



Valued Quality. Delivered.

TEST REPORT

Report Number: 17031818HKG-001

Application
for
Original Grant of 47 CFR Part 15 Certification
Single New of RSS-247 Issue 2 Equipment

Learning App Tablet

FCC ID: G2R-6020


IC: 1135D-6020

Prepared and Checked by:

Approved by:

Signed On File

Yao Xin Lu, Josie
Engineer

 Digitally signed
by Jess Tang
Location:
Intertek Testing
Services Hong
Kong Ltd.

Tang Kwan Mo, Jess
Lead Engineer
May 26, 2017

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	VTech Electronics Limited
Applicant Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, N.T., Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2015 Edition
FCC ID:	G2R-6020
FCC Model(s):	6020
IC Specification Standard:	RSS-247 Issue 2, February 2017 RSS-Gen Issue 4, November 2014
IC:	1135D-6020
PMN:	LeapPad Ultimate
HVIN:	6020
Type of EUT:	Digital Transmission System
Description of EUT:	Learning App Tablet
Serial Number:	N/A
Sample Receipt Date:	March 31, 2017
Date of Test:	April 25, 2017 to May 17, 2017
Report Date:	May 26, 2017
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology	7
2.3 Test Facility	7
2.4 Related Submittal(s) Grants	7
3.0 System Test Configuration	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Maximum Conducted Output Power at Antenna Terminals	13
4.2 Minimum 6dB RF Bandwidth	15
4.3 Maximum Power Spectral Density	24
4.4 Out of Band Conducted Emissions	33
4.5 Field Strength Calculation	46
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	47
4.6.1 Radiated Emission Configuration Photograph	47
4.6.2 Radiated Emission Data	47
4.6.3 Radiated Emission Test Setup	61
4.6.4 Transmitter Duty Cycle Calculation	62
4.7 AC Power Line Conducted Emission	63
4.7.1 AC Power Line Conducted Emission Configuration Photograph	63
4.7.2 AC Power Line Conducted Emission Data	63
4.7.3 Conducted Emission Test Setup	65
5.0 Equipment List	67

INTERTEK TESTING SERVICES

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details see section
Antenna Requirement	15.203	8.3 [#]	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207	8.8 [#]	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2015 Edition
RSS-247 Issue 2, February 2017
RSS-Gen Issue 4, November 2014

INTERTEK TESTING SERVICES

EXHIBIT 2 GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The 6020 is a Learning App Tablet. The EUT contain WLAN (WiFi) module. The EUT can download and use App via WiFi. It can connect to a personal computer for installation of App. The EUT is power by a 100-240VAC to 5VDC 1500mA adaptor and/or a 3.7V rechargeable battery.

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 7 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v04 (05-April-2017) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 4 (2014).

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042V-1.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

INTERTEK TESTING SERVICES

EXHIBIT 3 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 **System Test Configuration**

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 100-240VAC to 5VDC 1500mA adaptor and/or a 3.7V rechargeable battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

INTERTEK TESTING SERVICES

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor and/or a battery (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC to 5.0VDC 1500mA, Model: AD530-US)
(Provided by Client)
- (2) A Li-ion type rechargeable battery (3.7V) (Provided by Client)

Description of Accessories:

- (1) Headphone of 1.2m length (Provided by client)
- (2) USB cable of 0.5m length (Provided by client)
- (3) Game card (Provided by client)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES


EXHIBIT 4 TEST RESULTS

INTERTEK TESTING SERVICES

4.0 Test Results

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.3 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi			
Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	12.3	16.982
Middle Channel:	2437	12.8	19.055
High Channel:	2462	12.8	19.055

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 0 dBi			
Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	16.0	39.811
Middle Channel:	2437	16.4	43.652
High Channel:	2462	16.4	43.652

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 0 dBi			
Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2412	15.4	34.674
Middle Channel:	2437	15.9	38.905
High Channel:	2462	15.9	38.905

INTERTEK TESTING SERVICES

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 0 dBi			
Frequency (MHz)		Output in dBm	Output in mWatt
Low Channel:	2422	15.9	38.905
Middle Channel:	2437	16.1	40.738
High Channel:	2452	16.2	41.687

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (peak) output level = 12.8 dBm

IEEE 802.11g (OFDM, 9 Mbps)
max. conducted (peak) output level = 16.4 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
max. conducted (peak) output level = 15.9dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)
max. conducted (peak) output level = 16.2 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

INTERTEK TESTING SERVICES

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)		
Frequency (MHz)		6dB Bandwidth (MHz)
Low Channel:	2412	9.28
Middle Channel:	2437	9.28
High Channel:	2462	9.20

IEEE 802.11g (OFDM, 6 Mbps)		
Frequency (MHz)		6dB Bandwidth (MHz)
Low Channel:	2412	16.72
Middle Channel:	2437	16.80
High Channel:	2462	16.72

IEEE 802.11n (20MHz) (OFDM, MCS0)		
Frequency (MHz)		6dB Bandwidth (MHz)
Low Channel:	2412	17.92
Middle Channel:	2437	17.92
High Channel:	2462	17.84

IEEE 802.11n (40MHz) (OFDM, MCS0)		
Frequency (MHz)		6dB Bandwidth (MHz)
Low Channel:	2422	36.72
Middle Channel:	2437	36.72
High Channel:	2452	36.72

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11b, Lowest Channel

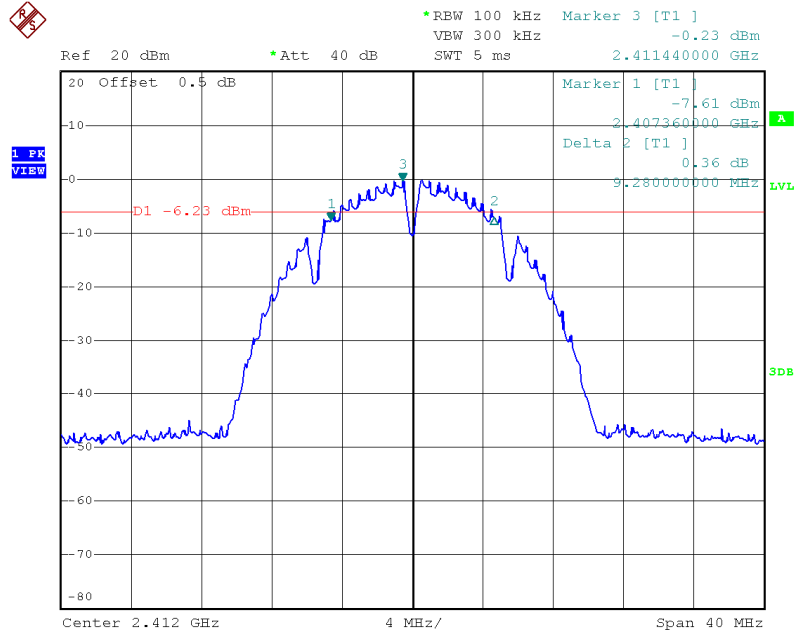


802.11b, Middle Channel

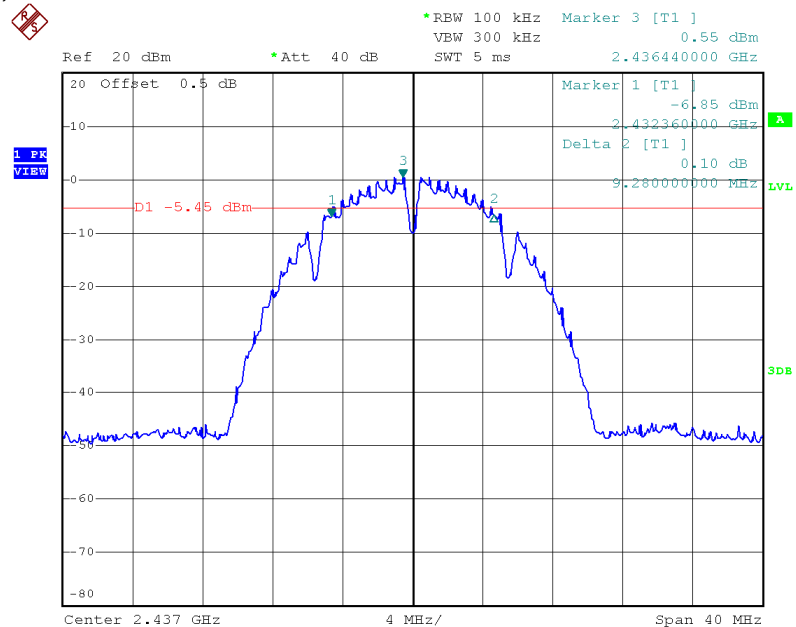

INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth


802.11b, Highest Channel

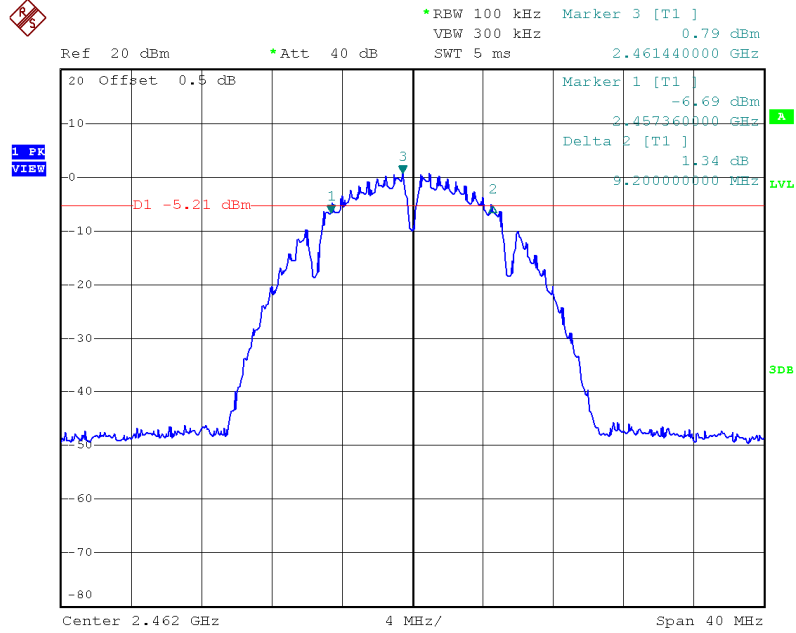


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11g, Lowest Channel

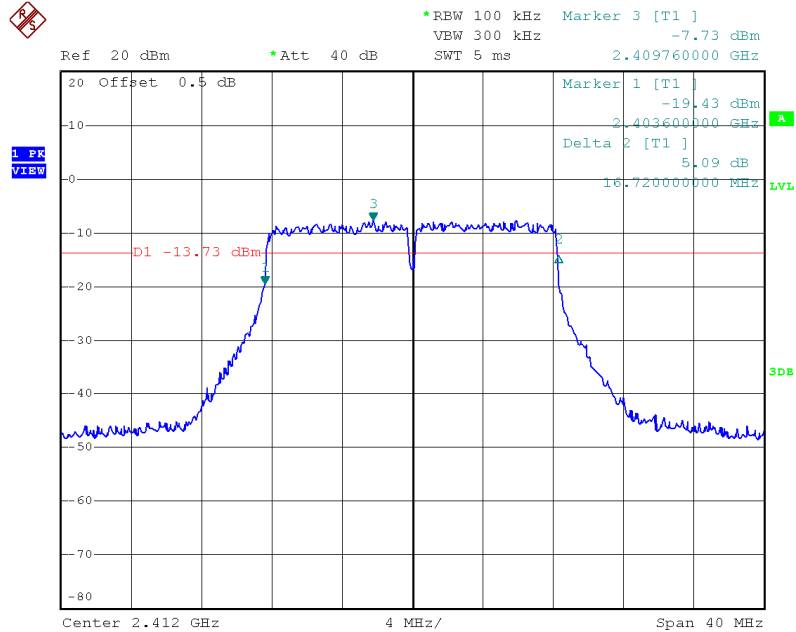


802.11g, Middle Channel

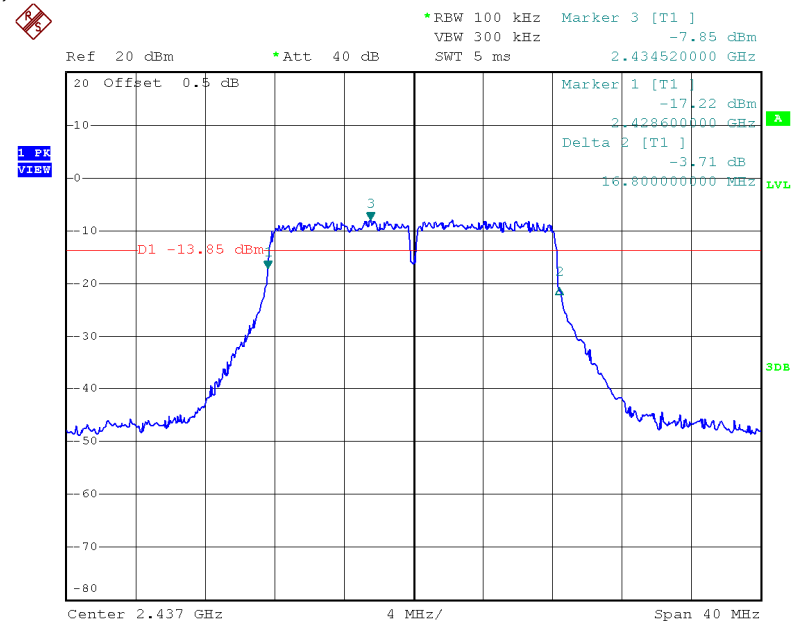

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth

802.11g, Highest Channel

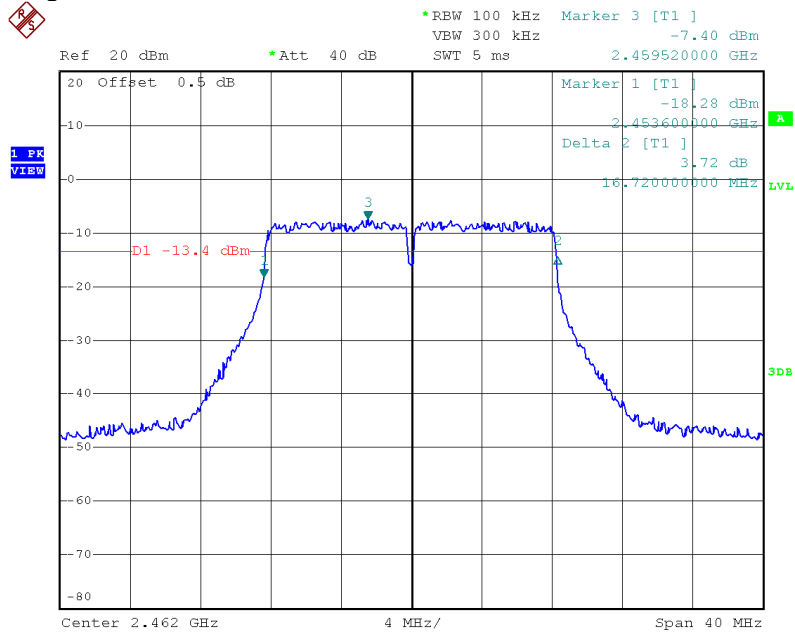


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth 802.11n (20MHz), Lowest Channel

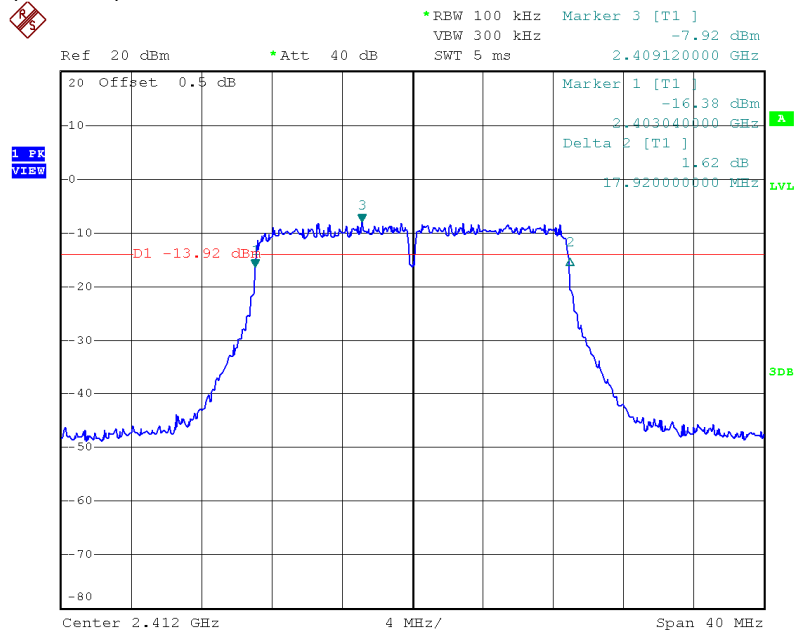


802.11n (20MHz), Middle Channel

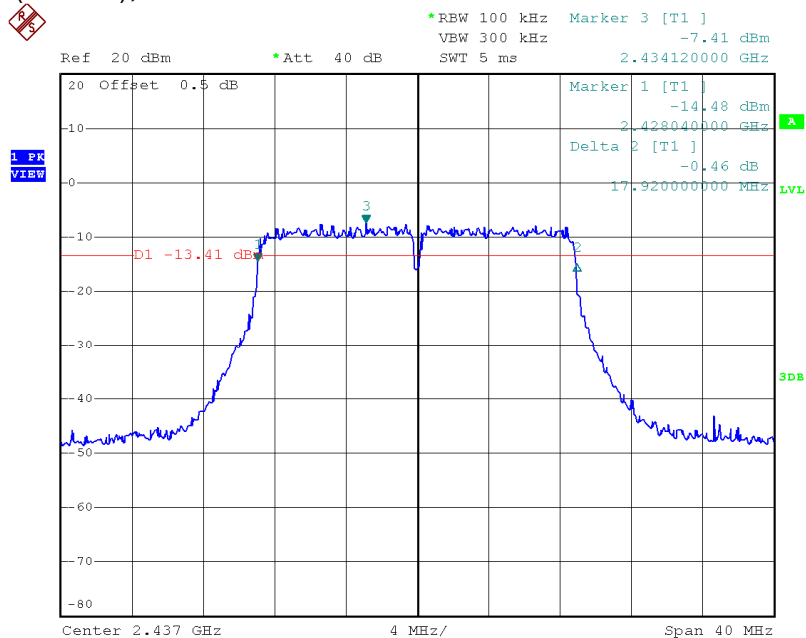


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth 802.11n (20MHz), Highest Channel

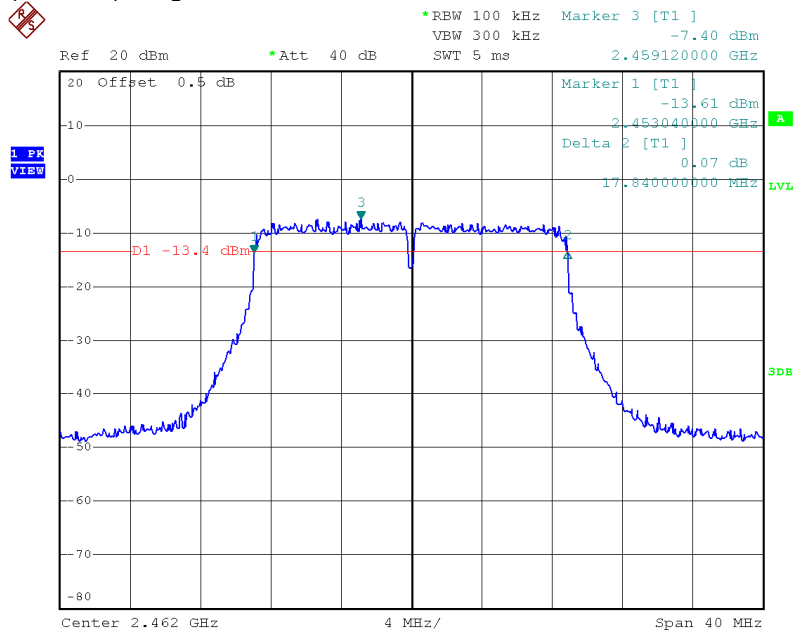


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth 802.11n (40MHz), Lowest Channel

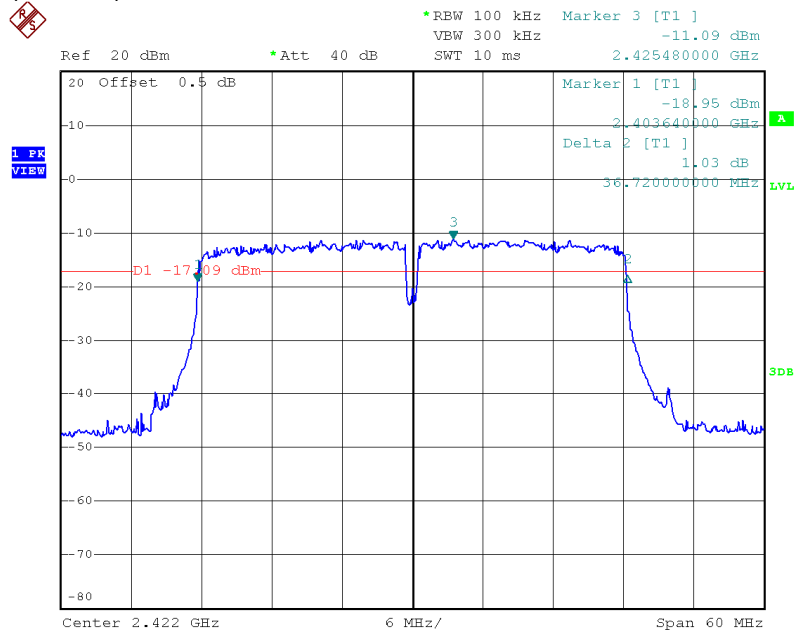

802.11n (40MHz), Middle Channel

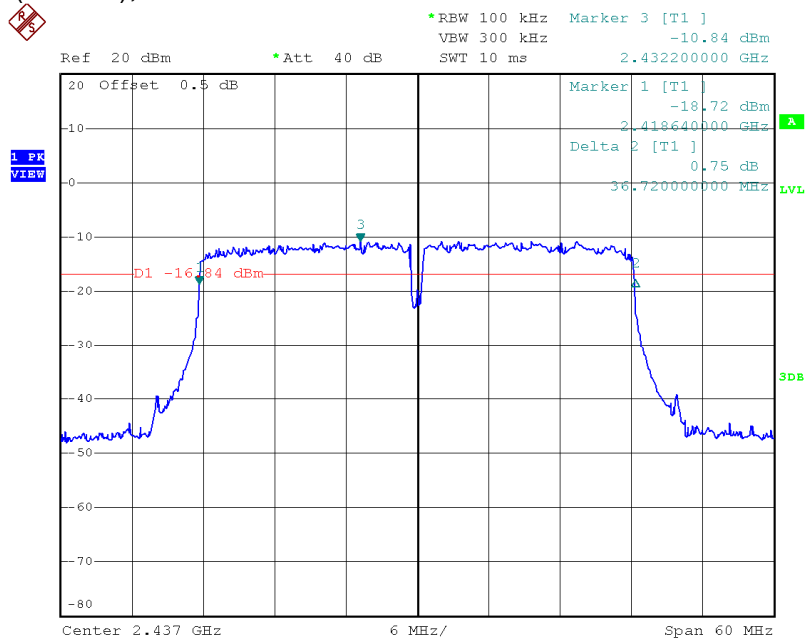

INTERTEK TESTING SERVICES

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD-1 was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)		
Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	0.36
Middle Channel:	2437	0.84
High Channel:	2462	0.79

IEEE 802.11g (OFDM, 6 Mbps)		
Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-8.27
Middle Channel:	2437	-7.28
High Channel:	2462	-7.25

IEEE 802.11n (20MHz) (OFDM, MCS0)		
Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-7.71
Middle Channel:	2437	-7.33
High Channel:	2462	-6.57

IEEE 802.11n (40MHz) (OFDM, MCS0)		
Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2422	-10.76
Middle Channel:	2437	-10.29
High Channel:	2452	-10.55

Cable Loss: 0.5 dB


Limit:
8dBm

The plots of power spectral density are as below.


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11b, Lowest channel

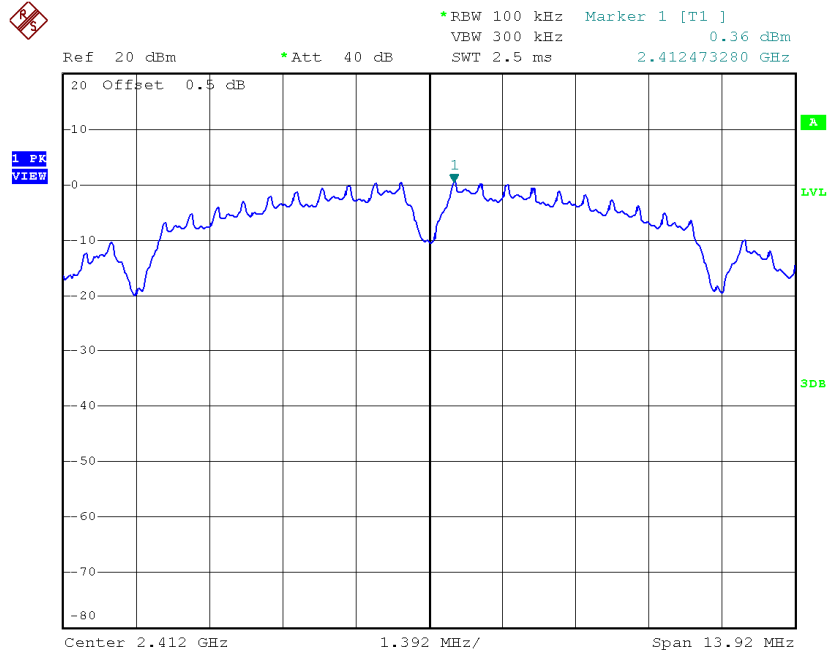


802.11b, Middle channel

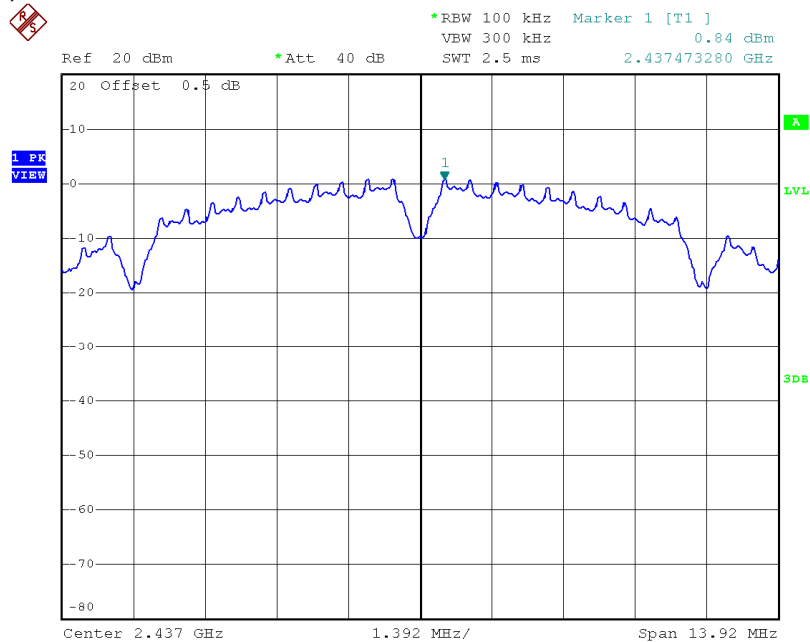

INTERTEK TESTING SERVICES

Plots of power spectral density


802.11b, Highest channel

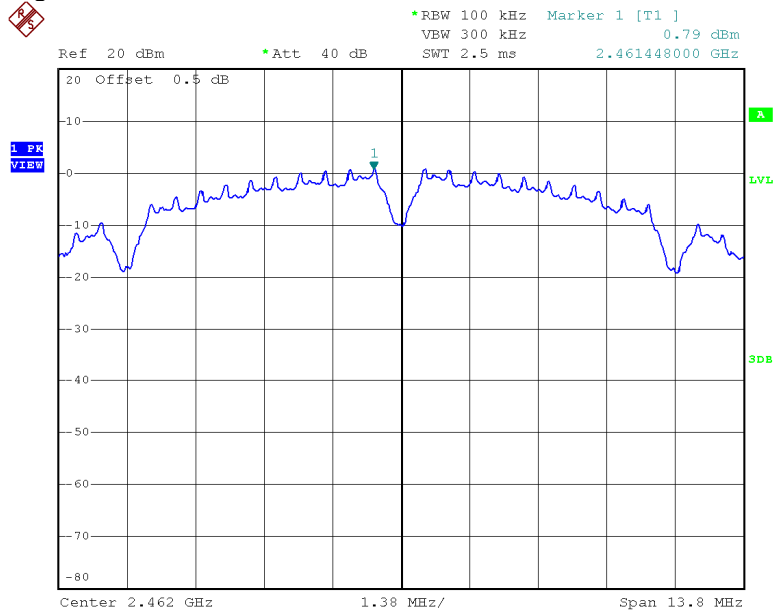


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11g, Lowest channel

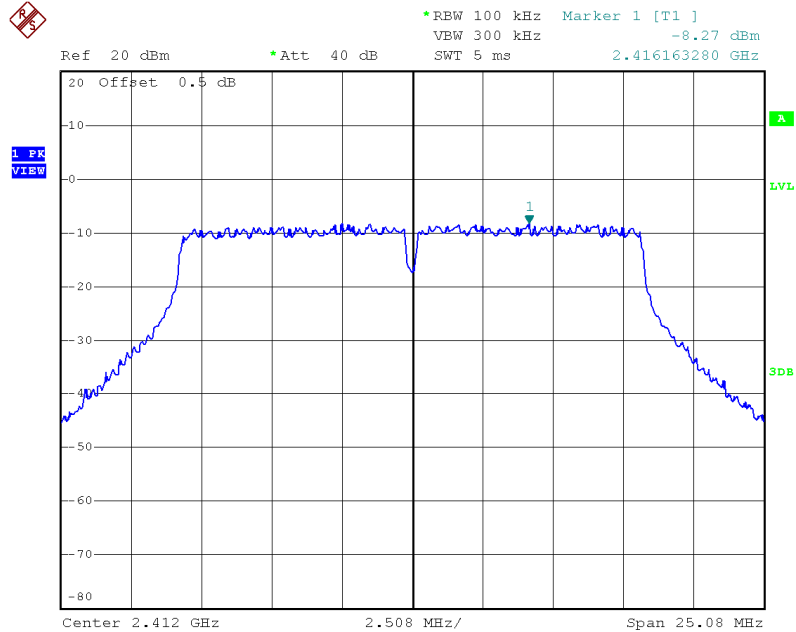


802.11g, Middle channel

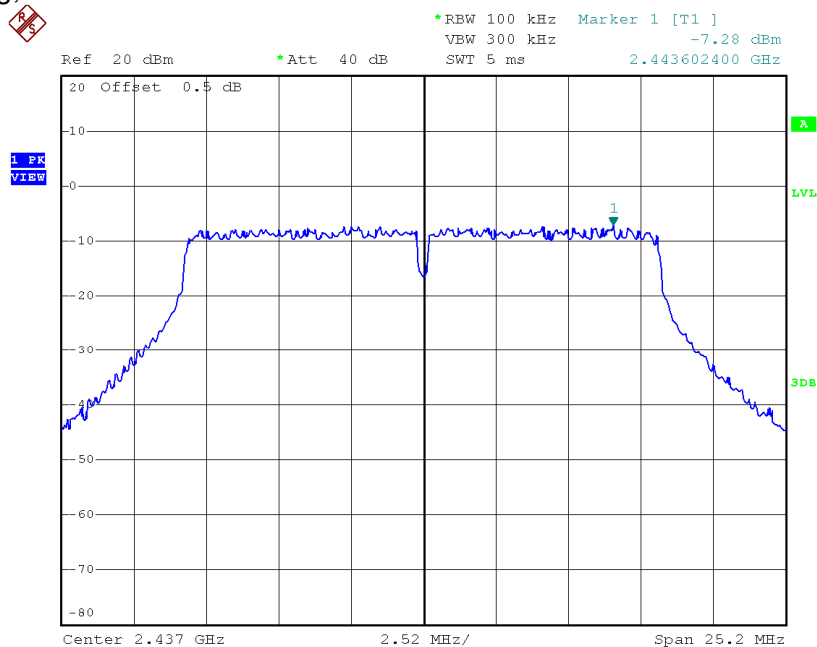

INTERTEK TESTING SERVICES

Plots of power spectral density


802.11g, Highest channel

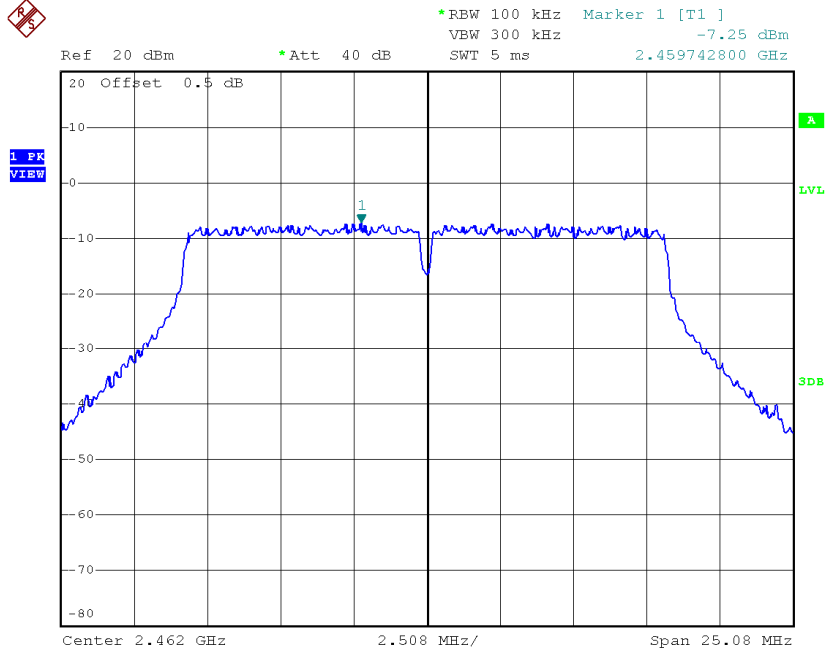


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11n (20MHz), Lowest channel

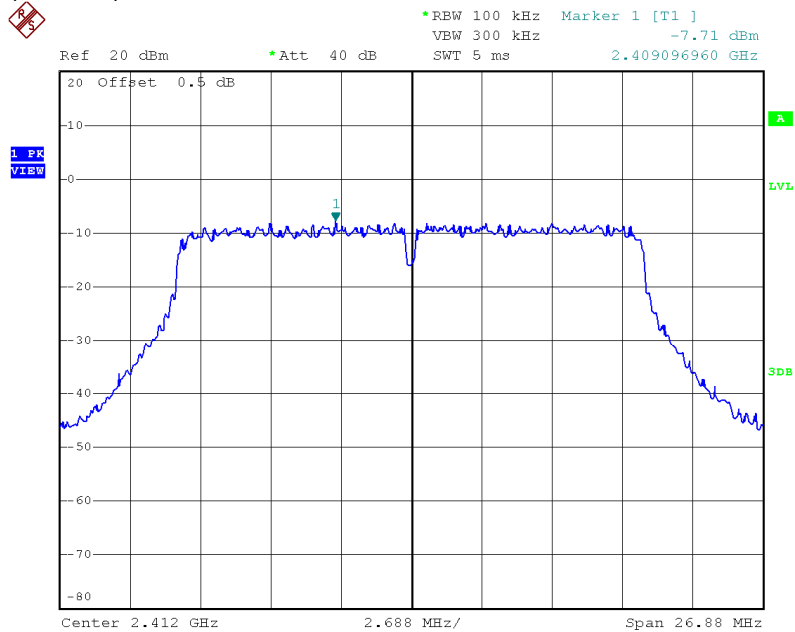


802.11n (20MHz), Middle channel

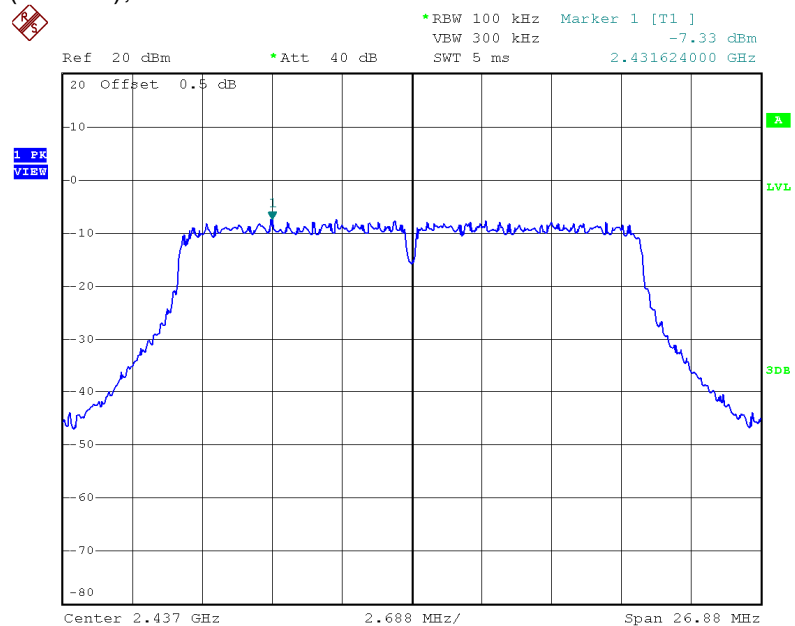

INTERTEK TESTING SERVICES

Plots of power spectral density


802.11n (20MHz), Highest channel

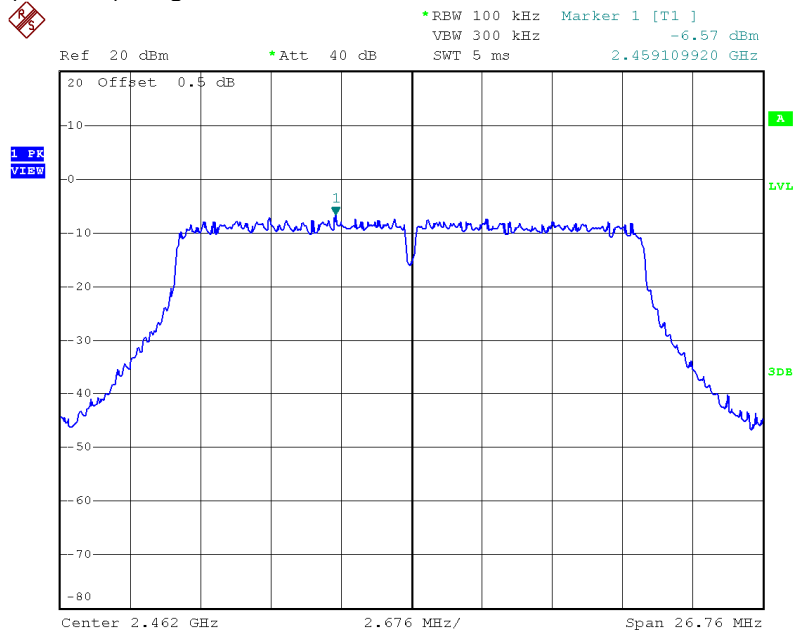


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11n (40MHz), Lowest channel

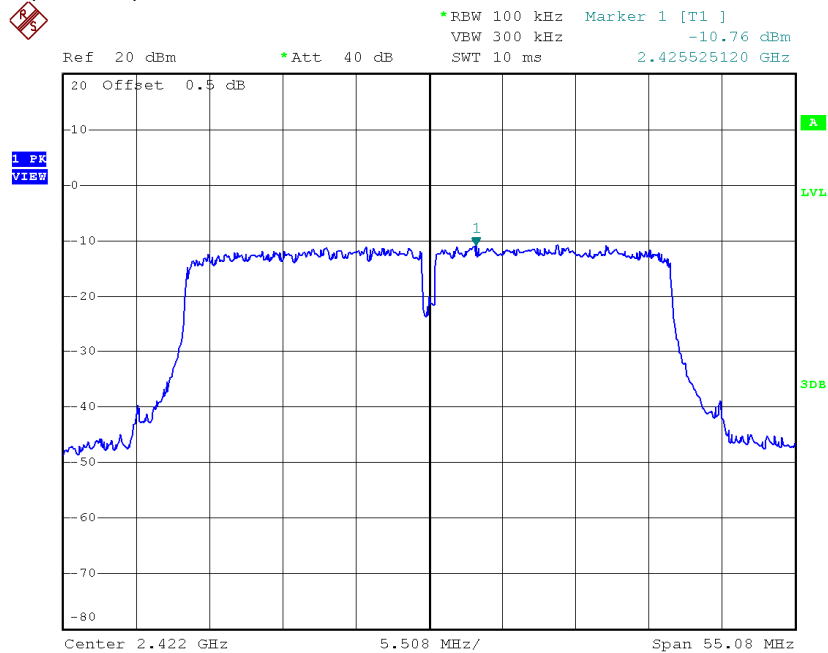


802.11n (40MHz), Middle channel

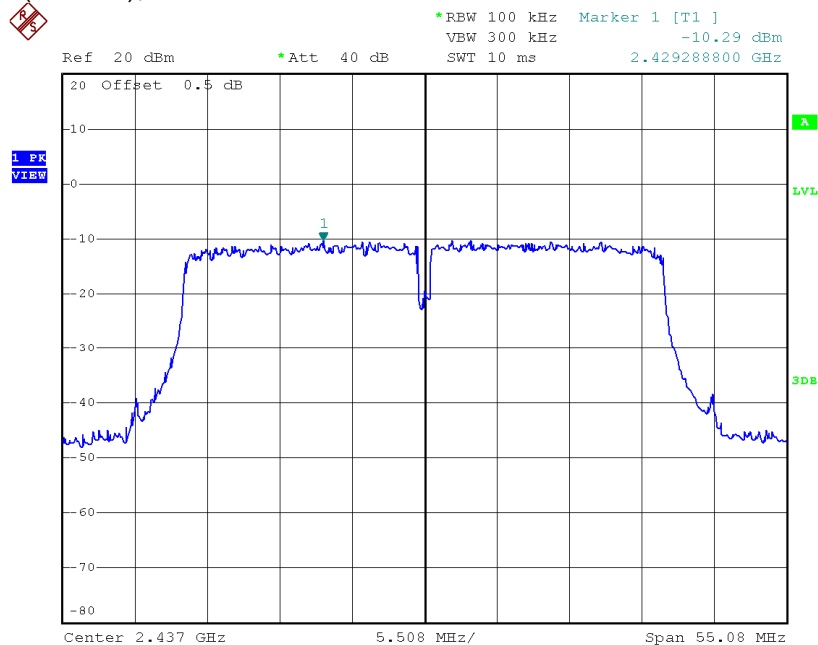

INTERTEK TESTING SERVICES

Plots of power spectral density

802.11n (20MHz), Highest channel

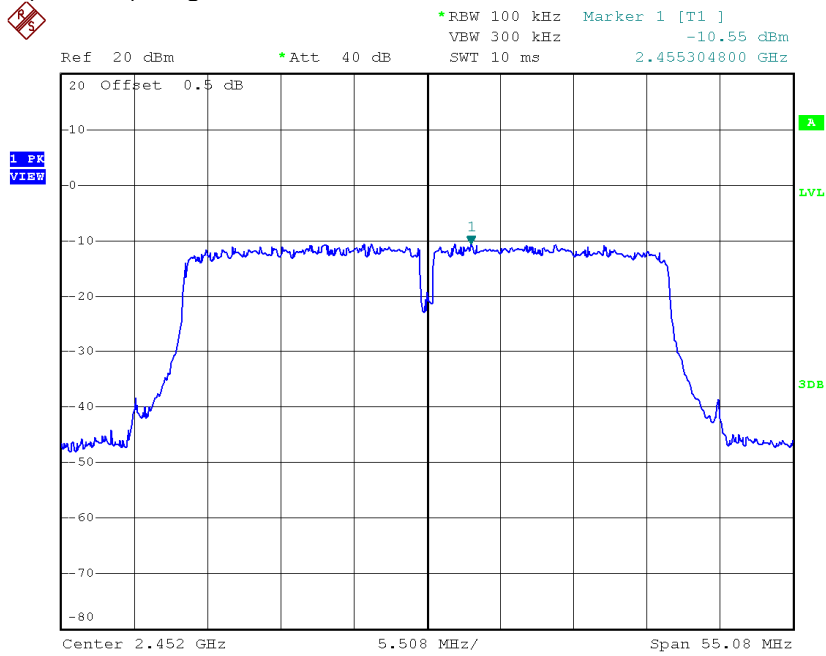

INTERTEK TESTING SERVICES

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20/n40MHz.

The measurement procedures under sections 11 of KDB558074 D01 v04 (05-April-2017) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB for 802.11b,g,n20MHz, n40MHz below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions are as below.


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

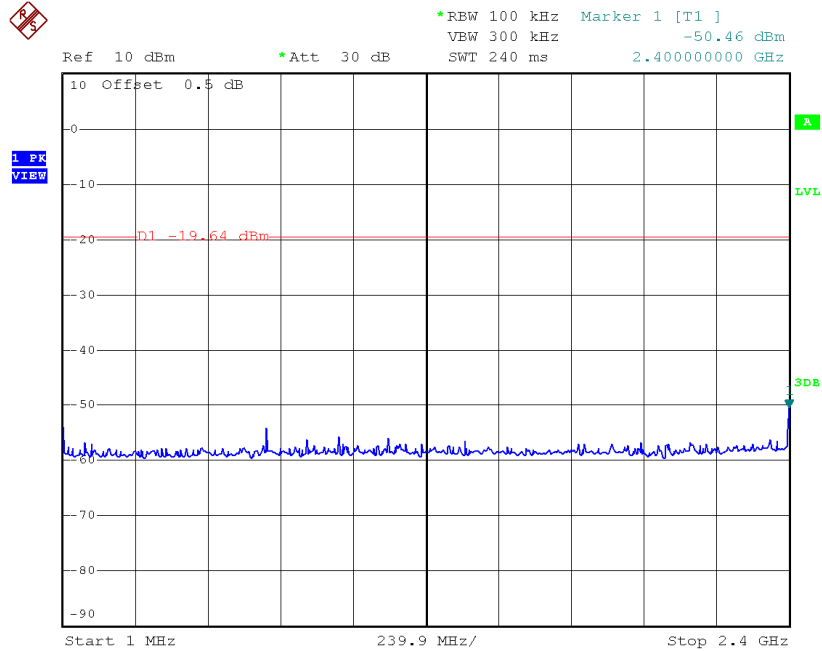


802.11b, Lowest Channel, Plot B

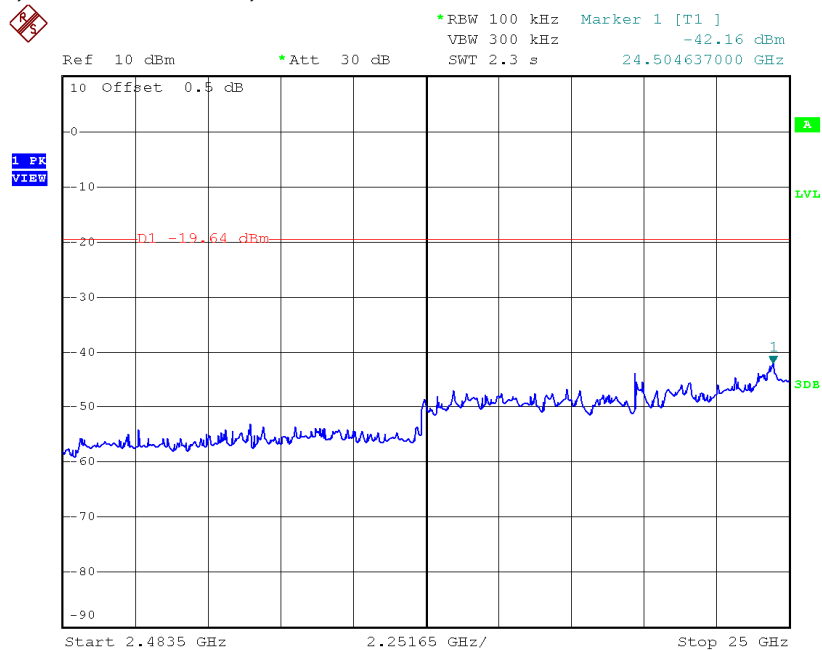


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11b, Middle Channel, Plot A

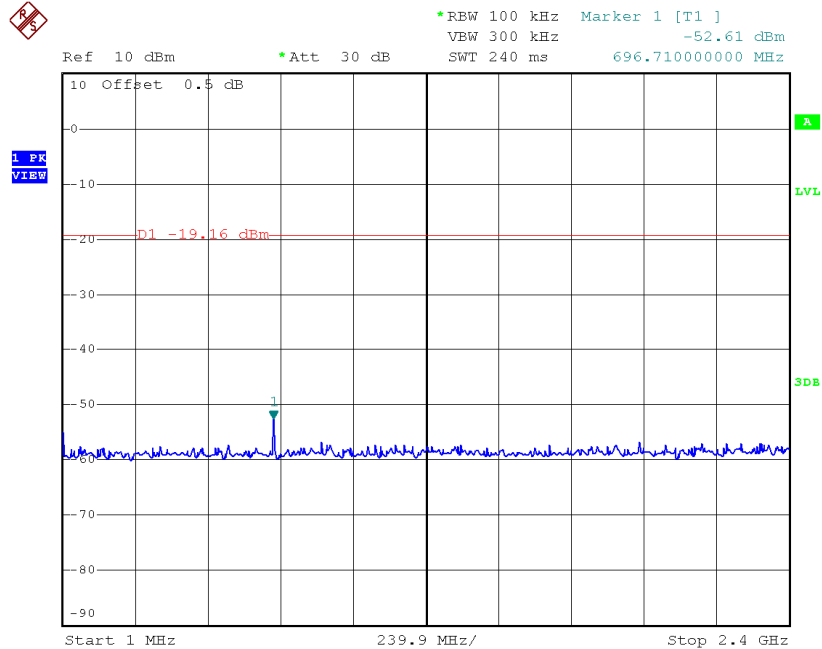


802.11b, Middle Channel, Plot B

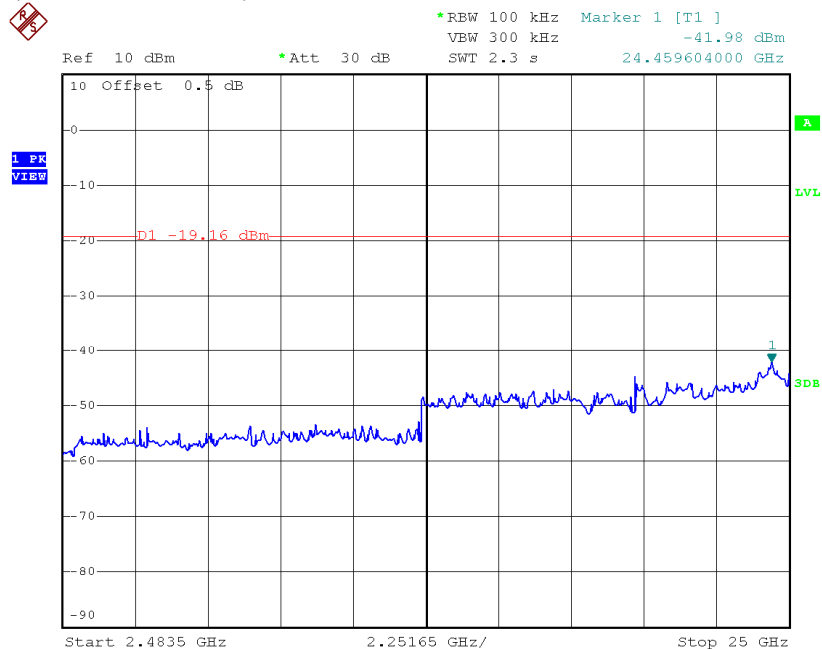


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

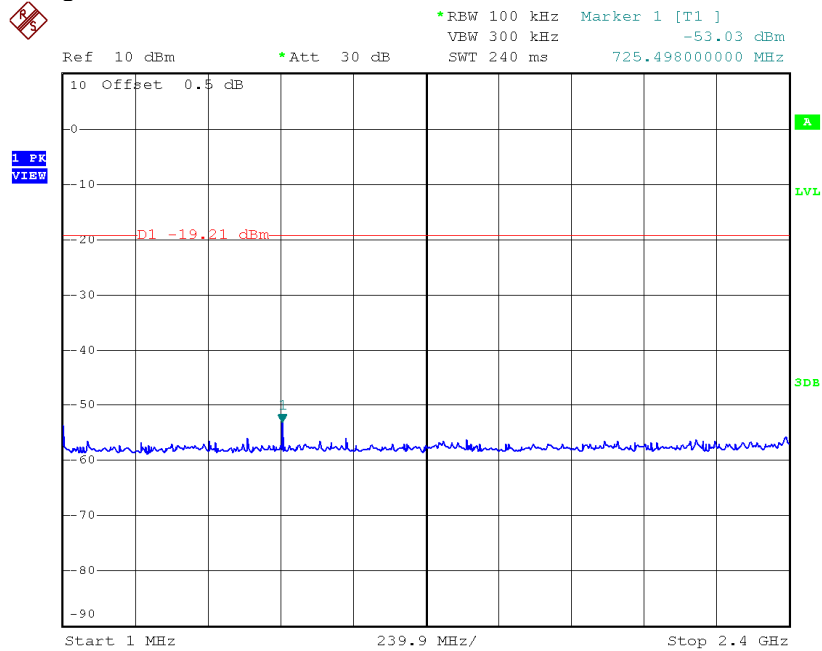


802.11b, Highest Channel, Plot B

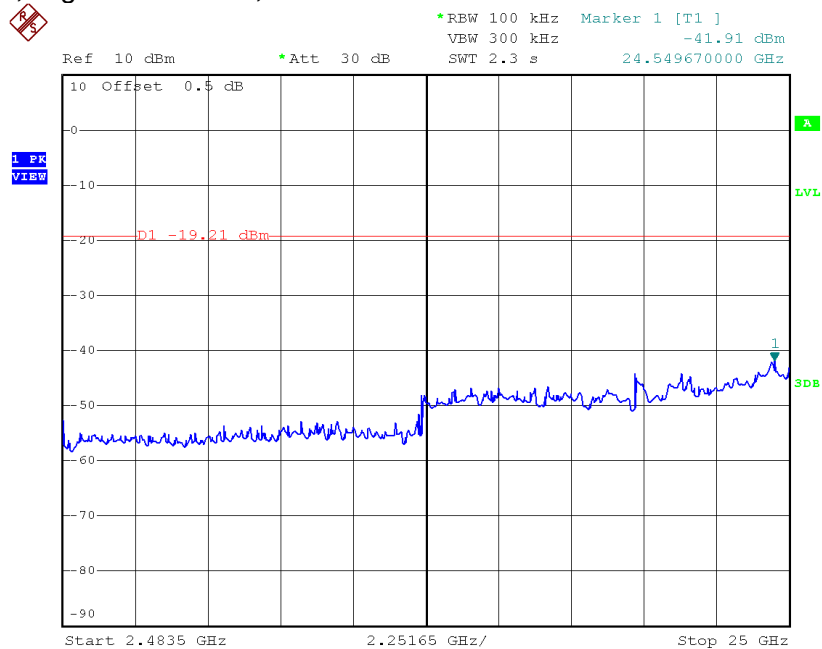


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Lowest Channel, Plot A

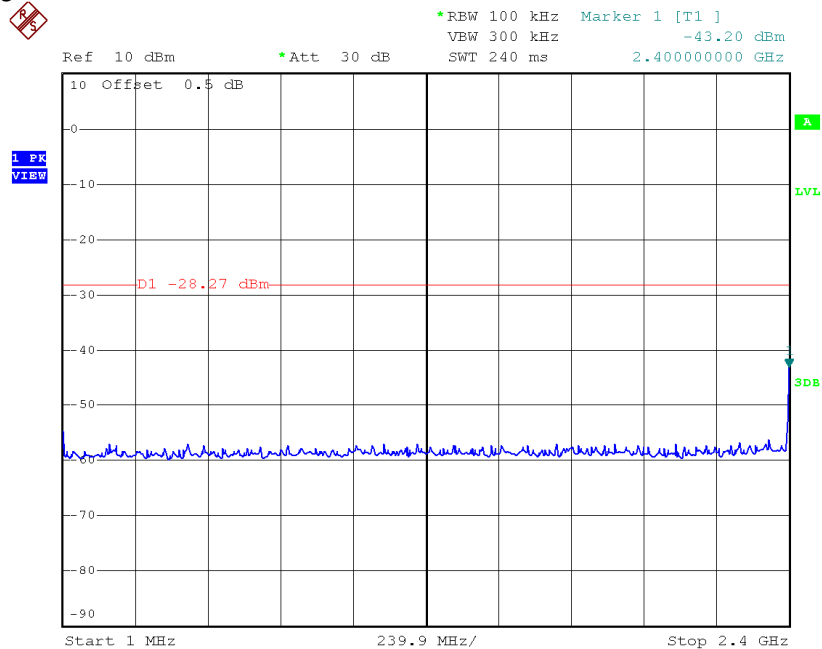


802.11g, Lowest Channel, Plot B

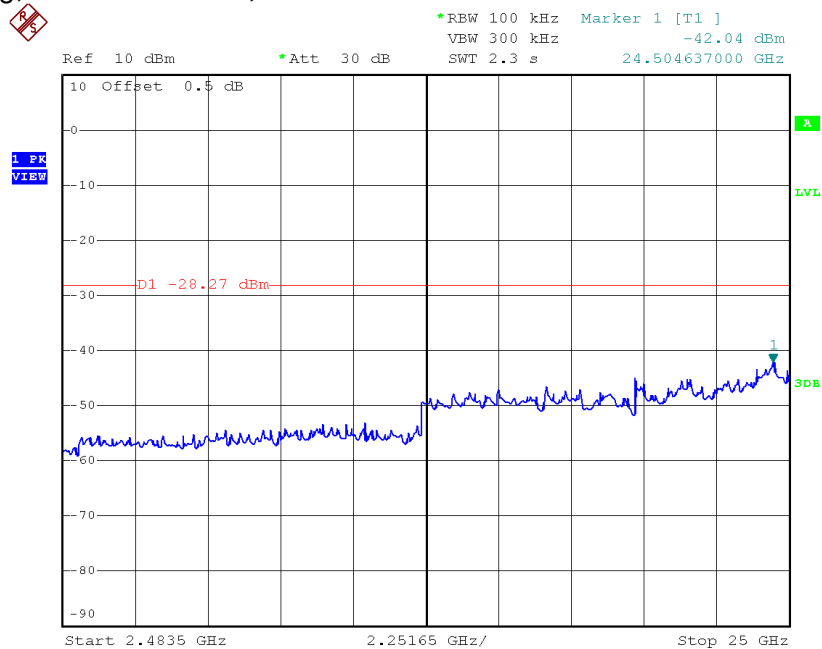


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Middle Channel, Plot A

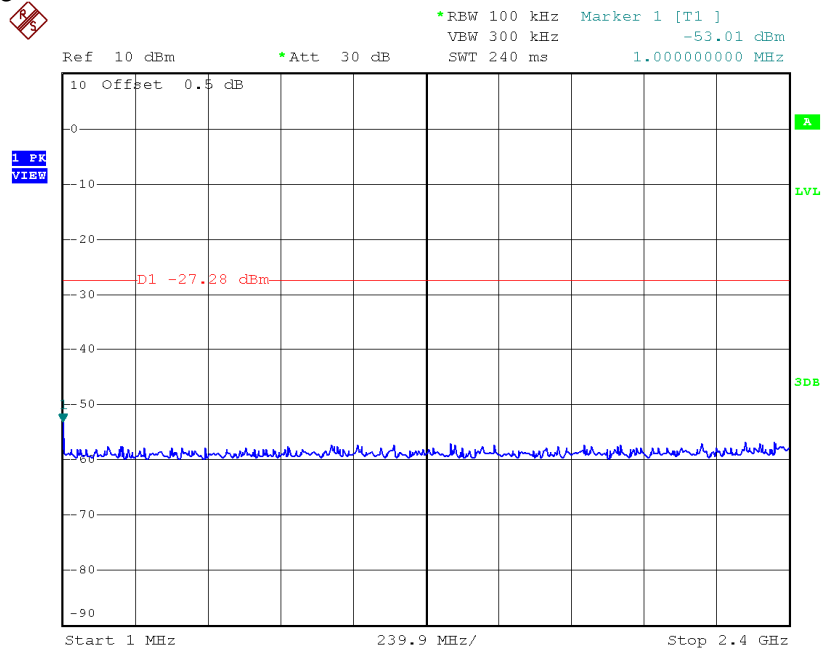


802.11g, Middle Channel, Plot B

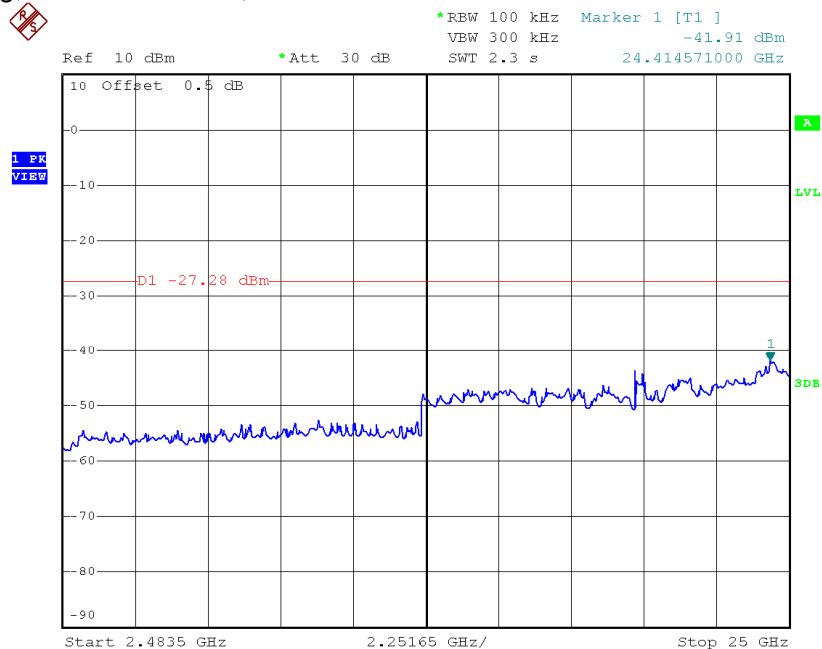


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Highest Channel, Plot A

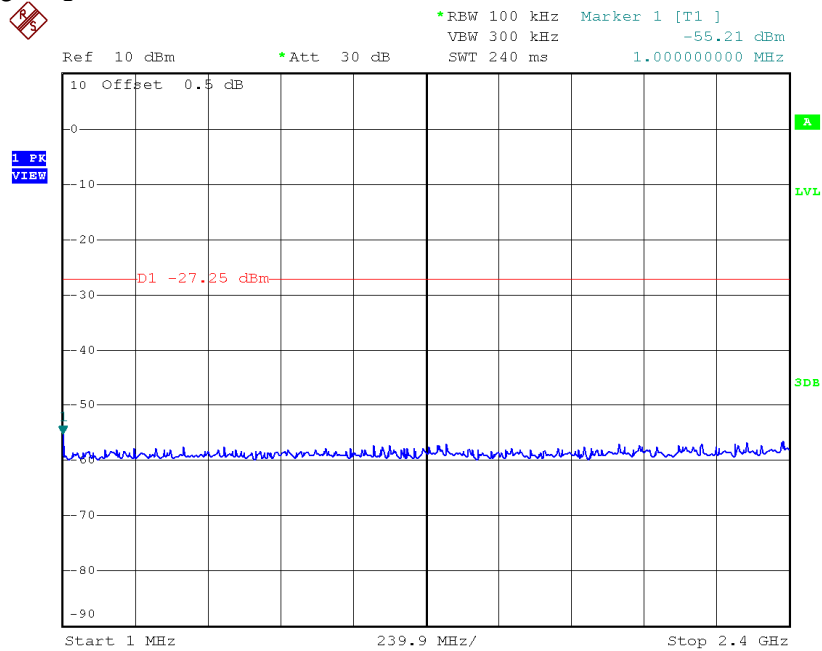


802.11g, Highest Channel, Plot B

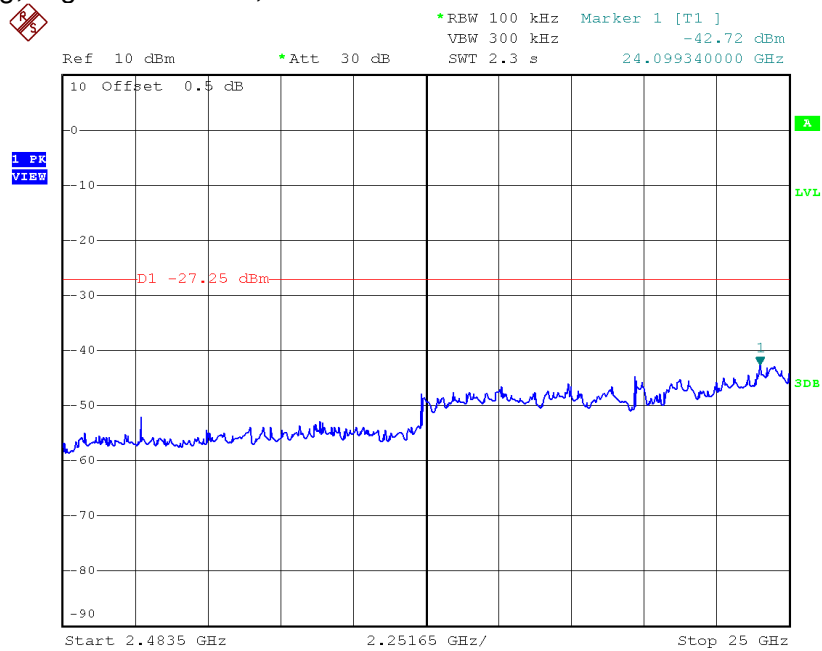


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (20MHz), Lowest Channel, Plot A

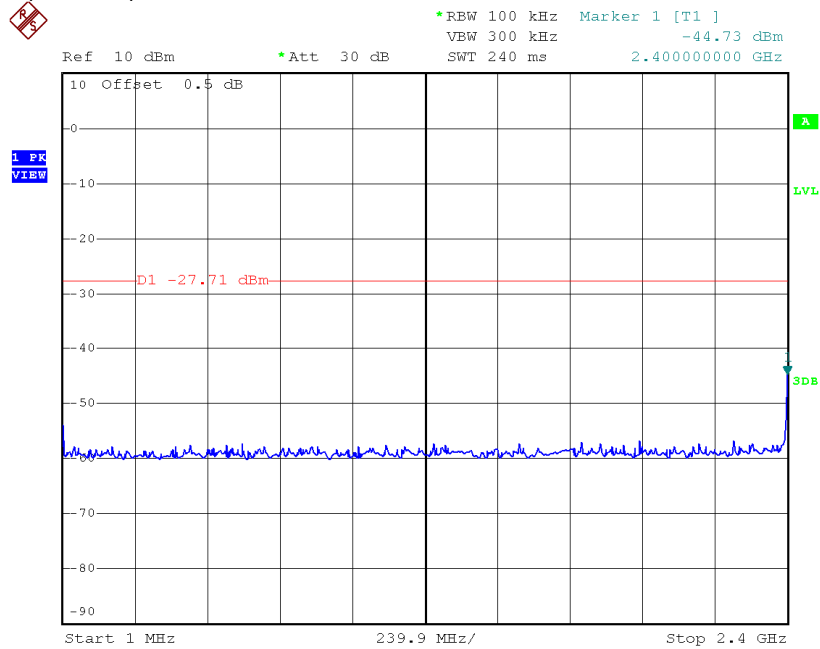


802.11n (20MHz), Lowest Channel, Plot B

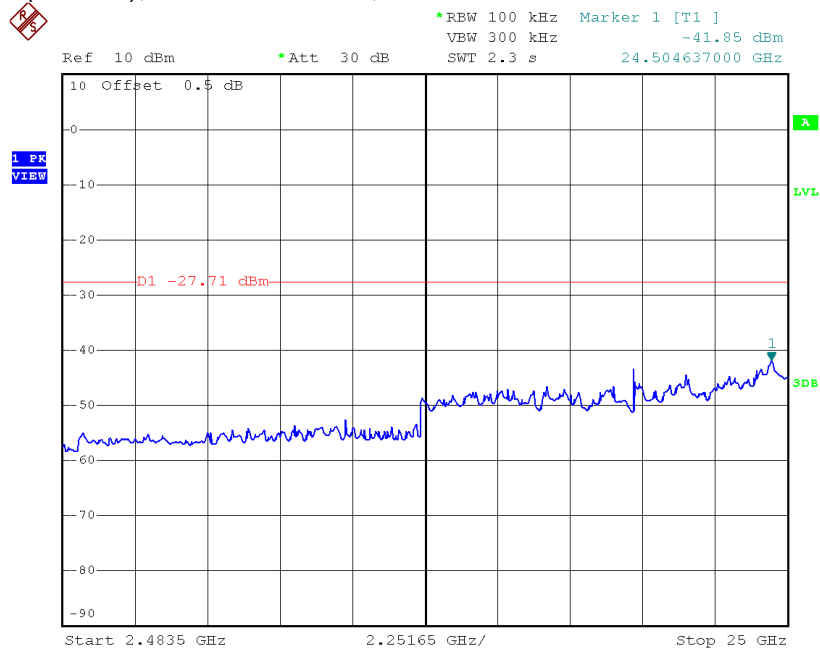


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (20MHz), Middle Channel, Plot A

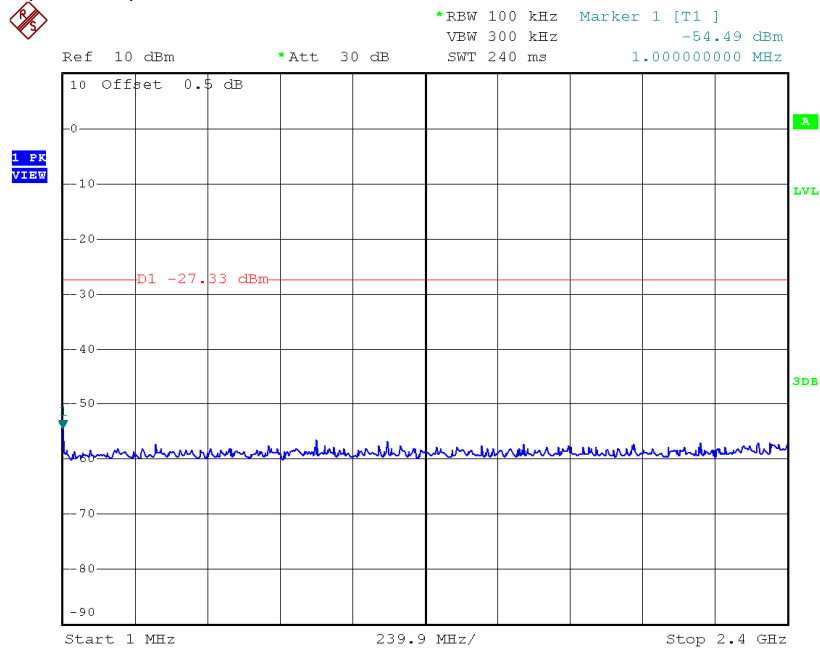


802.11n (20MHz), Middle Channel, Plot B

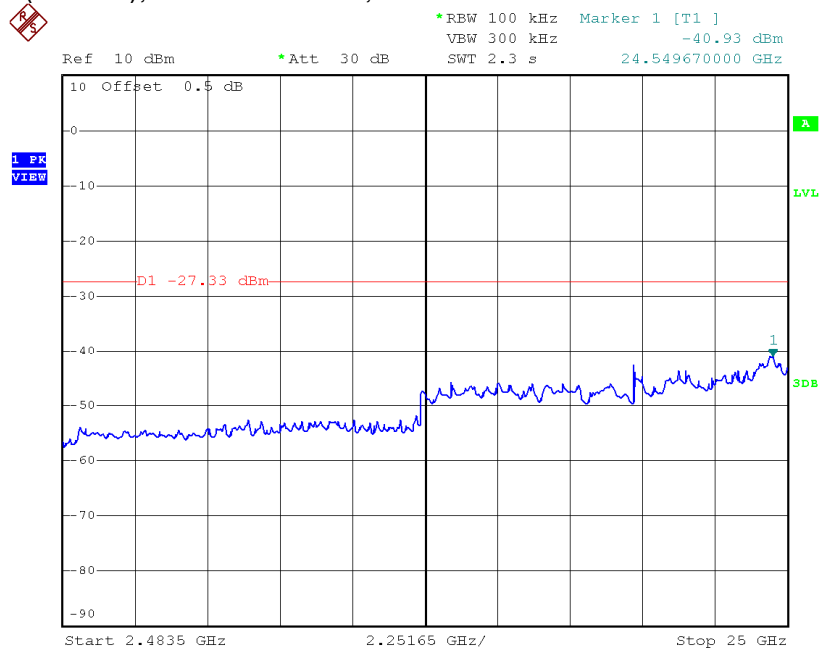


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (20MHz), Highest Channel, Plot A

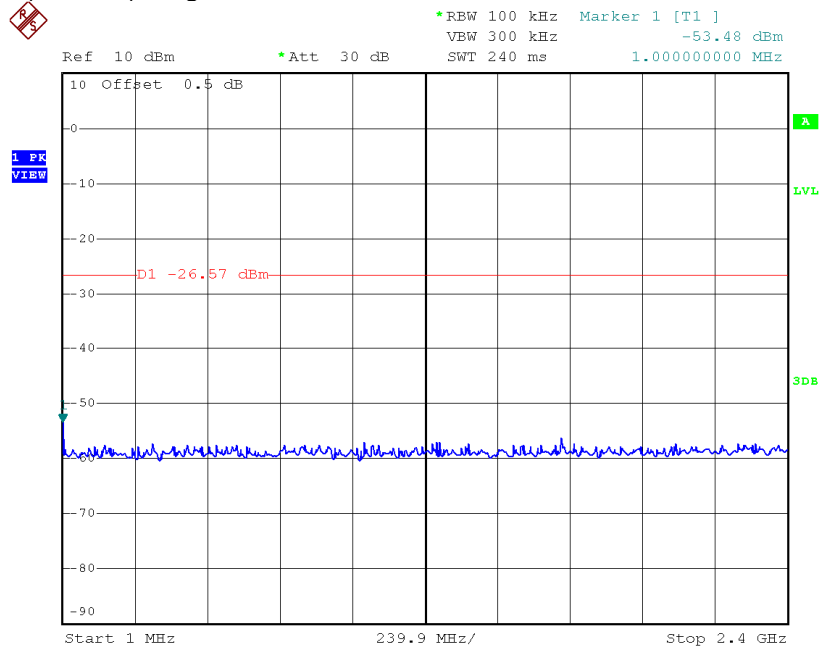


802.11n (20MHz), Highest Channel, Plot B

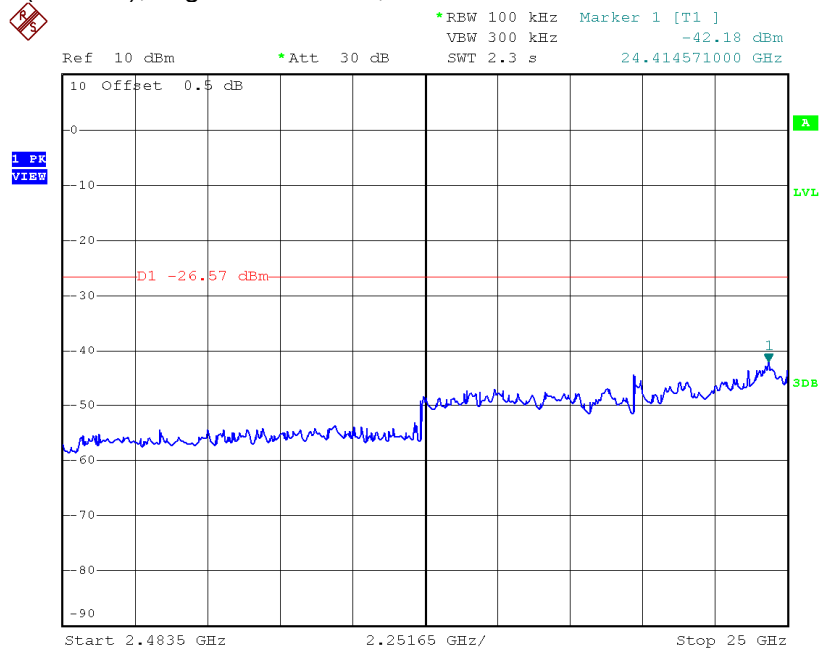


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40MHz), Lowest Channel, Plot A

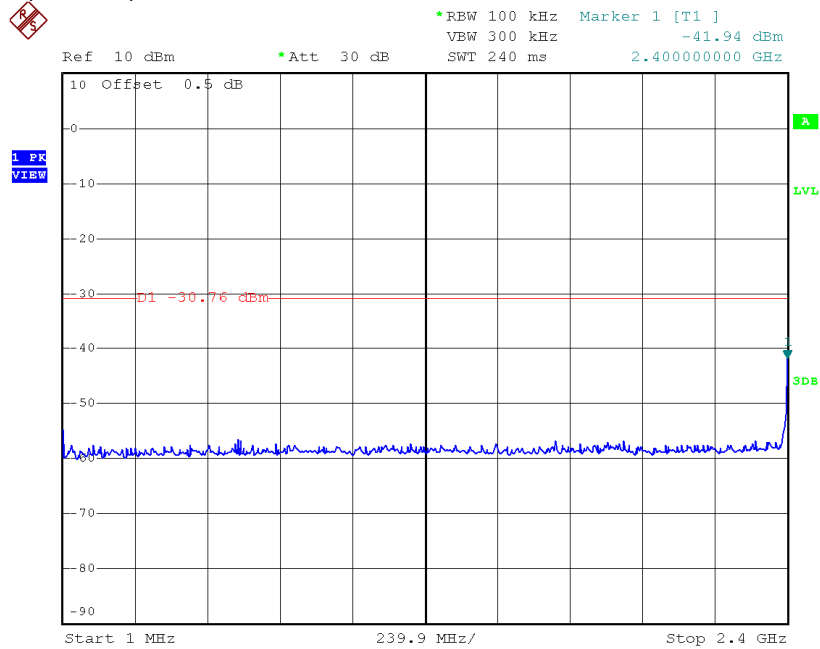


802.11n (40MHz), Lowest Channel, Plot B

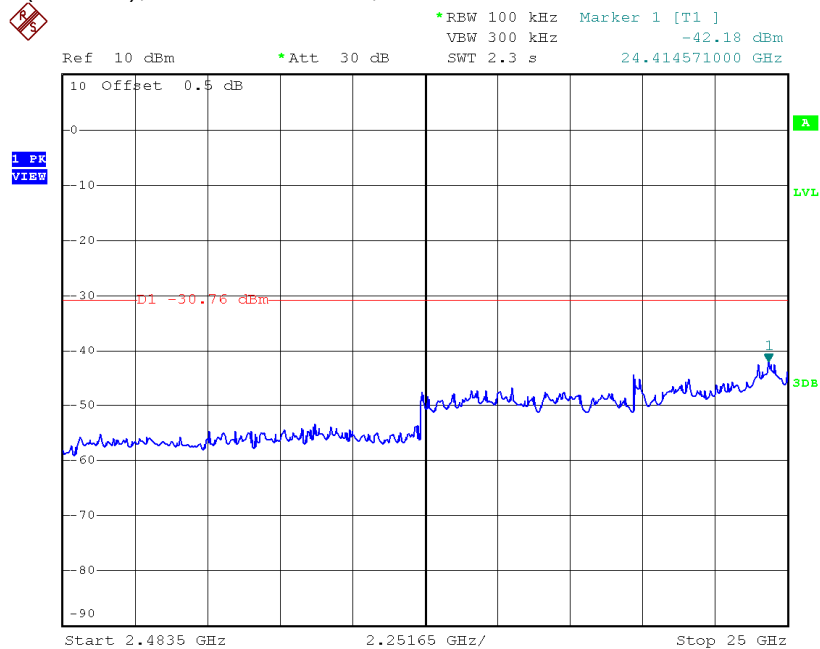


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40MHz), Middle Channel, Plot A

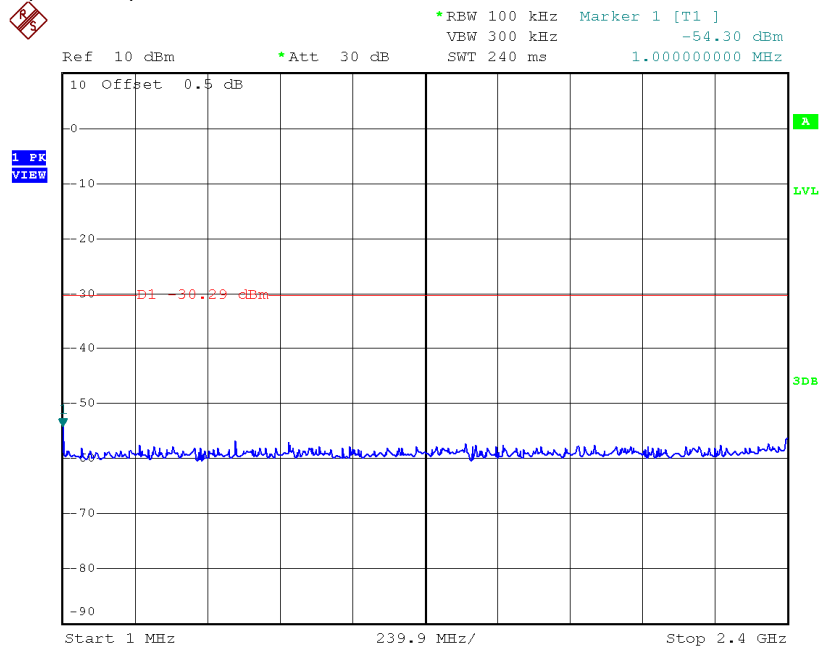


802.11n (40MHz), Middle Channel, Plot B

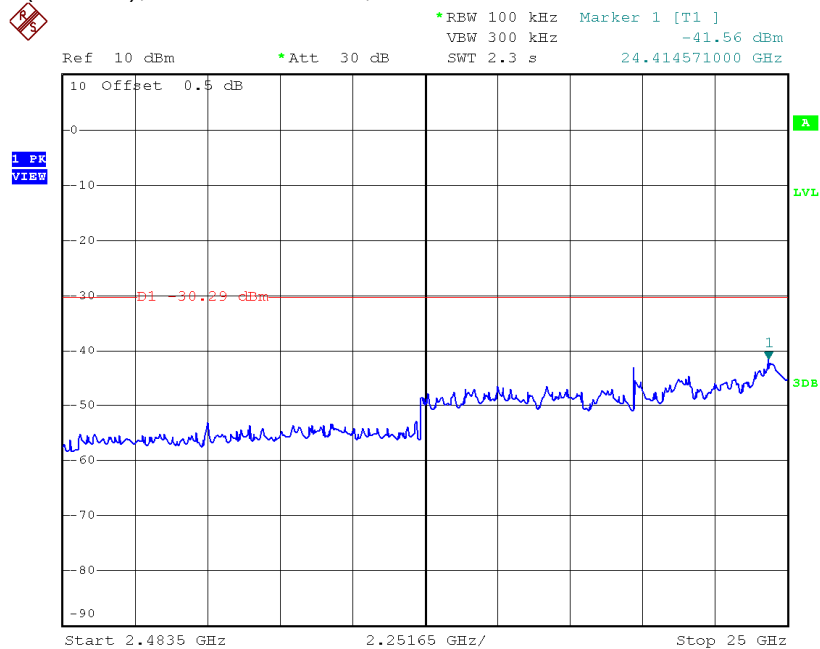


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40MHz), Highest Channel, Plot A

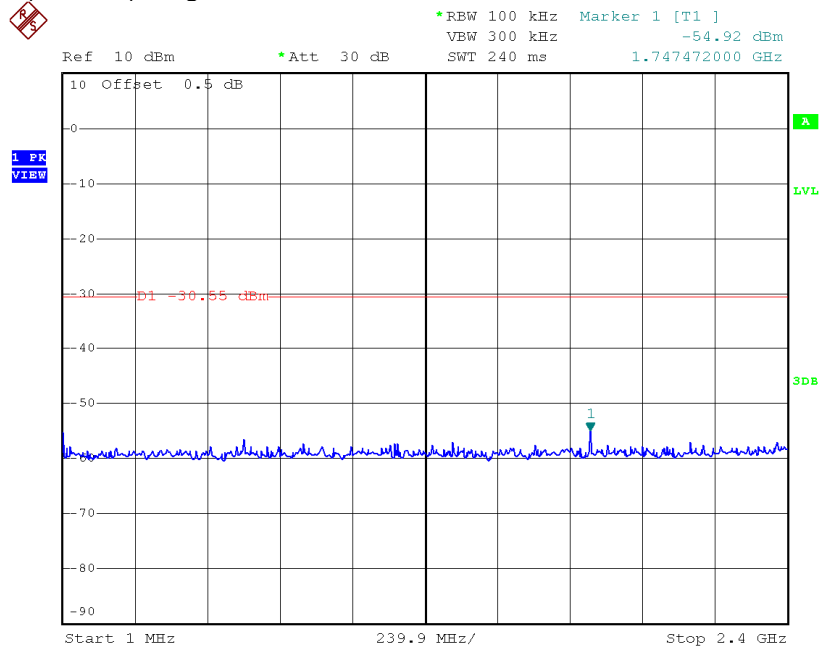

802.11n (40MHz), Highest Channel, Plot B

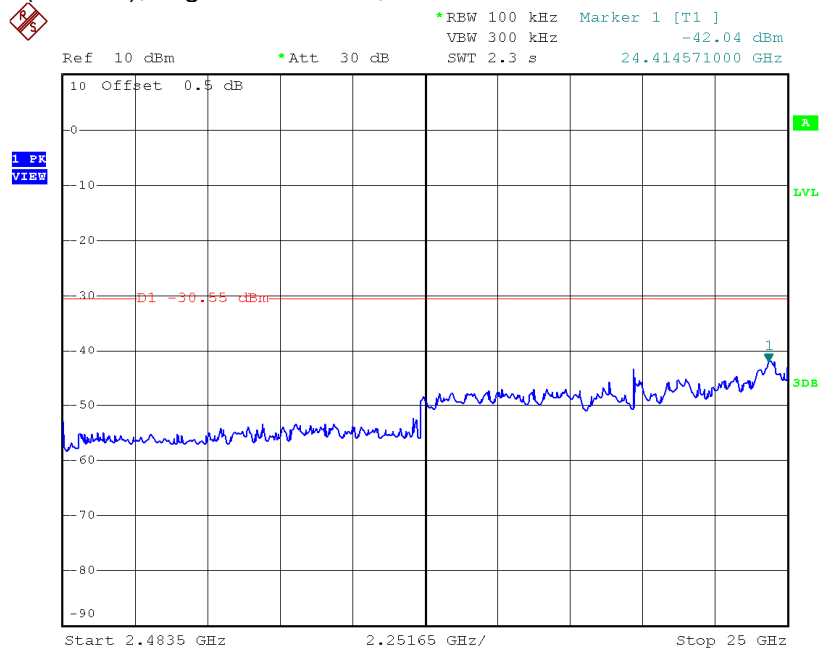

INTERTEK TESTING SERVICES

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

350.000 MHz

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 1.7 dB margin

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>49.9</i>	<i>33</i>	<i>29.4</i>	<i>46.3</i>	<i>54.0</i>	<i>-7.7</i>
<i>V</i>	<i>4824.000</i>	<i>30.2</i>	<i>33</i>	<i>34.9</i>	<i>32.1</i>	<i>54.0</i>	<i>-21.9</i>
<i>H</i>	<i>12060.000</i>	<i>31.7</i>	<i>33</i>	<i>40.5</i>	<i>39.2</i>	<i>54.0</i>	<i>-14.8</i>
<i>H</i>	<i>14472.000</i>	<i>33.1</i>	<i>33</i>	<i>40.0</i>	<i>40.1</i>	<i>54.0</i>	<i>-13.9</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>61.8</i>	<i>33</i>	<i>29.4</i>	<i>58.2</i>	<i>74.0</i>	<i>-15.8</i>
<i>V</i>	<i>4824.000</i>	<i>41.6</i>	<i>33</i>	<i>34.9</i>	<i>43.5</i>	<i>74.0</i>	<i>-30.5</i>
<i>H</i>	<i>12060.000</i>	<i>43.8</i>	<i>33</i>	<i>40.5</i>	<i>51.3</i>	<i>74.0</i>	<i>-22.7</i>
<i>H</i>	<i>14472.000</i>	<i>45.2</i>	<i>33</i>	<i>40.0</i>	<i>52.2</i>	<i>74.0</i>	<i>-21.8</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>30.4</i>	<i>33</i>	<i>34.9</i>	<i>32.3</i>	<i>54.0</i>	<i>-21.7</i>
<i>V</i>	<i>7311.000</i>	<i>29.7</i>	<i>33</i>	<i>37.9</i>	<i>34.6</i>	<i>54.0</i>	<i>-19.4</i>
<i>H</i>	<i>12185.000</i>	<i>31.7</i>	<i>33</i>	<i>40.5</i>	<i>39.2</i>	<i>54.0</i>	<i>-14.8</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>41.8</i>	<i>33</i>	<i>34.9</i>	<i>43.7</i>	<i>74.0</i>	<i>-30.3</i>
<i>V</i>	<i>7311.000</i>	<i>41.6</i>	<i>33</i>	<i>37.9</i>	<i>46.5</i>	<i>74.0</i>	<i>-27.5</i>
<i>H</i>	<i>12185.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>49.7</i>	<i>33</i>	<i>29.4</i>	<i>46.1</i>	<i>54.0</i>	<i>-7.9</i>
<i>V</i>	<i>4924.000</i>	<i>30.1</i>	<i>33</i>	<i>34.9</i>	<i>32.0</i>	<i>54.0</i>	<i>-22.0</i>
<i>V</i>	<i>7386.000</i>	<i>29.6</i>	<i>33</i>	<i>37.9</i>	<i>34.5</i>	<i>54.0</i>	<i>-19.5</i>
<i>H</i>	<i>12310.000</i>	<i>31.8</i>	<i>33</i>	<i>40.5</i>	<i>39.3</i>	<i>54.0</i>	<i>-14.7</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>61.7</i>	<i>33</i>	<i>29.4</i>	<i>58.1</i>	<i>74.0</i>	<i>-15.9</i>
<i>V</i>	<i>4924.000</i>	<i>41.4</i>	<i>33</i>	<i>34.9</i>	<i>43.3</i>	<i>74.0</i>	<i>-30.7</i>
<i>V</i>	<i>7386.000</i>	<i>41.5</i>	<i>33</i>	<i>37.9</i>	<i>46.4</i>	<i>74.0</i>	<i>-27.6</i>
<i>H</i>	<i>12310.000</i>	<i>44.0</i>	<i>33</i>	<i>40.5</i>	<i>51.5</i>	<i>74.0</i>	<i>-22.5</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>50.1</i>	<i>33</i>	<i>29.4</i>	<i>46.5</i>	<i>54.0</i>	<i>-7.5</i>
<i>V</i>	<i>4824.000</i>	<i>30.0</i>	<i>33</i>	<i>34.9</i>	<i>31.9</i>	<i>54.0</i>	<i>-22.1</i>
<i>V</i>	<i>9648.000</i>	<i>29.1</i>	<i>33</i>	<i>40.4</i>	<i>36.5</i>	<i>54.0</i>	<i>-17.5</i>
<i>H</i>	<i>12060.000</i>	<i>31.9</i>	<i>33</i>	<i>40.5</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>62.0</i>	<i>33</i>	<i>29.4</i>	<i>58.4</i>	<i>74.0</i>	<i>-15.6</i>
<i>V</i>	<i>4824.000</i>	<i>41.4</i>	<i>33</i>	<i>34.9</i>	<i>43.3</i>	<i>74.0</i>	<i>-30.7</i>
<i>V</i>	<i>9648.000</i>	<i>41.1</i>	<i>33</i>	<i>40.4</i>	<i>48.5</i>	<i>74.0</i>	<i>-25.5</i>
<i>H</i>	<i>12060.000</i>	<i>44.0</i>	<i>33</i>	<i>40.5</i>	<i>51.5</i>	<i>74.0</i>	<i>-22.5</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>30.4</i>	<i>33</i>	<i>34.9</i>	<i>32.3</i>	<i>54.0</i>	<i>-21.7</i>
<i>V</i>	<i>7311.000</i>	<i>29.7</i>	<i>33</i>	<i>37.9</i>	<i>34.6</i>	<i>54.0</i>	<i>-19.4</i>
<i>H</i>	<i>12185.000</i>	<i>31.7</i>	<i>33</i>	<i>40.5</i>	<i>39.2</i>	<i>54.0</i>	<i>-14.8</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>41.8</i>	<i>33</i>	<i>34.9</i>	<i>43.7</i>	<i>74.0</i>	<i>-30.3</i>
<i>V</i>	<i>7311.000</i>	<i>41.6</i>	<i>33</i>	<i>37.9</i>	<i>46.5</i>	<i>74.0</i>	<i>-27.5</i>
<i>H</i>	<i>12185.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>50.0</i>	<i>33</i>	<i>29.4</i>	<i>46.4</i>	<i>54.0</i>	<i>-7.6</i>
<i>V</i>	<i>4924.000</i>	<i>30.2</i>	<i>33</i>	<i>34.9</i>	<i>32.1</i>	<i>54.0</i>	<i>-21.9</i>
<i>V</i>	<i>7386.000</i>	<i>29.8</i>	<i>33</i>	<i>37.9</i>	<i>34.7</i>	<i>54.0</i>	<i>-19.3</i>
<i>H</i>	<i>12310.000</i>	<i>31.8</i>	<i>33</i>	<i>40.5</i>	<i>39.3</i>	<i>54.0</i>	<i>-14.7</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>61.9</i>	<i>33</i>	<i>29.4</i>	<i>58.3</i>	<i>74.0</i>	<i>-15.7</i>
<i>V</i>	<i>4924.000</i>	<i>41.5</i>	<i>33</i>	<i>34.9</i>	<i>43.4</i>	<i>74.0</i>	<i>-30.6</i>
<i>V</i>	<i>7386.000</i>	<i>41.7</i>	<i>33</i>	<i>37.9</i>	<i>46.6</i>	<i>74.0</i>	<i>-27.4</i>
<i>H</i>	<i>12310.000</i>	<i>44.0</i>	<i>33</i>	<i>40.5</i>	<i>51.5</i>	<i>74.0</i>	<i>-22.5</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	49.9	33	29.4	46.3	54.0	-7.7
V	4824.000	29.9	33	34.9	31.8	54.0	-22.2
H	12060.000	31.8	33	40.5	39.3	54.0	-14.7
H	14472.000	33.1	33	40.0	40.1	54.0	-13.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	61.9	33	29.4	58.3	74.0	-15.7
V	4824.000	41.3	33	34.9	43.2	74.0	-30.8
H	12060.000	43.9	33	40.5	51.4	74.0	-22.6
H	14472.000	45.1	33	40.0	52.1	74.0	-21.9

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>30.1</i>	<i>33</i>	<i>34.9</i>	<i>32.0</i>	<i>54.0</i>	<i>-22.0</i>
<i>V</i>	<i>7311.000</i>	<i>29.5</i>	<i>33</i>	<i>37.9</i>	<i>34.4</i>	<i>54.0</i>	<i>-19.6</i>
<i>H</i>	<i>12185.000</i>	<i>31.5</i>	<i>33</i>	<i>40.5</i>	<i>39.0</i>	<i>54.0</i>	<i>-15.0</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>41.4</i>	<i>33</i>	<i>34.9</i>	<i>43.3</i>	<i>74.0</i>	<i>-30.7</i>
<i>V</i>	<i>7311.000</i>	<i>41.4</i>	<i>33</i>	<i>37.9</i>	<i>46.3</i>	<i>74.0</i>	<i>-27.7</i>
<i>H</i>	<i>12185.000</i>	<i>43.6</i>	<i>33</i>	<i>40.5</i>	<i>51.1</i>	<i>74.0</i>	<i>-22.9</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>50.2</i>	<i>33</i>	<i>29.4</i>	<i>46.6</i>	<i>54.0</i>	<i>-7.4</i>
<i>V</i>	<i>4924.000</i>	<i>30.1</i>	<i>33</i>	<i>34.9</i>	<i>32.0</i>	<i>54.0</i>	<i>-22.0</i>
<i>V</i>	<i>7386.000</i>	<i>29.7</i>	<i>33</i>	<i>37.9</i>	<i>34.6</i>	<i>54.0</i>	<i>-19.4</i>
<i>H</i>	<i>12310.000</i>	<i>31.9</i>	<i>33</i>	<i>40.5</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>62.4</i>	<i>33</i>	<i>29.4</i>	<i>58.8</i>	<i>74.0</i>	<i>-15.2</i>
<i>V</i>	<i>4924.000</i>	<i>41.3</i>	<i>33</i>	<i>34.9</i>	<i>43.2</i>	<i>74.0</i>	<i>-30.8</i>
<i>V</i>	<i>7386.000</i>	<i>41.8</i>	<i>33</i>	<i>37.9</i>	<i>46.7</i>	<i>74.0</i>	<i>-27.3</i>
<i>H</i>	<i>12310.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 03

Table 10
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>50.0</i>	<i>33</i>	<i>29.4</i>	<i>46.4</i>	<i>54.0</i>	<i>-7.6</i>
<i>V</i>	<i>4844.000</i>	<i>29.7</i>	<i>33</i>	<i>34.9</i>	<i>31.6</i>	<i>54.0</i>	<i>-22.4</i>
<i>V</i>	<i>7266.000</i>	<i>29.4</i>	<i>33</i>	<i>37.9</i>	<i>34.3</i>	<i>54.0</i>	<i>-19.7</i>
<i>H</i>	<i>12110.000</i>	<i>31.7</i>	<i>33</i>	<i>40.5</i>	<i>39.2</i>	<i>54.0</i>	<i>-14.8</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2390.000</i>	<i>62.1</i>	<i>33</i>	<i>29.4</i>	<i>58.5</i>	<i>74.0</i>	<i>-15.5</i>
<i>V</i>	<i>4844.000</i>	<i>41.1</i>	<i>33</i>	<i>34.9</i>	<i>43.0</i>	<i>74.0</i>	<i>-31.0</i>
<i>V</i>	<i>7266.000</i>	<i>41.3</i>	<i>33</i>	<i>37.9</i>	<i>46.2</i>	<i>74.0</i>	<i>-27.8</i>
<i>H</i>	<i>12110.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 11
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>29.9</i>	<i>33</i>	<i>34.9</i>	<i>31.8</i>	<i>54.0</i>	<i>-22.2</i>
<i>V</i>	<i>7311.000</i>	<i>29.7</i>	<i>33</i>	<i>37.9</i>	<i>34.6</i>	<i>54.0</i>	<i>-19.4</i>
<i>H</i>	<i>12185.000</i>	<i>31.6</i>	<i>33</i>	<i>40.5</i>	<i>39.1</i>	<i>54.0</i>	<i>-14.9</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>4874.000</i>	<i>41.2</i>	<i>33</i>	<i>34.9</i>	<i>43.1</i>	<i>74.0</i>	<i>-30.9</i>
<i>V</i>	<i>7311.000</i>	<i>41.6</i>	<i>33</i>	<i>37.9</i>	<i>46.5</i>	<i>74.0</i>	<i>-27.5</i>
<i>H</i>	<i>12185.000</i>	<i>43.7</i>	<i>33</i>	<i>40.5</i>	<i>51.2</i>	<i>74.0</i>	<i>-22.8</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 09

Table 12
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>50.4</i>	<i>33</i>	<i>29.4</i>	<i>46.8</i>	<i>54.0</i>	<i>-7.2</i>
<i>V</i>	<i>4904.000</i>	<i>30.4</i>	<i>33</i>	<i>34.9</i>	<i>32.3</i>	<i>54.0</i>	<i>-21.7</i>
<i>V</i>	<i>7356.000</i>	<i>29.5</i>	<i>33</i>	<i>37.9</i>	<i>34.4</i>	<i>54.0</i>	<i>-19.6</i>
<i>H</i>	<i>12260.000</i>	<i>31.9</i>	<i>33</i>	<i>40.5</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>V</i>	<i>2483.500</i>	<i>62.6</i>	<i>33</i>	<i>29.4</i>	<i>59.0</i>	<i>74.0</i>	<i>-15.0</i>
<i>V</i>	<i>4904.000</i>	<i>41.5</i>	<i>33</i>	<i>34.9</i>	<i>43.4</i>	<i>74.0</i>	<i>-30.6</i>
<i>V</i>	<i>7356.000</i>	<i>41.3</i>	<i>33</i>	<i>37.9</i>	<i>46.2</i>	<i>74.0</i>	<i>-27.8</i>
<i>H</i>	<i>12260.000</i>	<i>44.0</i>	<i>33</i>	<i>40.5</i>	<i>51.5</i>	<i>74.0</i>	<i>-22.5</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: Adaptor Charging + Game Card + WIFI Connected - Video Playing

Table 13

Radiated Emission Data


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	62.495	35.3	16	10.0	29.3	40.0	-10.7
V	66.496	35.8	16	9.0	28.8	40.0	-11.2
V	143.126	33.9	16	14.0	31.9	43.5	-11.6
V	249.947	31.3	16	20.0	35.3	46.0	-10.7
H	300.000	27.0	16	22.0	33.0	46.0	-13.0
V	350.000	36.3	16	24.0	44.3	46.0	-1.7
H	369.378	27.8	16	24.0	35.8	46.0	-10.2
H	400.000	21.6	16	25.0	30.6	46.0	-15.4
H	450.010	30.5	16	26.0	40.5	46.0	-5.5
H	670.442	28.6	16	29.0	41.6	46.0	-4.4
H	803.696	24.0	16	31.0	39.0	46.0	-7.0
V	850.013	24.1	16	31.0	39.1	46.0	-6.9
V	960.120	26.0	16	33.0	43.0	54.0	-11.0

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


INTERTEK TESTING SERVICES

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

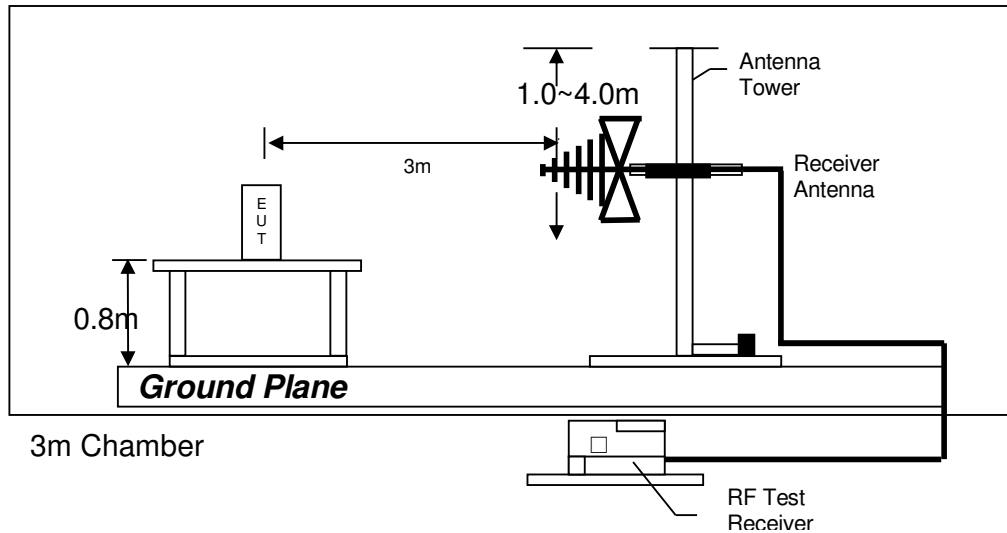

Test setup of radiated emissions up to 1GHz

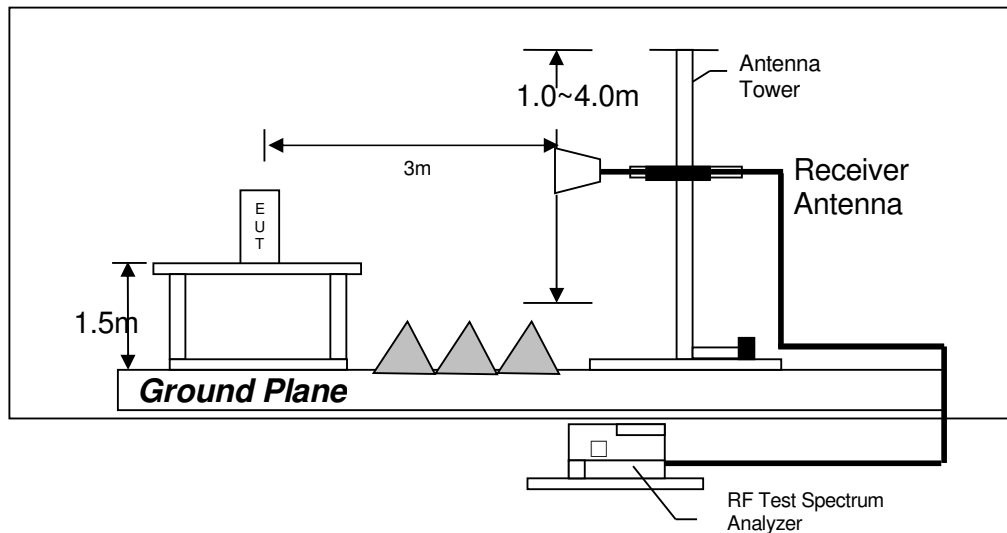

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

INTERTEK TESTING SERVICES

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 20dB margin


INTERTEK TESTING SERVICES

Worst Case: WiFi Online

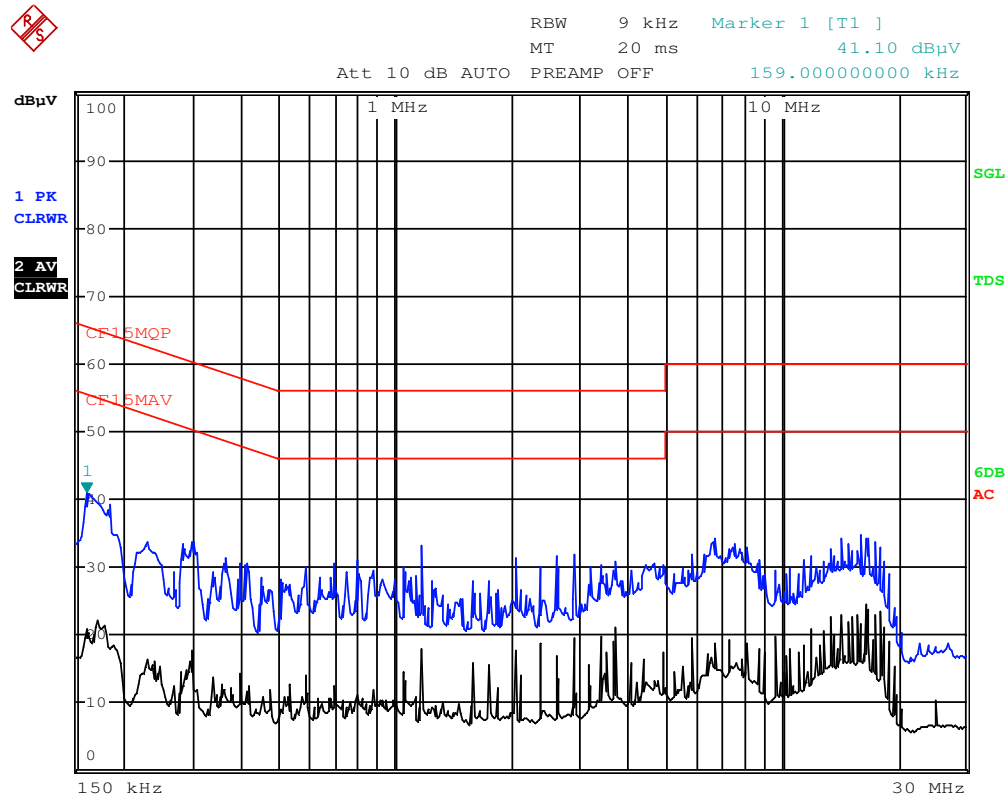

INTERTEK TESTING SERVICES

4.7.3 Conducted Emission Test Setup

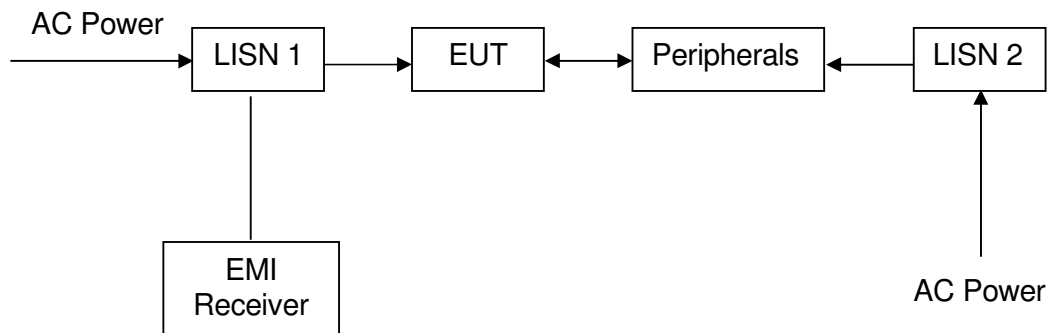

INTERTEK TESTING SERVICES

EXHIBIT 5 EQUIPMENT LIST

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	BiConiLog Antenna
Registration No.	EW-3156	EW-2253	EW-3061
Manufacturer	R&S	R&S	EMCO
Model No.	ESR26	FSP40	3412E
Calibration Date	Dec. 06, 2016	Jun. 15, 2016	Sep. 23, 2016
Calibration Due Date	Dec. 06, 2017	Jun. 15, 2017	Sep. 23, 2017

Equipment	Double Ridged Guide Antenna	Broad-Band Horn Antenna
Registration No.	EW-0194	EW-1679
Manufacturer	EMCO	SCHWARZBECK
Model No.	3115	BBHA9170
Calibration Date	Aug. 10, 2016	Jun. 28, 2016
Calibration Due Date	Feb. 10, 2018	Jun. 28, 2017

2) Conducted Emissions Test

Equipment	EMI Test Receiver	Artificial Mains	Pulse Limiter
Registration No.	EW-3156	EW-0192	EW-3248
Manufacturer	R&S	R&S	R&S
Model No.	ESR26	ESH3-Z5	E3H3-Z2
Calibration Date	Dec. 06, 2016	Aug. 26, 2016	Oct. 12, 2016
Calibration Due Date	Dec. 06, 2017	Aug. 26, 2017	Oct. 12, 2017

3) Conductive Measurement Test

Equipment	RF Power Meter	Power Sensor
Registration No.	SZ182-02	SZ182-02-01
Manufacturer	ANRITSU	ANRITSU
Model No.	ML2496A	MA2411B
Calibration Date	May. 23, 2016	May. 23, 2016
Calibration Due Date	May. 23, 2017	May. 23, 2017

END OF TEST REPORT