



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Shenzhen Youmi Intelligent Technology Co., Ltd.

**Address:** 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

**FCC ID:** 2ATZ4-G3MP606

**IC:** 26074-G3MP606

**HVIN:** G2239U-UF-V

**Product Name:** Smart phone

**Standard(s):** 47 CFR Part 15, Subpart E(15.407)  
RSS-247 Issue 3, August 2023  
RSS-Gen, Issue 5, February 2021 Amendment 2  
ANSI C63.10-2013  
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR231168240-00D

**Date Of Issue:** 2024/01/02

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>8</b>
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details .....	8
1.2.3 Support Cable List and Details .....	8
1.2.4 Block Diagram of Test Setup.....	9
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>12</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>12</b>
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup .....	14
3.1.4 Test Procedure .....	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
<b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>	<b>15</b>
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	18
3.2.4 Test Procedure .....	18
3.2.5 Corrected Amplitude & Margin Calculation.....	19
<b>3.3 26DB ATTENUATED BELOW THE CHANNEL POWER.....</b>	<b>20</b>
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure .....	20
<b>3.4 EMISSION BANDWIDTH.....</b>	<b>21</b>
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure .....	22
<b>3.5 MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>24</b>
3.5.1 Applicable Standard.....	24
3.5.2 EUT Setup.....	25
3.5.3 Test Procedure .....	25
<b>3.6 MAXIMUM POWER SPECTRAL DENSITY .....</b>	<b>26</b>
3.6.1 Applicable Standard.....	26
3.6.2 EUT Setup.....	27
3.6.3 Test Procedure .....	27
<b>3.7 DUTY CYCLE .....</b>	<b>28</b>
3.7.1 EUT Setup.....	28
3.7.2 Test Procedure .....	28

<b>3.8 TRANSMITTER FREQUENCY STABILITY .....</b>	<b>29</b>
3.8.1 Applicable Standard.....	29
3.8.2 EUT Setup.....	29
3.8.3 Test Procedure .....	29
<b>3.9 ANTENNA REQUIREMENT.....</b>	<b>31</b>
3.9.1 Applicable Standard.....	31
3.9.2 Judgment.....	31
<b>3.10 ADDITIONAL REQUIREMENT .....</b>	<b>32</b>
3.10.1 Applicable Standard.....	32
3.10.2 Judgment.....	33
<b>4. Test DATA AND RESULTS.....</b>	<b>34</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>34</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>37</b>
<b>4.3 26dB ATTENUATED BELOW THE CHANNEL POWER .....</b>	<b>79</b>
<b>4.4 EMISSION BANDWIDTH: .....</b>	<b>82</b>
<b>4.5 MAXIMUM CONDUCTED OUTPUT POWER: .....</b>	<b>96</b>
<b>4.6 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>98</b>
<b>4.7 DUTY CYCLE:.....</b>	<b>106</b>
<b>4.8 FREQUENCY STABILITY: .....</b>	<b>108</b>
<b>5. EUT PHOTOGRAPHS .....</b>	<b>113</b>
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>114</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231168240-00D	Original Report	2024/01/02

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Smart phone
<b>Trade Name:</b>	UMIDIGI
<b>EUT Model:</b>	G3 Max
<b>Operation Frequency:</b>	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
<b>Maximum Average Output Power (Conducted):</b>	10.79dBm (5150-5250 MHz) 8.81dBm (5725-5850 MHz)
<b>Modulation Type:</b>	802.11a/n/ac:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
<b>Rated Input Voltage:</b>	DC5V from adapter or DC3.85V from battery
<b>Serial Number:</b>	RF: 2DW6-1 CE/RE Below 1GHz: 2DW6-2, RE above 1GHz: 2DW4-2
<b>EUT Received Date:</b>	2023/11/20
<b>EUT Received Status:</b>	Good

### 1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m)/RSS-GEN section 6.9, the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

### For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m)/RSS-GEN section 6.9, the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

**For 802.11ac vht80:**

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m)/RSS-GEN section 6.9, the below frequencies were performed the test as below:			
42	5210	155	5775

**1.1.3 Antenna Information Detail▲:**

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5150~5250MHz	1.1 dBi
		5725~5850MHz	1.1 dBi

The Method of §15.203/RSS-Gen Compliance:

- ☒ Antenna was permanently attached to the unit.  
☐ Antenna use a unique type of connector to attach to the EUT.  
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**1.1.4 Accessory Information:**

Accessory Description	Manufacturer	Model	Parameters
Adapter	Huajin	HJ-0502000W2-US	Input:100-240V~50/60Hz 0.3A Output:5.0V, 2.0A

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>		The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>		No		
<b>EUT Exercise Software:</b>		Engineer mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :				
<b>5150-5250 MHz Band:</b>				
<b>Test Modes</b>	<b>Test Channels</b>	<b>Test Frequency (MHz)</b>	<b>Data rate</b>	<b>Power Level Setting</b>
802.11a	Lowest	5180	6Mbps	13
	Middle	5200	6Mbps	13
	Highest	5240	6Mbps	13
802.11ac ht20	Lowest	5180	MCS0	13
	Middle	5200	MCS0	13
	Highest	5240	MCS0	13
802.11ac ht40	Lowest	5190	MCS0	9
	Highest	5230	MCS0	9
802.11ac vht80	Middle	5210	MCS0	8
<b>5725-5850 MHz Band:</b>				
<b>Test Modes</b>	<b>Test Channels</b>	<b>Test Frequency (MHz)</b>	<b>Data rate</b>	<b>Power Level Setting</b>
802.11a	Lowest	5745	6Mbps	24
	Middle	5785	6Mbps	24
	Highest	5825	6Mbps	24
802.11ac ht20	Lowest	5745	MCS0	24
	Middle	5785	MCS0	24
	Highest	5825	MCS0	24
802.11ac ht40	Lowest	5755	MCS0	24
	Highest	5795	MCS0	24
802.11ac vht80	Middle	5775	MCS0	24

Note:  
The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the 802.11n ht20/ ht40 were reduced since the identical parameters with 802.11ac vht20/vht40.  
The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

### 1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown


### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.0	EUT	Adapter
Earphone Cable	No	No	1.2	Earphone	EUT




### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

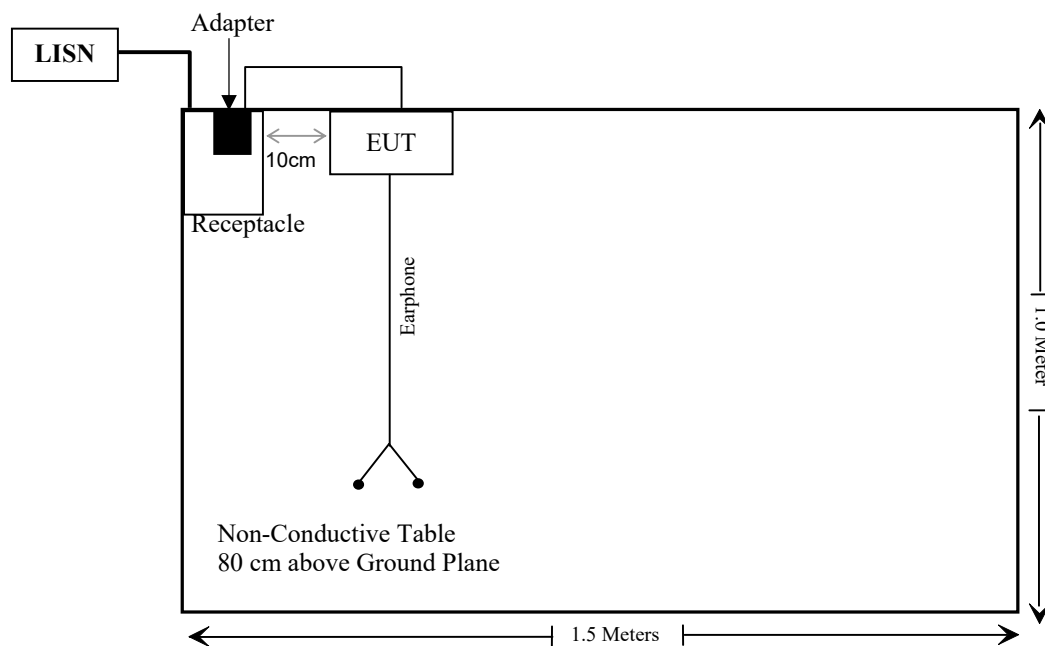

Radiated Spurious Emissions:

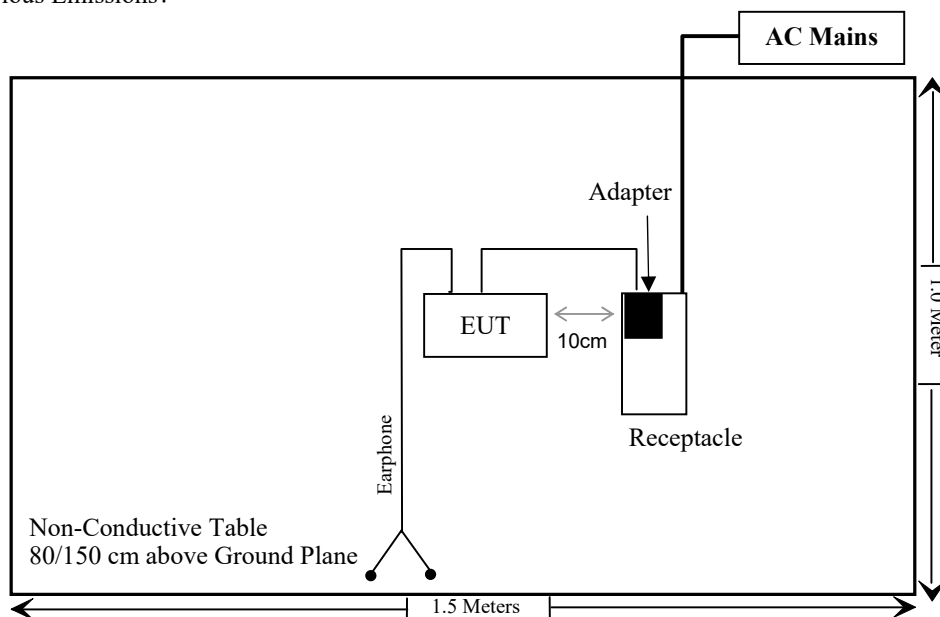

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9k~30MHz:4.12dB 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b) RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliant
RSS-247 Clause 6.2.1.2	26dB attenuated below the channel power	Compliant
FCC§15.407(a) (e) RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliant
FCC§15.407(a) RSS-247 Clause 6.2	Maximum Conducted Output Power	Compliant
FCC§15.407 (a) RSS-247 Clause 6.2	Power Spectral Density	Compliant
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliant
RSS-247 Clause 6.4	Additional requirements	Compliant
RSS-Gen Clause 6.11	Frequency Stability	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

#### RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the

boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50


**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

### 3.1.2 EUT Setup

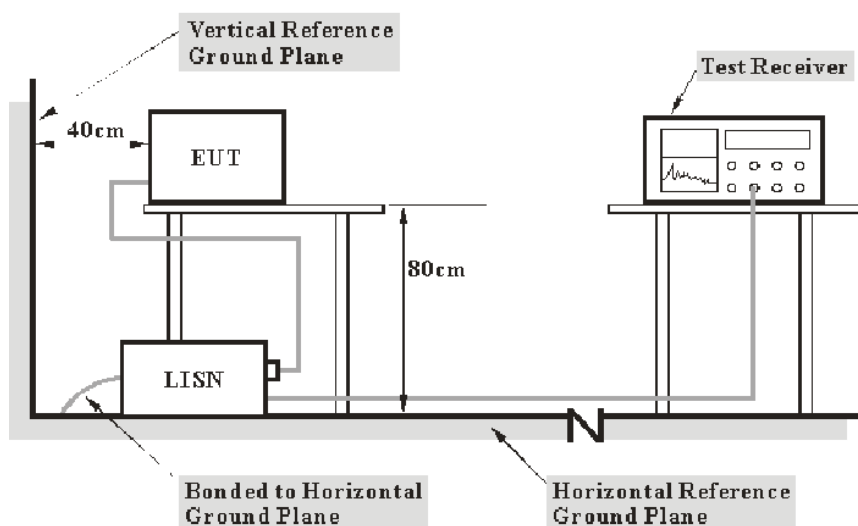

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207,RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.407 (b);

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

### Frequency band 5150-5250 MHz:

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

**Frequency band 5250-5350 MHz:**

## RSS-247 Clause 6.2.2.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

**Frequency bands 5470-5600 MHz and 5650-5725 MHz:**

## RSS-247 Clause 6.2.3.2

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

**Frequency band 5725-5850 MHz**

## RSS-247 Clause 6.2.4.2

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.


Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.




### 3.2.2 EUT Setup


9 kHz-30MHz:

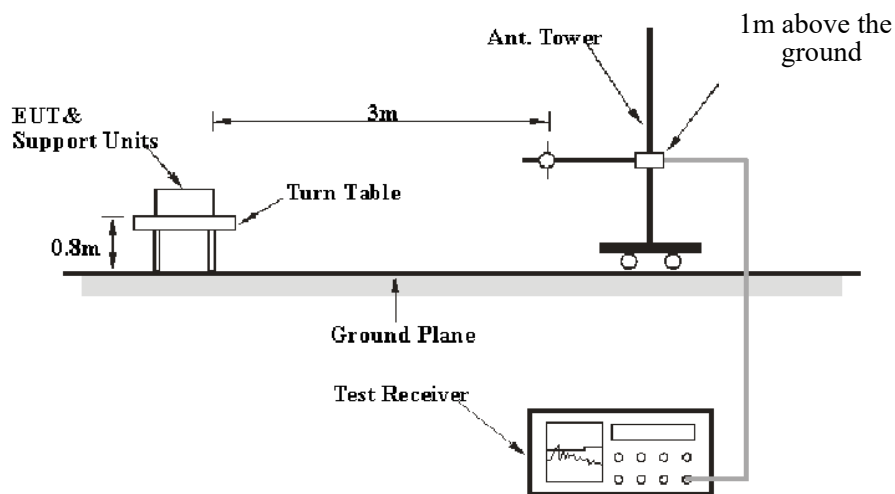

30MHz-1GHz:

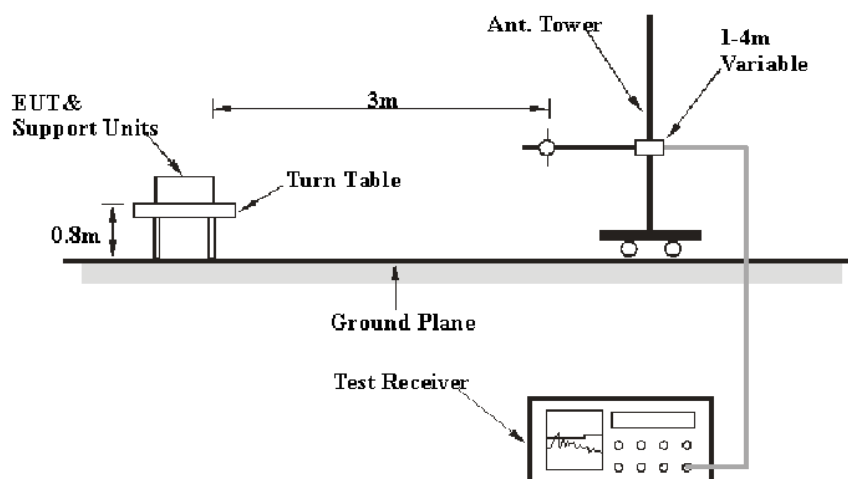

1-40 GHz:

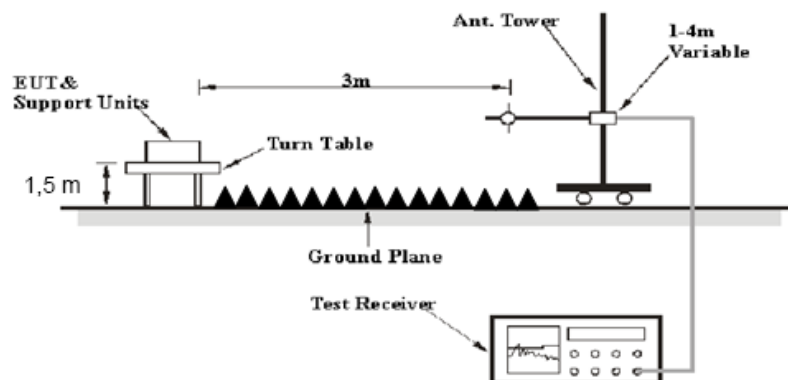

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$


### 3.3 26dB Attenuated Below The Channel Power

#### 3.3.1 Applicable Standard

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

#### 3.3.2 EUT Setup

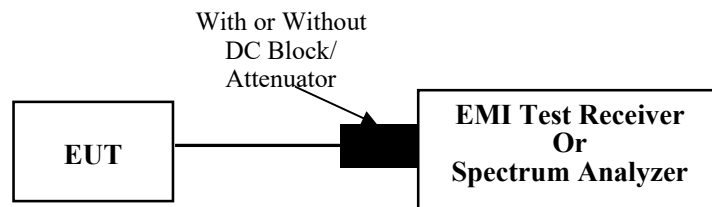

#### 3.3.3 Test Procedure

- Set RBW = 1%~5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = RMS.
- Trace mode = max hold
- Measure the emission attenuated below the channel power

### 3.4 Emission Bandwidth

#### 3.4.1 Applicable Standard

FCC §15.407 (a)

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

FCC §15.407 (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W

RSS-247 Clause 6.2.3.1


The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.4.1

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 3.4.2 EUT Setup

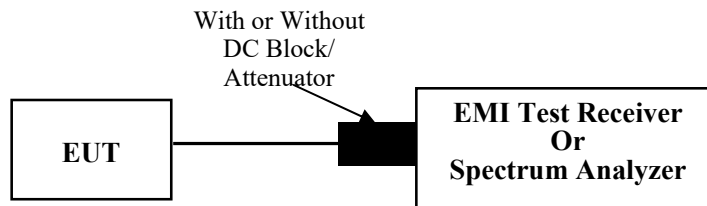

### 3.4.3 Test Procedure

#### 26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
  - Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - Detector = Peak.
  - Trace mode = max hold.
  - Sweep = auto couple.
  - Allow the trace to stabilize.
  - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

**99% Occupied Bandwidth:**

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.5 Maximum Conducted Output Power

#### 3.5.1 Applicable Standard

FCC §15.407(a) (1)

(iv) For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;



b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.3.1


The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

### 3.5.2 EUT Setup

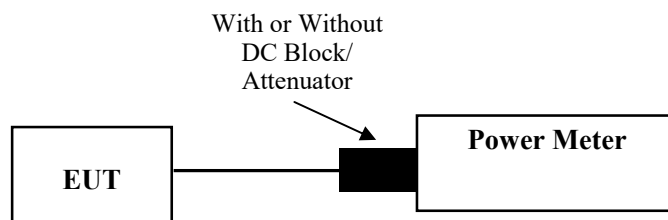

### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.6 Maximum Power Spectral Density

#### 3.6.1 Applicable Standard

FCC §15.407(a) (1)

(iv) For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.3.1


The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

### 3.6.2 EUT Setup

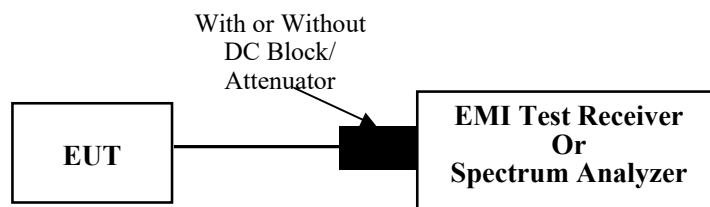

### 3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.2

#### **Duty cycle $\geq 98\%$**

Method SA-1 was used.

#### **Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$**


Method SA-2 was used.

#### **Duty cycle $< 98\%$ , duty cycle variations exceed $\pm 2\%$**

Method SA-3 was used.

### 3.7 Duty Cycle

#### 3.7.1 EUT Setup

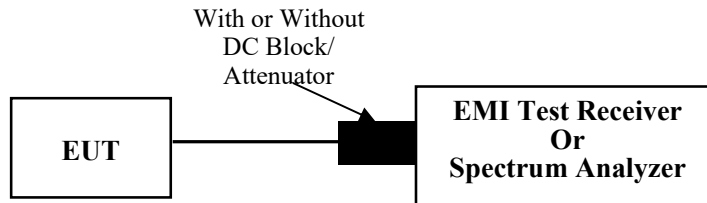

#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)


### 3.8 Transmitter frequency stability

#### 3.8.1 Applicable Standard

RSS-Gen Clause 8.11

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

#### 3.8.2 EUT Setup

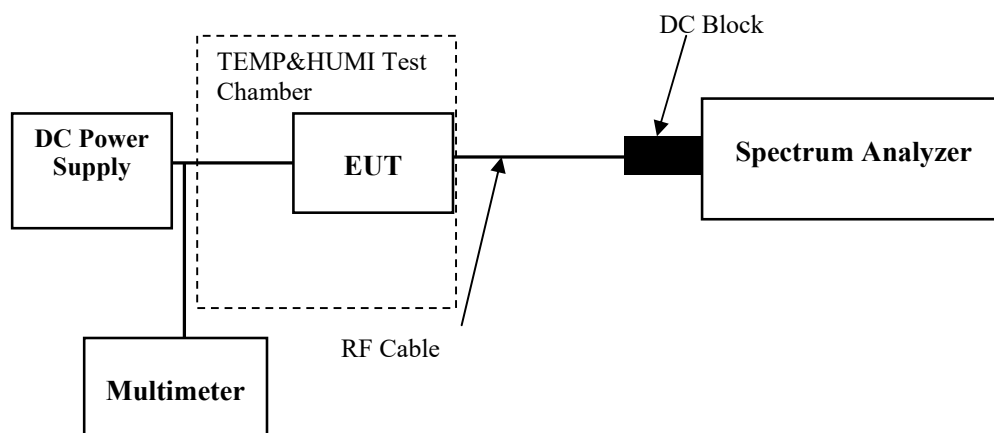

#### 3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 6.8

##### Frequency stability with respect to ambient temperature

- Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10 °C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

#### **Frequency stability when varying supply voltage**

Unless otherwise specified, these tests shall be made at ambient room temperature (+15 °C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.  
NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.
- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

### 3.9 Antenna Requirement

#### 3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

#### 3.9.2 Judgment

**Result: Compliant.** Please refer to the Antenna Information detail in Section 1.

### 3.10 Additional requirement

#### 3.10.1 Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
  - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;<sup>4</sup>
  - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
  - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
  - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.



### 3.10.2 Judgment

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

i). The device operates on 5150-5250MHz is only for indoor use.

ii). The device not operates on 5250-5350MHz/5470-5725MHz.

iii). The antenna permanently attached to the unit, and all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.

iv). The device not operates on 5250-5350MHz

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	2DW6-2	Test Date:	2023/11/23
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode, 802.11a 5240MHz )
Tester:	David Huang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.2	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

#### Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:


Please refer to the below table and plots.

Project No.: CR231168240-RF  
 Tester: David Huang  
 Port: Line  
 Note: Transmitting(5G WIFI)

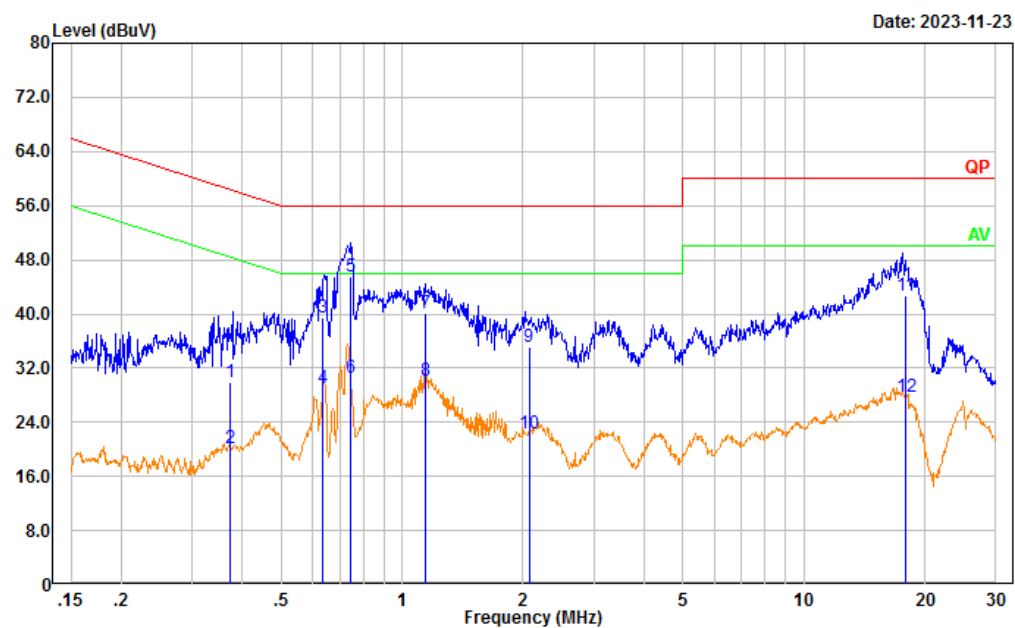

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
<hr/>							
1	0.372	20.20	9.61	29.81	58.46	28.65	QP
2	0.372	10.60	9.61	20.21	48.46	28.25	Average
3	0.637	29.84	9.62	39.46	56.00	16.54	QP
4	0.637	19.33	9.62	28.95	46.00	17.05	Average
5	0.746	35.83	9.62	45.45	56.00	10.55	QP
6	0.746	20.86	9.62	30.48	46.00	15.52	Average
7	1.141	30.54	9.62	40.16	56.00	15.84	QP
8	1.141	20.54	9.62	30.16	46.00	15.84	Average
9	2.069	25.39	9.63	35.02	56.00	20.98	QP
10	2.069	12.79	9.63	22.42	46.00	23.58	Average
11	17.879	32.95	9.75	42.70	60.00	17.30	QP
12	17.879	18.01	9.75	27.76	50.00	22.24	Average

Project No.: CR231168240-RF  
 Tester: David Huang  
 Port: neutral  
 Note: Transmitting(5G WIFI)

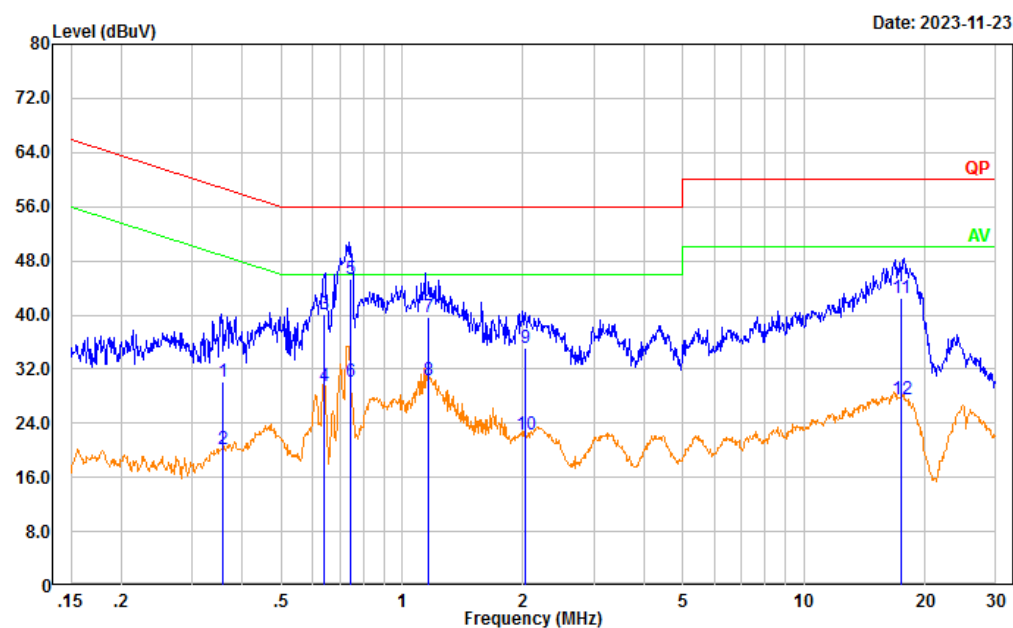

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
<hr/>							
1	0.357	20.49	9.61	30.10	58.79	28.69	QP
2	0.357	10.60	9.61	20.21	48.79	28.58	Average
3	0.641	30.56	9.62	40.18	56.00	15.82	QP
4	0.641	19.88	9.62	29.50	46.00	16.50	Average
5	0.747	35.70	9.62	45.32	56.00	10.68	QP
6	0.747	20.53	9.62	30.15	46.00	15.85	Average
7	1.164	29.98	9.62	39.60	56.00	16.40	QP
8	1.164	20.66	9.62	30.28	46.00	15.72	Average
9	2.028	25.54	9.63	35.17	56.00	20.83	QP
10	2.028	12.71	9.63	22.34	46.00	23.66	Average
11	17.404	32.76	9.69	42.45	60.00	17.55	QP
12	17.404	17.85	9.69	27.54	50.00	22.46	Average

**4.2 Radiation Spurious Emissions**

Serial Number:	2DW6-2, 2DW4-2		Test Date:	Below 1GHz: 2023/11/24 Above 1GHz: 2023/12/3	
Test Site:	966-2, 966-1		Test Mode:	Transmitting	
Tester:	Carl Xue ,Coco Tian		Test Result:	Pass	
Environmental Conditions:					
Temperature: (℃)	25.1~25.7	Relative Humidity: (%)	47~62	ATM Pressure: (kPa)	101.1~101.6

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/11/9	2026/11/8
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Above 1GHz					
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.


**1) 30MHz-1GHz:****5150-5250 MHz Band:** (Maximum Conducted Output Power Mode. 802.11a)**Low Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI B1

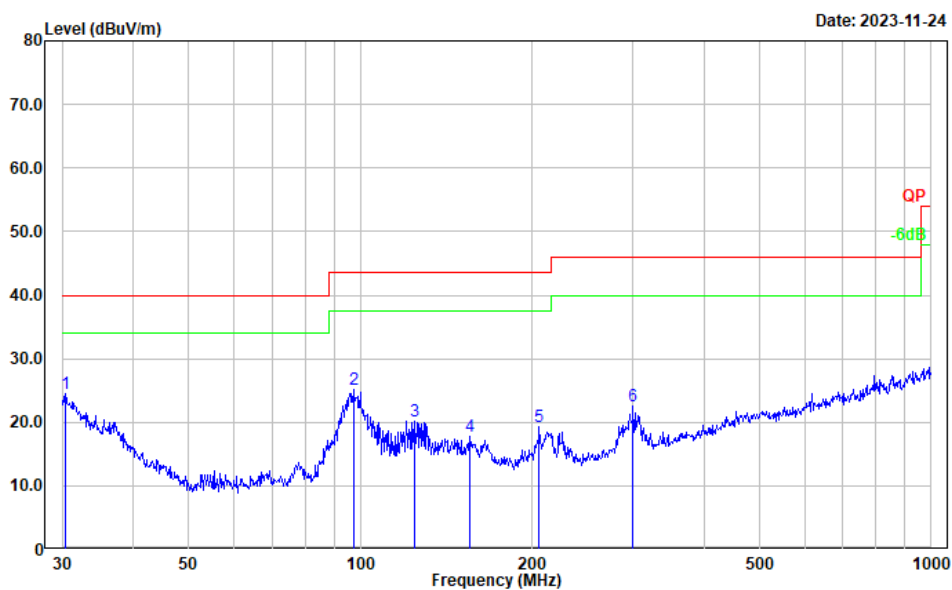

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	28.53	-4.13	24.40	40.00	15.60	Peak
2	97.115	40.16	-15.05	25.11	43.50	18.39	Peak
3	124.133	31.61	-11.38	20.23	43.50	23.27	Peak
4	155.364	29.82	-11.96	17.86	43.50	25.64	Peak
5	205.675	31.58	-12.38	19.20	43.50	24.30	Peak
6	300.367	33.12	-10.63	22.49	46.00	23.51	Peak

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI B1

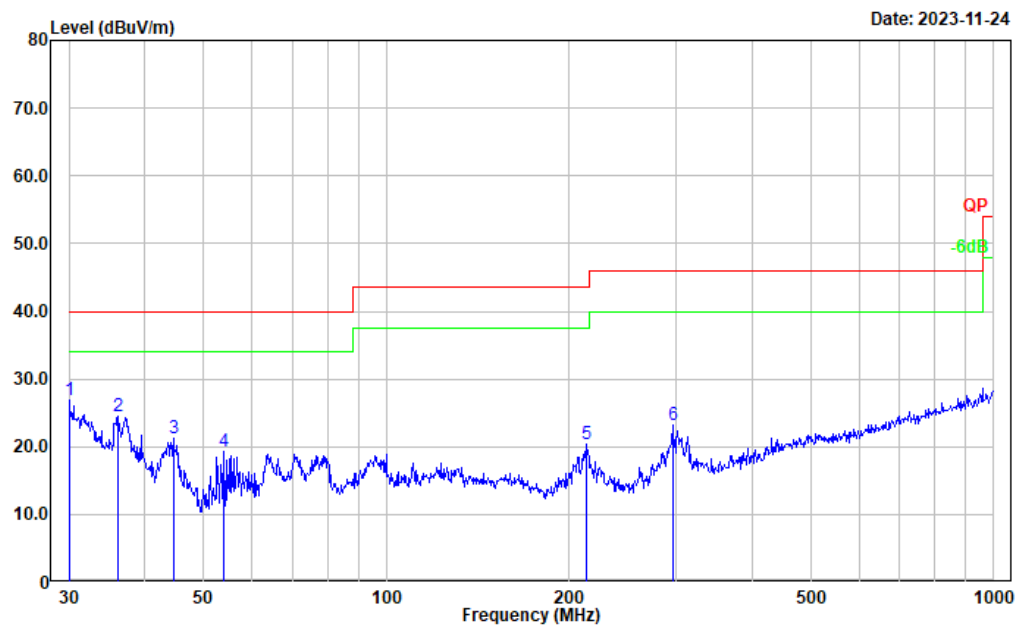


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	30.74	-3.80	26.94	40.00	13.06	Peak
2	36.127	33.06	-8.48	24.58	40.00	15.42	Peak
3	44.587	35.28	-14.00	21.28	40.00	18.72	Peak
4	53.882	36.54	-17.16	19.38	40.00	20.62	Peak
5	213.015	32.98	-12.57	20.41	43.50	23.09	Peak
6	296.184	33.87	-10.74	23.13	46.00	22.87	Peak




**Middle Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI B1

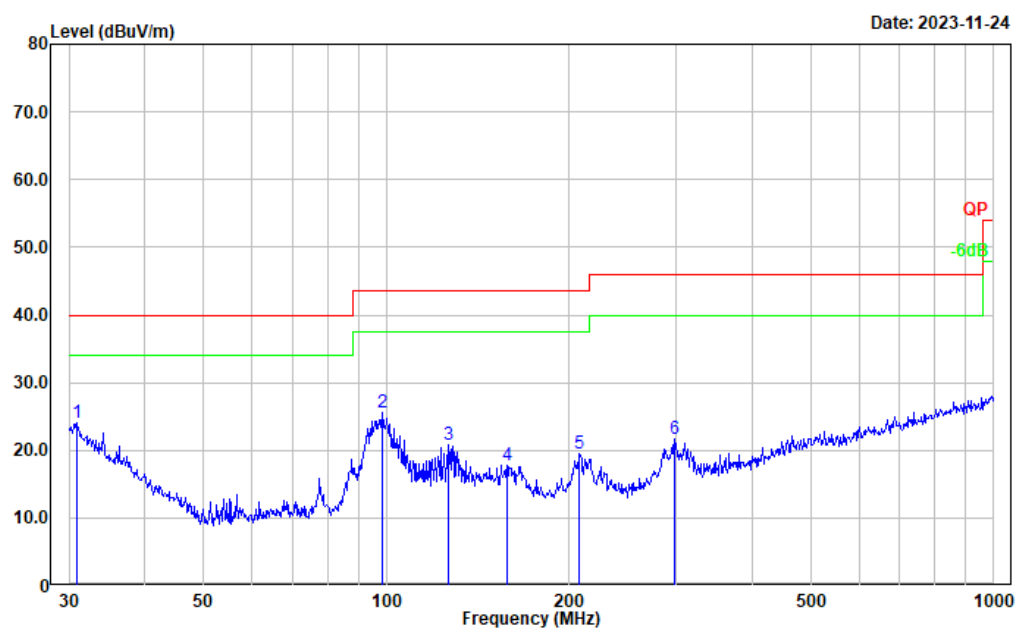

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	28.64	-4.53	24.11	40.00	15.89	Peak
2	98.487	40.15	-14.66	25.49	43.50	18.01	Peak
3	126.772	32.23	-11.35	20.88	43.50	22.62	Peak
4	158.112	29.84	-11.96	17.88	43.50	25.62	Peak
5	207.850	31.94	-12.45	19.49	43.50	24.01	Peak
6	298.268	32.31	-10.69	21.62	46.00	24.38	Peak


Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI B1

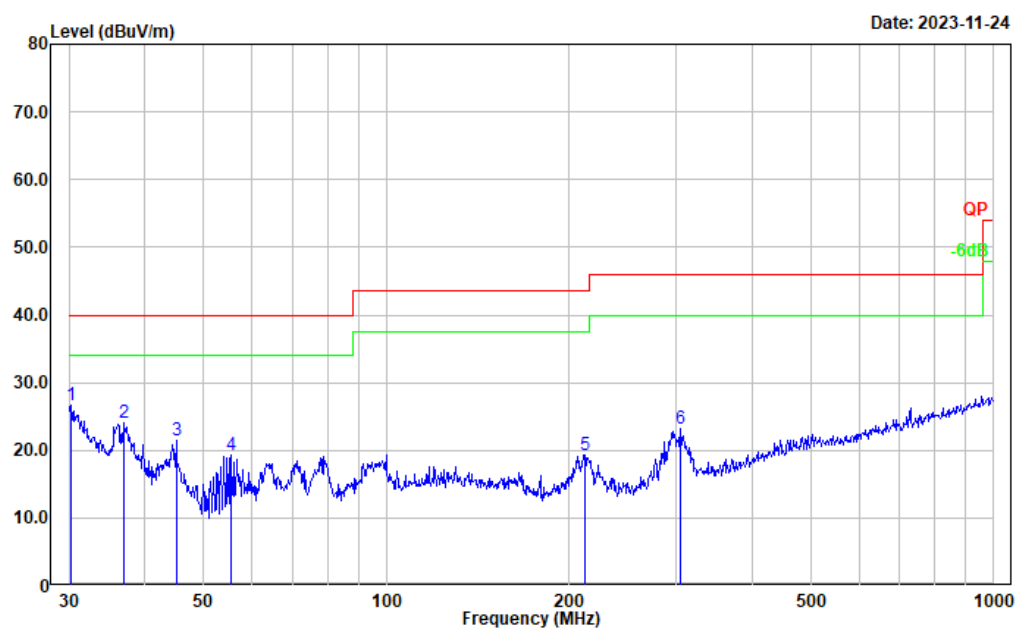

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.317	30.66	-4.04	26.62	40.00	13.38	Peak
2	36.895	33.12	-9.06	24.06	40.00	15.94	Peak
3	45.058	35.74	-14.25	21.49	40.00	18.51	Peak
4	55.415	36.41	-17.19	19.22	40.00	20.78	Peak
5	212.270	31.91	-12.57	19.34	43.50	24.16	Peak
6	304.610	33.73	-10.57	23.16	46.00	22.84	Peak


**High Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI B1

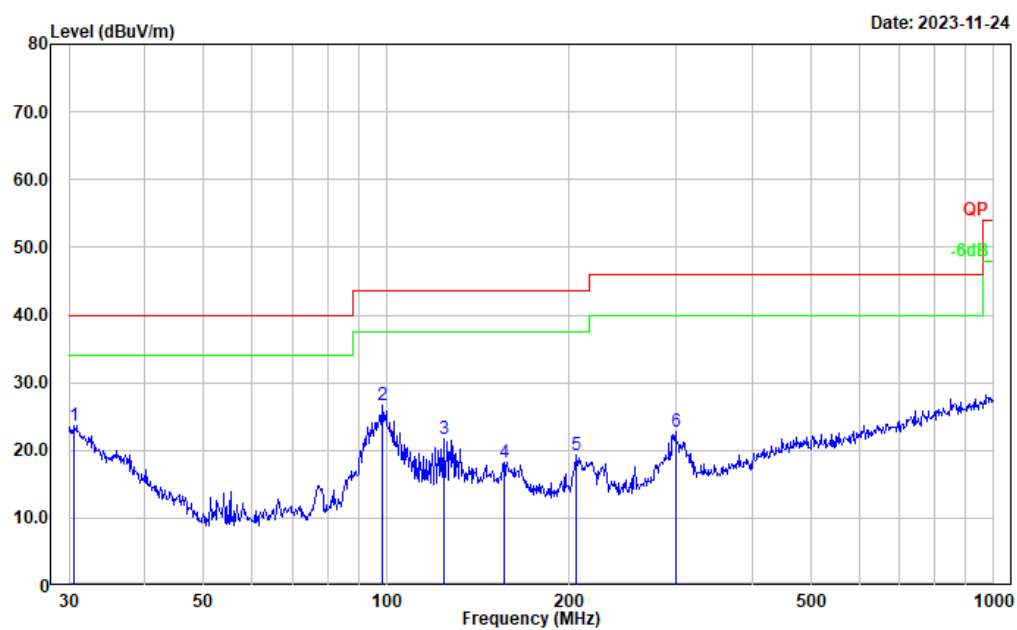

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
-----							
1	30.531	27.76	-4.20	23.56	40.00	16.44	Peak
2	98.487	41.31	-14.66	26.65	43.50	16.85	Peak
3	124.133	33.06	-11.38	21.68	43.50	21.82	Peak
4	156.458	30.24	-11.94	18.30	43.50	25.20	Peak
5	205.675	31.73	-12.38	19.35	43.50	24.15	Peak
6	299.316	33.32	-10.65	22.67	46.00	23.33	Peak


Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI B1

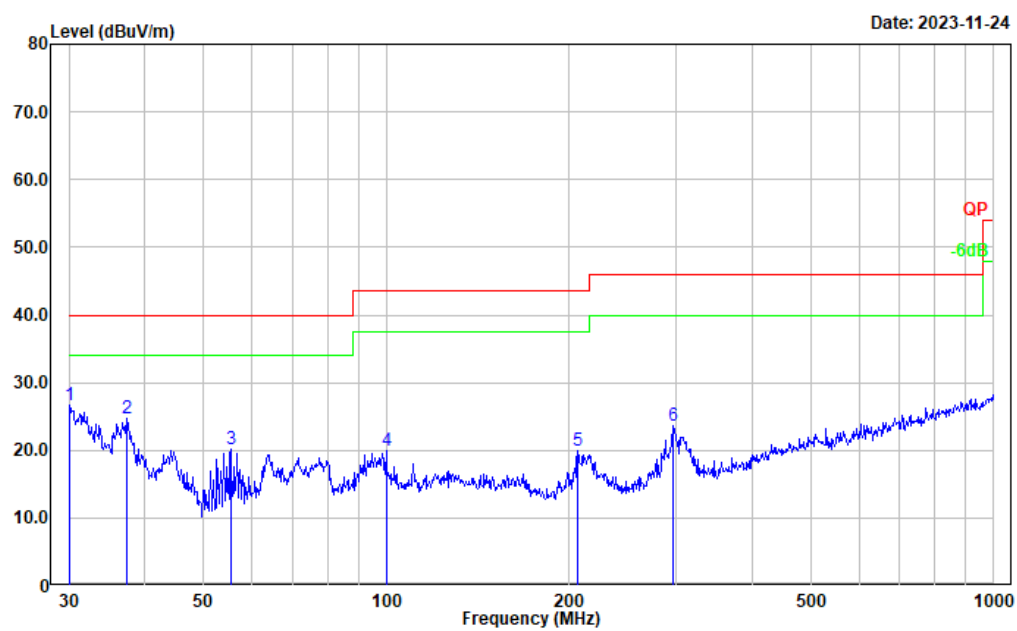

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
<hr/>							
1	30.000	30.53	-3.80	26.73	40.00	13.27	Peak
2	37.285	34.13	-9.35	24.78	40.00	15.22	Peak
3	55.415	37.44	-17.19	20.25	40.00	19.75	Peak
4	99.878	34.31	-14.35	19.96	43.50	23.54	Peak
5	206.398	32.29	-12.40	19.89	43.50	23.61	Peak
6	297.224	34.43	-10.71	23.72	46.00	22.28	Peak


**5725-5850 MHz Band: (Maximum Conducted Output Power Mode, 802 11a mode)****Low Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI

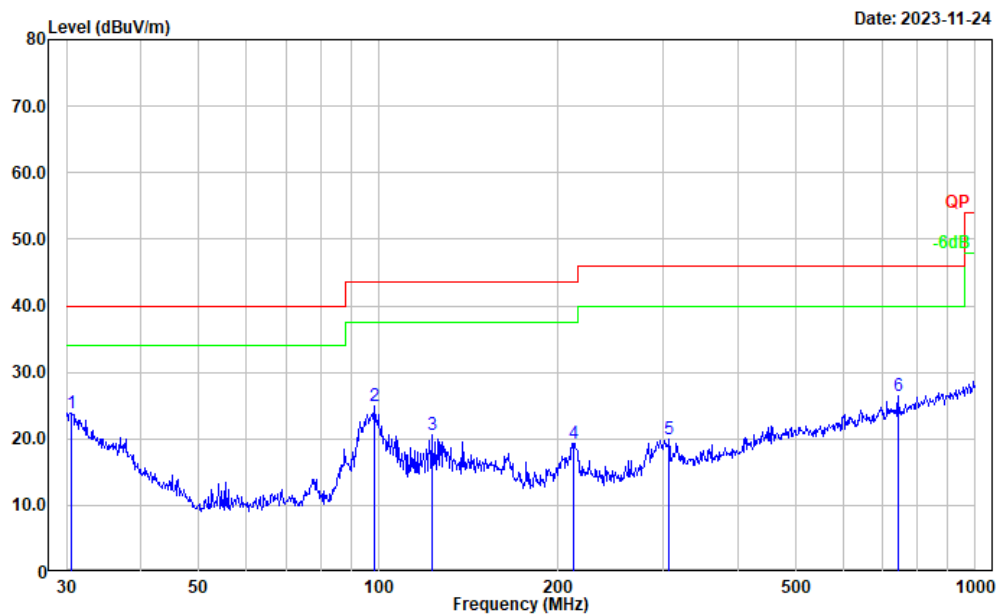

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	28.13	-4.20	23.93	40.00	16.07	Peak
2	98.487	39.57	-14.66	24.91	43.50	18.59	Peak
3	122.834	31.90	-11.38	20.52	43.50	22.98	Peak
4	212.270	31.89	-12.57	19.32	43.50	24.18	Peak
5	306.754	30.59	-10.58	20.01	46.00	25.99	Peak
6	742.259	29.51	-3.03	26.48	46.00	19.52	Peak


Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI

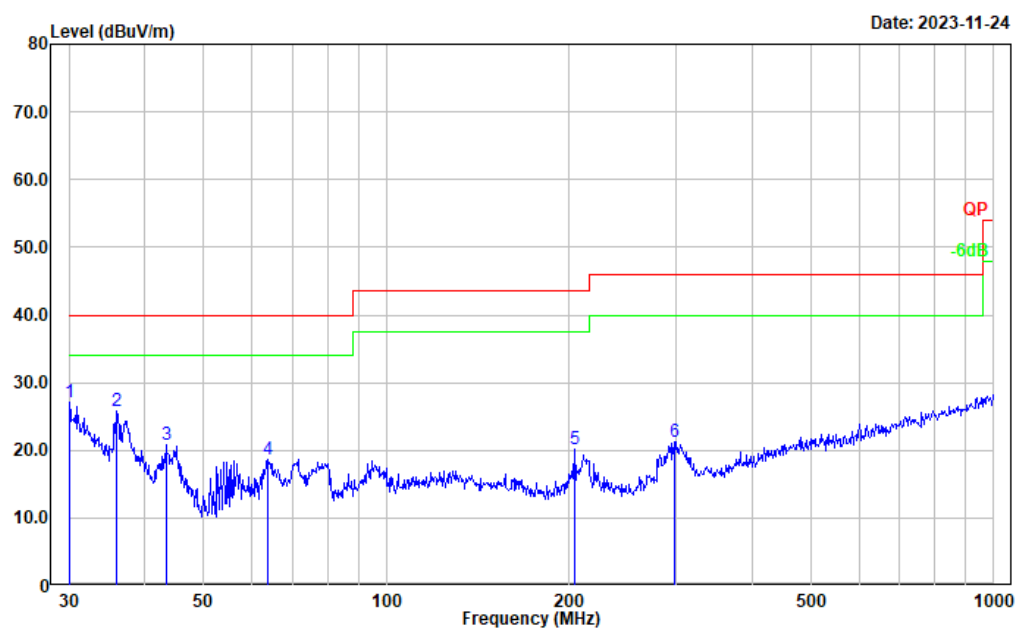

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	30.96	-3.80	27.16	40.00	12.84	Peak
2	35.875	34.16	-8.28	25.88	40.00	14.12	Peak
3	43.353	34.07	-13.32	20.75	40.00	19.25	Peak
4	63.759	35.74	-17.03	18.71	40.00	21.29	Peak
5	204.238	32.54	-12.33	20.21	43.50	23.29	Peak
6	298.268	32.04	-10.69	21.35	46.00	24.65	Peak


**Middle Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI

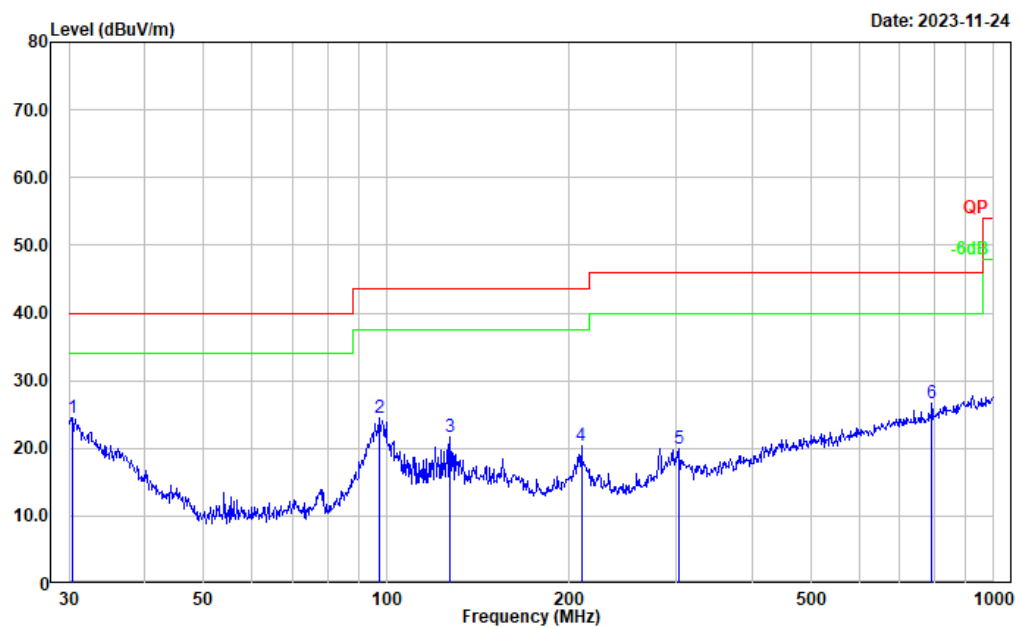

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	28.70	-4.13	24.57	40.00	15.43	Peak
2	97.115	39.54	-15.05	24.49	43.50	19.01	Peak
3	127.218	33.08	-11.35	21.73	43.50	21.77	Peak
4	209.313	32.89	-12.48	20.41	43.50	23.09	Peak
5	303.544	30.53	-10.59	19.94	46.00	26.06	Peak
6	790.619	29.05	-2.29	26.76	46.00	19.24	Peak

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI

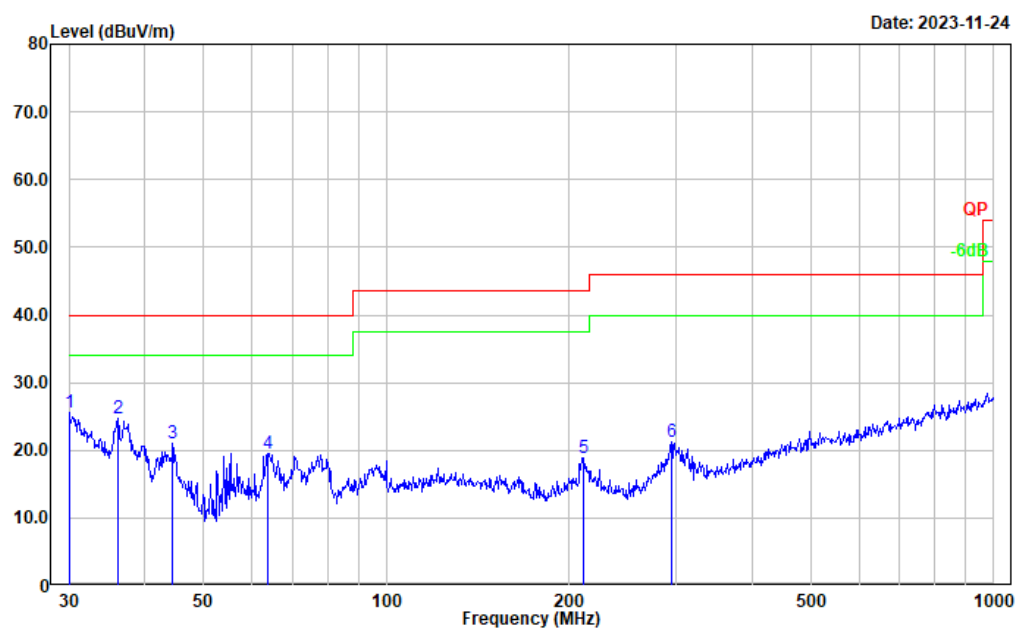


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
<hr/>							
1	30.000	29.37	-3.80	25.57	40.00	14.43	Peak
2	36.127	33.13	-8.48	24.65	40.00	15.35	Peak
3	44.431	34.84	-13.92	20.92	40.00	19.08	Peak
4	63.759	36.62	-17.03	19.59	40.00	20.41	Peak
5	211.527	31.41	-12.54	18.87	43.50	24.63	Peak
6	295.147	32.03	-10.77	21.26	46.00	24.74	Peak




**High Channel**

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting 5G WIFI

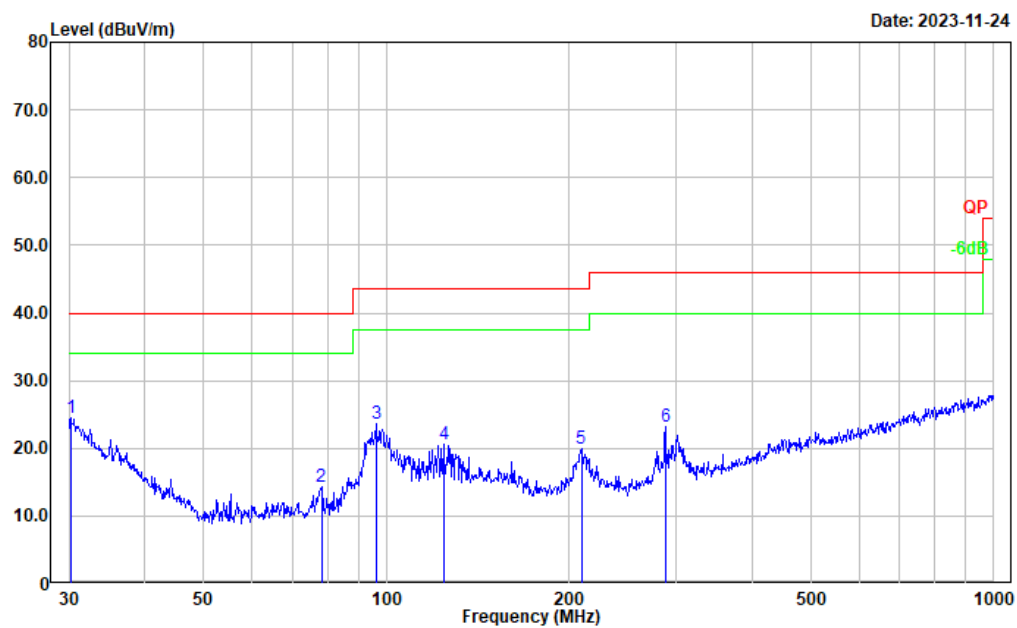

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.211	28.43	-3.96	24.47	40.00	15.53	Peak
2	78.139	31.63	-17.29	14.34	40.00	25.66	Peak
3	96.099	38.84	-15.31	23.53	43.50	19.97	Peak
4	124.133	31.96	-11.38	20.58	43.50	22.92	Peak
5	209.313	32.36	-12.48	19.88	43.50	23.62	Peak
6	287.990	34.43	-11.19	23.24	46.00	22.76	Peak

Project No.: CR231168240-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting 5G WIFI

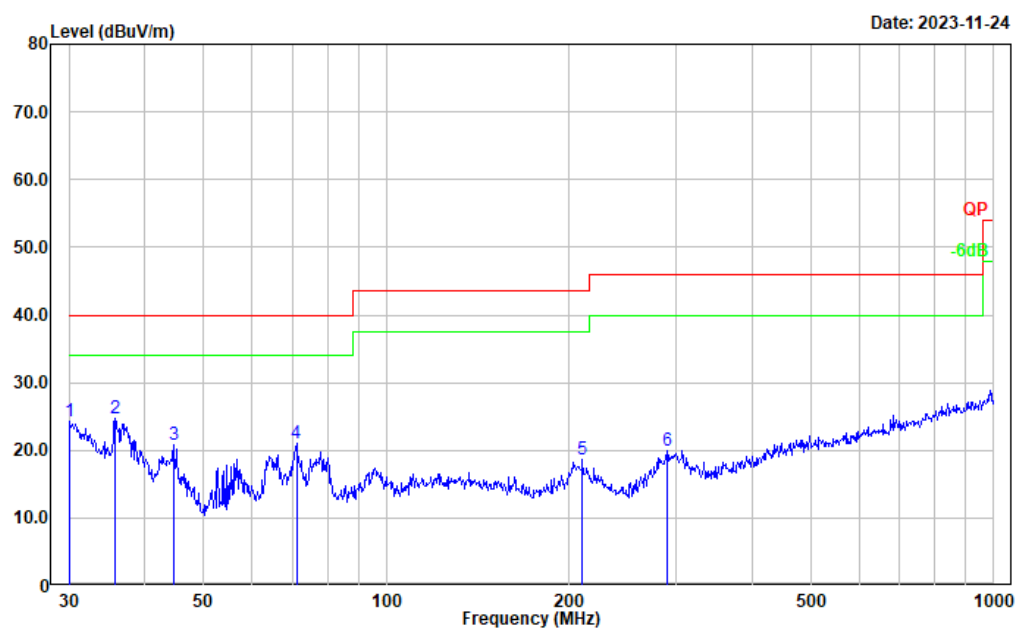

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.000	28.16	-3.80	24.36	40.00	15.64	Peak
2	35.749	32.82	-8.20	24.62	40.00	15.38	Peak
3	44.587	34.85	-14.00	20.85	40.00	19.15	Peak
4	71.080	37.63	-16.68	20.95	40.00	19.05	Peak
5	210.048	31.04	-12.49	18.55	43.50	24.95	Peak
6	290.017	31.03	-11.06	19.97	46.00	26.03	Peak

**2) 1GHz-40GHz:****5150-5250MHz:****802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	54.82	PK	H	11.67	66.49	74.00	7.51
5150.000	38.66	AV	H	11.67	50.33	54.00	3.67
5150.000	55.49	PK	V	11.67	67.16	74.00	6.84
5150.000	39.05	AV	V	11.67	50.72	54.00	3.28
10360.000	41.90	PK	H	20.47	62.37	68.20	5.83
10360.000	41.03	PK	V	20.47	61.5	68.20	6.70
Middle Channel: 5200 MHz							
10400.000	42.20	PK	H	20.54	62.74	68.20	5.46
10400.000	41.35	PK	V	20.54	61.89	68.20	6.31
High Channel: 5240 MHz							
5350.000	46.34	PK	H	11.94	58.28	74.00	15.72
5350.000	32.56	AV	H	11.94	44.50	54.00	9.50
5350.000	46.55	PK	V	11.94	58.49	74.00	15.51
5350.000	32.71	AV	V	11.94	44.65	54.00	9.35
10480.000	42.57	PK	H	20.42	62.99	68.20	5.21
10480.000	41.62	PK	V	20.42	62.04	68.20	6.16

**802.11ac vht20 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5180	MHz		
5150.000	55.91	PK	H	11.67	67.58	74.00	6.42
5150.000	38.97	AV	H	11.67	50.64	54.00	3.36
5150.000	56.52	PK	V	11.67	68.19	74.00	5.81
5150.000	39.33	AV	V	11.67	51	54.00	3.00
10360.000	42.56	PK	H	20.47	63.03	68.20	5.17
10360.000	41.37	PK	V	20.47	61.84	68.20	6.36
Middle Channel:				5200	MHz		
10400.000	42.86	PK	H	20.54	63.40	68.20	4.80
10400.000	41.65	PK	V	20.54	62.19	68.20	6.01
High Channel:				5240	MHz		
5350.000	46.45	PK	H	11.94	58.39	74.00	15.61
5350.000	32.81	AV	H	11.94	44.75	54.00	9.25
5350.000	46.68	PK	V	11.94	58.62	74.00	15.38
5350.000	32.94	AV	V	11.94	44.88	54.00	9.12
10480.000	43.27	PK	H	20.42	63.69	68.20	4.51
10480.000	42.13	PK	V	20.42	62.55	68.20	5.65

**802.11ac vht40 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5190	MHz		
5150.000	56.74	PK	H	11.67	68.41	74.00	5.59
5150.000	38.72	AV	H	11.67	50.39	54.00	3.61
5150.000	57.18	PK	V	11.67	68.85	74.00	5.15
5150.000	38.99	AV	V	11.67	50.66	54.00	3.34
10380.000	37.27	PK	H	20.51	57.78	68.20	10.42
10380.000	36.34	PK	V	20.51	56.85	68.20	11.35
High Channel:				5230	MHz		
5350.000	46.25	PK	H	11.94	58.19	74.00	15.81
5350.000	33.16	AV	H	11.94	45.10	54.00	8.90
5350.000	46.41	PK	V	11.94	58.35	74.00	15.65
5350.000	33.28	AV	V	11.94	45.22	54.00	8.78
10460.000	36.42	PK	H	20.45	56.87	68.20	11.33
10460.000	35.59	PK	V	20.45	56.04	68.20	12.16

**802.11ac vht80 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5210	MHz		
5150.000	53.06	PK	H	11.67	64.73	74.00	9.27
5150.000	38.99	AV	H	11.67	50.66	54.00	3.34
5150.000	53.53	PK	V	11.67	65.20	74.00	8.80
5150.000	39.31	AV	V	11.67	50.98	54.00	3.02
5350.000	46.47	PK	H	11.94	58.41	74.00	15.59
5350.000	34.04	AV	H	11.94	45.98	54.00	8.02
5350.000	46.70	PK	V	11.94	58.64	74.00	15.36
5350.000	34.18	AV	V	11.94	46.12	54.00	7.88
10420.000	35.80	PK	H	20.51	56.31	68.20	11.89
10420.000	34.93	PK	V	20.51	55.44	68.20	12.76

**5725-5850MHz****802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	35.07	PK	H	21.49	56.56	74.00	17.44
11490.000	22.61	AV	H	21.49	44.1	54.00	9.90
11490.000	34.14	PK	V	21.49	55.63	74.00	18.37
11490.000	21.48	AV	V	21.49	42.97	54.00	11.03
Middle Channel:				5785	MHz		
11570.000	34.27	PK	H	21.71	55.98	74.00	18.02
11570.000	21.20	AV	H	21.71	42.91	54.00	11.09
11570.000	33.51	PK	V	21.71	55.22	74.00	18.78
11570.000	20.39	AV	V	21.71	42.10	54.00	11.90
High Channel:				5825	MHz		
11650.000	33.26	PK	H	22.04	55.30	74.00	18.70
11650.000	19.95	AV	H	22.04	41.99	54.00	12.01
11650.000	32.44	PK	V	22.04	54.48	74.00	19.52
11650.000	18.79	AV	V	22.04	40.83	54.00	13.17

**802.11ac vht20 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	34.66	PK	H	21.49	56.15	74.00	17.85
11490.000	21.84	AV	H	21.49	43.33	54.00	10.67
11490.000	33.57	PK	V	21.49	55.06	74.00	18.94
11490.000	20.71	AV	V	21.49	42.20	54.00	11.80
Middle Channel:				5785	MHz		
11570.000	33.85	PK	H	21.71	55.56	74.00	18.44
11570.000	20.94	AV	H	21.71	42.65	54.00	11.35
11570.000	33.03	PK	V	21.71	54.74	74.00	19.26
11570.000	20.07	AV	V	21.71	41.78	54.00	12.22
High Channel:				5825	MHz		
11650.000	32.76	PK	H	22.04	54.80	74.00	19.20
11650.000	19.40	AV	H	22.04	41.44	54.00	12.56
11650.000	31.89	PK	V	22.04	53.93	74.00	20.07
11650.000	18.65	AV	V	22.04	40.69	54.00	13.31

**802.11ac vht40 Mode:**


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
11510.000	32.53	PK	H	21.48	54.01	74.00	19.99
11510.000	20.04	AV	H	21.48	41.52	54.00	12.48
11510.000	31.92	PK	V	21.48	53.40	74.00	20.60
11510.000	19.29	AV	V	21.48	40.77	54.00	13.23
High Channel: 5795 MHz							
11590.000	31.74	PK	H	21.78	53.52	74.00	20.48
11590.000	19.06	AV	H	21.78	40.84	54.00	13.16
11590.000	31.27	PK	V	21.78	53.05	74.00	20.95
11590.000	18.35	AV	V	21.78	40.13	54.00	13.87

**802.11ac vht80 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5775	MHz		
11550.000	30.70	PK	H	21.63	52.33	74.00	21.67
11550.000	19.99	AV	H	21.63	41.62	54.00	12.38
11550.000	30.23	PK	V	21.63	51.86	74.00	22.14
11550.000	19.38	AV	V	21.63	41.01	54.00	12.99




Listed with the worst harmonic margin test plot: (802.11ac vht20 5240MHz)

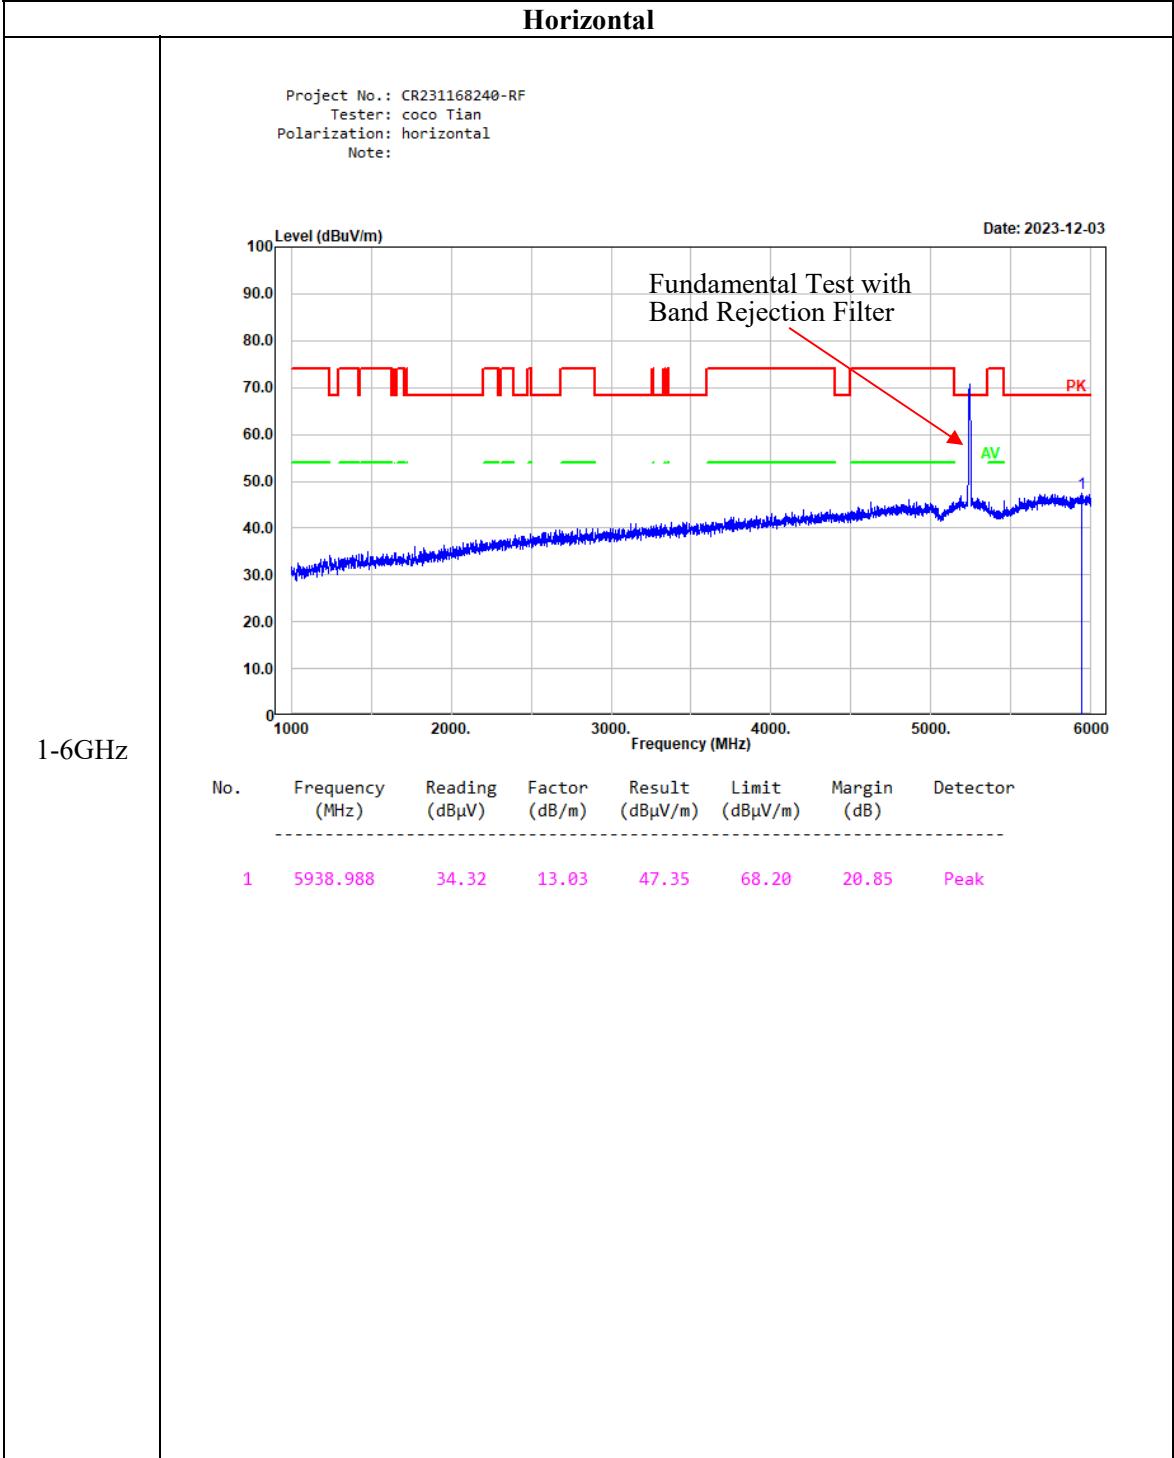

Horizontal

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: horizontal  
Note:

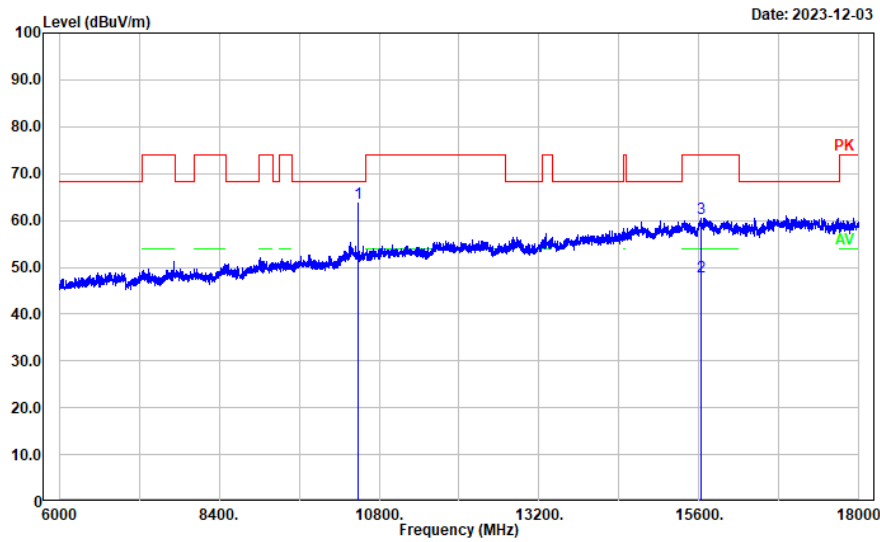


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10480.000	43.27	20.42	63.69	68.20	4.51	Peak
2	15633.130	23.12	24.73	47.85	54.00	6.15	Average
3	15633.130	35.80	24.73	60.53	74.00	13.47	Peak

Horizontal

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Horizontal  
Note:

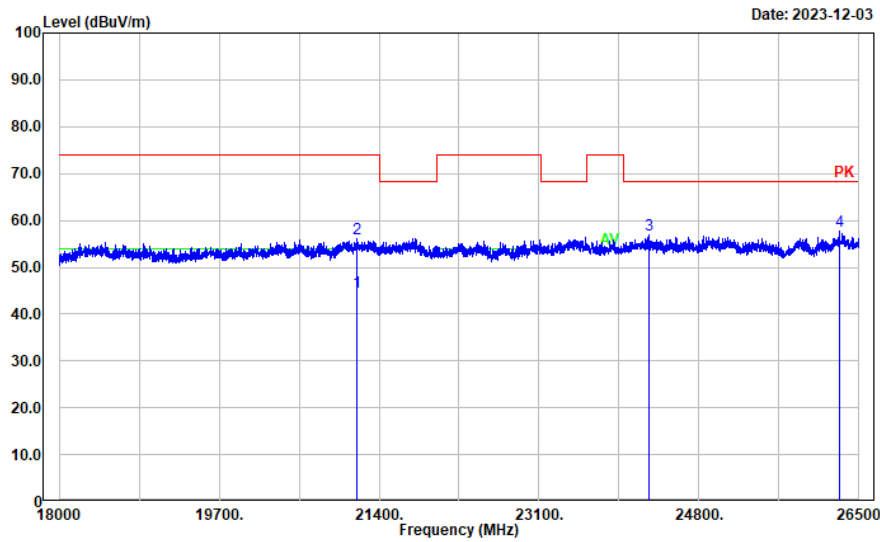


18-26.5GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	21162.630	39.89	4.76	44.65	54.00	9.35	Average
2	21162.630	51.28	4.76	56.04	74.00	17.96	Peak
3	24265.750	51.88	5.05	56.93	68.20	11.27	Peak
4	26290.860	50.71	6.94	57.65	68.20	10.55	Peak

Horizontal

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Horizontal  
Note:

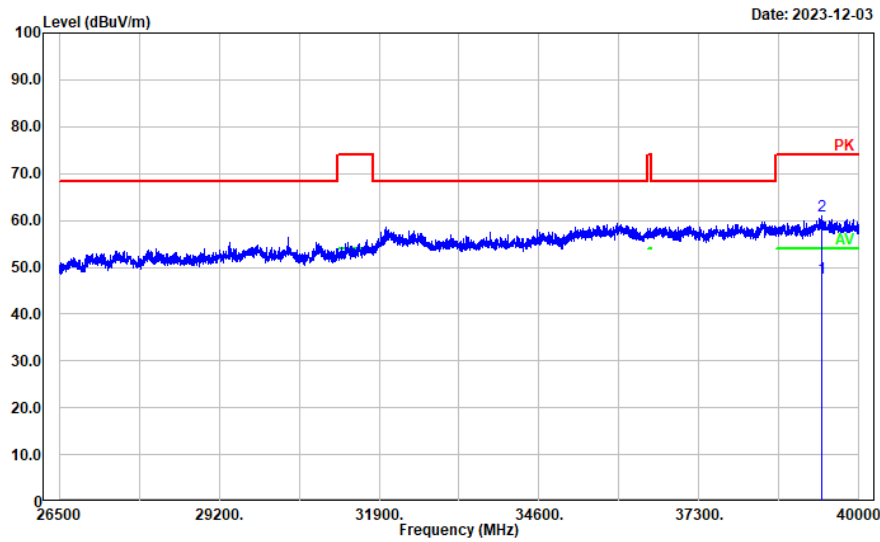


26.5-40GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39362.670	37.43	10.18	47.61	54.00	6.39	Average
2	39362.670	50.67	10.18	60.85	74.00	13.15	Peak

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: vertical  
Note:

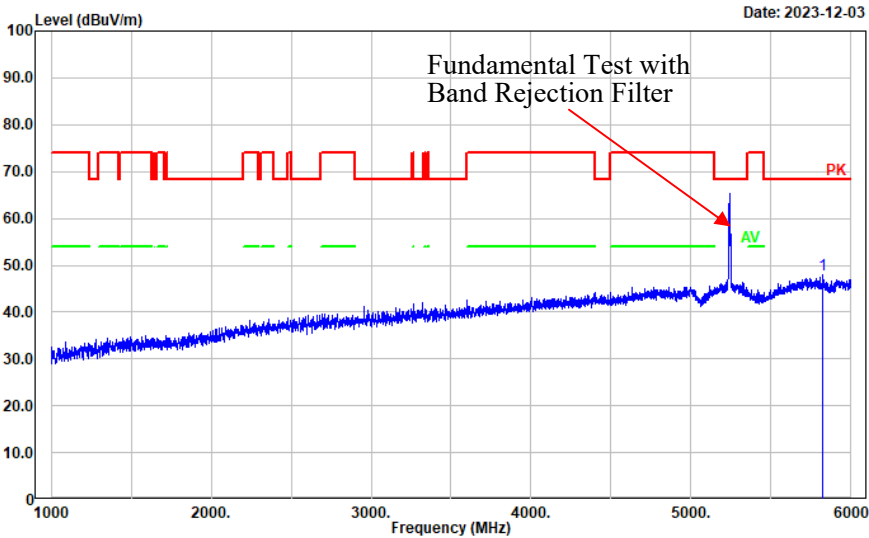


1-6GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5821.964	35.11	12.73	47.84	68.20	20.36	Peak

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: vertical  
Note:

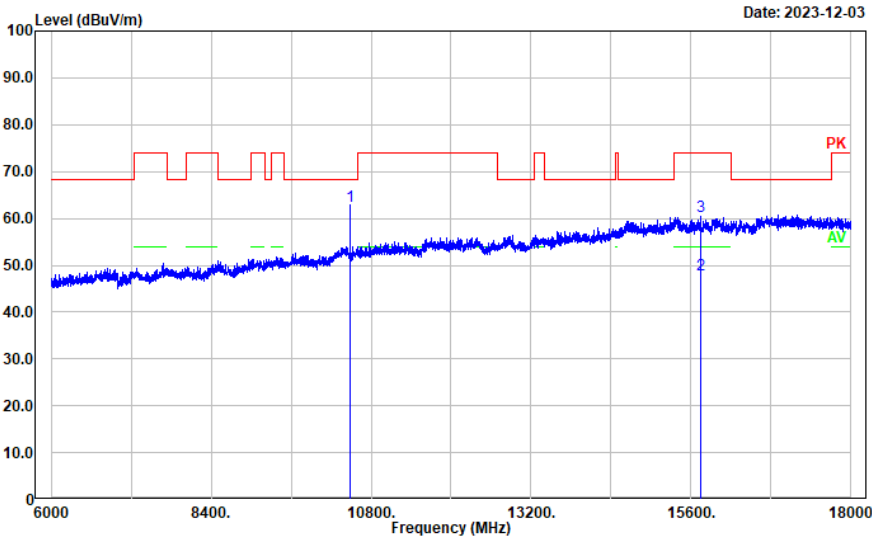


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10480.000	42.13	20.42	62.55	68.20	5.65	Peak
2	15748.350	23.00	24.87	47.87	54.00	6.13	Average
3	15748.350	35.44	24.87	60.31	74.00	13.69	Peak

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: vertical  
Note:

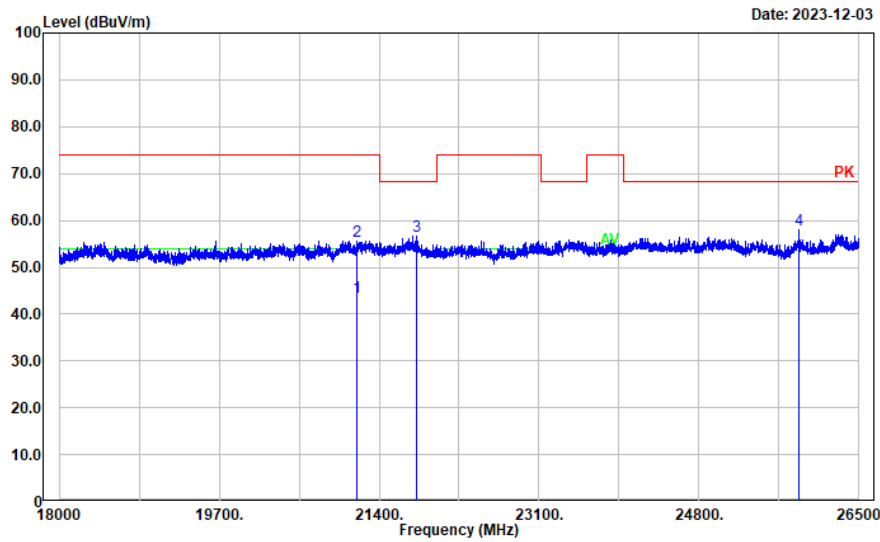


18-26.5GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
<hr/>							
1	21167.730	38.88	4.78	43.66	54.00	10.34	Average
2	21167.730	50.89	4.78	55.67	74.00	18.33	Peak
3	21793.460	51.60	4.95	56.55	68.20	11.65	Peak
4	25865.770	51.79	6.23	58.02	68.20	10.18	Peak

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

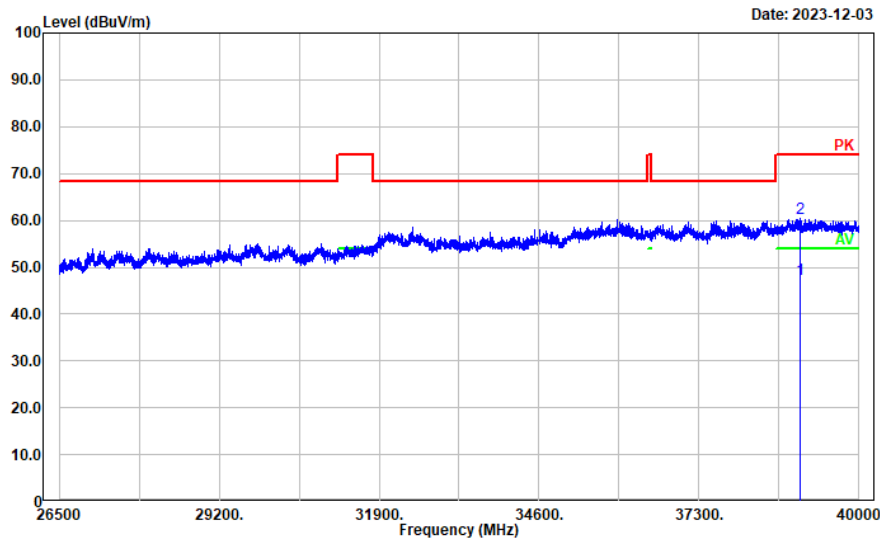

26.5-40GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39003.500	36.86	10.46	47.32	54.00	6.68	Average
2	39003.500	49.92	10.46	60.38	74.00	13.62	Peak



## Test plots for Band Edge Measurements (Radiated)

802.11a

Test Channel:


5745MHz

Ant. Polar. :

Horizontal

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Horizontal  
Note:

Date: 2023-12-03

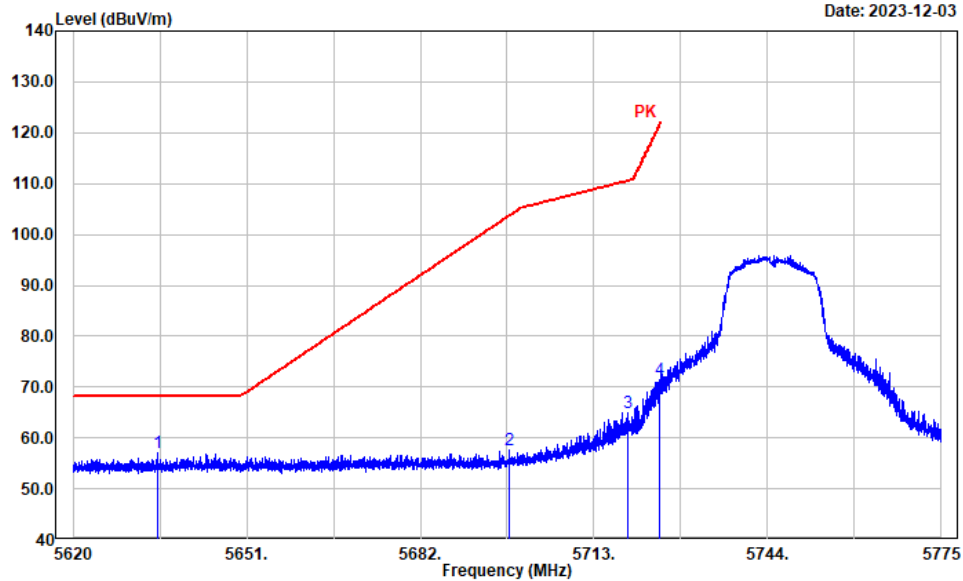

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5635.038	44.91	12.24	57.15	68.20	11.05	Peak
2	5697.794	45.10	12.54	57.64	103.57	45.93	Peak
3	5719.034	52.47	12.57	65.04	110.53	45.49	Peak
4	5724.615	58.91	12.57	71.48	121.32	49.84	Peak

## 802.11a


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

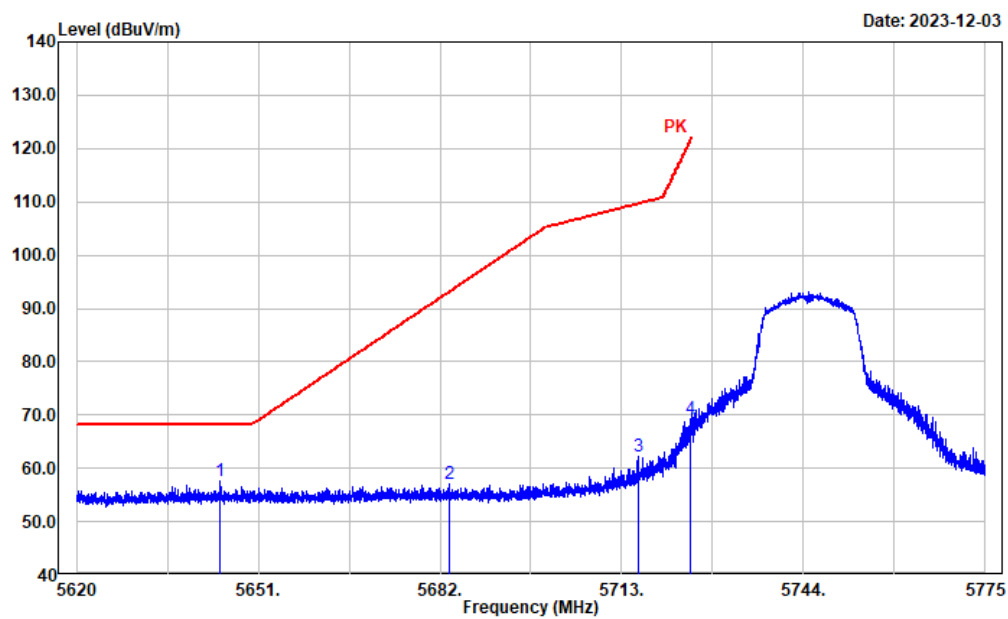

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5644.464	45.30	12.29	57.59	68.20	10.61	Peak
2	5683.500	44.63	12.47	57.10	93.03	35.93	Peak
3	5715.747	49.68	12.56	62.24	109.61	47.37	Peak
4	5724.739	56.60	12.57	69.17	121.60	52.43	Peak

## 802.11a


Test Channel:

5825MHz

Ant. Polar. :

Horizontal

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Horizontal  
Note:

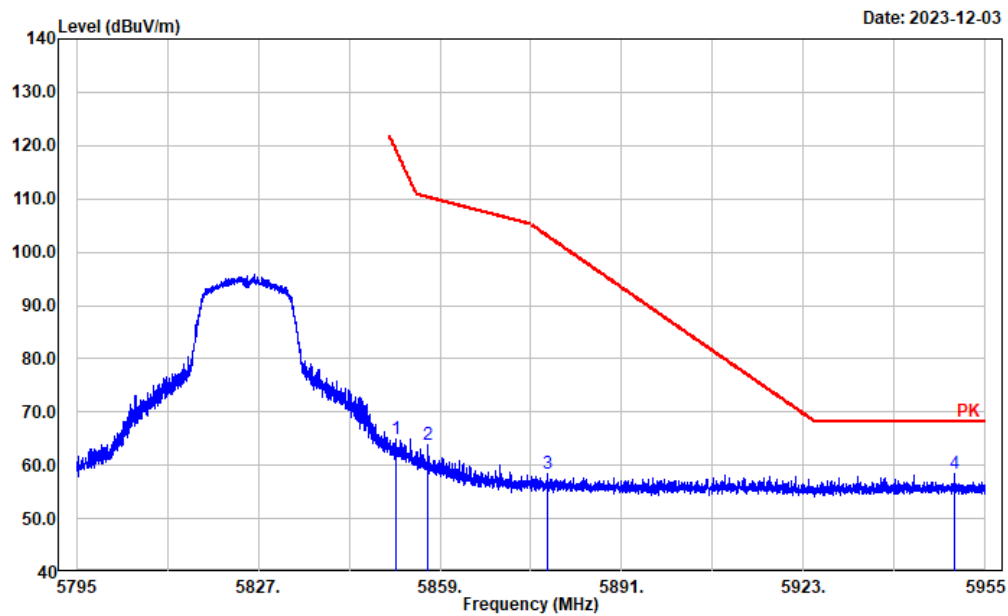

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.203	52.30	12.77	65.07	119.46	54.39	Peak
2	5856.836	51.07	12.81	63.88	110.29	46.41	Peak
3	5877.960	45.58	12.90	58.48	103.00	44.52	Peak
4	5949.559	45.28	13.03	58.31	68.20	9.89	Peak

## 802.11a

Test Channel:

5825MHz

Ant. Polar. :


Vertical

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Vertical

Note:

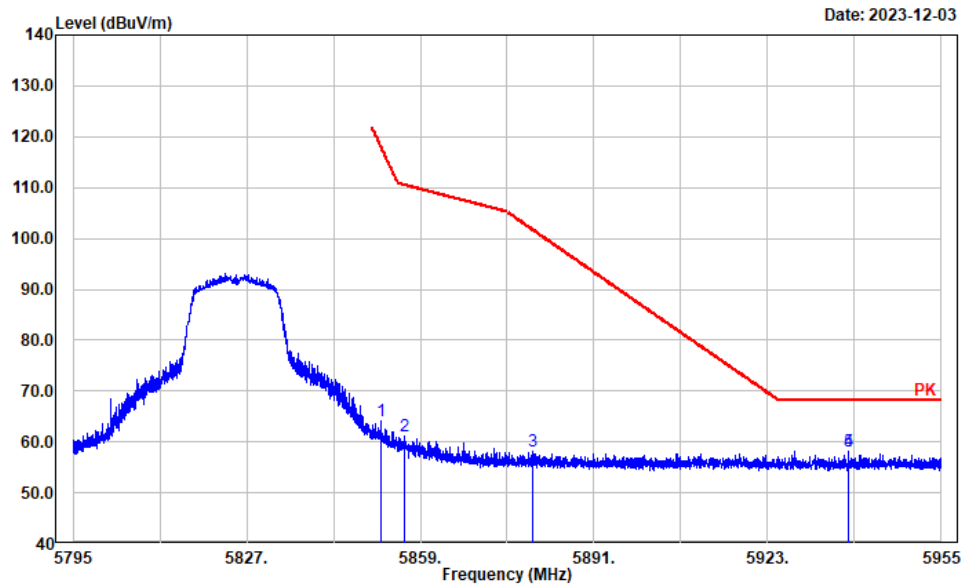

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.651	51.24	12.78	64.02	118.43	54.41	Peak
2	5856.068	48.32	12.80	61.12	110.50	49.38	Peak
3	5879.593	45.25	12.92	58.17	101.79	43.62	Peak
4	5937.845	45.09	13.03	58.12	68.20	10.08	Peak
5	5937.845	45.09	13.03	58.12	68.20	10.08	Peak

## 802.11ac vht20

Test Channel:

5745MHz

Ant. Polar. :


Horizontal

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Horizontal

Note:

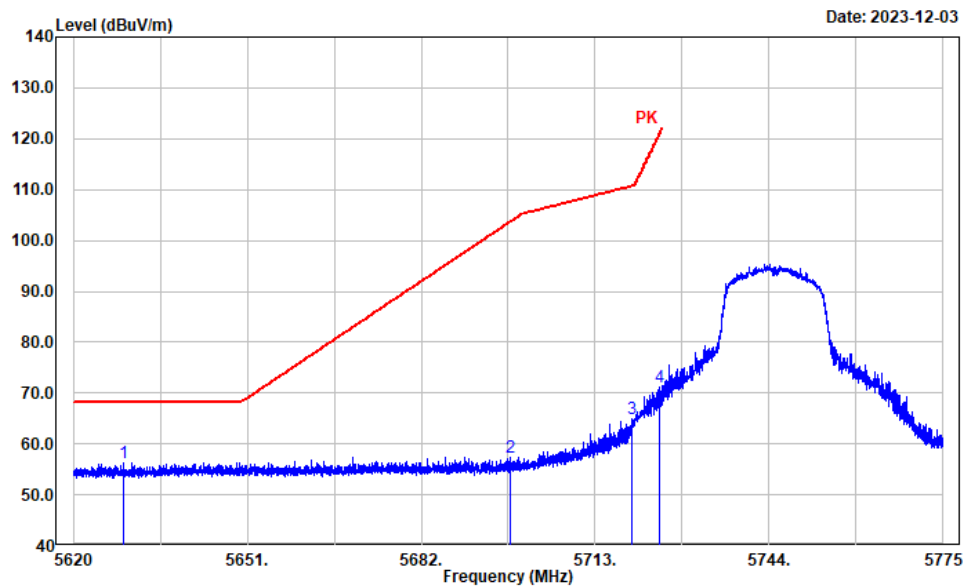

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5628.930	44.12	12.20	56.32	68.20	11.88	Peak
2	5697.794	44.87	12.54	57.41	103.57	46.16	Peak
3	5719.468	52.31	12.57	64.88	110.65	45.77	Peak
4	5724.522	58.69	12.57	71.26	121.11	49.85	Peak

## 802.11ac vht20

Test Channel:


5745MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

Date: 2023-12-03

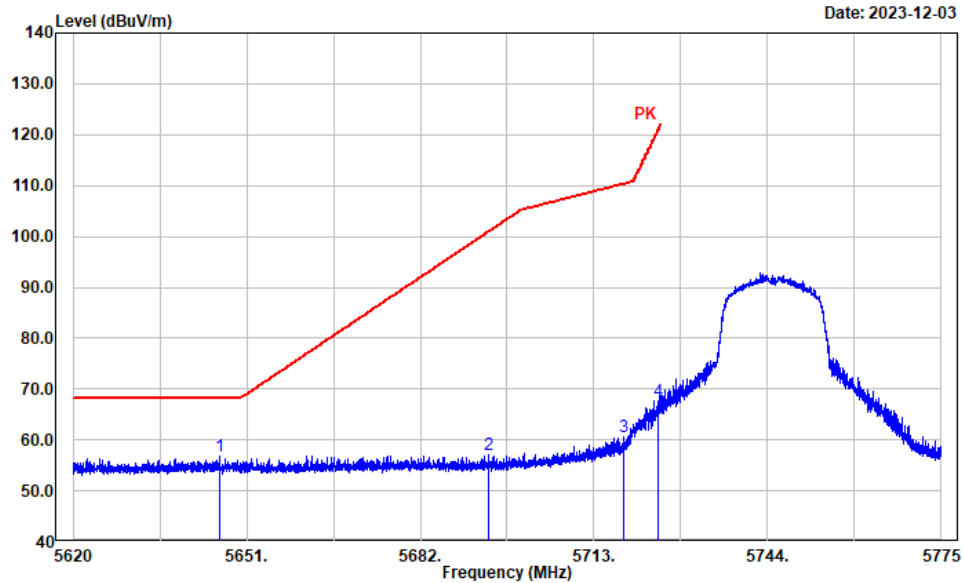

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5646.169	44.38	12.30	56.68	68.20	11.52	Peak
2	5694.291	44.51	12.52	57.03	100.99	43.96	Peak
3	5718.352	48.05	12.57	60.62	110.34	49.72	Peak
4	5724.553	55.16	12.57	67.73	121.18	53.45	Peak

## 802.11ac vht20

Test Channel:

5825MHz

Ant. Polar. :


Horizontal

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Horizontal

Note:

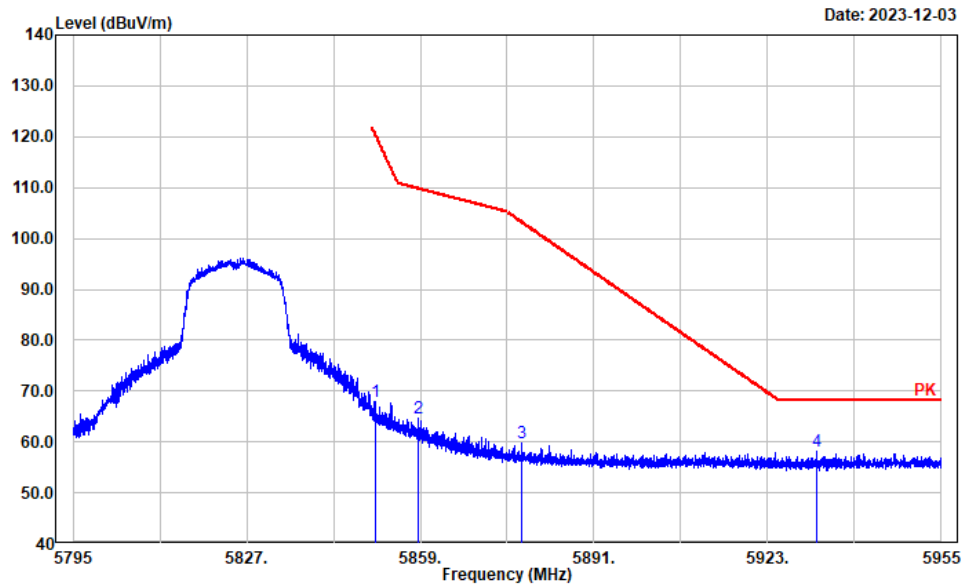

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.659	55.10	12.77	67.87	120.70	52.83	Peak
2	5858.725	51.94	12.80	64.74	109.76	45.02	Peak
3	5877.577	46.85	12.90	59.75	103.29	43.54	Peak
4	5932.020	45.17	13.03	58.20	68.20	10.00	Peak

## 802.11ac vht20

Test Channel:


5825MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

Date: 2023-12-03

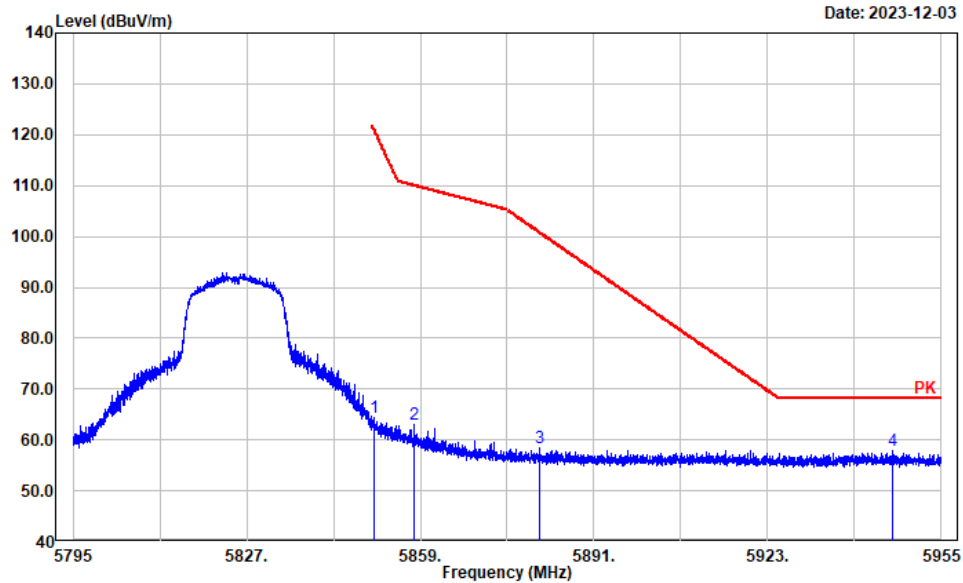

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.371	51.67	12.77	64.44	121.35	56.91	Peak
2	5857.860	50.13	12.81	62.94	110.00	47.06	Peak
3	5880.937	45.43	12.92	58.35	100.79	42.44	Peak
4	5946.038	44.91	13.03	57.94	68.20	10.26	Peak



## 802.11ac vht40

Test Channel:

5755MHz

Ant. Polar. :


Horizontal

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Horizontal

Note:

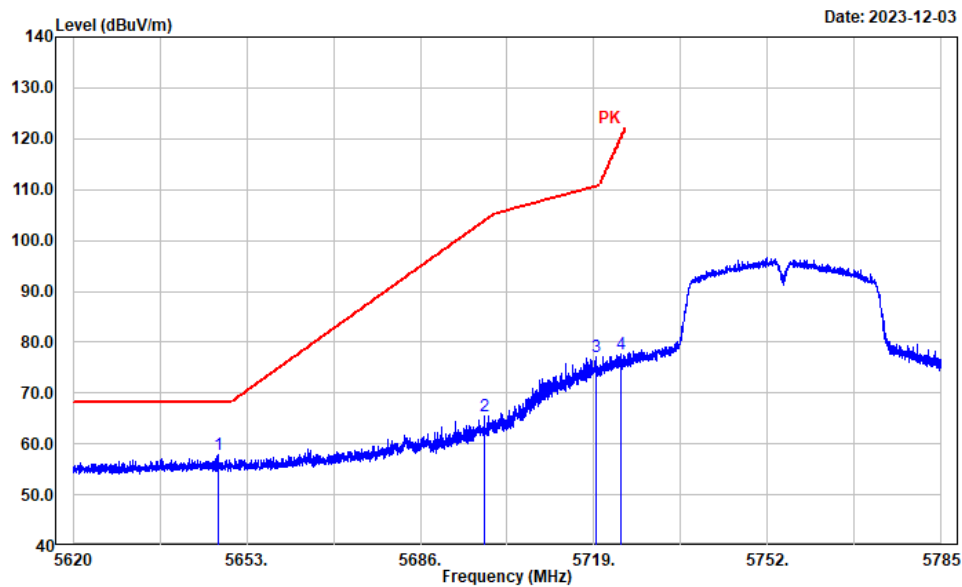

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5647.594	45.46	12.32	57.78	68.20	10.42	Peak
2	5698.094	52.99	12.54	65.53	103.80	38.27	Peak
3	5719.416	64.53	12.57	77.10	110.64	33.54	Peak
4	5724.004	65.05	12.57	77.62	119.93	42.31	Peak

## 802.11ac vht40

Test Channel:


5755MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

Date: 2023-12-03

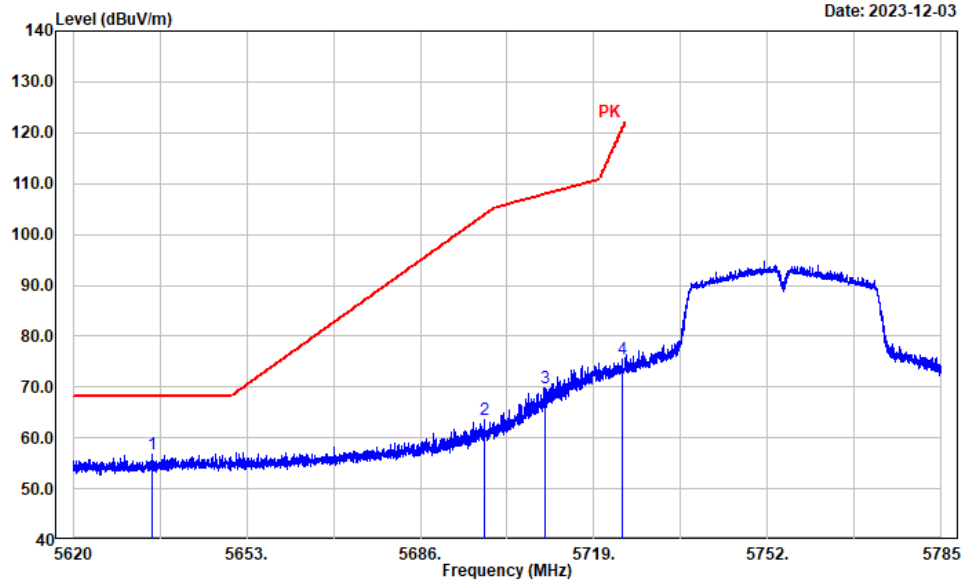

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5634.952	44.61	12.24	56.85	68.20	11.35	Peak
2	5698.193	51.06	12.54	63.60	103.87	40.27	Peak
3	5709.646	57.15	12.56	69.71	107.90	38.19	Peak
4	5724.334	62.86	12.57	75.43	120.68	45.25	Peak

## 802.11ac vht40

Test Channel:

5795MHz

Ant. Polar. :


Horizontal

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Horizontal

Note:

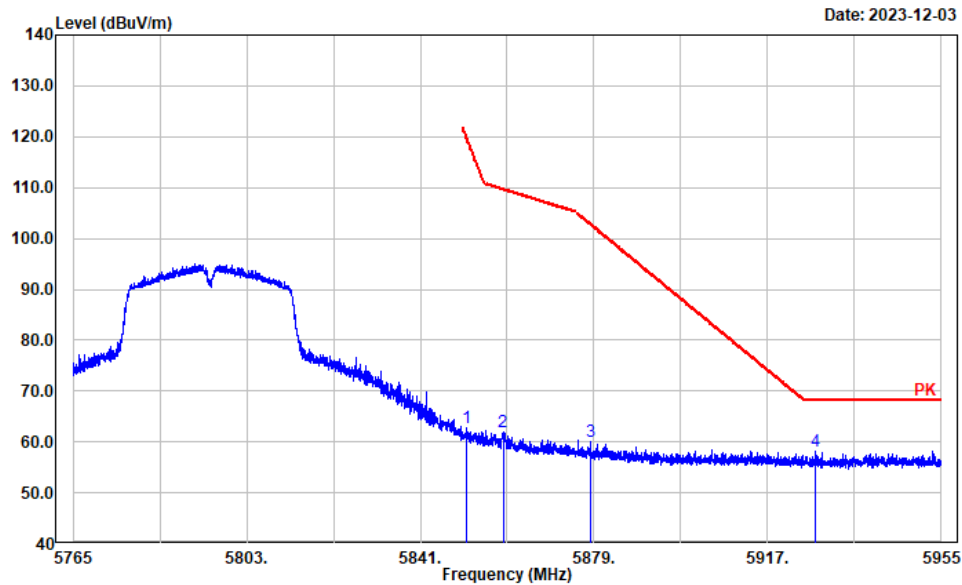

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.125	50.12	12.77	62.89	119.63	56.74	Peak
2	5859.107	49.13	12.81	61.94	109.65	47.71	Peak
3	5878.225	47.06	12.91	59.97	102.80	42.83	Peak
4	5927.521	45.15	13.02	58.17	68.20	10.03	Peak

## 802.11ac vht40

Test Channel:


5795MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

Date: 2023-12-03

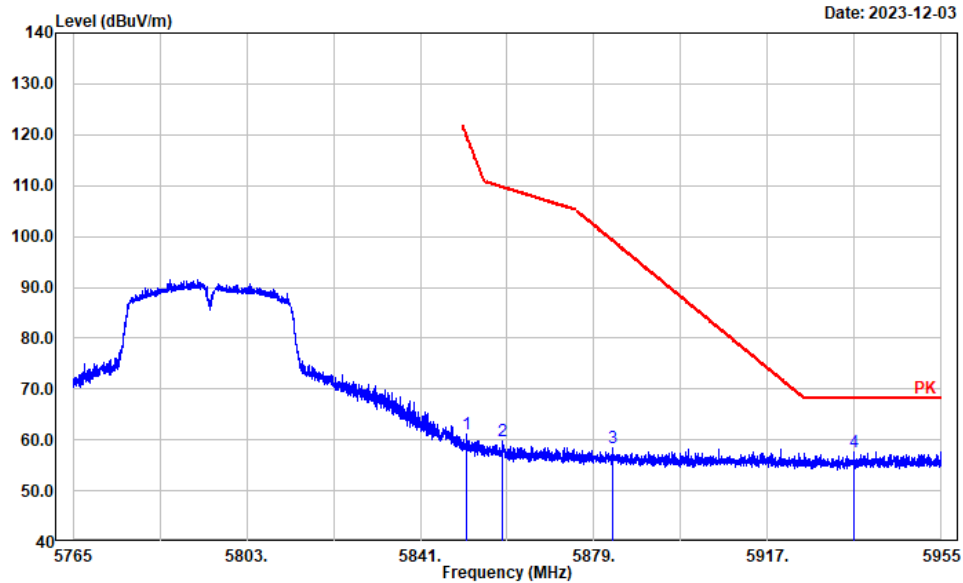

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.239	48.45	12.77	61.22	119.37	58.15	Peak
2	5858.879	46.97	12.81	59.78	109.71	49.93	Peak
3	5882.976	45.50	12.93	58.43	99.28	40.85	Peak
4	5935.806	44.47	13.04	57.51	68.20	10.69	Peak

## 802.11ac vht80

Test Channel:

5775MHz

Ant. Polar. :


Horizontal

Project No.: CR231168240-RF

Tester: coco Tian

Polarization: Horizontal

Note:

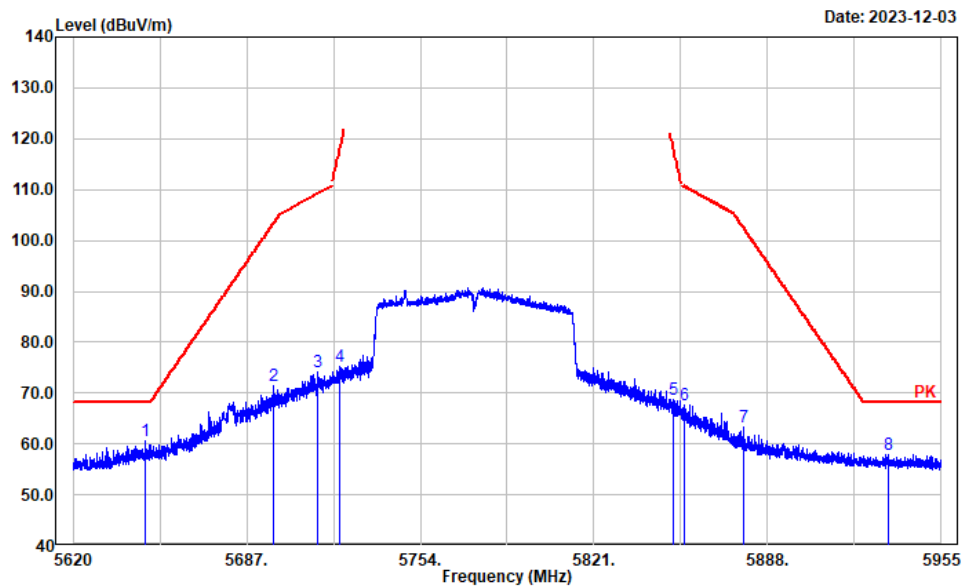

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5647.945	48.23	12.32	60.55	68.20	7.65	Peak
2	5697.602	58.85	12.54	71.39	103.43	32.04	Peak
3	5714.489	61.69	12.56	74.25	109.26	35.01	Peak
4	5722.798	62.65	12.57	75.22	117.18	41.96	Peak
5	5851.531	55.92	12.78	68.70	118.71	50.01	Peak
6	5855.887	54.97	12.80	67.77	110.55	42.78	Peak
7	5878.538	50.53	12.91	63.44	102.57	39.13	Peak
8	5934.762	44.98	13.04	58.02	68.20	10.18	Peak

## 802.11ac vht80

Test Channel:


5775MHz

Ant. Polar. :

Vertical

Project No.: CR231168240-RF  
Tester: coco Tian  
Polarization: Vertical  
Note:

Date: 2023-12-03

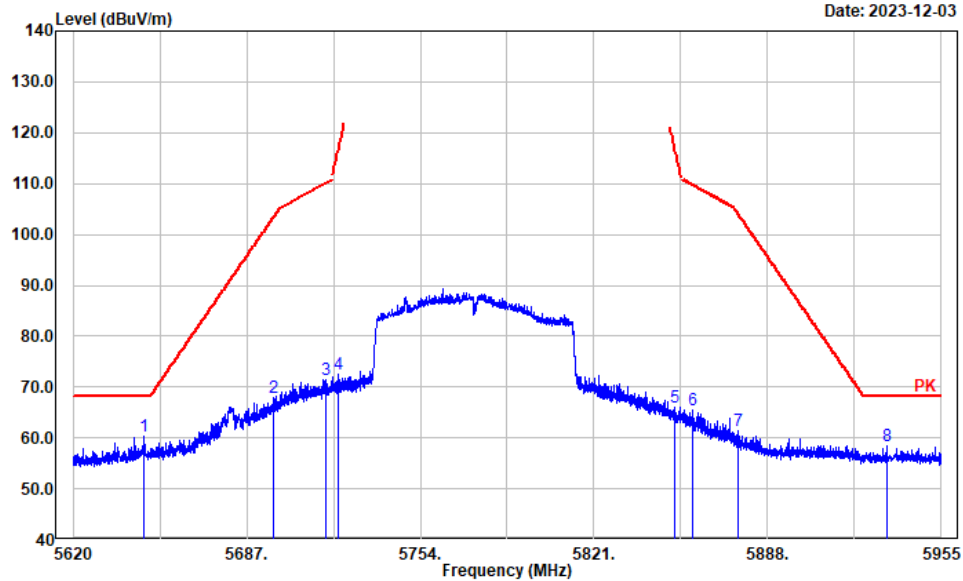

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5647.141	48.06	12.32	60.38	68.20	7.82	Peak
2	5697.602	55.35	12.54	67.89	103.43	35.54	Peak
3	5717.706	58.95	12.57	71.52	110.16	38.64	Peak
4	5722.263	59.86	12.57	72.43	115.96	43.53	Peak
5	5852.000	53.20	12.78	65.98	117.64	51.66	Peak
6	5858.970	52.73	12.81	65.54	109.69	44.15	Peak
7	5876.393	48.63	12.90	61.53	104.16	42.63	Peak
8	5934.226	45.44	13.03	58.47	68.20	9.73	Peak

**4.3 26dB attenuated below the channel power**

Serial Number:	2DW6-1	Test Date:	2023/12/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.9	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK- 18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A




*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**


Note: the requirement is for 5150-5250 MHz band. The channel power please refer to the power test result in section 4.5.

## 5150-5250MHz:

## 26dB attenuated below the channel power

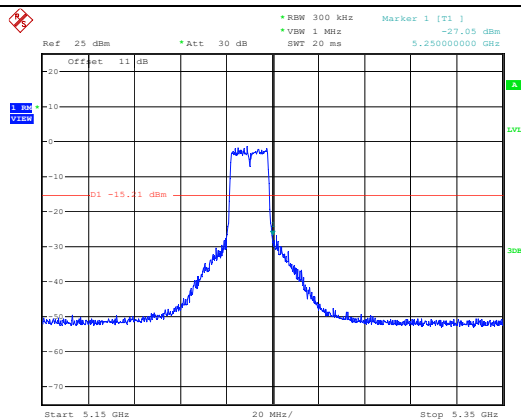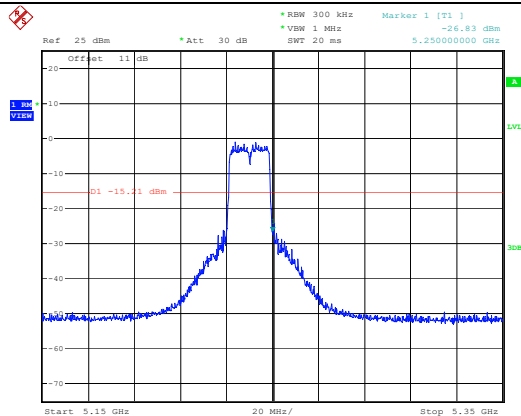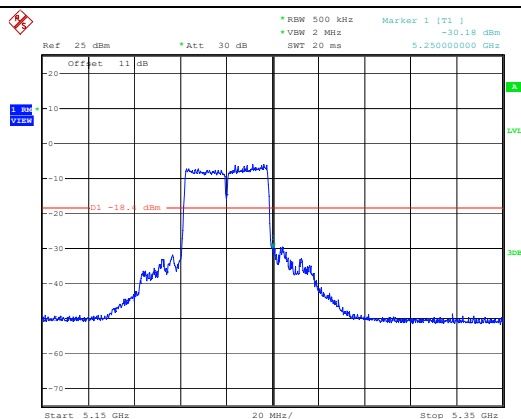802.11a  
Highest ChannelProjectNo.:CR231168240 Tester:Rod Luo  
Date: 13.DEC.2023 16:57:02802.11ac20  
Highest ChannelProjectNo.:CR231168240 Tester:Rod Luo  
Date: 13.DEC.2023 17:09:43802.11ac40  
Highest ChannelProjectNo.:CR231168240 Tester:Rod Luo  
Date: 13.DEC.2023 17:13:45

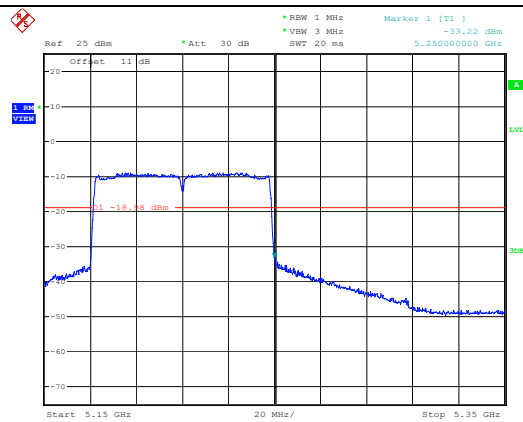

**26dB attenuated below the channel power**802.11ac80  
Middle ChannelProjectNo.:CR231168240 Tester:Rod Luo  
Date: 13.DEC.2023 17:15:28

**4.4 Emission Bandwidth:**

Serial Number:	2DW6-1	Test Date:	2023/12/01-2023/12/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.9-27.3	Relative Humidity: (%)	58-60	ATM Pressure: (kPa)	100.2-101
----------------------	-----------	------------------------------	-------	------------------------	-----------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK- 18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**


5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	32.10	17.40
	5200	32.52	17.36
	5240	32.22	17.32
802.11ac vht20	5180	34.32	18.20
	5200	33.78	18.20
	5240	36.06	18.24
802.11ac vht40	5190	45.12	36.56
	5230	48.08	36.56
802.11ac vht80	5210	89.76	75.84
Note: The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.			




5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.40	17.40
	5785	16.40	17.32
	5825	16.44	17.36
802.11ac vht20	5745	17.36	18.24
	5785	17.48	18.24
	5825	17.48	18.20
802.11ac vht40	5755	36.24	36.64
	5795	36.00	36.64
802.11ac vht80	5775	75.96	76.00
Note: 6dB Emission Bandwidth Limit: $\geq 0.5$ MHz The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			




## 5150-5250MHz:

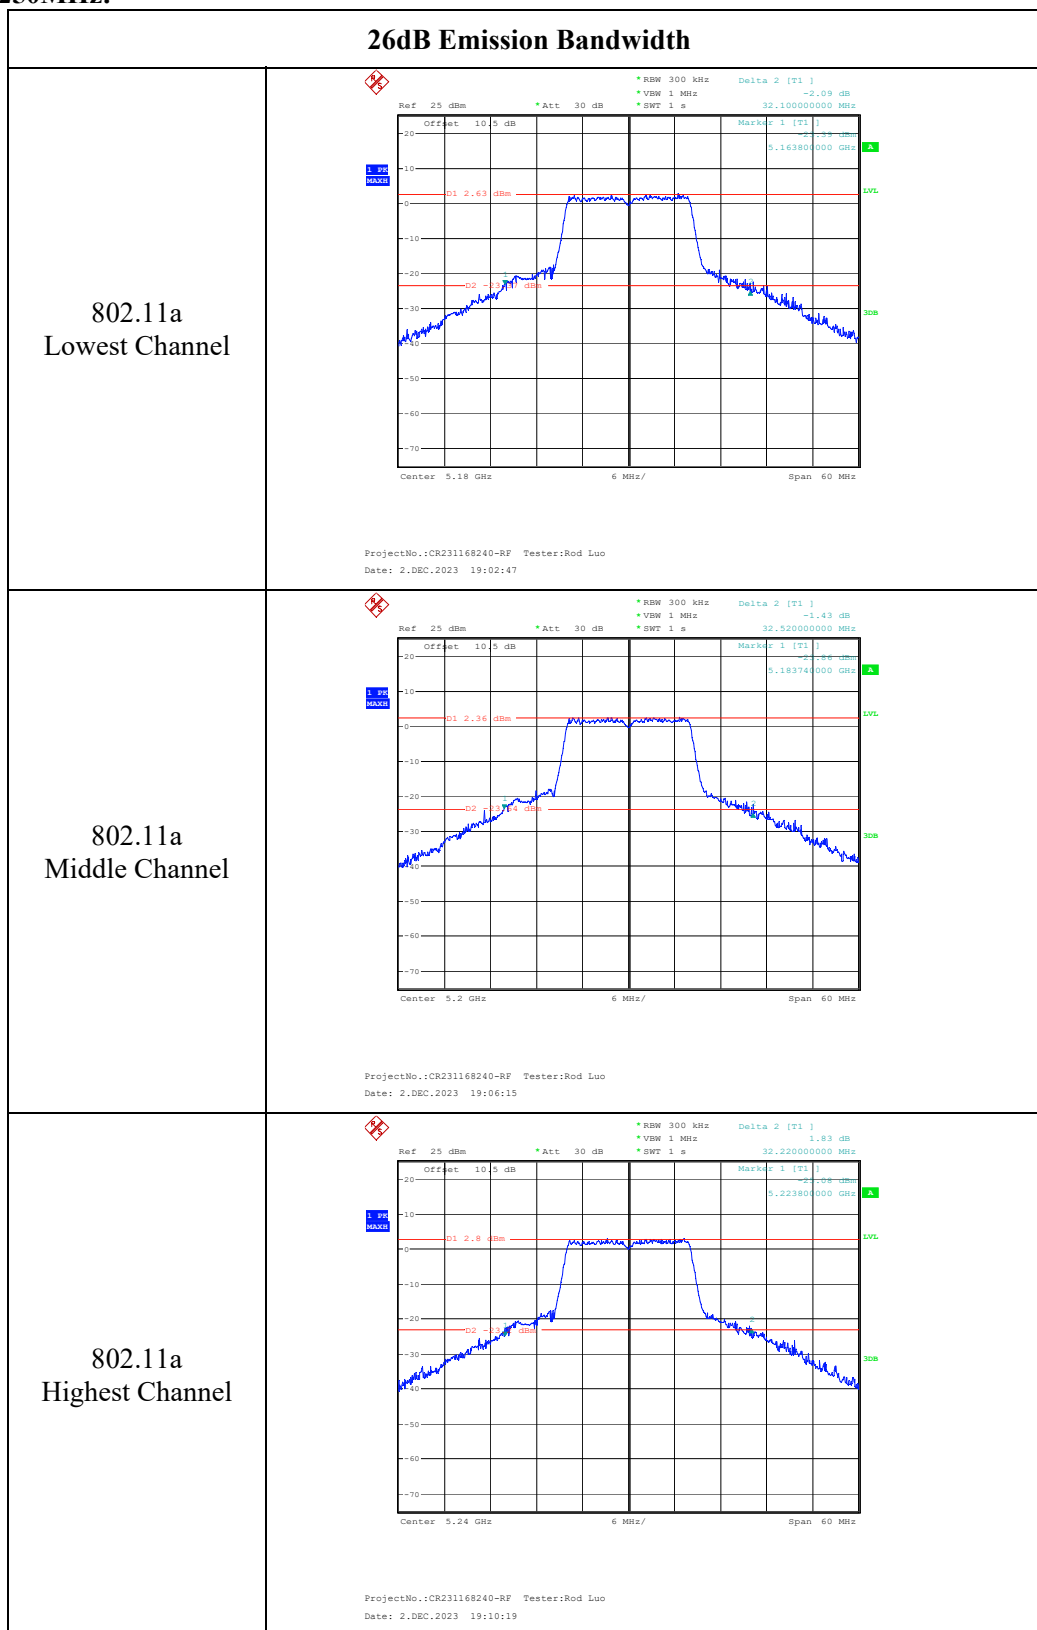

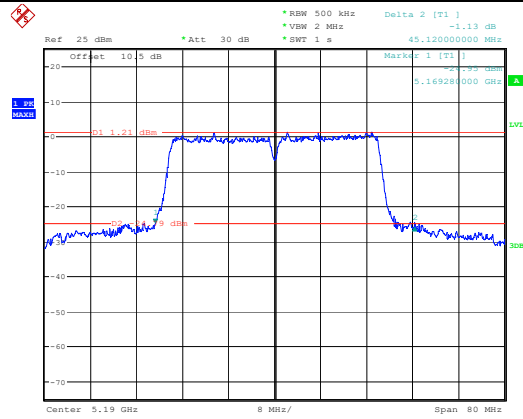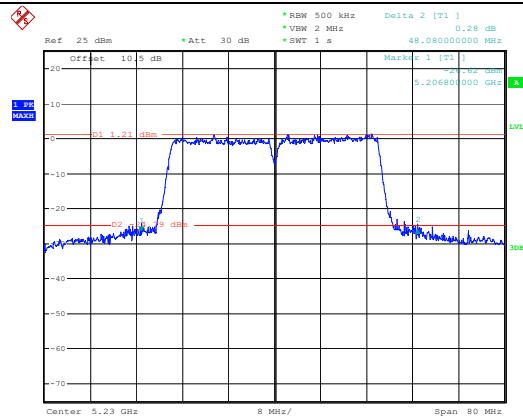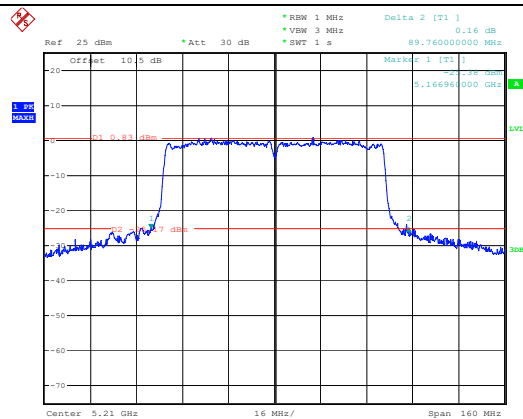


**26dB Emission Bandwidth**802.11ac vht40  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:21:04802.11ac vht40  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:26:29802.11ac80  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:37:41

## 99% Emission Bandwidth

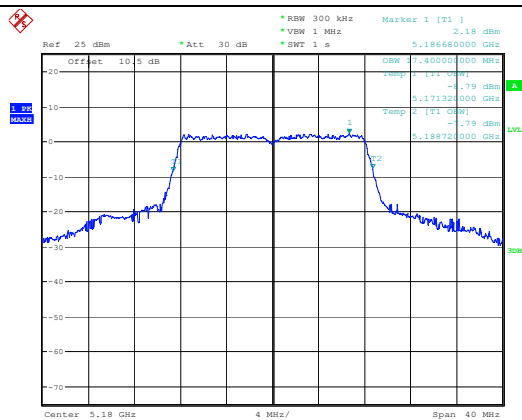
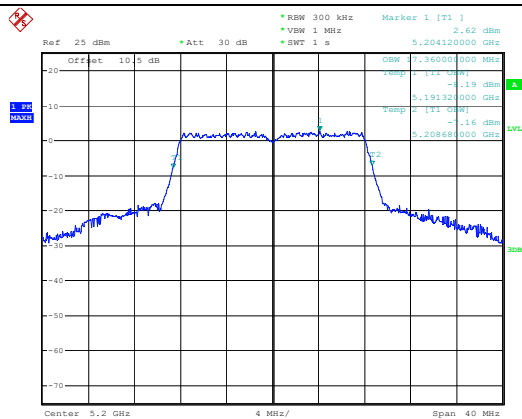
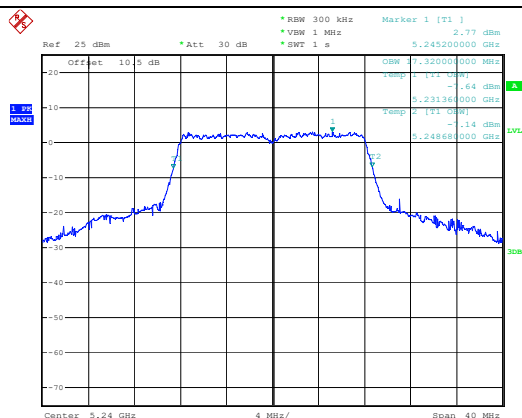
802.11a  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:02:10802.11a  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:05:37802.11a  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:09:41

## 99% Emission Bandwidth

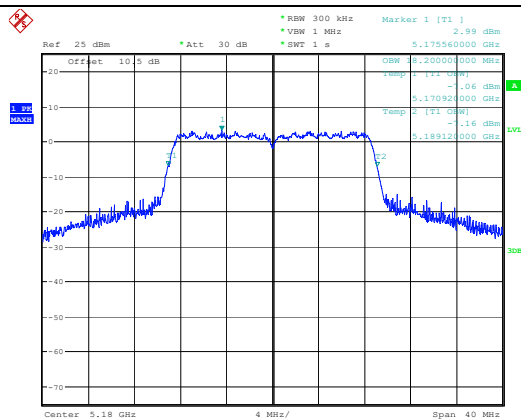
802.11ac vht20  
Lowest Channel






## 99% Emission Bandwidth

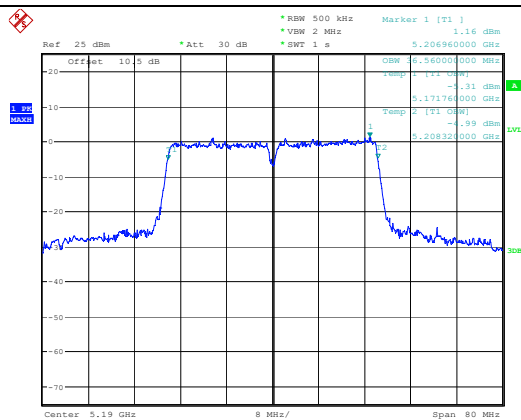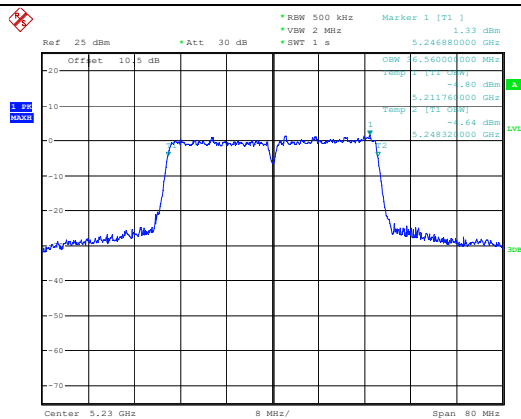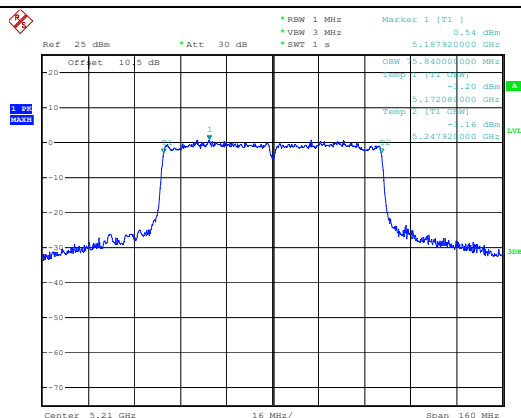802.11ac vht40  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:20:39802.11ac vht40  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:25:52802.11ac80  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 16:37:05




## 5725-5850MHz:

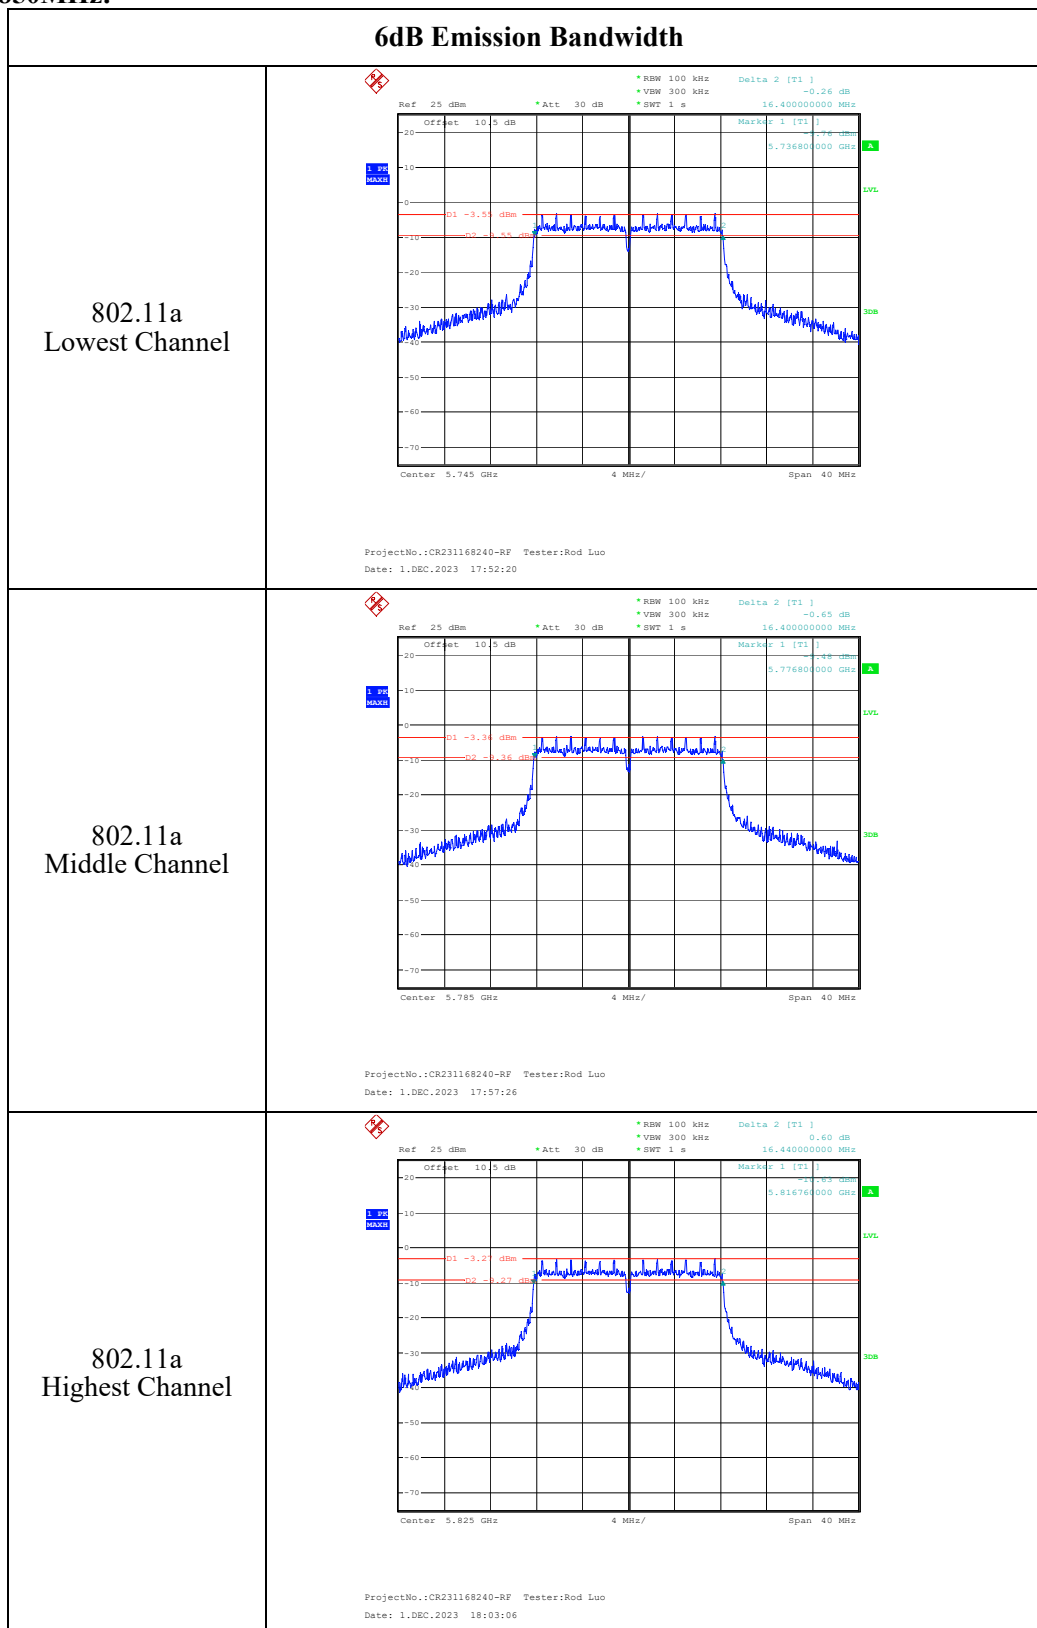




## 6dB Emission Bandwidth

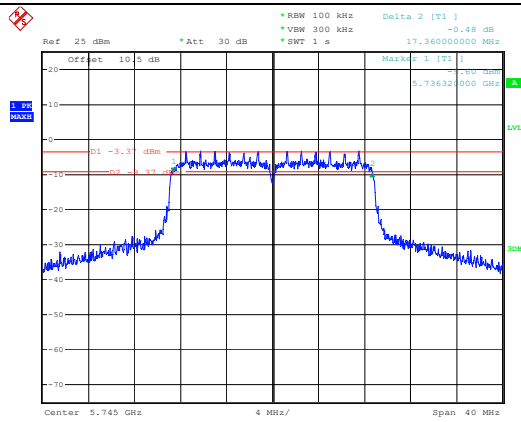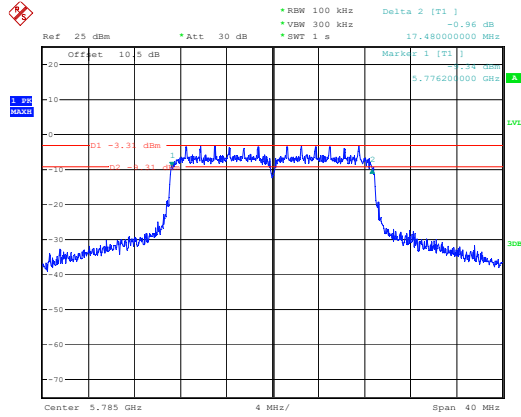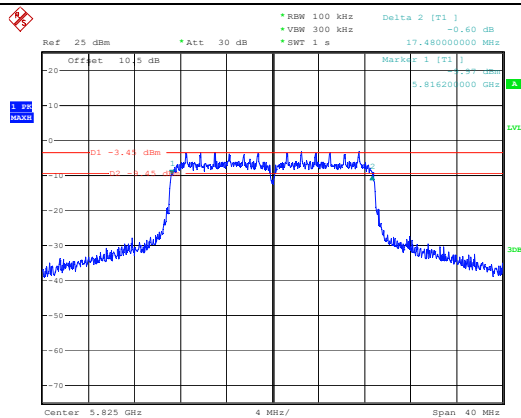802.11ac vht20  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:07:19802.11ac vht20  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:11:47802.11ac vht20  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:14:49




## 6dB Emission Bandwidth

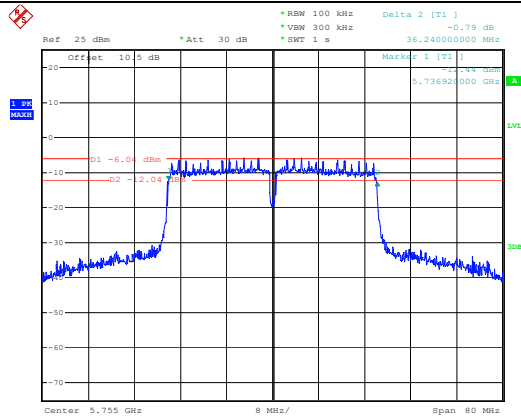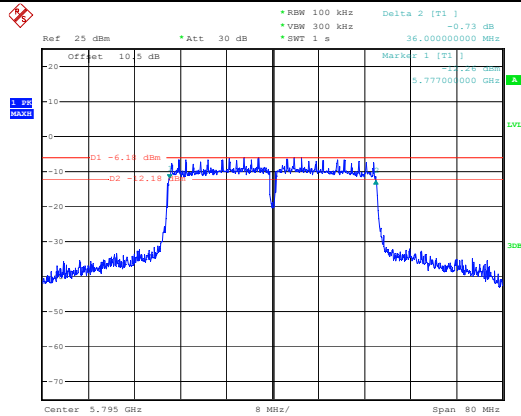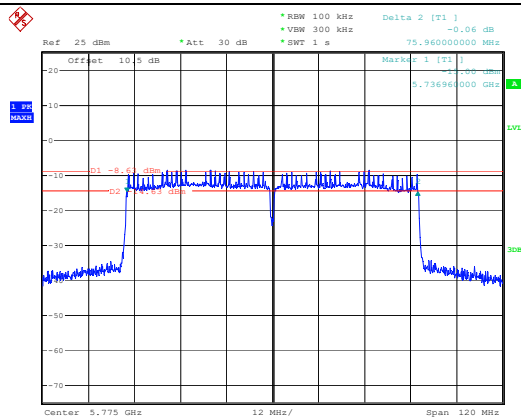802.11ac vht40  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:18:33802.11ac vht40  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:28:56802.11ac80  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:33:11




## 99% Emission Bandwidth

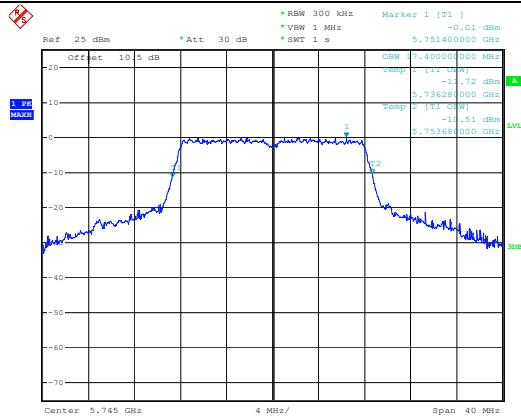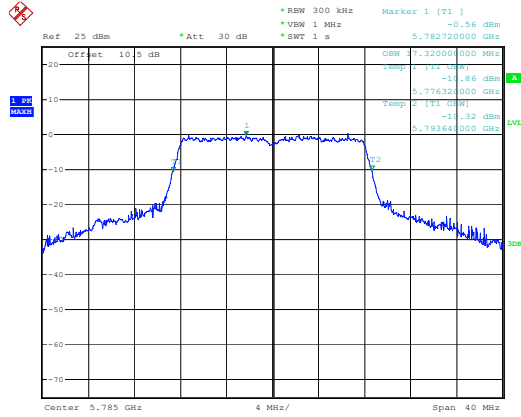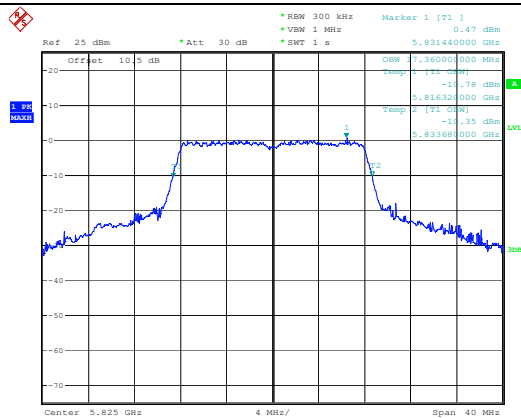802.11a  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 17:51:42802.11a  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 17:56:50802.11a  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:02:27

## 99% Emission Bandwidth

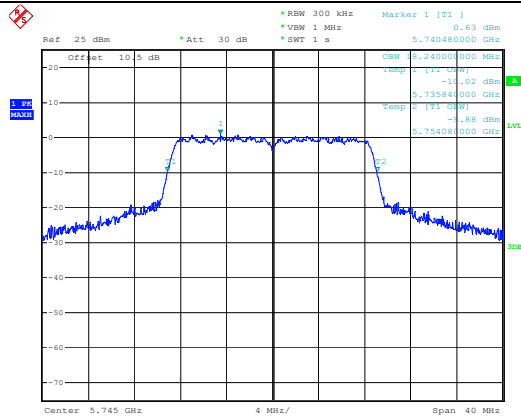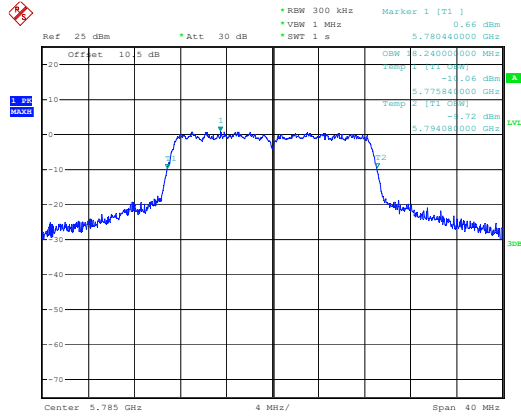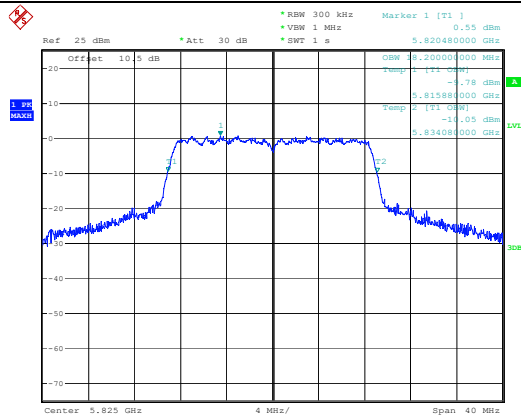802.11ac vht20  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:06:41802.11ac vht20  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:11:09802.11ac vht20  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:14:11

## 99% Emission Bandwidth

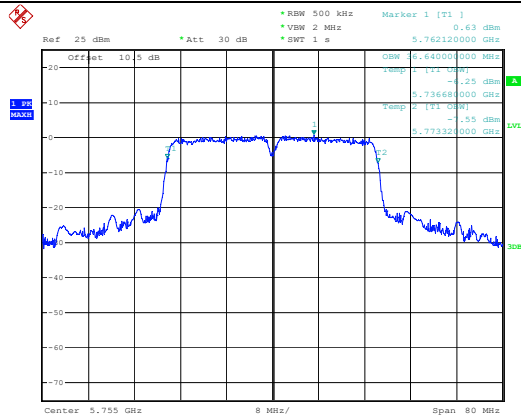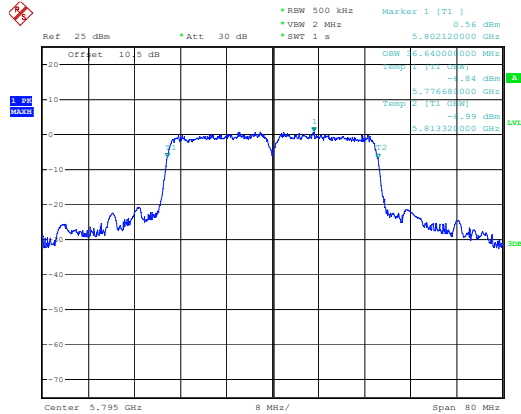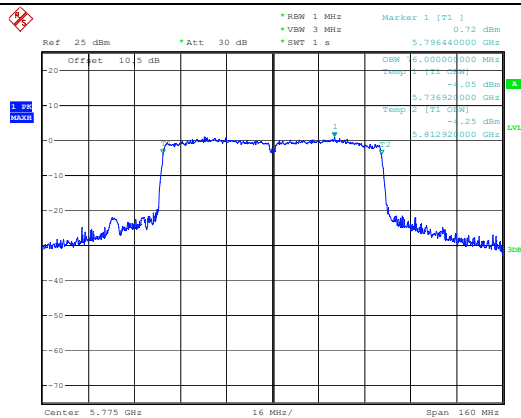802.11ac vht40  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:17:56802.11ac vht40  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:28:31802.11ac80  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 1.DEC.2023 18:32:45

**4.5 Maximum Conducted Output Power:**

Serial Number:	2DW6-1	Test Date:	2023/11/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5	Relative Humidity: (%)	48	ATM Pressure: (kPa)	100.2
----------------------	------	---------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)		EIRP (dBm)	
		Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	10.18	24	11.28	22.41
	5200	10.34	24	11.44	22.40
	5240	10.79	24	11.89	22.39
802.11ac vht20	5180	10.23	24	11.33	22.60
	5200	10.47	24	11.57	22.60
	5240	10.79	24	11.89	22.61
802.11ac vht40	5190	7.28	24	8.38	23.00
	5230	7.60	24	8.70	23.00
802.11ac vht80	5210	7.02	24	8.12	23.00

Note: The device is a client device.



5725-5850 MHz:

Test Modes	Test Frequency(MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	8.81	30
	5785	8.72	30
	5825	8.57	30
802.11ac vht20	5745	8.71	30
	5785	8.66	30
	5825	8.55	30
802.11ac vht40	5755	8.61	30
	5795	8.51	30
802.11ac vht80	5775	7.76	30

**4.6 Maximum power spectral density:**

Serial Number:	2DW6-1	Test Date:	2024/01/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.6	Relative Humidity: (%)	59	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	---------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023-04-18	2024-04-17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density(dBm/MHz)			Maximum EIRP Power Spectral Density(dBm/MHz)	
		Reading	Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	-0.70	-0.26	11	0.84	10
	5200	-1.03	-0.59	11	0.51	10
	5240	-1.75	-1.31	11	-0.21	10
802.11ac vht20	5180	-1.06	-0.55	11	0.55	10
	5200	-1.40	-0.89	11	0.21	10
	5240	-2.25	-1.74	11	-0.64	10
802.11ac vht40	5190	-7.21	-6.20	11	-5.10	10
	5230	-8.20	-7.19	11	-6.09	10
802.11ac vht80	5210	-12.06	-10.13	11	-9.03	10

Note:

The device is a client device.

Method SA-2 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

The duty cycle factor was added into the result.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/500kHz)		
		Reading	Result	Limit
802.11a	5745	-4.83	-4.39	30
	5785	-5.31	-4.87	30
	5825	-5.72	-5.28	30
802.11ac vht20	5745	-4.93	-4.42	30
	5785	-5.53	-5.02	30
	5825	-5.99	-5.48	30
802.11ac vht40	5755	-8.26	-7.25	30
	5795	-8.84	-7.83	30
802.11ac vht80	5775	-11.84	-9.91	30




Note:

Method SA-2 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

The duty cycle factor was added into the result.


## 5150-5250MHz:

## Maximum power spectral density

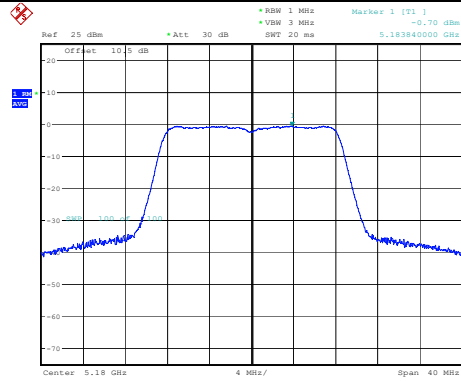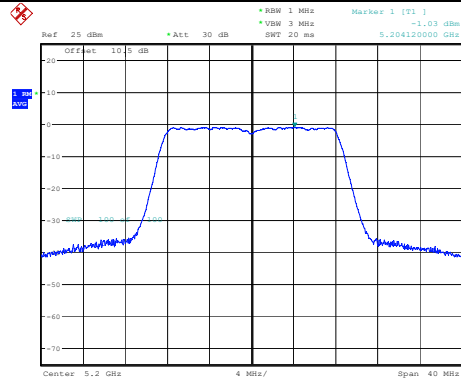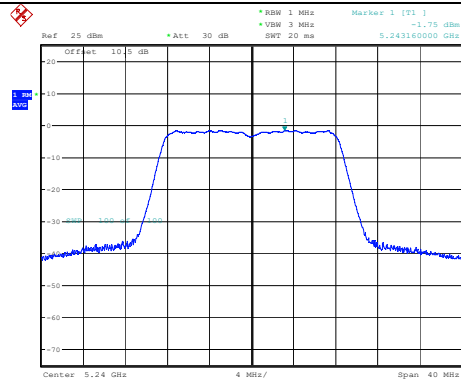802.11a  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:19:21802.11a  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:20:42802.11a  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:22:07


Maximum power spectral density

802.11ac vht20  
Lowest Channel

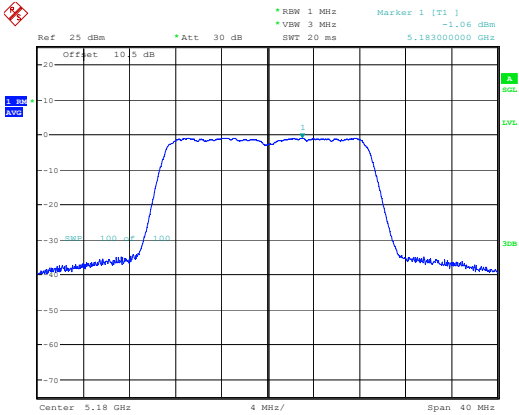


ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:24:52

802.11ac vht20  
Middle Channel

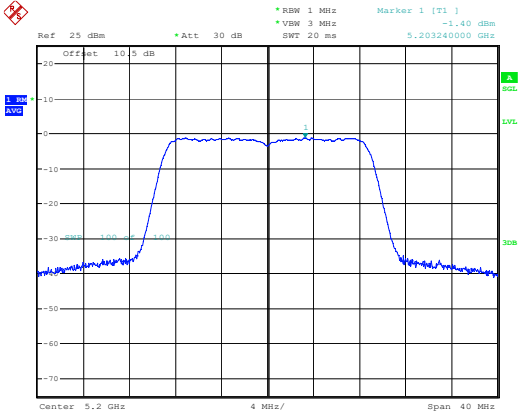

ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:26:51


802.11ac vht20  
Highest Channel

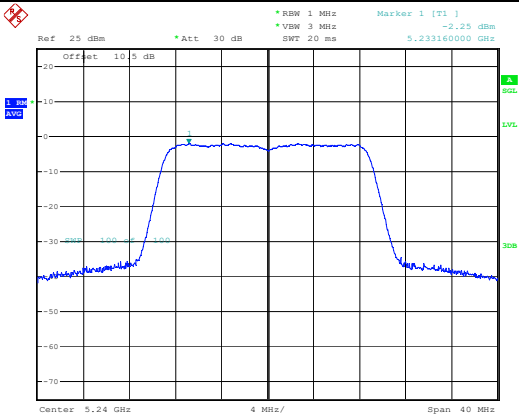

ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:28:56


Maximum power spectral density

802.11ac vht40  
Lowest Channel

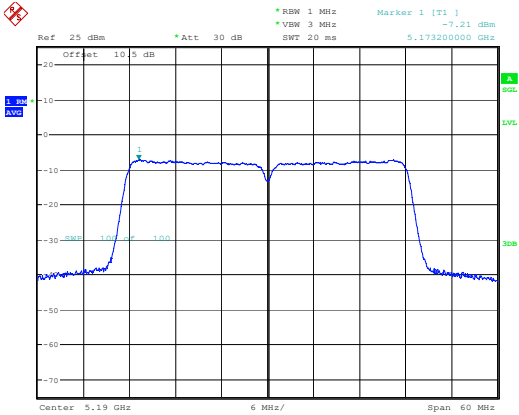


ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:31:22

802.11ac vht40  
Highest Channel

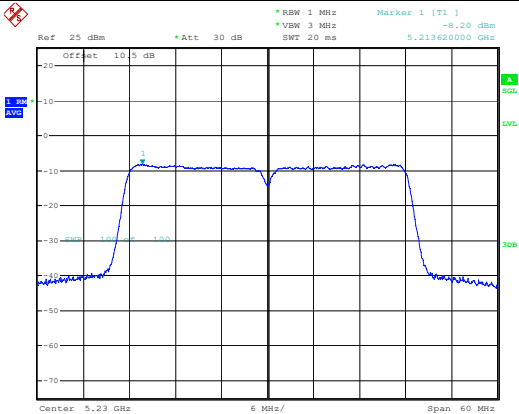


ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:33:05




802.11ac80  
Middle Channel

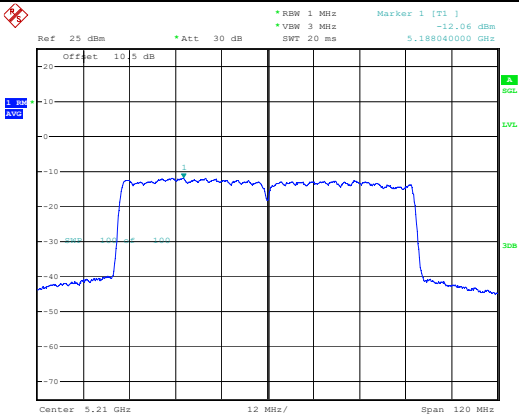

ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:37:43




## 5725-5850MHz:

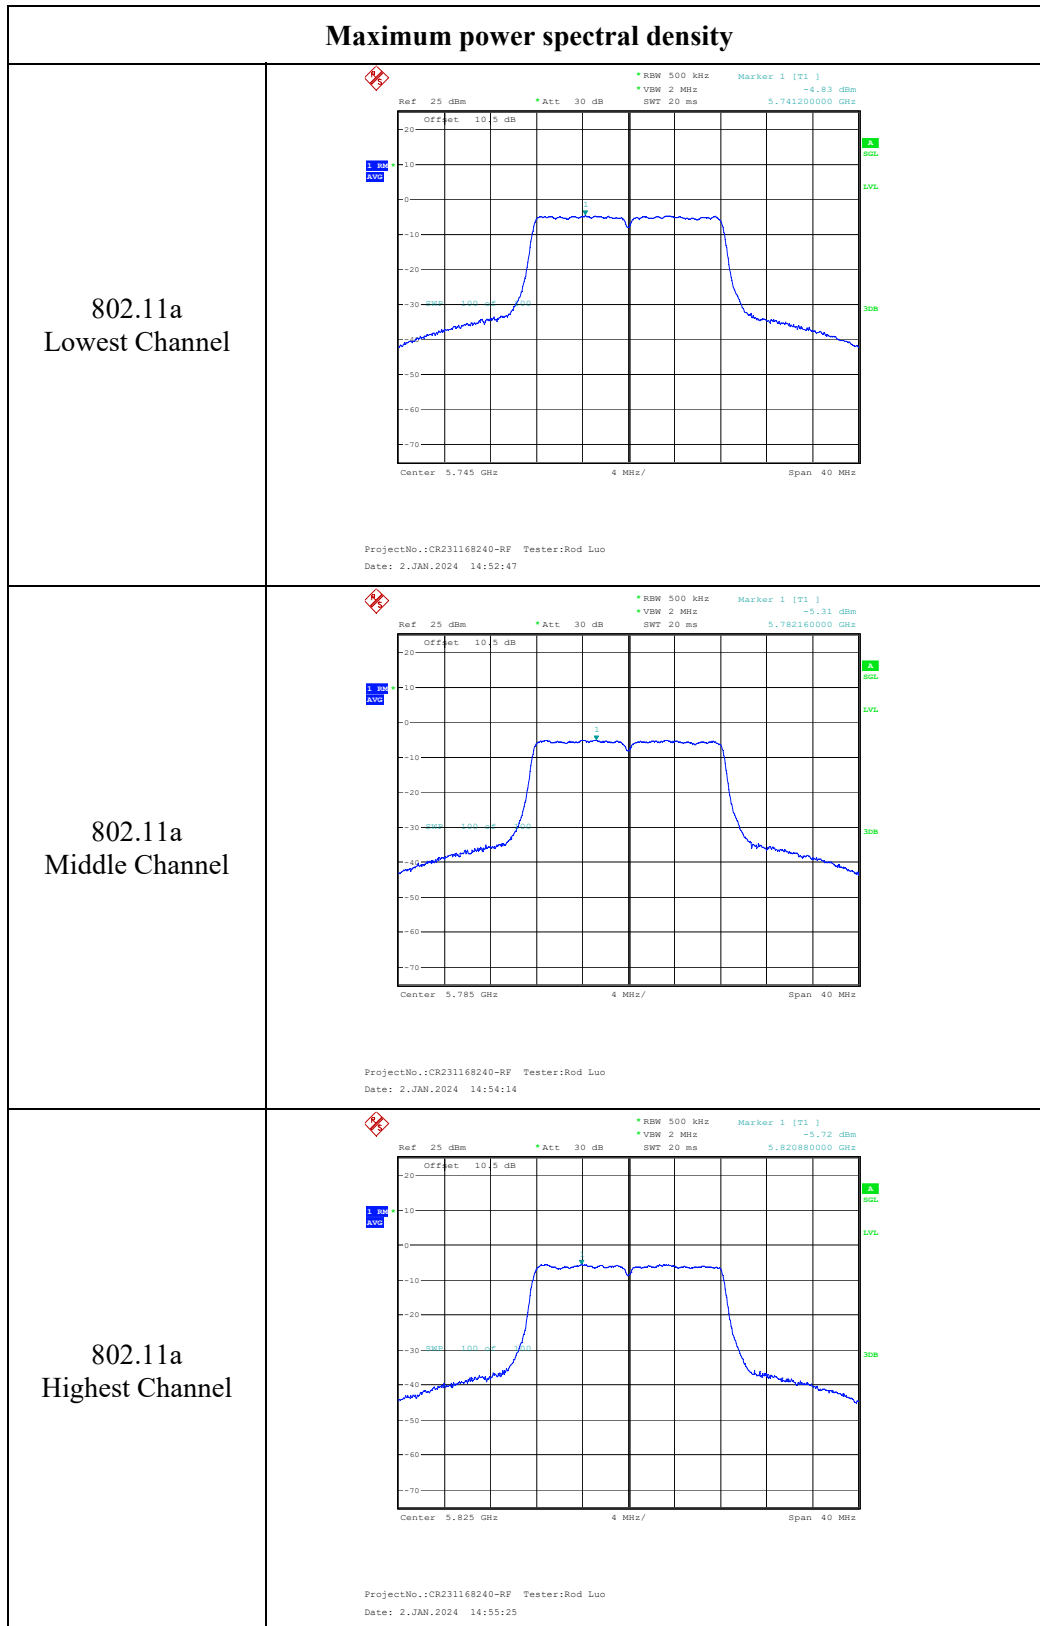

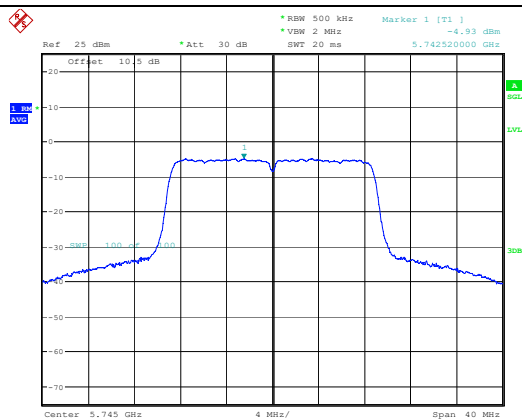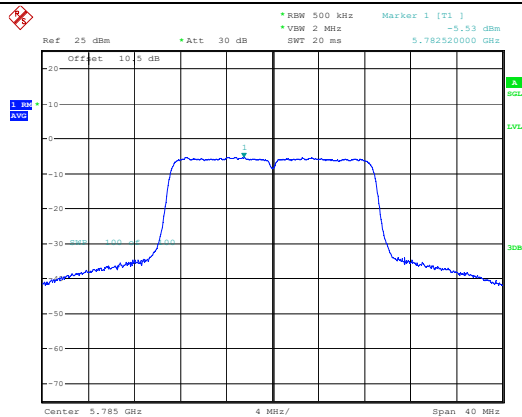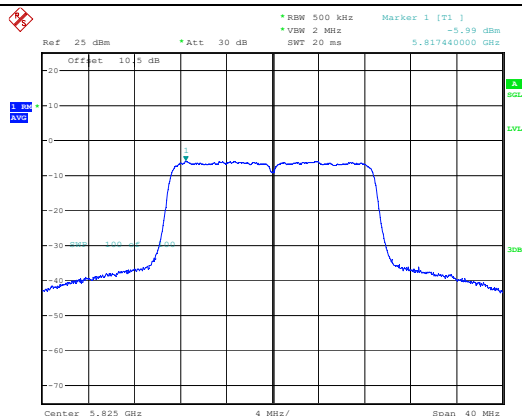**Maximum power spectral density**802.11ac vht20  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:45:36802.11ac vht20  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:46:46802.11ac vht20  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:48:39




## Maximum power spectral density

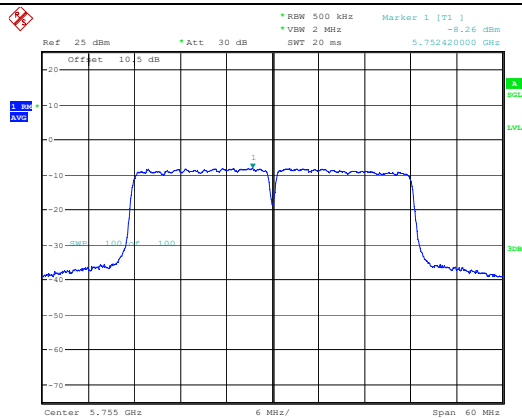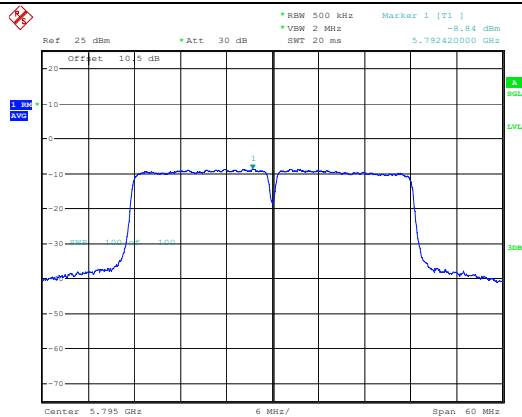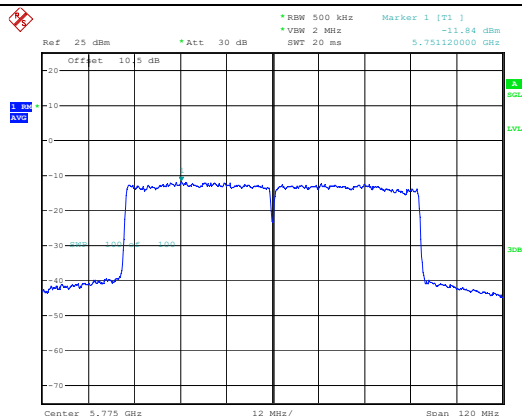802.11ac vht40  
Lowest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:41:50802.11ac vht40  
Highest ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:43:41802.11ac80  
Middle ChannelProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.JAN.2024 14:40:34




## Duty Cycle

802.11ac vht20

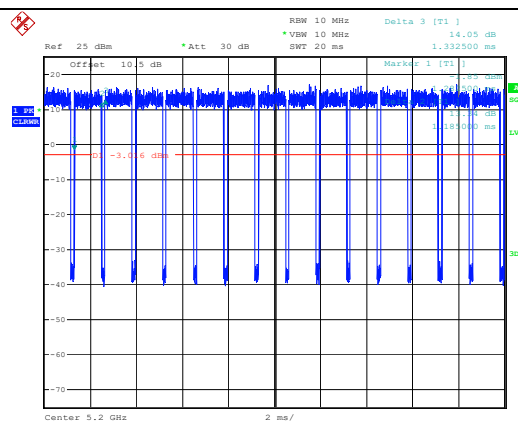


ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:15:11

802.11ac vht40

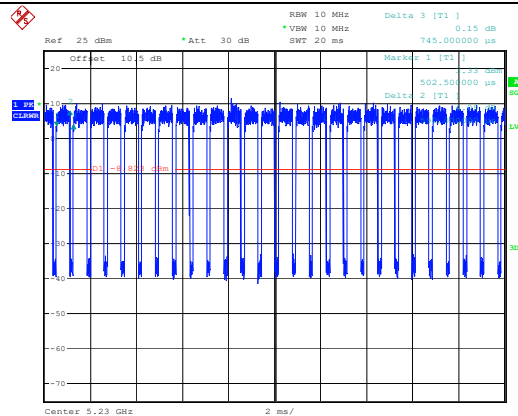

ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:32:45

802.11ac80

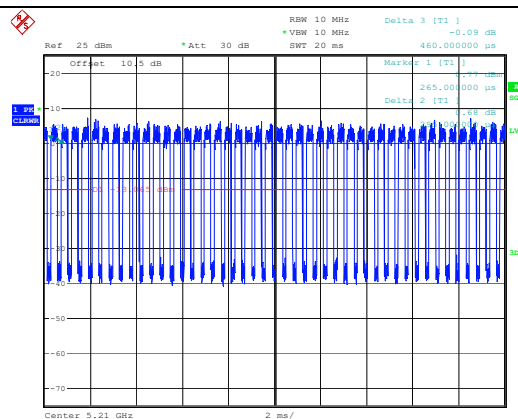

ProjectNo.:CR231168240-RF Tester:Rod Luo  
Date: 2.DEC.2023 19:35:06

**4.8 Frequency Stability:**

Serial Number:	2DW6-1	Test Date:	2023/12/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.9	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	---------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023-04-18	2024-04-17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

**5150-5250 MHz:**

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
A	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5171.0233	5150.000	5248.9901	5250.000
	20	4.4	5172.0321	5150.000	5249.5673	5250.000
	70	4.4	5171.7638	5150.000	5248.1010	5250.000
	-20	3.85	5172.0542	5150.000	5249.1632	5250.000
	20	3.85	5171.3848	5150.000	5248.8660	5250.000
	70	3.85	5172.2906	5150.000	5249.5151	5250.000
	-20	3.45	5172.2963	5150.000	5248.9663	5250.000
	20	3.45	5172.4201	5150.000	5249.6781	5250.000
	70	3.45	5171.3733	5150.000	5249.3996	5250.000
<b>Result:</b>					<b>Pass</b>	

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC20	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5170.5071	5150.000	5249.4221	5250.000
	20	4.4	5170.3866	5150.000	5249.1860	5250.000
	70	4.4	5170.1259	5150.000	5249.8762	5250.000
	-20	3.85	5169.5579	5150.000	5249.6435	5250.000
	20	3.85	5170.2304	5150.000	5248.8972	5250.000
	70	3.85	5170.1981	5150.000	5249.5448	5250.000
	-20	3.45	5170.1021	5150.000	5249.3665	5250.000
	20	3.45	5170.1637	5150.000	5249.0251	5250.000
	70	3.45	5170.4533	5150.000	5249.8374	5250.000
<b>Result:</b>					<b>Pass</b>	

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC40	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5171.2369	5150.000	5248.4229	5250.000
	20	4.4	5171.6541	5150.000	5248.4826	5250.000
	70	4.4	5171.6102	5150.000	5248.2539	5250.000
	-20	3.85	5171.5830	5150.000	5248.3554	5250.000
	20	3.85	5171.5441	5150.000	5248.3072	5250.000
	70	3.85	5171.7326	5150.000	5248.5652	5250.000
	-20	3.45	5171.5412	5150.000	5248.5934	5250.000
	20	3.45	5171.8915	5150.000	5248.5610	5250.000
	70	3.45	5171.7543	5150.000	5248.3804	5250.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC80	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5172.2759	5150.000	5247.8980	5250.000
	20	4.4	5172.2432	5150.000	5247.7769	5250.000
	70	4.4	5172.2804	5150.000	5247.6119	5250.000
	-20	3.85	5172.4504	5150.000	5247.7193	5250.000
	20	3.85	5172.3890	5150.000	5247.6648	5250.000
	70	3.85	5172.2840	5150.000	5247.8201	5250.000
	-20	3.45	5172.5195	5150.000	5247.7594	5250.000
	20	3.45	5172.4317	5150.000	5247.8166	5250.000
	70	3.45	5172.3140	5150.000	5247.8308	5250.000

**5725-5850 MHz:**

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
A	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5735.5725	5725.000	5834.9632	5850.000
	20	4.4	5735.5355	5725.000	5834.7541	5850.000
	70	4.4	5735.4088	5725.000	5834.7882	5850.000
	-20	3.85	5735.4855	5725.000	5834.8561	5850.000
	20	3.85	5735.4123	5725.000	5834.8247	5850.000
	70	3.85	5735.5763	5725.000	5834.1089	5850.000
	-20	3.45	5735.0489	5725.000	5834.9254	5850.000
	20	3.45	5735.5263	5725.000	5834.8302	5850.000
	70	3.45	5735.7861	5725.000	5834.9541	5850.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC20	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5734.4204	5725.000	5834.8222	5850.000
	20	4.4	5734.4873	5725.000	5834.7652	5850.000
	70	4.4	5734.3525	5725.000	5834.1043	5850.000
	-20	3.85	5734.3753	5725.000	5834.8507	5850.000
	20	3.85	5734.4660	5725.000	5834.9123	5850.000
	70	3.85	5734.3568	5725.000	5835.9814	5850.000
	-20	3.45	5734.8142	5725.000	5834.0032	5850.000
	20	3.45	5734.8255	5725.000	5835.1057	5850.000
	70	3.45	5734.4609	5725.000	5834.2577	5850.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC40	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5735.9425	5725.000	5814.2918	5850.000
	20	4.4	5736.0833	5725.000	5814.3129	5850.000
	70	4.4	5735.9568	5725.000	5814.4596	5850.000
	-20	3.85	5736.0424	5725.000	5814.4468	5850.000
	20	3.85	5735.9051	5725.000	5814.2593	5850.000
	70	3.85	5736.0422	5725.000	5814.3552	5850.000
	-20	3.45	5735.9966	5725.000	5814.1803	5850.000
	20	3.45	5736.1013	5725.000	5814.2295	5850.000
	70	3.45	5735.9577	5725.000	5814.4218	5850.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	Test Channel: Lowest for Lower Edge,Highest for Upper Edge					
AC80	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-20	4.4	5736.1972	5725.000	5813.7624	5850.000
	20	4.4	5736.9969	5725.000	5813.5021	5850.000
	70	4.4	5736.8736	5725.000	5813.5172	5850.000
	-20	3.85	5736.7127	5725.000	5813.3452	5850.000
	20	3.85	5736.3568	5725.000	5813.5087	5850.000
	70	3.85	5736.6227	5725.000	5813.6539	5850.000
	-20	3.45	5736.7096	5725.000	5813.6875	5850.000
	20	3.45	5736.8871	5725.000	5813.8921	5850.000
	70	3.45	5736.7706	5725.000	5813.6930	5850.000
					<b>Result:</b>	<b>Pass</b>



## **5. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR231168240-EXP EUT EXTERNAL PHOTOGRAPHS and  
CR231168240-INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR231168240-00D-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**