



FCC Test Report
FCC CFR Title 47 Part 2, Part 27

Report Reference No.....: HK2411207047-8E

FCC ID.....: 2A4FR-LS4G-6-G

Compiled by
(position+printed name+signature)...: File administrators Gary Qian

Gary Qian

Supervised by
(position+printed name+signature)...: Technique principal Eden Hu

Eden Hu

Approved by
(position+printed name+signature)...: Manager Jason Zhou

Jason Zhou

Date of issue.....: Dec. 23, 2024

Testing Laboratory Name: Shenzhen HUAKE Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Applicant's name.....: IGEN TECH CO.,Ltd.

Address: Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R. China
225400

Test specification

Standard: **FCC CFR Title 47 Part 2, Part 27**

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Stick Logger(4G)

Trade Mark: N/A

Manufacturer.....: IGEN TECH CO.,Ltd.

Model/Type reference.....: LS4G-6-G

Series Models: LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D

Modulation Type: QPSK, 16QAM

Rating: DC 5~12V 4W

Hardware version: V2.0

Software version: V2.0

Result.....: **PASS**



TEST REPORT

Test Report No. :	HK2411207047-8E	Dec. 23, 2024 Date of issue
-------------------	-----------------	--------------------------------

Equipment under Test : Stick Logger(4G)

Model /Type : LS4G-6-G

Series Models : LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D

Applicant : **IGEN TECH CO.,Ltd.**

Address : Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R.
China 225400

Manufacturer : **IGEN TECH CO.,Ltd.**

Address : Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R.
China 225400

Test result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

1	<u>Summary</u>	5
1.1	Test Standards	5
1.2	Test Description	5
1.3	Information of The Test Laboratory	6
1.4	Statement of The Measurement Uncertainty	6
2	<u>General Information</u>	7
2.1	General Remarks	7
2.2	Product Description	7
2.3	Equipment Under Test	7
2.4	Description of Test Modes	8
2.5	Equipments Used During The Test	9
2.6	Modifications	9
3	<u>Test Conditions and Results</u>	10
3.1	Output Power	10
3.2	Radiated Measurement	12
3.3	Peak-to-Average Ratio (PAR)	13
3.4	Occupied Bandwidth and Emission Bandwidth	16
3.5	Band Edge Compliance	19
3.6	Spurious Emission	22
3.7	Frequency Stability Under Temperature & Voltage Variations	39
4	<u>Test Setup Photos of the EUT</u>	41
5	<u>Photos of the EUT</u>	42



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 23, 2024	Jason Zhou



1 Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB971168 D01:v03r01](#): Measurement Guidance For Certification Of Licensed Digital Transmitters.

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 27.50 (b)(10)	Pass
Peak-to-Average Ratio	27.50 (d)(5)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)	Pass
Field Strength of Spurious Radiation	Clause 7 of KDB971168 D01 v02r02	Pass
Out of band emission, Band Edge	2.1051 27.53 (c)(2) and (5), (h)(1) and (3)(i)	Pass
Frequency stability	2.1055 27.54	Pass



1.3 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

1.4 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4:Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd.is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 General Information

2.1 General Remarks

Date of receipt of test sample	:	Nov. 23, 2024
Testing commenced on	:	Nov. 23, 2024
Testing concluded on	:	Dec. 23, 2024

2.2 Product Description

Name of EUT	Stick Logger(4G)
Model/Type reference:	LS4G-6-G
Series Models:	LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D
Power supply:	DC 5~12V 4W
Adapter Information	N/A
Modulation Type	QPSK,16QAM
Antenna Type	Internal Antenna
Operation Frequency Band	LTE Band 85
Operation frequency	LTE Band 85: 698-716MHz
LTE Release	R8
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	4.25VDC to 5.75VDC (nominal: 5VDC)

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V/ 60 Hz	<input type="radio"/> 115V/60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5~12V 4W

Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa



2.4 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.



2.5 Equipments Used During The Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2023/02/17	2024/02/16
Receiver	R&S	ESR-7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF cable	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMW500	HKE-026	2023/02/17	2024/02/16
Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-135	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2023/02/17	2024/02/16
Signal generator	Agilent	E4433B	HKE-120	2023/02/17	2024/02/16
Signal generator	Agilent	E4421B	HKE-121	2023/02/17	2024/02/16

2.6 Modifications

No modifications were implemented to meet testing criteria.




3 Test Conditions and Results

3.1 Output Power

LIMIT

According to §27.50 (b) (10): Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

TEST CONFIGURATION

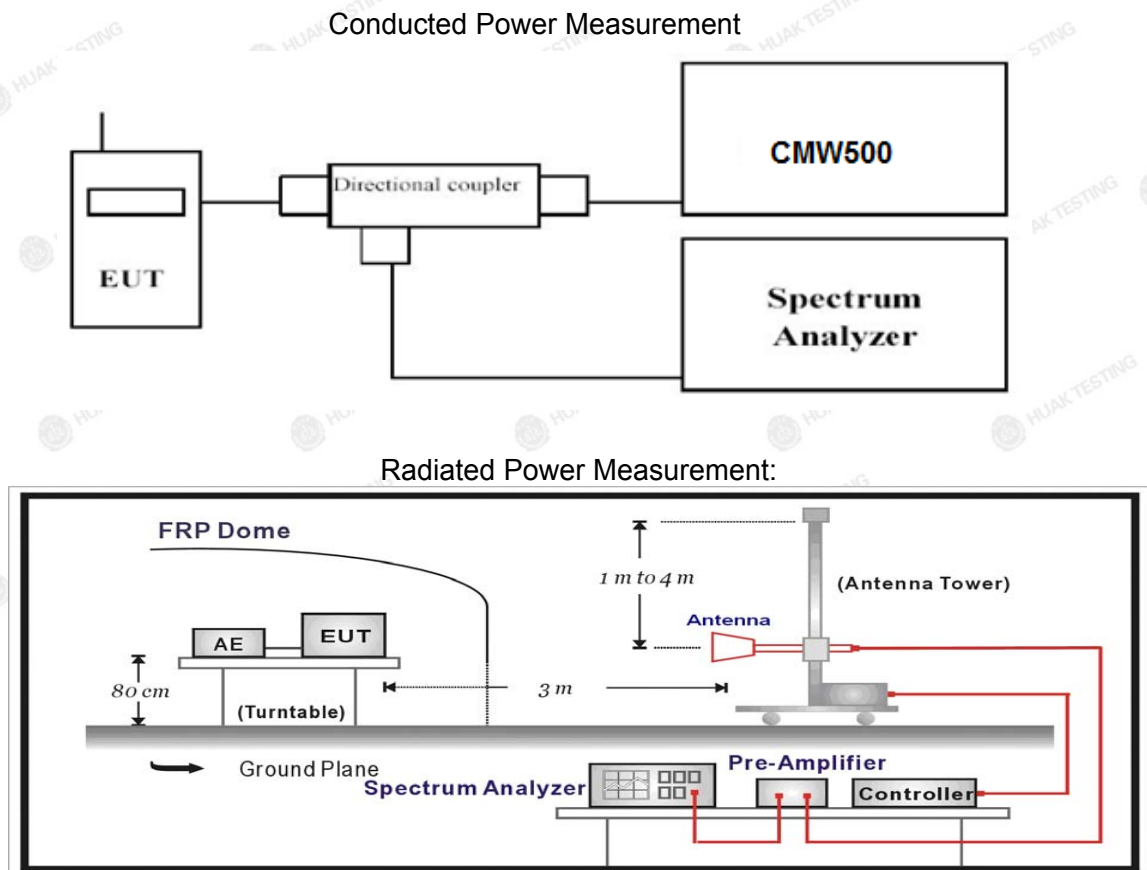

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.



- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

LTE FDD Band 85				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
5 MHz	1 RB low	700.5	21.51	21.65
		707.0	21.45	21.41
		713.5	20.26	20.26
	1 RB high	700.5	21.19	21.41
		707.0	21.40	21.38
		713.5	20.22	20.06
	50% RB mid	700.5	21.37	21.62
		707.0	21.32	21.47
		713.5	20.31	20.23
	100% RB	700.5	21.34	21.61
		707.0	21.34	21.27
		713.5	20.13	20.17
10 MHz	1 RB low	703.0	21.53	21.47
		707.0	21.35	21.42
		711.0	20.22	20.19
	1 RB high	703.0	21.40	21.58
		707.0	21.42	21.17
		711.0	20.20	20.10
	50% RB mid	703.0	21.28	21.58
		707.0	21.28	21.35
		711.0	20.24	20.16
	100% RB	703.0	21.09	21.47
		707.0	21.08	21.24
		711.0	20.32	20.24

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3.2 Radiated Measurement

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 85; recorded worst case for each Channel Bandwidth of LTE FDD Band 85.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
Margin = Limit - EIRP

LTE FDD Band 85_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-17.29	3.06	9.68	34.8	24.13	21.98	34.77	10.64	V
707.0	-17	3.17	9.68	34.8	24.31	22.16	34.77	10.46	V
713.5	-15.3	3.22	9.75	34.8	26.03	23.88	34.77	8.74	V
700.5	-18.44	3.06	9.68	34.8	22.98	20.83	34.77	11.79	H
707.0	-17.55	3.17	9.68	34.8	23.76	21.61	34.77	11.01	H
713.5	-18.18	3.22	9.75	34.8	23.15	21	34.77	11.62	H

LTE FDD Band 85_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
703.0	-17.55	3.06	9.68	34.8	23.87	21.72	34.77	10.9	V
707.0	-17.36	3.17	9.68	34.8	23.95	21.8	34.77	10.82	V
711.0	-15.28	3.22	9.75	34.8	26.05	23.9	34.77	8.72	V
703.0	-18.51	3.06	9.68	34.8	22.91	20.76	34.77	11.86	H
707.0	-17.52	3.17	9.68	34.8	23.79	21.64	34.77	10.98	H
711.0	-18.02	3.22	9.75	34.8	23.31	21.16	34.77	11.46	H

LTE FDD Band 85_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.5	-17.28	3.06	9.68	34.8	24.14	21.99	34.77	10.63	V
707.0	-17.45	3.17	9.68	34.8	23.86	21.71	34.77	10.91	V
713.5	-15.54	3.22	9.75	34.8	25.79	23.64	34.77	8.98	V
700.5	-18.57	3.06	9.68	34.8	22.85	20.7	34.77	11.92	H
707.0	-17.57	3.17	9.68	34.8	23.74	21.59	34.77	11.03	H
713.5	-18.06	3.22	9.75	34.8	23.27	21.12	34.77	11.5	H

LTE FDD Band 85_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
703.0	-17.27	3.06	9.68	34.8	24.15	22	34.77	10.62	V
707.0	-16.95	3.17	9.68	34.8	24.36	22.21	34.77	10.41	V
711.0	-15.01	3.22	9.75	34.8	26.32	24.17	34.77	8.45	V
703.0	-18.36	3.06	9.68	34.8	23.06	20.91	34.77	11.71	H
707.0	-16.9	3.17	9.68	34.8	24.41	22.26	34.77	10.36	H
711.0	-18.58	3.22	9.75	34.8	22.75	20.6	34.77	12.02	H




3.3 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

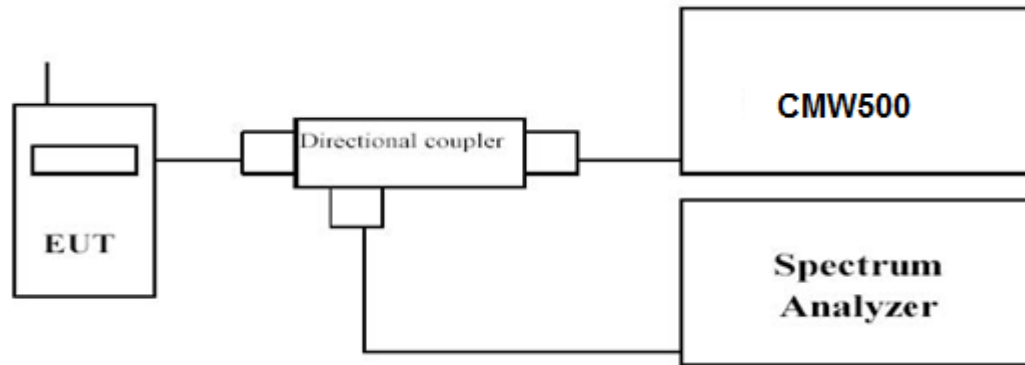

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 85; recorded worst case for each Channel Bandwidth of LTE Band 85.

LTE Band 85				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	700.5	1RB#0	7.30	8.53
	707.0		7.91	9.80
	713.5		10.44	9.86
10 MHz	703.0	1RB#0	7.65	9.88
	707.0		8.81	9.85
	711.0		6.30	9.82




LTE Band 85-5MHz Channel Bandwidth PAPR

QPSK

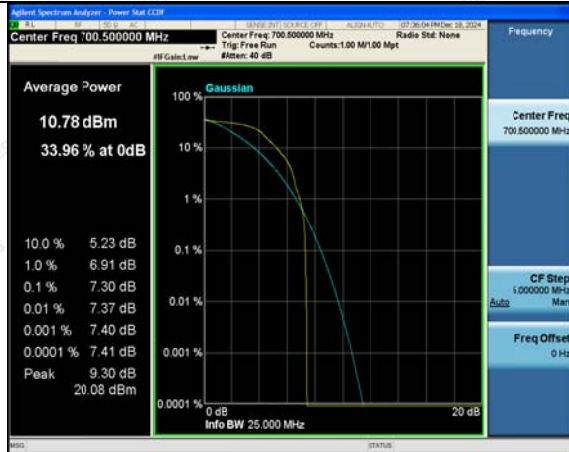


1RB#0

16QAM

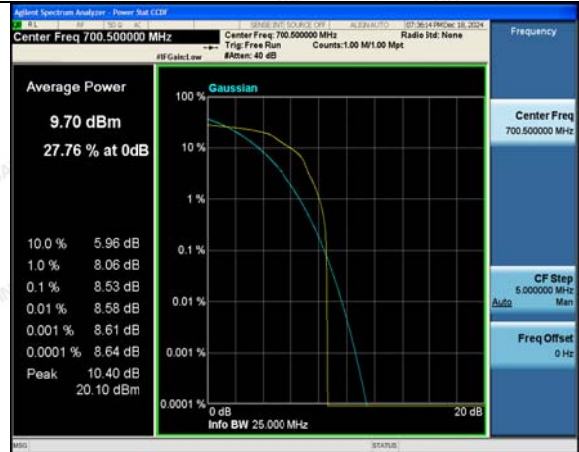

1RB#0

Low Channel

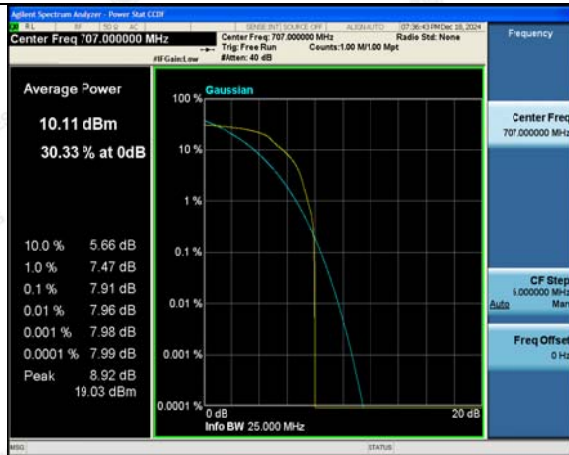


1RB#0




1RB#0

Middle Channel

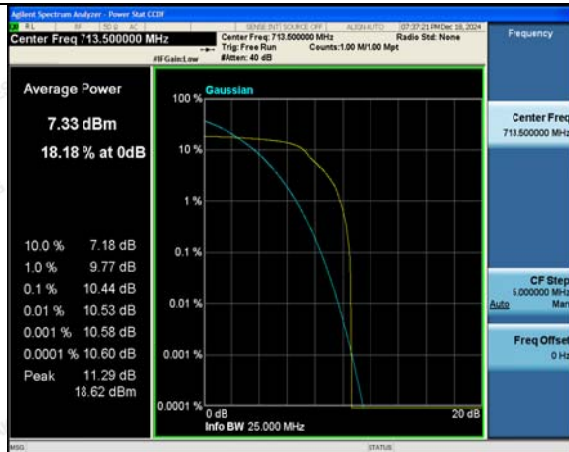

1RB#0

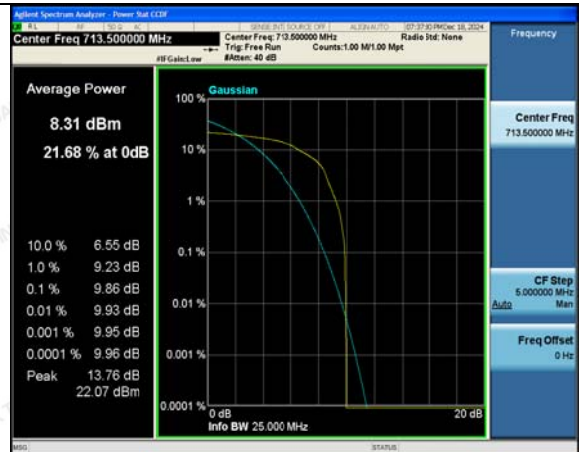


1RB#0

High Channel




LTE Band 85-10MHz Channel Bandwidth PAPR

QPSK

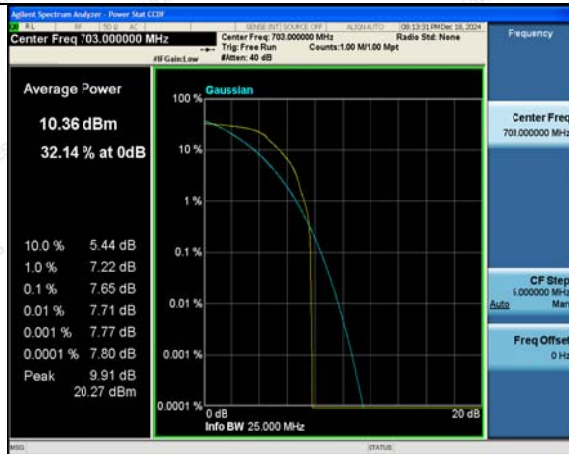


1RB#0

16QAM

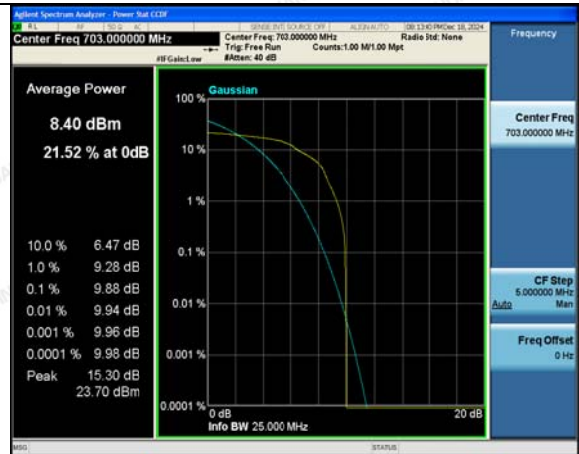

1RB#0

Low Channel

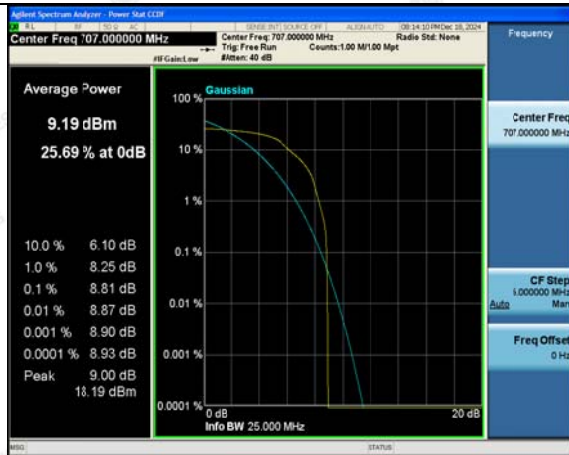


1RB#0




1RB#0

Middle Channel

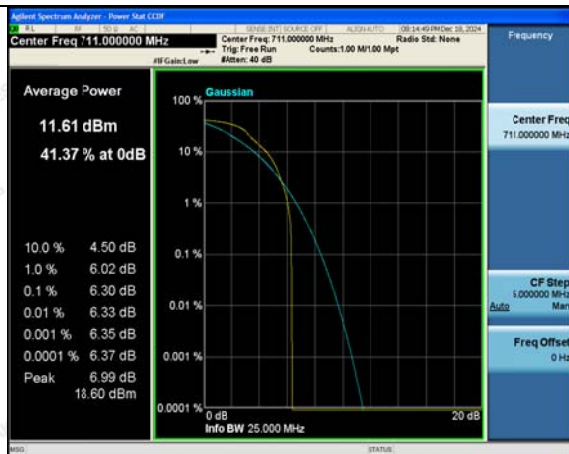

1RB#0

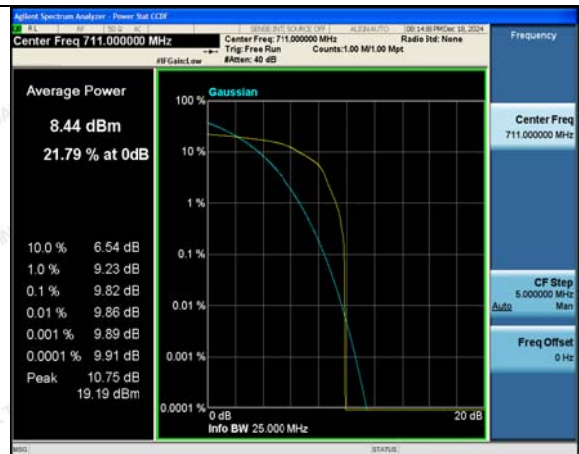

1RB#0

High Channel




3.4 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

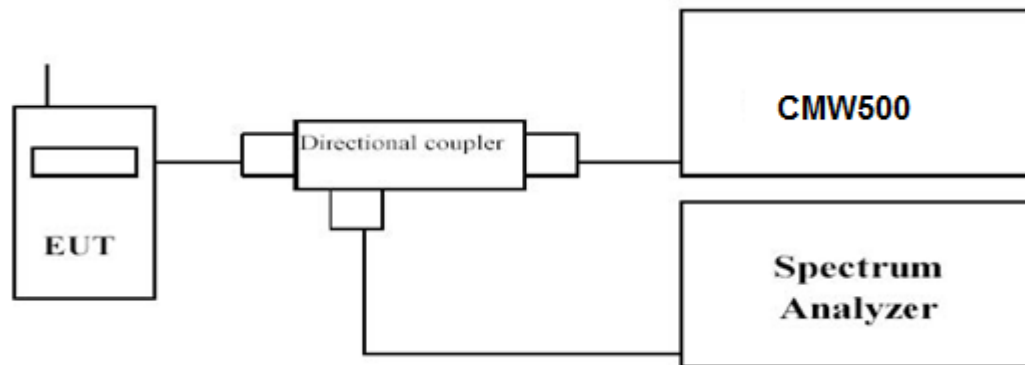

TEST PROCEDURE


The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW \geq 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 85; recorded worst case for each Channel Bandwidth of LTE Band 85.

LTE Band 85						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	6RB#0	700.5	1.292	1.306	1.0937	1.0966
		707.0	1.317	1.285	1.0903	1.0893
		713.5	1.349	1.355	1.0998	1.1036
10 MHz	6RB#0	703.0	1.295	1.308	1.1020	1.1043
		707.0	1.308	1.319	1.1042	1.1091
		711.0	1.314	1.290	1.1091	1.1114

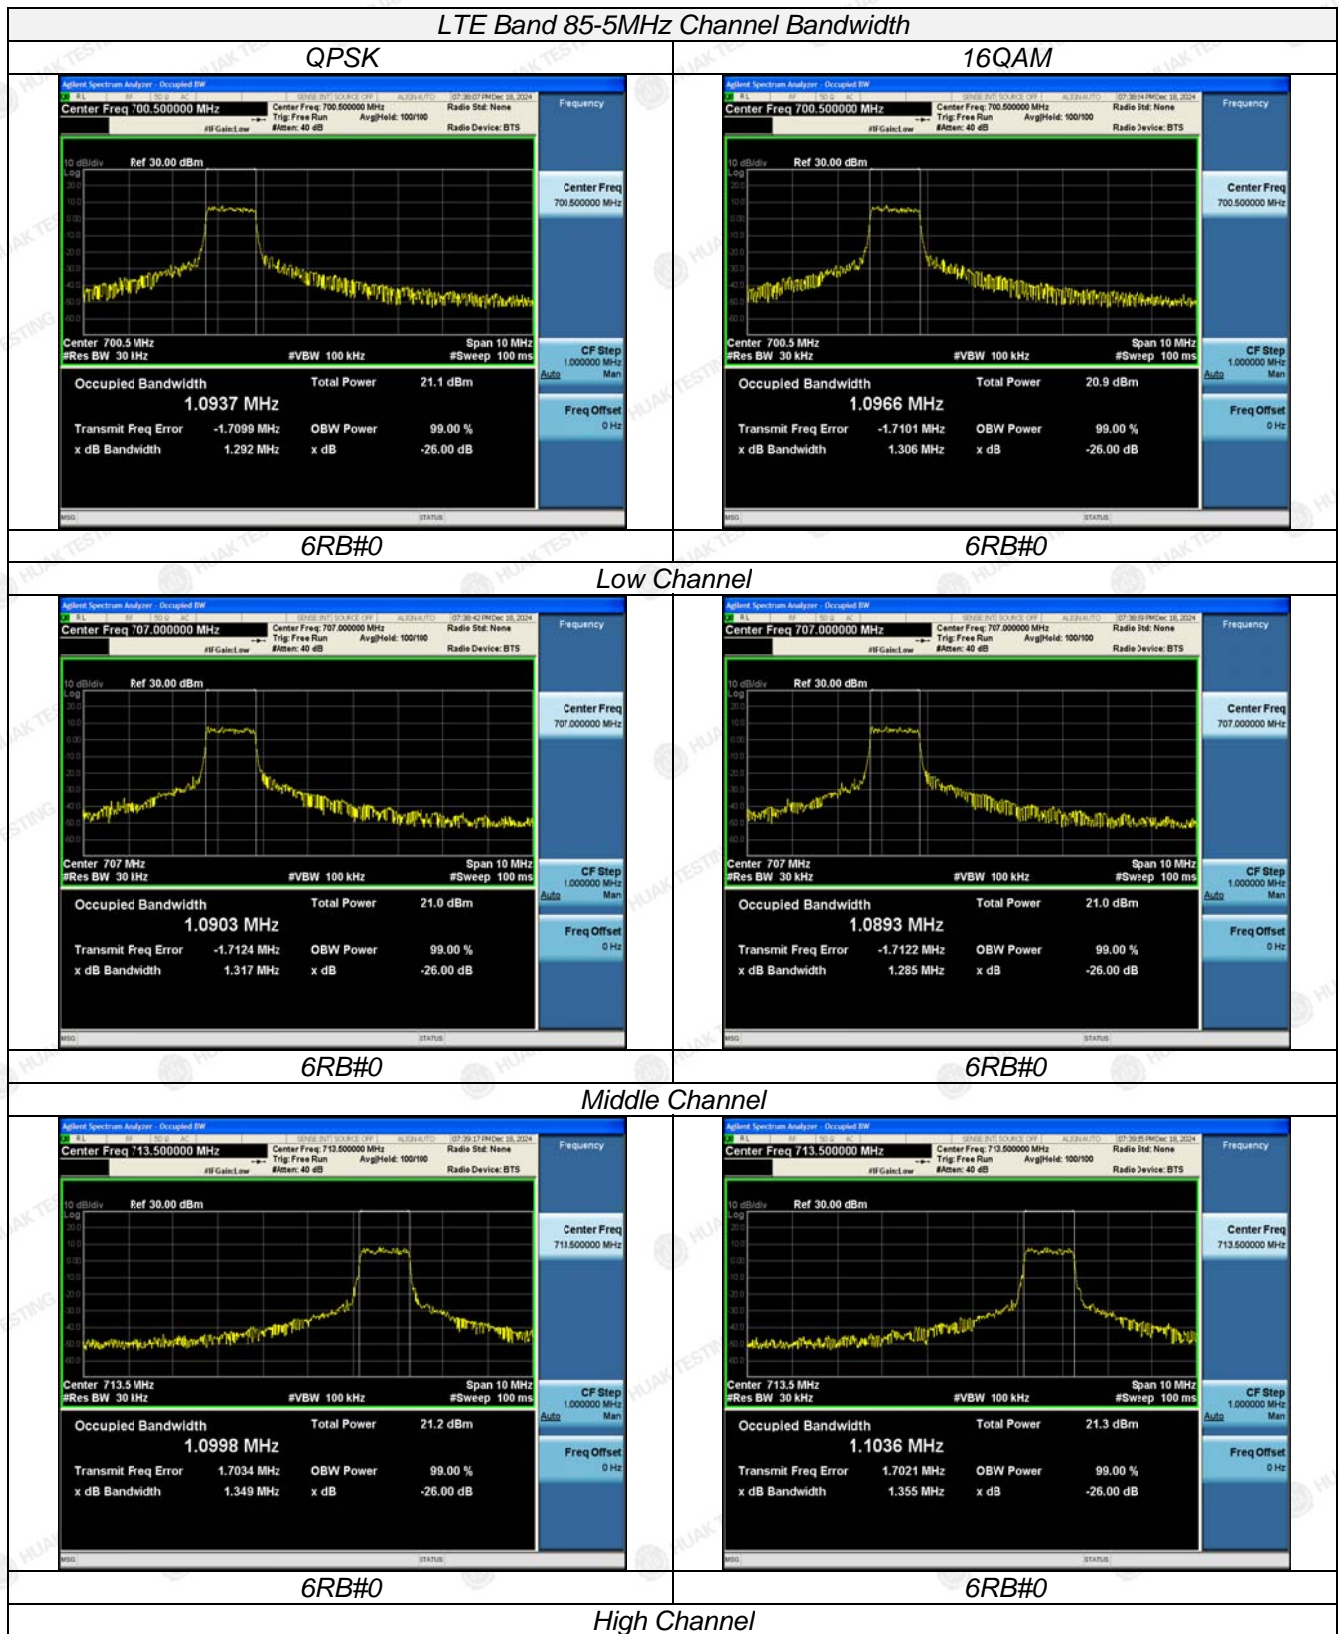

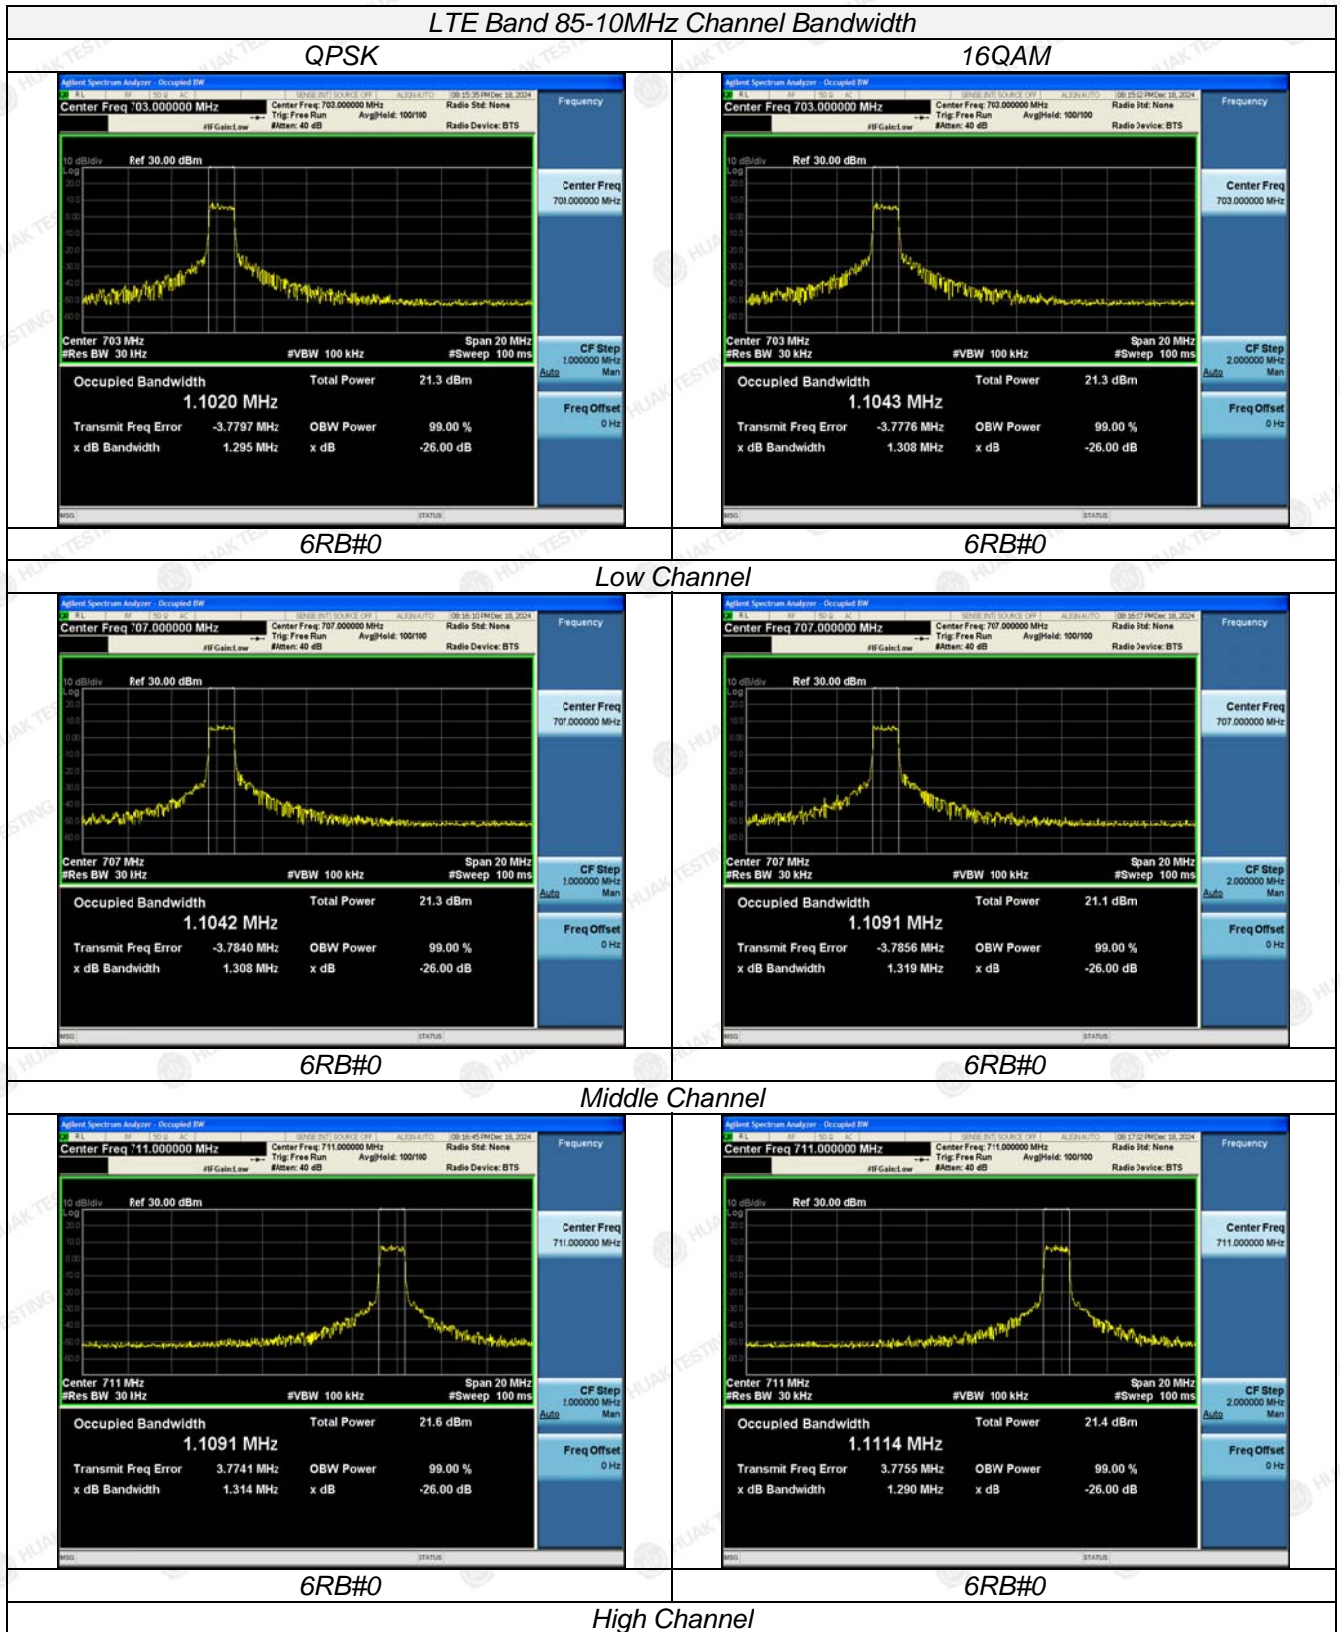




3.5 Band Edge Compliance

LIMIT

According to §27.53 (c): For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

TEST CONFIGURATION

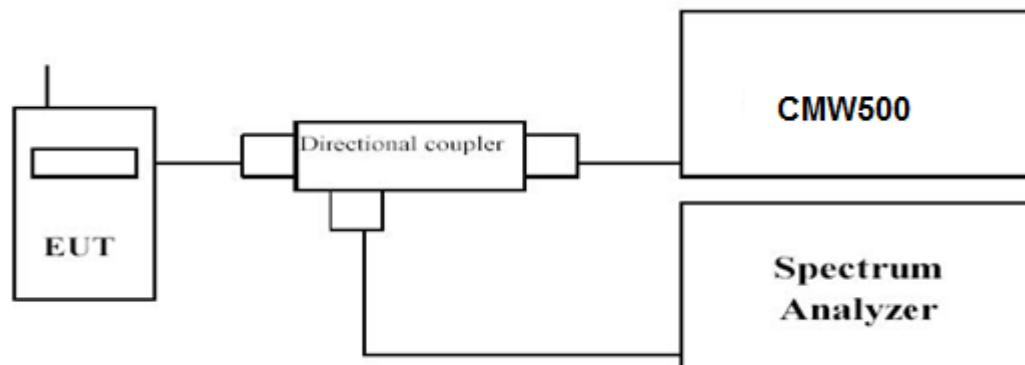


TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 85; recorded worst case for each Channel Bandwidth of LTE Band 85.

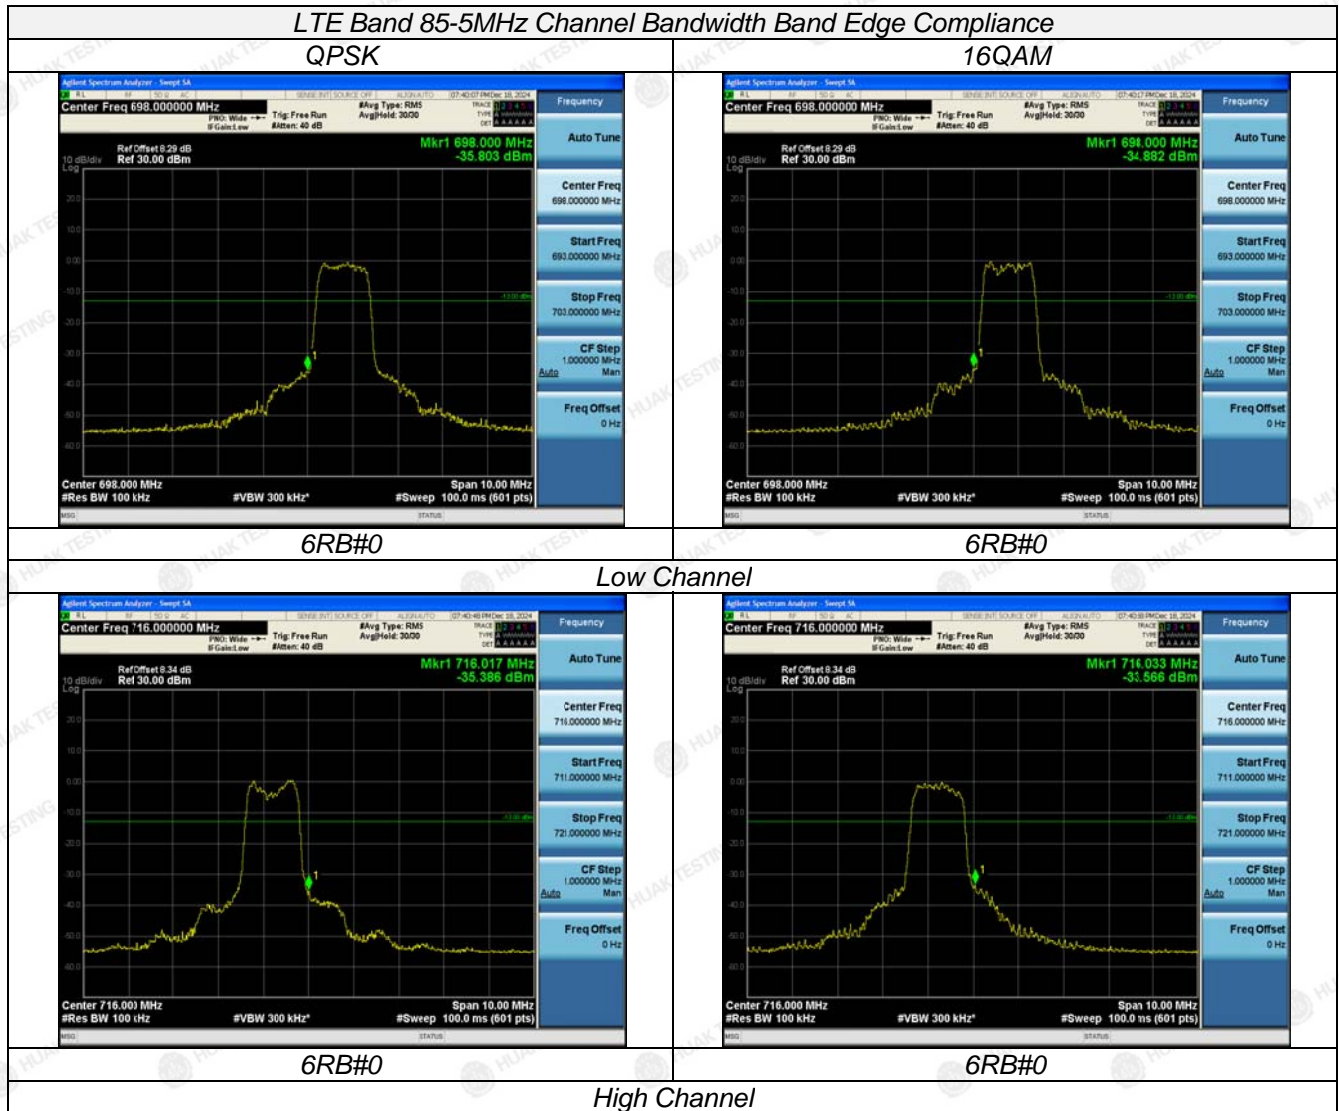

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

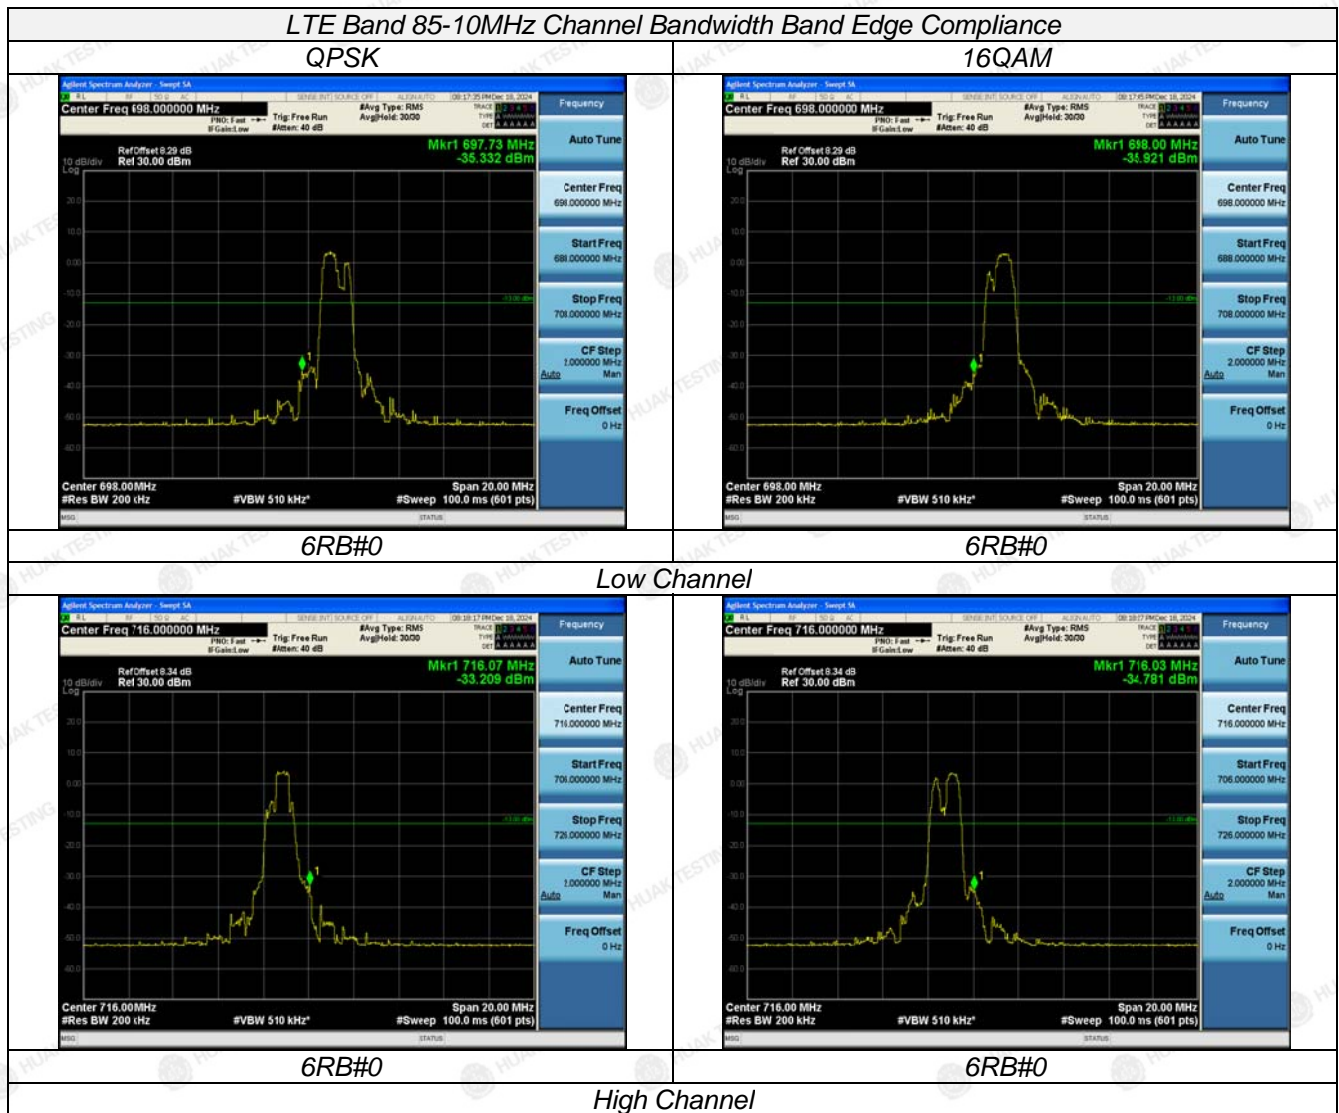

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.6 1Spurious Emission


LIMIT

According to §27.53 (c): For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

TEST CONFIGURATION

Conducted Spurious Measurement:

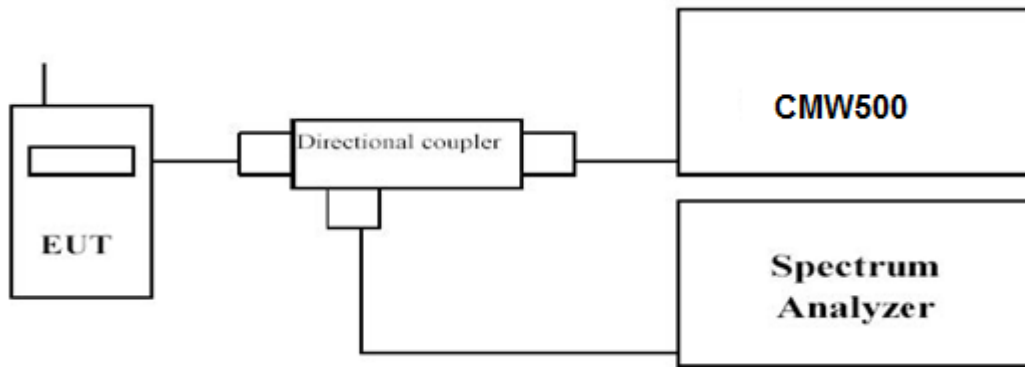

Radiated Spurious Measurement:

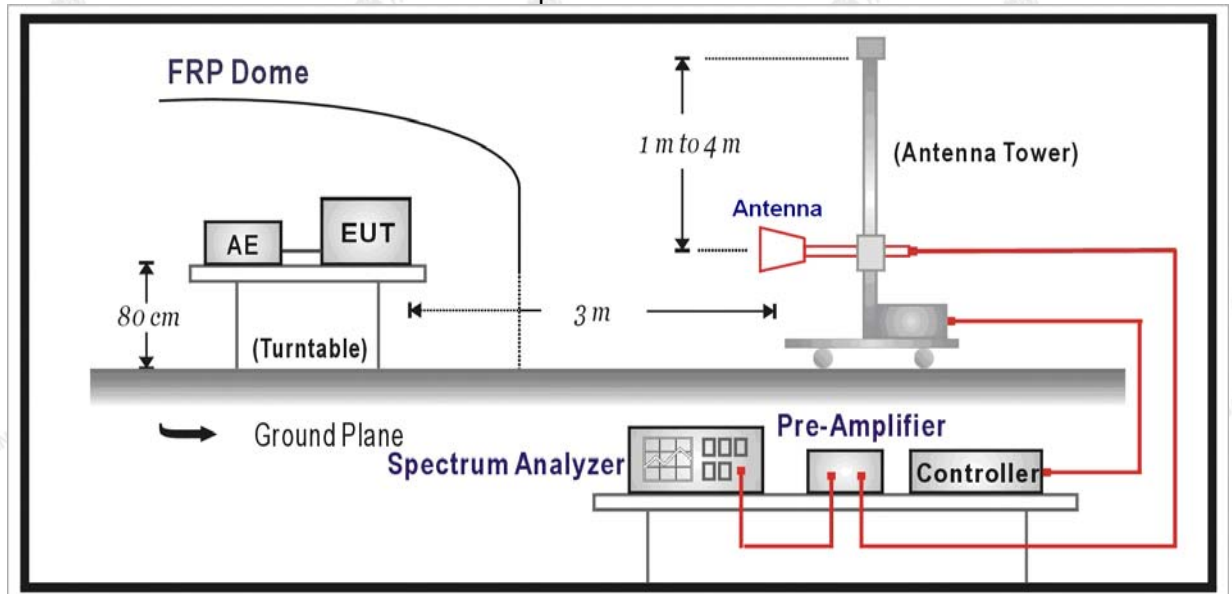

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

**Conducted Spurious Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 85	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto


Radiated Spurious Measurement:


- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.


TEST RESULTS**Remark:**

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 85; recorded worst case for each Channel Bandwidth of LTE Band 85.

Conducted Measurement:

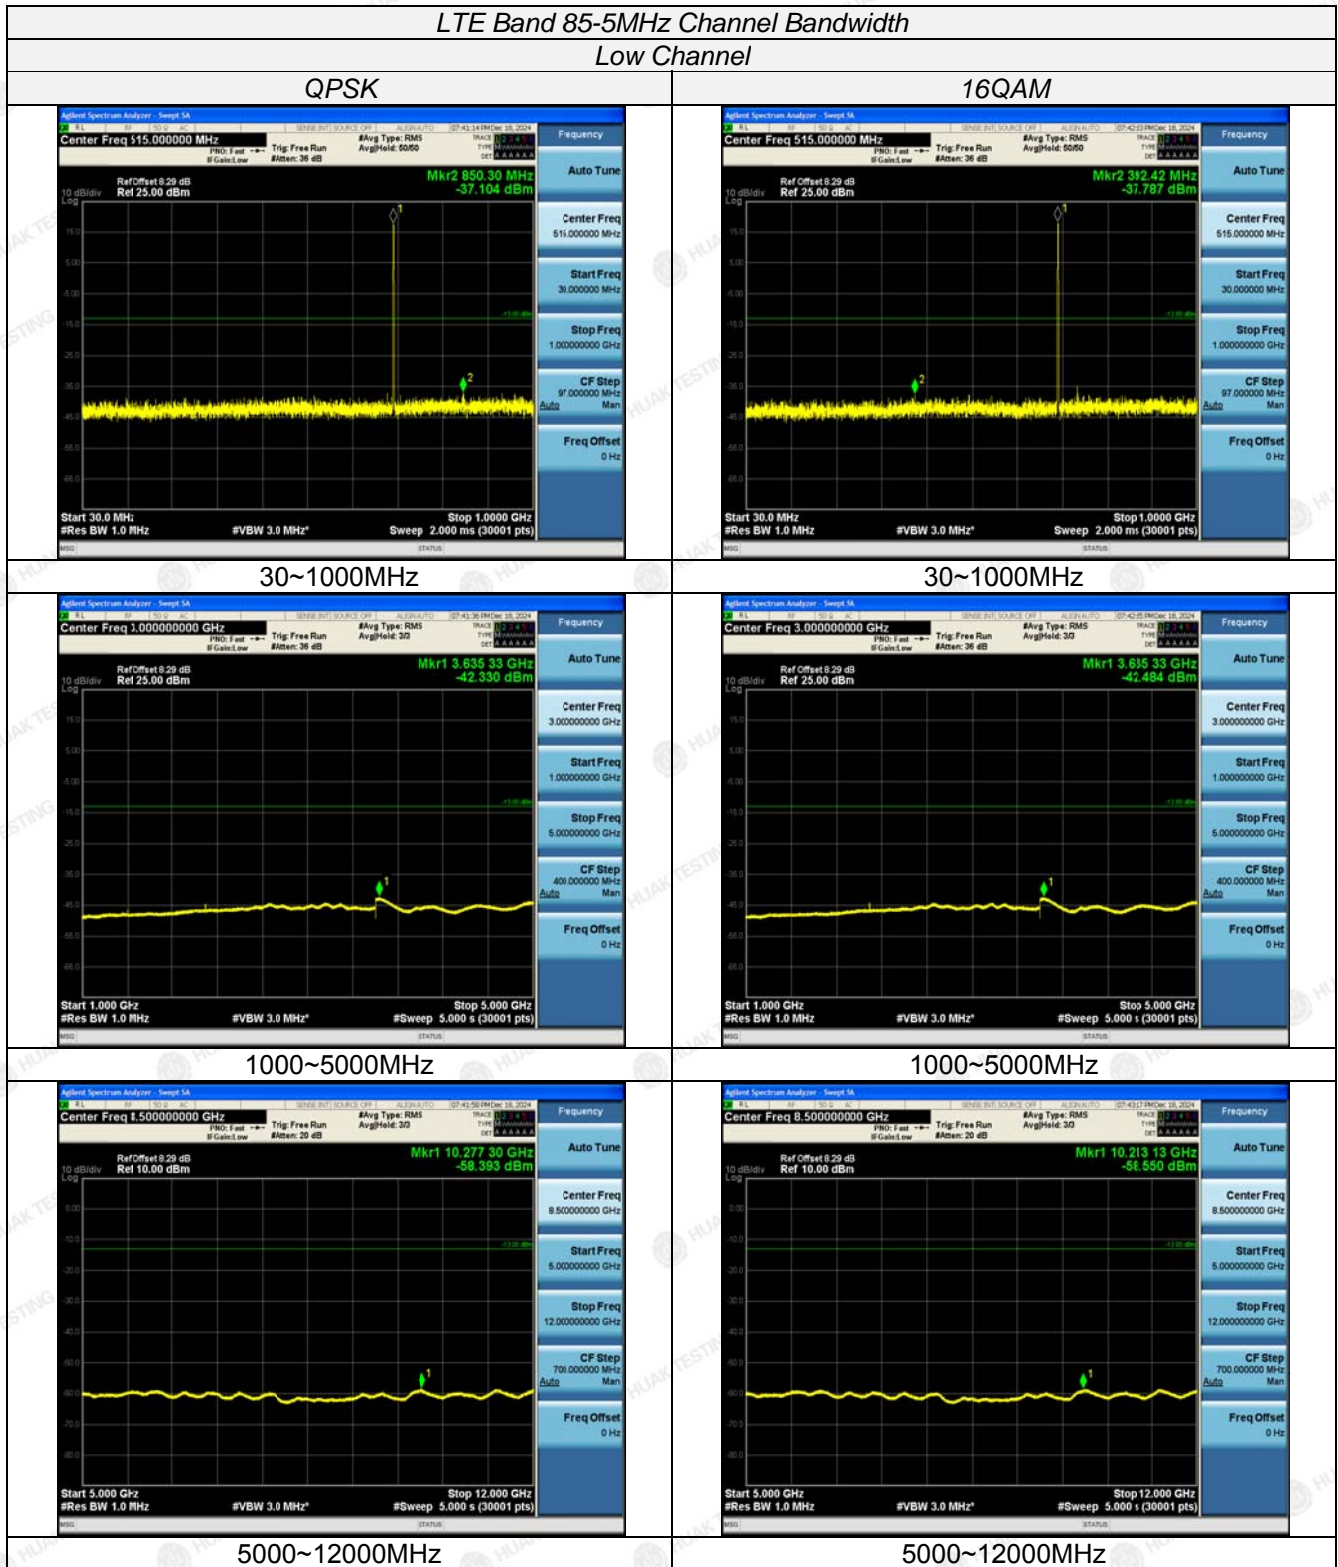

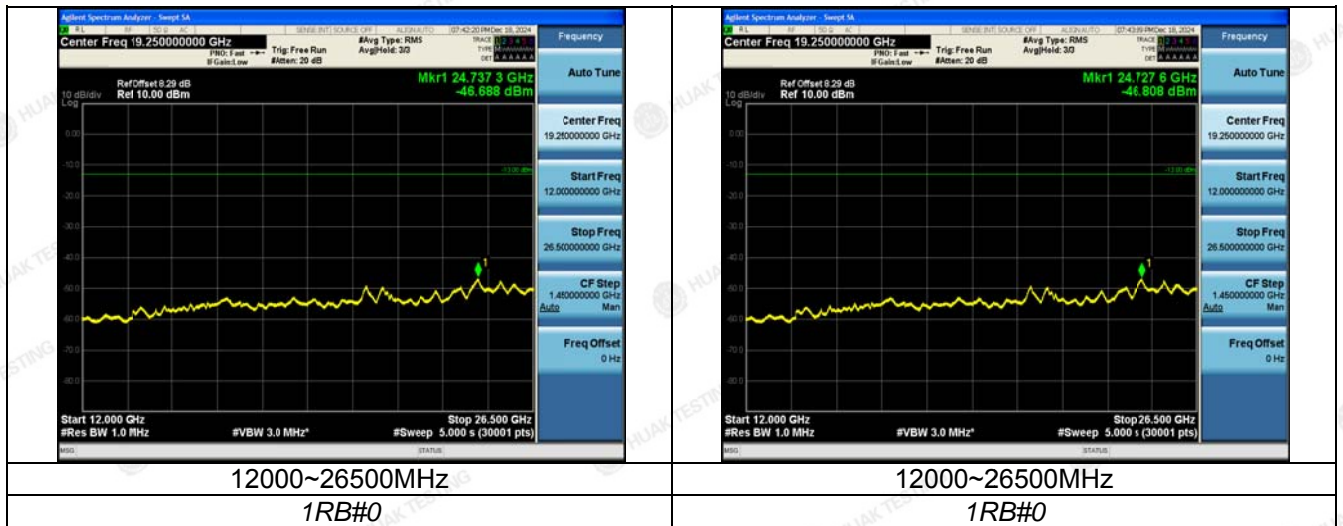


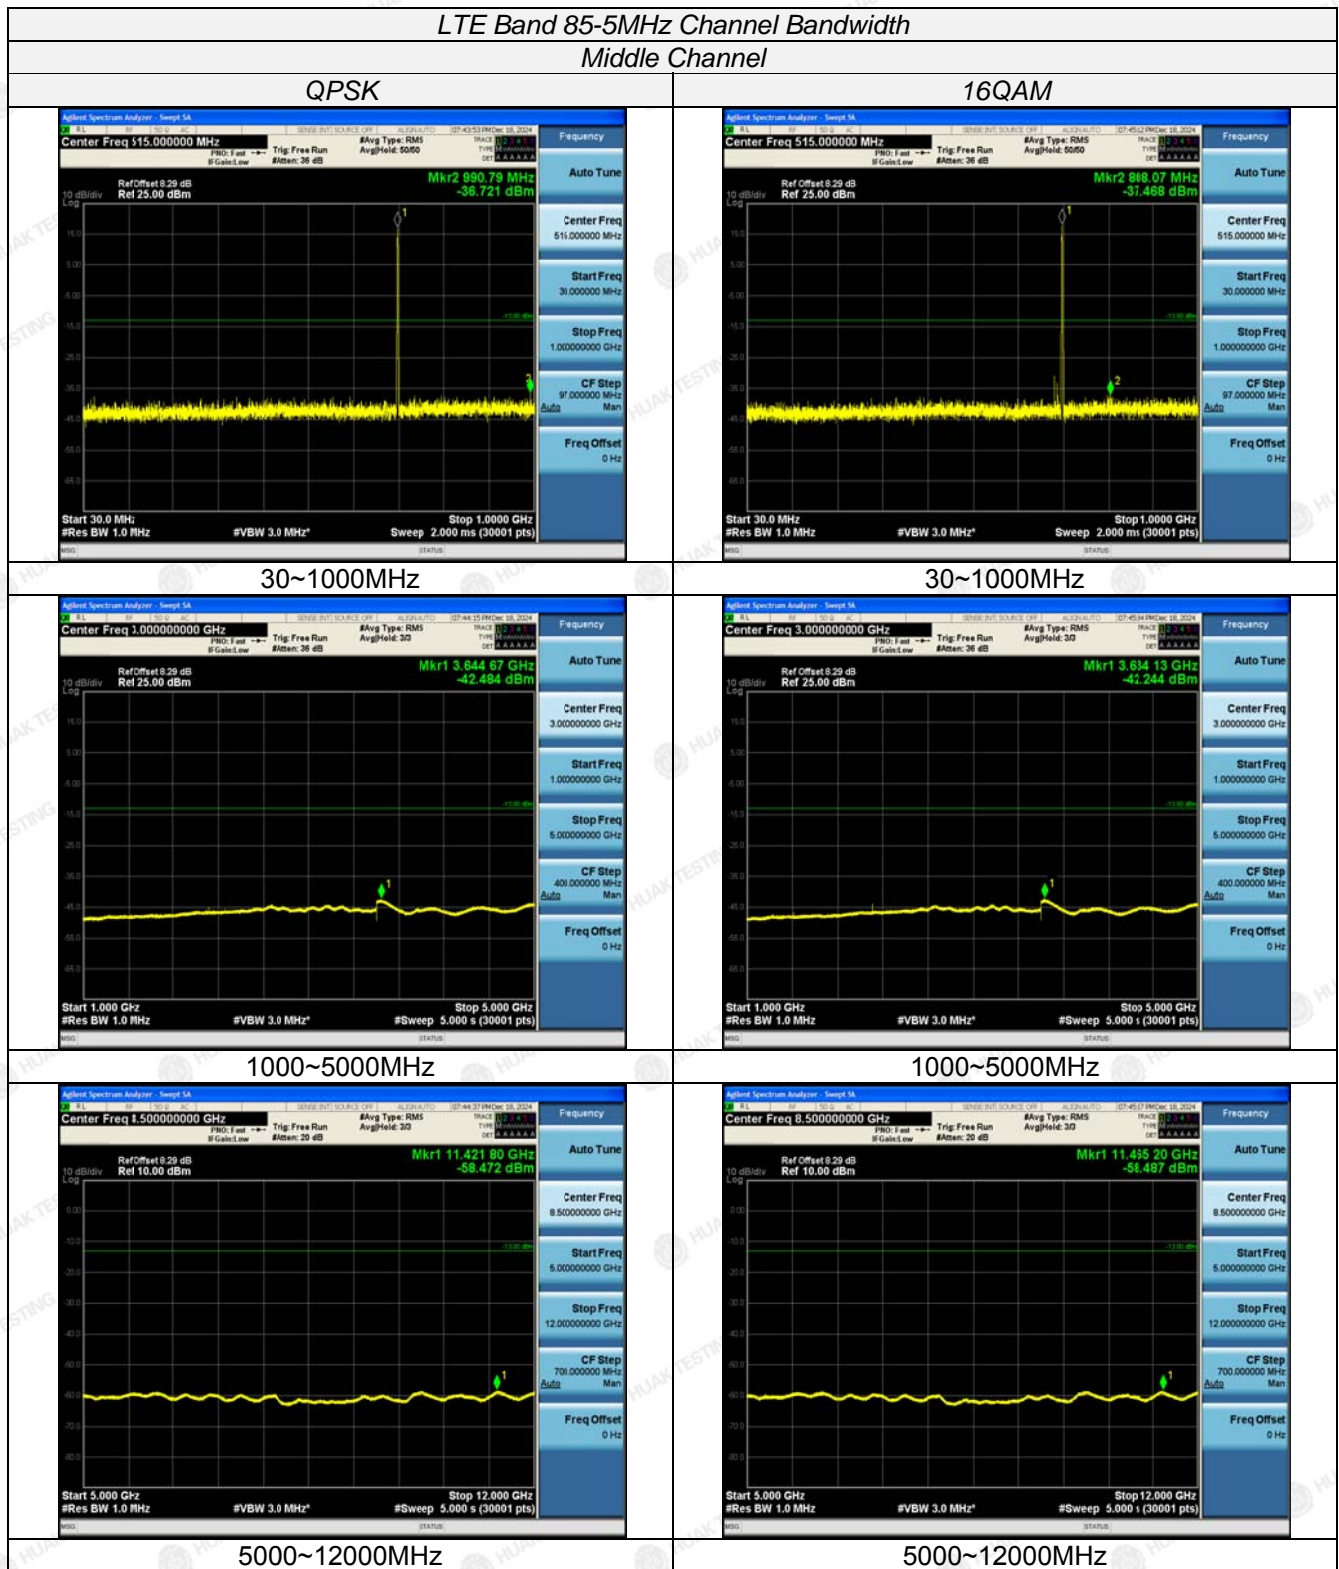


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

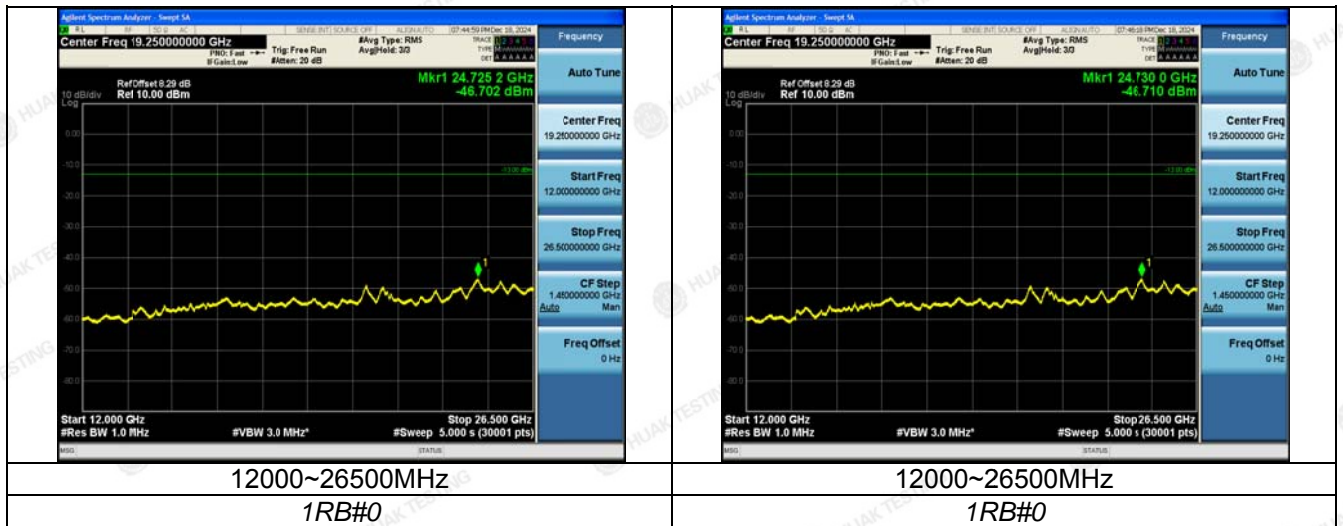


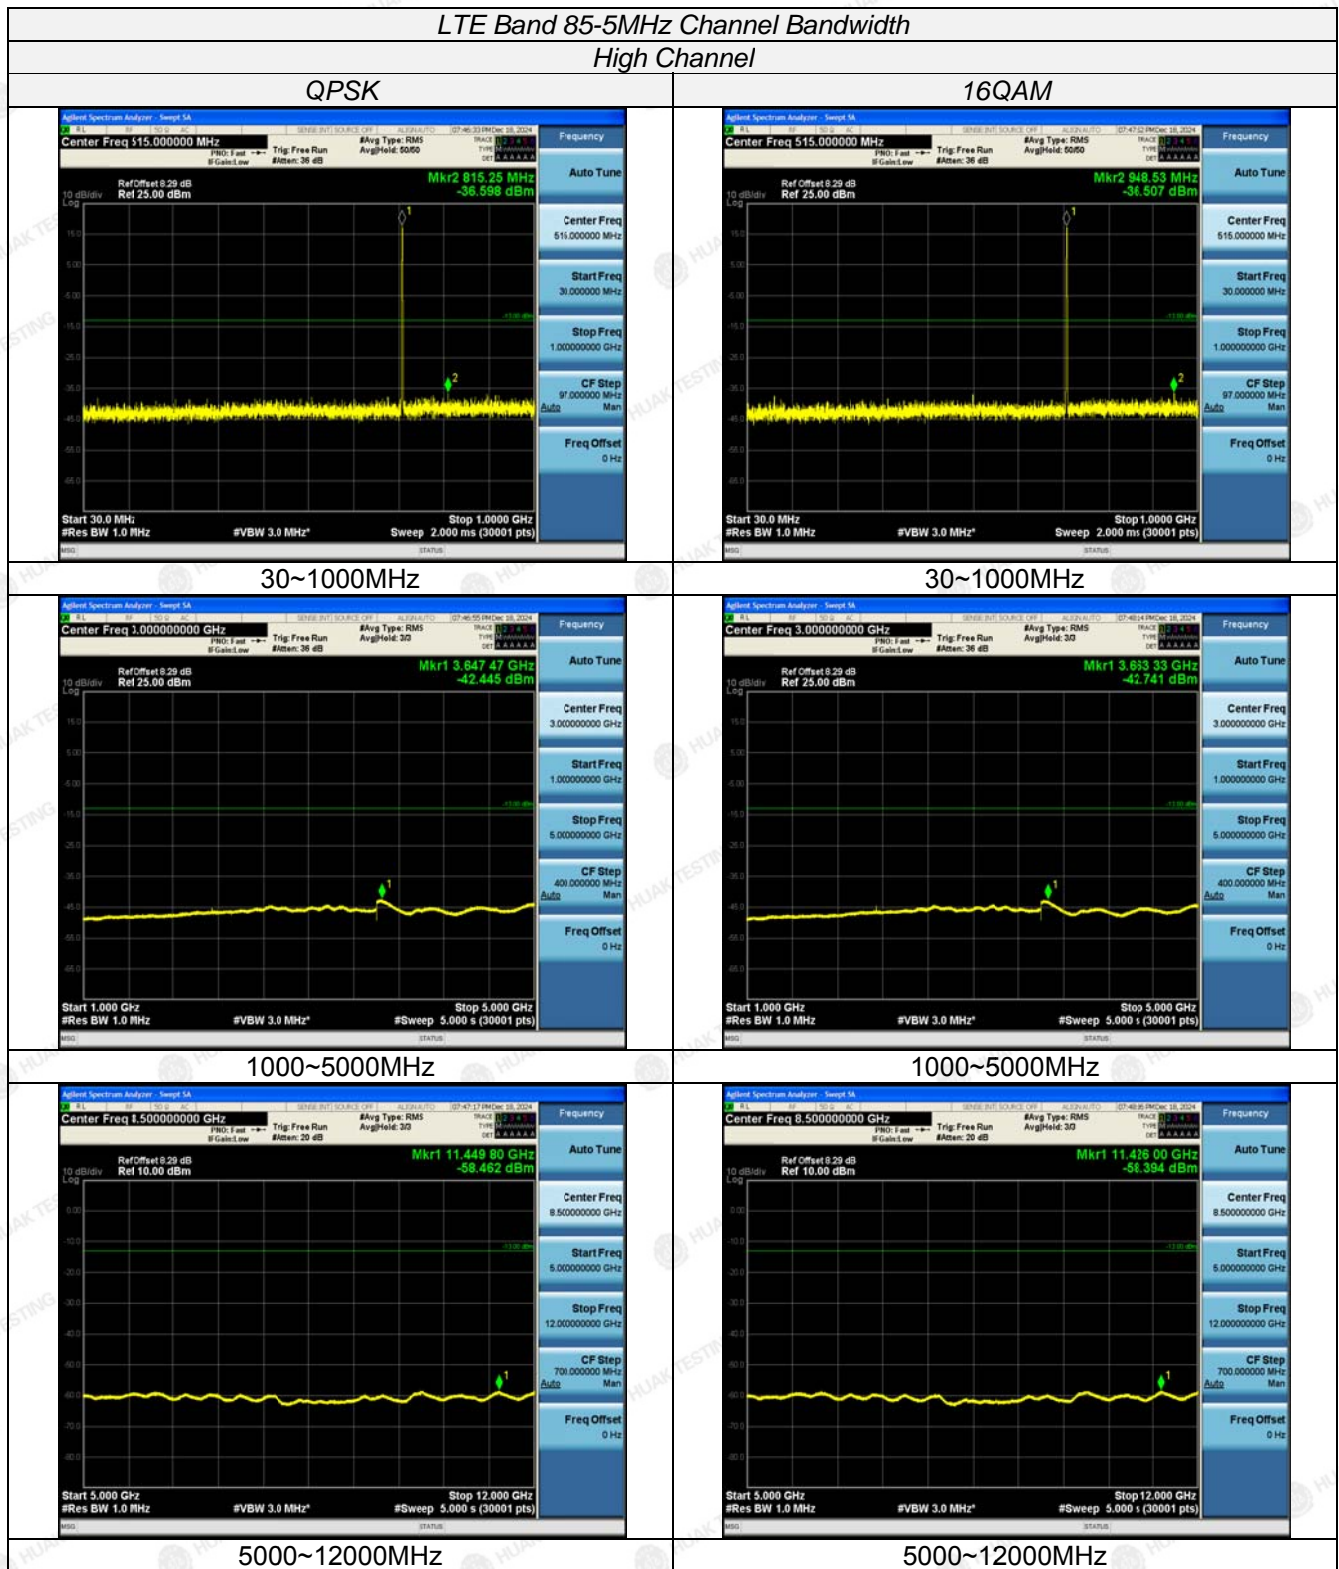

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

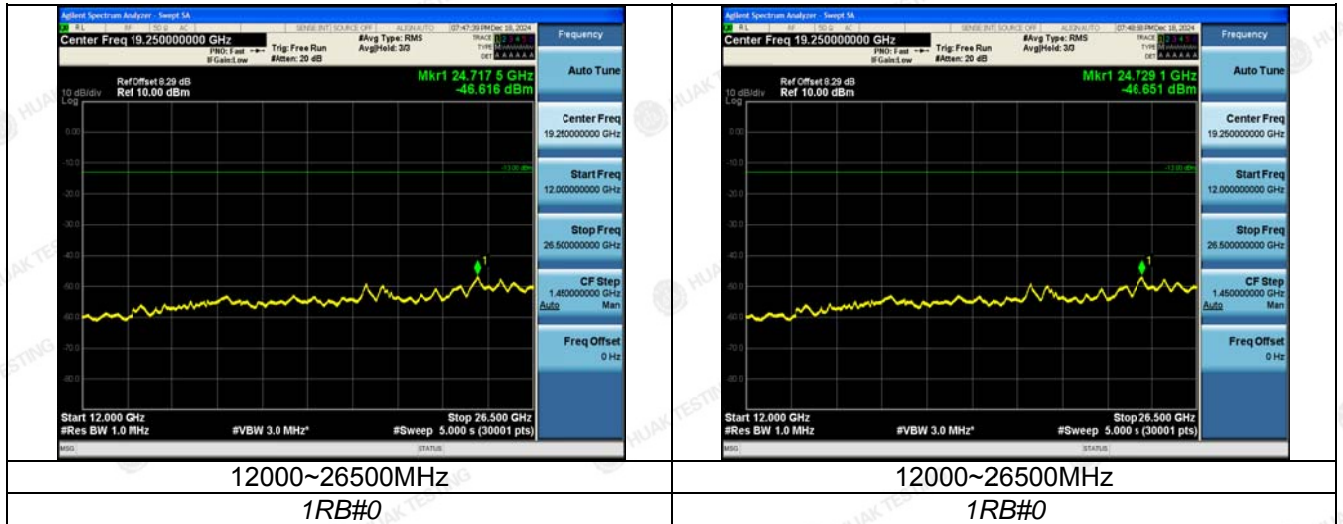


LTE Band 85-10MHz Channel Bandwidth
Low Channel

QPSK

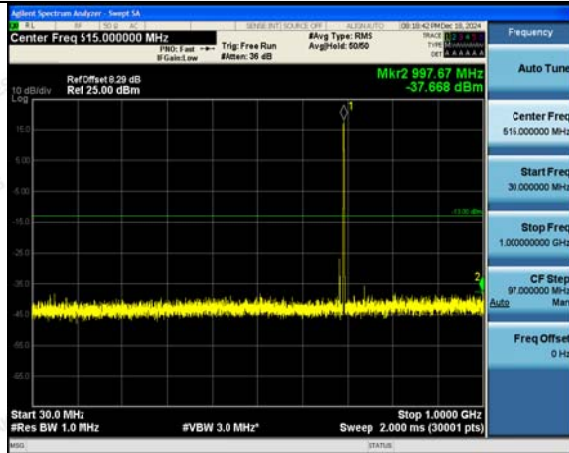

16QAM

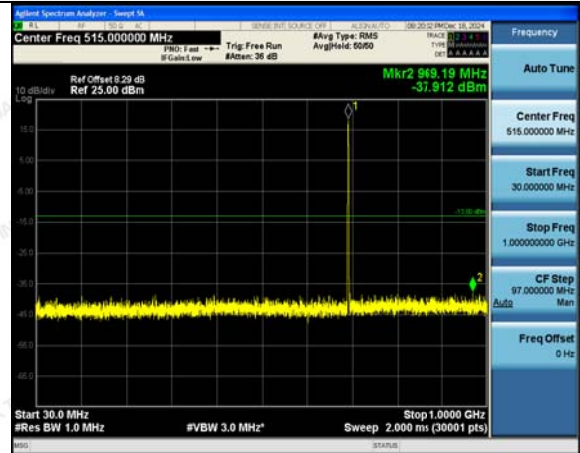

30~1000MHz



30~1000MHz



1000~5000MHz



1000~5000MHz





5000~12000MHz





5000~12000MHz




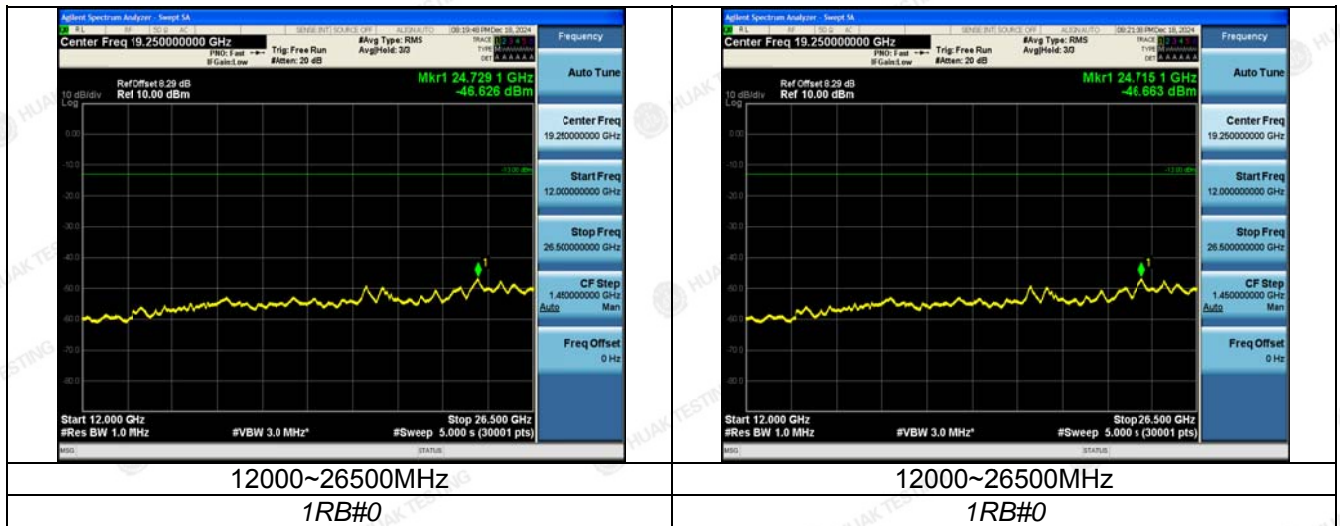

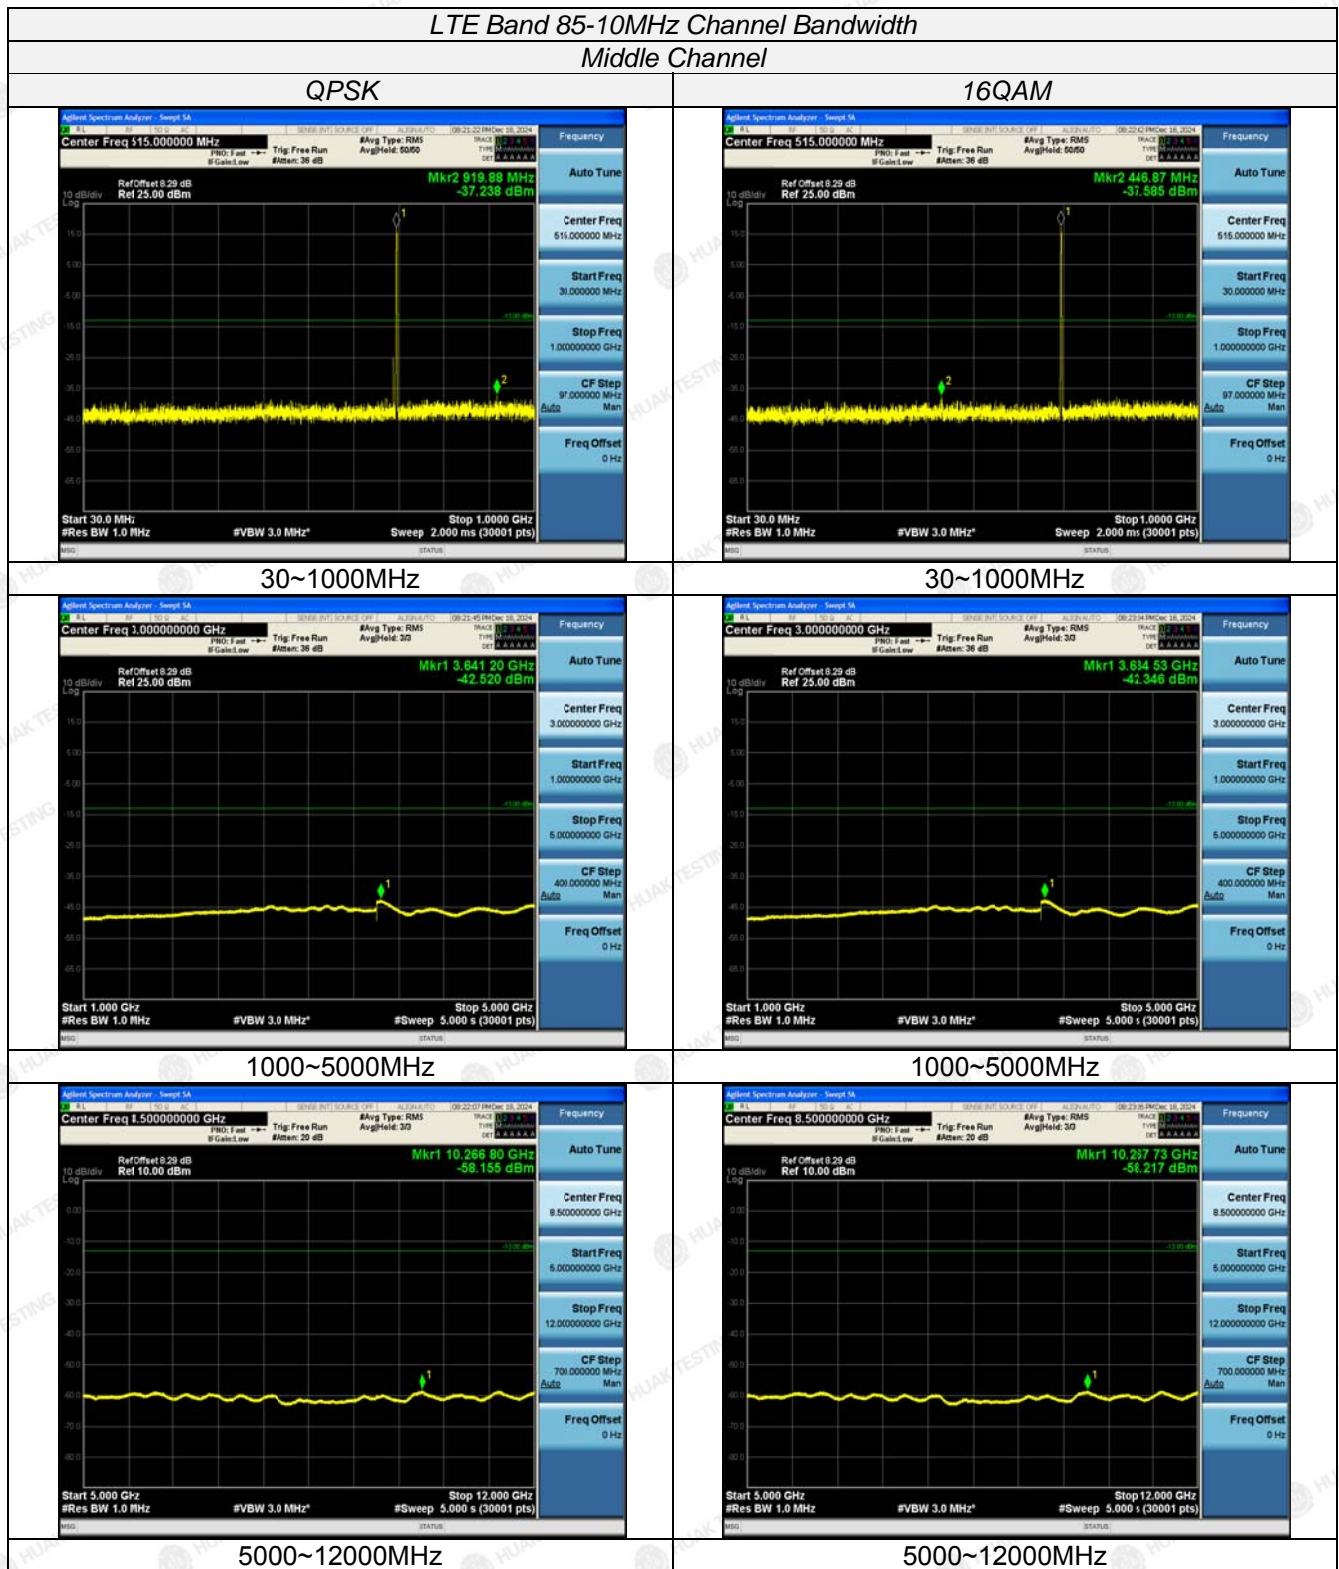

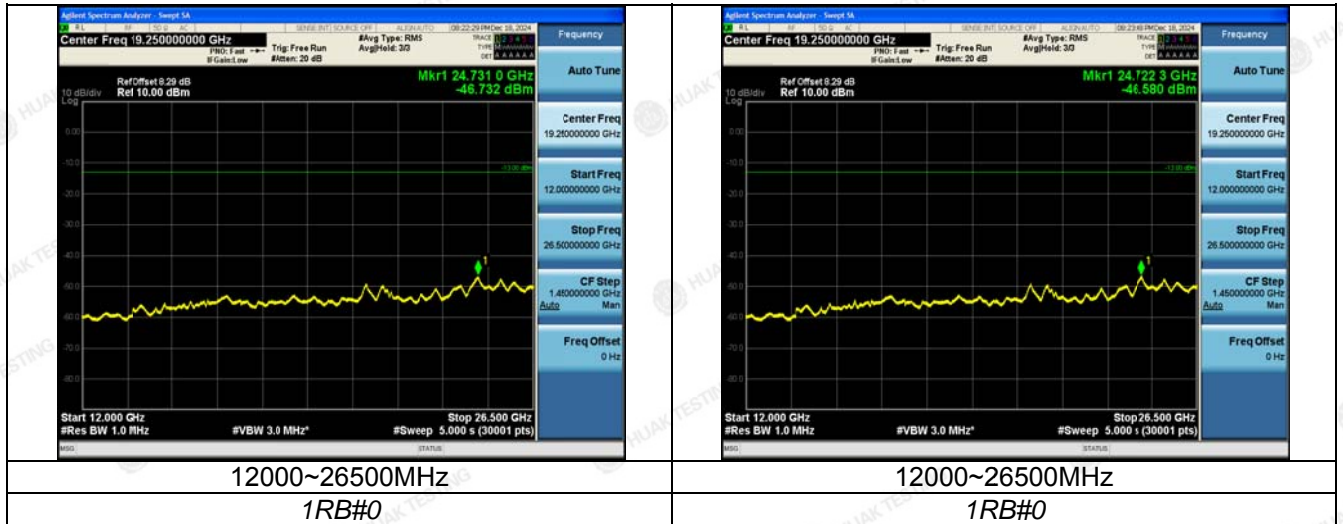

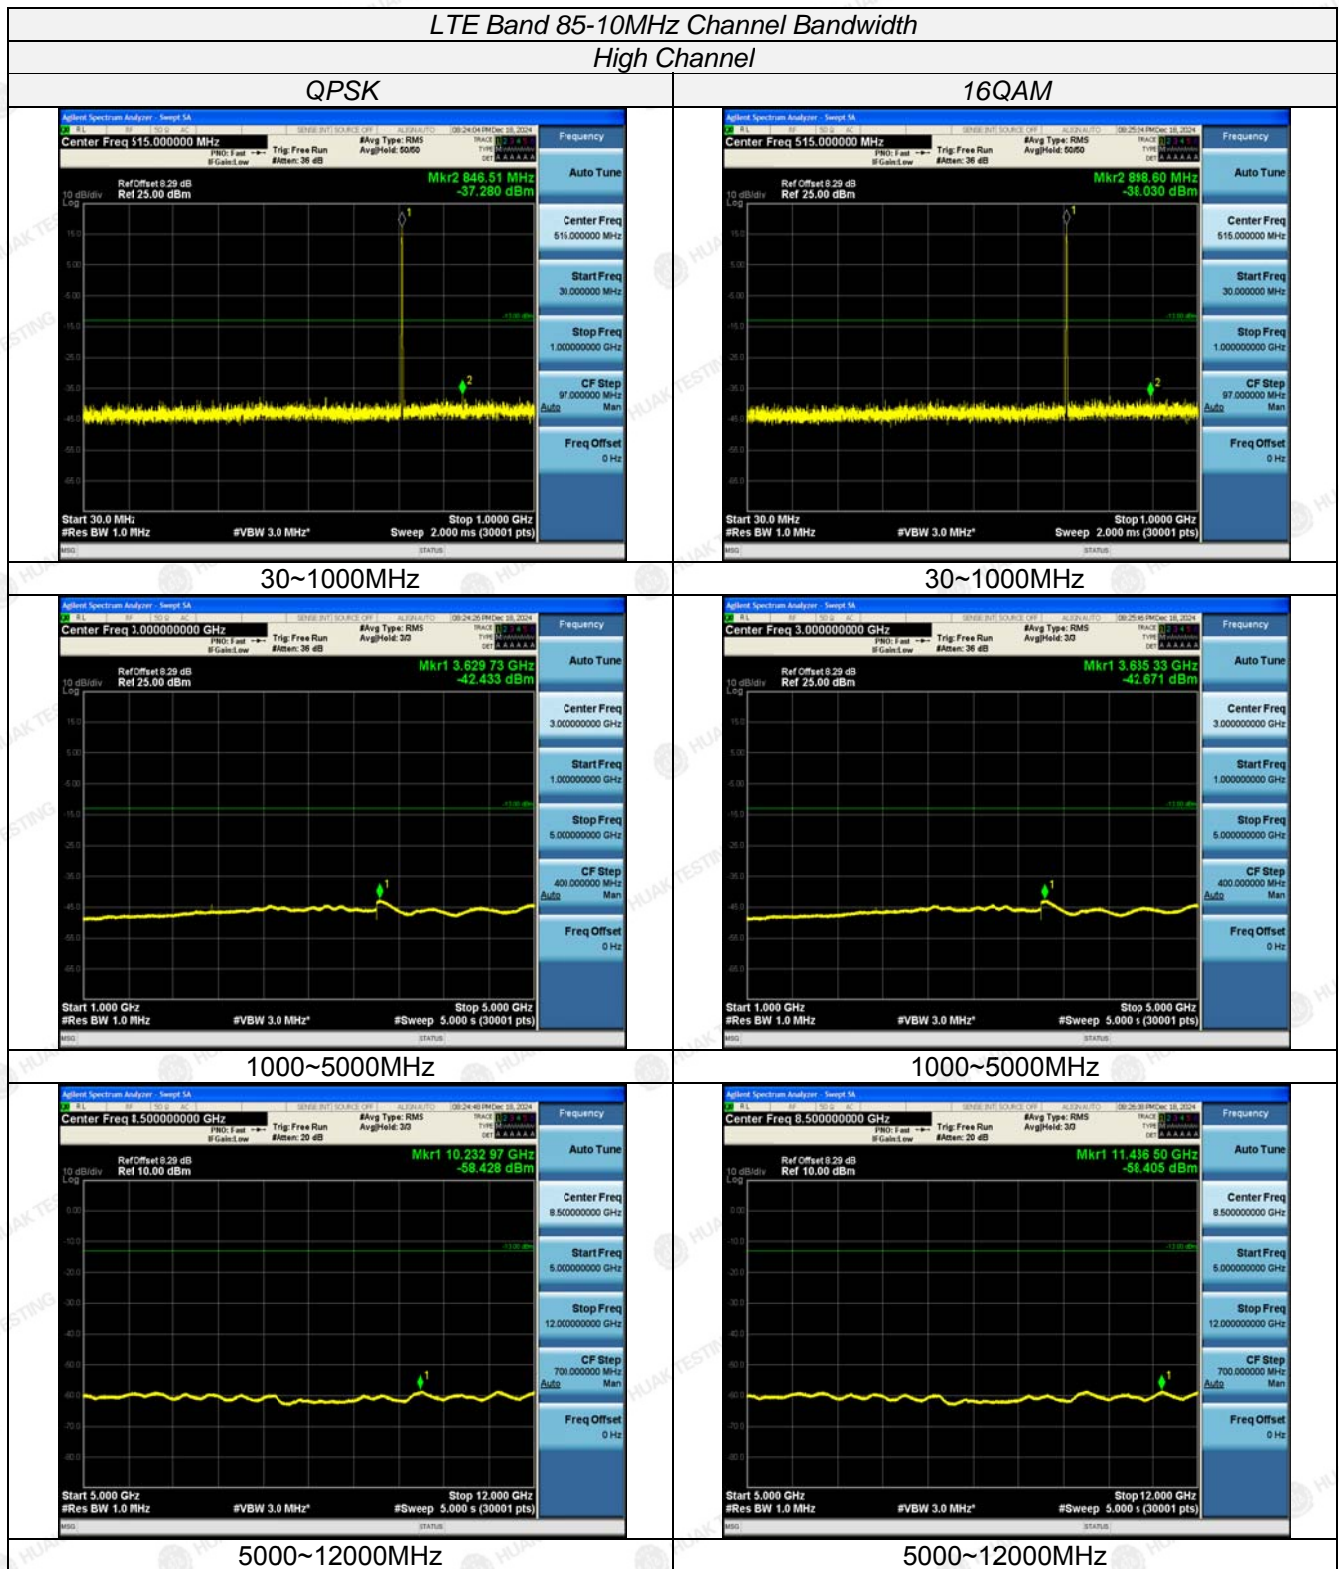

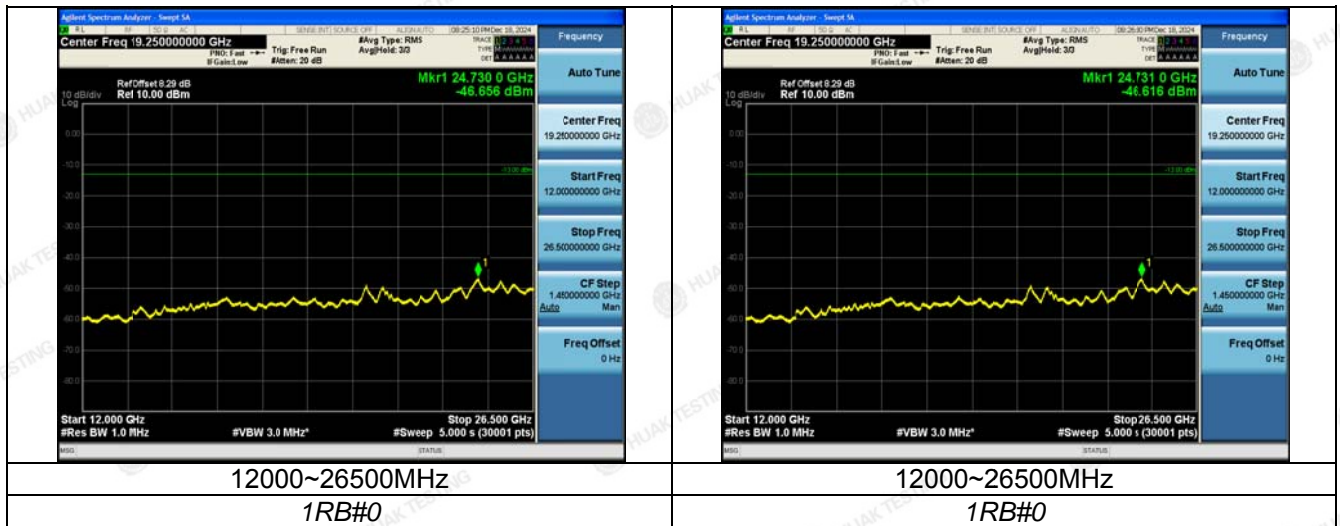

**Radiated Measurement:****Remark:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 85; recorded worst case for each Channel Bandwidth of LTE FDD Band 85.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 85 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1401.0	-47.48	4.02	3.00	12.21	-39.29	-13.00	26.29	H
2101.5	-47.22	5.11	3.00	13.26	-39.07	-13.00	26.07	H
1401.0	-48.72	4.02	3.00	12.21	-40.53	-13.00	27.53	V
2101.5	-49.21	5.11	3.00	13.26	-41.06	-13.00	28.06	V

LTE FDD Band 85 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1414.0	-47.35	4.02	3.00	12.21	-39.16	-13.00	26.16	H
2121.0	-47.08	5.11	3.00	13.26	-38.93	-13.00	25.93	H
1414.0	-48.96	4.02	3.00	12.21	-40.77	-13.00	27.77	V
2121.0	-48.36	5.11	3.00	13.26	-40.21	-13.00	27.21	V

LTE FDD Band 85 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.0	-47.75	4.02	3.00	12.21	-39.56	-13.00	26.56	H
2140.5	-47.1	5.11	3.00	13.26	-38.95	-13.00	25.95	H
1427.0	-49.43	4.02	3.00	12.21	-41.24	-13.00	28.24	V
2140.5	-48.53	5.11	3.00	13.26	-40.38	-13.00	27.38	V

TE FDD Band 85 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1406.0	-47.68	4.02	3.00	12.21	-39.49	-13.00	26.49	H
2109.0	-46.7	5.11	3.00	13.26	-38.55	-13.00	25.55	H
1406.0	-48.72	4.02	3.00	12.21	-40.53	-13.00	27.53	V
2109.0	-48.47	5.11	3.00	13.26	-40.32	-13.00	27.32	V



LTE FDD Band 85_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1414.0	-47.52	4.02	3.00	12.21	-39.33	-13.00	26.33	H
2121.0	-46.98	5.11	3.00	13.26	-38.83	-13.00	25.83	H
1414.0	-48.9	4.02	3.00	12.21	-40.71	-13.00	27.71	V
2121.0	-48.39	5.11	3.00	13.26	-40.24	-13.00	27.24	V

LTE FDD Band 85_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1422.0	-47.5	4.02	3.00	12.21	-39.31	-13.00	26.31	H
2133.0	-46.99	5.11	3.00	13.26	-38.84	-13.00	25.84	H
1422.0	-49.36	4.02	3.00	12.21	-41.17	-13.00	28.17	V
2133.0	-49.23	5.11	3.00	13.26	-41.08	-13.00	28.08	V

LTE FDD Band 85_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1414.0	-46.92	4.02	3.00	12.21	-38.73	-13.00	25.73	H
2121.0	-47.32	5.11	3.00	13.26	-39.17	-13.00	26.17	H
1414.0	-48.82	4.02	3.00	12.21	-40.63	-13.00	27.63	V
2121.0	-48.95	5.11	3.00	13.26	-40.8	-13.00	27.80	V

LTE FDD Band 85_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1414.0	-46.96	4.02	3.00	12.21	-38.77	-13.00	25.77	H
2121.0	-47.01	5.11	3.00	13.26	-38.86	-13.00	25.86	H
1414.0	-49.14	4.02	3.00	12.21	-40.95	-13.00	27.95	V
2121.0	-48.53	5.11	3.00	13.26	-40.38	-13.00	27.38	V

LTE FDD Band 85_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.0	-47.25	4.02	3.00	12.21	-39.06	-13.00	26.06	H
2140.5	-47.2	5.11	3.00	13.26	-39.05	-13.00	26.05	H
1427.0	-49.19	4.02	3.00	12.21	-41	-13.00	28.00	V
2140.5	-48.72	5.11	3.00	13.26	-40.57	-13.00	27.57	V

TE FDD Band 85_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1406.0	-47.9	4.02	3.00	12.21	-39.71	-13.00	26.71	H
2109.0	-46.82	5.11	3.00	13.26	-38.67	-13.00	25.67	H
1406.0	-48.84	4.02	3.00	12.21	-40.65	-13.00	27.65	V
2109.0	-48.93	5.11	3.00	13.26	-40.78	-13.00	27.78	V



LTE FDD Band 85 Channel Bandwidth 10MHz 16QAM Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1414.0	-47.01	4.02	3.00	12.21	-38.82	-13.00	25.82	H
2121.0	-47.51	5.11	3.00	13.26	-39.36	-13.00	26.36	H
1414.0	-49.21	4.02	3.00	12.21	-41.02	-13.00	28.02	V
2121.0	-49.19	5.11	3.00	13.26	-41.04	-13.00	28.04	V

LTE FDD Band 85 Channel Bandwidth 10MHz 16QAM High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1422.0	-47.89	4.02	3.00	12.21	-39.7	-13.00	26.70	H
2133.0	-47.23	5.11	3.00	13.26	-39.08	-13.00	26.08	H
1422.0	-49.07	4.02	3.00	12.21	-40.88	-13.00	27.88	V
2133.0	-48.72	5.11	3.00	13.26	-40.57	-13.00	27.57	V




3.7 Frequency Stability Under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

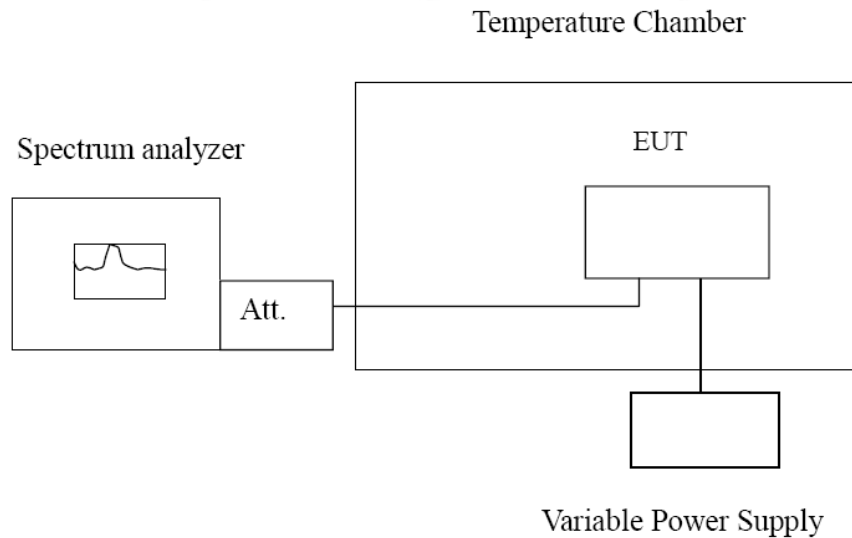

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 85, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 85; recorded worst case.

LTE Band 85, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage



Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.15V	-3.79	-6.39	-0.005410	-0.008956
3.70V	4.11	-6.44	0.005867	-0.009026
4.26V	2.75	-6.92	0.003926	-0.009699

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	-3.28	-2.96	0.006524	-0.004682
-20°	2.75	2.03	0.007266	0.003926
-10°	3.15	-3.23	0.011089	0.004497
0°	3.85	-3.29	0.010424	0.005496
10°	2.69	-3.25	0.009264	0.003840
20°	4.43	2.92	0.009661	0.006324
30°	6.47	-2.90	0.007454	0.009151
40°	6.52	2.26	-0.012642	0.009222
50°	6.91	2.76	-0.014142	0.009774



4 Test Setup Photos of the EUT

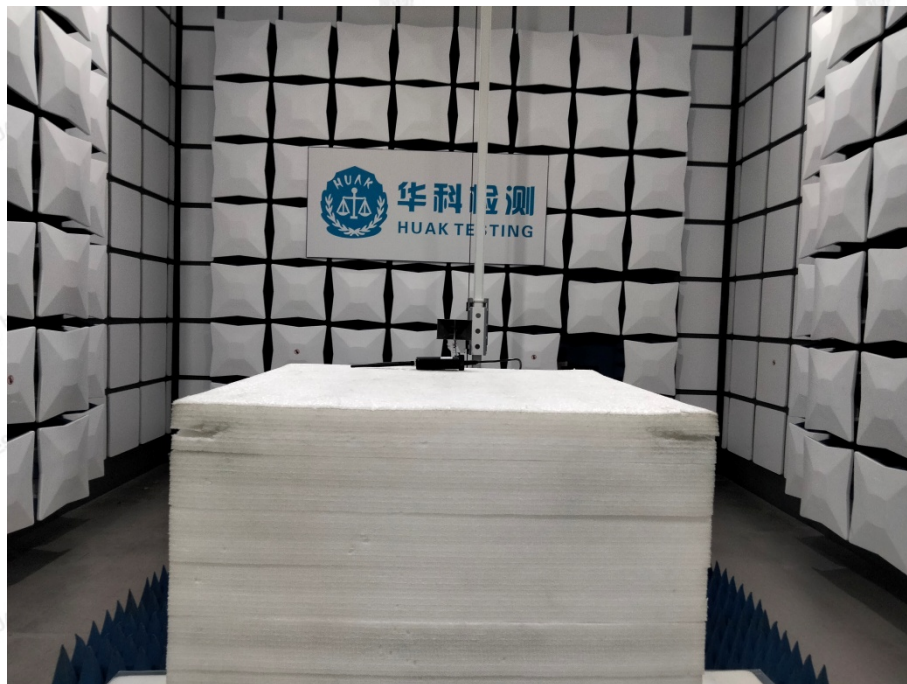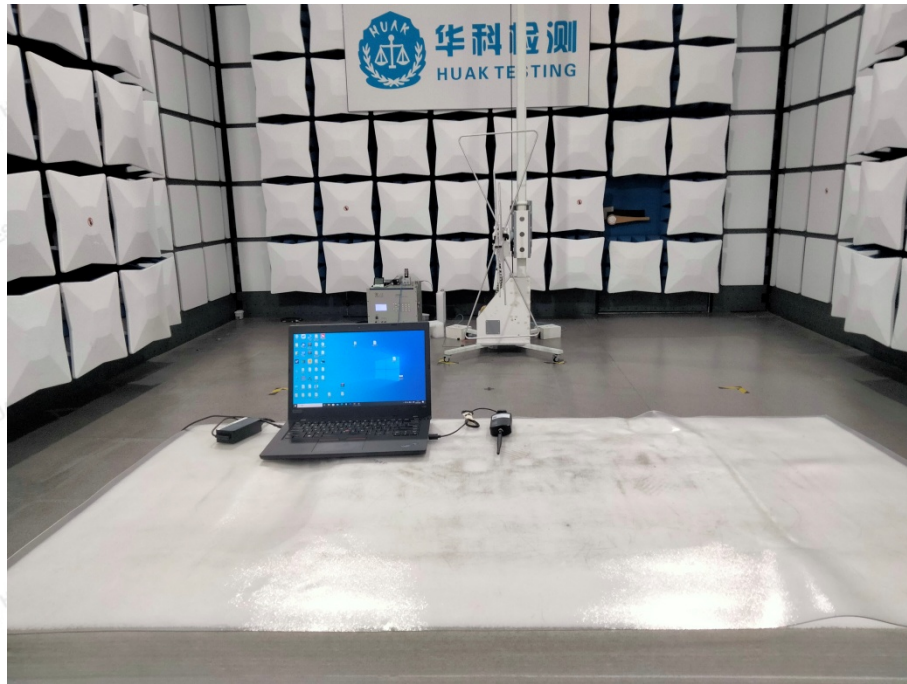



5 Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

.....End of Report.....