

FCC Test Report

Report No.: AGC01110240642FR04

FCC ID : 2AOKB-A31A3

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless speaker

BRAND NAME : soundcore

MODEL NAME : A31A3

APPLICANT: Anker Innovations Limited

DATE OF ISSUE : Aug. 21, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation Of Global Conclude (Shenzhen) Co., Ltd



Page 2 of 69


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 21, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4. System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Result	16
8. 6dB Bandwidth Measurement	20
8.1 Provisions Applicable	20
8.2 Measurement Procedure	20
8.3 Measurement Setup (Block Diagram of Configuration)	20
8.4 Measurement Results	21
9. Power Spectral Density Measurement	28
9.1 Provisions Applicable	28
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	28
9.4 Measurement Results	29
10. Conducted Band Edge and Out-of-Band Emissions	33





10.1 Provisions Applicable	33
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	33
10.4 Measurement Results	34
11. Radiated Spurious Emission	45
11.1 Measurement Limit	45
11.2 Measurement Procedure	45
11.3 Measurement Setup (Block Diagram of Configuration)	48
11.4 Measurement Result	49
12. AC Power Line Conducted Emission Test	65
12.1 Measurement Limit	65
12.2 Measurement Setup (Block Diagram of Configuration)	65
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	66
12.5 Measurement Results	66
Appendix I: Photographs of Test Setup	69
Appendix II: Photographs of Test EUT	69



1. General Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Factory	N/A
Address	N/A
Product Designation	Wireless speaker
Brand Name	soundcore
Test Model	A31A3
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jul. 12, 2024
Date of Test	Jul. 12, 2024 to Aug. 13, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Reviewed By

Cici Li
(Project Engineer)

Calvin Liu
(Reviewer)

Aug. 21, 2024

Aug. 21, 2024


Aug. 21, 2024

Aug. 21, 2024

Approved By

Max Zhang
Authorized Officer

Aug. 21, 2024





2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	BLE GFSK 1Mbps: 3.721dBm BLE GFSK 2Mbps: 3.788dBm
Hardware Version	V1.1
Software Version	V3.4.2
Antenna Designation	FPC Antenna
Antenna Gain	4.40dBi
Power Supply	DC 7.3V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2404 MHz			
	:	:			
2400~2483.5MHz	19	2440MHz			
	:	:			
	38	2478 MHz			
	39	2480 MHz			
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.					



Page 7 of 69

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A31A3**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 4.40dBi.



Page 8 of 69

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 69


3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 7.3V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





3.5 List of Equipment Use

RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31
	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



Page 11 of 69

• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A			
	AGC-EM-S004	4 RE Test System To	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 12 of 69

4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	
1	Control Box		USB-TTL		
2	Adapter	Huawei	HW-20044 0C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A;2 0V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

☐ Test Accessories Come From The Manufacturer

No	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	USB Cable				1.43m unshielded



Page 13 of 69

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d) Conducted Band Edge and Out-of-Band Emissions		Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass





5. Description of Test Modes

Summary Table of Test Cases				
	Data Rate / Modulation			
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)			
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)			
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)			
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter)			
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter)			
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)			
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- For Conducted Test method, a temporary antenna connector is provided by the manufacture.
 Software Setting Diagram

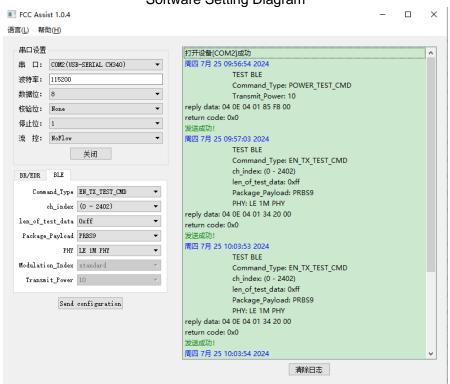





6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode T(µs)		Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2140	85.60	0.68	0.47
BLE_2Mbps	1080	43.20	3.65	0.93

Remark:

- Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the high channel measurement value

The test plots as follows:

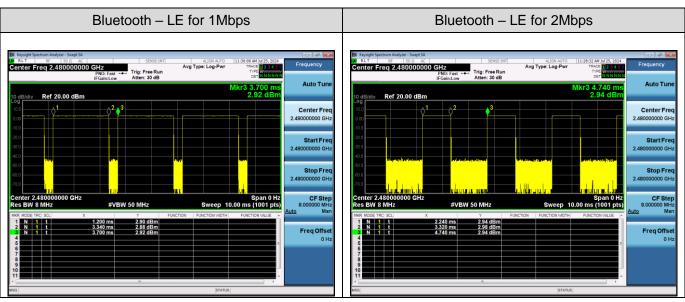

Page 16 of 69

7. RF Output Power Measurement

7.1 Provisions Applicable


For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW ≥ [3 x RBW].
- 4. Span ≥ [3 x RBW].
- Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.3 Measurement Setup (Block Diagram of Configuration)

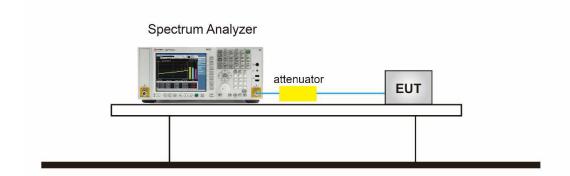

7.4 Measurement Result

Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	2.878	≤30	Pass		
GFSK_1Mbps	2440	3.545	≤30	Pass		
	2480	3.721	≤30	Pass		
	2402	3.032	≤30	Pass		
GFSK_2Mbps	2440	3.609	≤30	Pass		
	2480	3.788	≤30	Pass		







Test Graphs of Conducted Output Power Center Freq 2.402000000 GHz
PNO: Fast PRO: Fast FGain:Low Trig: Free Run **Auto Tune** Mkr1 2.402 268 GHz 2.878 dBm Ref 30.00 dBm Center Frea 2.402000000 GHz Start Freq 2.399500000 GHz Stop Freq 2.404500000 GHz 500.000 kHz Man <u>Auto</u> Freq Offset Center 2.402000 GHz #Res BW 1.5 MHz Span 5.000 MHz **#VBW 5.0 MHz** Sweep 1.066 ms (1000 pts) Test_Graph_LE1M_ANT1_2402_1Mbps_Peak Power 11:00:04 AM Jul 25, 2024 Avg Type: Log-Pwr Avg|Hold: 100/100 Frequency Center Freq 2.440000000 GHz Trig: Free Run #Atten: 40 dB **Auto Tune** Mkr1 2.439 817 GHz 3.545 dBm Ref 30.00 dBm Center Frea 2.440000000 GHz 2.437500000 GHz Stop Frea 2.442500000 GHz 500.000 kHz Man <u>Auto</u> Freq Offset 0 Hz Center 2.440000 GHz Span 5.000 MHz **#VBW 5.0 MHz** #Res BW 1.5 MHz Sweep 1.066 ms (1000 pts)


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_Peak Power






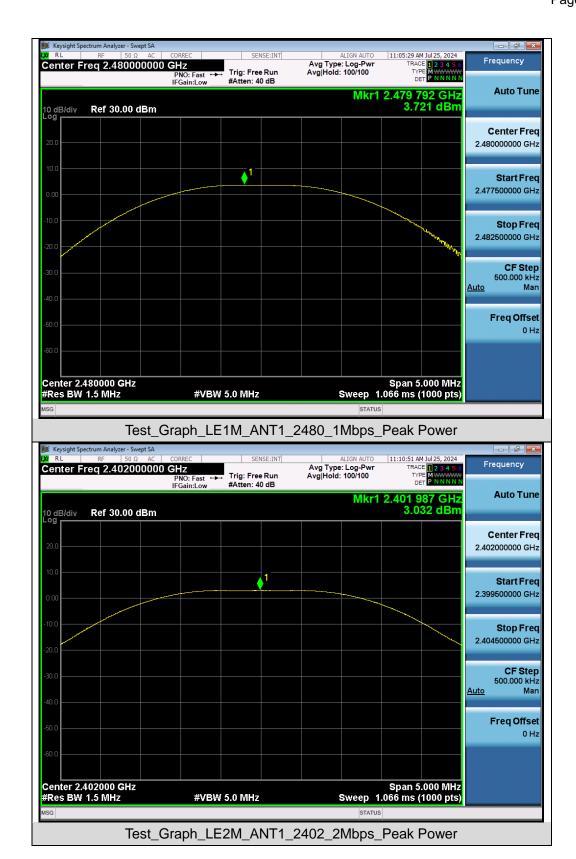





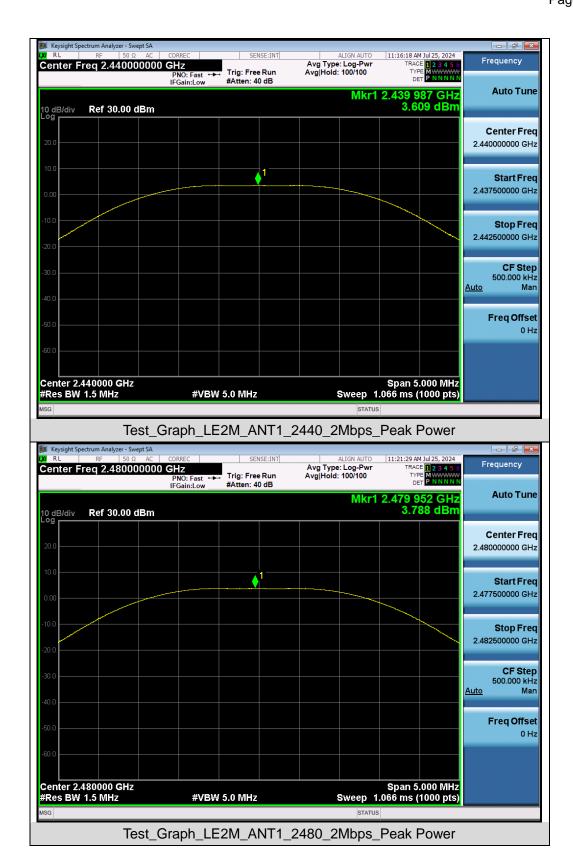



Page 20 of 69

8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

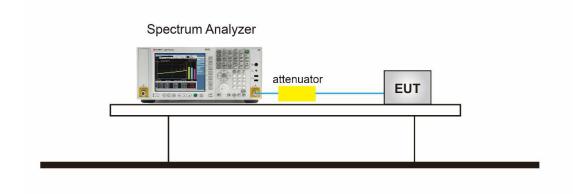





8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail	
	2402	1.027	0.673	≥0.5	Pass	
GFSK_1Mbps	2440	1.027	0.668	≥0.5	Pass	
	2480	1.029	0.668	≥0.5	Pass	
	2402	2.040	1.149	≥0.5	Pass	
GFSK_2Mbps	2440	2.041	1.153	≥0.5	Pass	
	2480	2.043	1.139	≥0.5	Pass	

Test Graphs of Occupied Bandwidth

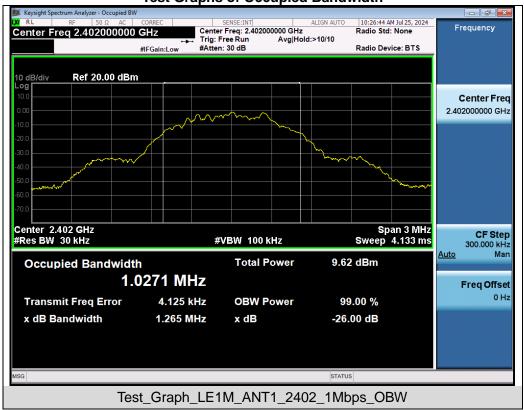








Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/














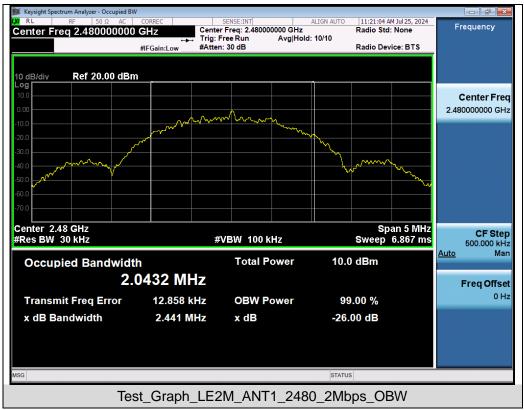

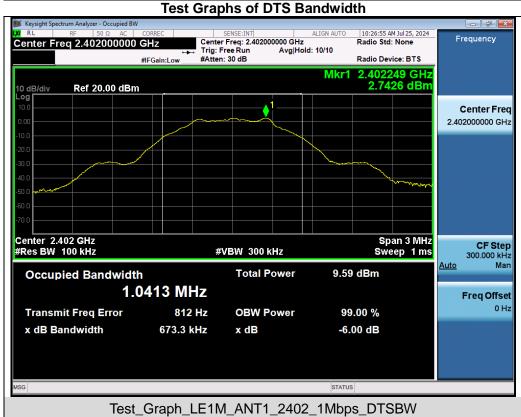


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/
















Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





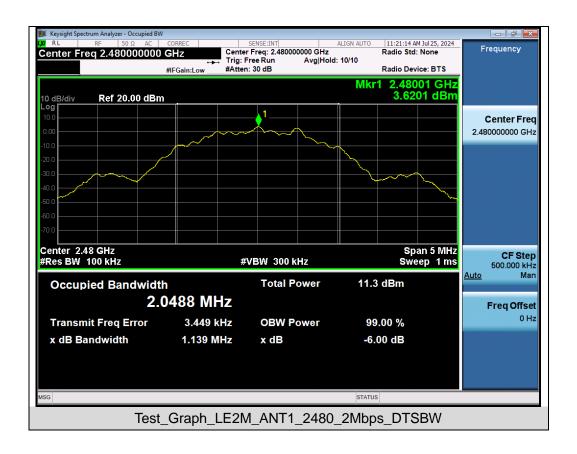





9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

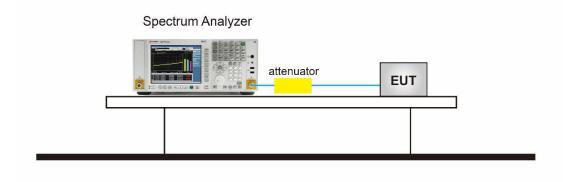




9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-13.230	≤8	Pass		
GFSK_1Mbps	2440	-12.600	≤8	Pass		
	2480	-12.300	≤8	Pass		
	2402	-14.751	≤8	Pass		
GFSK_2Mbps	2440	-14.212	≤8	Pass		
	2480	-13.912	≤8	Pass		


Test Graphs of Conducted Output Power Spectral Density








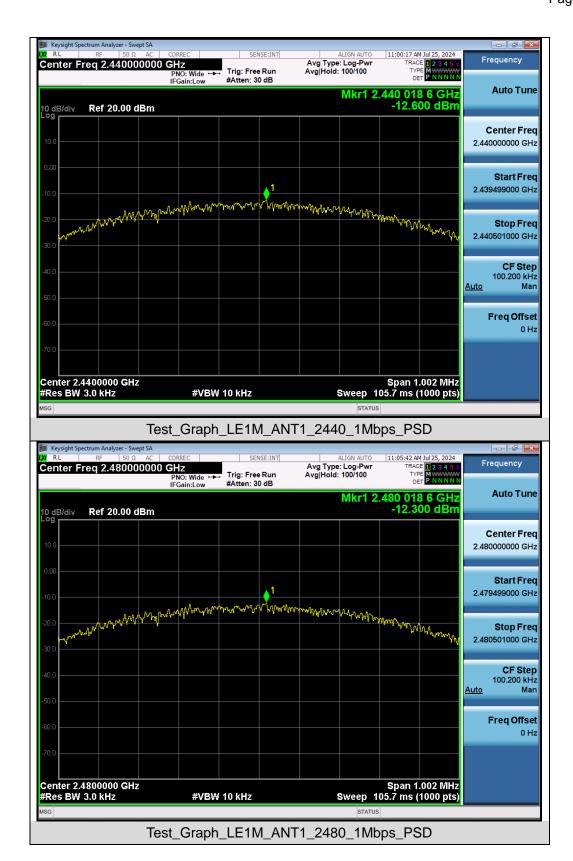












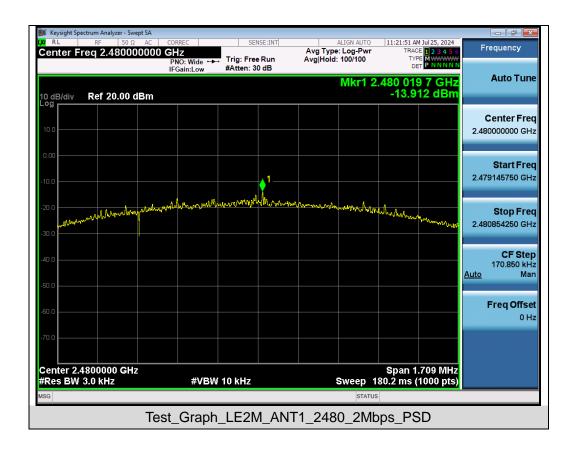





10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to ≥ 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- Set the VBW ≥ 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

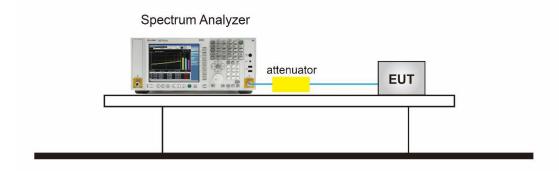





10.4 Measurement Results

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been signed by authorized approver, or having been altered without authorization, or having not been signed by the Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


#VBW 300 kHz


Span 2.360 GHz Sweep 226.0 ms (30000 pts)

Center 1.210 GHz #Res BW 100 kHz







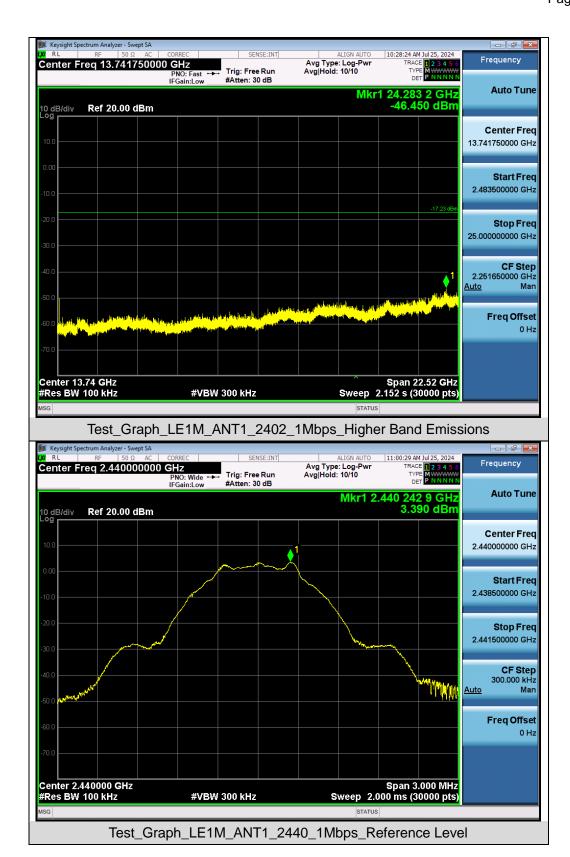






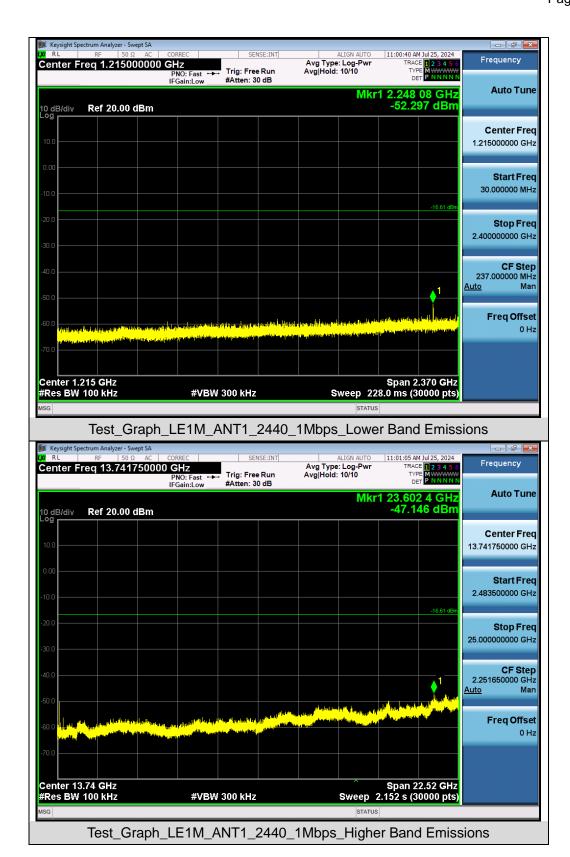







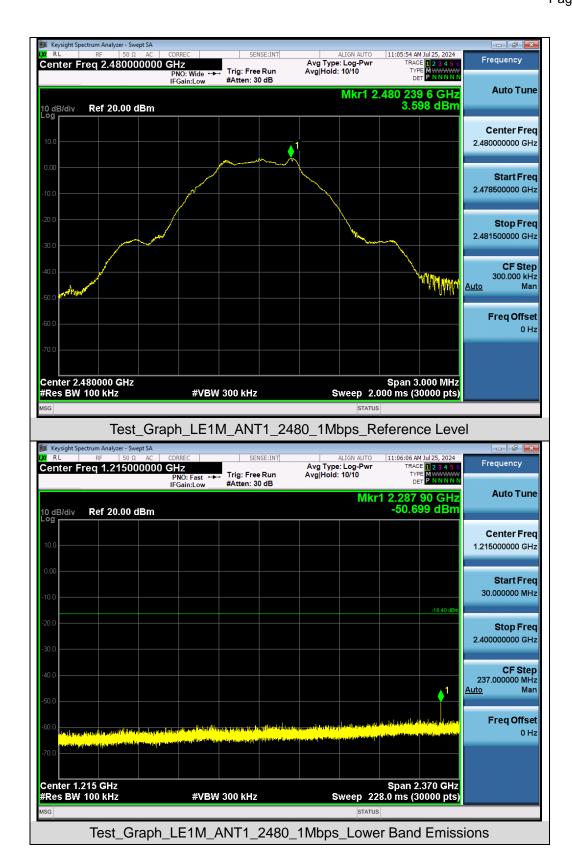




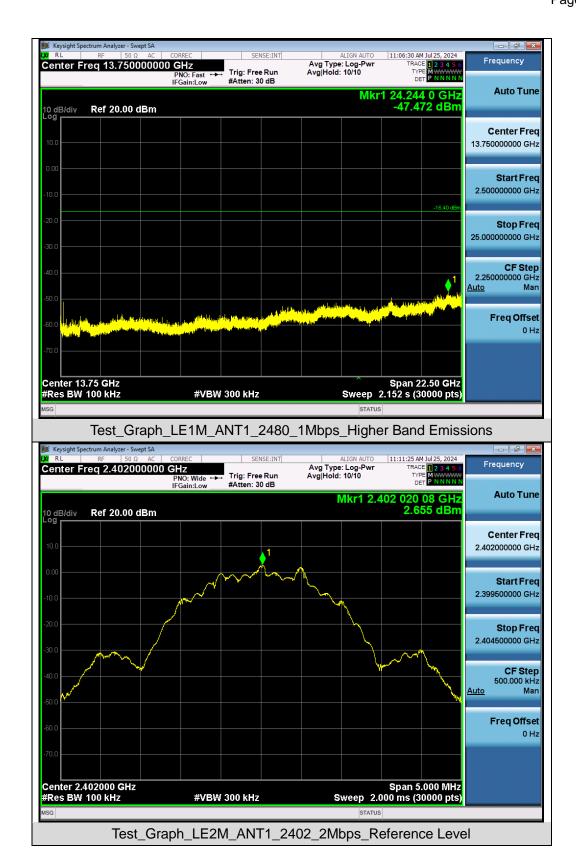






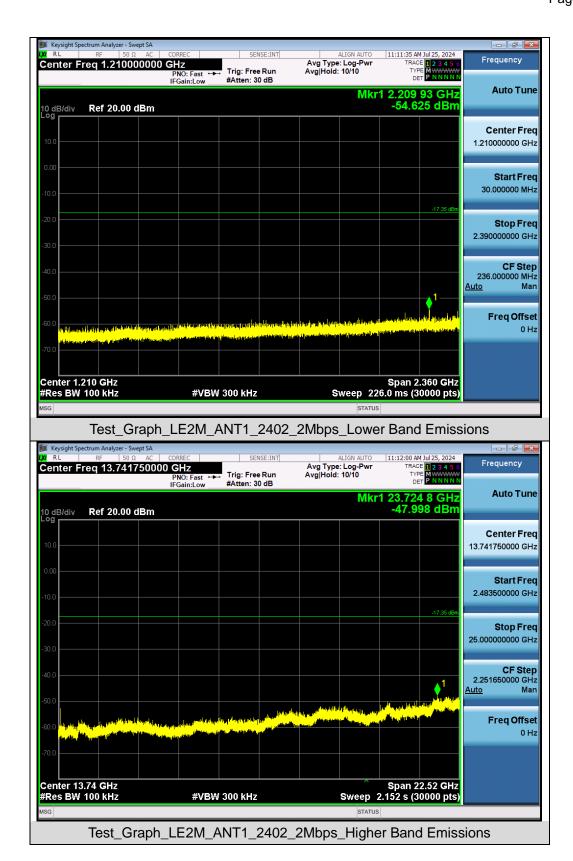










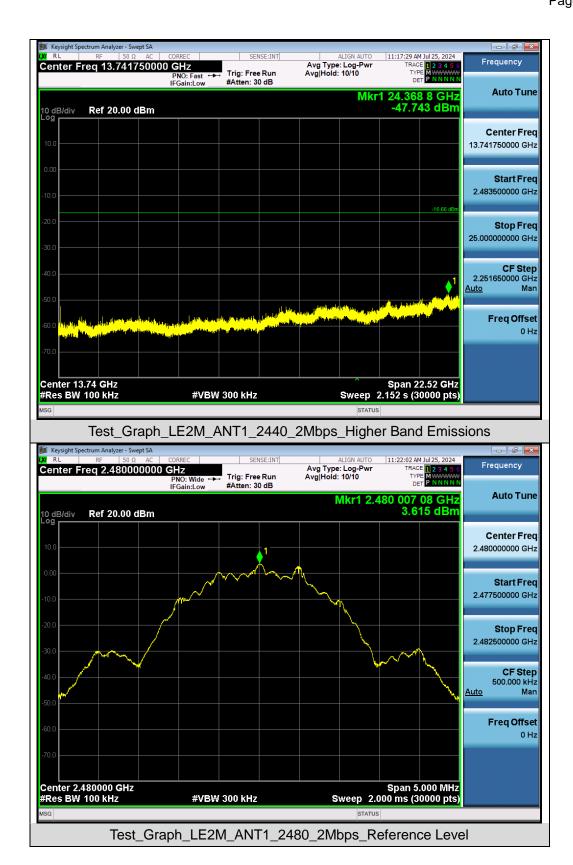






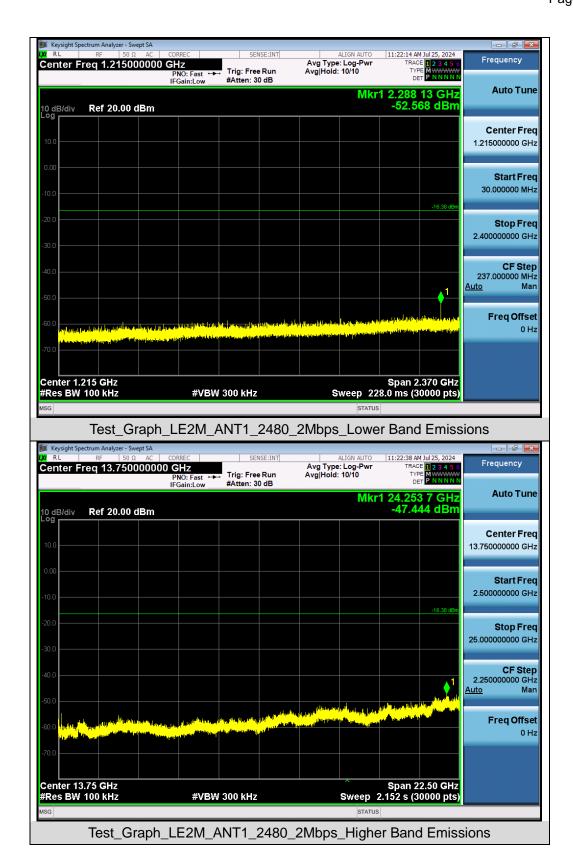





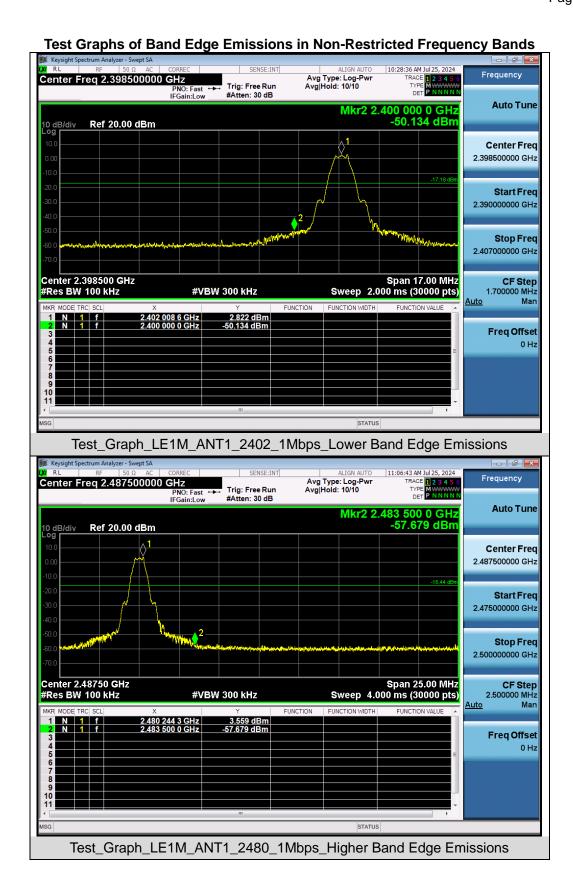

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







Report No.: AGC01110240642FR04

Page 45 of 69

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Report No.: AGC01110240642FR04

Page 46 of 69

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Report No.: AGC01110240642FR04 Page 47 of 69

Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Average Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. $VBW \ge [3 \times RBW]$
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.






11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

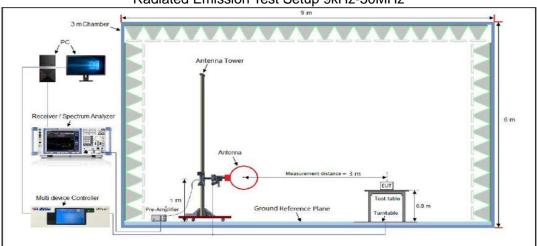

Radiated Emission Test Setup 30MHz-1000MHz

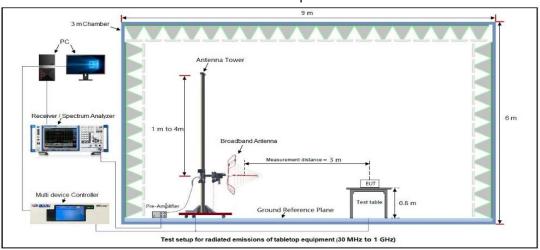

Radiated Emission Test Setup Above 1000MHz

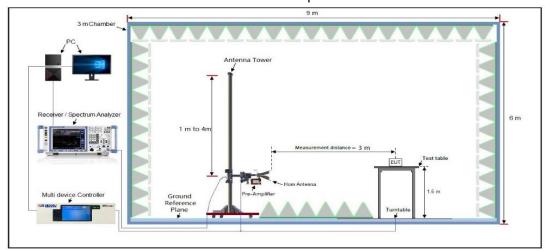




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Radiated Emission Test Results at 30MHz-1GHz							
EUT Name Wireless speaker Model Name A31A3							
Temperature	23.1℃	Relative Humidity	57.9%				
Pressure	960hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 6	Antenna Polarity	Horizontal				

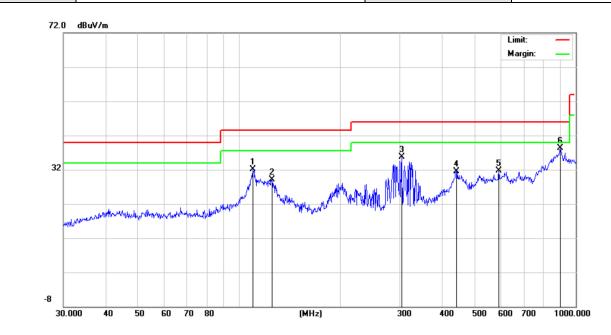

Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	109.7960	32.06	16.30	43.50	11.44	100	40	Horizontal
2	125.0066	29.03	16.10	43.50	14.47	100	180	Horizontal
3	303.5437	35.63	16.50	46.00	10.37	100	210	Horizontal
4	441.7425	31.56	25.04	46.00	14.44	100	160	Horizontal
5	590.9737	31.79	24.74	46.00	14.21	100	120	Horizontal
6	900.1473	38.21	31.78	46.00	7.79	100	100	Horizontal



Radiated Emission Test Results at 30MHz-1GHz							
EUT Name	e Wireless speaker Model Name A31A3						
Temperature	23.1℃	Relative Humidity	57.9%				
Pressure	960hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 6	Antenna Polarity	Vertical				

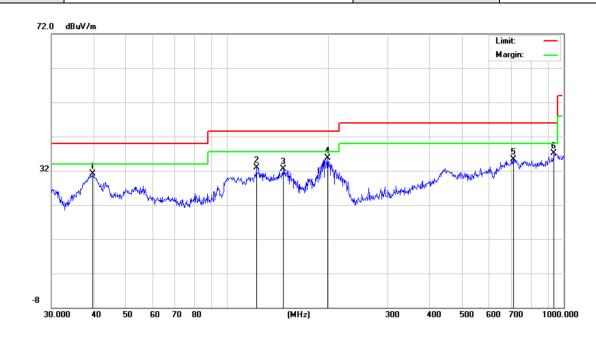


Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.8541	31.09	16.85	40.00	8.91	100	120	Vertical
2	121.9754	32.94	17.75	43.50	10.56	100	60	Vertical
3	146.3735	32.60	18.20	43.50	10.9	100	230	Vertical
4	198.5879	35.77	17.94	43.50	7.73	100	250	Vertical
5	709.1823	35.21	28.42	46.00	10.79	100	180	Vertical
6	935.5461	37.03	30.40	46.00	8.97	100	140	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.


2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.





Radiated Emissions Test Results for Above 1GHz


EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

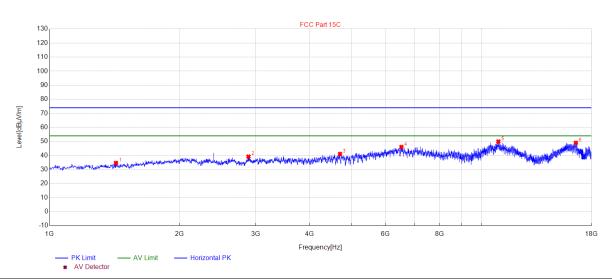

PK D	PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	1425.0425	34.69	-17.66	74.00	39.31	150	33	Horizontal	
2	2888.8889	39.21	-12.02	74.00	34.79	150	316	Horizontal	
3	4706.3706	41.09	-7.83	74.00	32.91	150	129	Horizontal	
4	6530.6531	46.06	-4.44	74.00	27.94	150	196	Horizontal	
5	10951.0951	49.90	2.50	74.00	24.10	150	10	Horizontal	
6	16556.5557	48.98	5.68	74.00	25.02	150	139	Horizontal	




EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

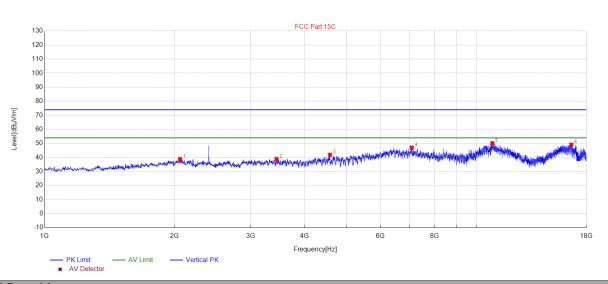

PK D	PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2059.2059	38.83	-13.27	74.00	35.17	150	136	Vertical
2	3444.8445	38.86	-10.79	74.00	35.14	150	88	Vertical
3	4582.2582	41.88	-7.86	74.00	32.12	150	203	Vertical
4	7086.6087	47.05	-3.62	74.00	26.95	150	165	Vertical
5	10893.2893	50.08	2.31	74.00	23.92	150	280	Vertical
6	16593.9594	49.08	5.72	74.00	24.92	150	45	Vertical


RESULT: Pass






Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

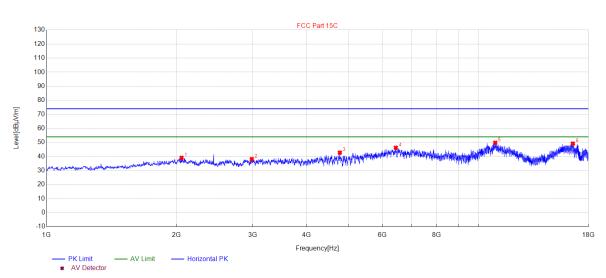


PK [PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2054.1054	39.03	-13.28	74.00	34.97	150	2	Horizontal
2	2987.4988	38.14	-11.98	74.00	35.86	150	295	Horizontal
3	4777.7778	42.71	-7.82	74.00	31.29	150	0	Horizontal
4	6440.5441	46.22	-4.60	74.00	27.78	150	146	Horizontal
5	10944.2944	49.78	2.48	74.00	24.22	150	2	Horizontal
6	16553.1553	49.13	5.68	74.00	24.87	150	175	Horizontal






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

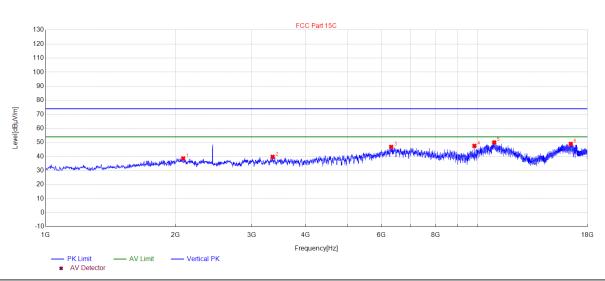

PK [PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2083.0083	38.55	-13.21	74.00	35.45	150	322	Vertical
2	3356.4356	39.76	-11.02	74.00	34.24	150	269	Vertical
3	6316.4316	46.81	-4.82	74.00	27.19	150	174	Vertical
4	9847.6848	47.54	-0.42	74.00	26.46	150	353	Vertical
5	10942.5943	49.99	2.47	74.00	24.01	150	360	Vertical
6	16461.3461	48.96	5.57	74.00	25.04	150	1	Vertical


RESULT: Pass






Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

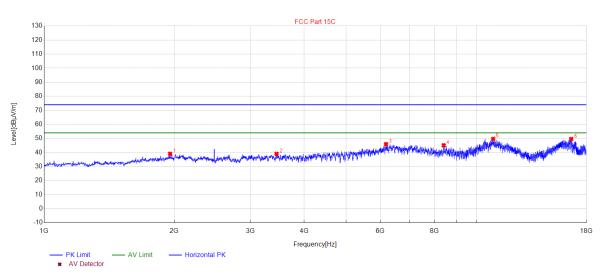


PK [PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1957.1957	39.07	-13.76	74.00	34.93	150	313	Horizontal
2	3451.6452	39.04	-10.77	74.00	34.96	150	3	Horizontal
3	6183.8184	45.94	-5.07	74.00	28.06	150	352	Horizontal
4	8411.0411	45.11	-3.04	74.00	28.89	150	265	Horizontal
5	10945.9946	49.67	2.48	74.00	24.33	150	252	Horizontal
6	16587.1587	49.61	5.72	74.00	24.39	150	352	Horizontal





EUT Name	Wireless speaker	Model Name	A31A3
Temperature	22.9℃	Relative Humidity	58.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

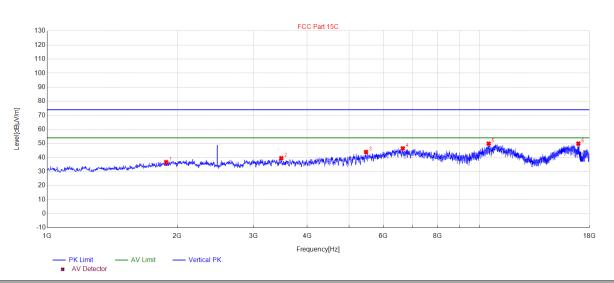


PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1885.7886	36.70	-14.35	74.00	37.30	150	83	Vertical
2	3482.2482	39.51	-10.69	74.00	34.49	150	3	Vertical
3	5471.4471	43.93	-6.93	74.00	30.07	150	49	Vertical
4	6654.7655	46.50	-4.21	74.00	27.50	150	145	Vertical
5	10520.9521	49.84	1.09	74.00	24.16	150	215	Vertical
6	16962.8963	49.89	6.13	74.00	24.11	150	102	Vertical

RESULT: Pass

Note:

- The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin =Limit- Level.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, BLE GFSK 2Mbps mode is the worst case and documented in the report.






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement





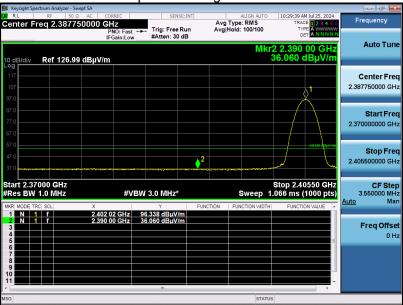

RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical


Test Graph for Peak Measurement





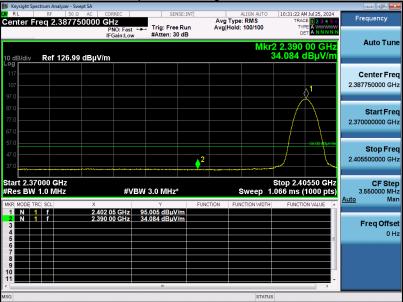

RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement





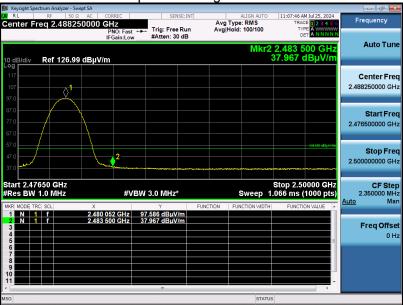


RESULT: Pass





EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical


Test Graph for Peak Measurement

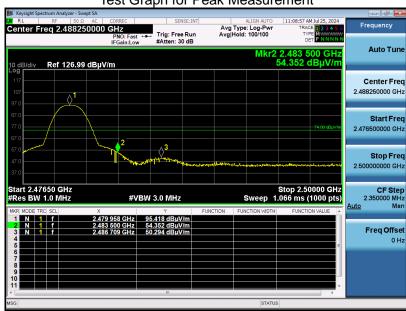






RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

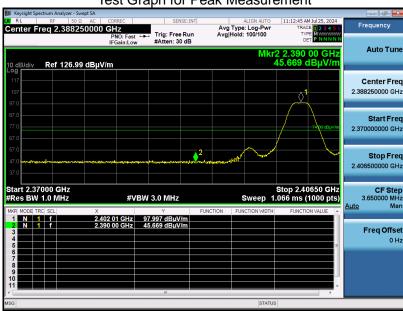



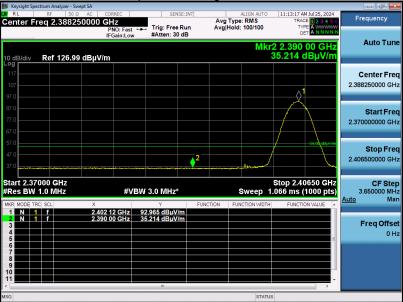


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical


Test Graph for Peak Measurement

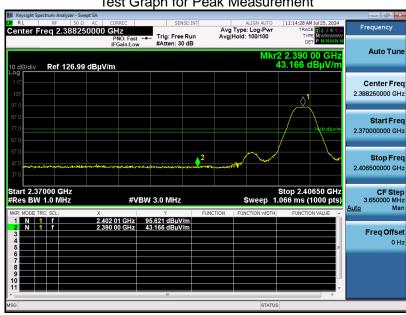



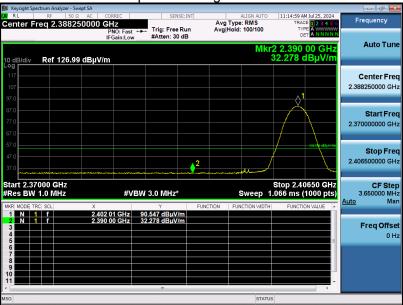

RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	24.7℃	Relative Humidity	54.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement





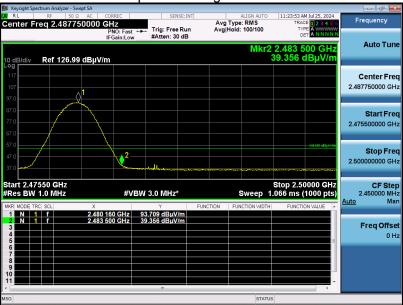

RESULT: Pass