

RF Test Report

For

Globe Electric Company Inc.

Test Standards:	<u>Part 15C Subpart C §15.247</u> <u>RSS 247 Issue 2</u>
Product Description:	<u>50020</u>
Tested Model:	<u>50020</u>
Additional Model No.:	<u>N/A</u>
FCC ID:	<u>2AQUQGE50020</u>
IC:	<u>8290A-GE50020</u>
Classification	(DTS) Digital Transmission System
Report No.:	<u>EC1905005RF01</u>
Tested Date:	<u>2019-06-11 to 2019-08-16</u>
Issued Date:	<u>2019-08-16</u>
Prepared By:	<u>Tiny Yang</u> Tiny Yang/ Engineer
Approved By:	<u>Bacon Wu</u> Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C
Tel.: +86-731-89634887 Fax.: +86-731-89634887
www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2019.08.16	Valid	Original Report

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	6
2.5	Applicable Standards.....	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	9
3.3	Support Equipment	10
3.4	Test Setup	10
3.5	Measurement Results Explanation Example.....	13
4	TEST RESULT	14
4.1	6dB and 99% Bandwidth Measurement	14
4.2	Output Power Measurement.....	24
4.3	Power Spectral Density Measurement	36
4.4	Conducted Band Edges and Spurious Emission Measurement	43
4.5	Radiated Band Edges and Spurious Emission Measurement	67
4.6	AC Conducted Emission Measurement.....	149
4.7	Antenna Requirements.....	154
5	LIST OF MEASURING EQUIPMENT.....	155
6	UNCERTAINTY OF EVALUATION.....	156

APPENDIX A. SETUP PHOTOGRAPHS

APPENDIX B. EUT EXTERNAL PHOTOGRAPHS

APPENDIX C. EUT INTERNAL PHOTOGRAPHS

Summary Of Test Result

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
15.247(b)(3)	RSS-247 A5.4(4)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit -1.47 dB at 4874 MHz
15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit -0.53 dB at 0.444 MHz
15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012, ISED# :24347)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code : 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

Globe Electric Company Inc.

150, ONEIDA, MONTREAL, QUEBEC, CANADA, H9R 1A8

2.2 Manufacturer

Globe Electric Company Inc.

150, ONEIDA, MONTREAL, QUEBEC, CANADA, H9R 1A8

2.3 General Description Of EUT

Product	50020
Model No.	50020
Additional No.	N/A
Difference Description	N/A
FCC ID	2AQUQGE50020
IC ID	8290A-GE50020
Power Supply	120 Vac / 125 Vac
Rated Voltage	125 Vac
Modulation Technology	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Type	802.11b : DSSS 802.11g/n : OFDM
Operating Frequency	2412-2462MHz
Number Of Channel	11
Max. Output Power	802.11b : 17.60 dBm (0.0575 W) 802.11g : 17.21 dBm (0.0526 W) 802.11n HT20 : 17.11 dBm (0.0514 W)
Antenna Type	PCB Antenna type with 3dBi gain
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

The transmitter has a maximum peak conducted output power as follows:

Frequency Range(MHz)	Mode	Rate	Output Power(dBm)
2412~2462	802.11b	1 Mbps	17.60
2412~2462	802.11g	6 Mbps	17.21
2412~2462	802.11n HT20	MCS0	17.11

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases			
Test Item	Modulation		
	802.11 b	802.11 g	802.11n HT20
Conducted Test Cases	Mode 1: CH01	Mode 1: CH01	Mode 1: CH01
	Mode 2: CH06	Mode 2: CH06	Mode 2: CH06
	Mode 3: CH011	Mode 3: CH011	Mode 3: CH011

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Modulation
	Mode 1: 802.11b CH01

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3.2.3 Radiated Emission Test (Above 1GHz)

Test Item	Modulation		
	802.11 b	802.11 g	802.11n HT20
Radiated Test Cases	Mode 1: CH01	Mode 1: CH01	Mode 1: CH01
	Mode 2: CH06	Mode 2: CH06	Mode 2: CH06
	Mode 3: CH011	Mode 3: CH011	Mode 3: CH011

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : Power Supply + WLAN Link + Lamp
-----------------------------	--

3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Incandescent Lamp	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	E540	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m


Note: The incandescent lamp provided by manufacturer declared the rated power is 100W.

3.4 Test Setup


The EUT is continuously communicating to the WIFI tester during the tests.

EUT was set in the Hidden menu mode to enable WIFI communications.


Setup diagram for Conducted Test

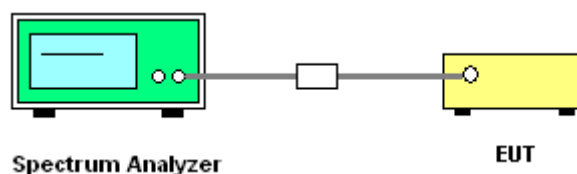


Setup diagram for Radiation(9KHz~30MHz) Test

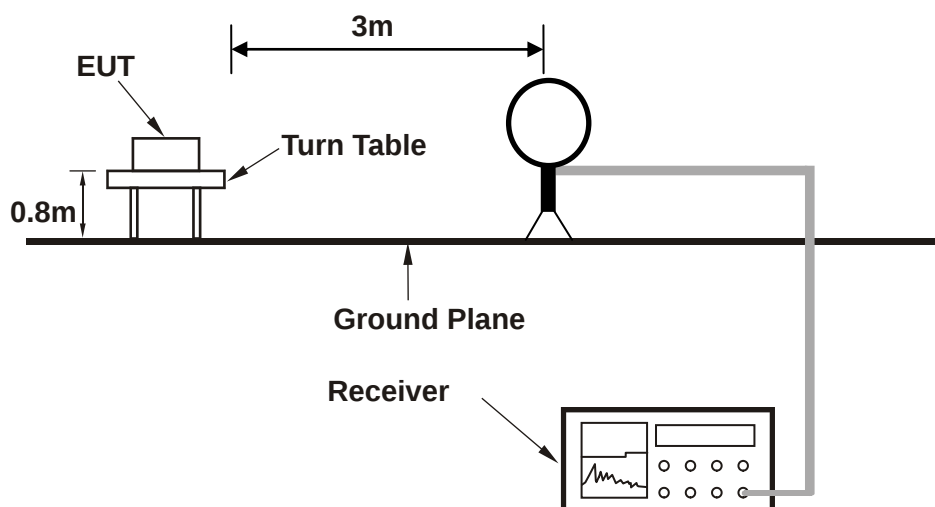


Setup diagram for Raidation(Below 1G) Test

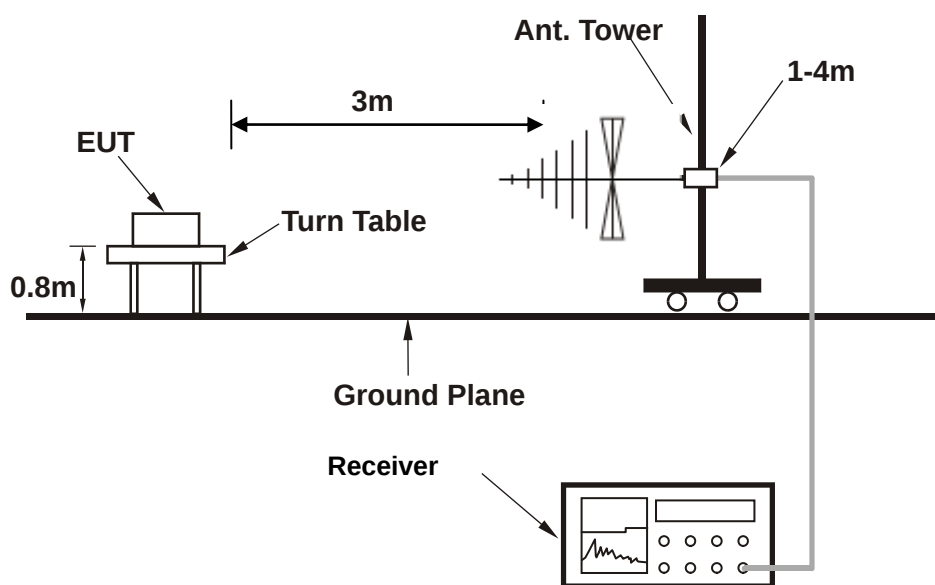

Setup diagram for Raidation(Above1G) Test

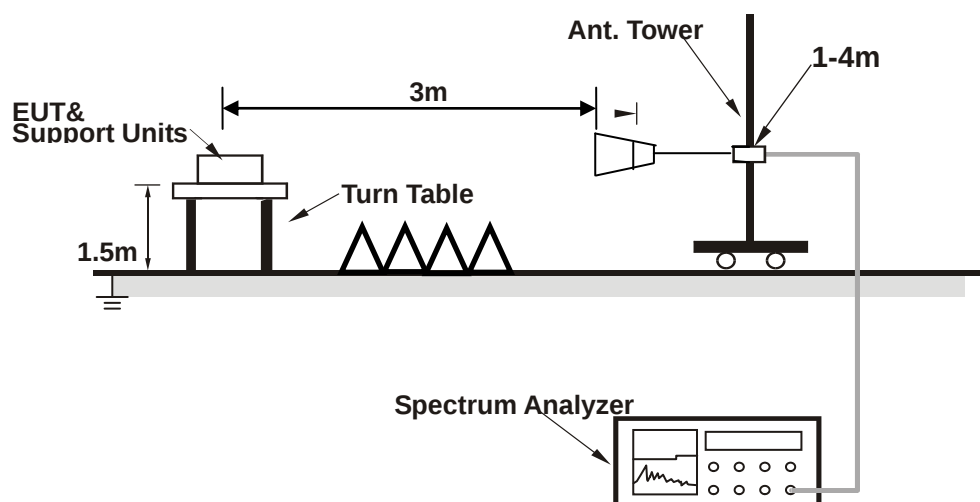

Setup diagram for AC Conducted Emission Test

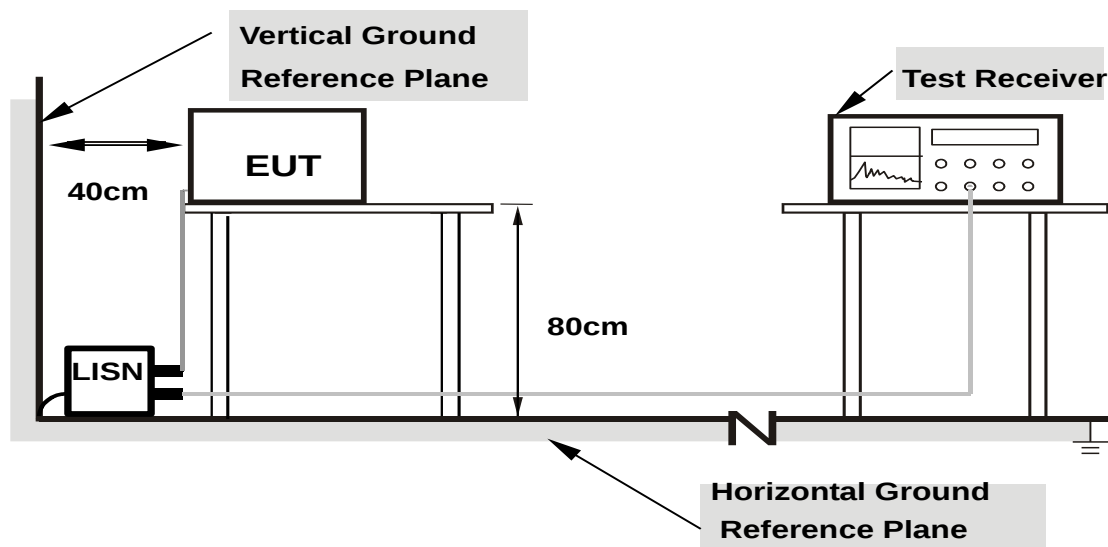

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

4 Test Result

4.1 6dB and 99% Bandwidth Measurement

4.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

IC RSS-247 5.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


4.1.2 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v05r02.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Turn on the EUT and connect it to measurement instrument.
4. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
5. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = $(1\% \sim 5\%) \times \text{OBW}$ and set the Video bandwidth (VBW) $\approx 3 \times \text{RBW}$, span = $(1.5 \sim 5) \times \text{OBW}$


4.1.3 Test Result of 6dB and 99% Bandwidth

Test Mode :		TX Mode		Temperature :	24~26°C
Test Engineer :		Victorique Gao		Relative Humidity :	50~53%
Mode	Channel	6dB Bandwidth [MHz]		99% OBW [MHz]	Verdict
11B	LCH	9.043		11.347	PASS
11B	MCH	9.043		11.918	PASS
11B	HCH	8.574		11.885	PASS
11G	LCH	16.31		17.085	PASS
11G	MCH	16.11		17.150	PASS
11G	HCH	16.28		17.236	PASS
11N20	LCH	16.56		17.889	PASS
11N20	MCH	16.55		18.016	PASS
11N20	HCH	16.56		18.007	PASS


6dB Bandwidth Plot

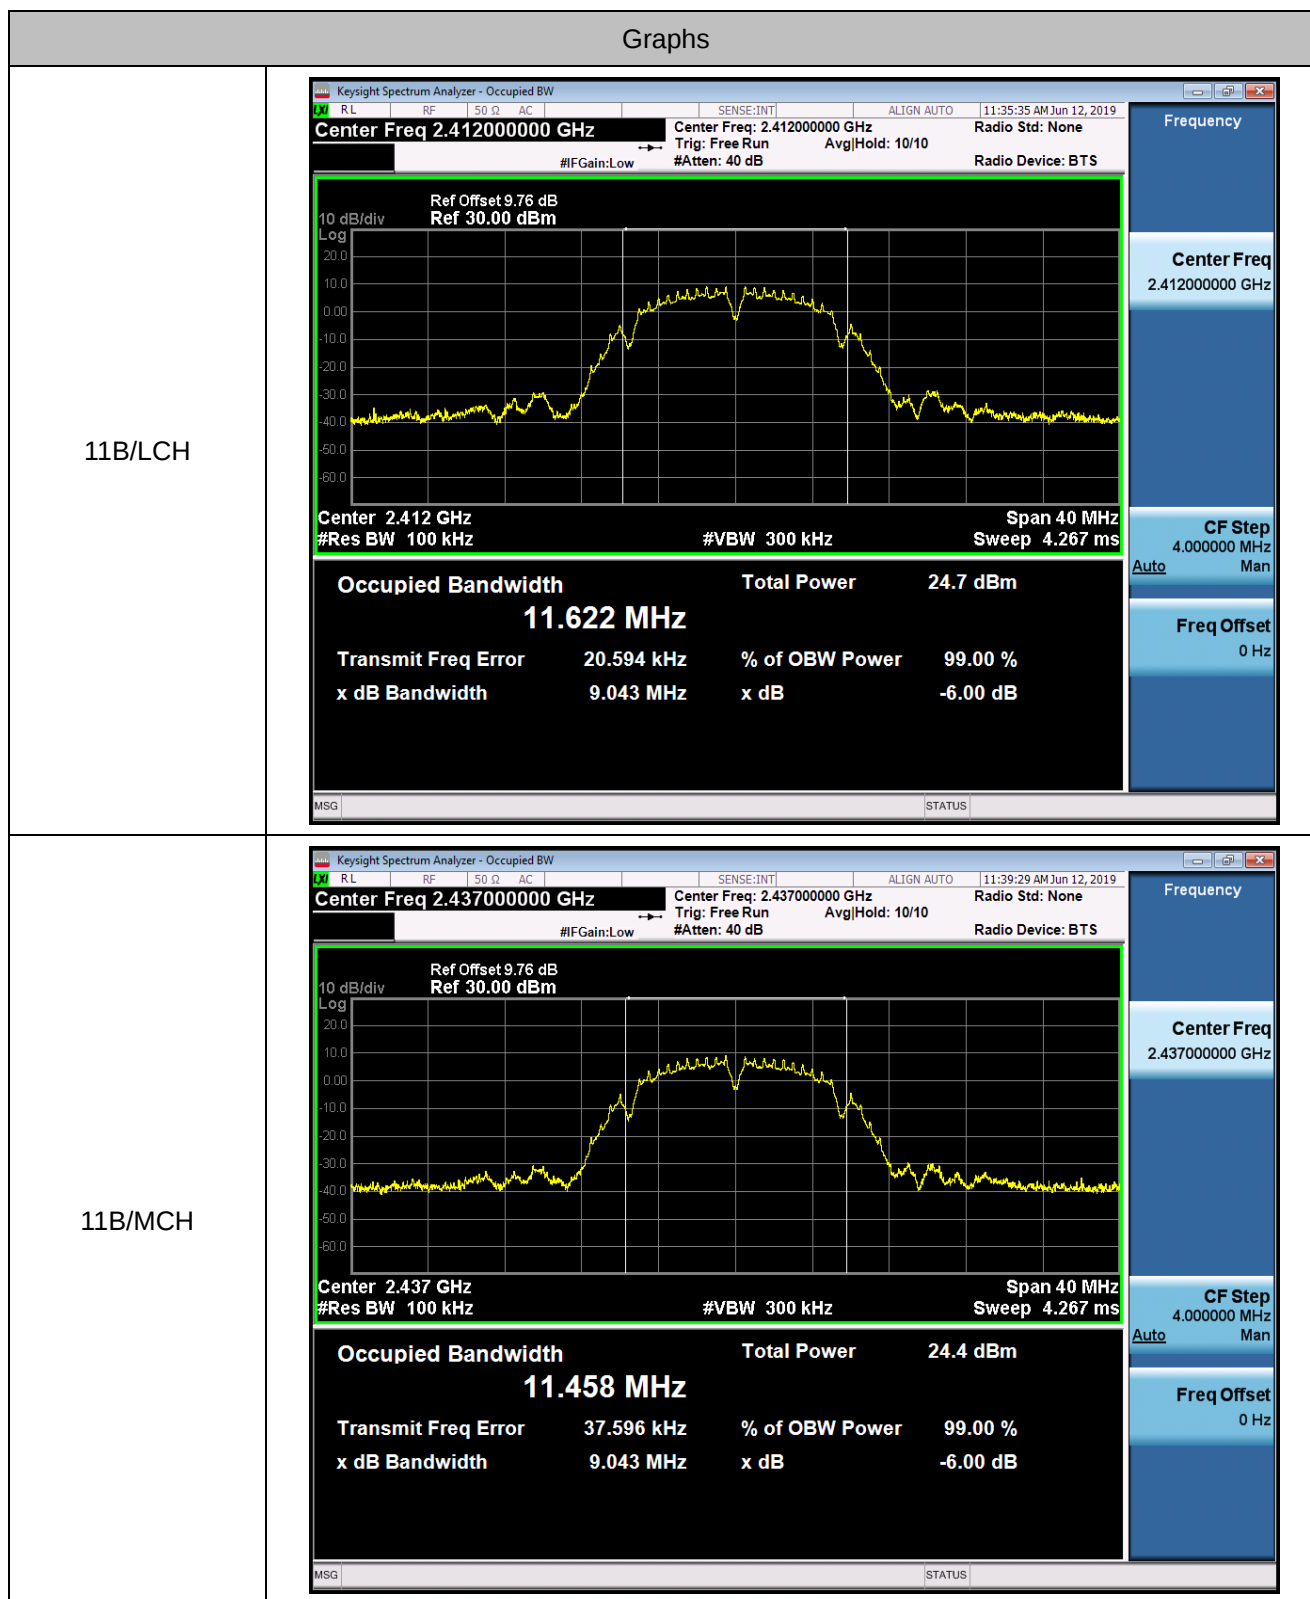


11B/HCH

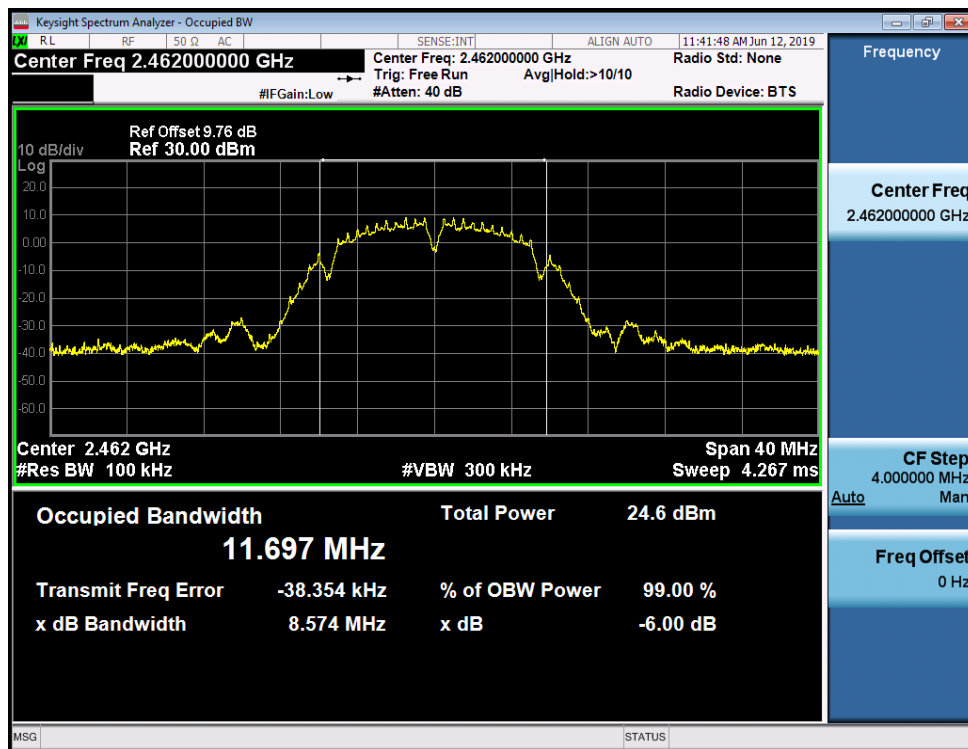


11G/LCH

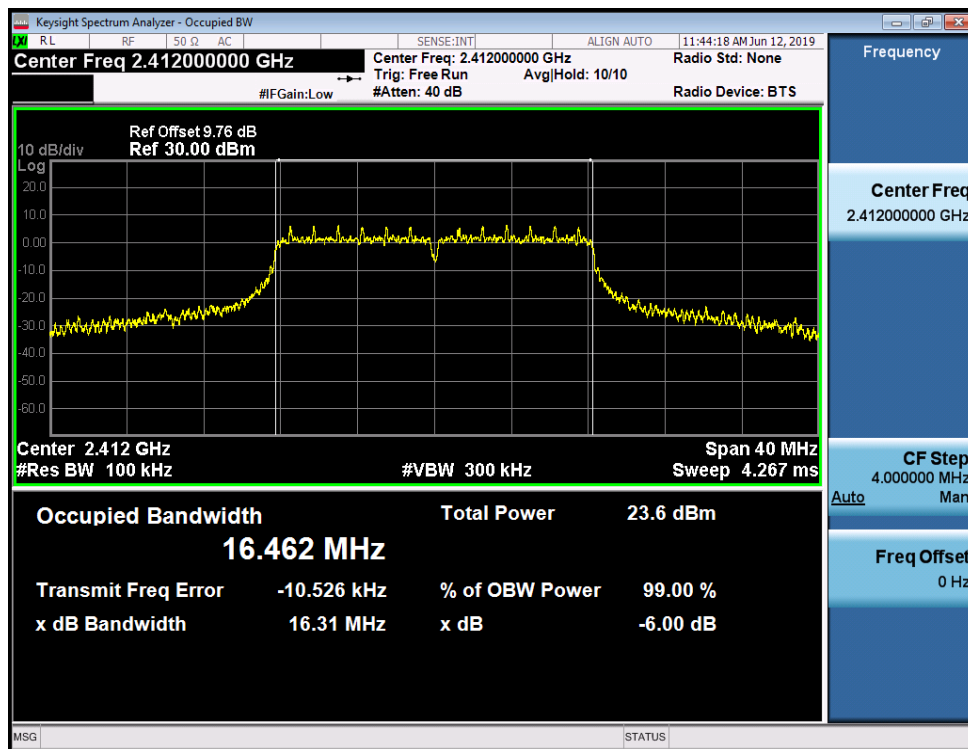


11G/MCH

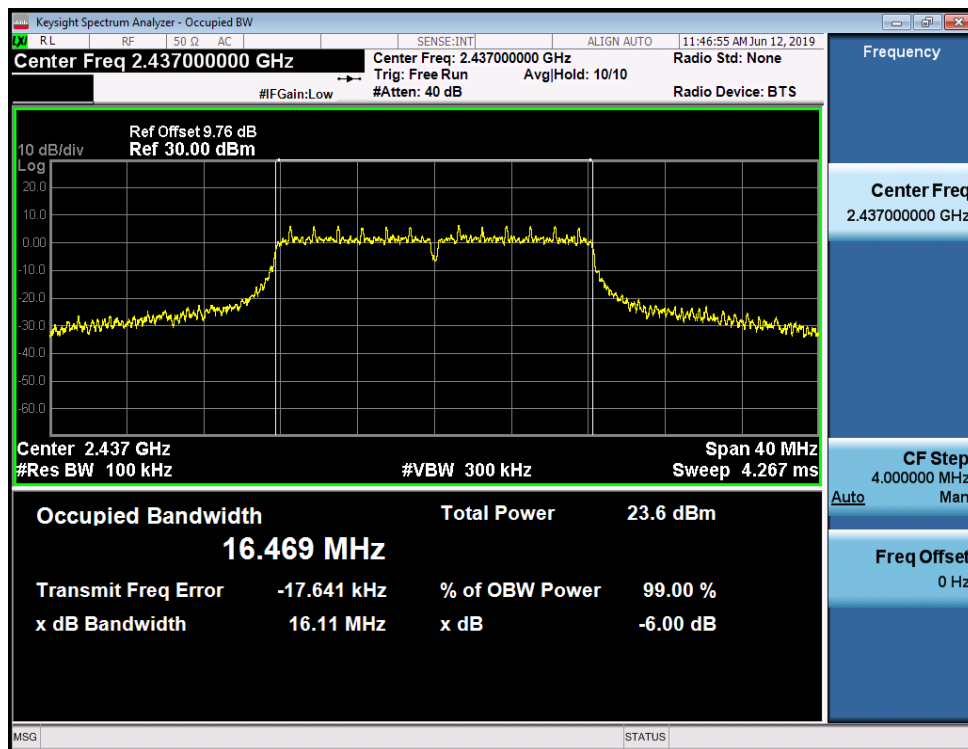


11G/HCH

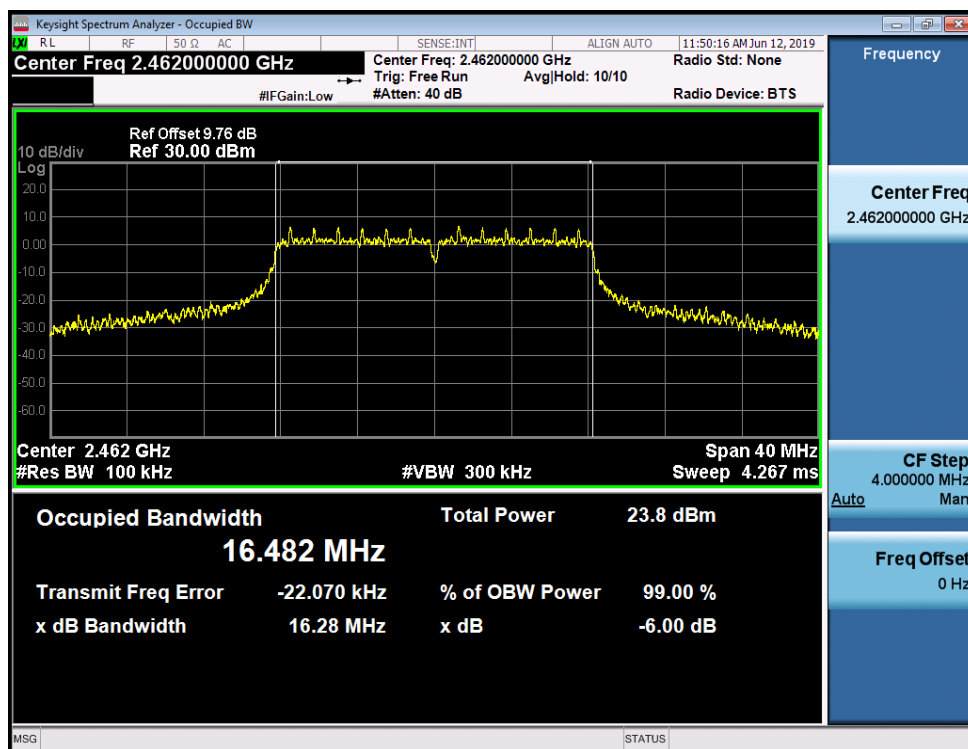


11N20/LCH

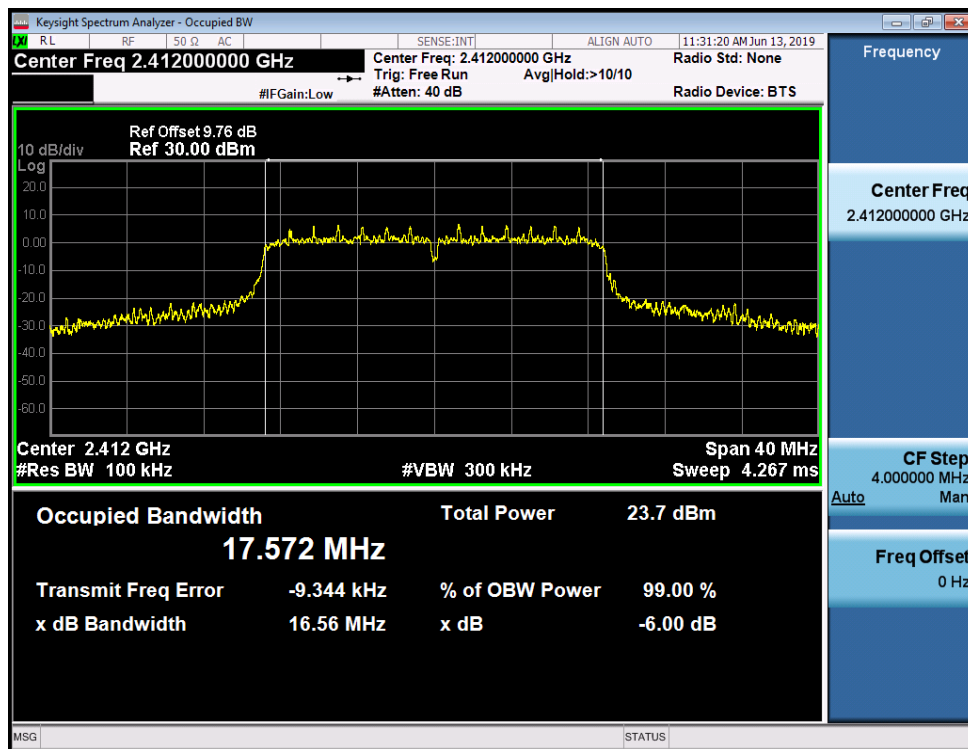

11N20/MCH

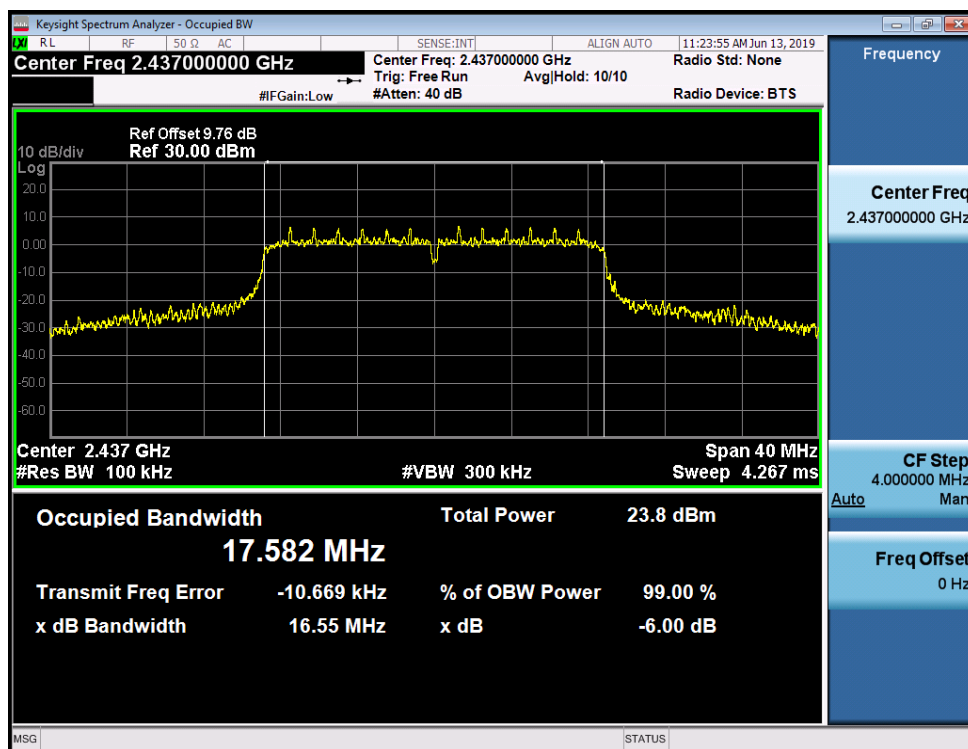


11N20/HCH

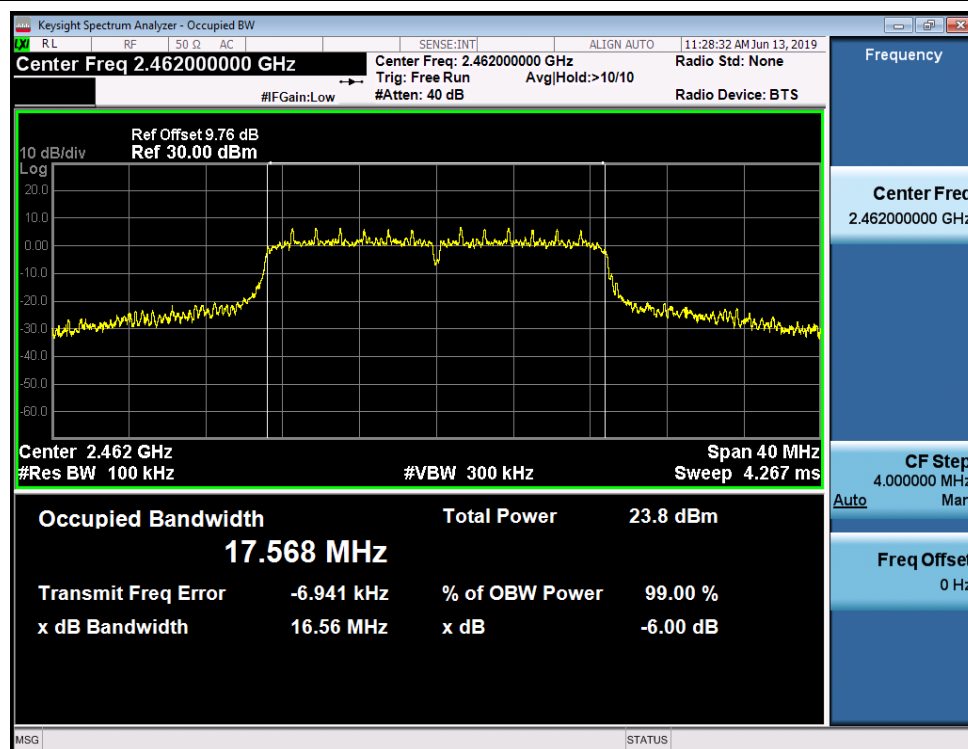


99% Bandwidth Plot

Graphs


11B/LCH

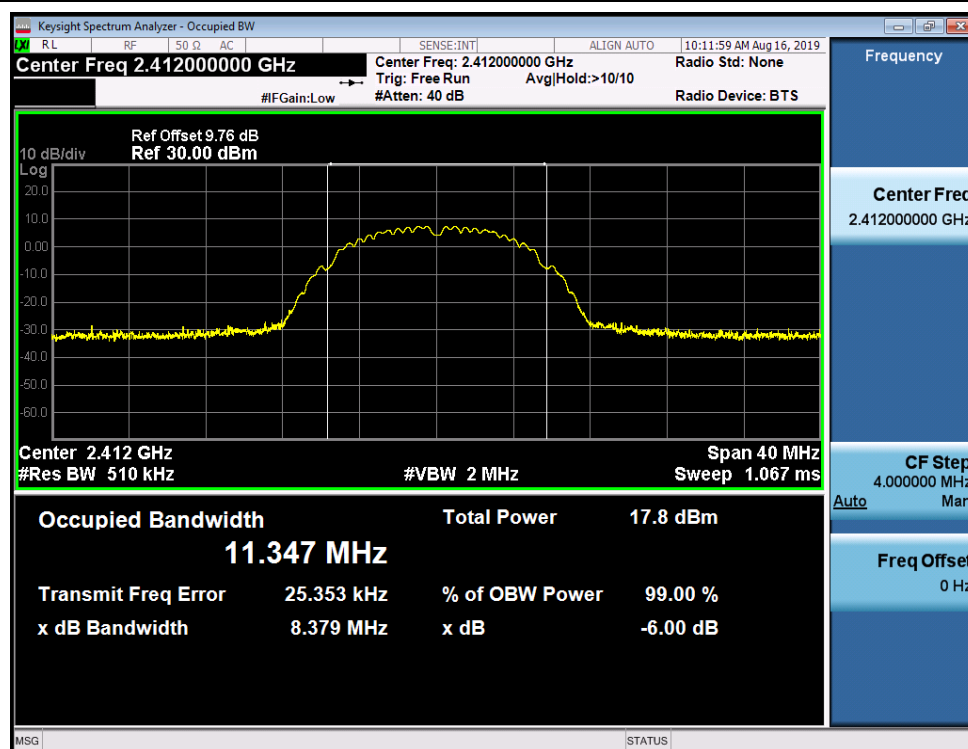


11B/MCH

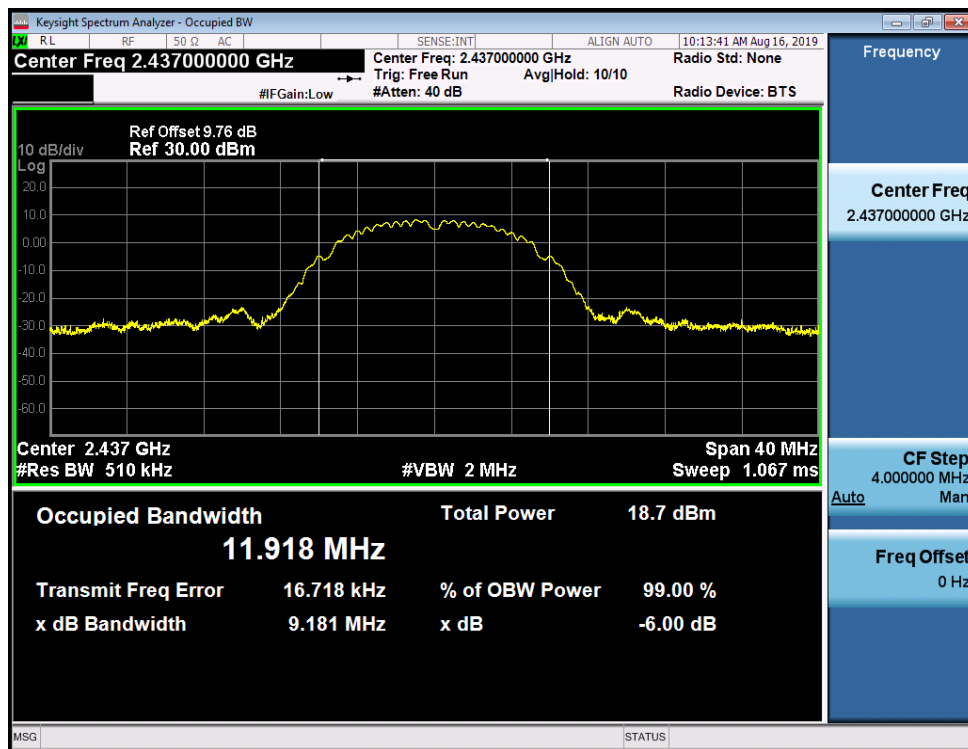


11B/HCH

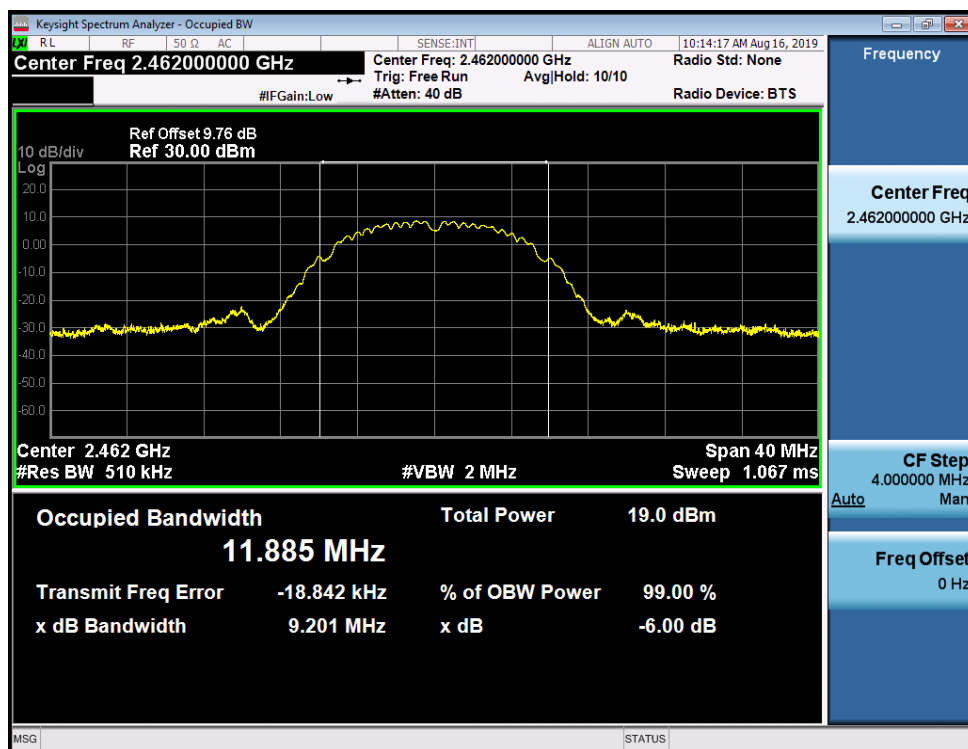


11G/LCH

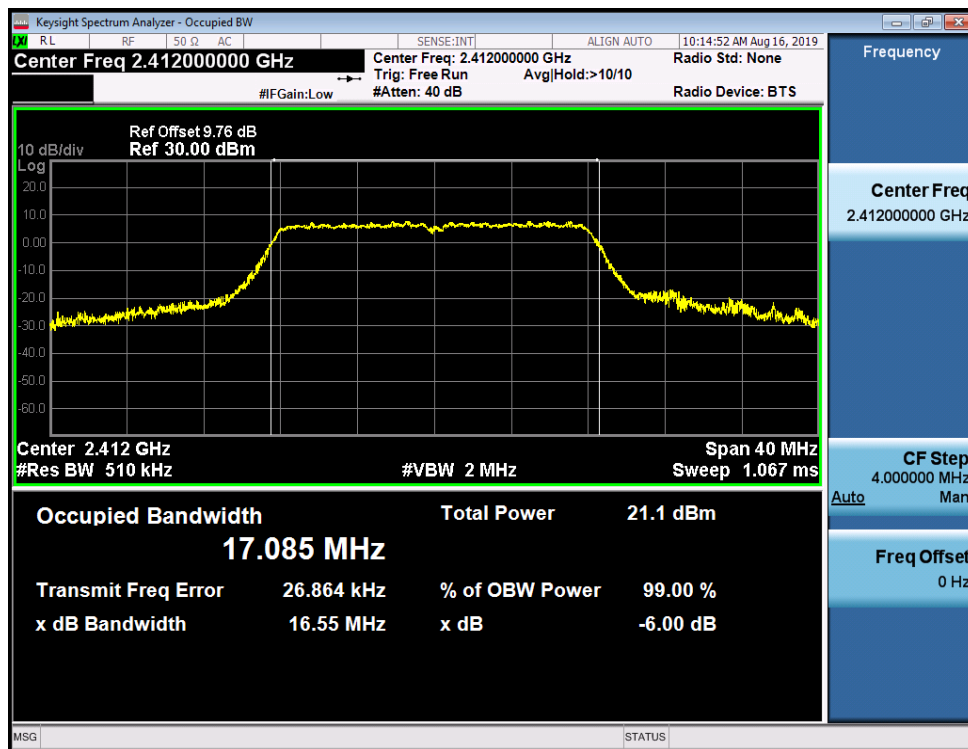


11G/MCH

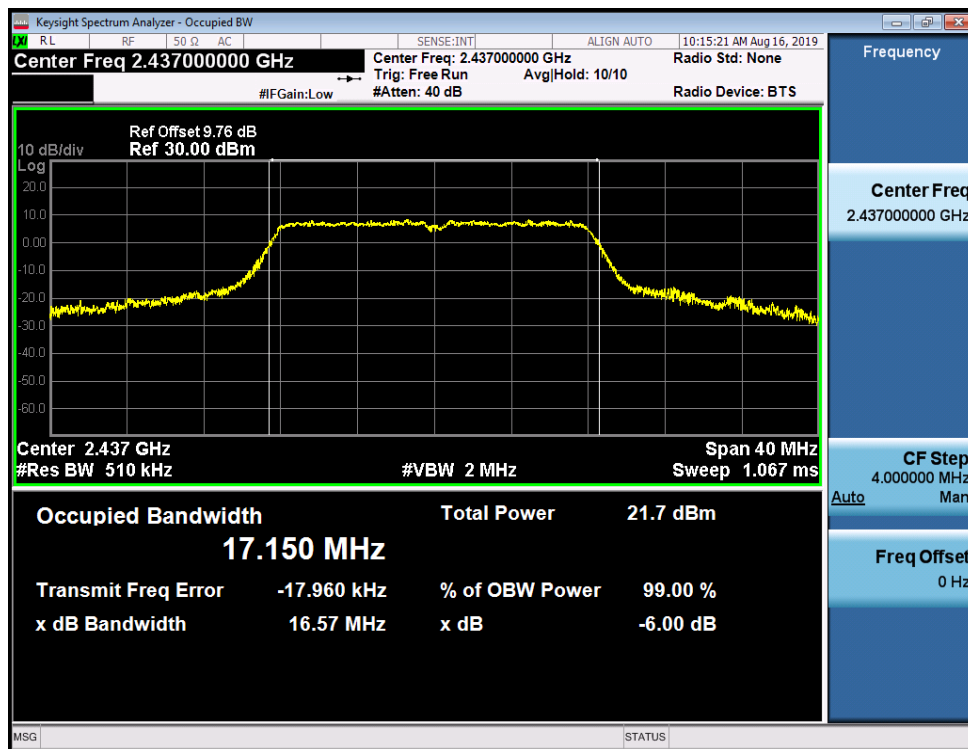


11G/HCH

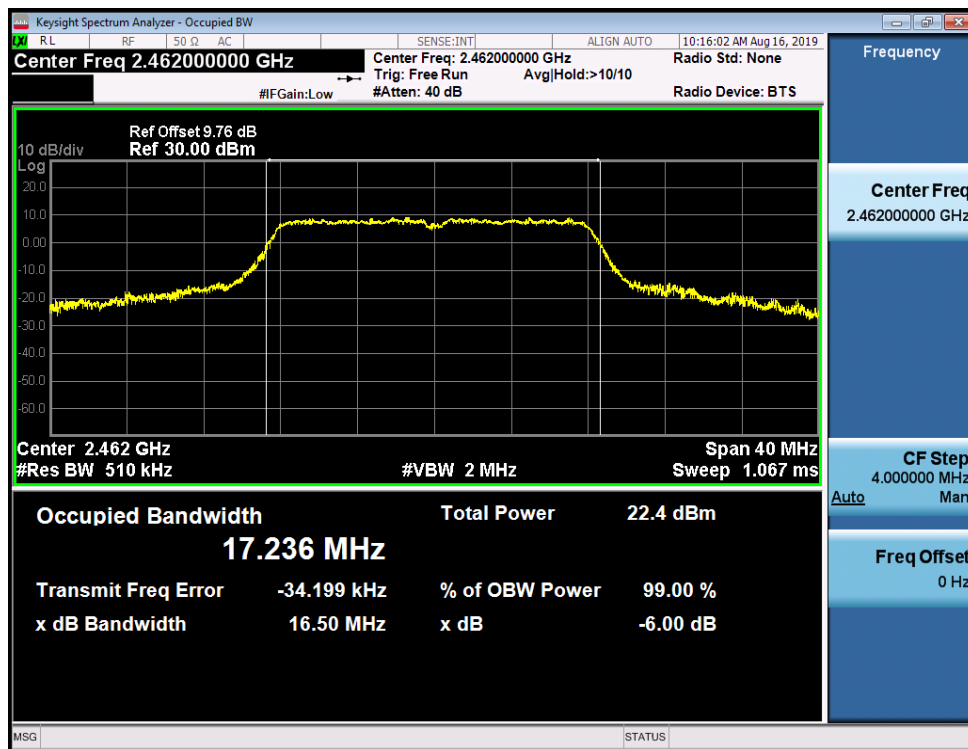


11N20/LCH

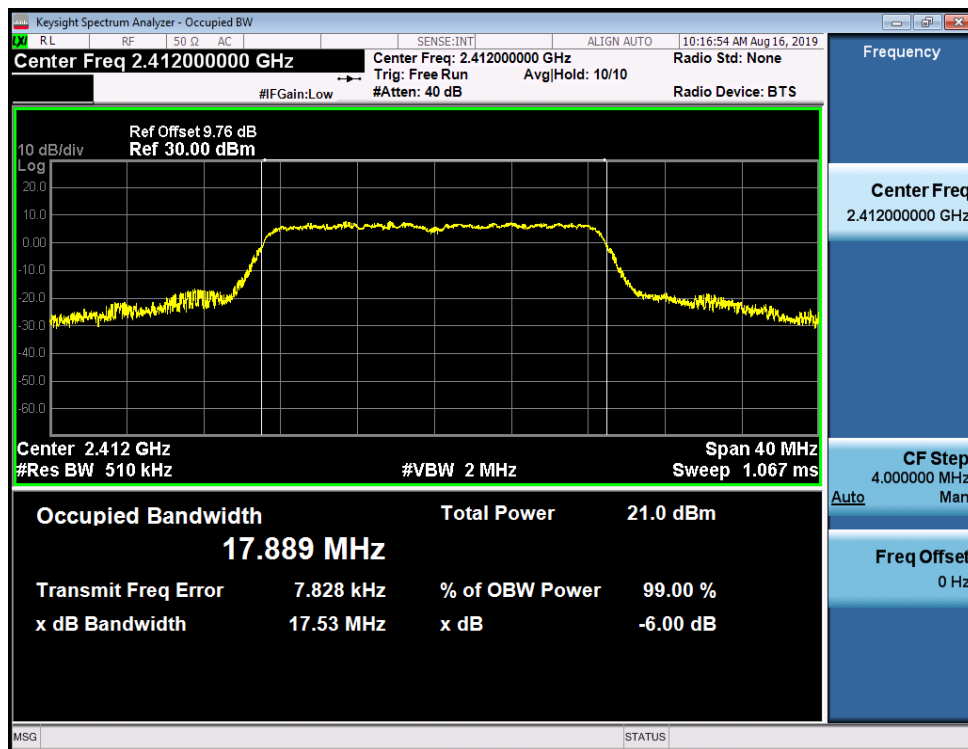

11N20/MCH

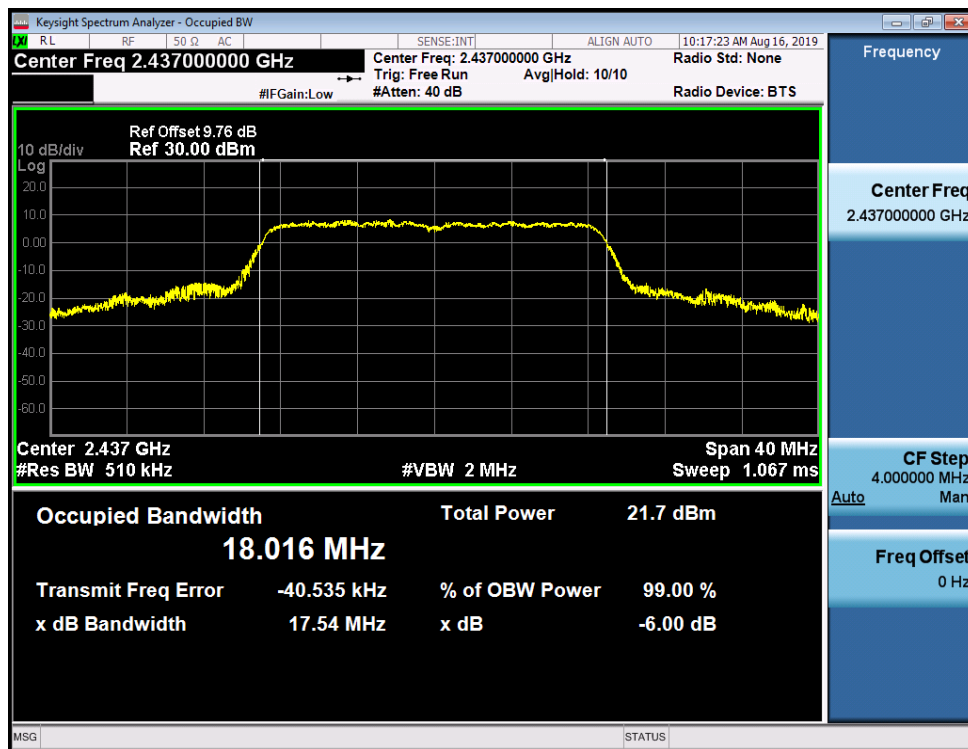

11N20/HCH

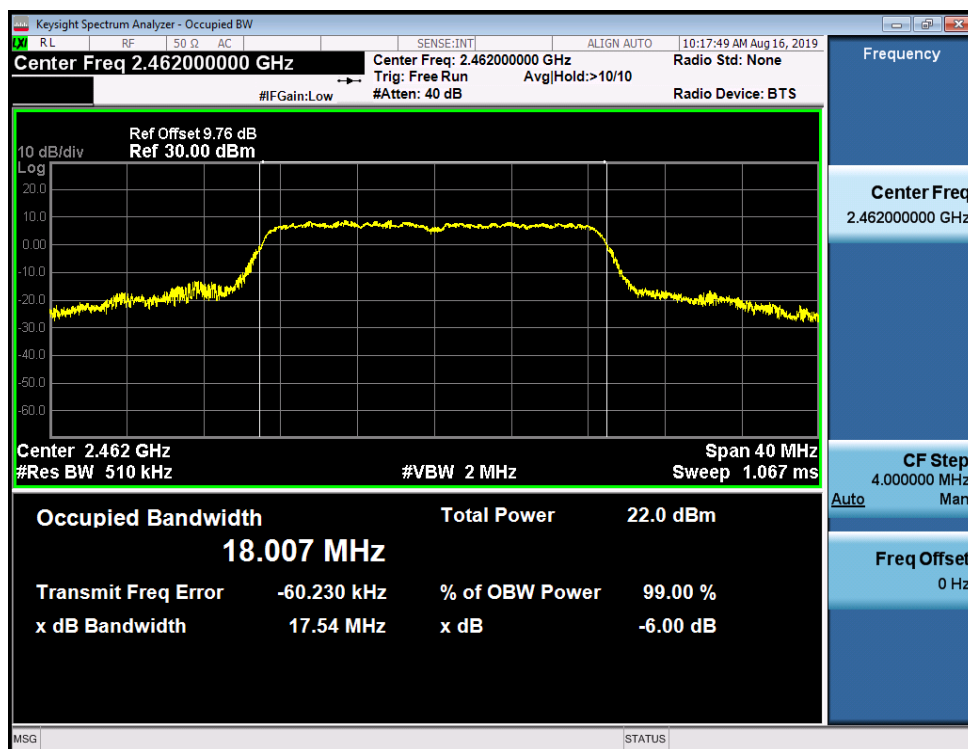

4.2 Output Power Measurement

4.2.1 Limit of Output Power

FCC §15.247 (b)(3)

IC RSS-247 A5.4(4)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.


4.2.2 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.2.4 Measurement using a spectrum analyzer.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Turn on the EUT and connect it to spectrum analyzer.
4. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
5. Measure the duty cycle, x , of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
6. Set span to at least $1.5 \times \text{OBW}$. Set RBW=510KHz, VBW=2MHz, Number of points in sweep $\geq 2/3 \times$ span, Sweep time = auto. Detector = RMS
7. Allow the sweep to "free run". Trace average 100 traces in RMS mode
8. Compute power by integrating the spectrum across the OBW of the signal using the instrument's Channel power measurement function with band limits set equal to the OBW band edges.
9. Add $10 \log (1/x)$, where x is the duty cycle.


4.2.3 Test Result of Output Power

Test Mode :		Tx Mode		Temperature :		24~26℃
Test Engineer :		Victorique Gao		Relative Humidity :		50~53%
Mode	Channel	Meas.Level [dBm]	DT	10 log (1/x)	AV.Power [dBm]	Verdict
11B	LCH	17.08	88.87 %	0.51	17.59	PASS
11B	MCH	16.82	88.87 %	0.51	17.33	PASS
11B	HCH	17.09	88.82 %	0.51	17.6	PASS
11G	LCH	16.57	86.31 %	0.64	17.21	PASS
11G	MCH	16.39	86.58 %	0.63	17.02	PASS
11G	HCH	16.57	86.58 %	0.63	17.2	PASS
11N20	LCH	16.44	85.67 %	0.67	17.11	PASS
11N20	MCH	16.38	85.95 %	0.66	17.04	PASS
11N20	HCH	16.32	85.62 %	0.67	16.99	PASS


Meas.Level Plot

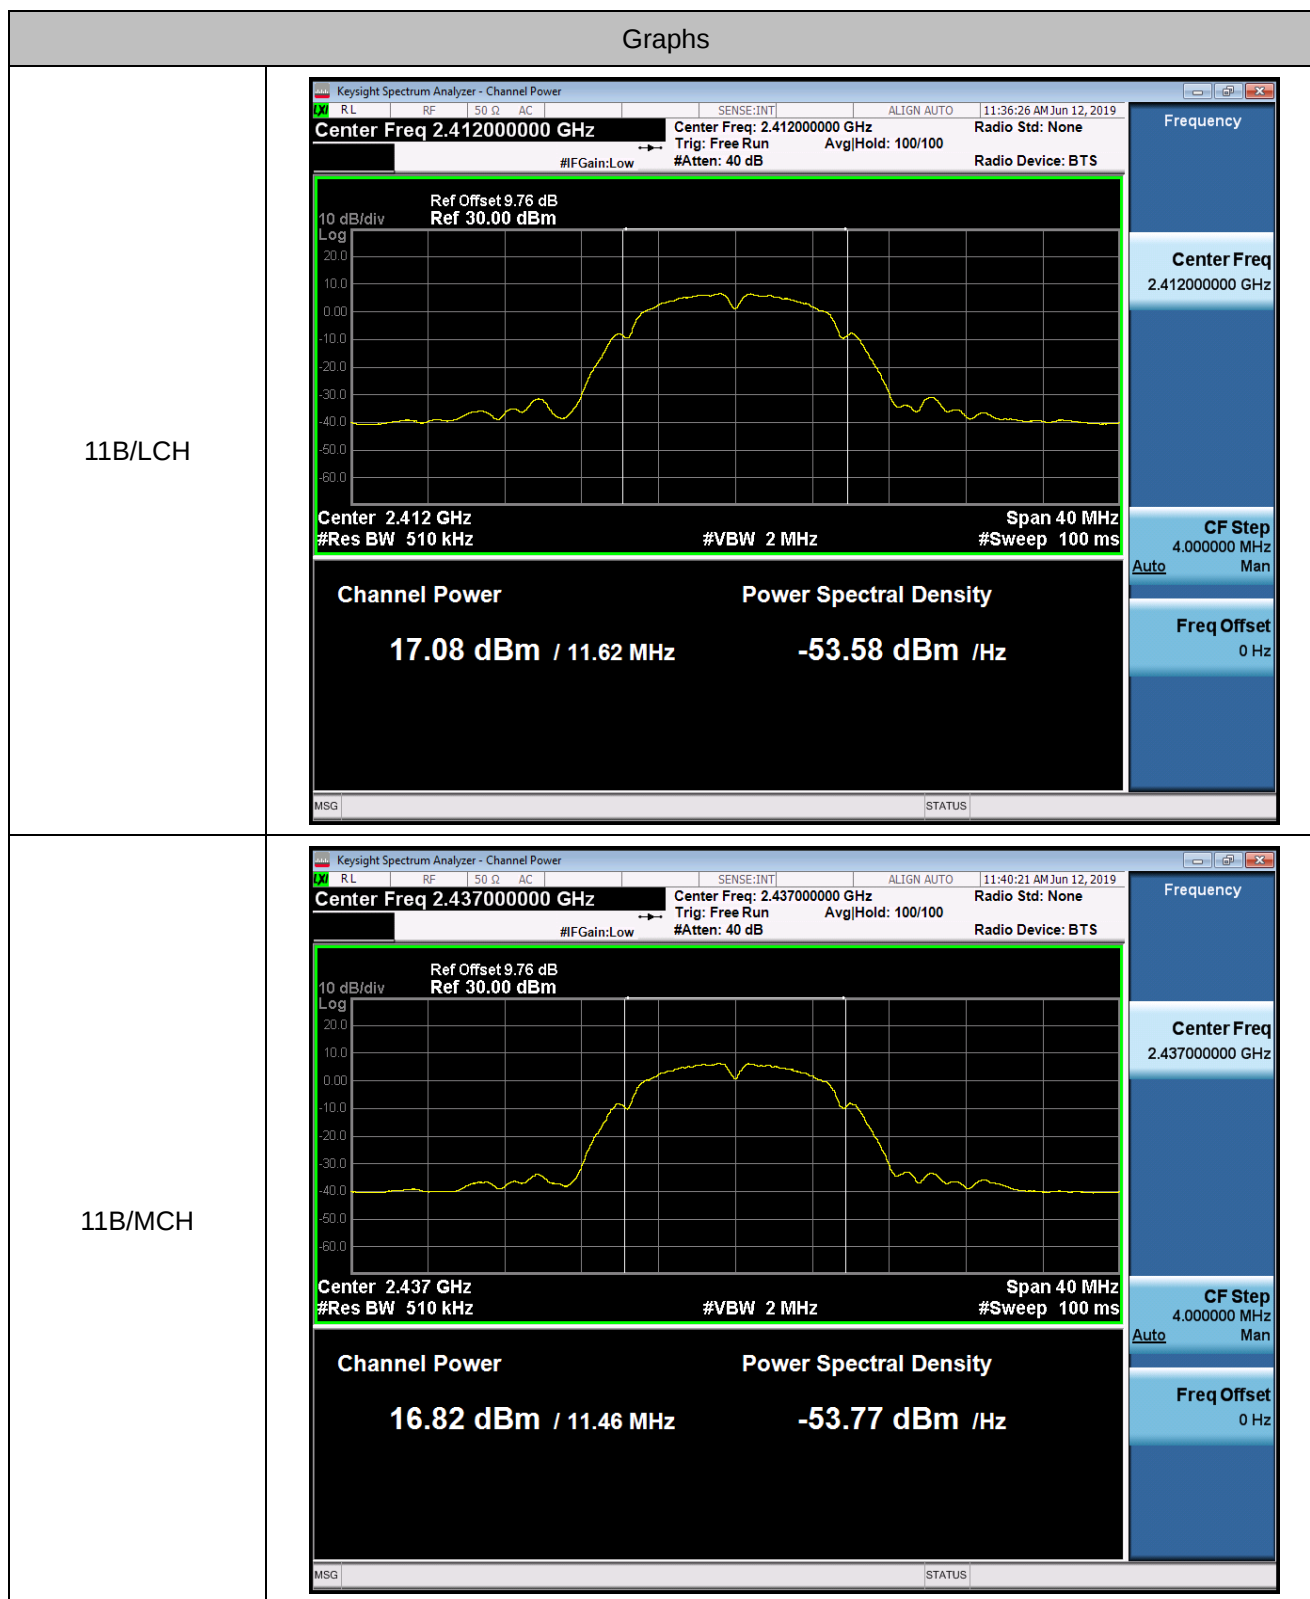


11B/HCH

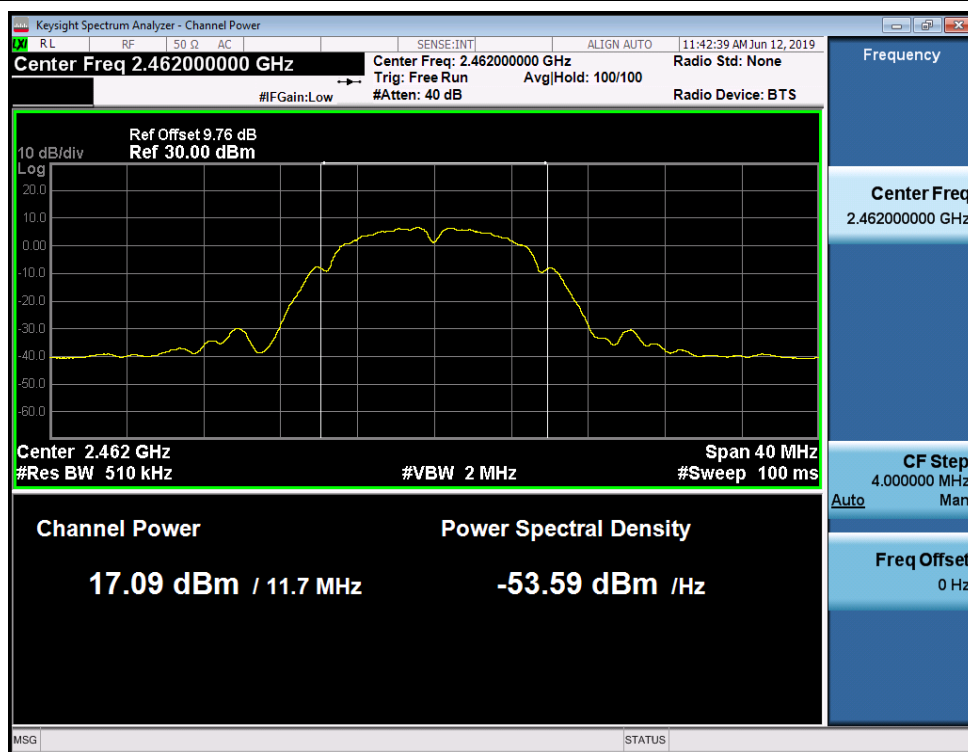


11G/LCH

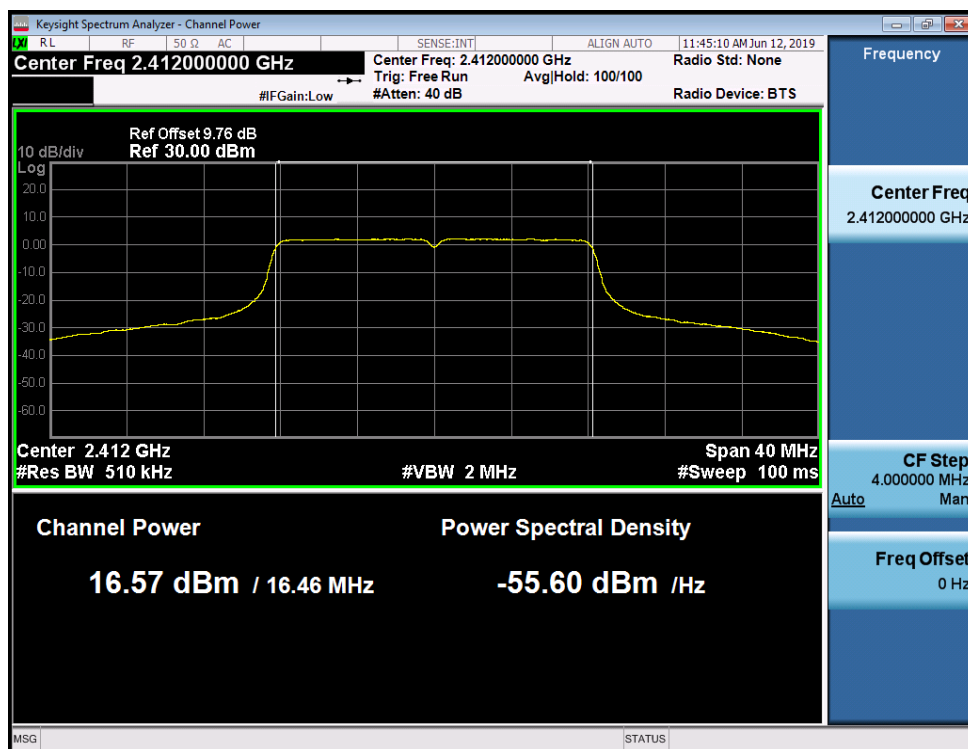


11G/MCH

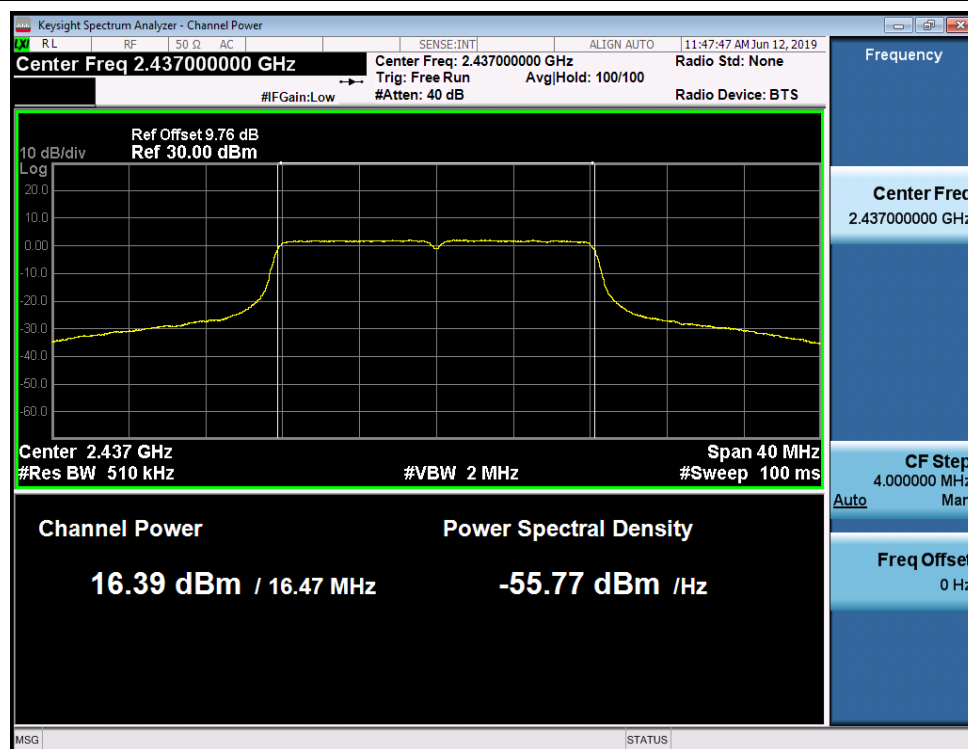


11G/HCH

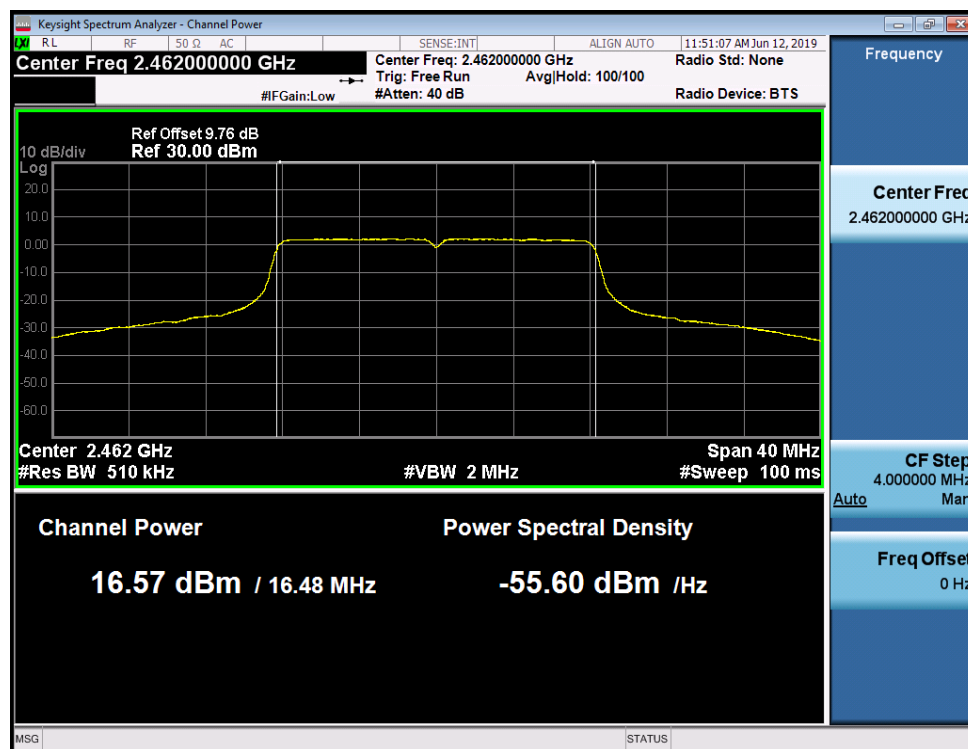


11N20/LCH

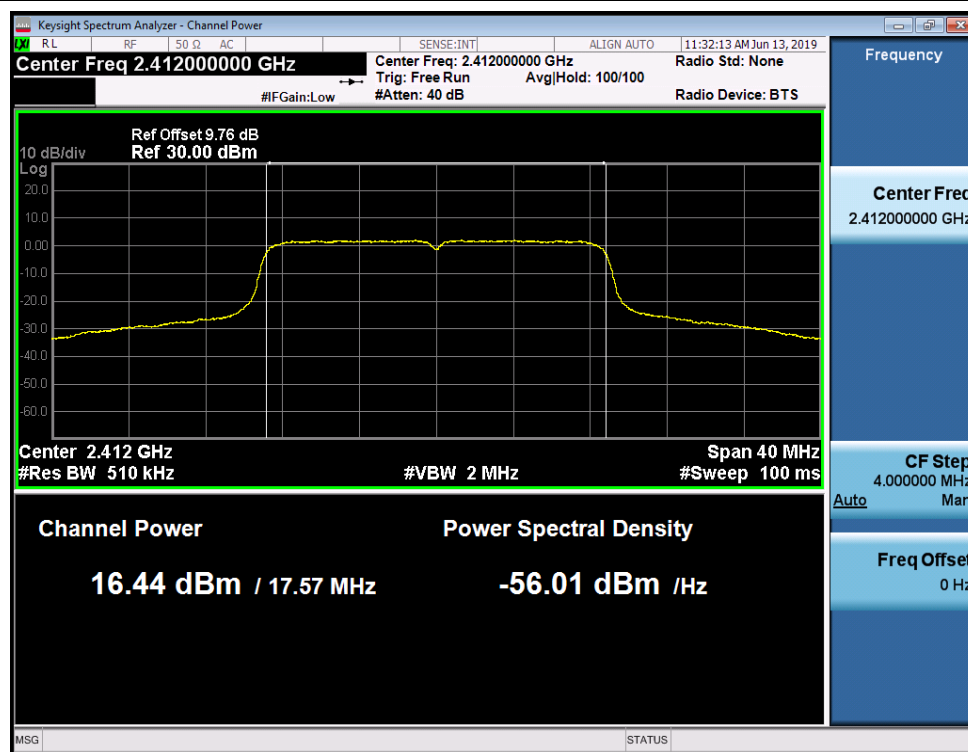

11N20/MCH

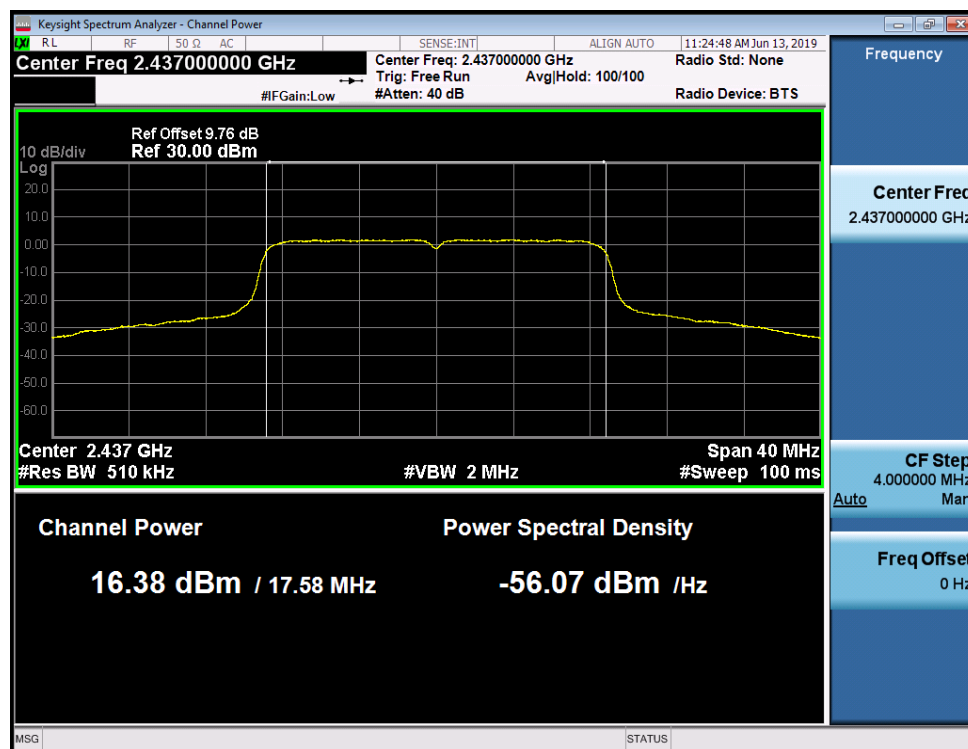


11N20/HCH

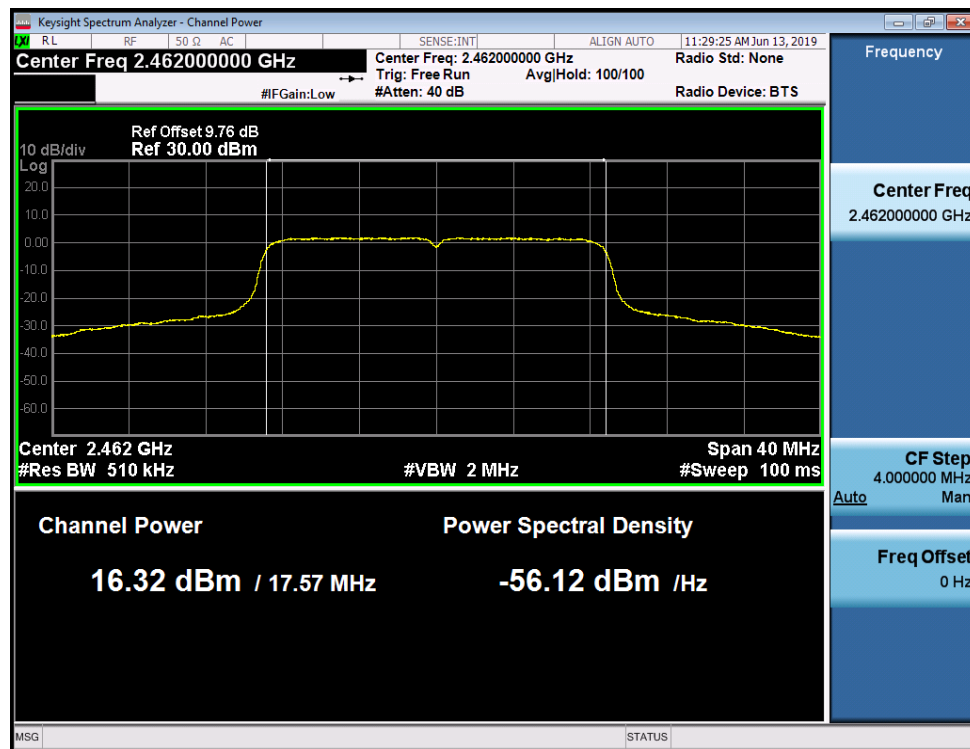

Duty cycle Plot

Graphs


11B/LCH

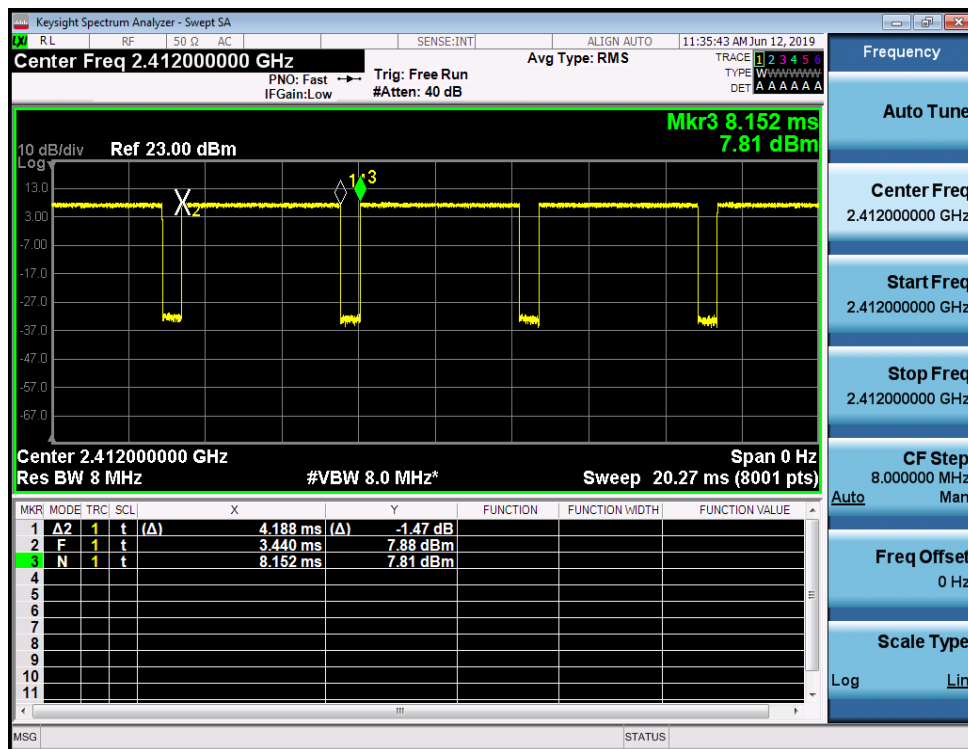


11B/MCH




11B/HCH

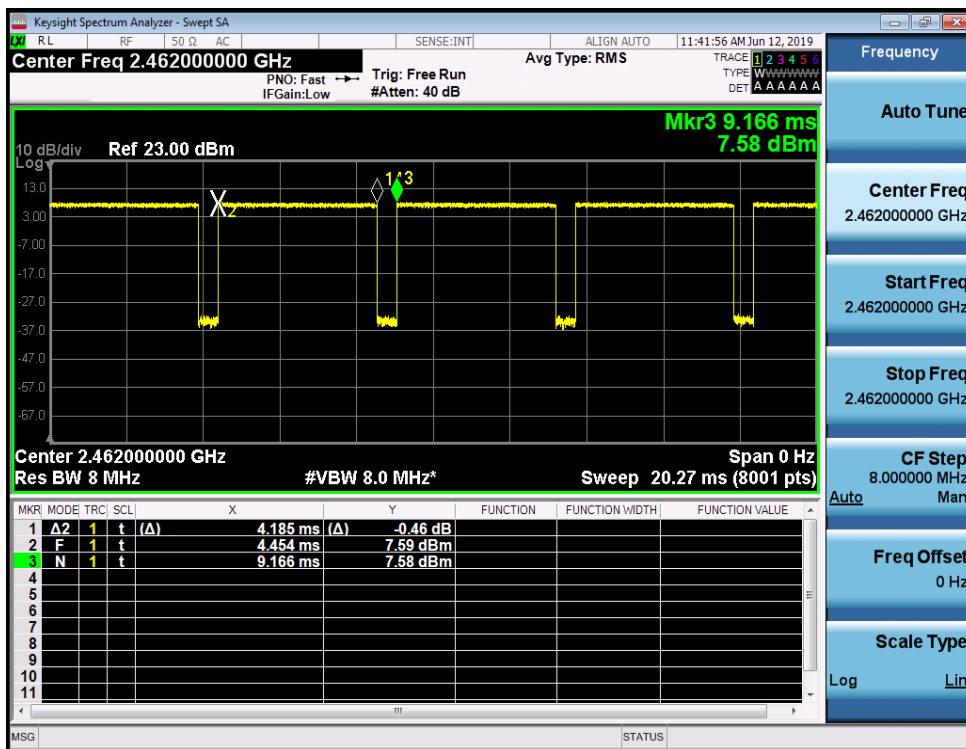


11G/LCH

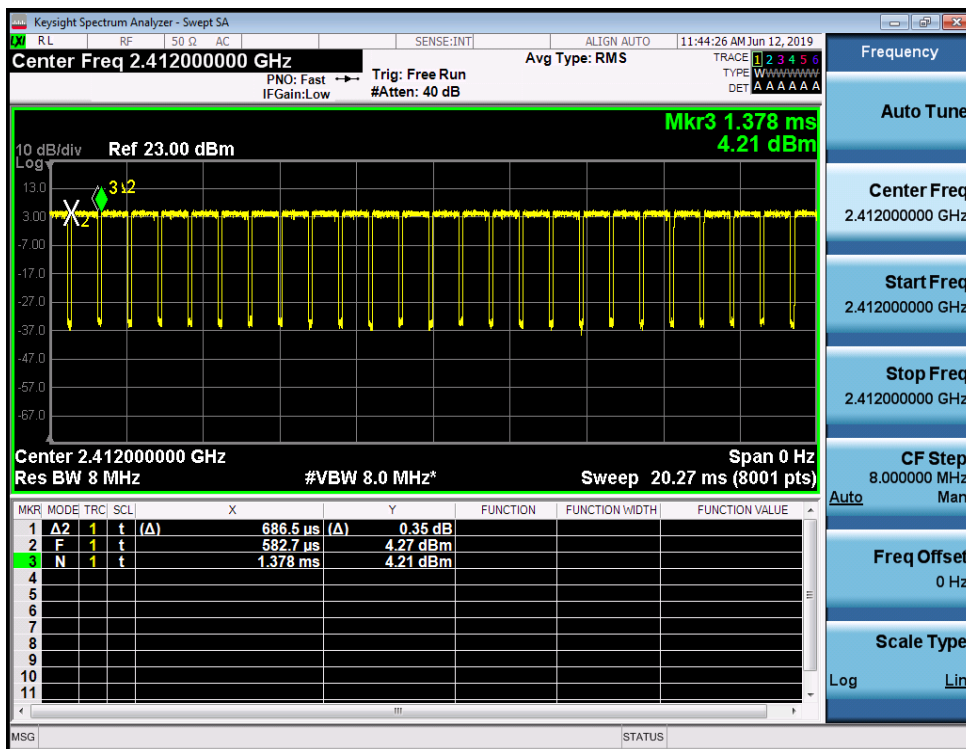


11G/MCH

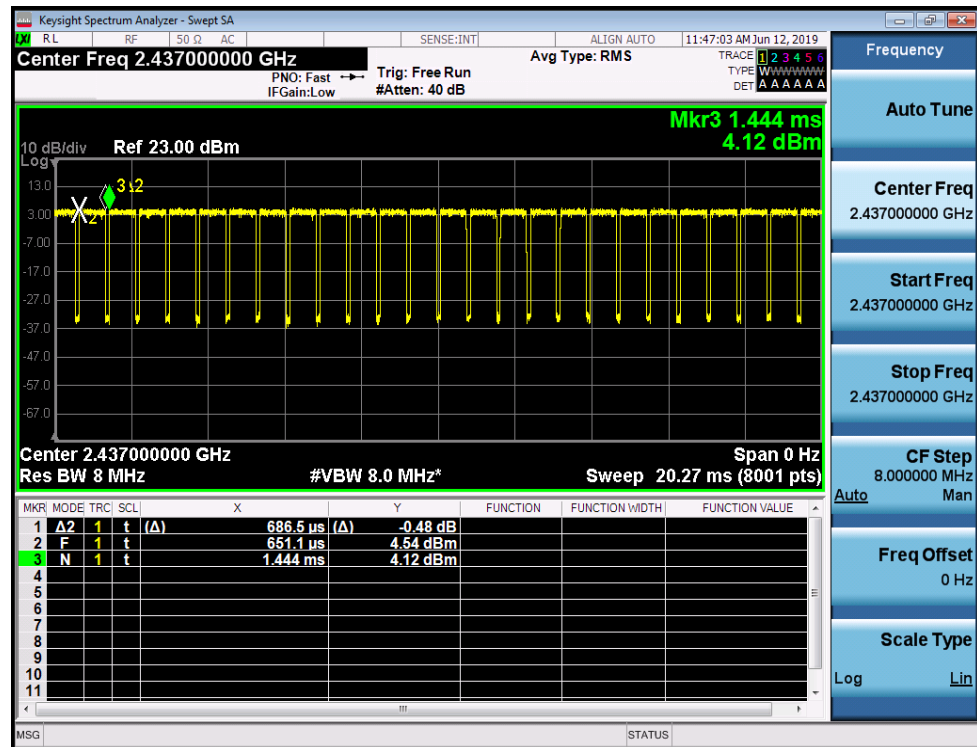


11G/HCH

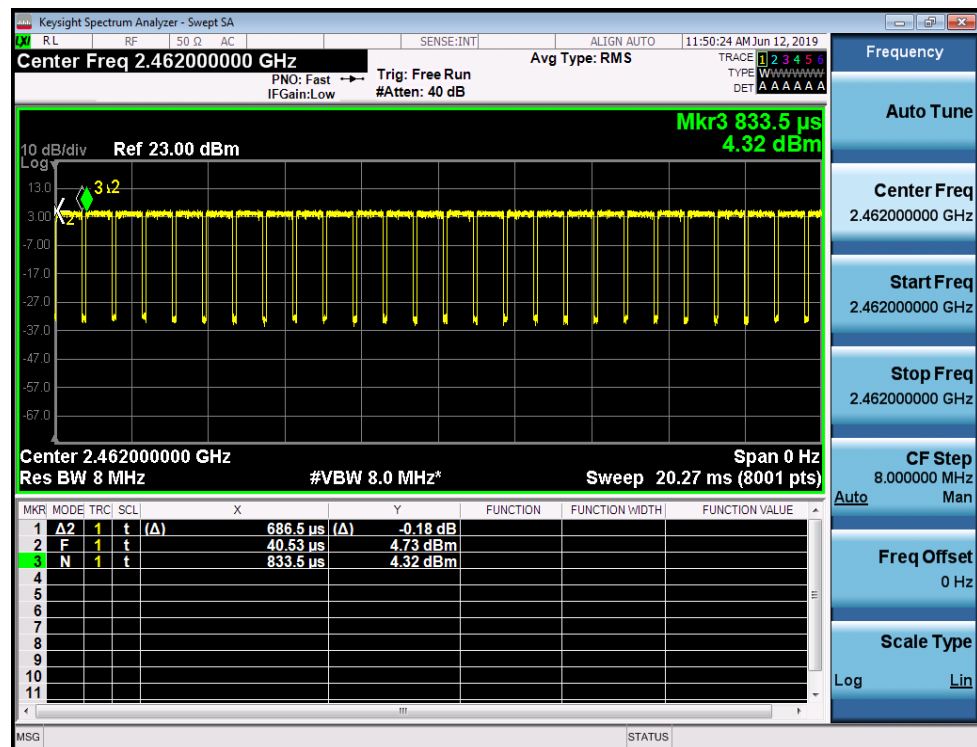


11N20/LCH

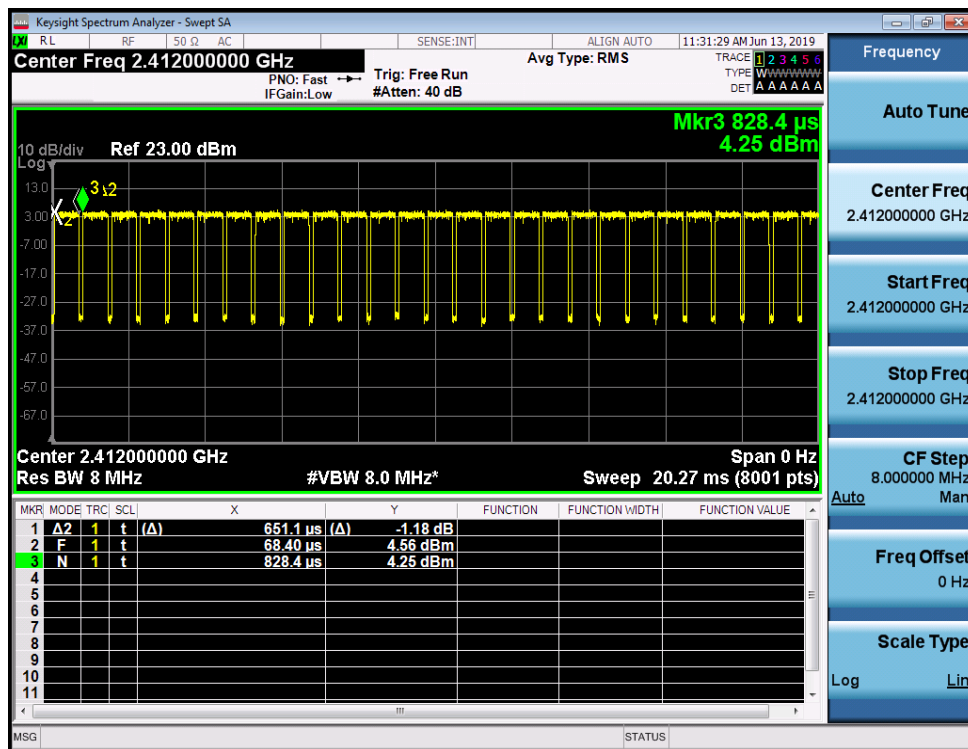

11N20/MCH

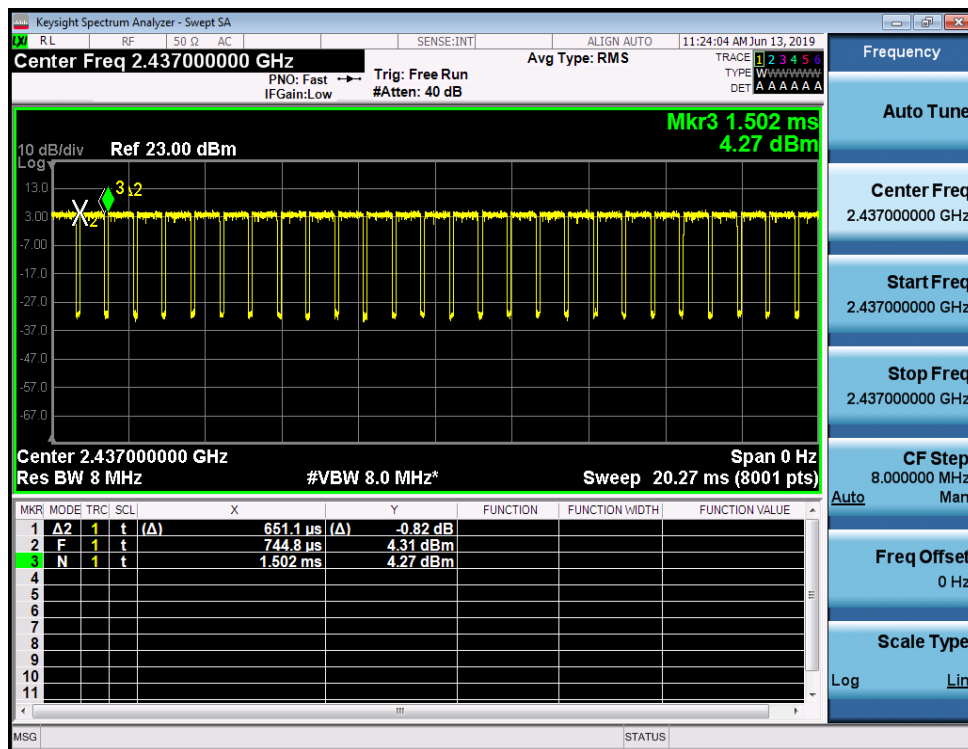

11N20/HCH

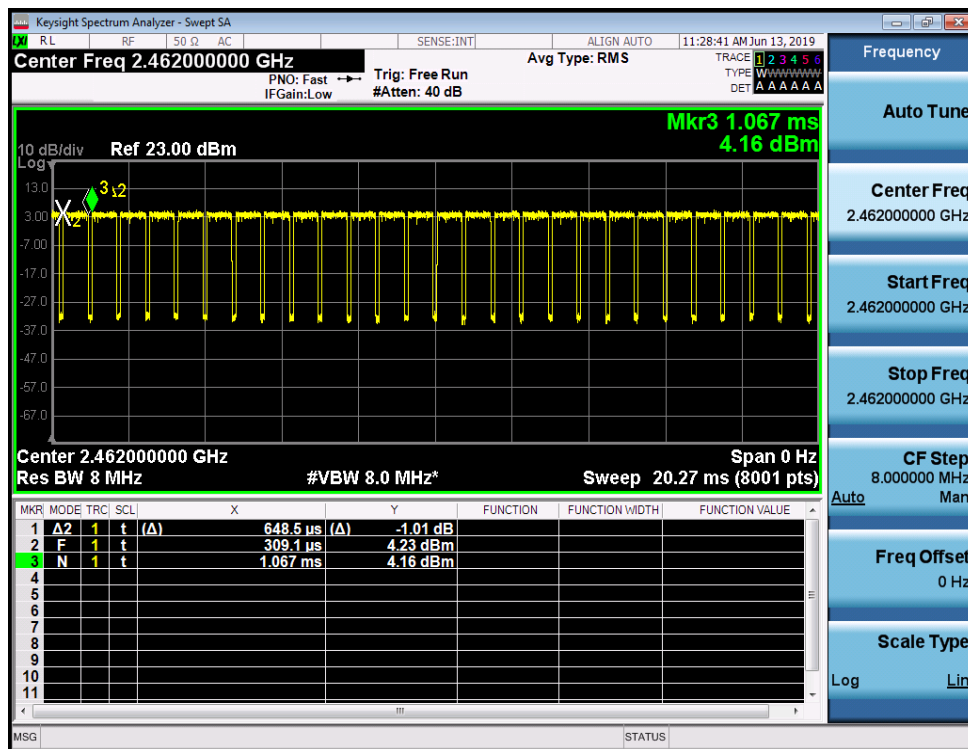

4.3 Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density

FCC§15.247(e)

IC RSS-247 5.2(2)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

4.3.2 Test Procedure

1. The testing follows Measurement Procedure 8.4 DTS maximum power spectral density level in the fundamental emission of ANSI C63.10-2013 section 11.9.2.2.4
2. Turn on the EUT and connect it to measurement instrument.
3. Measure the duty cycle, x , of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
4. Set span to at least $1.5 \times \text{OBW}$. Set RBW= 3 KHz, VBW=10 KHz, Number of points in sweep $\geq 2/3 \times$ span, Sweep time = auto.
5. Detector = power averaging (rms), Sweep time = auto couple, Trace mode = averaging (rms) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.
6. Add $10 \log (1/x)$, where x is the duty cycle.
7. Measure and record the results in the test report.
8. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

4.3.3 Test Result of Power Spectral Density

Test Mode :		TX Mode		Temperature :	24~26℃	
Test Engineer :		Victorique Gao		Relative Humidity :	50~53%	
Mode	Channel	Meas.Level [dBm]		Av.PSD [dBm]		Verdict
11B	LCH	-12.172		-11.662		PASS
11B	MCH	-11.560		-11.050		PASS
11B	HCH	-11.553		-11.043		PASS
11G	LCH	-14.716		-14.076		PASS
11G	MCH	-13.923		-13.293		PASS
11G	HCH	-13.590		-12.960		PASS
11N20	LCH	-13.787		-13.117		PASS
11N20	MCH	-13.803		-13.143		PASS
11N20	HCH	-14.306		-13.636		PASS

Power Spectral Density Plot

Graphs

11B/LCH




11B/MCH




11B/HCH




11G/LCH

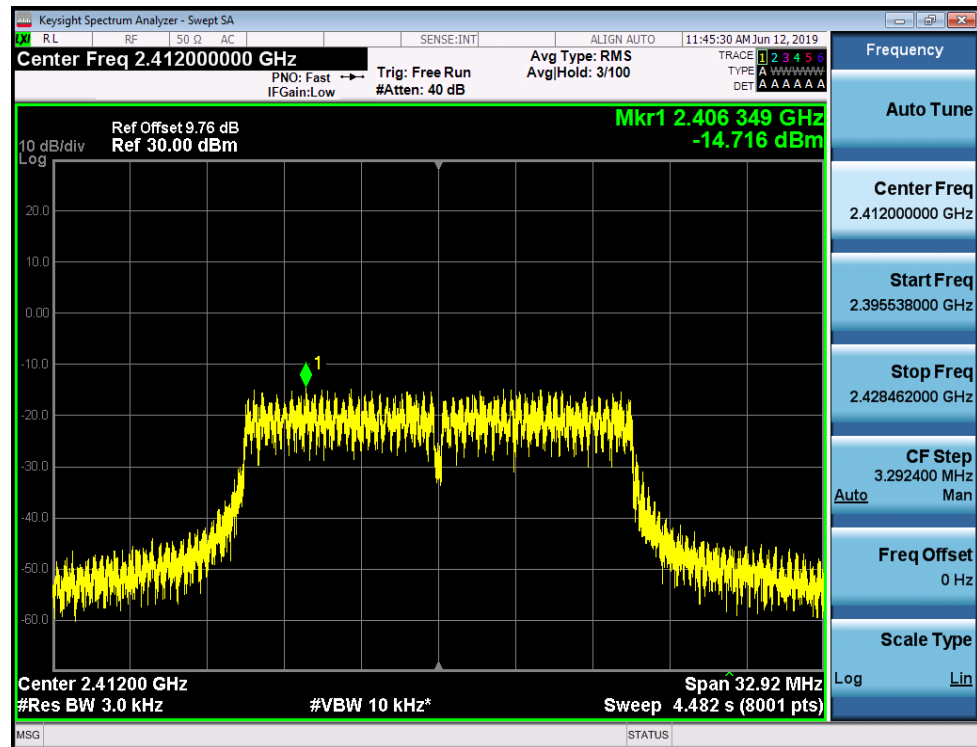


11G/MCH

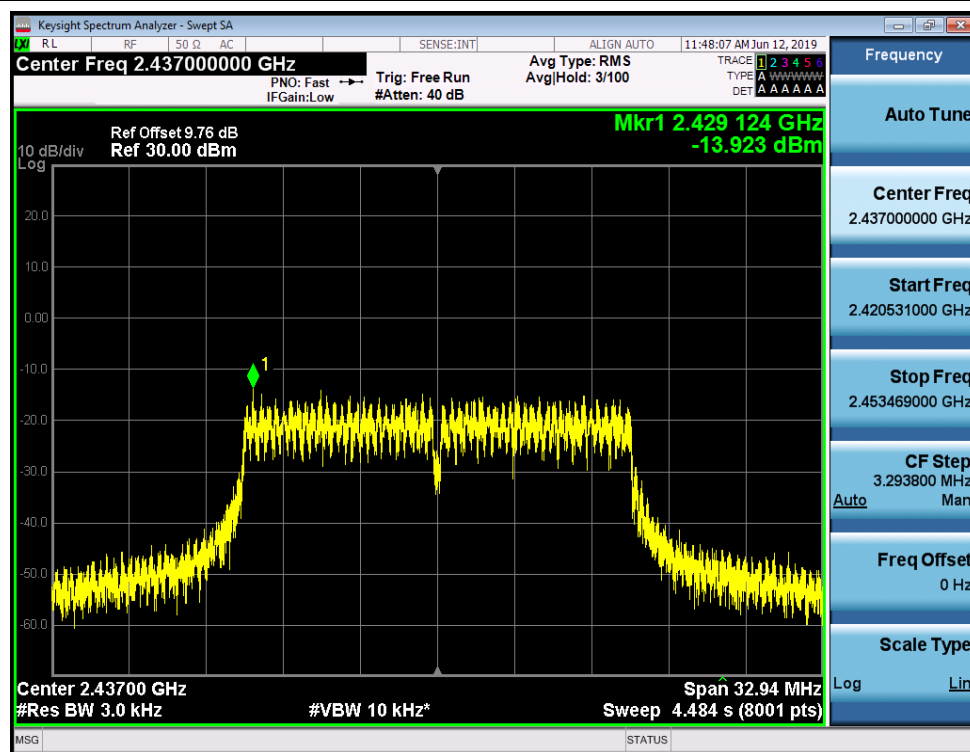


11G/HCH

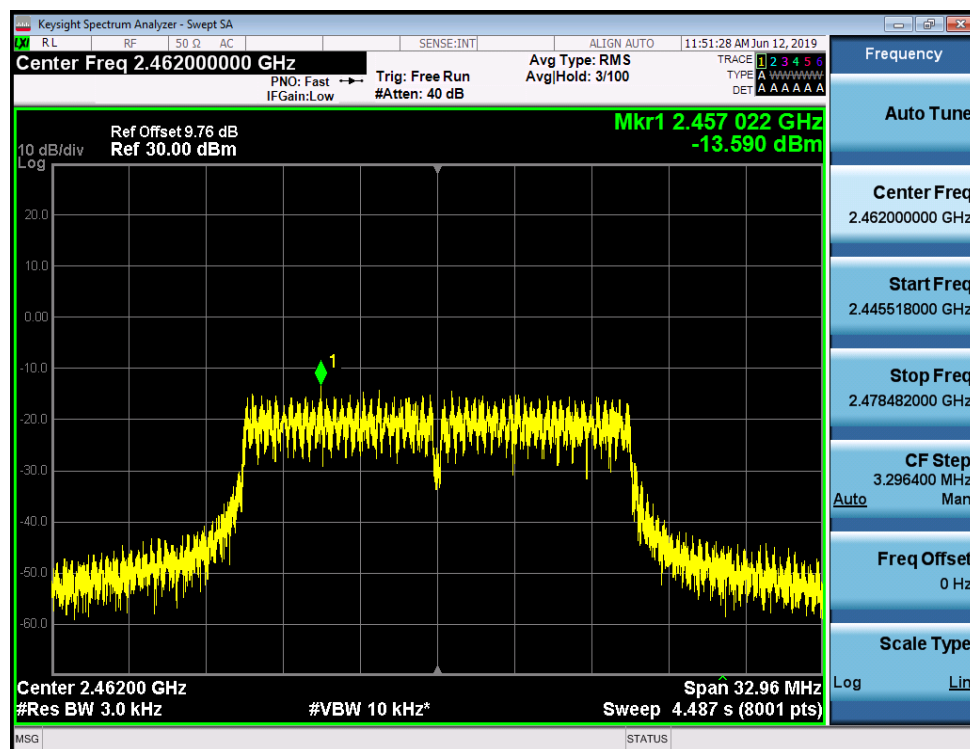


11N20/LCH

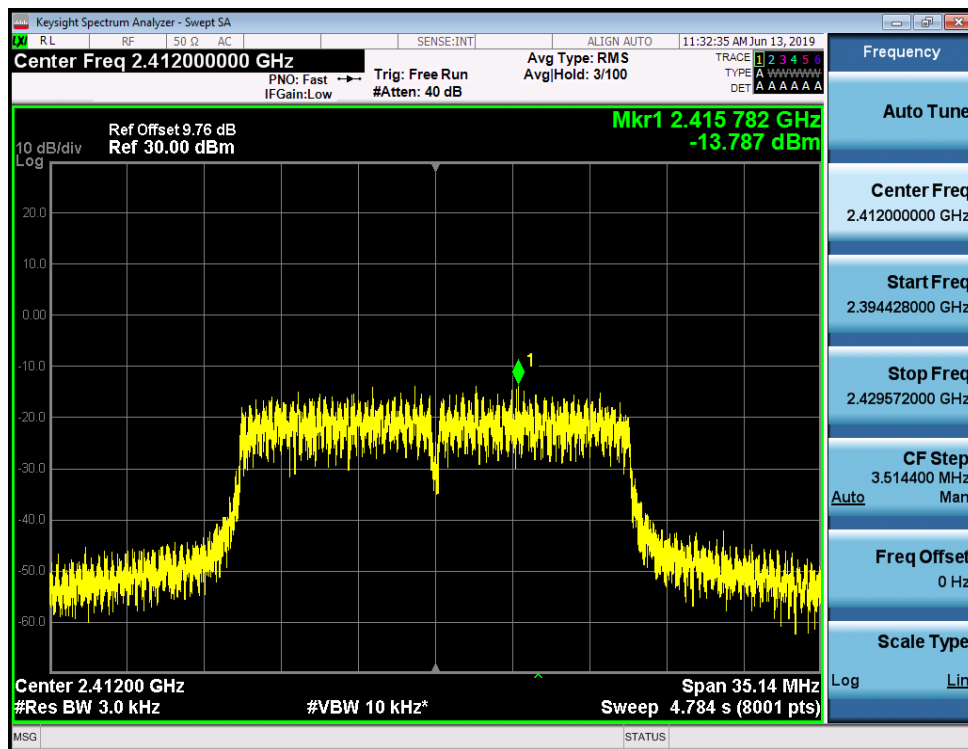

11N20/MCH

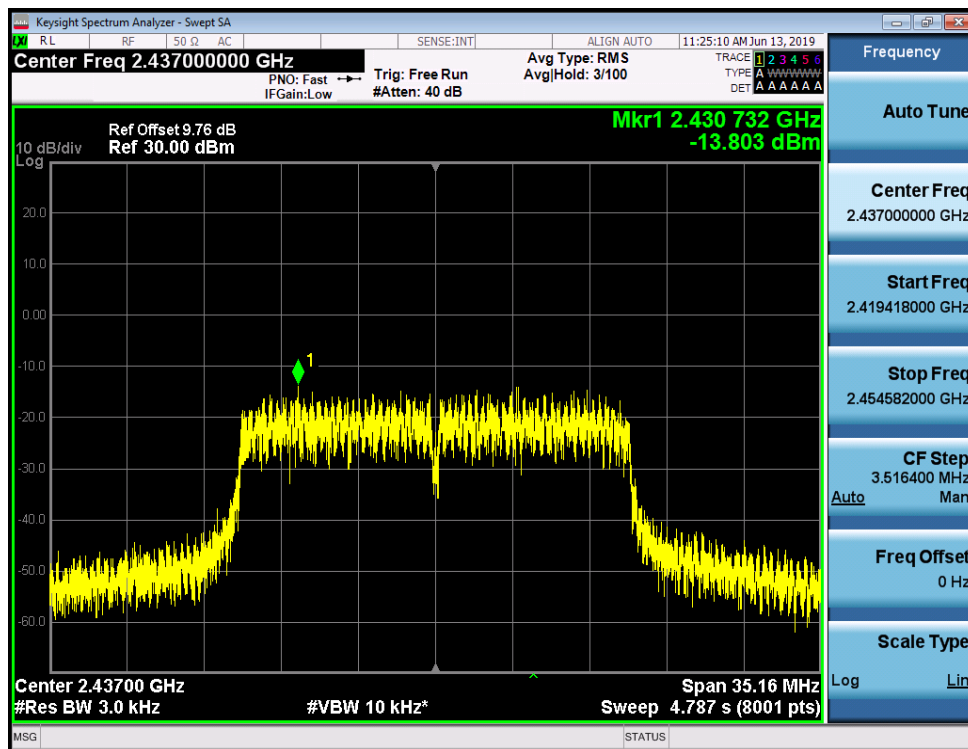

11N20/HCH

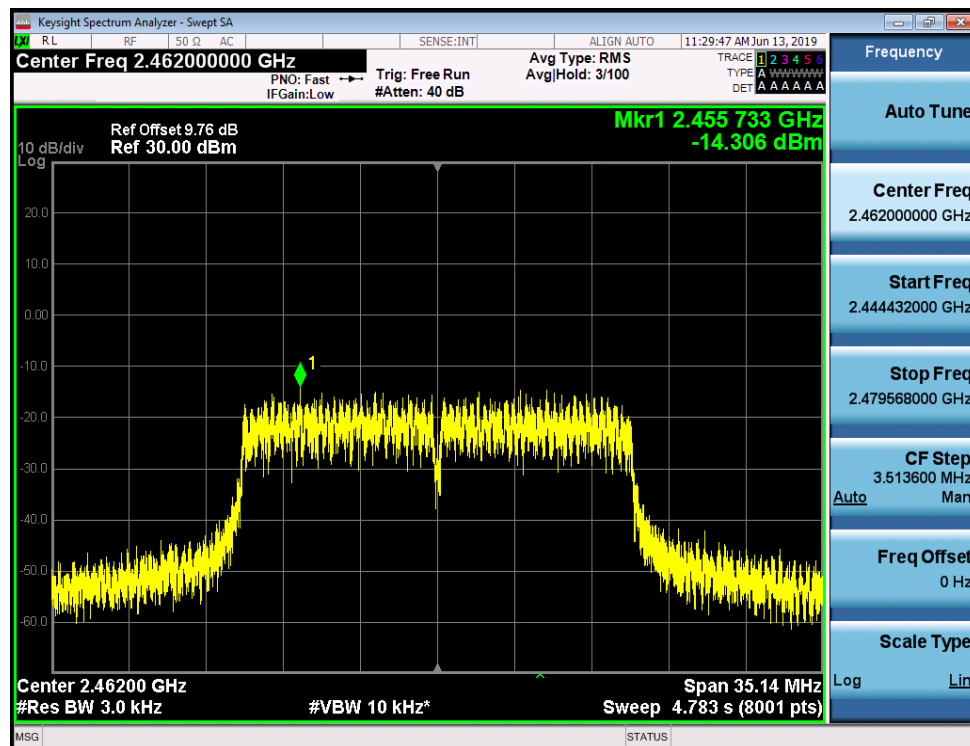

4.4 Conducted Band Edges and Spurious Emission Measurement

4.4.1 Limit of Conducted Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

4.4.2 Test Procedures


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.4.3 Test Result of Conducted Band Edges


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	8.839	-33.605	-21.16	PASS
11B	HCH	9.030	-35.542	-20.97	PASS
11G	LCH	6.467	-33.380	-23.53	PASS
11G	HCH	6.278	-33.587	-23.72	PASS
11N20SISO	LCH	6.546	-31.950	-23.45	PASS
11N20SISO	HCH	5.979	-32.424	-24.02	PASS

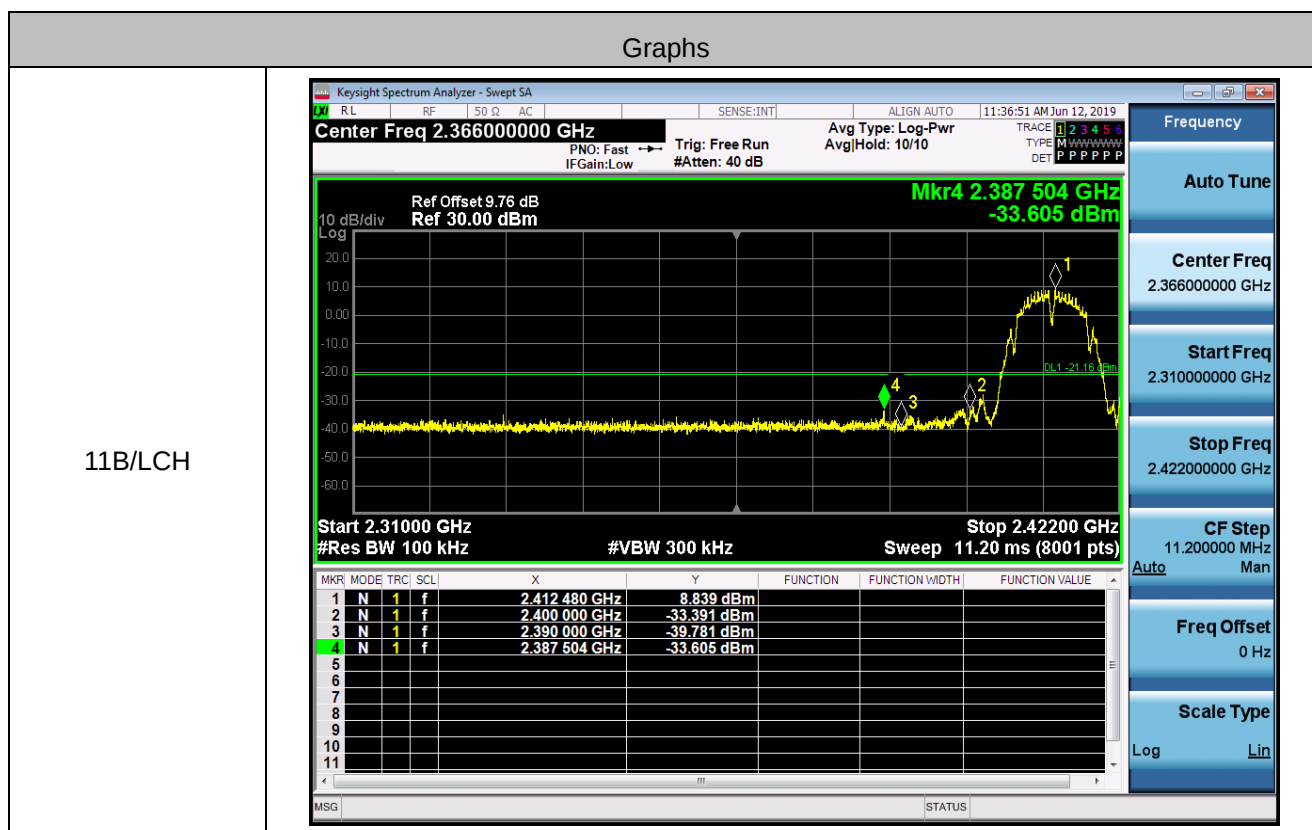


11B/HCH

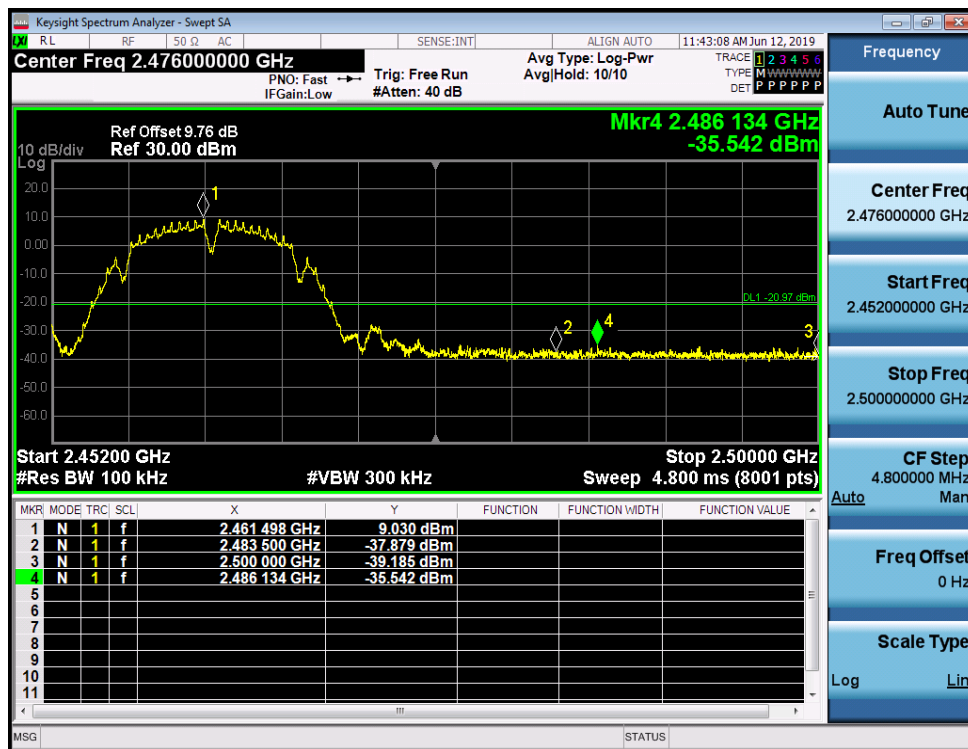


11G/LCH

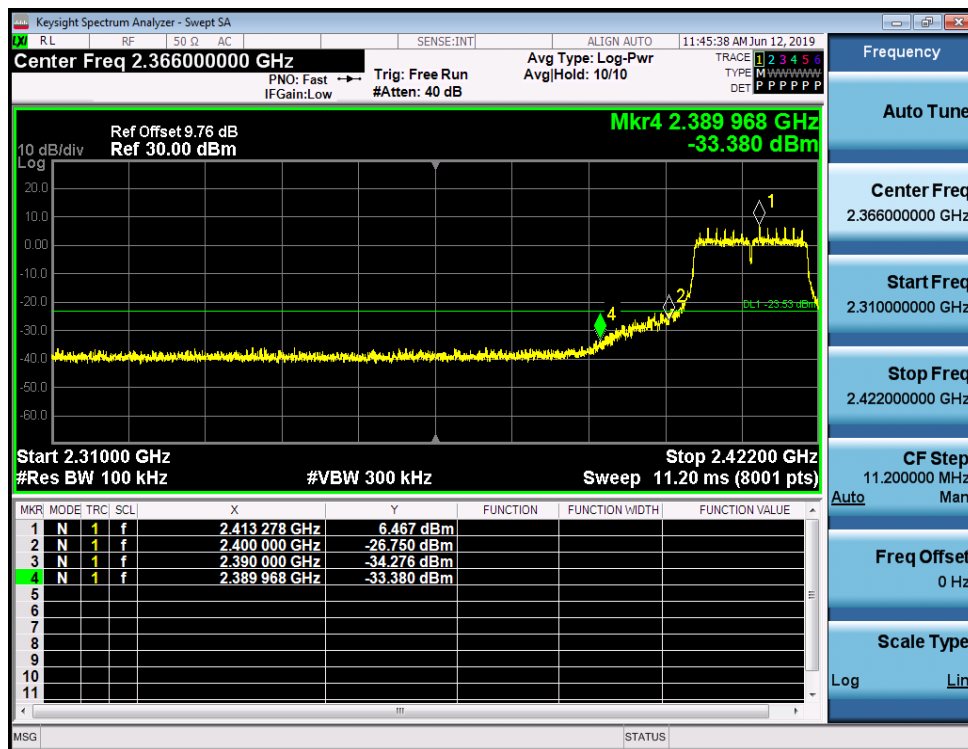


11G/HCH

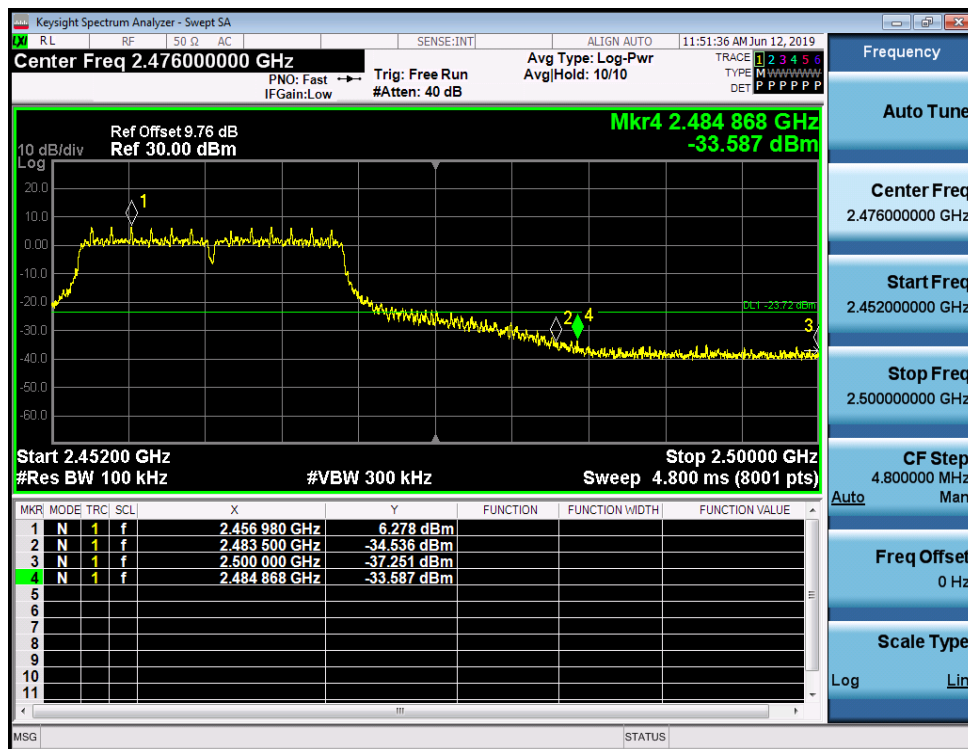

11N20SISO/LCH

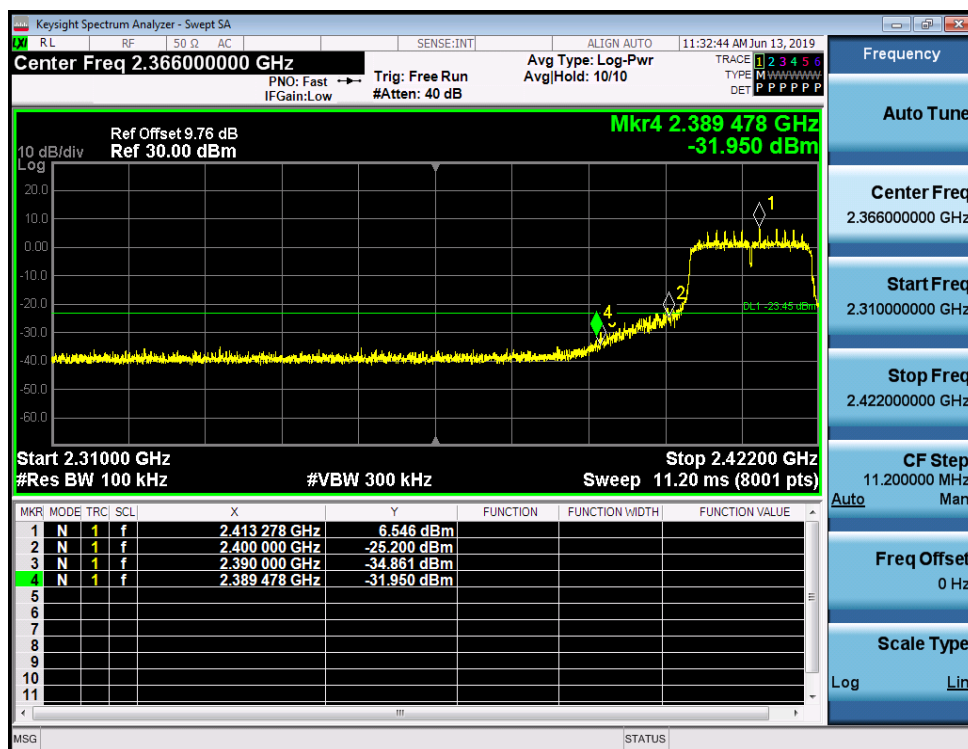

11N20SISO/HCH

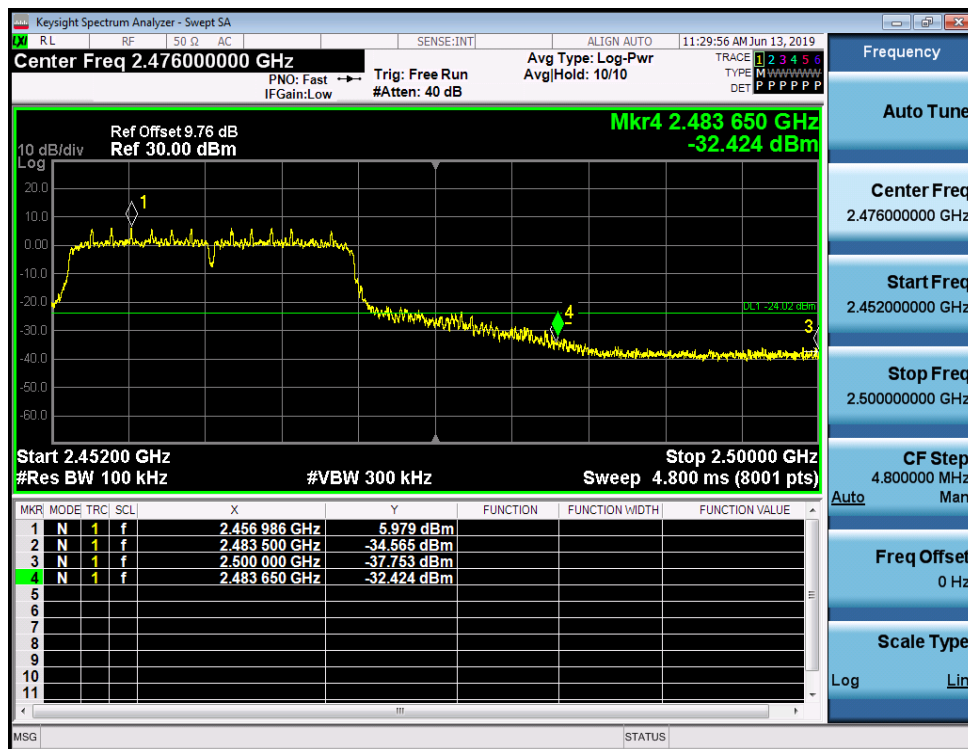


4.4.4 Test Result of Conducted Spurious Emission

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	9.386	<Limit	PASS
11B	MCH	9.012	<Limit	PASS
11B	HCH	9.023	<Limit	PASS
11G	LCH	6.442	<Limit	PASS
11G	MCH	5.948	<Limit	PASS
11G	HCH	6.54	<Limit	PASS
11N20SISO	LCH	6.718	<Limit	PASS
11N20SISO	MCH	6.18	<Limit	PASS
11N20SISO	HCH	6.254	<Limit	PASS


Conducted Band Edges and Spurious Emission Plot

11B_LCH_Graphs

Pref/11B/LCH

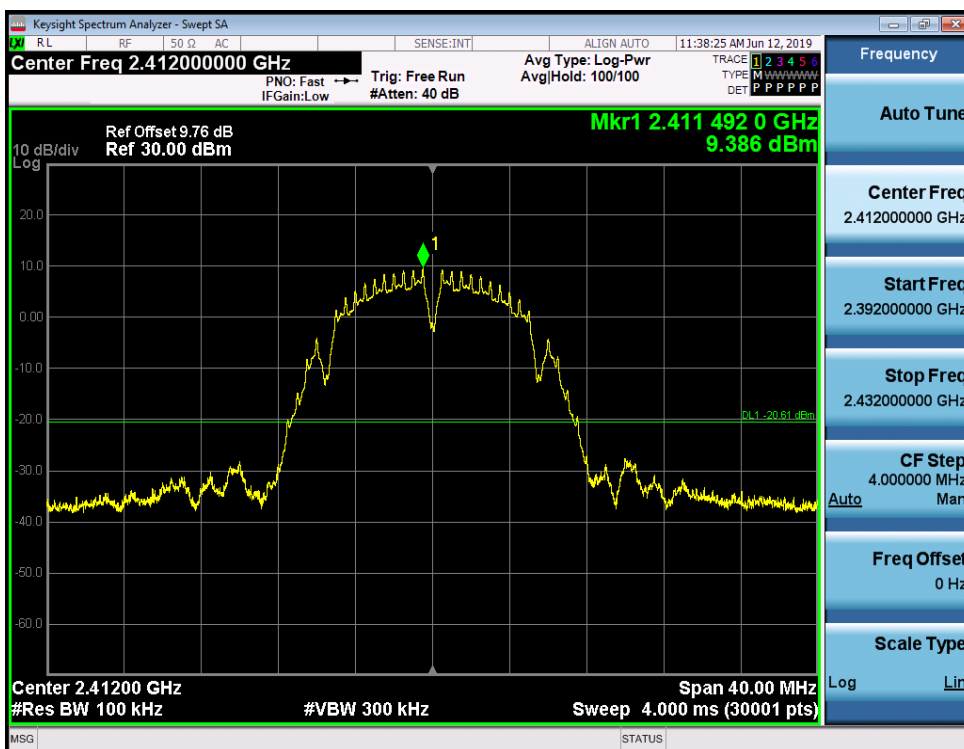


Puw/11B/LCH

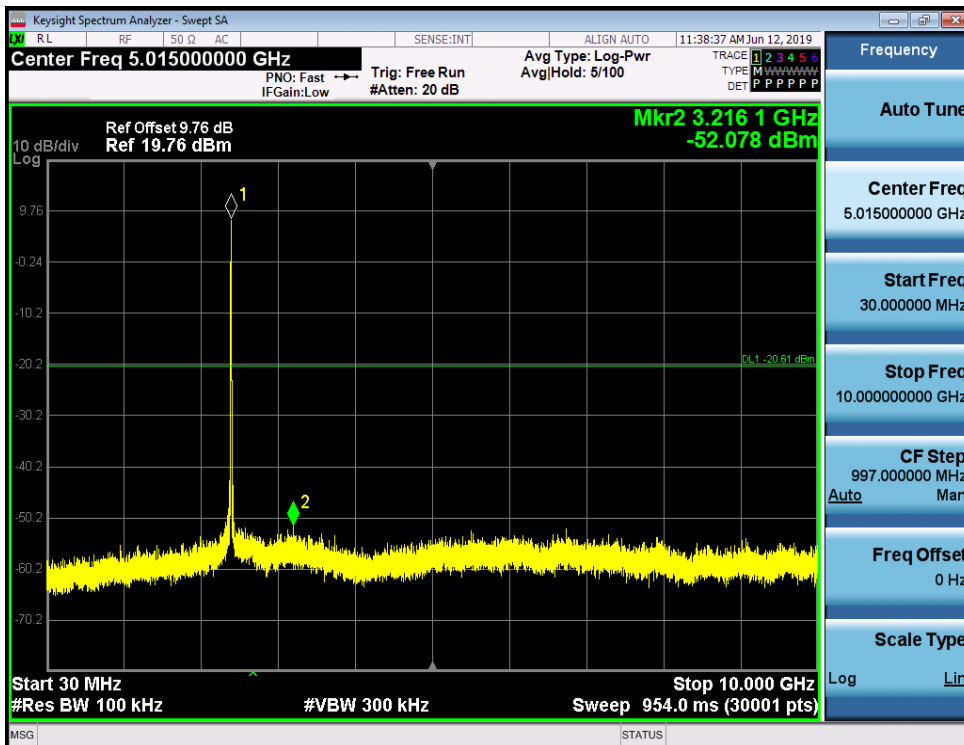




11B_MCH_Graphs

Pref/11B/MCH

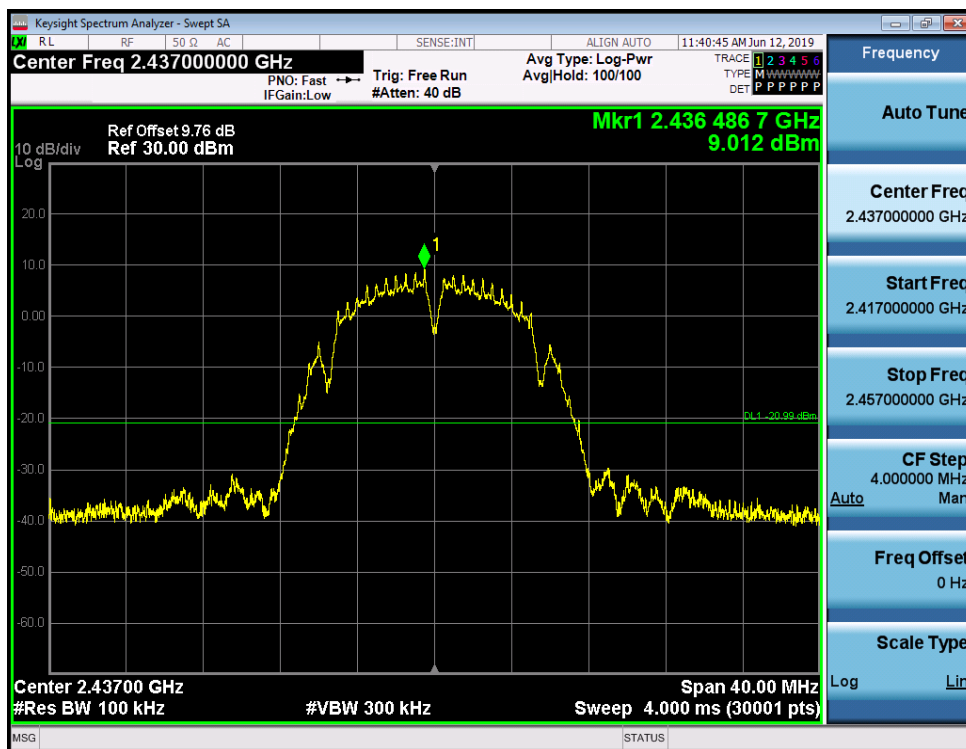


Puw/11B/MCH

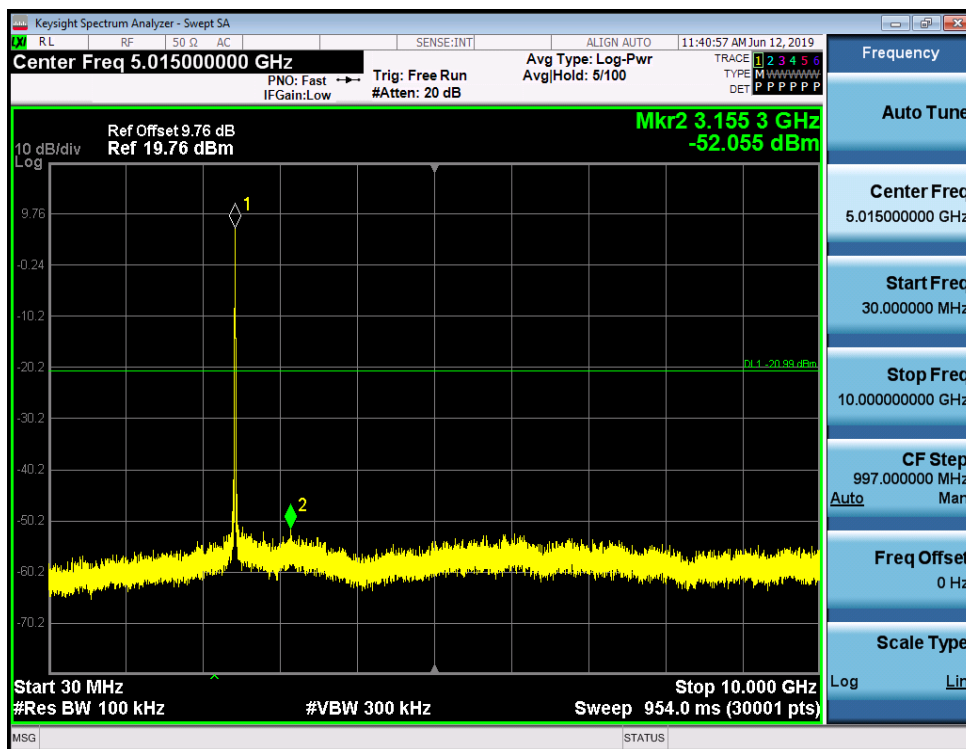





11B_HCH_Graphs

Pref/11B/HCH

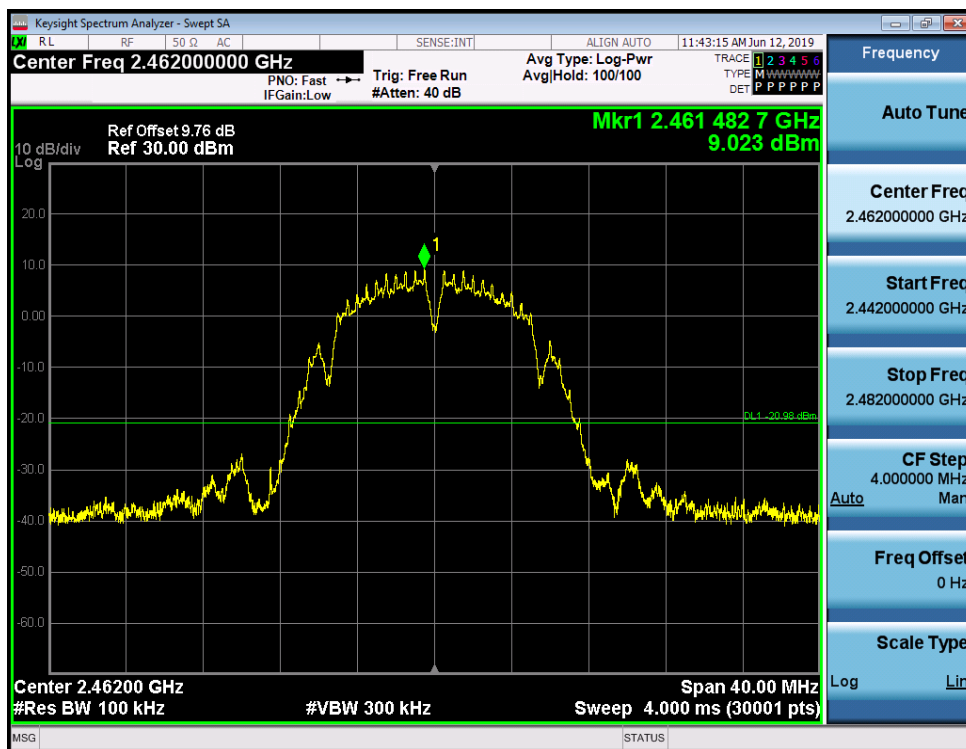


Puw/11B/HCH

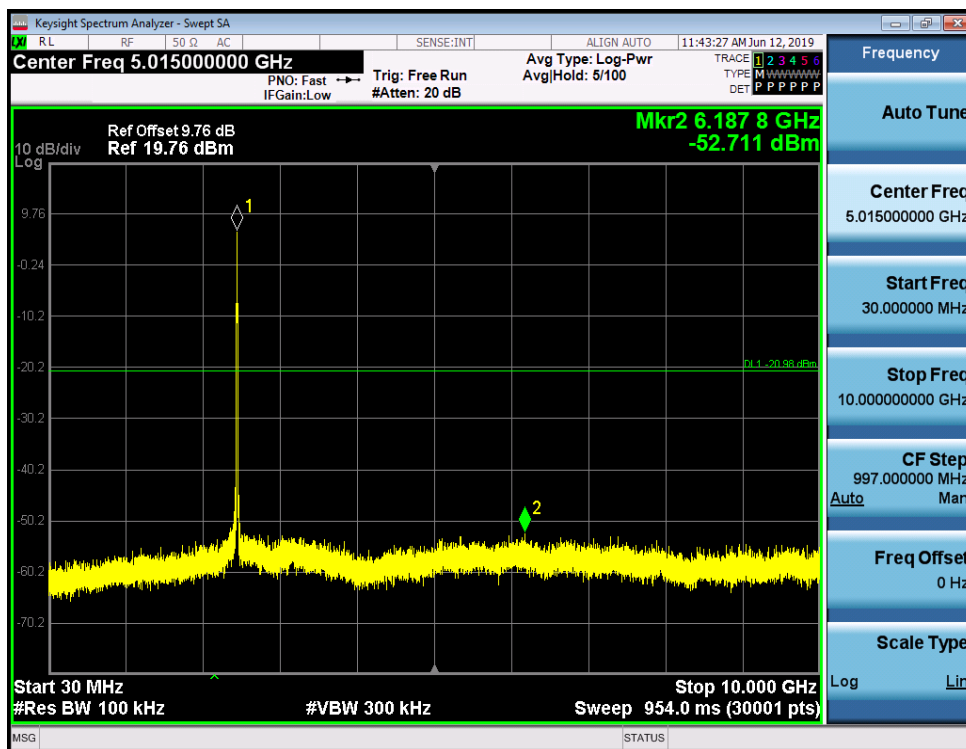

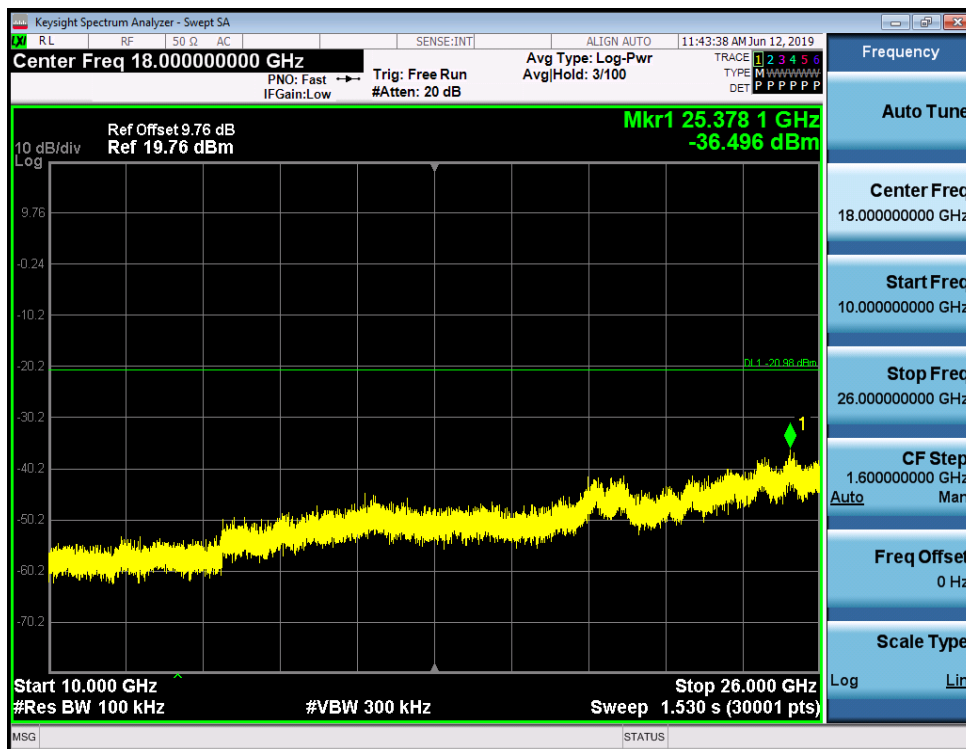


11G_LCH_Graphs

Pref/11G/LCH

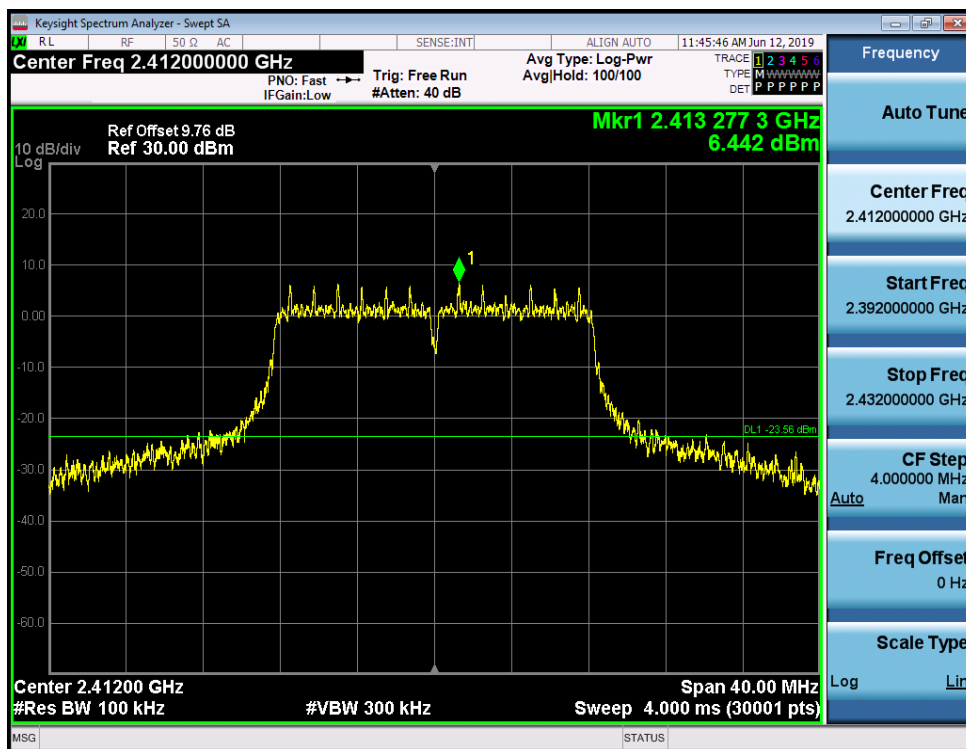


Puw/11G/LCH

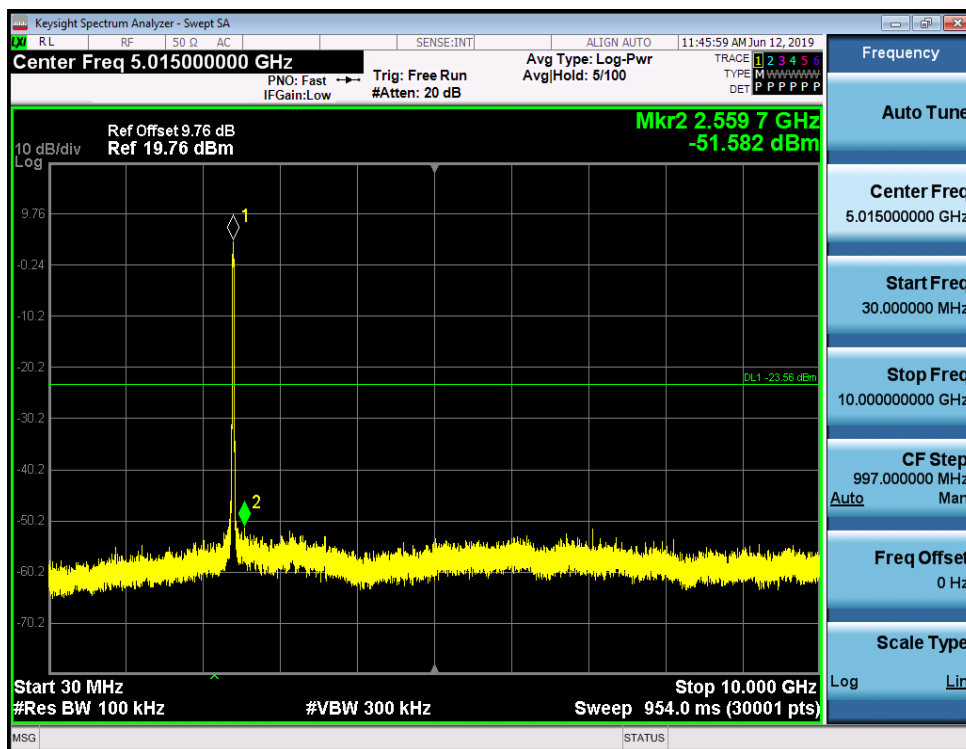





11G_MCH_Graphs

Pref/11G/MCH

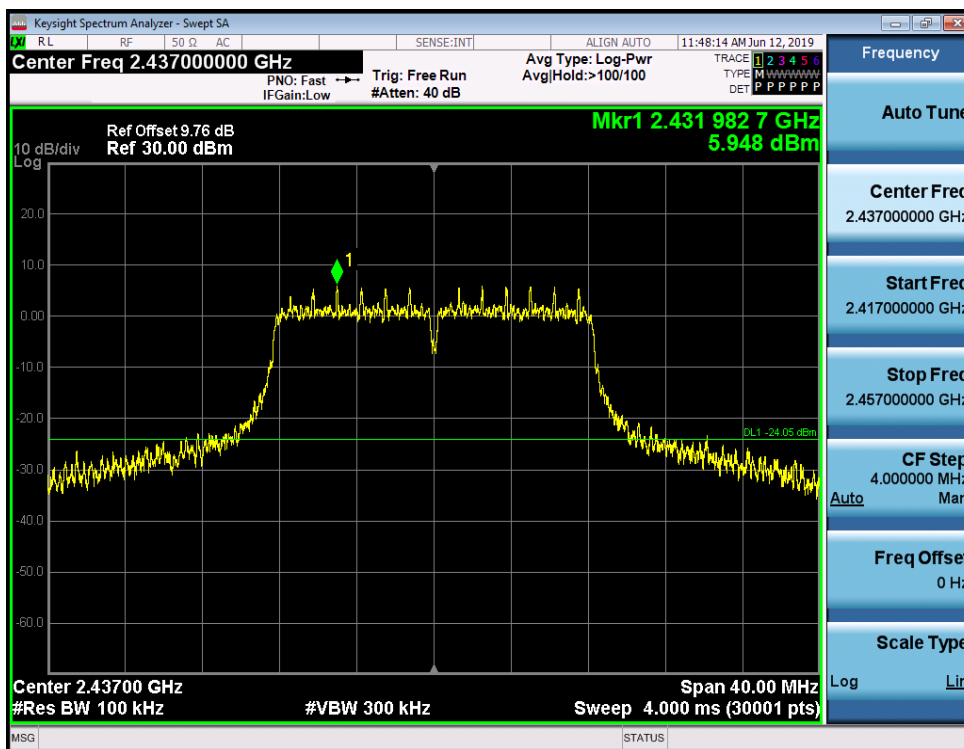


Puw/11G/MCH

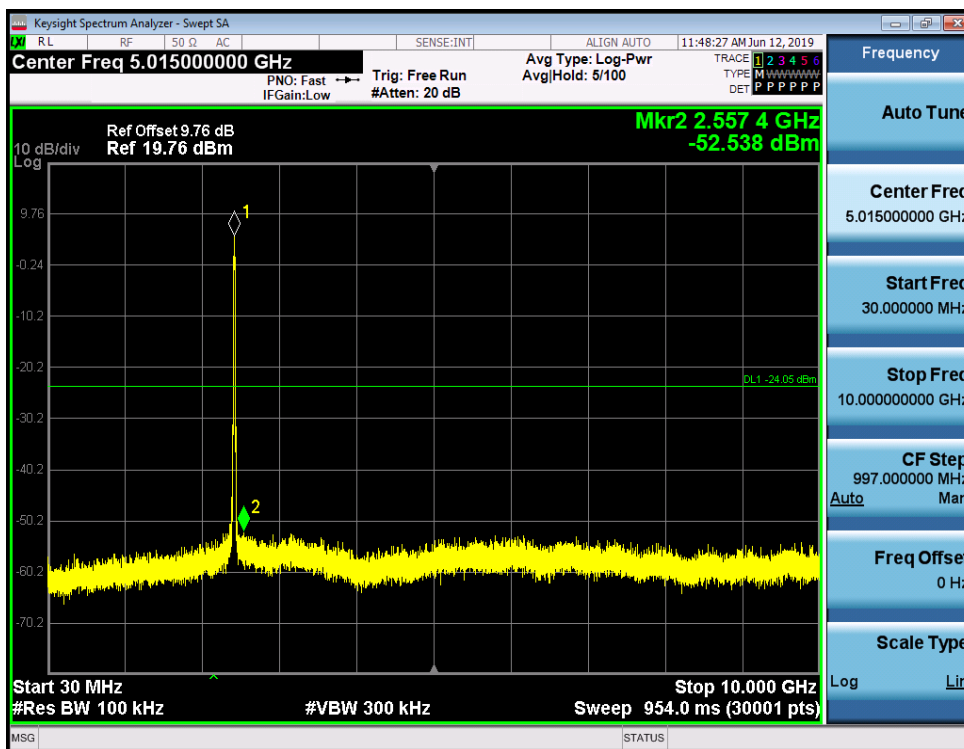

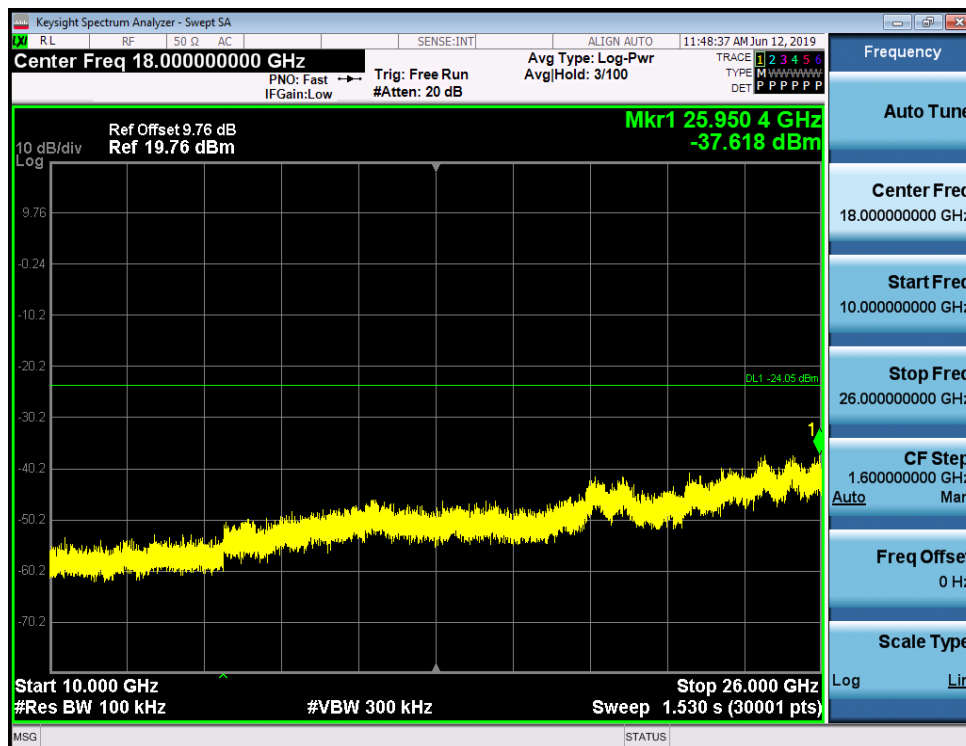



11G_HCH_Graphs

Pref/11G/HCH


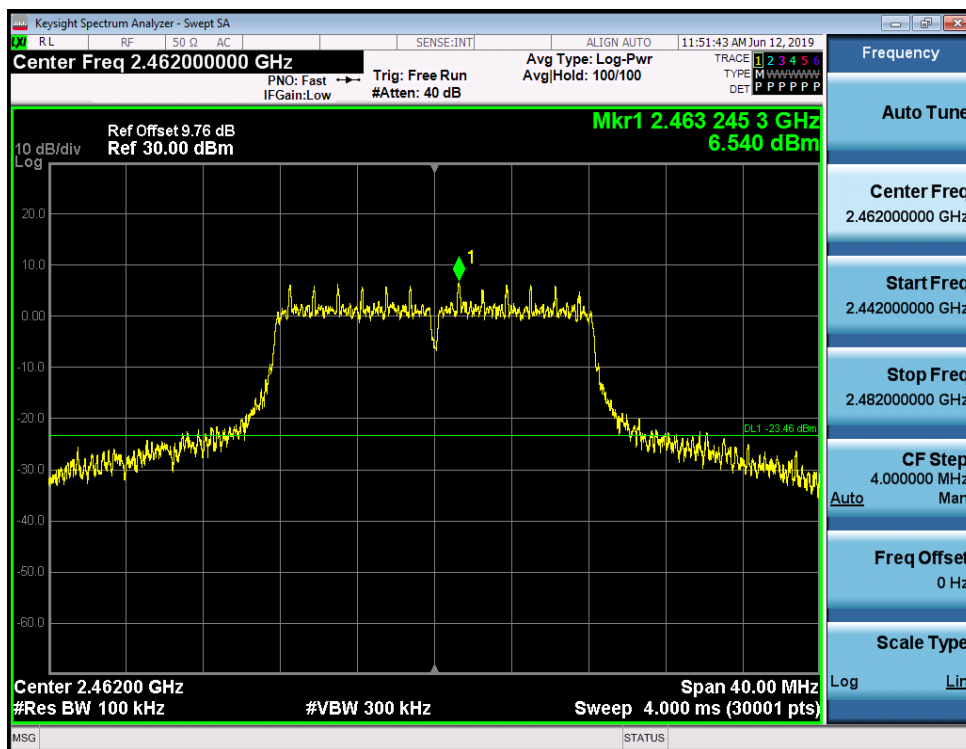



Puw/11G/HCH

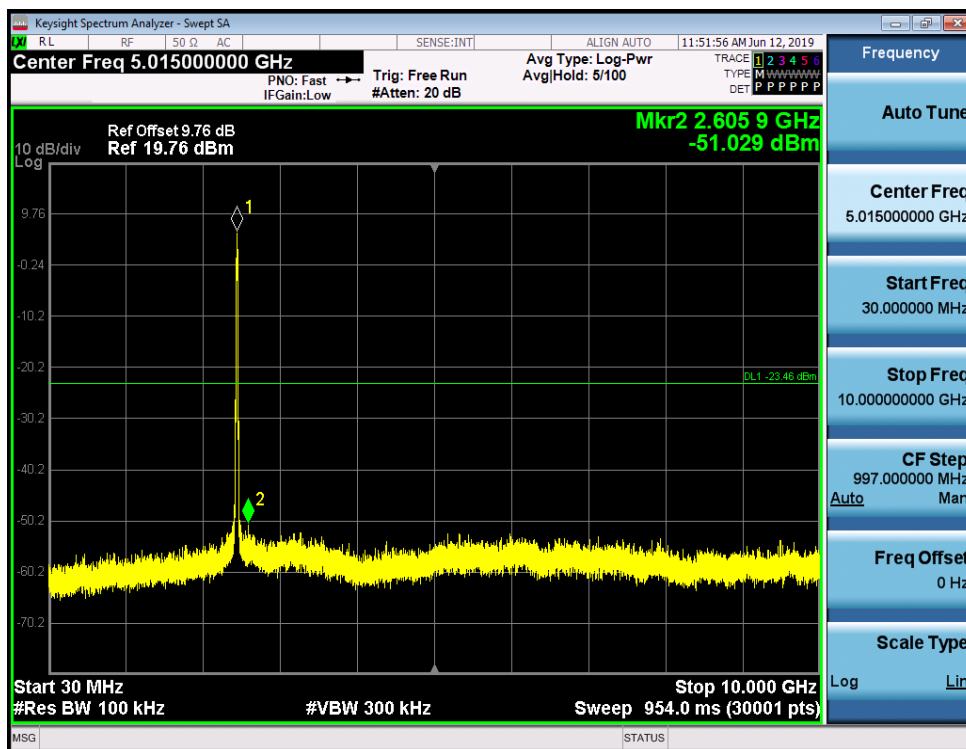

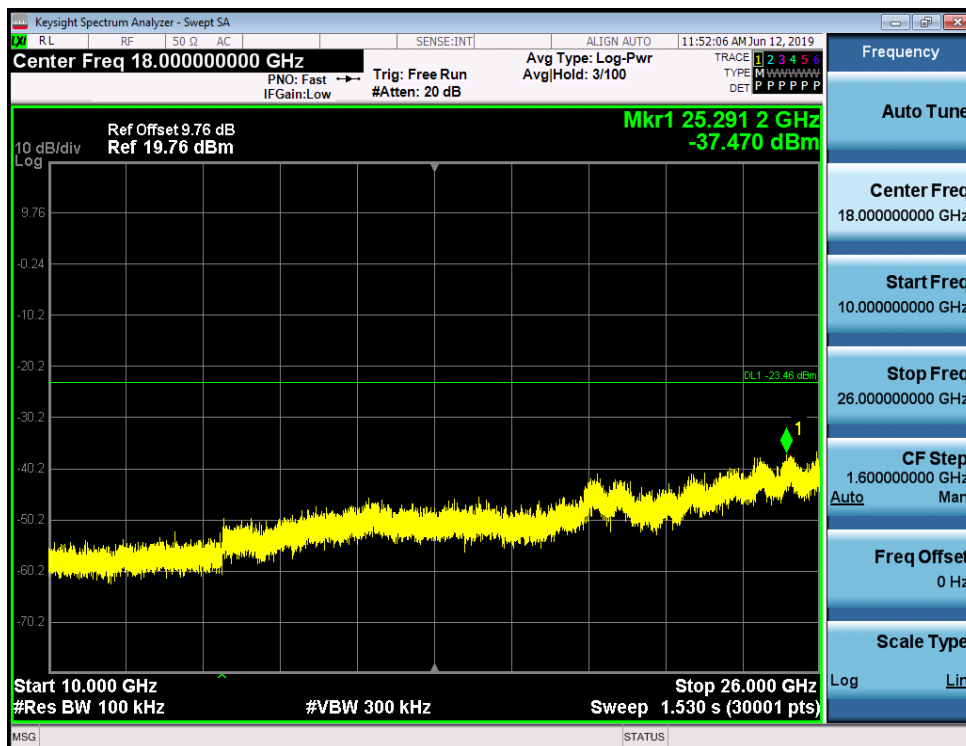


11N20_LCH_Graphs

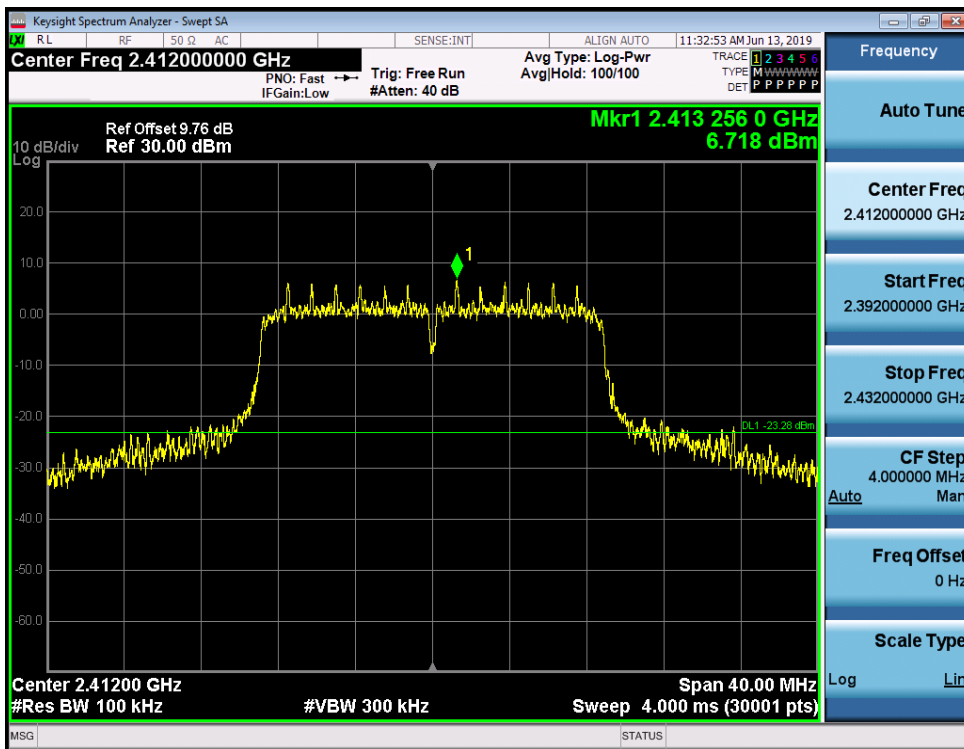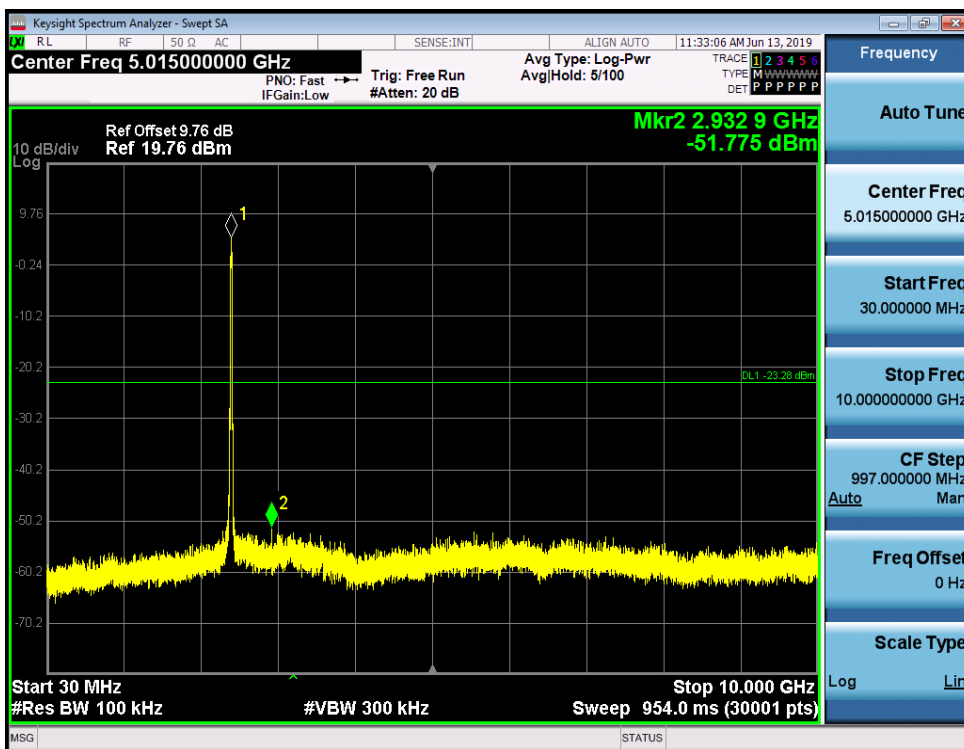Pref/11N20/LC
H

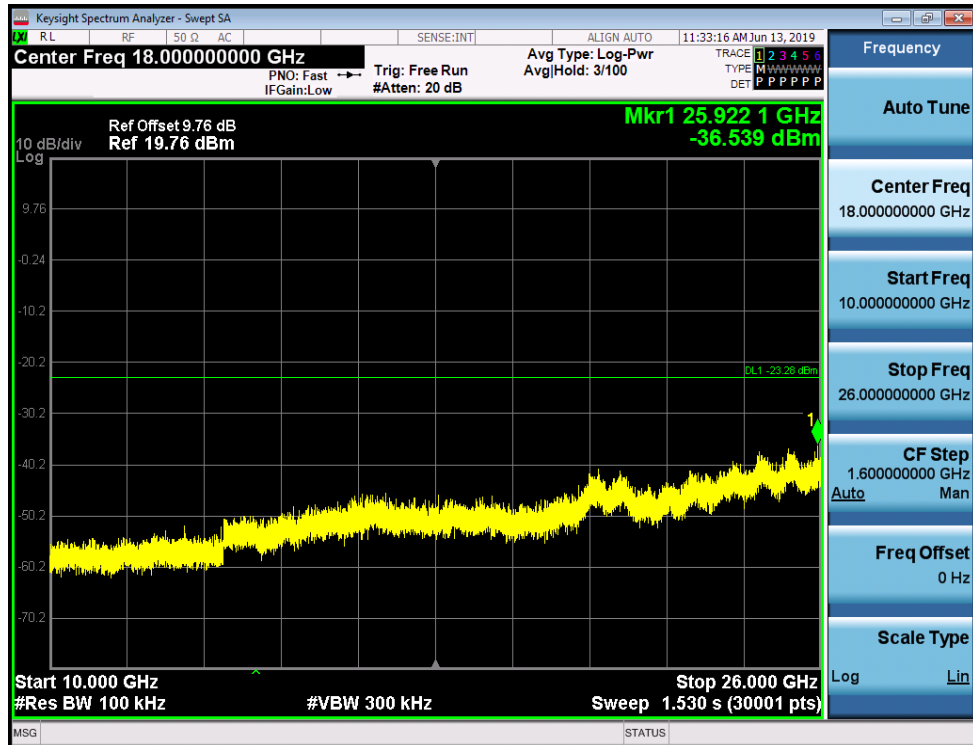Puw/11N20/LC
H


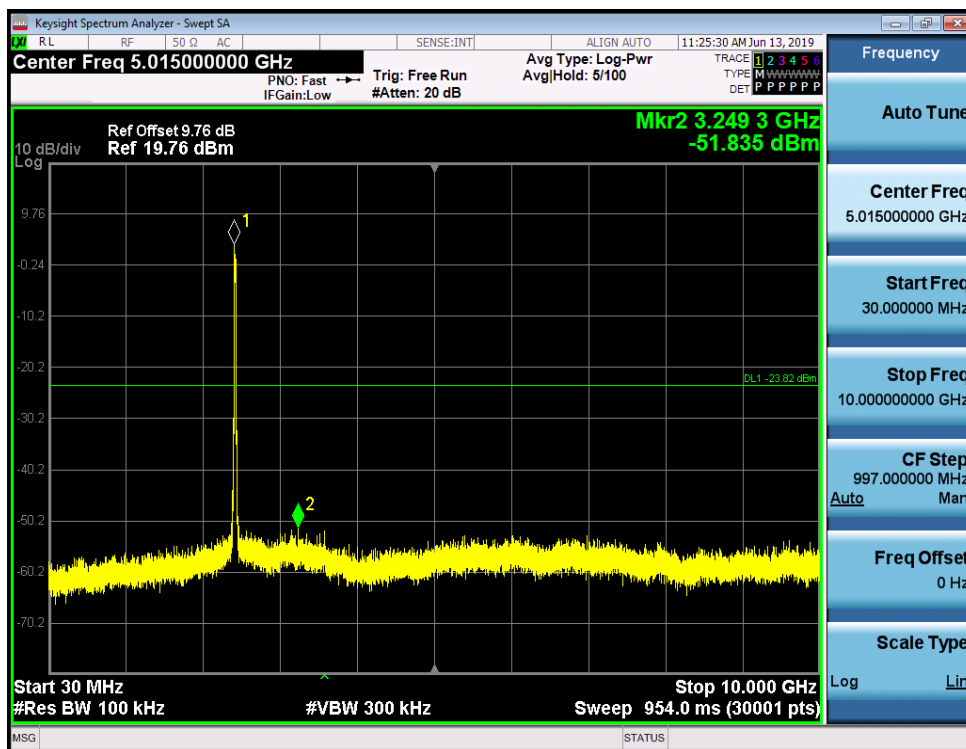



11N20_MCH_Graphs

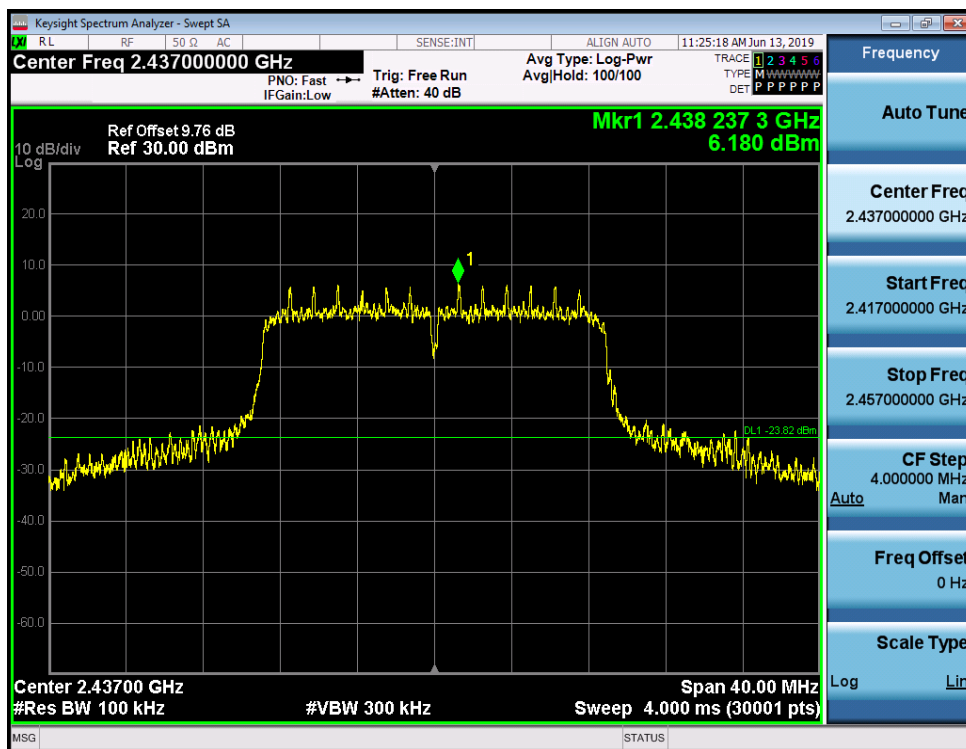Pref/11N20/MCH






Puw/11N20/MCH



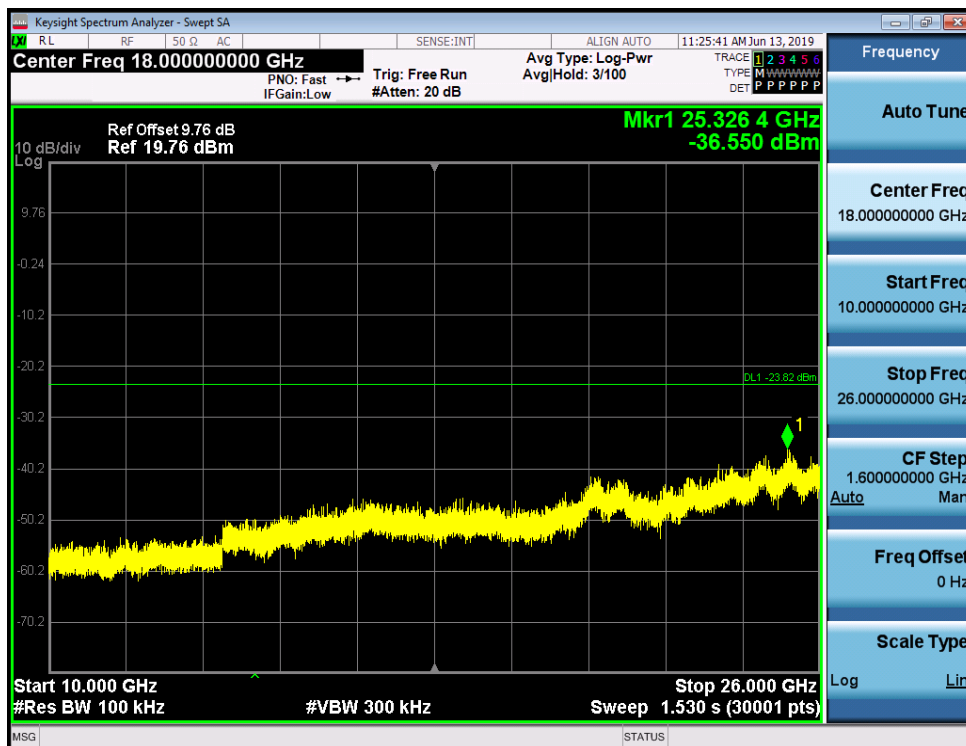

11N20_HCH_Graphs

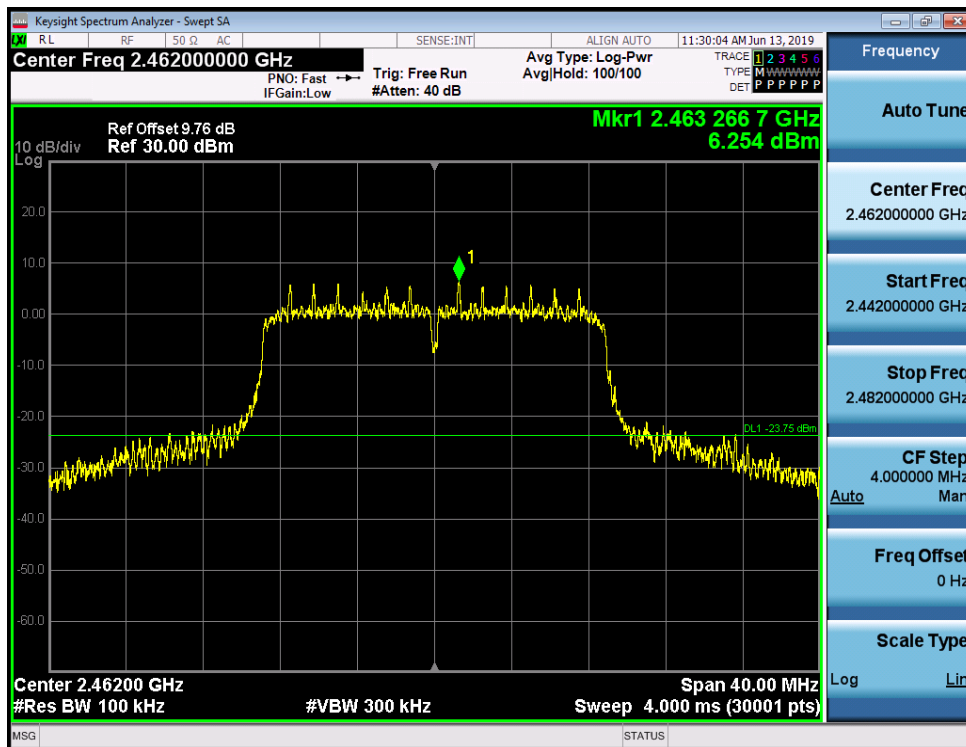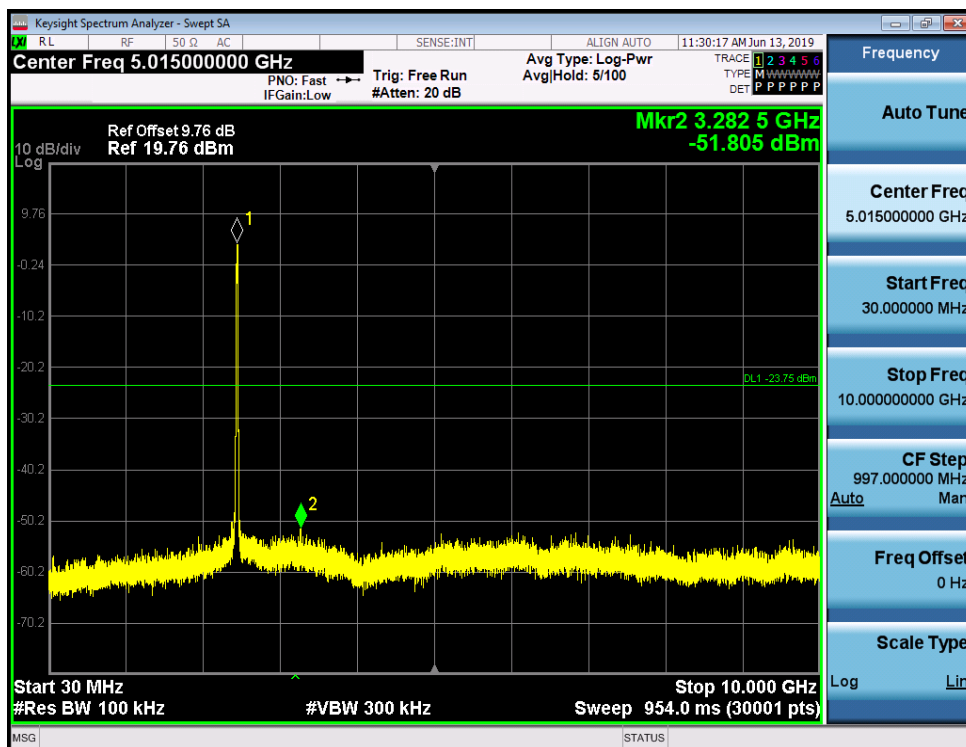Pref/11N20/HC
H

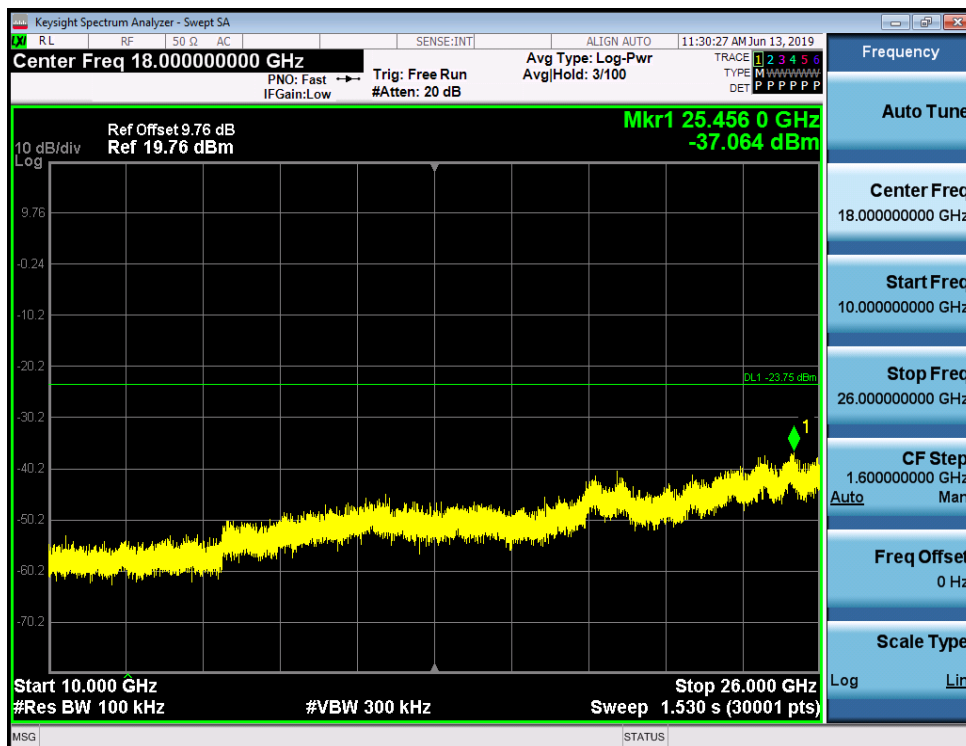Puw/11N20/HC
H




4.5 Radiated Band Edges and Spurious Emission Measurement

4.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

4.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Modulation	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	88.87	4.188	0.24	1KHz
802.11g	86.58	0.6865	1.46	3KHz
802.11n HT20	85.95	0.6511	1.54	3KHz

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


4.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.5.4 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 30

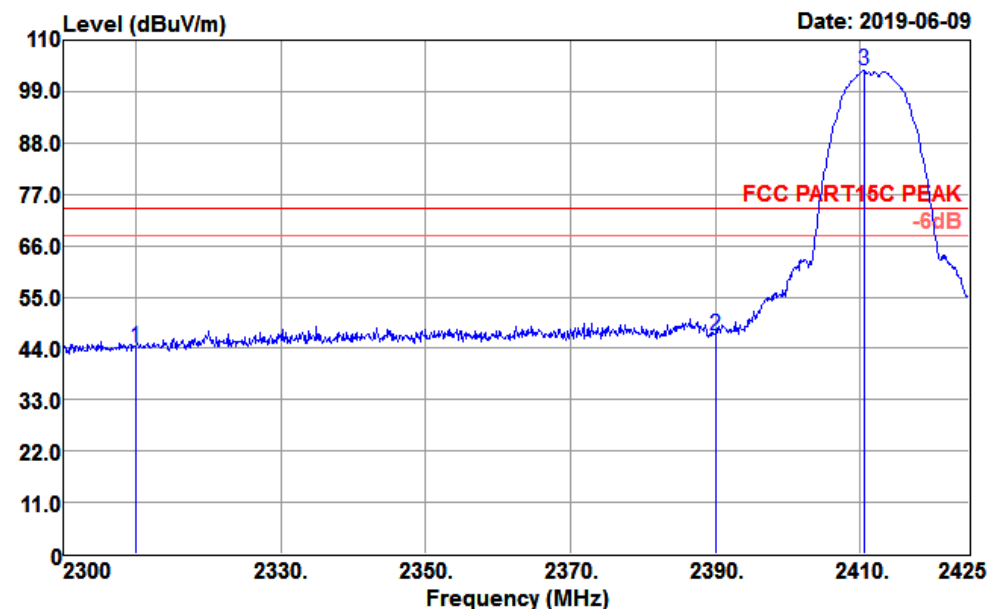

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	49.69	26.91	3.56	35.87	44.29	74.00	-29.71	Peak
2390.000	52.15	27.11	3.64	36.08	46.82	74.00	-27.18	Peak
2410.625	108.86	27.17	3.65	36.13	103.55	74.00	29.55	Peak

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 31

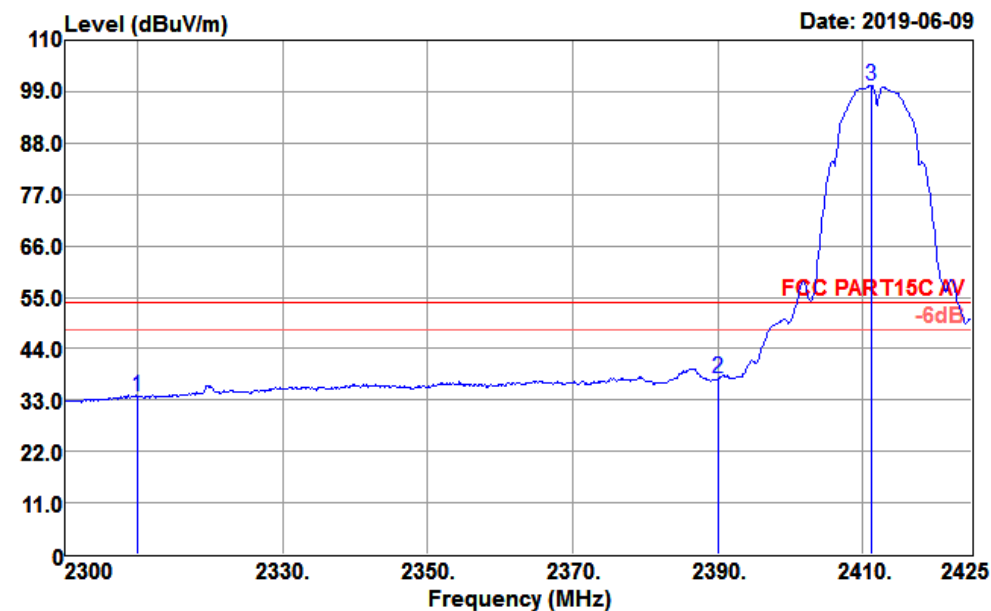

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	39.20	26.91	3.56	35.87	33.80	54.00	-20.20	Average
2390.000	43.08	27.11	3.64	36.08	37.75	54.00	-16.25	Average
2411.250	105.70	27.17	3.65	36.14	100.38	54.00	46.38	Average

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 29

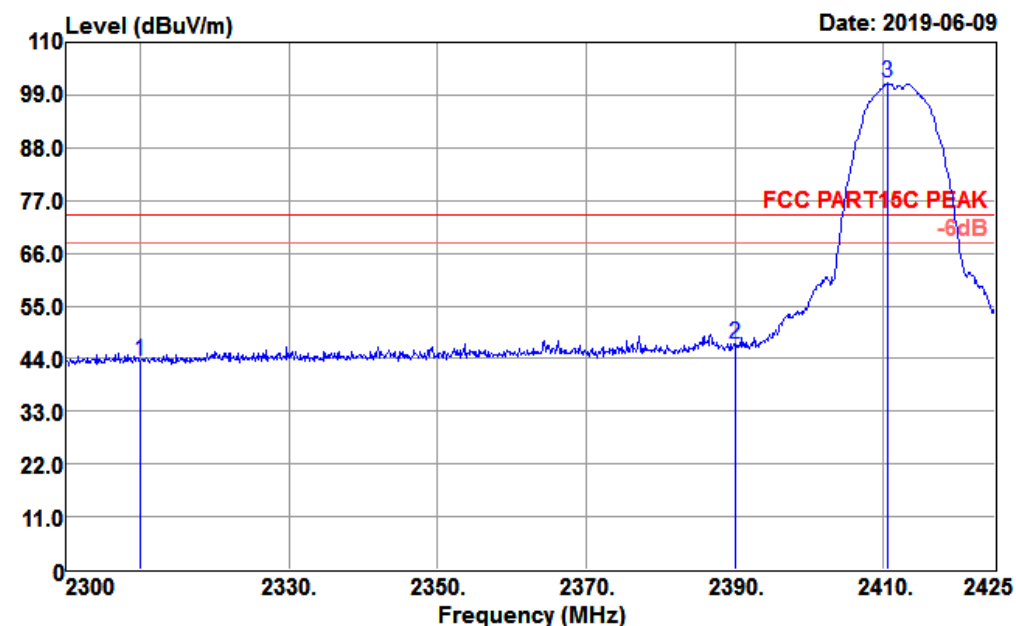

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	48.81	26.91	3.56	35.87	43.41	74.00	-30.59	Peak
2390.000	52.32	27.11	3.64	36.08	46.99	74.00	-27.01	Peak
2410.625	106.72	27.17	3.65	36.13	101.41	74.00	27.41	Peak

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 32

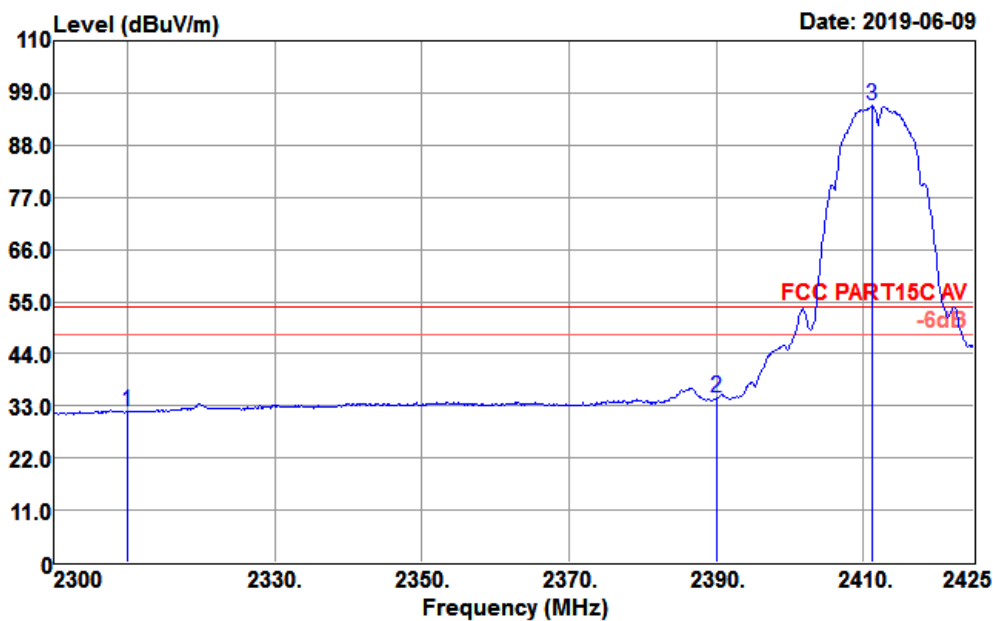

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	37.29	26.91	3.56	35.87	31.89	54.00	-22.11	Average
2390.000	40.07	27.11	3.64	36.08	34.74	54.00	-19.26	Average
2411.250	101.61	27.17	3.65	36.14	96.29	54.00	42.29	Average

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Data: 38

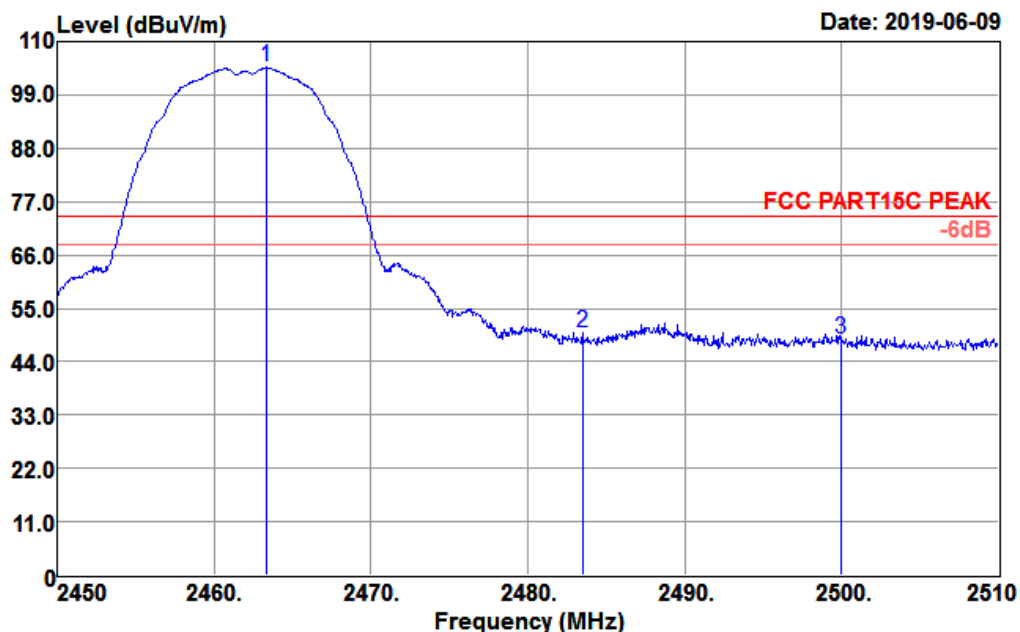

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.320	110.06	27.30	3.67	36.27	104.76	74.00	30.76	Peak
2483.500	55.24	27.36	3.68	36.33	49.95	74.00	-24.05	Peak
2500.000	53.91	27.40	3.68	36.37	48.62	74.00	-25.38	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal

Data: 39

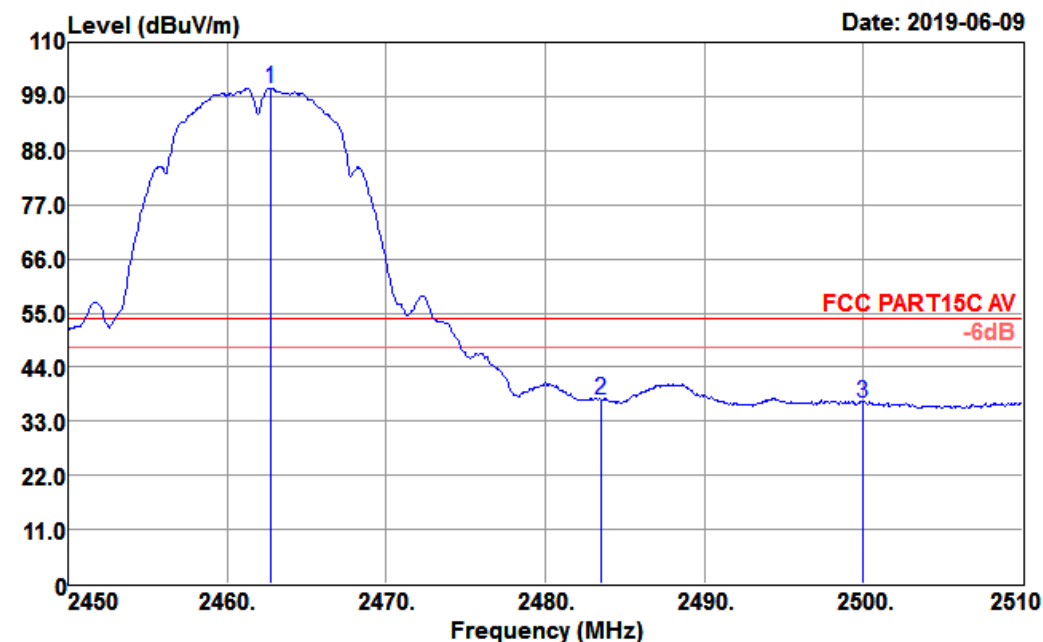


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.780	106.01	27.30	3.67	36.27	100.71	54.00	46.71	Average
2483.500	42.75	27.36	3.68	36.33	37.46	54.00	-16.54	Average
2500.000	42.09	27.40	3.68	36.37	36.80	54.00	-17.20	Average

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Data: 37


Date: 2019-06-09

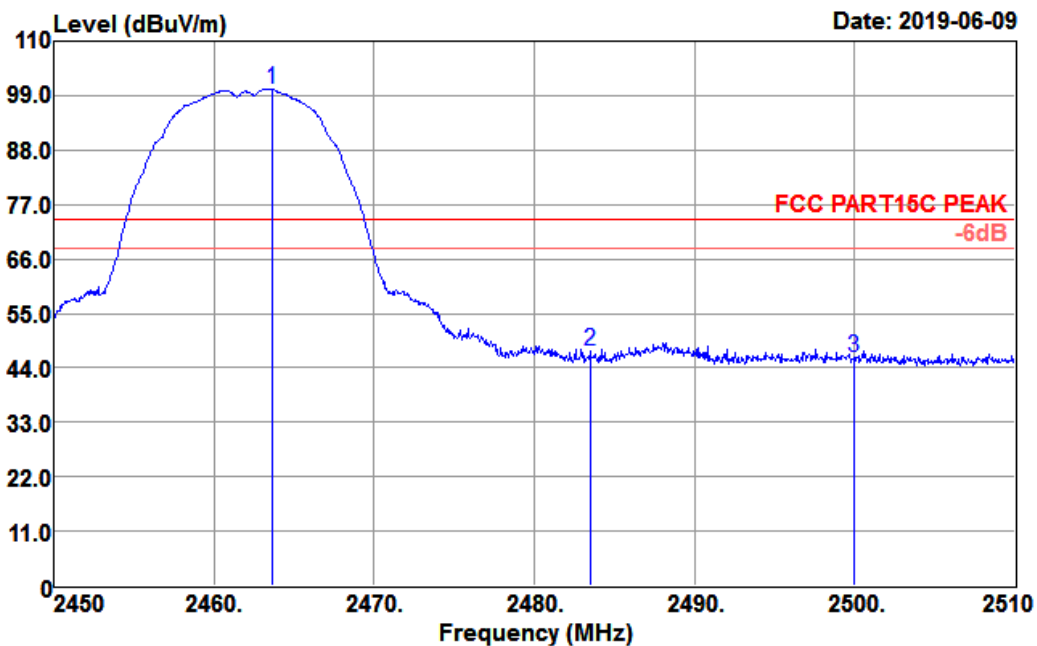

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.620	105.69	27.31	3.67	36.27	100.40	74.00	26.40	Peak
2483.500	52.62	27.36	3.68	36.33	47.33	74.00	-26.67	Peak
2500.000	51.47	27.40	3.68	36.37	46.18	74.00	-27.82	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Data: 40

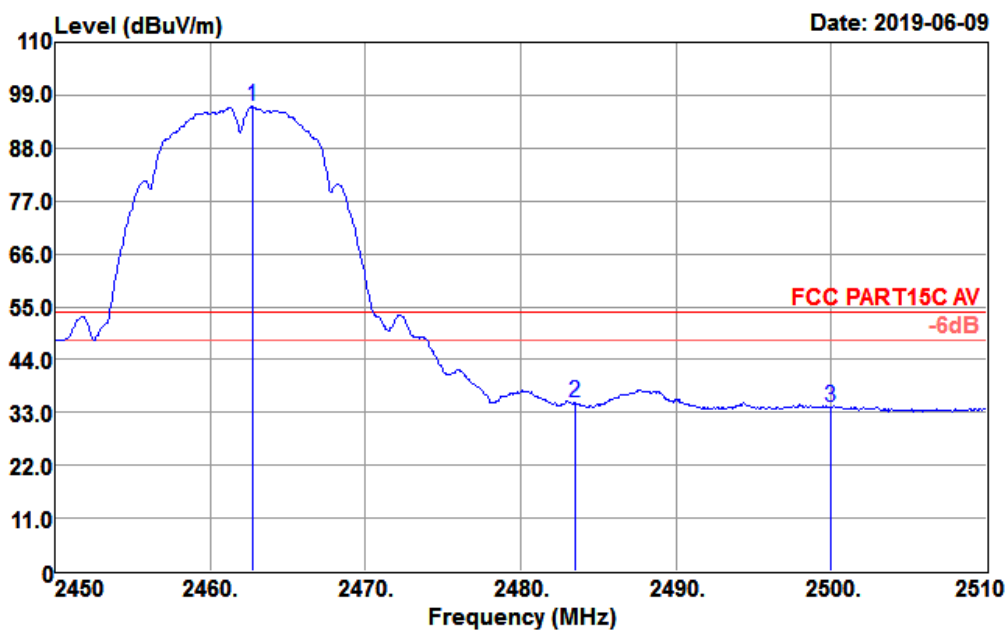

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.780	101.89	27.30	3.67	36.27	96.59	54.00	42.59	Average
2483.480	40.20	27.36	3.68	36.33	34.91	54.00	-19.09	Average
2499.980	39.27	27.40	3.68	36.37	33.98	54.00	-20.02	Average

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 44

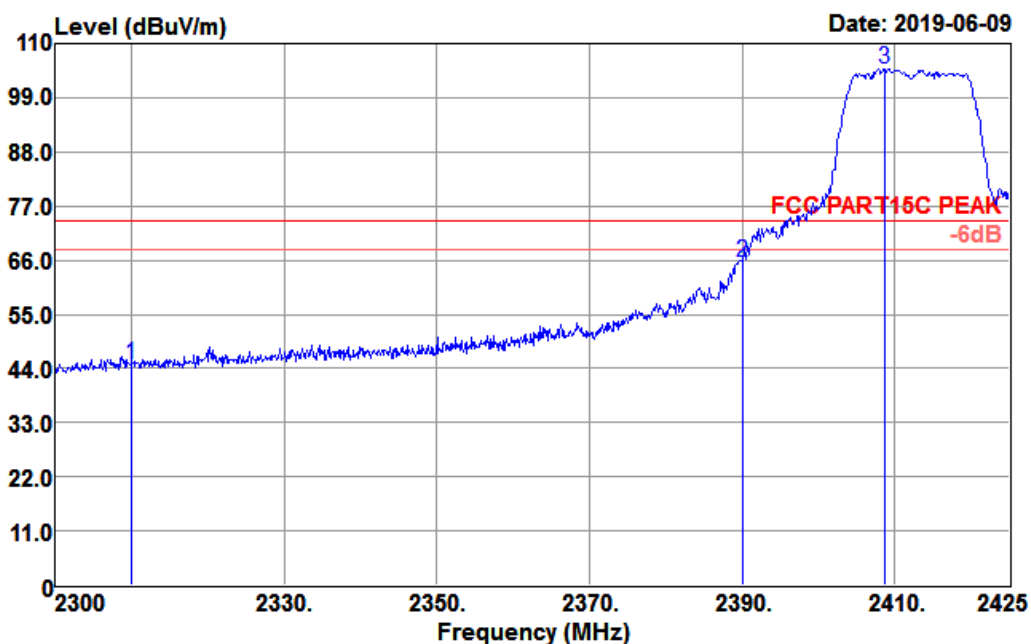

Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBUV/m	Limit level dBUV/m	Over limit dB	Remark
2310.000	50.28	26.91	3.56	35.87	44.88	74.00	-29.12	Peak
2390.000	70.92	27.11	3.64	36.08	65.59	74.00	-8.41	Peak
2408.750	110.10	27.16	3.65	36.13	104.78	74.00	30.78	Peak

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 45

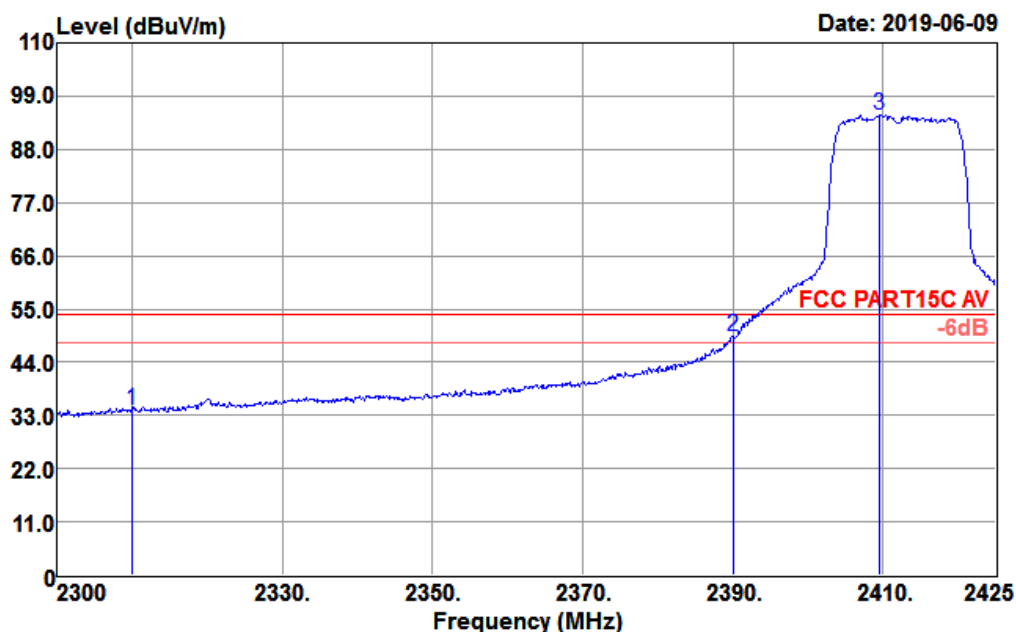

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	39.42	26.91	3.56	35.87	34.02	54.00	-19.98	Average
2390.000	54.51	27.11	3.64	36.08	49.18	54.00	-4.82	Average
2409.625	100.54	27.17	3.65	36.13	95.23	54.00	41.23	Average

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 43

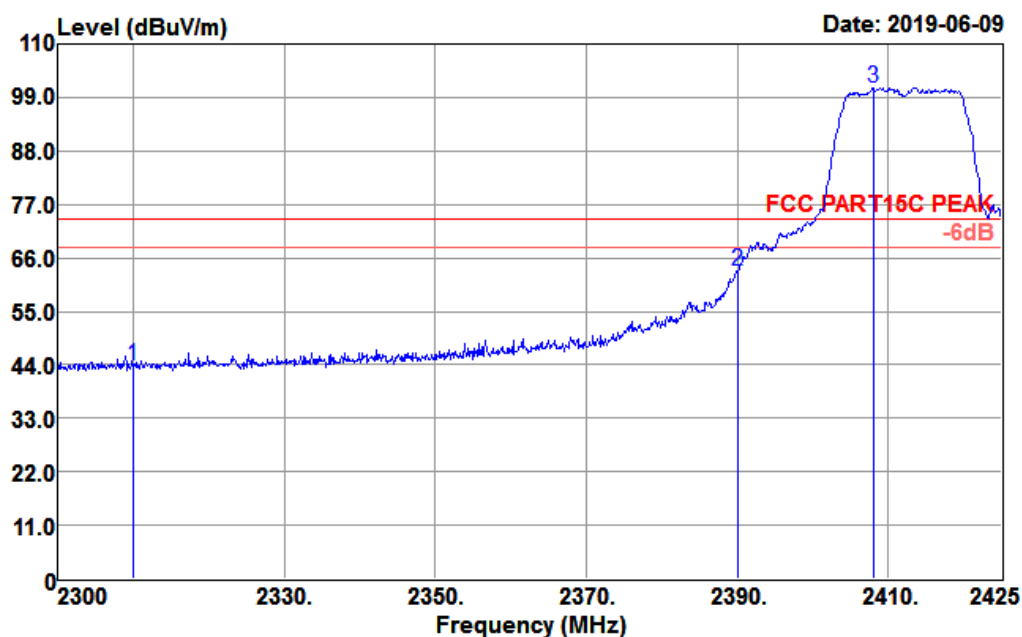

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	49.30	26.91	3.56	35.87	43.90	74.00	-30.10	Peak
2390.000	68.56	27.11	3.64	36.08	63.23	74.00	-10.77	Peak
2408.000	106.35	27.16	3.65	36.13	101.03	74.00	27.03	Peak

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 46

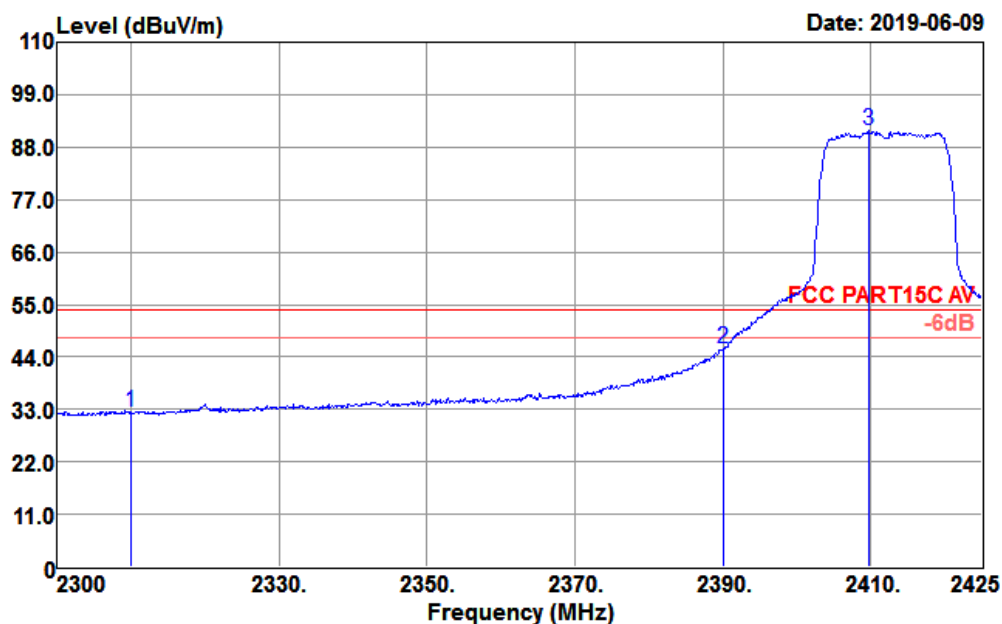

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	37.86	26.91	3.56	35.87	32.46	54.00	-21.54	Average
2390.000	50.96	27.11	3.64	36.08	45.63	54.00	-8.37	Average
2409.750	96.69	27.17	3.65	36.13	91.38	54.00	37.38	Average

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Data: 51

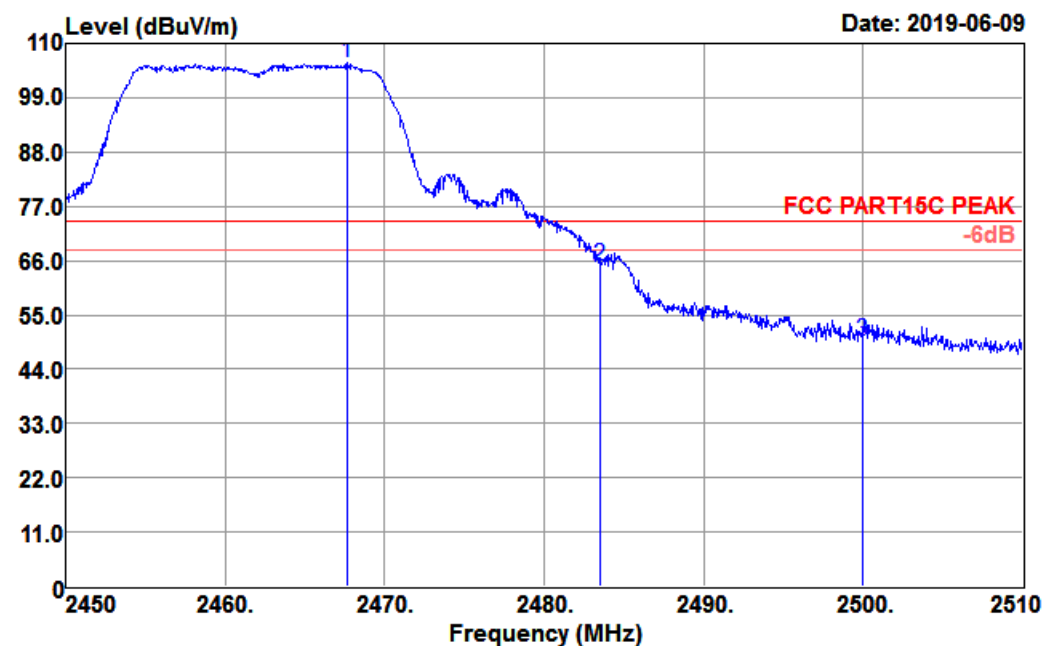

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2467.700	111.28	27.32	3.67	36.28	105.99	74.00	31.99	Peak
2483.500	70.27	27.36	3.68	36.33	64.98	74.00	-9.02	Peak
2500.000	54.94	27.40	3.68	36.37	49.65	74.00	-24.35	Peak

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Data: 53

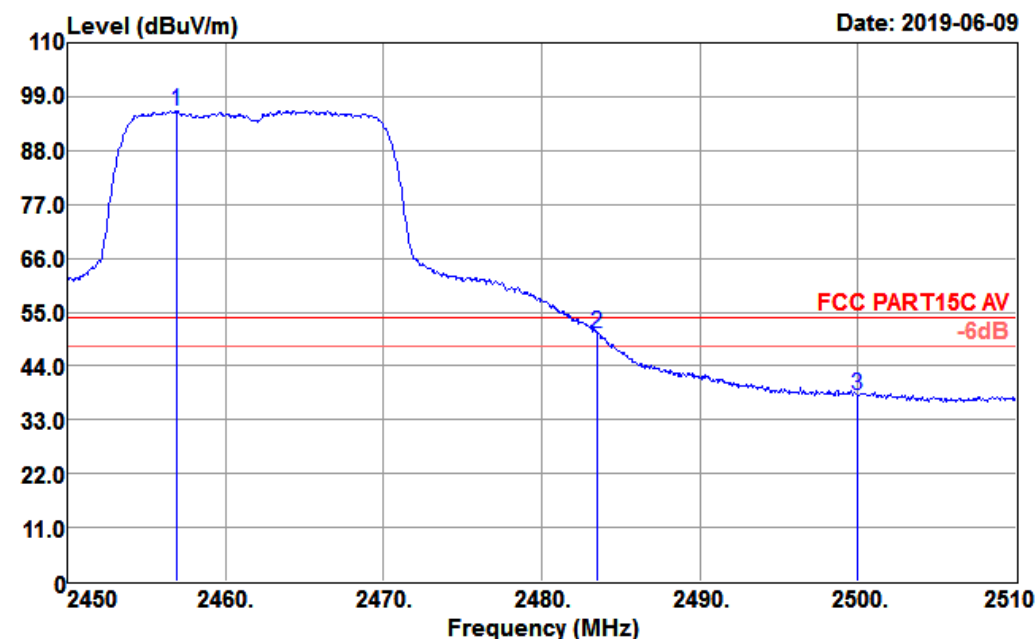

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2456.960	101.44	27.29	3.67	36.26	96.14	54.00	42.14	Average
2483.500	56.00	27.36	3.68	36.33	50.71	54.00	-3.29	Average
2500.000	43.26	27.40	3.68	36.37	37.97	54.00	-16.03	Average

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Data: 52

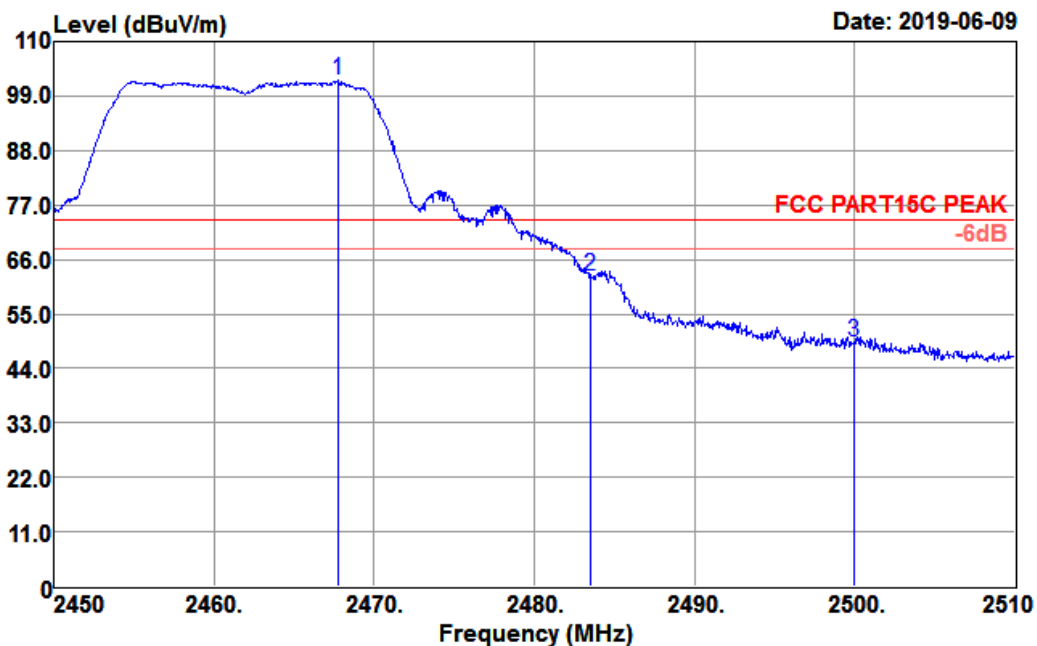

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2467.760	107.44	27.32	3.67	36.28	102.15	74.00	28.15	Peak
2483.500	67.93	27.36	3.68	36.33	62.64	74.00	-11.36	Peak
2500.000	54.50	27.40	3.68	36.37	49.21	74.00	-24.79	Peak

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Data: 54

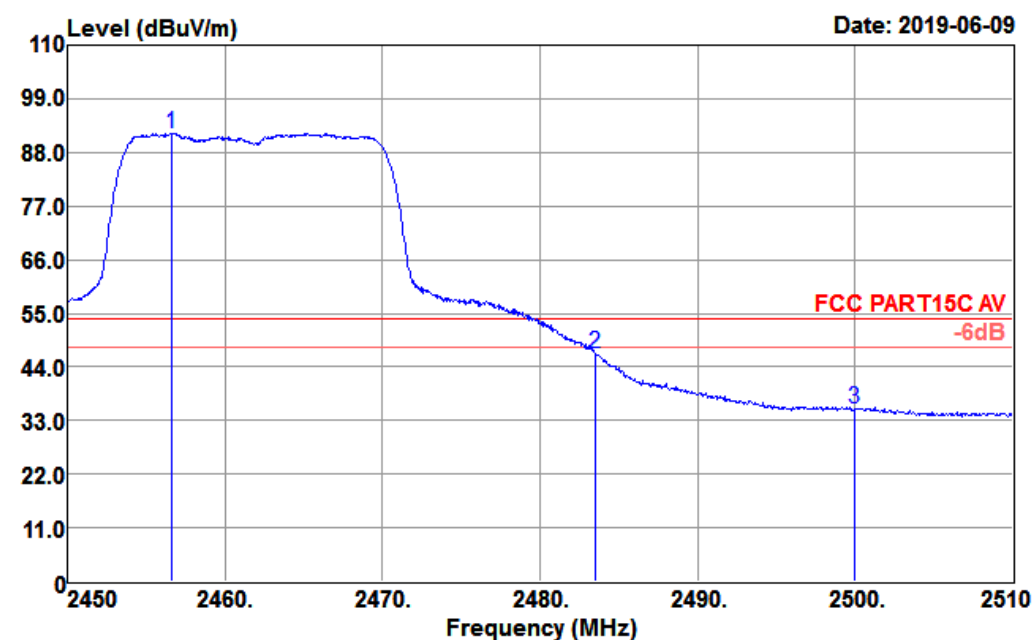

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2456.600	97.18	27.29	3.67	36.26	91.88	54.00	37.88	Average
2483.500	51.93	27.36	3.68	36.33	46.64	54.00	-7.36	Average
2500.000	40.77	27.40	3.68	36.37	35.48	54.00	-18.52	Average

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 84

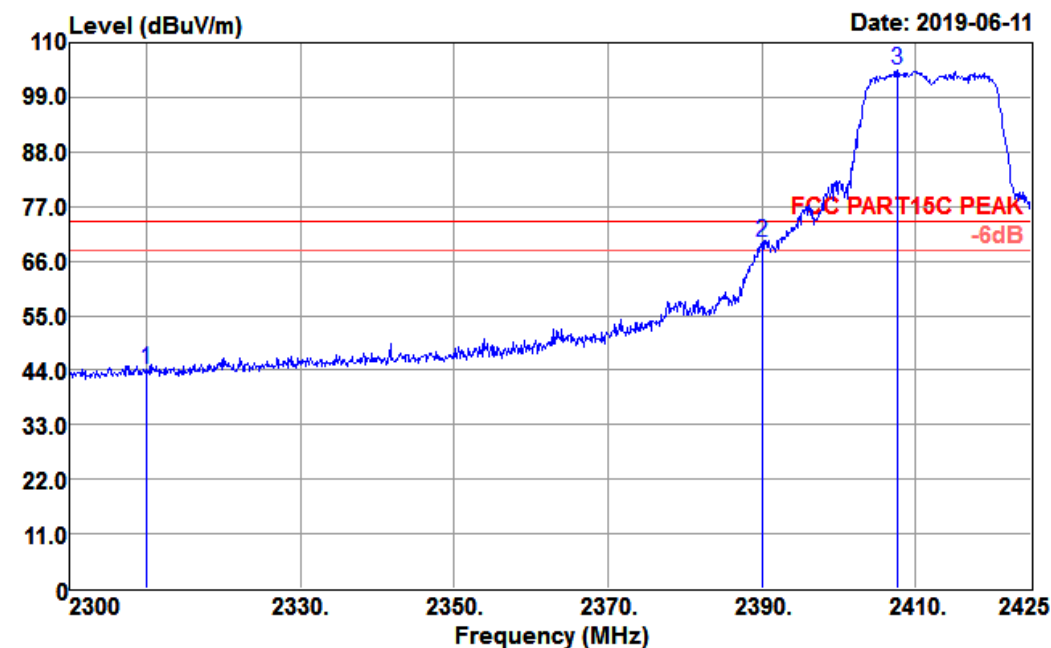

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	49.46	26.91	3.56	35.87	44.06	74.00	-29.94	Peak
2390.000	75.10	27.11	3.64	36.08	69.77	74.00	-4.23	Peak
2407.625	109.75	27.16	3.65	36.13	104.43	74.00	30.43	Peak

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Data: 85

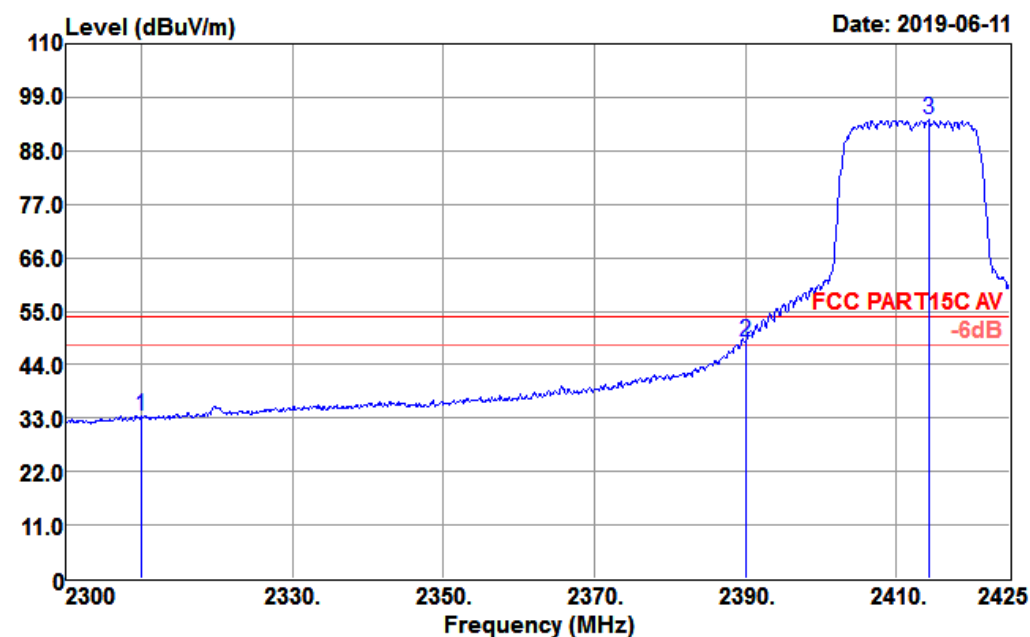

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	38.70	26.91	3.56	35.87	33.30	54.00	-20.70	Average
2390.000	54.10	27.11	3.64	36.08	48.77	54.00	-5.23	Average
2414.250	99.66	27.18	3.65	36.14	94.35	54.00	40.35	Average

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 83

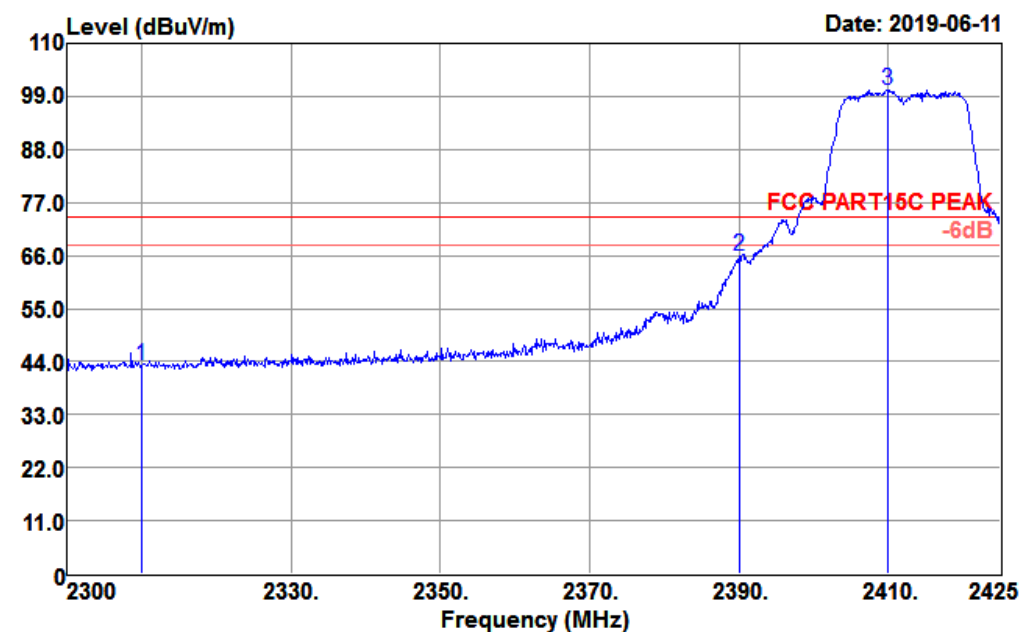

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	48.70	26.91	3.56	35.87	43.30	74.00	-30.70	Peak
2390.000	71.11	27.11	3.64	36.08	65.78	74.00	-8.22	Peak
2409.875	105.59	27.17	3.65	36.13	100.28	74.00	26.28	Peak

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Data: 86

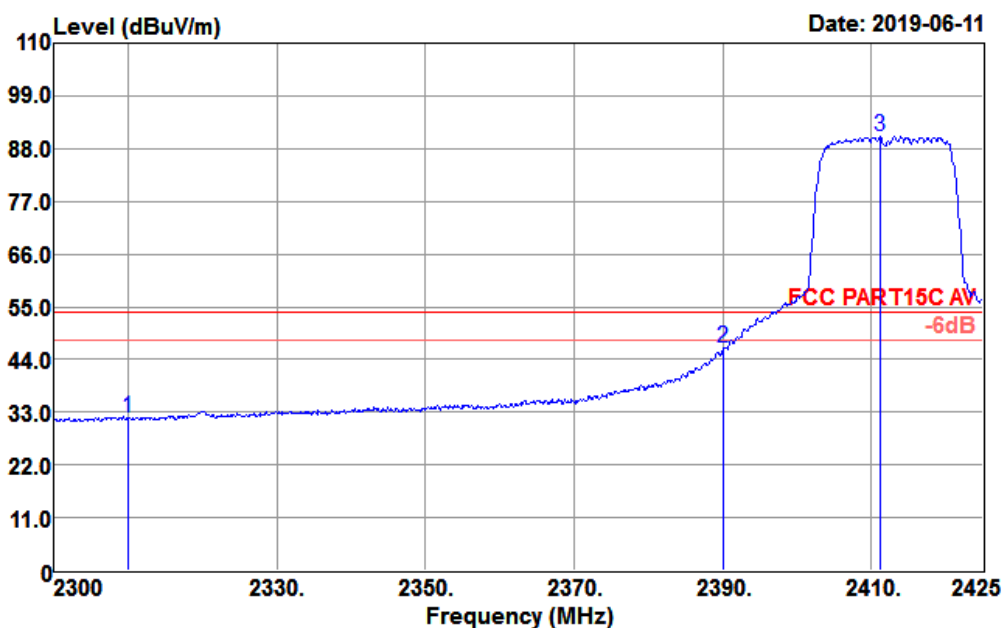

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	37.09	26.91	3.56	35.87	31.69	54.00	-22.31	Average
2390.000	51.70	27.11	3.64	36.08	46.37	54.00	-7.63	Average
2411.250	95.93	27.17	3.65	36.14	90.61	54.00	36.61	Average

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Data: 90

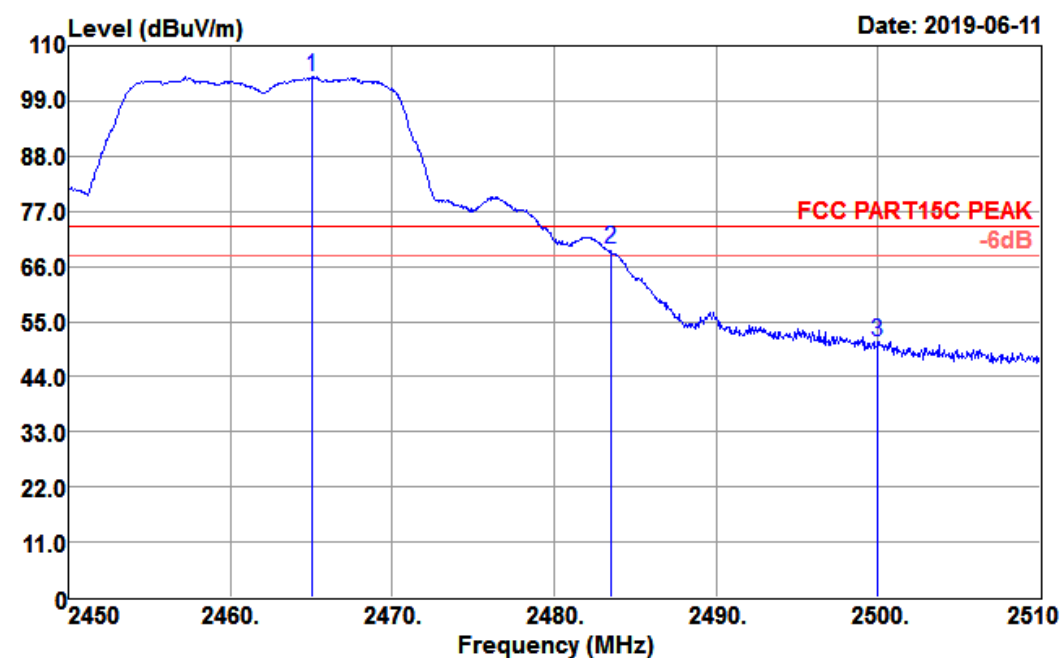

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2465.060	109.15	27.31	3.67	36.28	103.85	74.00	29.85	Peak
2483.500	74.69	27.36	3.68	36.33	69.40	74.00	-4.60	Peak
2500.000	56.30	27.40	3.68	36.37	51.01	74.00	-22.99	Peak

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal

Data: 89

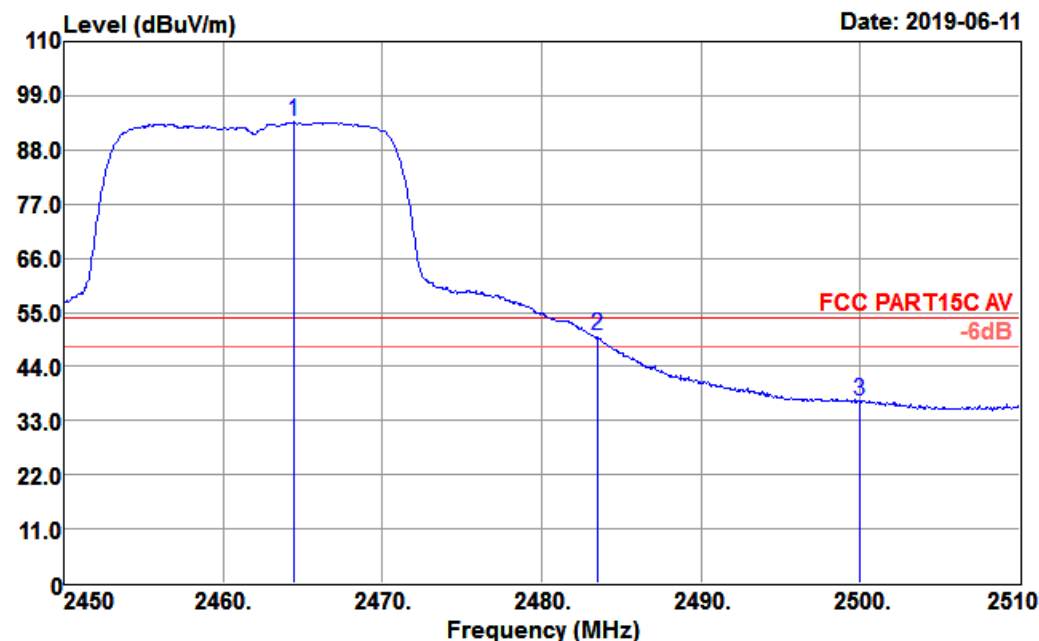


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2464.400	98.93	27.31	3.67	36.28	93.63	54.00	39.63	Average
2483.500	55.59	27.36	3.68	36.33	50.30	54.00	-3.70	Average
2500.000	42.34	27.40	3.68	36.37	37.05	54.00	-16.95	Average

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Data: 91


Date: 2019-06-11

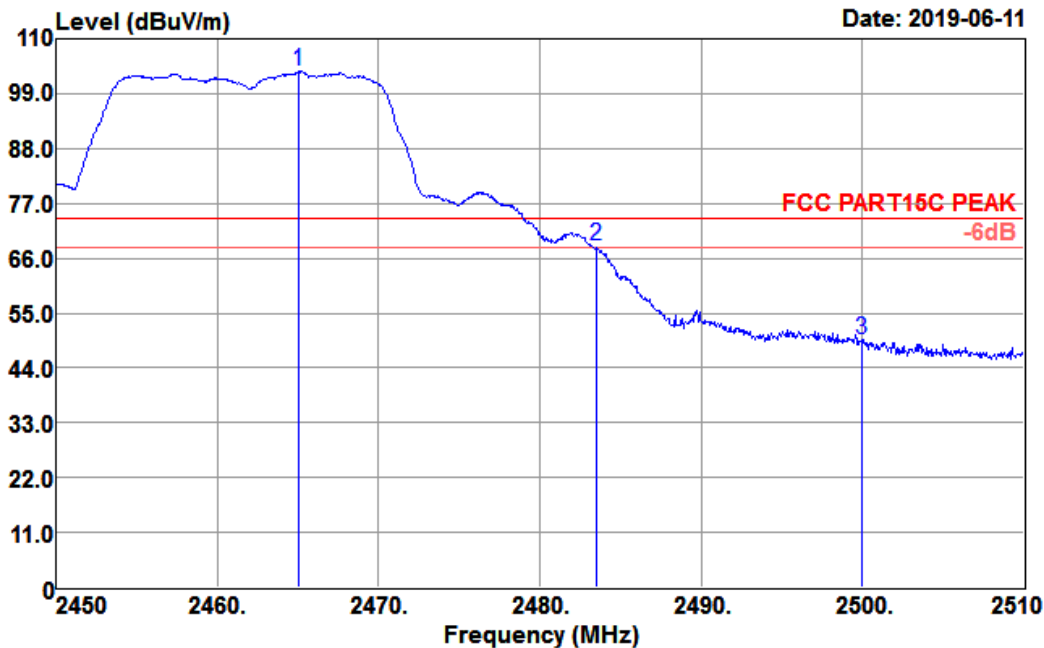

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2465.060	108.75	27.31	3.67	36.28	103.45	74.00	29.45	Peak
2483.500	73.75	27.36	3.68	36.33	68.46	74.00	-5.54	Peak
2500.000	55.07	27.40	3.68	36.37	49.78	74.00	-24.22	Peak

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Julie Deng	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Data: 92

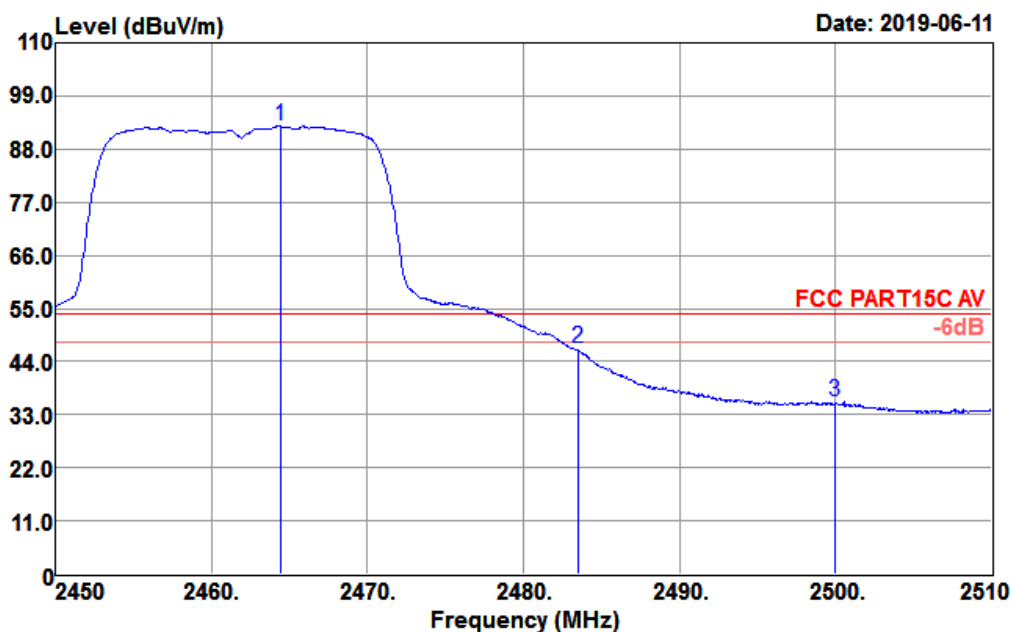

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2464.400	98.04	27.31	3.67	36.28	92.74	54.00	38.74	Average
2483.500	52.02	27.36	3.68	36.33	46.73	54.00	-7.27	Average
2500.000	40.86	27.40	3.68	36.37	35.57	54.00	-18.43	Average