

# FCC Measurement/Technical Report on

## WLAN and Bluetooth module

### JODY-W164-03A

(Core0 measurements are also  
valid for JODY-W164-07A)

FCC ID: XPYJODYW164  
IC: 8595A-JODYW164

**Test Report Reference:** MDE\_UBLOX\_1701\_FCCb

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**

Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

**Geschäftsführer/**

**Managing Directors:**

Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

**Registergericht/registered:**

Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

[www.7layers.com](http://www.7layers.com)

## Table of Contents

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| <b>1</b> | <b>Applied Standards and Test Summary</b>                  | <b>4</b>  |
| 1.1      | Applied Standards                                          | 4         |
| 1.2      | FCC-IC Correlation Table                                   | 5         |
| 1.3      | Measurement Summary / Signatures                           | 6         |
| <b>2</b> | <b>Administrative Data</b>                                 | <b>14</b> |
| 2.1      | Testing Laboratory                                         | 14        |
| 2.2      | Project Data                                               | 14        |
| 2.3      | Applicant Data                                             | 14        |
| 2.4      | Manufacturer Data                                          | 14        |
| <b>3</b> | <b>Test object Data</b>                                    | <b>15</b> |
| 3.1      | General EUT Description                                    | 15        |
| 3.2      | EUT Main components                                        | 16        |
| 3.3      | Ancillary Equipment                                        | 16        |
| 3.4      | Auxiliary Equipment                                        | 17        |
| 3.5      | EUT Setups                                                 | 17        |
| 3.6      | Test Channels and Power Setting                            | 18        |
| 3.7      | Product labelling                                          | 19        |
| <b>4</b> | <b>Test Results</b>                                        | <b>20</b> |
| 4.1      | AC Conducted Emissions                                     | 20        |
| 4.2      | 26 dB Bandwidth                                            | 23        |
| 4.3      | 6 dB Bandwidth                                             | 28        |
| 4.4      | 99 % Bandwidth                                             | 31        |
| 4.5      | Maximum Conducted Output Power                             | 35        |
| 4.6      | Peak Power Spectral Density                                | 44        |
| 4.7      | Undesirable Emissions; General Field Strength Limits       | 52        |
| 4.8      | Band Edge                                                  | 67        |
| 4.9      | Dynamic Frequency Selection                                | 82        |
| <b>5</b> | <b>Test Equipment</b>                                      | <b>85</b> |
| <b>6</b> | <b>Antenna Factors, Cable Loss and Sample Calculations</b> | <b>87</b> |
| 6.1      | LISN R&S ESH3-Z5 (150 kHz – 30 MHz)                        | 87        |
| 6.2      | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)                       | 88        |
| 6.3      | Antenna R&S HL562 (30 MHz – 1 GHz)                         | 89        |
| 6.4      | Antenna R&S HF907 (1 GHz – 18 GHz)                         | 90        |
| 6.5      | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)                   | 91        |
| 6.6      | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)                   | 92        |
| <b>7</b> | <b>Setup Drawings</b>                                      | <b>93</b> |
| <b>8</b> | <b>Measurement Uncertainties</b>                           | <b>94</b> |

## **9 Photo Report**

**94**

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-15 Edition) and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notices "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v02r01, 2017-12-14".

"Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection, 905462 D02 UNII DFS Compliance Procedures New Rules v02, 2016-04-08".

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

## Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

### 1.2 FCC-IC CORRELATION TABLE

#### Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

##### UNII equipment

| Measurement                                                                              | FCC reference                                 | IC reference                                                                                            |
|------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Conducted emissions on AC Mains                                                          | § 15.207                                      | RSS-Gen Issue 4: 8.8                                                                                    |
| Occupied bandwidth                                                                       | § 15.403 (i) (26 dB) /<br>§ 15.407 (e) (6 dB) | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1 (99%)<br>RSS-247 Issue 2: 6.2.4.1 (6 dB)                  |
| Maximum conducted output power                                                           | § 15.407 (a)<br>(1),(2),(3),(4)               | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1, 6.2.4.1                                                  |
| Maximum power spectral density                                                           | § 15.407 (a)<br>(1),(2),(3),(5)               | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1, 6.2.4.1                                                  |
| Transmitter undesirable emissions;<br>General Field Strength Limits,<br>Restricted Bands | § 15.407 (b)<br>§ 15.209 (a)                  | RSS-Gen Issue 4:<br>6.13/8.9/8.10;<br>RSS-247 Issue 2: 3.3/6.2<br>6.2.1.2, 6.2.2.2, 6.2.3.2,<br>6.2.4.2 |
| Frequency stability                                                                      | § 15.407 (g)                                  | RSS-Gen Issue 4: 6.11/8.11                                                                              |
| Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)                       | § 15.407 (h)                                  | RSS-247 Issue 2: 6.2.2.1,<br>6.2.3.1, 6.3                                                               |
| Antenna requirement                                                                      | § 15.203 / 15.204                             | RSS-Gen Issue 4: 8.3                                                                                    |
| Receiver spurious emissions                                                              | –                                             | –                                                                                                       |

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

#### FCC §15.207

AC Conducted Emissions

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Operating mode

worst case

#### Setup

S03\_3\_AD01

#### FCC

Passed

#### IC

Passed

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

#### FCC §15.31, §15.403 (i)

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Radio Technology, Operating Frequency, Subband

#### Setup

#### FCC

#### IC

WLAN a, high, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN a, high, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN a, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN a, high, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN a, low, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN a, low, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN a, low, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN a, low, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN a, mid, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN a, mid, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN a, mid, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN a, mid, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN ac 20 MHz, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN ac 40 MHz, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, low, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, mid, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, mid, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, mid, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN ac 80 MHz, mid, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, high, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, high, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, high, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, low, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, low, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, low, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, low, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, mid, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, mid, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, mid, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN n 20 MHz, mid, U-NII-3

S01\_3\_AA01

Performed

N/A

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.403 (i)**

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN n 40 MHz, high, U-NII-1

**Setup**

S01\_3\_AA01

**FCC**

Performed

**IC**

N/A

WLAN n 40 MHz, high, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, high, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, high, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, low, U-NII-1

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, low, U-NII-2A

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, low, U-NII-2C

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, low, U-NII-3

S01\_3\_AA01

Performed

N/A

WLAN n 40 MHz, mid, U-NII-2C

S01\_3\_AA01

Performed

N/A

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (e)**

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-3

**Setup**

S01\_3\_AA01

**FCC**

Passed

**IC**

Passed

WLAN a, low, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN a, mid, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN ac 80 MHz, mid, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN n 20 MHz, high, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN n 20 MHz, low, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN n 20 MHz, mid, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN n 40 MHz, high, U-NII-3

S01\_3\_AA01

Passed

Passed

WLAN n 40 MHz, low, U-NII-3

S01\_3\_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, IC RSS 247 Ch. 6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-1

**Setup**

S01\_3\_AA01

**FCC**

N/A

**IC**

Performed

WLAN a, high, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN a, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN a, high, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN a, low, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN a, low, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN a, low, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN a, low, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN a, mid, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN a, mid, U-NII-2A

S01\_3\_AA01

N/A

Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, IC RSS 247 Ch.**  
**6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, mid, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN a, mid, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN ac 20 MHz, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN ac 40 MHz, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, low, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, mid, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, mid, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, mid, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN ac 80 MHz, mid, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, high, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, high, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, high, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, high, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, low, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, low, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, low, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, low, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 20 MHz, mid, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, high, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, high, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, high, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, high, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, low, U-NII-1

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, low, U-NII-2A

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, low, U-NII-2C

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, low, U-NII-3

S01\_3\_AA01

N/A

Performed

WLAN n 40 MHz, mid, U-NII-2C

S01\_3\_AA01

N/A

Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-1

S01\_3\_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

| <b>OP-Mode</b>                 | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|--------------------------------|--------------|------------|-----------|
| WLAN a, high, U-NII-2A         | S01_3_AA01   | Passed     | Passed    |
| WLAN a, high, U-NII-2C         | S01_3_AA01   | Passed     | Passed    |
| WLAN a, high, U-NII-3          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-1           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-2A          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-2C          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-3           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-1           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-2A          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-2C          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-3           | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 20 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 40 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, low, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-2C  | S01_3_AA01   | Passed     | N/A       |
| WLAN ac 80 MHz, mid, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, mid, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (a)**  
**(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

|                                | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|--------------------------------|--------------|------------|-----------|
| WLAN a, high, U-NII-1          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, high, U-NII-2A         | S01_3_AA01   | Passed     | Passed    |
| WLAN a, high, U-NII-2C         | S01_3_AA01   | Passed     | Passed    |
| WLAN a, high, U-NII-3          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-1           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-2A          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-2C          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, low, U-NII-3           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-1           | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-2A          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-2C          | S01_3_AA01   | Passed     | Passed    |
| WLAN a, mid, U-NII-3           | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 20 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 40 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, high, U-NII-2C | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, low, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-2C  | S01_3_AA01   | Passed     | N/A       |
| WLAN ac 80 MHz, mid, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-1   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-2A  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-2C  | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-3   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-1    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-2A   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-3    | S01_3_AA01   | Passed     | Passed    |
| WLAN n 40 MHz, mid, U-NII-2C   | S01_3_AA01   | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4); FCC §15.205,  
§15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement range, Subband

|                                                                                 | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------------------------------------------------|--------------|------------|-----------|
| WLAN a, high, 1GHz - 26GHz, U-NII-1                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, high, 1GHz - 26GHz, U-NII-2A                                            | S02_3_AB01   | Passed     | Passed    |
| WLAN a, high, 1GHz - 26GHz, U-NII-2C                                            | S02_3_AB01   | Passed     | Passed    |
| WLAN a, high, 1GHz - 26GHz, U-NII-3                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, high, 9kHz - 30MHz, U-NII-2C                                            | S02_3_AB01   | Passed     | Passed    |
| WLAN a, low, 1GHz - 26GHz, U-NII-1                                              | S02_3_AB01   | Passed     | Passed    |
| WLAN a, low, 1GHz - 26GHz, U-NII-2A                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, low, 1GHz - 26GHz, U-NII-2C                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, low, 1GHz - 26GHz, U-NII-3                                              | S02_3_AB01   | Passed     | Passed    |
| WLAN a, low, 9kHz - 30MHz, U-NII-1                                              | S02_3_AB01   | Passed     | Passed    |
| WLAN a, mid, 1GHz - 26GHz, U-NII-1                                              | S02_3_AB01   | Passed     | Passed    |
| WLAN a, mid, 1GHz - 26GHz, U-NII-2A                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, mid, 1GHz - 26GHz, U-NII-2C                                             | S02_3_AB01   | Passed     | Passed    |
| WLAN a, mid, 1GHz - 26GHz, U-NII-3                                              | S02_3_AB01   | Passed     | Passed    |
| WLAN a, mid, 26GHz - 40GHz, U-NII-1                                             | S02_3_AA01   | Passed     | Passed    |
| WLAN a, mid, 26GHz - 40GHz, U-NII-2A                                            | S02_3_AA01   | Passed     | Passed    |
| WLAN a, mid, 26GHz - 40GHz, U-NII-2C                                            | S02_3_AA01   | Passed     | Passed    |
| WLAN a, mid, 26GHz - 40GHz, U-NII-3                                             | S02_3_AA01   | Passed     | Passed    |
| WLAN a, mid, 30MHz - 1GHz, U-NII-1                                              | S02_3_AC01   | Passed     | Passed    |
| WLAN a, mid, 30MHz - 1GHz, U-NII-2A                                             | S02_3_AC01   | Passed     | Passed    |
| WLAN a, mid, 30MHz - 1GHz, U-NII-2C                                             | S02_3_AC01   | Passed     | Passed    |
| WLAN a, mid, 30MHz - 1GHz, U-NII-3                                              | S02_3_AC01   | Passed     | Passed    |
| WLAN ac 80 MHz, high, 1GHz - 26GHz, U-NII-2C<br>Remark: Radiated only BE tested | S02_3_AC01   | Failed     | Failed    |
| WLAN ac 80 MHz, low, 1GHz - 26GHz, U-NII-2C<br>Remark: Radiated only BE tested  | S02_3_AC01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, 1GHz - 26GHz, U-NII-1<br>Remark: Radiated only BE tested   | S02_3_AC01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, 1GHz - 26GHz, U-NII-2A<br>Remark: Radiated only BE tested  | S02_3_AC01   | Passed     | Passed    |
| WLAN ac 80 MHz, mid, 1GHz - 26GHz, U-NII-3<br>Remark: Radiated only BE tested   | S02_3_AC01   | Passed     | Passed    |
| WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1<br>Remark: Radiated 1-18 GHz tested  | S02_3_AB01   | Passed     | Passed    |
| WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-2A<br>Remark: Radiated 1-18 GHz tested | S02_3_AB01   | Passed     | Passed    |
| WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-2C<br>Remark: Radiated 1-18 GHz tested | S02_3_AB01   | Passed     | Passed    |
| WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-3<br>Remark: Radiated 1-18 GHz tested  | S02_3_AB01   | Passed     | Passed    |
| WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1<br>Remark: Radiated 1-18 GHz tested   | S02_3_AB01   | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4); FCC §15.205,  
§15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement range, Subband

WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-2A  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-2C  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-3  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-2A  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-2C  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-3  
Remark: Radiated 1-18 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-1  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-2A  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-2C  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-3  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-1  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-2A  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-2C  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-3  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

WLAN n 40 MHz, mid, 1GHz - 26GHz, U-NII-2C  
Remark: Radiated 4.5-12.7 GHz tested

S02\_3\_AB01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-2A

S02\_3\_AB01

Passed

Passed

WLAN a, high, U-NII-2C

S02\_3\_AB01

Passed

Passed

WLAN a, high, U-NII-3

S02\_3\_AB01

Passed

Passed

WLAN a, low, U-NII-1

S02\_3\_AB01

Passed

Passed

WLAN a, low, U-NII-2C

S02\_3\_AB01

Passed

Passed

WLAN a, low, U-NII-3

S02\_3\_AB01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN ac 80 MHz, high, U-NII-2C

WLAN ac 80 MHz, low, U-NII-2C

WLAN ac 80 MHz, mid, U-NII-1

WLAN ac 80 MHz, mid, U-NII-2A

WLAN ac 80 MHz, mid, U-NII-3

WLAN n 20 MHz, high, U-NII-2A

WLAN n 20 MHz, high, U-NII-2C

WLAN n 20 MHz, high, U-NII-3

WLAN n 20 MHz, low, U-NII-1

WLAN n 20 MHz, low, U-NII-2C

WLAN n 20 MHz, low, U-NII-3

WLAN n 40 MHz, high, U-NII-2A

WLAN n 40 MHz, high, U-NII-2C

WLAN n 40 MHz, high, U-NII-3

WLAN n 40 MHz, low, U-NII-1

WLAN n 40 MHz, low, U-NII-2C

WLAN n 40 MHz, low, U-NII-3

**Setup**

**FCC**

**IC**

S02\_3\_AC01

Passed

Passed

S02\_3\_AC01

Passed

Passed

S02\_3\_AC01

Passed

Passed

S02\_3\_AC01

Passed

Passed

S02\_3\_AC01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

S02\_3\_AB01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, §15.407 (h)**

Dynamic Frequency Selection

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

**Setup**

**FCC**

**IC**

WLAN ac 80 MHz normal connection

S01\_3\_AA01

Passed

Passed

N/A: Not applicable

N/P: Not performed



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

*M. Kullik*

(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik

*D. Gall*

(responsible for testing and report)  
Dipl.-Ing. Daniel Gall

## 2 ADMINISTRATIVE DATA

### 2.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the ISED and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik  
Report Template Version: 2018-01-10

### 2.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2018-05-18  
Testing Period: 2017-11-08 to 2018-02-26

### 2.3 APPLICANT DATA

Company Name: u-blox AG  
Address: Zürcherstrasse 68  
8800 Thalwil  
Switzerland  
Contact Person: Mr. Filip Kruzela

### 2.4 MANUFACTURER DATA

Company Name: Please see applicant data  
Address:  
Contact Person:

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of Device product description | The EUT is a module supporting WLAN in the 2.4 GHz and 5 GHz bands as well as Bluetooth (BT) 4.2 including Bluetooth Low Energy (BT LE)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Product name                       | JODY-W164-03A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Type                               | JODY-W164-03A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Declared EUT data by the supplier  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Voltage Type                       | DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Voltage Level                      | 3.3 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Tested Modulation Type             | WLAN: Mode a: OFDM Modulation, 6Mbps<br>Mode n: OFDM Modulation, MCS 0 (20 / 40 MHz)<br>Mode ac: OFDM Modulation, MCS 0 (20 / 40 / 80 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Specific product description       | <p>The JODY-W1 is a compact automotive grade module that provides Wi-Fi, Bluetooth, and Bluetooth low energy communication. The JODY-W164-03A module can be operated in the following modes:</p> <p>Wi-Fi 2x2 MIMO 802.11n/ac in the 5 GHz band</p> <p>Wi-Fi 1x1 802.11ac in 2.4 / 5 GHz real simultaneous dual band</p> <p>Dual-mode Bluetooth v4.2, can be operated fully simultaneous with both the Wi-Fi modes</p> <p>It is equipped with two antenna pins connected to two SMA antenna connectors on the evaluation board.</p> <p>Maximum supported band width in 2.4 GHz WLAN mode: 20 MHz, 5 GHz WLAN mode: 80 MHz</p> |
| Ports of the device                | DC Power Supply<br>Antenna ports<br>Signal ports                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Antennas                           | The EUT has two 50 Ohm antenna ports. No antennas are provided, an antenna gain of 2dBi is assumed for evaluation of test results.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Special software used for testing  | The test modes were set using scripts that were run on a board computer with linux operating system provided by the applicant.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| DFS capability                     | Slave without radar detection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

### 3.2 EUT MAIN COMPONENTS

| Sample Name      | Sample Code   | Description                |
|------------------|---------------|----------------------------|
| EUT 3A           | DE1015081aa01 | Module on evaluation board |
| Sample Parameter | Value         |                            |
| Serial No.       | 001           |                            |
| HW Version       | 01            |                            |
| SW Version       | P8.1          |                            |
| Comment          |               |                            |

| Sample Name      | Sample Code   | Description                |
|------------------|---------------|----------------------------|
| EUT 3B           | DE1015081ab01 | Module on evaluation board |
| Sample Parameter | Value         |                            |
| Serial No.       | 002           |                            |
| HW Version       | 01            |                            |
| SW Version       | P8.1          |                            |
| Comment          |               |                            |

| Sample Name      | Sample Code   | Description                |
|------------------|---------------|----------------------------|
| EUT 3C           | DE1015081ac01 | Module on evaluation board |
| Sample Parameter | Value         |                            |
| Serial No.       | 003           |                            |
| HW Version       | 01            |                            |
| SW Version       | P8.1          |                            |
| Comment          |               |                            |

| Sample Name      | Sample Code   | Description                |
|------------------|---------------|----------------------------|
| EUT 3D           | DE1015081ad01 | Module on evaluation board |
| Sample Parameter | Value         |                            |
| Serial No.       | 004           |                            |
| HW Version       | 01            |                            |
| SW Version       | P8.1          |                            |
| Comment          |               |                            |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device           | Details<br>(Manufacturer, Type Model, OUT Code) | Description                                                                                 |
|------------------|-------------------------------------------------|---------------------------------------------------------------------------------------------|
| Evaluation Board | UBLOX, REV. B, - , -                            | Board the EUT is mounted to, providing ports to the EUT (DC, Antennas, wired communication) |

### 3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device                           | Details (Manufacturer, HW, SW, S/N)                           | Description                                                      |
|----------------------------------|---------------------------------------------------------------|------------------------------------------------------------------|
| AC/DC power supply (115 V 60 Hz) | PeakTech, -, -, 081062045                                     | PeakTech 6005D                                                   |
| DFS Master                       | UBLOX Emmy-W163, 03, 15.68.7.p62-15.29.7.p62, 632000013740100 | DFS Master for DFS tests, FCC ID: XPYEMMYW163, IC:8595A-EMMYW163 |

### 3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup      | Combination of EUTs                                        | Description and Rationale                        |
|------------|------------------------------------------------------------|--------------------------------------------------|
| S01_3_AA01 | EUT 3A, Evaluation Board                                   | Representative setup Conducted testing           |
| S02_3_AB01 | EUT 3B,                                                    | Representative setup Radiated Emissions          |
| S02_3_AC01 | EUT 3C,                                                    | Representative setup Radiated Emissions          |
| S03_3_AD01 | EUT 3D, Evaluation Board, AC/DC power supply (115 V 60 Hz) | Representative setup AC conducted emissions test |
| S04_3_AA01 | EUT 3A, Evaluation Board, DFS Master                       | DFS test setup                                   |

### 3.6 TEST CHANNELS AND POWER SETTING

Test Channels:

| U-NII-Subband 1<br>5150 - 5250 MHz |      |      | U-NII-Subband 2A<br>5250 - 5350 MHz |      |      | U-NII-Subband 2C<br>5470 - 5725 MHz |      |                       | U-NII-Subband 3<br>5725 - 5850 MHz |      |      | Nom.<br>BW |
|------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|-----------------------|------------------------------------|------|------|------------|
| low                                | mid  | high | low                                 | mid  | high | low                                 | mid  | high                  | low                                | mid  | high | 20 MHz     |
| 36                                 | 40   | 48   | 52                                  | 60   | 64   | 100/104 <sup>2)</sup>               | 116  | 140/144 <sup>1)</sup> | 149                                | 157  | 165  | Ch.-No.    |
| 5180                               | 5200 | 5240 | 5260                                | 5300 | 5320 | 5500/5520                           | 5580 | 5700/5720             | 5745                               | 5785 | 5825 | MHz        |
| low                                | mid  | high | low                                 | mid  | high | low                                 | mid  | high                  | low                                | mid  | high | 40 MHz     |
| 38                                 | -    | 46   | 54                                  | -    | 62   | 102 <sup>2)</sup>                   | 110  | 134/142 <sup>1)</sup> | 151                                | -    | 159  | Ch.-No.    |
| 5190                               | -    | 5230 | 5270                                | -    | 5310 | 5510                                | 5550 | 5690/5710             | 5755                               | -    | 5795 | MHz        |
| low                                | mid  | high | low                                 | mid  | high | low                                 | mid  | high                  | low                                | mid  | high | 80 MHz     |
| -                                  | 42   | -    | -                                   | 58   | -    | 106                                 | 122  | 138                   | -                                  | 155  | -    | Ch.-No.    |
| -                                  | 5210 | -    | -                                   | 5290 | -    | 5530                                | 5610 | 5690                  | -                                  | 5775 | -    | MHz        |

1)The lower channel is applicable for a/n mode, the higher channel for ac mode ("straddle" channels acc. KDB 789033)

2)Since the power of the second lowest channel is higher than the power of the lowest channel, the second lowest was also tested for some test cases.

Power Levels:

The power levels to be used were reduced at the end of testing by the applicant. Since the higher power is worst case, the tests were not repeated with the lower power settings.

Power Setting in EUT Script used for all tests except Band edge conducted (not to be used in final product):

#### 20 MHz Channel

| Channel No.         | 36   | 40   | 44   | 48   | 52   | 56   | 60   | 64   | 100  | 104  | 108  | 112  | 116  | 120  | 124  | 128  | 132  | 136  | 140  | 144  | 149  | 153  | 157  | 161  | 165  |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Channel freq. [MHz] | 5180 | 5200 | 5220 | 5240 | 5260 | 5280 | 5300 | 5320 | 5500 | 5520 | 5540 | 5560 | 5580 | 5600 | 5620 | 5640 | 5660 | 5680 | 5700 | 5720 | 5745 | 5765 | 5785 | 5805 | 5825 |
| WLAN mode a         | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 13   | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 17   | 17   | 17   | 17   | 17   | 17   |
| WLAN mode n         | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 13   | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 17   | 17   | 17   | 17   | 17   | 17   |
| WLAN mode ac        | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 13   | 13   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 15   | 17   | 17   | 17   | 17   | 17   | 17   |

#### 40 MHz Channel

| Channel No.         | 38   | 46   | 54   | 62   | 102  | 110  | 118  | 126  | 134  | 142  | 151  | 159  |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Channel freq. [MHz] | 5190 | 5230 | 5270 | 5310 | 5510 | 5550 | 5590 | 5630 | 5670 | 5710 | 5755 | 5795 |
| WLAN mode n         | 10   | 13   | 13   | 12   | 12   | 15   | 15   | 15   | 15   | 15   | 17   | 17   |
| WLAN mode ac        | 10   | 13   | 13   | 12   | 12   | 15   | 15   | 15   | 15   | 15   | 17   | 17   |

#### 80 MHz Channel

| Channel No.         | 42   | 58   | 106  | 122  | 138  | 155  |
|---------------------|------|------|------|------|------|------|
| Channel freq. [MHz] | 5210 | 5290 | 5530 | 5610 | 5690 | 5775 |
| WLAN mode ac        | 10   | 10   | 12   | 12   | 15   | 17   |

Power Setting in EUT Script used for Band edge conducted (power levels of final product):

**20 MHz Channel**

|                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Channel No.         | 36   | 40   | 44   | 48   | 52   | 56   | 60   | 64   | 100  | 104  | 108  | 112  | 116  | 120  | 124  | 128  | 132  | 136  | 140  | 144  | 149  | 153  | 157  | 161  | 165  |
| Channel freq. [MHz] | 5180 | 5200 | 5220 | 5240 | 5260 | 5280 | 5300 | 5320 | 5500 | 5520 | 5540 | 5560 | 5580 | 5600 | 5620 | 5640 | 5660 | 5680 | 5700 | 5720 | 5745 | 5765 | 5785 | 5805 | 5825 |
| WLAN mode a         | 12   | 14   | 14   | 14   | 14   | 14   | 14   | 12   | 11   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 17   | 17   | 17   | 17   | 17   |
| WLAN mode n         | 12   | 14   | 14   | 14   | 14   | 14   | 14   | 12   | 11   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 17   | 17   | 17   | 17   | 17   |
| WLAN mode ac        | 12   | 14   | 14   | 14   | 14   | 14   | 14   | 12   | 11   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 14   | 17   | 17   | 17   | 17   | 17   |

**40 MHz Channel**

|                     |      |      |      |      |      |      |      |      |      |      |      |      |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Channel No.         | 38   | 46   | 54   | 62   | 102  | 110  | 118  | 126  | 134  | 142  | 151  | 159  |
| Channel freq. [MHz] | 5190 | 5230 | 5270 | 5310 | 5510 | 5550 | 5590 | 5630 | 5670 | 5710 | 5755 | 5795 |
| WLAN mode n         | 10   | 13   | 13   | 12   | 10   | 14   | 14   | 14   | 14   | 14   | 17   | 17   |
| WLAN mode ac        | 10   | 13   | 13   | 12   | 10   | 14   | 14   | 14   | 14   | 14   | 17   | 17   |

**80 MHz Channel**

|                     |      |      |      |      |      |      |
|---------------------|------|------|------|------|------|------|
| Channel No.         | 42   | 58   | 106  | 122  | 138  | 155  |
| Channel freq. [MHz] | 5210 | 5290 | 5530 | 5610 | 5690 | 5775 |
| WLAN mode ac        | 10   | 10   | 9    | 12   | 12   | 15   |

### 3.7 PRODUCT LABELLING

#### 3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

#### 3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

#### 4.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

##### **Step 1: Preliminary scan**

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

##### **Step 2: Final measurement**

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### 4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

| Frequency (MHz) | QP Limits (dBμV) | AV Limits (dBμV) |
|-----------------|------------------|------------------|
| 0.15 – 0.5      | 66 - 56          | 56 - 46          |
| 0.5 – 5         | 56               | 46               |
| 5 – 30          | 60               | 50               |

#### 4.1.3 TEST PROTOCOL


Temperature: 24 °C  
Air Pressure: 986 hPa  
Humidity: 37 %

| Power line | Frequency [MHz] | Measured value QP [dBμV] | Measured value AV [dBμV] | QP Limit [dBμV] | AV Limit [dBμV] | Margin QP [dB] | Margin AV [dB] |
|------------|-----------------|--------------------------|--------------------------|-----------------|-----------------|----------------|----------------|
| N          | -               | -                        | -                        | -               | -               | > 20           | > 20           |
| L          | -               | -                        | -                        | -               | -               | > 20           | > 20           |

Remark: Measured at 120 V 60 Hz input of lab power supply, WLAN 5 GHz, CH 48

#### 4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Core 0:

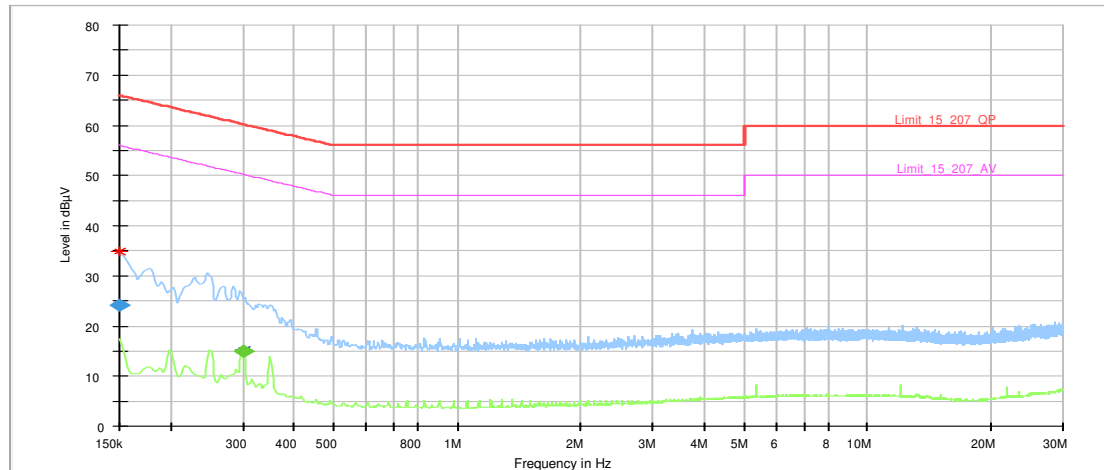

#### Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | PE  | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|-----|------------|
| 0.150000        | 24.06            | ---             | 66.00        | 41.94       | 1000.0          | 9.000           | L1   | FLO | 10.1       |
| 0.300750        | ---              | 15.06           | 50.22        | 35.16       | 1000.0          | 9.000           | N    | FLO | 10.1       |

Core 1:

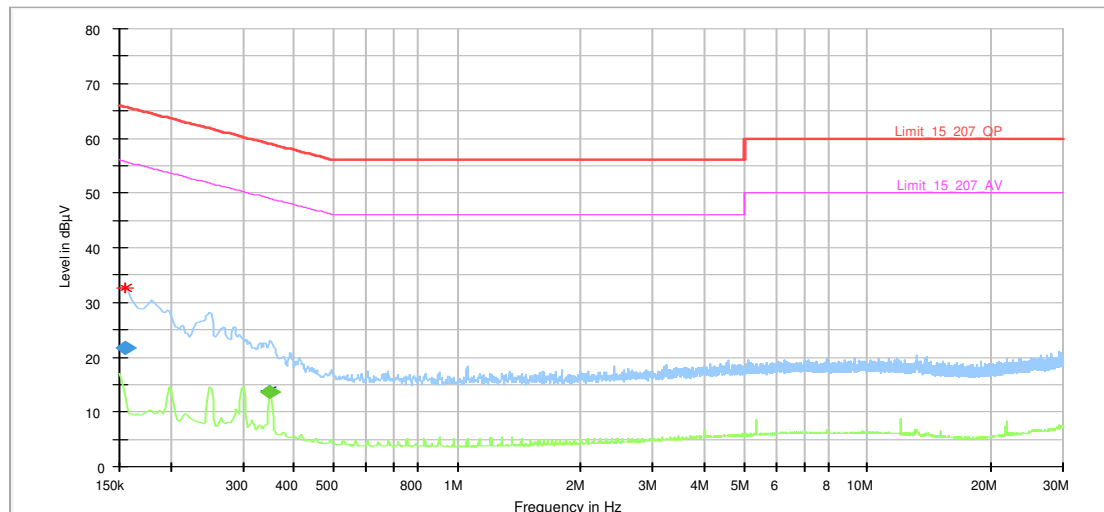

#### Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | PE  | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|-----|------------|
| 0.154500        | 21.64            | ---             | 65.75        | 44.11       | 1000.0          | 9.000           | N    | GND | 10.1       |
| 0.350250        | ---              | 13.64           | 48.96        | 35.32       | 1000.0          | 9.000           | N    | FLO | 10.1       |

#### 4.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

## 4.2 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- See plots

### 4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

### 4.2.3 TEST PROTOCOL


Ambient temperature: 25 °C  
Air Pressure: 1002 hPa  
Humidity: 35 %

| Radio Technology | Operating Frequency | Sub-band | 26 dB Bandwidth Core 0 [MHz] | 26 dB Bandwidth Core 1 [MHz] |
|------------------|---------------------|----------|------------------------------|------------------------------|
| WLAN a           | low                 | U-NII-1  | 21.4                         | <b>21.2</b>                  |
| WLAN a           | mid                 | U-NII-1  | 23.6                         | 21.5                         |
| WLAN a           | high                | U-NII-1  | 23.7                         | 23.0                         |
| WLAN a           | low                 | U-NII-2A | 24.5                         | 22.8                         |
| WLAN a           | mid                 | U-NII-2A | 22.0                         | 21.8                         |
| WLAN a           | high                | U-NII-2A | 21.5                         | 21.5                         |
| WLAN a           | low (5500 MHz)      | U-NII-2C | 25.1                         | 21.4                         |
| WLAN a           | low (5520 MHz)      | U-NII-2C | 24.9                         | 21.6                         |
| WLAN a           | mid                 | U-NII-2C | 28.1                         | 21.6                         |
| WLAN a           | high                | U-NII-2C | 28.2                         | 21.9                         |
| WLAN a           | low                 | U-NII-3  | 36.9                         | 32.2                         |
| WLAN a           | mid                 | U-NII-3  | 35.6                         | 32.3                         |
| WLAN a           | high                | U-NII-3  | 35.6                         | 32.8                         |
| WLAN n 20 MHz    | low                 | U-NII-1  | 21.7                         | 21.7                         |
| WLAN n 20 MHz    | mid                 | U-NII-1  | 22.6                         | 25.0                         |
| WLAN n 20 MHz    | high                | U-NII-1  | 26.1                         | 22.8                         |
| WLAN n 20 MHz    | low                 | U-NII-2A | 25.8                         | 24.3                         |
| WLAN n 20 MHz    | mid                 | U-NII-2A | 26.5                         | 24.8                         |
| WLAN n 20 MHz    | high                | U-NII-2A | 22.4                         | 22.2                         |
| WLAN n 20 MHz    | low (5500 MHz)      | U-NII-2C | 25.5                         | 22.4                         |
| WLAN n 20 MHz    | low (5520 MHz)      | U-NII-2C | 31.1                         | 27.1                         |
| WLAN n 20 MHz    | mid                 | U-NII-2C | 30.2                         | 24.7                         |
| WLAN n 20 MHz    | high                | U-NII-2C | 28.6                         | 25.8                         |
| WLAN n 20 MHz    | low                 | U-NII-3  | 41.2                         | 34.9                         |
| WLAN n 20 MHz    | mid                 | U-NII-3  | <b>41.3</b>                  | 35.4                         |
| WLAN n 20 MHz    | high                | U-NII-3  | 40.8                         | 36.7                         |
| WLAN n 40 MHz    | low                 | U-NII-1  | <b>40.3</b>                  | 40.3                         |
| WLAN n 40 MHz    | high                | U-NII-1  | 40.6                         | 40.5                         |
| WLAN n 40 MHz    | low                 | U-NII-2A | 40.4                         | 40.6                         |
| WLAN n 40 MHz    | high                | U-NII-2A | 40.8                         | 47.0                         |
| WLAN n 40 MHz    | low                 | U-NII-2C | 40.6                         | 46.7                         |
| WLAN n 40 MHz    | mid                 | U-NII-2C | 68.6                         | 50.4                         |
| WLAN n 40 MHz    | high                | U-NII-2C | 56.6                         | 48.6                         |
| WLAN n 40 MHz    | low                 | U-NII-3  | 81.8                         | 74.2                         |
| WLAN n 40 MHz    | high                | U-NII-3  | <b>82.6</b>                  | 74.6                         |
| WLAN ac 20 MHz   | high                | U-NII-2C | 33.6                         | 26.0                         |
| WLAN ac 40 MHz   | high                | U-NII-2C | 56.4                         | 51.5                         |
| WLAN ac 80 MHz   | mid                 | U-NII-1  | <b>82.1</b>                  | 82.1                         |
| WLAN ac 80 MHz   | mid                 | U-NII-2A | 86.9                         | 86.9                         |
| WLAN ac 80 MHz   | low                 | U-NII-2C | 83.3                         | 82.6                         |
| WLAN ac 80 MHz   | mid                 | U-NII-2C | 83.1                         | 86.4                         |
| WLAN ac 80 MHz   | high                | U-NII-2C | 105.0                        | 98.6                         |
| WLAN ac 80 MHz   | mid                 | U-NII-3  | <b>160.1</b>                 | 132.3                        |


Remark: Please see next sub-clause for the measurement plot.

#### 4.2.4 MEASUREMENT PLOT (SHOWING HIGHEST AND LOWEST MEASURED BANDWIDTH PER SET BANDWIDTH)


Radio Technology = WLAN a, Band = U-NII-1, Operating Frequency = low, Core 1  
(S01\_3\_AA01)

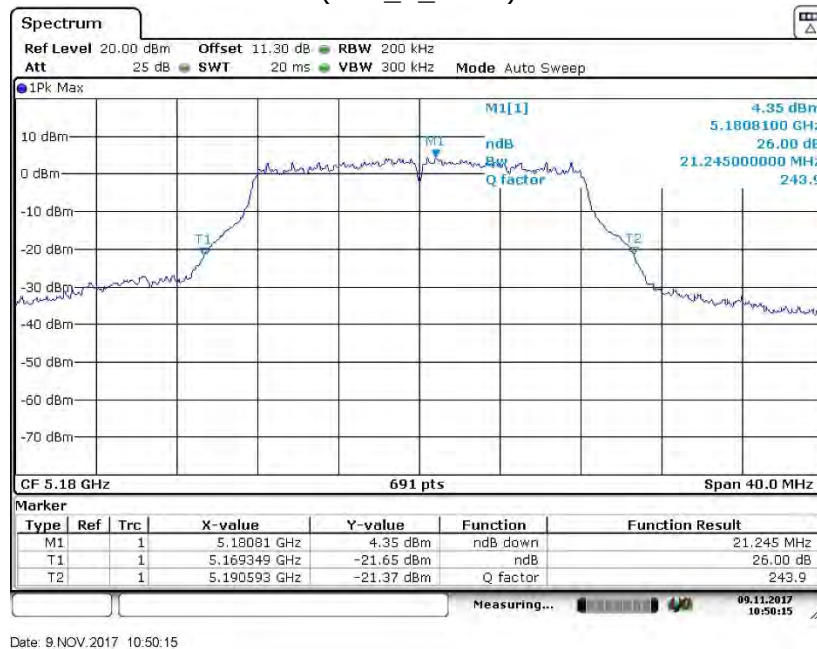

Radio Technology = WLAN n20, Band = U-NII-3, Operating Frequency = mid, Core 0  
(S01\_3\_AA01)

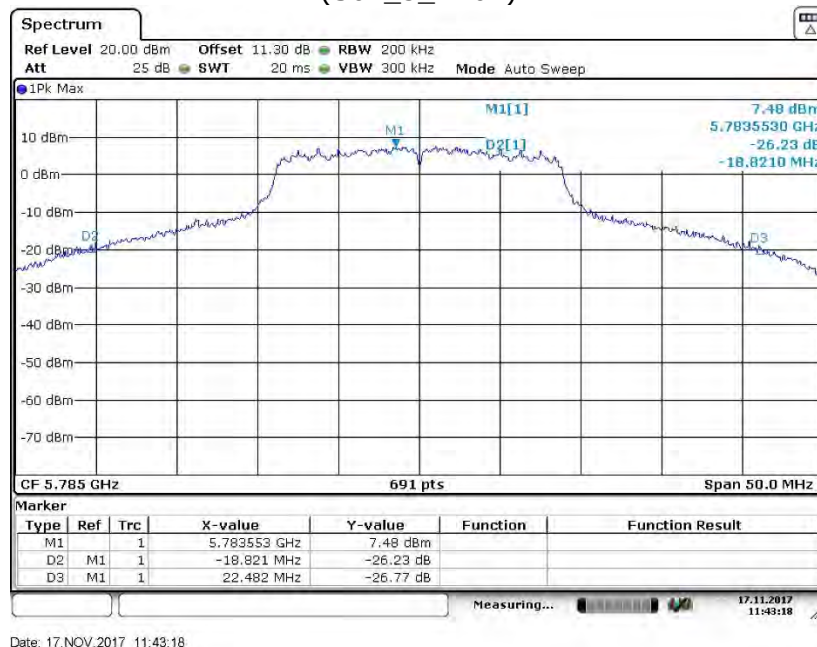


Radio Technology = WLAN n40, Band = U-NII-1, Operating Frequency = low, Core 0  
(S01\_3\_AA01)

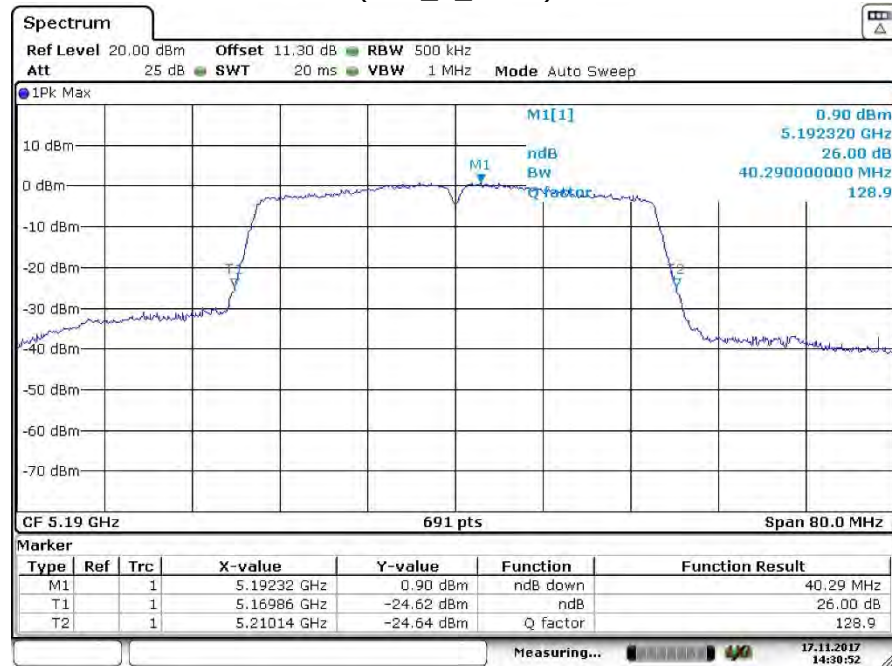


Date: 17.NOV.2017 14:30:52

Radio Technology = WLAN n40, Band = U-NII-3, Operating Frequency = high, Core 0  
(S01\_3\_AA01)

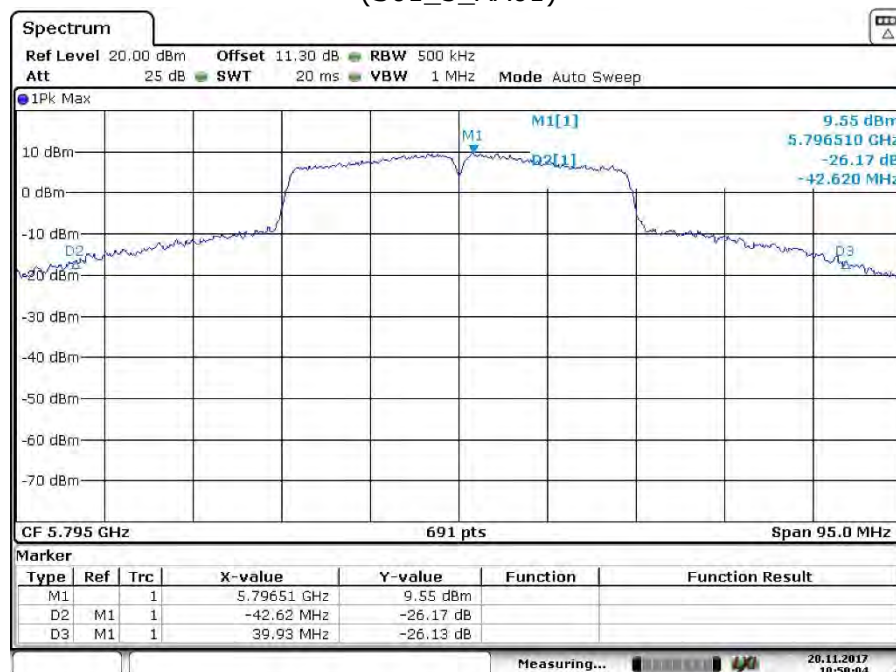


Date: 20.NOV.2017 10:50:04

Radio Technology = WLAN ac80, Band = U-NII-1, Operating Frequency = mid, Core 0  
(S01\_3\_AA01)

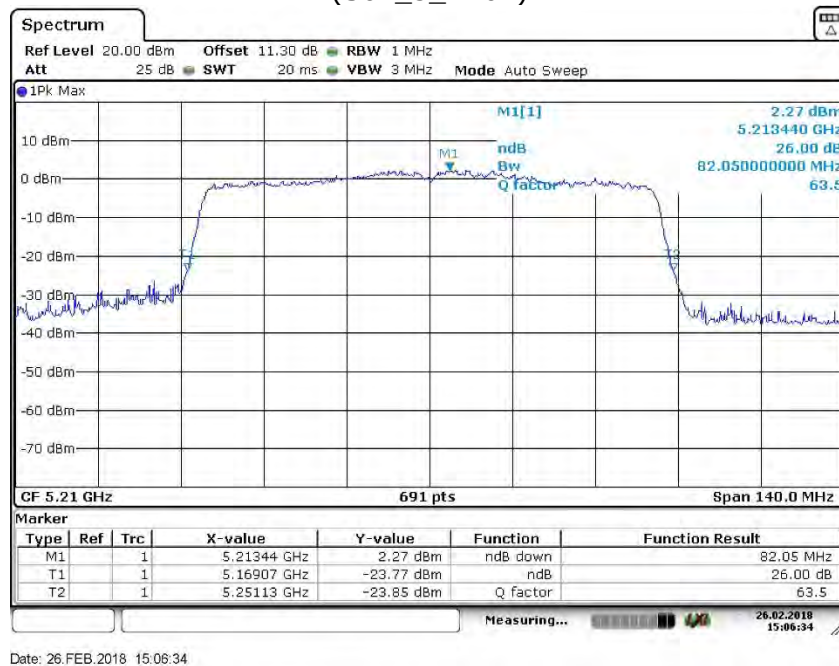

Radio Technology = WLAN ac80, Band = U-NII-3, Operating Frequency = mid, Core 0  
(S01\_3\_AA01)

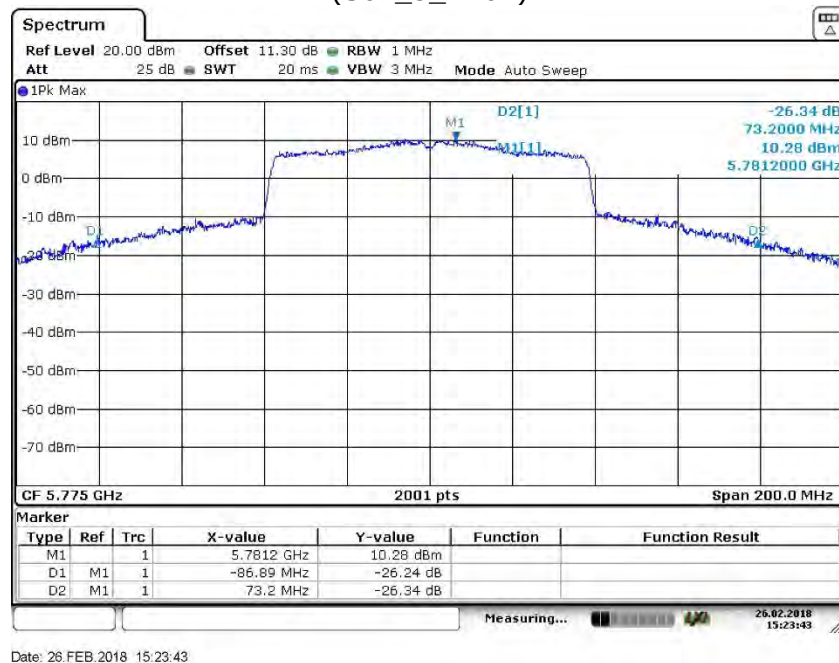

#### 4.2.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.3 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 60 / 100 MHz (for 20 / 40 / 80 MHz nominal bandwidth)
- Trace: Maxhold
- Sweptime: 37.9 / 75.8 / 113.8  $\mu$ s
- Detector: Peak

### 4.3.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 4.3.3 TEST PROTOCOL


Ambient temperature: 25 °C  
 Air Pressure: 1002 hPa  
 Humidity: 35 %

| Radio Technology | Operating Frequency | Sub-band | 6 dB Bandwidth Core 0 [MHz] | Limit [MHz] | Margin [MHz] | 6 dB Bandwidth Core 1 [MHz] | Limit [MHz] | Margin [MHz] |
|------------------|---------------------|----------|-----------------------------|-------------|--------------|-----------------------------|-------------|--------------|
| WLAN a           | low                 | U-NII-3  | 16.4                        | 0.5         | 15.9         | 16.4                        | 0.5         | 15.9         |
| WLAN a           | mid                 | U-NII-3  | 16.3                        | 0.5         | 15.8         | 16.4                        | 0.5         | 15.9         |
| WLAN a           | high                | U-NII-3  | 16.4                        | 0.5         | 15.9         | 16.4                        | 0.5         | 15.9         |
| WLAN n 20 MHz    | low                 | U-NII-3  | 17.6                        | 0.5         | 17.1         | 17.6                        | 0.5         | 17.1         |
| WLAN n 20 MHz    | mid                 | U-NII-3  | 17.6                        | 0.5         | 17.1         | 17.6                        | 0.5         | 17.1         |
| WLAN n 20 MHz    | high                | U-NII-3  | 17.6                        | 0.5         | 17.1         | 17.6                        | 0.5         | 17.1         |
| WLAN n 40 MHz    | low                 | U-NII-3  | 36.3                        | 0.5         | 35.8         | 36.3                        | 0.5         | 35.8         |
| WLAN n 40 MHz    | high                | U-NII-3  | 36.2                        | 0.5         | 35.7         | 36.2                        | 0.5         | 35.7         |
| WLAN ac 80 MHz   | mid                 | U-NII-3  | 75.7                        | 0.5         | 75.2         | 76.0                        | 0.5         | 75.5         |

Remark: Please see next sub-clause for the measurement plot.


#### 4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = mid, Core 0  
(S01\_3\_AA01)

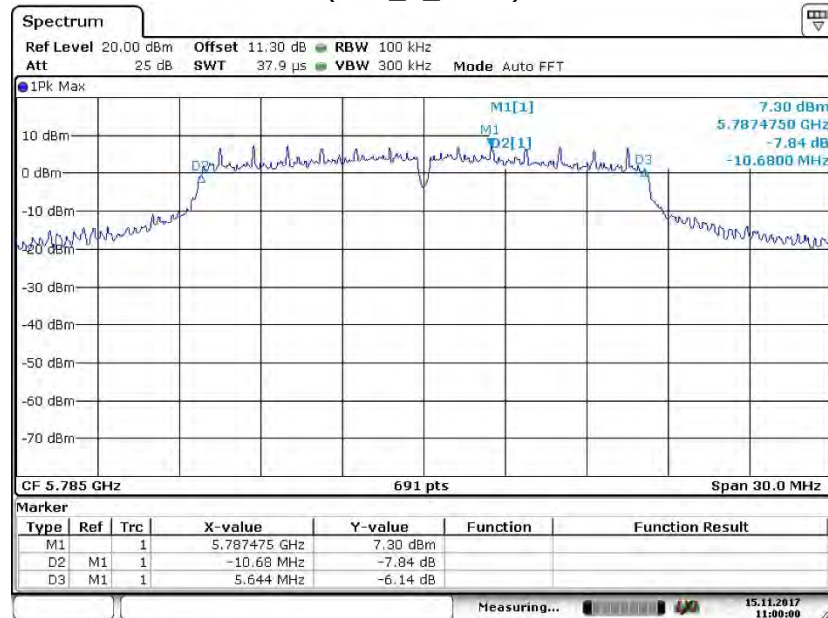

Date: 15.NOV.2017 11:00:00

Radio Technology = WLAN a, Operating Frequency = low, Core 1  
(S01\_3\_AA01)

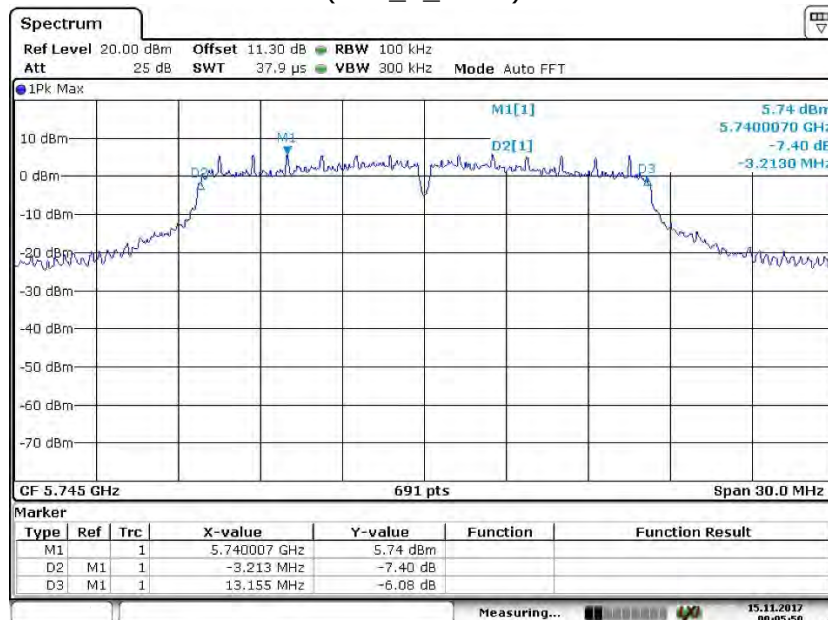

Date: 15.NOV.2017 09:05:59

#### 4.3.5 TEST EQUIPMENT USED

- R&S TS8997

#### 4.4 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

##### 4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx.  $\geq 1$  % of the span, but not below
- Video Bandwidth (VBW):  $\geq 3$  times the RBW
- Span: 40 / 80 / 160 MHz (for 20 / 40 / 80 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweeptime: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

##### 4.4.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

#### 4.4.3 TEST PROTOCOL


Ambient temperature: 25 °C  
 Air Pressure: 1002 hPa  
 Humidity: 35 %

| Radio Technology | Operating Frequency | Subband  | 99% Bandwidth Core 0 [MHz] | 99% Bandwidth Core 1 [MHz] |
|------------------|---------------------|----------|----------------------------|----------------------------|
| WLAN a           | low                 | U-NII-1  | 17.5                       | 17.6                       |
| WLAN a           | mid                 | U-NII-1  | 17.7                       | 17.7                       |
| WLAN a           | high                | U-NII-1  | 17.7                       | 17.7                       |
| WLAN a           | low                 | U-NII-2A | 17.9                       | 17.8                       |
| WLAN a           | mid                 | U-NII-2A | 17.9                       | 17.8                       |
| WLAN a           | high                | U-NII-2A | 17.6                       | 17.6                       |
| WLAN a           | low (5500 MHz)      | U-NII-2C | 17.9                       | 17.7                       |
| WLAN a           | low (5520 MHz)      | U-NII-2C | 17.9                       | 17.8                       |
| WLAN a           | mid                 | U-NII-2C | 18.2                       | 17.8                       |
| WLAN a           | high                | U-NII-2C | 18.2                       | 17.8                       |
| WLAN a           | low                 | U-NII-3  | 20.6                       | 18.6                       |
| WLAN a           | mid                 | U-NII-3  | 20.7                       | 18.6                       |
| WLAN a           | high                | U-NII-3  | 21.5                       | 18.9                       |
| WLAN n 20 MHz    | low                 | U-NII-1  | 18.6                       | 18.6                       |
| WLAN n 20 MHz    | mid                 | U-NII-1  | 18.6                       | 18.7                       |
| WLAN n 20 MHz    | high                | U-NII-1  | 18.6                       | 18.7                       |
| WLAN n 20 MHz    | low                 | U-NII-2A | 18.8                       | 18.8                       |
| WLAN n 20 MHz    | mid                 | U-NII-2A | 18.8                       | 18.7                       |
| WLAN n 20 MHz    | high                | U-NII-2A | 18.7                       | 18.7                       |
| WLAN n 20 MHz    | low (5500 MHz)      | U-NII-2C | 18.8                       | 18.6                       |
| WLAN n 20 MHz    | low (5520 MHz)      | U-NII-2C | 18.8                       | 18.9                       |
| WLAN n 20 MHz    | mid                 | U-NII-2C | 19.0                       | 18.9                       |
| WLAN n 20 MHz    | high                | U-NII-2C | 18.9                       | 18.8                       |
| WLAN n 20 MHz    | low                 | U-NII-3  | 21.2                       | 19.5                       |
| WLAN n 20 MHz    | mid                 | U-NII-3  | 21.0                       | 19.3                       |
| WLAN n 20 MHz    | high                | U-NII-3  | <b>22.3</b>                | <b>19.6</b>                |
| WLAN n 40 MHz    | low                 | U-NII-1  | 36.4                       | 36.4                       |
| WLAN n 40 MHz    | high                | U-NII-1  | 36.4                       | 36.6                       |
| WLAN n 40 MHz    | low                 | U-NII-2A | 36.5                       | 36.5                       |
| WLAN n 40 MHz    | high                | U-NII-2A | 36.5                       | 36.5                       |
| WLAN n 40 MHz    | low (5510 MHz)      | U-NII-2C | 36.5                       | 36.6                       |
| WLAN n 40 MHz    | low (5530 MHz)      | U-NII-2C | 36.7                       | 36.7                       |
| WLAN n 40 MHz    | mid                 | U-NII-2C | 36.7                       | 36.7                       |
| WLAN n 40 MHz    | high                | U-NII-2C | 36.7                       | 36.7                       |
| WLAN n 40 MHz    | low                 | U-NII-3  | 39.1                       | 37.2                       |
| WLAN n 40 MHz    | high                | U-NII-3  | <b>39.5</b>                | <b>37.2</b>                |
| WLAN ac 20 MHz   | high                | U-NII-2C | 18.8                       | 18.8                       |
| WLAN ac 40 MHz   | high                | U-NII-2C | 36.7                       | 36.6                       |
| WLAN ac 80 MHz   | mid                 | U-NII-1  | 75.7                       | 75.7                       |
| WLAN ac 80 MHz   | mid                 | U-NII-2A | 75.7                       | 75.9                       |
| WLAN ac 80 MHz   | low                 | U-NII-2C | 75.9                       | 75.9                       |
| WLAN ac 80 MHz   | mid                 | U-NII-2C | 75.9                       | 75.9                       |
| WLAN ac 80 MHz   | high                | U-NII-2C | 76.2                       | 76.2                       |
| WLAN ac 80 MHz   | mid                 | U-NII-3  | <b>77.3</b>                | <b>76.4</b>                |


Remark: Please see next sub-clause for the measurement plot.

#### 4.4.4 MEASUREMENT PLOT (SHOWING HIGHEST VALUE FOR EACH BW)


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband U-NII-3  
(S01\_3\_AA01)

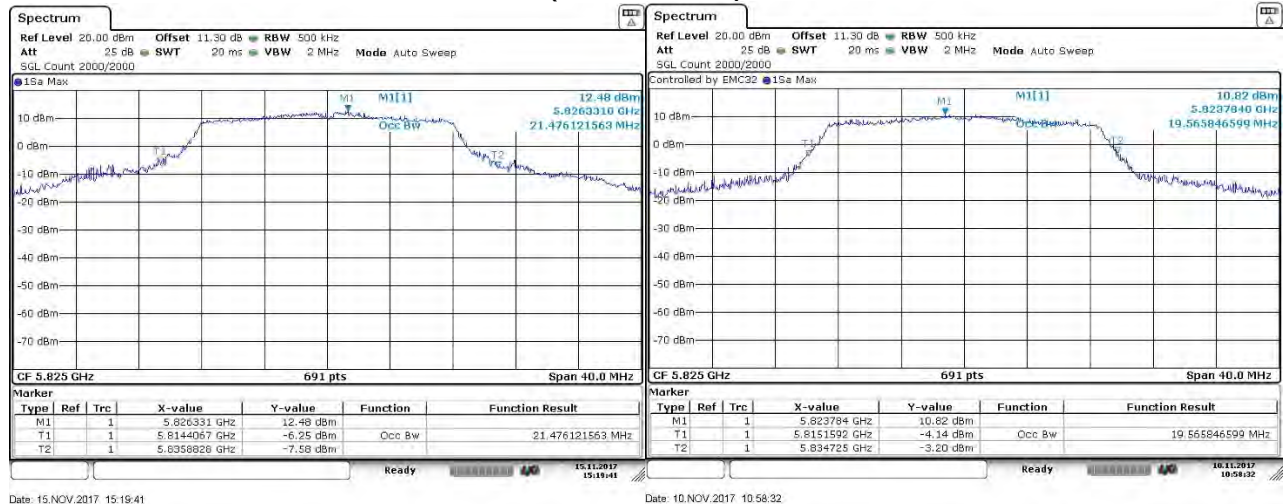

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband U-NII-3  
(S01\_3\_AA01)

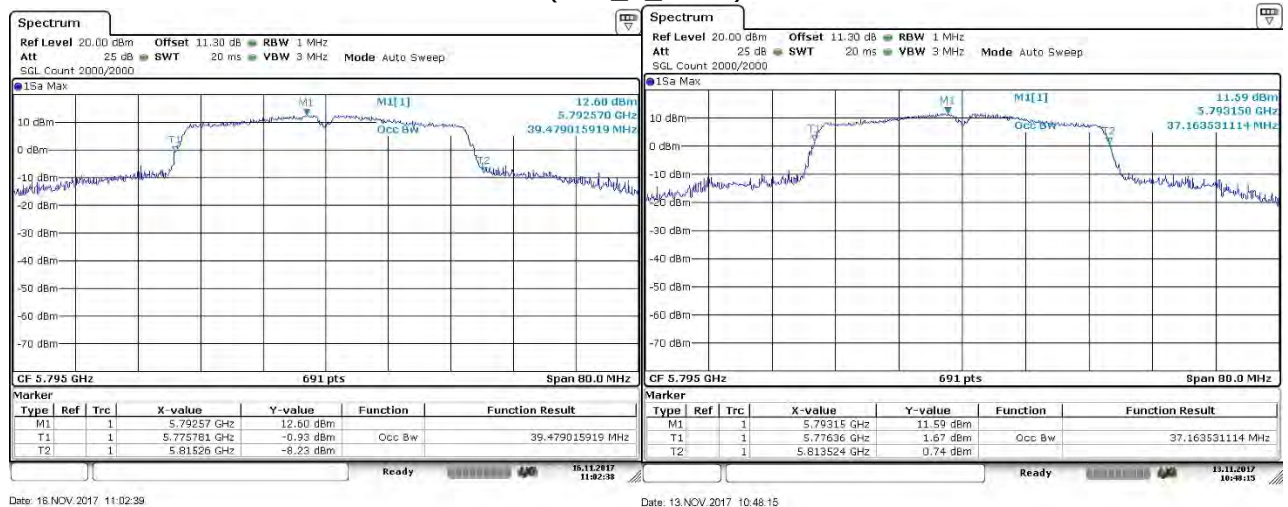

Radio Technology = WLAN ac 80 MHz, Operating Frequency = high, Subband U-NII-3  
(S01\_3\_AA01)

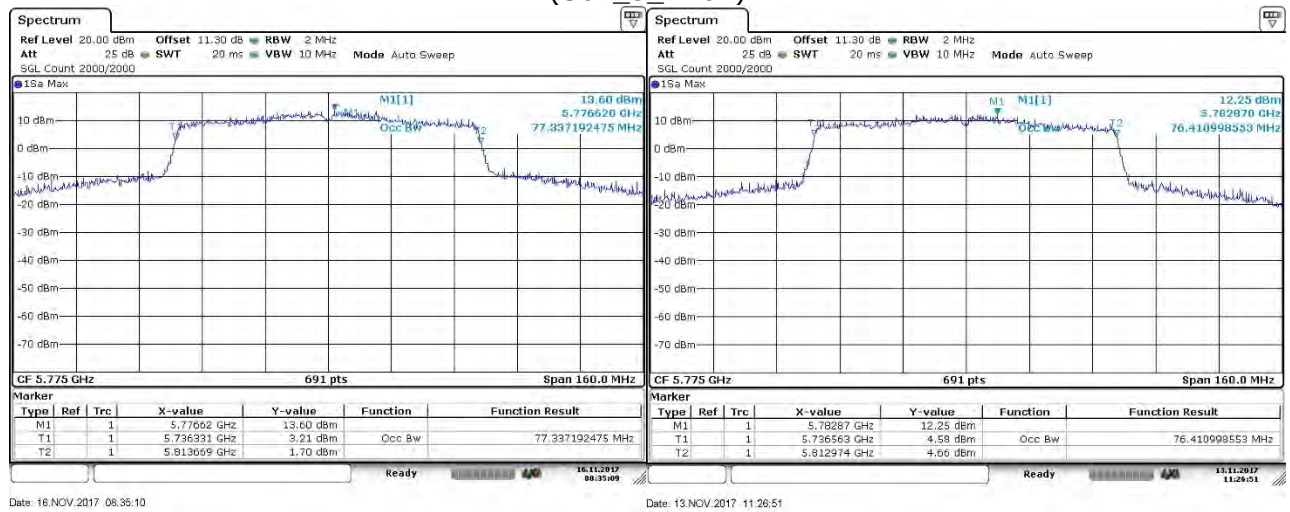

Core 0

Core 1

#### 4.4.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.5 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 1000
- Sweeptime: 20 ms
- Detector: RMS
- Trigger: gated mode

The channel power function of the spectrum analyser was used (Used channel bandwidth = nominal bandwidth)

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

### 4.5.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or  $4 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or  $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or  $17 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

## **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or  $10 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or  $23 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

### 4.5.3 TEST PROTOCOL

#### Measured Single Core Output Core 0

Ambient temperature: 25 °C  
Air Pressure: 1002 hPa  
Humidity: 35 %  
WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 36      | 5180        | 12.7              | 14.7       | 24.0              | 11.3        | N/A               | -           | 22.4             | 7.7         | 1) |
|               | 40      | 5200        | 14.4              | 16.4       | 24.0              | 9.6         | N/A               | -           | 22.4             | 6.1         | 1) |
|               | 48      | 5240        | 14.3              | 16.3       | 24.0              | 9.7         | N/A               | -           | 22.5             | 6.1         | 1) |
| 2A            | 52      | 5260        | 14.9              | 16.9       | 24.0              | 9.1         | 23.5              | 8.7         | 29.5             | 12.7        | 1) |
|               | 60      | 5300        | 14.7              | 16.7       | 24.0              | 9.3         | 23.5              | 8.8         | 29.5             | 12.8        | 1) |
|               | 64      | 5320        | 12.4              | 14.4       | 24.0              | 11.6        | 23.5              | 11.0        | 29.5             | 15.0        | 1) |
| 2C            | 100     | 5500        | 13.1              | 15.1       | 24.0              | 10.9        | 23.5              | 10.4        | 29.5             | 14.4        |    |
|               | 104     | 5520        | 15.3              | 17.3       | 24.0              | 8.7         | 23.6              | 8.3         | 29.6             | 12.3        |    |
|               | 116     | 5580        | 15.3              | 17.3       | 24.0              | 8.7         | 23.6              | 8.3         | 29.6             | 12.3        |    |
|               | 140     | 5700        | 15.2              | 17.2       | 24.0              | 8.8         | 23.6              | 8.4         | 29.6             | 12.4        |    |
| 3             | 149     | 5745        | 17.8              | 19.8       | 30.0              | 12.2        | 30.0              | 12.2        | 36.0             | 16.2        |    |
|               | 157     | 5785        | 17.8              | 19.8       | 30.0              | 12.2        | 30.0              | 12.2        | 36.0             | 16.2        |    |
|               | 165     | 5825        | <b>18.0</b>       | 20.0       | 30.0              | 12.0        | 30.0              | 12.0        | 36.0             | 16.0        |    |

WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 36      | 5180        | 12.6              | 14.6       | 24.0              | 11.4        | N/A               | -           | 22.7             | 8.1         | 1) |
|               | 40      | 5200        | 14.3              | 16.3       | 24.0              | 9.7         | N/A               | -           | 22.7             | 6.5         | 1) |
|               | 48      | 5240        | 14.2              | 16.2       | 24.0              | 9.8         | N/A               | -           | 22.7             | 6.5         | 1) |
| 2A            | 52      | 5260        | 14.8              | 16.8       | 24.0              | 9.2         | 23.7              | 9.0         | 29.7             | 13.0        | 1) |
|               | 60      | 5300        | 14.7              | 16.7       | 24.0              | 9.3         | 24.0              | 9.3         | 30.0             | 13.3        | 1) |
|               | 64      | 5320        | 12.4              | 14.4       | 24.0              | 11.6        | 23.7              | 11.3        | 29.7             | 15.3        | 1) |
| 2C            | 100     | 5500        | 13.0              | 15.0       | 24.0              | 11.0        | 23.7              | 10.7        | 29.7             | 14.7        |    |
|               | 104     | 5520        | 15.3              | 17.3       | 24.0              | 8.7         | 23.8              | 8.5         | 29.8             | 12.5        |    |
|               | 116     | 5580        | 15.2              | 17.2       | 24.0              | 8.8         | 23.8              | 8.6         | 29.8             | 12.6        |    |
|               | 140     | 5700        | 15.1              | 17.1       | 24.0              | 8.9         | 23.8              | 8.7         | 29.8             | 12.7        |    |
| 3             | 149     | 5745        | 17.8              | 19.8       | 30.0              | 12.2        | 30.0              | 12.2        | 36.0             | 16.2        |    |
|               | 157     | 5785        | 17.8              | 19.8       | 30.0              | 12.2        | 30.0              | 12.2        | 36.0             | 16.2        |    |
|               | 165     | 5825        | <b>17.9</b>       | 19.9       | 30.0              | 12.1        | 30.0              | 12.1        | 36.0             | 16.1        |    |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 38      | 5190        | 8.6               | 10.6       | 24.0              | 15.4        | N/A               | -           | 23.0             | 12.4        | 1) |
|               | 46      | 5230        | 11.5              | 13.5       | 24.0              | 12.5        | N/A               | -           | 23.0             | 9.5         | 1) |
| 2A            | 54      | 5270        | 11.7              | 13.7       | 24.0              | 12.3        | 24.0              | 12.3        | 30.0             | 16.3        | 1) |
|               | 62      | 5310        | 10.6              | 12.6       | 24.0              | 13.4        | 24.0              | 13.4        | 30.0             | 17.4        | 1) |
| 2C            | 102     | 5510        | 11.0              | 13.0       | 24.0              | 13.0        | 24.0              | 13.0        | 30.0             | 17.0        |    |
|               | 110     | 5550        | 13.9              | 15.9       | 24.0              | 10.1        | 24.0              | 10.1        | 30.0             | 14.1        |    |
|               | 134     | 5670        | 13.8              | 15.8       | 24.0              | 10.3        | 24.0              | 10.3        | 30.0             | 14.3        |    |
| 3             | 151     | 5755        | <b>17.5</b>       | 19.5       | 30.0              | 12.5        | 30.0              | 12.5        | 36.0             | 16.5        |    |
|               | 159     | 5795        | 17.5              | 19.5       | 30.0              | 12.5        | 30.0              | 12.5        | 36.0             | 16.5        |    |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |  |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|--|
| 2C            | 144     | 5720        | 15.0              | 17.0       | 24.0              | 9.0         | 23.8              | 8.8         | 29.8             | 12.8        |  |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |  |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|--|
| 2C            | 142     | 5710        | 13.9              | 15.9       | 24.0              | 10.1        | 24.0              | 10.1        | 30.0             | 14.1        |  |

WLAN ac-Mode; 80 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 42      | 5210        | 8.5               | 10.5       | 24.0              | 15.6        | N/A               | -           | 23.0             | 12.6        | 1) |
| 2A            | 58      | 5290        | 11.2              | 13.2       | 24.0              | 12.9        | 24.0              | 12.9        | 30.0             | 16.9        | 1) |
| 2C            | 106     | 5530        | 10.7              | 12.7       | 24.0              | 13.3        | 24.0              | 13.3        | 30.0             | 17.3        |    |
|               | 122     | 5610        | 10.6              | 12.6       | 24.0              | 13.4        | 24.0              | 13.4        | 30.0             | 17.4        |    |
|               | 138     | 5690        | 13.4              | 15.4       | 24.0              | 10.6        | 24.0              | 10.6        | 30.0             | 14.6        |    |
| 3             | 155     | 5775        | 17.0              | 19.0       | 30.0              | 13.0        | 30.0              | 13.0        | 36.0             | 17.0        |    |

Remark: Please see next sub-clause for the measurement plot.

## Measured Single Core Output Core 1

WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 36      | 5180        | 12.9              | 14.9       | 24.0              | 11.1        | N/A               | -           | 22.5             | 7.5         | 1) |
|               | 40      | 5200        | 15.2              | 17.2       | 24.0              | 8.8         | N/A               | -           | 22.5             | 5.2         | 1) |
|               | 48      | 5240        | 14.6              | 16.6       | 24.0              | 9.4         | N/A               | -           | 22.5             | 5.9         | 1) |
| 2A            | 52      | 5260        | 15.3              | 17.3       | 24.0              | 8.7         | 23.5              | 8.2         | 29.5             | 12.2        | 1) |
|               | 60      | 5300        | 15.3              | 17.3       | 24.0              | 8.7         | 23.5              | 8.1         | 29.5             | 12.1        | 1) |
|               | 64      | 5320        | 13.5              | 15.5       | 24.0              | 10.5        | 23.5              | 10.0        | 29.5             | 14.0        | 1) |
| 2C            | 100     | 5500        | 13.6              | 15.6       | 24.0              | 10.4        | 23.5              | 9.9         | 29.5             | 13.9        |    |
|               | 104     | 5520        | 15.3              | 17.3       | 24.0              | 8.7         | 23.5              | 8.2         | 29.5             | 12.2        |    |
|               | 116     | 5580        | 15.2              | 17.2       | 24.0              | 8.8         | 23.5              | 8.3         | 29.5             | 12.3        |    |
|               | 140     | 5700        | 15.0              | 17.0       | 24.0              | 9.1         | 23.5              | 8.6         | 29.5             | 12.6        |    |
| 3             | 149     | 5745        | 16.9              | 18.9       | 30.0              | 13.1        | 30.0              | 13.1        | 36.0             | 17.1        |    |
|               | 157     | 5785        | 16.7              | 18.7       | 30.0              | 13.3        | 30.0              | 13.3        | 36.0             | 17.3        |    |
|               | 165     | 5825        | 16.5              | 18.5       | 30.0              | 13.5        | 30.0              | 13.5        | 36.0             | 17.5        |    |

WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 36      | 5180        | 12.7              | 14.7       | 24.0              | 11.3        | N/A               | -           | 22.7             | 8.0         | 1) |
|               | 40      | 5200        | 15.1              | 17.1       | 24.0              | 8.9         | N/A               | -           | 22.7             | 5.6         | 1) |
|               | 48      | 5240        | 14.4              | 16.4       | 24.0              | 9.6         | N/A               | -           | 22.7             | 6.3         | 1) |
| 2A            | 52      | 5260        | 15.3              | 17.3       | 24.0              | 8.7         | 23.7              | 8.5         | 29.7             | 12.5        | 1) |
|               | 60      | 5300        | 15.1              | 17.1       | 24.0              | 8.9         | 23.9              | 8.8         | 29.9             | 12.8        | 1) |
|               | 64      | 5320        | 13.4              | 15.4       | 24.0              | 10.6        | 23.7              | 10.3        | 29.7             | 14.3        | 1) |
| 2C            | 100     | 5500        | 13.5              | 15.5       | 24.0              | 10.5        | 23.7              | 10.2        | 29.7             | 14.2        |    |
|               | 104     | 5520        | 15.2              | 17.2       | 24.0              | 8.8         | 23.8              | 8.5         | 29.8             | 12.5        |    |
|               | 116     | 5580        | 15.1              | 17.1       | 24.0              | 8.9         | 23.8              | 8.7         | 29.8             | 12.7        |    |
|               | 140     | 5700        | 14.9              | 16.9       | 24.0              | 9.1         | 23.7              | 8.9         | 29.7             | 12.9        |    |
| 3             | 149     | 5745        | 16.8              | 18.8       | 30.0              | 13.2        | 30.0              | 13.2        | 36.0             | 17.2        |    |
|               | 157     | 5785        | 16.6              | 18.6       | 30.0              | 13.4        | 30.0              | 13.4        | 36.0             | 17.4        |    |
|               | 165     | 5825        | 16.3              | 18.3       | 30.0              | 13.7        | 30.0              | 13.7        | 36.0             | 17.7        |    |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 38      | 5190        | 9.9               | 11.9       | 24.0              | 14.1        | N/A               | -           | 23.0             | 11.1        | 1) |
|               | 46      | 5230        | 12.8              | 14.8       | 24.0              | 11.2        | N/A               | -           | 23.0             | 8.2         | 1) |
| 2A            | 54      | 5270        | 12.8              | 14.8       | 24.0              | 11.2        | 24.0              | 11.2        | 30.0             | 15.2        | 1) |
|               | 62      | 5310        | 11.7              | 13.7       | 24.0              | 12.3        | 24.0              | 12.3        | 30.0             | 16.3        | 1) |
| 2C            | 102     | 5510        | 12.0              | 14.0       | 24.0              | 12.0        | 24.0              | 12.0        | 30.0             | 16.0        |    |
|               | 110     | 5550        | 14.5              | 16.5       | 24.0              | 9.5         | 24.0              | 9.5         | 30.0             | 13.5        |    |
|               | 134     | 5670        | 14.3              | 16.3       | 24.0              | 9.7         | 24.0              | 9.7         | 30.0             | 13.7        |    |
| 3             | 151     | 5755        | <b>16.4</b>       | 18.4       | 30.0              | 13.6        | 30.0              | 13.6        | 36.0             | 17.6        |    |
|               | 159     | 5795        | 16.4              | 18.4       | 30.0              | 13.7        | 30.0              | 13.7        | 36.0             | 17.7        |    |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |  |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|--|
| 2C            | 144     | 5720        | 15.6              | 17.6       | 24.0              | 8.4         | 23.7              | 8.1         | 29.7             | 12.1        |  |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |  |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|--|
| 2C            | 142     | 5710        | 15.0              | 17.0       | 24.0              | 9.0         | 24.0              | 9.0         | 30.0             | 13.0        |  |

WLAN ac-Mode; 80 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|-------------------|-------------|------------------|-------------|----|
| 1             | 42      | 5210        | 10.2              | 12.2       | 24.0              | 13.8        | N/A               | -           | 23.0             | 10.8        | 1) |
| 2A            | 58      | 5290        | 13.0              | 15.0       | 24.0              | 11.0        | 24.0              | 11.0        | 30.0             | 15.0        | 1) |
| 2C            | 106     | 5530        | 12.0              | 14.0       | 24.0              | 12.0        | 24.0              | 12.0        | 30.0             | 16.0        |    |
|               | 122     | 5610        | 11.9              | 13.9       | 24.0              | 12.1        | 24.0              | 12.1        | 30.0             | 16.1        |    |
|               | 138     | 5690        | 14.3              | 16.3       | 24.0              | 9.7         | 24.0              | 9.7         | 30.0             | 13.7        |    |
| 3             | 155     | 5775        | <b>16.1</b>       | 18.1       | 30.0              | 13.9        | 30.0              | 13.9        | 36.0             | 17.9        |    |

## Calculated MIMO Output Core 0 + Core 1

WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Power Core 0 [dBm] | Power Core 1 [dBm] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|--------------------|--------------------|----|
| 1             | 36      | 5180        | 15.7              | 17.7       | 24.0              | 8.3         | 12.6               | 12.7               | 1) |
|               | 40      | 5200        | 17.7              | 19.7       | 24.0              | 6.3         | 14.3               | 15.1               | 1) |
|               | 48      | 5240        | 17.3              | 19.3       | 24.0              | 6.7         | 14.2               | 14.4               | 1) |
| 2A            | 52      | 5260        | 18.0              | 20.0       | 24.0              | 6.0         | 14.8               | 15.3               |    |
|               | 60      | 5300        | 17.9              | 19.9       | 24.0              | 6.1         | 14.7               | 15.1               |    |
|               | 64      | 5320        | 15.9              | 17.9       | 24.0              | 8.1         | 12.4               | 13.4               |    |
| 2C            | 100     | 5500        | 16.3              | 18.3       | 24.0              | 7.7         | 13.0               | 13.5               |    |
|               | 104     | 5520        | 18.3              | 20.3       | 24.0              | 5.7         | 15.3               | 15.2               |    |
|               | 116     | 5580        | 18.1              | 20.1       | 24.0              | 5.9         | 15.2               | 15.1               |    |
|               | 140     | 5700        | 18.0              | 20.0       | 24.0              | 6.0         | 15.1               | 14.9               |    |
| 3             | 149     | 5745        | 20.3              | 22.3       | 30.0              | 9.7         | 17.8               | 16.8               |    |
|               | 157     | 5785        | 20.3              | 22.3       | 30.0              | 9.7         | 17.8               | 16.6               |    |
|               | 165     | 5825        | 20.2              | 22.2       | 30.0              | 9.8         | 17.9               | 16.3               |    |

| table continued |         |             | IC                |             |                  |             |    |
|-----------------|---------|-------------|-------------------|-------------|------------------|-------------|----|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |    |
| 1               | 36      | 5180        | N/A               |             | 22.7             | 5.0         |    |
|                 | 44      | 5220        | N/A               |             | 22.7             | 3.0         |    |
|                 | 48      | 5240        | N/A               |             | 22.7             | 3.4         |    |
| 2A              | 52      | 5260        | 23.5              | 5.5         | 29.7             | 9.7         | 1) |
|                 | 56      | 5280        | 23.5              | 5.6         | 29.7             | 9.8         | 1) |
|                 | 64      | 5320        | 23.5              | 7.5         | 29.7             | 11.8        | 1) |
| 2C              | 100     | 5500        | 23.5              | 7.3         | 29.7             | 11.4        |    |
|                 | 104     | 5520        | 23.6              | 5.3         | 29.8             | 9.5         |    |
|                 | 116     | 5580        | 23.6              | 5.5         | 29.8             | 9.7         |    |
|                 | 140     | 5700        | 23.6              | 5.6         | 29.8             | 9.8         |    |
| 3               | 149     | 5745        | 30.0              | 9.7         | 36.0             | 13.7        |    |
|                 | 157     | 5785        | 30.0              | 9.7         | 36.0             | 13.7        |    |
|                 | 165     | 5825        | 30.0              | 9.8         | 36.0             | 13.8        |    |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Power Core 0 [dBm] | Power Core 1 [dBm] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|--------------------|--------------------|----|
| 1             | 38      | 5190        | 12.3              | 14.3       | 24.0              | 11.7        | 8.6                | 9.9                | 1) |
|               | 46      | 5230        | 15.2              | 17.2       | 24.0              | 8.8         | 11.5               | 12.8               | 1) |
| 2A            | 54      | 5270        | 15.3              | 17.3       | 24.0              | 8.7         | 11.7               | 12.8               |    |
|               | 62      | 5310        | 14.2              | 16.2       | 24.0              | 9.8         | 10.6               | 11.7               |    |
| 2C            | 102     | 5510        | 14.6              | 16.6       | 24.0              | 9.4         | 11.0               | 12.0               |    |
|               | 110     | 5550        | 17.2              | 19.2       | 24.0              | 6.8         | 13.9               | 14.5               |    |
|               | 134     | 5670        | 17.0              | 19.0       | 24.0              | 7.0         | 13.8               | 14.3               |    |
| 3             | 151     | 5755        | 20.0              | 22.0       | 30.0              | 10.0        | 17.5               | 16.4               |    |
|               | 159     | 5795        | 20.0              | 22.0       | 30.0              | 10.0        | 17.5               | 16.4               |    |

| table continued |         |             | IC                |             |                  |             |
|-----------------|---------|-------------|-------------------|-------------|------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |
| 1               | 38      | 5190        | N/A               |             | 23.0             | 8.7         |
|                 | 46      | 5230        | N/A               |             | 23.0             | 5.8         |
| 2A              | 54      | 5270        | 24.0              | 11.7        | 30.0             | 12.7        |
|                 | 62      | 5310        | 24.0              | 8.7         | 30.0             | 13.8        |
| 2C              | 102     | 5510        | 24.0              | 9.8         | 30.0             | 13.4        |
|                 | 110     | 5550        | 24.0              | 9.4         | 30.0             | 10.8        |
|                 | 134     | 5670        | 24.0              | 6.8         | 30.0             | 11.0        |
| 3               | 151     | 5755        | 30.0              | 13.0        | 36.0             | 14.0        |
|                 | 159     | 5795        | 30.0              | 10.0        | 36.0             | 14.0        |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Power Core 0 [dBm] | Power Core 1 [dBm] |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|--------------------|--------------------|
| 2C            | 144     | 5720        | 18.3              | 20.3       | 24.0              | 5.7         | 15.0               | 15.6               |

| table continued |         |             | IC                |             |                  |             |
|-----------------|---------|-------------|-------------------|-------------|------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |
| 2C              | 144     | 5720        | 23.8              | 5.5         | 29.8             | 9.5         |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Power Core 0 [dBm] | Power Core 1 [dBm] |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|--------------------|--------------------|
| 2C            | 142     | 5710        | 17.5              | 19.5       | 24.0              | 6.5         | 13.9               | 15.0               |

| table continued |         |             | IC                |             |                  |             |
|-----------------|---------|-------------|-------------------|-------------|------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |
| 2C              | 142     | 5710        | 24.0              | 21.0        | 30.0             | 10.5        |


WLAN n-Mode; 80 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | Cond. Limit [dBm] | Margin [dB] | Power Core 0 [dBm] | Power Core 1 [dBm] |    |
|---------------|---------|-------------|-------------------|------------|-------------------|-------------|--------------------|--------------------|----|
| 1             | 42      | 5210        | 12.4              | 14.4       | 24.0              | 11.6        | 8.5                | 10.2               | 1) |
| 2A            | 58      | 5290        | 15.2              | 17.2       | 24.0              | 8.8         | 11.2               | 13.0               |    |
| 2C            | 106     | 5530        | 14.4              | 16.4       | 24.0              | 9.6         | 10.7               | 12.0               |    |
|               | 122     | 5610        | 14.3              | 16.3       | 24.0              | 9.7         | 10.6               | 11.9               |    |
|               | 138     | 5690        | 16.9              | 18.9       | 24.0              | 7.1         | 13.4               | 14.3               |    |
| 3             | 155     | 5775        | 19.6              | 21.6       | 30.0              | 10.4        | 17.0               | 16.1               |    |


| table continued |         |             | IC                |             |                  |             |
|-----------------|---------|-------------|-------------------|-------------|------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | Cond. Limit [dBm] | Margin [dB] | EIRP Limit [dBm] | Margin [dB] |
| 1               | 42      | 5210        | N/A               |             | 23.0             | 8.6         |
| 2A              | 58      | 5290        | 24.0              | 8.8         | 30.0             | 12.8        |
| 2C              | 106     | 5530        | 24.0              | 9.6         | 30.0             | 13.6        |
|                 | 122     | 5610        | 24.0              | 9.7         | 30.0             | 13.7        |
|                 | 138     | 5690        | 24.0              | 7.1         | 30.0             | 11.1        |
| 3               | 155     | 5775        | 30.0              | 10.4        | 36.0             | 14.4        |

#### 4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN a 20 MHz, Subband U-NII-3  
(S01\_3\_AA01)

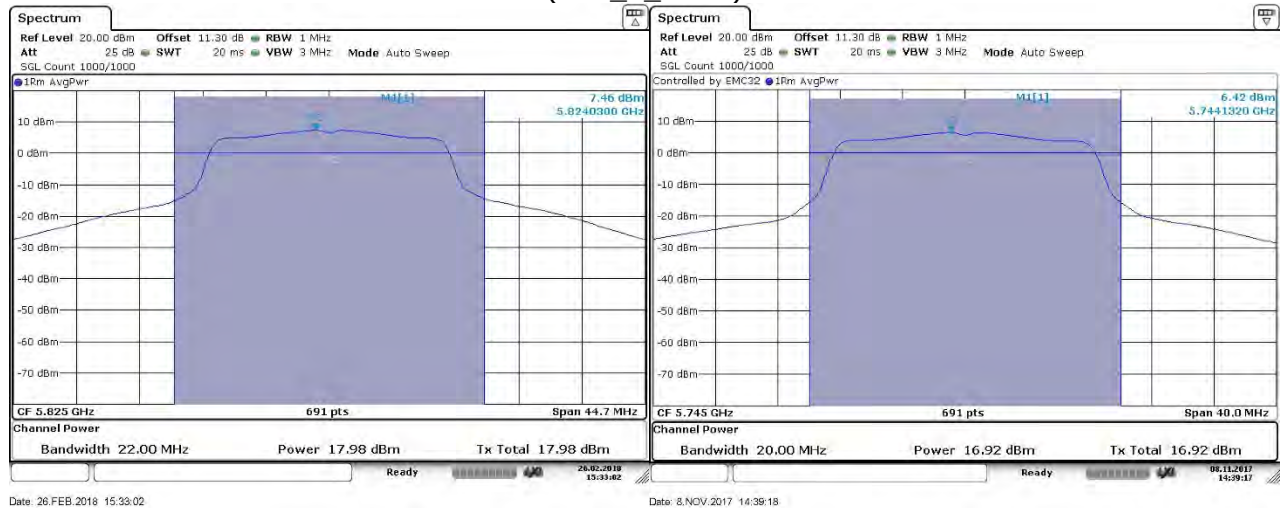

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband U-NII-3  
(S01\_3\_AA01)

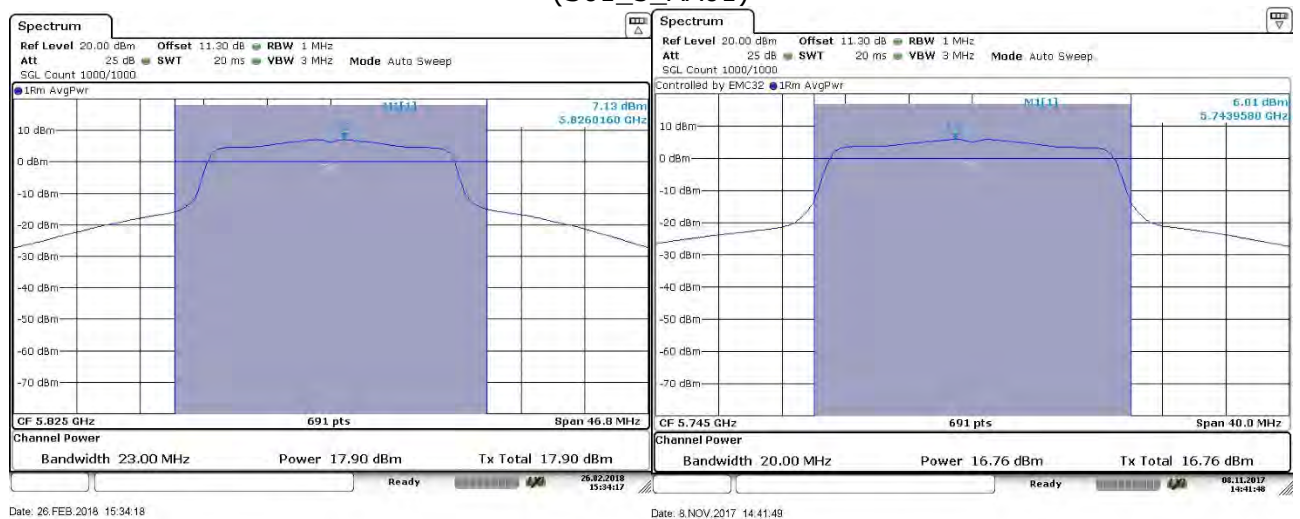


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband U-NII-3  
(S01\_3\_AA01)

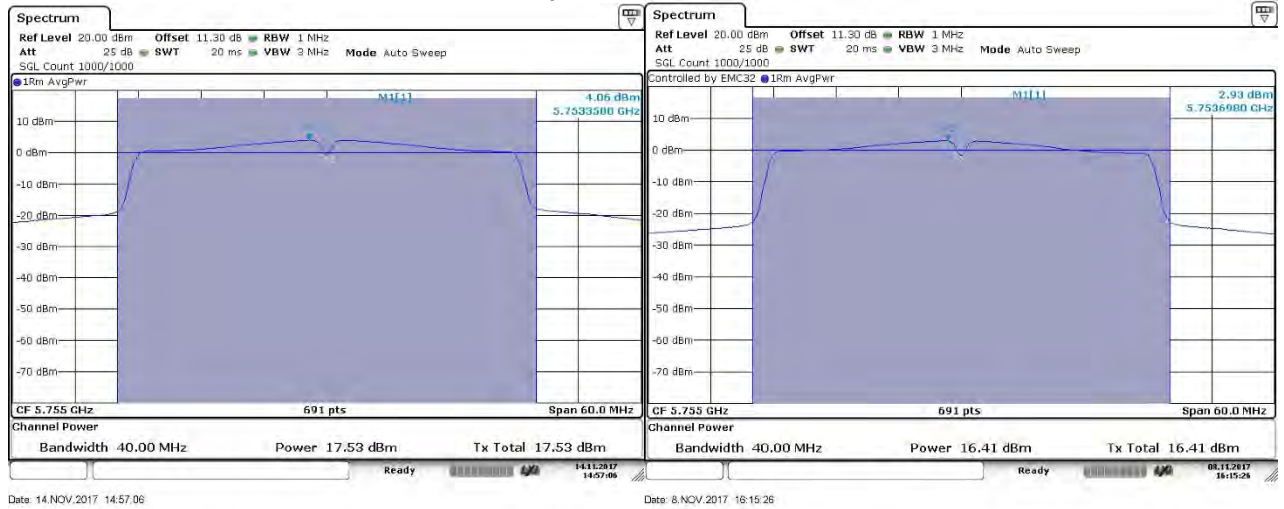

Core 0

Core 1

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband U-NII-3  
(S01\_3\_AA01)

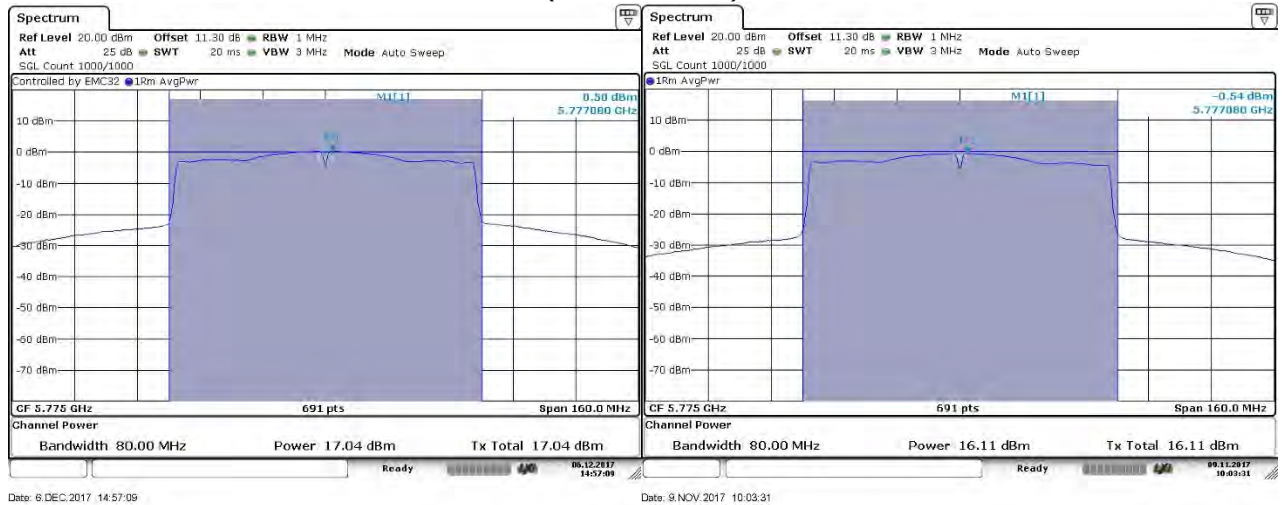

Core 0

Core 1

#### 4.5.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.6 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.6.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.  
The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweeptime: 5 ms
- Detector: RMS
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

### 4.6.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz.

This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

## B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:  
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:  
Limit: 30 dBm/500 kHz.

## 4.6.3 TEST PROTOCOL

### Measured Single Core Output Core 0

Ambient temperature: 25 °C  
Air Pressure: 1002 hPa  
Humidity: 35 %  
WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|-------------|
| 1             | 36      | 5180        | 2.2            | 11.0                | 8.8         | 10.0               | 5.8         | 4.2         |
|               | 40      | 5200        | 3.9            | 11.0                | 7.1         | 10.0               | 4.1         | 5.9         |
|               | 48      | 5240        | 3.8            | 11.0                | 7.2         | 10.0               | 4.2         | 5.8         |
| 2A            | 52      | 5260        | 4.3            | 11.0                | 6.7         | 11.0               | 6.7         | unit:       |
|               | 60      | 5300        | 4.2            | 11.0                | 6.8         | 11.0               | 6.8         | dBm/        |
|               | 64      | 5320        | 1.9            | 11.0                | 9.1         | 11.0               | 9.1         | MHz         |
| 2C            | 100     | 5500        | 2.6            | 11.0                | 8.4         | 11.0               | 8.4         |             |
|               | 104     | 5520        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         |             |
|               | 116     | 5580        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         |             |
|               | 140     | 5700        | 4.7            | 11.0                | 6.3         | 11.0               | 6.3         |             |
| 3             | 149     | 5745        | 7.2            | 30.0                | 22.8        | 30.0               | 22.8        |             |
|               | 157     | 5785        | 7.3            | 30.0                | 22.7        | 30.0               | 22.7        |             |
|               | 165     | 5825        | 7.5            | 30.0                | 22.5        | 30.0               | 22.5        |             |

WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|-------------|
| 1             | 36      | 5180        | 1.8            | 11.0                | 9.3         | 10.0               | 6.3         | 3.8         |
|               | 40      | 5200        | 3.5            | 11.0                | 7.5         | 10.0               | 4.5         | 5.5         |
|               | 48      | 5240        | 3.5            | 11.0                | 7.5         | 10.0               | 4.5         | 5.5         |
| 2A            | 52      | 5260        | 4.0            | 11.0                | 7.0         | 11.0               | 7.0         | unit:       |
|               | 60      | 5300        | 4.0            | 11.0                | 7.0         | 11.0               | 7.0         | dBm/        |
|               | 64      | 5320        | 1.6            | 11.0                | 9.4         | 11.0               | 9.4         | MHz         |
| 2C            | 100     | 5500        | 2.3            | 11.0                | 8.7         | 11.0               | 8.7         |             |
|               | 104     | 5520        | 4.5            | 11.0                | 6.5         | 11.0               | 6.5         |             |
|               | 116     | 5580        | 4.4            | 11.0                | 6.6         | 11.0               | 6.6         |             |
|               | 140     | 5700        | 4.3            | 11.0                | 6.7         | 11.0               | 6.7         |             |
| 3             | 149     | 5745        | 7.0            | 30.0                | 23.0        | 30.0               | 23.0        |             |
|               | 157     | 5785        | 7.1            | 30.0                | 22.9        | 30.0               | 22.9        |             |
|               | 165     | 5825        | 7.1            | 30.0                | 22.9        | 30.0               | 22.9        |             |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|---------------|
| 1             | 38      | 5190        | -4.9           | 11.0                | 15.9        | 10.0               | 12.9        | -2.9          |
|               | 46      | 5230        | -1.9           | 11.0                | 12.9        | 10.0               | 9.9         | 0.1           |
| 2A            | 54      | 5270        | -1.8           | 11.0                | 12.8        | 11.0               | 12.8        | unit:         |
|               | 62      | 5310        | -3.0           | 11.0                | 14.0        | 11.0               | 14.0        | dBm/          |
| 2C            | 102     | 5510        | -2.5           | 11.0                | 13.5        | 11.0               | 13.5        | MHz           |
|               | 110     | 5550        | 0.4            | 11.0                | 10.6        | 11.0               | 10.6        |               |
|               | 134     | 5670        | 0.3            | 11.0                | 10.7        | 11.0               | 10.7        |               |
| 3             | 151     | 5755        | <b>4.1</b>     | 30.0                | 25.9        | 30.0               | 25.9        |               |
|               | 159     | 5795        | 4.0            | 30.0                | 26.0        | 30.0               | 26.0        |               |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|---------------|
| 2C            | 144     | 5720        | 4.3            | 11.0                | 6.7         | 11.0               | 6.7         |               |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|---------------|
| 2C            | 142     | 5710        | 0.5            | 11.0                | 10.5        | 11.0               | 10.5        |               |

WLAN ac-Mode; 80 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|---------------|
| 1             | 42      | 5210        | -8.1           | 11.0                | 19.1        | 10.0               | 16.1        | -6.1          |
| 2A            | 58      | 5290        | -5.3           | 11.0                | 16.3        | 11.0               | 16.3        | unit:         |
| 2C            | 106     | 5530        | -5.8           | 11.0                | 16.8        | 11.0               | 16.8        | dBm/          |
|               | 122     | 5610        | -6.0           | 11.0                | 17.0        | 11.0               | 17.0        | MHz           |
|               | 138     | 5690        | -3.2           | 11.0                | 14.2        | 11.0               | 14.2        |               |
| 3             | 155     | 5775        | <b>0.5</b>     | 30.0                | 29.5        | 30.0               | 29.5        |               |

## Measured Single Core Output Core 1

WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSPD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|---------------|
| 1             | 36      | 5180        | 2.4            | 11.0                | 8.6         | 10.0               | 5.6         | 4.4           |
|               | 40      | 5200        | 4.7            | 11.0                | 6.3         | 10.0               | 3.3         | 6.7           |
|               | 48      | 5240        | 4.1            | 11.0                | 6.9         | 10.0               | 3.9         | 6.1           |
| 2A            | 52      | 5260        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         | unit:         |
|               | 60      | 5300        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         | MHz           |
|               | 64      | 5320        | 3.0            | 11.0                | 8.0         | 11.0               | 8.0         |               |
| 2C            | 100     | 5500        | 3.1            | 11.0                | 7.9         | 11.0               | 7.9         |               |
|               | 104     | 5520        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         |               |
|               | 116     | 5580        | 4.7            | 11.0                | 6.3         | 11.0               | 6.3         |               |
|               | 140     | 5700        | 4.5            | 11.0                | 6.5         | 11.0               | 6.5         |               |
| 3             | 149     | 5745        | <b>6.4</b>     | 30.0                | 23.6        | 30.0               | 23.6        |               |
|               | 157     | 5785        | 6.2            | 30.0                | 23.8        | 30.0               | 23.8        |               |
|               | 165     | 5825        | 5.9            | 30.0                | 24.1        | 30.0               | 24.1        |               |

WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 1             | 36      | 5180        | 2.0            | 11.0                | 9.0         | 10.0               | 6.0         | 4.0          |
|               | 40      | 5200        | 4.4            | 11.0                | 6.6         | 10.0               | 3.6         | 6.4          |
|               | 48      | 5240        | 3.7            | 11.0                | 7.3         | 10.0               | 4.3         | 5.7          |
| 2A            | 52      | 5260        | 4.5            | 11.0                | 6.5         | 11.0               | 6.5         | unit:        |
|               | 60      | 5300        | 4.4            | 11.0                | 6.7         | 11.0               | 6.7         | MHz          |
|               | 64      | 5320        | 2.6            | 11.0                | 8.4         | 11.0               | 8.4         |              |
| 2C            | 100     | 5500        | 2.7            | 11.0                | 8.3         | 11.0               | 8.3         |              |
|               | 104     | 5520        | 4.5            | 11.0                | 6.5         | 11.0               | 6.5         |              |
|               | 116     | 5580        | 4.3            | 11.0                | 6.7         | 11.0               | 6.7         |              |
|               | 140     | 5700        | 4.1            | 11.0                | 6.9         | 11.0               | 6.9         |              |
| 3             | 149     | 5745        | <b>6.0</b>     | 30.0                | 24.0        | 30.0               | 24.0        |              |
|               | 157     | 5785        | 5.8            | 30.0                | 24.2        | 30.0               | 24.2        |              |
|               | 165     | 5825        | 5.5            | 30.0                | 24.5        | 30.0               | 24.5        |              |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 1             | 38      | 5190        | -3.6           | 11.0                | 14.6        | 10.0               | 11.6        | -1.6         |
|               | 46      | 5230        | -0.7           | 11.0                | 11.7        | 10.0               | 8.7         | 1.4          |
| 2A            | 54      | 5270        | -0.7           | 11.0                | 11.7        | 11.0               | 11.7        | unit:        |
|               | 62      | 5310        | -1.8           | 11.0                | 12.8        | 11.0               | 12.8        | dBm/         |
| 2C            | 102     | 5510        | -1.5           | 11.0                | 12.5        | 11.0               | 12.5        | MHz          |
|               | 110     | 5550        | 1.0            | 11.0                | 10.0        | 11.0               | 10.0        |              |
|               | 134     | 5670        | 0.8            | 11.0                | 10.2        | 11.0               | 10.2        |              |
| 3             | 151     | 5755        | <b>2.9</b>     | 30.0                | 27.1        | 30.0               | 27.1        |              |
|               | 159     | 5795        | 2.9            | 30.0                | 27.1        | 30.0               | 27.1        |              |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 2C            | 144     | 5720        | 4.8            | 11.0                | 6.2         | 11.0               | 6.2         |              |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 2C            | 142     | 5710        | 1.5            | 11.0                | 9.5         | 11.0               | 9.5         |              |

WLAN ac-Mode; 80 MHz; x Mbit/s MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 1             | 42      | 5210        | -6.3           | 11.0                | 17.3        | 10.0               | 14.3        | -4.3         |
| 2A            | 58      | 5290        | -3.6           | 11.0                | 14.6        | 11.0               | 14.6        | unit:        |
| 2C            | 106     | 5530        | -4.6           | 11.0                | 15.6        | 11.0               | 15.6        | dBm/         |
|               | 122     | 5610        | -4.7           | 11.0                | 15.7        | 11.0               | 15.7        | MHz          |
|               | 138     | 5690        | -2.3           | 11.0                | 13.3        | 11.0               | 13.3        |              |
| 3             | 155     | 5775        | <b>-0.5</b>    | 30.0                | 30.5        | 30.0               | 30.5        |              |

## Calculated MIMO Output Core 0 + Core 1

Ambient temperature: 25 °C  
Air Pressure: 1002 hPa  
Humidity: 35 %  
WLAN n-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | Power Core 0 [dBm/MHz] | Power Core 1 [dBm/MHz] |
|---------------|---------|-------------|----------------|---------------------|-------------|------------------------|------------------------|
| 1             | 36      | 5180        | 4.9            | 11.0                | 6.1         | 1.8                    | 2.0                    |
|               | 40      | 5200        | 7.0            | 11.0                | 4.0         | 3.5                    | 4.4                    |
|               | 48      | 5240        | 6.6            | 11.0                | 4.4         | 3.5                    | 3.7                    |
| 2A            | 52      | 5260        | 7.3            | 11.0                | 3.7         | 4.0                    | 4.5                    |
|               | 60      | 5300        | 7.2            | 11.0                | 3.8         | 4.0                    | 4.4                    |
|               | 64      | 5320        | 5.2            | 11.0                | 5.8         | 1.6                    | 2.6                    |
| 2C            | 100     | 5500        | 5.5            | 11.0                | 5.5         | 2.3                    | 2.7                    |
|               | 104     | 5520        | 7.5            | 11.0                | 3.5         | 4.5                    | 4.5                    |
|               | 116     | 5580        | 7.4            | 11.0                | 3.6         | 4.4                    | 4.3                    |
|               | 140     | 5700        | 7.2            | 11.0                | 3.8         | 4.3                    | 4.1                    |
| 3             | 149     | 5745        | 9.5            | 30.0                | 20.5        | 7.0                    | 6.0                    |
|               | 157     | 5785        | 9.5            | 30.0                | 20.5        | 7.1                    | 5.8                    |
|               | 165     | 5825        | 9.4            | 30.0                | 20.6        | 7.1                    | 5.5                    |

table continued

| U-NII-Subband | Ch. No. | Freq. [MHz] | IC EIRP MPD          | IC Limit [dBm/MHz] | Margin [dB] |
|---------------|---------|-------------|----------------------|--------------------|-------------|
| 1             | 36      | 5180        | 6.9                  | 10.0               | 3.1         |
|               | 44      | 5220        | 9.0                  | 10.0               | 1.0         |
|               | 48      | 5240        | 8.6                  | 10.0               | 1.4         |
| 2A            | 52      | 5260        | unit:<br>dBm/<br>MHz | 11.0               | 3.7         |
|               | 56      | 5280        |                      | 11.0               | 3.8         |
|               | 64      | 5320        |                      | 11.0               | 5.8         |
| 2C            | 100     | 5500        |                      | 11.0               | 5.5         |
|               | 116     | 5580        |                      | 11.0               | 3.6         |
|               | 140     | 5700        |                      | 11.0               | 3.8         |
| 3             | 149     | 5745        |                      | 30.0               | 20.5        |
|               | 157     | 5785        |                      | 30.0               | 20.5        |
|               | 165     | 5825        |                      | 30.0               | 20.6        |

WLAN n-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | Power Core 0 [dBm/MHz] | Power Core 1 [dBm/MHz] |
|---------------|---------|-------------|----------------|---------------------|-------------|------------------------|------------------------|
| 1             | 38      | 5190        | -1.2           | 11.0                | 12.2        | -4.9                   | -3.6                   |
|               | 46      | 5230        | 1.8            | 11.0                | 9.2         | -1.9                   | -0.7                   |
| 2A            | 54      | 5270        | 1.8            | 11.0                | 9.2         | -1.8                   | -0.7                   |
|               | 62      | 5310        | 0.7            | 11.0                | 10.3        | -3.0                   | -1.8                   |
| 2C            | 102     | 5510        | 1.1            | 11.0                | 9.9         | -2.5                   | -1.5                   |
|               | 110     | 5550        | 3.8            | 11.0                | 7.2         | 0.4                    | 1.0                    |
|               | 134     | 5670        | 3.6            | 11.0                | 7.4         | 0.3                    | 0.8                    |
| 3             | 151     | 5755        | 6.5            | 30.0                | 23.5        | 4.1                    | 2.9                    |
|               | 159     | 5795        | 6.5            | 30.0                | 23.5        | 4.0                    | 2.9                    |

| table continued |         |             |                      |                    |             |
|-----------------|---------|-------------|----------------------|--------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | IC EIRP MPD          | IC Limit [dBm/MHz] | Margin [dB] |
| 1               | 38      | 5190        | 0.8                  | 10.0               | 9.2         |
|                 | 46      | 5230        | 3.8                  | 10.0               | 6.2         |
| 2A              | 54      | 5270        | unit:<br>dBm/<br>MHz | 11.0               | 9.2         |
|                 | 62      | 5310        |                      | 11.0               | 10.3        |
| 2C              | 102     | 5510        |                      | 11.0               | 9.9         |
|                 | 110     | 5550        |                      | 11.0               | 7.2         |
|                 | 134     | 5670        |                      | 11.0               | 7.4         |
| 3               | 151     | 5755        |                      | 30.0               | 23.5        |
|                 | 159     | 5795        |                      | 30.0               | 23.5        |

WLAN ac-Mode; 20 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | Power Core 0 [dBm/MHz] | Power Core 1 [dBm/MHz] |
|---------------|---------|-------------|---------------|---------------------|-------------|------------------------|------------------------|
| 2C            | 144     | 5720        | 7.6           | 11.0                | 3.4         | 4.3                    | 4.8                    |

| table continued |         |             |             |                    |             |
|-----------------|---------|-------------|-------------|--------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | IC EIRP MPD | IC Limit [dBm/MHz] | Margin [dB] |
| 2C              | 144     | 5720        |             | 11.0               | 3.4         |

WLAN ac-Mode; 40 MHz; MCS0

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | Power Core 0 [dBm/MHz] | Power Core 1 [dBm/MHz] |
|---------------|---------|-------------|---------------|---------------------|-------------|------------------------|------------------------|
| 2C            | 142     | 5710        | 4.0           | 11.0                | 7.0         | 0.5                    | 1.5                    |

| table continued |         |             |             |                    |             |
|-----------------|---------|-------------|-------------|--------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | IC EIRP MPD | IC Limit [dBm/MHz] | Margin [dB] |
| 2C              | 142     | 5710        |             | 11.0               | 7.0         |

WLAN ac-Mode; 80 MHz; MCS0


| U-NII-Subband | Ch. No. | Freq. [MHz] | MPD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | Power Core 0 [dBm/MHz] | Power Core 1 [dBm/MHz] |
|---------------|---------|-------------|---------------|---------------------|-------------|------------------------|------------------------|
| 1             | 42      | 5210        | -4.1          | 11.0                | 15.1        | -8.1                   | -6.3                   |
| 2A            | 58      | 5290        | -1.4          | 11.0                | 12.4        | -5.3                   | -3.6                   |
| 2C            | 106     | 5530        | -2.1          | 11.0                | 13.1        | -5.8                   | -4.6                   |
|               | 122     | 5610        | -2.3          | 11.0                | 13.3        | -6.0                   | -4.7                   |
|               | 138     | 5690        | 0.3           | 11.0                | 10.7        | -3.2                   | -2.3                   |
| 3             | 155     | 5775        | 3.0           | 30.0                | 27.0        | 0.5                    | -0.5                   |

| table continued |         |             |             |                    |             |
|-----------------|---------|-------------|-------------|--------------------|-------------|
| U-NII-Subband   | Ch. No. | Freq. [MHz] | IC EIRP MPD | IC Limit [dBm/MHz] | Margin [dB] |
| 1               | 42      | 5210        | -2.1        | 10.0               | 12.1        |
| 2A              | 58      | 5290        | unit:       | 11.0               | 12.4        |
| 2C              | 106     | 5530        | dBm/<br>MHz | 11.0               | 13.1        |
|                 | 122     | 5610        |             | 11.0               | 13.3        |
|                 | 138     | 5690        |             | 11.0               | 10.7        |
| 3               | 155     | 5775        |             | 30.0               | 27.0        |


Remark: Please see next sub-clause for the measurement plot.  
PSD of Band 3 measured with 1 MHz instead of 500 kHz (worse case).

#### 4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN a 20 MHz, Subband U-NII-3  
(S01\_3\_AA01)

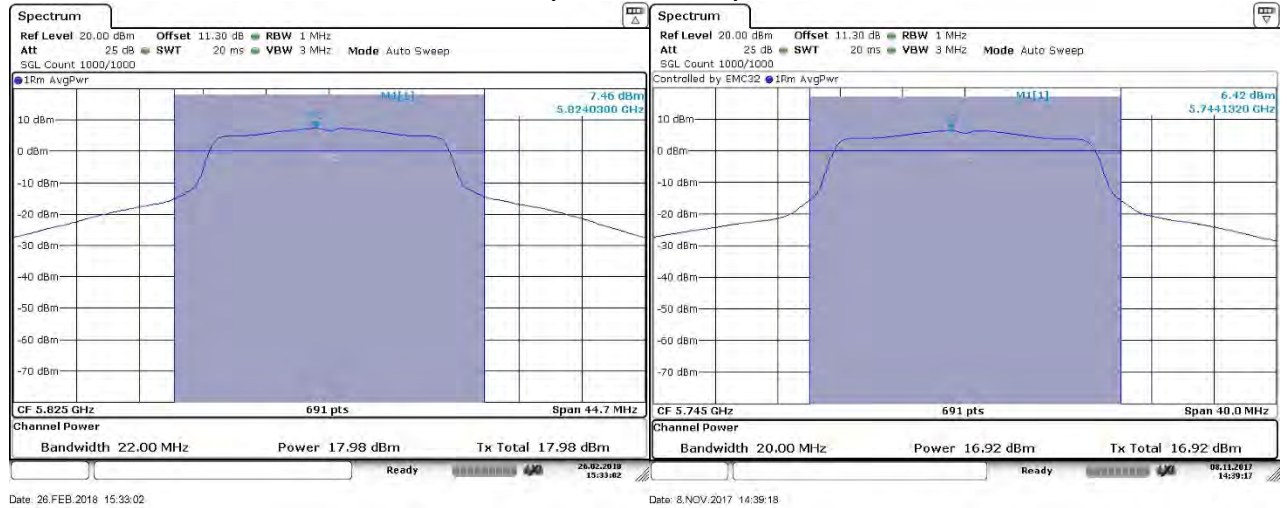

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband U-NII-3  
(S01\_3\_AA01)

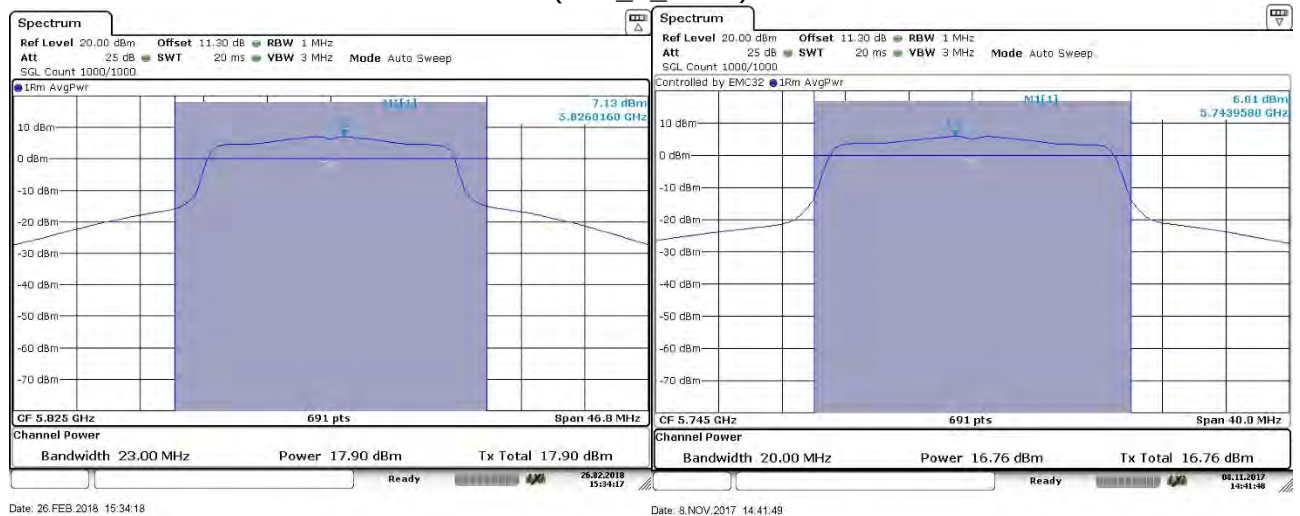


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband U-NII-3  
(S01\_3\_AA01)

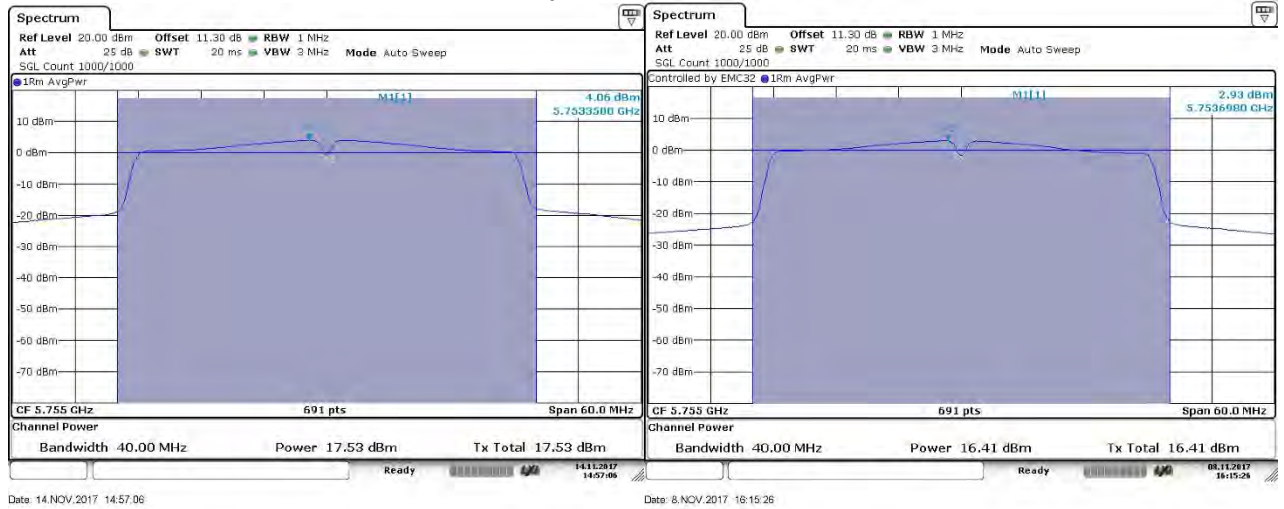

Core 0

Core 1

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband U-NII-3  
(S01\_3\_AA01)

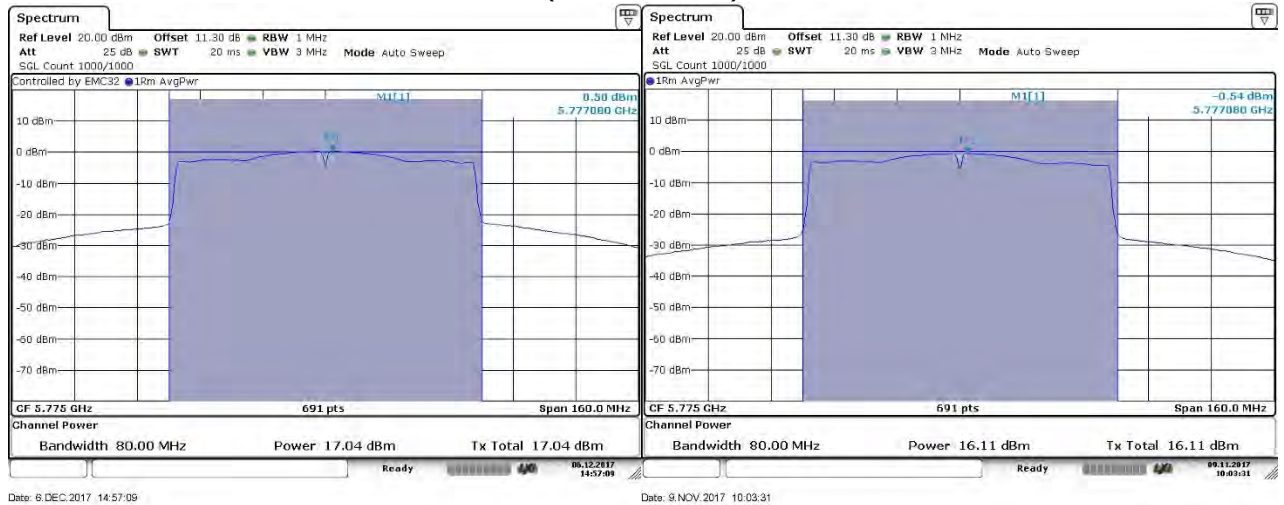

Core 0

Core 1

#### 4.6.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.7 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

### 4.7.1 RADIATED MEASUREMENTS (ANTENNA PORTS TERMINATED WITH 50 OHM)

**The test was performed according to:**  
ANSI C63.10

#### 4.7.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test site
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

#### **Step 2: Adjustment measurement**

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

#### **Step 3: Final measurement with QP detector**

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

### **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

#### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

Above 26 GHz the measurement distance is reduced to 1 m.

#### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna in step 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^\circ$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

### **Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### **4.7.1.2 Test Requirements / Limits**

##### **A) FCC**

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz EIRP at  $\geq 75$  MHz away from the band edge,  
75 MHz to 25 MHz away from the band edge increasing linearly to 10 dBm/MHz  
25 MHz to 5 MHz away from the band edge increasing linearly to 15.6 dBm/MHz  
5 MHz to the band edge increasing linearly to 27 dBm/MHz

##### **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150–5250 MHz, indoor operation only:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250–5350 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470–5600 MHz and 5650–5725 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725–5825 MHz:

Limit: –27 dBm/MHz EIRP at  $\geq 75$  MHz away from the band edge,  
75 MHz to 25 MHz away from the band edge increasing linearly to 10 dBm/MHz

25 MHz to 5 MHz away from the band edge increasing linearly to 15.6 dBm/MHz  
5 MHz to the band edge increasing linearly to 27 dBm/MHz

### C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (µV/m)     | Measurement distance (m) | Limits (dBµV/m)    |
|------------------|------------------|--------------------------|--------------------|
| 0.009 – 0.49     | 2400/F(kHz)@300m | 3                        | (48.5 – 13.8)@300m |
| 0.49 – 1.705     | 24000/F(kHz)@30m | 3                        | (33.8 – 23.0)@30m  |
| 1.705 – 30       | 30@30m           | 3                        | 29.5@30m           |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 – 88          | 100@3m       | 3                        | 40.0@3m         |
| 88 – 216         | 150@3m       | 3                        | 43.5@3m         |
| 216 – 960        | 200@3m       | 3                        | 46.0@3m         |
| 960 – 26000      | 500@3m       | 3                        | 54.0@3m         |
| 26000 – 40000    | 500@3m       | 1                        | 54.0@3m         |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 \*)

UE – "Undesirable Emission Limit" according FCC §15.407

BE-RB – Band Edge Limit basing on "Restricted Band Limits"

BE-UE – Band Edge Limit basing on "Undesirable Emission Limit"

\*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

#### 4.7.1.3 Test Protocol

**Ambient temperature:** 20–26 °C  
**Air Pressure:** 999–1026 hPa  
**Humidity:** 30–47 %

**WLAN a-Mode; 20 MHz; 6 Mbit/s**

**Applied duty cycle correction (AV): 0 dB**

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 36      | 5180                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 44      | 5220                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 48      | 5240                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 25      | 5260                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 56      | 5280                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 64      | 5320                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 100     | 5500                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 116     | 5580                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 140     | 5700                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 149     | 5745                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 157     | 5785                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 165     | 5825                   | -                    | -                       | Peak     | -         | -              | >6          | -          |

**WLAN n-Mode; 20 MHz; MCS 0**

**Applied duty cycle correction (AV): 0 dB**


| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 36      | 5180                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 44      | 5220                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 48      | 5240                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 25      | 5260                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 56      | 5280                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 64      | 5320                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 100     | 5500                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 116     | 5580                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 140     | 5700                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 149     | 5745                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 157     | 5785                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 165     | 5825                   | -                    | -                       | Peak     | -         | -              | >6          | -          |

| WLAN n-Mode; 40 MHz; MCS 0               |                        |                      |                         |          |           |                |             |            |
|------------------------------------------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| Applied duty cycle correction (AV): 0 dB |                        |                      |                         |          |           |                |             |            |
| Ch. No.                                  | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
| 38                                       | 5190                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 46                                       | 5230                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 54                                       | 5270                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 62                                       | 5310                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 102                                      | 5510                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 118                                      | 5590                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 134                                      | 5670                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 151                                      | 5755                   | -                    | -                       | Peak     | -         | -              | >6          | -          |
| 159                                      | 5795                   | -                    | -                       | Peak     | -         | -              | >6          | -          |

Remark: Please see next sub-clause for the measurement plot.

#### 4.7.1.4 Measurement Plot (showing the highest value, "worst case")


Radio Technology = WLAN a 20 MHz, Range 9 kHz – 30 MHz, Core 0, Channel 140 (S01\_3\_AB01)

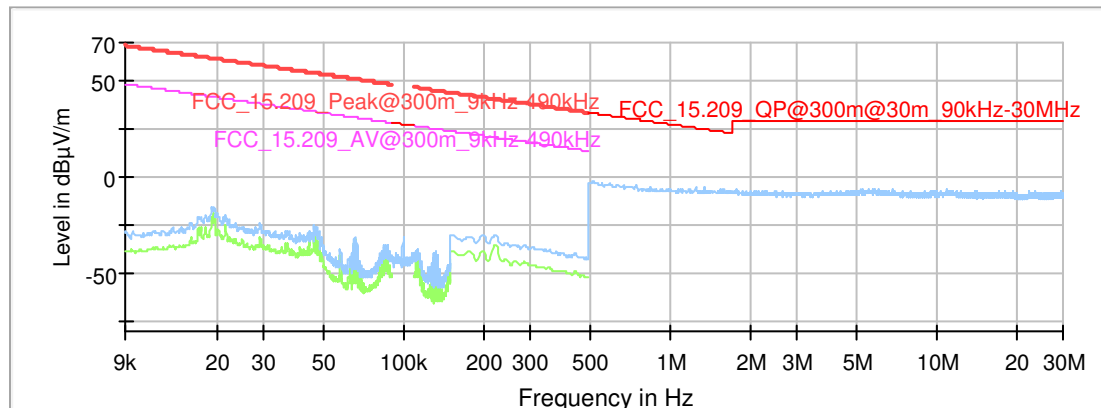

#### Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Comment |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|---------|
| ---             | ---              | ---              | ---            | ---         | ---             | ---             | ---         |     | ---           | ---        |         |


Radio Technology = WLAN a 20 MHz, Range 30 MHz – 1 GHz, Core 1, Channel 116  
(S01\_3\_AC01)

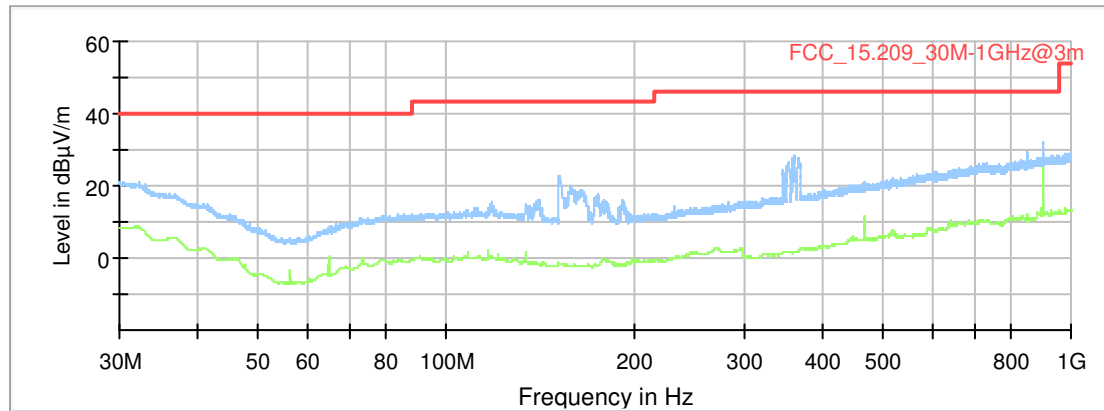

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Comment |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|---------|
| ---             | ---                | ---            | ---         | ---             | ---             | ---         |     | ---           | ---        |         |


Radio Technology = WLAN a 20 MHz, Range 1 GHz – 26 GHz, Core 1, Channel 116  
(S01\_3\_AB01)

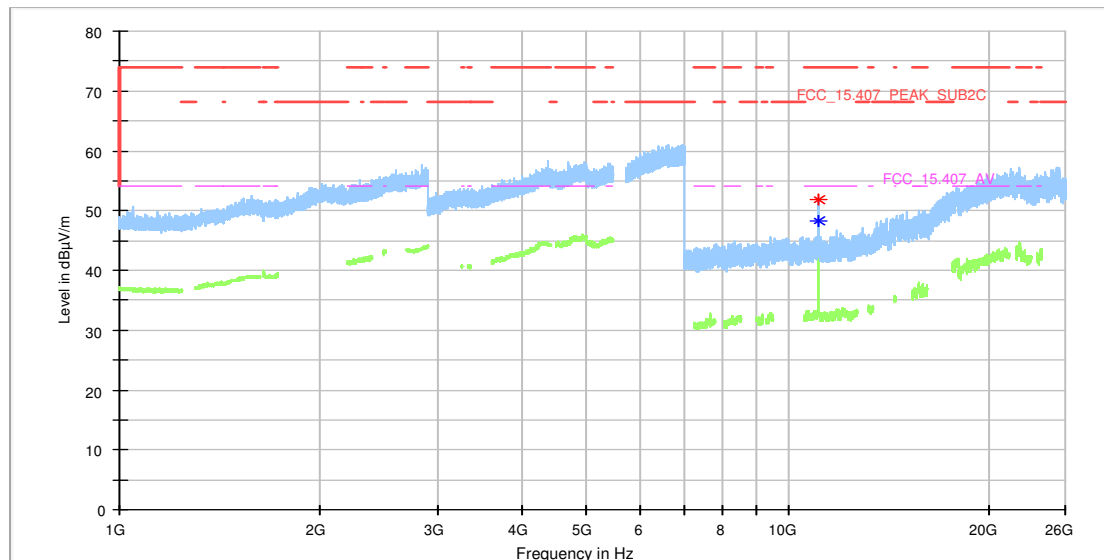

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 11159.965000    | ---              | 48.37            | 54.00          | 5.63        | ---             | ---             | 150.0       | V   | 0.0           | 0.0             |
| 11159.965000    | 51.87            | ---              | 74.00          | 22.13       | ---             | ---             | 150.0       | V   | 0.0           | 0.0             |

Radio Technology = WLAN a 20 MHz, Range 26 GHz – 40 GHz, Core 0, Channel 44  
(S01\_3\_AA01)

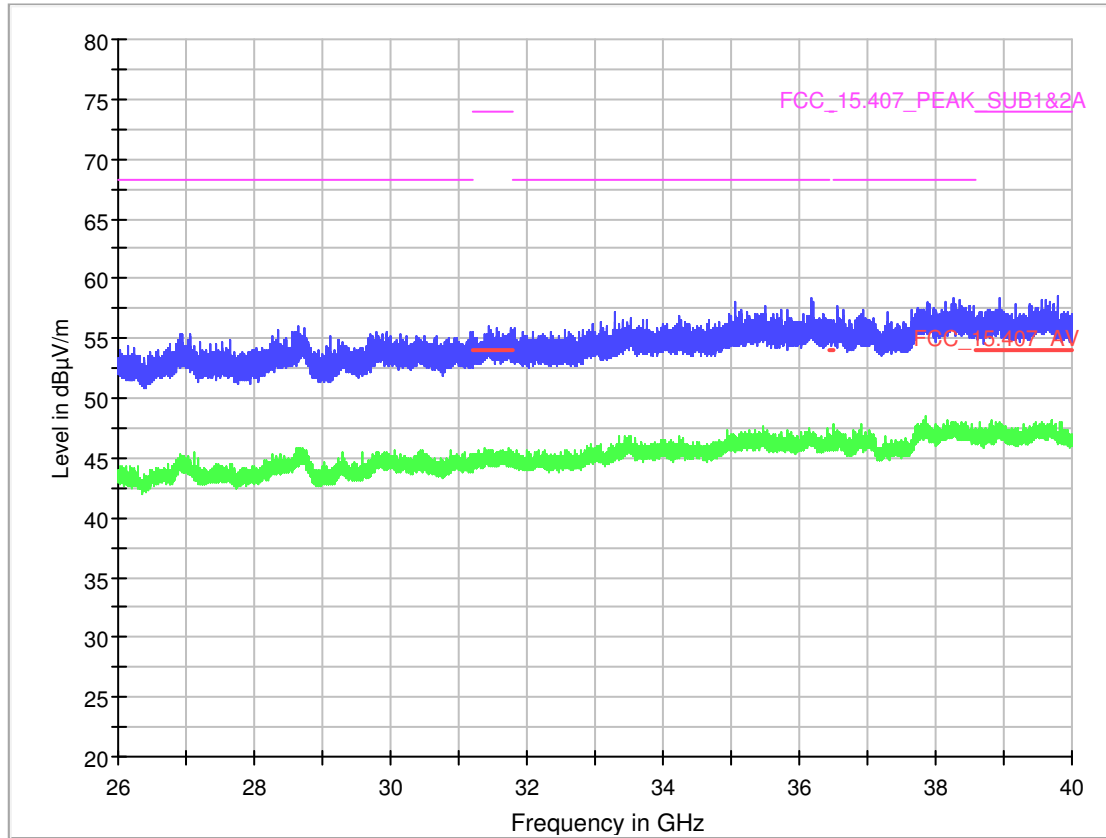

## 4.7.2 CONDUCTED MEASUREMENTS AT ANTENNA PORT

### The test was performed according to:

ANSI C63.10

#### 4.7.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the conducted spurious emissions measurements. The antenna port of the EUT was connected to spectrum analyzer via a short coax cable with a known cable loss  $C_L$ . The measured voltage  $U_{meas}$  at the 50 Ohm input of the analyser was used to calculate the EUT output power at the antenna port:

$$P = U_{meas}^2 + C_L - 107$$

where

$P$  is the output power in dBm

$U_{meas}$  is the measured voltage at the 50 Ohm input of the analyzer in dB $\mu$ V

$C_L$  is the cable loss of the used cable.

The maximum transmit isotropically antenna gain  $G_i$  (in dBi) was added to the measured output power  $P$  to determine the equivalent isotropically radiated power EIRP.

$$EIRP = P + G_i$$

where

$P$  is the output power in dBm

$G_i$  is maximum transmit antenna gain in dBi.

The resultant EIRP level was converted to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20 \log d + 104.8$$

where

$E$  is the electric field strength in dB $\mu$ V/m

EIRP is the equivalent isotropically radiated power in dBm

$d$  is the specified measurement distance in m.

The appropriate maximum ground reflection factor was added to the EIRP:

6 dB for frequencies  $\leq 30$  MHz;

4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and

0 dB for frequencies  $> 1000$  MHz).

| Frequency range<br>[MHz] | measurement distance $d$<br>[m] | $-20 \log d$<br>[dB] | ground reflection factor<br>[dB] |
|--------------------------|---------------------------------|----------------------|----------------------------------|
| 0,009 – 0,49             | 300                             | -49,54               | 6                                |
| 0,49 – 30                | 30                              | -29,54               | 6                                |
| 30 – 1000                | 3                               | -9,54                | 4,7                              |
| $> 1000$                 | 3                               | -9,54                | 0                                |

For the MIMO values of Core 0 + Core 1, the measured dBm values were converted to mW, than added together, reconverted to dBm and afterwards converted to dB $\mu$ V/m as described above.

### 1. Measurement up to 30 MHz

#### Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

- Detector: Peak-Maxhold/ Quasipeak (FFT-based)
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

#### Step 2: final measurement

EMI receiver settings:

- Detector: Peak / Average / Quasi-Peak (depending on frequency)
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz (depending on frequency)
- Measuring time / Frequency step: 1 s

### 2. Measurement above 30 MHz and up to 1 GHz

#### Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings:

- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms

#### Step 2: final measurement

EMI receiver settings:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

### 3. Measurement above 1 GHz

#### Step 1: pre measurement

Settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

#### Step 2: final measurement

Spectrum analyzer settings:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4.7.2.2 Test Requirements / Limits

Please see test description for radiated measurement

#### 4.7.2.3 Test Protocol

**Ambient temperature:** 20–25 °C

**Air Pressure:** 981–1026 hPa

**Humidity:** 34–44 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

**Applied duty cycle correction (AV): 0 dB**

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level Core 0 [dBμV/m] | Spurious Level Core 1 [dBμV/m] | Spurious Level Core 0 + 1 [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|--------------------------------|--------------------------------|------------------------------------|----------|-----------|----------------|-------------|------------|
| 36      | 5180                   | 10353.4              | 51.2                           | 45.4                           | 52.2                               | PEAK     | 1000      | 68.0           | 16.8        | UE         |
| 40      | 5200                   | 10402.5              | 51.7                           | 45.1                           | 52.6                               | PEAK     | 1000      | 68.0           | 16.3        | UE         |
| 40      | 5200                   | 15602.9              | 51.7                           | 45.0                           | 52.5                               | PEAK     | 1000      | 74.0           | 22.3        | RB         |
| 40      | 5200                   | 15602.4              | 39.0                           | 34.4                           | 40.3                               | AV       | 1000      | 54.0           | 15.0        | RB         |
| 48      | 5240                   | 10482.9              | 48.5                           | 43.7                           | 49.7                               | PEAK     | 1000      | 68.0           | 19.5        | UE         |
| 48      | 5240                   | 15721.6              | 51.1                           | 46.8                           | 52.5                               | PEAK     | 1000      | 74.0           | 22.9        | RB         |
| 48      | 5240                   | 15717.1              | 38.8                           | 35.5                           | 40.5                               | AV       | 1000      | 54.0           | 15.2        | RB         |
| 52      | 5260                   | 10522.3              | 47.7                           | 44.0                           | 49.2                               | PEAK     | 1000      | 68.0           | 20.3        | UE         |
| 52      | 5260                   | 15775.1              | 51.0                           | 45.7                           | 52.1                               | PEAK     | 1000      | 74.0           | 23.0        | RB         |
| 52      | 5260                   | 15780.5              | 38.6                           | 35.1                           | 40.2                               | AV       | 1000      | 54.0           | 15.4        | RB         |
| 60      | 5300                   | 15902.2              | 48.3                           | 45.4                           | 50.1                               | PEAK     | 1000      | 74.0           | 25.7        | RB         |
| 60      | 5300                   | 15900.8              | 36.7                           | 34.0                           | 38.6                               | AV       | 1000      | 54.0           | 17.3        | RB         |
| 64      | 5320                   | -                    | -                              | -                              | -                                  | Peak     | -         | -              | -           | -          |
| 100     | 5500                   | 10999.2              | 51.8                           | 44.0                           | 52.5                               | PEAK     | 1000      | 74.0           | 22.2        | RB         |
| 100     | 5500                   | 11000.3              | 39.2                           | 33.4                           | 40.2                               | AV       | 1000      | 54.0           | 14.8        | RB         |
| 104     | 5520                   | 11038.4              | 49.2                           | 44.2                           | 50.4                               | PEAK     | 1000      | 74.0           | 24.8        | RB         |
| 104     | 5520                   | 11042.4              | 38.7                           | 33.1                           | 39.8                               | AV       | 1000      | 54.0           | 15.3        | RB         |
| 116     | 5580                   | 11159.3              | <b>52.4</b>                    | 45.8                           | 53.3                               | PEAK     | 1000      | 74.0           | 21.6        | RB         |
| 116     | 5580                   | 11159.1              | 40.9                           | 34.7                           | 41.8                               | AV       | 1000      | 54.0           | 13.1        | RB         |
| 140     | 5700                   | 11399.5              | 51.5                           | 47.3                           | 52.9                               | PEAK     | 1000      | 74.0           | 22.5        | RB         |
| 140     | 5700                   | 11401.5              | 40.2                           | 36.5                           | 41.7                               | AV       | 1000      | 54.0           | 13.8        | RB         |
| 149     | 5745                   | 11489.5              | 52.1                           | 47.5                           | 53.4                               | PEAK     | 1000      | 74.0           | 21.9        | RB         |
| 149     | 5745                   | 11492.6              | 41.2                           | 37.1                           | 42.6                               | AV       | 1000      | 54.0           | 12.8        | RB         |
| 157     | 5785                   | 11570.0              | 51.9                           | 48.3                           | 53.5                               | PEAK     | 1000      | 74.0           | 22.1        | RB         |
| 157     | 5785                   | 11566.6              | <b>41.5</b>                    | 36.8                           | 42.8                               | AV       | 1000      | 54.0           | 12.5        | RB         |
| 165     | 5825                   | 11652.8              | 52.1                           | 48.1                           | 53.6                               | PEAK     | 1000      | 74.0           | 21.9        | RB         |
| 165     | 5825                   | 11646.1              | 41.2                           | 37.7                           | 42.8                               | AV       | 1000      | 54.0           | 12.8        | RB         |

WLAN n-Mode; 20 MHz; MCS 0

Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level Core 0 [dBμV/m] | Spurious Level Core 1 [dBμV/m] | Spurious Level Core 0 + 1 [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|--------------------------------|--------------------------------|------------------------------------|----------|-----------|----------------|-------------|------------|
| 36      | 5180                   | 10359.4              | 51.6                           | 44.9                           | 52.4                               | PEAK     | 1000      | 68.0           | 15.6        | UE         |
| 40      | 5200                   | 10398.2              | 51.5                           | 45.2                           | 52.4                               | PEAK     | 1000      | 68.0           | 15.6        | UE         |
| 40      | 5200                   | 15597.5              | 52.2                           | 46.1                           | 53.2                               | PEAK     | 1000      | 74.0           | 20.8        | RB         |
| 40      | 5200                   | 15604.3              | 38.5                           | 34.5                           | 40.0                               | AV       | 1000      | 54.0           | 14.0        | RB         |
| 48      | 5240                   | 10479.0              | 48.3                           | 44.3                           | 49.8                               | PEAK     | 1000      | 68.0           | 18.2        | UE         |
| 48      | 5240                   | 15720.7              | 51.2                           | 46.5                           | 52.5                               | PEAK     | 1000      | 74.0           | 21.5        | RB         |
| 48      | 5240                   | 15718.5              | 38.3                           | 35.3                           | 40.1                               | AV       | 1000      | 54.0           | 13.9        | RB         |
| 52      | 5260                   | 10521.0              | 47.8                           | 44.4                           | 49.4                               | PEAK     | 1000      | 68.0           | 18.6        | UE         |
| 52      | 5260                   | 15775.4              | 50.2                           | 45.7                           | 51.5                               | PEAK     | 1000      | 74.0           | 22.5        | RB         |
| 52      | 5260                   | 15779.5              | 38.6                           | 35.1                           | 40.2                               | AV       | 1000      | 54.0           | 13.8        | RB         |
| 60      | 5300                   | -                    | -                              | -                              | -                                  | Peak     | -         | -              | >6          | -          |
| 64      | 5320                   | -                    | -                              | -                              | -                                  | Peak     | -         | -              | >6          | -          |
| 100     | 5500                   | 10999.5              | 48.7                           | 44.1                           | 50.0                               | PEAK     | 1000      | 74.0           | 24.0        | RB         |
| 100     | 5500                   | 10999.8              | 37.2                           | 33.0                           | 38.6                               | AV       | 1000      | 54.0           | 15.4        | RB         |
| 104     | 5520                   | 11039.6              | 49.0                           | 44.3                           | 50.3                               | PEAK     | 1000      | 74.0           | 23.7        | RB         |
| 104     | 5520                   | 11040.2              | 38.8                           | 33.2                           | 39.9                               | AV       | 1000      | 54.0           | 14.1        | RB         |
| 116     | 5580                   | 11158.5              | 51.2                           | 44.4                           | 52.0                               | PEAK     | 1000      | 74.0           | 22.0        | RB         |
| 116     | 5580                   | 11159.3              | 39.7                           | 34.0                           | 40.7                               | AV       | 1000      | 54.0           | 13.3        | RB         |
| 144     | 5720                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 149     | 5745                   | 11491.6              | <b>52.7</b>                    | 47.1                           | 53.8                               | PEAK     | 1000      | 74.0           | 20.2        | RB         |
| 149     | 5745                   | 11491.6              | 40.4                           | 36.2                           | 41.8                               | AV       | 1000      | 54.0           | 12.2        | RB         |
| 157     | 5785                   | 11567.9              | 51.1                           | 46.7                           | 52.4                               | PEAK     | 1000      | 74.0           | 21.6        | RB         |
| 157     | 5785                   | 11571.1              | <b>41.4</b>                    | 36.0                           | 42.5                               | AV       | 1000      | 54.0           | 11.5        | RB         |
| 165     | 5825                   | 11653.3              | 51.9                           | 46.7                           | 53.0                               | PEAK     | 1000      | 74.0           | 21.0        | RB         |
| 165     | 5825                   | 11652.6              | 41.0                           | 36.3                           | 42.3                               | AV       | 1000      | 54.0           | 11.7        | RB         |

WLAN n-Mode; 40 MHz; MCS 0

Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level Core 0 [dBμV/m] | Spurious Level Core 1 [dBμV/m] | Spurious Level Core 0 + 1 [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|--------------------------------|--------------------------------|------------------------------------|----------|-----------|----------------|-------------|------------|
| 38      | 5190                   | 10380.1              | 45.2                           | 44.0                           | 47.7                               | PEAK     | 1000      | 68.0           | 20.3        | UE         |
| 46      | 5230                   | 10445.3              | 46.3                           | 44.3                           | 48.4                               | PEAK     | 1000      | 68.0           | 19.6        | UE         |
| 54      | 5270                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 62      | 5310                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 102     | 5510                   | 11029.2              | 46.5                           | 43.9                           | 48.4                               | PEAK     | 1000      | 74.0           | 25.6        | RB         |
| 102     | 5510                   | 11020.0              | 35.1                           | 32.4                           | 37.0                               | AV       | 1000      | 54.0           | 17.0        | RB         |
| 110     | 5550                   | 11098.0              | 47.5                           | 44.7                           | 49.3                               | PEAK     | 1000      | 74.0           | 24.7        | RB         |
| 110     | 5550                   | 11103.0              | 36.0                           | 32.9                           | 37.7                               | AV       | 1000      | 54.0           | 16.3        | RB         |
| 118     | 5590                   | 11178.5              | 47.4                           | 44.5                           | 49.2                               | PEAK     | 1000      | 74.0           | 24.8        | RB         |
| 118     | 5590                   | 11178.1              | 36.2                           | 33.3                           | 38.0                               | AV       | 1000      | 54.0           | 16.0        | RB         |
| 134     | 5670                   | 11348.8              | 48.1                           | 45.7                           | 50.1                               | PEAK     | 1000      | 74.0           | 23.9        | RB         |
| 134     | 5670                   | 11337.1              | 36.1                           | 33.7                           | 38.1                               | AV       | 1000      | 54.0           | 15.9        | RB         |
| 151     | 5755                   | 11506.6              | 48.7                           | 45.3                           | 50.3                               | PEAK     | 1000      | 74.0           | 23.7        | RB         |
| 151     | 5755                   | 11507.5              | 38.1                           | 34.6                           | 39.7                               | AV       | 1000      | 54.0           | 14.3        | RB         |
| 159     | 5795                   | 11590.2              | <b>50.0</b>                    | 45.3                           | 51.3                               | PEAK     | 1000      | 74.0           | 22.7        | RB         |
| 159     | 5795                   | 11587.3              | <b>38.1</b>                    | 34.4                           | 39.6                               | AV       | 1000      | 54.0           | 14.4        | RB         |

WLAN ac-Mode; 80 MHz; MCS 0

Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level Core 0 [dBμV/m] | Spurious Level Core 1 [dBμV/m] | Spurious Level Core 0 + 1 [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|--------------------------------|--------------------------------|------------------------------------|----------|-----------|----------------|-------------|------------|
| 42      | 5210                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 58      | 5290                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 106     | 5530                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 122     | 5610                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 138     | 5690                   | -                    | -                              | -                              | -                                  | PEAK     | -         | -              | >6          | -          |
| 155     | 5775                   | 11559.2              | <b>47.1</b>                    | 44.4                           | 49.0                               | PEAK     | 1000      | 74.0           | 25.0        | RB         |
| 155     | 5775                   | 11549.5              | <b>36.0</b>                    | 33.4                           | 37.9                               | AV       | 1000      | 54.0           | 16.1        | RB         |

Remark: Please see next sub-clause for the measurement plot.

Values at band edges are not given, see Band Edge Test Case for the respective results.