



11AX40MIMO\_Ant1\_High\_2452



11AX40MIMO\_Ant2\_High\_2452




Spurious Emission:





11B\_Ant1\_2437\_30~1000

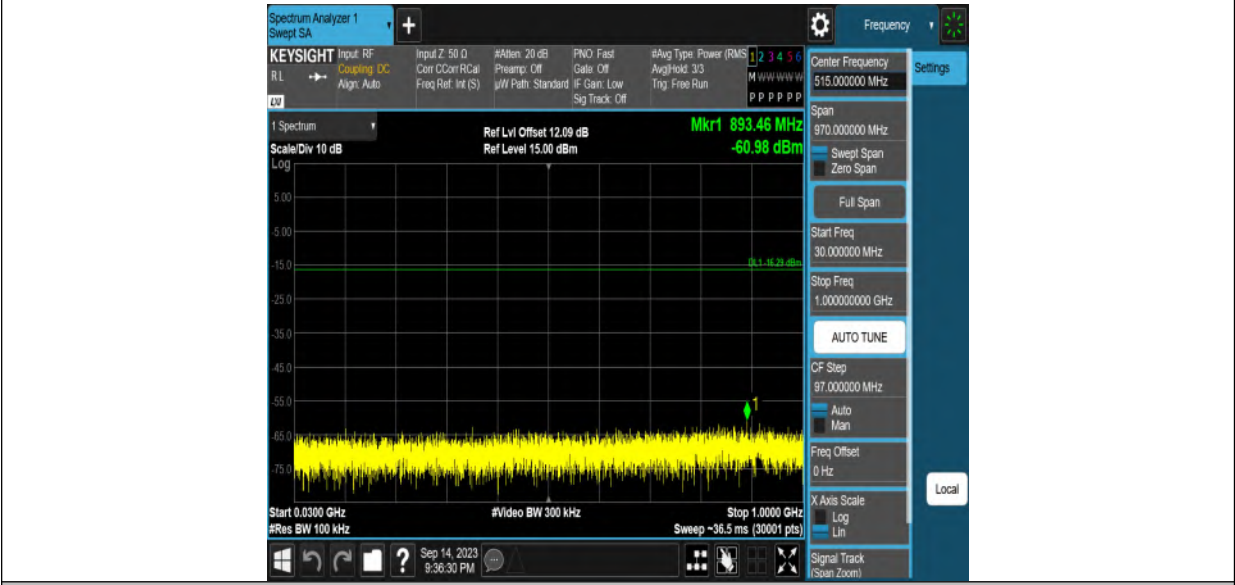

11B\_Ant1\_2437\_1000~26500




11B\_Ant2\_2437\_30~1000








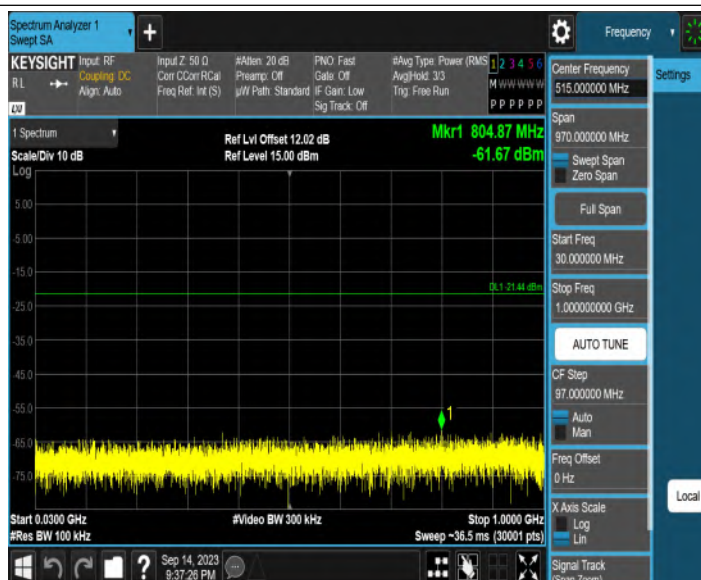

11G\_Ant1\_2412\_1000~26500



11G\_Ant2\_2412\_30~1000

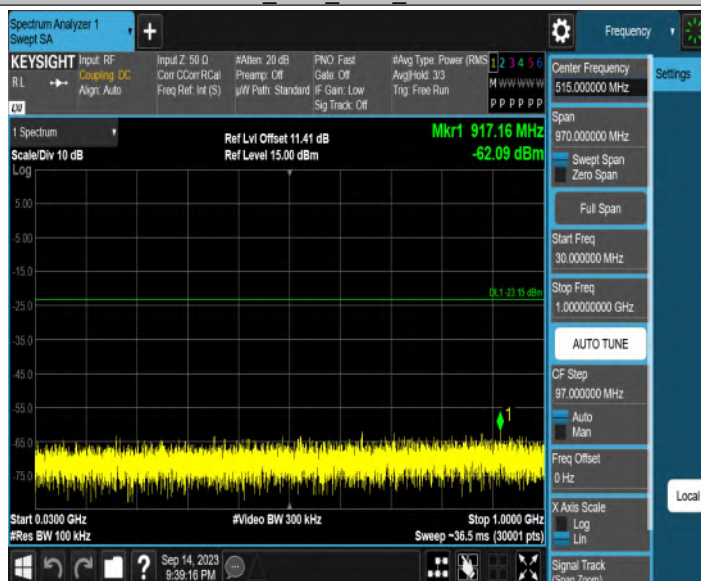


11G\_Ant2\_2412\_1000~26500





11G\_Ant1\_2437\_30~1000

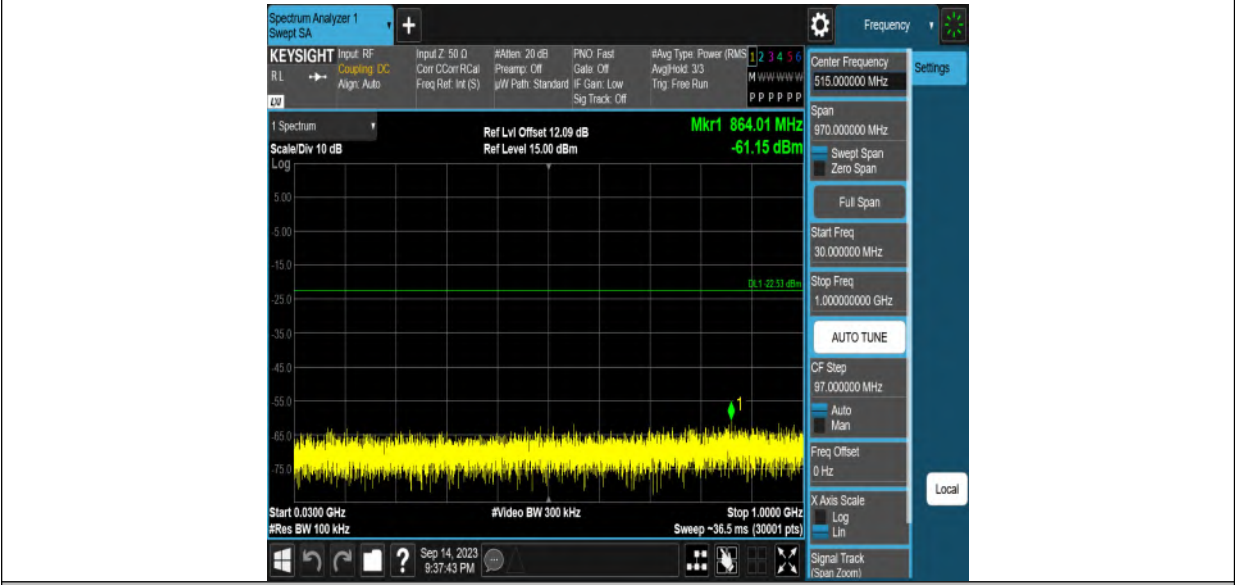

11G\_Ant1\_2437\_1000~26500




11G\_Ant2\_2437\_30~1000








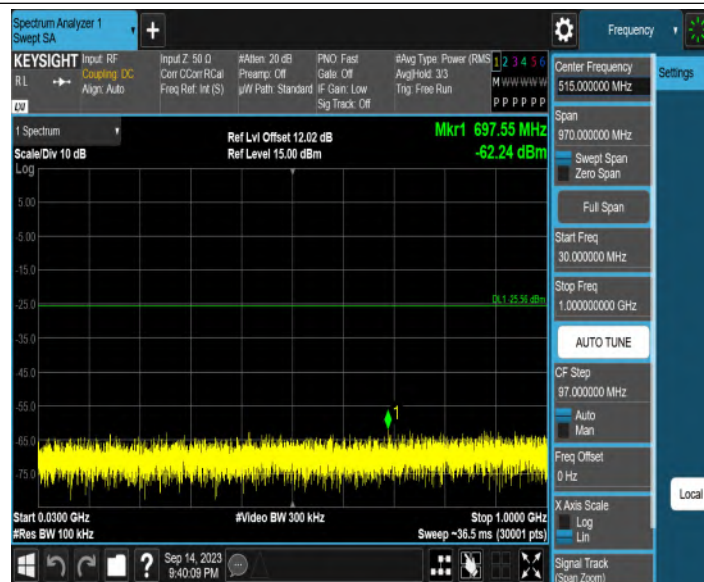

11N20MIMO\_Ant1\_2412\_1000~26500




11N20MIMO\_Ant2\_2412\_30~1000

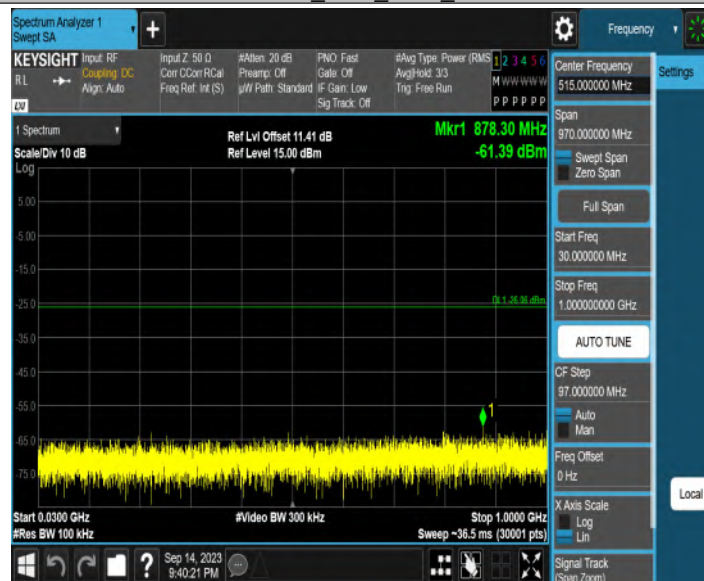

11N20MIMO\_Ant2\_2412\_1000~26500



11N20MIMO\_Ant1\_2437\_30~1000

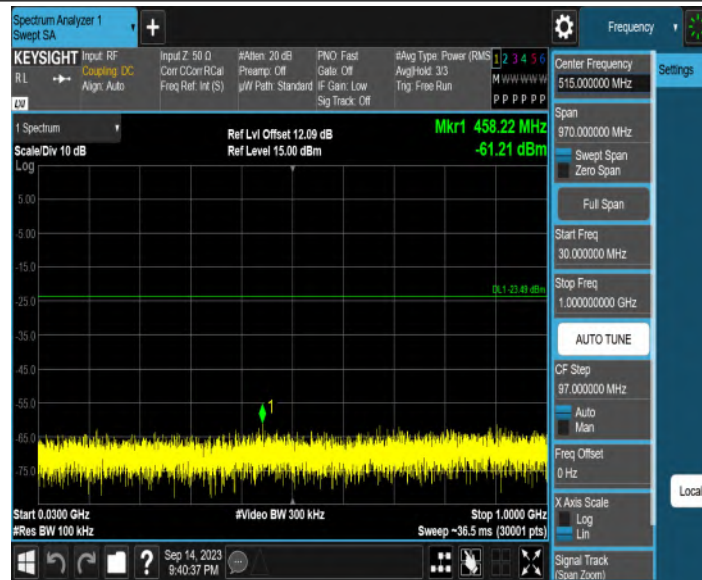


11N20MIMO\_Ant1\_2437\_1000~26500




11N20MIMO\_Ant2\_2437\_30~1000




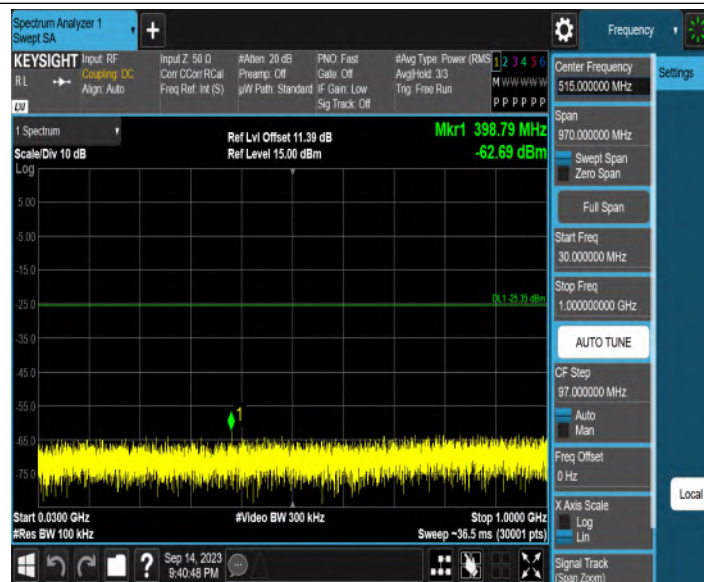

11N20MIMO\_Ant2\_2437\_1000~26500

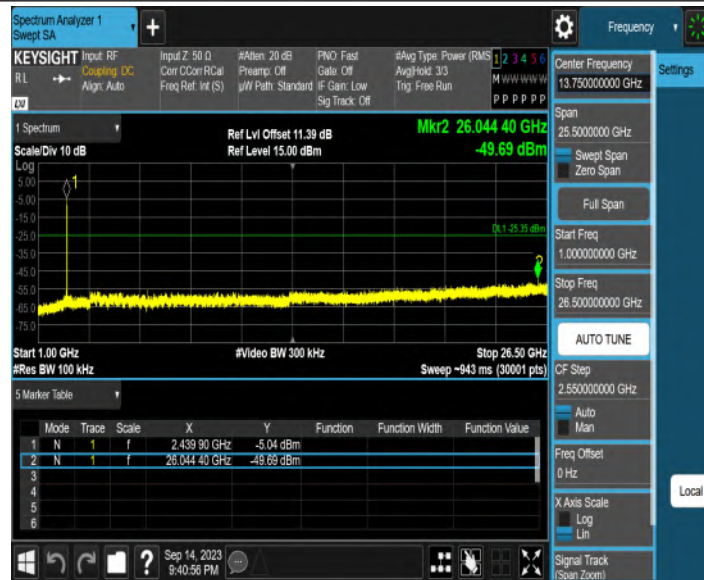

11N20MIMO\_Ant1\_2462\_30~1000

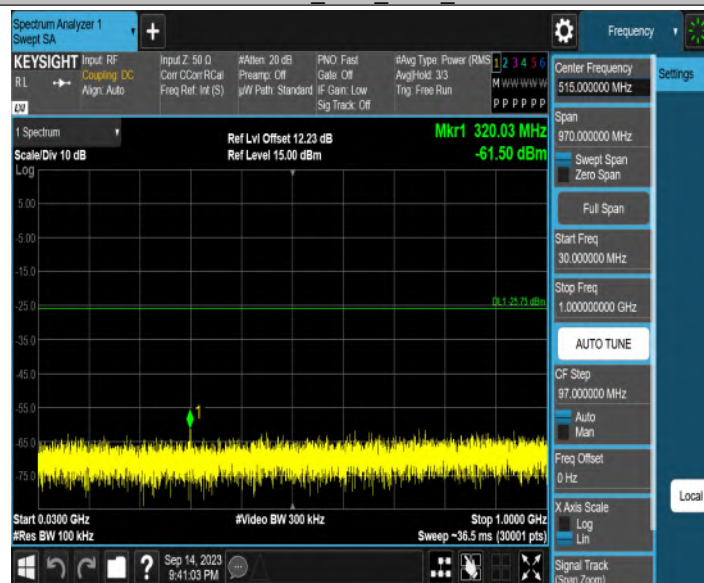

11N20MIMO\_Ant1\_2462\_1000~26500



11N20MIMO\_Ant2\_2462\_30~1000



11N20MIMO\_Ant2\_2462\_1000~26500




11N40MIMO\_Ant1\_2422\_30~1000









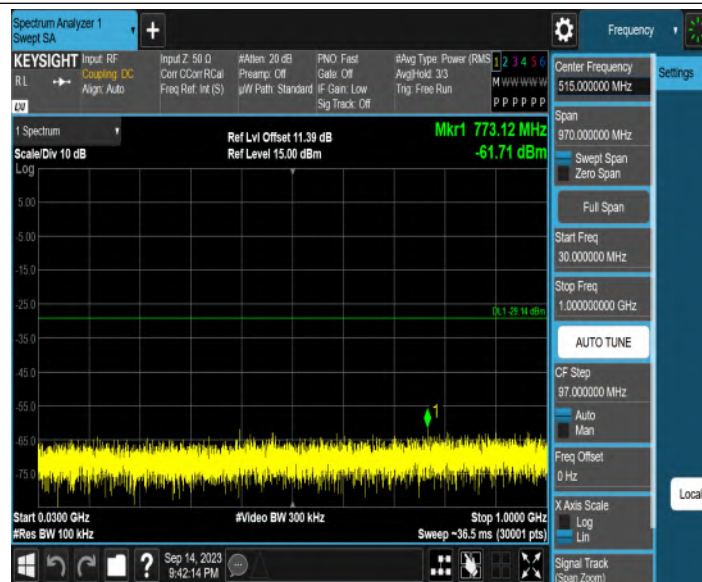

11N40MIMO\_Ant2\_2437\_1000~26500

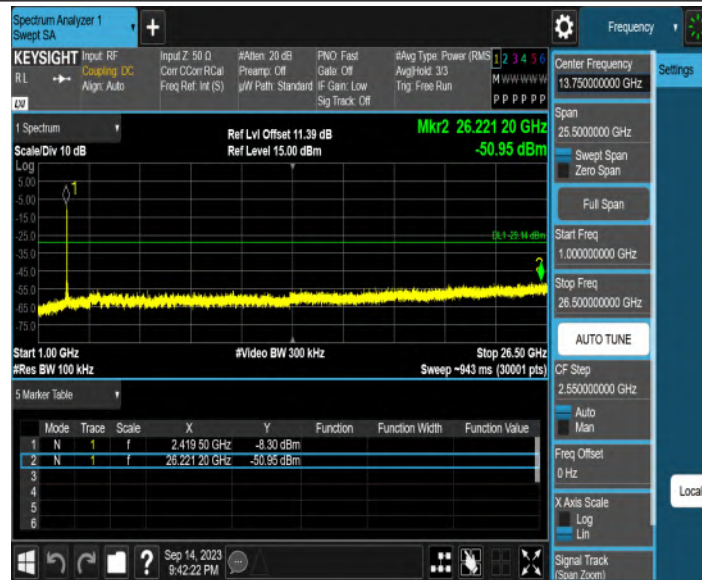


11N40MIMO\_Ant1\_2452\_30~1000

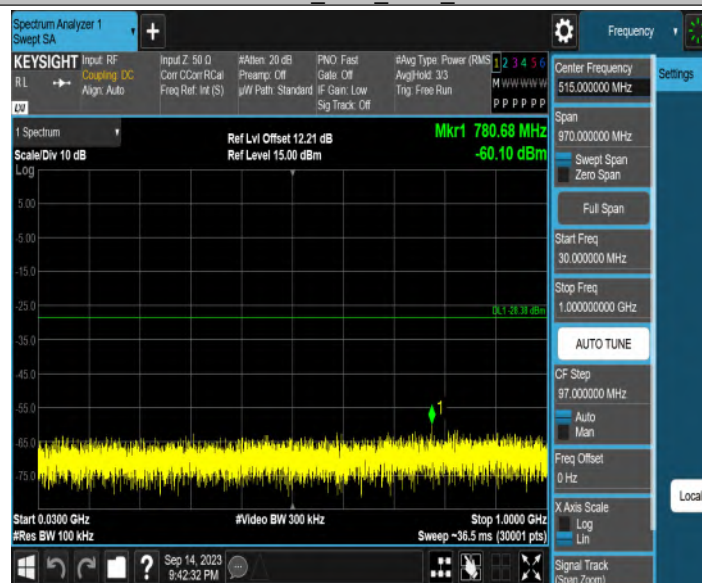

11N40MIMO\_Ant1\_2452\_1000~26500






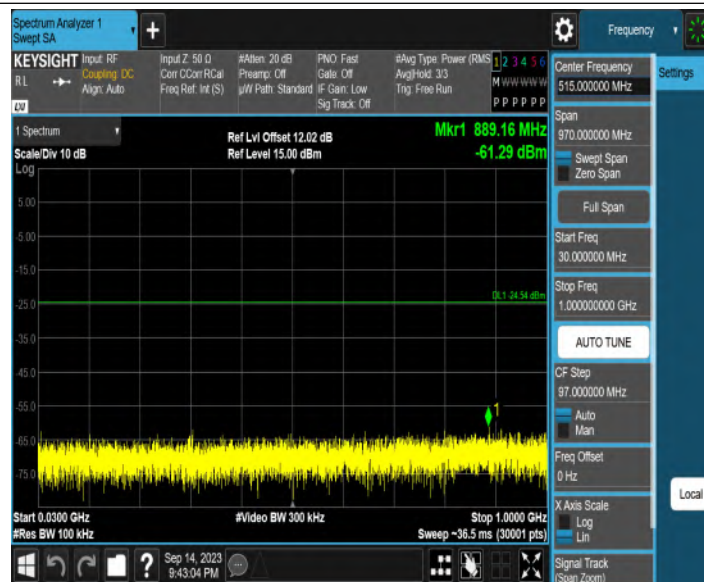

11AX20MIMO\_Ant1\_2412\_1000~26500




11AX20MIMO\_Ant2\_2412\_30~1000

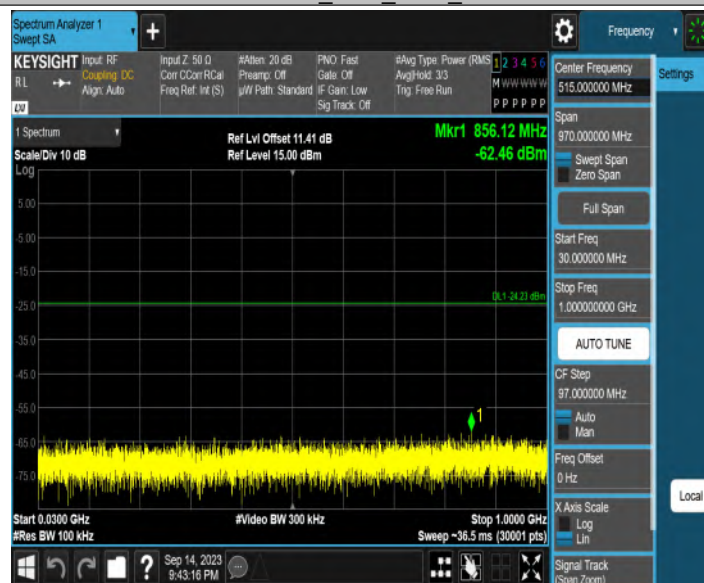

11AX20MIMO\_Ant2\_2412\_1000~26500




11AX20MIMO\_Ant1\_2437\_30~1000

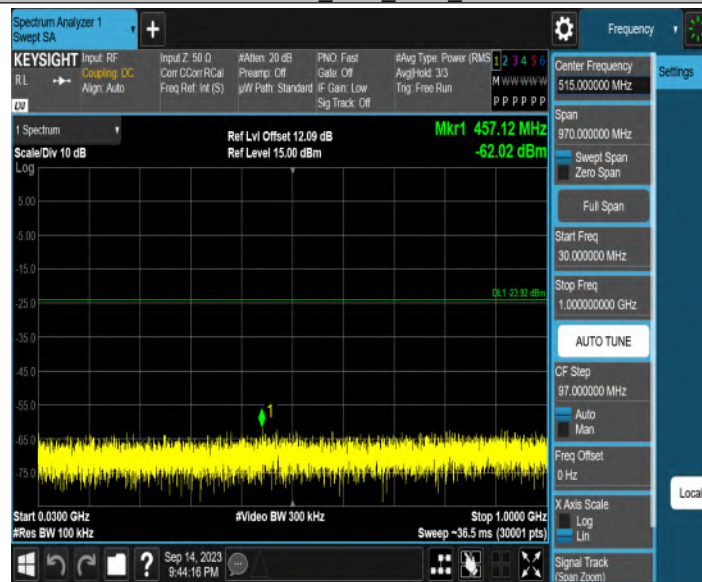

11AX20MIMO\_Ant1\_2437\_1000~26500



11AX20MIMO\_Ant2\_2437\_30~1000

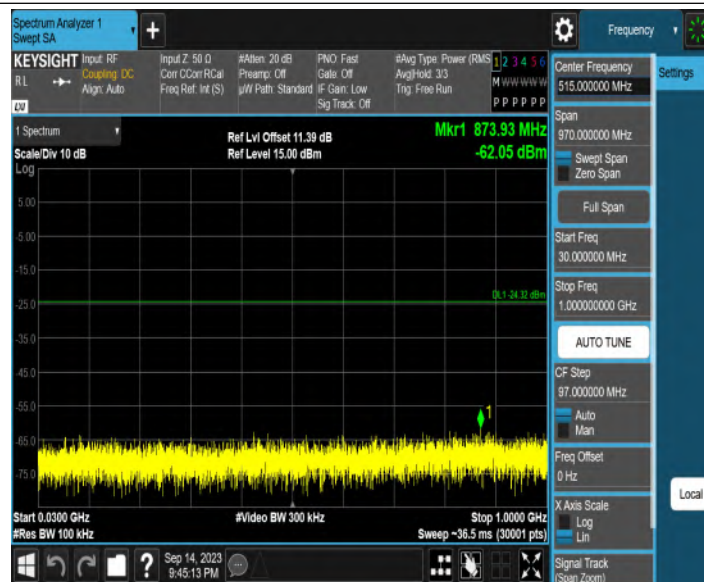

11AX20MIMO\_Ant2\_2437\_1000~26500



11AX20MIMO\_Ant1\_2462\_30~1000




11AX20MIMO\_Ant1\_2462\_1000~26500





11AX20MIMO\_Ant2\_2462\_30~1000

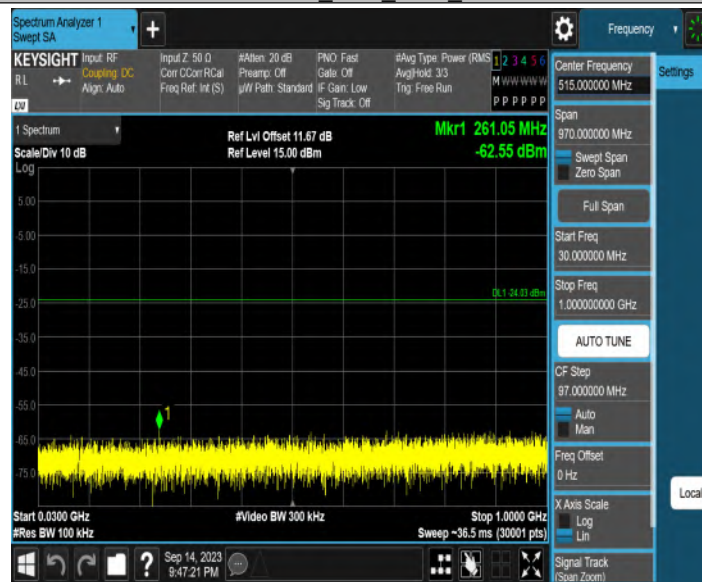

11AX20MIMO\_Ant2\_2462\_1000~26500




11AX40MIMO\_Ant1\_2422\_30~1000





11AX40MIMO\_Ant1\_2437\_30~1000

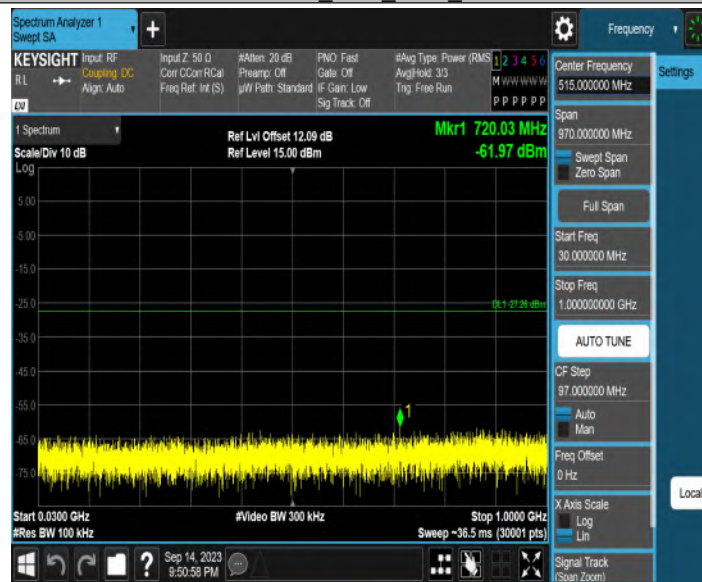


11AX40MIMO\_Ant1\_2437\_1000~26500



11AX40MIMO\_Ant2\_2437\_30~1000






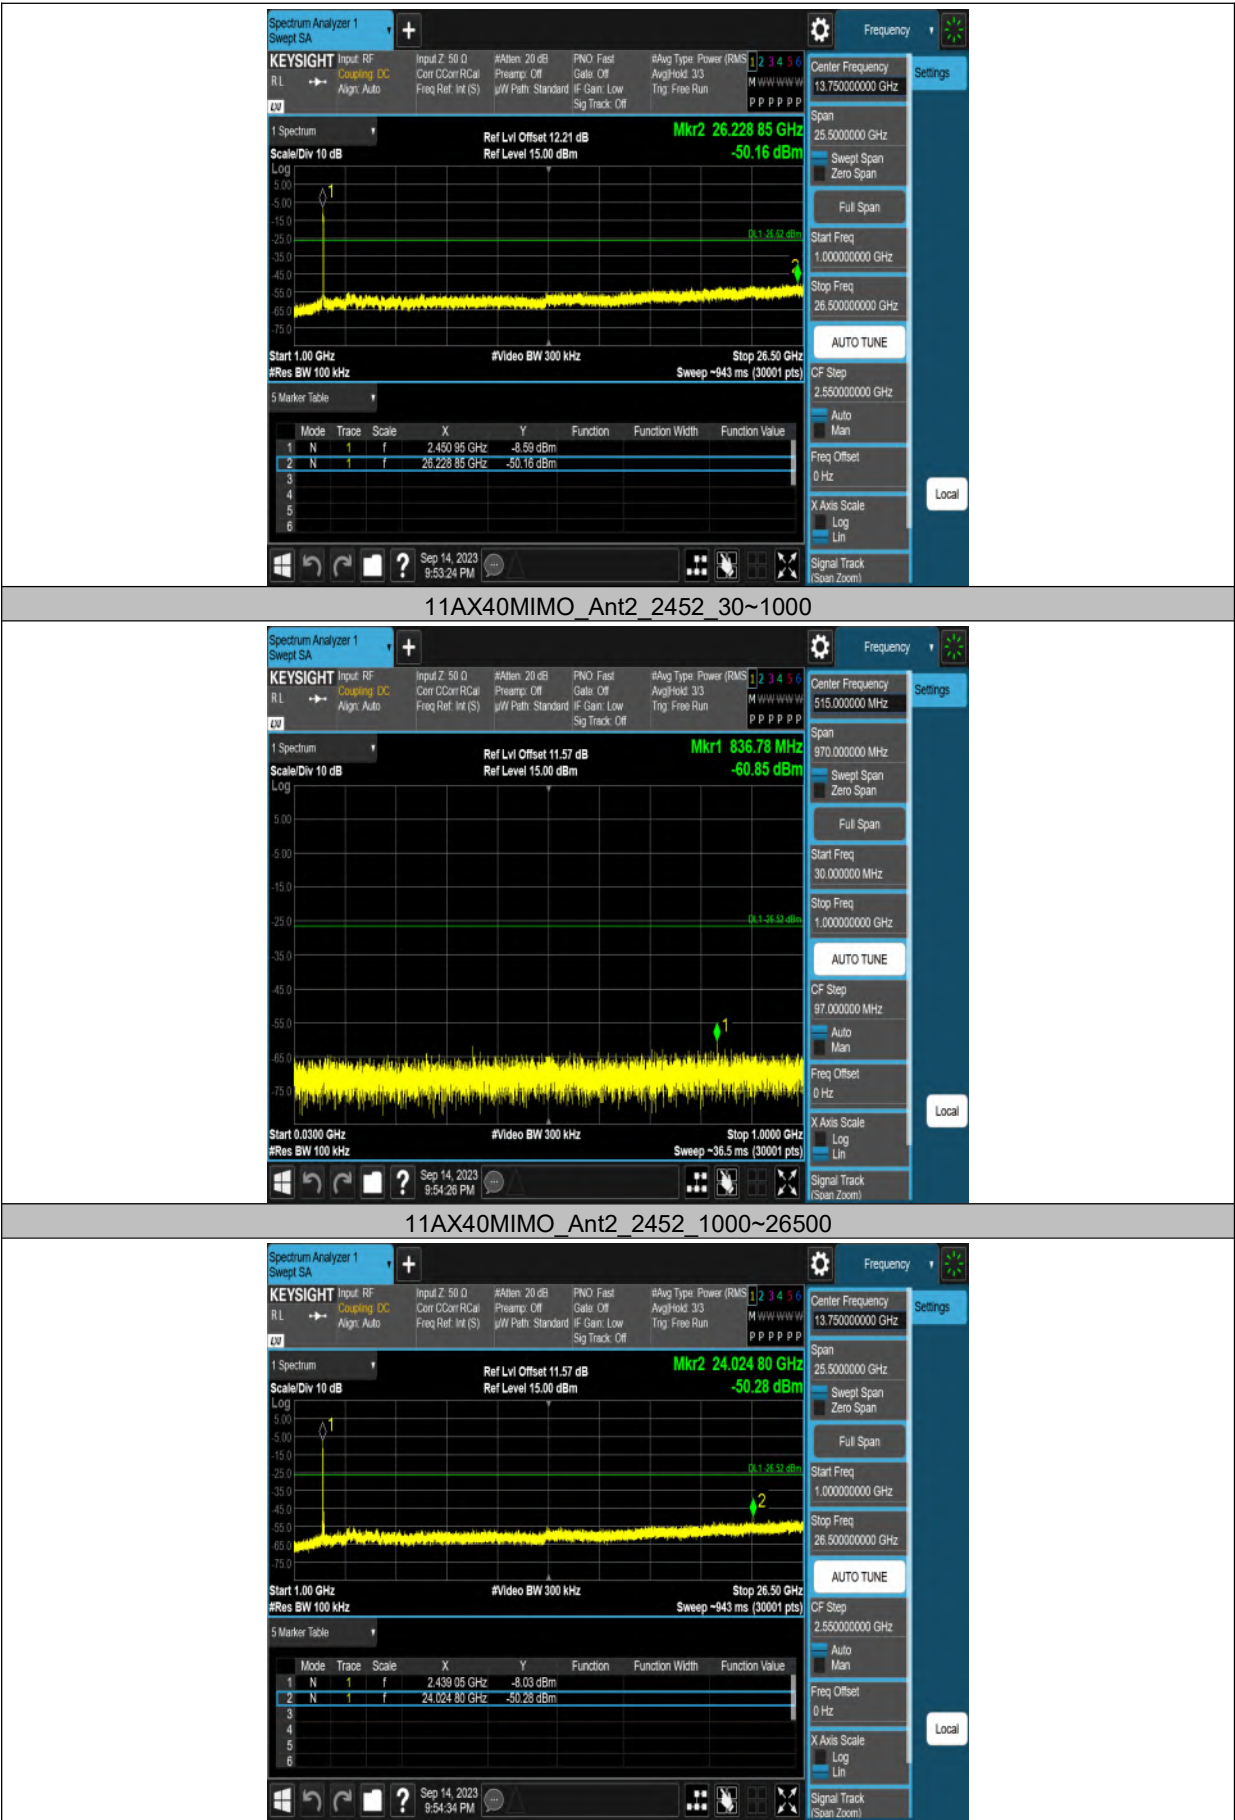


## 13. Radiated Emission

### 13.1. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

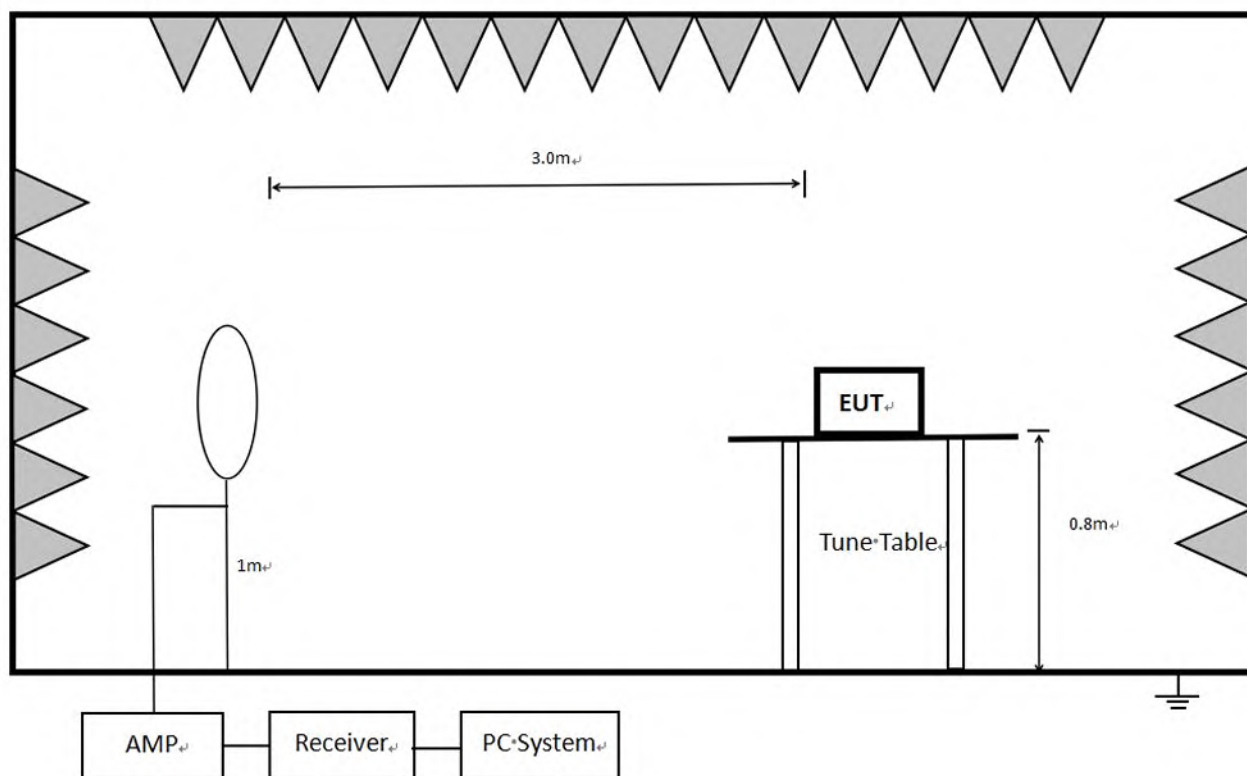


In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

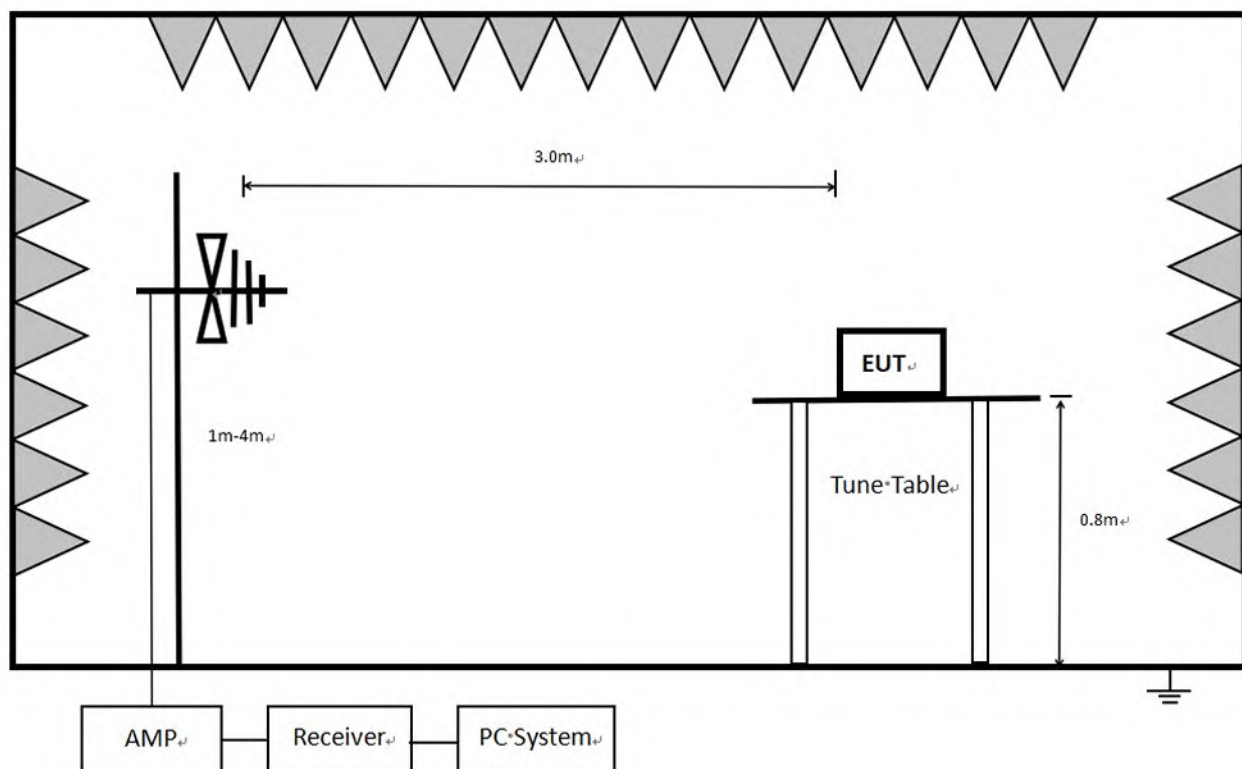



In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

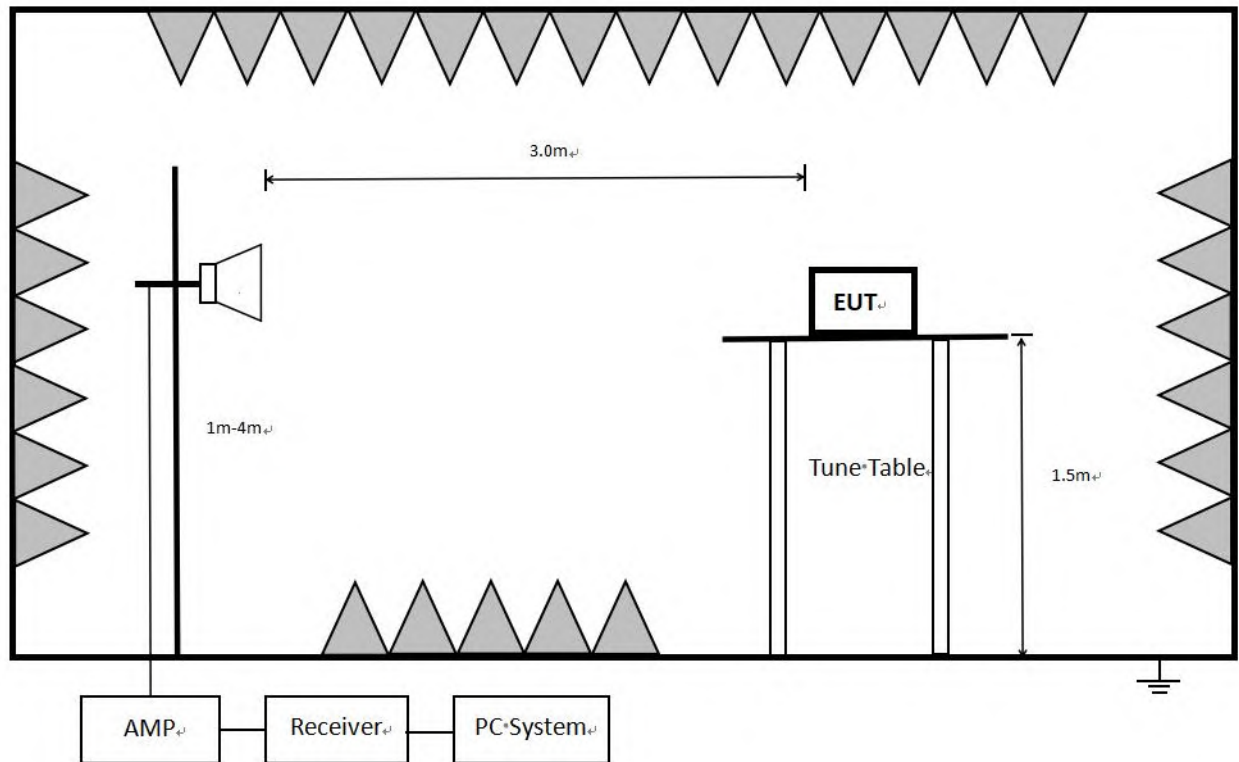

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

### 13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## (2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC § 15.205(a).

### 13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.



Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
  2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  3. The EUT was placed on a turntable with 1.5m above ground.
  4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
  5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
  6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.
  7. Restriction band: Investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2425 MHz to 2500MHz.
- All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.
- Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.
- Note 2: The EUT does not support simultaneous transmission.
- Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

### 13.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in ANT1+ ANT2, 11n HT20, Tx CH1 mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

### 13.5. Original test data


Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B



## 14. AC Power Line Conducted Emissions

### 14.1. Block diagram of test setup

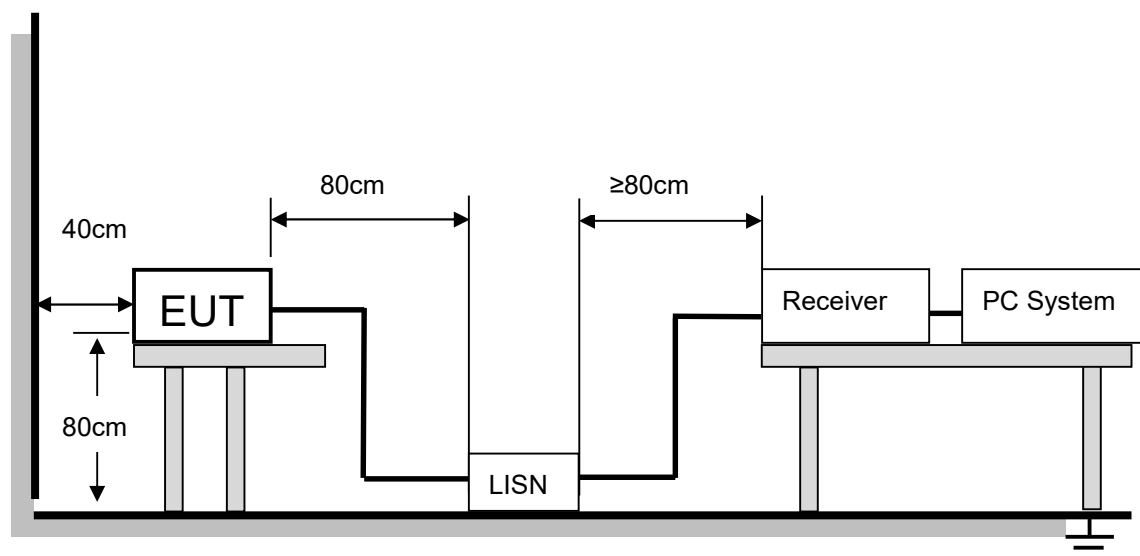

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### 14.2. Limits

Please refer to CFR 47 FCC § 15.207 (a) and ISSED RSS-Gen Clause 8.8.

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 14.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### **14.4. Test result**

According to 15.207, power Line Conducted Emission is not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## **15. Antenna Requirements**

### **15.1. Applicable Requirements**

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **15.2. Result**

The antenna used for this product is External antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.86 dBi


## APPENDIX A – Radiated Emission Below 1GHz Test Data

### Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23℃ 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:			

Start of Test: 2023-09-02 09:58:06

#### Test Graph

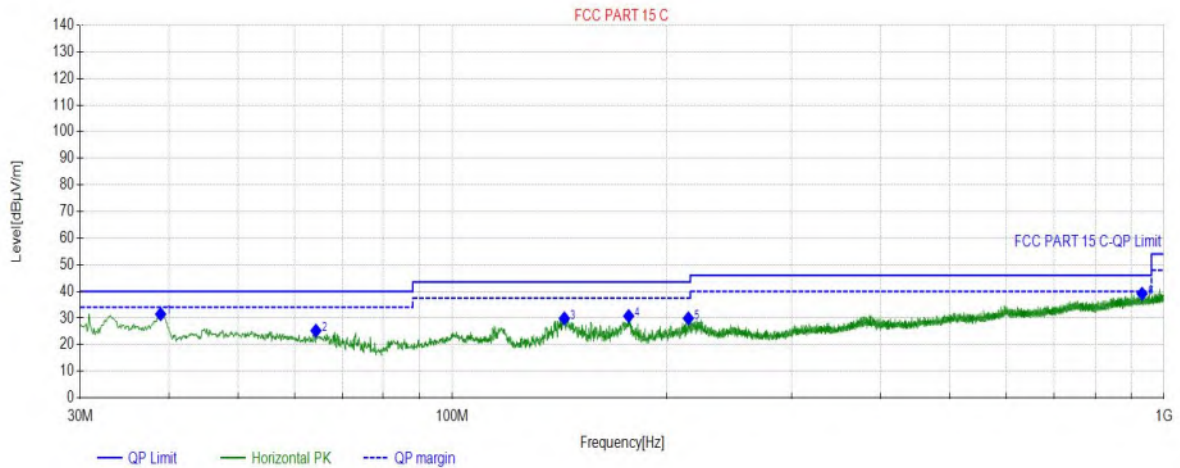

#### Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	38.9249	20.97	31.46	40.00	8.54	100	150	Horizontal
2	64.3414	19.97	25.25	40.00	14.75	100	27	Horizontal
3	143.6954	17.07	29.86	43.50	13.64	100	136	Horizontal
4	176.9697	18.27	30.72	43.50	12.78	100	256	Horizontal
5	214.6095	20.69	29.88	43.50	13.62	100	227	Horizontal
6	931.4141	34.79	39.13	46.00	6.87	100	160	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:			

Start of Test: 2023-09-02 09:58:51

## Test Graph

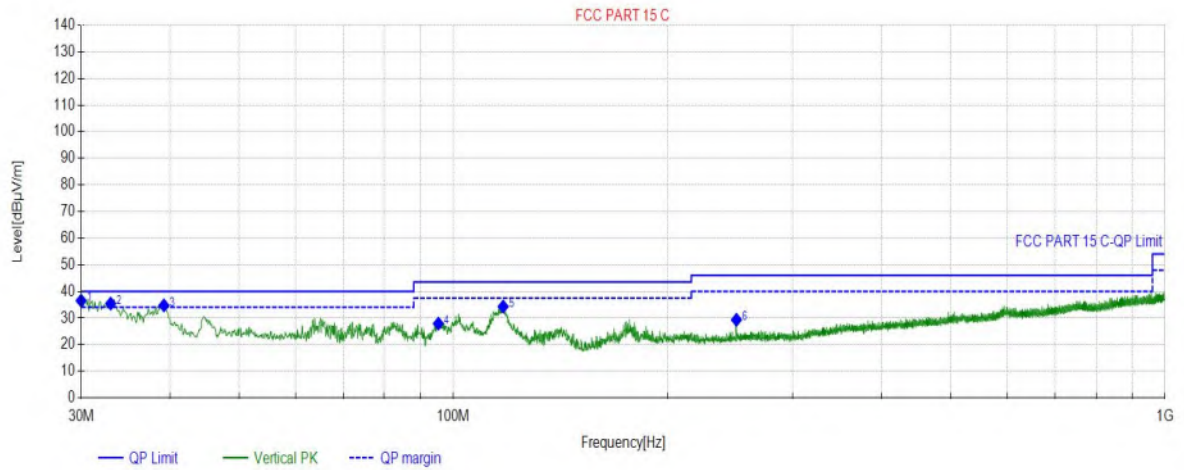

## Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	30.0000	18.82	36.53	40.00	3.47	100	330	Vertical
2	33.0073	19.54	35.45	40.00	4.55	100	296	Vertical
3	39.2159	21.04	34.74	40.00	5.26	100	50	Vertical
4	95.2875	19.66	27.90	43.50	15.60	100	163	Vertical
5	117.502	18.99	34.30	43.50	9.20	100	272	Vertical
6	249.921	21.54	29.34	46.00	16.66	100	206	Vertical


## APPENDIX B – Radiated Emission Above 1GHz Test Data

### Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23℃ 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 11:54:43

#### Test Graph

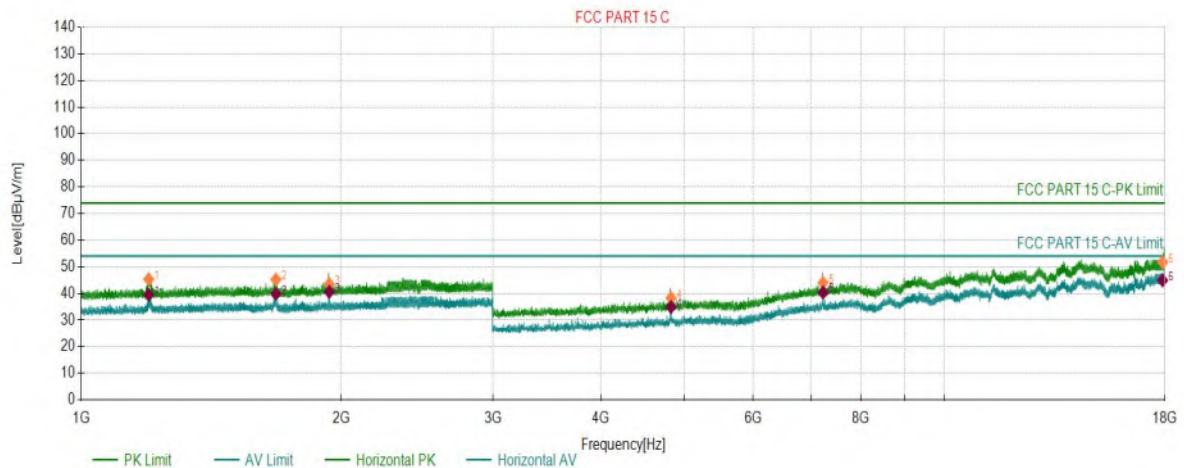

#### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.5099	1.34	45.34	74.00	28.66	150	315	Horizontal
2	1680.9340	3.98	45.27	74.00	28.73	150	303	Horizontal
3	1937.9469	4.66	43.50	74.00	30.50	150	247	Horizontal
4	4821.0911	-11.11	38.25	74.00	35.75	150	23	Horizontal
5	7231.7116	-2.53	44.02	74.00	29.98	150	102	Horizontal
6	17883.7442	21.67	51.73	74.00	22.27	150	33	Horizontal

#### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.5099	1.34	39.48	54.00	14.52	150	315	Horizontal
2	1680.9340	3.98	39.83	54.00	14.17	150	303	Horizontal
3	1937.9469	4.66	40.58	54.00	13.42	150	247	Horizontal
4	4821.0911	-11.11	34.89	54.00	19.11	150	23	Horizontal
5	7231.7116	-2.53	40.38	54.00	13.62	150	102	Horizontal
6	17883.7442	21.67	44.91	54.00	9.09	150	33	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 11:56:05

## Test Graph

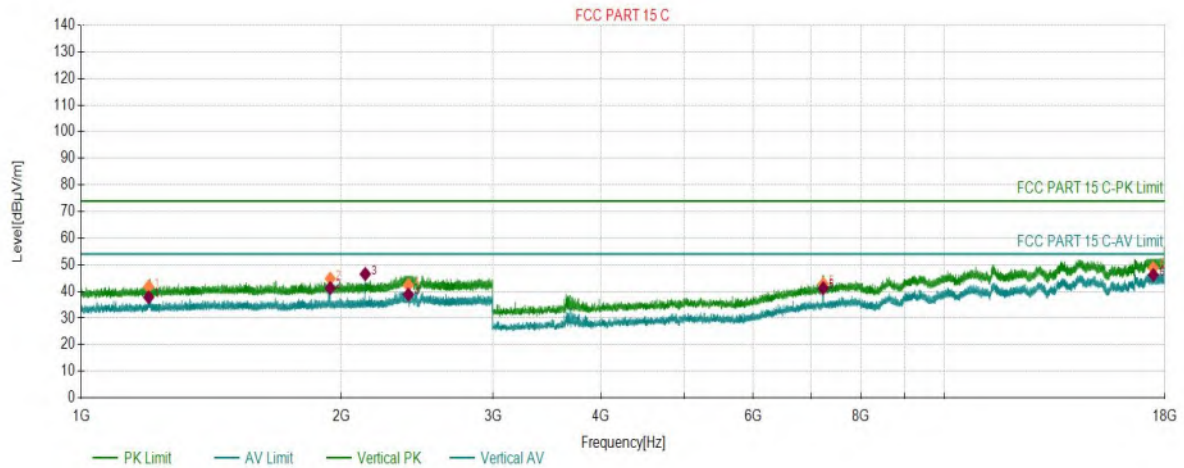

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.4099	1.34	41.80	74.00	32.20	150	176	Vertical
2	1943.1472	4.67	44.78	74.00	29.22	150	27	Vertical
3	2133.4567	5.33	46.57	74.00	27.43	150	86	Vertical
4	2393.1697	7.07	42.35	74.00	31.65	150	154	Vertical
5	7235.4618	-2.49	42.84	74.00	31.16	150	115	Vertical
6	17446.4723	14.85	48.77	74.00	25.23	150	138	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.4099	1.34	37.81	54.00	16.19	150	176	Vertical
2	1943.1472	4.67	41.28	54.00	12.72	150	27	Vertical
3	2133.4567	5.33	46.51	54.00	7.49	150	86	Vertical
4	2393.1697	7.07	38.82	54.00	15.18	150	154	Vertical
5	7235.4618	-2.49	41.18	54.00	12.82	150	115	Vertical
6	17446.4723	14.85	46.18	54.00	7.82	150	138	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:36:48

## Test Graph

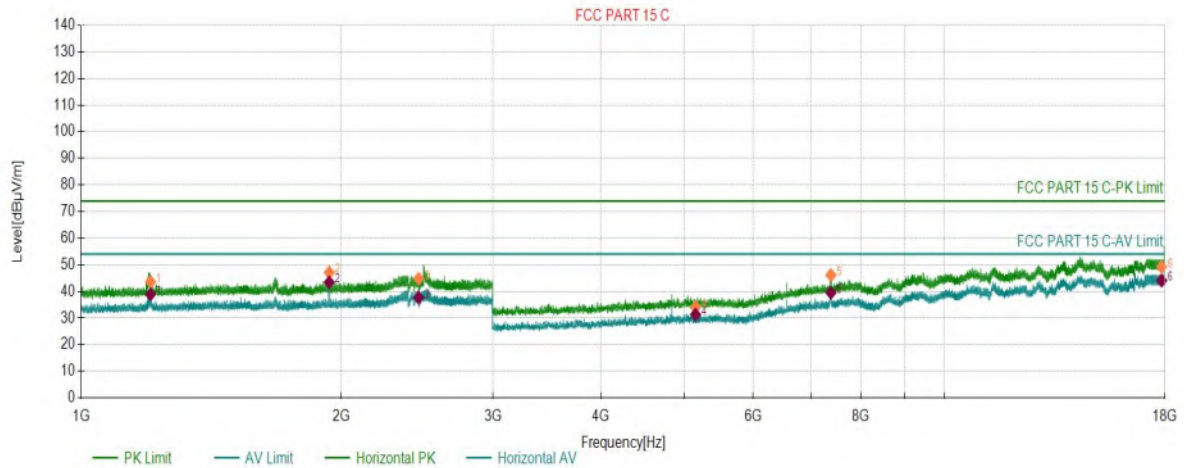

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1203.2102	1.38	43.63	74.00	30.37	150	320	Horizontal
2	1937.8469	4.66	47.10	74.00	26.90	150	360	Horizontal
3	2459.6730	7.35	44.77	74.00	29.23	150	35	Horizontal
4	5146.6073	-9.96	34.08	74.00	39.92	150	9	Horizontal
5	7383.9692	-1.96	46.13	74.00	27.87	150	16	Horizontal
6	17836.4918	21.11	49.18	74.00	24.82	150	72	Horizontal

### AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1203.2102	1.38	38.89	54.00	15.11	150	320	Horizontal
2	1937.8469	4.66	43.40	54.00	10.60	150	360	Horizontal
3	2459.6730	7.35	37.71	54.00	16.29	150	35	Horizontal
4	5146.6073	-9.96	31.29	54.00	22.71	150	9	Horizontal
5	7383.9692	-1.96	39.50	54.00	14.50	150	16	Horizontal
6	17836.4918	21.11	44.09	54.00	9.91	150	72	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:41:35

## Test Graph

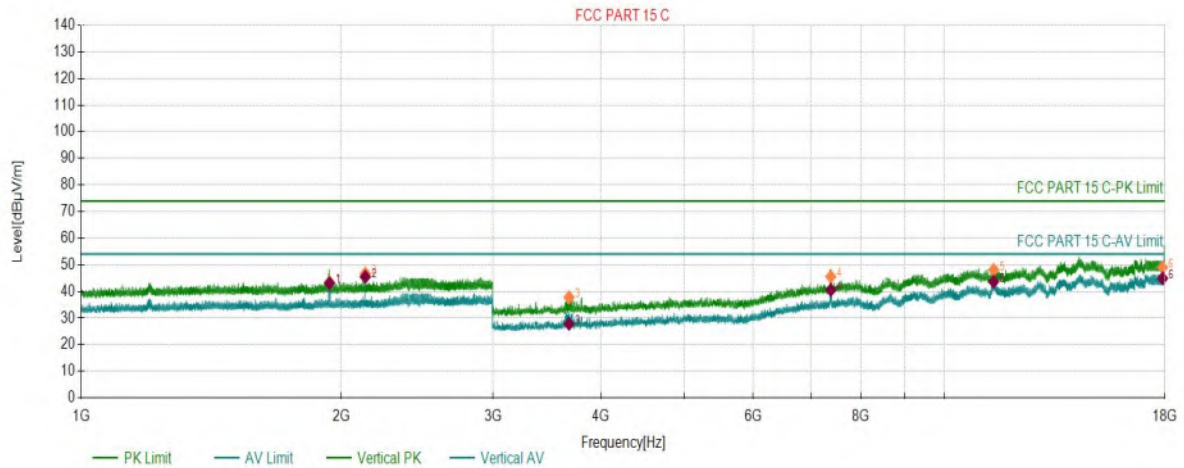

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1939.3470	4.66	43.44	74.00	30.56	150	186	Vertical
2	2133.3567	5.33	46.69	74.00	27.31	150	104	Vertical
3	3673.5337	-15.46	37.75	74.00	36.25	150	117	Vertical
4	7382.4691	-1.96	45.56	74.00	28.44	150	103	Vertical
5	11397.4199	7.11	48.11	74.00	25.89	150	163	Vertical
6	17885.2443	21.69	49.00	74.00	25.00	150	1	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1939.3470	4.66	43.06	54.00	10.94	150	186	Vertical
2	2133.3567	5.33	45.47	54.00	8.53	150	104	Vertical
3	3673.5337	-15.46	27.80	54.00	26.20	150	117	Vertical
4	7382.4691	-1.96	40.58	54.00	13.42	150	103	Vertical
5	11397.4199	7.11	43.67	54.00	10.33	150	163	Vertical
6	17885.2443	21.69	44.91	54.00	9.09	150	1	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2437	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:50:51

## Test Graph

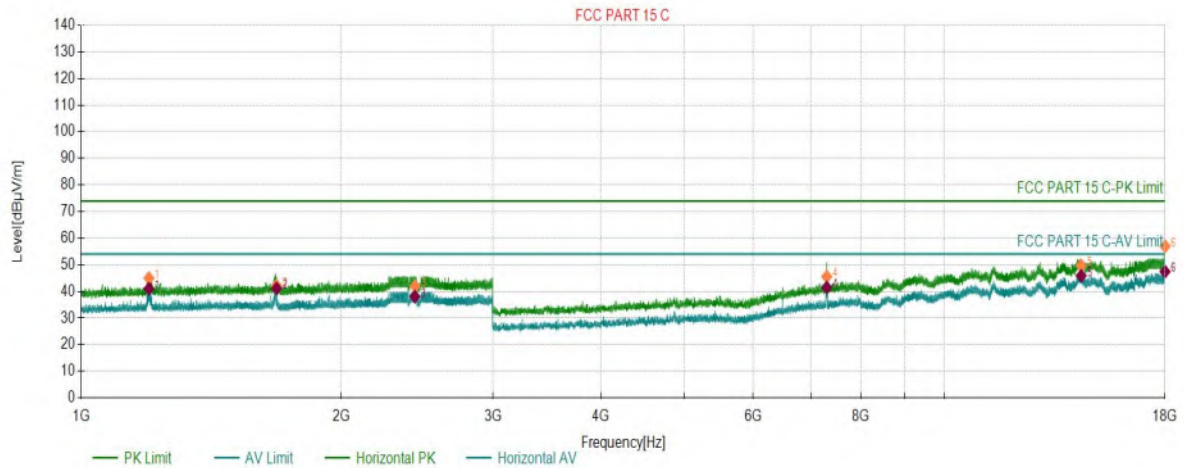

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1198.2099	1.34	44.97	74.00	29.03	150	314	Horizontal
2	1683.8342	3.98	42.18	74.00	31.82	150	303	Horizontal
3	2435.6718	7.25	41.92	74.00	32.08	150	337	Horizontal
4	7303.7152	-1.88	45.58	74.00	28.42	150	92	Horizontal
5	14391.5696	12.98	49.70	74.00	24.30	150	138	Horizontal
6	18000.0000	21.97	56.96	74.00	17.04	150	232	Horizontal

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1198.2099	1.34	41.02	54.00	12.98	150	314	Horizontal
2	1683.8342	3.98	41.11	54.00	12.89	150	303	Horizontal
3	2435.6718	7.25	38.04	54.00	15.96	150	337	Horizontal
4	7303.7152	-1.88	41.46	54.00	12.54	150	92	Horizontal
5	14391.5696	12.98	45.87	54.00	8.13	150	138	Horizontal
6	18000.0000	21.97	47.46	54.00	6.54	150	232	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2437	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:52:23

## Test Graph

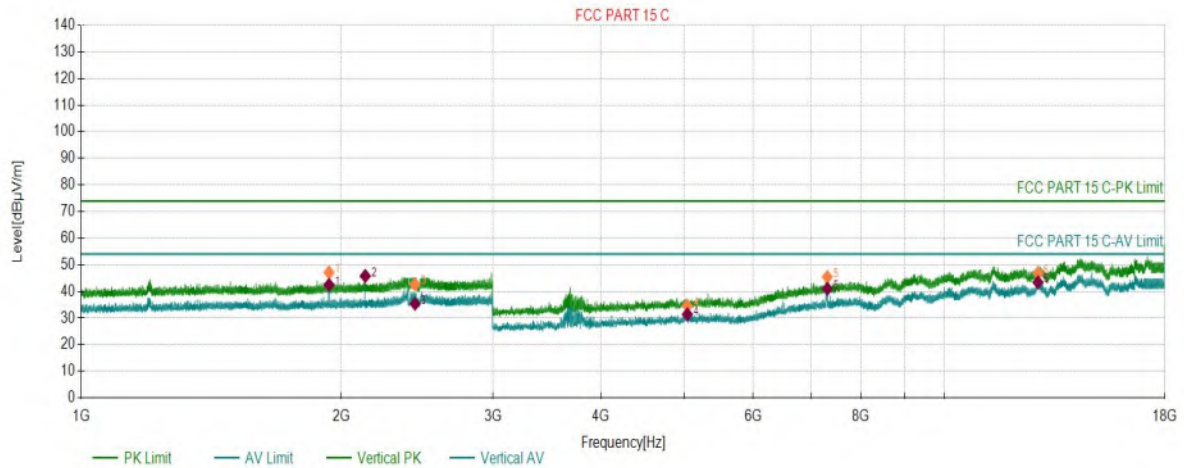

## PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1936.7468	4.66	47.12	74.00	26.88	150	95	Vertical
2	2133.3567	5.33	45.69	74.00	28.31	150	85	Vertical
3	2435.9718	7.25	42.63	74.00	31.37	150	9	Vertical
4	5035.6018	-10.16	34.57	74.00	39.43	150	357	Vertical
5	7314.2157	-1.89	45.42	74.00	28.58	150	127	Vertical
6	12825.4913	8.57	46.82	74.00	27.18	150	360	Vertical

## AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1936.7468	4.66	42.45	54.00	11.55	150	95	Vertical
2	2133.3567	5.33	45.83	54.00	8.17	150	85	Vertical
3	2435.9718	7.25	35.34	54.00	18.66	150	9	Vertical
4	5035.6018	-10.16	31.37	54.00	22.63	150	357	Vertical
5	7314.2157	-1.89	40.98	54.00	13.02	150	127	Vertical
6	12825.4913	8.57	43.43	54.00	10.57	150	360	Vertical


Restriction Band Emission

Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23℃ 56%
Mode:	11B_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 19		

Start of Test: 2023-09-02 11:04:34

Test Graph

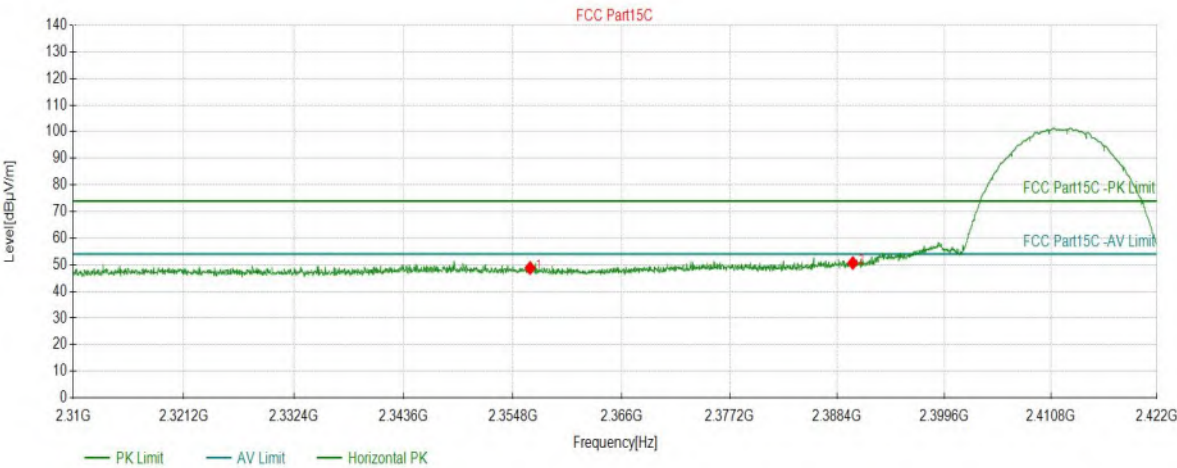

Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2356.5702	48.81	5.57	74.00	25.19	150	270	PK	Horizont
2	2390.0320	50.68	5.61	74.00	23.32	150	118	PK	Horizont




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11B_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 19		

Start of Test: 2023-09-02 11:05:18

## Test Graph

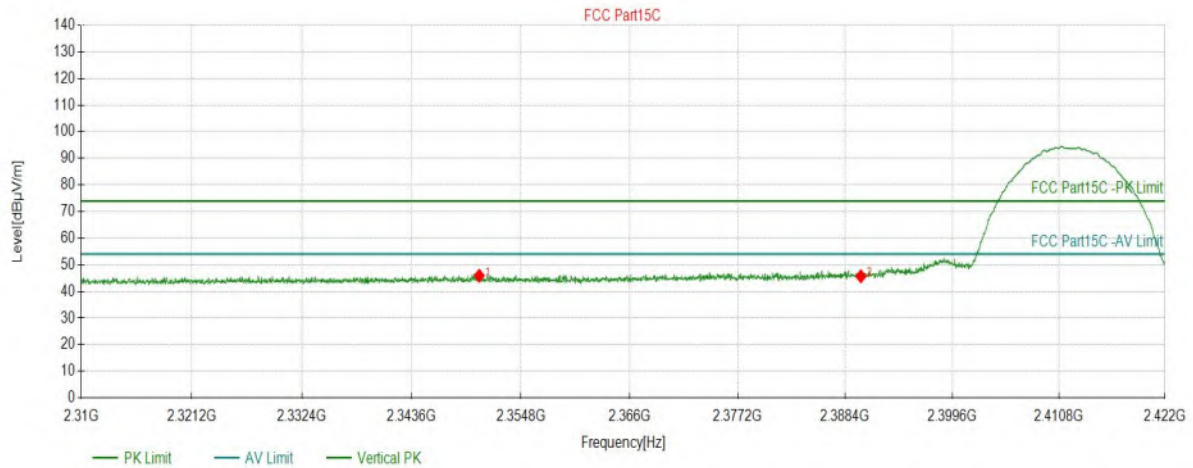

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2350.5202	45.92	5.56	74.00	28.08	150	166	PK	Vertical
2	2390.0320	45.68	5.61	74.00	28.32	150	171	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11B_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 19		

Start of Test: 2023-09-02 11:08:04

## Test Graph

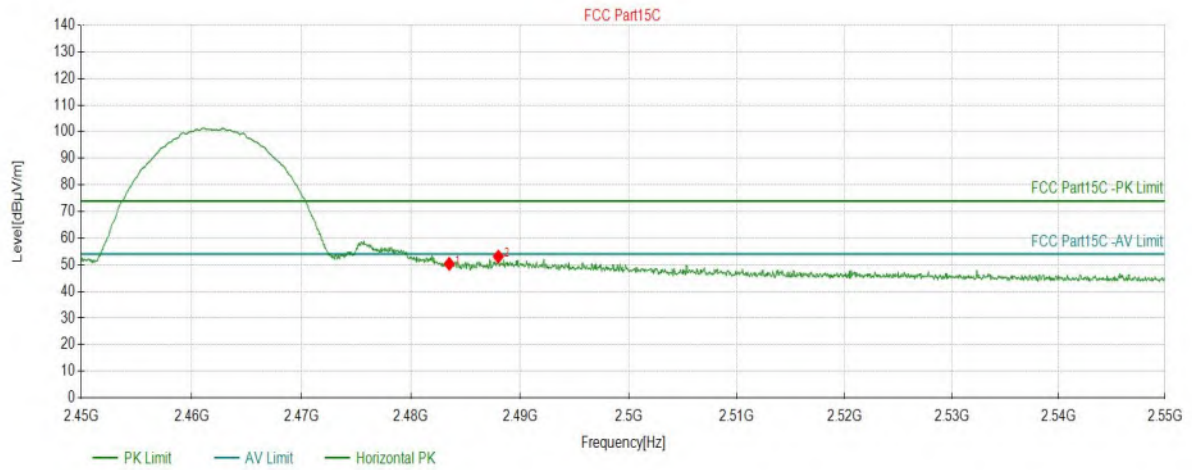

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5168	50.34	6.07	74.00	23.66	150	264	PK	Horizont
2	2488.0190	53.10	6.10	74.00	20.90	150	264	PK	Horizont

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11B_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 19		

Start of Test: 2023-09-02 11:08:57

## Test Graph

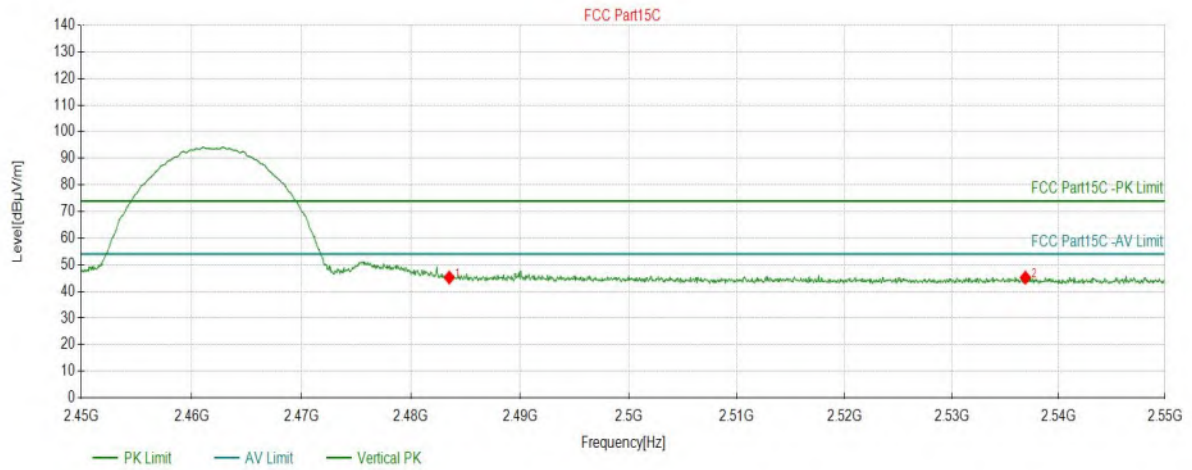

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5168	45.21	6.07	74.00	28.79	150	36	PK	Vertical
2	2536.8934	45.18	6.17	74.00	28.82	150	0	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11G_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 11		

Start of Test: 2023-09-02 11:14:00

## Test Graph

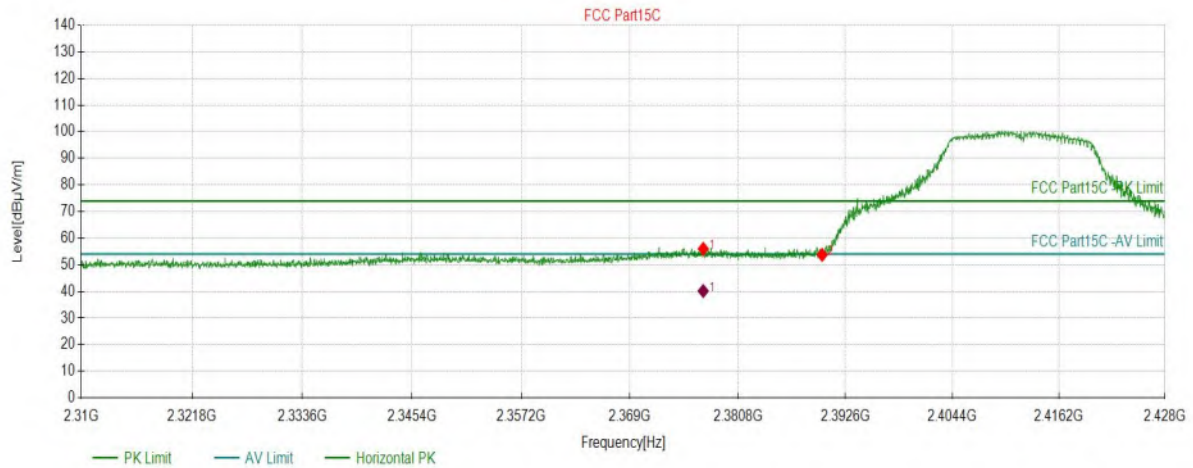

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2377.0070	56.00	5.59	74.00	18.00	150	115	PK	Horizontal
2	2390.0307	53.76	5.61	74.00	20.24	150	110	PK	Horizontal

## AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2377.0072	5.59	40.15	54.00	13.85	154.9	111.2	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11G_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 11		

Start of Test: 2023-09-02 11:14:44

## Test Graph

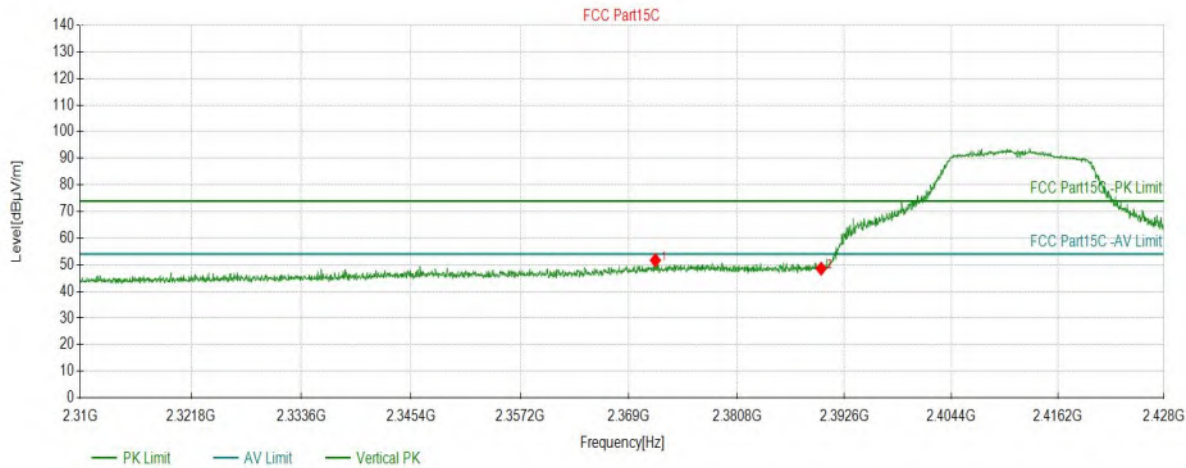


Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2371.8920	51.67	5.59	74.00	22.33	150	66	PK	Vertical
2	2390.0307	48.54	5.61	74.00	25.46	150	166	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11G_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 11		

Start of Test: 2023-09-02 11:28:55

## Test Graph

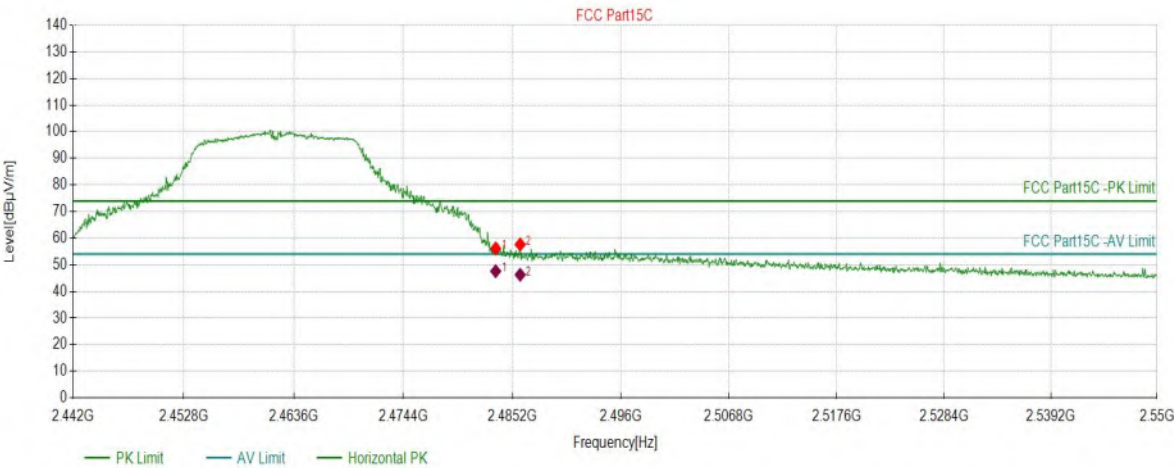

Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	56.14	6.07	74.00	17.86	150	326	PK	Horizontal
2	2485.9780	57.64	6.08	74.00	16.36	150	263	PK	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5470	6.07	47.59	54.00	6.41	171.5	258.3	Horizontal
2	2485.9781	6.09	46.25	54.00	7.75	170.8	262.5	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11G_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1 11		

Start of Test: 2023-09-02 11:30:55

## Test Graph

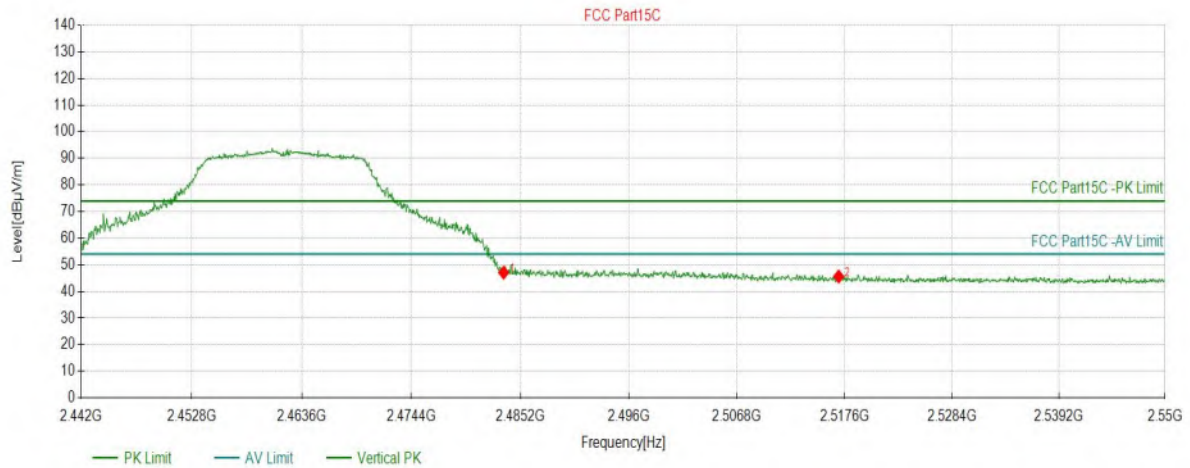

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	47.04	6.07	74.00	26.96	150	81	PK	Vertical
2	2516.9895	45.58	6.17	74.00	28.42	150	88	PK	Vertical

Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 11:40:35

Test Graph

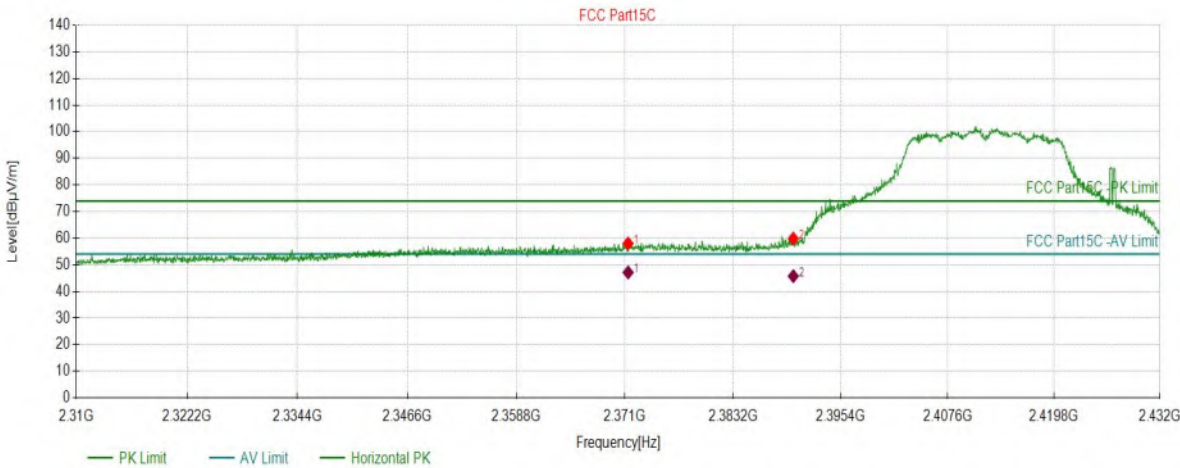

Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2371.3458	57.99	5.59	74.00	16.01	150	180	PK	Horizontal
2	2390.0180	59.83	5.61	74.00	14.17	150	124	PK	Horizontal

AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2371.3458	5.59	47.11	54.00	6.89	150	180	Horizontal
2	2390.0179	5.61	45.74	54.00	8.26	161.3	190.8	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 11:41:20

## Test Graph

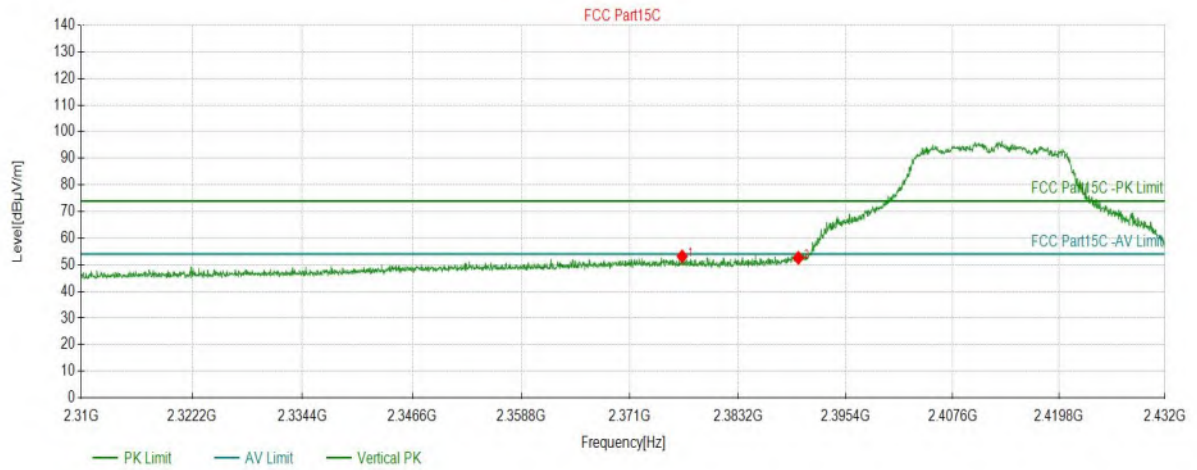

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2376.8783	53.16	5.59	74.00	20.84	150	164	PK	Vertical
2	2390.0180	52.61	5.61	74.00	21.39	150	164	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:27:11

## Test Graph

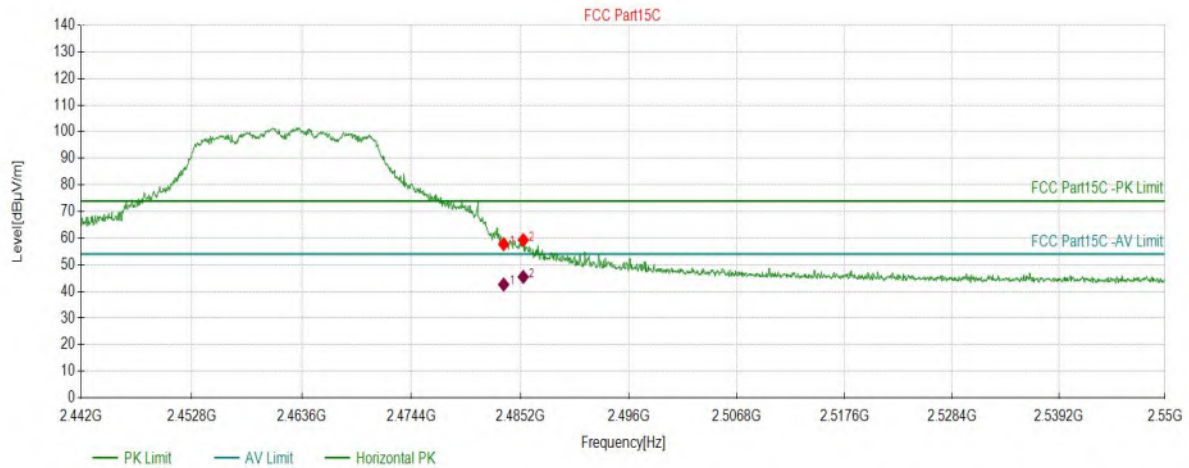

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	57.76	6.07	74.00	16.24	150	30	PK	Horizontal
2	2485.4917	59.31	6.08	74.00	14.69	150	30	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5468	6.07	42.59	54.00	11.41	150	30	Horizontal
2	2485.4918	6.08	45.43	54.00	8.57	154.8	33.5	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:28:03

## Test Graph

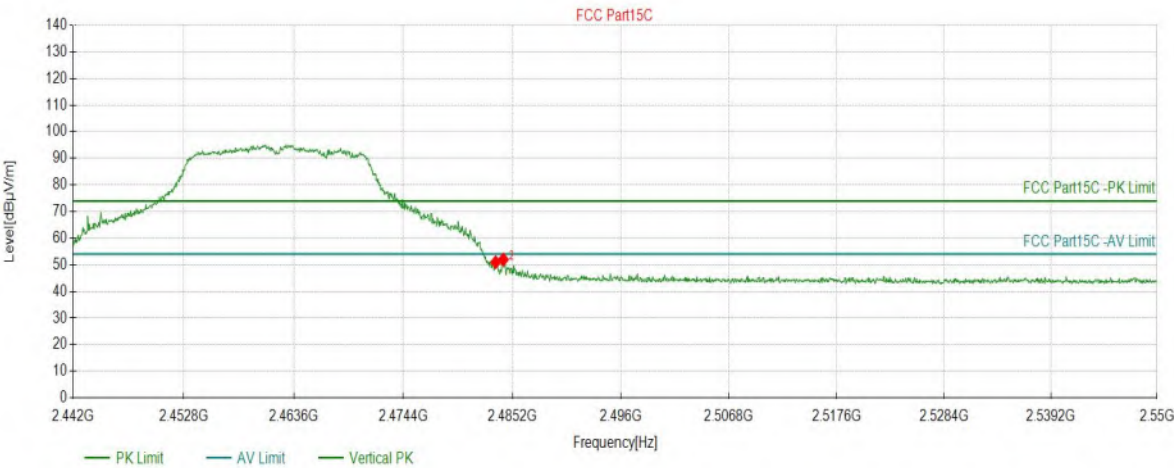


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	50.99	6.07	74.00	23.01	150	55	PK	Vertical
2	2484.3032	51.94	6.08	74.00	22.06	150	89	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N40_2422	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:56:49

## Test Graph

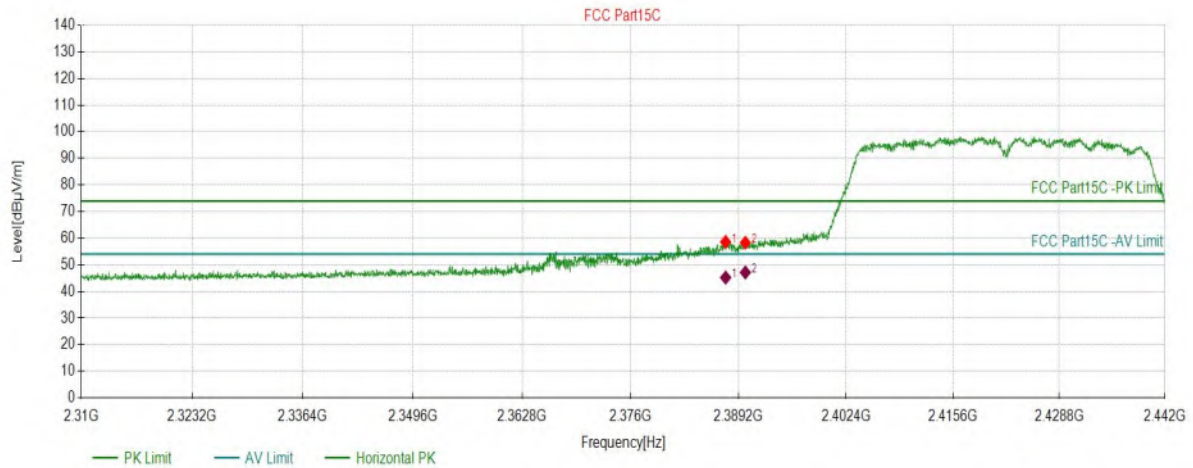

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2387.5979	58.57	5.61	74.00	15.43	150	124	PK	Horizontal
2	2390.0187	58.30	5.61	74.00	15.70	150	150	PK	Horizontal

## AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.5979	5.61	45.19	54.00	8.81	150	124	Horizontal
2	2390.0187	5.61	47.13	54.00	6.87	150	150	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N40_2422	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 12:57:33

## Test Graph

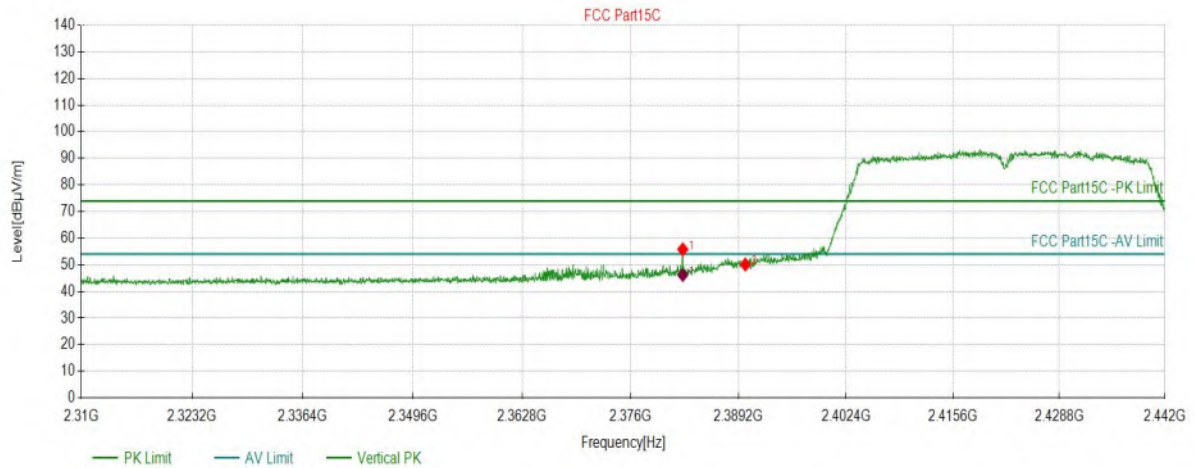

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2382.3601	55.80	5.60	74.00	18.20	150	157	PK	Vertical
2	2390.0187	50.09	5.61	74.00	23.91	150	147	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.3601	5.60	46.16	54.00	7.84	166.1	144.6	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N40_2452	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 12		

Start of Test: 2023-09-02 13:11:26

## Test Graph

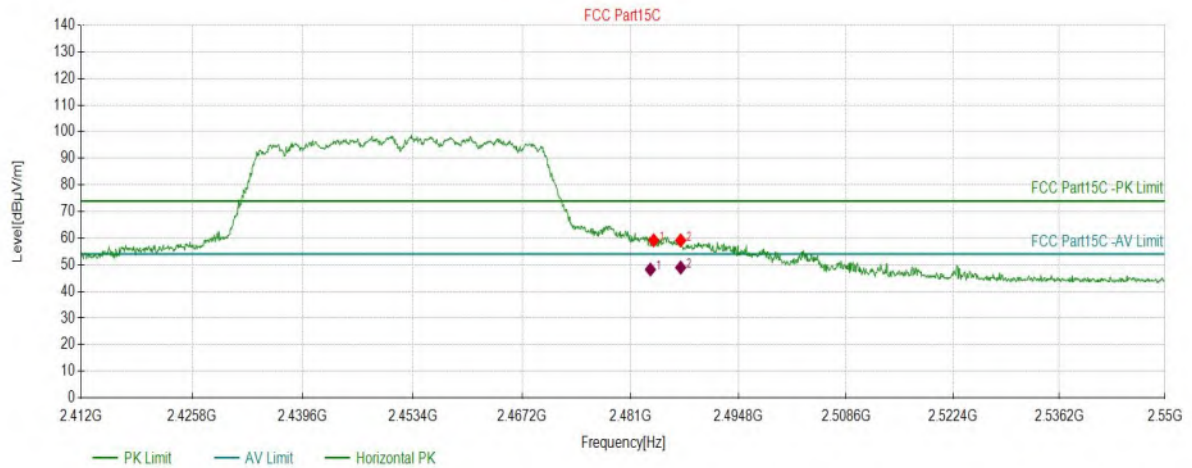

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.9340	59.19	6.07	74.00	14.81	150	22	PK	Horizontal
2	2487.3857	59.15	6.09	74.00	14.85	150	22	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5196	6.07	48.22	54.00	5.78	150	33.1	Horizontal
2	2487.3857	6.09	48.95	54.00	5.05	150	22	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11N40_2452	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 12		

Start of Test: 2023-09-02 13:13:45

## Test Graph

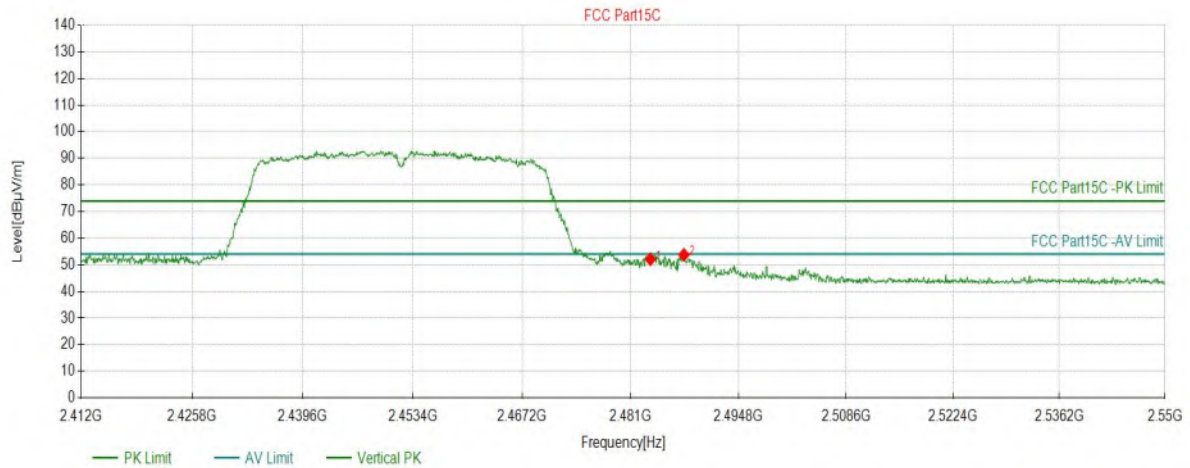

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5198	52.09	6.07	74.00	21.91	150	90	PK	Vertical
2	2487.7999	53.74	6.09	74.00	20.26	150	76	PK	Vertical

Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:25:04

Test Graph

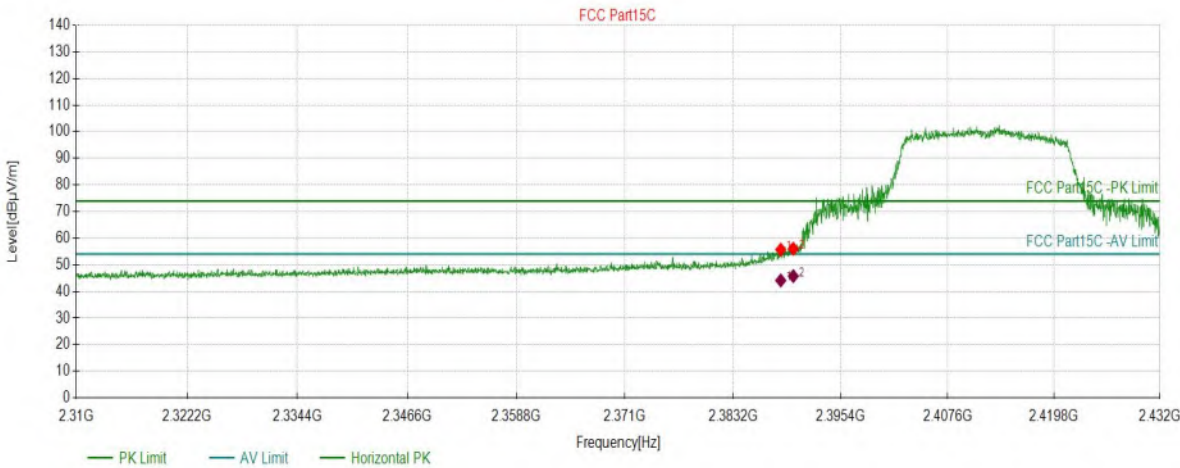

Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2388.5942	55.71	5.61	74.00	18.29	150	158	PK	Horizontal
2	2390.0180	56.03	5.61	74.00	17.97	150	153	PK	Horizontal

AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.5942	5.61	44.13	54.00	9.87	150	158	Horizontal
2	2390.0180	5.61	45.73	54.00	8.27	150	153	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX20_2412	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:25:41

## Test Graph

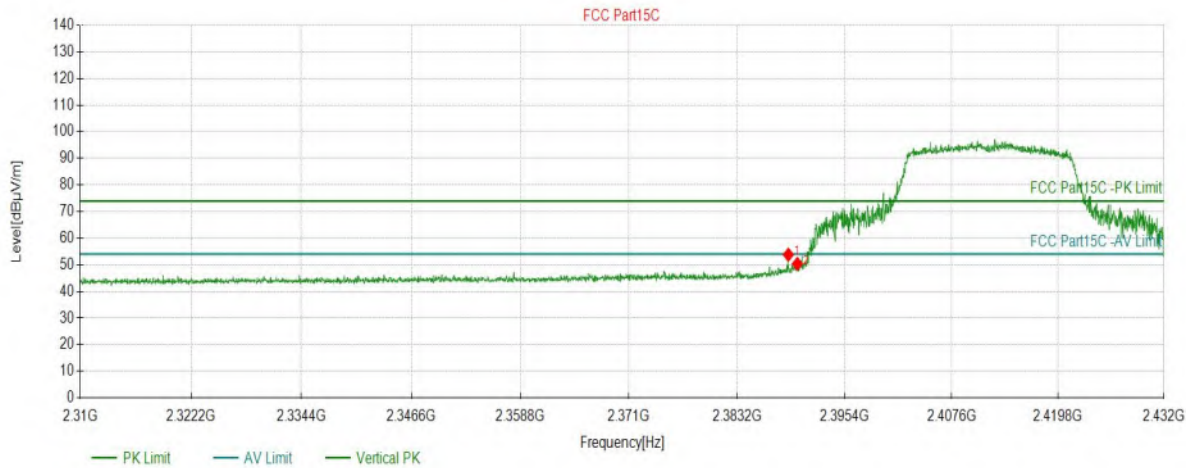


Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2389.0010	53.80	5.61	74.00	20.20	150	172	PK	Vertical
2	2390.0180	50.34	5.61	74.00	23.66	150	140	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:31:30

## Test Graph

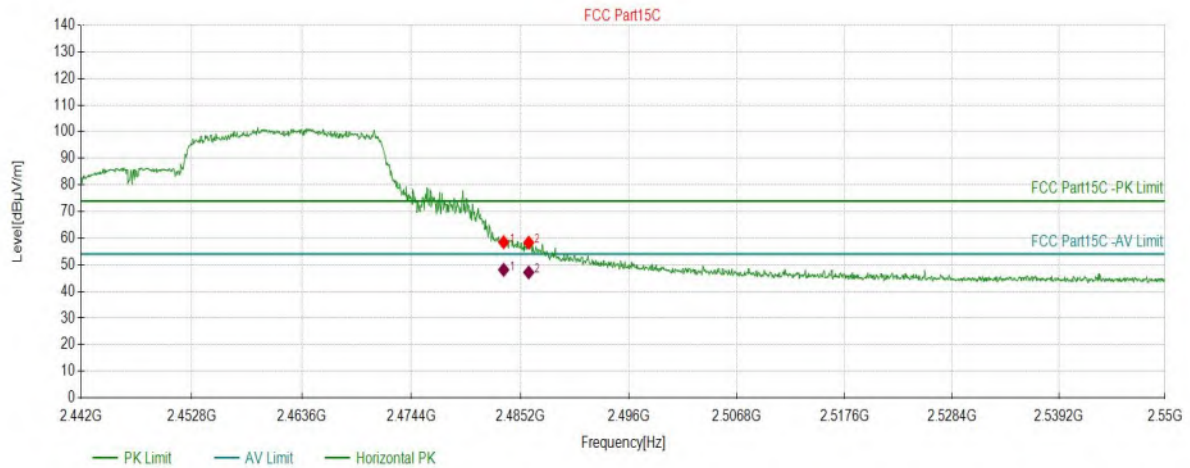

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	58.47	6.07	74.00	15.53	150	34	PK	Horizontal
2	2486.0320	58.33	6.08	74.00	15.67	150	34	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5468	6.07	48.11	54.00	5.89	150	34	Horizontal
2	2486.0320	6.08	47.13	54.00	6.87	150	34	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R23℃ 56%IEEE 802.11b/g/n/a/ac/ax 2T2R USB		
Model:	SKI.WB920TU.2	Environment:	23℃ 56%
Mode:	11AX20_2462	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:32:23

## Test Graph

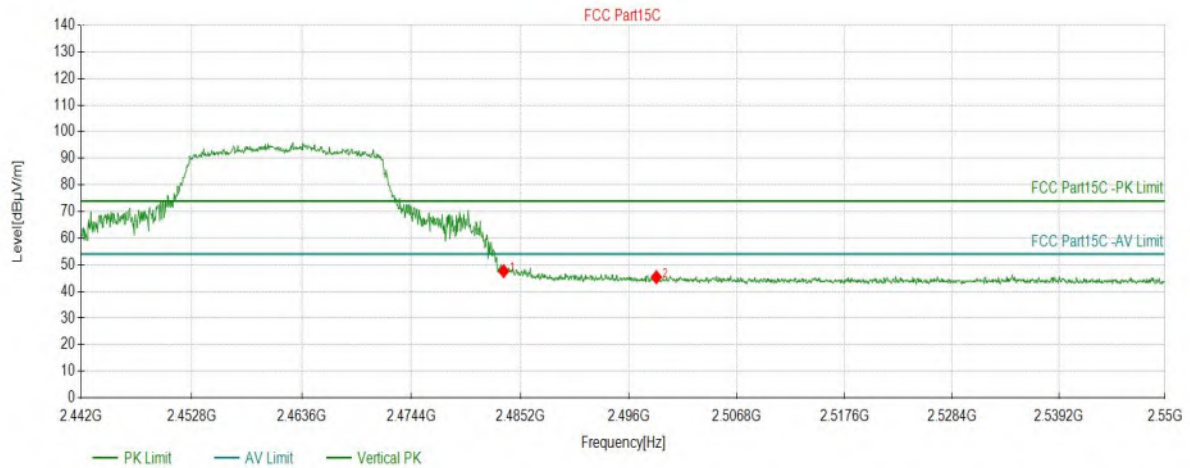

## Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5468	47.61	6.07	74.00	26.39	150	83	PK	Vertical
2	2498.7284	45.33	6.15	74.00	28.67	150	287	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX40_2422	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:38:24

## Test Graph

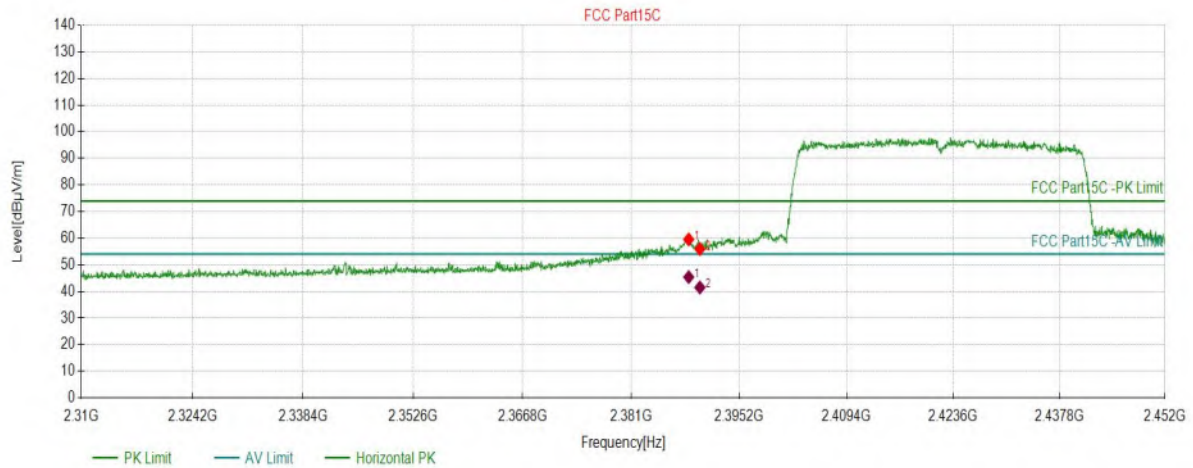

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2388.5522	59.55	5.61	74.00	14.45	150	151	PK	Horizontal
2	2390.0200	55.93	5.61	74.00	18.07	150	151	PK	Horizontal

## AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.5523	5.60	45.38	54.00	8.62	154.9	154.1	Horizontal
2	2390.0200	5.61	41.47	54.00	12.53	150	151	Horizontal




# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX40_2422	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:39:01

## Test Graph

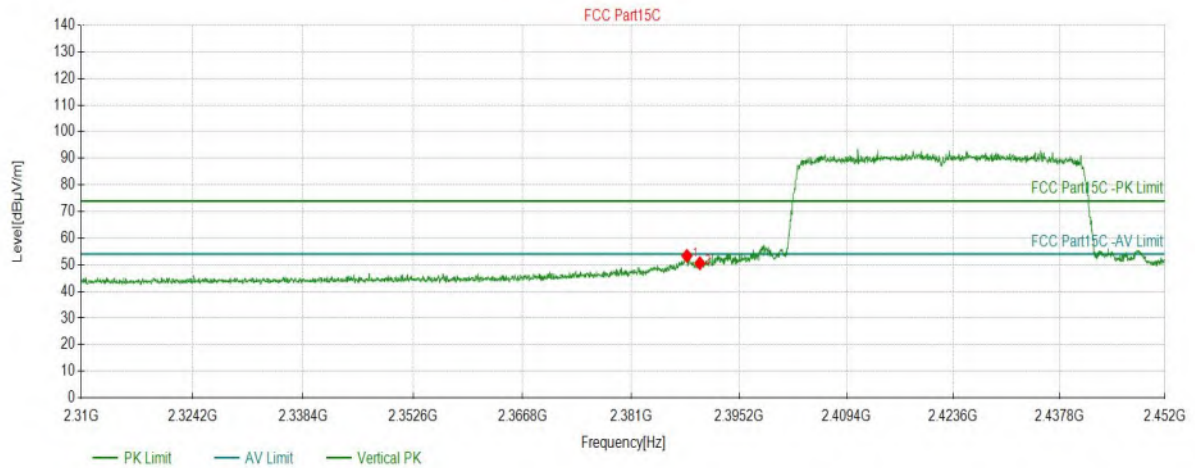


Suspected Data List									
NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2388.3154	53.36	5.61	74.00	20.64	150	142	PK	Vertical
2	2390.0200	50.60	5.61	74.00	23.40	150	142	PK	Vertical

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX40_2452	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:44:14

## Test Graph

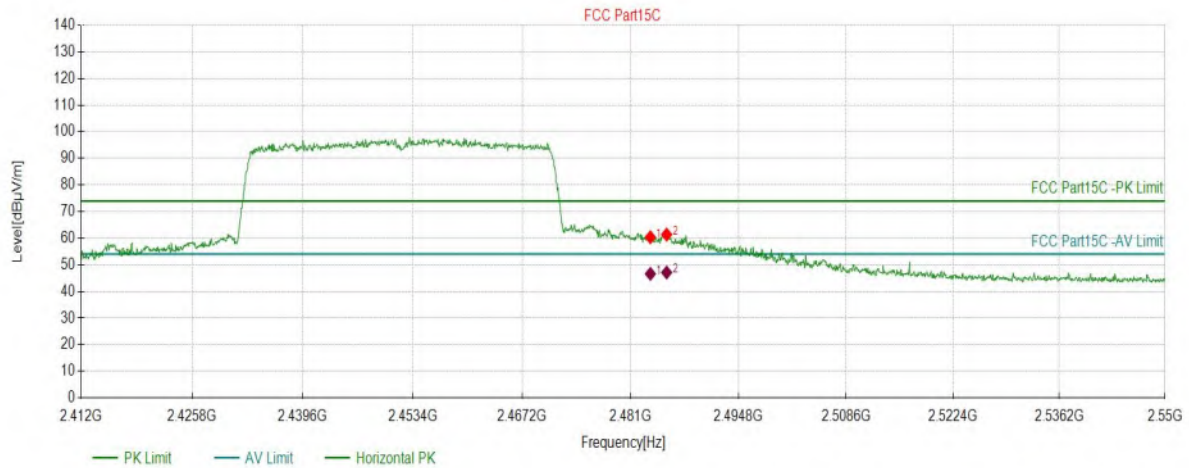

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5198	60.36	6.07	74.00	13.64	150	29	PK	Horizontal
2	2485.5908	61.35	6.08	74.00	12.65	150	37	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5198	6.07	46.60	54.00	7.40	150	29	Horizontal
2	2485.5908	6.08	47.10	54.00	6.90	150	37	Horizontal

# Test Report

Project Information			
EUT:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2		
Model:	SKI.WB920TU.2	Environment:	23°C 56%
Mode:	11AX40_2452	Voltage:	DC3.3V
Customer:		Engineer:	Kennys Zhang
Remark:	Power Set : Ant1+Ant2 10		

Start of Test: 2023-09-02 13:46:07

## Test Graph

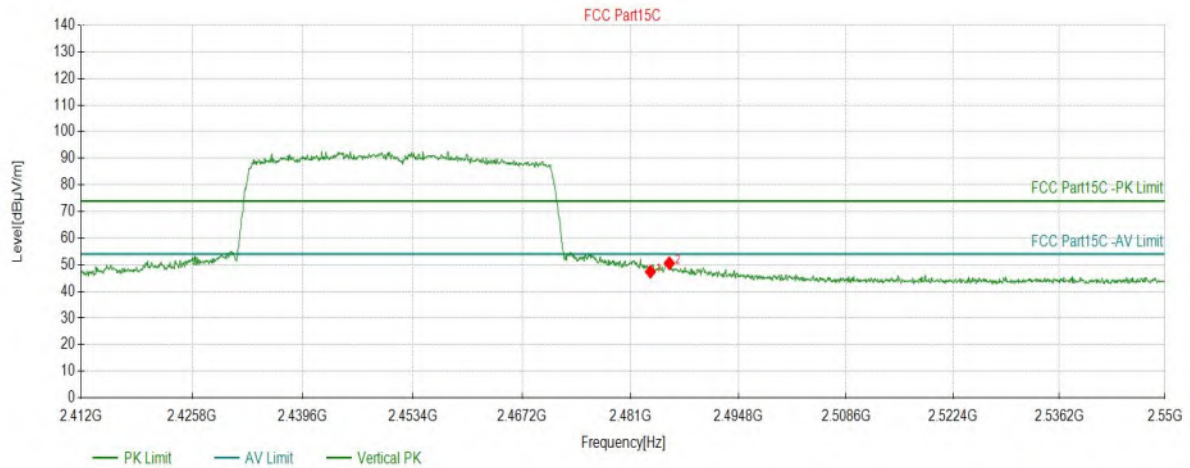

## Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5198	47.39	6.07	74.00	26.61	150	81	PK	Vertical
2	2485.9360	50.58	6.08	74.00	23.42	150	279	PK	Vertical

**END OF REPORT**