

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nan shan District, Shenzhen,
518057 China

FCC ID: YAMBD50XVHFS


Report Type: Original Report	Product Type: DIGITAL PORTABLE RADIO
Report Number: RDG210330019-00A	
Report Date: 2021-05-26	
Reviewed By:	Gavin Xu RF Engineer 
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
TECHNICAL SPECIFICATION	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENT LIST	7
ENVIRONMENTAL CONDITIONS	7
SUMMARY OF TEST RESULTS.....	8
1 - RF EXPOSURE.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
2 - RF OUTPUT POWER.....	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST DATA	10
3 - MODULATION CHARACTERISTIC	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST DATA	16
4 – OCCUPIED BANDWIDTH & EMISSION MASK	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
6 - RADIATED SPURIOUS EMISSIONS	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
7 - FREQUENCY STABILITY	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46

TEST DATA46

8 - TRANSIENT FREQUENCY BEHAVIOR.....50

APPLICABLE STANDARD50

TEST PROCEDURE50

TEST DATA51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		DIGITAL PORTABLE RADIO
Test Model:		BD505 VHF
Multiple Models:		BD500 VHF, BD502 VHF, BD506 VHF, BD508 VHF
Model Difference:		Refer to the DOS letter
Adapter Information	Model:	HKA01212010-XQ
	Input:	AC 100-240V 50/60Hz, 0.5A
	Output:	DC 12.0V 1.0A, 12.0W
Rated Input Voltage:		DC 7.2V from Battery or DC 12V from adapter
Serial Number:		RDG210330019-RF-S1
EUT Received Date:		2021.03.31
EUT Received Status:		Good

Technical Specification

Operation Frequency Range (MHz):	136-174
Rated RF Output Power (Conducted) (W):	High power level: 5 Low power level: 1
Modulation Type:	FM, 4FSK
Channel Spacing (kHz):	12.5/25

Objective

This test report is prepared on behalf of **Hytera Communications Corporation Limited** in accordance with Part 2, and Part 22,74,80 and 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22, Part 74, Part 80 and Part 90

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E-2016, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software

No software was tested in test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Wenschel	Terminations	1440	MD477

Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

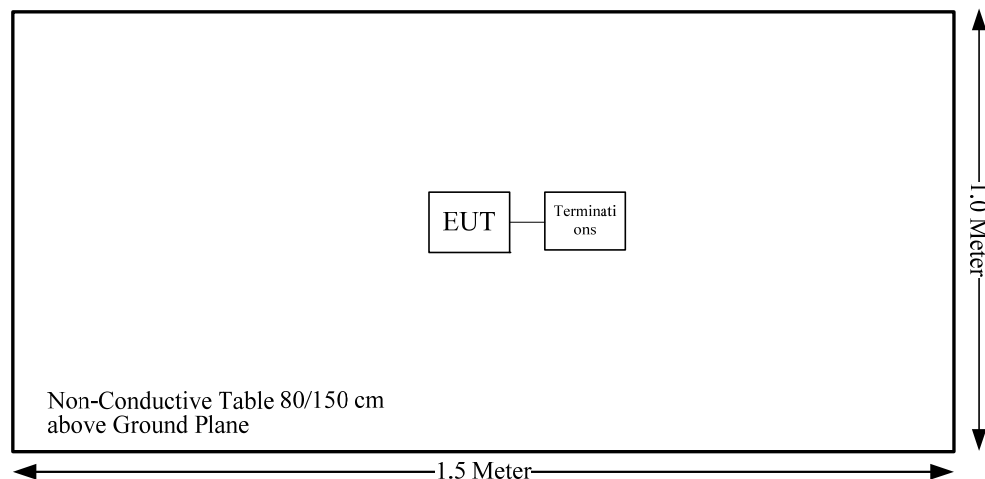

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2020-12-09	2021-12-08
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26EA	2020-09-25	2021-09-25
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2020-12-09	2021-12-08
RF Conducted Test					
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Rohde & Schwarz	Spectrum Analyzer	FSEB 7	8463211015	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2020-06-22	2021-06-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2020-09-12	2021-09-12
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	2020-09-05	2021-09-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2020-09-05	2021-09-05
E-Microwave	Coaxial Attenuators	EMCA40-200SN-6	OE01201046	2020-09-06	2021-09-06
E-Microwave	Coaxial Attenuators	EMCA30-200SN-6	OE00803029	2020-09-06	2021-09-06
HP	RF Communications Test Set	8920A	3438A05201	2020-07-07	2021-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	RF Conducted	Radiated emissions
Temperature:	25.6~27.1°C	24.9~26.4°C
Relative Humidity:	45~51 %	46 %
ATM Pressure:	100.4~101.4 kPa	101 ~ 101.7kPa
Tester:	Levi Shi	Asa Chen, Joker Chen
Test Date:	2021-05-16~2021-05-24	2021-04-07~2021-04-13

SUMMARY OF TEST RESULTS

S/N	FCC Rules	Description of Test	Results
1	§1.1310 and §2.1093	RF Exposure	Compliance
2	§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliance
3	§2.1047	Modulation Characteristic	Compliance
4	§2.1049; §22.357; § 22.731; §74.462; §80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
5	§2.1051; §22.861; §74.462; §80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
6	§2.1053; §22.861; §74.462; §80.211; §90.210	Spurious Radiated Emissions	Compliance
7	§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliance
8	§90.214	Transient Frequency Behavior	Compliance

1 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RDG210330019-20A.

2 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data





Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.


Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)		Note
				High Power Level	Low Power Level	High Power Level	Low Power Level	
12.5kHz	FM	Low	136.0125	36.67	30.62	37.78	30.79	FCC
		Middle	155.7525	36.52	30.71	37.78	30.79	FCC Part 90
		High	173.9875	36.16	30.24	37.78	30.79	FCC
		Additional	150.8125	36.55	30.78	37.78	30.79	FCC Part 22
		Additional	161.1000	36.59	30.32	37.78	30.79	FCC Part 74
	4FSK	Low	136.0125	36.62	30.37	37.78	30.79	FCC
		Middle	155.7525	36.77	30.61	37.78	30.79	FCC Part 90
		High	173.9875	36.44	29.94	37.78	30.79	FCC
		Additional	150.8125	36.86	30.74	37.78	30.79	FCC Part 22
		Additional	161.1000	36.59	30.31	37.78	30.79	FCC Part 74
25kHz	FM	Additional	150.8125	36.86	30.78	37.78	30.79	FCC Part 22
		Additional	154.0125	36.56	30.71	37.78	30.79	FCC Part 80
		Additional	161.1000	36.57	30.32	37.78	30.79	FCC Part 74

Note: The high rated power level is 5W(37dBm), and low rated power level is 1 W(30dBm).


The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

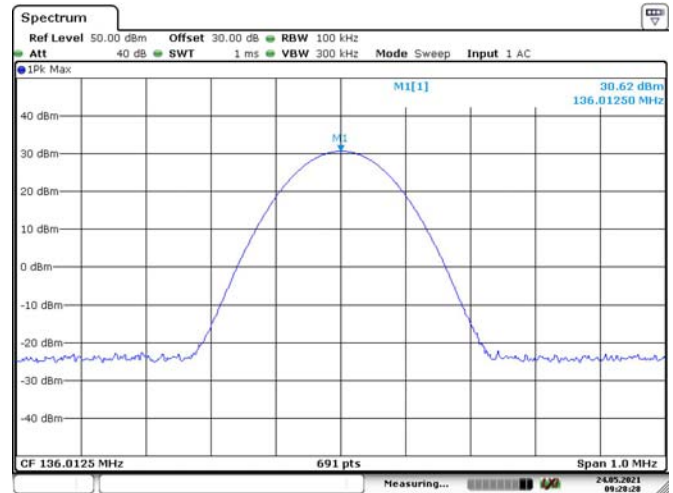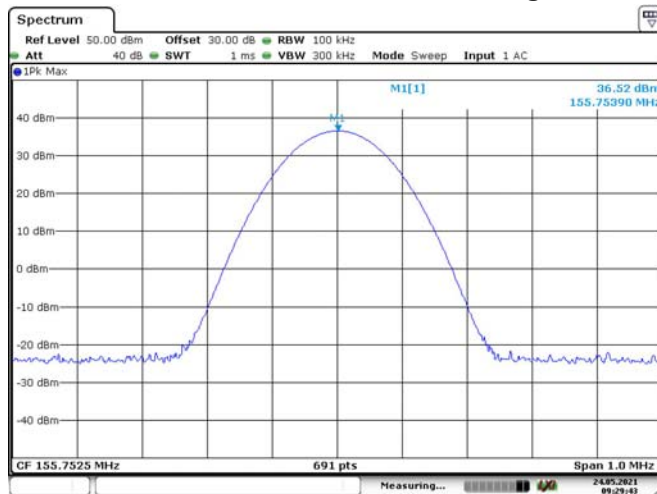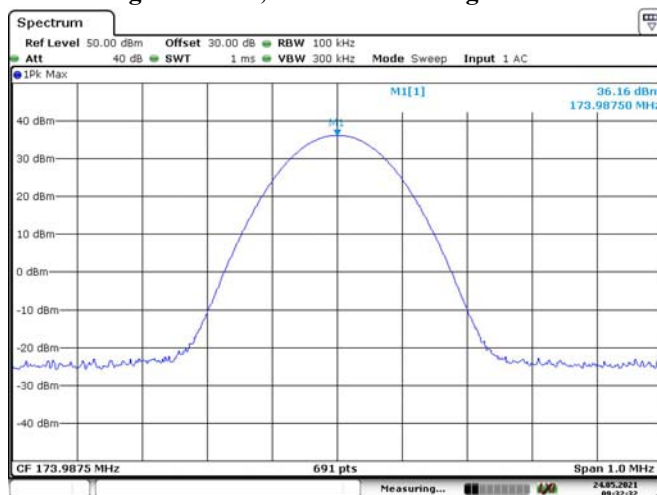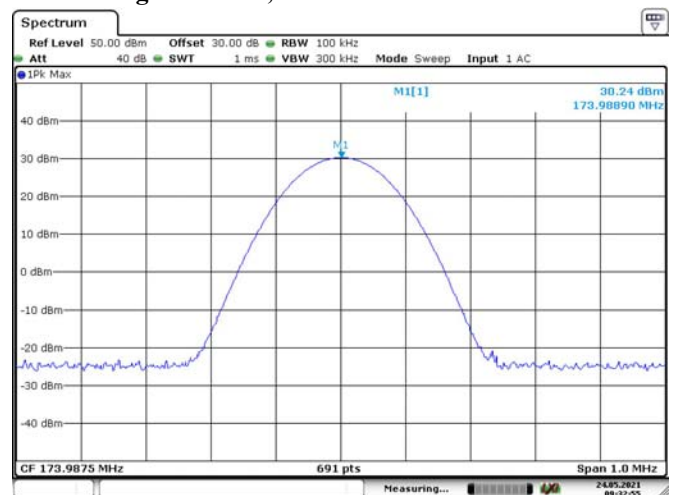FM, 12.5kHz:**Low Channel, 136.0125 MHz High Power****Low Channel, 136.0125 MHz Low Power****Part 90, Middle Channel, 155.7525 MHz High Power****Part 90, Middle Channel, 155.7525 MHz Low Power****High Channel, 173.9875 MHz High Power****High Channel, 173.9875 MHz Low Power**


Part 22, Additional Channel, 150.8125 MHz High Power

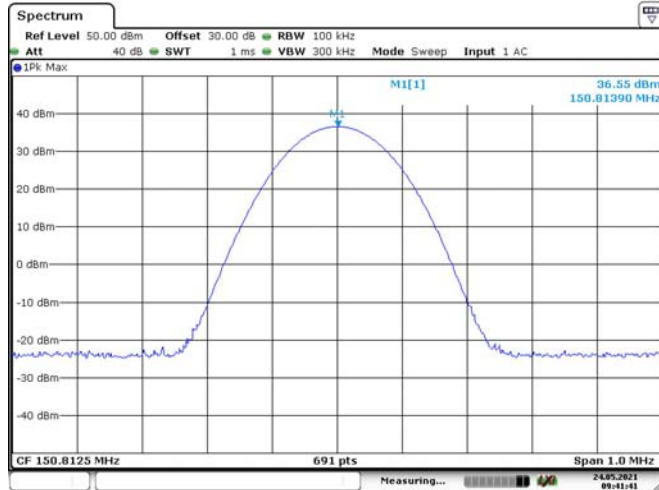


Part 22, Additional Channel, 150.8125 MHz Low Power

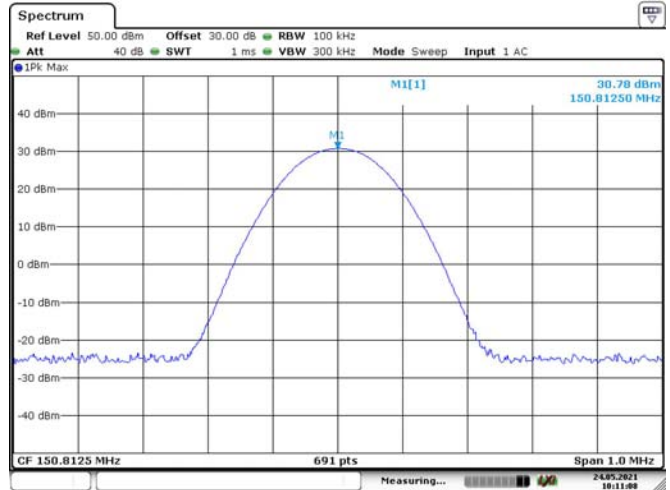

Part 74, Additional Channel, 161.1 MHz High Power

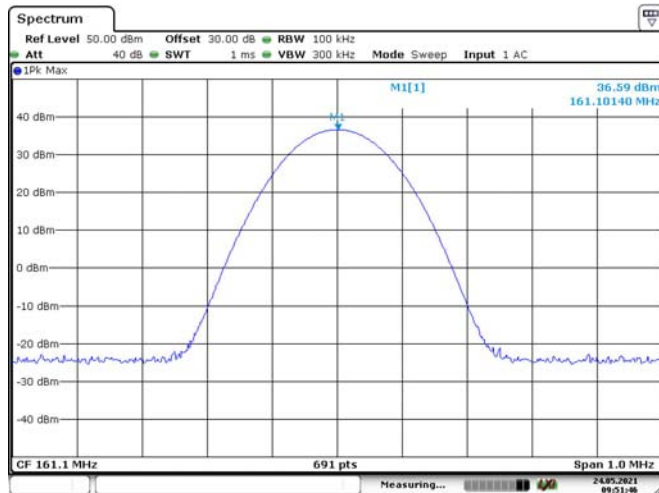


Part 74, Additional Channel, 161.1 MHz Low Power

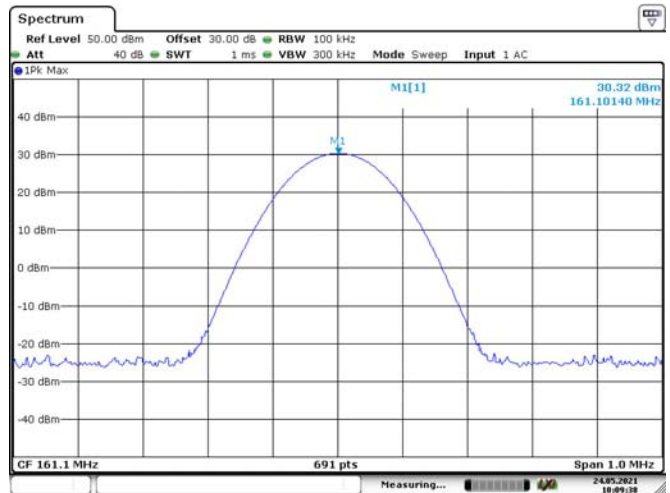


4FSK, 12.5kHz:**Low Channel, 136.0125 MHz High Power**


Date: 24.MAY.2021 09:56:29

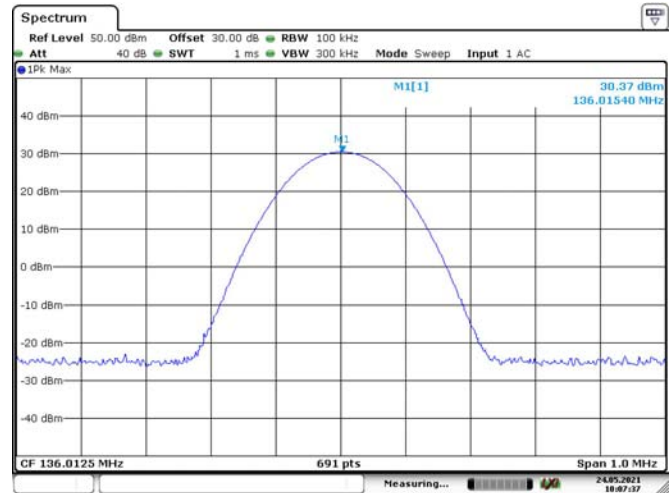Low Channel, 136.0125 MHz Low Power

Date: 24.MAY.2021 10:07:37

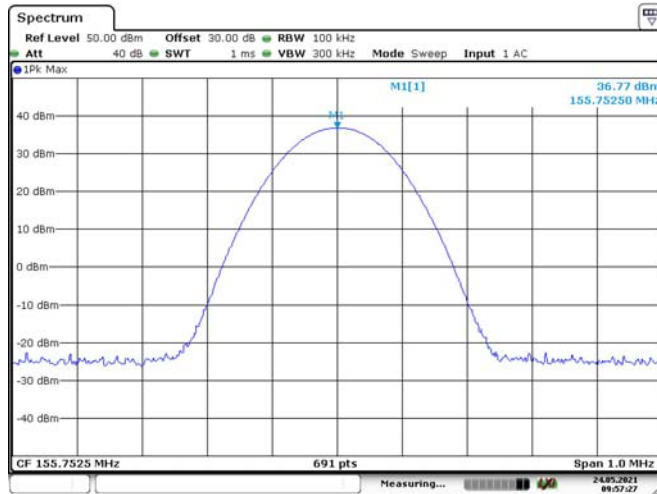Part 90, Middle Channel, 155.7525 MHz High Power

Date: 24.MAY.2021 09:57:28

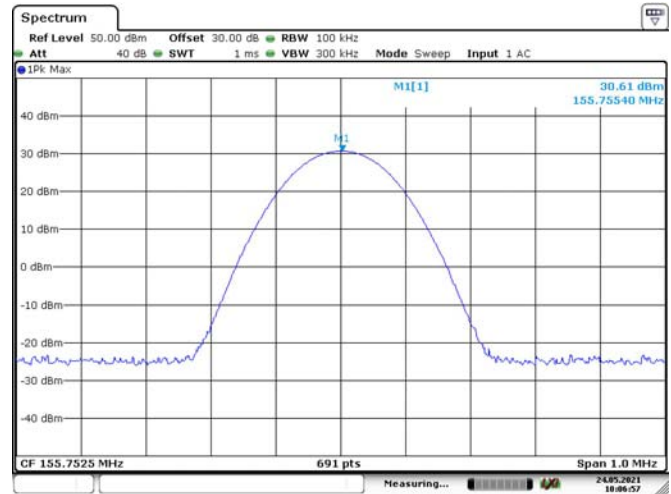Part 90, Middle Channel, 155.7525 MHz Low Power

Date: 24.MAY.2021 10:06:58


High Channel, 173.9875 MHz High Power

Date: 24.MAY.2021 09:58:14

High Channel, 173.9875 MHz Low Power


Date: 24.MAY.2021 10:06:00

Part 22, Additional Channel, 150.8125 MHz High Power

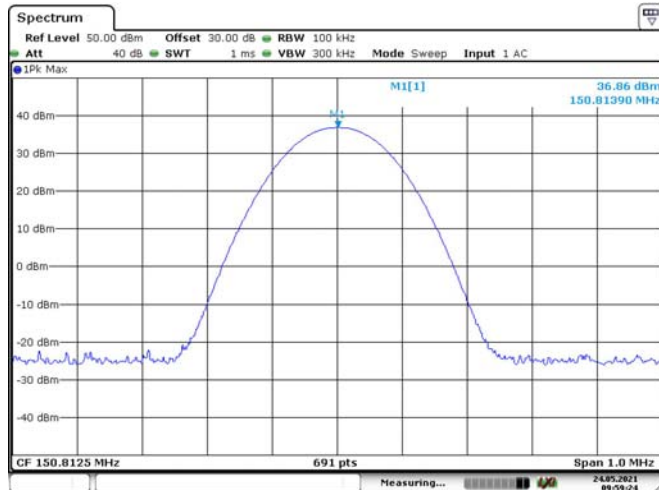


Date: 24.MAY.2021 09:59:24

Part 22, Additional Channel, 150.8125 MHz Low Power

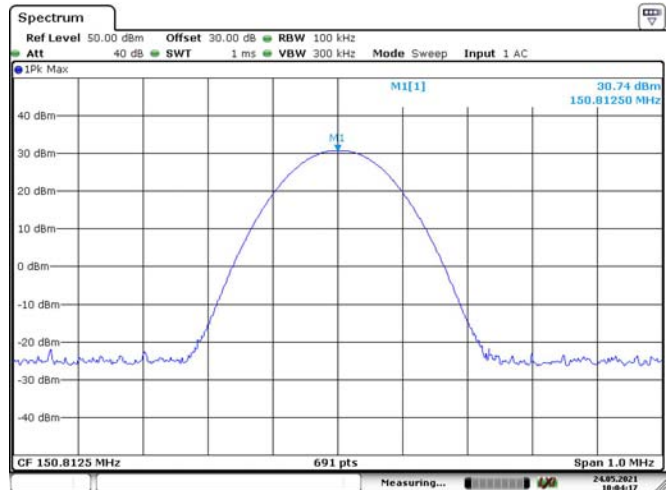


Date: 24.MAY.2021 10:04:17

Part 74, Additional Channel, 161.1 MHz High Power




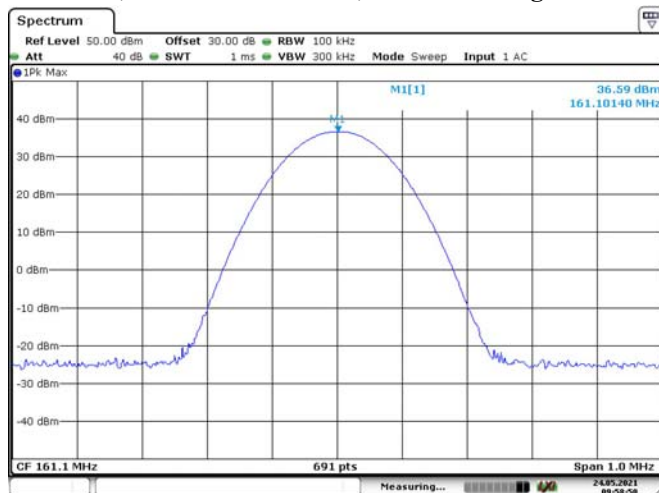


Date: 24.MAY.2021 09:58:51

Part 74, Additional Channel, 161.1 MHz Low Power

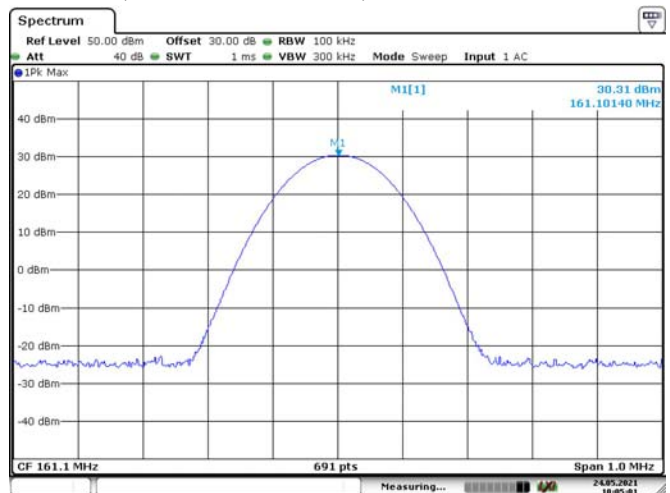

Date: 24.MAY.2021 10:05:01

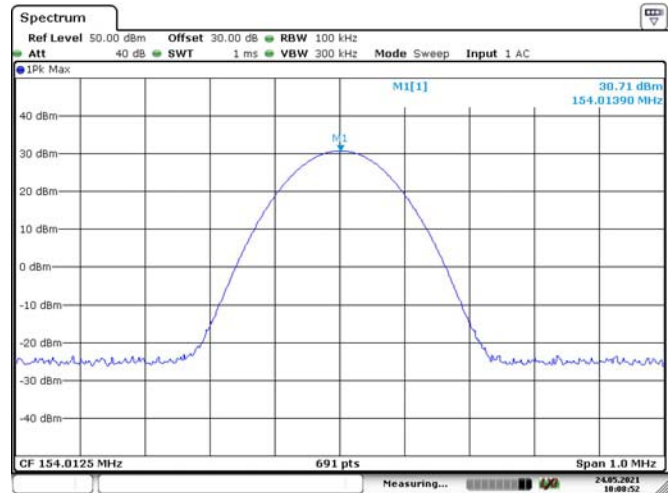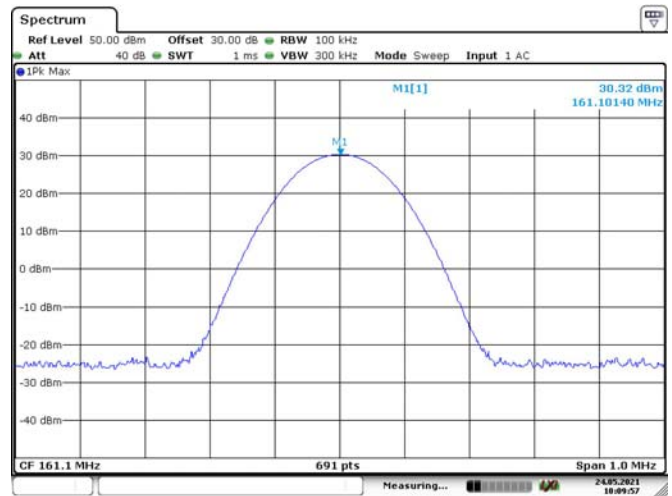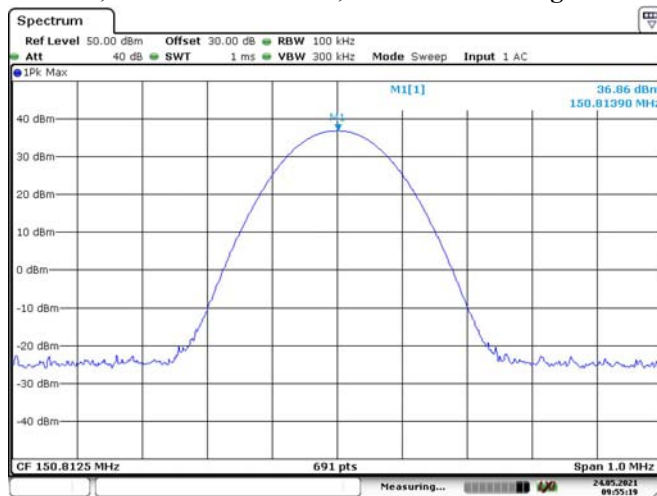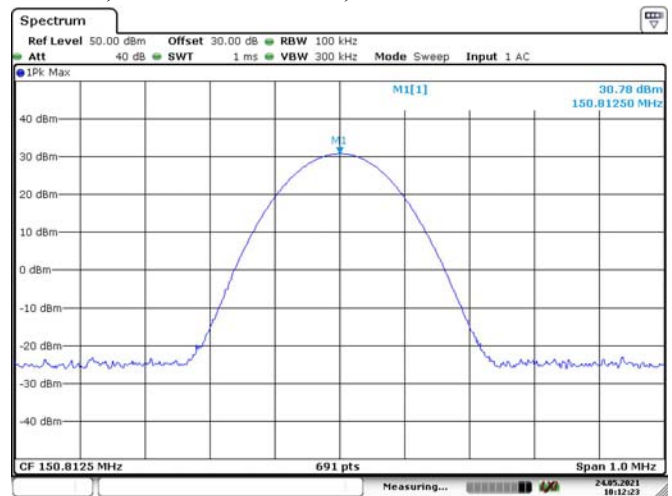FM, 25kHz:**Part 80, Additional Channel, 154.0125 MHz High Power****Part 80, Additional Channel, 154.0125 MHz Low Power****Part 74, Additional Channel, 161.1 MHz High Power****Part 74, Additional Channel, 161.1 MHz Low Power****Part 22, Additional Channel, 150.8125 MHz High Power****Part 22, Additional Channel, 150.8125 MHz Low Power**

3 - MODULATION CHARACTERISTIC

Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA-603-E 2.2.3



Test Data

Test Mode: Transmitting

Test Result: Compliance.


Please refer to the following tables and plots.

Audio Frequency Response – High Power

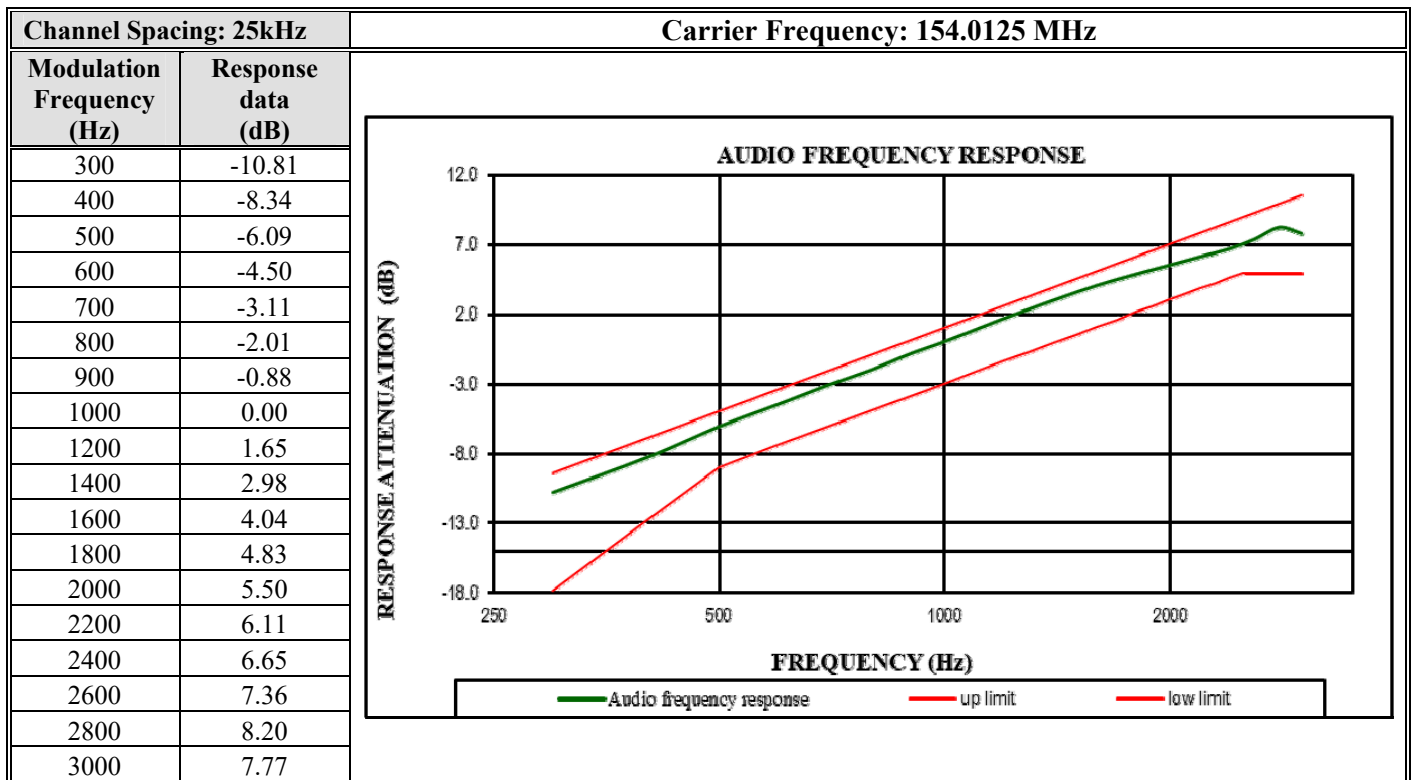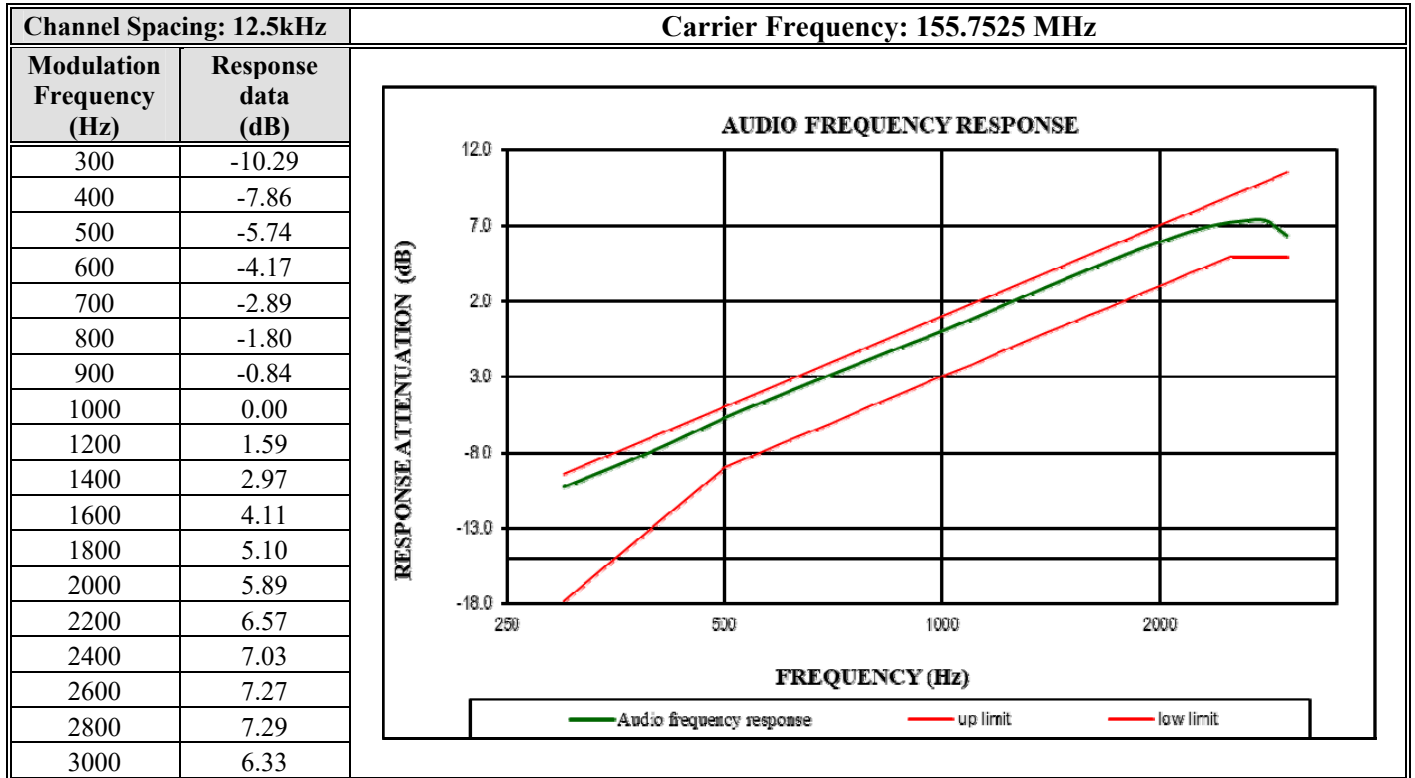


Modulation Limiting – High Power



Channel Spacing: 12.5kHz		Carrier Frequency: 155.7525 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.591	0.105	0.538	0.096	2.5
400	0.771	0.086	0.764	0.082	2.5
500	1.010	0.115	0.994	0.125	2.5
600	1.220	0.135	1.180	0.136	2.5
700	1.390	0.156	1.412	0.156	2.5
800	1.620	0.189	1.635	0.176	2.5
900	1.740	0.201	1.736	0.200	2.5
1000	1.850	0.208	1.869	0.204	2.5
1200	1.980	0.212	1.993	0.230	2.5
1400	2.001	0.234	2.000	0.260	2.5
1600	2.026	0.256	2.012	0.270	2.5
1800	2.024	0.274	2.014	0.268	2.5
2000	2.033	0.328	2.035	0.312	2.5
2200	2.042	0.349	2.034	0.354	2.5
2400	2.013	0.376	2.010	0.367	2.5
2600	1.920	0.425	1.870	0.416	2.5
2800	1.797	0.381	1.735	0.375	2.5
3000	1.526	0.311	1.524	0.286	2.5

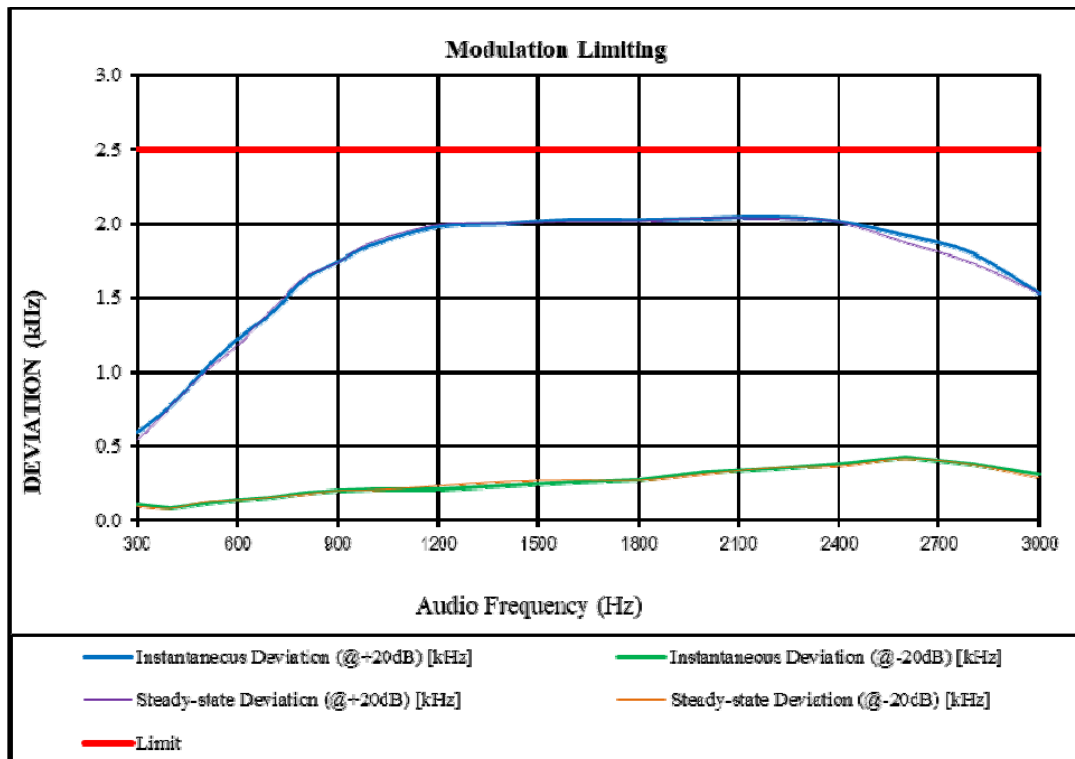

Channel Spacing: 25kHz		Carrier Frequency: 154.0125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.060	0.336	0.964	0.313	5
400	1.450	0.350	1.360	0.350	5
500	1.893	0.440	1.879	0.412	5
600	2.326	0.360	2.325	0.424	5
700	2.734	0.532	2.726	0.536	5
800	3.114	0.570	3.105	0.581	5
900	3.498	0.654	3.475	0.658	5
1000	3.642	0.673	3.625	0.682	5
1200	3.906	0.657	3.867	0.648	5
1400	3.960	0.687	3.945	0.691	5
1600	3.961	0.696	3.978	0.703	5
1800	3.896	0.721	3.925	0.726	5
2000	3.805	0.735	3.834	0.746	5
2200	3.795	0.746	3.764	0.735	5
2400	3.724	0.728	3.710	0.769	5
2600	3.828	0.825	3.825	0.831	5
2800	3.919	0.916	3.940	0.869	5
3000	3.501	0.731	3.470	0.702	5

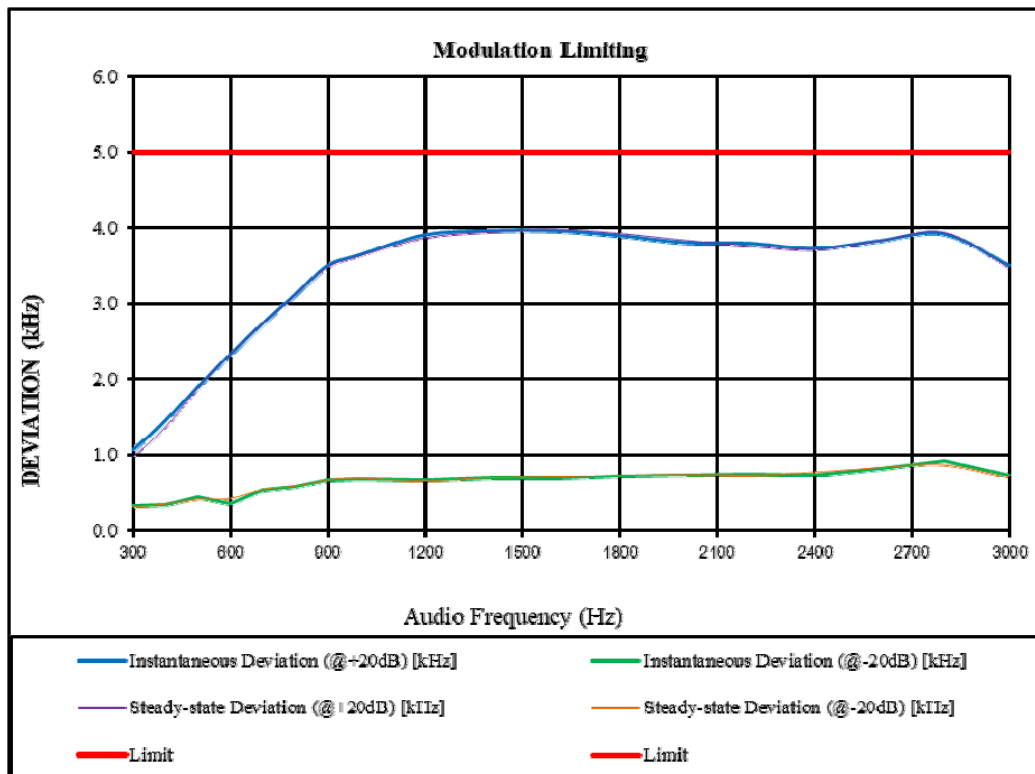

Audio Frequency Low Pass Filter Response – High Power

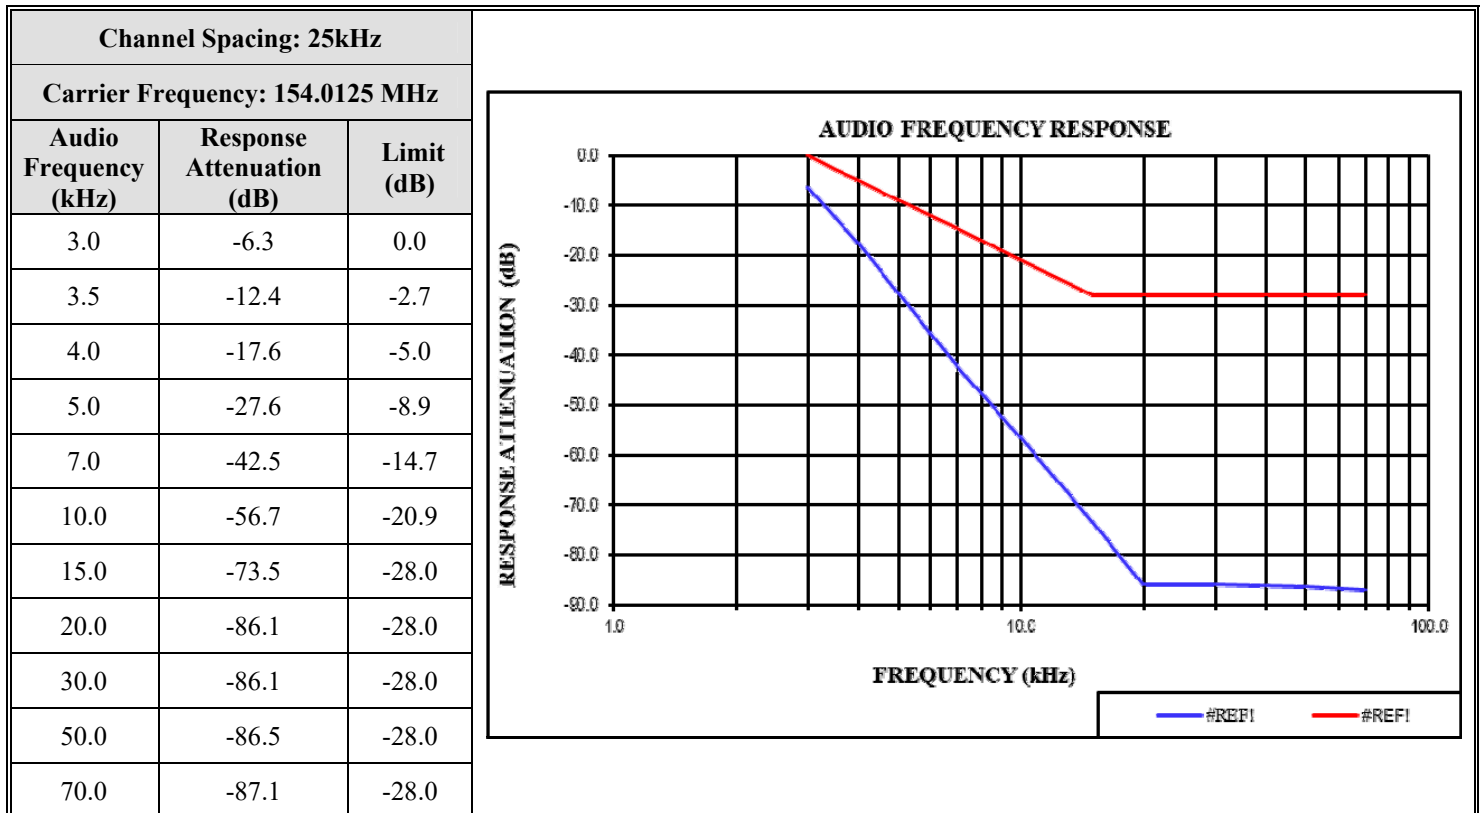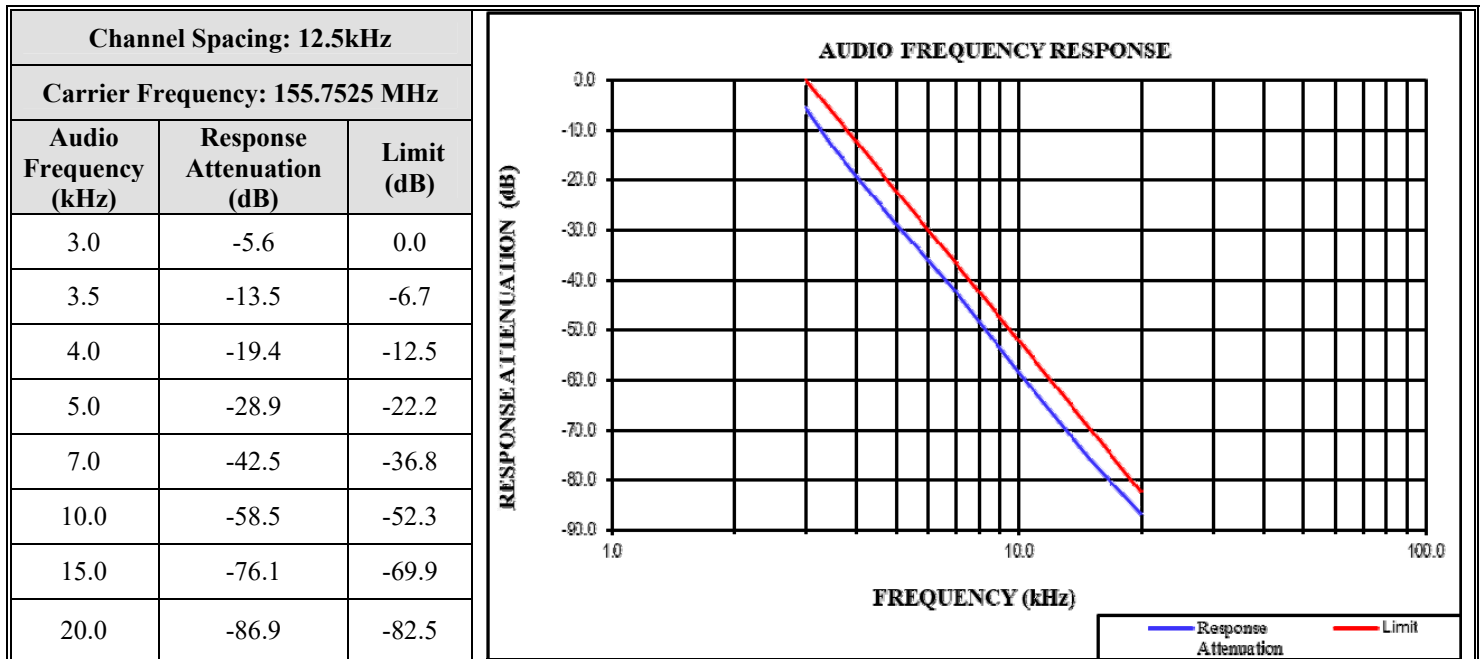

4 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level		Note
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	
FM 12.5kHz	Low	136.0125	9.820	10.421	9.820	10.421	FCC
	Middle	155.7525	5.210	10.321	5.210	10.421	FCC Part 90
	High	173.9875	5.210	10.321	5.210	10.321	FCC
	Additional	150.8125	5.311	10.321	5.311	10.421	FCC Part 22
	Additional	161.1000	5.210	10.271	5.210	10.371	FCC Part 74
4FSK 12.5kHz	Low	136.0125	7.615	9.619	7.014	9.018	FCC
	Middle	155.7525	7.114	9.018	7.014	9.118	FCC Part 90
	High	173.9875	7.315	9.018	7.214	9.319	FCC
	Additional	150.8125	7.415	9.118	7.315	9.018	FCC Part 22
	Additional	161.1000	7.315	9.619	7.114	9.319	FCC Part 74
FM 25kHz	Additional	150.8125	10.621	16.032	10.621	15.832	FCC Part 22
	Additional	154.0125	10.621	16.032	10.621	16.032	FCC Part 80
	Additional	161.1000	10.621	15.982	10.621	15.982	FCC Part 74

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E



The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.



Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

FM, 12.5kHz, High Power:



Low Channel

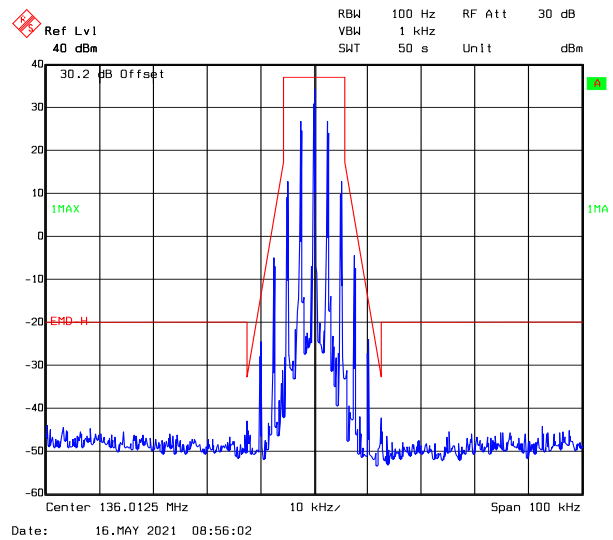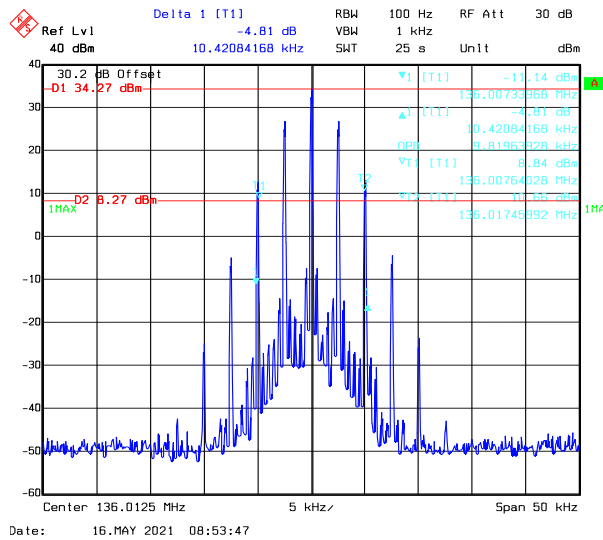


Middle Channel

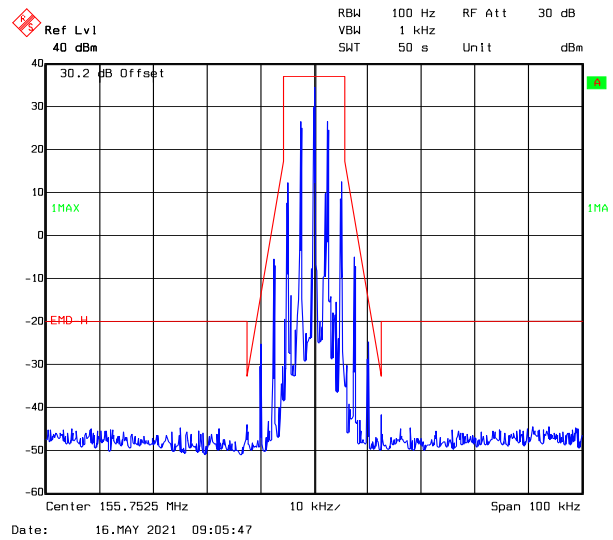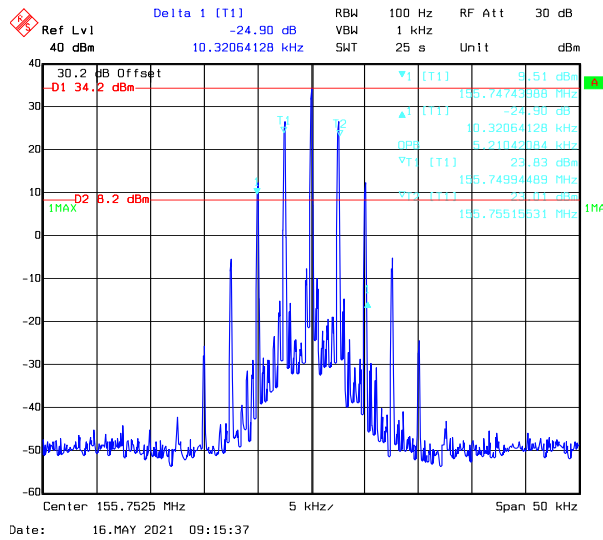


High Channel

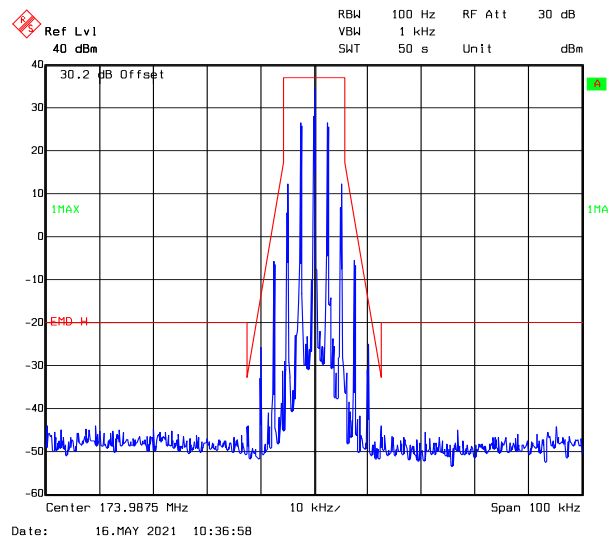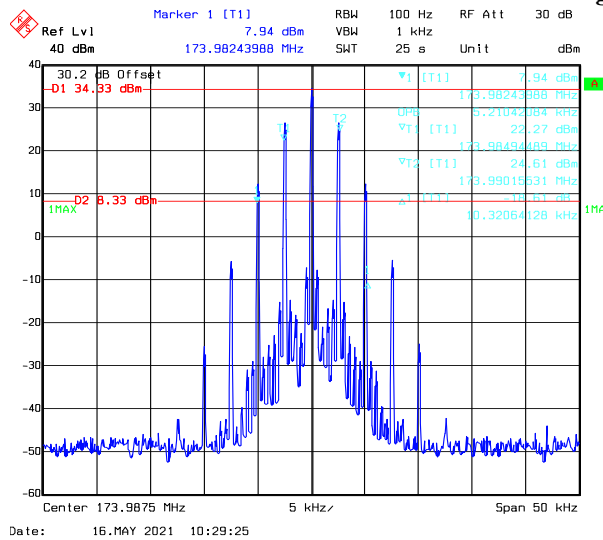

Additional Channel Part 74, 161.1 MHz

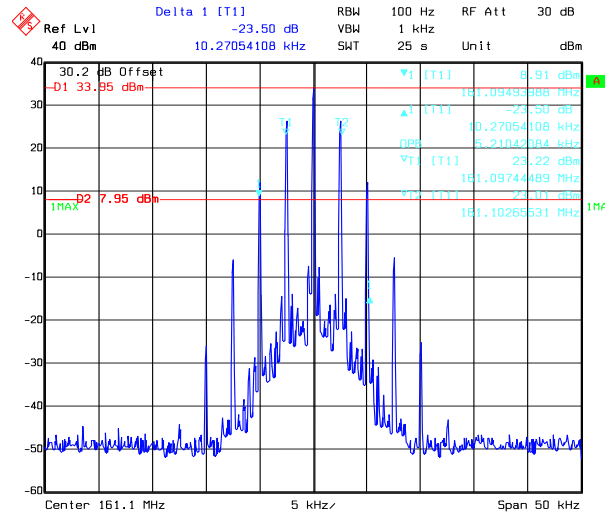


Date: 16.MAY 2021 09:43:09

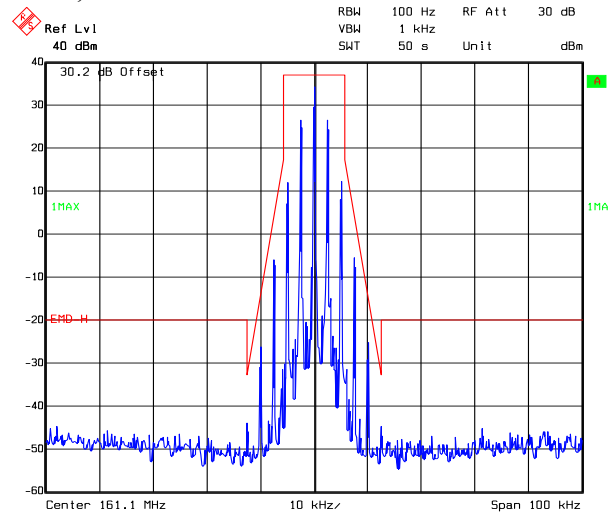


Date: 16.MAY 2021 15:05:03

Additional Channel Part 22, 150.8125 MHz

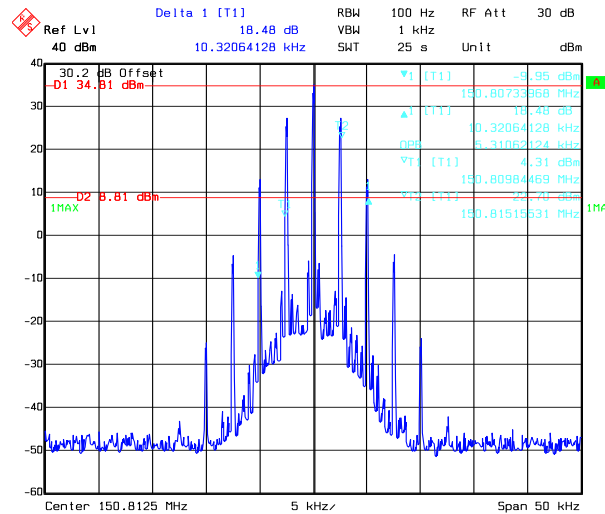



Date: 16.MAY 2021 09:58:29

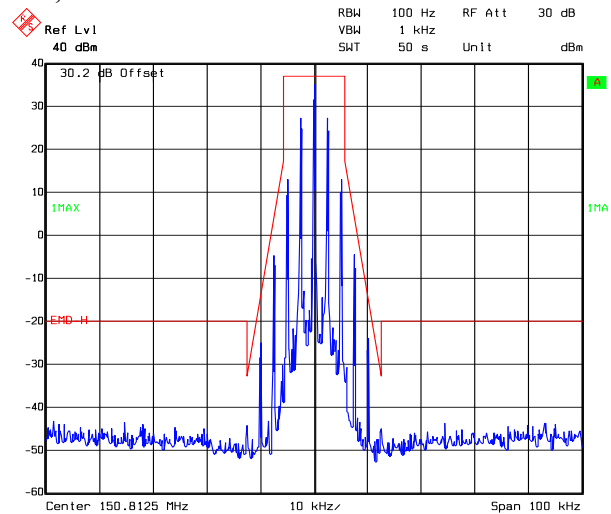



Date: 16.MAY 2021 10:03:17

FM, 12.5kHz, Low Power:



Low Channel

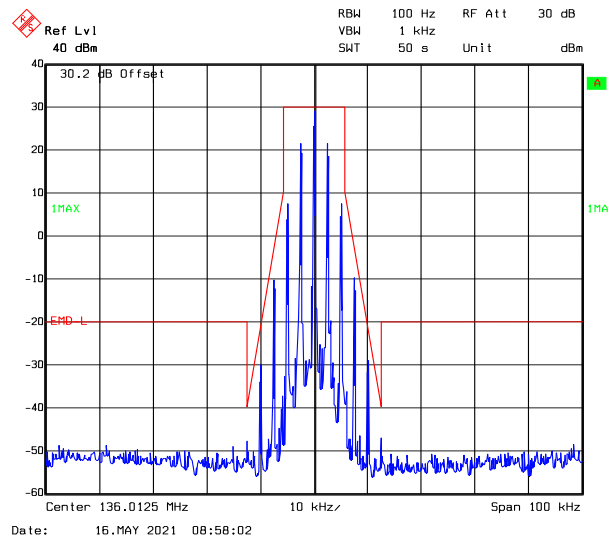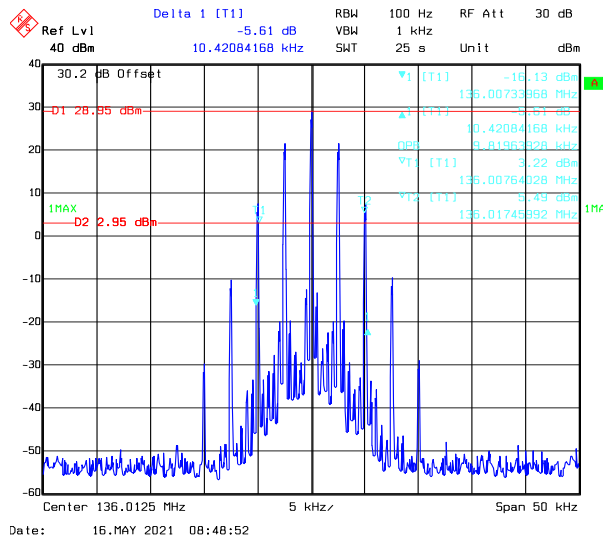

Middle Channel

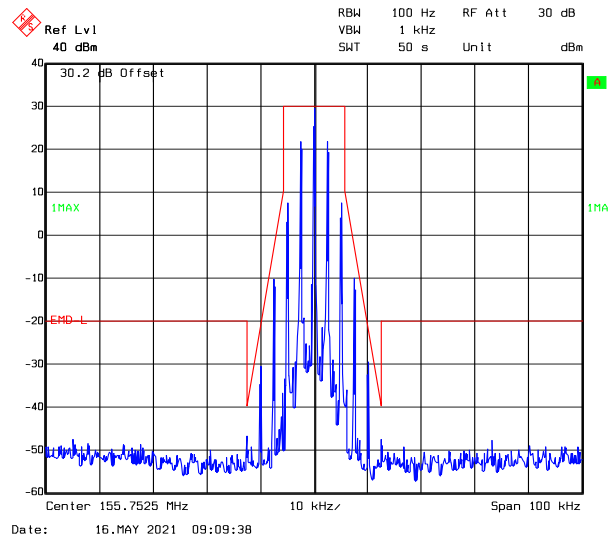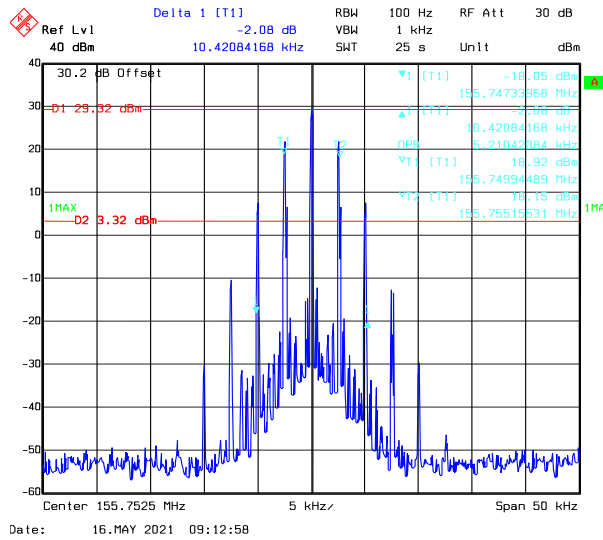

High Channel

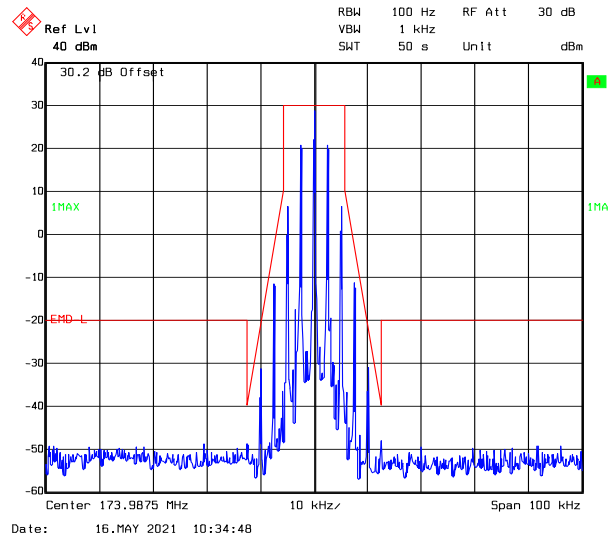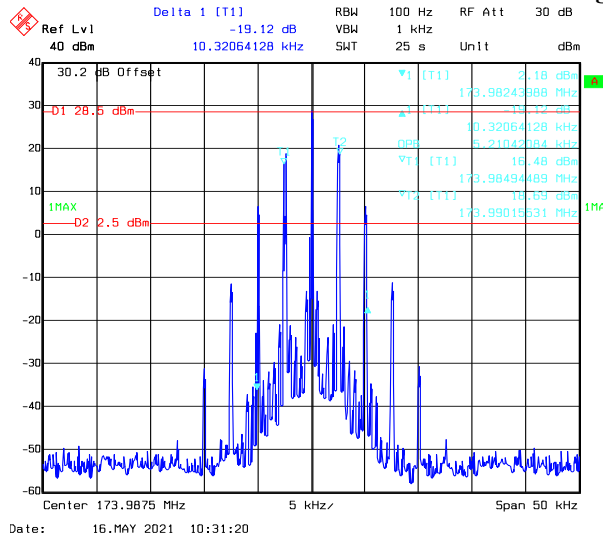

Delta 1 [T1] -1.30 dB

Ref Lvl 40 dBm 10.37074148 kHz

RBW 100 Hz RF Att 30 dB

VBW 1 kHz

SMT 25 s Unit dBm

30.2 dB Offset

D1 29.08 dBm

V1 [T1] -18.68 dBm

161.0948358 MHz

Delta 1 [T1] -1.30 dB

10.37074148 kHz

D2 3.08 dBm

V1 [T1] 18.66 dBm

161.09744489 MHz

V1 [T1] 18.05 dBm

161.10265531 MHz

1MAX

Center 161.1 MHz

5 kHz

Span 50 kHz

Ref Lvl 100 Hz RF Att 30 dB
40 dBm
RBW 1 kHz
VBW 50 s Unit dBm
SWT

30.2 dB Offset

11AX

END L

Center 161.1 MHz 10 kHz/ Span 100 kHz

Marker 1 [T1] -15.46 dBm

Ref Lvl 40 dBm

100 Hz RBW

1 kHz VBW

25 s Unit

30 dB Span

30.2 dB Offset

01 29.45 dBm

1MAX 3.45 dBm

02 3.45 dBm

03 3.45 dBm

04 3.45 dBm

05 3.45 dBm

06 3.45 dBm

07 3.45 dBm

08 3.45 dBm

09 3.45 dBm

10 3.45 dBm

11 3.45 dBm

12 3.45 dBm

13 3.45 dBm

14 3.45 dBm

15 3.45 dBm

16 3.45 dBm

17 3.45 dBm

18 3.45 dBm

19 3.45 dBm

20 3.45 dBm

21 3.45 dBm

22 3.45 dBm

23 3.45 dBm

24 3.45 dBm

25 3.45 dBm

26 3.45 dBm

27 3.45 dBm

28 3.45 dBm

29 3.45 dBm

30 3.45 dBm

31 3.45 dBm

32 3.45 dBm

33 3.45 dBm

34 3.45 dBm

35 3.45 dBm

36 3.45 dBm

37 3.45 dBm

38 3.45 dBm

39 3.45 dBm

40 3.45 dBm

41 3.45 dBm

42 3.45 dBm

43 3.45 dBm

44 3.45 dBm

45 3.45 dBm

46 3.45 dBm

47 3.45 dBm

48 3.45 dBm

49 3.45 dBm

50 3.45 dBm

51 3.45 dBm

52 3.45 dBm

53 3.45 dBm

54 3.45 dBm

55 3.45 dBm

56 3.45 dBm

57 3.45 dBm

58 3.45 dBm

59 3.45 dBm

60 3.45 dBm

61 3.45 dBm

62 3.45 dBm

63 3.45 dBm

64 3.45 dBm

65 3.45 dBm

66 3.45 dBm

67 3.45 dBm

68 3.45 dBm

69 3.45 dBm

70 3.45 dBm

71 3.45 dBm

72 3.45 dBm

73 3.45 dBm

74 3.45 dBm

75 3.45 dBm

76 3.45 dBm

77 3.45 dBm

78 3.45 dBm

79 3.45 dBm

80 3.45 dBm

81 3.45 dBm

82 3.45 dBm

83 3.45 dBm

84 3.45 dBm

85 3.45 dBm

86 3.45 dBm

87 3.45 dBm

88 3.45 dBm

89 3.45 dBm

90 3.45 dBm

91 3.45 dBm

92 3.45 dBm

93 3.45 dBm

94 3.45 dBm

95 3.45 dBm

96 3.45 dBm

97 3.45 dBm

98 3.45 dBm

99 3.45 dBm

100 3.45 dBm

101 3.45 dBm

102 3.45 dBm

103 3.45 dBm

104 3.45 dBm

105 3.45 dBm

106 3.45 dBm

107 3.45 dBm

108 3.45 dBm

109 3.45 dBm

110 3.45 dBm

111 3.45 dBm

112 3.45 dBm

113 3.45 dBm

114 3.45 dBm

115 3.45 dBm

116 3.45 dBm

117 3.45 dBm

118 3.45 dBm

119 3.45 dBm

120 3.45 dBm

121 3.45 dBm

122 3.45 dBm

123 3.45 dBm

124 3.45 dBm

125 3.45 dBm

126 3.45 dBm

127 3.45 dBm

128 3.45 dBm

129 3.45 dBm

130 3.45 dBm

131 3.45 dBm

132 3.45 dBm

133 3.45 dBm

134 3.45 dBm

135 3.45 dBm

136 3.45 dBm

137 3.45 dBm

138 3.45 dBm

139 3.45 dBm

140 3.45 dBm

141 3.45 dBm

142 3.45 dBm

143 3.45 dBm

144 3.45 dBm

145 3.45 dBm

146 3.45 dBm

147 3.45 dBm

148 3.45 dBm

149 3.45 dBm

150 3.45 dBm

151 3.45 dBm

152 3.45 dBm

153 3.45 dBm

154 3.45 dBm

155 3.45 dBm

156 3.45 dBm

157 3.45 dBm

158 3.45 dBm

159 3.45 dBm

160 3.45 dBm

161 3.45 dBm

162 3.45 dBm

163 3.45 dBm

164 3.45 dBm

165 3.45 dBm

166 3.45 dBm

167 3.45 dBm

168 3.45 dBm

169 3.45 dBm

170 3.45 dBm

171 3.45 dBm

172 3.45 dBm

173 3.45 dBm

174 3.45 dBm

175 3.45 dBm

176 3.45 dBm

177 3.45 dBm

178 3.45 dBm

179 3.45 dBm

180 3.45 dBm

181 3.45 dBm

182 3.45 dBm

183 3.45 dBm

184 3.45 dBm

185 3.45 dBm

186 3.45 dBm

187 3.45 dBm

188 3.45 dBm

189 3.45 dBm

190 3.45 dBm

191 3.45 dBm

192 3.45 dBm

193 3.45 dBm

194 3.45 dBm

195 3.45 dBm

196 3.45 dBm

197 3.45 dBm

198 3.45 dBm

199 3.45 dBm

200 3.45 dBm

201 3.45 dBm

202 3.45 dBm

203 3.45 dBm

204 3.45 dBm

205 3.45 dBm

206 3.45 dBm

207 3.45 dBm

208 3.45 dBm

209 3.45 dBm

210 3.45 dBm

211 3.45 dBm

212 3.45 dBm

213 3.45 dBm

214 3.45 dBm

215 3.45 dBm

216 3.45 dBm

217 3.45 dBm

218 3.45 dBm

219 3.45 dBm

220 3.45 dBm

221 3.45 dBm

222 3.45 dBm

223 3.45 dBm

224 3.45 dBm

225 3.45 dBm

226 3.45 dBm

227 3.45 dBm

228 3.45 dBm

229 3.45 dBm

230 3.45 dBm

231 3.45 dBm

232 3.45 dBm

233 3.45 dBm

234 3.45 dBm

235 3.45 dBm

236 3.45 dBm

237 3.45 dBm

238 3.45 dBm

239 3.

Ref Lvl 40 dBm RBW 100 Hz RF Att 30 dB
 VBW 1 kHz
 SWT 50 s Unit dBm

30.2 dB Offset

1MAX



END L

Center 150.8125 MHz 10 kHz Span 100 kHz



Date: 16.MAY 2021 10:06:38

4FSK, 12.5kHz, High Power:



Low Channel

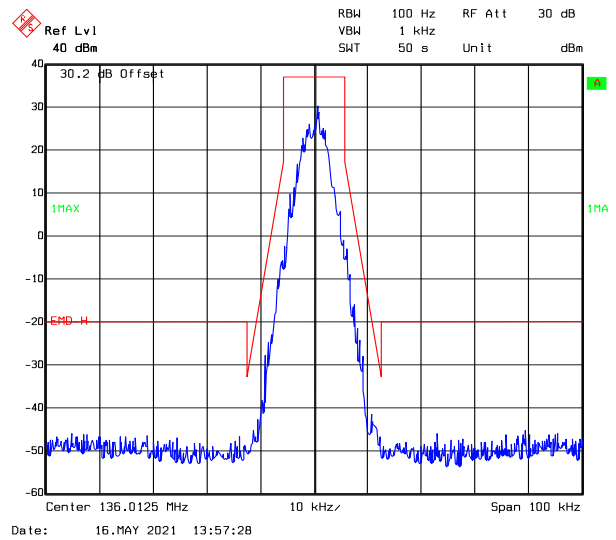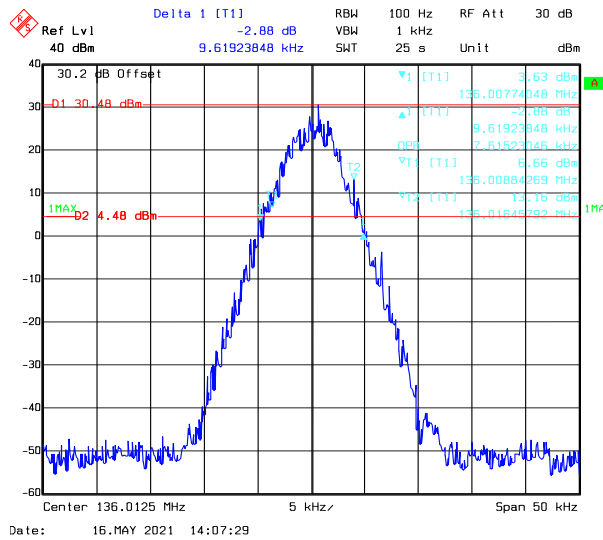


Middle Channel

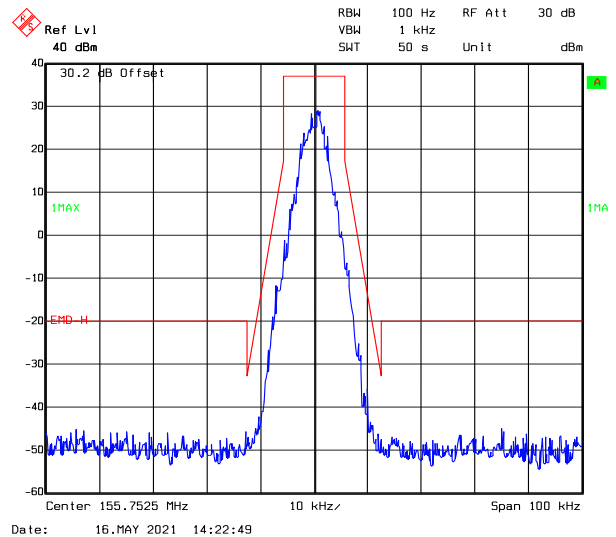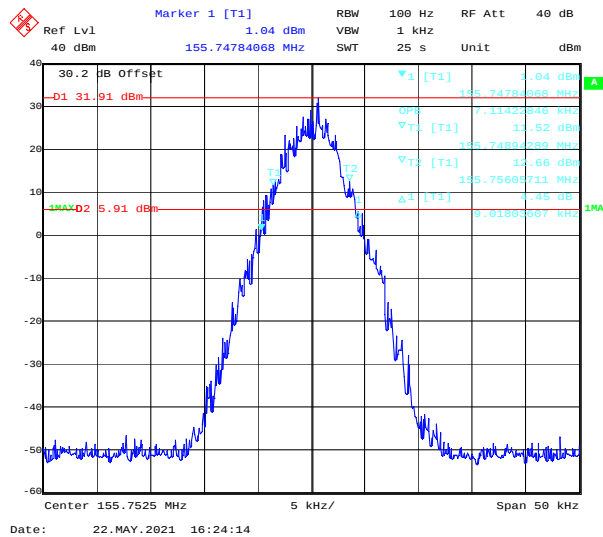


High Channel

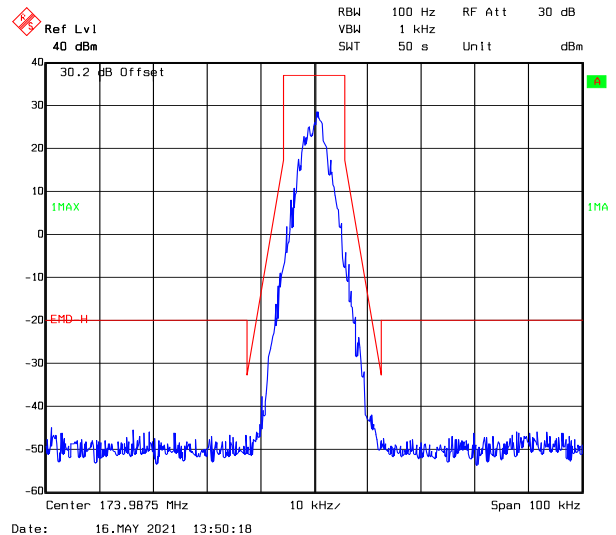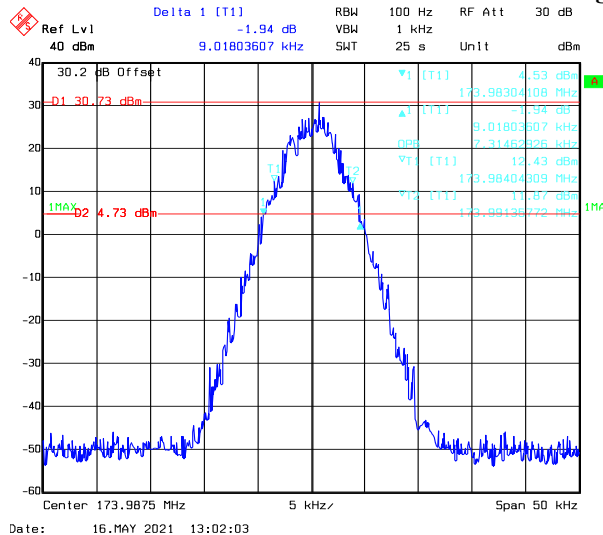

Additional Channel Part 74, 161.1MHz

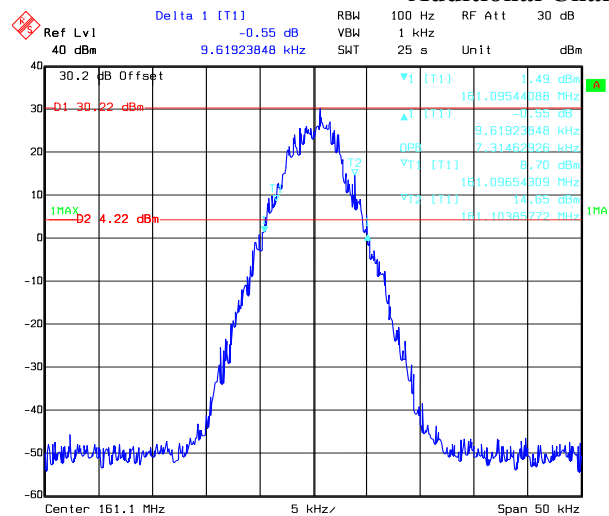


Date: 16.MAY 2021 14:45:30

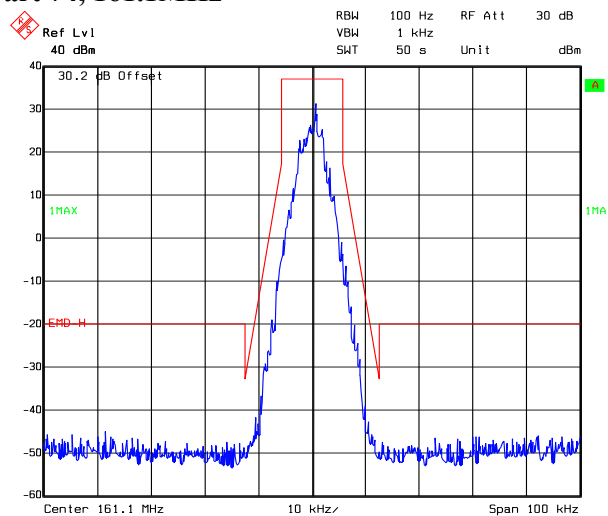


Date: 16.MAY 2021 14:34:14

Additional Channel Part 22, 150.8125 MHz

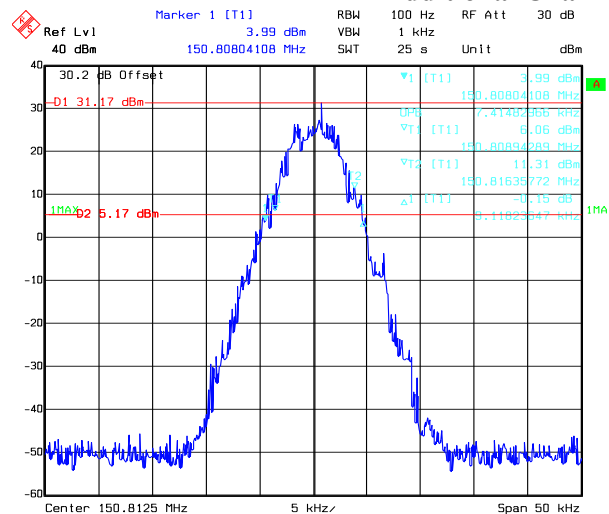



Date: 17.MAY 2021 08:25:41

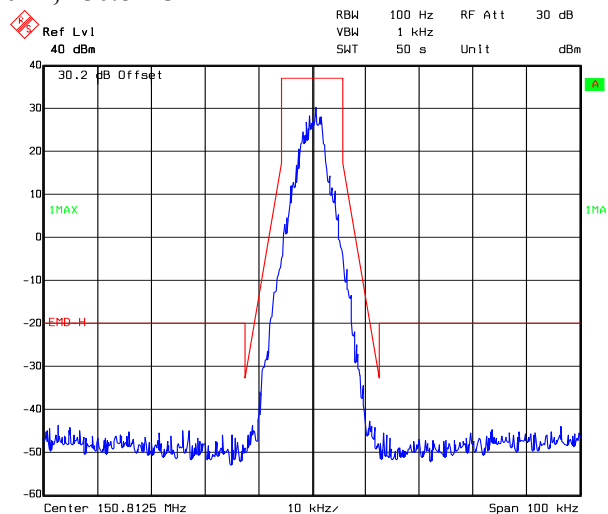



Date: 17.MAY 2021 08:31:48

4FSK, 12.5kHz, Low Power:



Low Channel

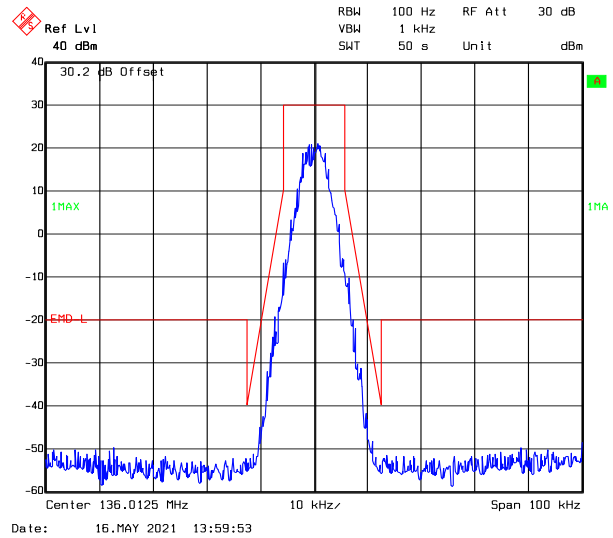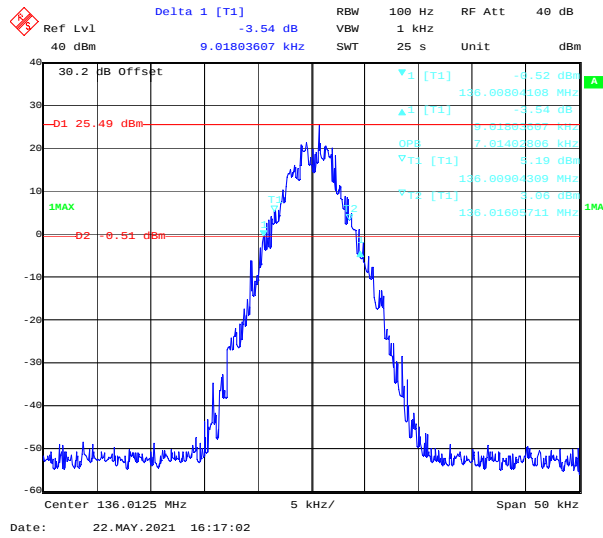


Middle Channel

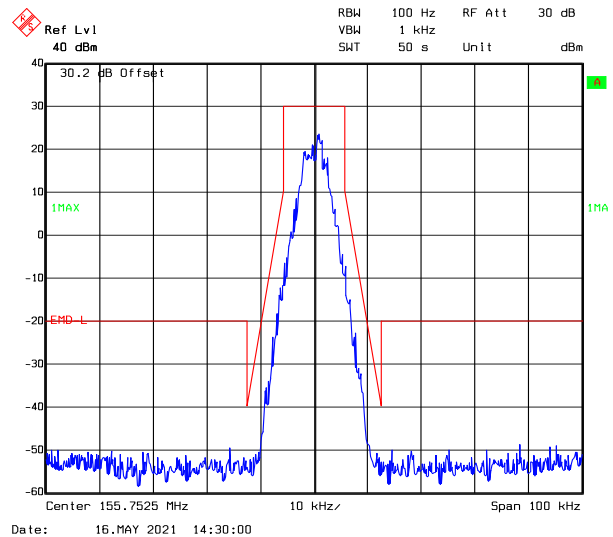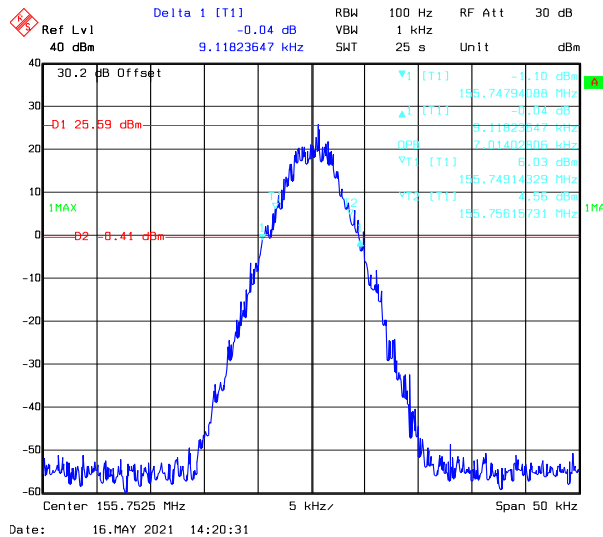


High Channel

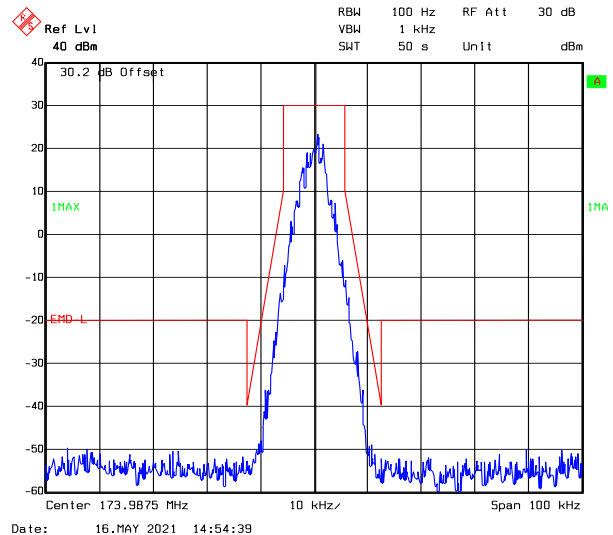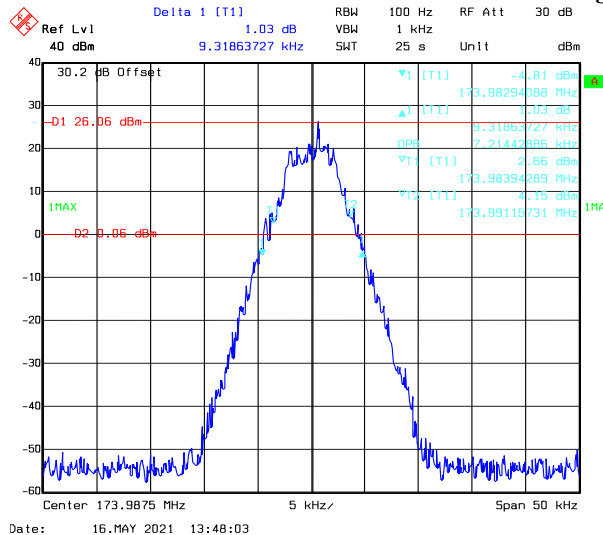

Additional Channel Part 74, 161.1 MHz

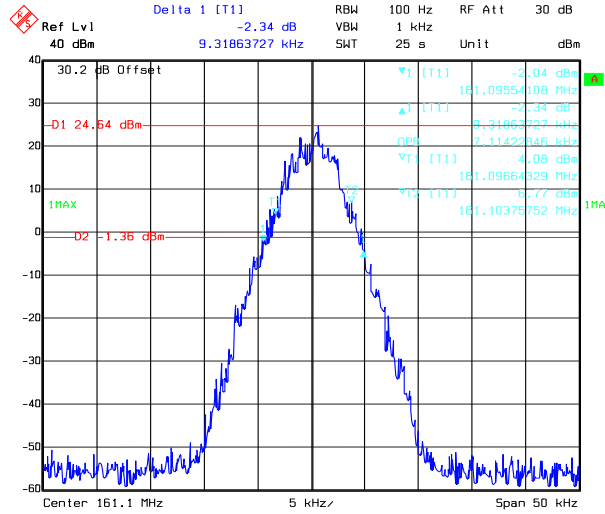


Date: 16.MAY 2021 14:49:18

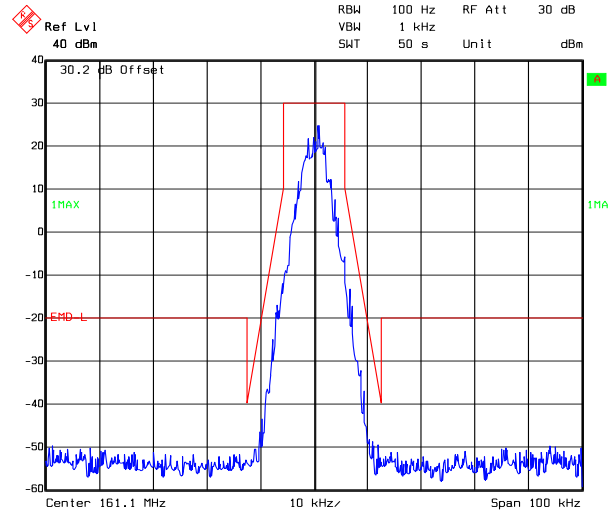


Date: 16.MAY 2021 14:37:49

Additional Channel Part 22, 150.8125 MHz

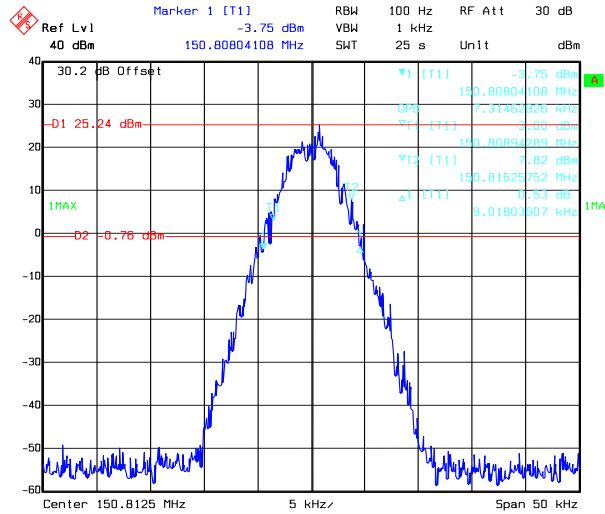


Date: 17.MAY 2021 08:27:47

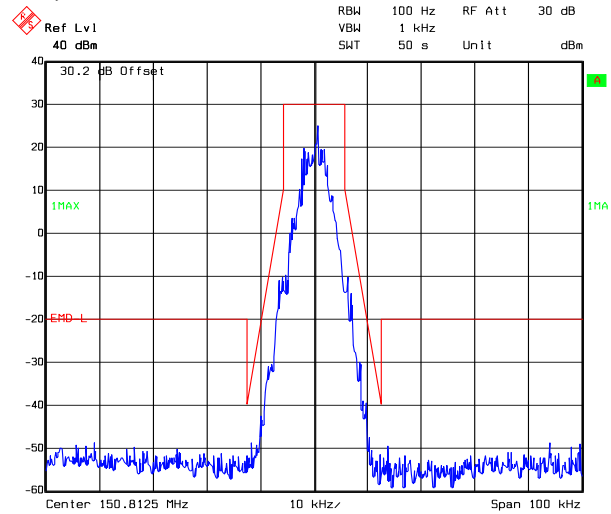


Date: 17.MAY 2021 08:33:30

FM, 25 kHz, High Power:

Additional Channel Part 80, 154.0125 MHz

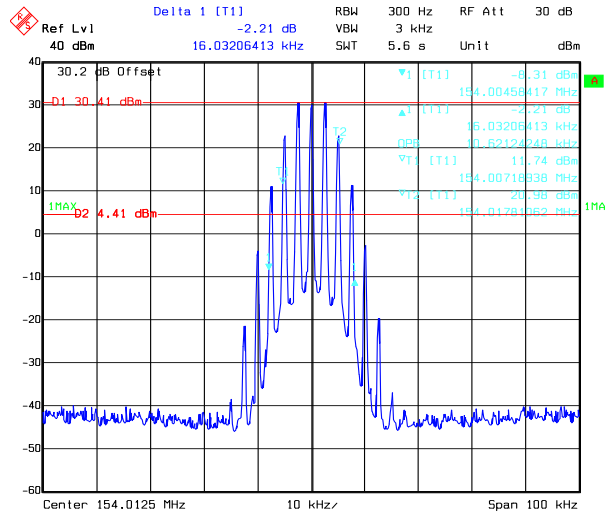


Date: 16.MAY 2021 09:19:02

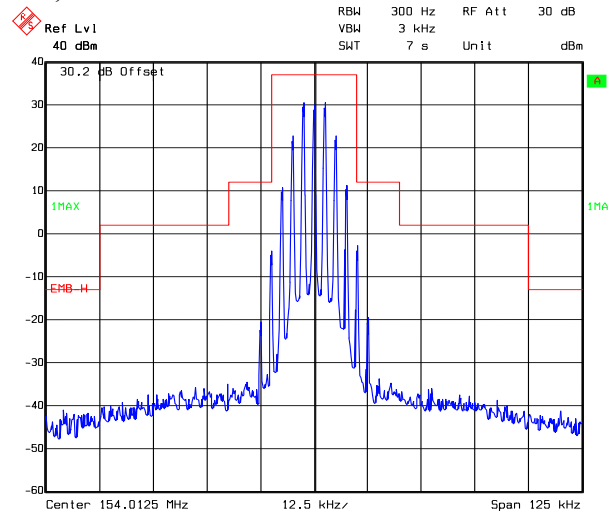


Date: 16.MAY 2021 09:26:00

Additional Channel Part 74, 161.1 MHz

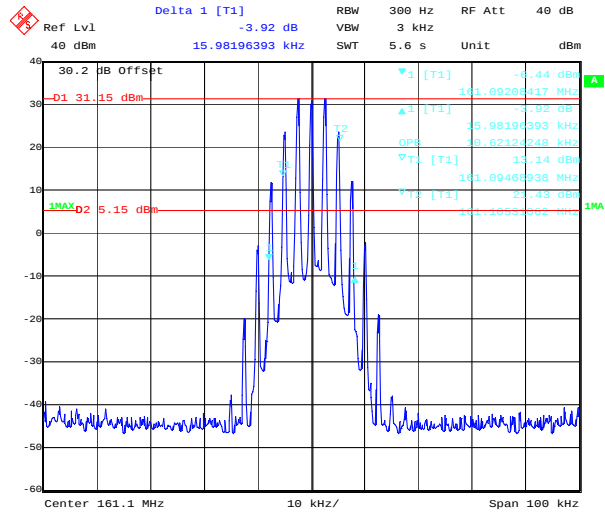


Date: 22.MAY.2021 16:31:19

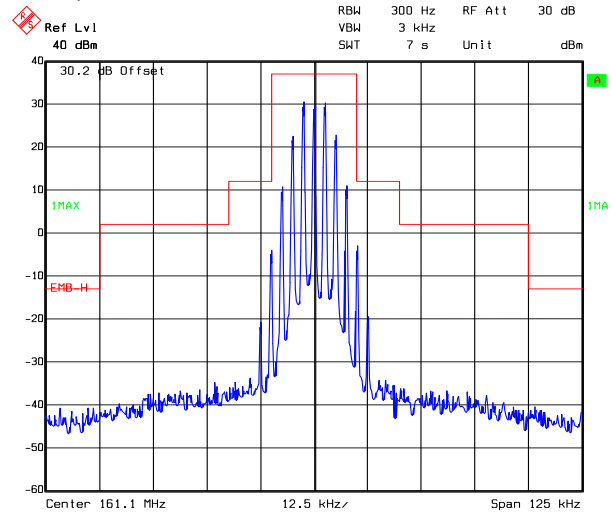


Date: 16.MAY 2021 09:28:56

Additional Channel Part 22, 150.8125 MHz

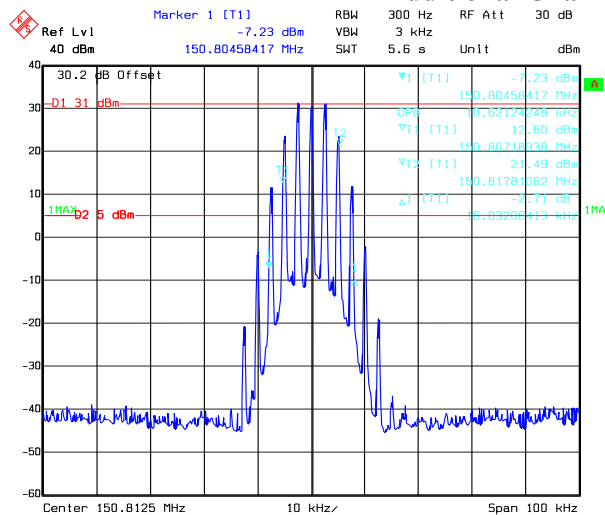


Date: 16.MAY 2021 10:21:29

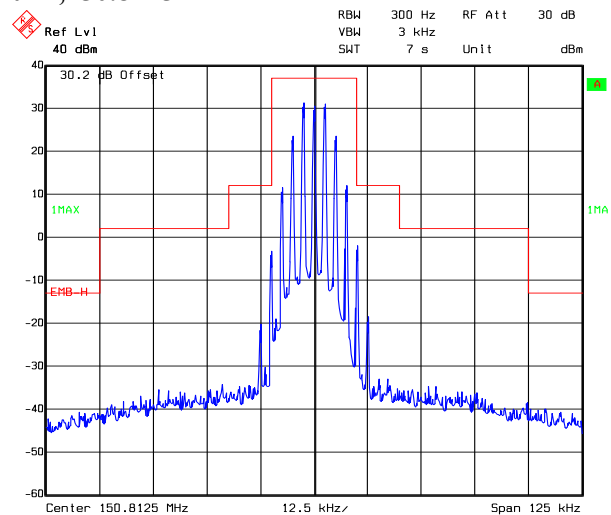


Date: 16.MAY 2021 10:16:20

FM, 25 kHz, Low Power:

Additional Channel Part 80, 154.0125 MHz

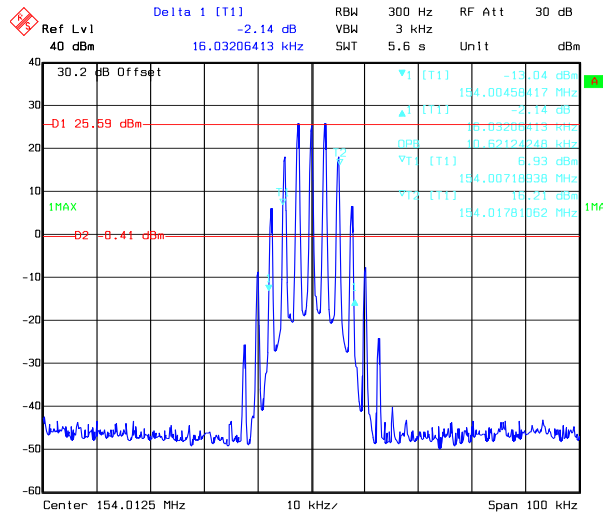


Date: 16.MAY 2021 09:22:34

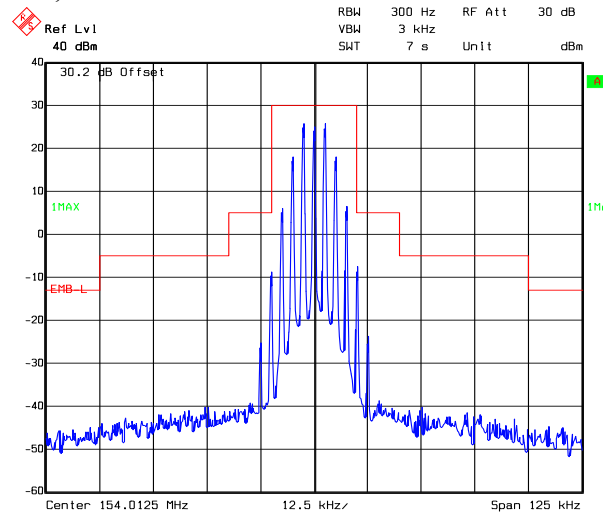


Date: 16.MAY 2021 09:24:25

Additional Channel Part 74, 161.1 MHz

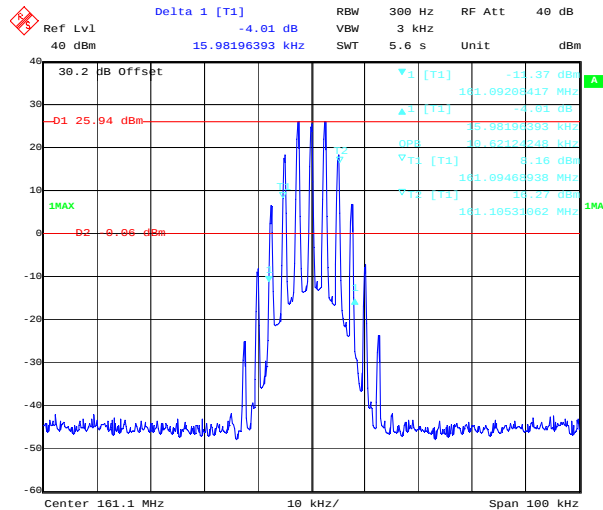


Date: 22.MAY.2021 16:36:14

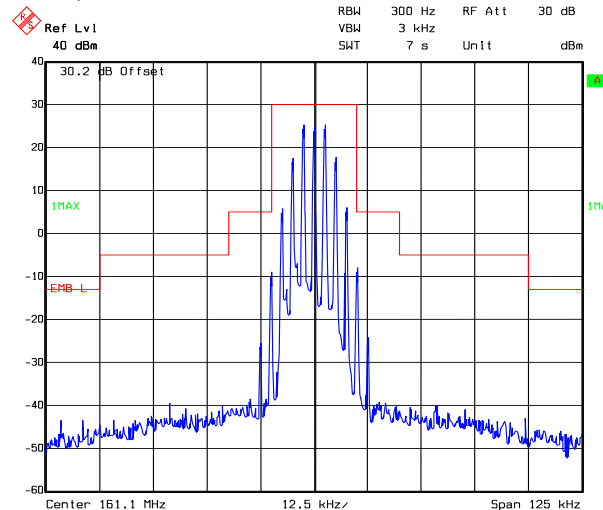


Date: 16.MAY 2021 09:30:14

Additional Channel Part 22, 150.8125 MHz

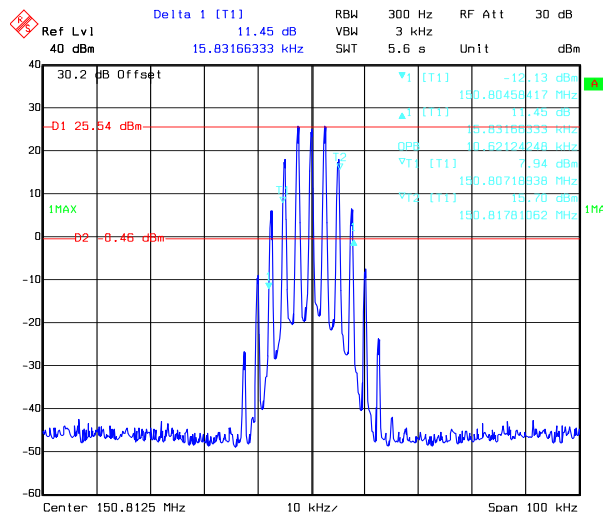

Date: 16.MAY 2021 10:48:06

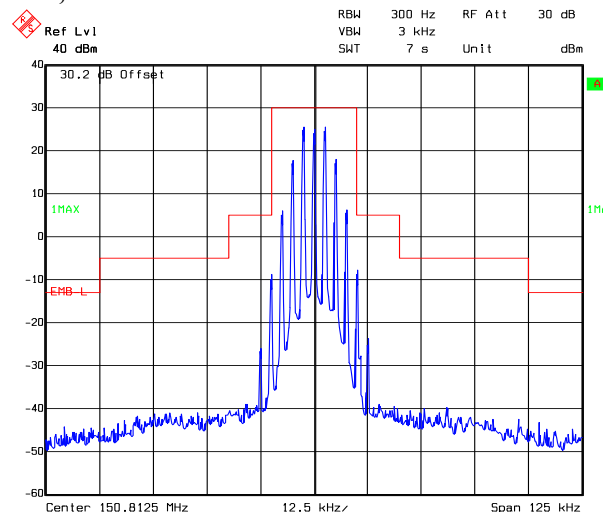

Date: 16.MAY 2021 10:14:36

5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data



Test Mode: Transmitting

Test Result: Compliance.

Test performed at high power level with Band Reject Filter, *please refer to the following plots.*

FM, 12.5kHz:



Low Channel, 136.0125 MHz

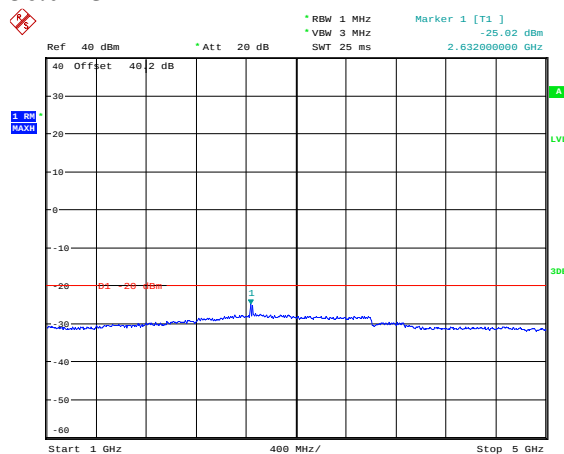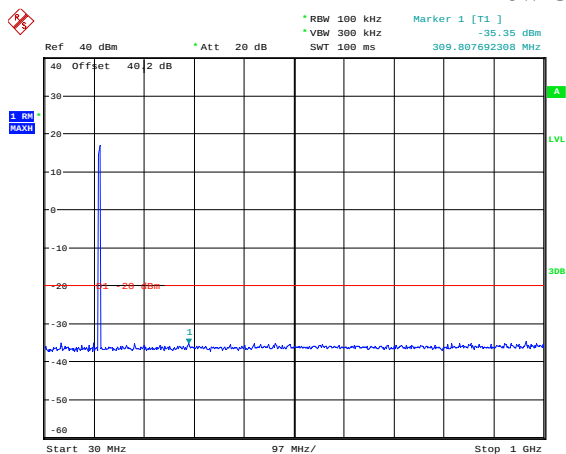

Date: 29.APR.2021 19:12:53

Date: 29.APR.2021 19:13:58



Middle Channel, 155.7525 MHz

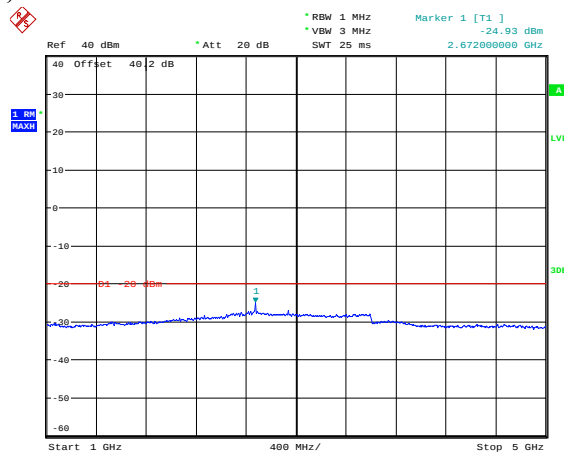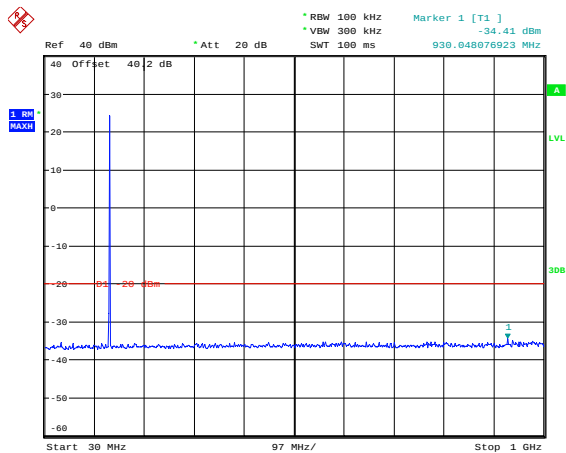

Date: 29.APR.2021 19:16:55

Date: 29.APR.2021 19:17:31

High Channel, 173.9875 MHz

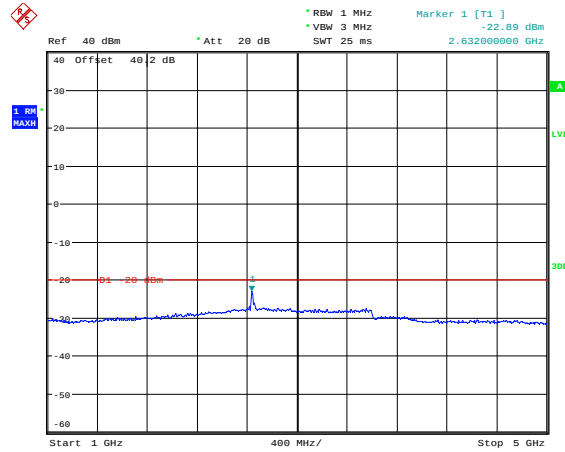
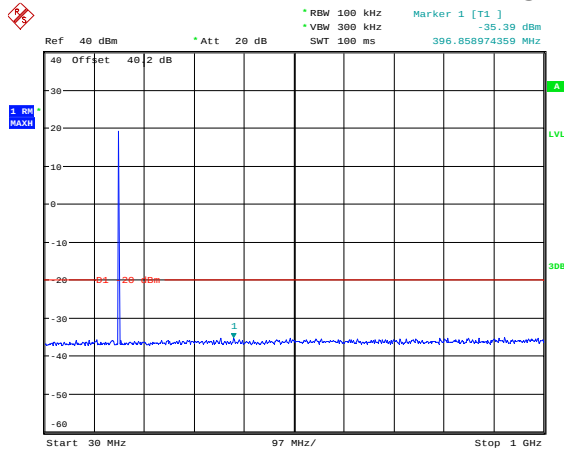


Date: 29.APR.2021 19:19:29

Date: 29.APR.2021 19:18:30

4FSK, 12.5kHz:



Low Channel, 136.0125 MHz

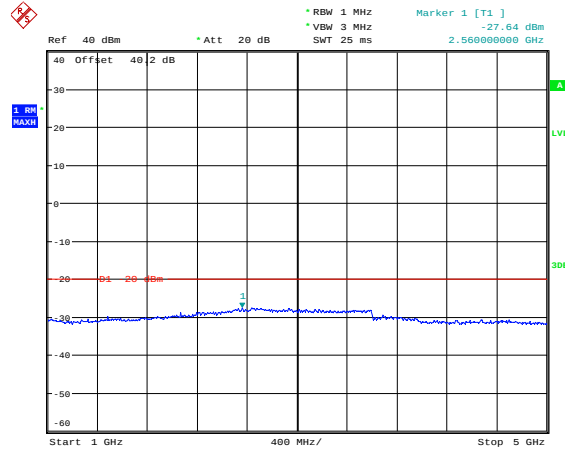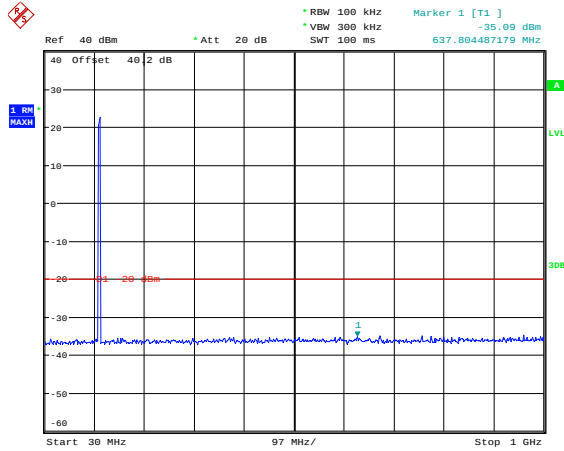

Date: 30.APR.2021 16:09:24

Date: 30.APR.2021 16:09:54



Middle Channel, 155.7525 MHz

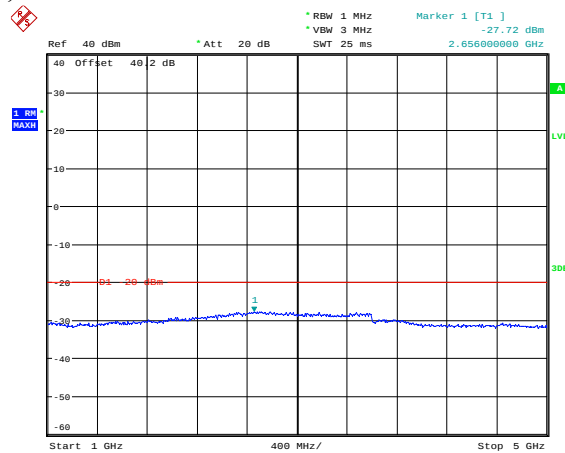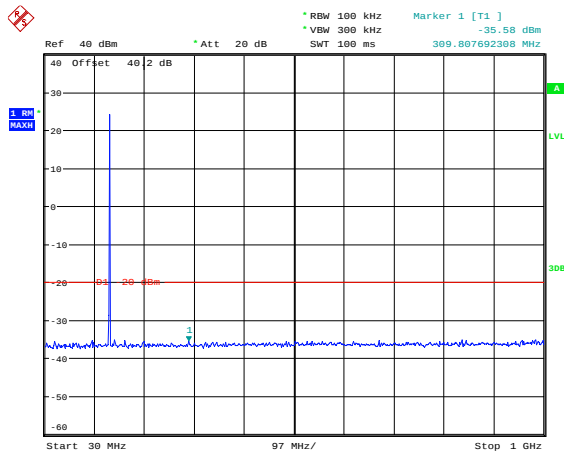

Date: 30.APR.2021 16:12:07

Date: 30.APR.2021 16:11:34

High Channel, 173.9875 MHz

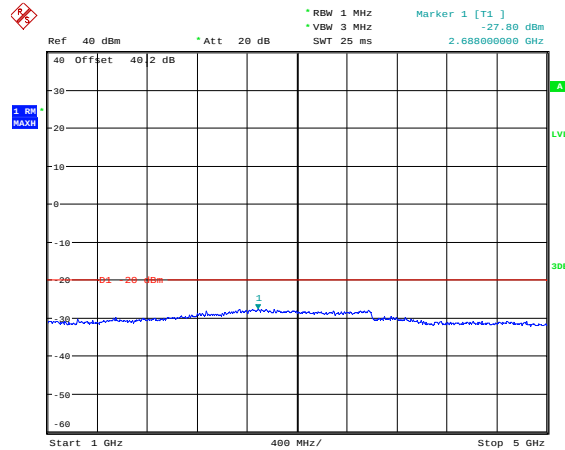
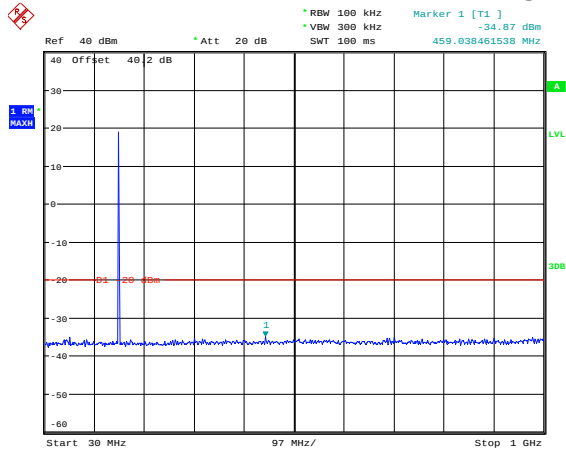


Date: 30.APR.2021 16:12:51

Date: 30.APR.2021 16:14:19

Part 80:

FM, 25kHz, 154.0125 MHz

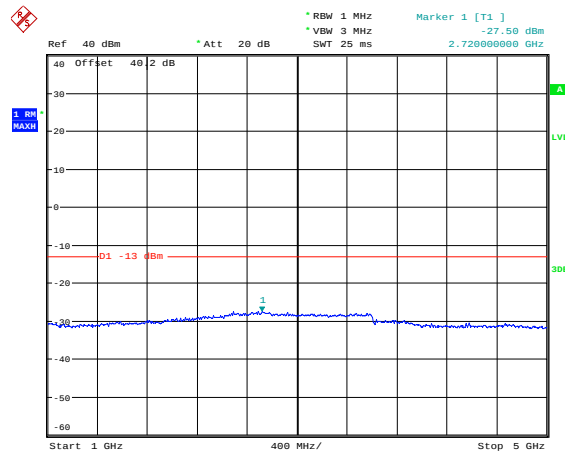
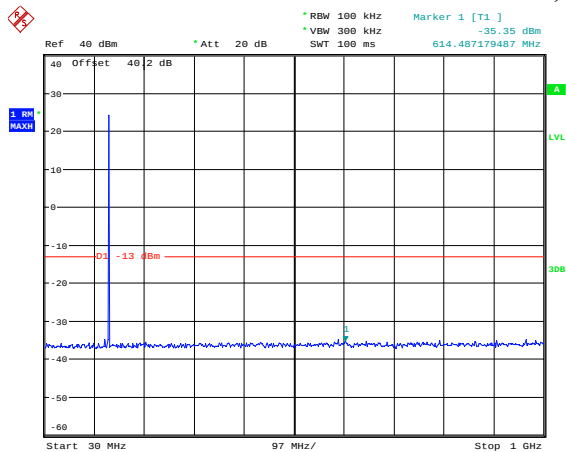


Date: 29.APR.2021 19:26:10

Date: 29.APR.2021 19:26:44

Part 74:


FM, 12.5kHz, 161.1 MHz

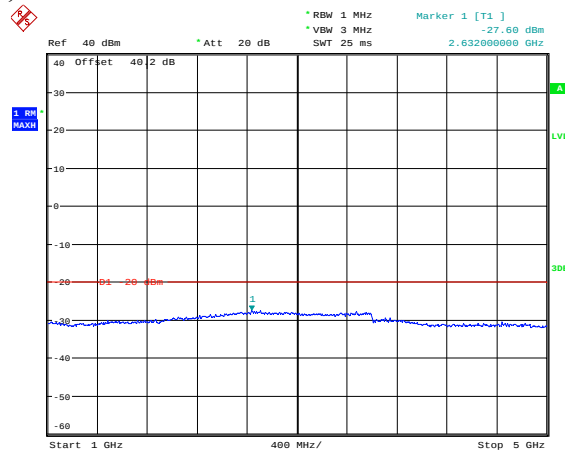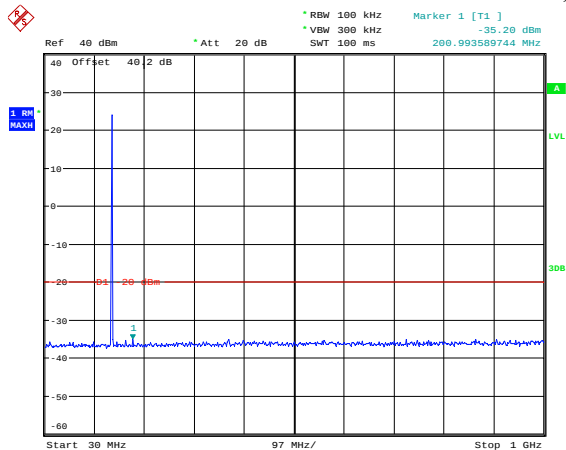


Date: 29.APR.2021 19:22:36

Date: 29.APR.2021 19:24:43

FM, 25kHz, 161.1 MHz

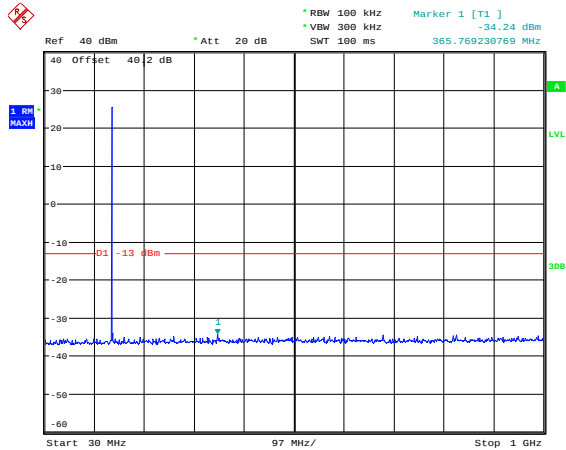


Date: 13.MAY.2021 10:46:14

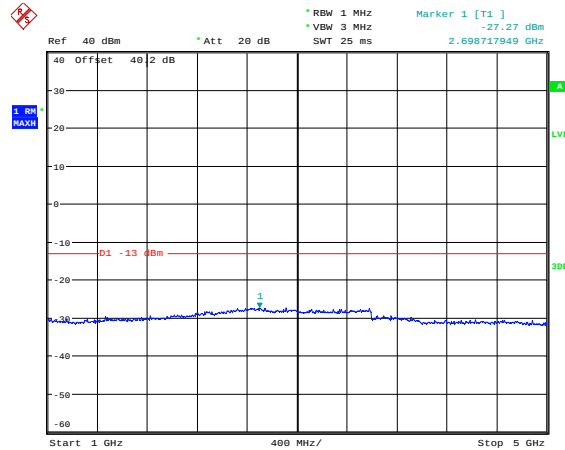


Date: 13.MAY.2021 10:46:53

4FSK, 12.5kHz, 161.1 MHz

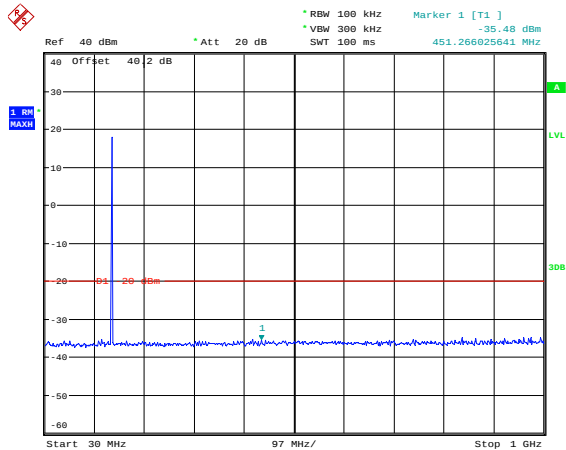


Date: 30.APR.2021 16:15:18

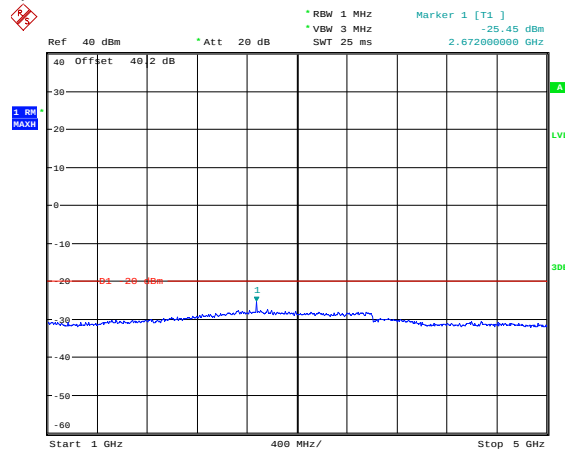


Date: 30.APR.2021 16:15:45

Part 22:

FM, 12.5kHz, 150.8125 MHz


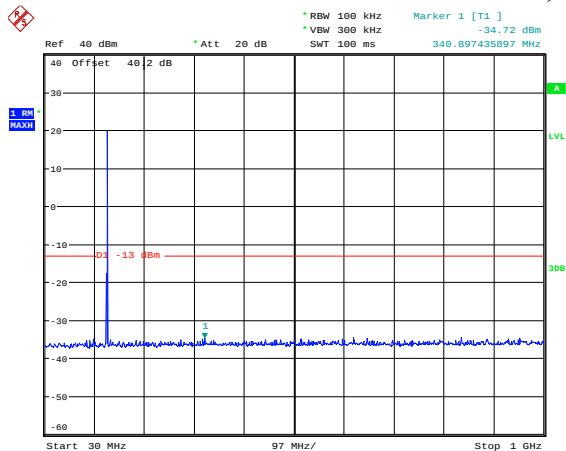


Date: 30.APR.2021 16:39:58

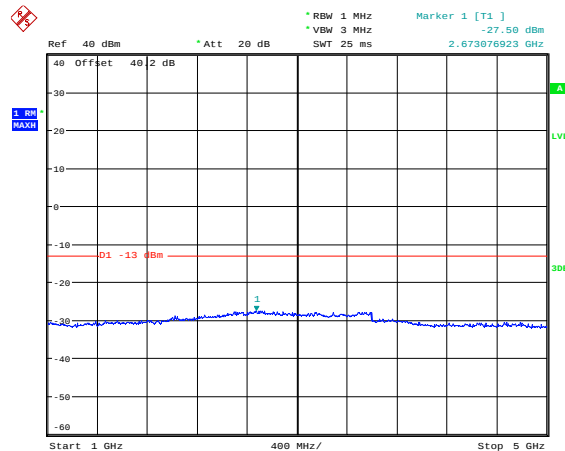

Date: 30.APR.2021 16:40:35



FM,25kHz, 150.8125 MHz

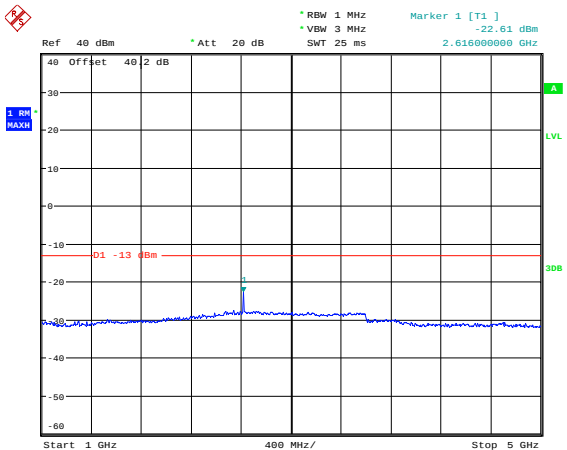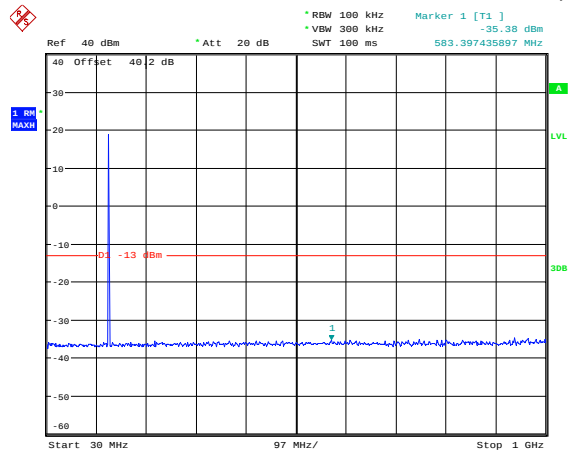

Date: 29.APR.2021 19:28:15

Date: 29.APR.2021 19:27:33

4FSK, 12.5kHz, 150.8125 MHz

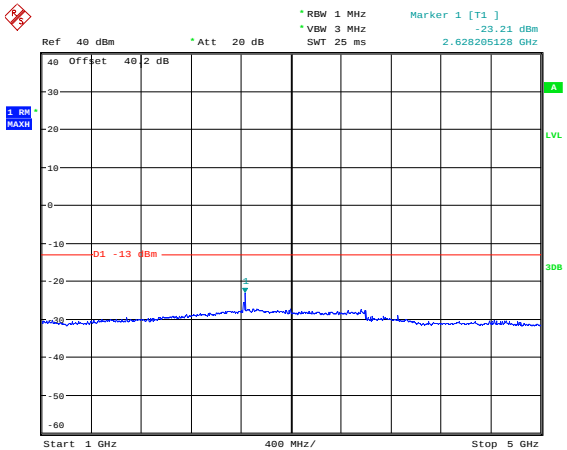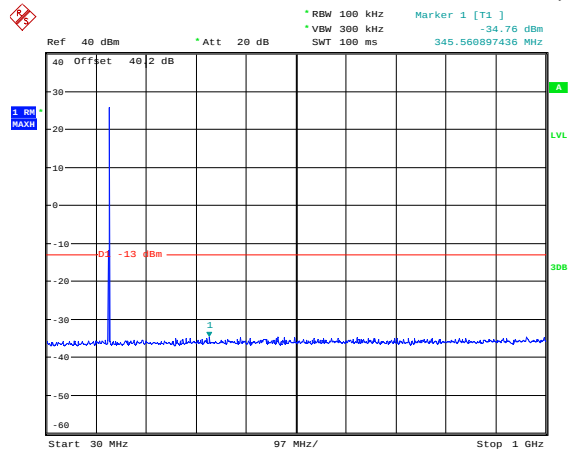

Date: 30.APR.2021 16:42:03

Date: 30.APR.2021 16:41:22

6 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ - the absolute level

Test Data

Test Mode: Transmitting

Test Result: Compliance.

Test performed at high power level with Band Reject Filter, *please refer to the following table.*

30MHz - 2GHz:**FM 12.5kHz, 4FSK**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	45.47	-63.53	0.00	0.29	-63.82	-20.00	43.82
272.03	V	50.00	-57.54	0.00	0.29	-57.83	-20.00	37.83
408.04	H	49.08	-57.60	0.00	0.38	-57.98	-20.00	37.98
408.04	V	53.05	-50.97	0.00	0.38	-51.35	-20.00	31.35
544.05	H	39.93	-64.17	0.00	0.35	-64.52	-20.00	44.52
544.05	V	42.22	-59.31	0.00	0.35	-59.66	-20.00	39.66
680.06	H	38.86	-62.35	0.00	0.38	-62.73	-20.00	42.73
680.06	V	39.72	-58.30	0.00	0.38	-58.68	-20.00	38.68
816.08	H	39.72	-58.34	0.00	0.49	-58.83	-20.00	38.83
816.08	V	38.86	-56.11	0.00	0.49	-56.60	-20.00	36.60
952.09	H	39.81	-53.95	0.00	0.51	-54.46	-20.00	34.46
952.09	V	39.91	-50.82	0.00	0.51	-51.33	-20.00	31.33
1088.10	H	39.90	-62.39	8.27	0.85	-54.97	-20.00	34.97
1088.10	V	38.23	-64.65	8.27	0.85	-57.23	-20.00	37.23
1224.11	H	39.44	-63.80	8.84	1.01	-55.97	-20.00	35.97
1224.11	V	39.84	-63.77	8.84	1.01	-55.94	-20.00	35.94
1360.13	H	38.82	-65.37	9.41	1.18	-57.14	-20.00	37.14
1360.13	V	39.58	-64.76	9.41	1.18	-56.53	-20.00	36.53
4FSK, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	51.64	-57.36	0.00	0.29	-57.65	-20.00	37.65
272.03	V	50.92	-56.62	0.00	0.29	-56.91	-20.00	36.91
408.04	H	50.93	-55.75	0.00	0.38	-56.13	-20.00	36.13
408.04	V	53.89	-50.13	0.00	0.38	-50.51	-20.00	30.51
544.05	H	39.52	-64.58	0.00	0.35	-64.93	-20.00	44.93
544.05	V	42.39	-59.14	0.00	0.35	-59.49	-20.00	39.49
680.06	H	40.47	-60.74	0.00	0.38	-61.12	-20.00	41.12
680.06	V	39.78	-58.24	0.00	0.38	-58.62	-20.00	38.62
816.08	H	40.22	-57.84	0.00	0.49	-58.33	-20.00	38.33
816.08	V	40.10	-54.87	0.00	0.49	-55.36	-20.00	35.36
952.09	H	39.96	-53.80	0.00	0.51	-54.31	-20.00	34.31
952.09	V	39.12	-51.61	0.00	0.51	-52.12	-20.00	32.12
1088.10	H	39.81	-62.48	8.27	0.85	-55.06	-20.00	35.06
1088.10	V	37.99	-64.89	8.27	0.85	-57.47	-20.00	37.47
1224.11	H	39.48	-63.76	8.84	1.01	-55.93	-20.00	35.93
1224.11	V	39.56	-64.05	8.84	1.01	-56.22	-20.00	36.22
1360.13	H	39.14	-65.05	9.41	1.18	-56.82	-20.00	36.82
1360.13	V	39.46	-64.88	9.41	1.18	-56.65	-20.00	36.65

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	50.46	-57.98	0.00	0.32	-58.30	-20.00	38.30
311.51	V	53.02	-53.64	0.00	0.32	-53.96	-20.00	33.96
467.26	H	36.92	-68.94	0.00	0.36	-69.30	-20.00	49.30
467.26	V	47.79	-55.39	0.00	0.36	-55.75	-20.00	35.75
623.01	H	34.56	-67.52	0.00	0.36	-67.88	-20.00	47.88
623.01	V	35.33	-64.11	0.00	0.36	-64.47	-20.00	44.47
778.76	H	35.22	-63.81	0.00	0.47	-64.28	-20.00	44.28
778.76	V	36.49	-59.44	0.00	0.47	-59.91	-20.00	39.91
934.52	H	34.19	-60.19	0.00	0.51	-60.70	-20.00	40.70
934.52	V	32.13	-59.10	0.00	0.51	-59.61	-20.00	39.61
1090.27	H	38.87	-63.44	8.28	0.85	-56.01	-20.00	36.01
1090.27	V	38.05	-64.84	8.28	0.85	-57.41	-20.00	37.41
1246.02	H	38.54	-64.85	8.93	1.04	-56.96	-20.00	36.96
1246.02	V	38.10	-65.63	8.93	1.04	-57.74	-20.00	37.74
1401.77	H	37.55	-66.93	9.59	1.23	-58.57	-20.00	38.57
1401.77	V	37.90	-66.66	9.59	1.23	-58.30	-20.00	38.30
1557.53	H	37.17	-67.94	10.17	1.32	-59.09	-20.00	39.09
1557.53	V	37.53	-67.51	10.17	1.32	-58.66	-20.00	38.66
4FSK, Frequency:155.7525MHz-12.5 kHz								
311.51	H	50.41	-58.03	0.00	0.32	-58.35	-20.00	38.35
311.51	V	53.30	-53.36	0.00	0.32	-53.68	-20.00	33.68
467.26	H	36.91	-68.95	0.00	0.36	-69.31	-20.00	49.31
467.26	V	47.89	-55.29	0.00	0.36	-55.65	-20.00	35.65
623.01	H	34.58	-67.50	0.00	0.36	-67.86	-20.00	47.86
623.01	V	35.47	-63.97	0.00	0.36	-64.33	-20.00	44.33
778.76	H	35.32	-63.71	0.00	0.47	-64.18	-20.00	44.18
778.76	V	36.57	-59.36	0.00	0.47	-59.83	-20.00	39.83
934.52	H	34.25	-60.13	0.00	0.51	-60.64	-20.00	40.64
934.52	V	32.54	-58.69	0.00	0.51	-59.20	-20.00	39.20
1090.27	H	38.71	-63.60	8.28	0.85	-56.17	-20.00	36.17
1090.27	V	38.14	-64.75	8.28	0.85	-57.32	-20.00	37.32
1246.02	H	38.56	-64.83	8.93	1.04	-56.94	-20.00	36.94
1246.02	V	38.52	-65.21	8.93	1.04	-57.32	-20.00	37.32
1401.77	H	37.28	-67.20	9.59	1.23	-58.84	-20.00	38.84
1401.77	V	38.09	-66.47	9.59	1.23	-58.11	-20.00	38.11
1557.53	H	37.32	-67.79	10.17	1.32	-58.94	-20.00	38.94
1557.53	V	37.21	-67.83	10.17	1.32	-58.98	-20.00	38.98

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	38.42	-69.34	0.00	0.34	-69.68	-20.00	49.68
347.98	V	61.62	-44.00	0.00	0.34	-44.34	-20.00	24.34
521.96	H	38.42	-66.34	0.00	0.35	-66.69	-20.00	46.69
521.96	V	47.70	-54.42	0.00	0.35	-54.77	-20.00	34.77
695.95	H	38.42	-62.54	0.00	0.38	-62.92	-20.00	42.92
695.95	V	40.19	-57.44	0.00	0.38	-57.82	-20.00	37.82
869.94	H	38.42	-58.06	0.00	0.50	-58.56	-20.00	38.56
869.94	V	39.76	-53.45	0.00	0.50	-53.95	-20.00	33.95
1043.93	H	38.79	-63.20	8.08	0.79	-55.91	-20.00	35.91
1043.93	V	38.87	-63.78	8.08	0.79	-56.49	-20.00	36.49
1217.91	H	39.22	-63.98	8.82	1.01	-56.17	-20.00	36.17
1217.91	V	37.81	-65.77	8.82	1.01	-57.96	-20.00	37.96
1391.90	H	39.23	-65.18	9.55	1.22	-56.85	-20.00	36.85
1391.90	V	38.06	-66.45	9.55	1.22	-58.12	-20.00	38.12
1565.89	H	37.70	-67.41	10.20	1.32	-58.53	-20.00	38.53
1565.89	V	37.78	-67.26	10.20	1.32	-58.38	-20.00	38.38
1739.88	H	38.11	-66.85	10.72	1.24	-57.37	-20.00	37.37
1739.88	V	38.03	-66.87	10.72	1.24	-57.39	-20.00	37.39
4FSK, Frequency:173.9875MHz-12.5 kHz								
347.98	H	49.49	-58.27	0.00	0.34	-58.61	-20.00	38.61
347.98	V	50.15	-55.47	0.00	0.34	-55.81	-20.00	35.81
521.96	H	39.55	-65.21	0.00	0.35	-65.56	-20.00	45.56
521.96	V	39.69	-62.43	0.00	0.35	-62.78	-20.00	42.78
695.95	H	39.05	-61.91	0.00	0.38	-62.29	-20.00	42.29
695.95	V	39.76	-57.87	0.00	0.38	-58.25	-20.00	38.25
869.94	H	39.08	-57.40	0.00	0.50	-57.90	-20.00	37.90
869.94	V	39.62	-53.59	0.00	0.50	-54.09	-20.00	34.09
1043.93	H	39.11	-62.88	8.08	0.79	-55.59	-20.00	35.59
1043.93	V	38.44	-64.21	8.08	0.79	-56.92	-20.00	36.92
1217.91	H	38.98	-64.22	8.82	1.01	-56.41	-20.00	36.41
1217.91	V	37.90	-65.68	8.82	1.01	-57.87	-20.00	37.87
1391.90	H	39.43	-64.98	9.55	1.22	-56.65	-20.00	36.65
1391.90	V	38.08	-66.43	9.55	1.22	-58.10	-20.00	38.10
1565.89	H	37.63	-67.48	10.20	1.32	-58.60	-20.00	38.60
1565.89	V	37.45	-67.59	10.20	1.32	-58.71	-20.00	38.71
1739.88	H	37.98	-66.98	10.72	1.24	-57.50	-20.00	37.50
1739.88	V	37.80	-67.10	10.72	1.24	-57.62	-20.00	37.62

Part 80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 154.0125MHz-25 kHz								
308.03	H	50.26	-58.24	0.00	0.32	-58.56	-13.00	45.56
308.03	V	53.01	-53.75	0.00	0.32	-54.07	-13.00	41.07
462.04	H	36.92	-69.01	0.00	0.36	-69.37	-13.00	56.37
462.04	V	47.81	-55.45	0.00	0.36	-55.81	-13.00	42.81
616.05	H	33.95	-68.23	0.00	0.36	-68.59	-13.00	55.59
616.05	V	35.33	-64.28	0.00	0.36	-64.64	-13.00	51.64
770.06	H	34.68	-64.56	0.00	0.46	-65.02	-13.00	52.02
770.06	V	37.13	-58.98	0.00	0.46	-59.44	-13.00	46.44
924.08	H	33.04	-61.71	0.00	0.51	-62.22	-13.00	49.22
924.08	V	33.23	-58.30	0.00	0.51	-58.81	-13.00	45.81
1078.09	H	37.00	-65.22	8.23	0.84	-57.83	-13.00	44.83
1078.09	V	37.41	-65.42	8.23	0.84	-58.03	-13.00	45.03
1232.10	H	37.98	-65.32	8.87	1.02	-57.47	-13.00	44.47
1232.10	V	38.17	-65.48	8.87	1.02	-57.63	-13.00	44.63
1386.11	H	38.05	-66.32	9.52	1.21	-58.01	-13.00	45.01
1386.11	V	37.33	-67.15	9.52	1.21	-58.84	-13.00	45.84
1540.13	H	38.58	-66.55	10.12	1.33	-57.76	-13.00	44.76
1540.13	V	38.37	-66.69	10.12	1.33	-57.90	-13.00	44.90

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
322.20	H	45.66	-62.58	0.00	0.33	-62.91	-20.00	42.91
322.20	V	47.25	-59.11	0.00	0.33	-59.44	-20.00	39.44
483.30	H	37.21	-68.43	0.00	0.36	-68.79	-20.00	48.79
483.30	V	47.45	-55.51	0.00	0.36	-55.87	-20.00	35.87
644.40	H	35.05	-66.70	0.00	0.37	-67.07	-20.00	47.07
644.40	V	34.58	-64.33	0.00	0.37	-64.70	-20.00	44.70
805.50	H	33.29	-65.08	0.00	0.49	-65.57	-20.00	45.57
805.50	V	35.63	-59.69	0.00	0.49	-60.18	-20.00	40.18
966.60	H	33.90	-59.34	0.00	0.51	-59.85	-20.00	39.85
966.60	V	33.74	-56.57	0.00	0.51	-57.08	-20.00	37.08
1127.70	H	37.07	-65.50	8.44	0.90	-57.96	-20.00	37.96
1127.70	V	37.56	-65.53	8.44	0.90	-57.99	-20.00	37.99
1288.80	H	38.03	-65.66	9.11	1.09	-57.64	-20.00	37.64
1288.80	V	37.84	-66.12	9.11	1.09	-58.10	-20.00	38.10
1449.90	H	38.38	-66.43	9.79	1.29	-57.93	-20.00	37.93
1449.90	V	37.35	-67.47	9.79	1.29	-58.97	-20.00	38.97
1611.00	H	38.84	-66.23	10.33	1.30	-57.20	-20.00	37.20
1611.00	V	38.49	-66.51	10.33	1.30	-57.48	-20.00	37.48
FM, Frequency: 161.1MHz-25 kHz								
322.20	H	45.82	-62.42	0.00	0.33	-62.75	-13.00	49.75
322.20	V	47.63	-58.73	0.00	0.33	-59.06	-13.00	46.06
483.30	H	37.25	-68.39	0.00	0.36	-68.75	-13.00	55.75
483.30	V	47.42	-55.54	0.00	0.36	-55.90	-13.00	42.90
644.40	H	35.21	-66.54	0.00	0.37	-66.91	-13.00	53.91
644.40	V	35.14	-63.77	0.00	0.37	-64.14	-13.00	51.14
805.50	H	33.53	-64.84	0.00	0.49	-65.33	-13.00	52.33
805.50	V	35.41	-59.91	0.00	0.49	-60.40	-13.00	47.40
966.60	H	33.95	-59.29	0.00	0.51	-59.80	-13.00	46.80
966.60	V	33.75	-56.56	0.00	0.51	-57.07	-13.00	44.07
1127.70	H	36.97	-65.60	8.44	0.90	-58.06	-13.00	45.06
1127.70	V	37.20	-65.89	8.44	0.90	-58.35	-13.00	45.35
1288.80	H	38.14	-65.55	9.11	1.09	-57.53	-13.00	44.53
1288.80	V	37.75	-66.21	9.11	1.09	-58.19	-13.00	45.19
1449.90	H	37.90	-66.91	9.79	1.29	-58.41	-13.00	45.41
1449.90	V	37.18	-67.64	9.79	1.29	-59.14	-13.00	46.14
1611.00	H	38.97	-66.10	10.33	1.30	-57.07	-13.00	44.07
1611.00	V	38.75	-66.25	10.33	1.30	-57.22	-13.00	44.22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
322.20	H	45.87	-62.37	0.00	0.33	-62.70	-20.00	42.70
322.20	V	47.20	-59.16	0.00	0.33	-59.49	-20.00	39.49
483.30	H	37.41	-68.23	0.00	0.36	-68.59	-20.00	48.59
483.30	V	47.28	-55.68	0.00	0.36	-56.04	-20.00	36.04
644.40	H	35.52	-66.23	0.00	0.37	-66.60	-20.00	46.60
644.40	V	34.38	-64.53	0.00	0.37	-64.90	-20.00	44.90
805.50	H	34.63	-63.74	0.00	0.49	-64.23	-20.00	44.23
805.50	V	35.02	-60.30	0.00	0.49	-60.79	-20.00	40.79
966.60	H	34.25	-58.99	0.00	0.51	-59.50	-20.00	39.50
966.60	V	33.74	-56.57	0.00	0.51	-57.08	-20.00	37.08
1127.70	H	37.60	-64.97	8.44	0.90	-57.43	-20.00	37.43
1127.70	V	37.24	-65.85	8.44	0.90	-58.31	-20.00	38.31
1288.80	H	38.61	-65.08	9.11	1.09	-57.06	-20.00	37.06
1288.80	V	38.23	-65.73	9.11	1.09	-57.71	-20.00	37.71
1449.90	H	37.99	-66.82	9.79	1.29	-58.32	-20.00	38.32
1449.90	V	37.67	-67.15	9.79	1.29	-58.65	-20.00	38.65
1611.00	H	38.77	-66.30	10.33	1.30	-57.27	-20.00	37.27
1611.00	V	38.52	-66.48	10.33	1.30	-57.45	-20.00	37.45

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	53.89	-54.73	0.00	0.31	-55.04	-13.00	42.04
301.63	V	54.32	-52.62	0.00	0.31	-52.93	-13.00	39.93
452.44	H	39.58	-66.49	0.00	0.36	-66.85	-13.00	53.85
452.44	V	49.51	-53.88	0.00	0.36	-54.24	-13.00	41.24
603.25	H	34.35	-68.03	0.00	0.36	-68.39	-13.00	55.39
603.25	V	35.25	-64.68	0.00	0.36	-65.04	-13.00	52.04
754.06	H	34.52	-65.10	0.00	0.44	-65.54	-13.00	52.54
754.06	V	34.69	-61.74	0.00	0.44	-62.18	-13.00	49.18
904.88	H	35.40	-60.03	0.00	0.51	-60.54	-13.00	47.54
904.88	V	33.27	-58.81	0.00	0.51	-59.32	-13.00	46.32
1055.69	H	37.69	-64.38	8.13	0.81	-57.06	-13.00	44.06
1055.69	V	37.24	-65.47	8.13	0.81	-58.15	-13.00	45.15
1206.50	H	38.82	-64.30	8.77	0.99	-56.52	-13.00	43.52
1206.50	V	38.41	-65.11	8.77	0.99	-57.33	-13.00	44.33
1357.31	H	38.08	-66.09	9.40	1.18	-57.87	-13.00	44.87
1357.31	V	37.84	-66.49	9.40	1.18	-58.27	-13.00	45.27
1508.13	H	38.85	-66.30	10.02	1.35	-57.63	-13.00	44.63
1508.13	V	38.44	-66.64	10.02	1.35	-57.97	-13.00	44.97
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	54.14	-54.48	0.00	0.31	-54.79	-13.00	41.79
301.63	V	54.63	-52.31	0.00	0.31	-52.62	-13.00	39.62
452.44	H	38.47	-67.60	0.00	0.36	-67.96	-13.00	54.96
452.44	V	49.56	-53.83	0.00	0.36	-54.19	-13.00	41.19
603.25	H	34.52	-67.86	0.00	0.36	-68.22	-13.00	55.22
603.25	V	36.27	-63.66	0.00	0.36	-64.02	-13.00	51.02
754.06	H	33.85	-65.77	0.00	0.44	-66.21	-13.00	53.21
754.06	V	34.89	-61.54	0.00	0.44	-61.98	-13.00	48.98
904.88	H	34.25	-61.18	0.00	0.51	-61.69	-13.00	48.69
904.88	V	34.20	-57.88	0.00	0.51	-58.39	-13.00	45.39
1055.69	H	37.48	-64.59	8.13	0.81	-57.27	-13.00	44.27
1055.69	V	37.33	-65.38	8.13	0.81	-58.06	-13.00	45.06
1206.50	H	38.52	-64.60	8.77	0.99	-56.82	-13.00	43.82
1206.50	V	38.25	-65.27	8.77	0.99	-57.49	-13.00	44.49
1357.31	H	37.94	-66.23	9.40	1.18	-58.01	-13.00	45.01
1357.31	V	37.51	-66.82	9.40	1.18	-58.60	-13.00	45.60
1508.13	H	38.75	-66.40	10.02	1.35	-57.73	-13.00	44.73
1508.13	V	38.82	-66.26	10.02	1.35	-57.59	-13.00	44.59

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
301.63	H	53.94	-54.68	0.00	0.31	-54.99	-13.00	41.99
301.63	V	54.23	-52.71	0.00	0.31	-53.02	-13.00	40.02
452.44	H	38.28	-67.79	0.00	0.36	-68.15	-13.00	55.15
452.44	V	49.62	-53.77	0.00	0.36	-54.13	-13.00	41.13
603.25	H	34.03	-68.35	0.00	0.36	-68.71	-13.00	55.71
603.25	V	35.41	-64.52	0.00	0.36	-64.88	-13.00	51.88
754.06	H	33.48	-66.14	0.00	0.44	-66.58	-13.00	53.58
754.06	V	34.52	-61.91	0.00	0.44	-62.35	-13.00	49.35
904.88	H	34.15	-61.28	0.00	0.51	-61.79	-13.00	48.79
904.88	V	33.32	-58.76	0.00	0.51	-59.27	-13.00	46.27
1055.69	H	37.58	-64.49	8.13	0.81	-57.17	-13.00	44.17
1055.69	V	37.63	-65.08	8.13	0.81	-57.76	-13.00	44.76
1206.50	H	38.93	-64.19	8.77	0.99	-56.41	-13.00	43.41
1206.50	V	37.95	-65.57	8.77	0.99	-57.79	-13.00	44.79
1357.31	H	38.32	-65.85	9.40	1.18	-57.63	-13.00	44.63
1357.31	V	38.06	-66.27	9.40	1.18	-58.05	-13.00	45.05
1508.13	H	38.40	-66.75	10.02	1.35	-58.08	-13.00	45.08
1508.13	V	38.52	-66.56	10.02	1.35	-57.89	-13.00	44.89

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

7 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Test Mode: Transmitting

Test Result: Compliance. *Please refer to the following Tables.*

FCC Part 90:

FM,12.5kHz, Reference Frequency: 155.7525 MHz, Limit: ±5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	155.7527189	1.41
-20		155.7525607	0.39
-10		155.7526300	0.83
0		155.7525656	0.42
10		155.7525658	0.42
20		155.7525400	0.26
30		155.7525272	0.17
40		155.7527906	1.87
50		155.7526255	0.81
20	6.4	155.7525053	0.03
20	8.4	155.7527658	1.71

4FSK, 12.5kHz, Reference Frequency: 155.7525MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	155.7525254	0.16
-20		155.7527224	1.43
-10		155.7525709	0.46
0		155.7527220	1.43
10		155.7527805	1.80
20		155.7525000	0.00
30		155.7525301	0.19
40		155.7527411	1.55
50		155.7527703	1.74
20	6.4	155.7527790	1.79
20	8.4	155.7525695	0.45

FCC Part 80:

FM,25kHz, Reference Frequency: 154.0125MHz,Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	154.012670	1.10
-20		154.012778	1.80
-10		154.012641	0.91
0		154.012759	1.68
10		154.012618	0.76
20		154.012540	0.26
30		154.012593	0.60
40		154.012574	0.48
50		154.012584	0.54
20	6.4	154.012529	0.19
20	8.4	154.012609	0.71

FCC Part 22:

FM,12.5kHz, Reference Frequency: 150.8125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	150.812794	1.95
-20		150.812619	0.79
-10		150.812781	1.86
0		150.812637	0.91
10		150.812753	1.68
20		150.812500	0.00
30		150.812580	0.53
40		150.812692	1.27
50		150.812768	1.78
20	6.4	150.812784	1.88
20	8.4	150.812582	0.54

4FSK,12.5kHz, Reference Frequency: 150.8125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	150.812757	1.70
-20		150.812572	0.48
-10		150.812557	0.38
0		150.812660	1.06
10		150.812774	1.82
20		150.812600	0.66
30		150.812788	1.91
40		150.812751	1.66
50		150.812748	1.64
20	6.4	150.812754	1.68
20	8.4	150.812786	1.90

FM,25kHz, Reference Frequency: 150.8125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	150.812749	1.65
-20		150.812752	1.67
-10		150.812620	0.80
0		150.812702	1.34
10		150.812599	0.66
20		150.812500	0.00
30		150.812669	1.12
40		150.812638	0.92
50		150.812640	0.93
20	6.4	150.812773	1.81
20	8.4	150.812574	0.49

FCC Part 74:

FM,12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	161.100045	0.28
-20		161.100047	0.29
-10		161.100173	1.07
0		161.100243	1.51
10		161.100087	0.54
20		161.100040	0.25
30		161.100003	0.02
40		161.100146	0.91
50		161.100287	1.78
20	6.4	161.100057	0.35
20	8.4	161.100196	1.22

4FSK,12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	161.100138	0.86
-20		161.100165	1.02
-10		161.100168	1.04
0		161.100221	1.37
10		161.100209	1.30
20		161.100100	0.62
30		161.100033	0.20
40		161.100201	1.25
50		161.100259	1.61
20	6.4	161.100031	0.19
20	8.4	161.100111	0.69

FM,25kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	161.100198	1.23
-20		161.100104	0.65
-10		161.100068	0.42
0		161.100006	0.04
10		161.100166	1.03
20		161.100040	0.25
30		161.100060	0.37
40		161.100058	0.36
50		161.100103	0.64
20	6.4	161.100211	1.31
20	8.4	161.100219	1.36


8 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .


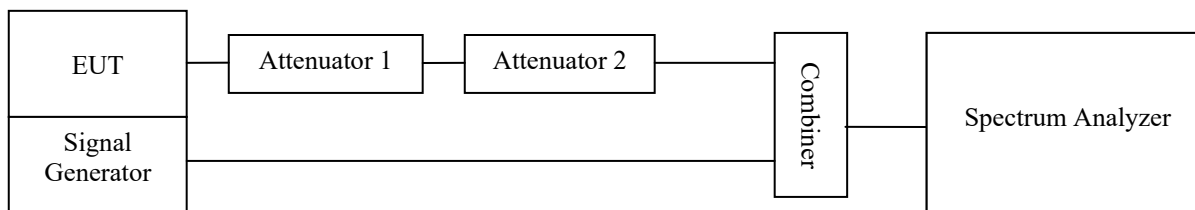


Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5(t_1)	± 12.5 kHz	Pass
	20(t_2)	± 6.25 kHz	
	5(t_3)	± 12.5 kHz	

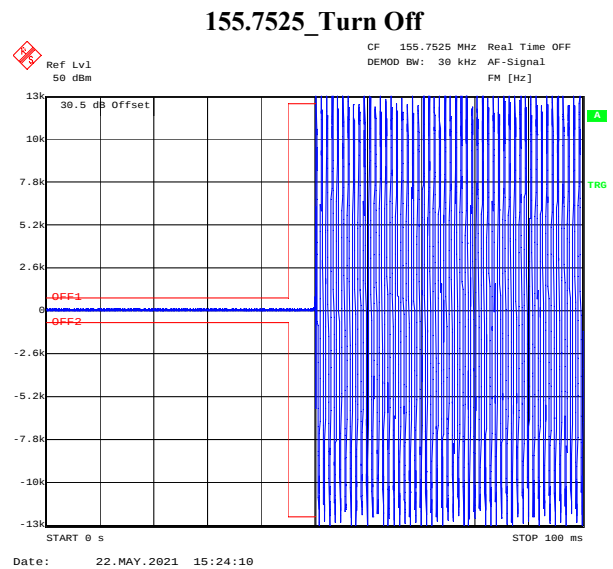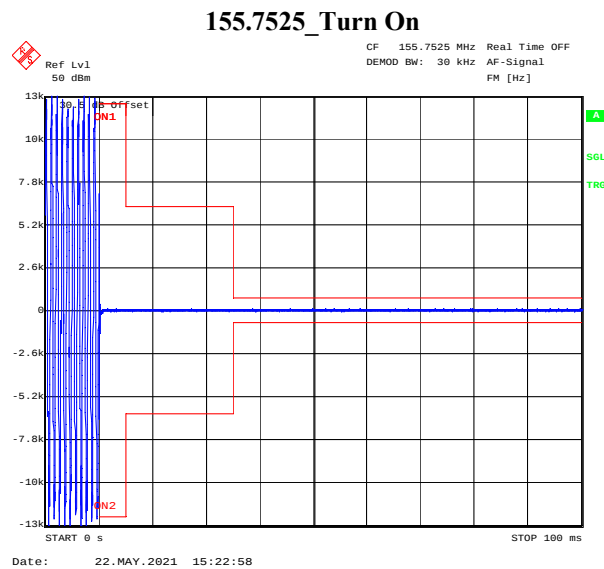

***** END OF REPORT *****