Antenna Composite Gain Test Report

1. Test Information

Equipment	EMT
Brand Name	Nokia
Model Name	B3.1
Applicant	Nokia
Manufacturer	Nokia

2. Testing Location

Testing Location	
AOT	ADD: 289 Jinghua Road,Shipai, BachengTown, Kunshan City, Jiangsu Province

Test Condition	Test Engineer	Test Environment (°C / %)	Test Date	Signature
Radiated	Changgan Lai	20-24 / 45-60	08.09.2023~08.09.2023	Changgan Lai

3. Test Frequency

Band (MHz)	Test Frequency (MHz)
2400-2500	2400 / 2450 / 2500
5150-5850	5150 / 5500 / 5850

4. Antenna Information

Ant. Position	Brand Name	Model Name	Ant. Type	Connector
Antenna 1 (5G)	Nokia	ANT-M5158-N05	Dipole	I-PEX
Antenna 2 (5G)	Nokia	ANT-M5158-N06	Dipole	I-PEX
Antenna 3 (2.4G)	Nokia	ANT-P2425-N05	Dipole	I-PEX
Antenna 4 (2.4G)	Nokia	ANT-P2425-N10	Dipole	I-PEX
Antenna 5 (2.4G)	Nokia	ANT-P2425-N11	Dipole	I-PEX

5. Test Configuration

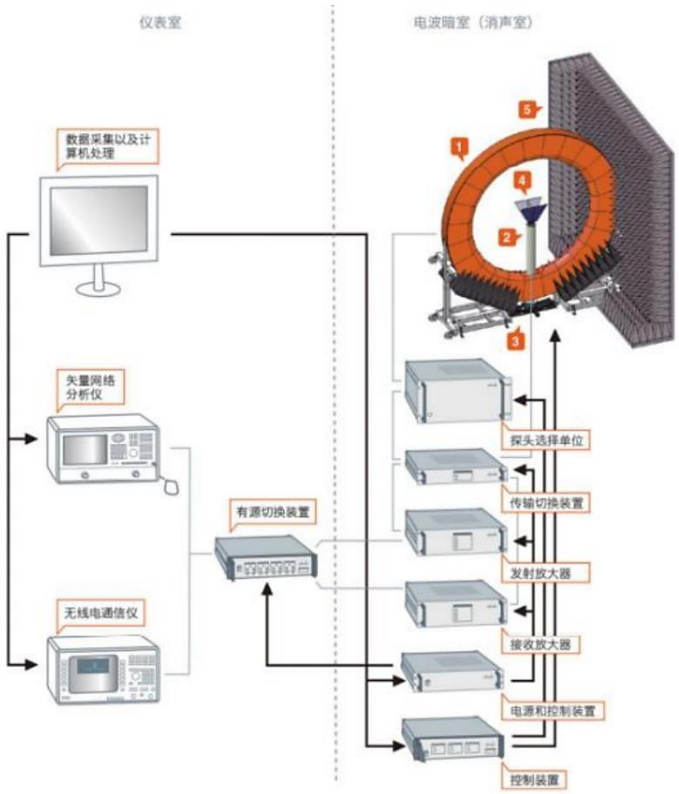

6. Reference Calibration

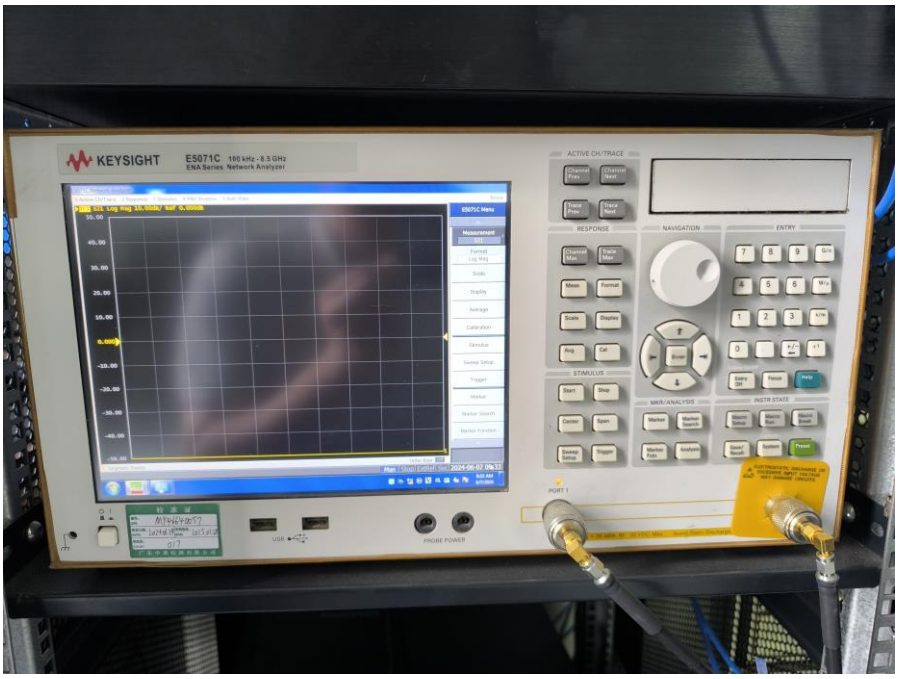

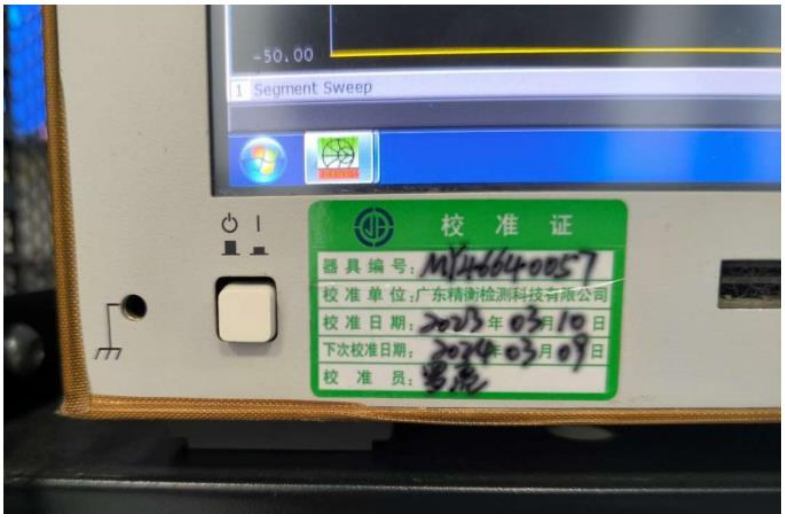

CALIBRATION PASS
CAL.DATA: 2023.3.10
NEXT CAL.DATA: 2024.3.09

7. Test Method

The “great circle” cut method, whereby the Measurement Antenna remains fixed and the EUT is rotated about two axes in sequential order. The radiated RF performance of the Equipment Under Test (EUT) is measured by sampling the radiated transmit power of the mobile at various locations surrounding the device. A three-dimensional characterization of the 'transmit' performance of the EUT is pieced together by analyzing the data from the spatially distributed measurements.

Data points taken every 2 degrees in the theta and in the phi axes are deemed sufficient to fully characterize the EUT's Far-Field radiation pattern and total radiated power All of the measured power values will be integrated.

8. Measured Values and Calculation of Correlated / Uncorrelated Gains

Antenna Peak Gain Table (Ant. Position：5G Ant.1~2)

Band (MHz)	5150-5850		
Frequency (MHz)	5150	5500	5850
Ant.1 Max Gain (dBi)	2.96	2.86	2.77
Ant.2 Max Gain (dBi)	3.07	2.76	2.79
Max Gain (dBi)	3.07	2.86	2.79

Antenna Peak Gain Table (Ant. Position：2.4G Ant.3~5)

Band (MHz)	2400-2500		
Frequency (MHz)	2400	2450	2500
Ant.3 Max Gain (dBi)	2.71	2.66	2.72
Ant.4 Max Gain (dBi)	1.95	2.56	2.82
Ant.5 Max Gain (dBi)	2.96	2.97	2.88
Max Gain (dBi)	2.96	2.97	2.88

Because the antennas are fixed in location within the device the directional antenna gain for MIMO is calculated over a sphere using the raw spatial data taken at 2 degree steps of theta and phi for each antenna using the equations from KDB 662911 D01. The raw antenna data is located in the appendix of this report.

The correlated antenna gain was calculated using KDB 662911 D01F(2)(f)(ii) for CDD and KDB 662911 D01, F(2)(e)(ii) for TxBF.

The correlated gains were calculated for each point in the spatial data and the highest values reported.

(ii) If antenna gains are not equal, the user may use either of the following methods to calculate directional gain. provided that each transmit antenna s driven by only one spatial stream.

- Directional gain may be calculated by using the formulas applicable to equal gain

antennas with Gur set equal to the gain of the antenna having the highest gain, or.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Maximum Correlated / Uncorrelated Gain Calculation

(Ant. Position：2G Ant.3~5)

Frequency (MHz)	2400	2450	2500
Phi (°)	18	18	36
Theta (°)	68	68	66
Beamforming	3.93	4.02	4.18
Non Beamforming (CDD MODE)	3.93	4.02	4.18

(Ant. Position：5G Ant.1~2)

Frequency (MHz)	5150	5500	5850
Phi (°)	80	80	84
Theta (°)	88	84	100
Beamforming	3.75	4.44	4.50
Non Beamforming (CDD MODE)	3.75	4.44	4.50

9. Radiation Pattern

Ant. Position：5G Ant.1~2

XY_Pol._Phi_Ant.1@5.xG

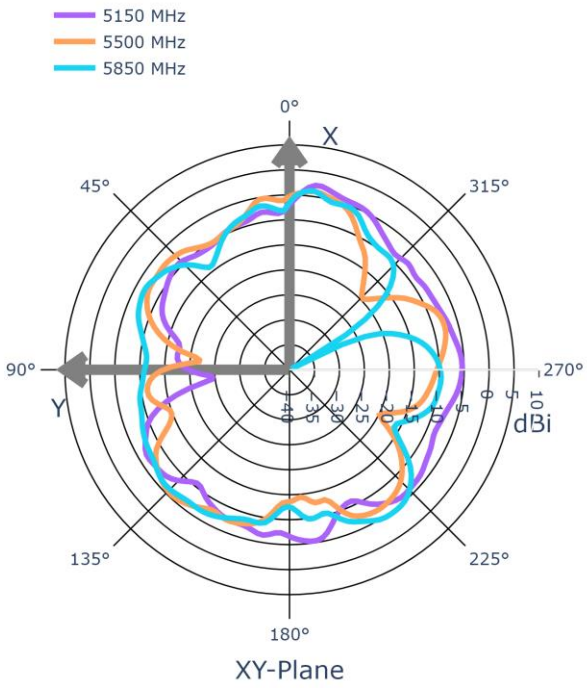

XY_Pol._Phi_Ant.2@5.xG

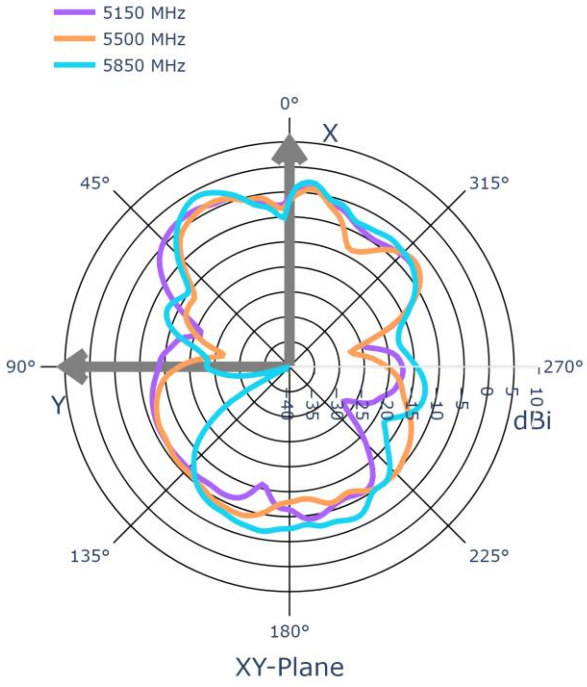

XY_Pol._theta_Ant.1@5.xG

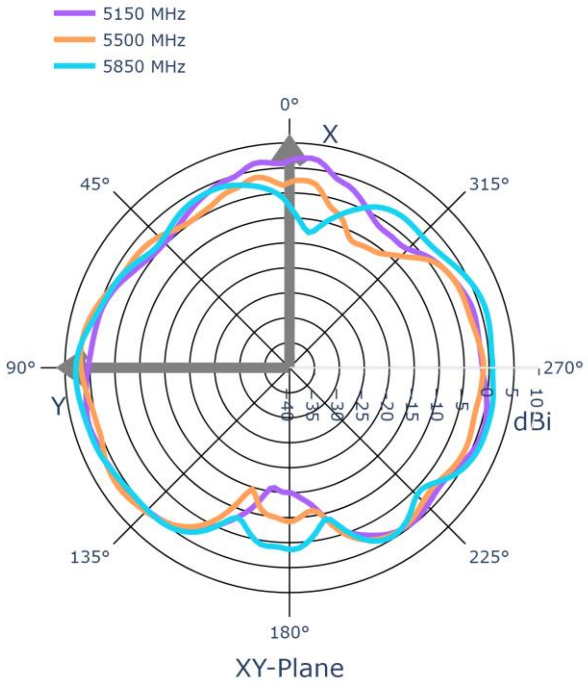

XY_Pol._theta_Ant.2@5.xG

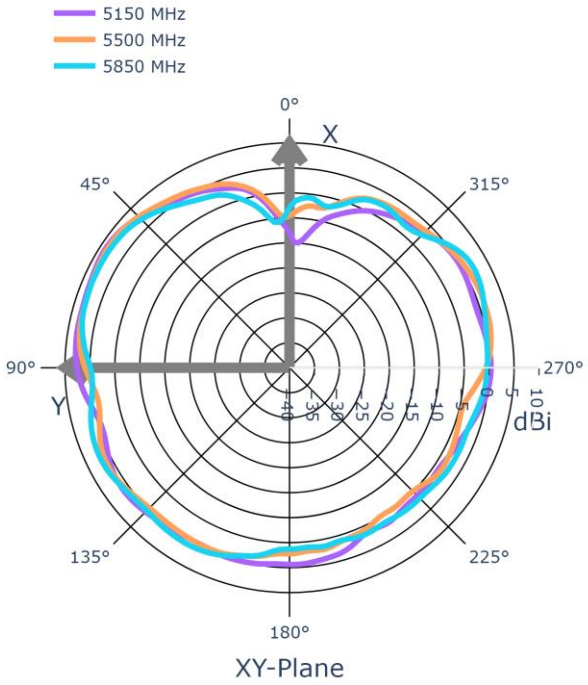

XZ_Pol._Phi_Ant.1@5.xG

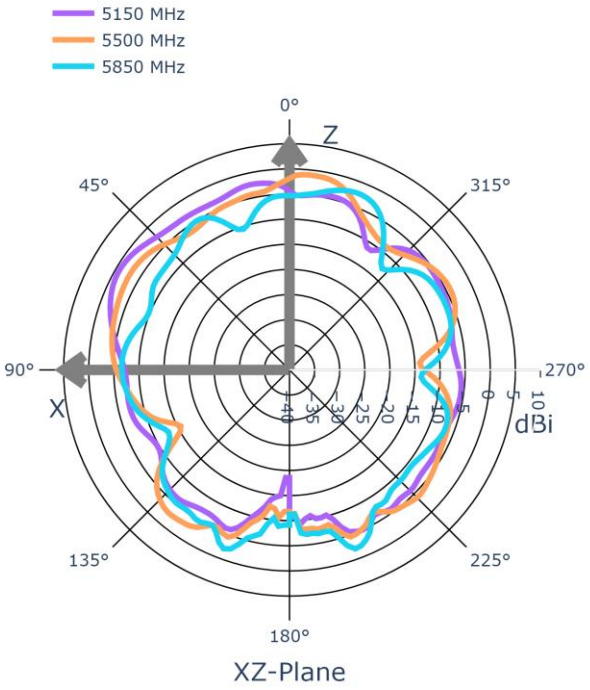

XZ_Pol._Phi_Ant.2@5.xG

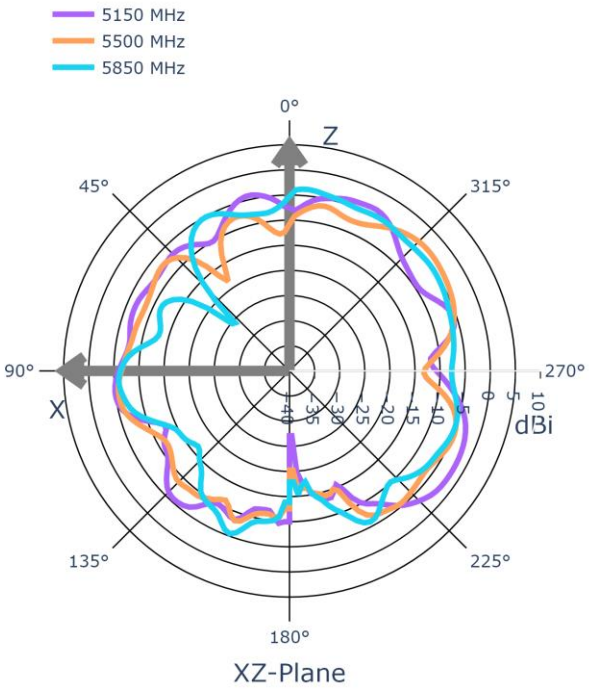

XZ_Pol._theta_Ant.1@5.xG

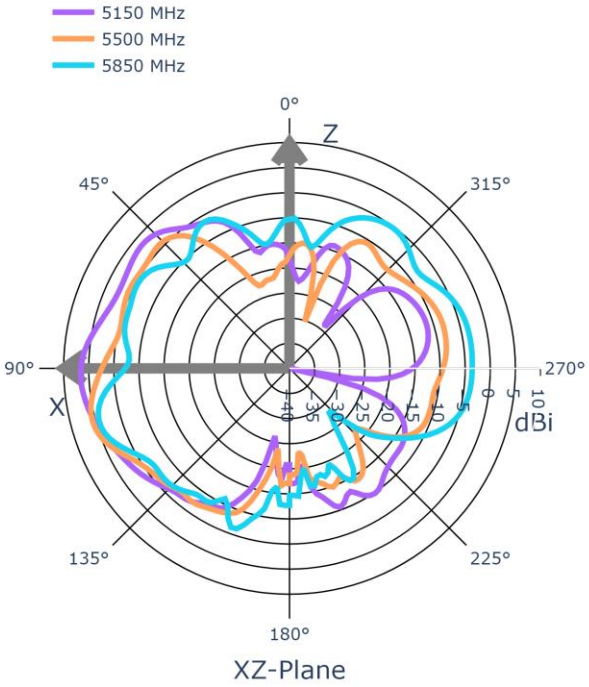

XZ_Pol._theta_Ant.2@5.xG

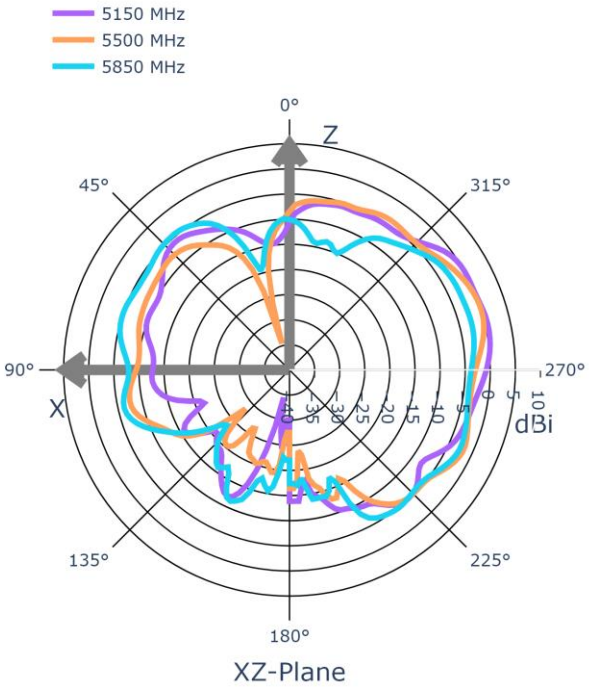

YZ_Pol._Phi_Ant.1@5.xG

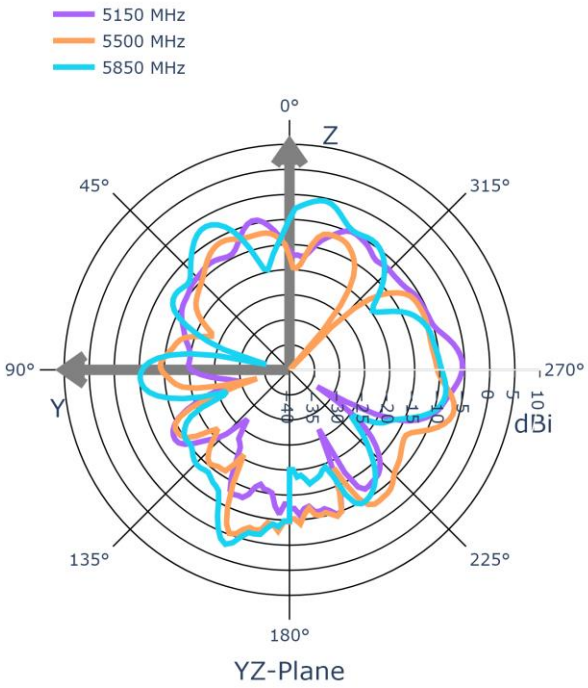

YZ_Pol._Phi_Ant.2@5.xG

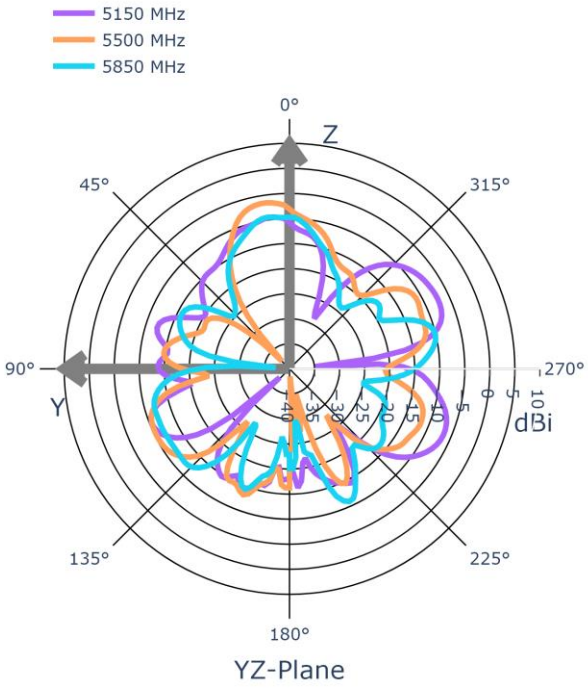

YZ_Pol._theta_Ant.1@5.xG

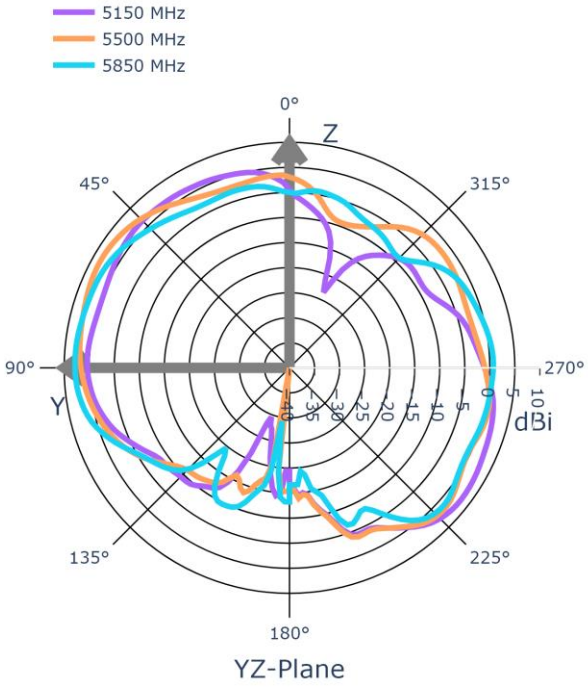

YZ_Pol._theta_Ant.2@5.xG

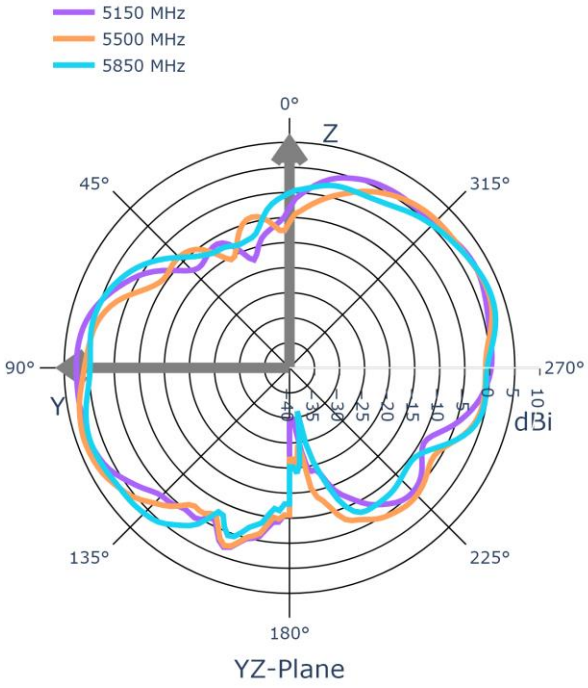

Ant. Position：2.4G Ant.3~5

XY_Pol._Phi_Ant.3

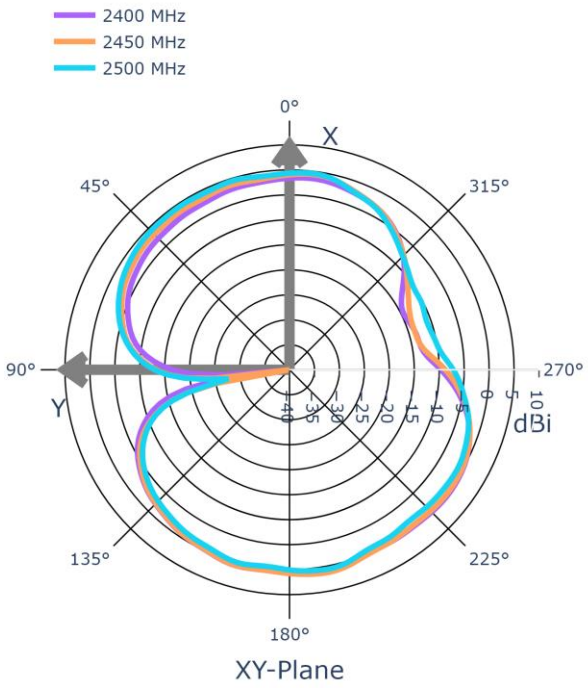

XY_Pol._Phi_Ant.4

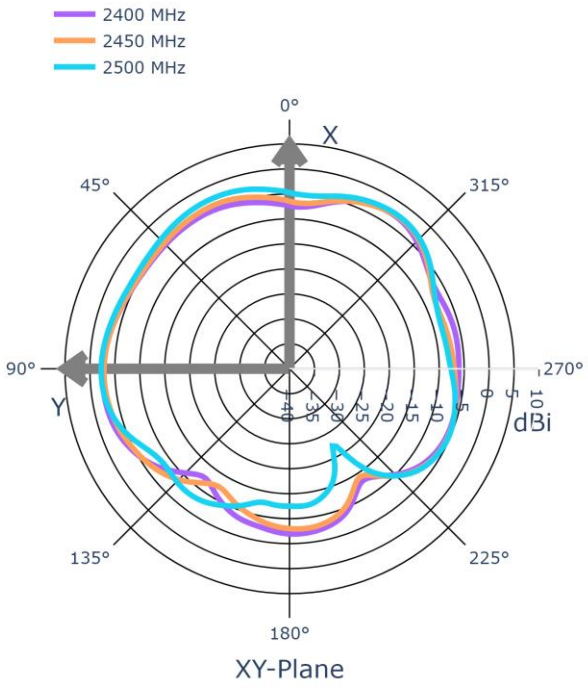

XY_Pol._Phi_Ant.5

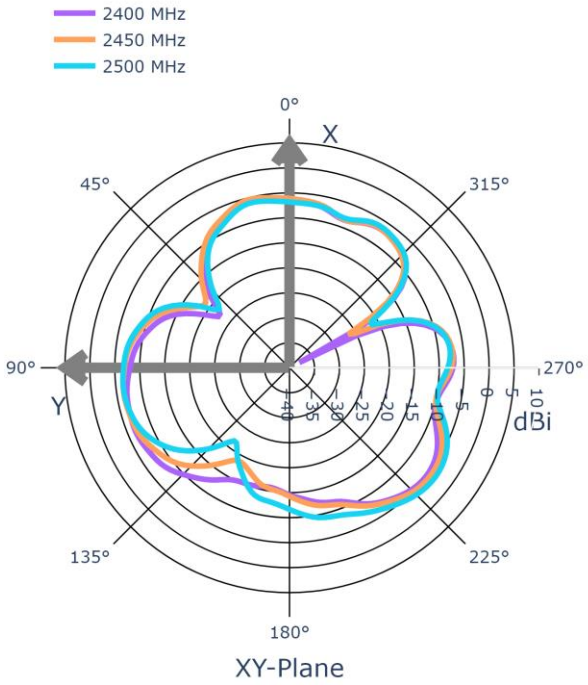

XY_Pol._theta_Ant.3

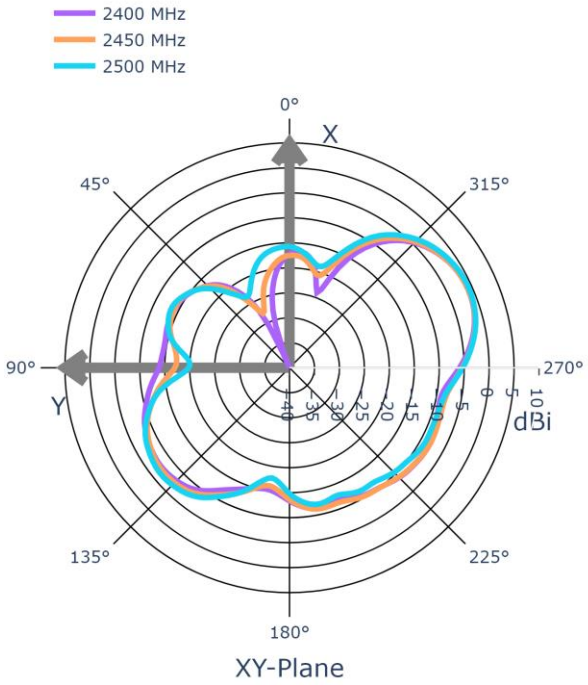

XY_Pol._theta_Ant.4

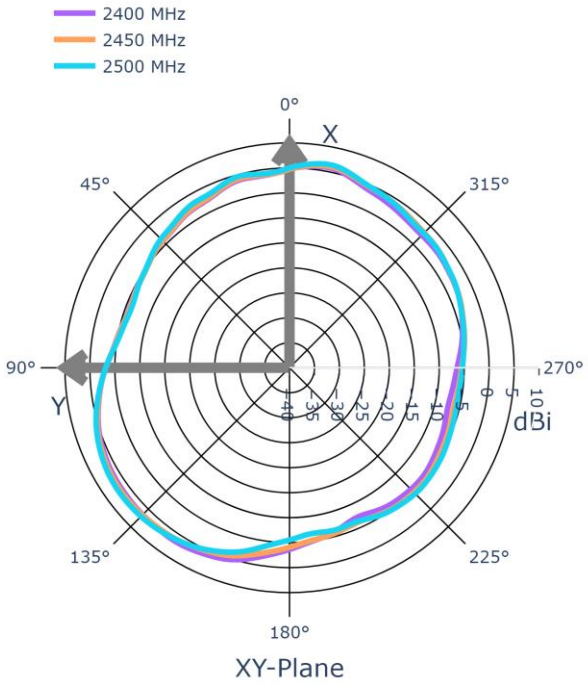

XY_Pol._theta_Ant.5

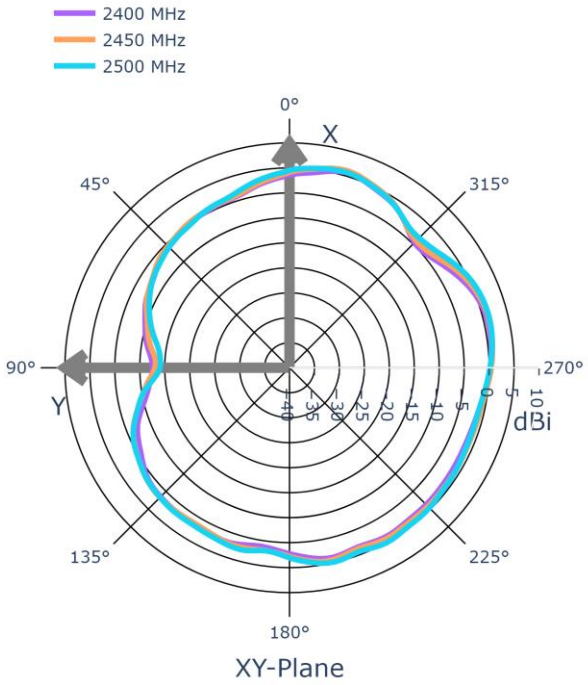

XZ_Pol._Phi_Ant.3

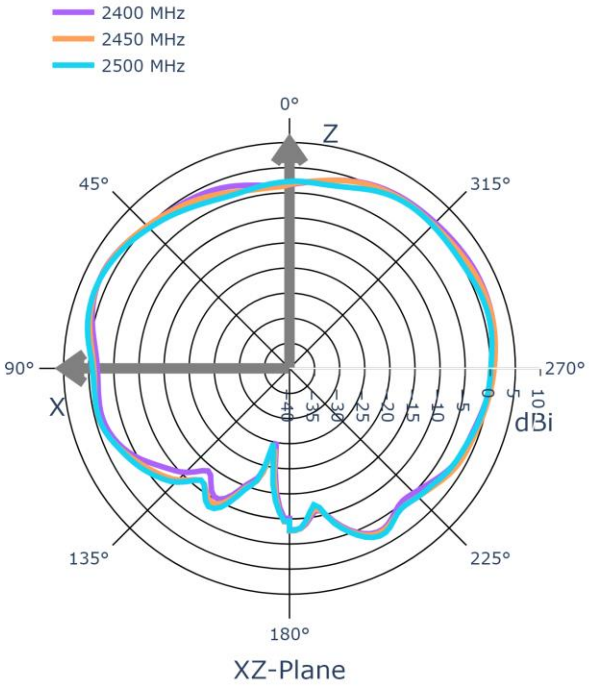

XZ_Pol._Phi_Ant.4

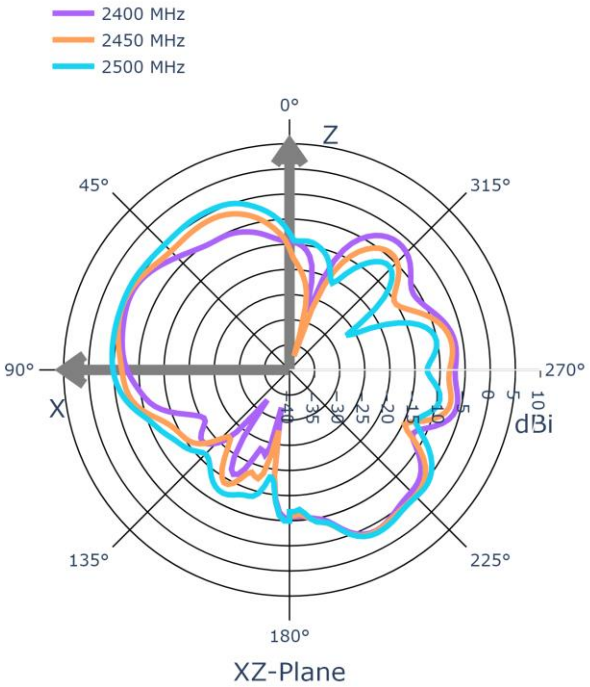

XZ_Pol._Phi_Ant.5

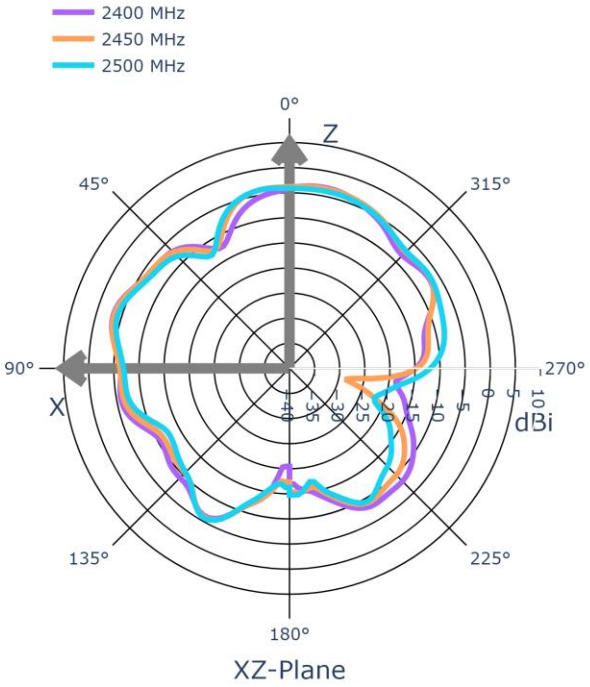

XZ_Pol._theta_Ant.3

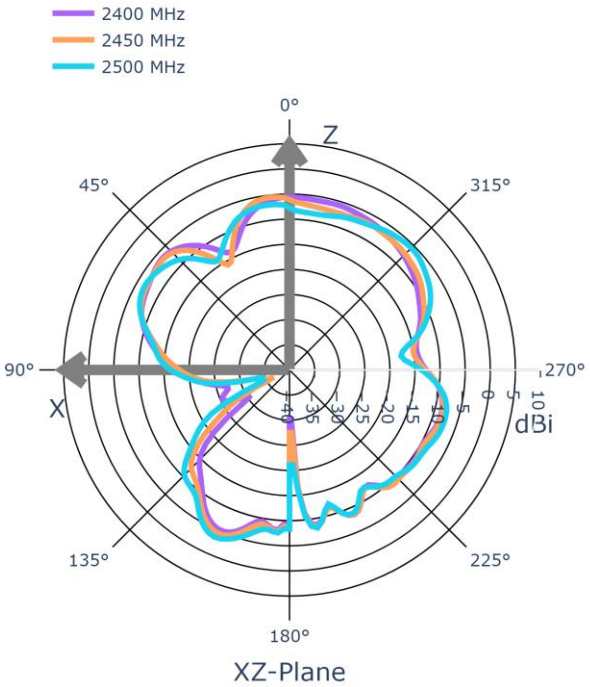

XZ_Pol._theta_Ant.4

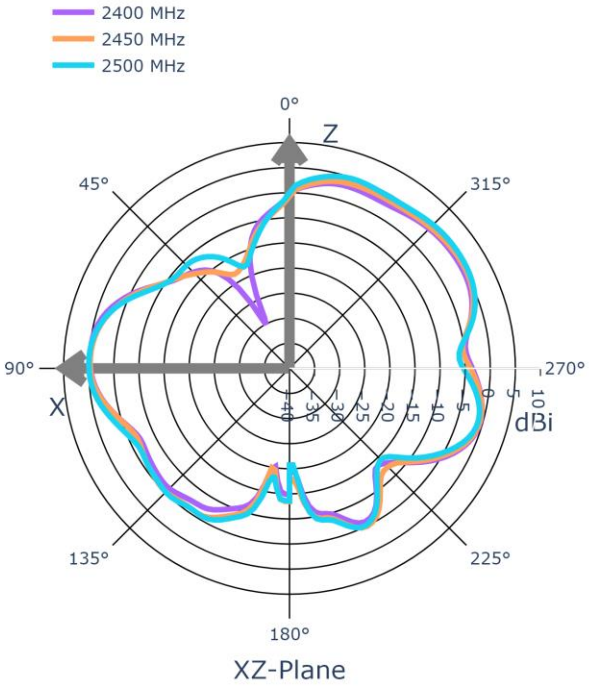

XZ_Pol._theta_Ant.5

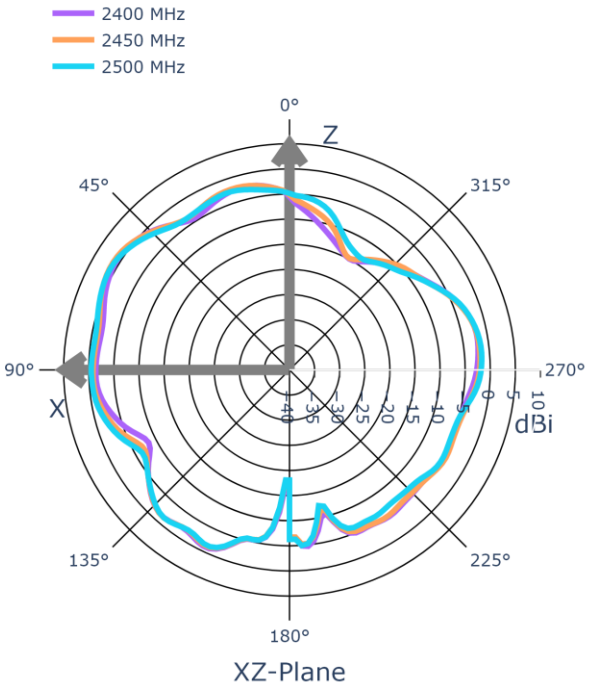

YZ_Pol._Phi_Ant.3

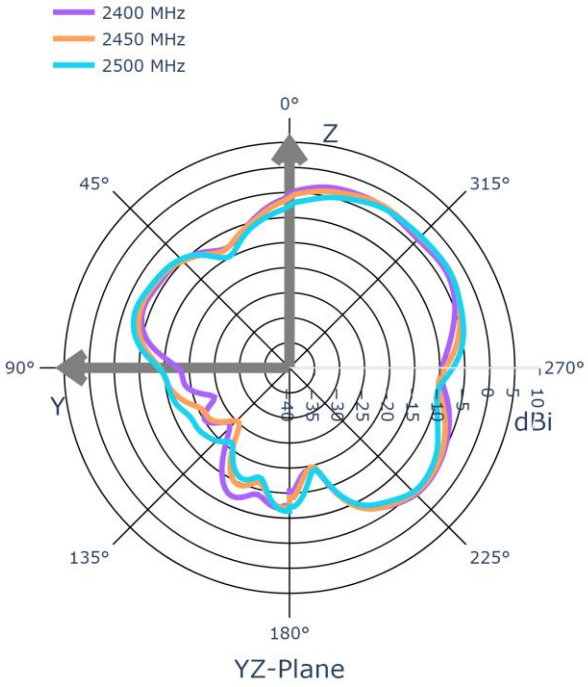

YZ_Pol._Phi_Ant.4

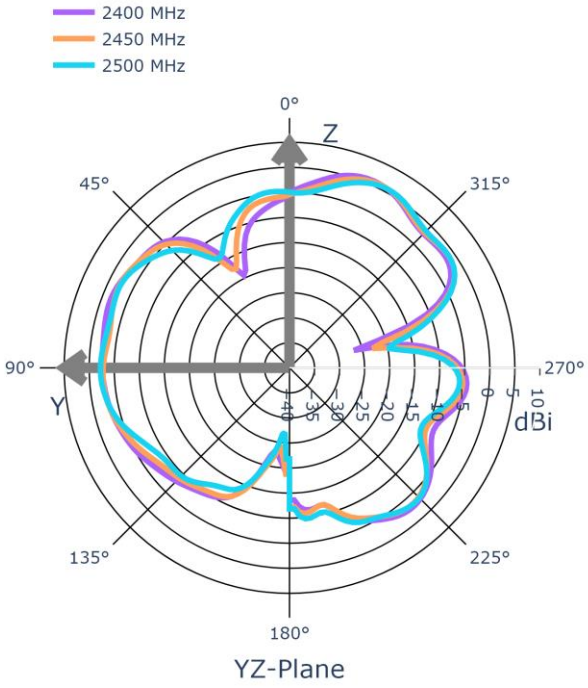

YZ_Pol._Phi_Ant.5

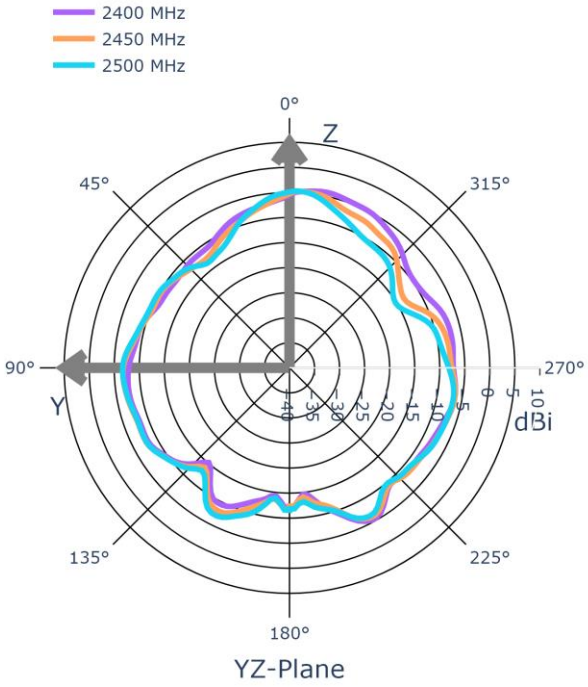

YZ_Pol._theta_Ant.3

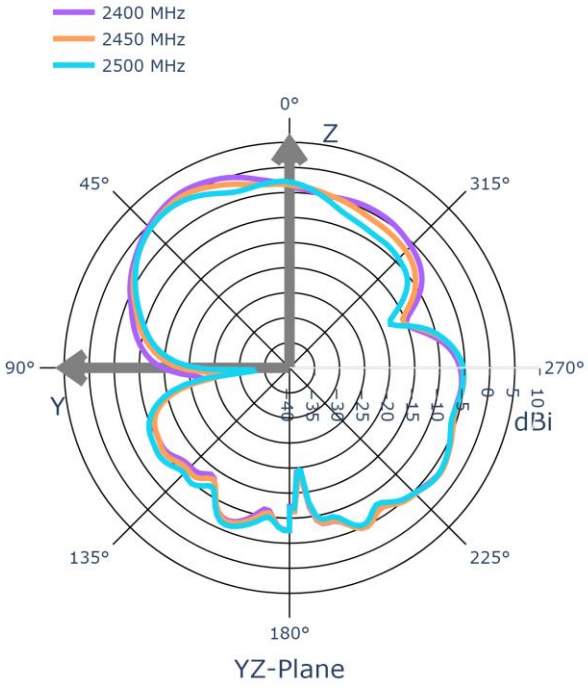

YZ_Pol._theta_Ant.4

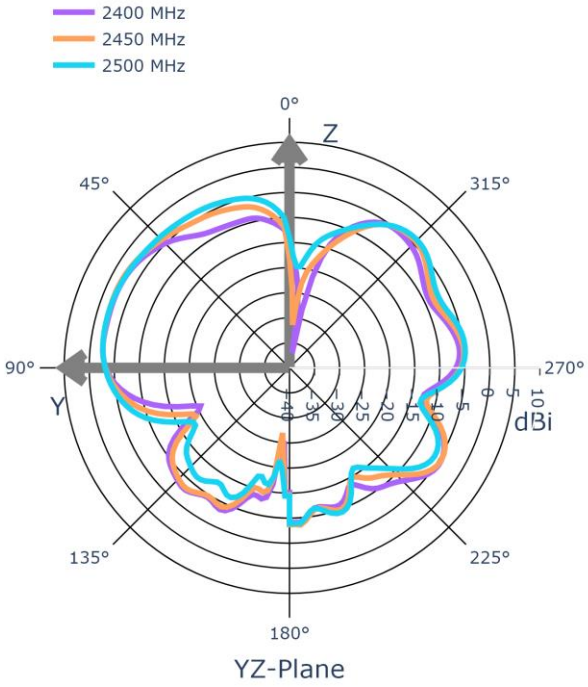

YZ_Pol._theta_Ant.5

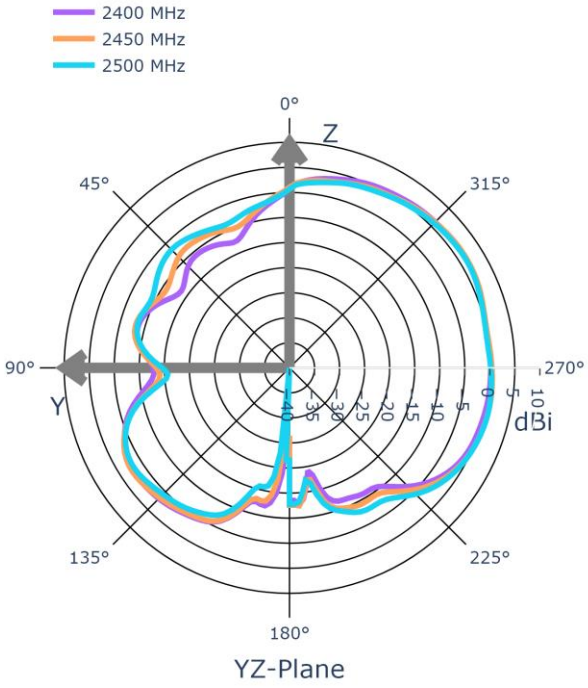

Appendix _Radiated Total Gain Result

Ant. Position：5G Ant.1_GAIN PHI

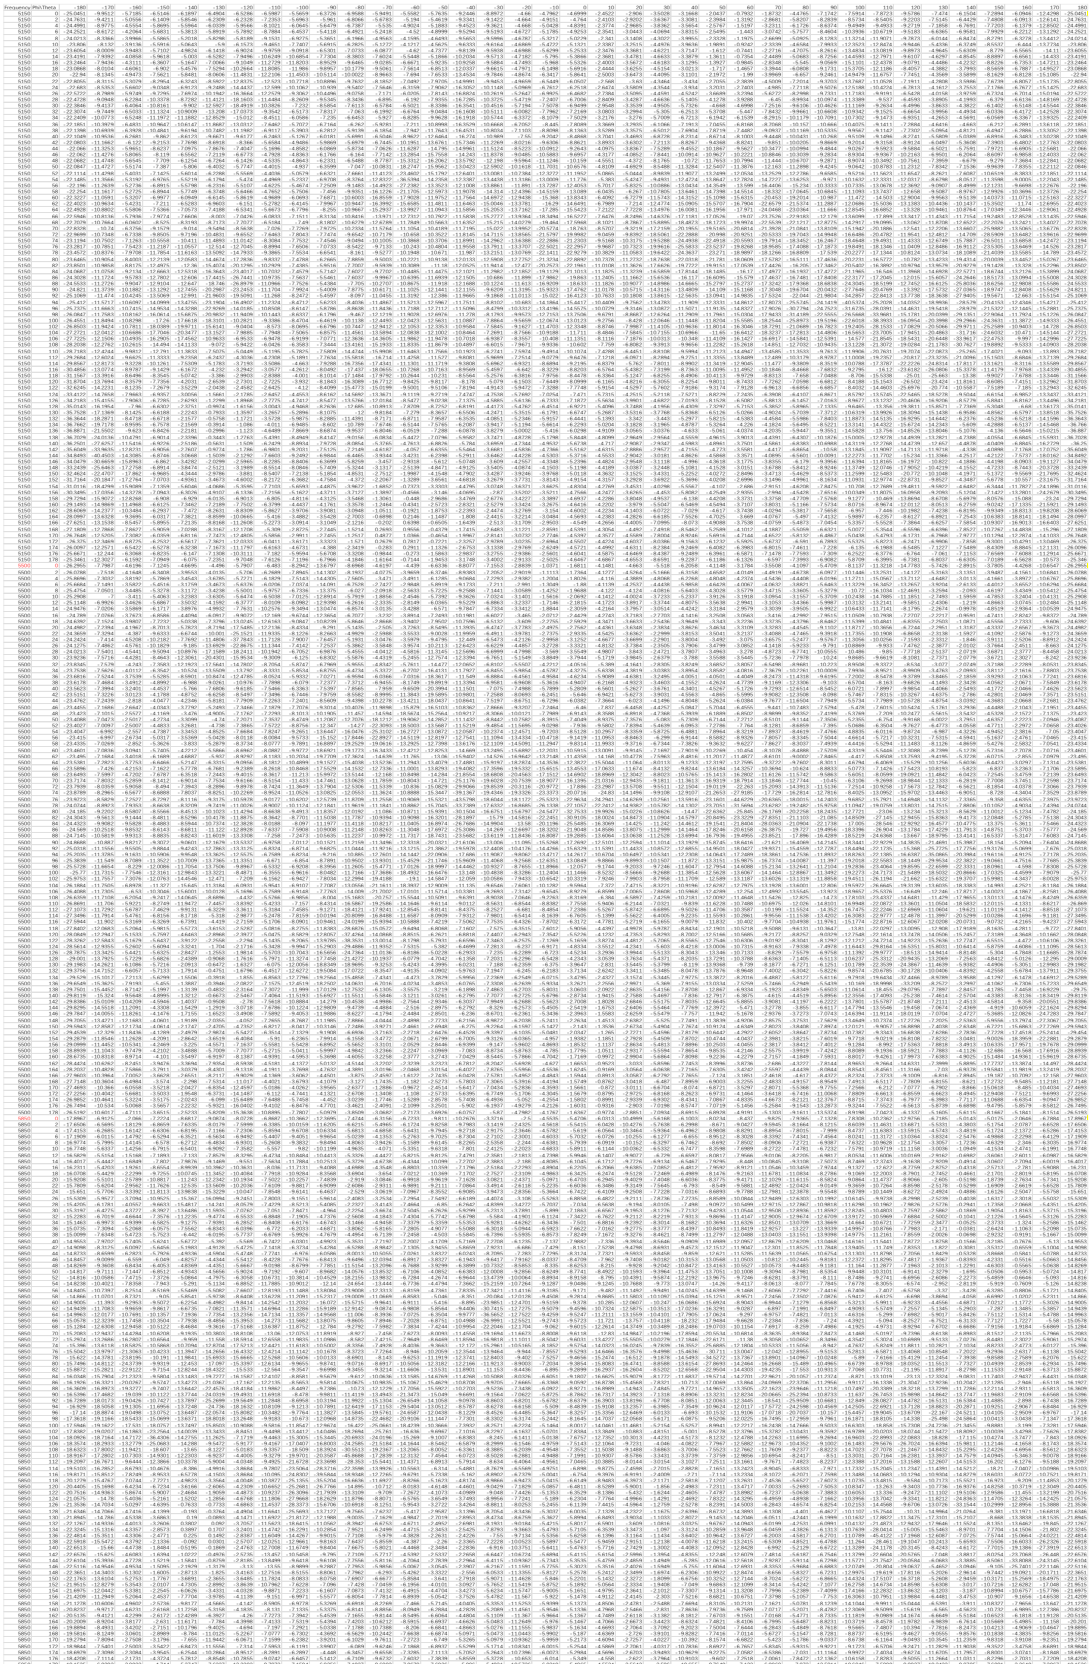

Ant. Position：5G Ant.1_GAIN THETA

Ant. Position：5G Ant.2_GAIN PHI

Ant. Position：5G Ant.2_GAIN THETA

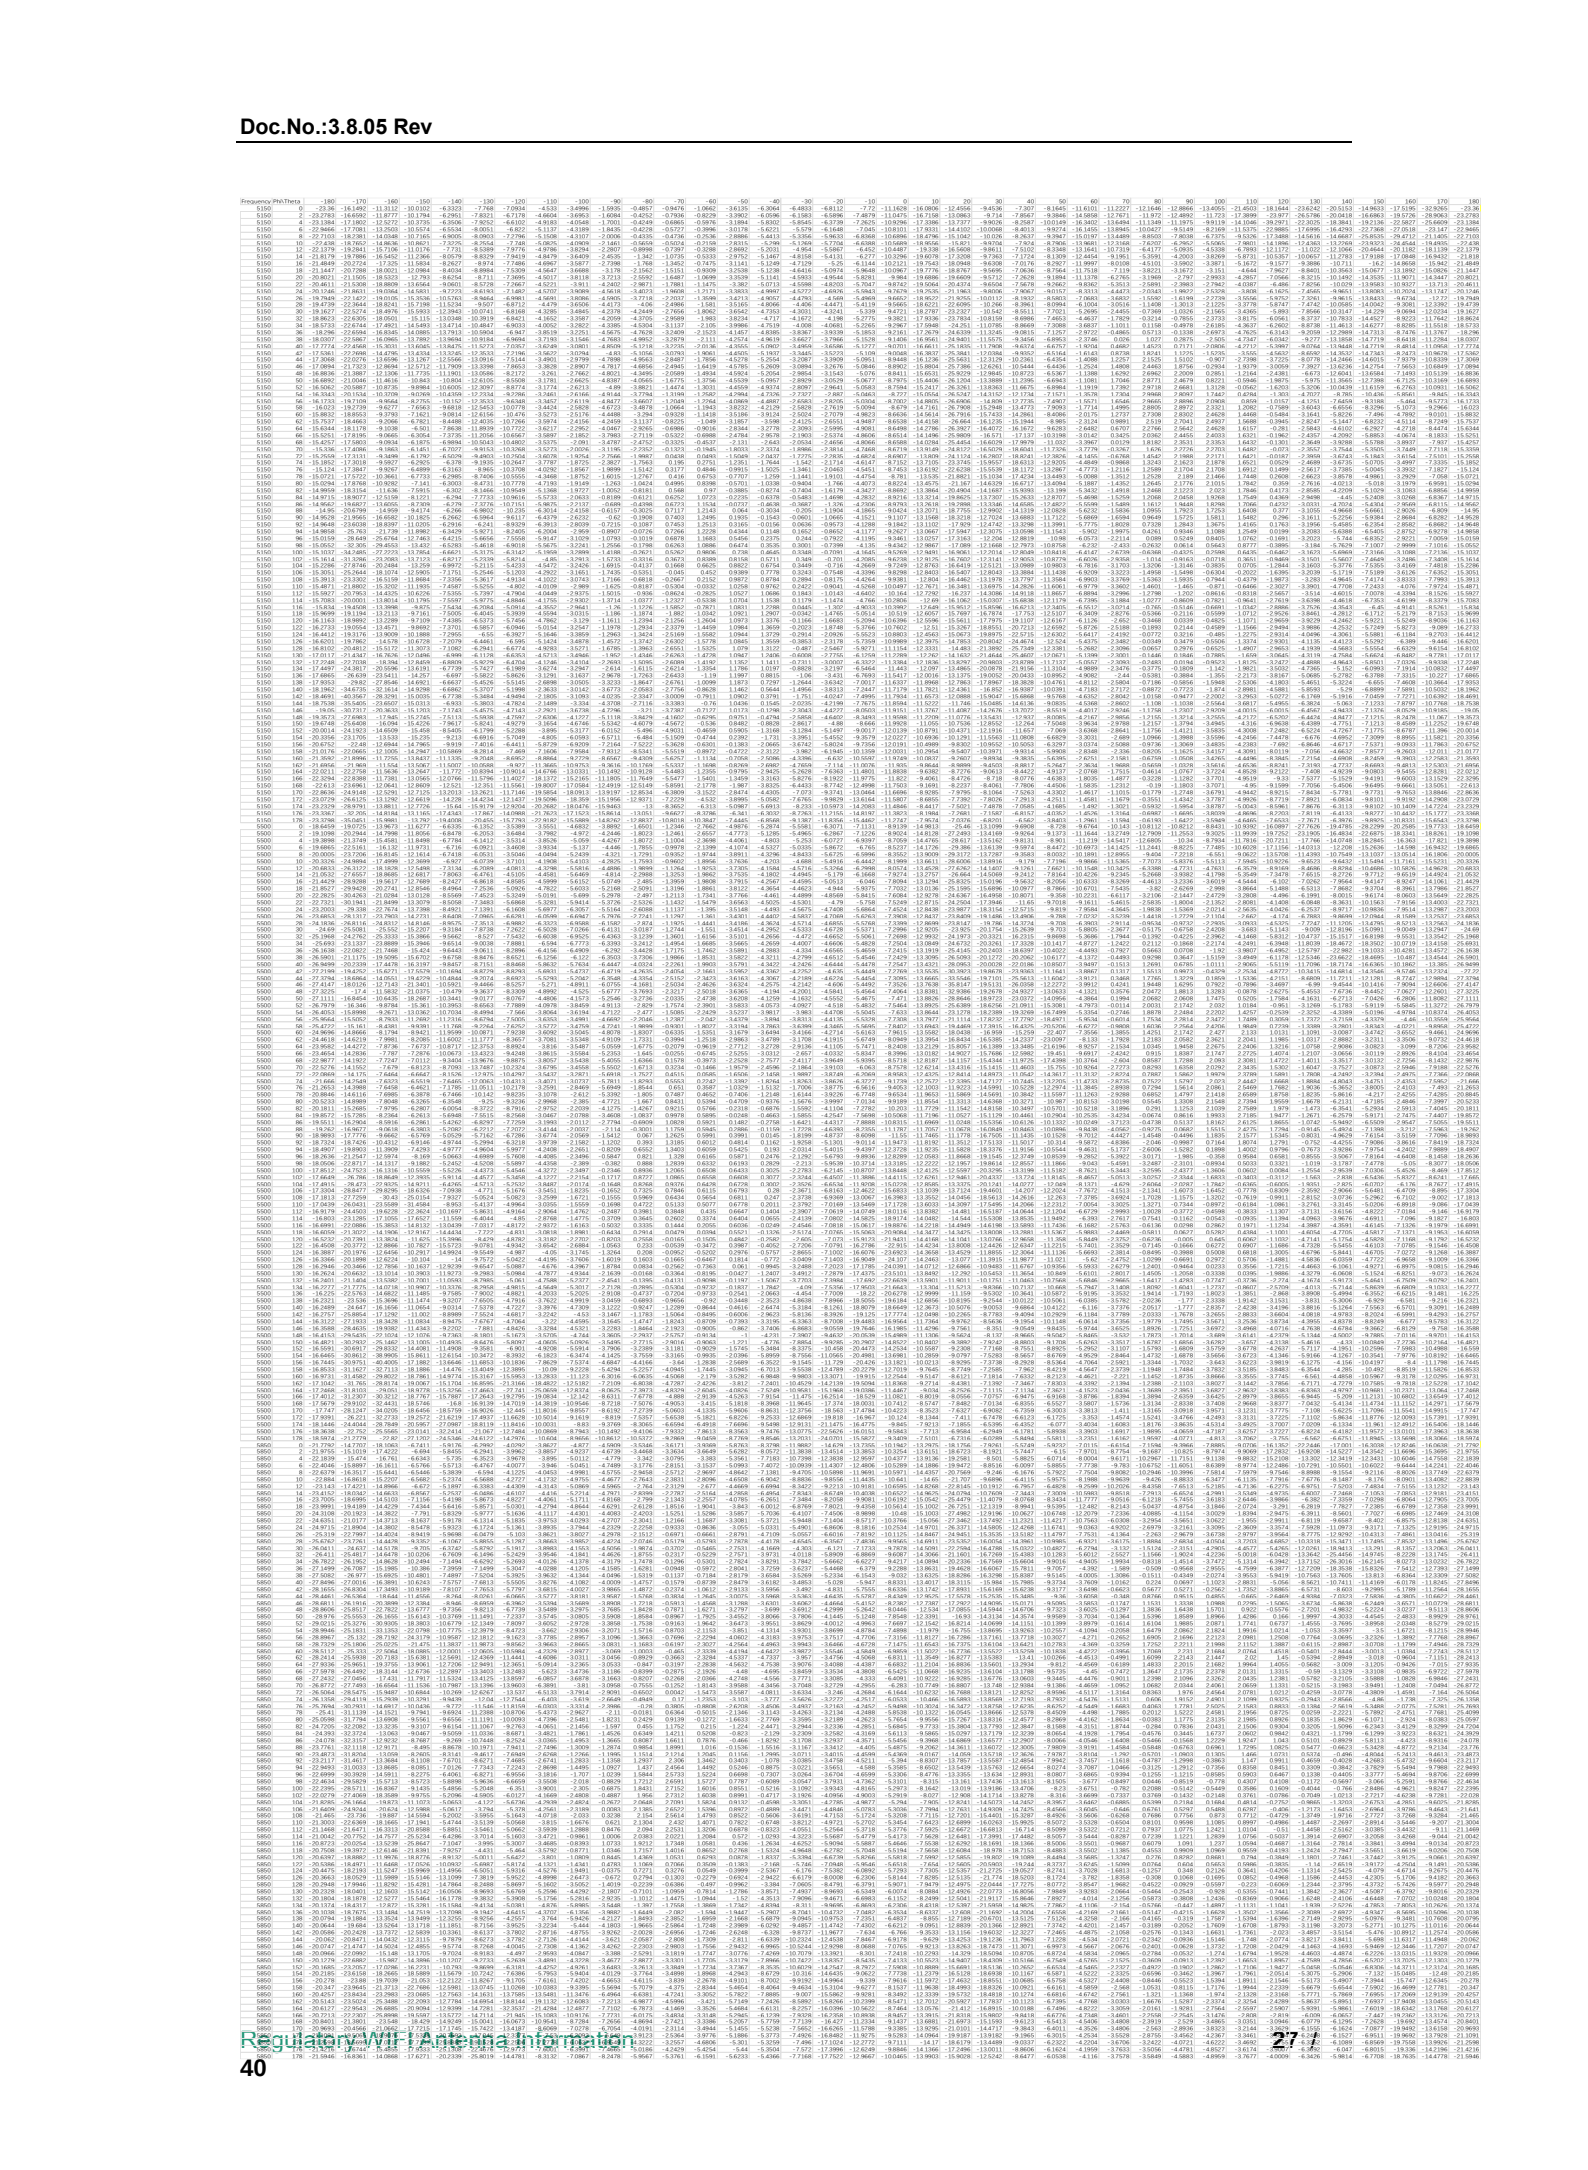

Ant. Position：2.4G Ant.3_GAIN PHI

Ant. Position：2.4G Ant.3_GAIN THETA

Ant. Position：2.4G Ant.4_GAIN PHI

Ant. Position：2.4G Ant.4_GAIN THETA

Ant. Position：2.4G Ant.5_GAIN PHI

Ant. Position：2.4G Ant.5_GAIN THETA