


Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH.....	2
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	6
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	10
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	12
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY.....	14
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	21
<i>Band Edge</i>	21
<i>Conducted Spurious Emission</i>	26
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	36
30 MHz - 1GHz.....	36
1GHz - 18GHz.....	38
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	44

Appendix A.1: Test Results of 99% Bandwidth


TestMode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.87157	2401.5684	2402.4400	---	PASS
DH5	Ant1	2441	0.86050	2440.5724	2441.4329	---	PASS
DH5	Ant1	2480	0.88586	2479.5590	2480.4448	---	PASS
2DH5	Ant1	2402	1.1913	2401.4097	2402.6010	---	PASS
2DH5	Ant1	2441	1.1948	2440.4090	2441.6038	---	PASS
2DH5	Ant1	2480	1.1922	2479.4105	2480.6027	---	PASS

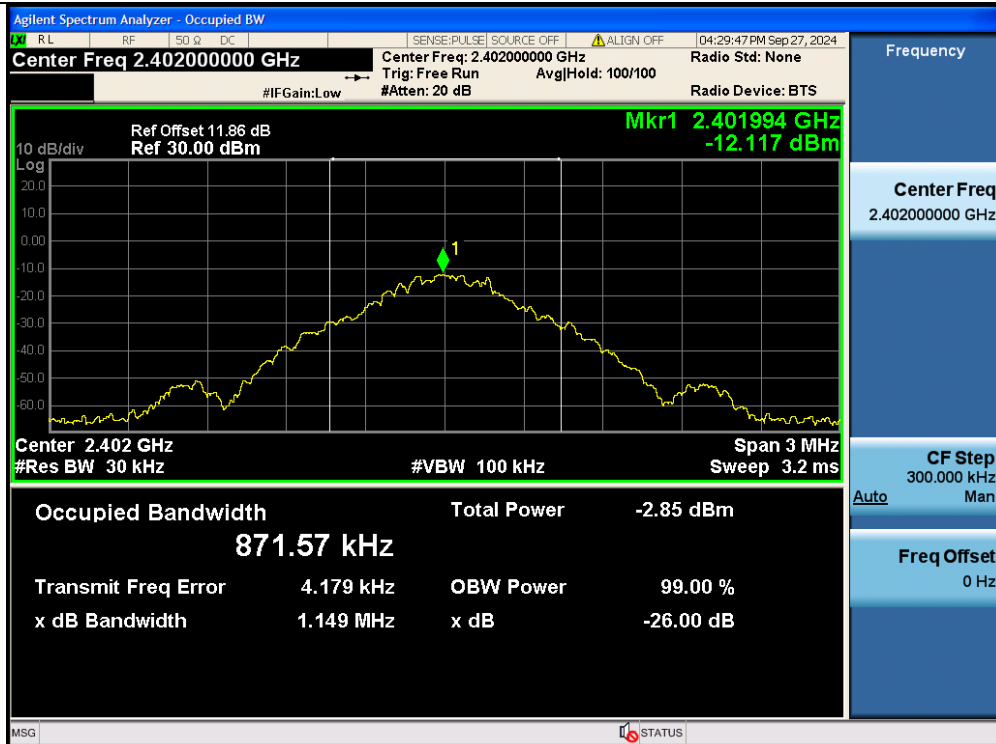


DH5-Ant1-2402

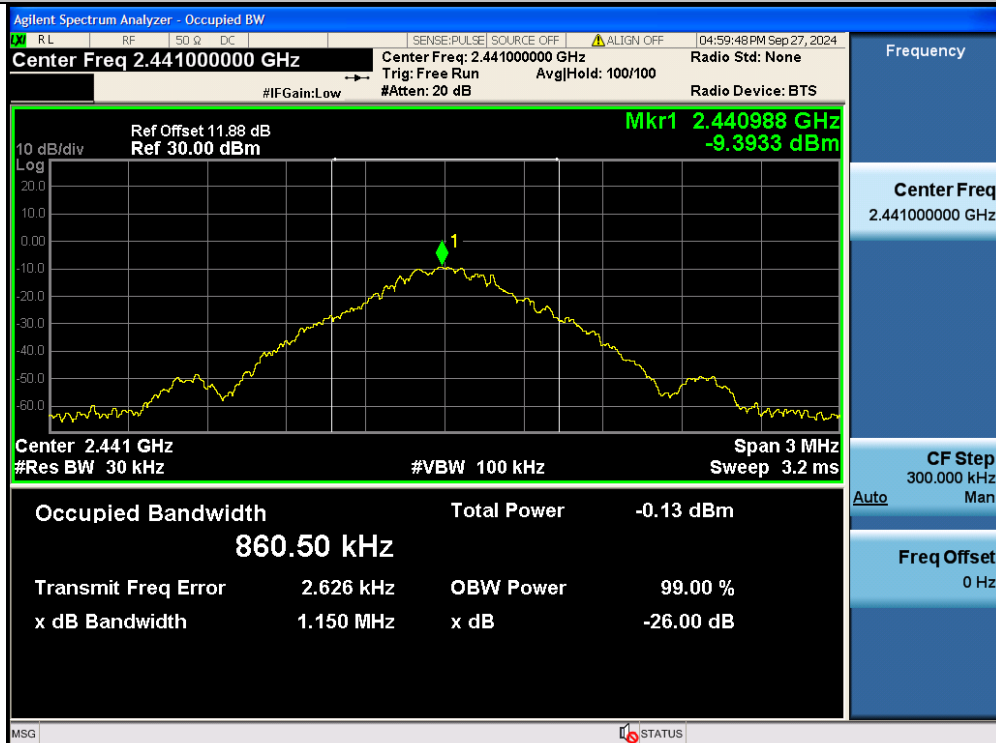


DH5-Ant1-2441

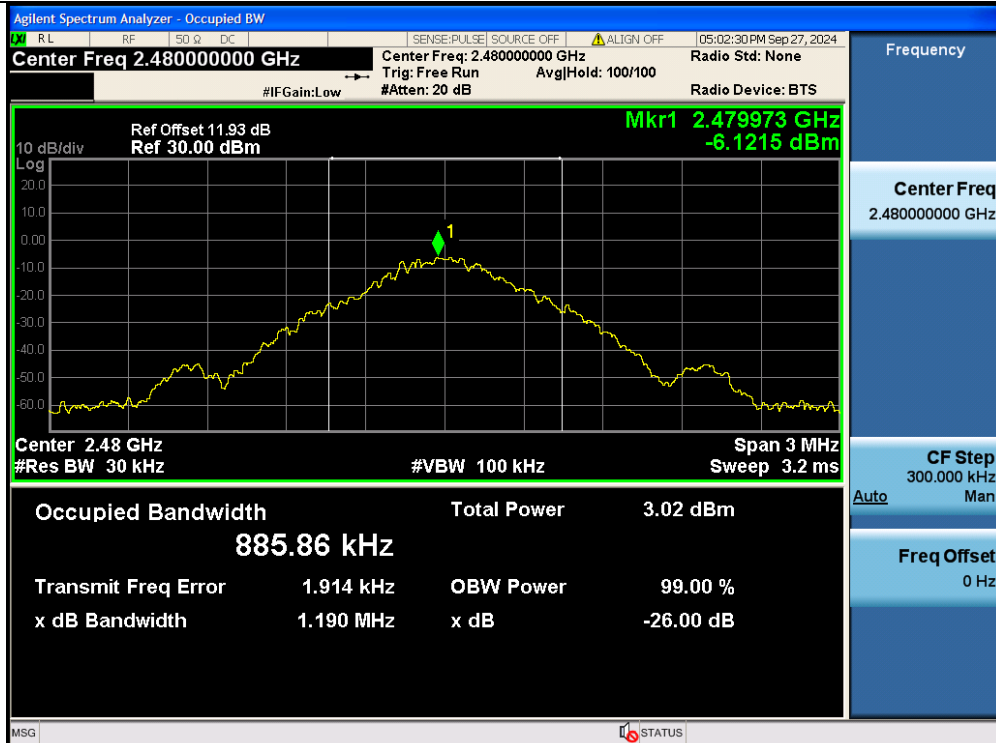


DH5-Ant1-2480

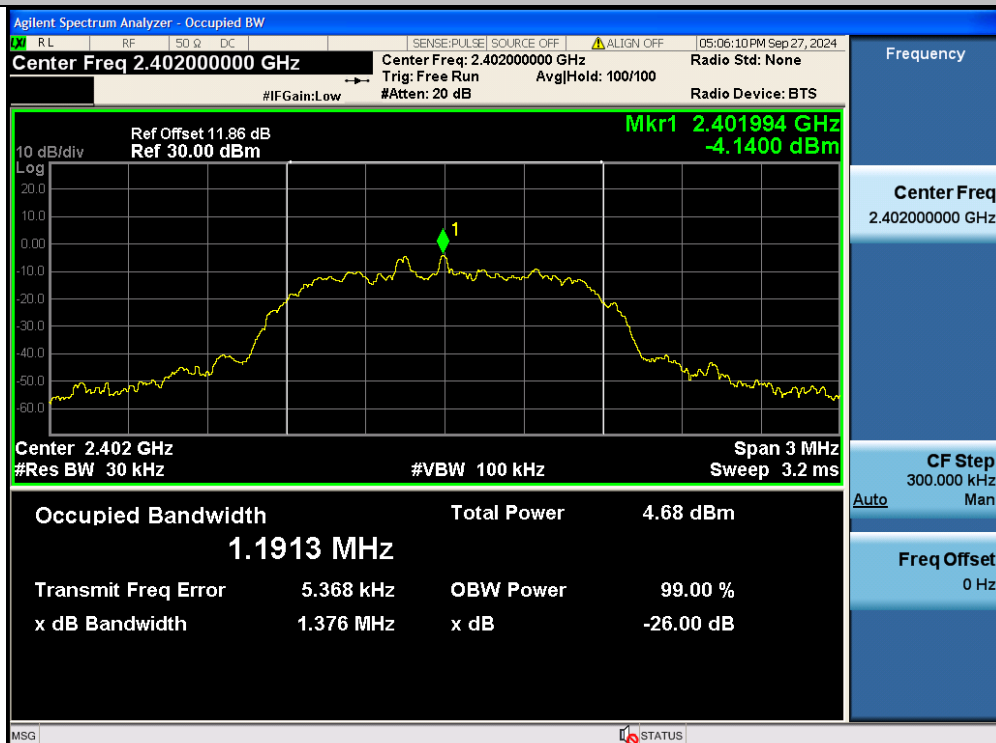

2DH5-Ant1-2402

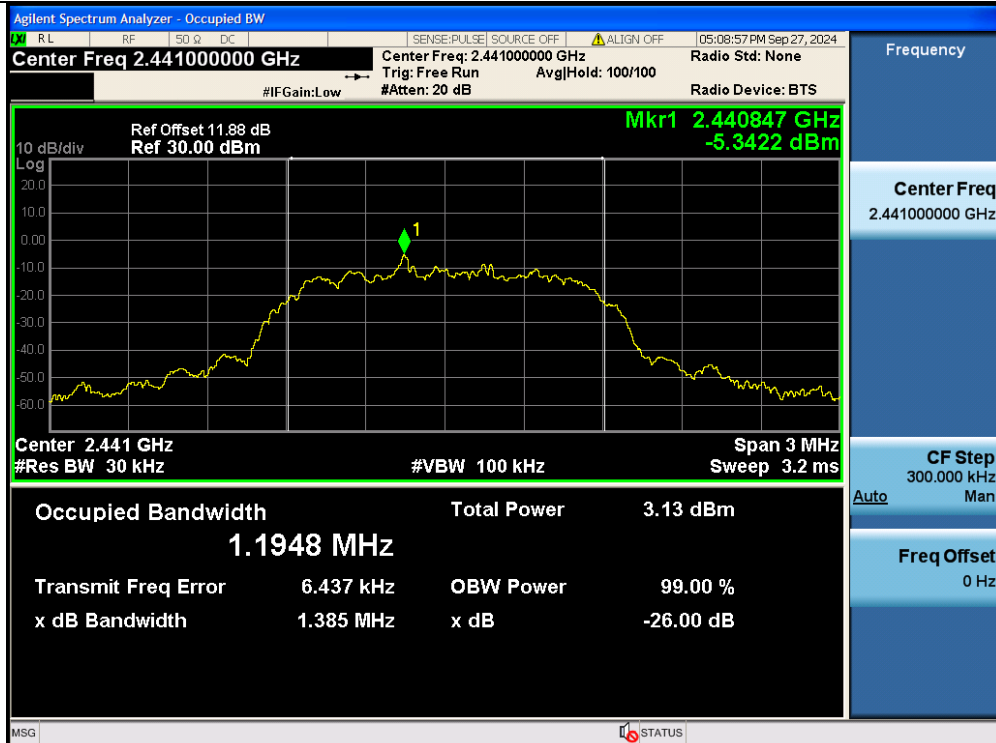


2DH5-Ant1-2441

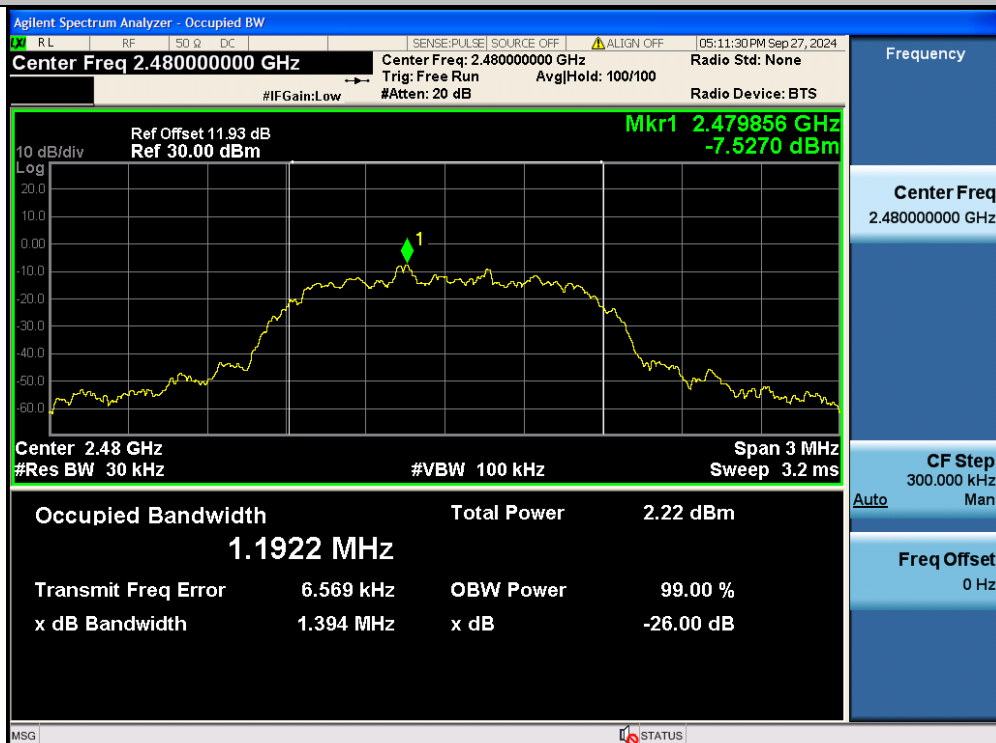


2DH5-Ant1-2480

Appendix A.2: Test Results of 20dB Bandwidth


TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.9540	---	PASS
DH5	Ant1	2441	0.9548	---	PASS
DH5	Ant1	2480	0.9927	---	PASS
2DH5	Ant1	2402	1.313	---	PASS
2DH5	Ant1	2441	1.274	---	PASS
2DH5	Ant1	2480	1.288	---	PASS

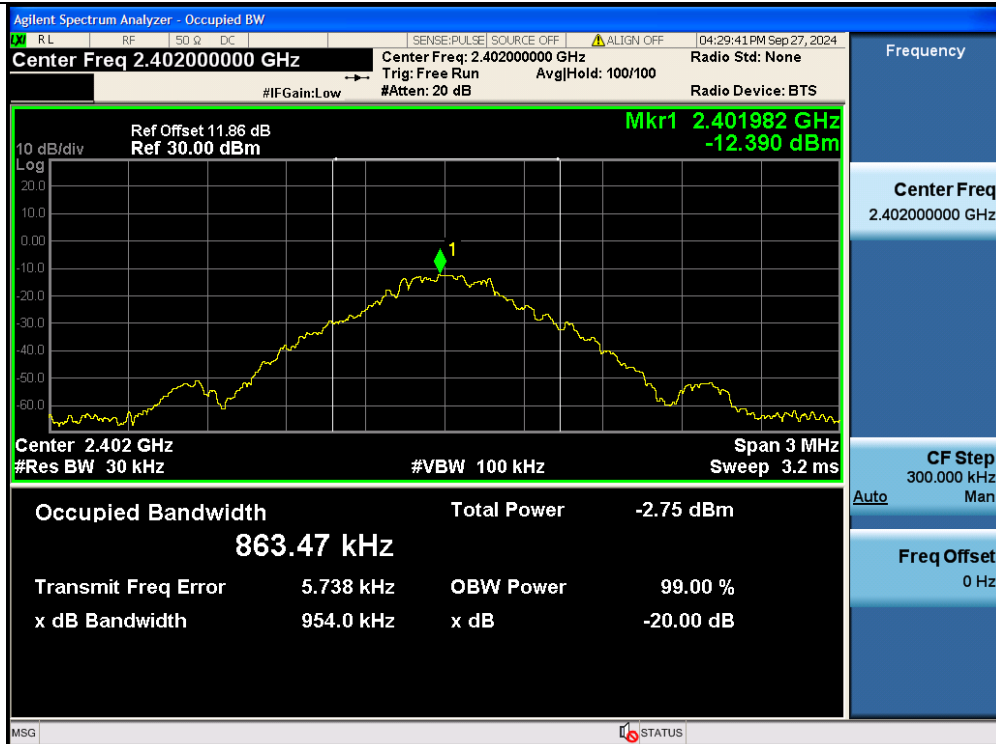

DH5-Ant1-2402

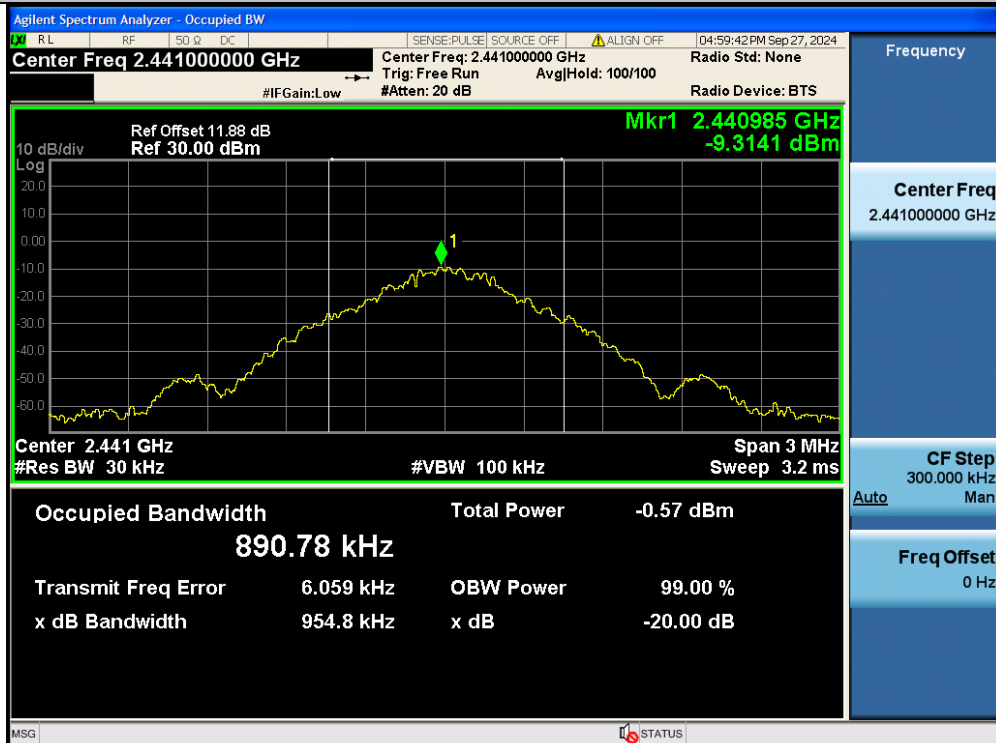


DH5-Ant1-2441

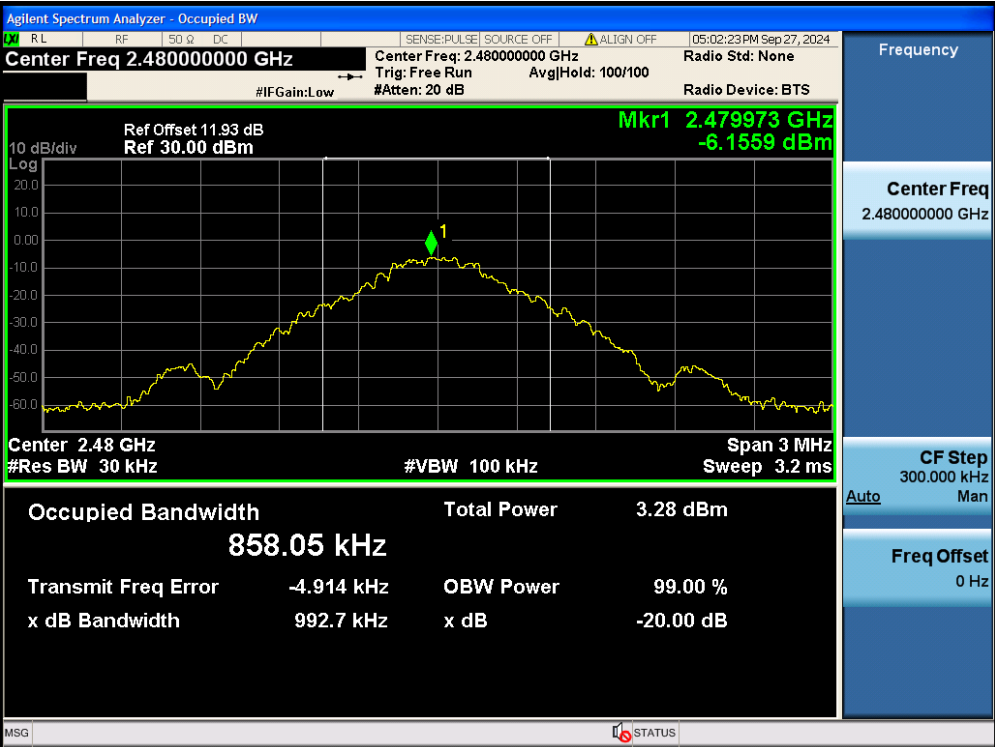


DH5-Ant1-2480



2DH5-Ant1-2402

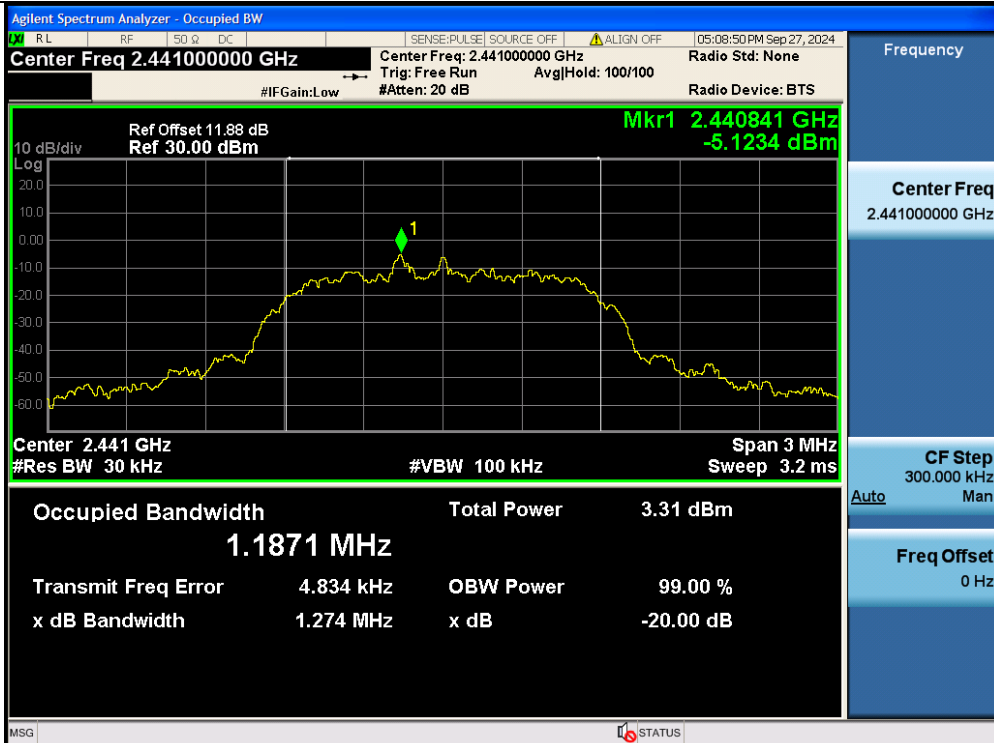


2DH5-Ant1-2441

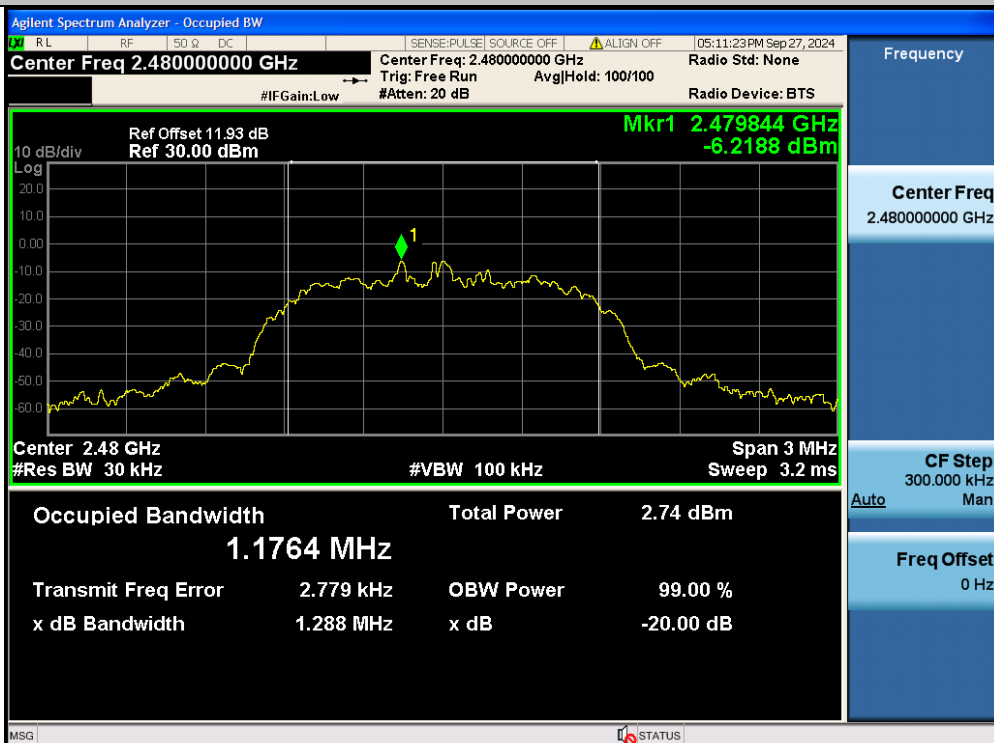


2DH5-Ant1-2480

Appendix A.3: Test Results of Carrier Frequency Separation

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.022	≥ 0.993	PASS
2DH5	Ant1	Hop	1.004	≥ 0.875	PASS

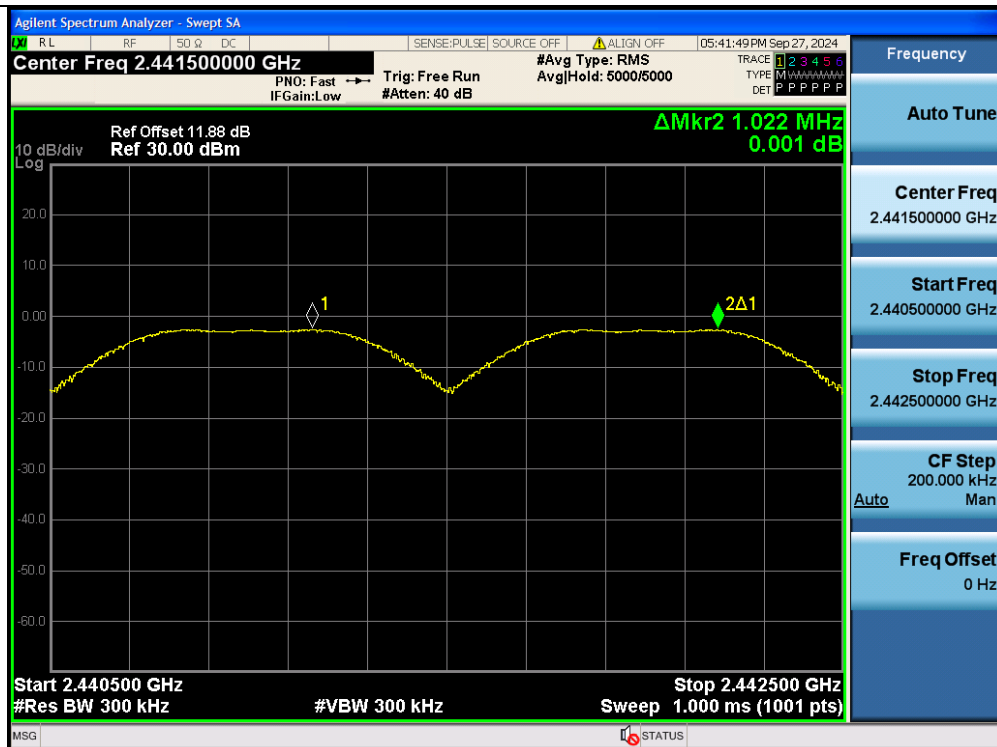


DH5-Ant1-Hop-PASS

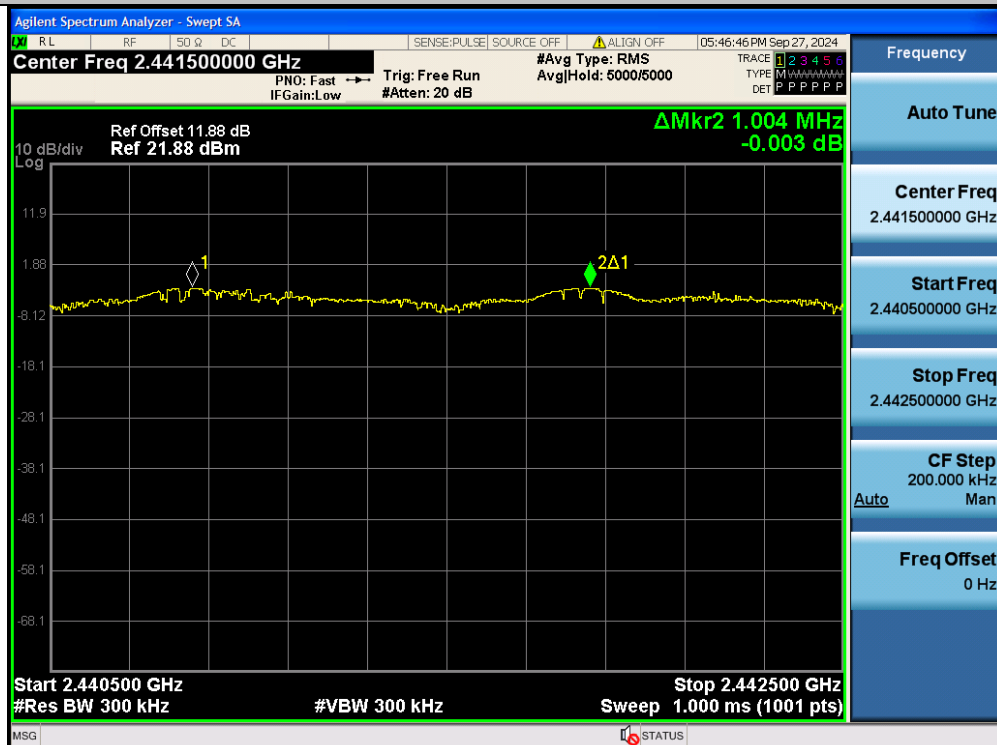


2DH5-Ant1-Hop-PASS

Appendix A.4: Test Results of Number of Hopping Frequency

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

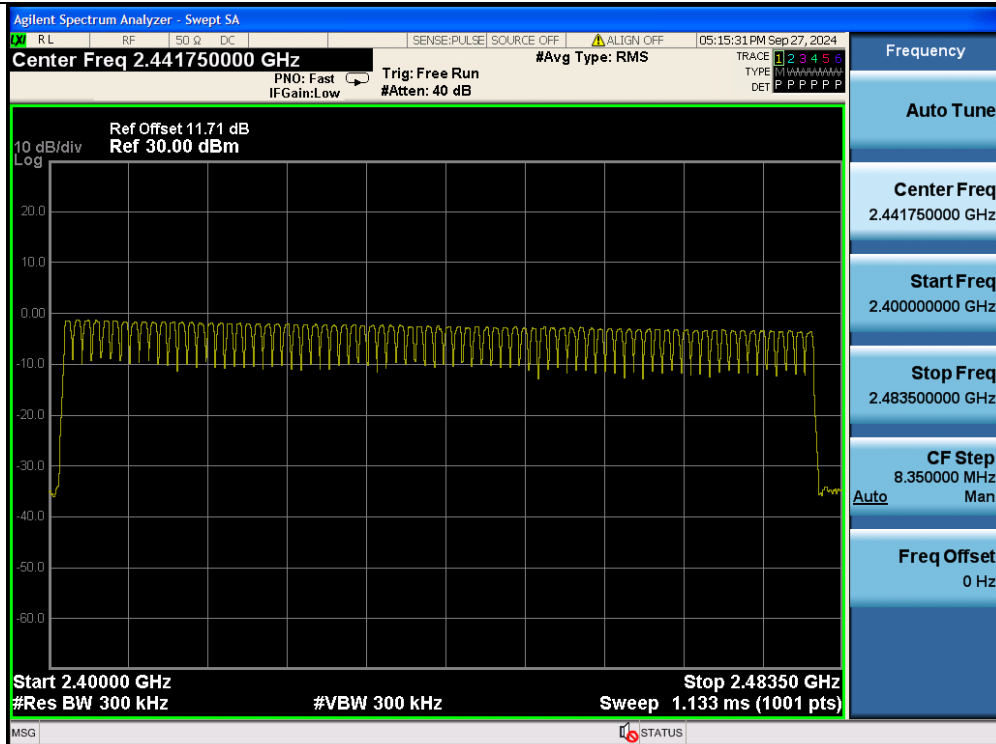



DH5-Ant1-Hop-PASS

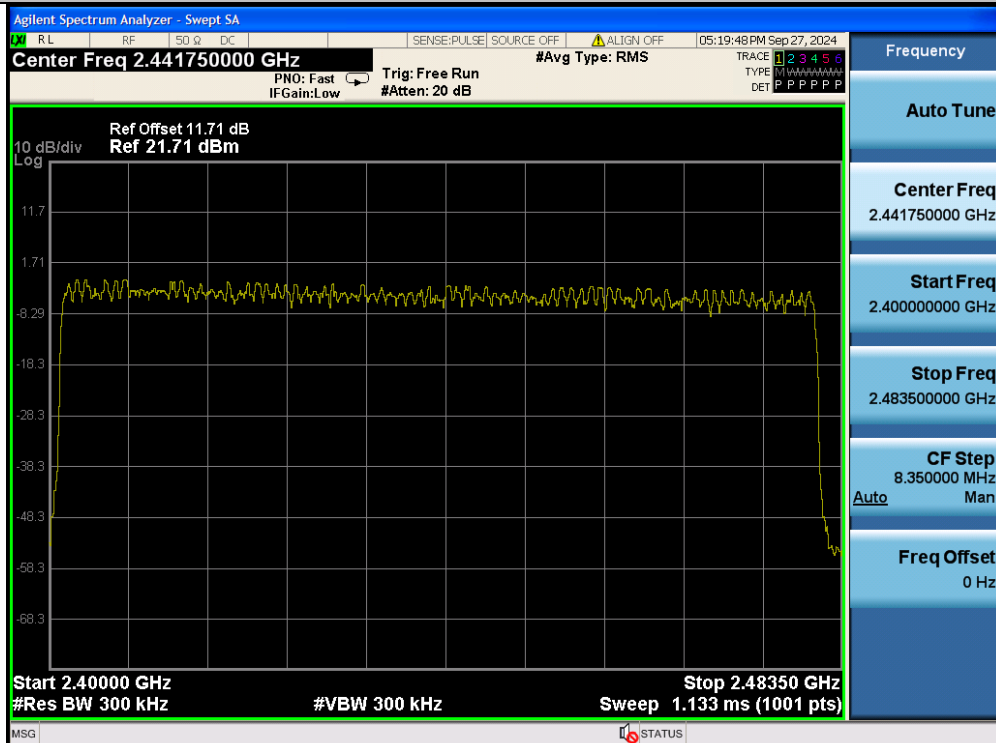



2DH5-Ant1-Hop-PASS

Appendix A.5: Test Results of Time of Occupancy



TestMode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.381	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.638	170	0.278	≤0.4	PASS
DH5	Ant1	Hop	2.884	100	0.288	≤0.4	PASS
2DH1	Ant1	Hop	0.390	330	0.129	≤0.4	PASS
2DH3	Ant1	Hop	1.643	150	0.246	≤0.4	PASS
2DH5	Ant1	Hop	2.891	120	0.347	≤0.4	PASS

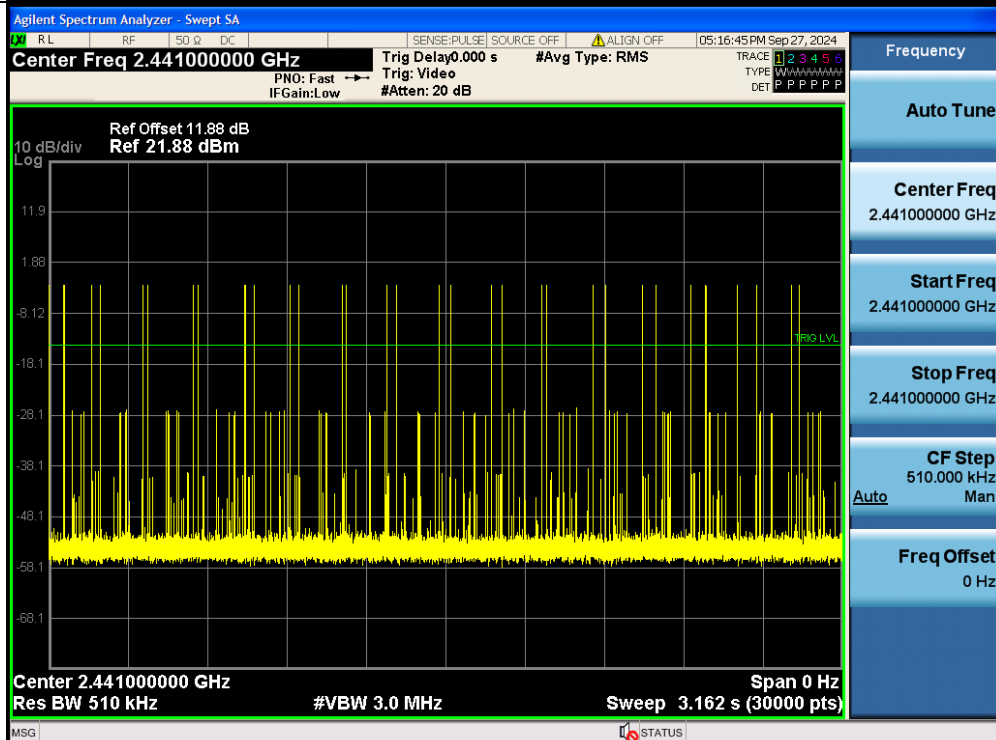
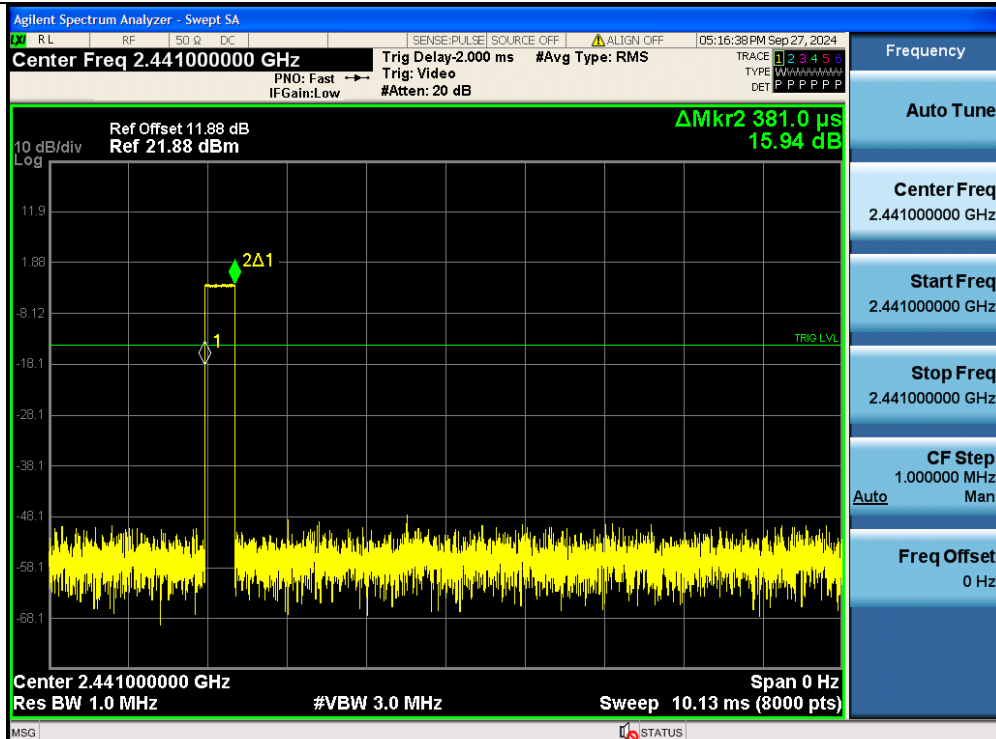


DH1-Ant1-Hop-PASS

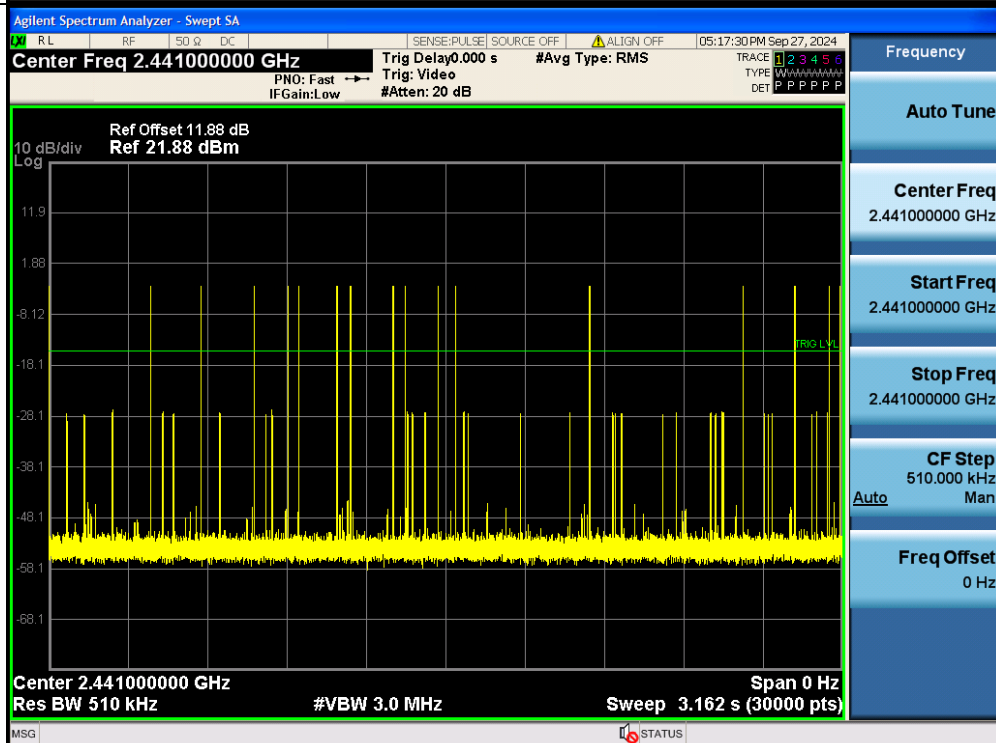
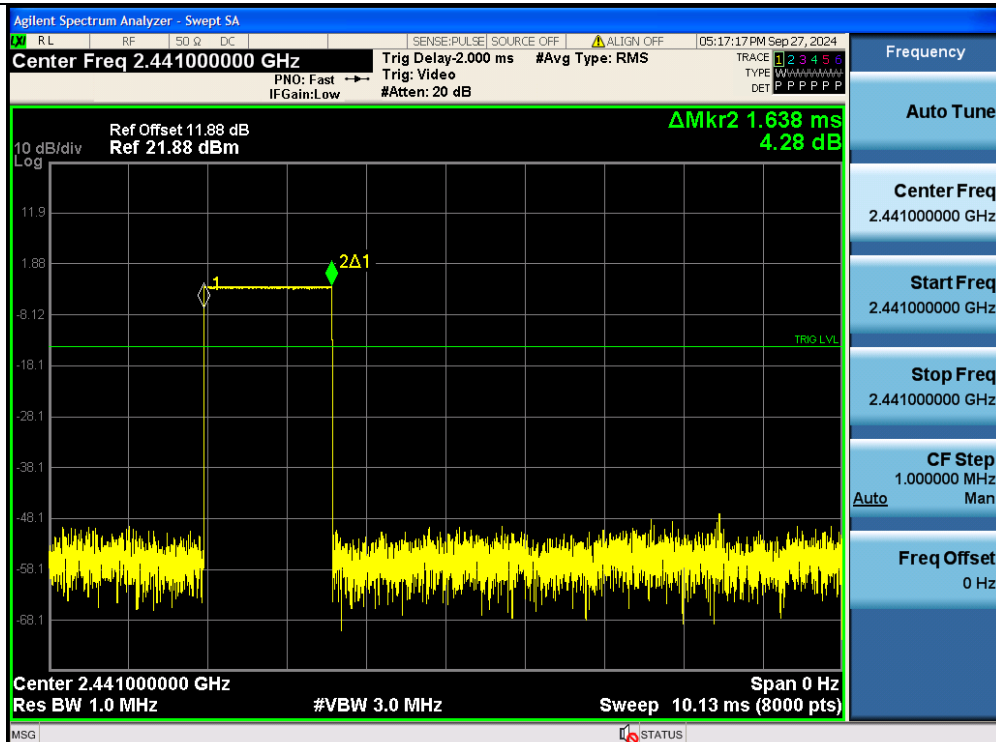


DH3-Ant1-Hop-PASS

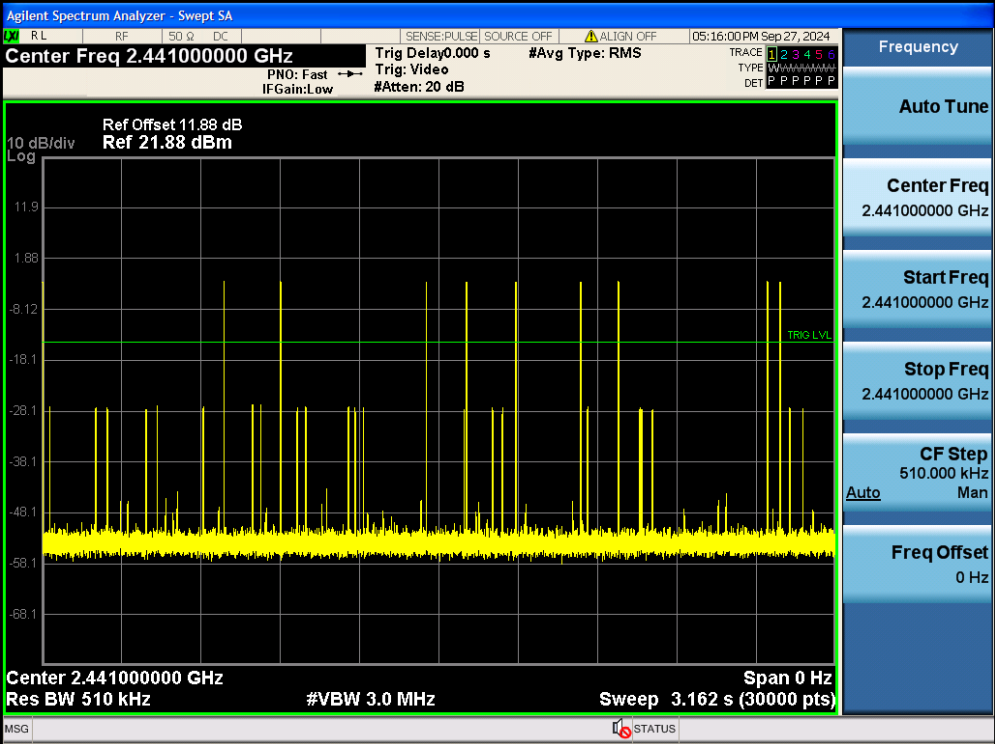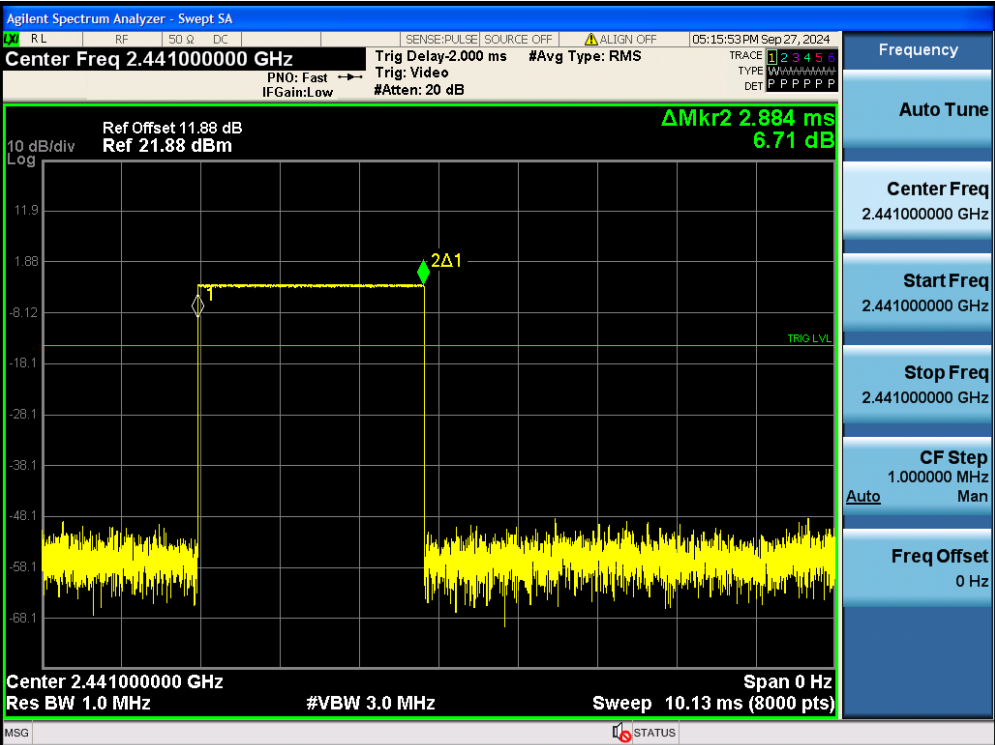

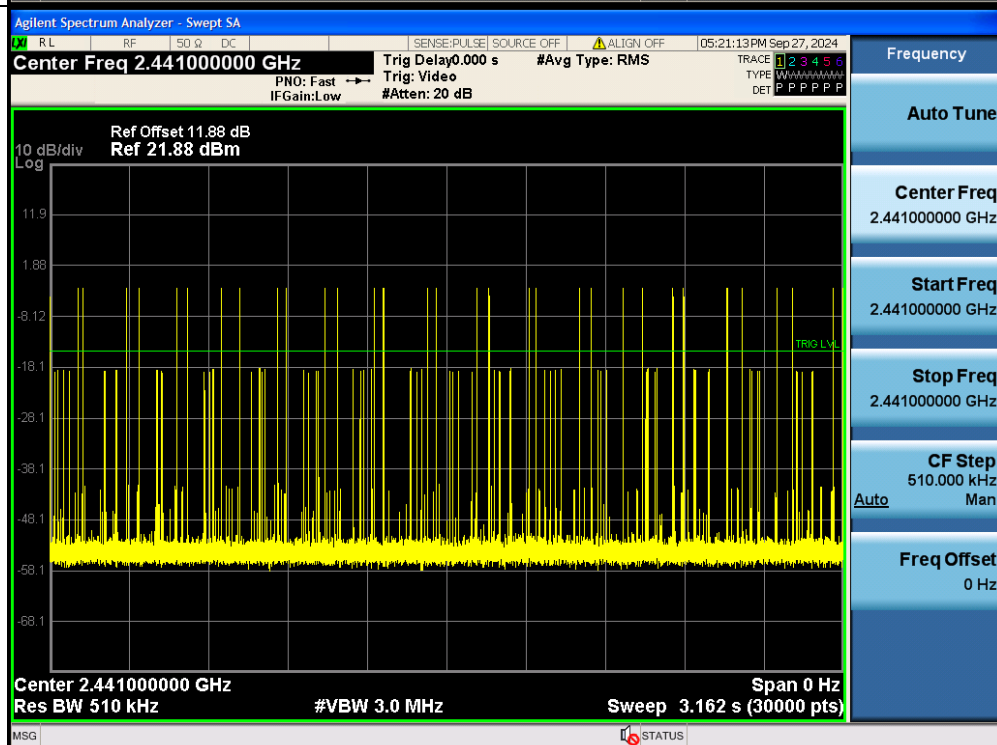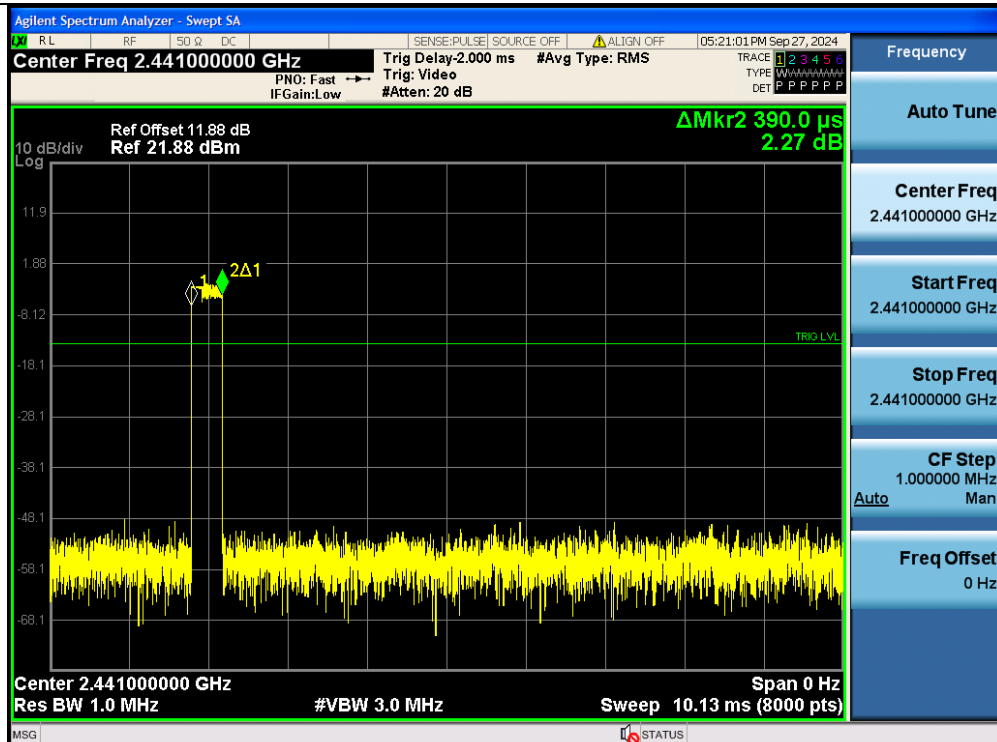

2DH1-Ant1-Hop-PASS

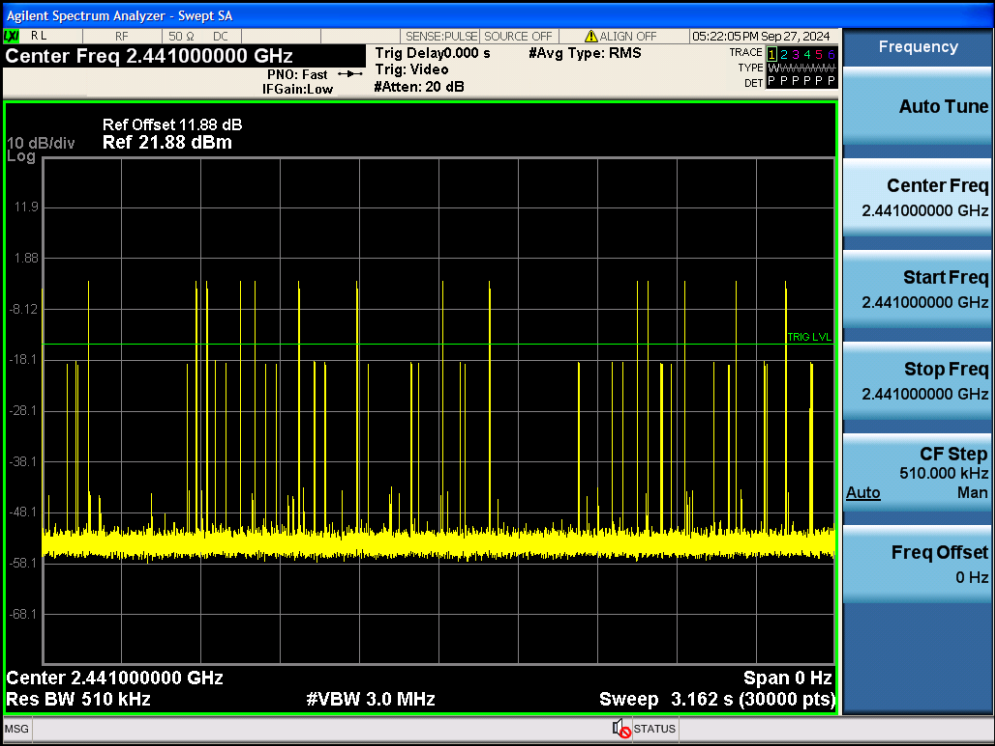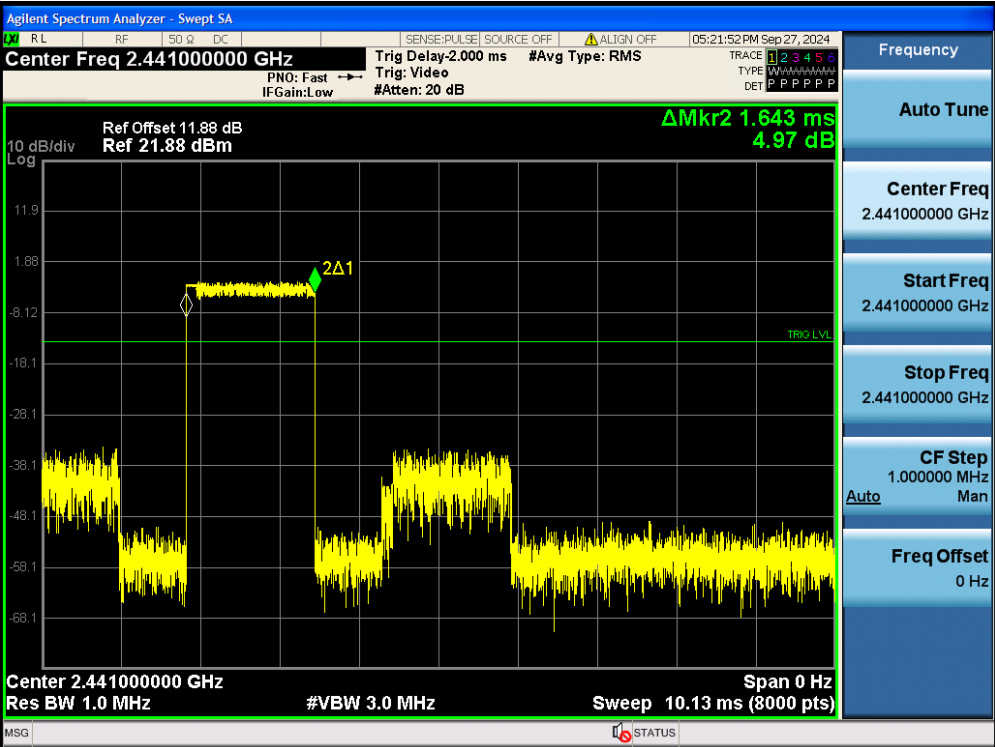


2DH3-Ant1-Hop-PASS

2DH5-Ant1-Hop-PASS


Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge


TestMode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-9.75	-57.83	≤-29.75	PASS
DH5	Ant1	High	2480	-3.72	-56.37	≤-23.72	PASS
DH5	Ant1	Low	Hop_2402	-1.70	-56.67	≤-21.7	PASS
DH5	Ant1	High	Hop_2480	-3.77	-53.04	≤-23.77	PASS
2DH5	Ant1	Low	2402	-2.23	-53.33	≤-22.23	PASS
2DH5	Ant1	High	2480	-3.66	-52.48	≤-23.66	PASS
2DH5	Ant1	Low	Hop_2402	-2.49	-56.92	≤-22.49	PASS
2DH5	Ant1	High	Hop_2480	-5.91	-47.75	≤-25.91	PASS

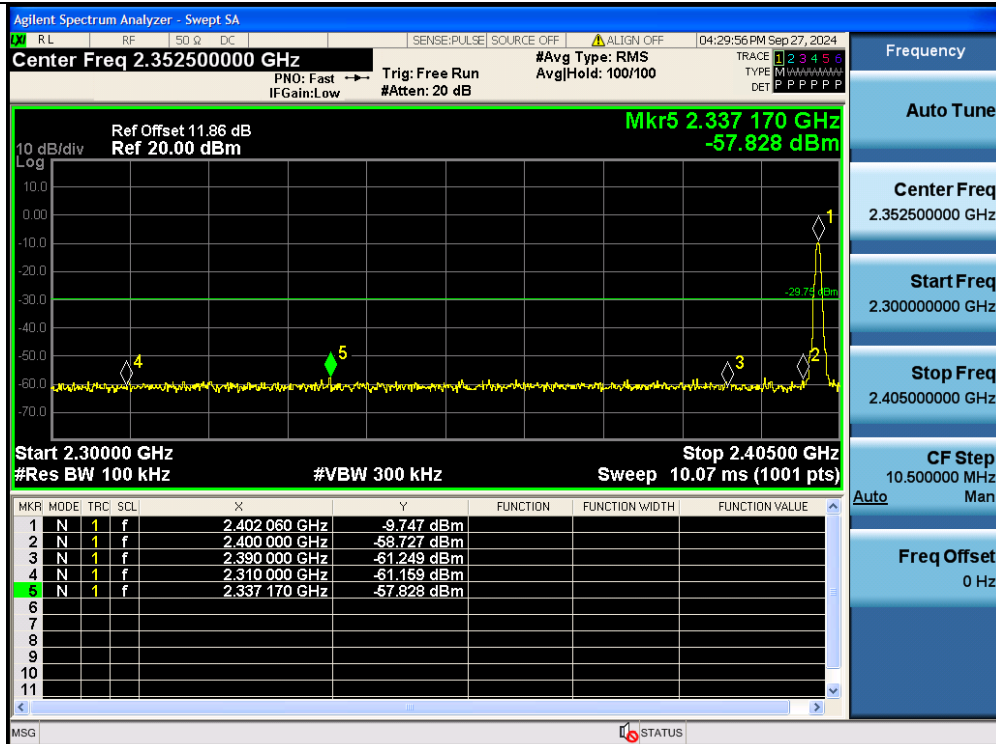


DH5-Ant1-2402-PASS

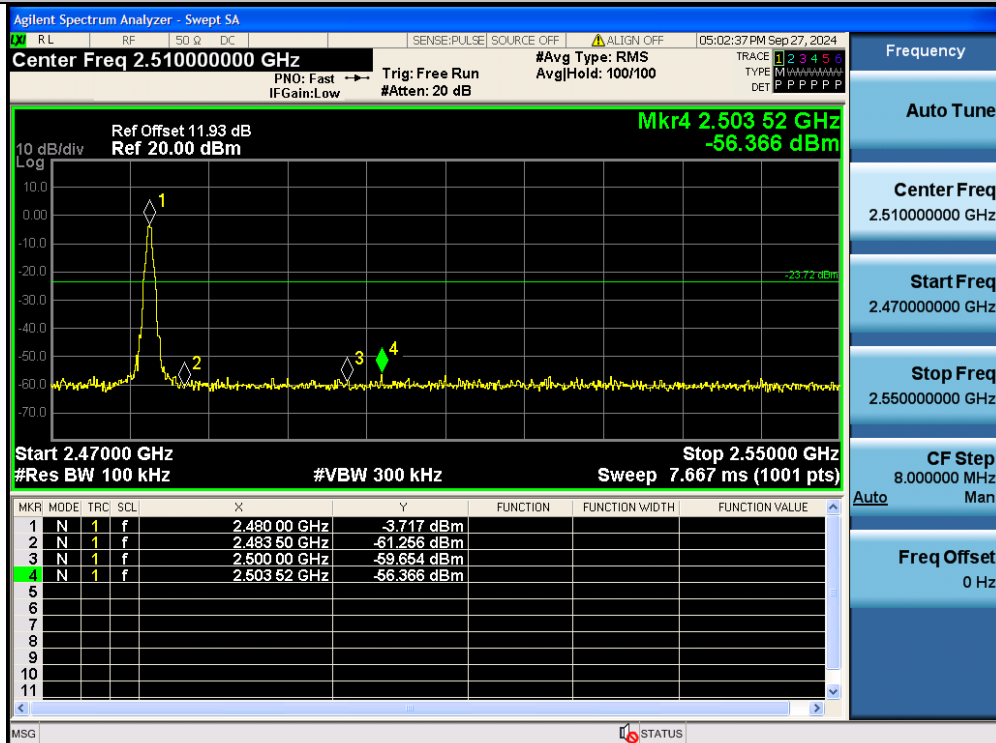


DH5-Ant1-2480-PASS

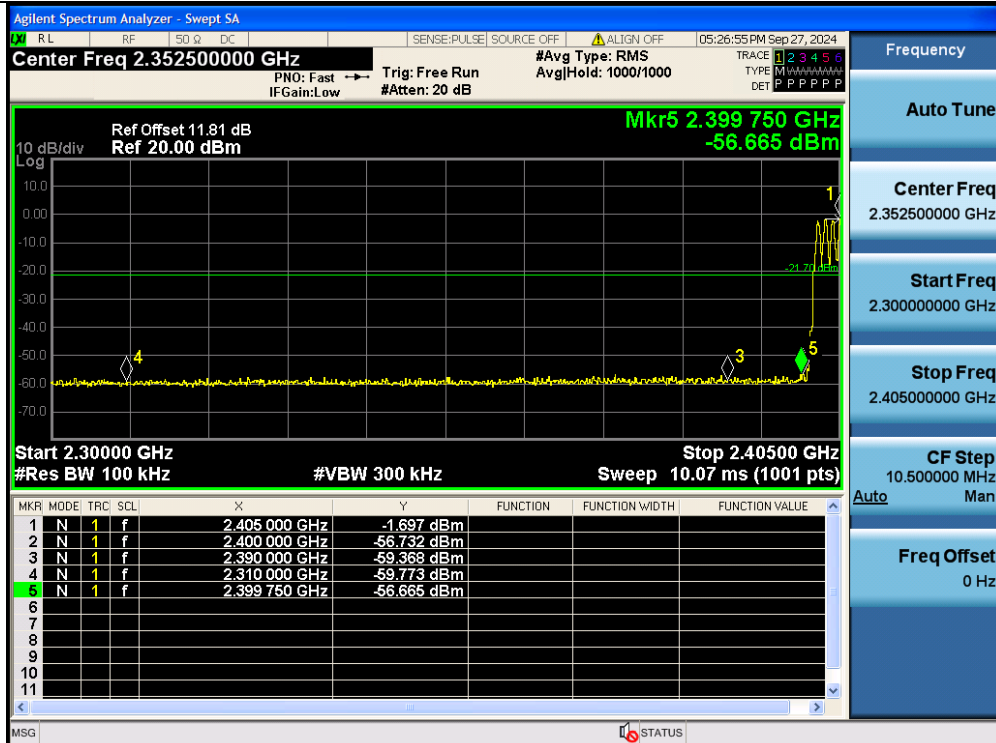


DH5-Ant1-Hop_2402-PASS

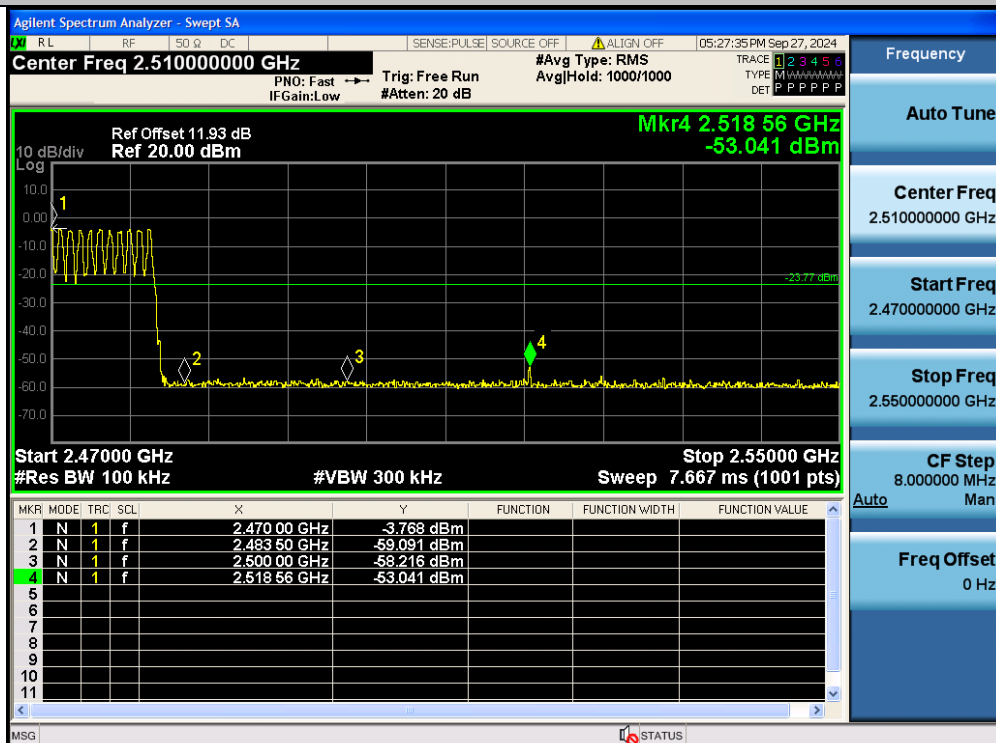


DH5-Ant1-Hop_2480-PASS

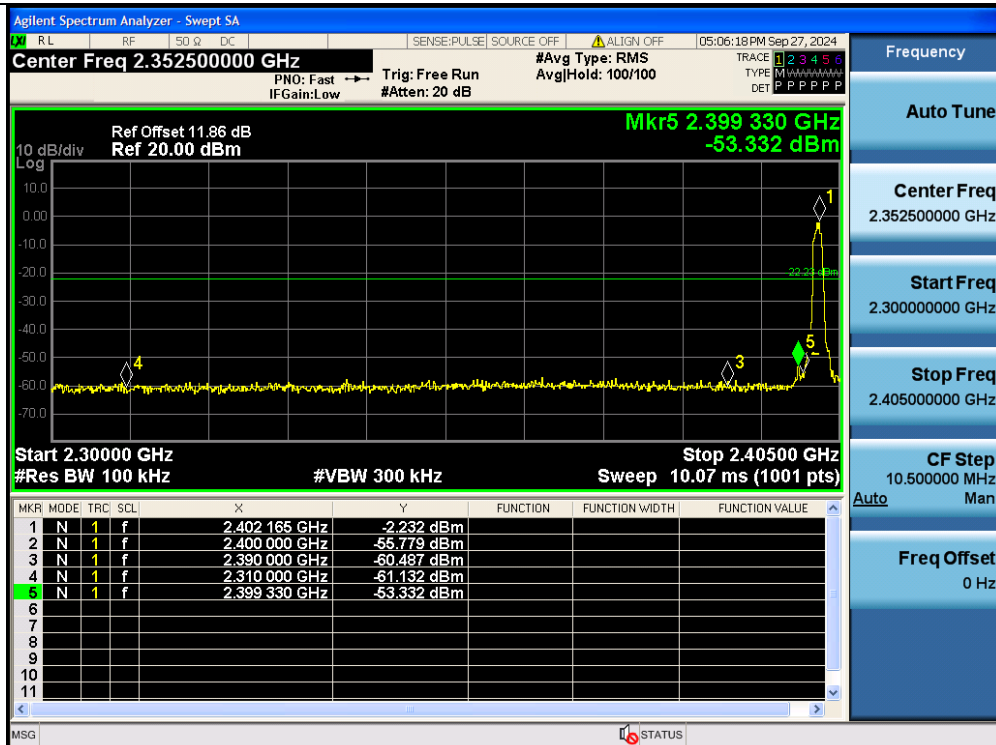


2DH5-Ant1-2402-PASS

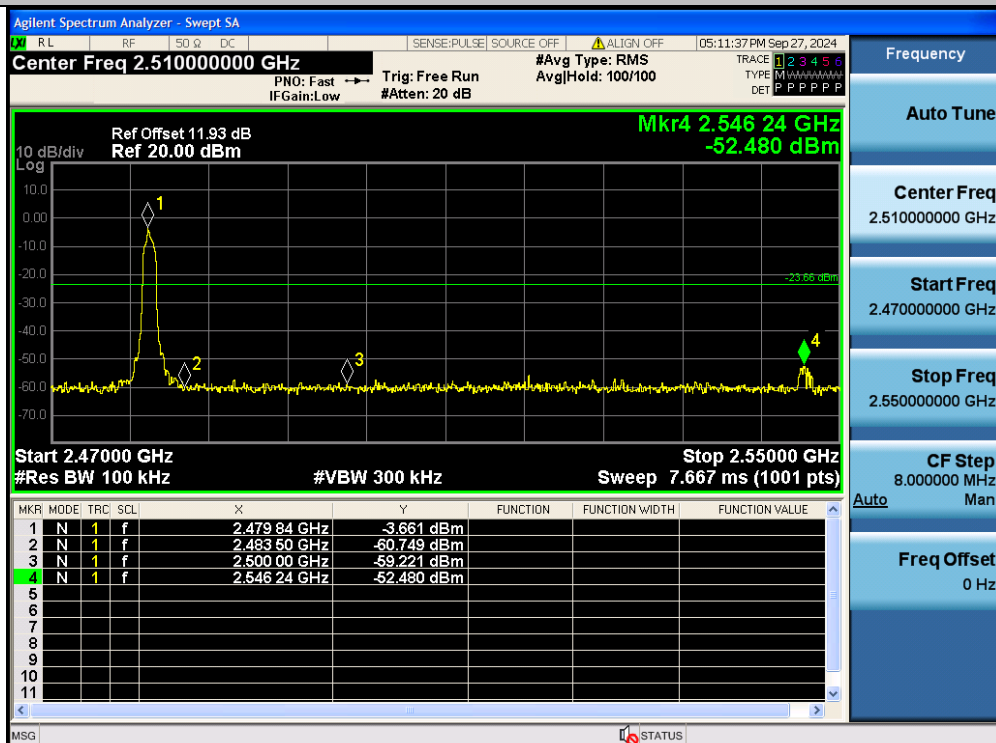

2DH5-Ant1-2480-PASS

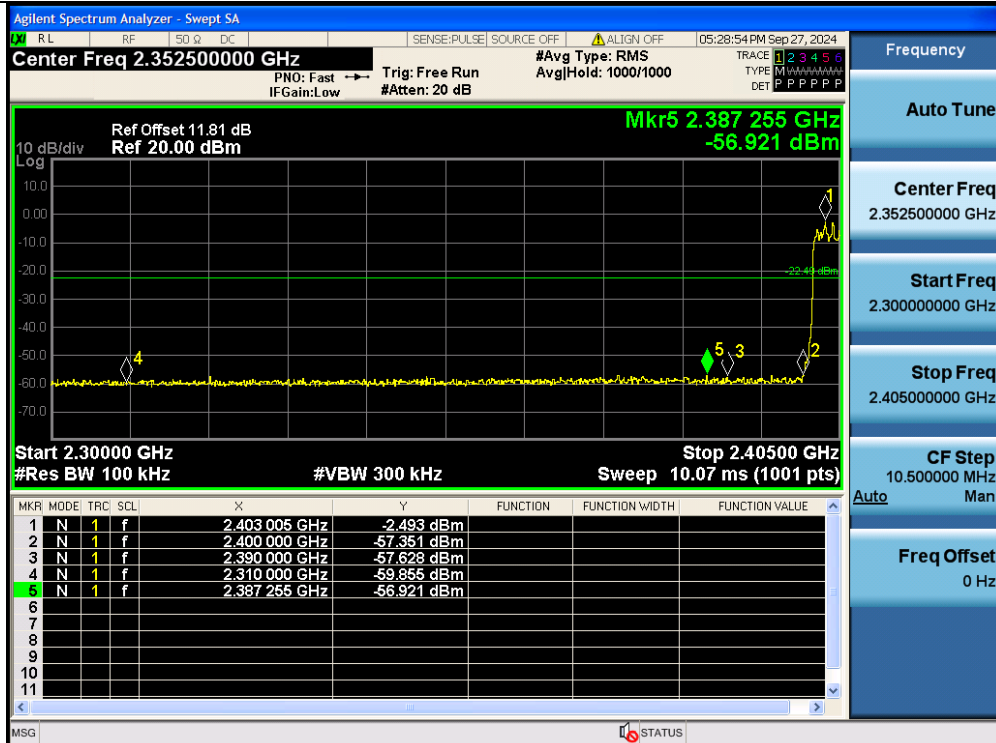


2DH5-Ant1-Hop_2402-PASS

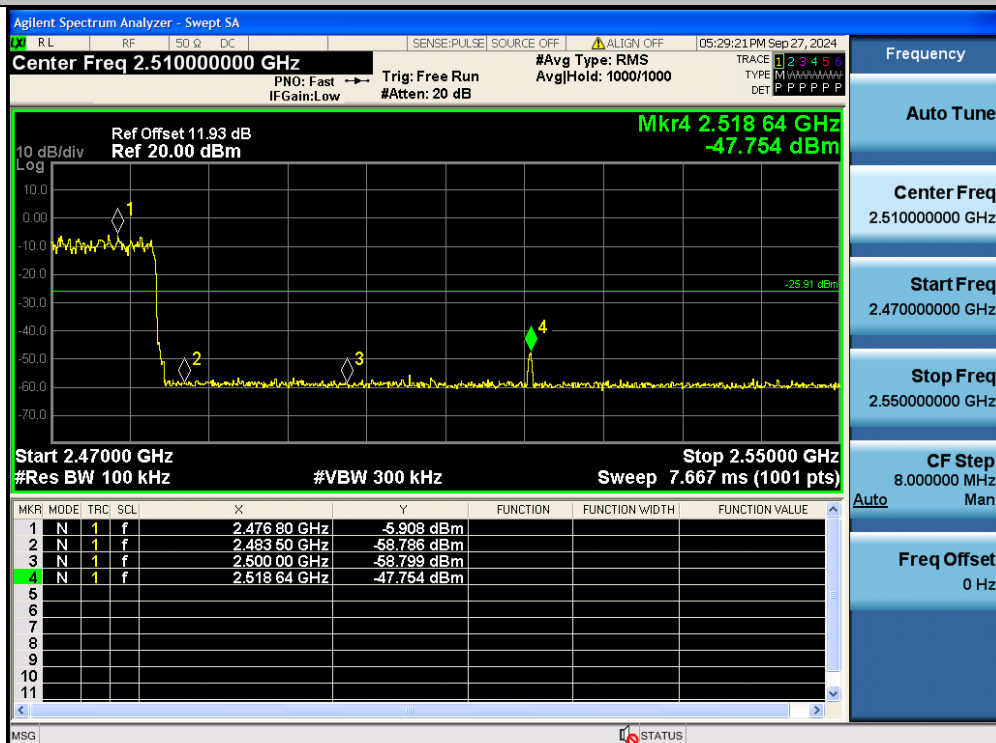


2DH5-Ant1-Hop_2480-PASS

Conducted Spurious Emission


TestMode	Antenna	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-10.42	-10.42	---	PASS
DH5	Ant1	2402	30~1000	-10.42	-59.17	≤-30.42	PASS
DH5	Ant1	2402	1000~26500	-10.42	-39.85	≤-30.42	PASS
DH5	Ant1	2441	0~Reference	-7.50	-7.50	---	PASS
DH5	Ant1	2441	30~1000	-7.50	-58.34	≤-27.5	PASS
DH5	Ant1	2441	1000~26500	-7.50	-37.21	≤-27.5	PASS
DH5	Ant1	2480	0~Reference	-4.36	-4.36	---	PASS
DH5	Ant1	2480	30~1000	-4.36	-58.22	≤-24.36	PASS
DH5	Ant1	2480	1000~26500	-4.36	-37.68	≤-24.36	PASS
2DH5	Ant1	2402	0~Reference	-2.43	-2.43	---	PASS
2DH5	Ant1	2402	30~1000	-2.43	-59.25	≤-22.43	PASS
2DH5	Ant1	2402	1000~26500	-2.43	-37.45	≤-22.43	PASS
2DH5	Ant1	2441	0~Reference	-2.91	-2.91	---	PASS
2DH5	Ant1	2441	30~1000	-2.91	-58.45	≤-22.91	PASS
2DH5	Ant1	2441	1000~26500	-2.91	-35.54	≤-22.91	PASS
2DH5	Ant1	2480	0~Reference	-4.14	-4.14	---	PASS
2DH5	Ant1	2480	30~1000	-4.14	-58.21	≤-24.14	PASS
2DH5	Ant1	2480	1000~26500	-4.14	-37.72	≤-24.14	PASS

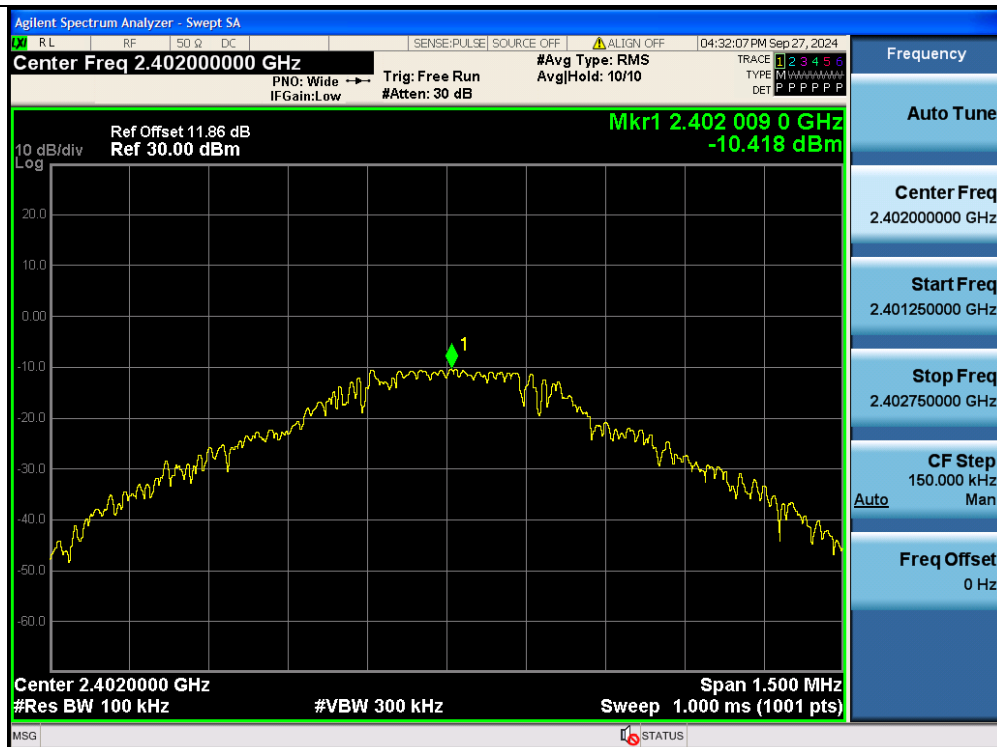

DH5-Ant1-2402-0~Reference-PASS

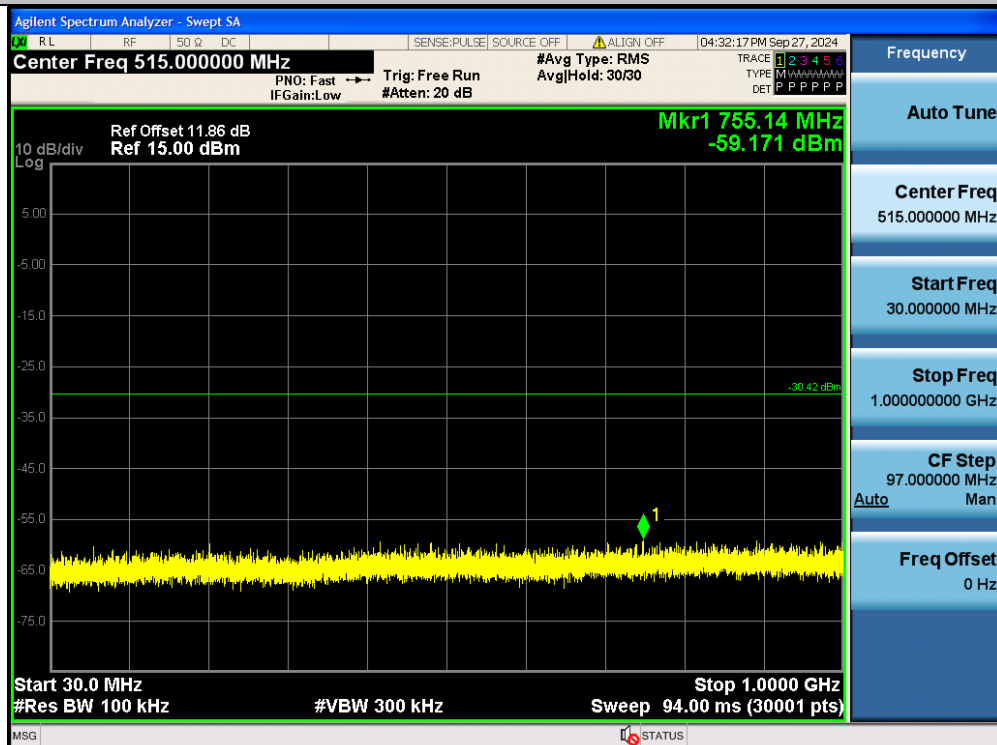


DH5-Ant1-2402-30~1000-PASS

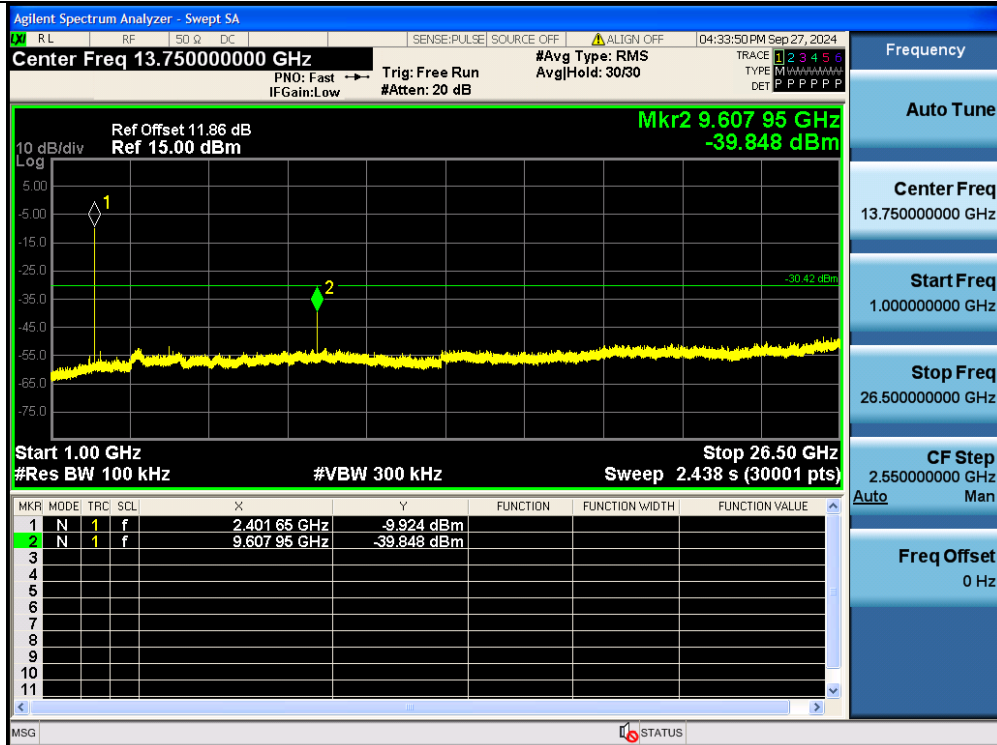


DH5-Ant1-2402-1000~26500-PASS



DH5-Ant1-2441-0~Reference-PASS

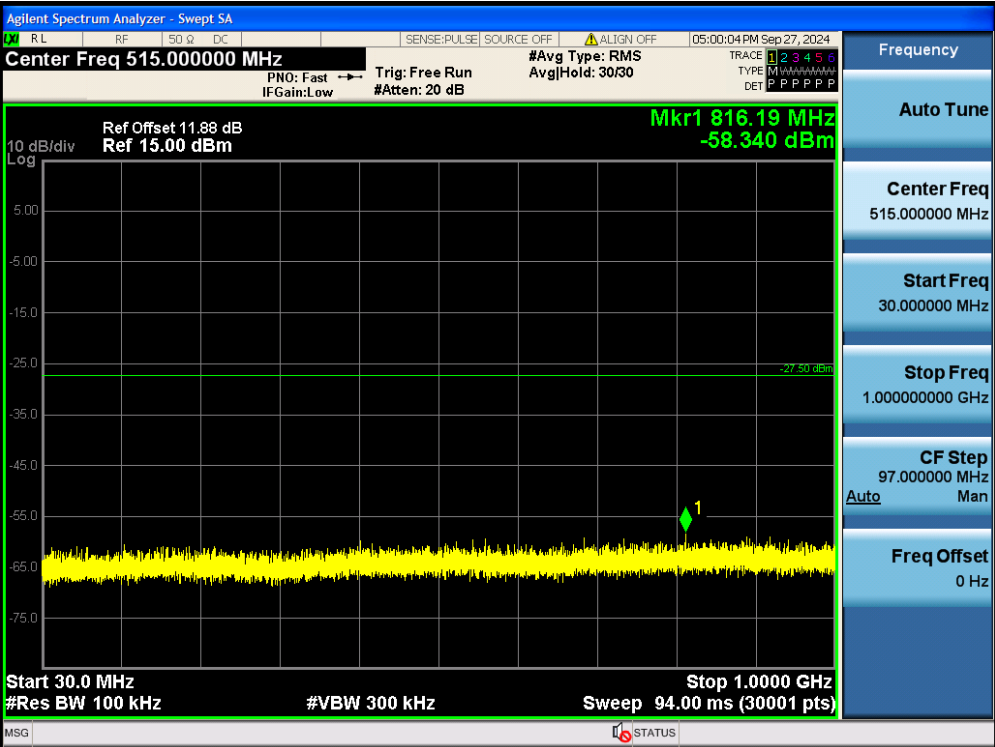


DH5-Ant1-2441-30~1000-PASS

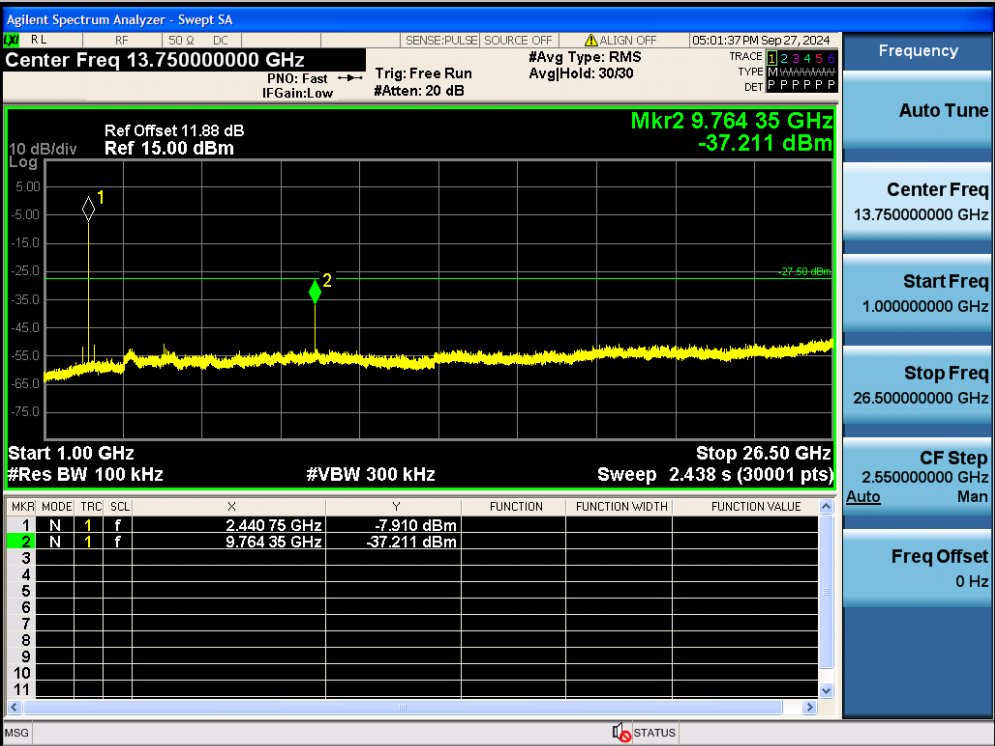


DH5-Ant1-2441-1000~26500-PASS



DH5-Ant1-2480-0~Reference-PASS

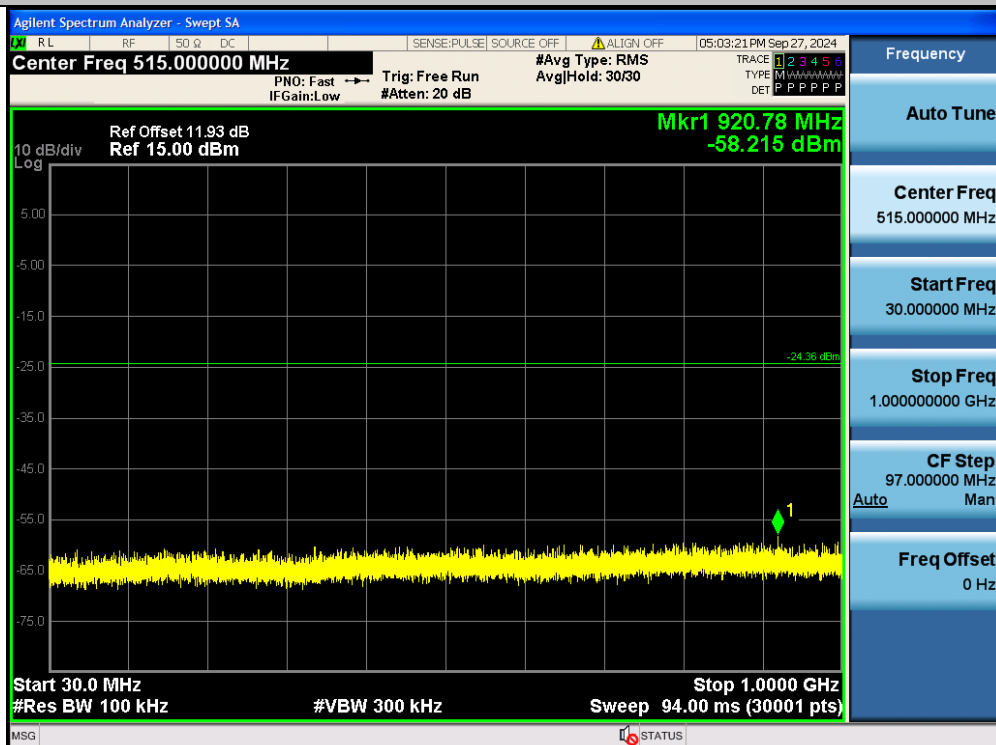


DH5-Ant1-2480-30~1000-PASS

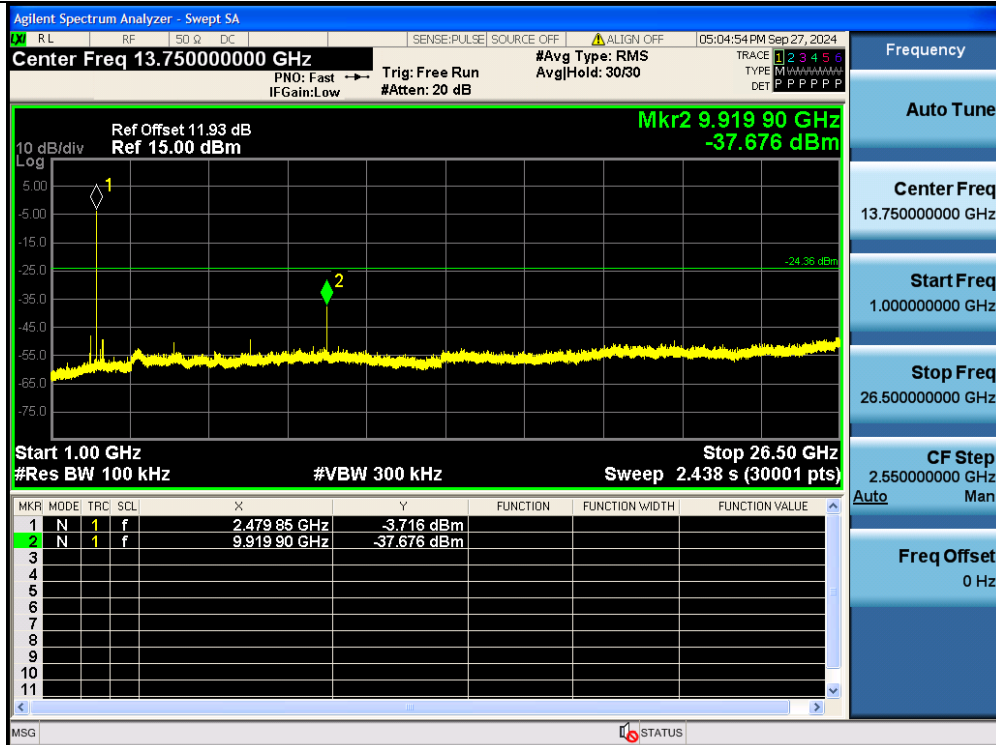


DH5-Ant1-2480-1000~26500-PASS



2DH5-Ant1-2402-0~Reference-PASS

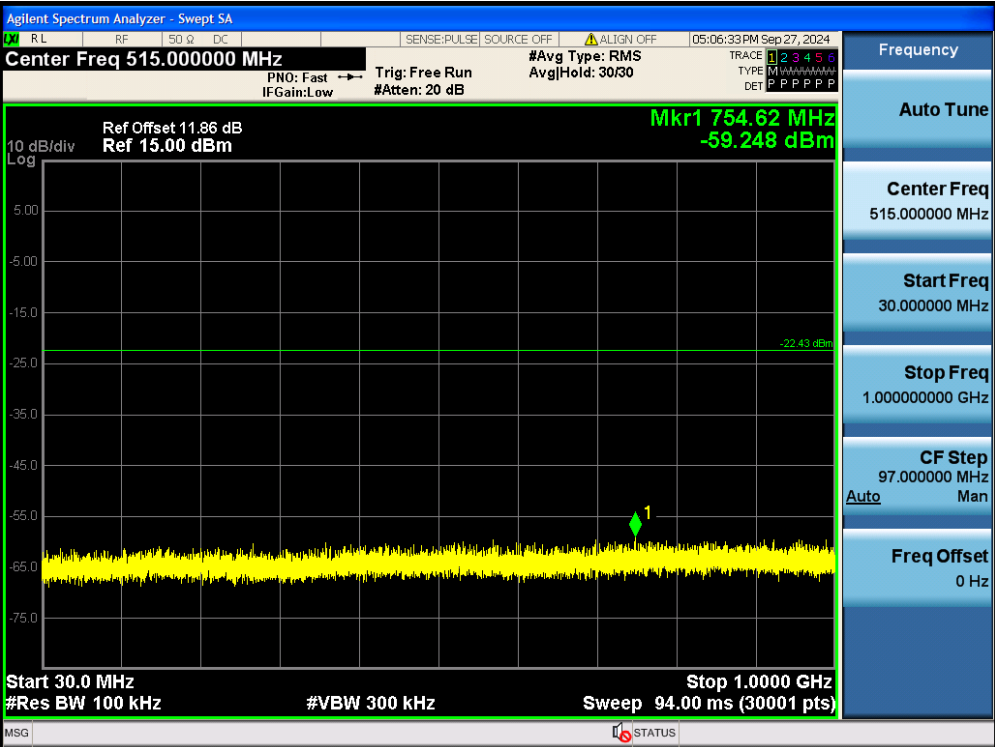


2DH5-Ant1-2402-30~1000-PASS

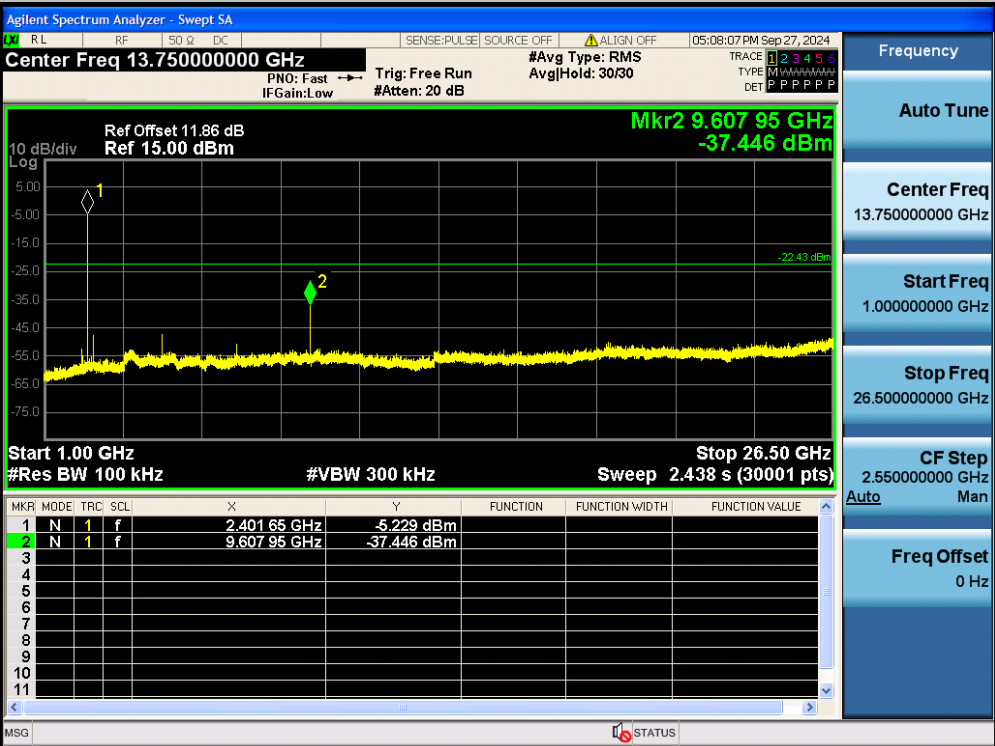


2DH5-Ant1-2402-1000~26500-PASS



2DH5-Ant1-2441-0~Reference-PASS

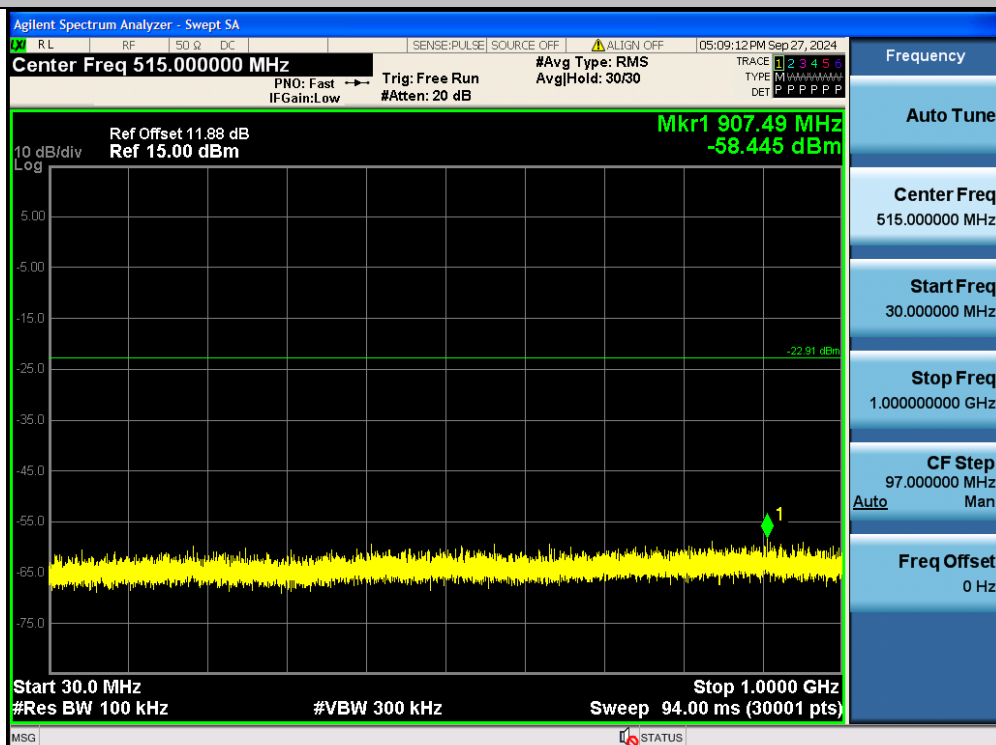


2DH5-Ant1-2441-30~1000-PASS

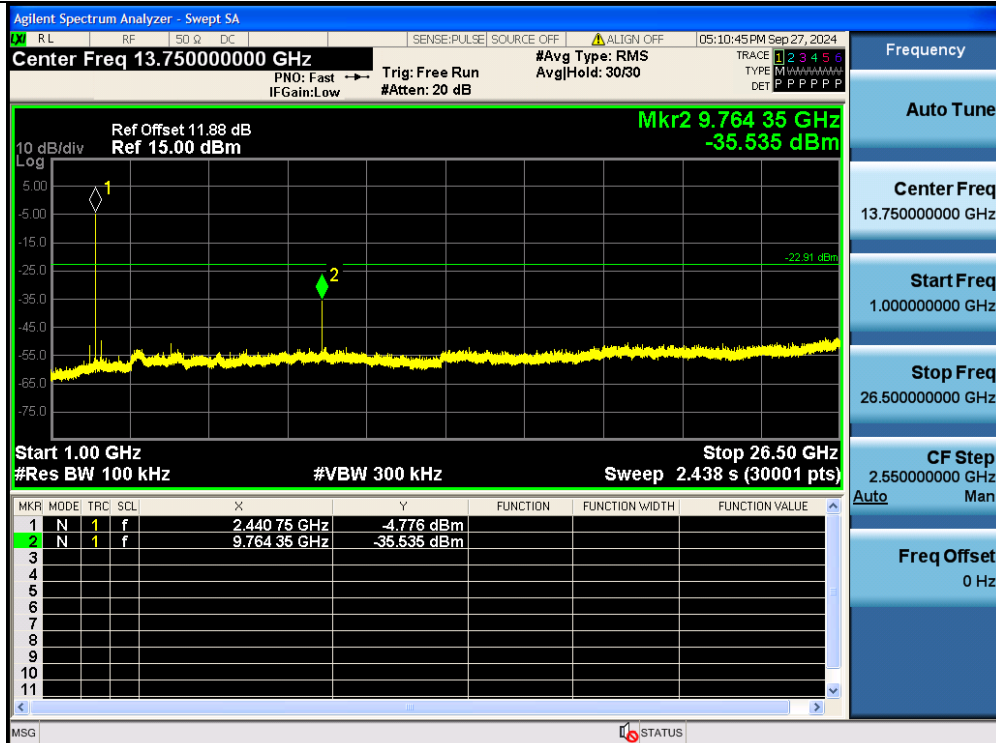


2DH5-Ant1-2441-1000~26500-PASS



2DH5-Ant1-2480-0~Reference-PASS

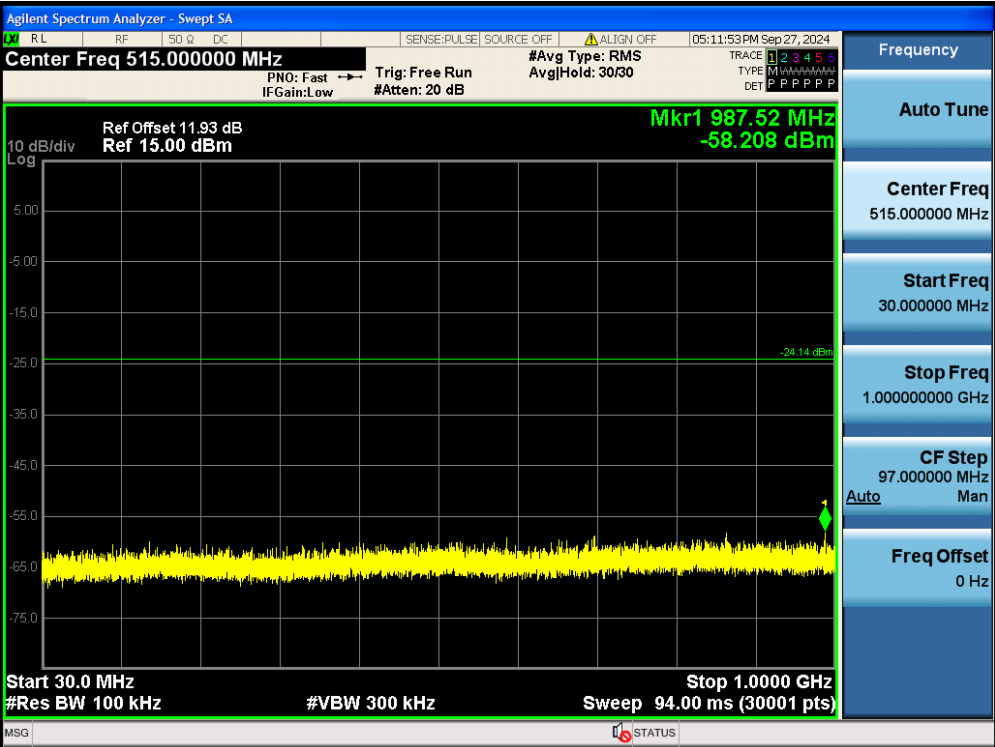

2DH5-Ant1-2480-30~1000-PASS

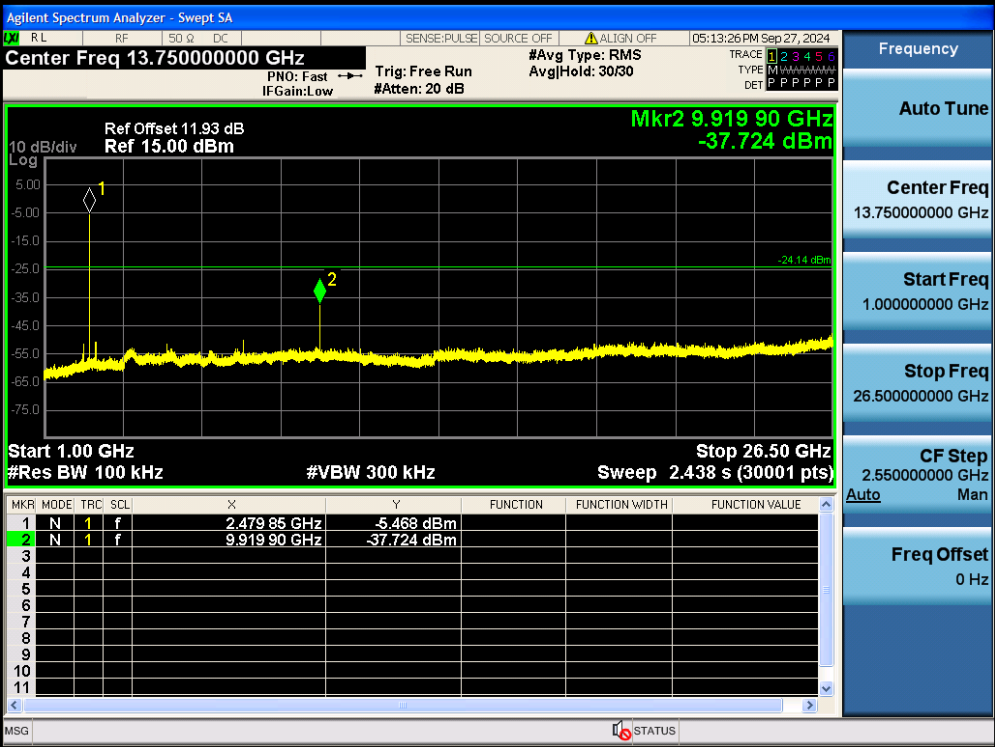

2DH5-Ant1-2480-1000~26500-PASS

Appendix A.7: Test Results of Radiated Spurious Emissions

Note:


- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

*Note: The Model PM22 is the factory code, and the actual model is WIRTWS3WHTPRM.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

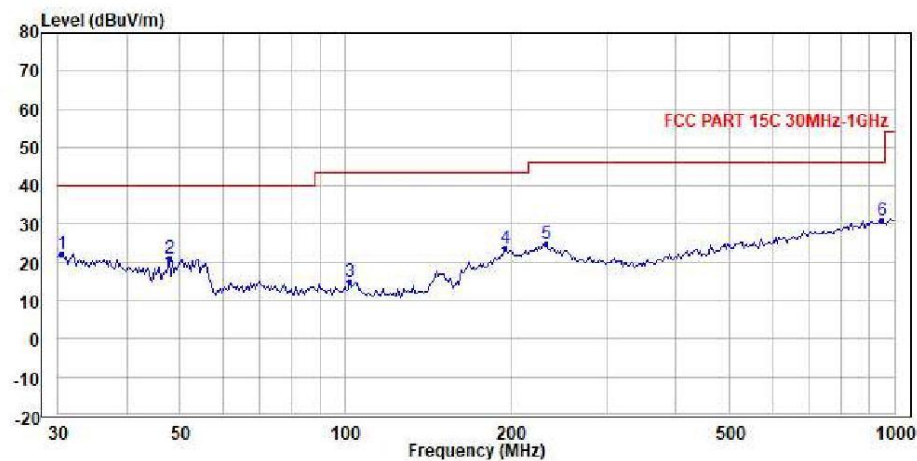


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_LINK
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	30.425	22.34	27.22	23.39	0.00	0.63	28.90	40.00	-17.66	Peak
2	47.703	20.90	34.00	14.99	0.00	0.81	28.90	40.00	-19.10	Peak
3	101.893	15.10	30.77	12.17	0.00	1.06	28.90	43.50	-28.40	Peak
4	195.870	23.71	34.89	16.41	0.00	1.41	29.00	43.50	-19.79	Peak
5	231.853	24.71	35.44	16.80	0.00	1.50	29.03	46.00	-21.29	Peak
6 PP	952.000	31.00	25.77	31.20	0.00	3.00	28.97	46.00	-15.00	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

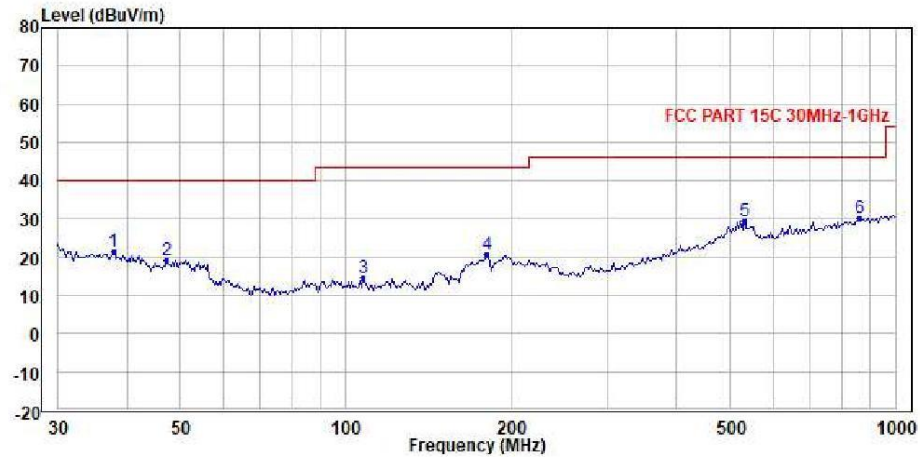

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_LINK
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	37.830	21.42	28.65	20.85	0.00	0.82	28.90	40.00	-18.58	Peak
2	47.369	19.28	32.28	15.09	0.00	0.81	28.90	40.00	-20.72	Peak
3	107.785	14.44	29.67	12.60	0.00	1.08	28.91	43.50	-29.06	Peak
4	181.300	20.63	32.45	15.80	0.00	1.36	28.98	43.50	-22.87	Peak
5	531.291	29.35	31.12	25.50	0.00	2.13	29.40	46.00	-16.65	Peak
6 PP	862.802	30.12	25.97	30.56	0.00	2.70	29.11	46.00	-15.88	Peak

1GHz - 18GHz

*Note: The Model PM22 is the factory code, and the actual model is WIRTWS3WHTPRM.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

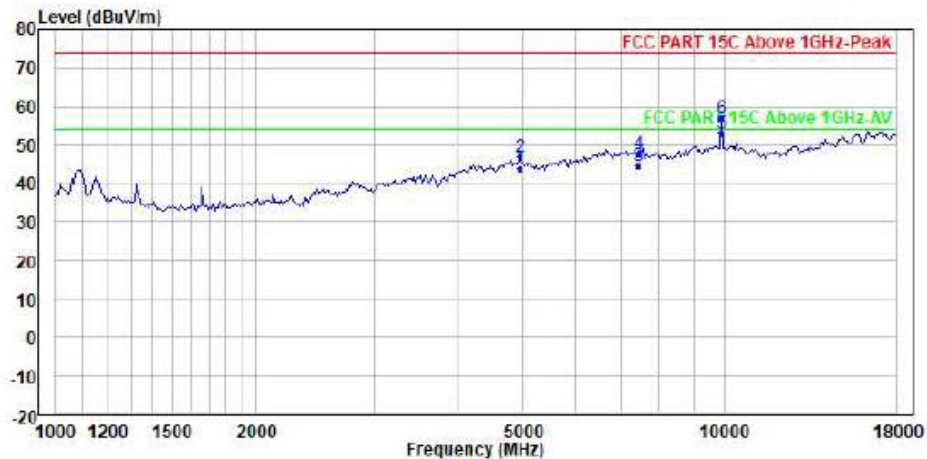


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DHS_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	43.75	45.77	34.49	0.00	9.38	45.89	54.00	-10.25	Average
2	4960.000	46.75	48.77	34.49	0.00	9.38	45.89	74.00	-27.25	Peak
3	7440.000	44.63	43.31	36.50	0.00	10.41	45.59	54.00	-9.37	Average
4	7440.000	47.63	46.31	36.50	0.00	10.41	45.59	74.00	-26.37	Peak
5 PP	9912.156	52.85	49.57	37.71	0.00	11.96	46.39	54.00	-1.15	Average
6 PK	9912.156	56.73	53.45	37.71	0.00	11.96	46.39	74.00	-17.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

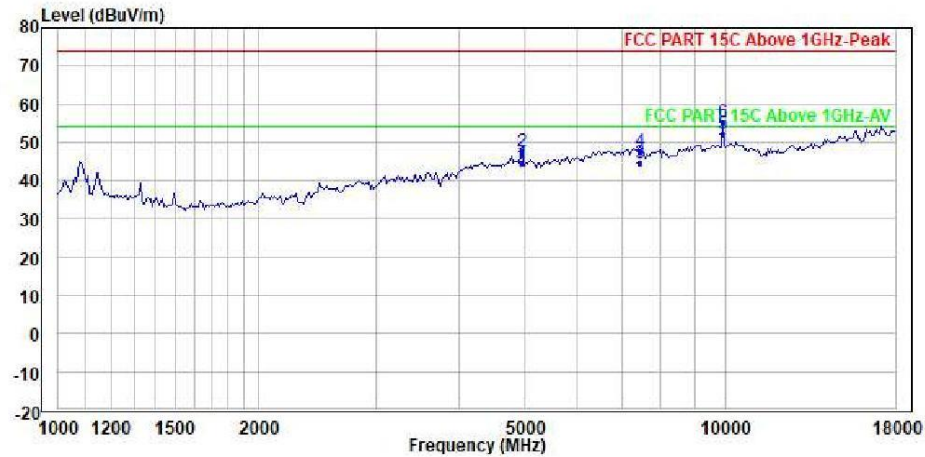


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	44.58	46.60	34.49	0.00	9.38	45.89	54.00	-9.42	Average
2	4960.000	47.58	49.60	34.49	0.00	9.38	45.89	74.00	-26.42	Peak
3	7440.000	44.62	43.30	36.50	0.00	10.41	45.59	54.00	-9.38	Average
4	7440.000	47.62	46.30	36.50	0.00	10.41	45.59	74.00	-26.38	Peak
5 PP	9912.156	52.31	49.03	37.71	0.00	11.96	46.39	54.00	-1.69	Average
6 PK	9912.156	55.31	52.03	37.71	0.00	11.96	46.39	74.00	-18.69	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

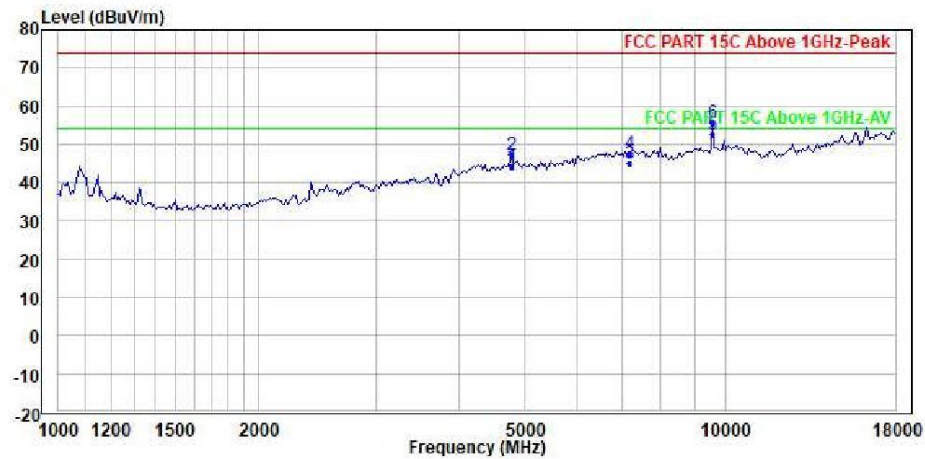


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4777.554	44.36	46.45	34.46	0.00	9.31	45.86	54.00	-9.64	Average
2	4777.554	47.36	49.45	34.46	0.00	9.31	45.86	74.00	-26.64	Peak
3	7206.000	44.86	43.56	36.50	0.00	10.34	45.54	54.00	-9.14	Average
4	7206.000	47.86	46.56	36.50	0.00	10.34	45.54	74.00	-26.14	Peak
5 PP	9573.587	52.69	49.60	37.37	0.00	11.71	45.99	54.00	-1.31	Average
6 PK	9573.587	55.69	52.60	37.37	0.00	11.71	45.99	74.00	-18.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

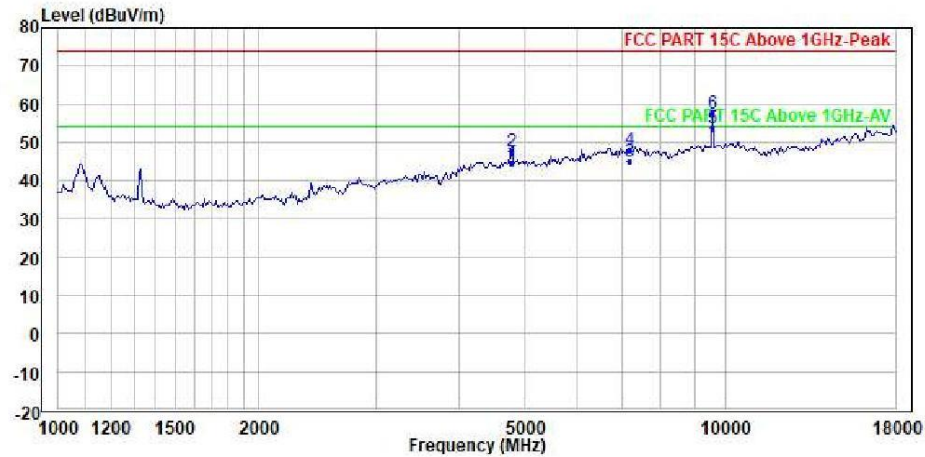


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4777.554	44.60	46.69	34.46	0.00	9.31	45.86	54.00	-9.40	Average
2	4777.554	47.60	49.69	34.46	0.00	9.31	45.86	74.00	-26.40	Peak
3	7206.000	44.90	43.60	36.50	0.00	10.34	45.54	54.00	-9.10	Average
4	7206.000	47.90	46.60	36.50	0.00	10.34	45.54	74.00	-26.10	Peak
5 PP	9573.587	53.69	50.60	37.37	0.00	11.71	45.99	54.00	-0.31	Average
6 PK	9573.587	57.74	54.65	37.37	0.00	11.71	45.99	74.00	-16.26	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

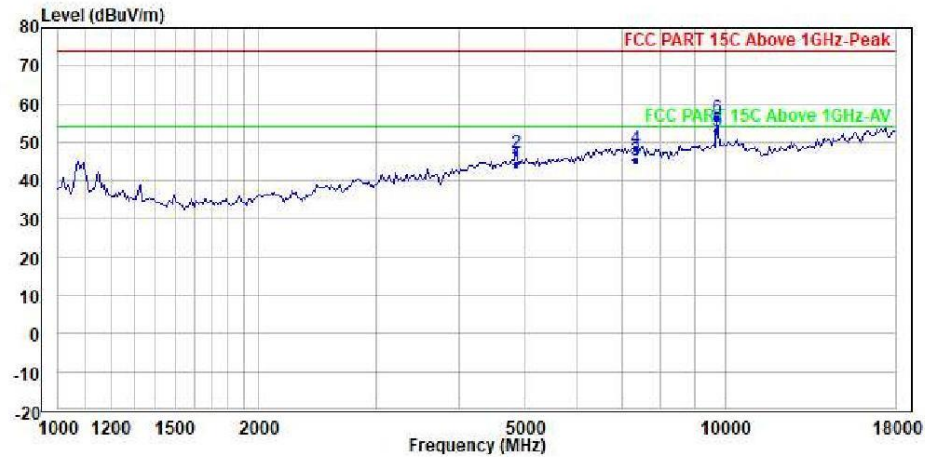


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2441
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4861.298	44.34	46.39	34.47	0.00	9.35	45.87	54.00	-9.66	Average
2	4861.298	47.34	49.39	34.47	0.00	9.35	45.87	74.00	-26.66	Peak
3	7323.000	45.52	44.21	36.50	0.00	10.37	45.56	54.00	-8.48	Average
4	7323.000	48.52	47.21	36.50	0.00	10.37	45.56	74.00	-25.48	Peak
5	PP 9741.401	52.83	49.65	37.54	0.00	11.83	46.19	54.00	-1.17	Average
6	PK 9741.401	56.33	53.15	37.54	0.00	11.83	46.19	74.00	-17.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

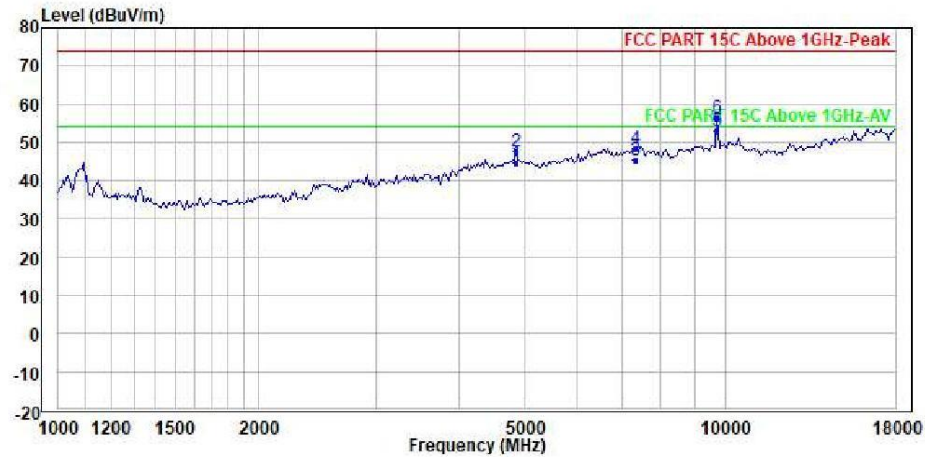

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2441
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4861.298	44.76	46.81	34.47	0.00	9.35	45.87	54.00	-9.24	Average
2	4861.298	47.76	49.81	34.47	0.00	9.35	45.87	74.00	-26.24	Peak
3	7323.000	45.58	44.27	36.50	0.00	10.37	45.56	54.00	-8.42	Average
4	7323.000	48.58	47.27	36.50	0.00	10.37	45.56	74.00	-25.42	Peak
5	PP 9741.401	53.02	49.84	37.54	0.00	11.83	46.19	54.00	-0.98	Average
6	PK 9741.401	56.49	53.31	37.54	0.00	11.83	46.19	74.00	-17.51	Peak

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

*Note: The Model PM22 is the factory code, and the actual model is WIRTWS3WHTPRM.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

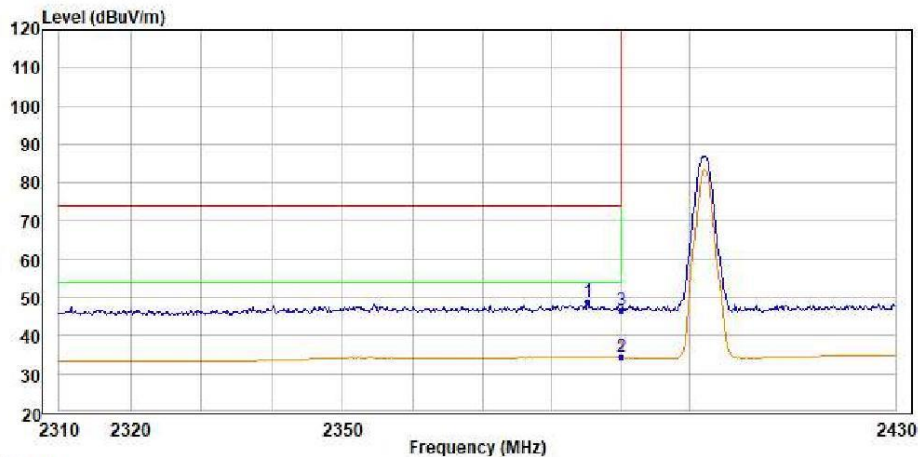


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DHS_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2385.150	48.71	47.22	31.54	10.00	7.35	47.40	74.00	-25.29	Peak
2	PP 2390.000	34.56	33.06	31.55	10.00	7.35	47.40	54.00	-19.44	Average
3	2390.000	46.63	45.13	31.55	10.00	7.35	47.40	74.00	-27.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

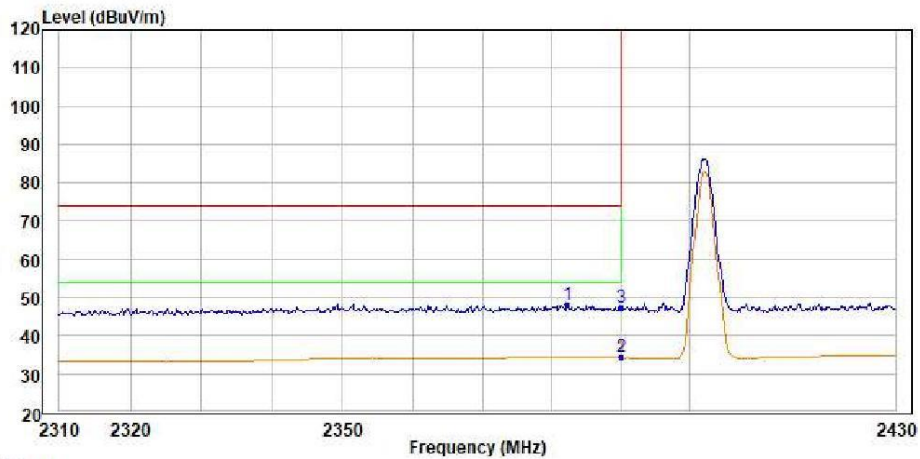


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2382.265	48.22	46.74	31.54	10.00	7.34	47.40	74.00	-25.78	Peak
2	PP 2390.000	34.56	33.06	31.55	10.00	7.35	47.40	54.00	-19.44	Average
3	2390.000	47.28	45.78	31.55	10.00	7.35	47.40	74.00	-26.72	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

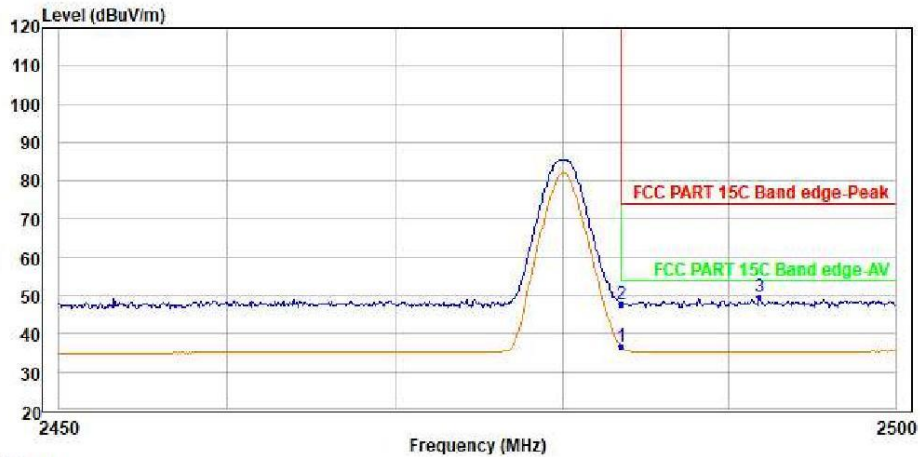


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	36.81	35.06	31.68	10.00	7.47	47.40	54.00	-17.19	Average
2	2483.500	47.76	46.01	31.68	10.00	7.47	47.40	74.00	-26.24	Peak
3 PK	2491.834	49.48	47.71	31.69	10.00	7.48	47.40	74.00	-24.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

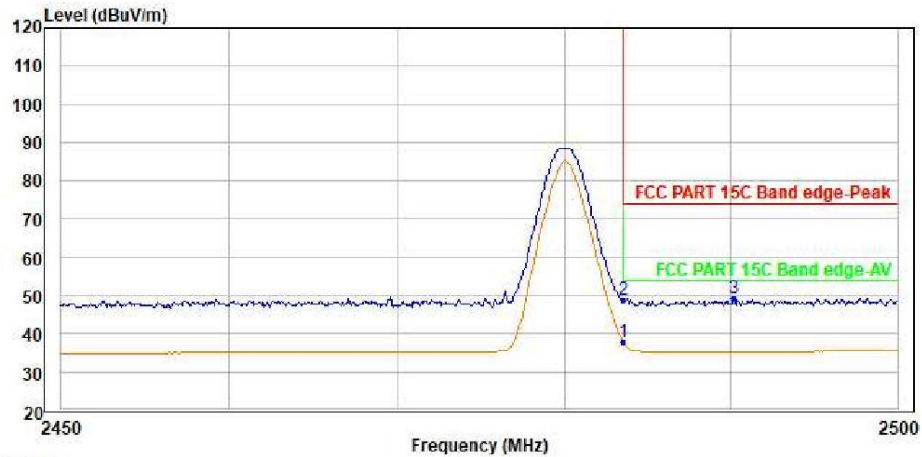

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/62.3(%)
Press : 99.7kpa
Product : TWS earbuds
Model No. : PM22
Power Rating : Battery
Test Engineer : Jackson
Test Mode : DH5_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	38.01	36.26	31.68	10.00	7.47	47.40	54.00	-15.99	Average
2	2483.500	49.02	47.27	31.68	10.00	7.47	47.40	74.00	-24.98	Peak
3 PK	2490.130	49.35	47.58	31.69	10.00	7.48	47.40	74.00	-24.65	Peak