

CERTIFICATION TEST REPORT

Report Number. : 4790976523-E13V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-S921U, SM-S921U1

FCC ID : A3LSMS921U

EUT Description : GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
NFC and WPT

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2023-10-25

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2023-10-25	Initial issue	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. DECISION RULE	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM E-FIELD STRENGTH.....	7
5.3. PRELIMINARY TEST CONFIGURATIONS.....	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. MODIFICATIONS.....	9
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	12
7. APPLICABLE LIMITS AND TEST RESULTS	13
7.1. RADIATED EMISSIONS	13
7.1. AC MAINS LINE CONDUCTED EMISSIONS.....	15

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT

MODEL NUMBER: SM-S921U, SM-S921U1

SERIAL NUMBER: R3CW90BXLCD (RADIATED)

DATE TESTED: 2023-10-10 ~ 2023-10-25

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT. This test report addresses the wireless low power transmitter(DCD) operational mode.

Representative model	Difference	Derivative model
		SM-S921U1
SM-S921U	Hardware	Same
	Software	The UI has changed according to Service Provider

The model SM-S921U was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM E-FIELD STRENGTH

Fundamental Frequency (kHz)	Test Case	E-Field (30m distance) FCC (dBuV/m)
110 - 148	4	1.48

5.3. PRELIMINARY TEST CONFIGURATIONS

	Power sharing mode
Worst case of antenna axis	X

5.4. WORST-CASE CONFIGURATION AND MODE

Mode 1	Test Case	Description
Power sharing mode	1	Charging from EUT to Phone
	2	Charging from EUT(Charging from TA) to Phone
	3	Charging from EUT to Phone (Cross position)
	4	Charging from EUT(Charging from TA) to Phone (Cross position)
	5	Charging from EUT to Wearable device
	6	Charging from EUT(Charging from TA) to Wearable device

For radiated test, test case 1/3/5, the EUT can operate the power sharing mode when battery level is over 30%. Because test results are not different between fully charged status and battery level 30% status(EUT condition), test were performed fully charged condition.

Also according to current client device's(Phone and Wearable device) battery level, test results are different. Because the test results were worst when the battery level was 1%~20%, tests were performed when the battery level was 1%~20%.(Client device)

During radiated test for test case 1/3/5, the EUT didn't connected AC adapter, but for AC line conducted test for all test case was performed with connected with AC adapter.

For power sharing mode, test results of case 4 is worst case so this test report described test case 4.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37MC7MHS27DK3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02111A	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is installed in a typical configuration. Charging from EUT.


TEST SETUP DIAGRAM

NOTE : Test case 1/3/5, EUT did not connected with Travel adapter(AC Main) in below set-up diagram for radiated test.


- Test Case1 and 2 : Charging Phone

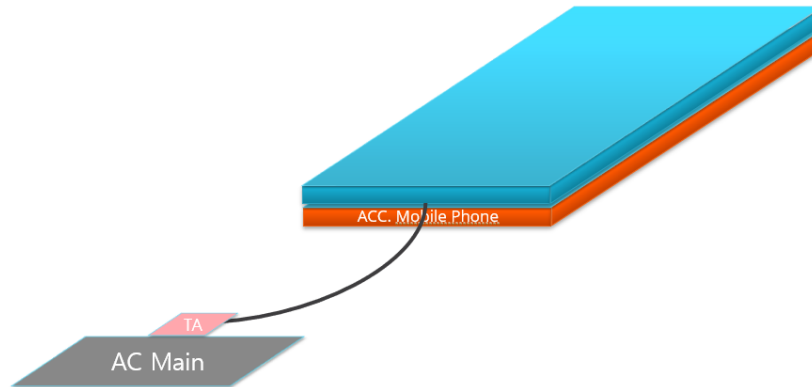

- Test Case 3 and 4 : Charging Phone(Cross position)

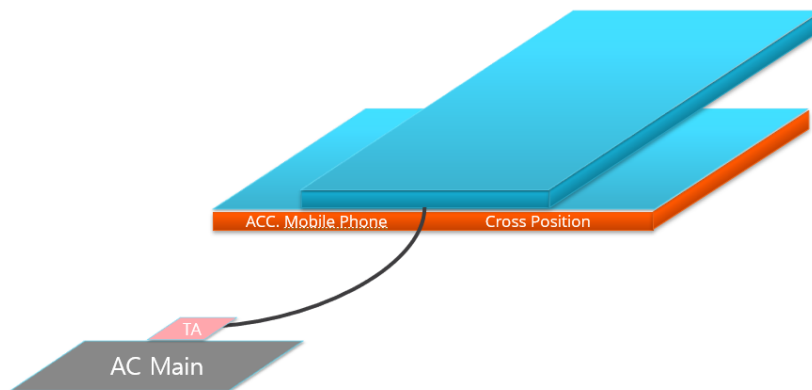

- Test Case 5 and 6 : Charging Wearable device

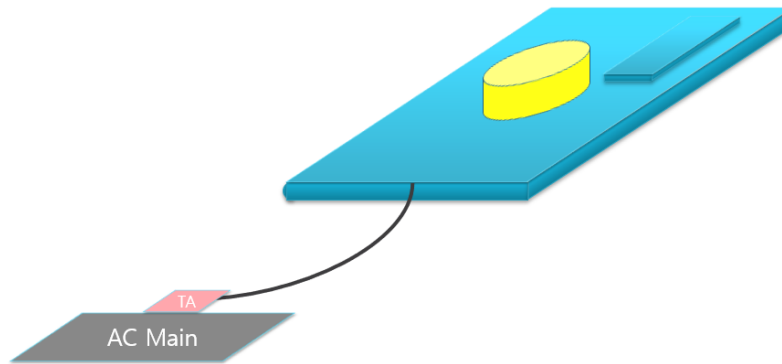

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 1000 MHz	Sonoma	310N	351741	2024-07-24
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2024-07-23
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030A	MY54170614	2024-07-24
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2024-07-23
DC Power Supply	Agilent / HP	E3640A	MY54226395	2024-07-24
Temperature Chamber	ESPEC	SH-642	93001109	2024-07-24
LISN	R&S	ENV-216	101836	2024-07-23
LISN	R&S	ENV-216	101837	2024-07-23
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2013

The highest clock frequency generated or used in the EUT is 600 kHz therefore the frequency range was investigated from 9 kHz to 30 MHz.

LIMIT

FCC §15.209 (a)

ICES-001 Section 6.2, IC RSS-216 6.2.2, and IC RSS-GEN Sections 8.9 and 8.10.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		


RESULTS

The EUT belongs to Test Case 4.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 300 m open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

FUNDAMENTAL AND RADIATED EMISSIONS 9 KHz to 30 MHz(Power sharing mode Test Case 4)

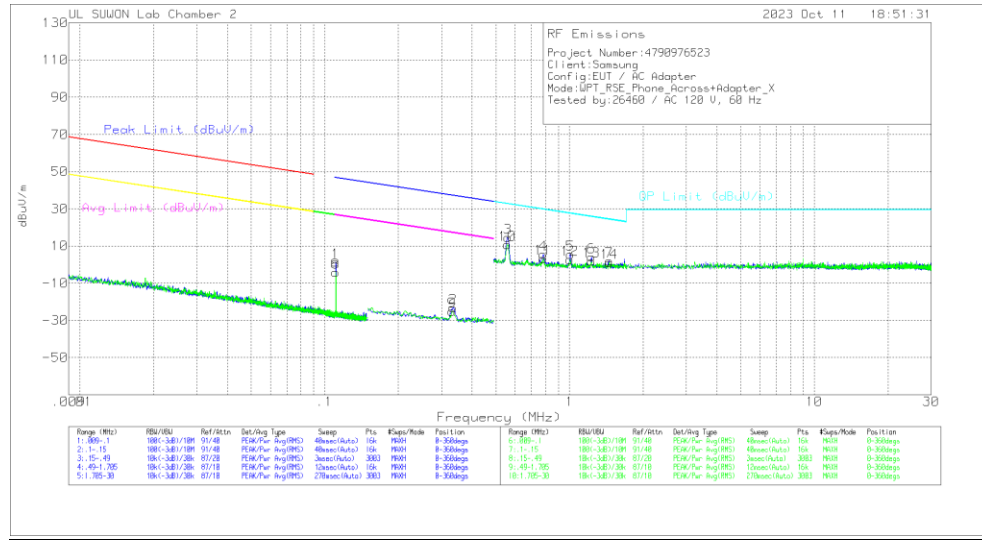

TEST DATA

Trace Markers

[Face On]

Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor [dB(1/m)]	Cable Loss [dB]	Dist Corr 300m [dB]	Correcte d Reading dBuV/m	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
**1	.11105	61.38	Pk	20	.1	-80	1.48	46.72	-45.24	26.72	-25.24	0-360
2	.33481	36.93	Pk	19.9	.1	-80	-23.07	37.11	-60.18	17.11	-40.18	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor [dB(1/m)]	Cable Loss [dB]	Dist Corr 30m [dB]	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	.55958	34.46	Pk	20	.1	-40	14.56	32.65	-18.09	0-360
4	.78218	25.19	Pk	20	.2	-40	5.39	29.75	-24.36	0-360
5	1.00558	25.28	Pk	20	.2	-40	5.48	27.57	-22.09	0-360
6	1.23001	23.9	Pk	20	.2	-40	4.1	25.83	-21.73	0-360
7	1.45265	21.72	Pk	20	.2	-40	1.92	24.39	-22.47	0-360

[Face Off]

Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor [dB(1/m)]	Cable Loss [dB]	Dist Corr 300m [dB]	Correcte d Reading dBuV/m	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
**8	.11103	55.82	Pk	20	.1	-80	-4.08	46.72	-50.8	26.72	-30.8	0-360
9	.33131	34.86	Pk	19.9	.1	-80	-25.14	37.21	-62.35	17.21	-42.35	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor [dB(1/m)]	Cable Loss [dB]	Dist Corr 30m [dB]	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
10	.5576	30.68	Pk	20	.1	-40	10.78	32.68	-21.9	0-360
11	.78192	23.05	Pk	20	.2	-40	3.25	29.75	-26.5	0-360
12	1.00418	22.62	Pk	20	.2	-40	2.82	27.59	-24.77	0-360
13	1.22883	21.64	Pk	20	.2	-40	1.84	25.84	-24	0-360
14	1.45113	20.97	Pk	20	.2	-40	1.17	24.4	-23.23	0-360

Pk - Peak detector

** Fundamental

Note : Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.1. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2013

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

LIMIT

FCC §15.207 (a)

Frequency range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50
*Decreases with the logarithm of the frequency.		


RESULTS

The EUT belongs to Test Case 4.

WORST EMISSIONS (Power sharing mode Test Case 4)

Line-L1 .15 - 30MHz

LINE 1 RESULTS

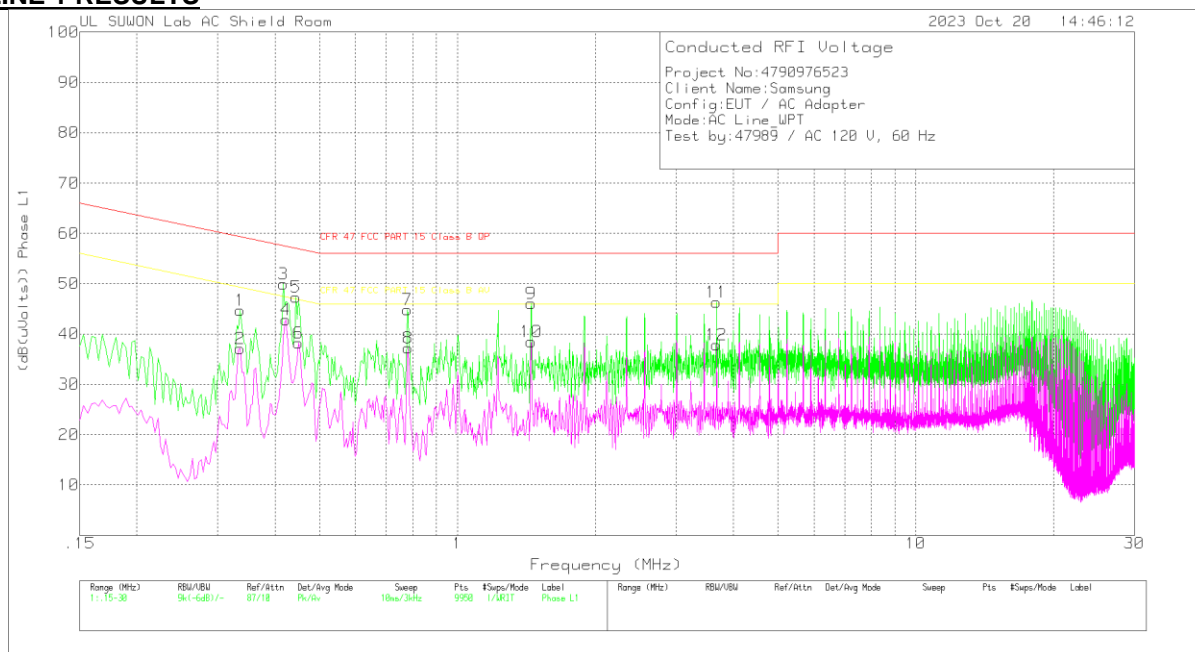

Trace Markers

Range 1: Phase L1 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	CFR 47 FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
1	.336	34.96	Pk	9.5	.2	44.66	59.3	-14.64	-	-
2	.336	27.42	Av	9.5	.2	37.12	-	-	49.3	-12.18
3	.417	40.28	Pk	9.5	.2	49.98	57.51	-7.53	-	-
4	.423	33.11	Av	9.5	.2	42.81	-	-	47.39	-4.58
5	.444	37.6	Pk	9.5	.2	47.3	56.99	-9.69	-	-
6	.45	28.47	Av	9.5	.2	38.17	-	-	46.88	-8.71
7	.777	34.99	Pk	9.6	.2	44.79	56	-11.21	-	-
8	.78	27.44	Av	9.6	.2	37.24	-	-	46	-8.76
9	1.449	36.19	Pk	9.6	.3	46.09	56	-9.91	-	-
10	1.449	28.6	Av	9.6	.3	38.5	-	-	46	-7.5
11	3.675	36.43	Pk	9.6	.3	46.33	56	-9.67	-	-
12	3.675	27.98	Av	9.6	.3	37.88	-	-	46	-8.12

Pk - Peak detector

Av - Average detection

Line-N .15 - 30MHz

LINE 2 RESULTS

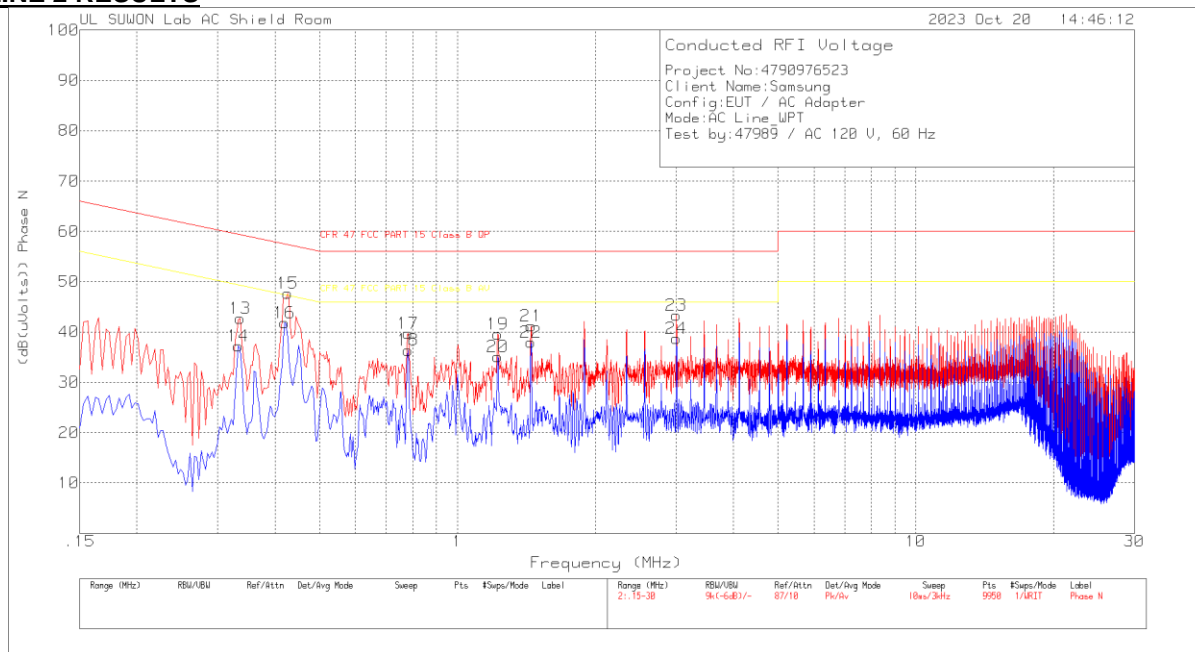

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_N[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	CFR 47 FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
13	.336	32.95	Pk	9.5	.2	42.65	59.3	-16.65	-	-
14	.333	27.57	Av	9.5	.2	37.27	-	-	49.38	-12.11
15	.426	37.94	Pk	9.5	.2	47.64	57.33	-9.69	-	-
16	.42	32.12	Av	9.5	.2	41.82	-	-	47.45	-5.63
17	.78	29.91	Pk	9.6	.2	39.71	56	-16.29	-	-
18	.78	26.61	Av	9.6	.2	36.41	-	-	46	-9.59
19	1.224	29.64	Pk	9.6	.3	39.54	56	-16.46	-	-
20	1.224	25.2	Av	9.6	.3	35.1	-	-	46	-10.9
21	1.449	31.35	Pk	9.6	.3	41.25	56	-14.75	-	-
22	1.446	28.07	Av	9.6	.3	37.97	-	-	46	-8.03
23	3.006	33.45	Pk	9.6	.3	43.35	56	-12.65	-	-
24	3.006	28.83	Av	9.6	.3	38.73	-	-	46	-7.27

Pk - Peak detector

Av - Average detection

END OF TEST REPORT