


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-61	4.3	0	-65.3	-62	OFF
					-63	4.3	0	-67.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
	320	95	6270	6270	-58	4.3	0	-62.3	-62	OFF
					-61	4.3	0	-65.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			6425	6425	-59	4.3	0	-63.3	-62	OFF
					-62	4.3	0	-66.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			6580	6580	-58	4.3	0	-62.3	-62	OFF
					-60	4.3	0	-64.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss), the one representative port (Ant. 4) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

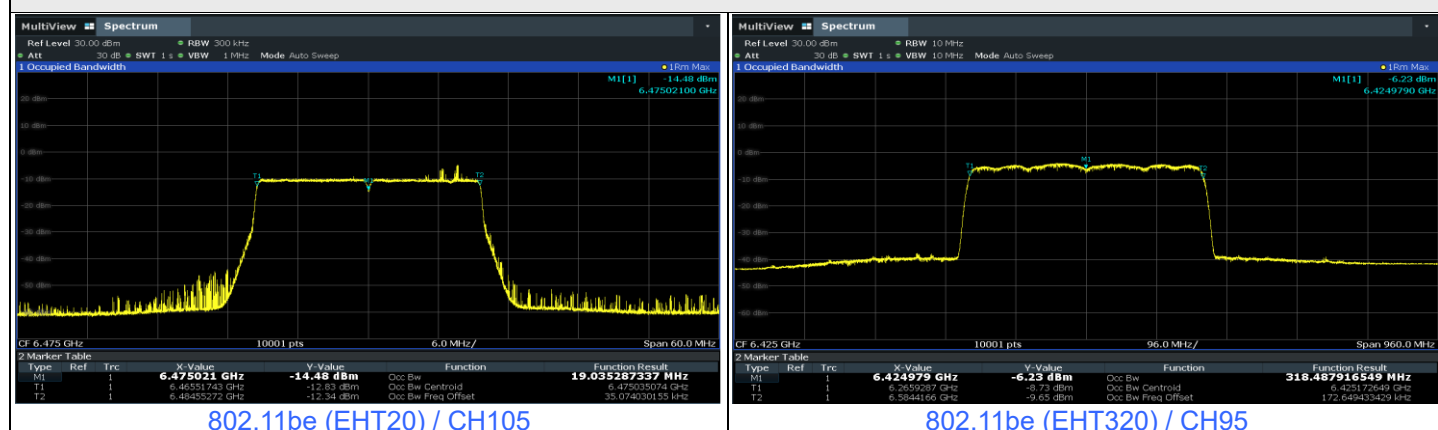


Plots of Injected signal (AWGN) level

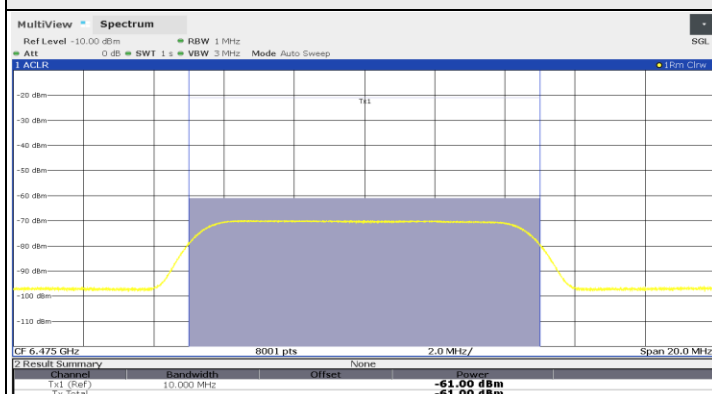


802.11be (EHT20) / CH105

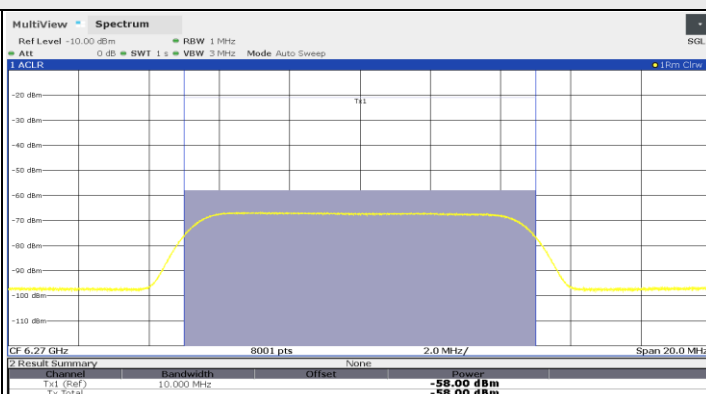

802.11be (EHT320) / CH95(Low Edge)

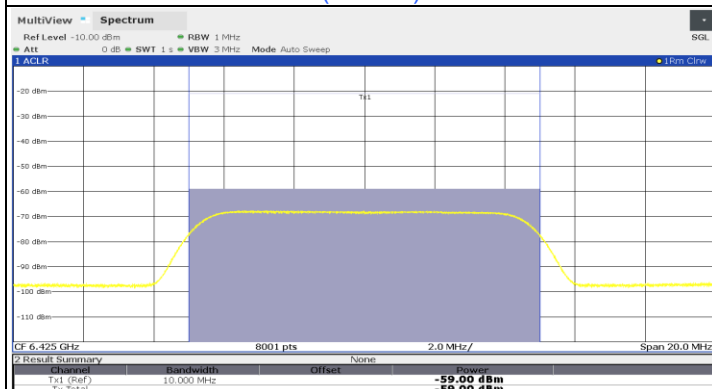


802.11be (EHT320) / CH95(Middle)

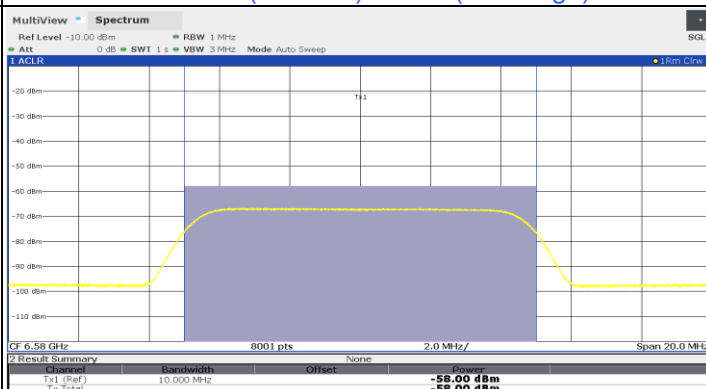

802.11be (EHT320) / CH95(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

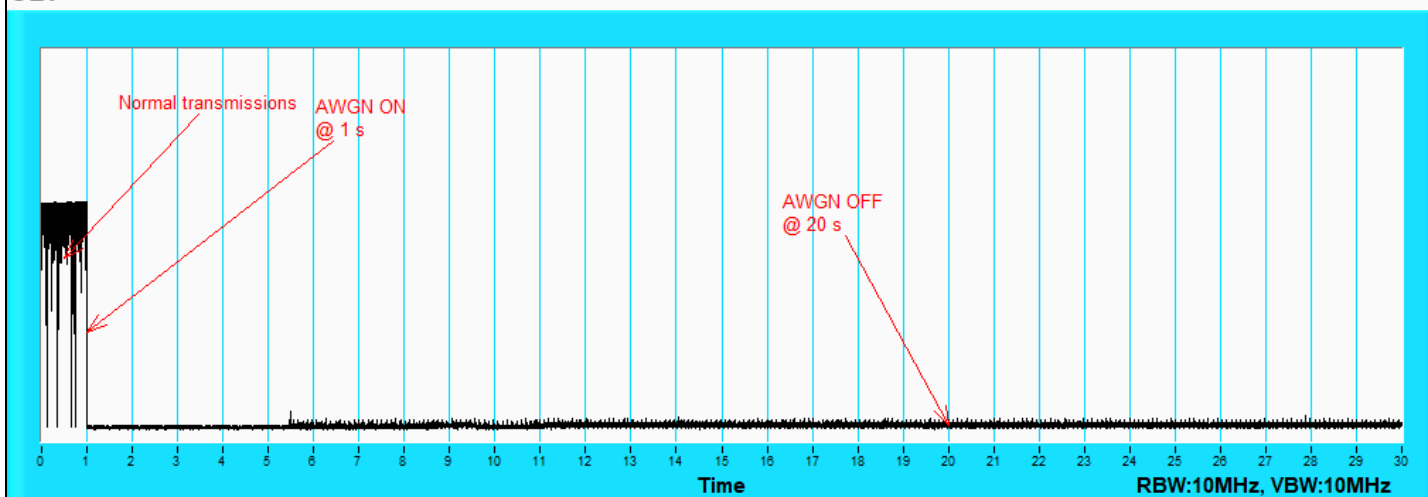

802.11be (EHT20) / CH105


Plots of EUT ceased transmission in the time domain

CBP

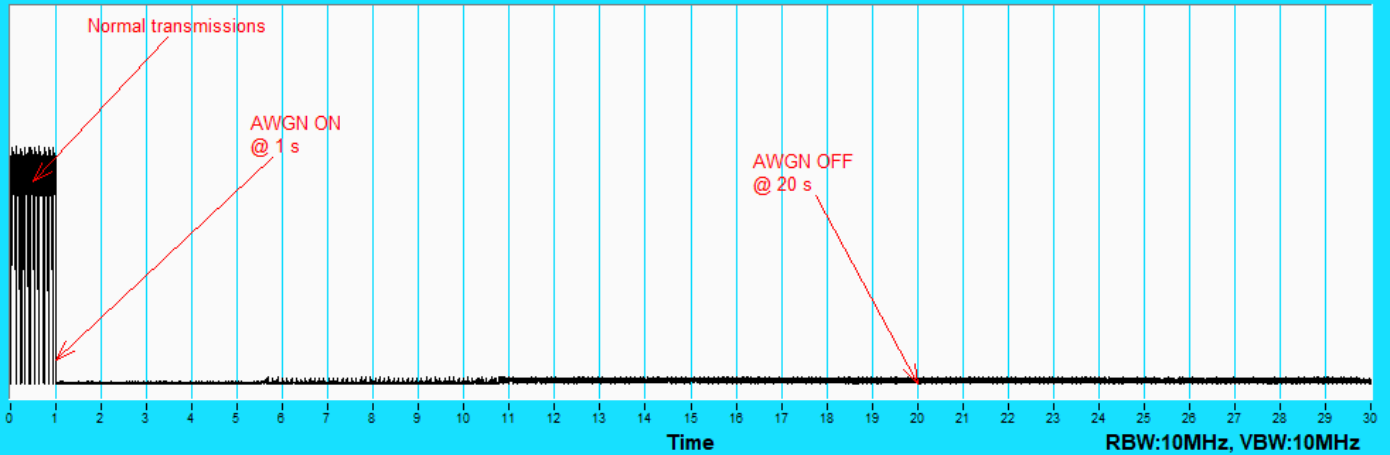


802.11be (EHT320) / CH95(Low Edge)

CBP

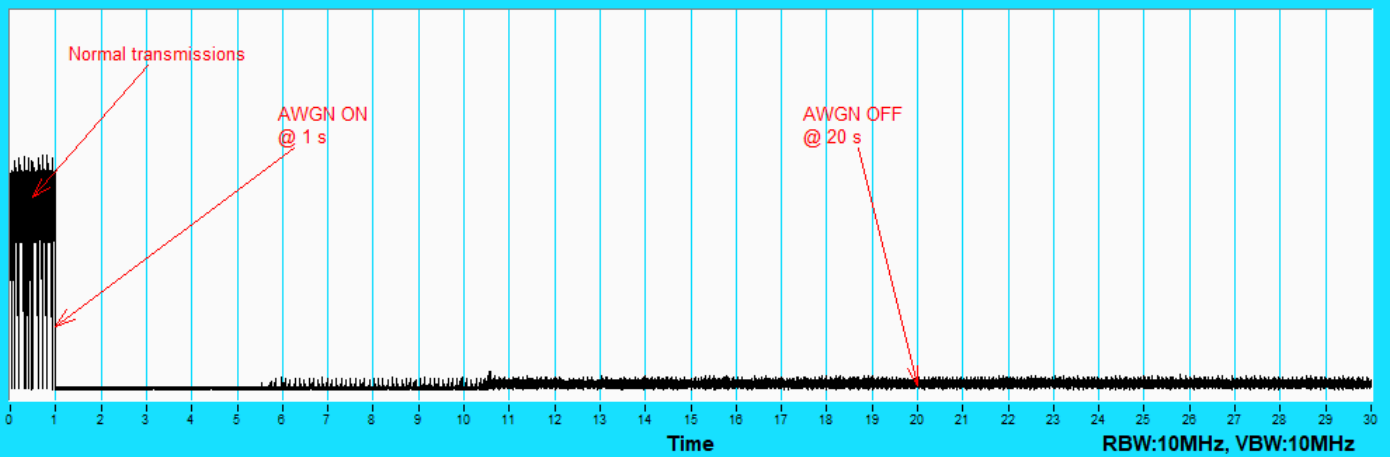

802.11be (EHT320) / CH95(Middle)

CBP

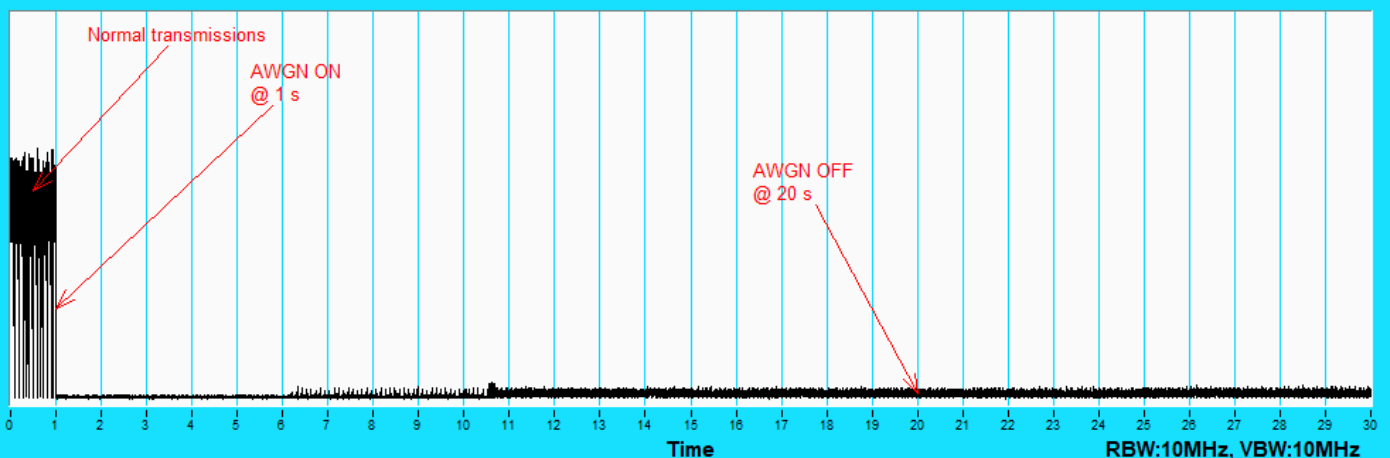

802.11be (EHT320) / CH95(High Edge)

For U-NII-7

Contention Based Protocol Measurement

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-60	4.3	0	-64.3	-62	OFF
					-62	4.3	0	-66.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
	320	159	6590	6590	-59	4.3	0	-63.3	-62	OFF
					-61	4.3	0	-65.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			6745	6745	-58	4.3	0	-62.3	-62	OFF
					-61	4.3	0	-65.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			6900	6900	-58	4.3	0	-62.3	-62	OFF
					-59	4.3	0	-63.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Ant. 4) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability

Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

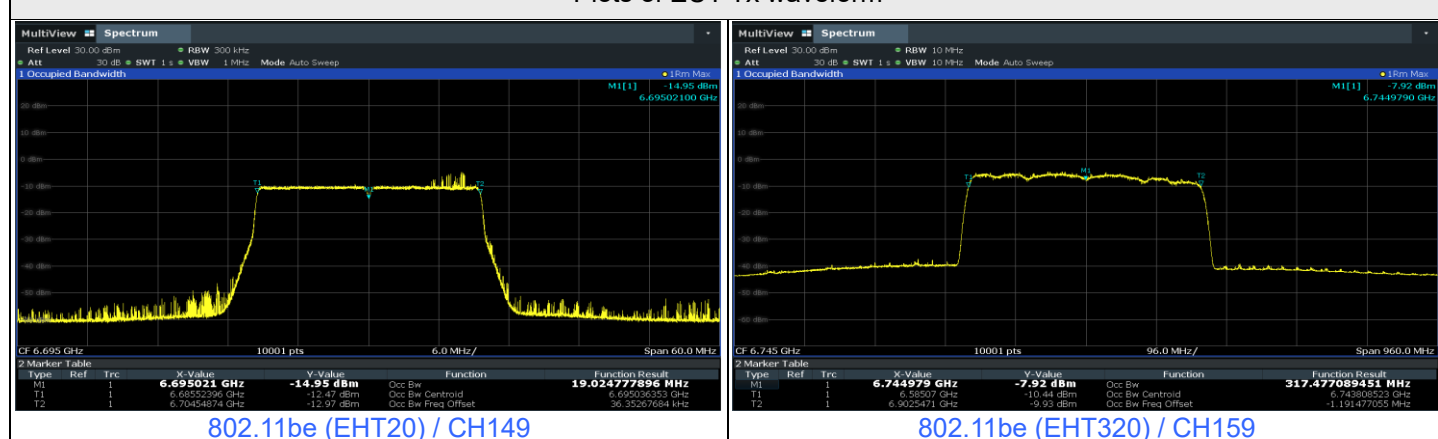


Plots of Injected signal (AWGN) level

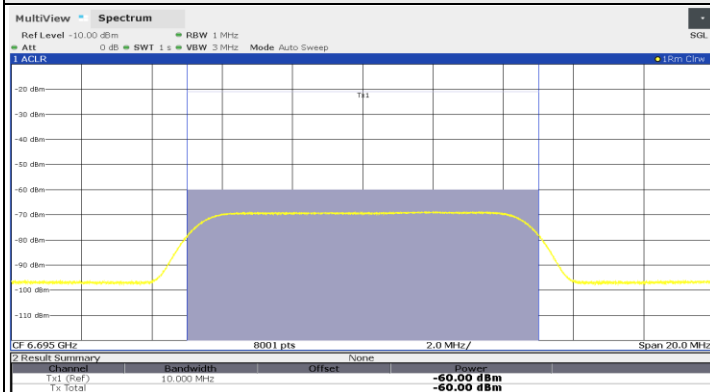


802.11be (EHT20) / CH149

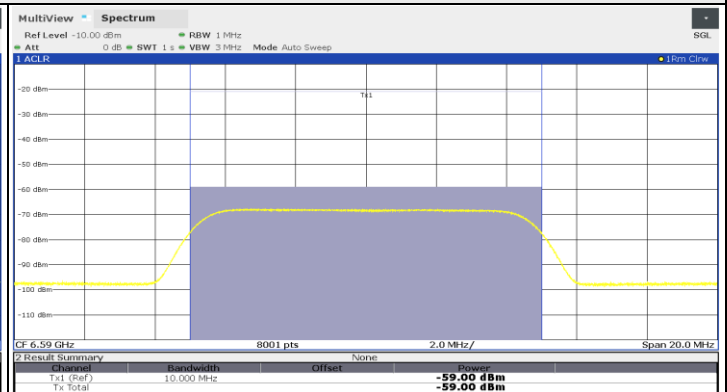

802.11be (EHT320) / CH159(Low Edge)

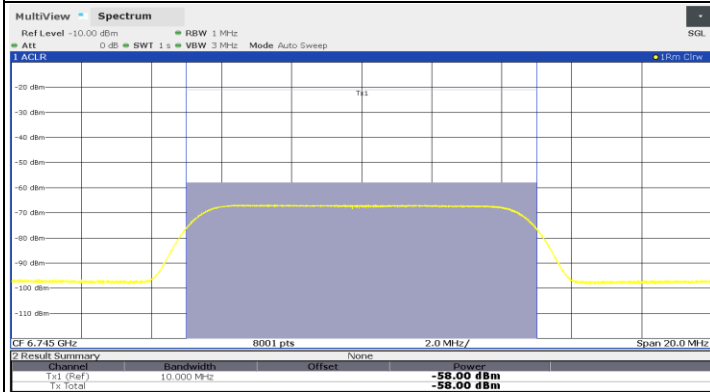


802.11be (EHT320) / CH159(Middle)

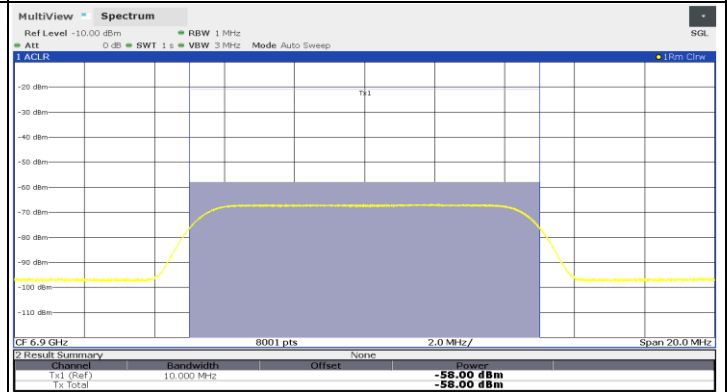

802.11be (EHT320) / CH159(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

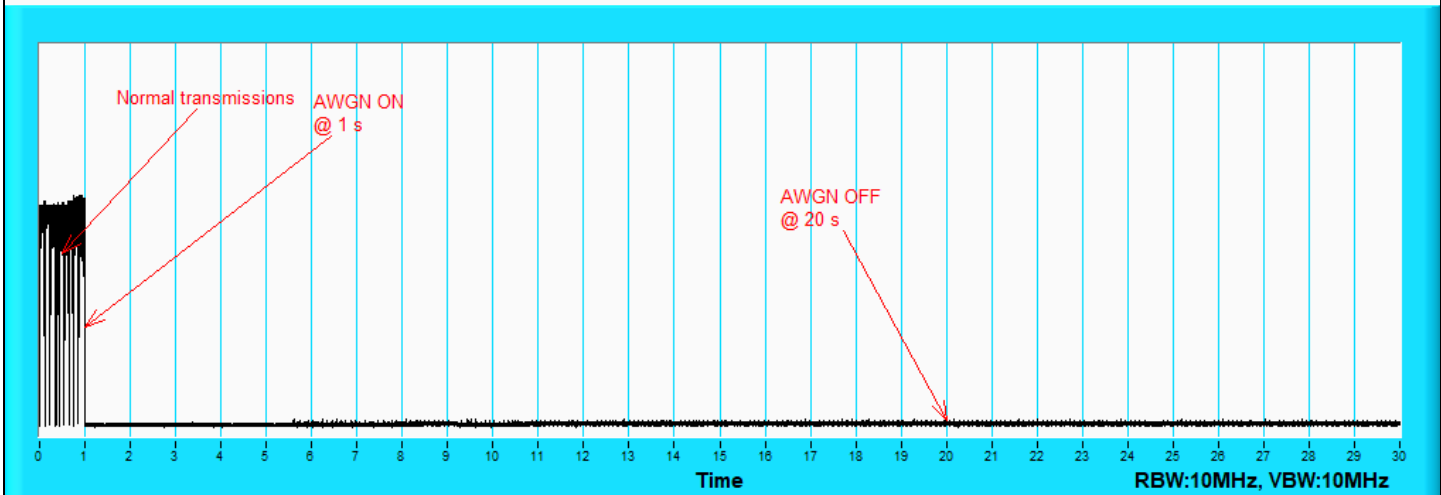

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

CBP

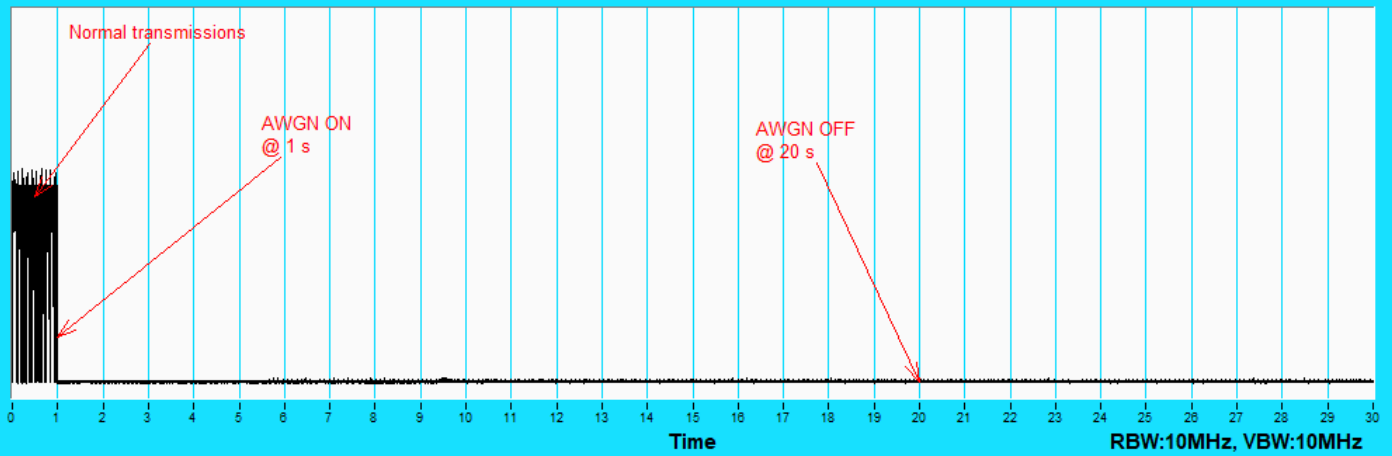


802.11be (EHT320) / CH159(Low Edge)

CBP

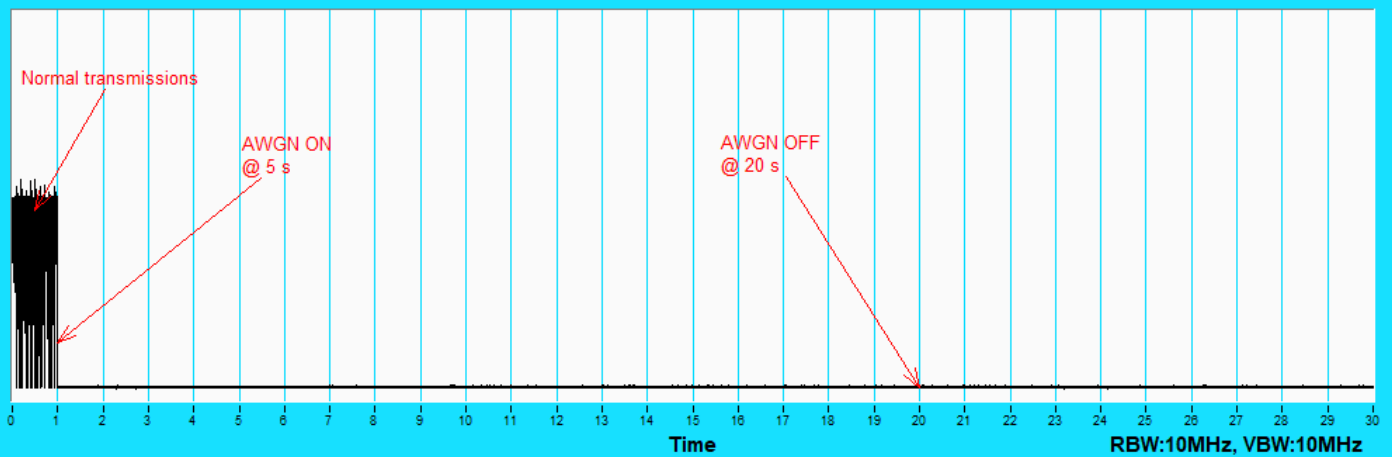

802.11be (EHT320) / CH159(Middle)

CBP

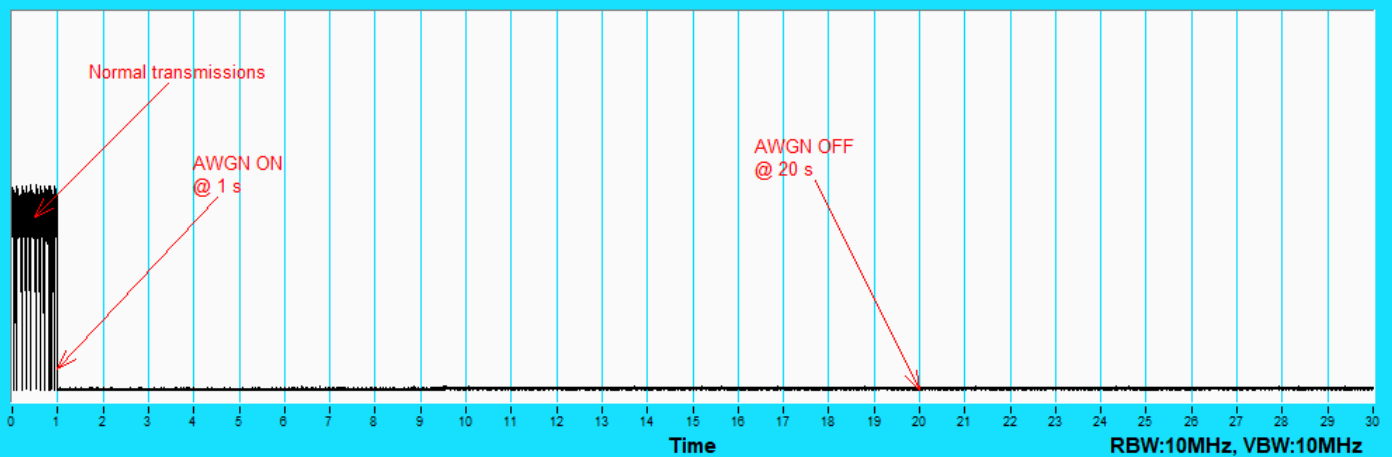

802.11be (EHT320) / CH159(High Edge)

For U-NII-8

Contention Based Protocol Measurement

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-61	4.3	0	-65.3	-62	OFF
					-63	4.3	0	-67.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
	320	191	6750	6750	-58	4.3	0	-62.3	-62	OFF
					-60	4.3	0	-64.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			6905	6905	-58	4.3	0	-62.3	-62	OFF
					-60	4.3	0	-64.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
			7060	7060	-58	4.3	0	-62.3	-62	OFF
					-60	4.3	0	-64.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Ant. 4) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability

Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

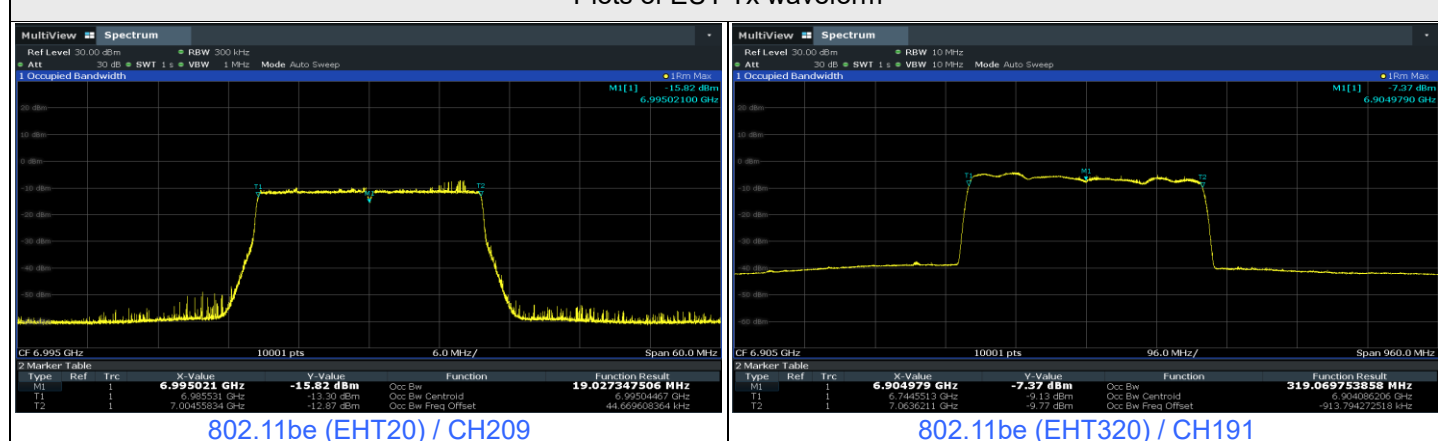


Plots of Injected signal (AWGN) level

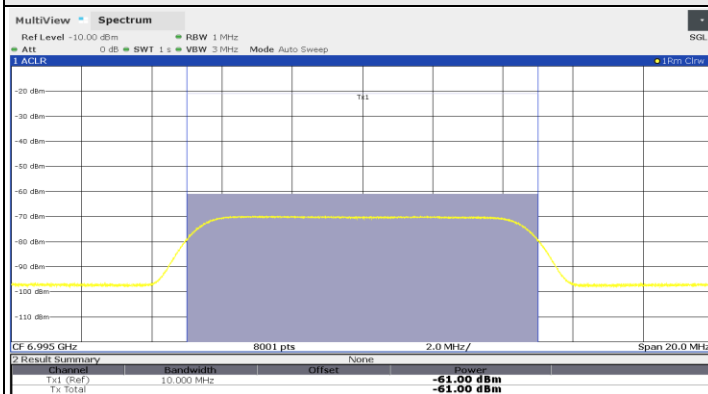


802.11be (EHT20) / CH209

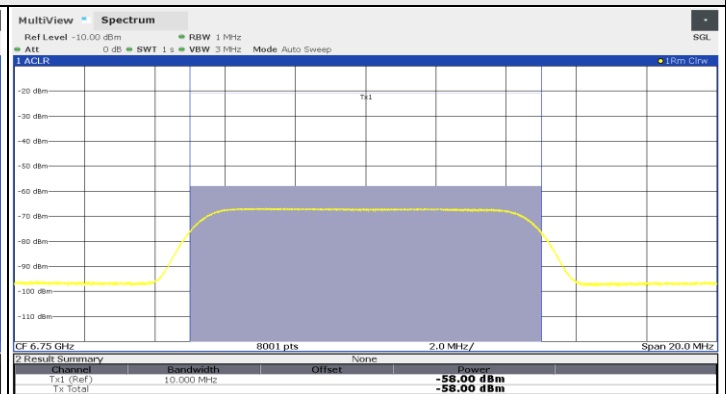

802.11be (EHT320) / CH191(Low Edge)

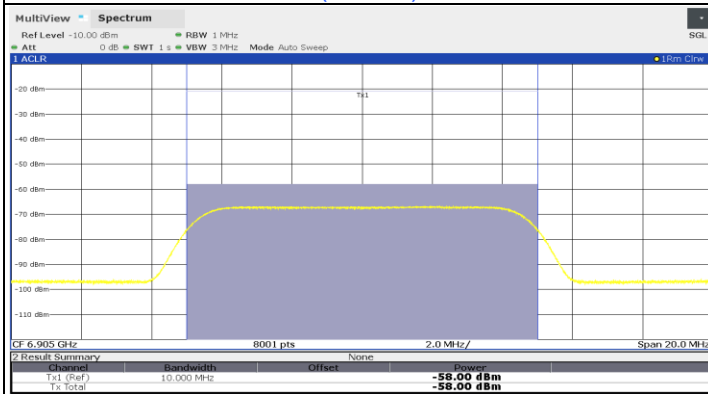


802.11be (EHT320) / CH191(Middle)

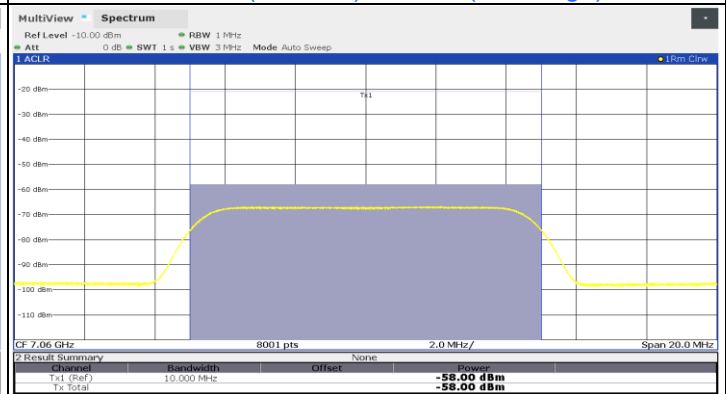

802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

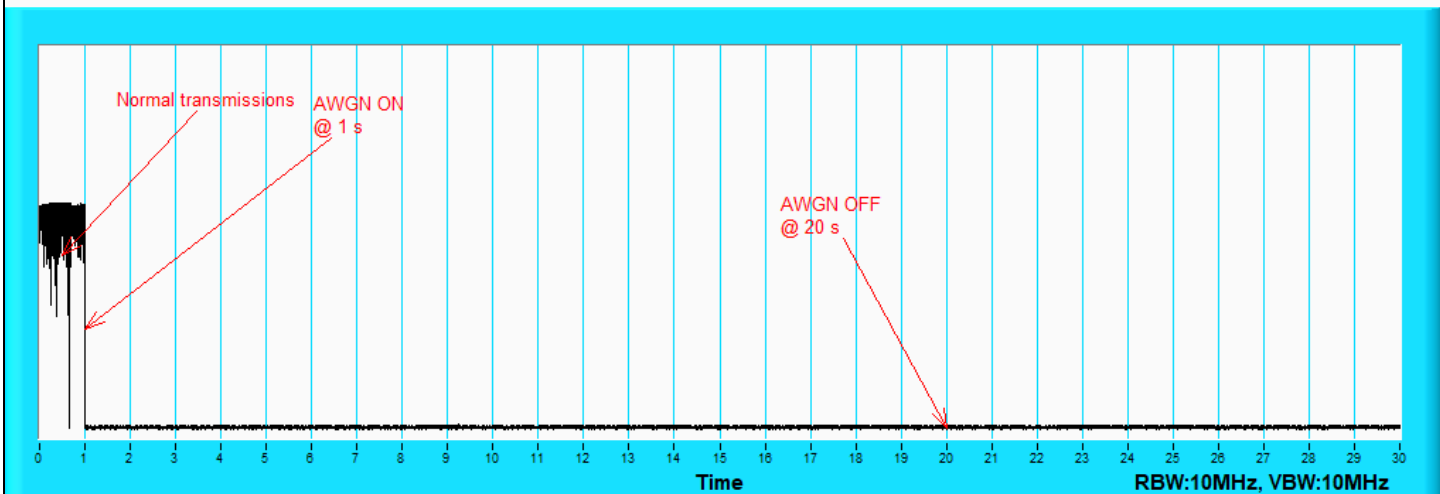

802.11be (EHT20) / CH209


Plots of EUT ceased transmission in the time domain

CBP

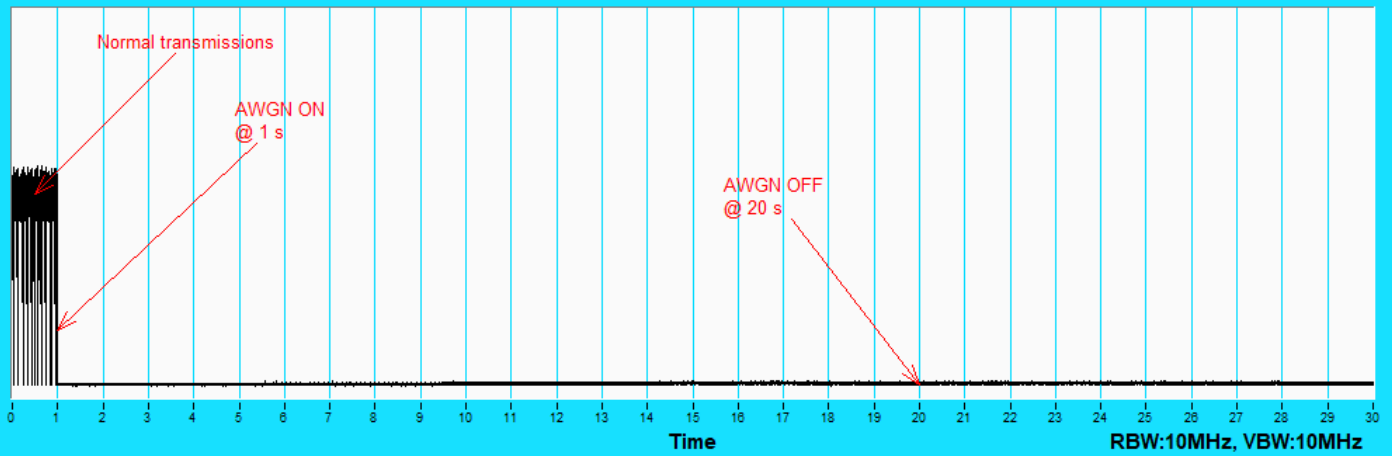


802.11be (EHT320) / CH191(Low Edge)

CBP

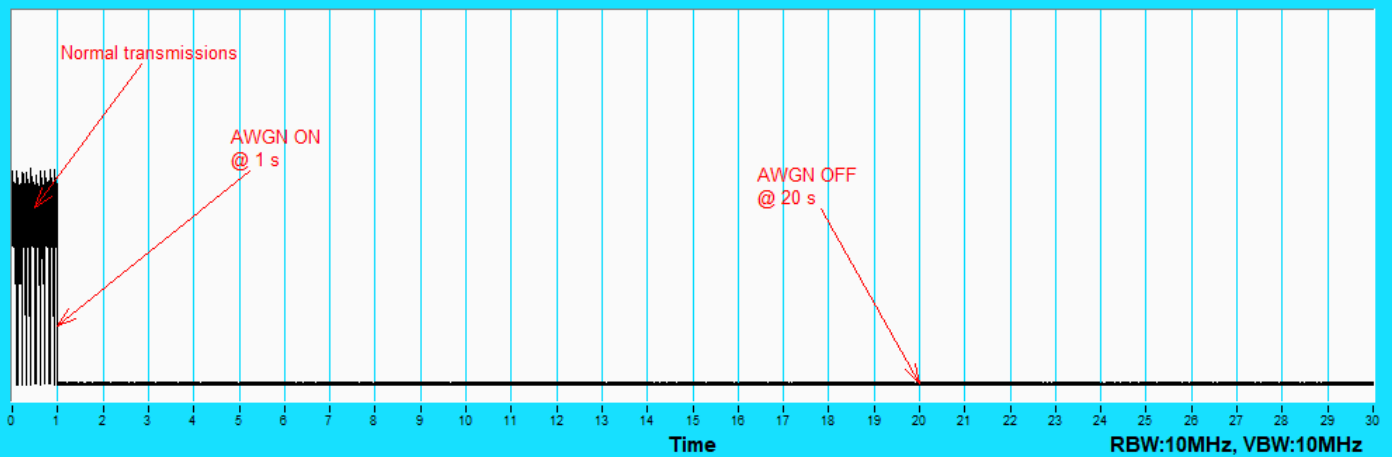

802.11be (EHT320) / CH191(Middle)

CBP

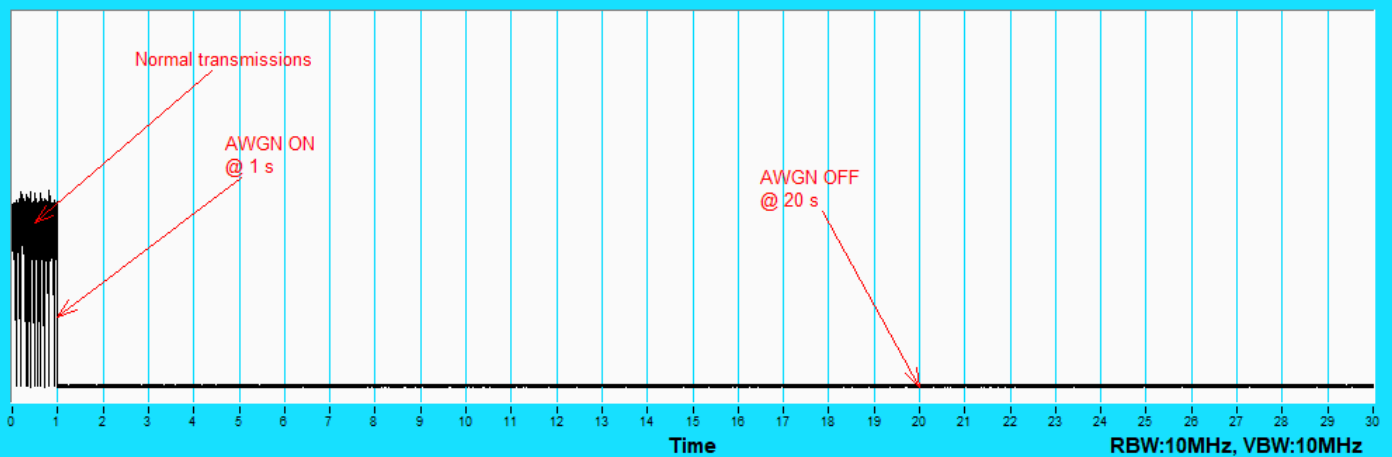

802.11be (EHT320) / CH191(High Edge)


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.64	49.16	36.84	58.80	46.48	65.58	55.58	-6.78	-9.10
2	0.40391	9.64	34.16	27.61	43.80	37.25	57.77	47.77	-13.97	-10.52
3	0.98203	9.65	24.46	9.94	34.11	19.59	56.00	46.00	-21.89	-26.41
4	1.58984	9.67	19.66	10.39	29.33	20.06	56.00	46.00	-26.67	-25.94
5	6.73438	9.93	13.67	6.69	23.60	16.62	60.00	50.00	-36.40	-33.38
6	21.54688	10.35	16.14	11.03	26.49	21.38	60.00	50.00	-33.51	-28.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

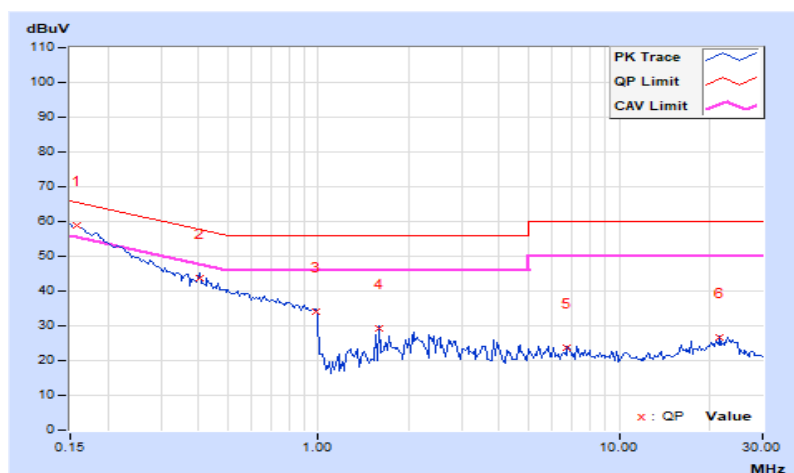


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.63	50.46	37.32	60.09	46.95	65.79	55.79	-5.70	-8.84
2	0.34531	9.61	36.52	19.11	46.13	28.72	59.07	49.07	-12.94	-20.35
3	0.88828	9.65	27.36	11.15	37.01	20.80	56.00	46.00	-18.99	-25.20
4	1.53125	9.68	21.73	8.59	31.41	18.27	56.00	46.00	-24.59	-27.73
5	6.86328	9.92	12.65	6.03	22.57	15.95	60.00	50.00	-37.43	-34.05
6	22.61719	10.38	16.03	11.16	26.41	21.54	60.00	50.00	-33.59	-28.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

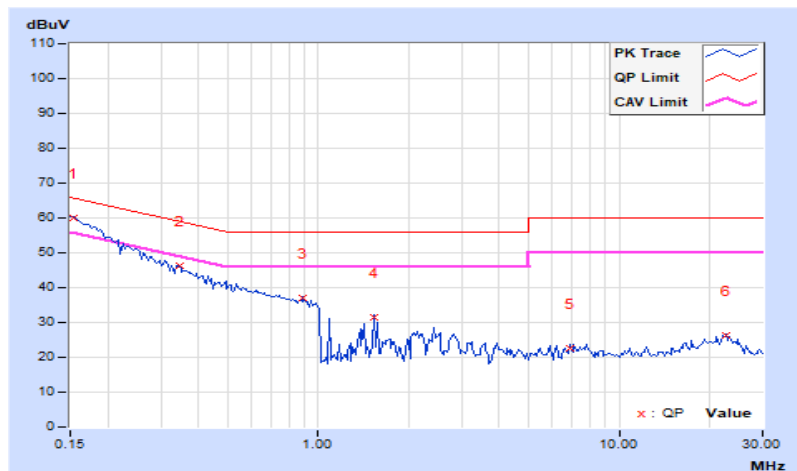


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.70	20.0 QP	40.0	-20.0	1.23 H	206	28.6	-8.6
2	163.13	25.3 QP	43.5	-18.2	1.04 H	266	33.0	-7.7
3	393.26	35.4 QP	46.0	-10.6	1.75 H	316	39.0	-3.6
4	435.75	39.2 QP	46.0	-6.8	1.58 H	360	41.5	-2.3
5	667.39	34.5 QP	46.0	-11.5	1.69 H	316	32.0	2.5
6	807.65	38.0 QP	46.0	-8.0	1.93 H	208	32.4	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

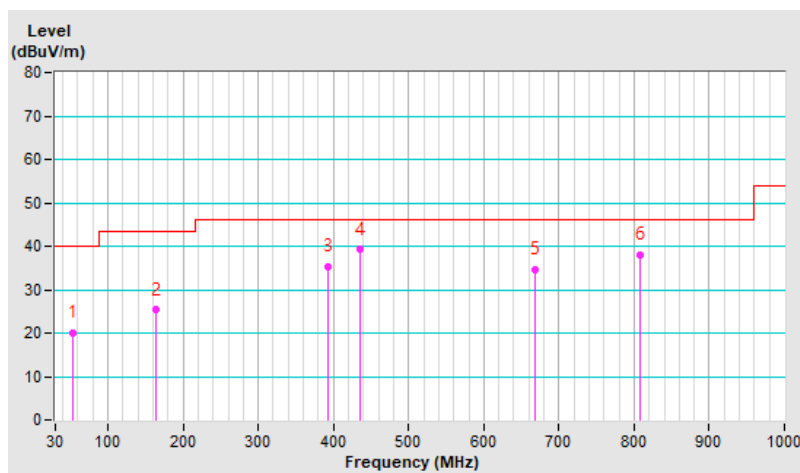


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	122.88	29.6 QP	43.5	-13.9	2.54 V	156	39.6	-10.0
2	230.21	27.9 QP	46.0	-18.1	3.21 V	169	37.6	-9.7
3	356.74	36.4 QP	46.0	-9.6	1.02 V	188	40.8	-4.4
4	453.99	38.5 QP	46.0	-7.5	2.02 V	169	40.5	-2.0
5	525.14	37.5 QP	46.0	-8.5	1.52 V	223	38.3	-0.8
6	789.80	36.3 QP	46.0	-9.7	1.87 V	145	30.7	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

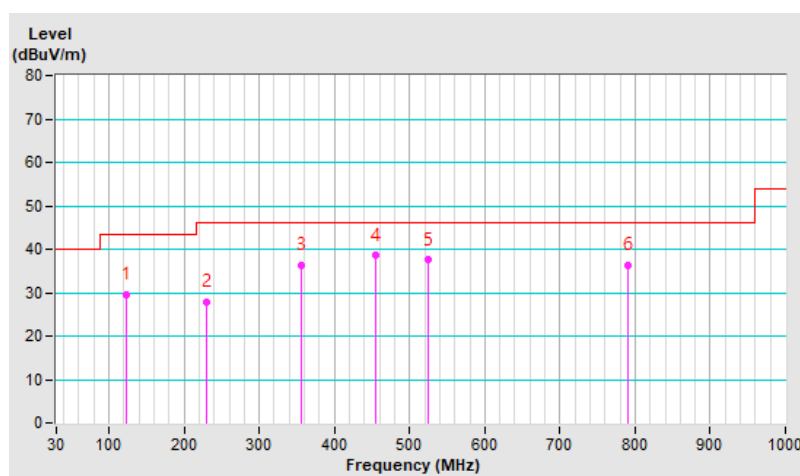

7.9 Unwanted Emissions above 1 GHz

CDD Mode

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.8 PK	88.2	-32.4	1.79 H	177	51.1	4.7
2	#5925.00	42.3 AV	68.2	-25.9	1.79 H	177	37.6	4.7
3	*5955.00	111.1 PK			1.79 H	177	68.8	42.3
4	*5955.00	100.7 AV			1.79 H	177	58.4	42.3
5	11910.00	55.8 PK	74.0	-18.2	1.35 H	264	46.6	9.2
6	11910.00	42.6 AV	54.0	-11.4	1.35 H	264	33.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.5 PK	88.2	-25.7	1.25 V	355	57.8	4.7
2	#5925.00	43.4 AV	68.2	-24.8	1.25 V	355	38.7	4.7
3	*5955.00	112.0 PK			1.25 V	355	69.7	42.3
4	*5955.00	102.1 AV			1.25 V	355	59.8	42.3
5	11910.00	57.3 PK	74.0	-16.7	1.58 V	254	48.1	9.2
6	11910.00	43.7 AV	54.0	-10.3	1.58 V	254	34.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.1 PK			1.55 H	178	68.8	43.3
2	*6175.00	101.7 AV			1.55 H	178	58.4	43.3
3	12350.00	56.2 PK	74.0	-17.8	1.33 H	267	46.6	9.6
4	12350.00	42.7 AV	54.0	-11.3	1.33 H	267	33.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.9 PK			1.17 V	358	69.6	43.3
2	*6175.00	102.9 AV			1.17 V	358	59.6	43.3
3	12350.00	57.6 PK	74.0	-16.4	1.59 V	255	48.0	9.6
4	12350.00	44.0 AV	54.0	-10.0	1.59 V	255	34.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.5 PK			1.61 H	96	65.7	44.8
2	*6415.00	100.7 AV			1.61 H	96	55.9	44.8
3	#12830.00	56.7 PK	88.2	-31.5	1.37 H	266	46.7	10.0
4	#12830.00	43.6 AV	68.2	-24.6	1.37 H	266	33.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.6 PK			1.23 V	358	66.8	44.8
2	*6415.00	101.9 AV			1.23 V	358	57.1	44.8
3	#12830.00	58.2 PK	88.2	-30.0	1.62 V	257	48.2	10.0
4	#12830.00	44.5 AV	68.2	-23.7	1.62 V	257	34.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.3 PK			1.60 H	260	68.4	44.9
2	*6435.00	102.9 AV			1.60 H	260	58.0	44.9
3	#12870.00	56.6 PK	88.2	-31.6	1.44 H	264	46.7	9.9
4	#12870.00	43.6 AV	68.2	-24.6	1.44 H	264	33.7	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	114.2 PK			1.33 V	69	69.3	44.9
2	*6435.00	104.0 AV			1.33 V	69	59.1	44.9
3	#12870.00	57.9 PK	88.2	-30.3	1.53 V	254	48.0	9.9
4	#12870.00	44.6 AV	68.2	-23.6	1.53 V	254	34.7	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.5 PK			1.60 H	266	65.5	45.0
2	*6475.00	101.1 AV			1.60 H	266	56.1	45.0
3	#12950.00	57.2 PK	88.2	-31.0	1.31 H	249	47.2	10.0
4	#12950.00	44.0 AV	68.2	-24.2	1.31 H	249	34.0	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.4 PK			1.45 V	34	66.4	45.0
2	*6475.00	102.0 AV			1.45 V	34	57.0	45.0
3	#12950.00	58.1 PK	88.2	-30.1	1.55 V	268	48.1	10.0
4	#12950.00	44.9 AV	68.2	-23.3	1.55 V	268	34.9	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.2 PK			2.03 H	95	66.0	45.2
2	*6515.00	100.3 AV			2.03 H	95	55.1	45.2
3	#13030.00	57.2 PK	88.2	-31.0	1.37 H	249	47.3	9.9
4	#13030.00	43.9 AV	68.2	-24.3	1.37 H	249	34.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.4 PK			1.46 V	214	67.2	45.2
2	*6515.00	101.4 AV			1.46 V	214	56.2	45.2
3	#13030.00	58.3 PK	88.2	-29.9	1.62 V	278	48.4	9.9
4	#13030.00	45.0 AV	68.2	-23.2	1.62 V	278	35.1	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.4 PK			1.98 H	94	66.1	45.3
2	*6535.00	101.6 AV			1.98 H	64	56.3	45.3
3	#13070.00	57.4 PK	88.2	-30.8	1.37 H	251	47.5	9.9
4	#13070.00	43.9 AV	68.2	-24.3	1.37 H	251	34.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.0 PK			1.44 V	217	67.7	45.3
2	*6535.00	102.7 AV			1.44 V	217	57.4	45.3
3	#13070.00	58.5 PK	88.2	-29.7	1.68 V	266	48.6	9.9
4	#13070.00	45.1 AV	68.2	-23.1	1.68 V	266	35.2	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.4 PK			2.03 H	91	65.8	45.6
2	*6695.00	101.5 AV			2.03 H	91	55.9	45.6
3	13390.00	57.8 PK	74.0	-16.2	1.41 H	248	48.4	9.4
4	13390.00	45.4 AV	54.0	-8.6	1.41 H	248	36.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.1 PK			1.74 V	73	66.5	45.6
2	*6695.00	102.6 AV			1.74 V	73	57.0	45.6
3	13390.00	58.4 PK	74.0	-15.6	1.71 V	270	49.0	9.4
4	13390.00	46.2 AV	54.0	-7.8	1.71 V	270	36.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.3 PK			1.61 H	2	64.5	45.8
2	*6855.00	100.6 AV			1.61 H	2	54.8	45.8
3	#13710.00	57.8 PK	88.2	-30.4	1.29 H	241	48.1	9.7
4	#13710.00	44.0 AV	68.2	-24.2	1.29 H	241	34.3	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.1 PK			1.61 V	64	66.3	45.8
2	*6855.00	102.4 AV			1.61 V	64	56.6	45.8
3	#13710.00	58.6 PK	88.2	-29.6	1.73 V	268	48.9	9.7
4	#13710.00	44.7 AV	68.2	-23.5	1.73 V	268	35.0	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.9 PK			1.87 H	78	64.1	45.8
2	*6875.00	100.5 AV			1.87 H	78	54.7	45.8
3	#13750.00	58.5 PK	88.2	-29.7	1.25 H	245	48.7	9.8
4	#13750.00	44.9 AV	68.2	-23.3	1.25 H	245	35.1	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.6 PK			1.50 V	310	65.8	45.8
2	*6875.00	102.0 AV			1.50 V	310	56.2	45.8
3	#13750.00	58.8 PK	88.2	-29.4	1.73 V	269	49.0	9.8
4	#13750.00	46.2 AV	68.2	-22.0	1.73 V	269	36.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.9 PK			1.26 H	189	64.0	45.9
2	*6995.00	100.5 AV			1.26 H	189	54.6	45.9
3	#13990.00	58.7 PK	88.2	-29.5	1.36 H	239	48.5	10.2
4	#13990.00	46.3 AV	68.2	-21.9	1.36 H	239	36.1	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.2 PK			1.67 V	62	65.3	45.9
2	*6995.00	102.1 AV			1.67 V	62	56.2	45.9
3	#13990.00	59.2 PK	88.2	-29.0	1.75 V	272	49.0	10.2
4	#13990.00	46.8 AV	68.2	-21.4	1.75 V	272	36.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.52 H	170	64.2	46.4
2	*7095.00	100.5 AV			1.52 H	170	54.1	46.4
3	#7125.00	59.3 PK	88.2	-28.9	1.55 H	121	51.0	8.3
4	#7125.00	46.0 AV	68.2	-22.2	1.55 H	121	37.7	8.3
5	#14130.00	58.7 PK	88.2	-29.5	1.38 H	250	48.4	10.3
6	#14130.00	46.7 AV	68.2	-21.5	1.38 H	250	36.4	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.7 PK			1.55 V	121	65.3	46.4
2	*7095.00	102.4 AV			1.55 V	121	56.0	46.4
3	#7125.00	60.3 PK	88.2	-27.9	1.55 V	121	52.0	8.3
4	#7125.00	47.0 AV	68.2	-21.2	1.55 V	121	38.7	8.3
5	#14130.00	57.6 PK	88.2	-30.6	1.74 V	283	47.3	10.3
6	#14130.00	45.3 AV	68.2	-22.9	1.74 V	283	35.0	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.4 PK	88.2	-30.8	2.03 H	269	52.7	4.7
2	#5925.00	42.2 AV	68.2	-26.0	2.03 H	269	37.5	4.7
3	*5955.00	112.7 PK			2.03 H	269	70.4	42.3
4	*5955.00	99.6 AV			2.03 H	269	57.3	42.3
5	11910.00	55.7 PK	74.0	-18.3	1.29 H	254	46.5	9.2
6	11910.00	42.6 AV	54.0	-11.4	1.29 H	254	33.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.7 PK	88.2	-28.5	1.51 V	178	55.0	4.7
2	#5925.00	43.1 AV	68.2	-25.1	1.51 V	178	38.4	4.7
3	*5955.00	114.2 PK			1.51 V	178	71.9	42.3
4	*5955.00	101.0 AV			1.51 V	178	58.7	42.3
5	11910.00	57.2 PK	74.0	-16.8	1.59 V	260	48.0	9.2
6	11910.00	43.6 AV	54.0	-10.4	1.59 V	260	34.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.3 PK			2.05 H	269	69.0	43.3
2	*6175.00	100.3 AV			2.05 H	269	57.0	43.3
3	12350.00	56.1 PK	74.0	-17.9	1.33 H	247	46.5	9.6
4	12350.00	42.7 AV	54.0	-11.3	1.33 H	247	33.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	114.2 PK			1.12 V	357	70.9	43.3
2	*6175.00	101.5 AV			1.12 V	357	58.2	43.3
3	12350.00	57.6 PK	74.0	-16.4	1.62 V	259	48.0	9.6
4	12350.00	44.1 AV	54.0	-9.9	1.62 V	259	34.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.9 PK			1.63 H	94	68.1	44.8
2	*6415.00	100.8 AV			1.63 H	94	56.0	44.8
3	#12830.00	58.5 PK	88.2	-29.7	1.41 H	246	48.5	10.0
4	#12830.00	43.6 AV	68.2	-24.6	1.41 H	246	33.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.7 PK			1.18 V	355	68.9	44.8
2	*6415.00	101.5 AV			1.18 V	355	56.7	44.8
3	#12830.00	58.1 PK	88.2	-30.1	1.65 V	253	48.1	10.0
4	#12830.00	44.4 AV	68.2	-23.8	1.65 V	253	34.4	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.7 PK			1.56 H	260	68.8	44.9
2	*6435.00	101.3 AV			1.56 H	260	56.4	44.9
3	#12870.00	58.5 PK	88.2	-29.7	1.41 H	249	48.6	9.9
4	#12870.00	43.4 AV	68.2	-24.8	1.41 H	249	33.5	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	114.5 PK			1.33 V	69	69.6	44.9
2	*6435.00	102.3 AV			1.33 V	69	57.4	44.9
3	#12870.00	58.1 PK	88.2	-30.1	1.59 V	258	48.2	9.9
4	#12870.00	44.7 AV	68.2	-23.5	1.59 V	258	34.8	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	113.7 PK			1.45 H	263	68.7	45.0
2	*6475.00	101.2 AV			1.45 H	263	56.2	45.0
3	#12950.00	57.2 PK	88.2	-31.0	1.35 H	241	47.2	10.0
4	#12950.00	44.2 AV	68.2	-24.0	1.35 H	241	34.2	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.0 PK			1.02 V	174	70.0	45.0
2	*6475.00	102.0 AV			1.02 V	174	57.0	45.0
3	#12950.00	58.1 PK	88.2	-30.1	1.55 V	269	48.1	10.0
4	#12950.00	44.8 AV	68.2	-23.4	1.55 V	269	34.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.6 PK			1.47 H	260	67.4	45.2
2	*6515.00	101.2 AV			1.47 H	260	56.0	45.2
3	#13030.00	57.4 PK	88.2	-30.8	1.37 H	254	47.5	9.9
4	#13030.00	44.1 AV	68.2	-24.1	1.37 H	254	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	114.9 PK			1.34 V	176	69.7	45.2
2	*6515.00	102.3 AV			1.34 V	176	57.1	45.2
3	#13030.00	58.1 PK	88.2	-30.1	1.69 V	270	48.2	9.9
4	#13030.00	44.9 AV	68.2	-23.3	1.69 V	270	35.0	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.1 PK			2.17 H	73	68.8	45.3
2	*6535.00	101.0 AV			2.17 H	73	55.7	45.3
3	#13070.00	57.5 PK	88.2	-30.7	1.35 H	253	47.6	9.9
4	#13070.00	44.1 AV	68.2	-24.1	1.35 H	253	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.0 PK			1.00 V	175	69.7	45.3
2	*6535.00	102.8 AV			1.00 V	175	57.5	45.3
3	#13070.00	58.4 PK	88.2	-29.8	1.27 V	256	48.5	9.9
4	#13070.00	44.9 AV	68.2	-23.3	1.27 V	256	35.0	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.6 PK			2.18 H	74	68.0	45.6
2	*6695.00	101.1 AV			2.18 H	74	55.5	45.6
3	13390.00	57.8 PK	74.0	-16.2	1.40 H	239	48.4	9.4
4	13390.00	45.3 AV	54.0	-8.7	1.40 H	239	35.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.7 PK			1.77 V	77	69.1	45.6
2	*6695.00	102.0 AV			1.77 V	77	56.4	45.6
3	13390.00	58.1 PK	74.0	-15.9	1.66 V	275	48.7	9.4
4	13390.00	46.1 AV	54.0	-7.9	1.66 V	275	36.7	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.5 PK			1.64 H	1	67.7	45.8
2	*6855.00	101.0 AV			1.64 H	1	55.2	45.8
3	#13710.00	57.7 PK	88.2	-30.5	1.32 H	241	48.0	9.7
4	#13710.00	44.2 AV	68.2	-24.0	1.32 H	241	34.5	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.5 PK			1.74 V	63	68.7	45.8
2	*6855.00	101.8 AV			1.74 V	63	56.0	45.8
3	#13710.00	58.4 PK	88.2	-29.8	1.70 V	265	48.7	9.7
4	#13710.00	44.8 AV	68.2	-23.4	1.70 V	265	35.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.7 PK			1.69 H	1	67.9	45.8
2	*6875.00	100.8 AV			1.69 H	1	55.0	45.8
3	#13750.00	58.3 PK	88.2	-29.9	1.23 H	245	48.5	9.8
4	#13750.00	44.9 AV	68.2	-23.3	1.23 H	245	35.1	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	114.5 PK			1.51 V	125	68.7	45.8
2	*6875.00	101.4 AV			1.51 V	125	55.6	45.8
3	#13750.00	58.5 PK	88.2	-29.7	1.72 V	266	48.7	9.8
4	#13750.00	46.3 AV	68.2	-21.9	1.72 V	266	36.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	113.8 PK			1.23 H	191	67.9	45.9
2	*6995.00	100.9 AV			1.23 H	191	55.0	45.9
3	#13990.00	58.8 PK	88.2	-29.4	1.35 H	242	48.6	10.2
4	#13990.00	46.6 AV	68.2	-21.6	1.35 H	242	36.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	114.6 PK			1.42 V	114	68.7	45.9
2	*6995.00	102.3 AV			1.42 V	114	56.4	45.9
3	#13990.00	59.0 PK	88.2	-29.2	1.74 V	275	48.8	10.2
4	#13990.00	46.7 AV	68.2	-21.5	1.74 V	275	36.5	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.9 PK			1.75 H	168	65.5	46.4
2	*7095.00	100.2 AV			1.75 H	168	53.8	46.4
3	#7125.00	60.6 PK	88.2	-27.6	1.75 H	168	52.3	8.3
4	#7125.00	46.3 AV	68.2	-21.9	1.75 H	168	38.0	8.3
5	#14190.00	57.1 PK	88.2	-31.1	1.30 H	221	46.7	10.4
6	#14190.00	44.7 AV	68.2	-23.5	1.30 H	221	34.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	114.6 PK			1.41 V	120	68.2	46.4
2	*7095.00	102.1 AV			1.41 V	120	55.7	46.4
3	#7125.00	61.6 PK	88.2	-26.6	1.41 V	120	53.3	8.3
4	#7125.00	47.9 AV	68.2	-20.3	1.41 V	120	39.6	8.3
5	#14190.00	57.9 PK	88.2	-30.3	1.55 V	286	47.5	10.4
6	#14190.00	45.1 AV	68.2	-23.1	1.55 V	286	34.7	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	1.61 H	261	67.5	4.7
2	#5925.00	53.6 AV	68.2	-14.6	1.61 H	261	48.9	4.7
3	*5965.00	112.5 PK			1.61 H	261	70.2	42.3
4	*5965.00	99.9 AV			1.61 H	261	57.6	42.3
5	11930.00	55.6 PK	74.0	-18.4	1.31 H	251	46.4	9.2
6	11930.00	43.0 AV	54.0	-11.0	1.31 H	251	33.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.8 PK	88.2	-17.4	1.33 V	177	66.1	4.7
2	#5925.00	52.9 AV	68.2	-15.3	1.33 V	177	48.2	4.7
3	*5965.00	115.0 PK			1.33 V	177	72.7	42.3
4	*5965.00	101.6 AV			1.33 V	177	59.3	42.3
5	11930.00	57.1 PK	74.0	-16.9	1.62 V	272	47.9	9.2
6	11930.00	43.5 AV	54.0	-10.5	1.62 V	272	34.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	111.5 PK			1.60 H	176	68.2	43.3
2	*6165.00	100.0 AV			1.60 H	176	56.7	43.3
3	12330.00	56.2 PK	74.0	-17.8	1.41 H	240	46.7	9.5
4	12330.00	42.9 AV	54.0	-11.1	1.41 H	240	33.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	114.6 PK			1.30 V	357	71.3	43.3
2	*6165.00	102.0 AV			1.30 V	357	58.7	43.3
3	12330.00	57.7 PK	74.0	-16.3	1.65 V	256	48.2	9.5
4	12330.00	44.0 AV	54.0	-10.0	1.65 V	256	34.5	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.9 PK			1.70 H	91	69.2	44.7
2	*6405.00	101.4 AV			1.70 H	91	56.7	44.7
3	#12810.00	58.4 PK	88.2	-29.8	1.41 H	243	48.4	10.0
4	#12810.00	44.6 AV	68.2	-23.6	1.41 H	243	34.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.9 PK			1.11 V	345	70.2	44.7
2	*6405.00	102.2 AV			1.11 V	345	57.5	44.7
3	#12810.00	58.3 PK	88.2	-29.9	1.70 V	263	48.3	10.0
4	#12810.00	44.5 AV	68.2	-23.7	1.70 V	263	34.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.9 PK			1.65 H	98	68.0	44.9
2	*6445.00	100.0 AV			1.65 H	98	55.1	44.9
3	#12890.00	58.5 PK	88.2	-29.7	1.48 H	236	48.5	10.0
4	#12890.00	43.8 AV	68.2	-24.4	1.48 H	236	33.8	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	113.5 PK			1.16 V	343	68.6	44.9
2	*6445.00	100.9 AV			1.16 V	343	56.0	44.9
3	#12890.00	58.4 PK	88.2	-29.8	1.72 V	268	48.4	10.0
4	#12890.00	44.5 AV	68.2	-23.7	1.72 V	268	34.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.7 PK			1.50 H	262	68.6	45.1
2	*6485.00	101.4 AV			1.50 H	262	56.3	45.1
3	#12970.00	57.4 PK	88.2	-30.8	1.38 H	252	47.4	10.0
4	#12970.00	44.4 AV	68.2	-23.8	1.38 H	252	34.4	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.9 PK			1.06 V	176	69.8	45.1
2	*6485.00	102.5 AV			1.06 V	176	57.4	45.1
3	#12970.00	58.3 PK	88.2	-29.9	1.56 V	273	48.3	10.0
4	#12970.00	44.9 AV	68.2	-23.3	1.56 V	273	34.9	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	113.5 PK			1.47 H	263	68.3	45.2
2	*6525.00	102.1 AV			1.47 H	263	56.9	45.2
3	#13050.00	57.7 PK	88.2	-30.5	1.42 H	243	47.7	10.0
4	#13050.00	44.3 AV	68.2	-23.9	1.42 H	243	34.3	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.6 PK			1.00 V	176	70.4	45.2
2	*6525.00	103.2 AV			1.00 V	176	58.0	45.2
3	#13050.00	58.4 PK	88.2	-29.8	1.66 V	261	48.4	10.0
4	#13050.00	45.0 AV	68.2	-23.2	1.66 V	261	35.0	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.3 PK			2.13 H	62	69.0	45.3
2	*6565.00	101.4 AV			2.13 H	62	56.1	45.3
3	#13130.00	57.4 PK	88.2	-30.8	1.29 H	250	47.6	9.8
4	#13130.00	44.2 AV	68.2	-24.0	1.29 H	250	34.4	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.8 PK			1.00 V	179	69.5	45.3
2	*6565.00	103.0 AV			1.00 V	179	57.7	45.3
3	#13130.00	58.1 PK	88.2	-30.1	1.65 V	262	48.3	9.8
4	#13130.00	44.9 AV	68.2	-23.3	1.65 V	262	35.1	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	113.4 PK			2.11 H	65	67.9	45.5
2	*6725.00	101.1 AV			2.11 H	65	55.6	45.5
3	#13450.00	58.2 PK	88.2	-30.0	1.48 H	226	48.6	9.6
4	#13450.00	45.5 AV	68.2	-22.7	1.48 H	226	35.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	114.8 PK			1.68 V	76	69.3	45.5
2	*6725.00	102.0 AV			1.68 V	76	56.5	45.5
3	#13450.00	58.5 PK	88.2	-29.7	1.66 V	274	48.9	9.6
4	#13450.00	46.1 AV	68.2	-22.1	1.66 V	274	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.8 PK			1.66 H	359	68.0	45.8
2	*6845.00	101.1 AV			1.66 H	359	55.3	45.8
3	#13690.00	57.8 PK	88.2	-30.4	1.23 H	256	48.1	9.7
4	#13690.00	44.1 AV	68.2	-24.1	1.23 H	256	34.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.7 PK			1.70 V	70	68.9	45.8
2	*6845.00	102.0 AV			1.70 V	70	56.2	45.8
3	#13690.00	58.4 PK	88.2	-29.8	1.73 V	273	48.7	9.7
4	#13690.00	45.0 AV	68.2	-23.2	1.73 V	273	35.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.0 PK			1.70 H	355	68.2	45.8
2	*6885.00	100.9 AV			1.70 H	355	55.1	45.8
3	#13770.00	58.2 PK	88.2	-30.0	1.29 H	238	48.4	9.8
4	#13770.00	45.1 AV	68.2	-23.1	1.29 H	238	35.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.7 PK			1.69 V	127	68.9	45.8
2	*6885.00	102.1 AV			1.69 V	127	56.3	45.8
3	#13770.00	58.6 PK	88.2	-29.6	1.69 V	265	48.8	9.8
4	#13770.00	46.1 AV	68.2	-22.1	1.69 V	265	36.3	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	114.0 PK			1.27 H	185	68.1	45.9
2	*7005.00	101.2 AV			1.27 H	185	55.3	45.9
3	#14010.00	58.7 PK	88.2	-29.5	1.30 H	251	48.5	10.2
4	#14010.00	46.6 AV	68.2	-21.6	1.30 H	251	36.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	115.1 PK			1.59 V	64	69.2	45.9
2	*7005.00	102.4 AV			1.59 V	64	56.5	45.9
3	#14010.00	59.2 PK	88.2	-29.0	1.78 V	263	49.0	10.2
4	#14010.00	46.9 AV	68.2	-21.3	1.78 V	263	36.7	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	113.5 PK			1.57 H	188	67.2	46.3
2	*7085.00	101.3 AV			1.57 H	188	55.0	46.3
3	#7125.00	68.8 PK	88.2	-19.4	1.57 H	188	60.5	8.3
4	#7125.00	52.8 AV	68.2	-15.4	1.57 H	188	44.5	8.3
5	#14170.00	58.8 PK	88.2	-29.4	1.33 H	252	48.5	10.3
6	#14170.00	46.5 AV	68.2	-21.7	1.33 H	252	36.2	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	115.4 PK			1.58 V	120	69.1	46.3
2	*7085.00	102.3 AV			1.58 V	120	56.0	46.3
3	#7125.00	69.3 PK	88.2	-18.9	1.58 V	120	61.0	8.3
4	#7125.00	53.8 AV	68.2	-14.4	1.58 V	120	45.5	8.3
5	#14170.00	59.4 PK	88.2	-28.8	1.66 V	265	49.1	10.3
6	#14170.00	47.1 AV	68.2	-21.1	1.66 V	265	36.8	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.7 PK	88.2	-10.5	2.06 H	271	73.0	4.7
2	#5925.00	63.4 AV	68.2	-4.8	2.06 H	271	58.7	4.7
3	*5985.00	113.7 PK			2.06 H	271	71.4	42.3
4	*5985.00	101.4 AV			2.06 H	271	59.1	42.3
5	11910.00	55.4 PK	74.0	-18.6	1.21 H	256	46.2	9.2
6	11910.00	42.8 AV	54.0	-11.2	1.21 H	256	33.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.49 V	177	72.1	4.7
2	#5925.00	58.7 AV	68.2	-9.5	1.49 V	177	54.0	4.7
3	*5985.00	114.6 PK			1.49 V	177	72.3	42.3
4	*5985.00	102.2 AV			1.49 V	177	59.9	42.3
5	11970.00	56.8 PK	74.0	-17.2	1.61 V	258	47.5	9.3
6	11970.00	43.5 AV	54.0	-10.5	1.61 V	258	34.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	113.1 PK			2.22 H	261	69.9	43.2
2	*6145.00	101.2 AV			2.22 H	261	58.0	43.2
3	12290.00	56.0 PK	74.0	-18.0	1.36 H	250	46.4	9.6
4	12290.00	43.0 AV	54.0	-11.0	1.36 H	250	33.4	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	115.4 PK			1.15 V	357	72.2	43.2
2	*6145.00	102.4 AV			1.15 V	357	59.2	43.2
3	12290.00	57.4 PK	74.0	-16.6	1.63 V	258	47.8	9.6
4	12290.00	44.0 AV	54.0	-10.0	1.63 V	258	34.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.7 PK			1.58 H	91	69.0	44.7
2	*6385.00	102.4 AV			1.58 H	91	57.7	44.7
3	#12770.00	58.0 PK	88.2	-30.2	1.48 H	251	48.1	9.9
4	#12770.00	43.9 AV	68.2	-24.3	1.48 H	251	34.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.7 PK			1.19 V	343	70.0	44.7
2	*6385.00	102.3 AV			1.19 V	343	57.6	44.7
3	#12770.00	58.3 PK	88.2	-29.9	1.63 V	255	48.4	9.9
4	#12770.00	44.3 AV	68.2	-23.9	1.63 V	255	34.4	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	114.5 PK			1.49 H	264	69.5	45.0
2	*6465.00	101.4 AV			1.49 H	264	56.4	45.0
3	#12930.00	57.3 PK	88.2	-30.9	1.25 H	360	47.4	9.9
4	#12930.00	44.2 AV	68.2	-24.0	1.25 H	360	34.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	114.9 PK			1.50 V	177	69.9	45.0
2	*6465.00	102.7 AV			1.50 V	177	57.7	45.0
3	#12930.00	58.5 PK	88.2	-29.7	1.65 V	251	48.6	9.9
4	#12930.00	44.4 AV	68.2	-23.8	1.65 V	251	34.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.8 PK			1.49 H	264	68.5	45.3
2	*6545.00	101.6 AV			1.49 H	264	56.3	45.3
3	#13090.00	57.5 PK	88.2	-30.7	1.33 H	246	47.6	9.9
4	#13090.00	44.3 AV	68.2	-23.9	1.33 H	246	34.4	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	115.5 PK			1.29 V	177	70.2	45.3
2	*6545.00	102.8 AV			1.29 V	177	57.5	45.3
3	#13090.00	58.0 PK	88.2	-30.2	1.68 V	271	48.1	9.9
4	#13090.00	45.0 AV	68.2	-23.2	1.68 V	271	35.1	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.5 PK			2.15 H	66	68.9	45.6
2	*6705.00	101.9 AV			2.15 H	66	56.3	45.6
3	#13410.00	57.4 PK	88.2	-30.8	1.33 H	243	47.9	9.5
4	#13410.00	44.3 AV	68.2	-23.9	1.33 H	243	34.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	115.8 PK			1.00 V	177	70.2	45.6
2	*6705.00	103.1 AV			1.00 V	177	57.5	45.6
3	#13410.00	57.8 PK	88.2	-30.4	1.66 V	256	48.3	9.5
4	#13410.00	44.8 AV	68.2	-23.4	1.66 V	256	35.3	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.9 PK			1.65 H	359	68.1	45.8
2	*6865.00	101.3 AV			1.65 H	359	55.5	45.8
3	#13730.00	57.7 PK	88.2	-30.5	1.33 H	245	48.0	9.7
4	#13730.00	44.7 AV	68.2	-23.5	1.33 H	245	35.0	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	115.1 PK			1.70 V	63	69.3	45.8
2	*6865.00	102.5 AV			1.70 V	63	56.7	45.8
3	#13730.00	58.3 PK	88.2	-29.9	1.69 V	261	48.6	9.7
4	#13730.00	46.2 AV	68.2	-22.0	1.69 V	261	36.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	114.1 PK			1.54 H	189	68.1	46.0
2	*6945.00	101.9 AV			1.54 H	189	55.9	46.0
3	#13890.00	58.4 PK	88.2	-29.8	1.33 H	252	48.4	10.0
4	#13890.00	46.1 AV	68.2	-22.1	1.33 H	252	36.1	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	115.2 PK			1.48 V	63	69.2	46.0
2	*6945.00	103.0 AV			1.48 V	63	57.0	46.0
3	#13890.00	58.6 PK	88.2	-29.6	1.71 V	265	48.6	10.0
4	#13890.00	46.4 AV	68.2	-21.8	1.71 V	265	36.4	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	113.9 PK			1.58 H	191	68.0	45.9
2	*7025.00	102.0 AV			1.58 H	191	56.1	45.9
3	#7125.00	70.9 PK	88.2	-17.3	1.58 H	191	62.6	8.3
4	#7125.00	55.6 AV	68.2	-12.6	1.58 H	191	47.3	8.3
5	#14050.00	58.7 PK	88.2	-29.5	1.33 H	250	48.5	10.2
6	#14050.00	46.7 AV	68.2	-21.5	1.33 H	250	36.5	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	114.9 PK			1.60 V	64	69.0	45.9
2	*7025.00	102.9 AV			1.60 V	64	57.0	45.9
3	#7125.00	73.3 PK	88.2	-14.9	1.60 V	64	65.0	8.3
4	#7125.00	57.7 AV	68.2	-10.5	1.60 V	64	49.4	8.3
5	#14050.00	59.2 PK	88.2	-29.0	1.79 V	272	49.0	10.2
6	#14050.00	47.0 AV	68.2	-21.2	1.79 V	272	36.8	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	1.56 H	268	71.4	4.7
2	#5925.00	64.1 AV	68.2	-4.1	1.56 H	268	59.4	4.7
3	*6025.00	110.3 PK			1.56 H	268	67.8	42.5
4	*6025.00	99.0 AV			1.56 H	268	56.5	42.5
5	12050.00	55.6 PK	74.0	-18.4	1.35 H	252	46.4	9.2
6	12050.00	42.9 AV	54.0	-11.1	1.35 H	252	33.7	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.7 PK	88.2	-9.5	1.41 V	354	74.0	4.7
2	#5925.00	66.1 AV	68.2	-2.1	1.41 V	354	61.4	4.7
3	*6025.00	112.6 PK			1.41 V	354	70.1	42.5
4	*6025.00	100.5 AV			1.41 V	354	58.0	42.5
5	12050.00	57.0 PK	74.0	-17.0	1.70 V	269	47.8	9.2
6	12050.00	43.7 AV	54.0	-10.3	1.70 V	269	34.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.0 PK			1.61 H	90	67.5	43.5
2	*6185.00	99.7 AV			1.61 H	90	56.2	43.5
3	12370.00	56.1 PK	74.0	-17.9	1.44 H	233	46.5	9.6
4	12370.00	43.5 AV	54.0	-10.5	1.44 H	233	33.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	112.2 PK			1.24 V	354	68.7	43.5
2	*6185.00	100.6 AV			1.24 V	354	57.1	43.5
3	12370.00	56.6 PK	74.0	-17.4	1.66 V	258	47.0	9.6
4	12370.00	44.1 AV	54.0	-9.9	1.66 V	258	34.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.6 PK			1.56 H	93	68.1	44.5
2	*6345.00	100.0 AV			1.56 H	93	55.5	44.5
3	12690.00	57.4 PK	74.0	-16.6	1.33 H	242	47.6	9.8
4	12690.00	43.8 AV	54.0	-10.2	1.33 H	242	34.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	113.7 PK			1.24 V	0	69.2	44.5
2	*6345.00	101.0 AV			1.24 V	0	56.5	44.5
3	12690.00	57.9 PK	74.0	-16.1	1.62 V	259	48.1	9.8
4	12690.00	44.6 AV	54.0	-9.4	1.62 V	259	34.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.3 PK			1.60 H	262	67.1	45.2
2	*6505.00	100.7 AV			1.60 H	262	55.5	45.2
3	#13010.00	57.7 PK	88.2	-30.5	1.42 H	241	47.8	9.9
4	#13010.00	44.4 AV	68.2	-23.8	1.42 H	241	34.5	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	113.4 PK			1.12 V	178	68.2	45.2
2	*6505.00	101.6 AV			1.12 V	178	56.4	45.2
3	#13010.00	58.3 PK	88.2	-29.9	1.66 V	247	48.4	9.9
4	#13010.00	45.0 AV	68.2	-23.2	1.66 V	247	35.1	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.0 PK			2.08 H	73	67.5	45.5
2	*6665.00	101.4 AV			2.08 H	73	55.9	45.5
3	13330.00	57.0 PK	74.0	-17.0	1.42 H	236	47.8	9.2
4	13330.00	44.0 AV	54.0	-10.0	1.42 H	236	34.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	114.4 PK			1.01 V	175	68.9	45.5
2	*6665.00	102.2 AV			1.01 V	175	56.7	45.5
3	13330.00	57.6 PK	74.0	-16.4	1.66 V	262	48.4	9.2
4	13330.00	44.5 AV	54.0	-9.5	1.66 V	262	35.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	113.5 PK			1.62 H	1	67.8	45.7
2	*6825.00	101.1 AV			1.62 H	1	55.4	45.7
3	#13650.00	57.6 PK	88.2	-30.6	1.27 H	248	48.0	9.6
4	#13650.00	45.9 AV	68.2	-22.3	1.27 H	248	36.3	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	114.6 PK			1.70 V	180	68.9	45.7
2	*6825.00	101.9 AV			1.70 V	180	56.2	45.7
3	#13650.00	58.3 PK	88.2	-29.9	1.62 V	280	48.7	9.6
4	#13650.00	46.2 AV	68.2	-22.0	1.62 V	280	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.6 PK			1.32 H	194	66.7	45.9
2	*6985.00	99.9 AV			1.32 H	194	54.0	45.9
3	#7125.00	76.4 PK	88.2	-11.8	1.32 H	194	68.1	8.3
4	#7125.00	59.6 AV	68.2	-8.6	1.32 H	194	51.3	8.3
5	#13970.00	58.3 PK	88.2	-29.9	1.30 H	255	48.1	10.2
6	#13970.00	46.6 AV	68.2	-21.6	1.30 H	255	36.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.7 PK			1.43 V	66	66.8	45.9
2	*6985.00	101.3 AV			1.43 V	66	55.4	45.9
3	#7125.00	80.5 PK	88.2	-7.7	1.43 V	66	72.2	8.3
4	#7125.00	61.4 AV	68.2	-6.8	1.43 V	66	53.1	8.3
5	#13970.00	59.1 PK	88.2	-29.1	1.66 V	265	48.9	10.2
6	#13970.00	47.0 AV	68.2	-21.2	1.66 V	265	36.8	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.48 H	178	71.8	4.7
2	#5925.00	64.7 AV	68.2	-3.5	1.48 H	178	60.0	4.7
3	*6105.00	108.3 PK			1.48 H	178	65.4	42.9
4	*6105.00	96.4 AV			1.48 H	178	53.5	42.9
5	12210.00	55.6 PK	74.0	-18.4	1.00 H	231	46.4	9.2
6	12210.00	43.2 AV	54.0	-10.8	1.00 H	231	34.0	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.8 PK	88.2	-7.4	1.37 V	359	76.1	4.7
2	#5925.00	67.9 AV	68.2	-0.3	1.37 V	359	63.2	4.7
3	*6105.00	111.1 PK			1.37 V	359	68.2	42.9
4	*6105.00	98.2 AV			1.37 V	359	55.3	42.9
5	12210.00	57.1 PK	74.0	-16.9	1.55 V	286	47.9	9.2
6	12210.00	43.8 AV	54.0	-10.2	1.55 V	286	34.6	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	110.4 PK			2.01 H	275	66.5	43.9
2	*6265.00	98.2 AV			2.01 H	274	54.3	43.9
3	12530.00	56.7 PK	74.0	-17.3	1.32 H	243	46.9	9.8
4	12530.00	44.8 AV	54.0	-9.2	1.32 H	243	35.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.2 PK			1.40 V	68	67.3	43.9
2	*6265.00	99.6 AV			1.40 V	68	55.7	43.9
3	12530.00	57.3 PK	74.0	-16.7	1.66 V	271	47.5	9.8
4	12530.00	45.6 AV	54.0	-8.4	1.66 V	271	35.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.1 PK			1.49 H	263	66.3	44.8
2	*6425.00	98.9 AV			1.49 H	263	54.1	44.8
3	#12850.00	56.4 PK	88.2	-31.8	1.37 H	236	46.5	9.9
4	#12850.00	44.2 AV	68.2	-24.0	1.37 H	236	34.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	112.4 PK			1.55 V	173	67.6	44.8
2	*6425.00	99.8 AV			1.55 V	173	55.0	44.8
3	#12850.00	57.2 PK	88.2	-31.0	1.70 V	263	47.3	9.9
4	#12850.00	44.9 AV	68.2	-23.3	1.70 V	263	35.0	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	112.0 PK			1.69 H	87	66.5	45.5
2	*6585.00	100.4 AV			1.69 H	87	54.9	45.5
3	#13170.00	57.6 PK	88.2	-30.6	1.23 H	251	47.9	9.7
4	#13170.00	44.5 AV	68.2	-23.7	1.23 H	251	34.8	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	113.4 PK			1.59 V	180	67.9	45.5
2	*6585.00	101.5 AV			1.59 V	180	56.0	45.5
3	#13170.00	58.2 PK	88.2	-30.0	1.55 V	283	48.5	9.7
4	#13170.00	45.0 AV	68.2	-23.2	1.55 V	283	35.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	113.1 PK			2.12 H	70	67.5	45.6
2	*6745.00	100.6 AV			2.12 H	70	55.0	45.6
3	#13490.00	57.7 PK	88.2	-30.5	1.29 H	241	47.9	9.8
4	#13490.00	44.6 AV	68.2	-23.6	1.29 H	241	34.8	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	114.2 PK			1.00 V	173	68.6	45.6
2	*6745.00	101.5 AV			1.00 V	173	55.9	45.6
3	#13490.00	58.3 PK	88.2	-29.9	1.63 V	269	48.5	9.8
4	#13490.00	45.3 AV	68.2	-22.9	1.63 V	269	35.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.1 °C, 75.3 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.5 PK			1.57 H	267	61.7	45.8
2	*6905.00	95.2 AV			1.57 H	267	49.4	45.8
3	#7125.00	65.4 PK	88.2	-22.8	1.57 H	267	57.1	8.3
4	#7125.00	52.9 AV	68.2	-15.3	1.57 H	267	44.6	8.3
5	7250.00	64.3 PK	74.0	-9.7	1.57 H	267	55.8	8.5
6	7250.00	50.9 AV	54.0	-3.1	1.57 H	267	42.4	8.5
7	#13810.00	58.7 PK	88.2	-29.5	1.38 H	250	48.7	10.0
8	#13810.00	46.3 AV	68.2	-21.9	1.38 H	250	36.3	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.0 PK			1.57 V	64	63.2	45.8
2	*6905.00	96.5 AV			1.57 V	64	50.7	45.8
3	#7125.00	70.7 PK	88.2	-17.5	1.57 V	64	62.4	8.3
4	#7125.00	58.3 AV	68.2	-9.9	1.57 V	64	50.0	8.3
5	7250.00	67.3 PK	74.0	-6.7	1.57 V	64	58.8	8.5
6	7250.00	53.7 AV	54.0	-0.3	1.57 V	64	45.2	8.5
7	#13810.00	58.5 PK	88.2	-29.7	1.63 V	261	48.5	10.0
8	#13810.00	46.7 AV	68.2	-21.5	1.63 V	261	36.7	10.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge_CDD

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

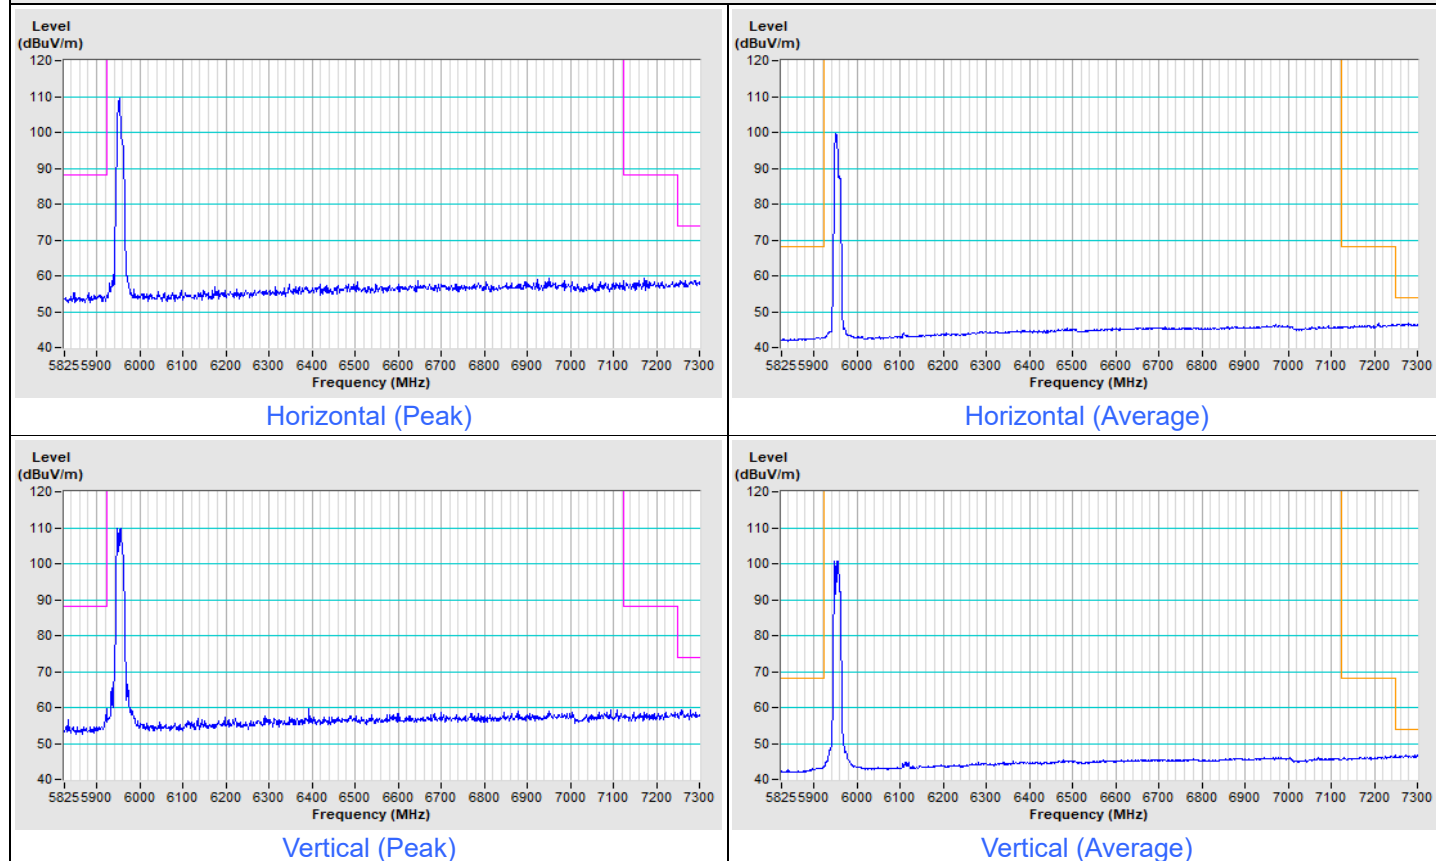


802.11a Channel 229

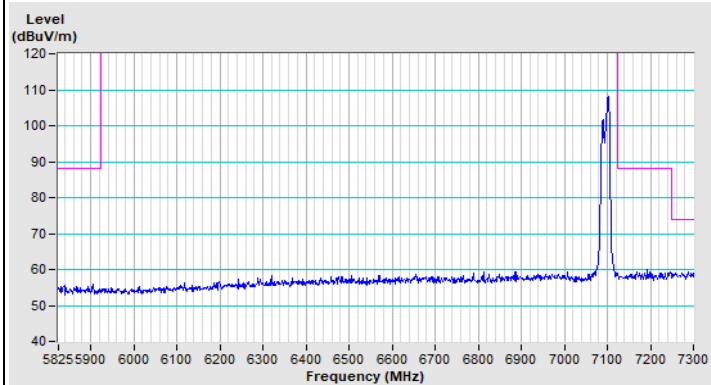


Horizontal (Peak)

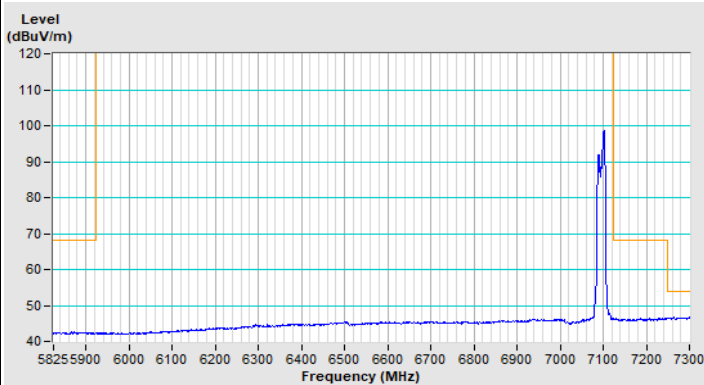

Horizontal (Average)

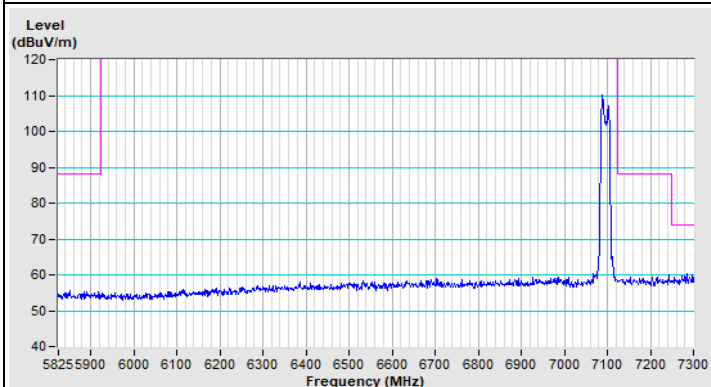


Vertical (Peak)

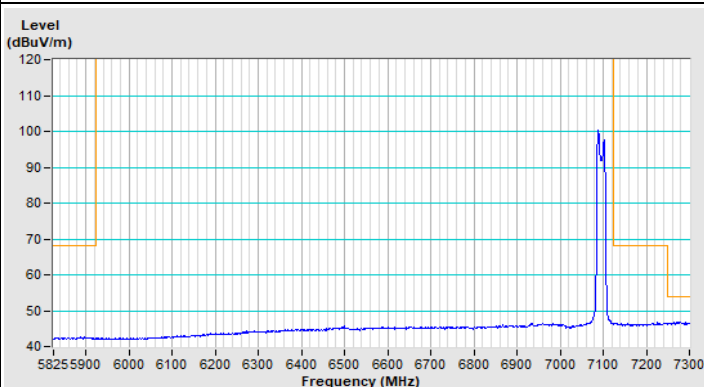


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

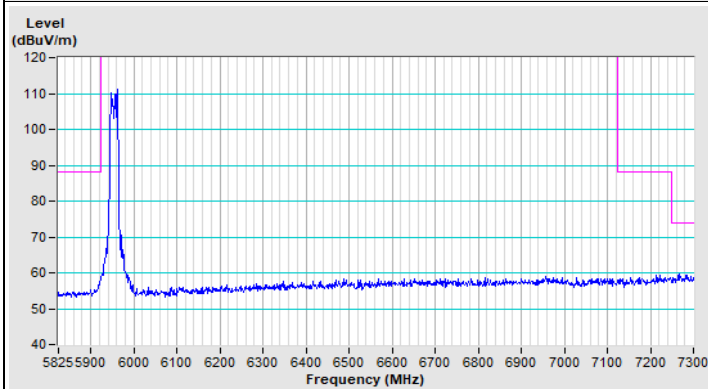


Horizontal (Peak)

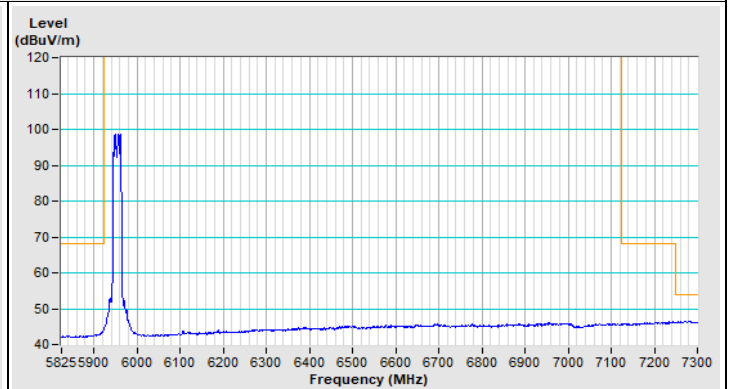

Horizontal (Average)

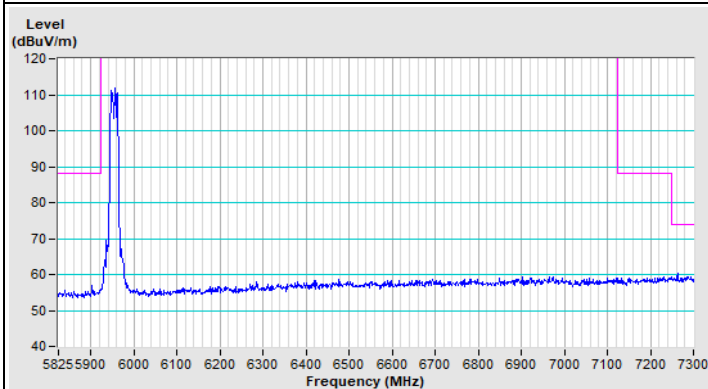


Vertical (Peak)

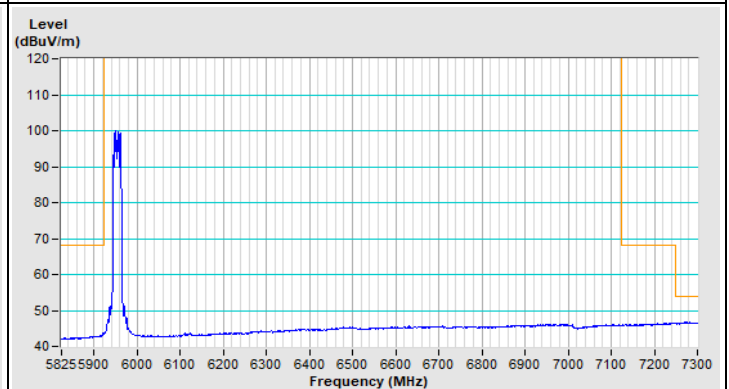


Vertical (Average)


802.11be (EHT20) Channel 229

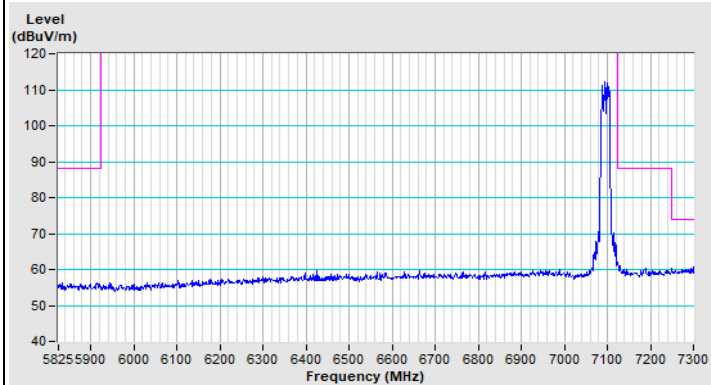


Horizontal (Peak)

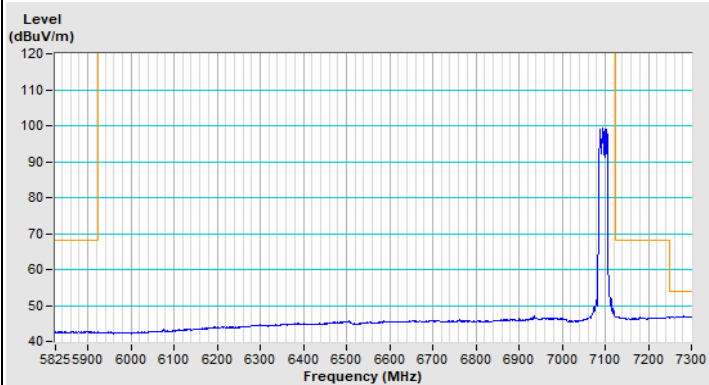

Horizontal (Average)

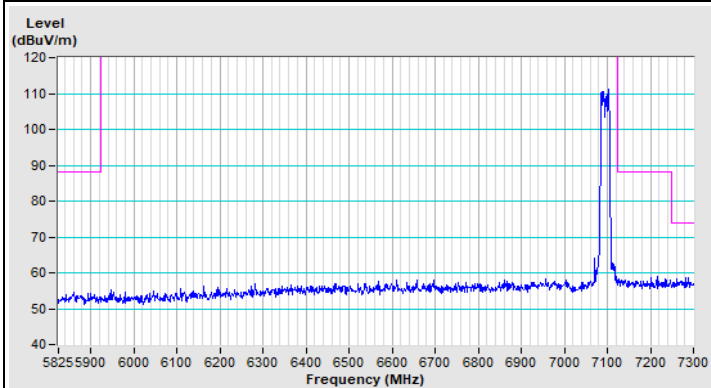


Vertical (Peak)

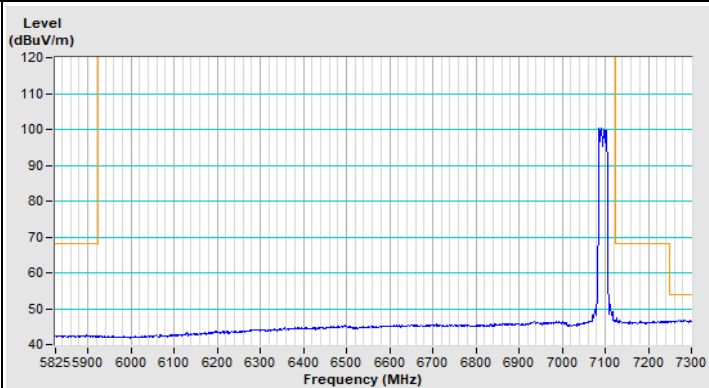


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

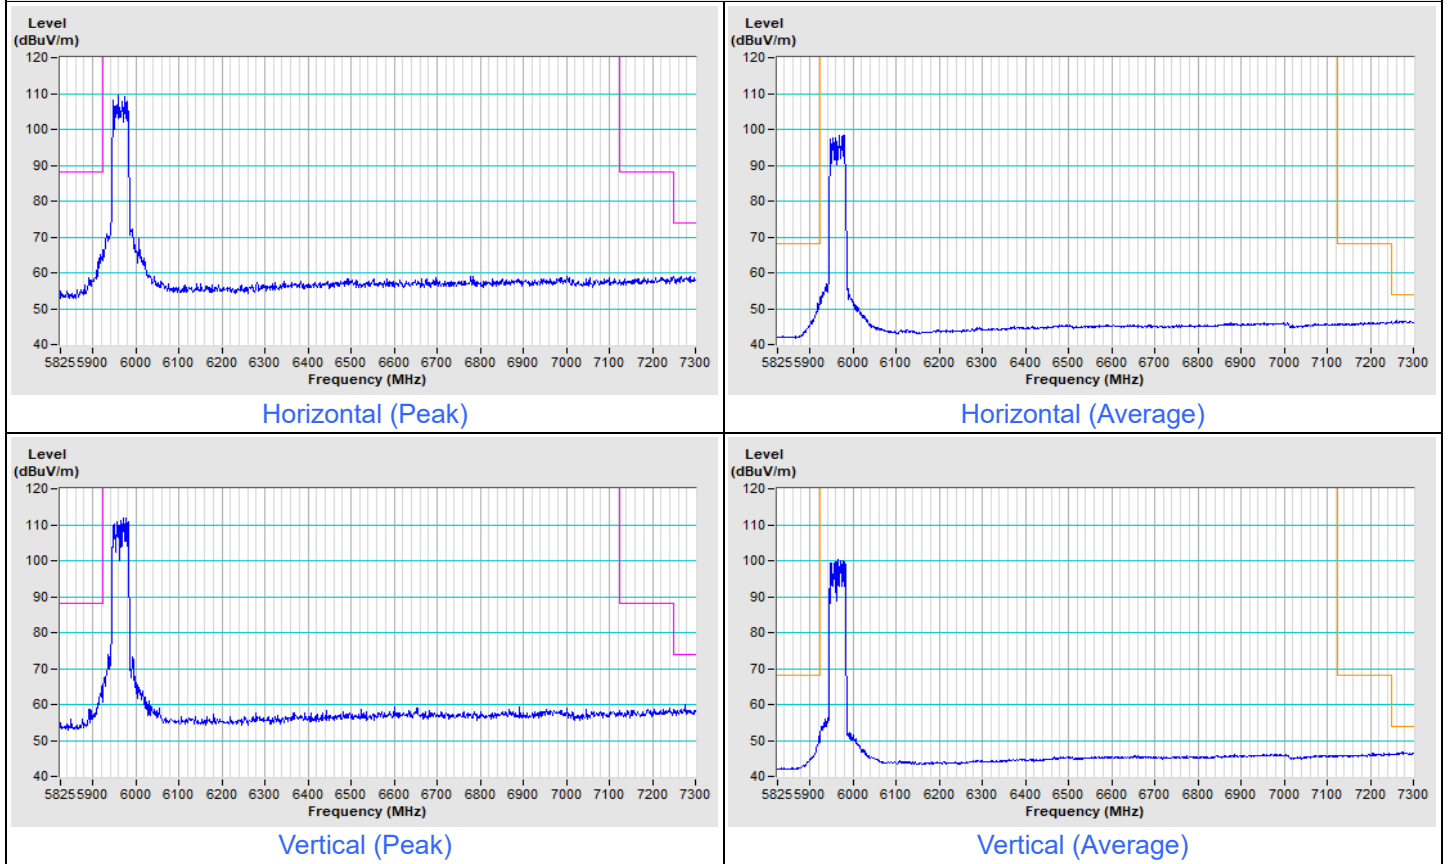


802.11be (EHT40) Channel 227

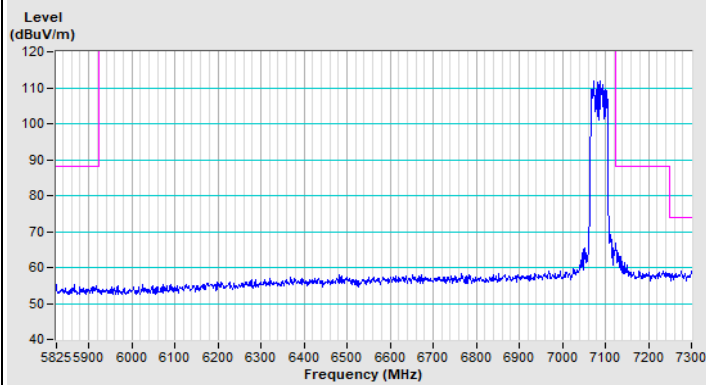


Horizontal (Peak)

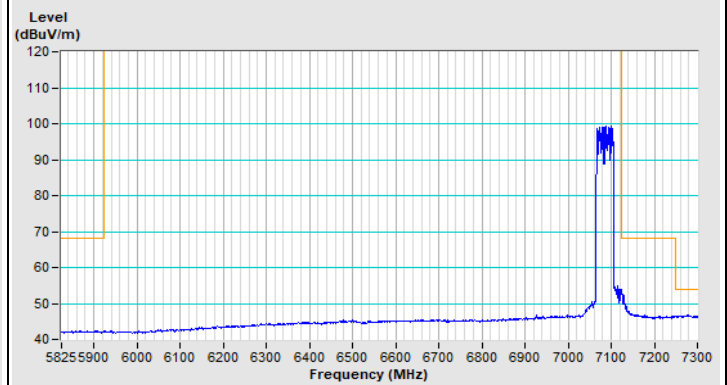

Horizontal (Average)

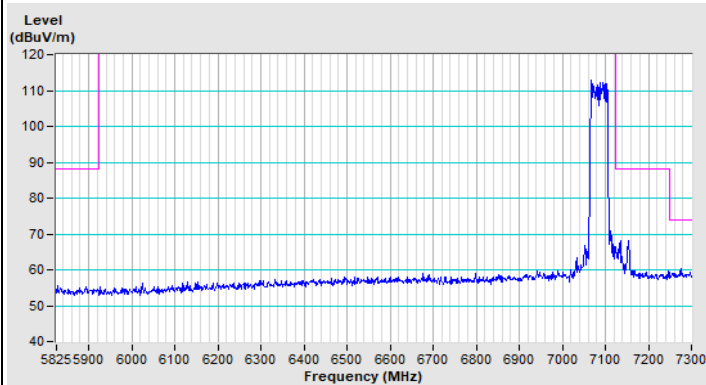


Vertical (Peak)

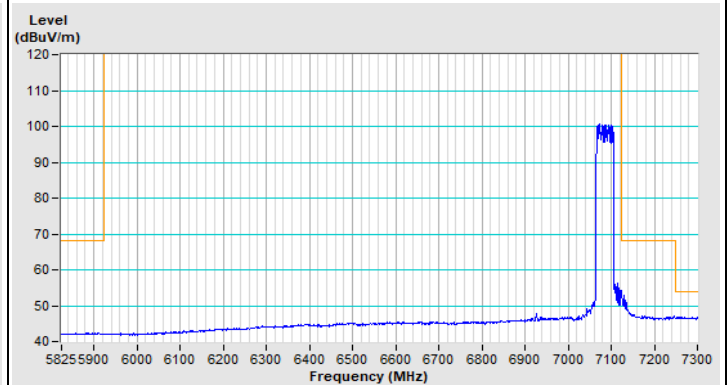


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

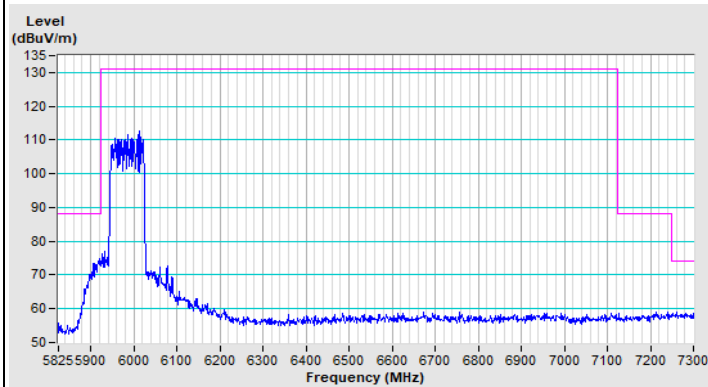


Horizontal (Peak)

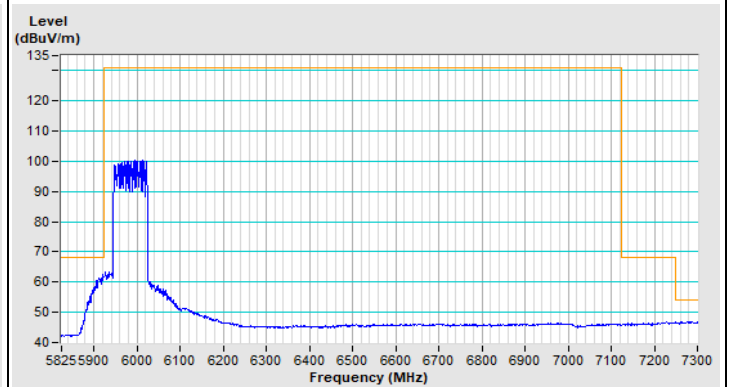

Horizontal (Average)

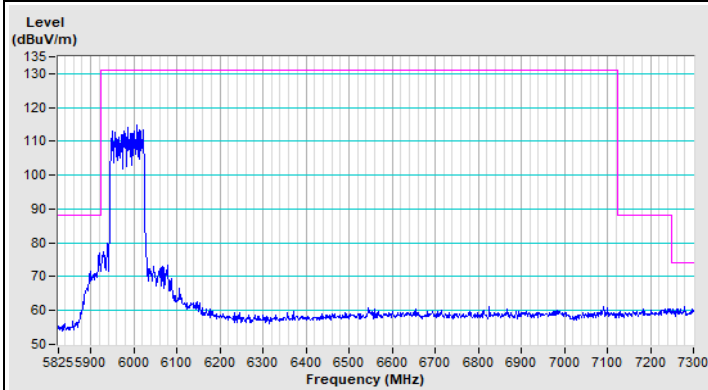


Vertical (Peak)

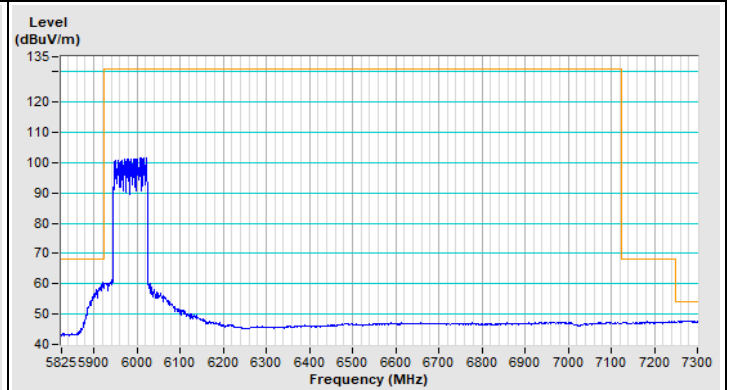


Vertical (Average)


802.11be (EHT80) Channel 215

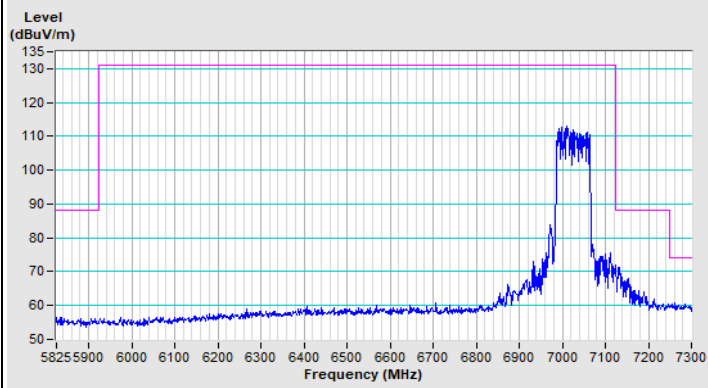


Horizontal (Peak)

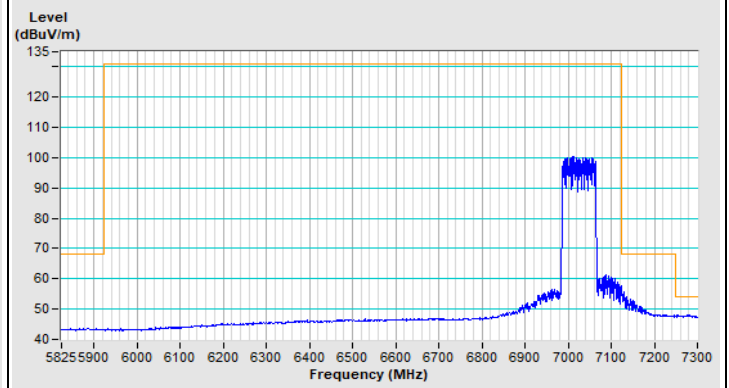

Horizontal (Average)

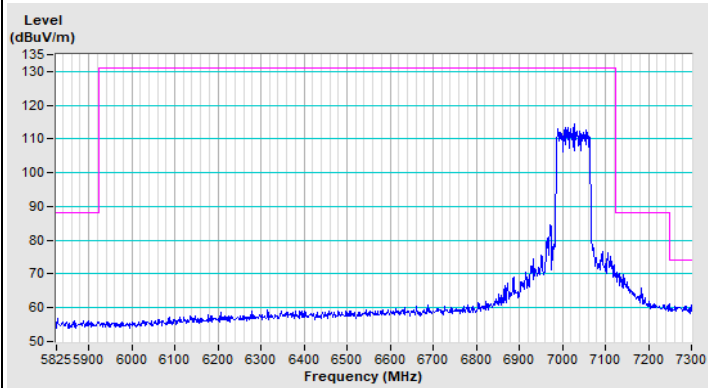


Vertical (Peak)

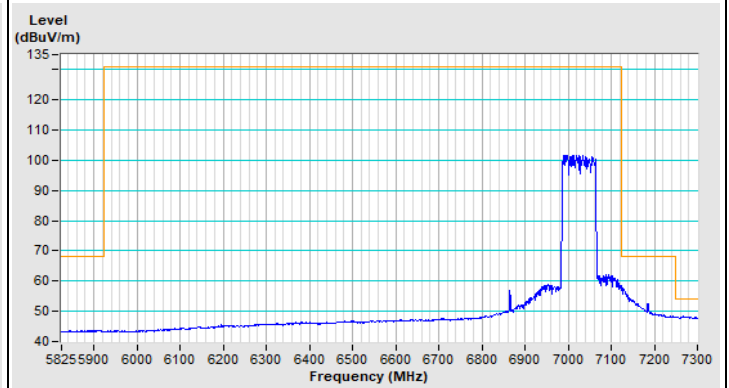


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

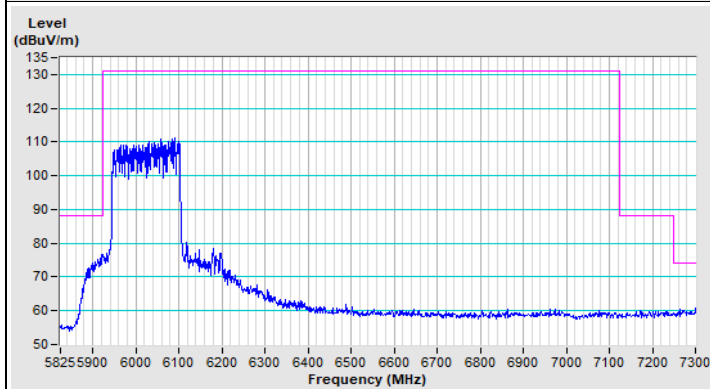


Horizontal (Peak)

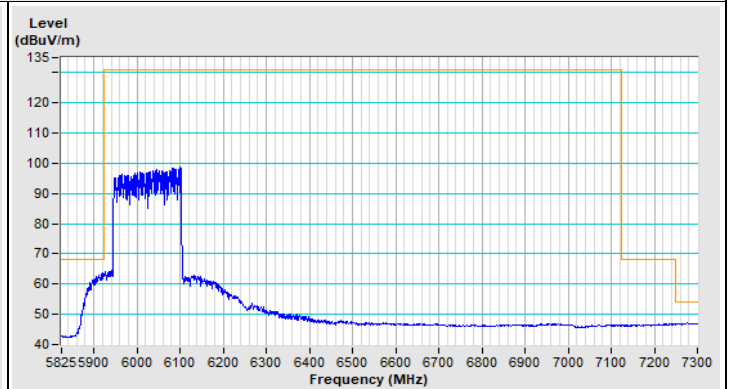

Horizontal (Average)

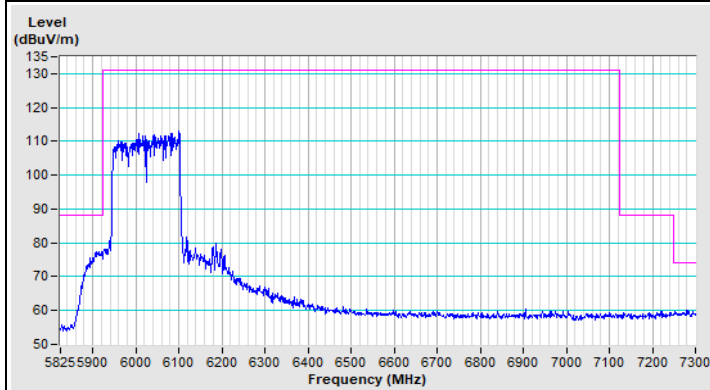


Vertical (Peak)

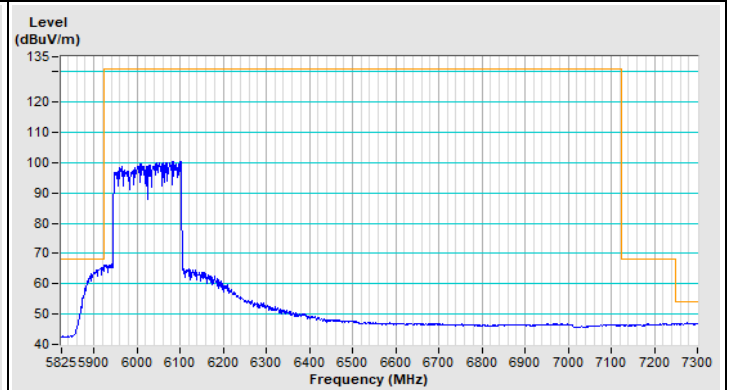


Vertical (Average)


802.11be (EHT160) Channel 207

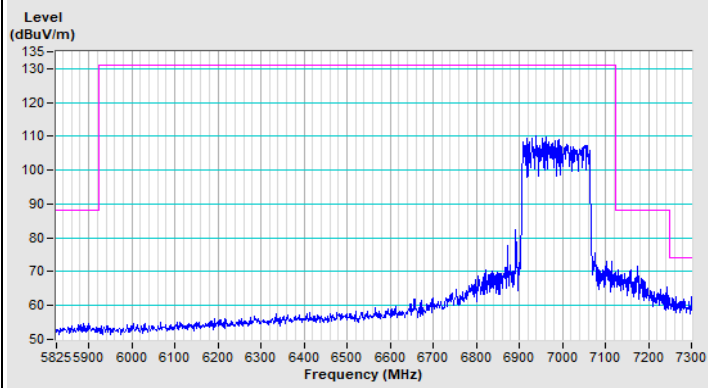


Horizontal (Peak)

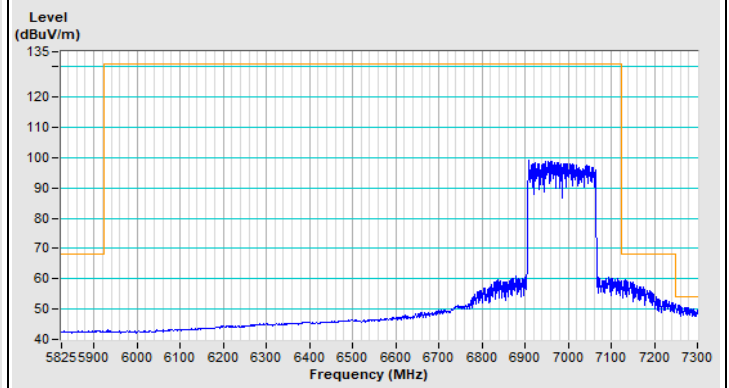

Horizontal (Average)

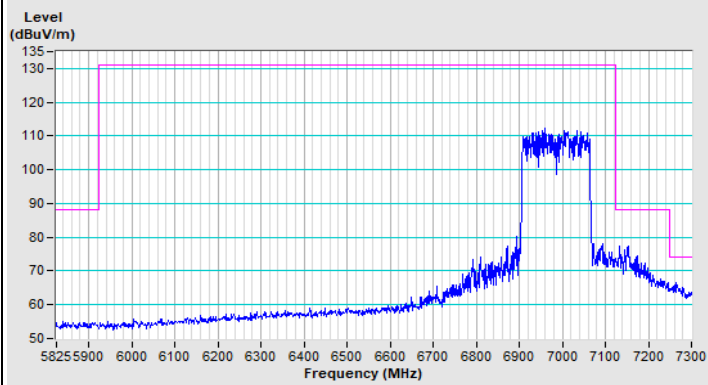


Vertical (Peak)

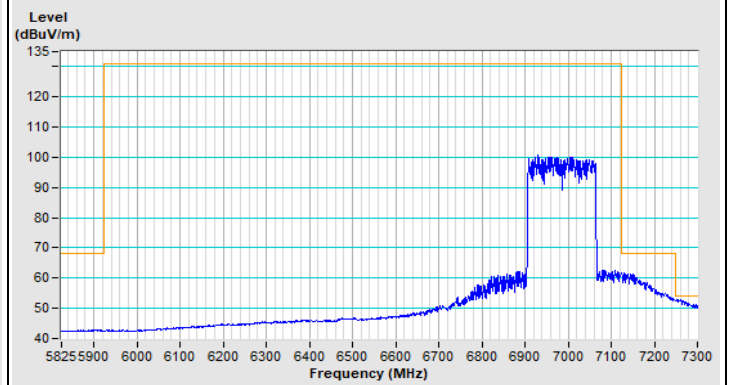


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

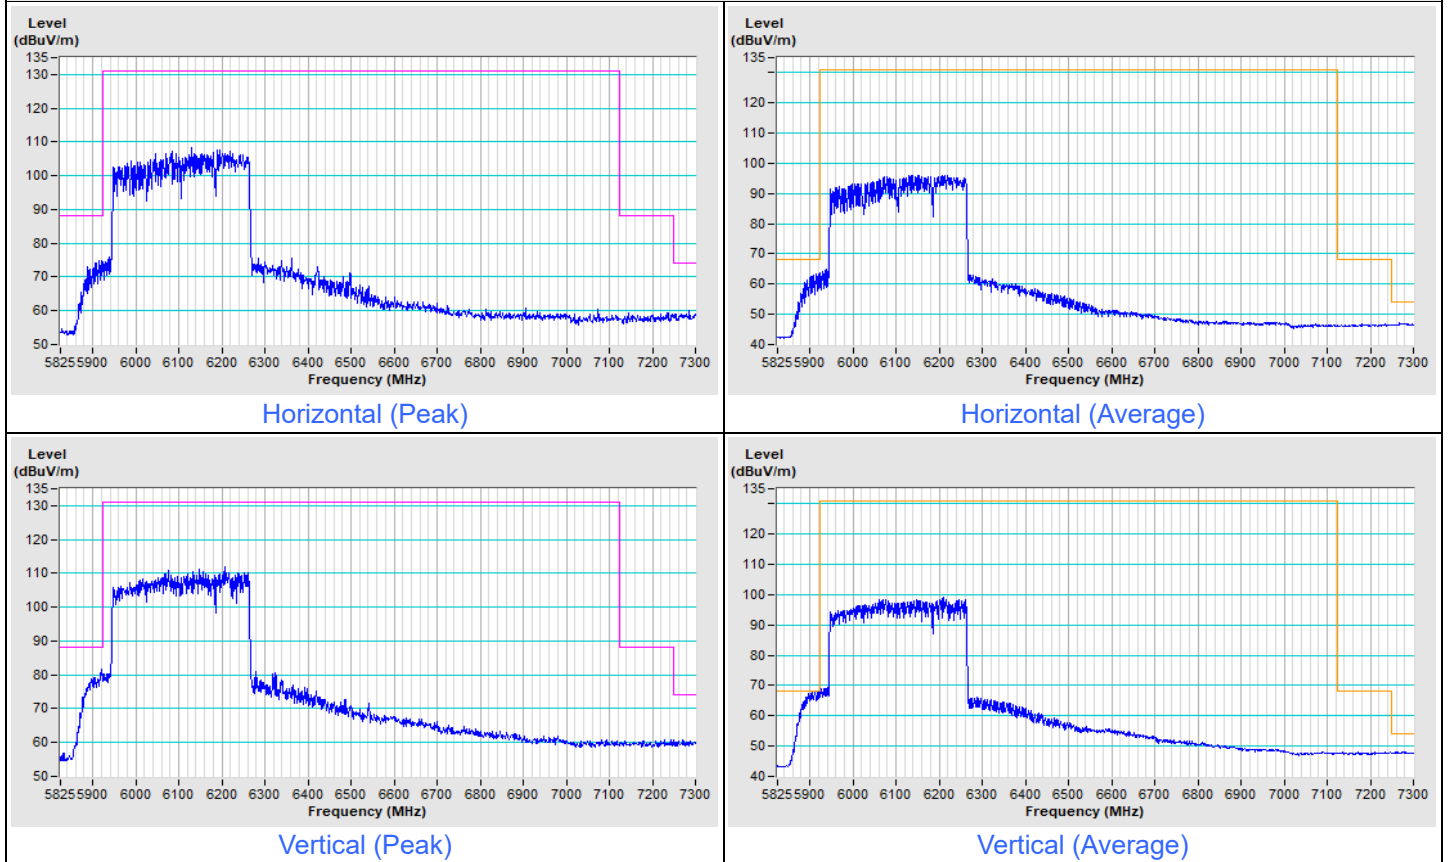


802.11be (EHT320) Channel 191

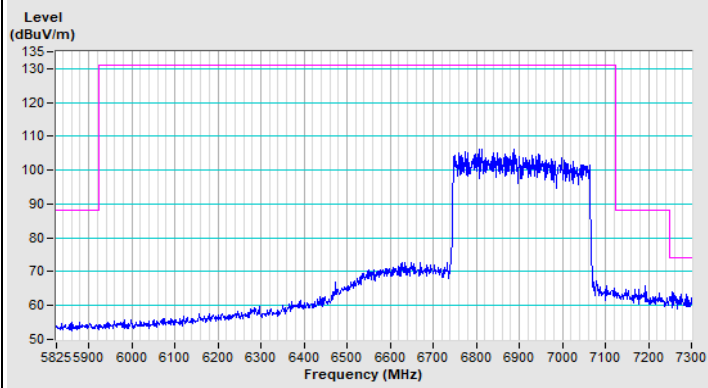


Horizontal (Peak)

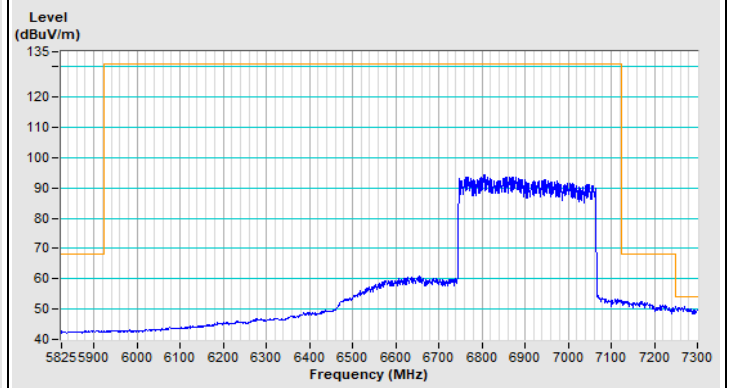

Horizontal (Average)

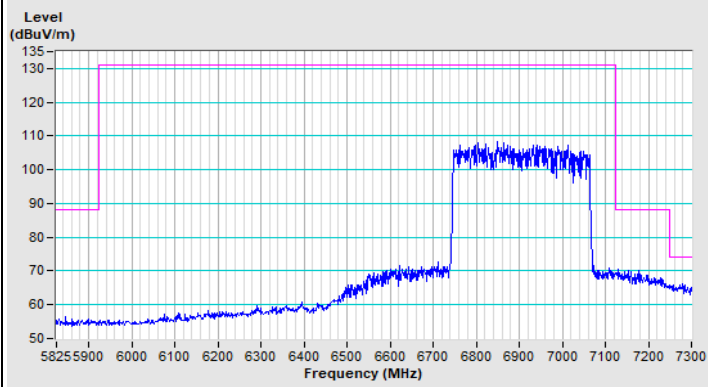

Vertical (Peak)

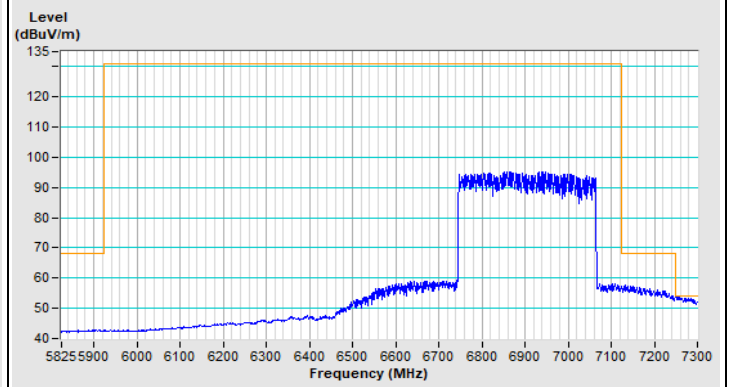

Vertical (Average)

Beamforming Mode

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.1 PK	88.2	-30.1	1.51 H	62	53.4	4.7
2	#5925.00	43.8 AV	68.2	-24.4	1.51 H	62	39.1	4.7
3	*5955.00	108.0 PK			1.51 H	62	65.7	42.3
4	*5955.00	96.1 AV			1.51 H	62	53.8	42.3
5	11910.00	56.1 PK	74.0	-17.9	1.19 H	36	46.9	9.2
6	11910.00	43.1 AV	54.0	-10.9	1.19 H	36	33.9	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.50 V	3	54.9	4.7
2	#5925.00	44.3 AV	68.2	-23.9	1.50 V	3	39.6	4.7
3	*5955.00	110.9 PK			1.50 V	3	68.6	42.3
4	*5955.00	98.9 AV			1.50 V	3	56.6	42.3
5	11910.00	56.5 PK	74.0	-17.5	1.55 V	134	47.3	9.2
6	11910.00	43.5 AV	54.0	-10.5	1.55 V	134	34.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	107.8 PK			1.51 H	62	64.5	43.3
2	*6175.00	95.8 AV			1.51 H	62	52.5	43.3
3	12350.00	56.2 PK	74.0	-17.8	1.67 H	329	46.6	9.6
4	12350.00	43.6 AV	54.0	-10.4	1.67 H	329	34.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.6 PK			1.51 V	3	66.3	43.3
2	*6175.00	97.8 AV			1.51 V	3	54.5	43.3
3	12350.00	56.4 PK	74.0	-17.6	1.75 V	118	46.8	9.6
4	12350.00	43.7 AV	54.0	-10.3	1.75 V	118	34.1	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.3 PK			1.52 H	61	62.5	44.8
2	*6415.00	95.6 AV			1.52 H	61	50.8	44.8
3	#12830.00	56.4 PK	88.2	-31.8	1.61 H	135	46.4	10.0
4	#12830.00	43.6 AV	68.2	-24.6	1.61 H	135	33.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.8 PK			1.52 V	3	65.0	44.8
2	*6415.00	97.8 AV			1.52 V	3	53.0	44.8
3	#12830.00	56.8 PK	88.2	-31.4	1.15 V	1	46.8	10.0
4	#12830.00	44.0 AV	68.2	-24.2	1.15 V	1	34.0	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.4 PK			1.54 H	55	63.5	44.9
2	*6435.00	96.7 AV			1.54 H	55	51.8	44.9
3	#12870.00	56.5 PK	88.2	-31.7	1.75 H	229	46.6	9.9
4	#12870.00	43.7 AV	68.2	-24.5	1.75 H	229	33.8	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.2 PK			1.52 V	2	65.3	44.9
2	*6435.00	98.6 AV			1.52 V	2	53.7	44.9
3	#12870.00	56.9 PK	88.2	-31.3	1.15 V	284	47.0	9.9
4	#12870.00	44.1 AV	68.2	-24.1	1.15 V	284	34.2	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.9 PK			1.50 H	60	62.9	45.0
2	*6475.00	95.8 AV			1.50 H	60	50.8	45.0
3	#12950.00	56.1 PK	88.2	-32.1	1.05 H	200	46.1	10.0
4	#12950.00	44.2 AV	68.2	-24.0	1.05 H	200	34.2	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.6 PK			1.51 V	2	64.6	45.0
2	*6475.00	97.7 AV			1.51 V	2	52.7	45.0
3	#12950.00	56.3 PK	88.2	-31.9	1.58 V	8	46.3	10.0
4	#12950.00	44.5 AV	68.2	-23.7	1.58 V	8	34.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.3 PK			1.53 H	61	62.1	45.2
2	*6515.00	95.1 AV			1.53 H	61	49.9	45.2
3	#13030.00	57.0 PK	88.2	-31.2	1.05 H	215	47.1	9.9
4	#13030.00	45.8 AV	68.2	-22.4	1.05 H	215	35.9	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.5 PK			1.50 V	1	64.3	45.2
2	*6515.00	97.4 AV			1.50 V	1	52.2	45.2
3	#13030.00	57.1 PK	88.2	-31.1	1.15 V	219	47.2	9.9
4	#13030.00	46.6 AV	68.2	-21.6	1.15 V	219	36.7	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.0 PK			1.50 H	62	61.7	45.3
2	*6535.00	95.2 AV			1.50 H	62	49.9	45.3
3	#13070.00	56.6 PK	88.2	-31.6	1.57 H	199	46.7	9.9
4	#13070.00	44.1 AV	68.2	-24.1	1.57 H	199	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.0 PK			1.52 V	2	63.7	45.3
2	*6535.00	97.0 AV			1.52 V	2	51.7	45.3
3	#13070.00	56.9 PK	88.2	-31.3	1.65 V	119	47.0	9.9
4	#13070.00	44.3 AV	68.2	-23.9	1.65 V	119	34.4	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.2 PK			1.50 H	59	61.6	45.6
2	*6695.00	95.4 AV			1.50 H	59	49.8	45.6
3	13390.00	57.3 PK	74.0	-16.7	1.57 H	194	47.9	9.4
4	13390.00	44.5 AV	54.0	-9.5	1.57 H	194	35.1	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.2 PK			1.50 V	3	63.6	45.6
2	*6695.00	97.3 AV			1.50 V	3	51.7	45.6
3	13390.00	57.6 PK	74.0	-16.4	1.54 V	111	48.2	9.4
4	13390.00	44.8 AV	54.0	-9.2	1.54 V	111	35.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.8 PK			1.51 H	64	61.0	45.8
2	*6855.00	94.1 AV			1.51 H	64	48.3	45.8
3	#13710.00	57.0 PK	88.2	-31.2	1.05 H	216	47.3	9.7
4	#13710.00	44.0 AV	68.2	-24.2	1.05 H	216	34.3	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.9 PK			1.51 V	1	63.1	45.8
2	*6855.00	96.7 AV			1.51 V	1	50.9	45.8
3	#13710.00	57.5 PK	88.2	-30.7	1.59 V	322	47.8	9.7
4	#13710.00	44.6 AV	68.2	-23.6	1.59 V	322	34.9	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.4 PK			1.51 H	59	60.6	45.8
2	*6875.00	94.2 AV			1.51 H	59	48.4	45.8
3	#13750.00	56.9 PK	88.2	-31.3	1.57 H	198	47.1	9.8
4	#13750.00	44.8 AV	68.2	-23.4	1.57 H	198	35.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.8 PK			1.51 V	2	63.0	45.8
2	*6875.00	96.9 AV			1.51 V	2	51.1	45.8
3	#13750.00	57.0 PK	88.2	-31.2	1.15 V	14	47.2	9.8
4	#13750.00	45.1 AV	68.2	-23.1	1.15 V	14	35.3	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.3 PK			1.55 H	59	60.4	45.9
2	*6995.00	94.5 AV			1.55 H	59	48.6	45.9
3	#13990.00	57.0 PK	88.2	-31.2	1.05 H	217	46.8	10.2
4	#13990.00	45.0 AV	68.2	-23.2	1.05 H	217	34.8	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.1 PK			1.51 V	4	62.2	45.9
2	*6995.00	96.2 AV			1.51 V	4	50.3	45.9
3	#13990.00	57.2 PK	88.2	-31.0	1.69 V	333	47.0	10.2
4	#13990.00	45.3 AV	68.2	-22.9	1.69 V	333	35.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	112.0 PK			1.39 H	18	65.6	46.4
2	*7095.00	98.5 AV			1.39 H	18	52.1	46.4
3	#7125.00	63.3 PK	88.2	-24.9	1.39 H	18	55.0	8.3
4	#7125.00	46.5 AV	68.2	-21.7	1.39 H	18	38.2	8.3
5	#14190.00	56.9 PK	88.2	-31.3	1.53 H	108	46.5	10.4
6	#14190.00	44.8 AV	68.2	-23.4	1.53 H	108	34.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	114.2 PK			1.50 V	262	67.8	46.4
2	*7095.00	101.1 AV			1.50 V	262	54.7	46.4
3	#7125.00	62.3 PK	88.2	-25.9	1.50 V	262	54.0	8.3
4	#7125.00	47.4 AV	68.2	-20.8	1.50 V	262	39.1	8.3
5	#14190.00	57.3 PK	88.2	-30.9	1.62 V	236	46.9	10.4
6	#14190.00	45.3 AV	68.2	-22.9	1.62 V	236	34.9	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.7 PK	88.2	-22.5	1.57 H	285	61.0	4.7
2	#5925.00	46.6 AV	68.2	-21.6	1.57 H	285	41.9	4.7
3	*5965.00	107.9 PK			1.57 H	285	65.6	42.3
4	*5965.00	98.0 AV			1.57 H	285	55.7	42.3
5	11930.00	55.7 PK	74.0	-18.3	1.68 H	103	46.5	9.2
6	11930.00	44.1 AV	54.0	-9.9	1.68 H	103	34.9	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.4 PK	88.2	-23.8	1.44 V	178	59.7	4.7
2	#5925.00	47.4 AV	68.2	-20.8	1.44 V	178	42.7	4.7
3	*5965.00	112.6 PK			1.44 V	178	70.3	42.3
4	*5965.00	100.9 AV			1.44 V	178	58.6	42.3
5	11930.00	56.3 PK	74.0	-17.7	1.60 V	222	47.1	9.2
6	11930.00	44.6 AV	54.0	-9.4	1.60 V	222	35.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	113.0 PK			1.57 H	267	69.7	43.3
2	*6165.00	99.8 AV			1.57 H	267	56.5	43.3
3	12330.00	56.2 PK	74.0	-17.8	1.68 H	102	46.7	9.5
4	12330.00	44.5 AV	54.0	-9.5	1.68 H	102	35.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	113.9 PK			1.37 V	8	70.6	43.3
2	*6165.00	102.3 AV			1.37 V	8	59.0	43.3
3	12330.00	56.5 PK	74.0	-17.5	1.60 V	227	47.0	9.5
4	12330.00	44.7 AV	54.0	-9.3	1.60 V	227	35.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.5 PK			1.49 H	266	66.8	44.7
2	*6405.00	100.5 AV			1.49 H	266	55.8	44.7
3	#12810.00	56.6 PK	88.2	-31.6	1.69 H	103	46.6	10.0
4	#12810.00	45.0 AV	68.2	-23.2	1.69 H	103	35.0	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.6 PK			1.39 V	10	68.9	44.7
2	*6405.00	103.3 AV			1.39 V	10	58.6	44.7
3	#12810.00	57.1 PK	88.2	-31.1	1.61 V	230	47.1	10.0
4	#12810.00	45.2 AV	68.2	-23.0	1.61 V	230	35.2	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	113.8 PK			1.58 H	239	68.9	44.9
2	*6445.00	101.0 AV			1.58 H	239	56.1	44.9
3	#12890.00	56.5 PK	88.2	-31.7	1.60 H	121	46.5	10.0
4	#12890.00	44.6 AV	68.2	-23.6	1.60 H	121	34.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	114.9 PK			1.60 V	248	70.0	44.9
2	*6445.00	103.2 AV			1.60 V	248	58.3	44.9
3	#12890.00	57.1 PK	88.2	-31.1	1.71 V	230	47.1	10.0
4	#12890.00	44.9 AV	68.2	-23.3	1.71 V	230	34.9	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.5 PK			1.55 H	63	65.4	45.1
2	*6485.00	97.6 AV			1.55 H	63	52.5	45.1
3	#12970.00	56.8 PK	88.2	-31.4	1.72 H	99	46.8	10.0
4	#12970.00	44.5 AV	68.2	-23.7	1.72 H	99	34.5	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	112.5 PK			1.62 V	234	67.4	45.1
2	*6485.00	100.6 AV			1.62 V	234	55.5	45.1
3	#12970.00	57.0 PK	88.2	-31.2	1.68 V	227	47.0	10.0
4	#12970.00	44.8 AV	68.2	-23.4	1.68 V	227	34.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.6 PK			1.52 H	61	63.4	45.2
2	*6525.00	96.2 AV			1.52 H	61	51.0	45.2
3	#13050.00	56.6 PK	88.2	-31.6	1.65 H	112	46.6	10.0
4	#13050.00	44.5 AV	68.2	-23.7	1.65 H	112	34.5	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.6 PK			1.62 V	359	66.4	45.2
2	*6525.00	100.0 AV			1.62 V	359	54.8	45.2
3	#13050.00	57.0 PK	88.2	-31.2	1.61 V	229	47.0	10.0
4	#13050.00	44.8 AV	68.2	-23.4	1.61 V	229	34.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.4 PK			1.54 H	55	65.1	45.3
2	*6565.00	97.9 AV			1.54 H	55	52.6	45.3
3	#13130.00	56.7 PK	88.2	-31.5	1.61 H	111	46.9	9.8
4	#13130.00	44.6 AV	68.2	-23.6	1.61 H	111	34.8	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.6 PK			1.65 V	357	67.3	45.3
2	*6565.00	99.6 AV			1.65 V	357	54.3	45.3
3	#13130.00	57.1 PK	88.2	-31.1	1.66 V	245	47.3	9.8
4	#13130.00	44.9 AV	68.2	-23.3	1.66 V	245	35.1	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.8 PK			1.53 H	62	66.3	45.5
2	*6725.00	98.5 AV			1.53 H	62	53.0	45.5
3	#13450.00	56.8 PK	88.2	-31.4	1.56 H	109	47.2	9.6
4	#13450.00	44.7 AV	68.2	-23.5	1.56 H	109	35.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	114.1 PK			1.48 V	8	68.6	45.5
2	*6725.00	101.2 AV			1.48 V	8	55.7	45.5
3	#13450.00	57.0 PK	88.2	-31.2	1.64 V	224	47.4	9.6
4	#13450.00	45.1 AV	68.2	-23.1	1.64 V	224	35.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.1 PK			1.63 H	267	65.3	45.8
2	*6845.00	97.9 AV			1.63 H	267	52.1	45.8
3	#13690.00	56.7 PK	88.2	-31.5	1.58 H	108	47.0	9.7
4	#13690.00	44.6 AV	68.2	-23.6	1.58 H	108	34.9	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.9 PK			1.56 V	67	68.1	45.8
2	*6845.00	100.6 AV			1.56 V	67	54.8	45.8
3	#13690.00	57.0 PK	88.2	-31.2	1.70 V	219	47.3	9.7
4	#13690.00	45.0 AV	68.2	-23.2	1.70 V	219	35.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.7 PK			1.50 H	60	64.9	45.8
2	*6885.00	98.0 AV			1.50 H	60	52.2	45.8
3	#13770.00	57.0 PK	88.2	-31.2	1.55 H	123	47.2	9.8
4	#13770.00	44.9 AV	68.2	-23.3	1.55 H	123	35.1	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.2 PK			1.59 V	245	66.4	45.8
2	*6885.00	100.3 AV			1.59 V	245	54.5	45.8
3	#13770.00	57.3 PK	88.2	-30.9	1.69 V	263	47.5	9.8
4	#13770.00	45.4 AV	68.2	-22.8	1.69 V	264	35.6	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.8 PK			1.66 H	96	63.9	45.9
2	*7005.00	98.0 AV			1.66 H	96	52.1	45.9
3	#14010.00	57.2 PK	88.2	-31.0	1.59 H	105	47.0	10.2
4	#14010.00	45.2 AV	68.2	-23.0	1.59 H	105	35.0	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.1 PK			1.51 V	116	66.2	45.9
2	*7005.00	99.9 AV			1.51 V	116	54.0	45.9
3	#14010.00	57.6 PK	88.2	-30.6	1.72 V	260	47.4	10.2
4	#14010.00	45.7 AV	68.2	-22.5	1.72 V	260	35.5	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.3 PK			1.38 H	202	64.0	46.3
2	*7085.00	98.2 AV			1.38 H	202	51.9	46.3
3	#7125.00	64.1 PK	88.2	-24.1	1.38 H	202	55.8	8.3
4	#7125.00	46.5 AV	68.2	-21.7	1.38 H	202	38.2	8.3
5	#14170.00	57.7 PK	88.2	-30.5	1.51 H	101	47.4	10.3
6	#14170.00	45.3 AV	68.2	-22.9	1.51 H	101	35.0	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.0 PK			1.52 V	115	64.7	46.3
2	*7085.00	98.6 AV			1.52 V	115	52.3	46.3
3	#7125.00	64.5 PK	88.2	-23.7	1.52 V	115	56.2	8.3
4	#7125.00	48.3 AV	68.2	-19.9	1.52 V	115	40.0	8.3
5	#14170.00	58.2 PK	88.2	-30.0	1.66 V	237	47.9	10.3
6	#14170.00	45.9 AV	68.2	-22.3	1.66 V	237	35.6	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	1.51 H	141	66.4	4.7
2	#5925.00	54.4 AV	68.2	-13.8	1.51 H	141	49.7	4.7
3	*5985.00	110.4 PK			1.51 H	141	68.1	42.3
4	*5985.00	98.8 AV			1.51 H	141	56.5	42.3
5	11970.00	55.6 PK	74.0	-18.4	1.68 H	100	46.3	9.3
6	11970.00	43.4 AV	54.0	-10.6	1.68 H	100	34.1	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	1.31 V	4	67.5	4.7
2	#5925.00	55.2 AV	68.2	-13.0	1.31 V	4	50.5	4.7
3	*5985.00	112.9 PK			1.31 V	4	70.6	42.3
4	*5985.00	101.1 AV			1.31 V	4	58.8	42.3
5	11970.00	55.8 PK	74.0	-18.2	1.68 V	232	46.5	9.3
6	11970.00	43.9 AV	54.0	-10.1	1.68 V	232	34.6	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	110.7 PK			1.52 H	145	67.5	43.2
2	*6145.00	98.2 AV			1.52 H	145	55.0	43.2
3	12290.00	54.8 PK	74.0	-19.2	1.69 H	102	45.2	9.6
4	12290.00	43.5 AV	54.0	-10.5	1.69 H	102	33.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	112.8 PK			1.45 V	6	69.6	43.2
2	*6145.00	100.8 AV			1.45 V	6	57.6	43.2
3	12290.00	55.5 PK	74.0	-18.5	1.65 V	233	45.9	9.6
4	12290.00	44.0 AV	54.0	-10.0	1.65 V	233	34.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.3 PK			1.66 H	96	65.6	44.7
2	*6385.00	97.7 AV			1.66 H	96	53.0	44.7
3	#12770.00	55.2 PK	88.2	-33.0	1.52 H	100	45.3	9.9
4	#12770.00	44.1 AV	68.2	-24.1	1.52 H	100	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.0 PK			1.52 V	70	68.3	44.7
2	*6385.00	100.5 AV			1.52 V	70	55.8	44.7
3	#12770.00	55.5 PK	88.2	-32.7	1.74 V	236	45.6	9.9
4	#12770.00	44.4 AV	68.2	-23.8	1.74 V	236	34.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.5 PK			1.36 H	201	64.5	45.0
2	*6465.00	97.4 AV			1.36 H	201	52.4	45.0
3	#12930.00	55.1 PK	88.2	-33.1	1.51 H	101	45.2	9.9
4	#12930.00	44.1 AV	68.2	-24.1	1.51 H	101	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.3 PK			1.50 V	133	67.3	45.0
2	*6465.00	99.1 AV			1.50 V	133	54.1	45.0
3	#12930.00	55.6 PK	88.2	-32.6	1.75 V	213	45.7	9.9
4	#12930.00	44.5 AV	68.2	-23.7	1.75 V	213	34.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.2 PK			1.51 H	59	64.9	45.3
2	*6545.00	97.4 AV			1.51 H	59	52.1	45.3
3	#13090.00	54.9 PK	88.2	-33.3	1.57 H	98	45.0	9.9
4	#13090.00	44.1 AV	68.2	-24.1	1.57 H	98	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.8 PK			1.30 V	191	67.5	45.3
2	*6545.00	99.8 AV			1.30 V	191	54.5	45.3
3	#13090.00	55.4 PK	88.2	-32.8	1.69 V	225	45.5	9.9
4	#13090.00	44.5 AV	68.2	-23.7	1.69 V	225	34.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.3 PK			1.32 H	205	65.7	45.6
2	*6705.00	98.2 AV			1.32 H	205	52.6	45.6
3	#13410.00	55.0 PK	88.2	-33.2	1.51 H	108	45.5	9.5
4	#13410.00	43.9 AV	68.2	-24.3	1.51 H	108	34.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.2 PK			1.51 V	4	67.6	45.6
2	*6705.00	100.1 AV			1.51 V	4	54.5	45.6
3	#13410.00	55.4 PK	88.2	-32.8	1.69 V	218	45.9	9.5
4	#13410.00	44.3 AV	68.2	-23.9	1.69 V	218	34.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.0 PK			1.52 H	62	64.2	45.8
2	*6865.00	97.7 AV			1.52 H	62	51.9	45.8
3	#13730.00	55.0 PK	88.2	-33.2	1.42 H	110	45.3	9.7
4	#13730.00	43.8 AV	68.2	-24.4	1.42 H	110	34.1	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.3 PK			1.30 V	193	67.5	45.8
2	*6865.00	100.6 AV			1.30 V	193	54.8	45.8
3	#13730.00	55.5 PK	88.2	-32.7	1.72 V	201	45.8	9.7
4	#13730.00	44.3 AV	68.2	-23.9	1.72 V	201	34.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.6 PK			1.49 H	251	64.6	46.0
2	*6945.00	98.3 AV			1.49 H	251	52.3	46.0
3	#13890.00	55.4 PK	88.2	-32.8	1.33 H	106	45.4	10.0
4	#13890.00	44.6 AV	68.2	-23.6	1.33 H	106	34.6	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.9 PK			1.31 V	103	66.9	46.0
2	*6945.00	99.9 AV			1.31 V	103	53.9	46.0
3	#13890.00	55.9 PK	88.2	-32.3	1.67 V	263	45.9	10.0
4	#13890.00	45.0 AV	68.2	-23.2	1.67 V	263	35.0	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.8 PK			2.09 H	7	64.9	45.9
2	*7025.00	98.4 AV			2.09 H	7	52.5	45.9
3	#7125.00	65.8 PK	88.2	-22.4	2.09 H	7	57.5	8.3
4	#7125.00	49.3 AV	68.2	-18.9	2.09 H	7	41.0	8.3
5	#14050.00	56.7 PK	88.2	-31.5	1.35 H	117	46.5	10.2
6	#14050.00	44.8 AV	68.2	-23.4	1.35 H	117	34.6	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.1 PK			1.68 V	354	66.2	45.9
2	*7025.00	99.3 AV			1.68 V	354	53.4	45.9
3	#7125.00	69.7 PK	88.2	-18.5	1.68 V	354	61.4	8.3
4	#7125.00	53.7 AV	68.2	-14.5	1.68 V	354	45.4	8.3
5	#14050.00	57.1 PK	88.2	-31.1	1.69 V	237	46.9	10.2
6	#14050.00	45.2 AV	68.2	-23.0	1.69 V	237	35.0	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.2 PK	88.2	-15.0	1.50 H	240	68.5	4.7
2	#5925.00	60.6 AV	68.2	-7.6	1.50 H	240	55.9	4.7
3	*6025.00	110.1 PK			1.50 H	240	67.6	42.5
4	*6025.00	97.2 AV			1.50 H	240	54.7	42.5
5	12050.00	57.0 PK	74.0	-17.0	1.05 H	227	47.8	9.2
6	12050.00	45.1 AV	54.0	-8.9	1.05 H	227	35.9	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.60 V	360	72.1	4.7
2	#5925.00	63.0 AV	68.2	-5.2	1.60 V	360	58.3	4.7
3	*6025.00	112.2 PK			1.60 V	360	69.7	42.5
4	*6025.00	99.5 AV			1.60 V	360	57.0	42.5
5	12050.00	57.2 PK	74.0	-16.8	1.67 V	44	48.0	9.2
6	12050.00	45.3 AV	54.0	-8.7	1.67 V	44	36.1	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.5 PK			1.50 H	241	67.0	43.5
2	*6185.00	97.6 AV			1.50 H	241	54.1	43.5
3	12370.00	57.1 PK	74.0	-16.9	1.05 H	216	47.5	9.6
4	12370.00	45.2 AV	54.0	-8.8	1.05 H	216	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	112.4 PK			1.60 V	360	68.9	43.5
2	*6185.00	99.7 AV			1.60 V	360	56.2	43.5
3	12370.00	57.3 PK	74.0	-16.7	1.69 V	9	47.7	9.6
4	12370.00	45.5 AV	54.0	-8.5	1.69 V	9	35.9	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.4 PK			1.51 H	242	65.9	44.5
2	*6345.00	97.5 AV			1.51 H	242	53.0	44.5
3	12690.00	57.0 PK	74.0	-17.0	1.00 H	144	47.2	9.8
4	12690.00	45.1 AV	54.0	-8.9	1.00 H	144	35.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.3 PK			1.60 V	360	67.8	44.5
2	*6345.00	99.6 AV			1.60 V	360	55.1	44.5
3	12690.00	57.3 PK	74.0	-16.7	1.55 V	199	47.5	9.8
4	12690.00	45.6 AV	54.0	-8.4	1.55 V	199	35.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.6 PK			1.58 H	245	64.4	45.2
2	*6505.00	96.7 AV			1.58 H	245	51.5	45.2
3	#13010.00	57.0 PK	88.2	-31.2	1.69 H	99	47.1	9.9
4	#13010.00	45.0 AV	68.2	-23.2	1.69 H	99	35.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.8 PK			1.61 V	355	66.6	45.2
2	*6505.00	98.5 AV			1.61 V	355	53.3	45.2
3	#13010.00	57.4 PK	88.2	-30.8	1.78 V	8	47.5	9.9
4	#13010.00	45.4 AV	68.2	-22.8	1.78 V	8	35.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.7 PK			1.59 H	241	63.2	45.5
2	*6665.00	95.9 AV			1.59 H	241	50.4	45.5
3	13330.00	57.6 PK	74.0	-16.4	1.57 H	77	48.4	9.2
4	13330.00	45.8 AV	54.0	-8.2	1.57 H	77	36.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.8 PK			1.60 V	359	65.3	45.5
2	*6665.00	97.3 AV			1.60 V	359	51.8	45.5
3	13330.00	57.8 PK	74.0	-16.2	1.64 V	99	48.6	9.2
4	13330.00	46.0 AV	54.0	-8.0	1.64 V	99	36.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.3 PK			1.57 H	244	62.6	45.7
2	*6825.00	95.4 AV			1.57 H	244	49.7	45.7
3	#13650.00	57.2 PK	88.2	-31.0	1.47 H	7	47.6	9.6
4	#13650.00	45.2 AV	68.2	-23.0	1.47 H	7	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.8 PK			1.60 V	353	65.1	45.7
2	*6825.00	98.0 AV			1.60 V	353	52.3	45.7
3	#13650.00	57.7 PK	88.2	-30.5	1.64 V	332	48.1	9.6
4	#13650.00	45.9 AV	68.2	-22.3	1.64 V	332	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.2 PK			1.51 H	244	61.3	45.9
2	*6985.00	94.2 AV			1.51 H	244	48.3	45.9
3	#7125.00	68.0 PK	88.2	-20.2	1.51 H	244	59.7	8.3
4	#7125.00	56.1 AV	68.2	-12.1	1.51 H	244	47.8	8.3
5	#13970.00	57.2 PK	88.2	-31.0	1.14 H	174	47.0	10.2
6	#13970.00	45.4 AV	68.2	-22.8	1.14 H	174	35.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.0 PK			1.60 V	323	64.1	45.9
2	*6985.00	97.3 AV			1.60 V	323	51.4	45.9
3	#7125.00	68.9 PK	88.2	-19.3	1.60 V	323	60.6	8.3
4	#7125.00	56.3 AV	68.2	-11.9	1.60 V	323	48.0	8.3
5	#13970.00	57.3 PK	88.2	-30.9	1.15 V	154	47.1	10.2
6	#13970.00	45.8 AV	68.2	-22.4	1.15 V	154	35.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.2 PK	88.2	-20.0	1.50 H	168	63.5	4.7
2	#5925.00	57.7 AV	68.2	-10.5	1.50 H	168	53.0	4.7
3	*6105.00	108.4 PK			1.50 H	168	103.1	5.3
4	*6105.00	96.3 AV			1.50 H	168	91.0	5.3
5	12210.00	57.0 PK	74.0	-17.0	1.56 H	333	47.8	9.2
6	12210.00	44.4 AV	54.0	-9.6	1.56 H	333	35.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.9 PK	88.2	-10.3	1.60 V	0	73.2	4.7
2	#5925.00	65.4 AV	68.2	-2.8	1.60 V	0	60.7	4.7
3	*6105.00	109.1 PK			1.60 V	0	66.2	42.9
4	*6105.00	97.5 AV			1.60 V	0	54.6	42.9
5	12210.00	57.2 PK	74.0	-16.8	1.67 V	77	48.0	9.2
6	12210.00	44.9 AV	54.0	-9.1	1.67 V	77	35.7	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	109.0 PK			1.50 H	168	65.1	43.9
2	*6265.00	96.7 AV			1.50 H	168	52.8	43.9
3	12530.00	57.1 PK	74.0	-16.9	1.95 H	60	47.3	9.8
4	12530.00	45.3 AV	54.0	-8.7	1.95 H	60	35.5	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	110.0 PK			1.61 V	1	66.1	43.9
2	*6265.00	97.3 AV			1.61 V	1	53.4	43.9
3	12530.00	57.2 PK	74.0	-16.8	1.59 V	9	47.4	9.8
4	12530.00	45.6 AV	54.0	-8.4	1.59 V	9	35.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.5 PK			1.50 H	169	63.7	44.8
2	*6425.00	95.6 AV			1.50 H	169	50.8	44.8
3	#12850.00	57.1 PK	88.2	-31.1	1.44 H	145	47.2	9.9
4	#12850.00	44.7 AV	68.2	-23.5	1.44 H	145	34.8	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.0 PK			1.61 V	1	65.2	44.8
2	*6425.00	97.3 AV			1.61 V	1	52.5	44.8
3	#12850.00	57.3 PK	88.2	-30.9	1.57 V	8	47.4	9.9
4	#12850.00	44.8 AV	68.2	-23.4	1.57 V	8	34.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.9 PK			1.50 H	168	62.4	45.5
2	*6585.00	94.9 AV			1.50 H	168	49.4	45.5
3	#13170.00	57.2 PK	88.2	-31.0	1.15 H	124	47.5	9.7
4	#13170.00	45.1 AV	68.2	-23.1	1.15 H	124	35.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	109.2 PK			1.60 V	359	63.7	45.5
2	*6585.00	96.3 AV			1.60 V	359	50.8	45.5
3	#13170.00	57.5 PK	88.2	-30.7	1.54 V	198	47.8	9.7
4	#13170.00	45.5 AV	68.2	-22.7	1.54 V	198	35.8	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.9 PK			1.50 H	170	62.3	45.6
2	*6745.00	94.8 AV			1.50 H	170	49.2	45.6
3	#13490.00	57.2 PK	88.2	-31.0	1.05 H	200	47.4	9.8
4	#13490.00	44.9 AV	68.2	-23.3	1.05 H	200	35.1	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.0 PK			1.60 V	2	63.4	45.6
2	*6745.00	96.2 AV			1.60 V	2	50.6	45.6
3	#13490.00	57.4 PK	88.2	-30.8	1.66 V	359	47.6	9.8
4	#13490.00	45.3 AV	68.2	-22.9	1.66 V	359	35.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Charles Hsiao		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.1 PK			1.50 H	182	59.3	45.8
2	*6905.00	92.8 AV			1.50 H	182	47.0	45.8
3	#7125.00	65.1 PK	88.2	-23.1	1.50 H	182	56.8	8.3
4	#7125.00	53.2 AV	68.2	-15.0	1.50 H	182	44.9	8.3
5	#13810.00	57.3 PK	88.2	-30.9	1.13 H	3	47.3	10.0
6	#13810.00	45.3 AV	68.2	-22.9	1.13 H	3	35.3	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.0 PK			1.60 V	115	61.2	45.8
2	*6905.00	94.5 AV			1.60 V	115	48.7	45.8
3	#7125.00	63.0 PK	88.2	-25.2	1.60 V	115	54.7	8.3
4	#7125.00	50.9 AV	68.2	-17.3	1.60 V	115	42.6	8.3
5	#13810.00	57.5 PK	88.2	-30.7	1.99 V	64	47.5	10.0
6	#13810.00	45.6 AV	68.2	-22.6	1.99 V	64	35.6	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge_Beamforming

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

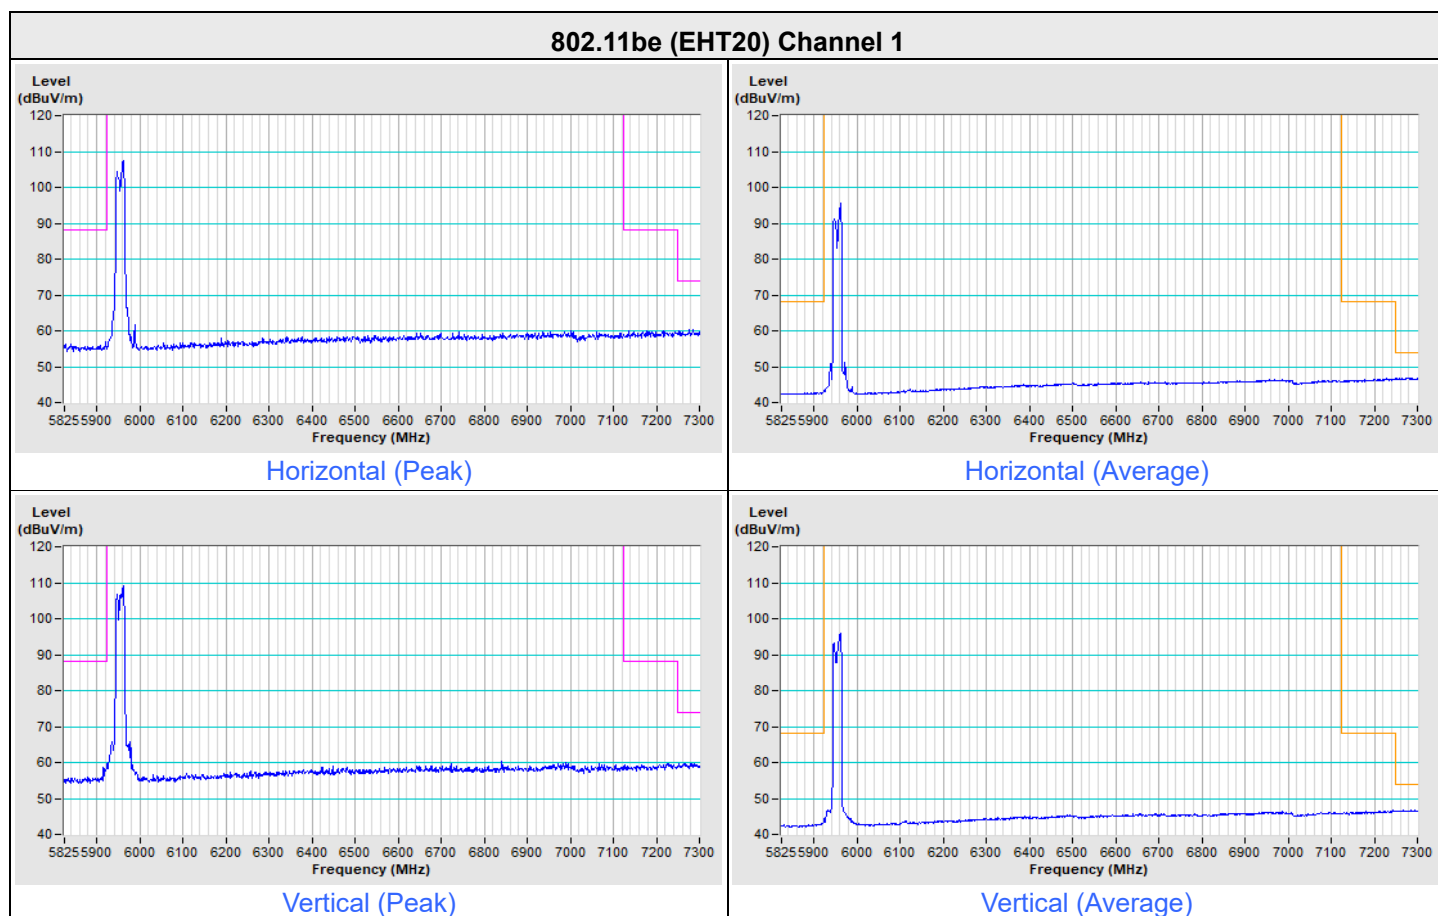


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

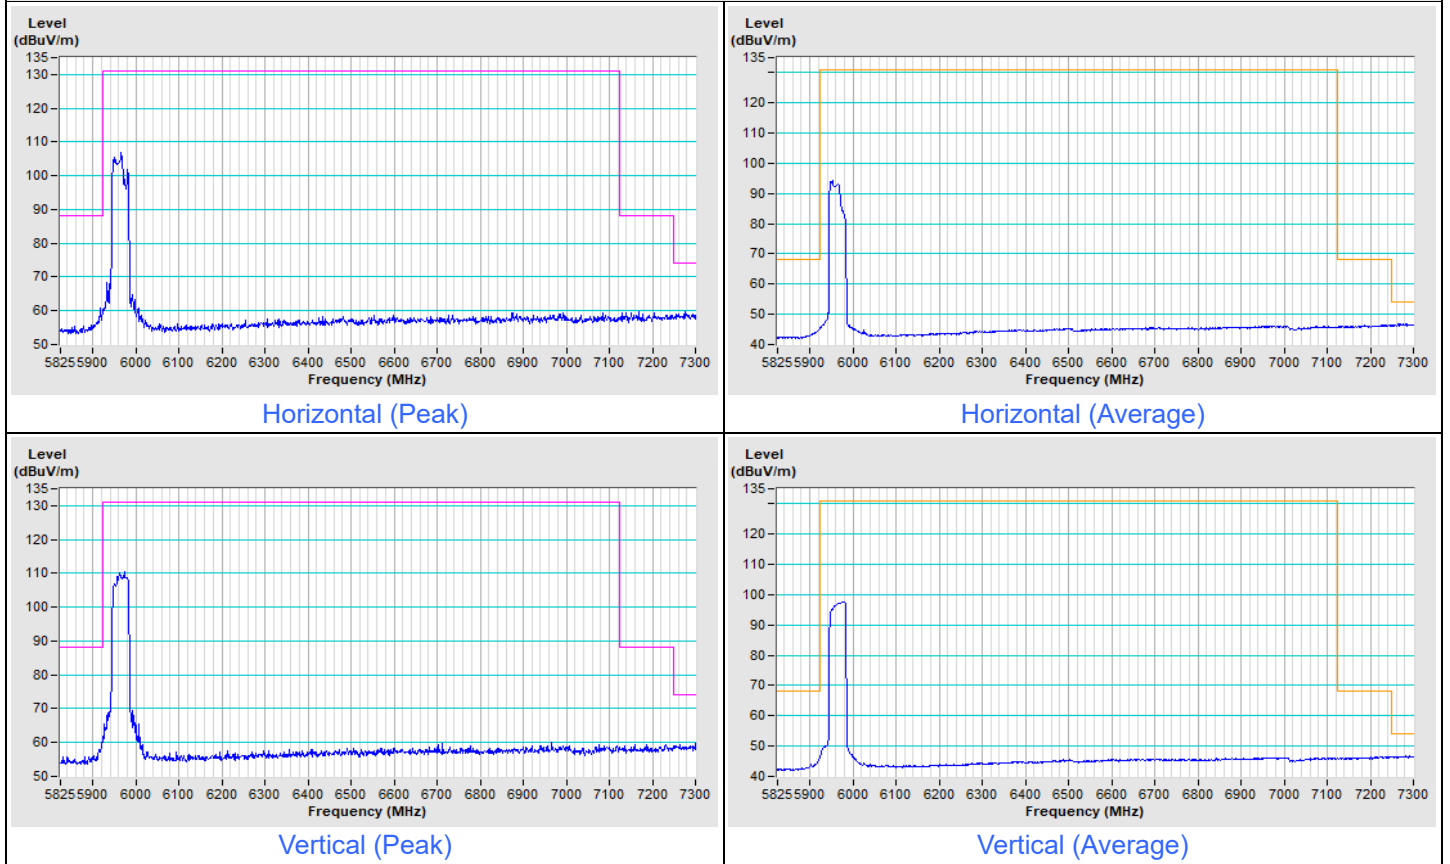


802.11be (EHT40) Channel 227

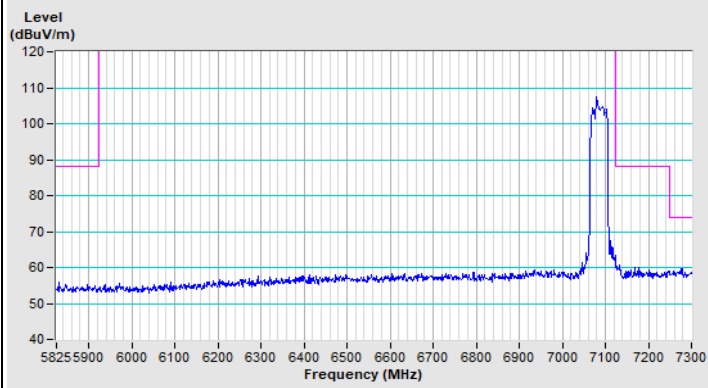


Horizontal (Peak)

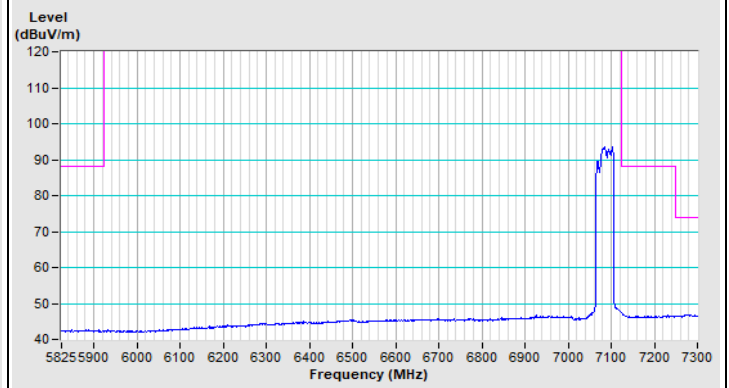

Horizontal (Average)

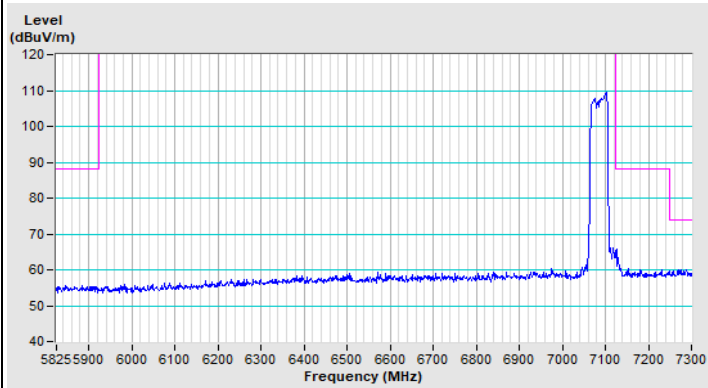


Vertical (Peak)

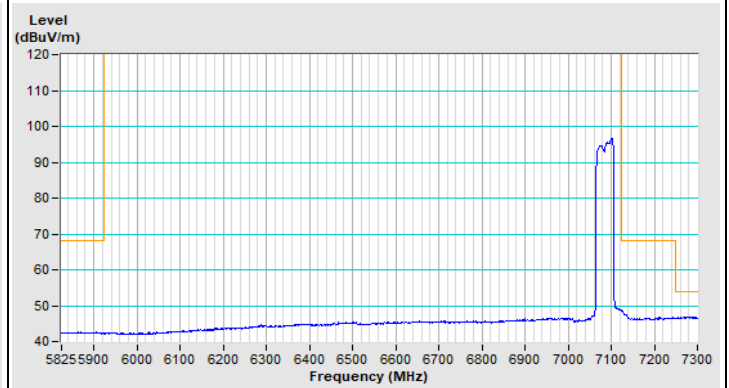


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

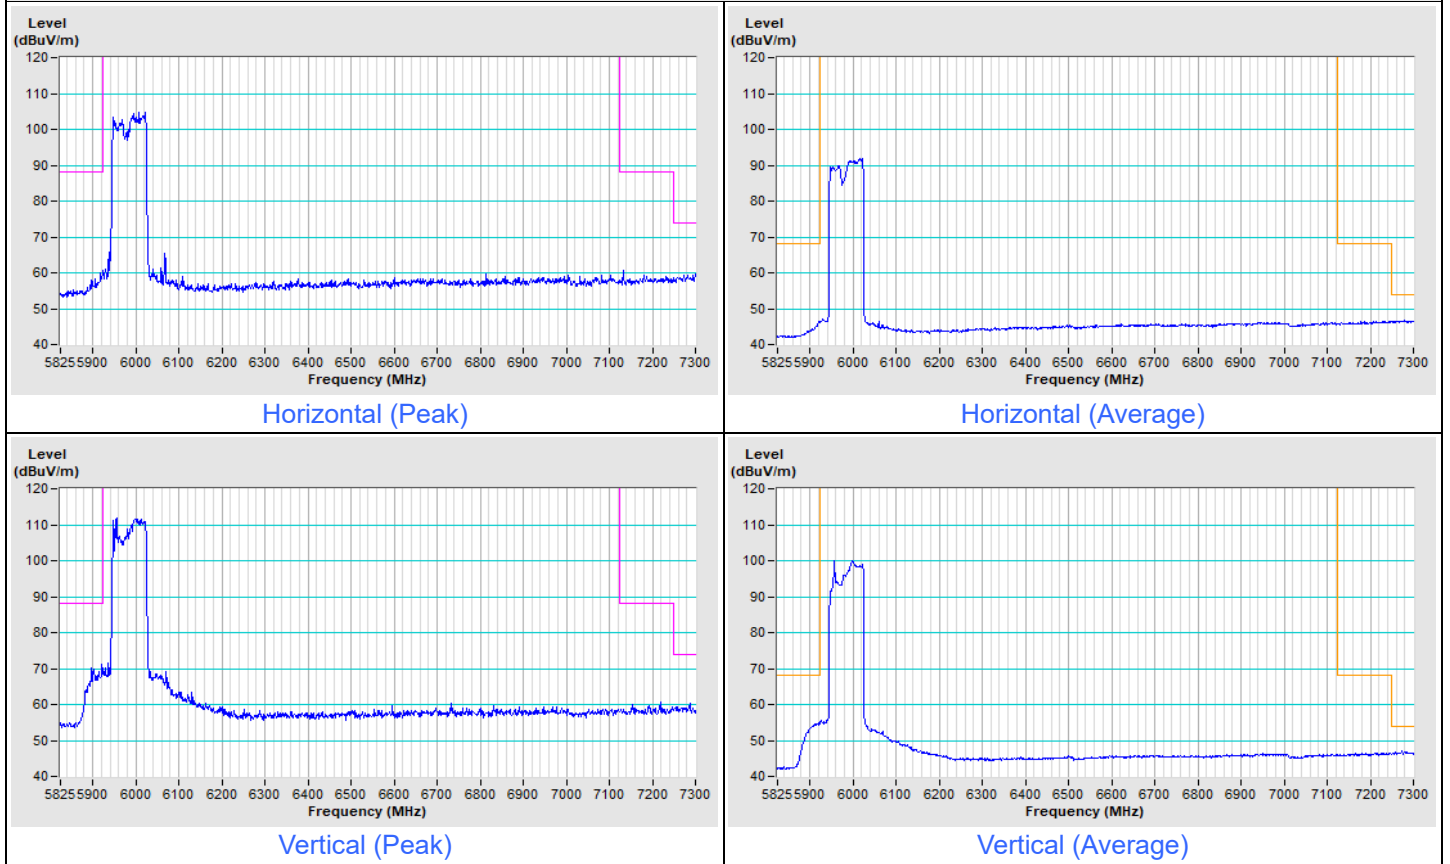


802.11be (EHT80) Channel 215

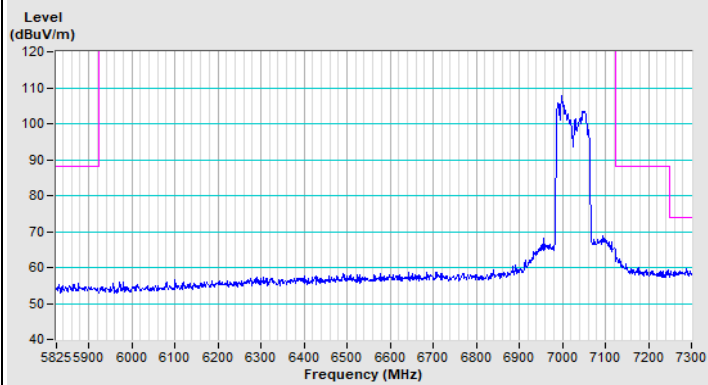


Horizontal (Peak)

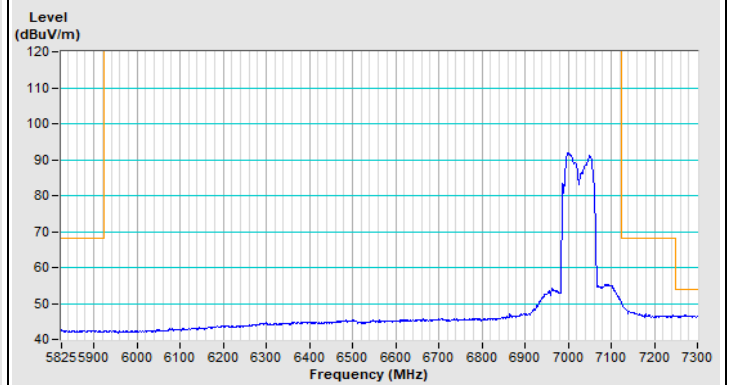

Horizontal (Average)

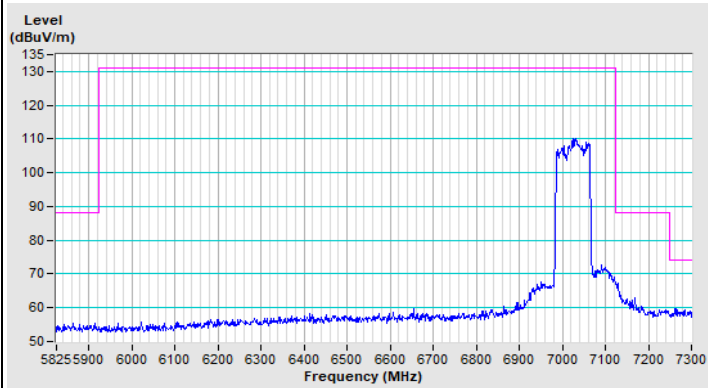


Vertical (Peak)

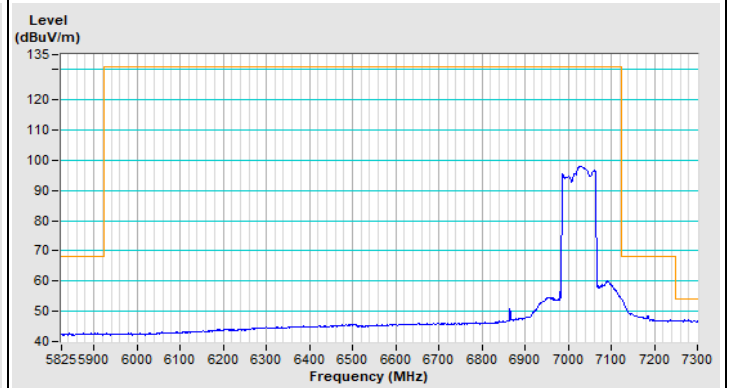


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

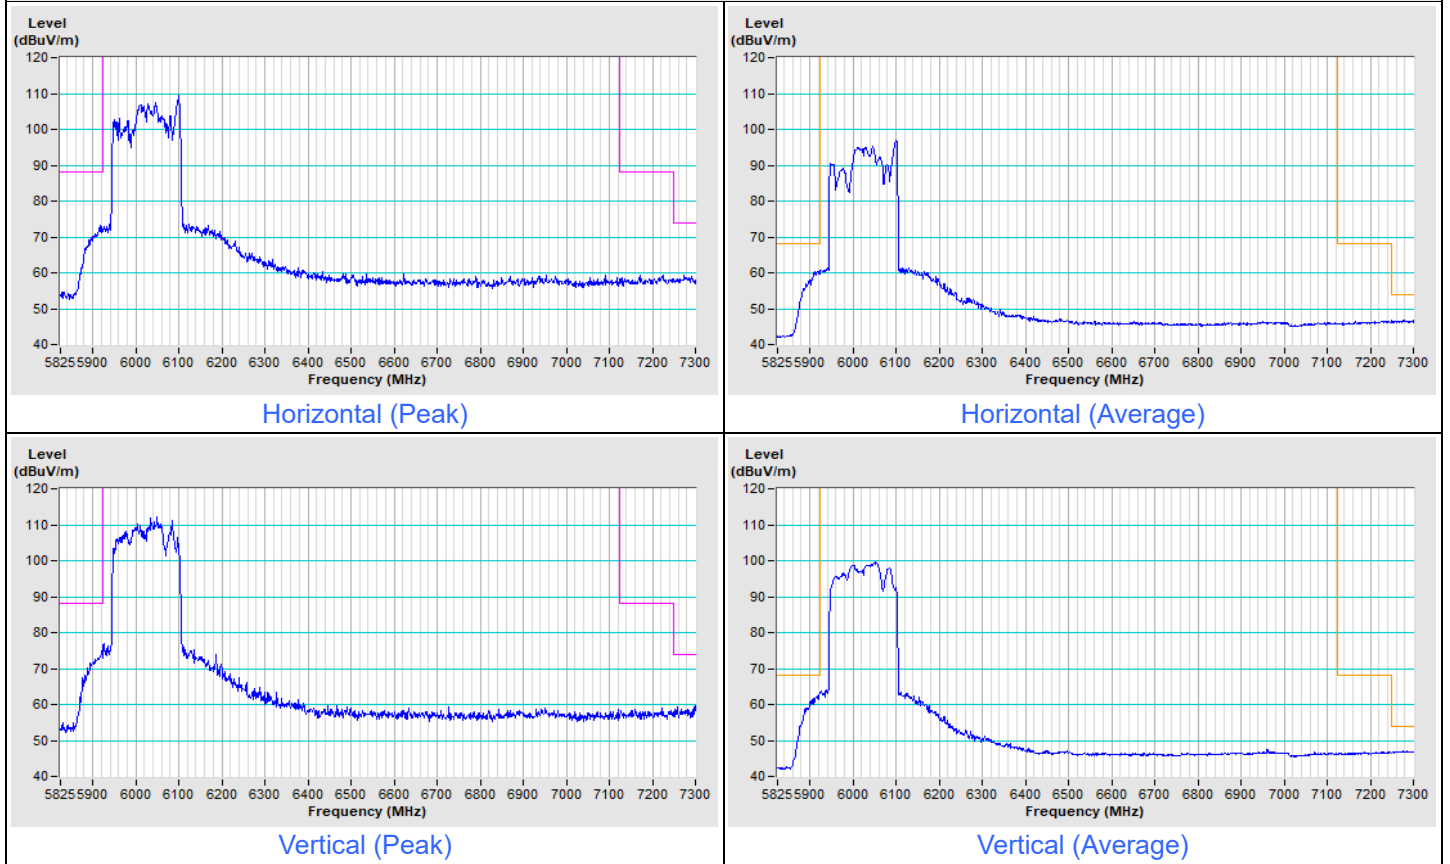


802.11be (EHT160) Channel 207

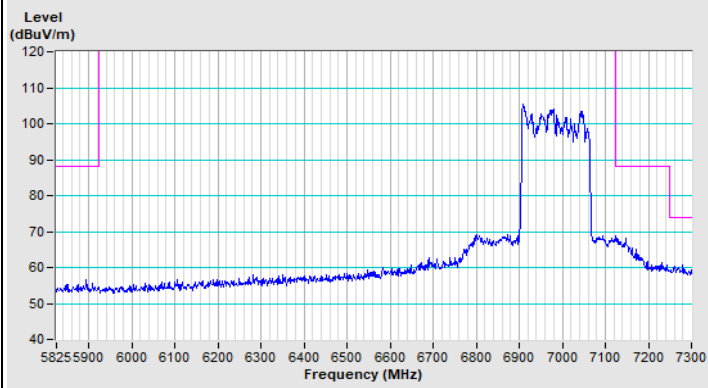


Horizontal (Peak)

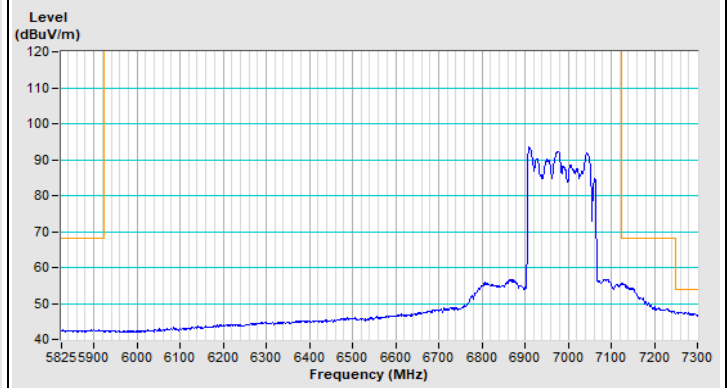

Horizontal (Average)

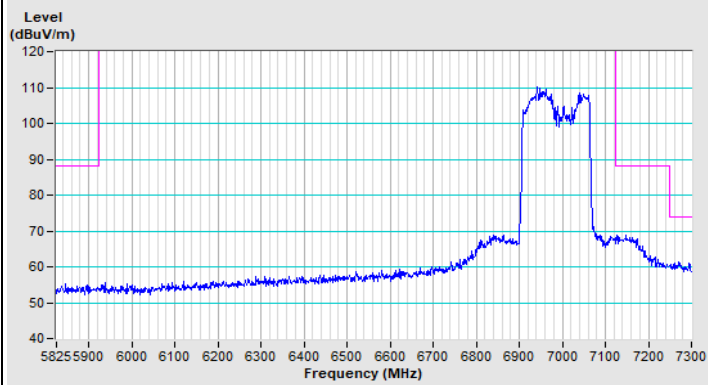


Vertical (Peak)

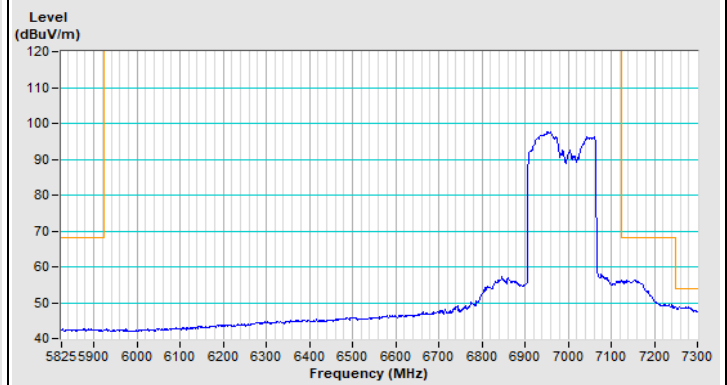


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

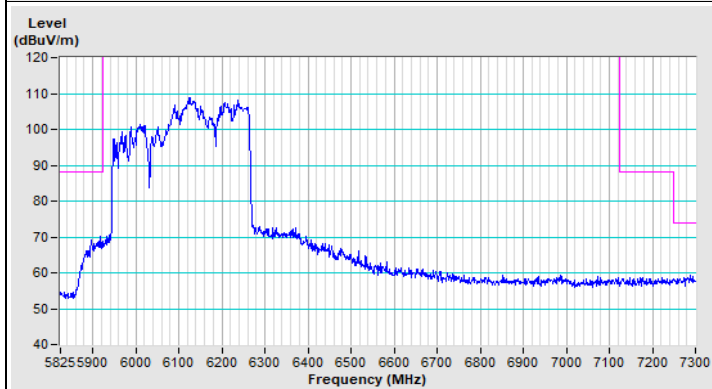


Horizontal (Peak)

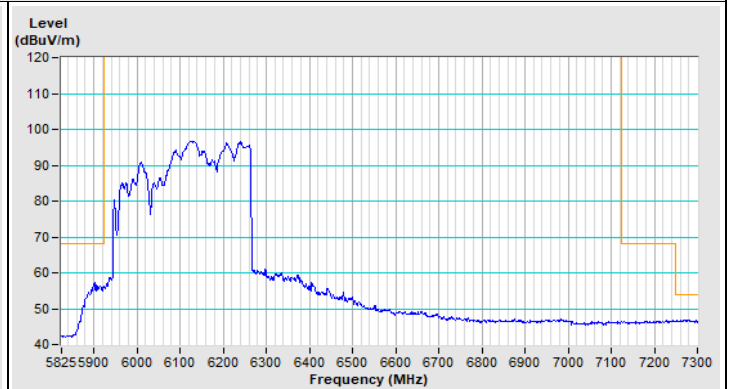

Horizontal (Average)

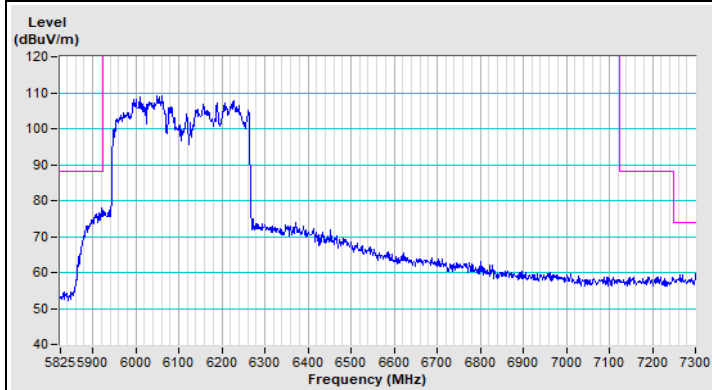


Vertical (Peak)

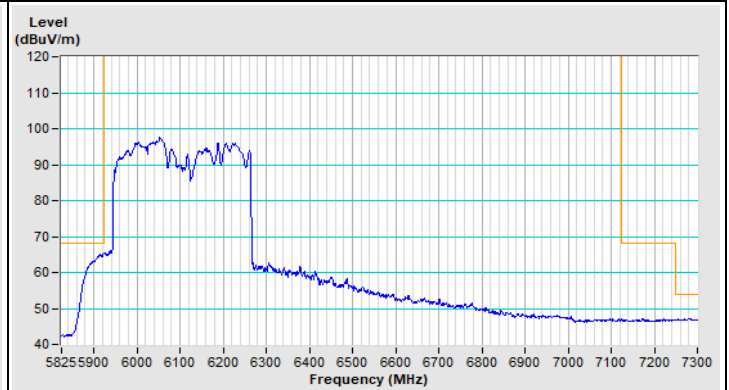


Vertical (Average)


802.11be (EHT320) Channel 191

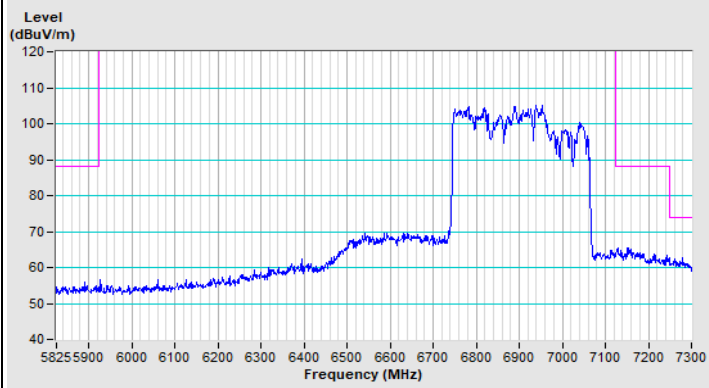


Horizontal (Peak)

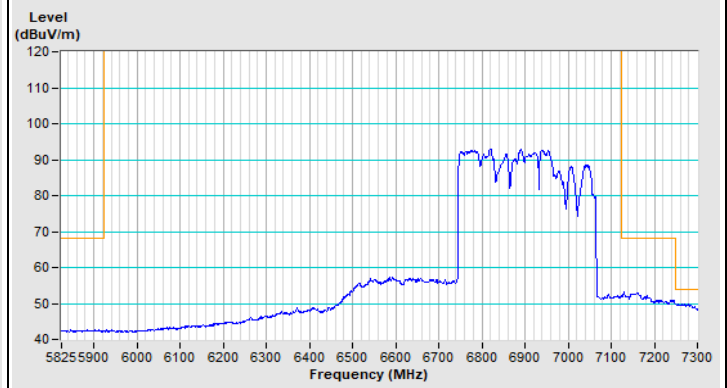

Horizontal (Average)

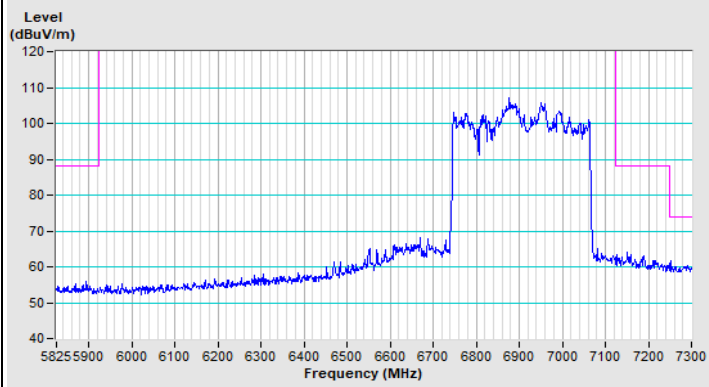

Vertical (Peak)

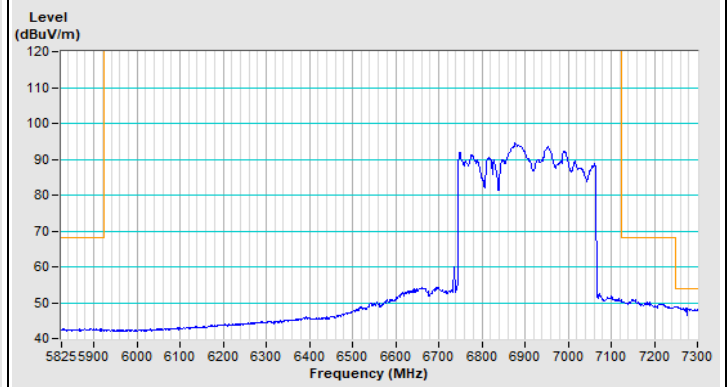

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---