



7705 SAR-Hm and 7705 SAR-Hmc | RELEASE 21.7

SAR-Hm and SAR-Hmc Chassis Installation Guide

3HE 17810 AAAA TQZZA

Edition: 04

April 2022

Nokia is committed to diversity and inclusion. We are continuously reviewing our customer documentation and consulting with standards bodies to ensure that terminology is inclusive and aligned with the industry. Our future customer documentation will be updated accordingly.

This document includes Nokia proprietary and confidential information, which may not be distributed or disclosed to any third parties without the prior written consent of Nokia.

This document is intended for use by Nokia's customers ("You"/"Your") in connection with a product purchased or licensed from any company within Nokia Group of Companies. Use this document as agreed. You agree to notify Nokia of any errors you may find in this document; however, should you elect to use this document for any purpose(s) for which it is not intended, You understand and warrant that any determinations You may make or actions You may take will be based upon Your independent judgment and analysis of the content of this document.

Nokia reserves the right to make changes to this document without notice. At all times, the controlling version is the one available on Nokia's site.

No part of this document may be modified.

NO WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF AVAILABILITY, ACCURACY, RELIABILITY, TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS MADE IN RELATION TO THE CONTENT OF THIS DOCUMENT. IN NO EVENT WILL NOKIA BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO SPECIAL, DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL OR ANY LOSSES, SUCH AS BUT NOT LIMITED TO LOSS OF PROFIT, REVENUE, BUSINESS INTERRUPTION, BUSINESS OPPORTUNITY OR DATA THAT MAY ARISE FROM THE USE OF THIS DOCUMENT OR THE INFORMATION IN IT, EVEN IN THE CASE OF ERRORS IN OR OMISSIONS FROM THIS DOCUMENT OR ITS CONTENT.

Copyright and trademark: Nokia is a registered trademark of Nokia Corporation. Other product names mentioned in this document may be trademarks of their respective owners.

© 2022 Nokia.

Table of Contents

1	Preface	19
1.1	About This Guide	19
1.1.1	List of Technical Publications	19
1.1.2	Warnings and Notes	19
1.1.3	Audience	19
1.1.4	Information Symbols	20
1.1.5	Technical Support	21
1.1.6	Nokia Canada Address	21
2	Mandatory Regulations	23
2.1	In This Chapter	23
2.2	List of Terms	24
2.3	Safety Warnings / Avertissements de Sécurité	26
2.3.1	Ground Connections / Raccordement à la Terre	28
2.3.2	LASER Transceiver / Émetteur-récepteur LASER	28
2.3.3	Lightning / Foudre	28
2.3.4	Physical Safety / Sécurité Physique	29
2.3.5	Electrical Safety / Sécurité Électrique	29
2.4	General Requirements	30
2.4.1	Anti-static Measures	30
2.4.1.1	ESD Grounding	31
2.4.2	Unit Repair	33
2.4.3	Equipment Interconnection Points	33
2.4.3.1	SELV and ES1	33
2.4.3.2	Primary and ES3	33
2.4.4	Prevention of Access	33
2.4.5	Environmental Requirements for Installation	34
2.4.6	Protective Safety Ground (Earth)	34
2.4.7	EMC Compliance	34
2.4.8	Regulatory Symbols	34
2.5	Safety Approvals	36
2.6	Safety Approval for External DC Sources That Power This Equipment	37
2.6.1	Low-Voltage DC Sources, Nominal 12/24/48 VDC	37
2.6.2	High-Voltage DC Sources, 88 to 300 VDC	37
2.7	Canada Regulations	38
2.7.1	Industry Canada Regulations	38
2.7.2	General Requirements for Compliance of Radio Apparatus (RSS- GEN)	38
2.7.3	EMC Compliance	41
2.7.4	RF Exposure	41
2.8	United States Regulations	42
2.8.1	Federal Communications Commission	42
2.8.1.1	EMC Regulations	42
2.8.1.2	RF Regulations	42

2.8.2	FCC RF-Exposure Regulations	43
2.9	European Union Regulations.....	45
2.9.1	Declaration of Conformity	45
2.9.2	EU Compliance Statement	45
2.9.3	EMC/EMI Compliance	45
2.9.4	Radio Compliance	46
2.9.5	RF Exposure	46
2.9.6	Protective Earth	46
2.9.7	Eco-Environmental	46
2.9.8	Material Content Compliance	48
2.10	United Kingdom Regulations	49
2.10.1	Declaration of Conformity	49
2.10.1.1	EMC/EMI Compliance	49
2.10.1.2	Laser Interface.....	49
2.10.1.3	Protective Earth	50
2.10.1.4	Material Content Compliance	50
2.11	Australia/New Zealand Regulations	51
2.11.1	ACMA Regulations	51
2.12	China Regulations	52
2.12.1	Packaging Collection and Recovery Requirements	52
2.12.2	Material Content Compliance	52
2.12.3	Altitude Limit.....	52
2.13	South Korea Regulations.....	54
2.14	Japan Regulations.....	55
2.14.1	Safety	55
2.14.2	EMC.....	55
2.15	Hazardous Locations.....	57
2.15.1	Chassis Labels	57
2.15.2	Conditions of Use	57
3	7705 SAR-Hm and 7705 SAR-Hmc Overview	59
3.1	In This Chapter	59
3.2	Overview of the 7705 SAR-Hm and 7705 SAR-Hmc	60
3.2.1	7705 SAR-Hm and 7705 SAR-Hmc Components	63
3.2.1.1	Chassis Features.....	63
3.2.1.2	Ethernet Ports	64
3.2.1.3	RSVD Port.....	64
3.2.1.4	RS-232 Ports	64
3.2.1.5	Console Port.....	65
3.2.1.6	Alarms Port.....	65
3.2.1.7	Main and Diversity Antenna Connectors	66
3.2.1.8	GPS Antenna Connector	66
3.2.1.9	WLAN Connector.....	66
3.2.1.10	Chassis Grounding	66
3.2.1.11	Power Supply Input	67
3.2.1.12	High Voltage Power Supply Unit	67
3.2.1.13	Chassis Temperature Control.....	68
3.2.1.14	Chassis Mounting Options.....	68
3.3	Cellular Components	70

3.3.1	Carrier Wireless Module Variants	70
3.3.2	SIMs	71
3.3.3	Commercial Cellular Antennas	72
3.3.3.1	Outdoor 2G/3G/4G Omni-directional Antenna	72
3.3.3.2	Outdoor 2G/3G/4G Directional Antenna	73
3.3.3.3	Indoor LTE Omni-directional Antenna	73
3.3.3.4	LTE Surge Protectors	73
3.4	GNSS Components	75
3.5	WLAN Components	76
3.5.1	Outdoor WiFi Antennas	76
3.5.2	Indoor WiFi Antenna	76
3.6	Citizens Broadband Radio Service	77
3.7	ADP-Hm Prerequisites and Pre-staging Considerations	78
3.8	Chassis Installation Process	79
3.8.1	Preparation	79
3.8.2	Pre-staging	79
3.8.3	On-site Installation	80
4	Site Preparation	81
4.1	In This Chapter	81
4.2	Warnings and Notes	82
4.3	7705 SAR-Hm and 7705 SAR-Hmc System Specifications	84
4.3.1	Physical Specifications	84
4.3.2	Environmental Specifications	85
4.3.3	Radio Specifications	86
4.3.4	Chassis Power Consumption	88
4.3.5	CBN and IBN Grounding Requirements	88
4.3.6	Storage	89
4.3.7	Compliance	89
4.3.8	SIM Specifications	89
4.4	HV-PS35 Specifications	90
4.4.1	Physical Specifications	90
4.4.2	Environmental Specifications	90
4.4.3	HV-PS35 Power Consumption	91
4.4.4	Power and Cabling Requirements	92
4.4.4.1	High-Voltage DC Power Requirements	92
4.4.4.2	AC Power Requirements	92
4.4.5	HV-PS35 Clearance Requirements	92
4.4.6	Storage	93
4.4.7	Compliance	93
4.5	Installation Locations	94
4.5.1	Chassis Clearance and Thermal Requirements	95
4.6	Cellular Radio Specifications	97
4.7	Commercial Antenna Specifications	102
4.7.1	Cellular Antenna Specifications	102
4.7.1.1	Outdoor 2G/3G/LTE Omni-directional Antenna Specifications	102
4.7.1.2	Outdoor 2G/3G/LTE Directional Antenna Specifications	104
4.7.1.3	Indoor LTE Omni-directional Antenna Specifications	105
4.7.1.4	Generic Outdoor Cellular Antenna Requirements	106

4.7.2	WiFi Omni-directional and Directional Antenna Specifications	106
4.7.2.1	Outdoor WiFi Omni-directional Antenna Specifications.....	107
4.7.2.2	Outdoor WiFi Directional Antenna Specifications	109
4.7.2.3	Vehicle Mount LTE/WiFi/GNSS Antenna Specifications	110
4.7.2.4	Indoor WiFi Omni-directional Antenna Specifications	113
4.7.2.5	Generic WiFi Antenna Requirements	114
4.7.3	GPS/GNSS Antenna Requirements	114
4.8	Generic Requirements for Enclosures.....	115
5	Installing and Grounding the Chassis	117
5.1	In This Chapter	117
5.2	Unpacking the Chassis.....	118
5.3	Installing the SIM	120
5.4	Installation Preparation and Precautions.....	122
5.5	Installing the Chassis on a DIN Rail	123
5.5.1	DIN Rail-mounting the Chassis	124
5.6	Mounting the Chassis in a Rack	126
5.7	Mounting the Chassis on a Flat Surface	127
5.8	7705 SAR-Hmc Direct Mounting	130
5.9	Grounding the Chassis	131
5.9.1	Making the Ground Connection.....	132
6	Making Indoor Antenna Connections to the 7705 SAR-Hm	135
6.1	In This Chapter	135
6.2	Overview	136
6.3	Direct-mounting the Indoor LTE Omni-directional Antenna.....	137
6.4	Direct Mounting an Indoor WiFi Antenna	138
6.5	Optimal Positions for Indoor Antennas	139
7	7705 Outdoor Enclosure	141
7.1	In This Chapter	141
7.2	7705 Outdoor Enclosure Features	142
7.2.1	7705 Outdoor Enclosure Connectors and Variant Types.....	144
7.2.2	Interior Features	146
7.2.2.1	Alarm Switch.....	147
7.3	7705 Outdoor Enclosure Requirements for Hazardous Locations	148
7.3.1	Schedule of Limitations	148
7.3.1.1	7705 Outdoor Enclosure Markings	149
7.3.1.2	7705 Outdoor Enclosure Compliance Standards	149
7.4	7705 Outdoor Enclosure Mounting Hardware	151
7.5	Installing the Chassis in a 7705 Outdoor Enclosure.....	152
7.5.1	Installing the 7705 SAR-Hm Chassis in a 7705 Outdoor Enclosure.....	154
7.5.2	Installing the 7705 SAR-Hmc Chassis in a 7705 Outdoor Enclosure.....	161
7.6	Installing the 7705 Outdoor Enclosure on a Pole or Wall.....	165

8	Installing and Grounding Outdoor Antennas.....	173
8.1	In This Chapter	173
8.2	Warnings and Notes	174
8.3	Installing and Grounding Outdoor Cellular Antennas	177
8.3.1	Outdoor Commercial Antennas	177
8.3.1.1	Outdoor 2G/3G/4G Omni-directional Antenna Installation Overview.....	177
8.3.1.2	Outdoor 2G/3G/4G Directional Antenna Installation Overview.....	178
8.3.2	LTE Indoor/Outdoor Application	179
8.3.3	LTE Outdoor Enclosure Application	180
8.3.4	LTE Antenna Installation Accessory Kits.....	181
8.4	Installing and Grounding the Outdoor GPS/GLONASS Antenna	183
8.5	Installing and Grounding WLAN Outdoor Antennas	184
8.5.1	WLAN Indoor/Outdoor and Outdoor Application	188
8.6	Grounding Outdoor Antennas.....	189
8.6.1	Antenna Coaxial Cable Shield Grounding	189
9	Making Outdoor Antenna and Cable Connections	193
9.1	In This Chapter	193
9.2	Connecting Outdoor Cellular Antennas to the Main and Diversity Connectors	194
9.2.1	Attaching LDF4 Coaxial Cables to an Outdoor Cellular Antenna	194
9.2.2	Attaching a Connector to an LDF4 Coaxial Cable	197
9.2.3	Installing Surge Protectors (Enclosure Application)	203
9.2.4	Completing the Indoor Cabling (Indoor/Outdoor Application).....	204
9.2.5	Attaching an LDF4 Coaxial Ground Kit to an LDF4 Coaxial Cable	205
9.3	Connecting the Outdoor WiFi Antenna to the 7705 SAR-Hm WLAN Connector.....	211
9.4	RF Power Budget Calculations.....	212
10	Making Connections to the RJ-45 Ports	215
10.1	In This Chapter	215
10.2	Connecting Cables to RJ-45 Ports	216
10.2.1	Making Shield Ground Connections	218
10.2.2	Making Cable Connections.....	218
10.2.3	Making External Alarm Connections	219
10.2.4	Routing Cables	219
10.3	Cabling Considerations for 7705 Outdoor Enclosure Applications	220
11	Preparing the DC Power Connections	221
11.1	In This Chapter	221
11.2	Warnings and Notes	221
11.3	Wiring and Connecting DC Power	223
11.3.1	Preparing the DC Input Wires.....	223
11.3.2	Removing and Reinstalling the DC Power Input Terminal Block.....	224
11.3.3	Making –12/24 VDC and –12/24/48 VDC Connections.....	226
11.3.4	Making +12/24 VDC and +12/24/48 VDC Connections.....	230

12	High Voltage Power Supply Unit	233
12.1	In This Chapter	233
12.2	Warnings and Notes	234
12.3	Overview	235
12.4	Unpacking the HV-PS35	236
12.5	DIN Rail-mounting the HV-PS35	237
12.6	Mounting the HV-PS35 on a Flat Surface	238
12.7	7705 Outdoor Enclosure Installation	239
12.8	HV-PS35 Ground Wiring	242
12.8.1	Making the Ground Connection	243
12.9	HV-PS35 Power Supply Connections	246
12.9.1	Removing and Reinstalling HV-PS35 Power Terminal Blocks	248
12.10	Connecting the HV-PS35 to the 7705 SAR-Hm or 7705 SAR-Hmc	250
12.11	Connecting the HV-PS35 to a Power Source	252
12.11.1	Connecting the HV-PS35 to a DC Power Source	252
12.11.2	Connecting the HV-PS35 to an AC Power Source	253
13	Powering Up and Initializing	255
13.1	In This Chapter	255
13.2	Overview and Prerequisites	256
13.3	Powering Up the Chassis	257
13.3.1	Power-up and Initialization	257
13.4	Establishing a Console Connection	259
13.5	Troubleshooting Initial Startup	260
13.6	Provisioning the 7705 SAR-Hm and 7705 SAR-Hmc	261
14	7705 SAR-Hm and 7705 SAR-Hmc LEDs	263
14.1	In This Chapter	263
14.2	7705 SAR-Hm and 7705 SAR-Hmc Faceplate LEDs	264
14.3	7705 SAR-Hm and 7705 SAR-Hmc RJ-45 Connector LEDs	269
15	Pinout Assignments	273
15.1	In This Chapter	273
15.2	Console Port Pinout Assignments	274
15.2.1	Console Port Pinouts	274
15.3	Alarms Port Pinout Assignments	275
15.3.1	External Alarms Port Pinouts	276
15.3.2	Alarm Examples	277
15.4	Ethernet Ports Pinout Assignments	278
15.4.1	Ethernet Port Pinouts	278
15.5	RS-232 Ports Pinout Assignments	279
15.5.1	RS-232 Port Pinouts	279
16	Standards and Protocol Support	283
16.1	Safety	284
16.2	Electromagnetic Compatibility	285
16.3	Environmental	287
16.4	Railway	288

16.5	Power Utility Substations.....	289
16.6	Radio	290
16.7	Directives, Regional Approvals, and Certifications.....	291
16.8	Telecom Interoperability	292
17	Appendix - 7705 SAR-Hmc Direct Mount Template	293

List of Tables

1	Preface	19
Table 1	Information Symbols	20
2	Mandatory Regulations	23
Table 2	List of Terms	24
Table 3	Regulatory Symbols	35
Table 4	WiFi Antenna Gain Limits	39
Table 5	LTE Antenna Gain Limits	40
Table 6	Indoor WLAN Antenna Gain Limits	43
Table 7	LTE Antenna Gain Limits	44
3	7705 SAR-Hm and 7705 SAR-Hmc Overview	59
Table 8	7705 SAR-Hm Chassis Variants by Carrier Wireless Module	61
Table 9	7705 SAR-Hmc Chassis Variants	62
Table 10	7705 SAR-Hm Carrier Wireless Module Variants	70
Table 11	7705 SAR-Hmc Carrier Wireless Module Variants	71
Table 12	Carrier Wireless Commercial Antenna Options	72
Table 13	Carrier Wireless Module Variants and Supported GNSS Systems and Frequencies	75
4	Site Preparation	81
Table 14	7705 SAR-Hm and 7705 SAR-Hmc Chassis Specifications	84
Table 15	7705 SAR-Hm and 7705 SAR-Hmc Chassis Environmental Specifications	85
Table 16	7705 SAR-Hm and 7705 SAR-Hmc LTE Port Specifications	86
Table 17	7705 SAR-Hm and 7705 SAR-Hmc WiFi Port Specifications	86
Table 18	7705 SAR-Hm and 7705 SAR-Hmc GNSS Port Specifications	87
Table 19	7705 SAR-Hm Chassis Power Consumption	88
Table 20	7705 SAR-Hmc Chassis Power Consumption	88
Table 21	7705 SAR-Hm Heat Dissipation	88
Table 22	7705 SAR-Hmc Heat Dissipation	88
Table 23	Chassis Storage Specifications	89
Table 24	2FF Industrial Mini SIM Specifications	89
Table 25	HV-PS35 Physical Specifications	90
Table 26	HV-PS35 Environmental Specifications	90
Table 27	HV-PS35 Power Consumption	91
Table 28	HV-PS35 Storage Specifications	93
Table 29	7705 SAR-Hm Cellular Radio Specifications	97
Table 30	7705 SAR-Hmc Cellular Radio Specifications	100
Table 31	Specifications for the Outdoor 2G/3G/LTE Omni-directional Antenna	103
Table 32	Specifications for the Outdoor 2G/3G/LTE Directional Antenna	104
Table 33	Specifications for the Indoor LTE Omni-directional Antenna	105
Table 34	Requirements for Generic Outdoor 3G and 4G Antennas	106
Table 35	Specifications for the Outdoor WiFi Omni-directional Antennas	107

Table 36	Specifications for the Outdoor WiFi Directional Antennas	110
Table 37	Specifications for Vehicle Mount LTE/WiFi/GNSS Antennas	110
Table 38	Indoor WiFi Omni-directional Antenna Specifications	113
Table 39	Requirements for Generic WiFi Antennas	114
5	Installing and Grounding the Chassis	117
Table 40	Ground Wire Descriptions	132
Table 41	Ground Connection Components	134
7	7705 Outdoor Enclosure	141
Table 42	7705 Outdoor Enclosure Variants	144
Table 43	Compliance Standards	149
8	Installing and Grounding Outdoor Antennas.....	173
Table 44	LTE Antenna Installation Accessory Kits	182
Table 45	Indoor/Outdoor Coaxial Shield Grounding and Surge Protection	191
9	Making Outdoor Antenna and Cable Connections.....	193
Table 46	LTE Losses for Power Budget Commercial Band Calculations for Indoor/Outdoor Installations	212
Table 47	LTE Losses for Power Budget Commercial Band Calculations for Outdoor Installations	212
Table 48	WiFi Losses for Power Budget Commercial Band Calculations for Indoor/Outdoor Installations	213
Table 49	WiFi Losses for Power Budget Commercial Band Calculations for Outdoor Installations	213
11	Preparing the DC Power Connections.....	221
Table 50	DC Power Cable Descriptions	223
Table 51	7705 SAR-Hm and 7705 SAR-Hmc DC Power Input Terminal Block Description	225
Table 52	Wiring the DC Power Supplies Description	228
Table 53	Wiring the DC Power Supplies Description	231
12	High Voltage Power Supply Unit.....	233
Table 54	Ground Wire Descriptions	243
Table 55	Ground Connection Components	244
Table 56	Wiring the HV-PS35 to the 7705 SAR-Hm or 7705 SAR-Hmc.....	247
Table 57	HV-PS35 Power Terminal Block	248
13	Powering Up and Initializing.....	255
Table 58	Console Port Default Settings	259
14	7705 SAR-Hm and 7705 SAR-Hmc LEDs	263
Table 59	7705 SAR-Hm Faceplate LED Descriptions	265
Table 60	7705 SAR-Hmc Faceplate LED Descriptions	267
Table 61	7705 SAR-Hm and 7705 SAR-Hmc RSSI LEDs	268
Table 62	7705 SAR-Hm RJ-45 Connector LED Descriptions	269

Table 63	7705 SAR-Hmc RJ-45 Connector LED Descriptions	271
15	Pinout Assignments	273
Table 64	Console Port Pinouts—RJ-45	274
Table 65	External Alarms Port Pinouts—RJ-45 Female	276
Table 66	Alarm Events	277
Table 67	Ethernet Port Pinouts—RJ-45 Female	278
Table 68	7705 SAR-Hm RS-232 Port Pinouts—RJ-45 Female	280
Table 69	7705 SAR-Hmc RJ-45 Port Pinouts	280
Table 70	Pinouts on the 7705 SAR-Hmc RS-232 Y-Cable Female Port 1 End	280
Table 71	Pinouts on the 7705 SAR-Hmc RS-232 Y-Cable Female Port 2 End	281
Table 72	Pinouts on a 7705 SAR-Hmc Single-Port Cable— RJ-45 Female	281
16	Standards and Protocol Support	283
Table 73	Safety Standards Compliance	284
Table 74	Electromagnetic Compatibility	285
Table 75	Environmental Standards Compliance	287
Table 76	Railway Compliance	288
Table 77	Power Utility Substations Compliance	289
Table 78	Radio Compliance	290
Table 79	Directives, Regional Approvals, and Certifications Compliance	291
Table 80	Telecom Interoperability	292

List of Figures

2	Mandatory Regulations	23
Figure 1	ESD Awareness Label.....	30
Figure 2	Wrist Strap Label at the Front of the 7705 SAR-Hm Chassis.....	32
Figure 3	Wrist Strap Label at the Front of the 7705 SAR-Hmc Chassis.....	32
Figure 4	WEEE Symbol for post-August 13, 2005 Product	47
Figure 5	Altitude Limit Symbol	53
3	7705 SAR-Hm and 7705 SAR-Hmc Overview	59
Figure 6	7705 SAR-Hm Chassis.....	60
Figure 7	7705 SAR-Hmc Chassis.....	61
Figure 8	7705 SAR-Hm Chassis Front and Back Features	63
Figure 9	7705 SAR-Hmc Chassis Front and Back Features	64
Figure 10	35W High Voltage Power Supply	67
5	Installing and Grounding the Chassis	117
Figure 11	Unpacking the Chassis.....	119
Figure 12	SIM Slots and Orientation on a 7705 SAR-Hm	121
Figure 13	SIM Slots and Orientation on a 7705 SAR-Hmc.....	121
Figure 14	DIN Rail Profile View	123
Figure 15	7705 SAR-Hm Chassis Rear-mounted on a Horizontal DIN Rail	123
Figure 16	7705 SAR-Hmc Chassis Rear-mounted on a Horizontal DIN Rail	124
Figure 17	DIN Rail Clip Oriented for a Horizontal DIN-rail Installation	124
Figure 18	Mounting the Chassis on a Horizontal DIN Rail	125
Figure 19	DIN Rail-to-rack Adapter	126
Figure 20	Rubber Feet Location on the 7705 SAR-Hm.....	128
Figure 21	Setting the 7705 SAR-Hm on a Flat Surface.....	128
Figure 22	Preparing the Ground Wire.....	132
Figure 23	Attaching a Ground Connector on a 7705 SAR-Hm.....	133
Figure 24	Attaching a Ground Connector on a 7705 SAR-Hmc.....	133
6	Making Indoor Antenna Connections to the 7705 SAR-Hm	135
Figure 25	Indoor LTE Omni-directional Antenna	137
Figure 26	WiFi Indoor Antenna.....	138
Figure 27	Indoor Antennas with Vertical Chassis	139
Figure 28	Indoor Antennas with Horizontal Chassis.....	140
7	7705 Outdoor Enclosure	141
Figure 29	7705 Outdoor Enclosure Front and Back	143
Figure 30	7705 Outdoor Enclosure Dimensions.....	143
Figure 31	Top and Bottom Cabling Ports	145
Figure 32	Interior Features	146
Figure 33	Alarm Switch Labels.....	147

Figure 34	Applying Thermal Gel on the Heatsink for a 7705 SAR-Hm Installation	153
Figure 35	Loosening the Captive Bolts.....	154
Figure 36	Removing the Interior Heatsink Screws	155
Figure 37	Removing the Rear Heatsink Screw.....	155
Figure 38	Mating the Heatsink to the Chassis	156
Figure 39	Re-installing the Heatsink With the Chassis Back in the Enclosure	157
Figure 40	Connecting the LTE RF Cables on a 7705 SAR-Hm.....	158
Figure 41	Connecting the WiFi and GNSS Cables on a 7705 SAR-Hm.....	159
Figure 42	Re-installing the Rear Heatsink Screw	159
Figure 43	Re-Installing the Cover Bolts	160
Figure 44	Mounting Points on the Enclosure.....	161
Figure 45	Mating the Heatsink to the 7705 SAR-Hmc Chassis	162
Figure 46	Connecting the LTE RF Cables on a 7705 SAR-Hmc.....	163
Figure 47	Re-Installing the Cover Bolts	164
Figure 48	Fastening the Mounting Bracket To the Enclosure.....	166
Figure 49	Attaching the Banding Straps to the Bracket.....	167
Figure 50	Securing the Enclosure To the Pole	168
Figure 51	Installing the Enclosure On a Brick Wall.....	169
Figure 52	Performing the Grounding on a 7705 SAR-Hm	170
Figure 53	Performing the Grounding on a 7705 SAR-Hmc	171
8	Installing and Grounding Outdoor Antennas.....	173
Figure 54	Lightning Protection Area for Ground Installation.....	175
Figure 55	Lightning Protection Area for Tower Installation.....	175
Figure 56	Outdoor 2G/3G/4G Omni-directional Antenna.....	178
Figure 57	Outdoor 2G/3G/4G Directional Antenna	179
Figure 58	LTE Antenna Indoor/Outdoor Application.....	180
Figure 59	LTE Outdoor Enclosure Application	181
Figure 60	3HE12346AA Outdoor WiFi Omni-directional Antenna	184
Figure 61	3HE12346Ax Outdoor WiFi Omni-directional Antennas.....	185
Figure 62	3HE12346Ax Outdoor WiFi Omni-directional Antennas with a Mast Mount Bracket.....	185
Figure 63	3HE12424AA Outdoor WiFi Directional Antenna	186
Figure 64	3HE12424AA Outdoor WiFi Directional Antenna with a Mast Mount Bracket	187
Figure 65	Vehicle Mount Outdoor LTE/WiFi/GNSS Antenna	188
Figure 66	Outdoor Coaxial Shield Grounding and Surge Protection Installation	190
Figure 67	Indoor/Outdoor Coaxial Shield Grounding and Surge Protection	191
9	Making Outdoor Antenna and Cable Connections	193
Figure 68	Attaching the Coaxial Cables	195
Figure 69	Coaxial Cable and Connector Kits.....	198
Figure 70	LDF4 Cable Strip Tool Components.....	198
Figure 71	Removing the Cable Jacket With A Knife.....	199
Figure 72	Inserting the Cable Into the LDF4 Cable Strip Tool.....	199
Figure 73	Rotating the LDF4 Cable Strip Tool Around the Cable.....	200
Figure 74	Opening the Housing and Removing the Cable	200

Figure 75	Flaring the Outer Conductor	201
Figure 76	Chamfering the Cable End	201
Figure 77	Flared Cable End Diameter	201
Figure 78	Attaching the O-ring and Connectors (Showing 4.3-10).....	202
Figure 79	Installing a Surge Protector on the Enclosure	203
Figure 80	Indoor Cabling and Equipment	204
Figure 81	Cutting and Stripping the LDF4 Cable Jacket	206
Figure 82	Applying the PVC Tape to the Grounding Clamp Cable.....	207
Figure 83	Pushing the PVC Tape Upward on the Grounding Clamp Cable	207
Figure 84	Installing the Grounding Clamp to the Cable	208
Figure 85	Applying the Weatherproofing Tape Over the Grounding Clamp and Cable	208
Figure 86	Applying the PVC Tape Over the Weatherproofing Tape and Cable	209
Figure 87	LDF4 Coaxial Cable With the Top Portion of the Ground Lead Wire Waterproofed and Sealed With Tape	209
Figure 88	Inserting the Two-Hole Lug at the End of the Lead Wire.....	210
Figure 89	Placing the Heat Shrink Tube Over the Two-Hole Lug.....	210
10	Making Connections to the RJ-45 Ports	215
Figure 90	RJ-45 Ports on the 7705 SAR-Hm	217
Figure 91	RJ-45 Ports on the 7705 SAR-Hmc.....	217
11	Preparing the DC Power Connections	221
Figure 92	DC Power Cable	223
Figure 93	Removing and Reinstalling the 7705 SAR-Hm DC Power Input Terminal Block.....	224
Figure 94	Removing and Reinstalling the 7705 SAR-Hmc DC Power Input Terminal Block.....	225
Figure 95	Power Inputs for –12/24 VDC Installation on a 7705 SAR-Hm	227
Figure 96	Power Inputs for –12/24/48 VDC Installation on a 7705 SAR-Hmc.....	228
Figure 97	Power Inputs for +12/24 VDC Installation on a 7705 SAR-Hm	230
Figure 98	Power Inputs for +12/24/48 VDC Installation on a 7705 SAR-Hmc	231
12	High Voltage Power Supply Unit	233
Figure 99	HV-PS35 Features	235
Figure 100	Attaching the HV-PS35 Mounting Bracket to the Chassis.....	240
Figure 101	HV-PS35 Attached to the Mounting Bracket on a 7705 SAR-Hm	240
Figure 102	The HV-PS35 Attached to the Mounting Bracket on the 7705 SAR-Hmc.....	241
Figure 103	Preparing the Ground Wire.....	243
Figure 104	Attaching a Ground Connector to the HV-PS35	244
Figure 105	Wiring the HV-PS35 to the 7705 SAR-Hm	246
Figure 106	Wiring the HV-PS35 to the 7705 SAR-Hmc	247
Figure 107	Removing and Reinstalling the HV-PS35 Power Terminal Blocks	248
13	Powering Up and Initializing	255
Figure 108	Files on the Integrated Flash Memory Device	260

14	7705 SAR-Hm and 7705 SAR-Hmc LEDs	263
Figure 109	7705 SAR-Hm Faceplate LEDs.....	264
Figure 110	7705 SAR-Hmc Faceplate LEDs	266
Figure 111	7705 SAR-Hm RJ-45 Connector LEDs	269
Figure 112	7705 SAR-Hmc RJ-45 Connector LEDs.....	270
15	Pinout Assignments	273
Figure 113	Console Port Pin Numbers	274
Figure 114	Alarms Port Pin Numbers	276
Figure 115	Ethernet Port RJ-45 Connector Pin Numbers	278
Figure 116	RS-232 RJ-45 Connector Pin Numbers	279

1 Preface

1.1 About This Guide

This guide provides an overview of the 7705 SAR-Hm and 7705 SAR-Hmc chassis, recommendations for preparing the site, procedures for installing, grounding, and powering the chassis, and prerequisites and instructions for initializing and commissioning the system.

After the hardware installation process is completed, refer to the [List of Technical Publications](#) for information about how to configure and manage the 7705 SAR-Hm and 7705 SAR-Hmc.

1.1.1 List of Technical Publications

For information about the 7705 SAR-Hm and 7705 SAR-Hmc software features, refer to the following software guides:

- 7705 SAR-Hm and 7705 SAR-Hmc Main Configuration Guide
- 7705 SAR-Hm and 7705 SAR-Hmc Interface Configuration Guide

1.1.2 Warnings and Notes

Observe the warnings and notes in this guide to avoid injury or equipment damage during installation and maintenance. Follow standard safety procedures and guidelines when working with and near electrical equipment. Warning statements and notes are provided in each chapter.

1.1.3 Audience

This guide is intended for network installers and system administrators who are responsible for installing, configuring, or maintaining networks. This guide assumes you are familiar with electronic and networking equipment.

1.1.4 Information Symbols

[Table 1](#) describes symbols contained in this guide.

Table 1 Information Symbols

Symbol	Meaning	Description
	Danger	This symbol warns that improper handling and installation could result in bodily injury. An electric shock hazard could exist. Before you begin work on this equipment, be aware of hazards involving electrical circuitry, be familiar with networking environments, and perform accident prevention procedures.
	Warning	This symbol warns that improper handling and installation could result in equipment damage or loss of data.
	Caution	This symbol warns that improper handling may reduce your component or system performance.
	Note	This symbol provides additional operational information.

1.1.5 Technical Support

If you purchased a service agreement for your router and related products from a distributor or authorized reseller, contact the technical support staff for that distributor or reseller for assistance. If you purchased a Nokia service agreement, follow this link to contact a Nokia support representative and to access product manuals and documentation updates:

[Product Support Portal](#)

1.1.6 Nokia Canada Address

Nokia Canada Inc.
600 March Road
K2K 2T6
Ottawa, Canada

2 Mandatory Regulations

2.1 In This Chapter

The following sections describe the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc:

- [List of Terms](#)
- [Safety Warnings / Avertissements de Sécurité](#)
- [General Requirements](#)
- [Safety Approvals](#)
- [Safety Approval for External DC Sources That Power This Equipment](#)
- [Canada Regulations](#)
- [United States Regulations](#)
- [European Union Regulations](#)
- [United Kingdom Regulations](#)
- [Australia/New Zealand Regulations](#)
- [China Regulations](#)
- [South Korea Regulations](#)
- [Japan Regulations](#)
- [Hazardous Locations](#)

2.2 List of Terms

Table 2 lists the mandatory regulations terms used in this guide.

Table 2 List of Terms

Term	Expansion
ACMA	Australian Communications and Media Authority
ACTA	Administrative Council for Terminal Attachments
ANSI	American National Standards Institute
AS/NZ	Australian/New Zealand standard
ATEX	ATmosphères EXplosives
CBN	Common Bonding Network
CE	Conformité Européene
CFR	Code of Federal Regulations
CSA International	Canadian Standards Association International
DC-C	Common DC Return
DC-I	Isolated DC Return
EEC	European Economic Community
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
EN	European Standards
ES1	Class 1 energy source
ES2	Class 2 energy source
ES3	Class 3 energy source
ETSI	European Telecommunications Standards Institute
FCC	Federal Communications Commission
IBN	Isolated Bonding Network
ICES	Interference Causing Equipment Standard
IEC	International Electrotechnical Commission
IET	Institution of Engineering and Technology (UK)

Table 2 List of Terms (Continued)

Term	Expansion
LVD	Low Voltage Directive
NRTL	Nationally Recognized Testing Laboratory
OSHA (USA)	Occupational Safety and Health Administration (USA)
PCS	Personal Communications Service
PTCRB	PCS Type Certification Review Board
RoHS	Restriction of the use of certain Hazardous Substances
SELV	Safety Extra Low Voltage
TNV-1	Telecommunications Network Voltage, class 1
TNV-2	Telecommunications Network Voltage, class 2
TNV-3	Telecommunications Network Voltage, class 3
UL	Underwriters Laboratories
WEEE	Waste Electrical and Electronic Equipment

2.3 Safety Warnings / Avertissements de Sécurité

Ensure that you read and observe all of the dangers and warnings described in this section.

Veillez lire la description des risques et les avertissements mentionnés dans le présent chapitre.

Installation sections throughout the document have links to this section as applicable.

Les chapitres relatifs à l'installation de tout le document comportent des liens vers le présent chapitre, le cas échéant.

- Installation and servicing of the system must be done only by trained service personnel familiar with potential electrical, mechanical, and LASER radiation hazards.

Seul un personnel formé qui connaît les risques électriques ou mécaniques ainsi que les dangers des rayons laser doit effectuer l'installation et l'entretien du système.

- Ensure that nearby equipment, including breaker panel bus bars and power connectors, is made safe. Either shut off the power, if possible, or install safety guards or mats over exposed power points and cables.

Vérifiez que les équipements à proximité, comme les barres omnibus, le panneau à disjoncteurs et les connecteurs électriques, sont sécurisés. Coupez l'alimentation si possible ou installez des protections ou des tapis de sécurité sur les points d'alimentation et les câbles exposés.

- Do not power up equipment before verifying that all common equipment (chassis, power, cooling, and grounding) is connected correctly.

Ne mettez pas l'équipement sous tension avant d'avoir vérifié que tous les équipements communs (châssis, alimentation, refroidissement et mise à la terre) sont correctement raccordés.

- The equipment must be provided with a readily accessible disconnect device as part of site preparation.

L'équipement doit être équipé d'un dispositif de déconnexion facilement accessible dans le cadre de la préparation du site.

- For DC (nominal 12, 24 VDC or 48 VDC) powered systems, the unit should be connected to a DC branch circuit with a 10 A (maximum for the 7705 SAR-Hm) or 5 A (maximum for the 7705 SAR-Hmc) DC-rated circuit breaker or fuse that meets the requirements for branch circuit protection. A suitable disconnect device must be provided in the DC branch, either a circuit breaker, fuse, or switch that can be used to disconnect power to the system during servicing. For high-voltage DC applications, the circuit breaker or fuse must be approved for the applicable DC voltage.

Pour les systèmes alimentés en courant continu (tension nominale de 12 VDC, 24 VDC ou de 48 VDC), l'unité doit être connectée à un circuit de dérivation DC avec un disjoncteur de 10 A au maximum (7705 SAR-Hm) ou 5A maximum (7705 SAR-Hmc) qui répond aux exigences de protection du circuit de dérivation. Un dispositif de déconnexion approprié, un disjoncteur ou un interrupteur capable de déconnecter l'alimentation du système pendant l'entretien, doit être prévu dans le circuit de dérivation DC. Pour les applications en courant continu haute tension, le disjoncteur ou le fusible doit être approuvé pour la tension en courant continue applicable.

- Disconnect all power feeds before installation and servicing.

Débrancher toutes les AC ou les sources DC d'alimentation avant l'entretien.

- Systems equipped with DC power connections should be installed in restricted access areas, such as a dedicated equipment room or an equipment closet, in accordance with Articles 110-16, 110-17, and 110-18 of the National Electric Code ANSI/NFPA 70, and in accordance with local rules, statutes and electrical codes.

Les systèmes équipés de connexions d'alimentation en courant continu doivent être installés dans des zones à accès restreint, comme un local spécial ou une armoire, conformément aux articles 110-16, 110-17 et 110-18 de la norme NEC (National Electric Code ou Code national de l'électricité) ANSI/NFPA 70 ainsi qu'aux réglementations, statuts et codes de l'électricité locaux.

- All AC power cords, DC power cords, and ground cables for equipment must meet local rules, statutes, and electrical codes.

Tous les câbles d'alimentation AC ou DC ainsi que les câbles de mise à la terre de l'équipement doivent être conformes aux réglementations, statuts et codes de l'électricité locaux.

- Never make equipment connections in wet locations.

Ne branchez jamais l'équipement dans des endroits humides.

2.3.1 Ground Connections / Raccordement à la Terre

- The chassis must be correctly connected to earth ground.
Le châssis doit être correctement raccordé à la terre.
- Ground connection on the chassis is mandatory. The gauge of the chassis ground wire must match or exceed the gauge of the supply conductors.
La mise à la terre du châssis est obligatoire. La section du câble de terre du châssis doit être au moins égale à celle des conducteurs d'alimentation.
- When wiring the unit, the ground connection must always be made first and disconnected last.
Lors du câblage de l'unité, le câble de terre doit toujours être raccordé en premier et déconnecté en dernier.

2.3.2 LASER Transceiver / Émetteur-récepteur LASER

- Class 1 LASER product
Appareil à LASER de classe 1
- Pluggable optic modules are very hot while in use. Touch only the extraction lever or handle when removing the module. Allow the module to cool before further handling.
Les modules optiques enfichables sont très chauds lorsqu'ils fonctionnent. Touchez uniquement le levier ou la poignée d'extraction lorsque vous retirez le module. Laissez-le refroidir avant de poursuivre la manipulation.

2.3.3 Lightning / Foudre

- Lightning strikes are possible during stormy weather and could result in death or severe injury. Do not work on antenna installation or on power supply lines or antenna feeds during stormy weather.
La foudre est possible par temps orageux et peut entraîner la mort ou des blessures graves. Ne travaillez pas sur l'installation de l'antenne, sur les lignes d'alimentation électrique ou les alimentations de l'antenne en cas d'orage.
- With AC power ports, an external surge protection device is intended to be used at the AC input of the router.
Avec les ports d'alimentation AC, un dispositif externe de protection contre les surtensions est destiné à être utilisé à l'entrée AC du routeur.

2.3.4 Physical Safety / Sécurité Physique

- Always keep your fingers away from rotating fan blades. Do not put your fingers or any tool near a fan if the fans are still spinning. Allow the fans to spin down and fully stop before servicing.

Tenez toujours vos doigts éloignés des pales du ventilateur en rotation. Ne placez pas vos doigts ou tout autre outil à proximité d'un ventilateur s'il tourne encore. Laissez les ventilateurs s'arrêter complètement avant l'entretien.

- Before working on equipment that is connected to power, remove jewelry, such as rings, necklaces, and watches. When metal objects are in contact with power and ground, serious burns can occur or the objects can become welded to the terminals.

Avant de travailler sur un équipement connecté à l'alimentation, retirez vos bijoux, tels que les bagues, les colliers et les montres. Lorsque des objets métalliques entrent en contact avec l'alimentation et la terre, de graves brûlures peuvent survenir ou les objets peuvent se souder aux bornes.

2.3.5 Electrical Safety / Sécurité Électrique

- Only connect like circuits: SELV to SELV (ES1 to ES1), TNV-2 to TNV-2 (ES2 to ES2), and Primary to Primary (ES3 to ES3), as defined in IEC 60950-1 and 62368-1.

Ne connectez que les circuits identiques: SELV à SELV (ES1 à ES1), TNV-2 à TNV-2 (ES2 à ES2) et primaire à primaire (ES3 à ES3), conformément à la définition des normes CEI 60950-1 et 62368-1.

- The intrabuilding ports of the equipment must use shielded intrabuilding cabling/wiring that is grounded at both ends.

Les ports de l'équipement se trouvant à l'intérieur d'un bâtiment doivent utiliser un câblage intérieur blindé mis à la terre aux deux extrémités.

2.4 General Requirements

The sections that follow outline the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc. The information in this section also describes instructions and information related to overall conformance with the mandatory regulations. You must adhere to these instructions so that your system meets regulatory requirements.



Danger: Before working on equipment that is connected to power, remove jewelry, such as rings, necklaces, and watches. When metal objects are in contact with power and ground, serious burns can occur or the objects can become welded to the terminals.



Warning: The compliance and long-term reliability of the 7705 SAR-Hm and 7705 SAR-Hmc are wholly dependent on using the product within the environmental limits and restrictions described in the [Site Preparation](#) chapter.

2.4.1 Anti-static Measures

[Figure 1](#) shows the ESD awareness label used on Nokia products to alert personnel to the presence of ESD-sensitive devices in the product. The necessary ESD precautions must be taken whenever this symbol is present on the product.

Figure 1 ESD Awareness Label



17658

This guide uses the following icon and associated text to provide special information relating to ESD-sensitive activities or situations.

**Warning:**

- ESD damage can occur if components are mishandled. The 7705 SAR-Hm and 7705 SAR-Hmc chassis must be properly grounded. The grounding point is located at the bottom of the chassis faceplate.
- Always wear an ESD-preventive wrist or ankle strap connected to a nearby ground point that is connected to the site grounding point when working on the 7705 SAR-Hm, 7705 SAR-Hmc, or the 35W High Voltage Power Supply.

The risk of damage to an ESD-sensitive device is reduced considerably after assembly in a circuit designed to protect sensitive components; however, the following basic precautions should be taken to reduce ESD to harmless levels.

- Handle all units as if they contained ESD-sensitive devices unless they are known not to contain ESD-sensitive parts.
- Wear an anti-static ESD strap on your wrist or heel prior to and while touching or handling units containing ESD-sensitive devices.
- For surfaces with resistance to ground in excess of 100 MΩ, such as ordinary tile, either cover them with properly grounded static dissipative runners or wax them with a static dissipative wax.
- Store (even temporarily), pack, and ship units in anti-static bags or containers.
- Do not handle units and components unnecessarily.
- Do not use synthetic bristled brushes or acid brushes to clean units.
- Handle failed units with the same precautions as working units.

2.4.1.1 ESD Grounding

When a 7705 SAR-Hm or 7705 SAR-Hmc chassis is properly installed in a grounded equipment rack, the rack provides ESD grounding for the chassis. Before a 7705 SAR-Hm or 7705 SAR-Hmc chassis is installed, connect the ESD wrist strap to a grounded rack or other ground point. After the chassis is installed in a grounded rack or cabinet, connect the anti-static wrist strap to the ground point on the front of the chassis, as shown in [Figure 2](#) and [Figure 3](#).

Figure 2 Wrist Strap Label at the Front of the 7705 SAR-Hm Chassis


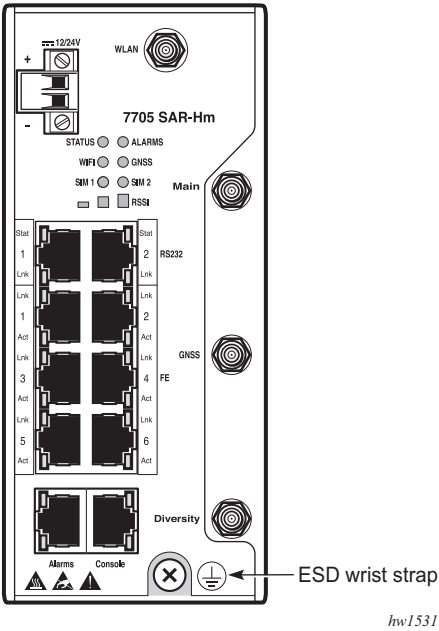


Figure 3 Wrist Strap Label at the Front of the 7705 SAR-Hmc Chassis

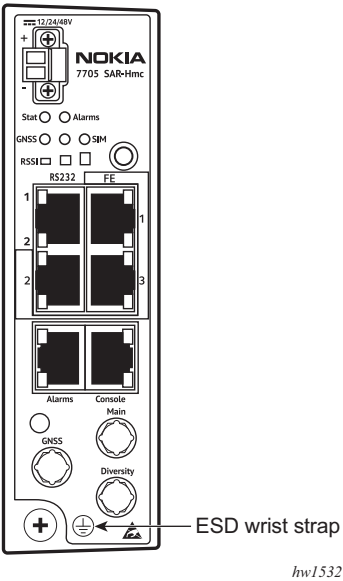

2.4.2 Unit Repair

Return a damaged unit to an authorized Nokia repair center for service or repair.

2.4.3 Equipment Interconnection Points



Warning: Only connect like circuits: SELV to SELV or TNV-2 to TNV-2, as defined in IEC 60950-1, and ES1 to ES1 or ES2 to ES2, as defined in IEC 62368-1.

2.4.3.1 SELV and ES1

The following interconnection points on all 7705 SAR-Hm and 7705 SAR-Hmc chassis are SELV or ES1 connections:

- Ethernet (10/100Base-T) ports
- Alarm port
- Console port
- RS-232 ports
- DC power input terminal block

2.4.3.2 Primary and ES3

The following interconnection points on all HV-PS35 external power are Primary or ES3 connections:

- AC
- HV DC (high voltage DC; from 88 VDC up to 300 VDC)

2.4.4 Prevention of Access

The 7705 SAR-Hm and 7705 SAR-Hmc must be accessible only to authorized, trained service personnel. Install this apparatus in a restricted access location or similar environment to prevent unauthorized access.

2.4.5 Environmental Requirements for Installation

For information about the environmental requirements for installing the 7705 SAR-Hm and 7705 SAR-Hmc, see [Installation Locations](#).

2.4.6 Protective Safety Ground (Earth)

The cable used for safety ground must be at minimum 12 AWG (3.3 sq mm; 2.0 mm diameter) in size, green and yellow in color, and of sufficient length to connect the building earth point to the chassis ground connection. This 12 AWG ground wire exceeds the minimum safety requirement, to also address compliance with the EMC surge requirements. See [Grounding the Chassis](#) for instructions on connecting the chassis ground.

2.4.7 EMC Compliance

EMC compliance requires the use of shielded cables and may require other special accessories. Where required, these special accessories must be installed as per the instructions.

To maintain EMC compliance, cables that are shielded and grounded at both ends must be used on the following interfaces and ports:

- Console port
- RJ-45 Alarm port
- Ethernet interfaces
 - Fast Ethernet (CAT5 minimum)
- RS-232 interfaces

2.4.8 Regulatory Symbols

The 7705 SAR-Hm and 7705 SAR-Hmc use various regulatory symbols, which may be used on product markings such as approvals labels. These symbols are described in IEC 60417 and shown in [Table 3](#).

Table 3 Regulatory Symbols

Symbol	Meaning	Description
	Protective earth (ground)	This symbol indicates that you must connect to earth ground before you make any other connections to the equipment.
	Protective bond	This symbol indicates that you must provide a protective bond connection on the equipment; that is, any accessible metal parts that could become energized must be properly bonded to the earthed chassis.
	Hot surface	This symbol indicates that the equipment surface is hot to the touch when it is powered on or during maintenance when a subassembly is removed.
	Direct current	This symbol indicates that the equipment is suitable for direct current only.
	Alternating current	This symbol indicates that the equipment is suitable for alternating current only.
	Caution	This symbol indicates that caution should be taken when handling the equipment.
	Read operator's manual	This symbol indicates that the operator's manual or card instructions should be read before continuing with an operation.

2.5 Safety Approvals

This product is approved by an NRTL and also the IECEE CB Scheme. It is compliant with IEC 60950-1 and IEC 62368-1, with all country deviations.

2.6 Safety Approval for External DC Sources That Power This Equipment

2.6.1 Low-Voltage DC Sources, Nominal 12/24/48 VDC

The low-voltage DC source, from which this equipment derives power, must be safety approved (as per local requirements) and meet the requirements of a SELV source as defined in IEC/UL/CSA/EN 60950-1, or an ES2 source as defined in IEC/UL/CSA/EN 62368-1.

2.6.2 High-Voltage DC Sources, 88 to 300 VDC

The high voltage DC source, from which the HV-PS35 external Power Supply derives power, must be safety approved (as per local requirements) and meet the requirements of a Hazardous Voltage Secondary source as defined in IEC/UL/CSA/EN 60950-1, or an ES3 source as defined in IEC/UL/CSA/EN 62368-1.

The external DC source must have double or reinforced levels of insulation, isolating the DC output from the AC mains. (AC mains are sources up to and including 300 Vrms, including 230/400 V and 277/480 V sources).



Note: Only the low-voltage DC option is approved for hazardous locations.

2.7 Canada Regulations

This section describes the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc in Canada.

2.7.1 Industry Canada Regulations

ICES-003: Interference-Causing Equipment Standard - Information Technology Equipment (ITE) - Limits and methods of measurement



Note: Changes or modifications not expressly approved by Nokia could void the user's authority, granted by Nokia's certification by Industry Canada, to operate the equipment.

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

2.7.2 General Requirements for Compliance of Radio Apparatus (RSS-GEN)

The 7705 SAR-Hm contains licensed and license-exempt transmitter modules.
The 7705 SAR-Hmc only contains a licensed transmitter module.

The 7705 SAR-Hm licensed transmitter module is approved under the certification number IC:2417C-MC7455.

The 7705 SAR-Hmc (3HE12472AA) licensed transmitter module is approved under the certification number IC:24872-MG401.

The 7705 SAR-Hmc (3HE12473AA) licensed transmitter module is approved under the certification number IC:2417C-MC74B.

This device contains license-exempt transmitter/receiver that comply with Innovation, Science and Economic Development Canada's license-exempt RSS-247.

Operation is subject to the following two conditions.

- This device may not cause interference.
- This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes.

- L'appareil ne doit pas produire de brouillage.
- L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter [IC: 8407A-RS9113DB] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio [IC: 8407A-RS9113DB] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

The maximum antenna gain must not exceed the limits listed in [Table 4](#) and [Table 5](#).



Note: WiFi (WLAN) is not supported on the 7705 SAR-Hmc.

Table 4 WiFi Antenna Gain Limits

WLAN Frequency (MHz)	Max Omni-directional Antenna Gain (dBi)	EIRP Limit (dBm)
2412- 2484	18	36
5150-5250	5	23
5250-5350	18	30
5470-5600	18	30

Table 4 WiFi Antenna Gain Limits (Continued)

WLAN Frequency (MHz)	Max Omni-directional Antenna Gain (dBi)	EIRP Limit (dBm)
5650-5725	18	30
5725-5850	18	30

Notes:

1. The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems (devices installed in vehicles are permitted).
2. For devices with detachable antennas, the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the Maximum Effective Isotropic Radiated Power (EIRP) limit.
3. For devices with detachable antennas, the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the EIRP limits, as appropriate.
4. Where applicable, antenna types, antenna models, and worst-case tilt angles necessary to remain compliant with the EIRP. elevation mask requirement set forth in RSS-247 section 6.2.2.3 shall be clearly indicated.

Table 5 LTE Antenna Gain Limits

Band	LTE Frequency (MHz)	EIRP Limit (dBm)
2	1850 to 1910	30
4	1710 to 1755	30
5	824 to 849	30
7	2500 to 2570	33
12	699 to 716	30
13	777 to 787	30
17	704 to 716	30
25	1850 to 1915	30
26	814 to 849	30
30 ¹	2305 to 2315	See Note 1
41	2496 to 2690	33
66	1710 to 1780	30

Note:

1. The EIRP limit in Band 30 for mobile stations must not have an antenna gain exceeding 1 dBi in Band 30. Additionally, the IC prohibits the use of external vehicle-mounted antennas for mobile stations in this band. Fixed subscriber stations in Canada may have an antenna gain of up to 10 dBi in Band 30; however, the use of outdoor antennas or outdoor station installations are prohibited, except if installed professionally in locations that are at least 20 meters from roadways or in locations where it can be shown that the ground power level of -44 dBm per 5 MHz in the bands 2305–2315 MHz and 2350–2360 MHz or -55 dBm per 5 MHz in the bands 2315–2320 MHz and 2345–2350 MHz will not be exceeded at the nearest roadway.

2.7.3 EMC Compliance

EMC compliance requires the use of shielded cables or other special accessories. These special accessories must be installed as per the instructions. See section [EMC Compliance](#) for additional information.

2.7.4 RF Exposure

The 7705 SAR-Hm and 7705 SAR-Hmc comply with the RSS-102 RF Exposure limits when operating with the allowed maximum gain antennas defined by Nokia. At least 7.9 in. (20 cm) separation distance between the operator or bystander and the 7705 SAR-Hm or 7705 SAR-Hmc antenna must be maintained at all times.

2.8 United States Regulations

This section describes the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc in the United States.

2.8.1 Federal Communications Commission

2.8.1.1 EMC Regulations

FCC Part 15



Note: Changes or modifications not expressly approved by Nokia could void the user's authority, granted by Nokia's certification by the FCC, to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.8.1.2 RF Regulations

The 7705 SAR-Hm is a mobile device and operates in the cellular bands. It contains licensed and license-exempted transmitter modules.

The 7705 SAR-Hm contains the licensed transmitter module that is approved under the certification number FCC ID: N7NMC7455.

The 7705 SAR-Hm contains the WLAN module that is certified under the FCC ID: XF6-RS9113DB.

The 7705 SAR-Hmc systems are mobile devices and operate in the cellular bands. The systems only contain a licensed transmitter module. WLAN is not supported on the 7705 SAR-Hmc systems.

The 7705 SAR-Hmc (3HE12472AA) contains the licensed transmitter module that is approved under the certification number FCC ID: 2AU8H-MG401.

The 7705 SAR-Hmc (3HE12472AA) system can also be configured as a CBSD Category A or B, and is approved under the certification number FCC ID: AS57705SARHMC-1.

The 7705 SAR-Hmc (3HE12473AA) contains the licensed transmitter module that is approved under the certification number FCC ID: N7MMC74B.

The 7705 SAR-Hmc (3HE12473AA) system can also be configured as a CBSD Category A or B, and is approved under the certification number FCC ID: AS57705SARHMC-2.

2.8.2 FCC RF-Exposure Regulations

These safety requirements require additional care to ensure that normal accessible areas near the antenna do not exceed the Uncontrolled Exposure limit, as specified in the FCC RF-Exposure Regulations.

FCC provides two exposure limits depending on the situation: 1) “Controlled” or occupational exposure, 2) “Uncontrolled”, which defines the exposure limit to the general public. A detailed discussion of the guidelines and adopted limits are included in FCC technical bulletin, OET Bulletin 65.

The 7705 SAR-Hm and 7705 SAR-Hmc comply with the Bulletin OET 65 RF Exposure limits when operating with the allowed maximum gain antennas defined by Nokia. At least 7.9 in. (20 cm) separation distance between the operator or bystanders and the 7705 SAR-Hm or 7705 SAR-Hmc antenna must be maintained at all times, as defined in the FCC 2.1091.

As a mobile deployment, the LTE and WLAN ports can transmit simultaneously on a 7705 SAR-Hm. The colocated configuration must not exceed the limits listed in [Table 6](#) and [Table 7](#).

Table 6 Indoor WLAN Antenna Gain Limits

WLAN Frequency (MHz)	Max Omni-directional Antenna Gain (dBi)	EIRP Limit (dBm)
2412- 2484	7	25
5150-5825	15	27

Note:

1. When selecting antennas, the maximum power spectral density limits as per FCC Part 15 Subpart E Section 15.407 shall not be exceeded for the 5GHz range. For the 2.4GHz range, the FCC Part 15 Subpart C Section 15.247 requirements shall not be exceeded.

Table 7 LTE Antenna Gain Limits

Band	LTE Frequency (MHz)	EIRP Limit (dBm)
2	1850 to 1910	30
4	1710 to 1755	30
5	824 to 849	30
12	699 to 716	30
13	777 to 787	30
17	704 to 716	30
25	1850 to 1915	30
26	814 to 849	30
30 ¹	2305 to 2315	See Note 1
41	2496 to 2690	33
48	3550 to 3700	EUD > 23 Category A > 30 Category B > 47
66	1710 to 1780	30

Note:

1. EIRP limit in Band 30 for mobile stations must not have antenna gain exceeding 1 dBi in Band 30. Additionally, the FCC prohibit the use of external vehicle-mounted antennas for mobile stations in this band. Fixed customer premises equipment (CPE) stations in the United States may have an antenna gain up to 10 dBi in Band 30; however, the use of outdoor antennas or outdoor station installations are prohibited except if professionally installed in locations that are at least 20 meters from roadways or in locations where it can be shown that the ground power level of -44 dBm per 5 MHz in the bands 2305 to 2315 MHz and 2350 to 2360 MHz or -55 dBm per 5 MHz in the bands 2315 to 2320 MHz and 2345 to 2350 MHz will not be exceeded at the nearest roadway.
2. This device is certified for mobile and fixed applications. Under no conditions may an antenna gain be used that exceed the EIRP power limit as specified in Part 22/24/27/90/96.

2.9 European Union Regulations

This section describes the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc in the European Union.

2.9.1 Declaration of Conformity

Hereby, Nokia declares that the equipment documented in this publication is in compliance with the essential requirements and other relevant provisions of Directive 2014/35/EU, Directive 2014/30/EU, and Directive 2011/65/EU (including Commission Delegated Directive (EU) 2015/863). Where radio devices are used, Directive 2014/53/EU applies.

The technical documentation as required by the Conformity Assessment procedure is kept at the Nokia location that is responsible for this product. For more information, please contact your local Nokia Customer Service Organization.

2.9.2 EU Compliance Statement

This product has been CE marked in accordance with the requirements of European Directives 2014/35/EU Low Voltage (LVD) Directive, 2014/30/EU Electromagnetic Compatibility (EMC), 2011/65/EU Restriction of Hazardous Substances (Recast) Directive, including Commission Delegated Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council as regards the list of restricted substances, and for radio devices, 2014/53/EU Radio Equipment Directive (RED).

2.9.3 EMC/EMI Compliance

The equipment complies with the following EMC and EMI specification: EN 301 489-1 Class A.

2.9.4 Radio Compliance

The equipment complies with the applicable requirements in ETSI EN 301 908-2 and EN 301 908-13.

The equipment complies with the applicable WLAN requirements in ETSI EN 300 328 (2.4GHz) and EN 301 893 (5GHz). In the frequency band 5 150-5 350 MHz, the band is restricted to indoor use with a maximum mean EIRP of 200 mW (23dB).

2.9.5 RF Exposure

The 7705 SAR-Hm and 7705 SAR-Hmc comply with the EN62311 RF Exposure limits when operating with the allowed maximum gain antennas defined by Nokia. At least 7.9 in. (20 cm) separation distance between the operator or bystander and the 7705 SAR-Hm or 7705 SAR-Hmc antenna must be maintained at all times.

The EIRP levels are maintained when operating with the antennas provided by Nokia.

2.9.6 Protective Earth

Protective earth is referred to as chassis ground in this document. A green and yellow colored earth wire must be connected from the site equivalent of the mains earth connection to all shelves in accordance with IET Wiring Regulations (use the most recent edition available). This connection is made via the chassis ground connection (see [Grounding the Chassis](#) for specific instructions on connecting the protective earth).

2.9.7 Eco-Environmental

Packaging Collection and Recovery Requirements

Countries, states, localities, or other jurisdictions may require that systems be established for the return and/or collection of packaging waste from the consumer, or other end user, or from the waste stream. Additionally, reuse, recovery, and/or recycling targets for the return and/or collection of the packaging waste may be established.

For more information regarding collection and recovery of packaging and packaging waste within specific jurisdictions, please contact the appropriate environmental health and safety organization.

Recycling / Take-back / Disposal of Product

Electronic products bearing or referencing the symbol shown in [Figure 4](#), when put on the market within the European Union, shall be collected and treated at the end of their useful life in compliance with applicable European Union and local legislation. They shall not be disposed of as part of unsorted municipal waste. Due to materials that may be contained in the product, such as heavy metals or batteries, the environment and human health may be negatively impacted as a result of inappropriate disposal.



Note: In the European Union, the WEEE symbol (a wheeled trash bin that has been crossed out and is positioned above a solid bar) indicates that the product was put on the market after 13 August 2005. This product is compliant with the WEEE marking requirements of Directive 2012/19/EU Waste Electrical and Electronic Equipment (WEEE).

Figure 4 WEEE Symbol for post-August 13, 2005 Product



21828

Moreover, in compliance with legal requirements and contractual agreements, where applicable, Nokia will offer to provide for the collection and treatment of Nokia products bearing the logo at the end of their useful life, or products displaced by Nokia equipment offers. For information regarding take-back of equipment by Nokia, or for more information regarding the requirements for recycling/disposal of product, please contact your Nokia Account Manager or Nokia Takeback Support.

2.9.8 Material Content Compliance

European Union (EU) Directive 2011/65/EU, “Restriction of the use of certain hazardous substances in electrical and electronic equipment” (recast), and Commission Delegated Directive (EU) 2015/863 restrict the use of lead, mercury, cadmium, hexavalent chromium, phthalate, and certain flame retardants in electrical and electronic equipment. The Directive 2011/65 EU applies to electrical and electronic products placed on the EU market after 2 January 2013, and the (EU) 2015/863 amendment after 22 July 2019. Nokia products shipped to the EU comply with the EU RoHS 2 Directive and latest amendments. Nokia ensures that equipment is assessed in accordance with the Harmonised Standard EN IEC 63000:2018 (CENELEC) on “Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances”.

2.10 United Kingdom Regulations

This section describes the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc in the United Kingdom.

2.10.1 Declaration of Conformity

Hereby, Nokia declares that the equipment documented in this publication is in compliance with the essential requirements and other relevant provisions of:

- Electromagnetic Compatibility Regulations 2016
- Electrical Equipment (Safety) Regulations 2016
- Radio Equipment Regulations 2017
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

The technical documentation as required by the Conformity Assessment procedure is kept at the Nokia location that is responsible for this product. For more information, please contact your local Nokia Customer Service Organization.

This product has been UKCA marked in accordance with the requirements of the Regulations.

2.10.1.1 EMC/EMI Compliance

The equipment complies with the following EMC and EMI specifications:

EN 300 386 Class A and EN 301 489-1 Class A

2.10.1.2 Laser Interface

The system uses laser devices that are rated in accordance with IEC 60825-1 as Class 1 devices.

2.10.1.3 Protective Earth

Protective earth is referred to as chassis ground in this document. A green, or green and yellow, colored earth wire must be connected from the site equivalent of the mains earth connection to all shelves in accordance with IET Wiring Regulations (use the most recent edition available). This connection is made via the chassis ground connection (see [Grounding the Chassis](#) for specific instructions for connecting the protective earth).

This equipment must be permanently grounded.

2.10.1.4 Material Content Compliance

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 restricts the use of lead, mercury, cadmium, hexavalent chromium, phthalate, and certain flame retardants in electrical and electronic equipment.

Nokia ensures that equipment is assessed in accordance with the Standard EN IEC 63000:2018 (CENELEC) on “Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances”.

2.11 Australia/New Zealand Regulations

This section describes the mandatory regulations that govern the installation and operation of the 7705 SAR-Hm and 7705 SAR-Hmc in Australia and New Zealand.

2.11.1 ACMA Regulations

The 7705 SAR-Hm and 7705 SAR-Hmc chassis comply with the ACMA requirements, and the product is marked with the RCM logo under the Supplier Code E762.

EMC

This Class A digital apparatus complies with AS/NZS CISPR 32.

Safety

All products supplied in Australia comply with an applicable Australian Standard electrical safety standard.

The 7705 SAR-Hm and 7705 SAR-Hmc chassis comply with the AS/Telecommunications requirements.

2.12 China Regulations

The statements that follow are the product conformance statements that apply to the 7705 SAR-Hm and 7705 SAR-Hmc when deployed in China.

2.12.1 Packaging Collection and Recovery Requirements

Jurisdictions in the People's Republic of China may require that systems be established for the return and/or collection of packaging waste from the consumer, or other end user, or from the waste stream. Additionally, reuse, recovery, and/or recycling targets for the return and/or collection of the packaging waste may be established.

For more information regarding collection and recovery of packaging and packaging waste within specific jurisdictions, please contact the appropriate environmental health and safety organization.

2.12.2 Material Content Compliance

The People's Republic of China Ministry of Information Industry has published a regulation (Order #39) and associated standards regarding restrictions on hazardous substances (China RoHS). The legislation requires all Electronic and Information Products (EIP) to comply with certain labeling and documentation requirements. Nokia products manufactured on or after 1 March 2007, that are intended for sale to customers in the China market, comply with these requirements.

In accordance with the People's Republic of China Electronic Industry Standard "Marking for the Control of Pollution Caused by Electronic Information Products" (SJ/T 11364-2006), customers may access the Nokia Hazardous Substances Table, in Chinese, from the following location:

https://www.nokia.com/sites/default/files/2018-11/nokia_china_rohs-2_hst-4_0.pdf

2.12.3 Altitude Limit

Nokia products use the symbol shown in [Figure 5](#) on the approvals label to indicate that the product is only to be used at altitudes equal to or less than 2000 m (6562 ft) above sea level.

Figure 5 **Altitude Limit Symbol**



23467

仅适用于海拔2000m 以下地区安全使用” 或类似的警告语句

“Only used at altitudes no higher than 2000 m above sea level”

2.13 South Korea Regulations

The following EMC statement applies to the 7705 SAR-Hm and 7705 SAR-Hmc when deployed in South Korea.

EMC

Class A Equipment (Broadcasting and Communication Equipment for Office Work)

A급 기기 (업무용 방송통신기자재)

The seller and user will be notified that this equipment is suitable for electromagnetic equipment for office work (Class A) and it can be used outside the home.

이 기기는 업무용(A급)으로 전자기파 차폐 기기를 표시 판매자 또는 사용자는 이 점을 주의하시기 바랍니다. 기성으로 지역에서 사용하는 것을 목적으로 합니다.

South Korea's "Electrical Communication Basic Law" requires EMC testing and certification. Certified equipment will be labeled with the KC mark and certification number shown below:



Certification number: R-R-NOK-7705SAR-Hm

2.14 Japan Regulations

The statements that follow are the product conformance statements that apply to the 7705 SAR-Hm and 7705 SAR-Hmc when deployed in Japan.

2.14.1 Safety

The equipment complies with the Product Safety specifications of IEC 60950-1 and/or IEC 62368-1.



Note:

- AC PSUs and AC cords sold by Nokia with a 3HExxxxxxx part number are dedicated for use with Nokia IP routers only.
- Based on the requirements from METI (Ministry of Economy, Trade and Industry), these AC PSUs and AC cords do not require PSE certification if used solely with Nokia IP routers.

2.14.2 EMC

This equipment is a VCCI Class A compliant product and is marked with the VCCI logo shown below.



Class A Equipment

この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A

This equipment is a Class A device. Operation of this equipment in a residential environment could cause radio interference. In such a case, the user may be required to take corrective actions. VCCI-A

2.15 Hazardous Locations

2.15.1 Chassis Labels

The 7705 SAR-Hm and 7705 SAR-Hmc chassis display the following labels:

Class I, Division 2, Groups A, B, C, D T4

Ex ec IIC T4 Gc -40°C ≤ Ta ≤ 65°C

Class I, Zone 2, AEx ec IIC T4 Gc

Note: special conditions, see manual.



2.15.2 Conditions of Use

- The equipment shall be installed in an enclosure that provides a degree of protection not less than IP 54 in accordance with EN 60079-0 and EN 60079-7. Any field wiring connections or cable entries used for this outer enclosure shall also be suitably certified against the enclosure requirements of EN 60079-0 and EN 60079-7. The installer shall ensure that the maximum ambient temperature of the module when installed is not exceeded.
- The equipment shall only be used in an area of at least pollution degree 2, as defined in IEC 60664-1.
- The chassis shall be grounded as described in the in this manual before use.
- The SIM card shall be connected or disconnected only in a non-hazardous area or when the device is not energized.
- The end-use enclosure shall provide a Warning label “Do not open while energized”.



Note: See [7705 Outdoor Enclosure Requirements for Hazardous Locations](#) for hazardous locations requirements pertaining to the 7705 Outdoor Enclosure.

3 7705 SAR-Hm and 7705 SAR-Hmc Overview

3.1 In This Chapter


This chapter provides an introduction to the 7705 SAR-Hm and 7705 SAR-Hmc. The topics include:

- [Overview of the 7705 SAR-Hm and 7705 SAR-Hmc](#)
- [7705 SAR-Hm and 7705 SAR-Hmc Components](#)
- [Cellular Components](#)
- [GNSS Components](#)
- [WLAN Components](#)
- [Citizens Broadband Radio Service](#)
- [ADP-Hm Prerequisites and Pre-staging Considerations](#)
- [Chassis Installation Process](#)

3.2 Overview of the 7705 SAR-Hm and 7705 SAR-Hmc


The 7705 SAR-Hm and 7705 SAR-Hmc are small form factor IP/MPLS routers. They are temperature and EMC-hardened and are passively cooled. The 7705 SAR-Hm supports cellular, GPS/GLONASS, and WLAN radio interfaces. The 7705 SAR-Hmc supports cellular and GPS/GLONASS radio interfaces. [Figure 6](#) shows the 7705 SAR-Hm chassis. [Figure 7](#) shows the 7705 SAR-Hmc chassis.

Figure 6 7705 SAR-Hm Chassis

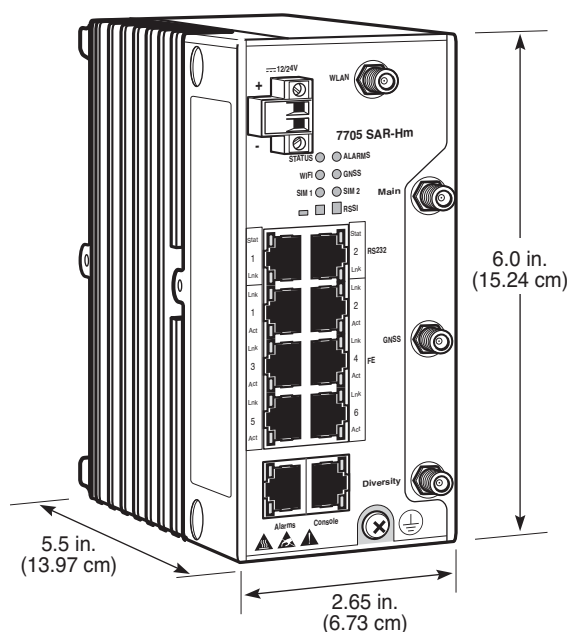

26450

Figure 7 7705 SAR-Hmc Chassis

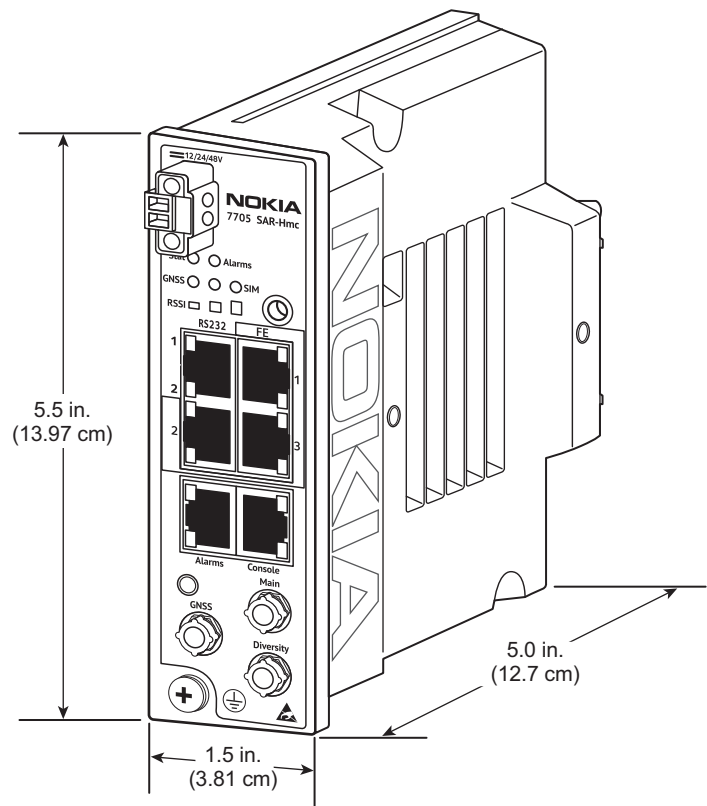

35685

The 7705 SAR-Hm chassis is available in the following variants, each of which is distinguished by its factory-installed carrier wireless module. The modules are designed to support the radio protocols and bands used in the geographic regions specified in [Table 8](#).

Table 8 7705 SAR-Hm Chassis Variants by Carrier Wireless Module

7705 SAR-Hm Chassis Part Number	Variant Description
3HE11600AA	7705 SAR-Hm 3G/LTE North America and EMEA
3HE11602AA	7705 SAR-Hm 3G/LTE APAC and ROW

The 7705 SAR-Hmc chassis is available in the following variants. The modules are designed to support the radio protocols and bands used in the geographic regions specified in [Table 9](#).

Table 9 7705 SAR-Hmc Chassis Variants

7705 SAR-Hmc Chassis Part Number	Variant Description
3HE12472AA	7705 SAR-Hmc NA
3HE12473AA	7705 SAR-Hmc NA Variant 2
3HE12474AA	7705 SAR-Hmc B31 (EMEA/CALA)
3HE12475AA	7705 SAR-Hmc B87 (EMEA/CALA)
3HE12477AA	7705 SAR-Hmc EMEA/APAC

All variants of the 7705 SAR-Hm and 7705 SAR-Hmc chassis have the same physical features and run the same operating system software. The terms 7705 SAR-Hm and 7705 SAR-Hmc are used in this document as a generic reference to all variants of the chassis. When referring to a specific chassis variant, the variant and part number are specified.

The 7705 SAR-Hm and 7705 SAR-Hmc chassis are designed for DIN-rail or flat-surface mounting and can be installed indoors or outdoors in enclosures (such as the 7705 Outdoor Enclosure), cabinets, or huts that provide weather and environmental protection in an extended temperature-controlled environment.

The 7705 SAR-Hm and 7705 SAR-Hmc support a low DC voltage input feed. The 7705 SAR-Hm supports a nominal rating of $\pm 12/24$ VDC and the 7705 SAR-Hmc supports a nominal rating of $\pm 12/24/48$ VDC. A separately orderable 35W High Voltage Power Supply Unit (HV-PS35) with an operating range of 88 VDC to 300 VDC or 90 VAC to 264 VAC is available for high-voltage applications.

The 7705 SAR-Hm chassis is equipped with six Fast Ethernet data ports and two RS-232 RJ-45 ports, WLAN, 3G/LTE, and GPS antenna connectors, console and alarm connectors, and indicator LEDs. All physical cabling connections are made at the front of the chassis, including the chassis ground connection and DC power input. All status and alarm LEDs are visible on the front of the chassis.

The 7705 SAR-Hmc chassis is equipped with three Fast Ethernet data ports and two RS-232 ports in a single RJ-45 connector, an LTE and GPS antenna connector, console and alarm connectors, and indicator LEDs. All physical cabling connections are made at the front of the chassis, including the chassis ground connection and DC power input. All status and alarm LEDs are visible on the front of the chassis.

The 7705 SAR-Hm and 7705 SAR-Hmc TiMOS software is factory-installed. Configuration files and executable software are stored locally in the on-board flash memory. The system boots up when power is applied to the chassis.


The NSP Network Functions Manager - Packet (NSP NFM-P) can be used to discover, configure, and manage the 7705 SAR-Hm nodes and domains. When the 7705 SAR-Hm or 7705 SAR-Hmc is powered on for the first time, Auto-Discovery Protocol (ADP-Hm) is instantiated by a factory-installed default boot option that automates and simplifies the initial commissioning of 7705 SAR-Hm or 7705 SAR-Hmc. See [ADP-Hm Prerequisites and Pre-staging Considerations](#) for more information.

3.2.1 7705 SAR-Hm and 7705 SAR-Hmc Components


3.2.1.1 Chassis Features

[Figure 8](#) and [Figure 9](#) show the physical features on the front and back of the 7705 SAR-Hm and 7705 SAR-Hmc chassis. The back views shows the chassis with the rear cover removed.

Figure 8 7705 SAR-Hm Chassis Front and Back Features

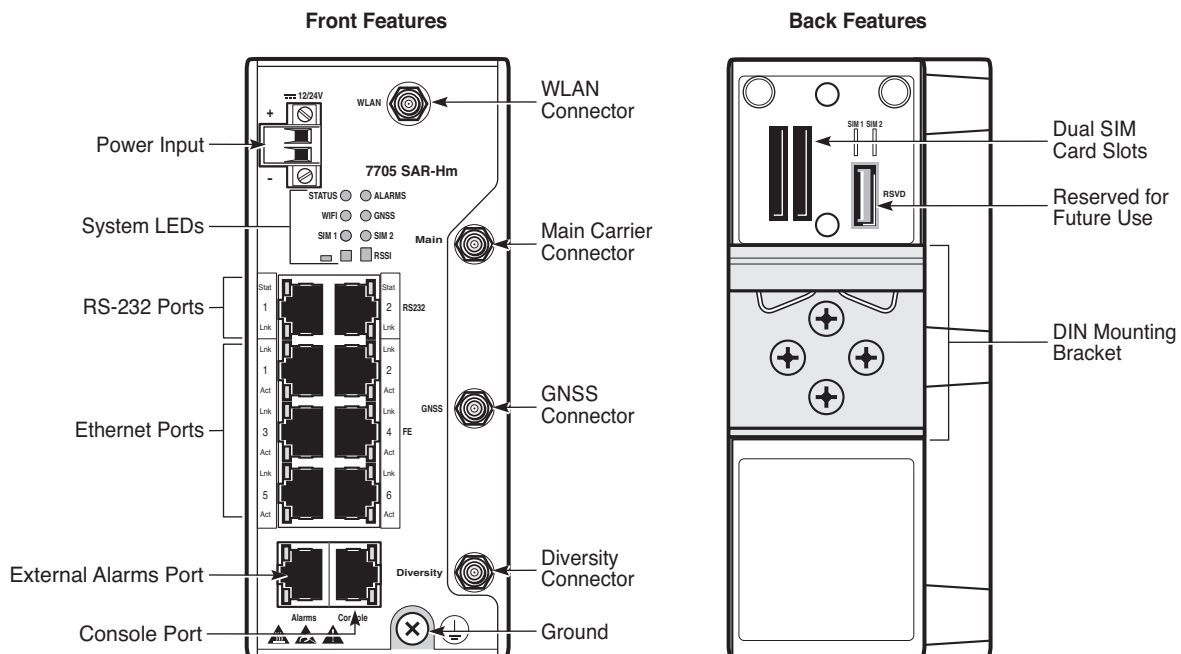

26451

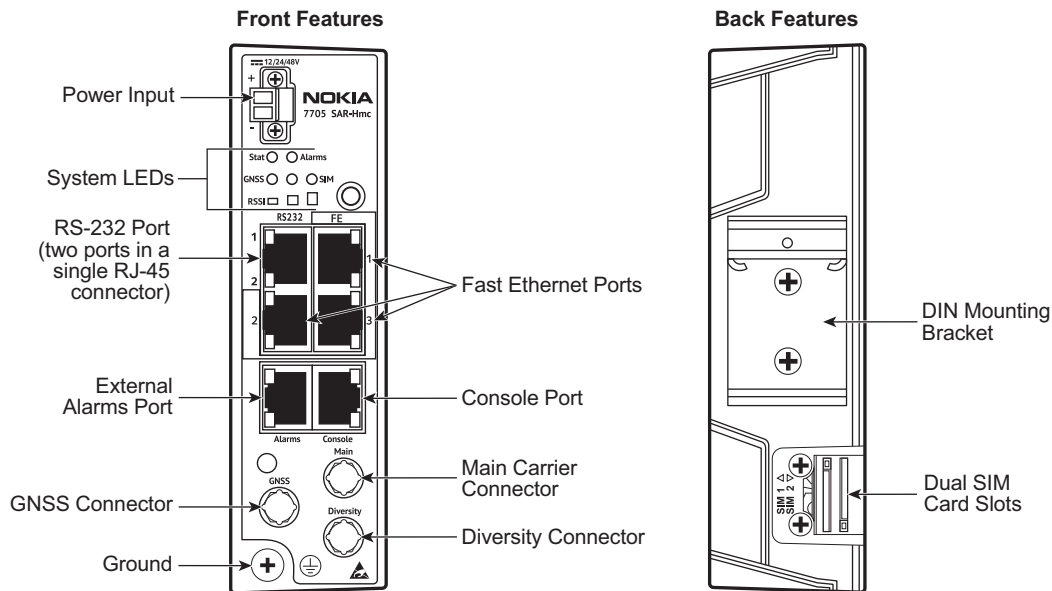Figure 9 7705 SAR-Hmc Chassis Front and Back Features

35683

3.2.1.2 Ethernet Ports

The 7705 SAR-Hm chassis has six 10/100Base-T RJ-45 Fast Ethernet (FE) ports and the 7705 SAR-Hmc has three 10/100Base-T RJ-45 FE ports. When making a connection to an FE port, a shielded CAT5 (minimum) Ethernet cable grounded at both ends must be used to maintain EMC compliance.

See [Ethernet Ports Pinout Assignments](#) for pinout assignments.

3.2.1.3 RSVD Port

The reserved (RSVD) port on the back of the chassis is for Nokia use only.

3.2.1.4 RS-232 Ports

The 7705 SAR-Hm has two asynchronous RS-232 serial ports that use RJ-45 connectors. The 7705 SAR-Hmc supports two RS-232 ports in a single RJ-45 connector.

When making a connection to an RS-232 port, a shielded cable grounded at both sides must be used to maintain EMC compliance (an 8-conductor cable is required on the 7705 SAR-Hm and a 4-conductor cable is required on the 7705 SAR-Hmc). If a connection to both RS-232 ports on the RJ-45 connector is required on the 7705 SAR-Hmc, a 7705 SAR-Hmc RS-232 Y-Cable (3HE12554AA) is required.

See [RS-232 Ports Pinout Assignments](#) for pinout assignments. Refer to the 7705 SAR-Hm and 7705 SAR-Hmc Main Configuration Guide for more information about how to configure and use these ports.

3.2.1.5 Console Port

The 7705 SAR-Hm and 7705 SAR-Hmc have a serial Console port that uses an RJ-45 connector to provide access to an RS-232 CLI craft terminal interface. The craft terminal is used during initial startup procedures, as described in [Powering Up and Initializing](#). The Console port is not a permanent connection and must be used only for installation and maintenance routines.

A shielded cable grounded at least at one end must be used.

See [Console Port Pinout Assignments](#) for pinout assignments.

3.2.1.6 Alarms Port

The 7705 SAR-Hm and 7705 SAR-Hmc have an Alarms port that uses an RJ-45 connector to monitor and report external alarms. In a remote or outdoor deployment, alarm inputs typically allow an operator to detect conditions such as whether a door is open or closed or an air conditioner fault has occurred.

The Alarms port on the 7705 SAR-Hm supports three input and two output pins. The Alarms port on the 7705 SAR-Hmc supports three input pins. Pins can be configured to indicate the severity level of an event and the normally open/normally closed state. When an input pin changes state, the router can generate log events and raise facility alarms. For more information about input and output alarms and the Alarms port pinout assignments, see [Alarms Port Pinout Assignments](#).

A shielded cable grounded at both ends must be used. For connections within the 7705 Outdoor Enclosure (a connection to the door alarm switch, for example), the shielded cable can be grounded at the 7705 SAR-Hmc Alarms port only.



Note: Both the 7705 SAR-Hm and 7705 SAR-Hmc Alarms port inputs have 100k Ohm pull-up resistors to 3.3V.

3.2.1.7 Main and Diversity Antenna Connectors

The 7705 SAR-Hm and 7705 SAR-Hmc have two subminiature version A (SMA) (female) connectors on the front of the chassis that are designed for external Main and Diversity antennas. See [Cellular Components](#) for more information. See also [Direct-mounting the Indoor LTE Omni-directional Antenna](#) and [Installing and Grounding Outdoor Cellular Antennas](#).

3.2.1.8 GPS Antenna Connector

The 7705 SAR-Hm and 7705 SAR-Hmc have an integrated Global Navigation Satellite System (GNSS) SMA (female) connector that is used for an external GNSS/GPS antenna.

See [GNSS Components](#) for more information.

3.2.1.9 WLAN Connector

The 7705 SAR-Hm has a reverse polarity RP-SMA (female) WLAN connector that is used for a WiFi antenna that supports a 2.4 GHz/5 GHz, IEEE 802.11b/g/n WLAN interface.

See [WLAN Components](#) for more information. Installation of the WiFi antenna is described in [Direct Mounting an Indoor WiFi Antenna](#) and [Installing and Grounding WLAN Outdoor Antennas](#).

3.2.1.10 Chassis Grounding

The 7705 SAR-Hm and 7705 SAR-Hmc have one designated grounding point on the front of the chassis. See [Grounding the Chassis](#) for more information.


3.2.1.11 Power Supply Input

The 7705 SAR-Hm and 7705 SAR-Hmc have a single pluggable terminal connector on the front of the chassis. The terminals are the DC power feed points for a low-voltage $\pm 12/24$ VDC power source on the 7705 SAR-Hm and a $\pm 12/24/48$ VDC power source on the 7705 SAR-Hmc. See [Preparing the DC Power Connections](#) for requirements and information about how to prepare DC power cables.

3.2.1.12 High Voltage Power Supply Unit

The Nokia 35W High Voltage Power Supply (HV-PS35) (3HE11298AA) is an optional and separately orderable component that can be used for high-voltage DC or AC applications. The HV-PS35 has a small form factor and is designed to be installed adjacent to the 7705 SAR-Hm or 7705 SAR-Hmc. The HV-PS35 is factory-equipped with a DIN rail mounting racket. [Figure 10](#) shows the HV-PS35.

Figure 10 35W High Voltage Power Supply

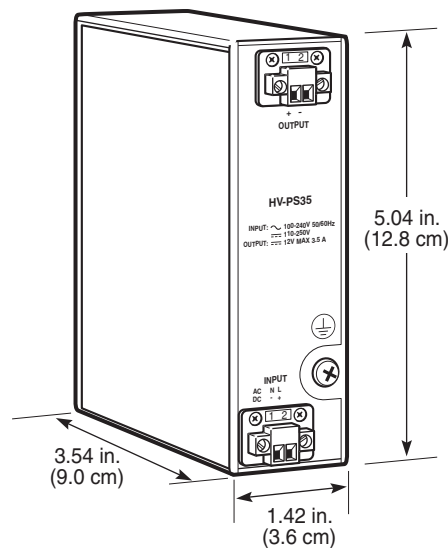

26450

The power input is a pluggable terminal block that supports power feeds of 90 to 264 VAC (50/60 Hz) or 88 to 300 VDC. The HV-PS35 power output is a pluggable terminal block that delivers a floating 24 VDC.

See [HV-PS35 Specifications](#) for technical data and [High Voltage Power Supply Unit](#) for installation instructions.

3.2.1.13 Chassis Temperature Control

The 7705 SAR-Hm and 7705 SAR-Hmc chassis are passively cooled using fins for heat dissipation. Clearance requirements must be followed to ensure proper airflow around the chassis (see [Chassis Clearance and Thermal Requirements](#)).

System temperature is monitored. An Overheat alarm is raised if the system ambient operating temperature range is exceeded. The Overheat alarm is cleared when the system temperature falls within the specified operating range.



Warning: If an Overheat alarm occurs, take immediate action to cool the operating environment. If the system internal temperature continues to increase, system functions will be affected and can shut down, which may result in equipment damage.

3.2.1.14 Chassis Mounting Options

The 7705 SAR-Hm and 7705 SAR-Hmc chassis are designed to support indoor and outdoor mounting options. Outdoor installation requires the use of a cabinet or enclosure that provides weather protection in an extended temperature-controlled environment. The following mounting options are available.



Note: An Uninterruptable Power Supply (UPS) is available for powering the 7705 SAR-Hm and 7705 SAR-Hmc outdoors. Refer to the UPS vendor manual for information on how to connect the UPS unit.

- 7705 SAR-Hm and 7705 SAR-Hmc DIN rail mount

The chassis is factory-equipped with a rear-mount DIN rail clip so that the chassis can be mounted on a horizontal 35 mm top-hat rail, as outlined in the EN 50022 standard. See [DIN Rail-mounting the Chassis](#) for more information.

The HV-PS35 also comes factory-equipped with a DIN rail clip so that the PSU can be DIN rail-mounted adjacent to the chassis. See [DIN Rail-mounting the HV-PS35](#) for mounting options and instructions.

- 7705 SAR-Hm and 7705 SAR-Hmc flat-surface mount

The chassis can be installed on a flat surface, such as a table or desktop.

7705 SAR-Hm includes four rubber feet that are shipped with the chassis in a bag. The feet are self-adhesive and must be applied to the bottom of the chassis if this mounting option is used. Restrictions apply. See [Mounting the Chassis on a Flat Surface](#).

- 7705 SAR-Hm and 7705 SAR-Hmc rack mount

The chassis can be rack-mounted using a DIN rail-to-rack mount adapter kit. These kits are available from third-party vendors.

- 7705 SAR-Hmc direct mount

The 7705 SAR-Hmc can be mounted directly on any surface using the two screw holes on the front of the chassis. See [7705 SAR-Hmc Direct Mounting](#).

- 7705 Outdoor Enclosure

See [7705 Outdoor Enclosure](#) for more information.

3.3 Cellular Components

This section describes the components that support cellular network connectivity for the 7705 SAR-Hm and 7705 SAR-Hmc, including the wireless module options for the 7705 SAR-Hm, and the Subscriber Identity Modules (SIMs) and antenna options.

3.3.1 Carrier Wireless Module Variants

The 7705 SAR-Hm and 7705 SAR-Hmc chassis variants are determined by the factory-installed carrier wireless module. [Table 10](#) and [Table 11](#) list the supported modules and their respective bands. See [Cellular Radio Specifications](#) for more information.

Table 10 7705 SAR-Hm Carrier Wireless Module Variants

Nokia Part Number	Description	Bands
3HE11600AA	7705 SAR-Hm 3G/LTE North America and Europe, the Middle East and Africa (EMEA)	LTE — B1-B5, B7, B12, B13, B20, B25, B26, B29, B30, B41 WCDMA — B1, B2, B3, B4, B5, B8
3HE11602AA	7705 SAR-Hm 3G/LTE Asia-Pacific (APAC) and the rest of the world (ROW)	LTE — B1, B3, B5, B7, B8, B18, B19, B21, B28, B38-B41 WCDMA — B1, B5, B6, B8, B9, B19

Table 11 7705 SAR-Hmc Carrier Wireless Module Variants

Nokia Part Number	Description	Bands
3HE12472AA	7705 SAR-Hmc NA	FDD-LTE — B2, B4, B5, B8, B12 (with MFBI), B13, B14, B25, B26, B66 TDD-LTE — B41, B42, B43, B48
3HE12473AA	7705 SAR-Hmc NA Variant 2	FDD-LTE — B2 (with UMTS), B4 (with UMTS), B5 (with UMTS), B7, B12, B13, B14, B25, B26, B66, B71 TDD-LTE — B41, B42, B43, B48
3HE12474AA	7705 SAR-Hmc B31 (EMEA/CALA)	FDD-LTE — B3, B4, B7, B20, B28, B31, B72 TDD-LTE — B38, B42, B43
3HE12475AA	7705 SAR-Hmc B87 (EMEA/CALA)	FDD-LTE — B3, B4, B7, B20, B28, B87 TDD-LTE — B38, B42, B43
3HE12477AA	7705 SAR-Hmc EMEA/APAC	FDD-LTE — B1 (with UMTS), B3, B5 (with UMTS), B7, B8 (with UMTS), B20, B28, B32 TDD-LTE — B38, B40, B41, B42, B43

The 7705 SAR-Hm and 7705 SAR-Hmc have a GNSS receiver that provides location data to operators of the 7705 SAR-Hm or 7705 SAR-Hmc. See [GNSS Components](#) for more information.

3.3.2 SIMs

The 7705 SAR-Hm and 7705 SAR-Hmc have two SIM slots to support carrier wireless network connectivity. The system uses the 2FF Industrial Mini SIM format. The SIMs are installed behind a tamper-resistant screw-down panel at the rear of the chassis, facing the DIN rail. This location reduces the likelihood of tampering.

The following are the SIM requirements.

- Only one SIM in slot 1 is required to operate the cellular interface; Slot 2 is used for dual SIM operation.
- A valid SIM must be procured from a service provider before operating the cellular interface.
- To run the ADP process on the 7705 SAR-Hm and 7705 SAR-Hmc, the SIM must be inserted in slot 1 or the ADP process will not function.

See [Installing the SIM](#) for installation instructions. Refer to the 7705 SAR-Hm Interface Configuration Guide for more information about SIMs and the configuration of the cellular interface.

3.3.3 Commercial Cellular Antennas

[Table 12](#) lists the commercial cellular antennas that are available from and approved by Nokia for use with the 7705 SAR-Hm and 7705 SAR-Hmc.

Table 12 Carrier Wireless Commercial Antenna Options

Nokia Part Number	Description	Comments
3HE12343AA	Outdoor 2G/3G/4G omni-directional Antenna	Omni-directional antenna with mounting bracket kit. See Outdoor 2G/3G/4G Omni-directional Antenna .
3HE12344AA	Outdoor 2G/3G/4G directional Antenna	Directional antenna with mounting bracket kit. See Outdoor 2G/3G/4G Directional Antenna .
3HE12371AA	Indoor LTE omni-directional Antenna	See Indoor LTE Omni-directional Antenna .

3.3.3.1 Outdoor 2G/3G/4G Omni-directional Antenna

The Outdoor 2G/3G/4G omni-directional Antenna (3HE12343AA) is a MIMO omni-directional LTE antenna that operates at two frequency ranges, 695 to 960 MHz and 1700 to 2700 MHz with gain of 2 dBi and 3dBi respectively. Impedance is 50 Ω . The antenna is equipped with two N-Type (female) connectors.

Installation instructions, a mounting bracket, U-bolts, and fastening hardware for mounting the antenna on a mast up to 2.5 in. (63.5 mm) O.D. are shipped with the antenna. See [Outdoor 2G/3G/LTE Omni-directional Antenna Specifications](#) and [Outdoor 2G/3G/4G Omni-directional Antenna Installation Overview](#) for more information.

3.3.3.2 Outdoor 2G/3G/4G Directional Antenna

The Outdoor 2G/3G/4G directional Antenna (3HE12344AA) features a frequency range of 698 to 960 MHz and 1710 to 2700 MHz and nominal gain of 6 dBi at 698 to 960 MHz and 8 dBi at 1710 to 2700 MHz. The impedance is 50 Ω . See [Outdoor 2G/3G/LTE Directional Antenna Specifications](#) and [Outdoor 2G/3G/4G Directional Antenna Installation Overview](#) for more information.

On the back of the antenna are two N-Type (female) connectors. The antenna is waterproof, vented, and rated at IP67 for indoor or outdoor use.

The antenna is shipped with a heavy-duty articulating mounting bracket that supports horizontal polarization, vertical polarization, or a 45° diagonal slant. The bracket can be fixed to a mast measuring 1.63 to 2.3 in. (41.4 to 58.4 mm) O.D. using pipe clamps. Pipe clamps and installation instructions are included with the antenna.

3.3.3.3 Indoor LTE Omni-directional Antenna

The indoor LTE omni-directional Antenna (3HE12371AA) is a dipole terminal antenna with a hinged SMA (male) connector suitable for direct mount on the 7705 SAR-Hm in an indoor facility.

The antenna operates in a dual frequency of 698 to 960 MHz and 1710 to 2690 MHz, a nominal impedance of 50 Ω . See [Indoor LTE Omni-directional Antenna Specifications](#) and [Direct-mounting the Indoor LTE Omni-directional Antenna](#) for more information.

3.3.3.4 LTE Surge Protectors

The LTE surge protectors are designed to offer sufficient protection against lightning surges and are highly recommended when installing outdoor antennas.

Nokia offers three variants, which are N-Type (female to female) for indoor to outdoor applications, and N-Type (female to male) or 4.3-10 (male to female) for 7705 Outdoor Enclosure applications. The frequency range is from 698 MHz to 2700 MHz.



Note: Nokia does not offer LTE surge protectors for the following frequency bands at this time:

- Band 31/72/87 (410 to 470 MHz)
- Band 42/43/48 (3400 to 3800 MHz)

3.4 GNSS Components

All 7705 SAR-Hm and 7705 SAR-Hmc variants have a GNSS receiver. [Table 13](#) lists the chassis models and the supported GNSS systems and frequencies.

Refer to the [GNSS Installation Guide](#), located in the [Nokia Documentation Center](#), for more information on antenna offerings, cable installation kits, and installation.

Table 13 Carrier Wireless Module Variants and Supported GNSS Systems and Frequencies

Nokia Part Number	Carrier Wireless Module Variant	Supported GNSS System and Frequency
3HE11600AA	7705 SAR-Hm 3G/LTE North America and EMEA	• GPS (1575.42 MHz) • GLONASS (1602 MHz)
3HE11602AA	7705 SAR-Hm 3G/LTE APAC and ROW	
3HE12472AA	7705 SAR-Hmc NA	
3HE12473AA	7705 SAR-Hmc NA Variant 2	
3HE12474AA	7705 SAR-Hmc B31 (EMEA/CALA)	
3HE12475AA	7705 SAR-Hmc B87 (EMEA/CALA)	
3HE12477AA	7705 SAR-Hmc EMEA/APAC	

3.5 WLAN Components

The following antennas can be connected to the WLAN port on the 7705 SAR-Hm.



Note: Nokia does not offer WLAN surge protectors at this time.

3.5.1 Outdoor WiFi Antennas

Nokia supports WiFi omni-directional antennas, WiFi directional antennas, and vehicle mount LTE/WiFi/GNSS outdoor antennas. For more information about these antennas, see [Installing and Grounding WLAN Outdoor Antennas](#).

3.5.2 Indoor WiFi Antenna

The Indoor WiFi omni-directional Antenna (3HE12345AA) is a dipole antenna with an RP-SMA (male) connector that can be mounted directly on the 7705 SAR-Hm chassis. The antenna is rated at IP65 and is suitable for indoor use.

The antenna supports frequency ranges of 2.4 to 2.5 GHz and 5.1 to 5.85 GHz, with a peak gain at 2.37 dBi and 2.93 dBi respectively. The antenna has a nominal impedance of 50 Ω . See [Indoor WiFi Omni-directional Antenna Specifications](#) and [Direct Mounting an Indoor WiFi Antenna](#) for more information.

3.6 Citizens Broadband Radio Service

The cellular interface on the 7705 SAR-Hmc NA (3HE12472AA) and the 7705 SAR-Hmc NA variant 2 (3HE12473AA) supports the Citizens Broadband Radio Service (CBRS) B48 spectrum.

When operating in the CBRS spectrum, the 7705 SAR-Hmc is classified as either an end-user device (EUD) or a Citizens Broadband Service Radio Device (CBSD) Category A or B, depending on the maximum effective isotropic radiated power (EIRP).

Refer to 7705 SAR Interface Configuration Guide for information about the settings and functionality.

3.7 ADP-Hm Prerequisites and Pre-staging Considerations

In order for ADP-Hm to function, a number of prerequisites must be completed in advance of initial power-up of a 7705 SAR-Hm and 7705 SAR-Hmc. Refer to the 7705 SAR-Hm Main Configuration Guide for a list of prerequisites for ADP-Hm.

Consideration must be given to when and where initial power-up of the node occurs. ADP-Hm supports two installation options that can be configured on the NSP NFM-P before the initial boot-up of the 7705 SAR-Hm or 7705 SAR-Hmc. The options are:

- a. The 7705 SAR-Hm or 7705 SAR-Hmc can be booted for the first time at a pre-staging facility, where it is initialized, secured, partially configured, and then shut down. The router is then shipped to the installation site, installed, and booted again, at which time the configuration process is completed.
- b. The 7705 SAR-Hm or 7705 SAR-Hmc can be installed on site, where it is booted for the first time, initialized, and configured.

3.8 Chassis Installation Process

3.8.1 Preparation

- Step 1.** Review all regulations. See [Mandatory Regulations](#).
- Step 2.** Assess and prepare the site and observe all safety warnings. See [Site Preparation](#).

3.8.2 Pre-staging

This section applies only if you are using ADP-Hm to initialize and commission the 7705 SAR-Hm or 7705 SAR-Hmc in a pre-staging facility.



Note: The instructions in this guide assume that the prerequisites for the instantiation of ADP-Hm have been completed. Refer to the 7705 SAR-Hm and 7705 SAR-Hmc Main Configuration Guide for more information.

To pre-stage the 7705 SAR-Hm or 7705 SAR-Hmc chassis, perform the following steps in order:

- Step 1.** Unpack the chassis at the pre-staging facility. See [Unpacking the Chassis](#).
- Step 2.** Install the SIM. See [Installing the SIM](#).
- Step 3.** Install the chassis on a table top. See [Mounting the Chassis on a Flat Surface](#).
- Step 4.** Ground the chassis. See [Grounding the Chassis](#).
- Step 5.** Connect the antenna and network cables to the chassis. See [Making Indoor Antenna Connections to the 7705 SAR-Hm](#) and [Making Connections to the RJ-45 Ports](#).
- Step 6.** Prepare the DC input power cables and connections to the DC power feed. See [Preparing the DC Power Connections](#). If the HV-PS35 is used, see [High Voltage Power Supply Unit](#).
- Step 7.** Power up the system and monitor ADP-Hm. See [Powering Up and Initializing](#).
- Step 8.** Shut down all power to the router.
- Step 9.** Remove the power cables from the router.
- Step 10.** Remove the antennas and cabling from the router. Do not remove the SIM.

Step 11. Repackage the router and ship it to the installation site.

Step 12. Perform [On-site Installation](#).

3.8.3 On-site Installation


This section applies in any the following installation scenarios:

- you are using ADP-Hm and have performed the pre-staging steps
- you are using ADP-Hm and are not pre-staging the router
- you are not using ADP-Hm

To install the 7705 SAR-Hm or 7705 SAR-Hmc chassis on site, perform the following steps in order:

- Step 1.** Assess and prepare the site. See [Site Preparation](#).
- Step 2.** Unpack the chassis. See [Unpacking the Chassis](#).
- Step 3.** Install the SIM. This step is not required if the router has been pre-staged. See [Pre-staging](#) in this chapter. See also [Installing the SIM](#).
- Step 4.** Install the chassis according to one of the methods described in [Installing and Grounding the Chassis](#).
- Step 5.** Ground the chassis. See [Grounding the Chassis](#).
- Step 6.** Install the Main, Diversity, WiFi, and GPS antennas. See [Overview](#) or [Installing and Grounding Outdoor Antennas](#).
- Step 7.** Connect the coaxial antenna cables and the network cables to the chassis. See [Making Outdoor Antenna and Cable Connections](#) and [Making Connections to the RJ-45 Ports](#).
- Step 8.** Prepare the DC input power cables and connections to the DC power feed. See [Preparing the DC Power Connections](#). If the HV-PS35 is used, see [High Voltage Power Supply Unit](#).
- Step 9.** Power up the system. See [Powering Up and Initializing](#).

7705 SAR-Hmc Direct Mount Template

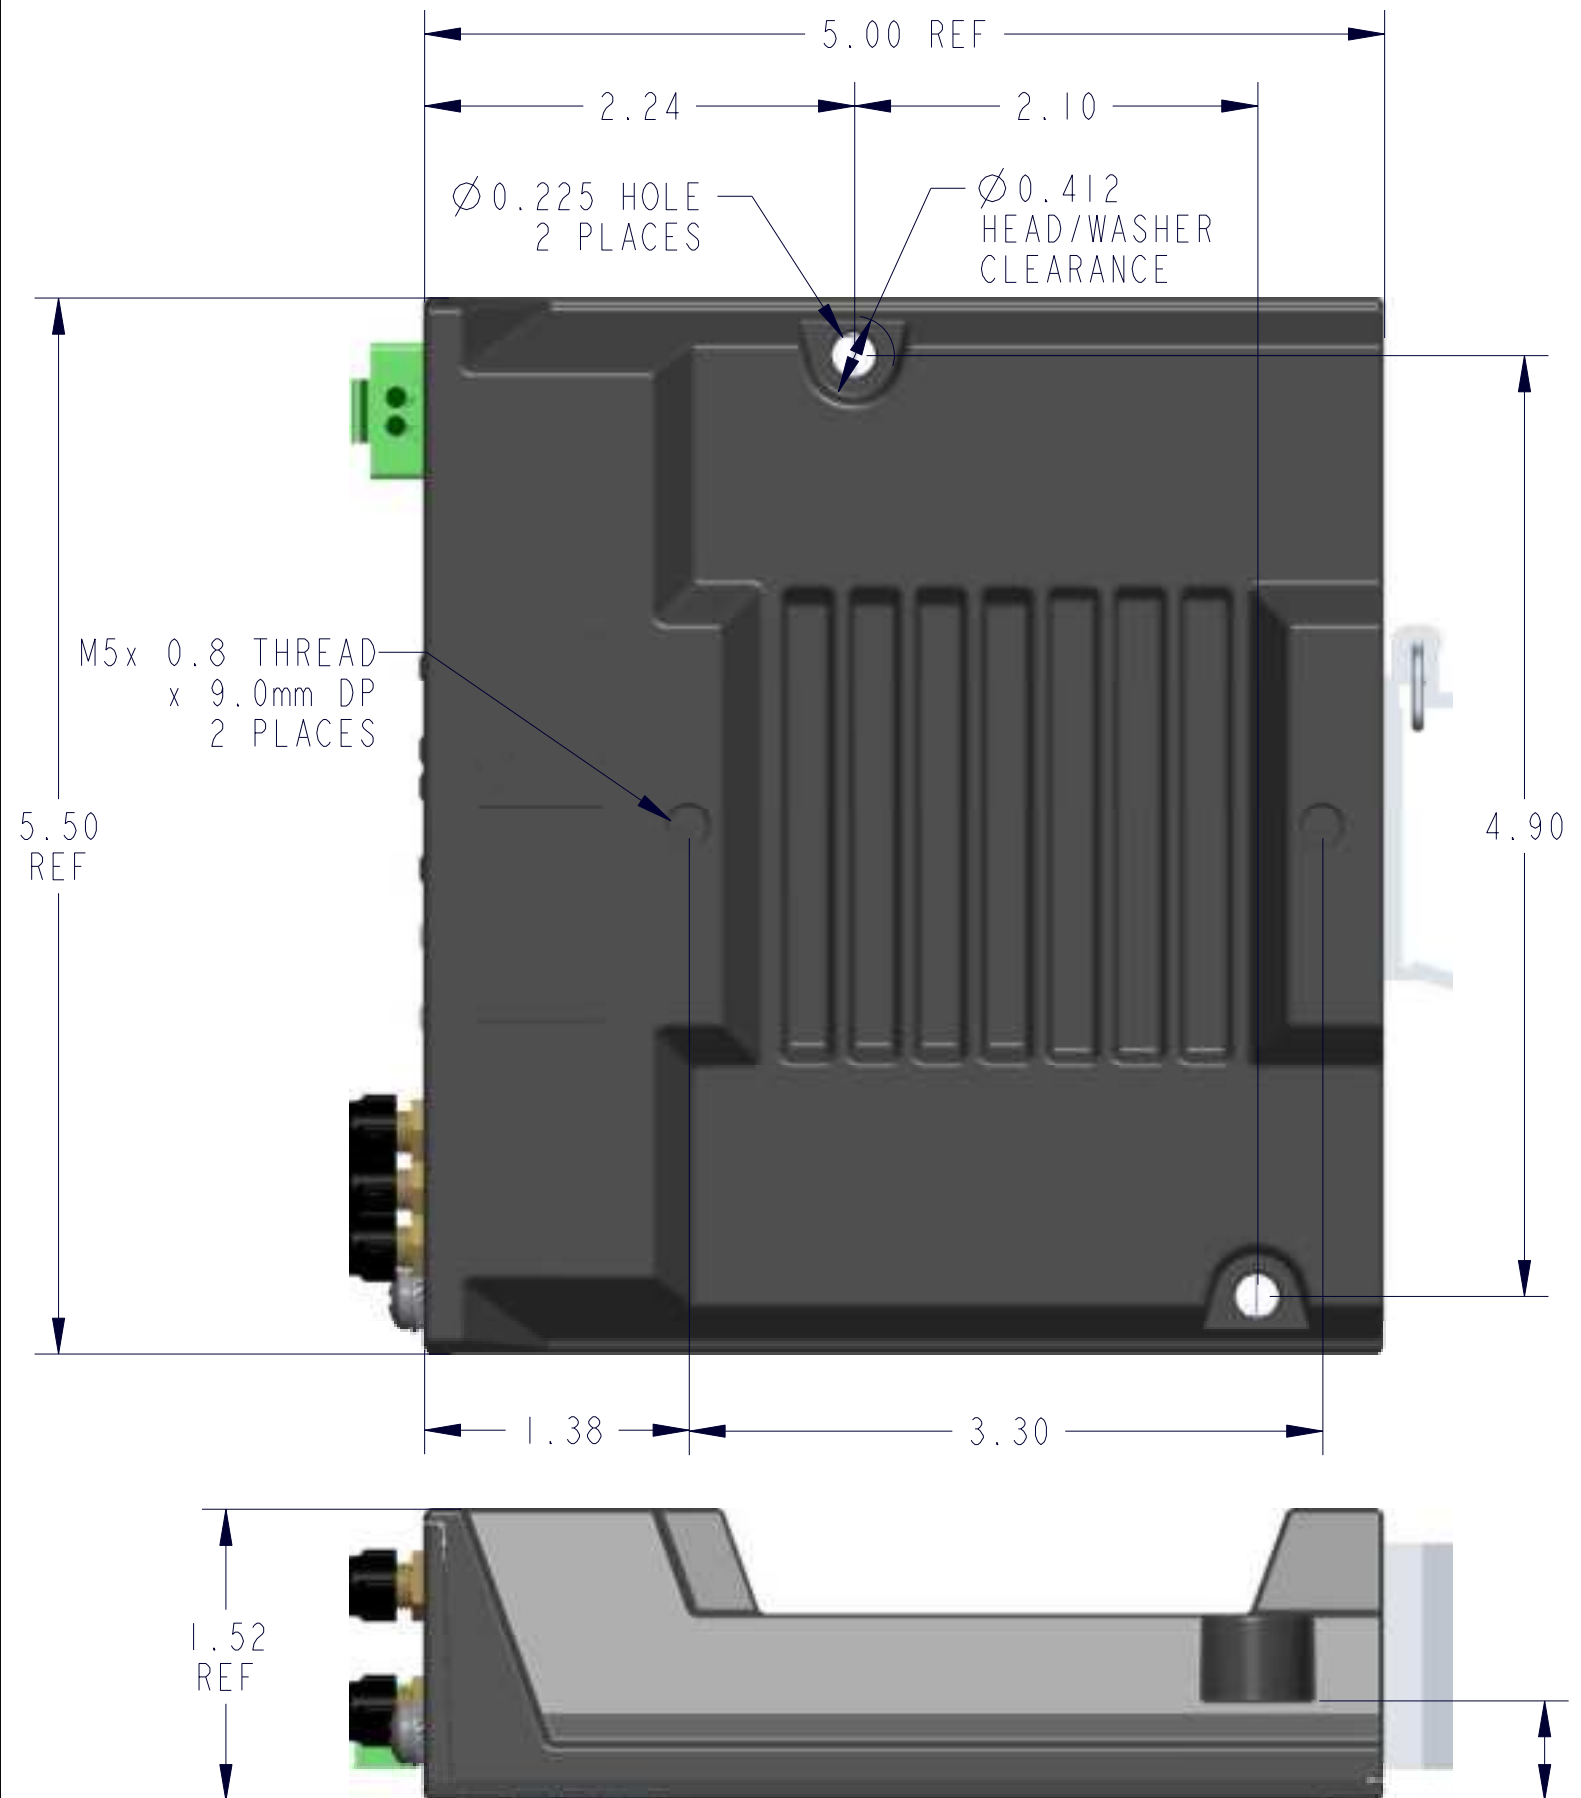

SCALE 1:1
RECOMMENDED SCREW/BOLT SIZE: #10-32 (M5)

BOLT LENGTH
THRU SAR-Hmc
0.52

Customer Document and Product Support



Customer Documentation

[Customer Documentation Welcome Page](#)



Technical Support

[Product Support Portal](#)



Documentation Feedback

[Customer Documentation Feedback](#)

