

Page 1 of 89

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Z-Com. Inc.

Applicant: 5F, No.8, HSIN ANN RD., HSINCH SCIENCE PARK, HSINCHU,

30078 TAIWAN

Product Name: 802.11ac Access Point

Brand Name: ZCOM

Marketing Name: SP220-C02 Model No.: SP220-C02

Model Difference: N/A

Report Number: T190514W02-RP1 FCC ID: M4Y-SP220C02 §15.247, Cat: DTS **FCC Rule Part:**

Issue Date: Jan. 21, 2020

Date of Test: May 14, 2019 ~ Jul. 31, 2019

Date of EUT Received: May 14, 2019

Compliance Certification Services Inc. Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. Issued by:

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 2 of 89

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190514W02-RP1	Rev.00	Initial creation of docu- ment	All	Jan. 21, 2020	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。







Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	11
7	DUTY CYCLE OF TEST SIGNAL	16
8	PEAK OUTPUT POWER MEASUREMENT	18
9	6DB BANDWIDTH MEASUREMENT	22
10	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	28
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	36
12	PEAK POWER SPECTRAL DENSITY	85
12	ANTENNA RECHIREMENT	20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





GENERAL INFORMATION

1.1 **Product Description**

in induder Becompain	1			
Product Name:	802.11ac Acces	ss Point		
Brand Name:	ZCOM			
Marketing Name:	SP220-C02			
Model No.:	SP220-C02			
Model Difference:	N/A			
Hardware Version:	N/A			
Software Version:	N/A			
Dower Cumphy	48V by POE In	jector		
Power Supply:	POE Injector:	Model No.: PSE301G, Supplier: N/A		

WLAN 802.11	Frequency Range	Channels	Rated Power (dBm)	Modulation Technology
b			25.25	DSSS
g	2412-2462	11	27.51	
n_HT20			28.03 (MIMO)	OFDM
n_HT40	2422-2452	7	26.21 (MIMO)	
Antenna	Antenna Designation:		itenna, Gain: 4.91dBi	
Modulation type:		,	PSK, DBPSK for DSSS 16QAM, QPSK, BPSK for OFDM	
Transition Rate:		802.11 g: 802.11 n __	1/2/5.5/11 Mbps 6/9/12/18/24/36/48/54 Mbps 20MHz: 6.5 – 144.4Mbps 40MHz: 13.5 – 300.0Mbps	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page 5 of 89

1.2 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 **Test Facility**

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 **Special Accessories**

There are no special accessories used while test was conducted.

1.5 **Equipment Modifications**

There was no modification incorporated into the EUT.

Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz 1.6

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 6 of 89

SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping" the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example 2.4

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧

2.5 **Configuration of Tested System** Fig. 2-1 Radiated Emission



Fig 2-2 Conducted (Antenna Port) Configuration



Fig 2-3 Conduction (AC Power Line)





Table 2-1 Equipment Used in Tested System

Table 2-1 Equipment Osed in Tested System						
Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	T420	S0012407	N/A	N/A
3.	Test Tool Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






SUMMARY OF TEST RESULTS

FCC Rules / IC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY			
1	2412 MHz	7	2442 MHz			
2	2417 MHz	8	2447 MHz			
3	2422 MHz	9	2452 MHz			
4	2427 MHz	10	2457 MHz			
5	2432 MHz	11	2462 MHz			
6	2437 MHz					

7 channels are provided for 802.11n HT40

			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The given UE is pre-scanned among below modes.

Modulation	Transmiss	ion Chain	Multiple Transmission Spatial
⊠ 802.11 b	⊠ Ch0	⊠ Ch1	□ 2TX
⊠ 802.11 g	⊠ Ch0	⊠ Ch1	□ 2TX
⊠ 802.11 n	⊠ Ch0	⊠ Ch1	⊠ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 10 of 89

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral	
Worst Case	Operation in normal mode	

RADIATED EMISSION TEST:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
RADIATED EMISSION TEST (BELOW 1 GHz)							
802.11g	1 to 11	6	OFDM	6	Ch1		
802.11n (HT40)	3 to 9	6	OFDM	MCS 8	MIMO		
	RADIAT	TED EMISSIC	N TEST (ABOVE	1 GHz)			
802.11b	1 to 11	1,6,11	DSSS	1	Ch1		
802.11g	1 to 11	1,6,11	OFDM	6	Ch1		
802.11n (HT20)	1 to 11	1,6,11	OFDM	MCS 8	MIMO		
802.11n (HT40)	3 to 9	3,6,9	OFDM	MCS 8	MIMO		


Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1,6,11	DSSS	1	Ch1		
802.11g	1 to 11	1,6,11	OFDM	6	Ch1		
802.11n (HT20)	1 to 11	1,6,11	OFDM	MCS 8	MIMO		
802.11n (HT40)	3 to 9	3,6,9	OFDM	MCS 8	MIMO		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page 11 of 89




MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





CONDUCTED EMISSION TEST

6.1 **Standard Applicable**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

requestey range warm recording	to continue origin flot oxcood the	Elittic table ac belett.						
_	Limits							
Frequency range	dB(uv)						
MHz	Quasi-peak	Average						
0.15 to 0.50	66 to 56	56 to 46						
0.50 to 5	56	46						
5 to 30	60	50						
	·							

Note

6.2 **Measurement Equipment Used**

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019					
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019					
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020					
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020					
ADAPTER	POE Injector		PSE30)1G						
Software		EZ-EMC(C	CCS-3A1-CE)						

6.3 **EUT Setup**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



6.4 Test SET-UP (Block Diagram of Configuration)

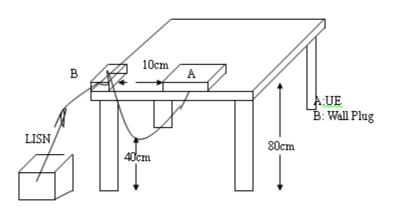

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 14 of 89

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation **Description:** Date: 2019/6/21 Line: Temp.(°C)/Hum.(%): L1 26.9(°C)/67%

Test Voltage: AC 120V/60Hz Test By: Henry

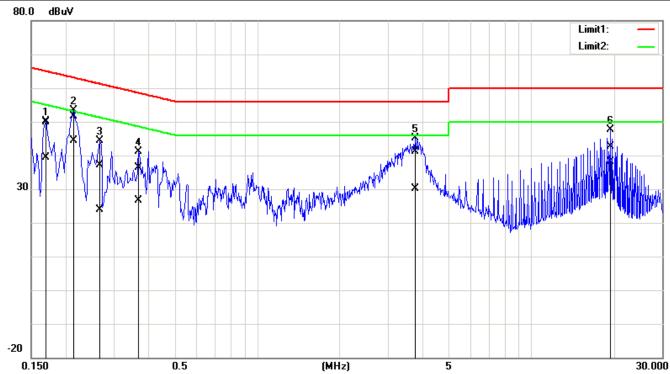

No.	Fre- quency	Qua- siPeak reading	Average reading	Cor- rection factor	Qua- siPeak result	Average result	Qua- siPeak limit	Average limit	Qua- siPeak margin	Aver- age margin	Re- mark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1700	39.68	29.36	10.14	49.82	39.50	64.96	54.96	-15.14	-15.46	Pass
2*	0.2140	41.49	34.35	10.13	51.62	44.48	63.04	53.05	-11.42	-8.57	Pass
3	0.2660	27.05	13.75	10.13	37.18	23.88	61.24	51.24	-24.06	-27.36	Pass
4	0.3700	26.18	16.44	10.14	36.32	26.58	58.50	48.50	-22.18	-21.92	Pass
5	3.7700	30.93	19.78	10.24	41.17	30.02	56.00	46.00	-14.83	-15.98	Pass
6	19.4619	32.27	27.82	10.37	42.64	38.19	60.00	50.00	-17.36	-11.81	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Page 15 of 89

Description: 2019/6/21 Operation Date:

Temp.(°C)/Hum.(%): Line: 26.9(°C)/67%

Test Voltage: AC 120V/60Hz Test By: Henry

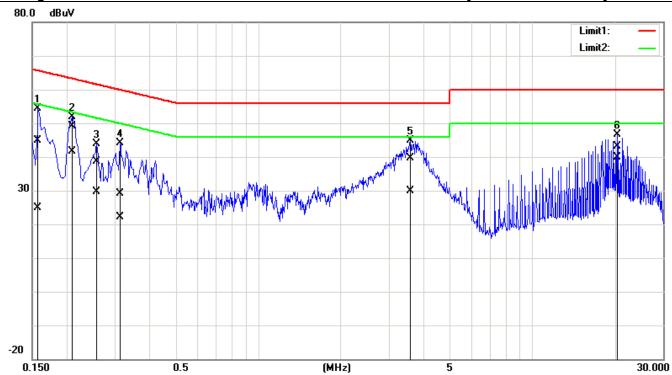

No.	Fre- quency	Qua- siPeak reading	Average reading	Cor- rection factor	Qua- siPeak result	Average result	Qua- siPeak limit	Average limit	Qua- siPeak margin	Aver- age margin	Re- mark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	34.97	14.96	10.02	44.99	24.98	65.56	55.57	-20.57	-30.59	Pass
2	0.2100	39.07	31.59	10.02	49.09	41.61	63.20	53.21	-14.11	-11.60	Pass
3	0.2580	28.54	19.62	10.02	38.56	29.64	61.49	51.50	-22.93	-21.86	Pass
4	0.3140	19.22	12.06	10.03	29.25	22.09	59.86	49.86	-30.61	-27.77	Pass
5	3.5860	29.65	19.79	10.10	39.75	29.89	56.00	46.00	-16.25	-16.11	Pass
6*	20.3819	32.78	29.51	10.28	43.06	39.79	60.00	50.00	-16.94	-10.21	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page 16 of 89

DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak


Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	99.64	0.02	0.08	0.01
802.11g	97.59	0.11	0.49	1.00
802.11n_20	95.09	0.22	1.03	2.00
802.11n_40	92.78	0.33	2.05	3.00

b = 99.64%, g = 97.59%, $n_ht_20 = 95.09\%$ $n_ht_40 = 92.78\%$


Duty Cycle Factor: $10 * \log(1/0.9964) = 0.02$ Duty Cycle Factor: $10 * \log(1/0.9759) = 0.11$ Duty Cycle Factor: $10 * \log(1/0.9509) = 0.22$ Duty Cycle Factor: $10 * \log(1/0.9278) = 0.33$


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






DUTY CYCLE TEST SIGNAL Measurement Result

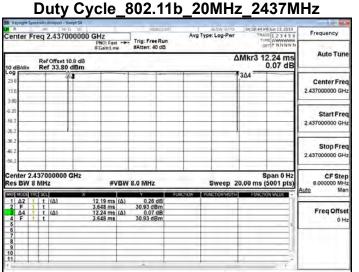


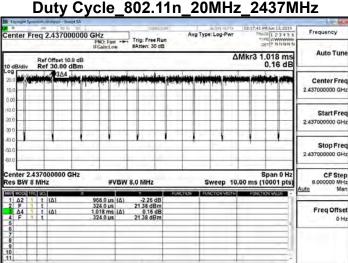

Duty Cycle_802.11g_20MHz_2437MHz

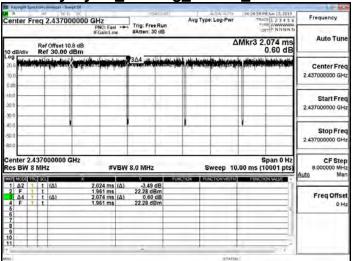

Duty Cycle_802.11n_40MHz_2437MHz

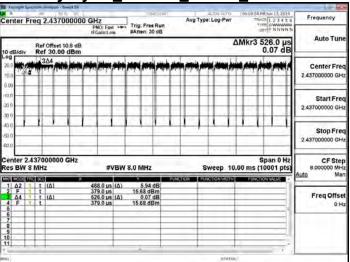

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 18 of 89

PEAK OUTPUT POWER MEASUREMENT

8.1 **Standard Applicable**

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Note:

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN

(i) If transmit signals are correlated, then Directional gain

= 10 log[(10G1 /20 + 10G2 /20 + ... + 10GN /20) 2 /NANT] dBi

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

The antenna gain is greater than 6 dBi, therefore the limit needs to be reduced as section 8.5.


8.2 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020
RF Cable	Woken	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8.3 **Test Set-up**



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:


It is used as the Chain1iliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

Measurement Result 8.5

Juit				
1b Ch1				
Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
2412	1	24.55	30.00	PASS
2437	1	25.25	30.00	PASS
2462	1	24.86	30.00	PASS
1b Ch1				
Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
2412	1	21.58	30.00	PASS
2437	1	21.74	30.00	PASS
2462	1	21.85	30.00	PASS
	1b Ch1 Freq. (MHz) 2412 2437 2462 1b Ch1 Freq. (MHz) 2412 2437	The Ch1 Freq. (MHz) 2412 2437 2462 1b Ch1 Freq. (MHz) A part of the children of the chi	Peak Output	Peak Output

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






802.1	802.11g Ch1								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	27.51	30.00	PASS				
6	2437	6	27.24	30.00	PASS				
11	2462	6	27.45	30.00	PASS				
802.1	1g Ch1				•				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	17.98	30.00	PASS				
6	2437	6	17.65	30.00	PASS				
11	2462	6	17.83	30.00	PASS				

802.1	802.11n_HT20M MIMO								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm) CH 0 CH 1		Total Peak Output Power (dBm)	Limit (dBm)	RESULT		
1	2412	MCS8	24.78	25.18	27.99	28.08	PASS		
6	2437	MCS8	24.64	25.36	28.03	28.08	PASS		
11	2462	MCS8	24.32	25.15	27.77	28.08	PASS		
802.1	1n_HT20	M MIMC)						
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT		
			CH 0	CH 1	(dBm)				
1	2412	MCS8	16.23	16.49	19.59	28.08	PASS		
6	2437	MCS8	16.28	16.32	19.53	28.08	PASS		
11	2462	MCS8	16.12	16.85	19.73	28.08	PASS		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



802.1	1n_HT40	M MIMC)				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1	(ubili)		
3	2422	MCS8	22.74	23.18	25.98	28.08	PASS
6	2437	MCS8	22.77	23.14	25.97	28.08	PASS
9	2452	MCS8	22.87	23.50	26.21	28.08	PASS
802.1	1n_HT40	M MIMC)				
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH 1	(dBm)		
3	2422	MCS8	14.25	14.26	17.59	28.08	PASS
6	2437	MCS8	14.24	14.29	17.60	28.08	PASS
9	2452	MCS8	14.33	14.81	17.91	28.08	PASS

^{*} Note: Cabel Loss

= Attenuator (10dB) + Cabel (0.80dB) = 10.80 dB (SISO)

= Attenuator (10dB) + Cabel (3.81dB) = 13.81 dB (MIMO)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧

^{*} Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.



Page 22 of 89

6DB BANDWIDTH MEASUREMENT

9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020


9.3 **Test Set-up**



9.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





Measurement Result 9.5


illollt i	Court	HOHE ROOME						
802.11b	802.11b Ch0 802.11b Ch1							
Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result	
(MHz)	(kHz)	(kHz)	Resuit	(MHz)	(kHz)	(kHz)	Result	
2412	7065.00	> 500	PASS	2412	7077.00	> 500	PASS	
2437	7082.00	> 500	PASS	2437	7080.00	> 500	PASS	
2462	7096.00	> 500	PASS	2462	7088.00	> 500	PASS	
802.110	802.11g Ch0 802.11g Ch1							
Freq.	6dB BW	Limit	Popult	Freq.	6dB BW	Limit	Result	
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	Resuit	
2412	15120.00	> 500	PASS	2412	15120.00	> 500	PASS	
2437	15120.00	> 500	PASS	2437	15120.00	> 500	PASS	
2462	15120.00	> 500	PASS	2462	15120.00	> 500	PASS	
802.11_n_HT20 Ch0 802.11_n_HT20 Ch1								
Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result	
(MHz)	(kHz)	(kHz)	Result	(MHz)	(kHz)	(kHz)	INCOUIL	
2412	15120.00	> 500	PASS	2412	15120.00	> 500	PASS	
2437	15120.00	> 500	PASS	2437	15130.00	> 500	PASS	
2462	15120.00	> 500	PASS	2462	15130.00	> 500	PASS	
802.11_n_HT40 Ch0 802.11_n_HT40 Ch1								
Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result	
(MHz)	(kHz)	(kHz)	iveant	(MHz)	(kHz)	(kHz)	Kesuit	
2422	32570.00	> 500	PASS	2422	32570.00	> 500	PASS	
2437	32570.00	> 500	PASS	2437	32580.00	> 500	PASS	
2452	32570.00	> 500	PASS	2452	32570.00	> 500	PASS	

^{*}Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。


隔升フラ河内の内 ル内 には は Name に Nam

Member of the SGS Group (SGS SA)







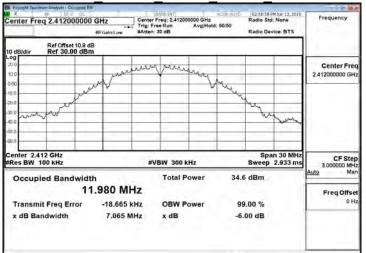


OBW 6dB 802.11b 20MHz Chain1 2412MHz




OBW 6dB 802.11b 20MHz Chain0 2437MHz




OBW 6dB 802.11b 20MHz Chain1 2437MHz

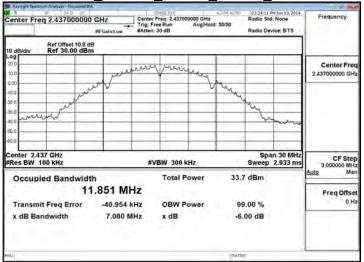

OBW 6dB 802.11b 20MHz Chain0 2462MHz

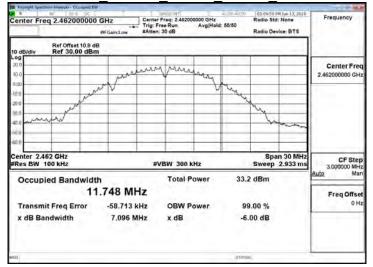


OBW 6dB 802.11b 20MHz Chain1 2462MHz

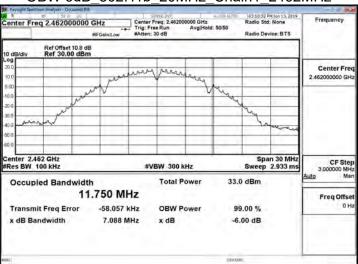

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.












OBW 6dB 802.11g 20MHz Chain1 2412MHz

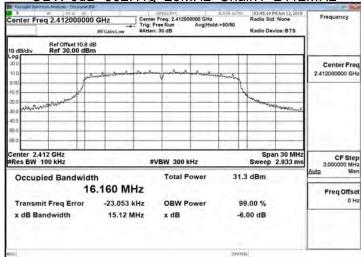


OBW 6dB 802.11g 20MHz Chain0 2437MHz

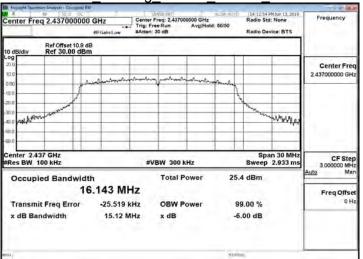


OBW 6dB 802.11g 20MHz Chain1 2437MHz

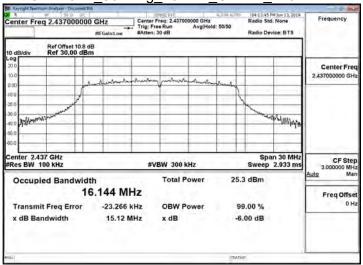

OBW 6dB 802.11g 20MHz Chain0 2462MHz

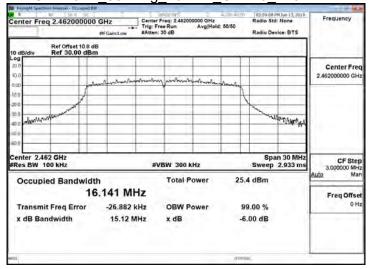


OBW 6dB 802.11g 20MHz Chain1 2462MHz

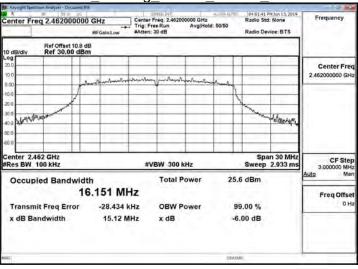

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders

程智科技股份有限公司







OBW 6dB 802.11n 20MHz Chain0 2412MHz

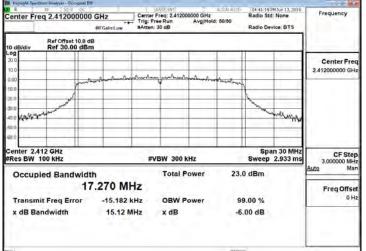


OBW 6dB 802.11n 20MHz Chain1 2412MHz

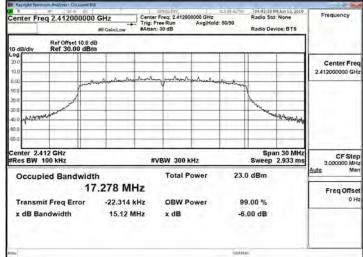


OBW 6dB 802.11n 20MHz Chain0 2437MHz

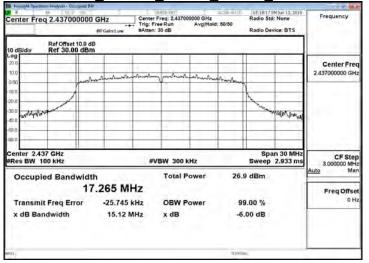


OBW 6dB 802.11n 20MHz Chain1 2437MHz

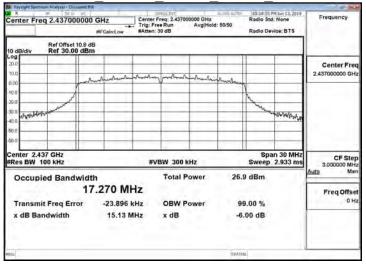

OBW 6dB 802.11n 20MHz Chain0 2462MHz

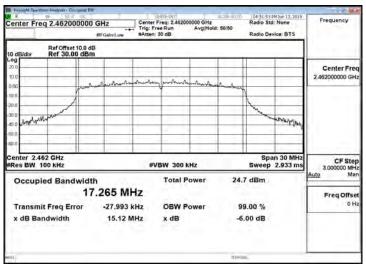

OBW 6dB 802.11n 20MHz Chain1 2462MHz

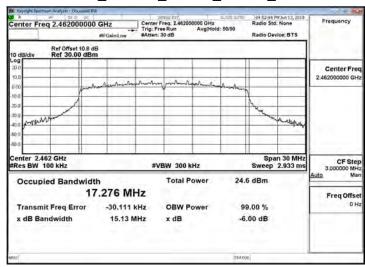

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




OBW 6dB 802.11n 40MHz Chain0 2422MHz

SAME AND ALICH AND ALICH AND ALICH AND ALICH AND ALICH AND AND ALICH AND AND ALICH Radio Device: BTS Ref Offset 10.8 dB Ref 30.00 dBm Center Fred Span 50 MHz Sweep 4.8 ms r 2.422 GHz CF Step 5.000000 MHz Man #VBW 300 kHz Occupied Bandwidth Total Power 22.8 dBm 35.612 MHz Freq Offse OBW Power Transmit Freg Error -62,919 kHz 99.00 % x dB x dB Bandwidth 32.57 MHz -6.00 dB


OBW 6dB 802.11n 40MHz Chain1 2422MHz

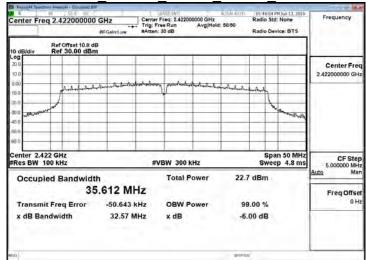


OBW 6dB 802.11n 40MHz Chain0 2437MHz

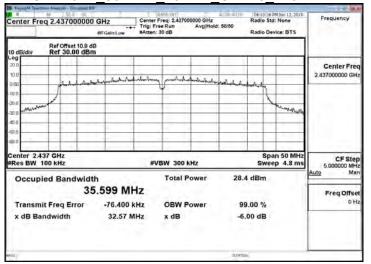


OBW 6dB 802.11n 40MHz Chain1 2437MHz

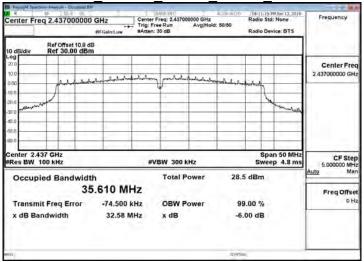

OBW 6dB 802.11n 40MHz Chain0 2452MHz

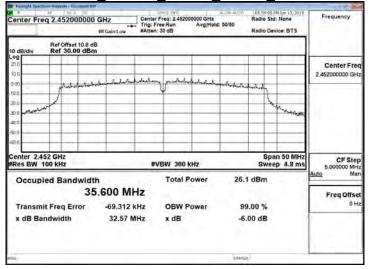


OBW 6dB 802.11n 40MHz Chain1 2452MHz

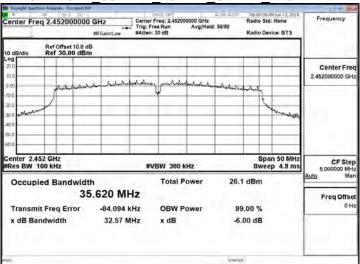

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 10


10.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Measurement Equipment Used 10.2

mode and more Equipment edea						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

10.3 Test SET-UP



10.4 Measurement Procedure

Reference Level of Emission Calculation:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector =Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

10.5 **Measurement Result**

Reference Level of Limit 802.11b mode			Reference Level of Limit 802.11g mode			
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2412	13.59	-6.41	2412	7.59	-12.41	
2437	14.65	-5.35	2437	7.69	-12.31	
2462	14.48	-5.52	2462	7.44	-12.56	
Reference Level of Limit 802.11n20 mode			Reference Level of Limit 802.11n40 MODE			
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2412	10.86	-9.14	2422	5.4	-14.60	
2437	9.26	-10.74	2437	5.51	-14.49	
2462	8.52	-11.48	2452	5.72	-14.28	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Reference Level_802.11b_20MHz_2412MHz

Reference Level_802.11g_20MHz_2412MHz



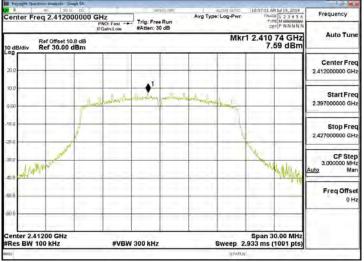


Reference Level 802.11b 20MHz 2437MHz

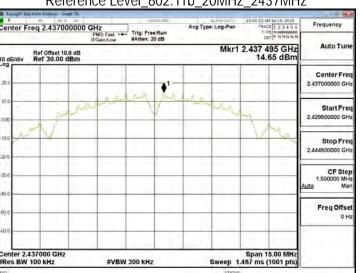





Reference Level_802.11b_20MHz_2462MHz

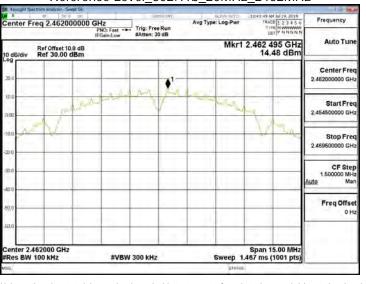



#VBW 300 kHz

Reference Level_802.11g_20MHz_2462MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

enter 2.46200 GHz

Span 30.00 MH: Sweep 2.933 ms (1001 pts



Reference Level_802.11n_20MHz_2412MHz


Reference Level_802.11n_40MHz_2422MHz






Reference Level_802.11n_20MHz_2437MHz

Reference Level 802.11n 40MHz 2437MHz

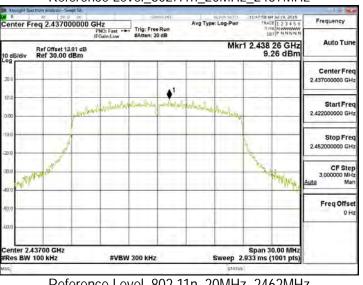

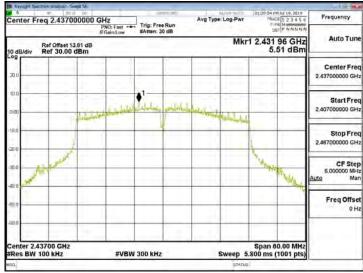

Reference Level_802.11n_20MHz_2462MHz


Reference Level_802.11n_40MHz_2452MHz






Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and conditions and therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders







Band Edge_802.11b_20MHz_2412MHz

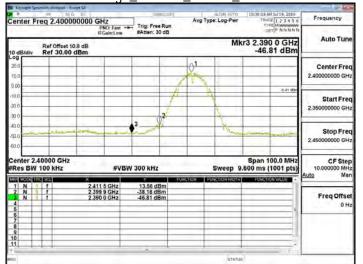


Band Edge_802.11b_20MHz 2462MHz

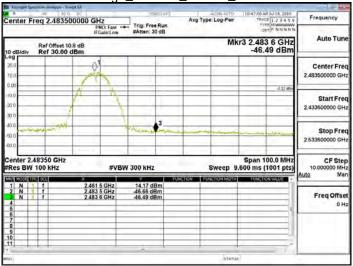


Band Edge_802.11g_20MHz_2412MHz

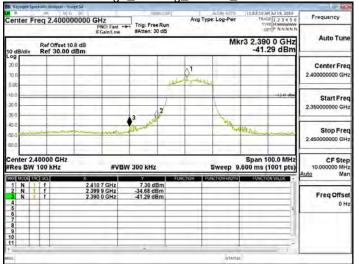

Band Edge 802.11g 20MHz 2462MHz

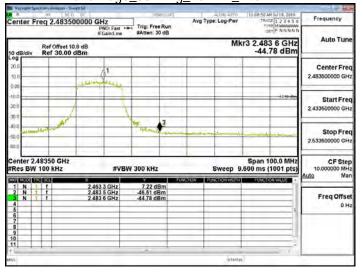


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。







Band Edge_802.11n_20MHz_2412MHz

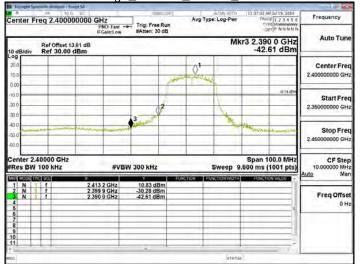


Band Edge_802.11n_20MHz 2462MHz

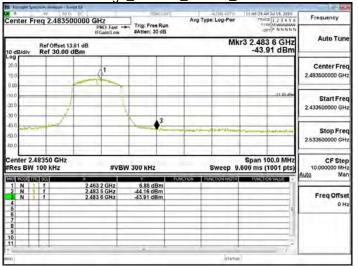

Band Edge_802.11n_40MHz_2422MHz

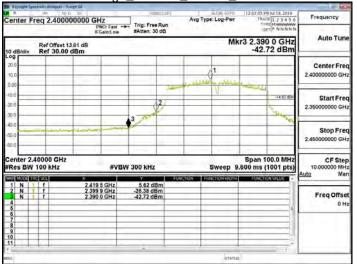


Band Edge 802.11n 40MHz 2452MHz

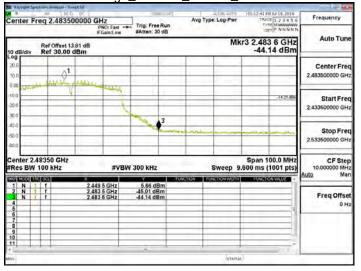


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Spurious Emission_802.11b_20MHz_2412MHz

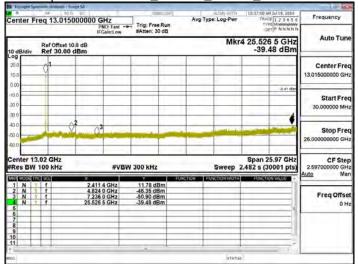


Spurious Emission_802.11b_20MHz_2437MHz

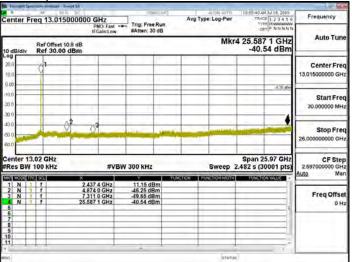


Spurious Emission 802.11b 20MHz 2462MHz

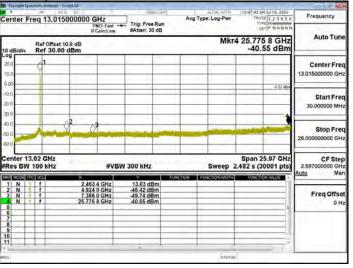


Spurious Emission_802.11g_20MHz_2412MHz

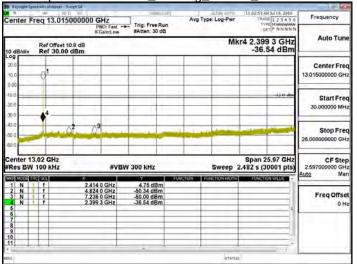

Spurious Emission_802.11g_20MHz_2437MHz

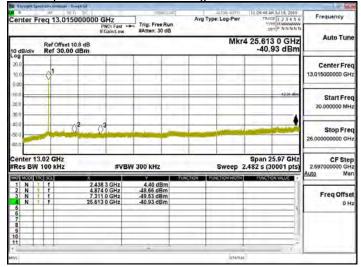

Spurious Emission_802.11g_20MHz_2462MHz

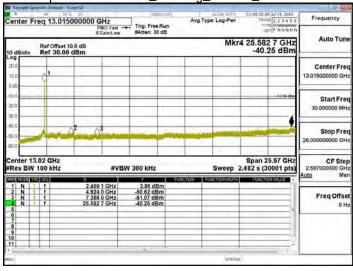


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

жинка шинка пытына жинка жин


程智科技股份有限公司




Spurious Emission_802.11n_20MHz_2412MHz

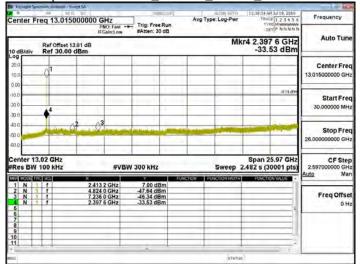


Spurious Emission_802.11n_20MHz_2437MHz

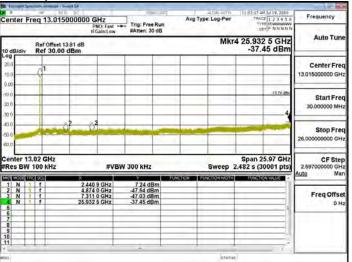


Spurious Emission 802.11n 20MHz 2462MHz

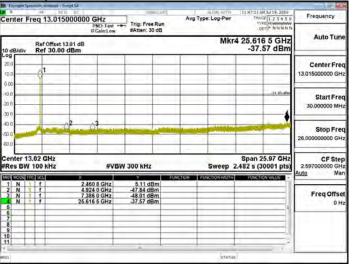


Spurious Emission_802.11n_40MHz_2422MHz

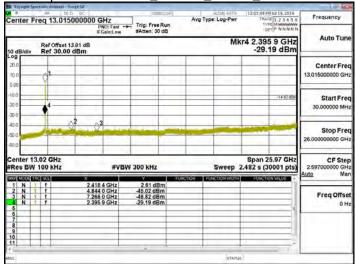

Spurious Emission_802.11n_40MHz_2437MHz

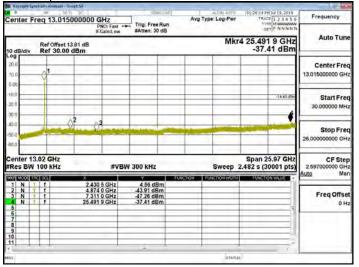

Spurious Emission 802.11n 40MHz 2452MHz

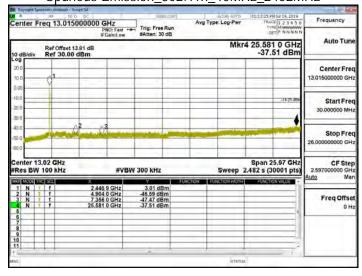

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

жинка шинка пытына жинка жин



Page 36 of 89

RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209


And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz. whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (dBµV/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Measurement Equipment Used:

1.2 Measurement	2 Measurement Equipment Osed: 966A Chamber									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020					
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020					
Band Reject Filters	MICRO TRON- ICS	BRM 50702	120	02/26/2019	02/25/2020					
Bilog Antenna	Sunol Sciences	JB1	A052609	03/06/2019	03/05/2020					
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020					
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020					
Digital Thermo-Hy- gro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020					
double Ridged Guide Horn An- tenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019					
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020					
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019					
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020					
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020					
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020					
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R					
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R					
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R					
Software		e3 V6	.11-20180413							


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




11.3 **Test SET-UP**


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

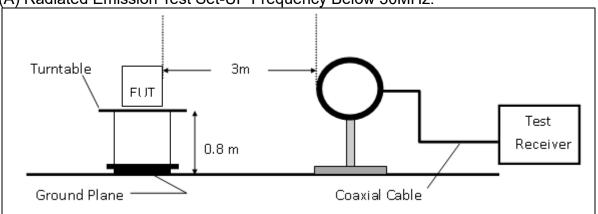

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

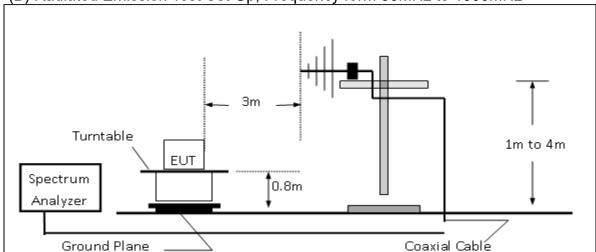

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

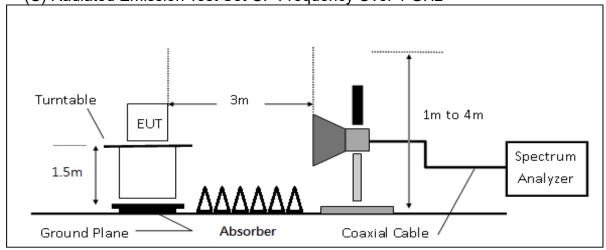

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



11.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: T190514W02-RP1

Page 40 of 89


11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7 **Measurement Result**

Note: Refer to next page for tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Radiated Band Edge Measurement Result


:T190514W02 **Project Number Test Date** :2019-07-24

Operation Band :802.11b Temp./Humi. :23.6/45

Frequency :2412 MHz :VERTICAL Antenna Pol.


Operation Mode :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

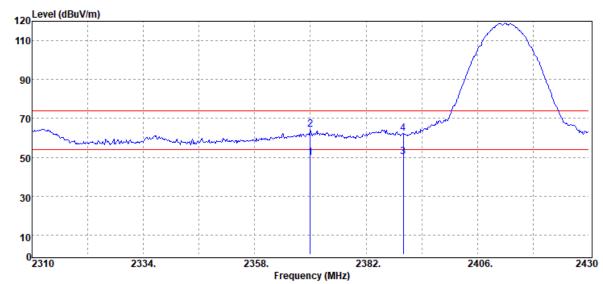

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2370.00	Average	53.12	-3.36	49.76	54.00	-4.24
2370.00	Peak	67.78	-3.36	64.42	74.00	-9.58
2390.00	Average	53.71	-3.38	50.33	54.00	-3.67
2390.00	Peak	65.65	-3.38	62.27	74.00	-11.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11b

Frequency :2412 MHz

Operation Mode :BE CH LOW


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/45


Antenna Pol. :HORIZONTAL

Engineer :Kailin

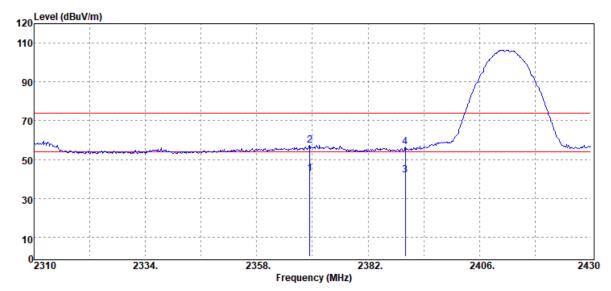

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2369.40	Average	46.21	-3.35	42.86	54.00	-11.14
2369.40	Peak	60.59	-3.35	57.24	74.00	-16.76
2390.00	Average	45.51	-3.38	42.13	54.00	-11.87
2390.00	Peak	59.84	-3.38	56.46	74.00	-17.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 **Test Date** :2019-07-24


Operation Band :802.11b Temp./Humi. :23.6/45 Antenna Pol. :VERTICAL Frequency :2462 MHz **Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :H Plan

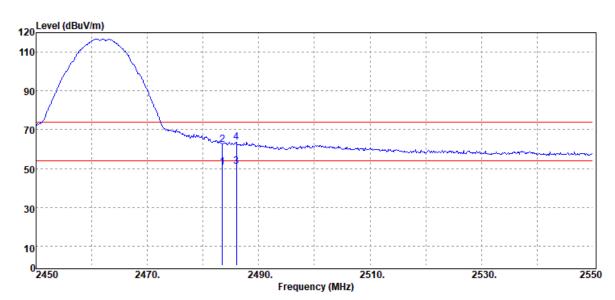

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	53.39	-2.83	50.56	54.00	-3.44
2483.50	Peak	64.94	-2.83	62.11	74.00	-11.89
2486.00	Average	53.86	-2.82	51.04	54.00	-2.96
2486.00	Peak	66.33	-2.82	63.51	74.00	-10.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11b

Frequency :2462 MHz

Operation Mode :BE CH HIGH


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/45


Antenna Pol. :HORIZONTAL

Engineer :Kailin

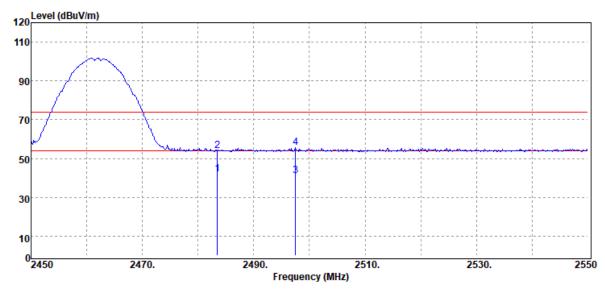

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	44.65	-2.83	41.82	54.00	-12.18
2483.50	Peak	56.76	-2.83	53.93	74.00	-20.07
2497.50	Average	43.84	-2.73	41.11	54.00	-12.89
2497.50	Peak	58.32	-2.73	55.59	74.00	-18.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 Test Date :2019-07-24


Operation Band :802.11g Temp./Humi. :23.6/45
Frequency :2412 MHz Antenna Pol. :VERTICAL
Operation Mode :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

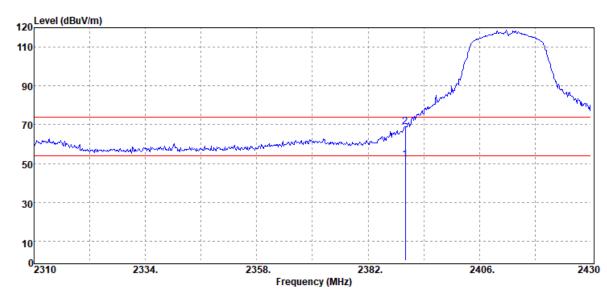

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB	
 2390.00	Average	55.25	-3.38	51.87	54.00	-2.13	
2390.00	Peak	72.31	-3.38	68.93	74.00	-5.07	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11g

Frequency :2412 MHz

Operation Mode :BE CH LOW


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/45


Antenna Pol. :HORIZONTAL

Engineer :Kailin

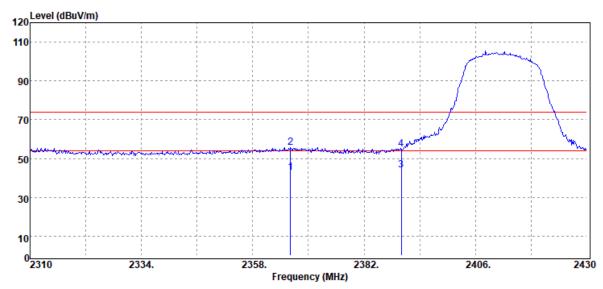

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2366.16	Average	46.26	-3.34	42.92	54.00	-11.08
2366.16	Peak	59.02	-3.34	55.68	74.00	-18.32
2390.00	Average	47.25	-3.38	43.87	54.00	-10.13
2390.00	Peak	58.24	-3.38	54.86	74.00	-19.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11g
Frequency :2462 MHz
Operation Mode :BE CH HIGH


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/45


Antenna Pol. :VERTICAL

Engineer :Kailin

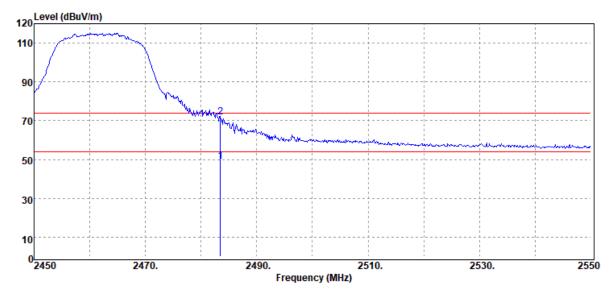

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	52.03	-2.83	49.20	54.00	-4.80
2483.50	Peak	74.64	-2.83	71.81	74.00	-2.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11g

Frequency :2462 MHz

Operation Mode :BE CH HIGH


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/45


Antenna Pol. :HORIZONTAL

Engineer :Kailin

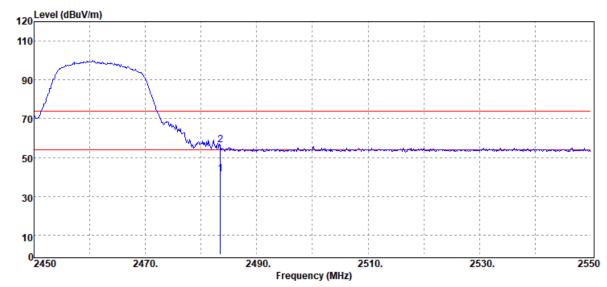

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBuV	dB	dBµV/m	dBµV/m	dB
-	1 1VQ1 //V			I		
2483.50	Average	44.26	-2.83	41.43	54.00	-12.57
2483.50	Peak	59.11	-2.83	56.28	74.00	-17.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 **Test Date** :2019-07-24


Operation Band :802.11n20 Temp./Humi. :23.6/46 :VERTICAL Frequency :2412 MHz Antenna Pol. **Operation Mode** :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

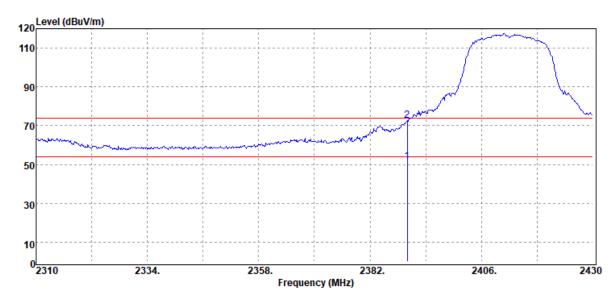

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
 2390.00	Average	54.75	-3.38	51.37	54.00	-2.63
2390.00	Peak	76.05	-3.38	72.67	74.00	-1.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n20

Frequency :2412 MHz

Operation Mode :BE CH LOW


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/46


Antenna Pol. :HORIZONTAL

Engineer :Kailin

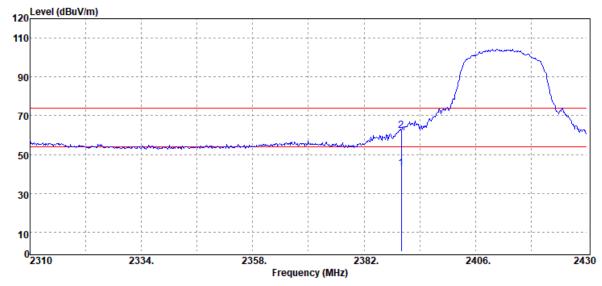

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	46.12	-3.38	42.74	54.00	-11.26
2390.00	Peak	65.73	-3.38	62.35	74.00	-11.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 Test Date :2019-07-24


Operation Band :802.11n20 Temp./Humi. :23.6/46
Frequency :2462 MHz Antenna Pol. :VERTICAL
Operation Mode :BE CH HIGH Engineer :Kailin

EUT Pol. :H Plan

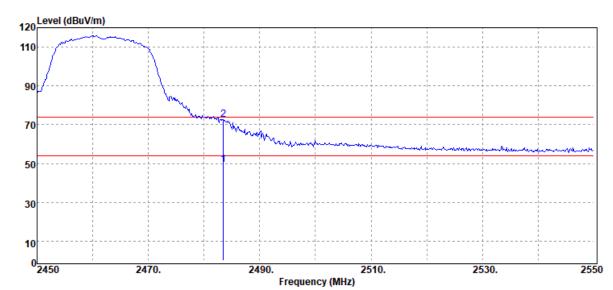

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	52.33	-2.83	49.50	54.00	-4.50
2483.50	Peak	75.38	-2.83	72.55	74.00	-1.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11n20

Frequency :2462 MHz

Operation Mode :BE CH HIGH


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/46


Antenna Pol. :HORIZONTAL

Engineer :Kailin

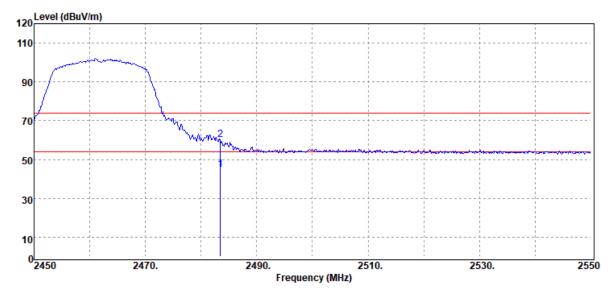

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.59	-2.83	44.76	54.00	-9.24
2483.50	Peak	62.91	-2.83	60.08	74.00	-13.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 Test Date :2019-07-24


Operation Band :802.11n40 Temp./Humi. :23.6/46
Frequency :2422 MHz Antenna Pol. :VERTICAL
Operation Mode :BE CH LOW Engineer :Kailin

EUT Pol. :H Plan

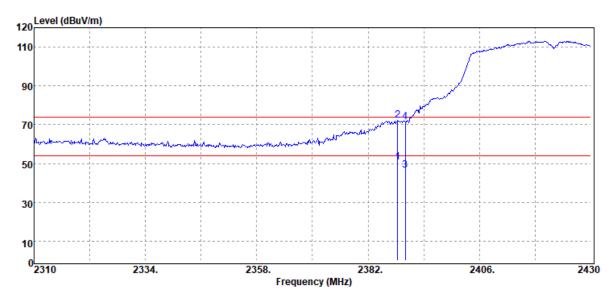

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2388.36	Average	53.88	-3.39	50.49	54.00	-3.51
2388.36	Peak	75.49	-3.39	72.10	74.00	-1.90
2390.00	Average	49.84	-3.38	46.46	54.00	-7.54
2390.00	Peak	74.96	-3.38	71.58	74.00	-2.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11n40

Frequency :2422 MHz

Operation Mode :BE CH LOW


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.6/46


Antenna Pol. :HORIZONTAL

Engineer :Kailin

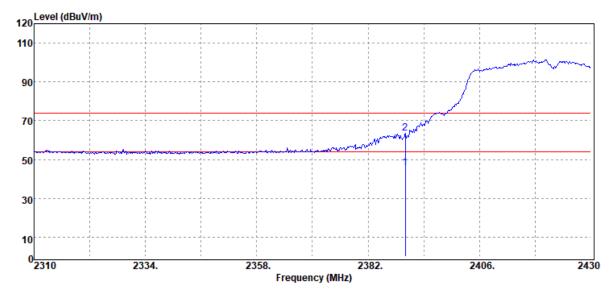

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	49.15	-3.38	45.77	54.00	-8.23
2390.00	Peak	66.87	-3.38	63.49	74.00	-10.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number :T190514W02 Test Date :2019-07-24


Operation Band :802.11n40 Temp./Humi. :23.7/46
Frequency :2452 MHz Antenna Pol. :VERTICAL
Operation Mode :BE CH HIGH Engineer :Kailin

EUT Pol. :H Plan

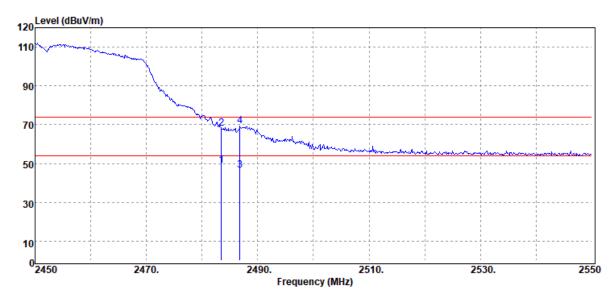

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	51.95	-2.83	49.12	54.00	-4.88
2483.50	Peak	70.99	-2.83	68.16	74.00	-5.84
2486.80	Average	49.15	-2.80	46.35	54.00	-7.65
2486.80	Peak	72.13	-2.80	69.33	74.00	-4.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Band :802.11n40

Frequency :2452 MHz

Operation Mode :BE CH HIGH


EUT Pol. :H Plan

Test Date :2019-07-24

Temp./Humi. :23.7/46


Antenna Pol. :HORIZONTAL

Engineer :Kailin

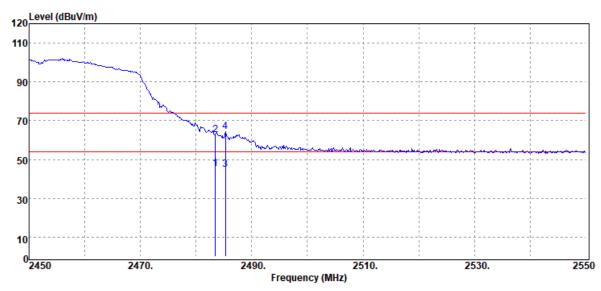

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	47.98	-2.83	45.15	54.00	-8.85
2483.50	Peak	65.55	-2.83	62.72	74.00	-11.28
2485.30	Average	47.66	-2.82	44.84	54.00	-9.16
2485.30	Peak	67.03	-2.82	64.21	74.00	-9.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Radiated Spurious Emission Measurement Result Below 1GHz Worst-Case Data:

Project Number :T190514W02 **Test Date** :2019-07-25

Operation Band Temp./Humi. :23.6/45 :802.11g Frequency :2437 MHz Antenna Pol. :VERTICAL


Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

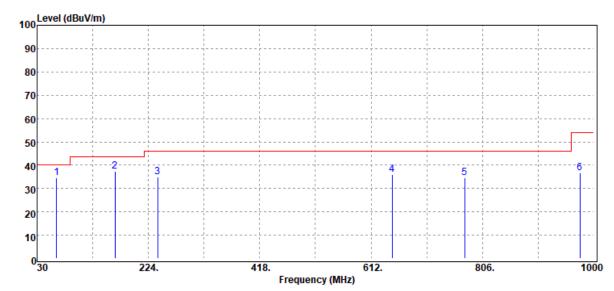

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
63.95	Peak	50.03	-15.28	34.75	40.00	-5.25
165.80	Peak	47.66	-10.34	37.32	43.50	-6.18
240.49	Peak	45.34	-10.25	35.09	46.00	-10.91
648.86	Peak	36.10	-0.08	36.02	46.00	-9.98
774.96	Peak	33.39	1.37	34.76	46.00	-11.24
975.75	Peak	30.97	5.54	36.51	54.00	-17.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



:2019-07-25



:H Plan


EUT Pol.

Project Number :T190514W02 **Test Date**

Operation Band :802.11g Temp./Humi. :23.6/45

:2437 MHz :HORIZONTAL Frequency Antenna Pol.


Operation Mode :TX CH MID Engineer :Kailin

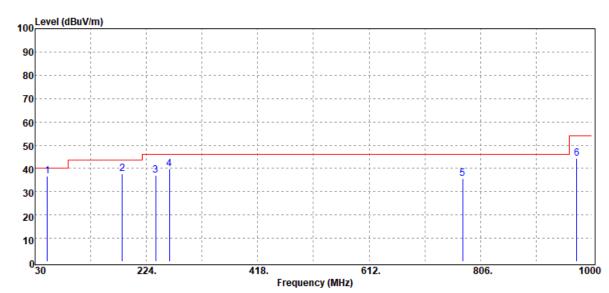

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
51.34	Peak	52.08	-15.57	36.51	40.00	-3.49
182.29	Peak	48.89	-11.28	37.61	43.50	-5.89
240.49	Peak	47.16	-10.25	36.91	46.00	-9.09
263.77	Peak	48.76	-9.12	39.64	46.00	-6.36
774.96	Peak	34.24	1.37	35.61	46.00	-10.39
973.81	Peak	38.75	5.63	44.38	54.00	-9.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧







Project Number :T190514W02 **Test Date** :2019-07-25

Operation Band :802.11n40 Temp./Humi. :23.6/45 :VERTICAL Frequency :2437 MHz Antenna Pol.


Operation Mode :TX CH MID Engineer :Kailin



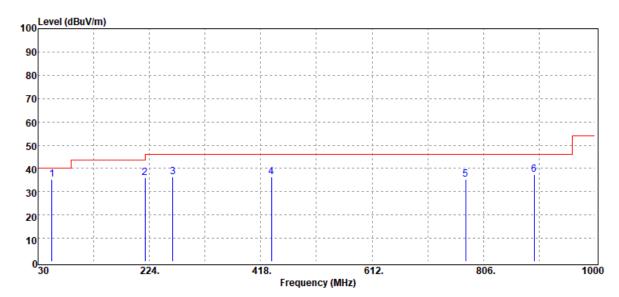

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
54.25	Peak	51.26	-15.95	35.31	40.00	-4.69
216.24	Peak	47.43	-11.45	35.98	46.00	-10.02
264.74	Peak	45.34	-8.95	36.39	46.00	-9.61
436.43	Peak	40.50	-4.29	36.21	46.00	-9.79
774.96	Peak	33.91	1.37	35.28	46.00	-10.72
894.27	Peak	33.43	4.07	37.50	46.00	-8.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n40

Frequency :2437 MHz


Operation Mode :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-07-25

> Temp./Humi. :23.6/45

:HORIZONTAL Antenna Pol.


Engineer :Kailin

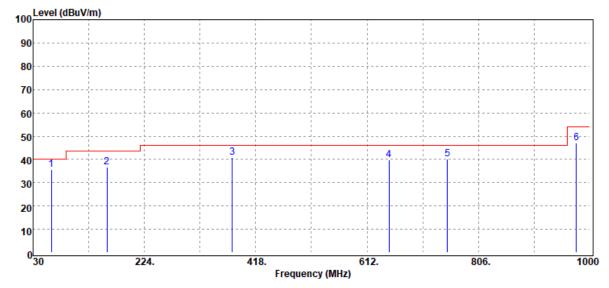

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
62.01	Peak	51.19	-15.60	35.59	40.00	-4.41
159.01	Peak	46.60	-9.95	36.65	43.50	-6.85
377.26	Peak	47.32	-6.37	40.95	46.00	-5.05
649.83	Peak	39.96	-0.13	39.83	46.00	-6.17
751.68	Peak	37.74	2.23	39.97	46.00	-6.03
976.72	Peak	41.37	5.53	46.90	54.00	-7.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Radiated Spurious Emission Measurement Result

Above 1GHz Data:


:T190514W02 **Project Number Test Date** :2019-07-23

Operation Band :802.11b Temp./Humi. :23.4/46

:VERTICAL Frequency :2412 MHz Antenna Pol.


Operation Mode :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

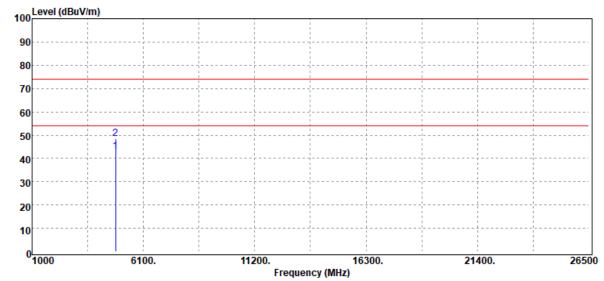

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	40.11	2.84	42.95	54.00	-11.05
4824.00	Peak	45.71	2.84	48.55	74.00	-25.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11b

Frequency :2412 MHz


Operation Mode :TX CH LOW

EUT Pol. :H Plan **Test Date** :2019-07-23

Temp./Humi. :23.4/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

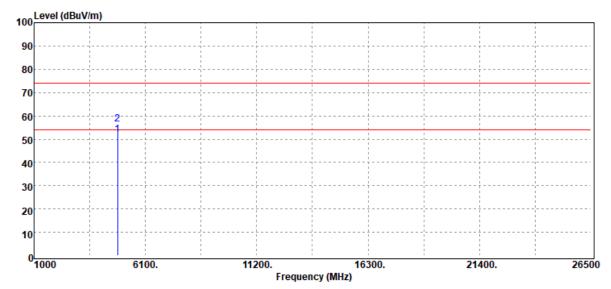

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	48.94	2.84	51.78	54.00	-2.22
4824.00	Peak	53.45	2.84	56.29	74.00	-17.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Project Number :T190514W02 **Test Date** :2019-07-23

Operation Band :802.11b Temp./Humi. :23.4/46 :VERTICAL Frequency :2437 MHz Antenna Pol.


Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

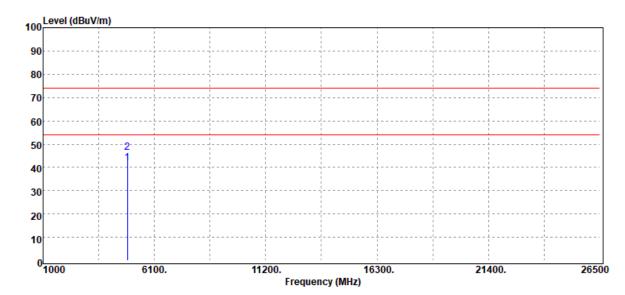

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	38.80	2.98	41.78	54.00	-12.22
4874.00	Peak	43.27	2.98	46.25	74.00	-27.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11b

Frequency :2437 MHz


Operation Mode :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-07-23

Temp./Humi. :23.4/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

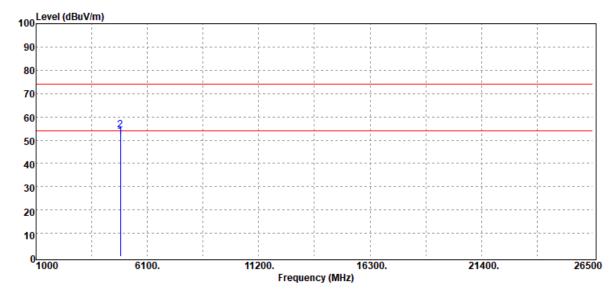

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	48.66	2.98	51.64	54.00	-2.36
4874.00	Peak	51.27	2.98	54.25	74.00	-19.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Project Number :T190514W02 **Test Date** :2019-07-23

Operation Band :802.11b Temp./Humi. :23.4/46 :VERTICAL Frequency :2462 MHz Antenna Pol.


Operation Mode :TX CH HIGH Engineer :Kailin

EUT Pol. :H Plan

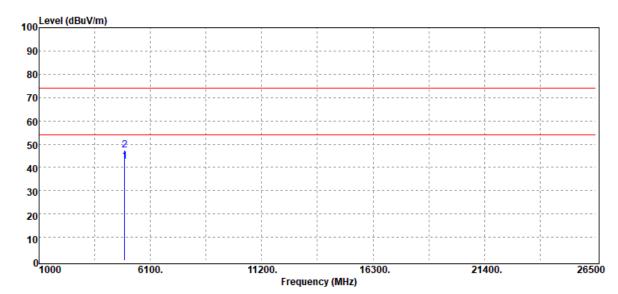

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4924.00	Average	38.95	3.46	42.41	54.00	-11.59
4924.00	Peak	43.77	3.46	47.23	74.00	-26.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11b

Frequency :2462 MHz


Operation Mode :TX CH HIGH

EUT Pol. :H Plan **Test Date** :2019-07-23

Temp./Humi. :23.4/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

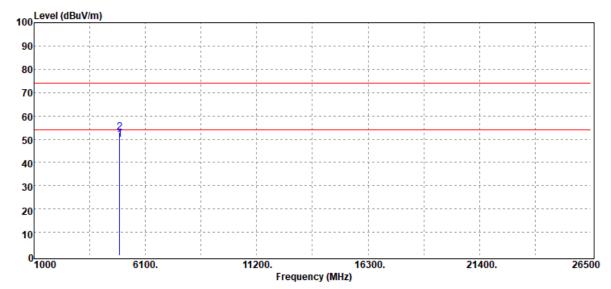

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
4924.00	Average	46.29	3.46	49.75	54.00	-4.25
4924.00	Peak	49.56	3.46	53.02	74.00	-20.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Project Number :T190514W02 **Test Date** :2019-07-23


Operation Band :802.11g Temp./Humi. :23.6/45 :2412 MHz :VERTICAL Frequency Antenna Pol. **Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

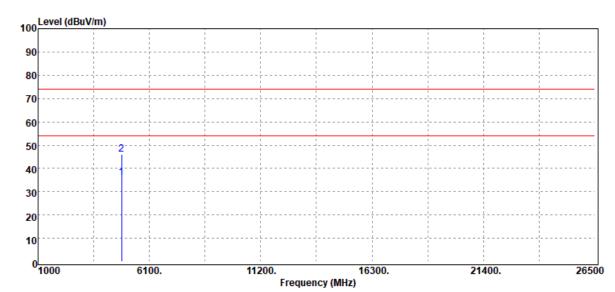

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	33.25	2.84	36.09	54.00	-17.91
4824.00	Peak	43.25	2.84	46.09	74.00	-27.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11g

:2412 MHz Frequency


Operation Mode :TX CH LOW

EUT Pol. :H Plan **Test Date** :2019-07-23

> Temp./Humi. :23.6/45


:HORIZONTAL Antenna Pol.

Engineer :Kailin

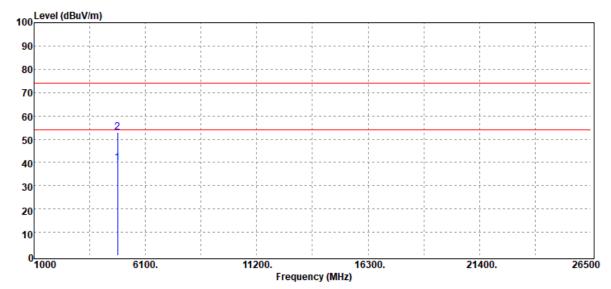

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	36.94	2.84	39.78	54.00	-14.22
4824.00	Peak	49.97	2.84	52.81	74.00	-21.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Project Number :T190514W02 **Test Date** :2019-07-23


Operation Band :802.11g Temp./Humi. :23.6/45 :2437 MHz :VERTICAL Frequency Antenna Pol. **Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

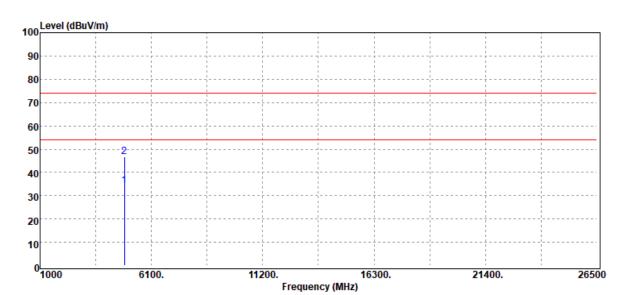

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4874.00	Average	31.27	2.98	34.25	54.00	-19.75
4874.00	Peak	43.63	2.98	46.61	74.00	-27.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11g

:2437 MHz Frequency


Operation Mode :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-07-23

Temp./Humi. :23.6/45


:HORIZONTAL Antenna Pol.

Engineer :Kailin

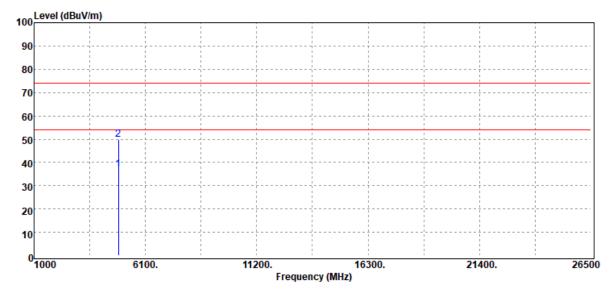

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	33.90	2.98	36.88	54.00	-17.12
4874.00	Peak	46.96	2.98	49.94	74.00	-24.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



:2019-07-23




Project Number :T190514W02 **Test Date**

Operation Band :802.11g Temp./Humi. :23.6/45 :2462 MHz :VERTICAL Frequency Antenna Pol.


Operation Mode :TX CH HIGH Engineer :Kailin

EUT Pol. :H Plan

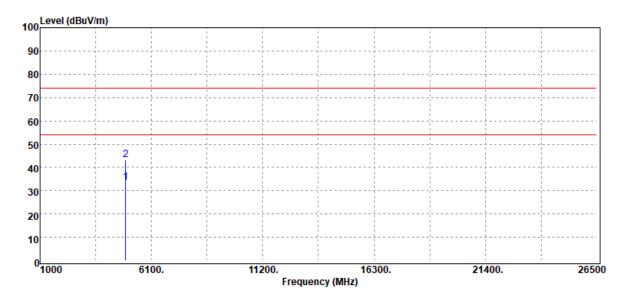

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	30.13	3.46	33.59	54.00	-20.41
4924.00	Peak	39.80	3.46	43.26	74.00	-30.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11g

:2462 MHz Frequency


Operation Mode :TX CH HIGH

EUT Pol. :H Plan **Test Date** :2019-07-23

> Temp./Humi. :23.6/45


:HORIZONTAL Antenna Pol.

Engineer :Kailin

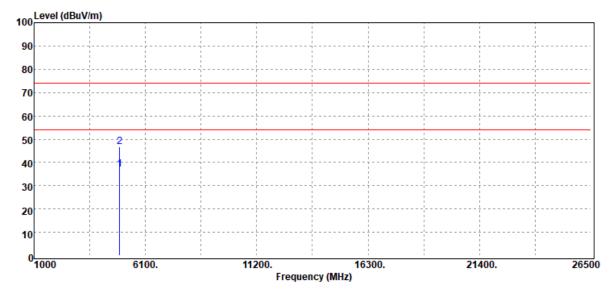

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4924.00	Average	33.46	3.46	36.92	54.00	-17.08
4924.00	Peak	43.29	3.46	46.75	74.00	-27.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n20 Temp./Humi. :23.6/46 :VERTICAL Frequency :2412 MHz Antenna Pol.


Operation Mode :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

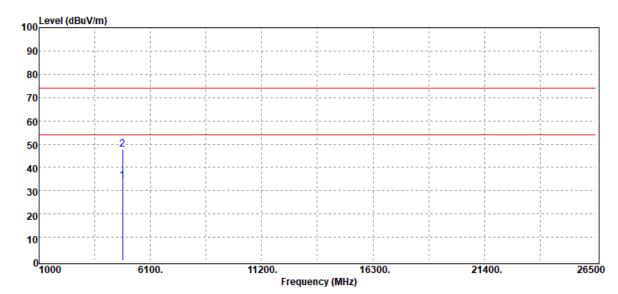

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	31.25	2.84	34.09	54.00	-19.91
4824.00	Peak	44.94	2.84	47.78	74.00	-26.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n20

Frequency :2412 MHz


Operation Mode :TX CH LOW

EUT Pol. :H Plan **Test Date** :2019-07-24

Temp./Humi. :23.6/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

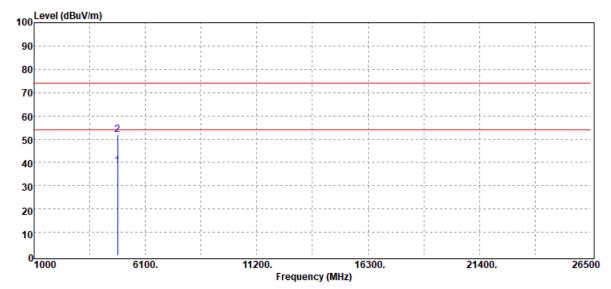

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4824.00	Average	35.68	2.84	38.52	54.00	-15.48
4824.00	Peak	48.94	2.84	51.78	74.00	-22.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n20 Temp./Humi. :23.6/46 :VERTICAL Frequency :2437 MHz Antenna Pol.


Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

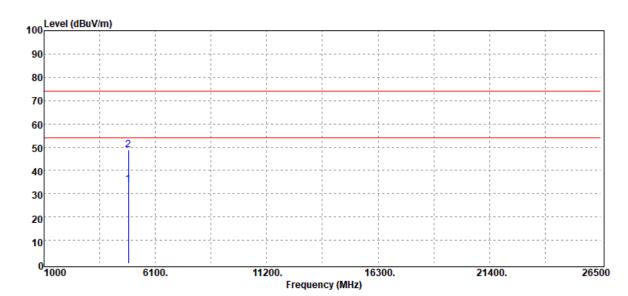

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	31.07	2.98	34.05	54.00	-19.95
4874.00	Peak	45.75	2.98	48.73	74.00	-25.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n20

Frequency :2437 MHz


Operation Mode :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-07-24

> Temp./Humi. :23.6/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

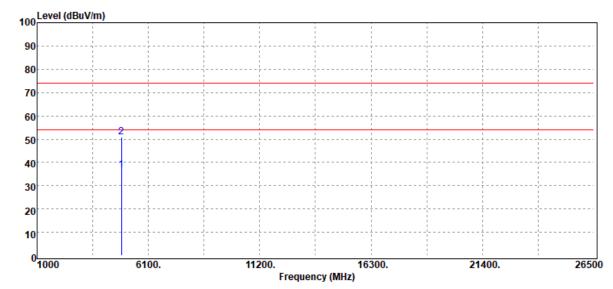

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4874.00	Average	33.80	2.98	36.78	54.00	-17.22
4874.00	Peak	47.96	2.98	50.94	74.00	-23.06


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n20 Temp./Humi. :23.6/46 :VERTICAL Frequency :2462 MHz Antenna Pol. **Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :H Plan

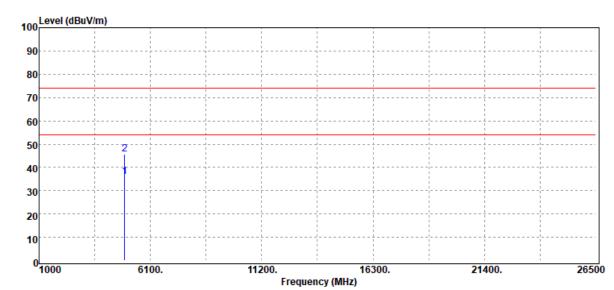

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
 4924.00	Average	32.47	3.46	35.93	54.00	-18.07
4924.00	Peak	42.17	3.46	45.63	74.00	-28.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n20

Frequency :2462 MHz


Operation Mode :TX CH HIGH

EUT Pol. :H Plan **Test Date** :2019-07-24

Temp./Humi. :23.6/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

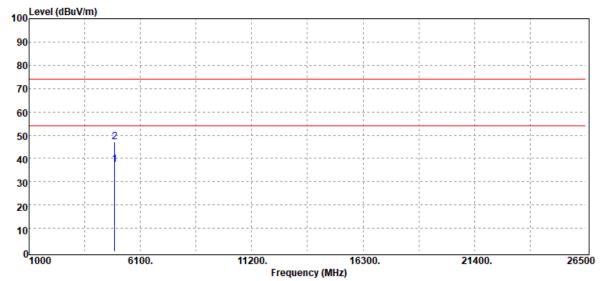

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
 4924.00	Average	33.79	3.46	37.25	54.00	-16.75
4924.00	Peak	43.57	3.46	47.03	74.00	-26.97


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n40 Temp./Humi. :23.5/46 :VERTICAL Frequency :2422 MHz Antenna Pol. **Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :H Plan

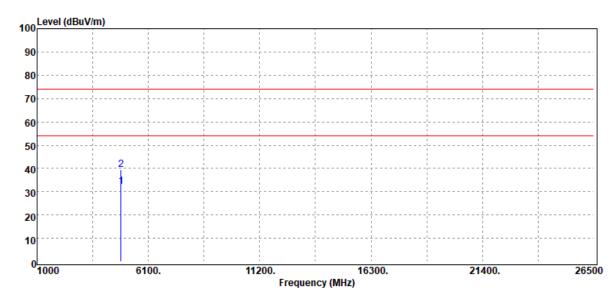

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4844.00	Average	29.49	2.84	32.33	54.00	-21.67
4844.00	Peak	36.49	2.84	39.33	74.00	-34.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n40

Frequency :2422 MHz


Operation Mode :TX CH LOW

EUT Pol. :H Plan **Test Date** :2019-07-24

Temp./Humi. :23.5/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

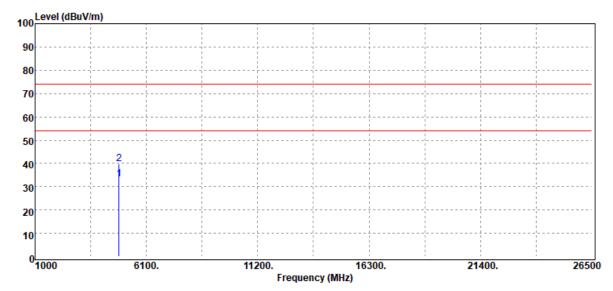

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	30.42	2.84	33.26	54.00	-20.74
4844.00	Peak	37.06	2.84	39.90	74.00	-34.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n40 Temp./Humi. :23.5/46 :VERTICAL Frequency :2437 MHz Antenna Pol.


Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

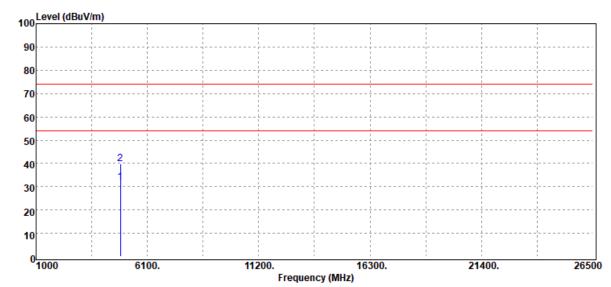

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	4874.00	Average	28.78	2.98	31.76	54.00	-22.24
	4874.00	Peak	36.80	2.98	39.78	74.00	-34.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n40

Frequency :2437 MHz


Operation Mode :TX CH MID

EUT Pol. :H Plan **Test Date** :2019-07-24

> Temp./Humi. :23.5/46


:HORIZONTAL Antenna Pol.

Engineer :Kailin

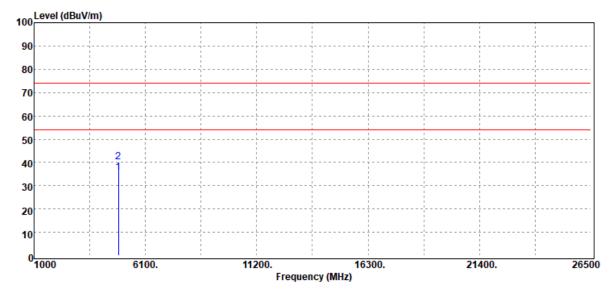

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4874.00	Average	32.60	2.98	35.58	54.00	-18.42
4874.00	Peak	37.17	2.98	40.15	74.00	-33.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧






Operation Band :802.11n40 Temp./Humi. :23.5/46 :VERTICAL Frequency :2452 MHz Antenna Pol.


Operation Mode :TX CH HIGH Engineer :Kailin



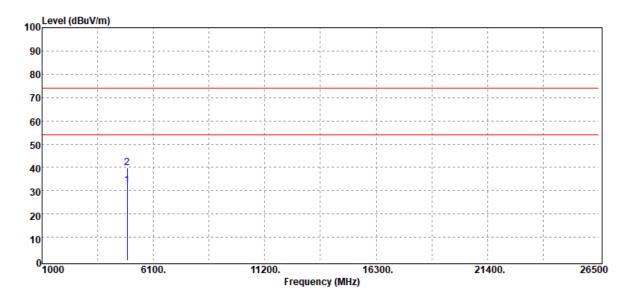

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4904.00	Average	28.89	3.22	32.11	54.00	-21.89
4904.00	Peak	36.50	3.22	39.72	74.00	-34.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧





Operation Band :802.11n40

Frequency :2452 MHz


Operation Mode :TX CH HIGH

EUT Pol. :H Plan **Test Date** :2019-07-24

> Temp./Humi. :23.5/46

:HORIZONTAL Antenna Pol.

Engineer :Kailin

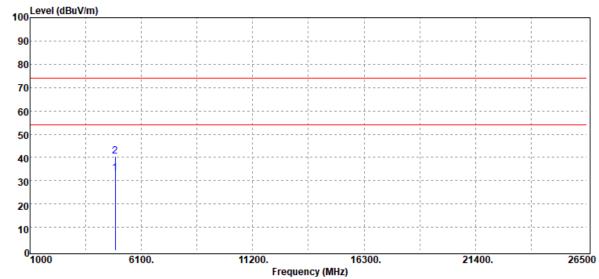

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
 4904.00	Average	30.11	3.22	33.33	54.00	-20.67
4904.00	Peak	37.09	3.22	40.31	74.00	-33.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Report No.: T190514W02-RP1

Page 85 of 89

12 PEAK POWER SPECTRAL DENSITY


Standard Applicable

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	
RF Cable	Woken	N/A	N/A	N/A	N/A	

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.
- 11.802.11n MIMO mode: offset is set following "measure and add 10 Log (N)" on spectrum to measure the PSD for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna. N=2 for this given application.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: T190514W02-RP1

Page 86 of 89

Note:

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ...,

(i) If transmit signals are correlated, then Directional gain

= 10 log[(10G1 /20 + 10G2 /20 + ... + 10GN /20) 2 /NANT] dBi

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

The antenna gain is greater than 6 dBi, therefore the limit needs to be reduced as section 12.5.

12.5 **Measurement Result**

POWER DENSITY 802.11b						
Freq.	PSD	Limit	Docult			
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result			
2412	-1.19	8.00	PASS			
2437	0.03	8.00	PASS			
2462	-0.76	8.00	PASS			
POWER DENSITY 802.11n HT20						
Freq.	PSD	Limit	Result			
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result			
2412	-4.28	6.08	PASS			
2437	-5.35	6.08	PASS			
2462	-6.53	6.08	PASS			

POWER DENSITY 802.11g					
Freq.	PSD	Limit	Result		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2412	-7.15	8.00	PASS		
2437	-6.62	8.00	PASS		
2462	-7.73	8.00	PASS		
POWER DENSITY 802.11n HT40					
Freq.	PSD	Limit	Result		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2422	-8.4	6.08	PASS		
2437	-9.69	6.08	PASS		
2452	-10.04	6.08	PASS		


= Attenuator (10dB) + Cabel (0.80dB) = 10.80 dB (SISO)

= Attenuator (10dB) + Cabel (3.81dB) = 13.81 dB (MIMO)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

^{*} Note: Cabel Loss

^{*}Refer to next page for plots







Power Density_802.11b_20MHz_2412MHz




Power Density 802.11b 20MHz 2437MHz

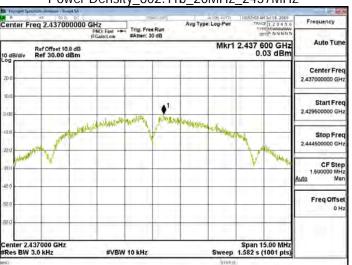


Power Density_802.11b_20MHz_2462MHz

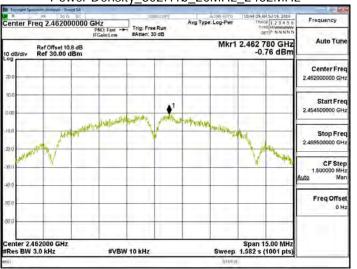


Power Density_802.11g_20MHz_2412MHz

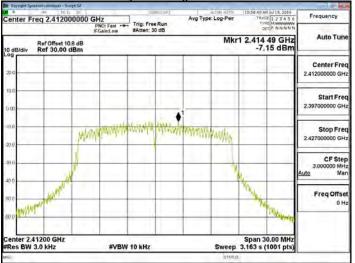


Power Density 802.11g 20MHz 2437MHz

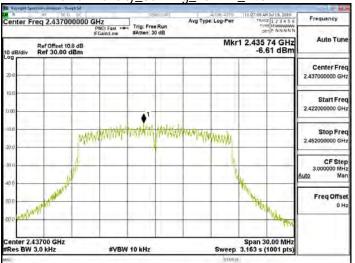

Power Density_802.11g_20MHz_2462MHz

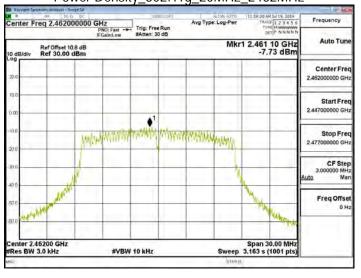


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。







Power Density_802.11n_20MHz_2412MHz

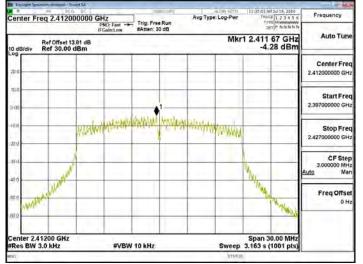


Power Density_802.11n_20MHz 2437MHz

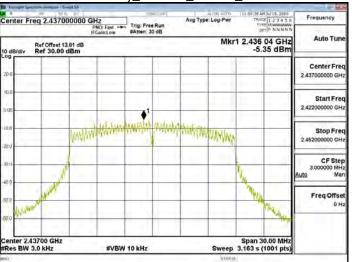


Power Density_802.11n_20MHz_2462MHz

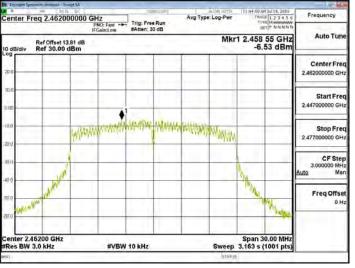


Power Density_802.11n_40MHz_2422MHz

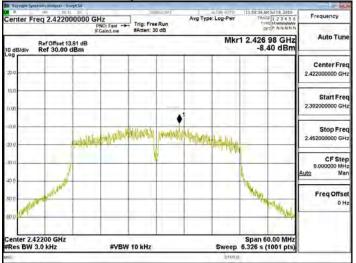

Power Density_802.11n_40MHz 2437MHz

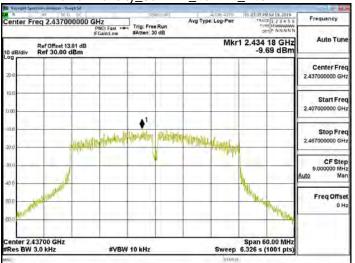

Power Density_802.11n_40MHz_2452MHz

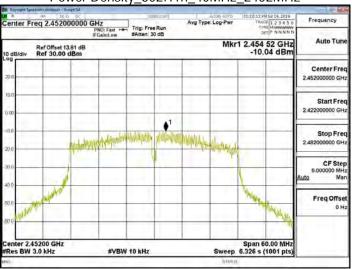

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Report No.: T190514W02-RP1

Page 89 of 89

13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details..

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧