




Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

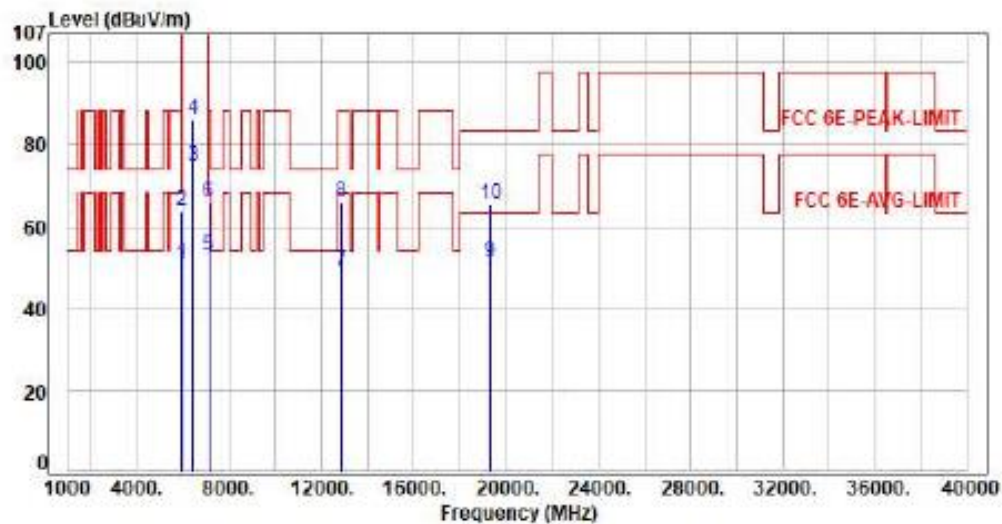

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.97	50.70	68.20	-17.50	Average	100	240	P
2	5925.00	7.73	56.18	63.91	88.20	-24.29	Peak	100	240	P
3	6445.00	8.33	66.41	74.74	200.00	-125.26	Average	100	240	P
4	6445.00	8.33	78.03	86.36	200.00	-113.64	Peak	100	240	P
5	7125.00	9.92	42.87	52.79	68.20	-15.41	Average	100	240	P
6	7125.00	9.92	55.98	65.90	88.20	-22.30	Peak	100	240	P
7	12890.00	18.06	31.24	49.30	68.20	-18.90	Average	100	218	P
8	12890.00	18.06	47.72	65.78	88.20	-22.42	Peak	100	218	P
9	19335.00	9.70	41.47	51.17	63.54	-12.37	Average	150	360	P
10	19335.00	9.70	55.85	65.55	83.54	-17.99	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx40 CH107 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

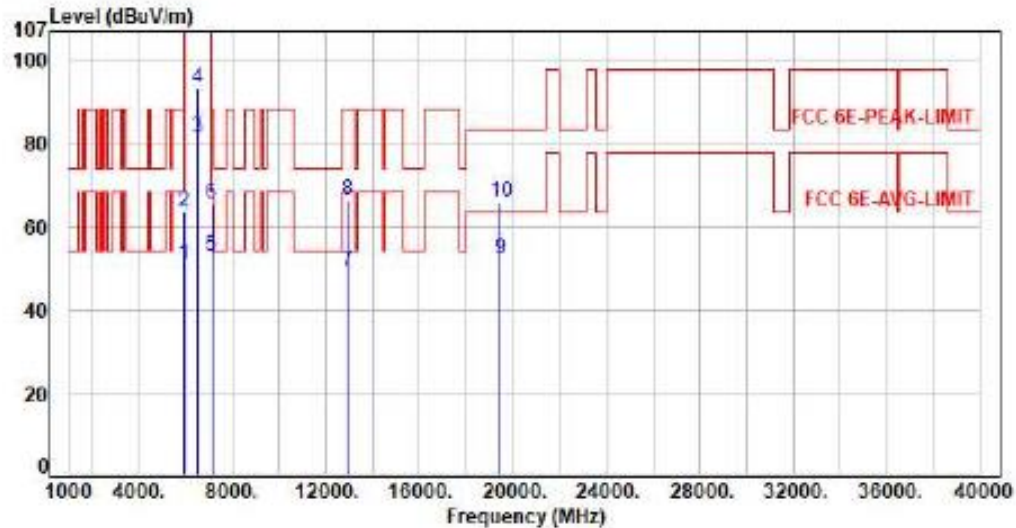

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.93	50.66	68.20	-17.54	Average	393	49	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	393	49	P
3	6485.00	8.35	73.15	81.50	200.00	-118.50	Average	393	49	P
4	6485.00	8.35	85.01	93.36	200.00	-106.64	Peak	393	49	P
5	7125.00	9.92	42.98	52.90	68.20	-15.30	Average	393	49	P
6	7125.00	9.92	55.62	65.54	88.20	-22.66	Peak	393	49	P
7	12970.00	18.48	30.57	49.05	68.20	-19.15	Average	100	115	P
8	12970.00	18.48	47.85	66.33	88.20	-21.87	Peak	100	115	P
9	19455.00	10.08	42.10	52.18	63.54	-11.36	Average	150	360	P
10	19455.00	10.08	55.89	65.97	83.54	-17.57	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x40 CH107 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

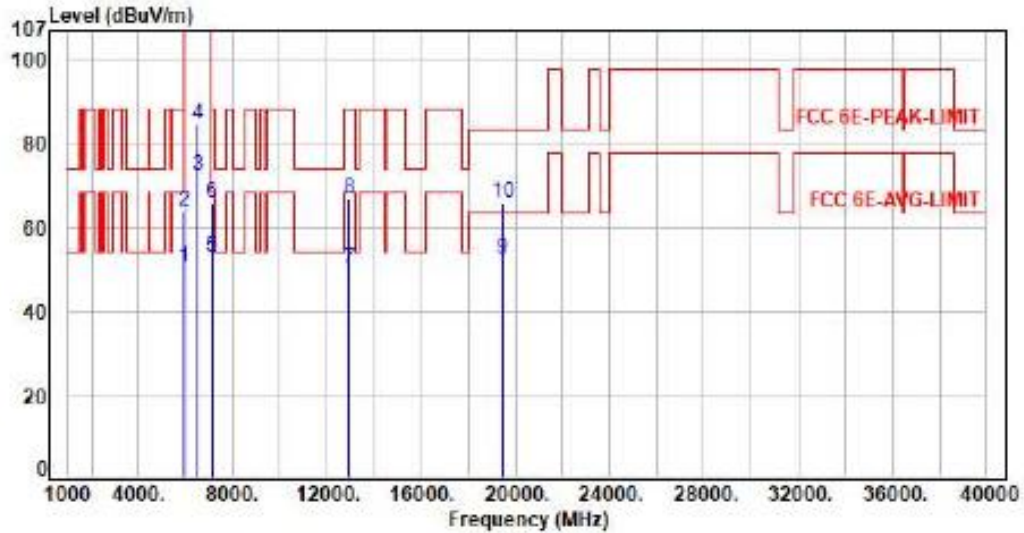

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.87	50.60	68.20	-17.60	Average	104	241	P
2	5925.00	7.73	56.14	63.87	88.20	-24.33	Peak	104	241	P
3	6485.00	8.35	64.24	72.59	200.00	-127.41	Average	104	241	P
4	6485.00	8.35	76.19	84.54	200.00	-115.46	Peak	104	241	P
5	7125.00	9.92	42.81	52.73	68.20	-15.47	Average	104	241	P
6	7125.00	9.92	55.79	65.71	88.20	-22.49	Peak	104	241	P
7	12970.00	18.48	31.48	49.96	68.20	-18.24	Average	100	220	P
8	12970.00	18.48	48.32	66.80	88.20	-21.40	Peak	100	220	P
9	19455.00	10.08	42.30	52.38	63.54	-11.16	Average	150	360	P
10	19455.00	10.08	55.87	65.95	83.54	-17.59	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

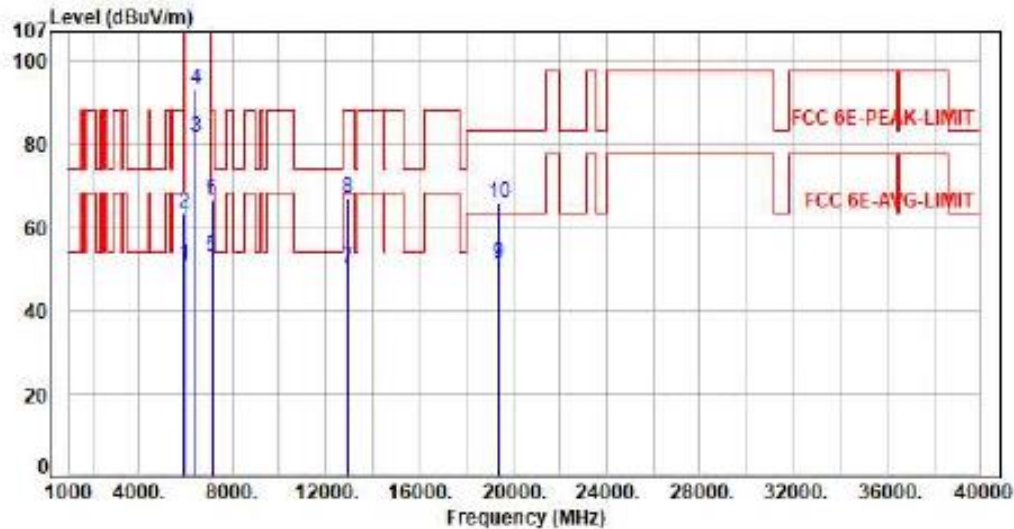

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.96	50.69	68.20	-17.51	Average	398	50	P
2	5925.00	7.73	55.74	63.47	88.20	-24.73	Peak	398	50	P
3	6465.00	8.33	73.39	81.72	200.00	-118.28	Average	398	50	P
4	6465.00	8.33	84.87	93.20	200.00	-106.80	Peak	398	50	P
5	7125.00	9.92	42.83	52.75	68.20	-15.45	Average	398	50	P
6	7125.00	9.92	56.66	66.58	88.20	-21.62	Peak	398	50	P
7	12930.00	18.27	31.86	50.13	68.20	-18.07	Average	100	113	P
8	12930.00	18.27	48.70	66.97	88.20	-21.23	Peak	100	113	P
9	19395.00	10.02	41.31	51.33	63.54	-12.21	Average	150	360	P
10	19395.00	10.02	55.79	65.81	83.54	-17.73	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax88 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

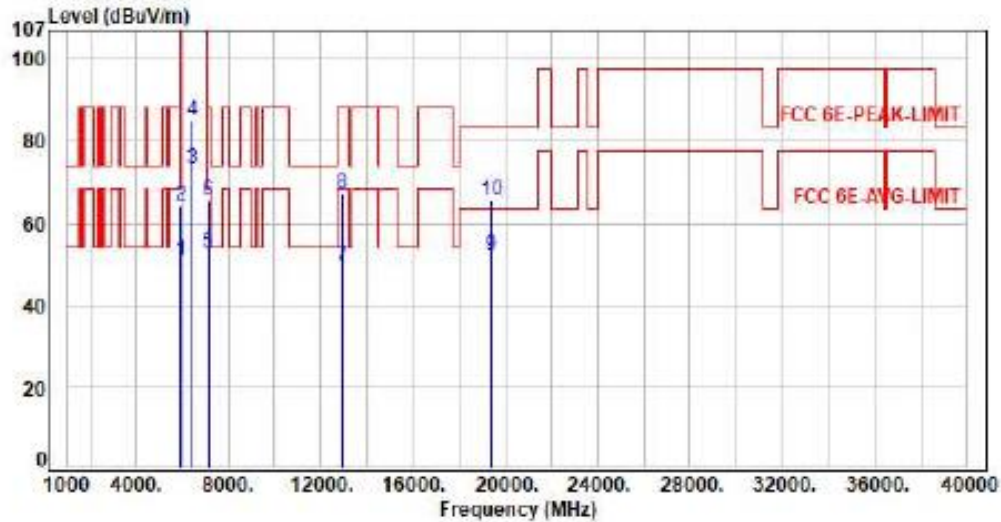

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.94	50.67	68.20	-17.53	Average	109	240	P
2	5925.00	7.73	56.41	64.14	88.20	-24.06	Peak	109	240	P
3	6465.00	8.33	65.04	73.37	200.00	-126.63	Average	109	240	P
4	6465.00	8.33	76.72	85.05	200.00	-114.95	Peak	109	240	P
5	7125.00	9.92	42.81	52.73	68.20	-15.47	Average	109	240	P
6	7125.00	9.92	55.72	65.64	88.20	-22.56	Peak	109	240	P
7	12930.00	18.27	31.56	49.83	68.20	-18.37	Average	100	221	P
8	12930.00	18.27	48.07	67.14	88.20	-21.06	Peak	100	221	P
9	19395.00	10.02	41.98	52.00	63.54	-11.54	Average	150	360	P
10	19395.00	10.02	55.39	65.41	83.54	-18.13	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO-B7

Test Mode : 2TX 11ax20 CH117 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

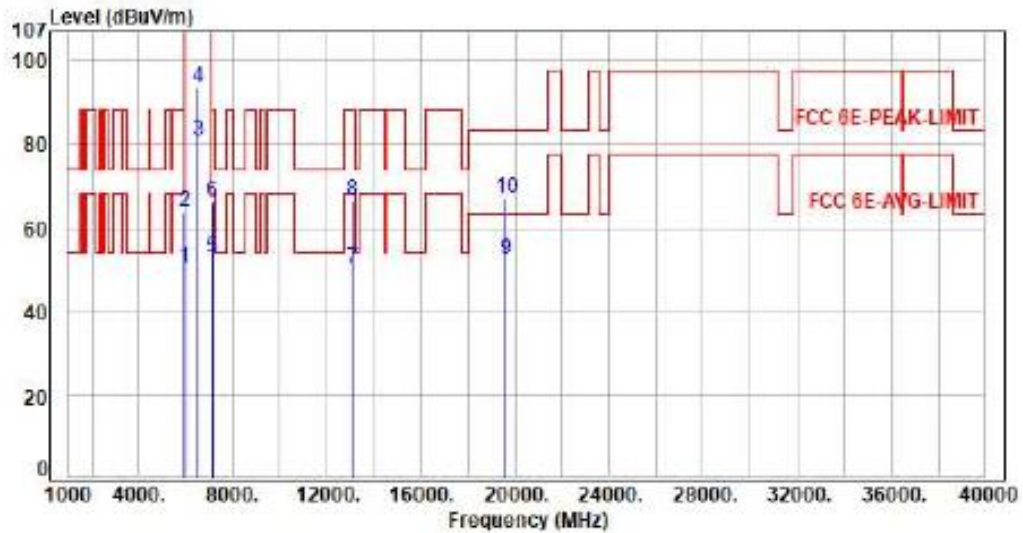

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.86	50.59	68.20	-17.61	Average	179	348	P
2	5925.00	7.73	56.26	63.99	88.20	-24.21	Peak	179	348	P
3	6535.00	8.57	72.52	81.09	200.00	-118.91	Average	179	348	P
4	6535.00	8.57	84.96	93.53	200.00	-106.47	Peak	179	348	P
5	7125.00	9.92	42.88	52.80	68.20	-15.40	Average	179	348	P
6	7125.00	9.92	56.37	66.29	88.20	-21.91	Peak	179	348	P
7	13070.00	18.92	31.45	50.37	68.20	-17.83	Average	100	119	P
8	13070.00	18.92	47.80	66.72	88.20	-21.48	Peak	100	119	P
9	19605.00	10.26	42.14	52.40	63.54	-11.14	Average	150	360	P
10	19605.00	10.26	56.87	67.13	83.54	-16.41	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

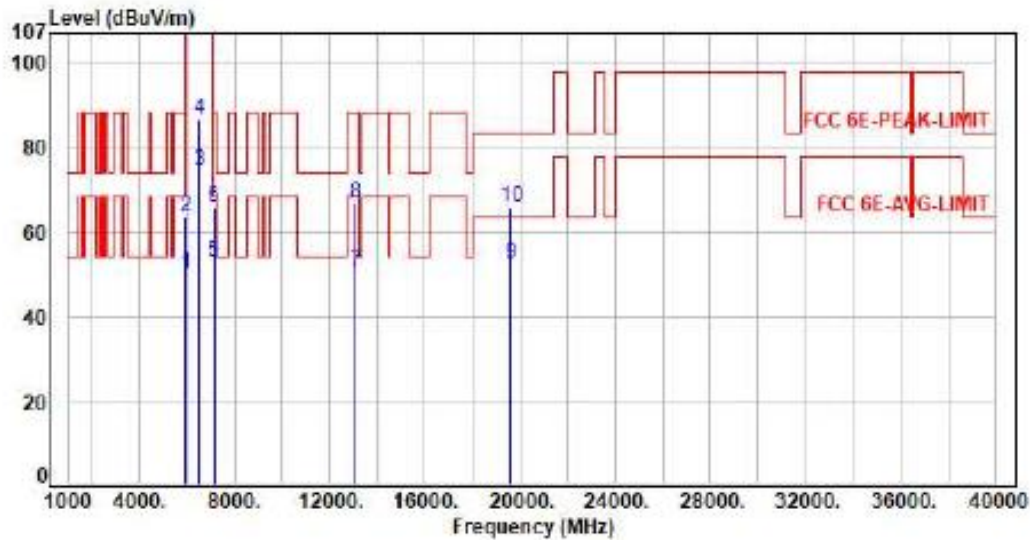

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.13	49.86	68.20	-18.34	Average	102	241	P
2	5925.00	7.73	55.82	63.55	88.20	-24.65	Peak	102	241	P
3	6535.00	8.57	65.73	74.30	200.00	-125.70	Average	102	241	P
4	6535.00	8.57	77.99	86.56	200.00	-113.44	Peak	102	241	P
5	7125.00	9.92	42.89	52.81	68.20	-15.39	Average	102	241	P
6	7125.00	9.92	56.19	66.11	88.20	-22.09	Peak	102	241	P
7	13070.00	18.92	31.53	50.45	68.20	-17.75	Average	100	221	P
8	13070.00	18.92	47.62	66.54	88.20	-21.66	Peak	100	221	P
9	19605.00	10.26	42.27	52.53	63.54	-11.01	Average	150	360	P
10	19605.00	10.26	55.73	65.99	83.54	-17.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

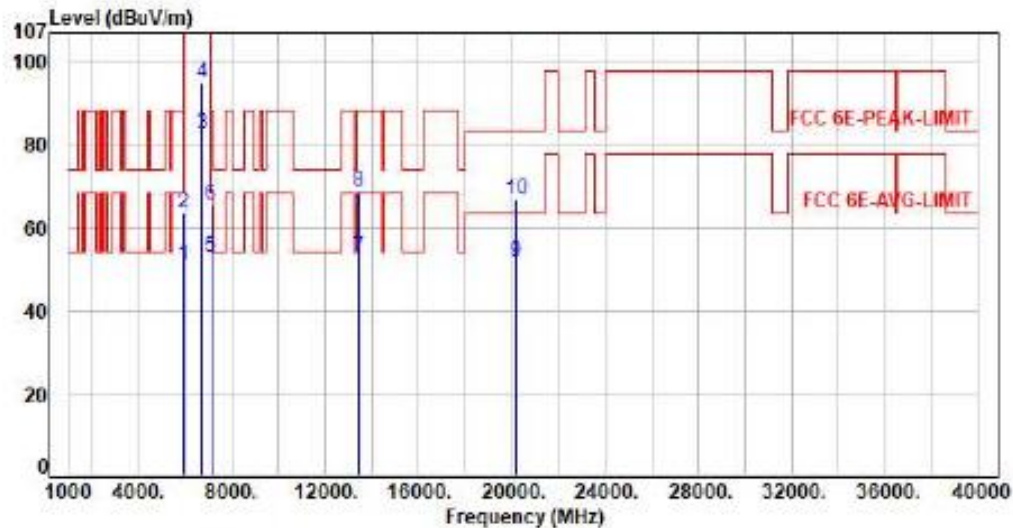

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.98	50.71	68.20	-17.49	Average	172	343	P
2	5925.00	7.73	55.92	63.65	88.20	-24.55	Peak	172	343	P
3	6715.00	9.20	73.31	82.51	200.00	-117.49	Average	172	343	P
4	6715.00	9.20	85.53	94.73	200.00	-105.27	Peak	172	343	P
5	7125.00	9.92	42.78	52.70	68.20	-15.50	Average	172	343	P
6	7125.00	9.92	55.49	65.41	88.20	-22.79	Peak	172	343	P
7	13430.00	20.57	32.41	52.98	68.20	-15.22	Average	100	115	P
8	13430.00	20.57	48.36	68.93	88.20	-19.27	Peak	100	115	P
9	20145.00	10.14	41.43	51.57	63.54	-11.97	Average	150	360	P
10	20145.00	10.14	56.38	66.52	83.54	-17.02	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

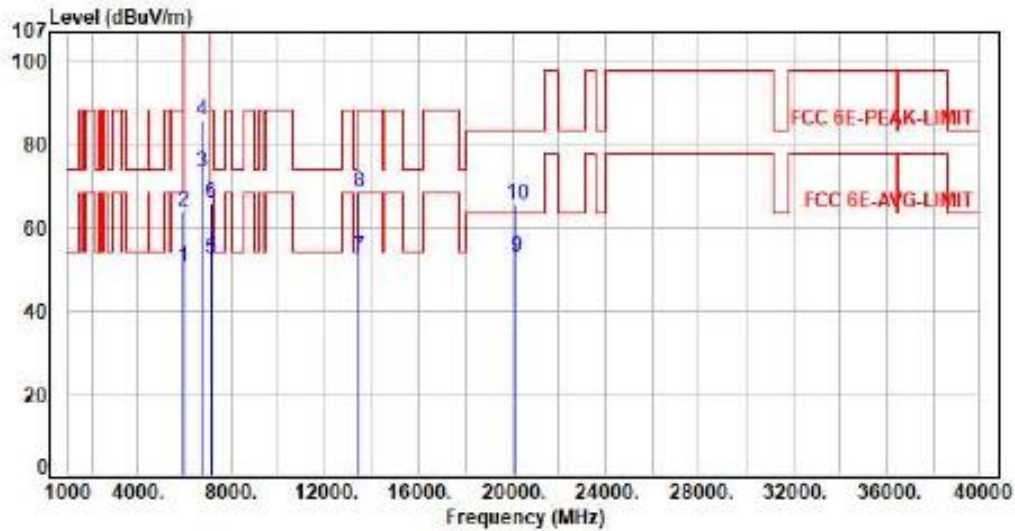

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.87	50.60	68.20	-17.60	Average	100	145	P
2	5925.00	7.73	56.28	64.01	88.20	-24.19	Peak	100	145	P
3	6715.00	9.20	64.15	73.35	200.00	-126.65	Average	100	145	P
4	6715.00	9.20	76.77	85.97	200.00	-114.03	Peak	100	145	P
5	7125.00	9.92	42.75	52.67	68.20	-15.53	Average	100	145	P
6	7125.00	9.92	55.96	65.88	88.20	-22.32	Peak	100	145	P
7	13430.00	20.57	32.22	52.79	68.20	-15.41	Average	100	217	P
8	13430.00	20.57	47.94	68.51	88.20	-19.69	Peak	100	217	P
9	20145.00	10.14	42.88	53.02	63.54	-10.52	Average	150	360	P
10	20145.00	10.14	55.39	65.53	83.54	-18.01	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx20 CH181 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

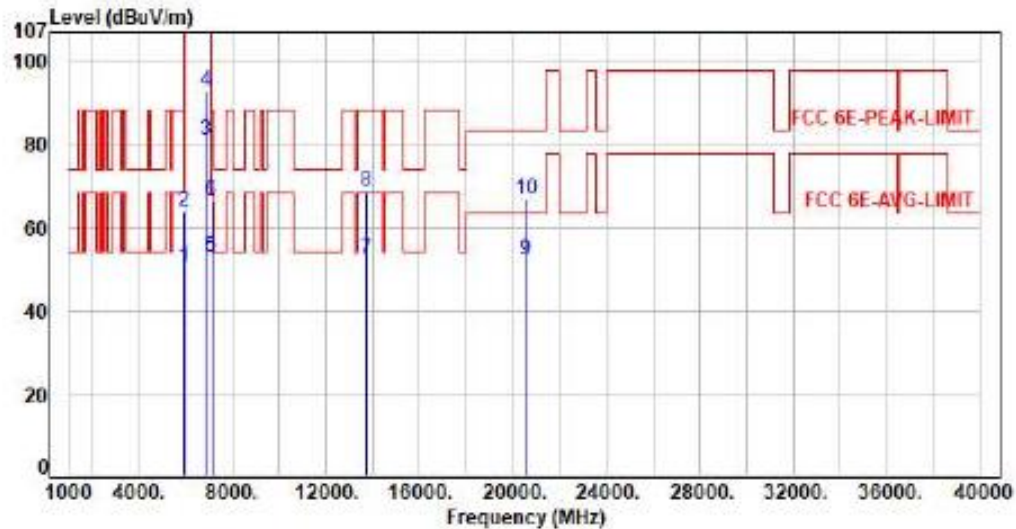

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.86	50.59	68.20	-17.61	Average	156	344	P
2	5925.00	7.73	55.97	63.70	88.20	-24.50	Peak	156	344	P
3	6855.00	9.48	71.28	80.76	200.00	-119.24	Average	156	344	P
4	6855.00	9.48	83.19	92.67	200.00	-107.33	Peak	156	344	P
5	7125.00	9.92	42.79	52.71	68.20	-15.49	Average	156	344	P
6	7125.00	9.92	56.42	66.34	88.20	-21.86	Peak	156	344	P
7	13710.00	21.36	31.09	52.45	68.20	-15.75	Average	100	115	P
8	13710.00	21.36	47.42	68.78	88.20	-19.42	Peak	100	115	P
9	20565.00	9.83	42.39	52.22	63.54	-11.32	Average	150	360	P
10	20565.00	9.83	56.79	66.62	83.54	-16.92	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

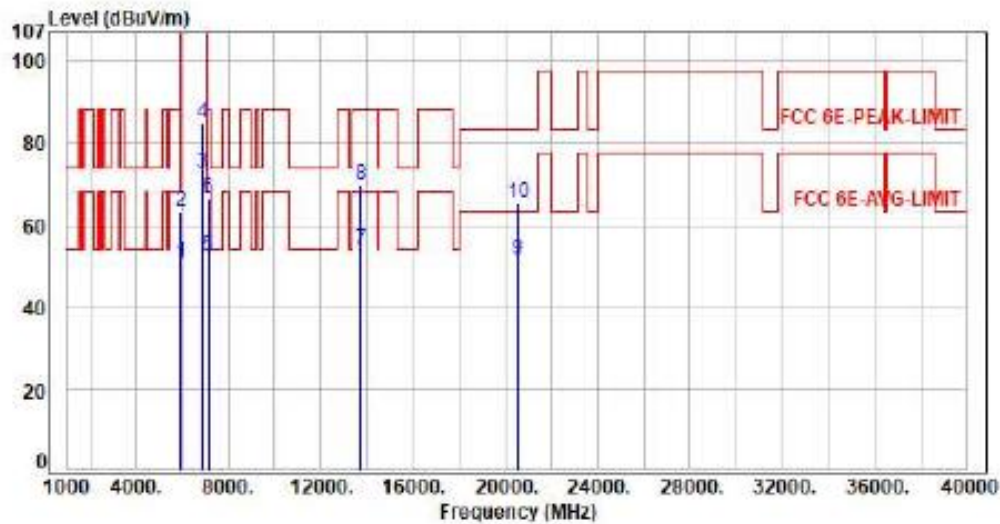

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.07	50.80	68.20	-17.40	Average	112	239	P
2	5925.00	7.73	55.72	63.45	88.20	-24.75	Peak	112	239	P
3	6855.00	9.48	63.20	72.68	200.00	-127.32	Average	112	239	P
4	6855.00	9.48	75.51	84.99	200.00	-115.01	Peak	112	239	P
5	7125.00	9.92	42.74	52.66	68.20	-15.54	Average	112	239	P
6	7125.00	9.92	56.98	66.90	88.20	-21.30	Peak	112	239	P
7	13710.00	21.36	32.63	53.99	68.20	-14.21	Average	100	221	P
8	13710.00	21.36	48.75	70.11	88.20	-18.09	Peak	100	221	P
9	20565.00	9.83	41.69	51.52	63.54	-12.02	Average	150	360	P
10	20565.00	9.83	55.85	65.68	83.54	-17.86	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

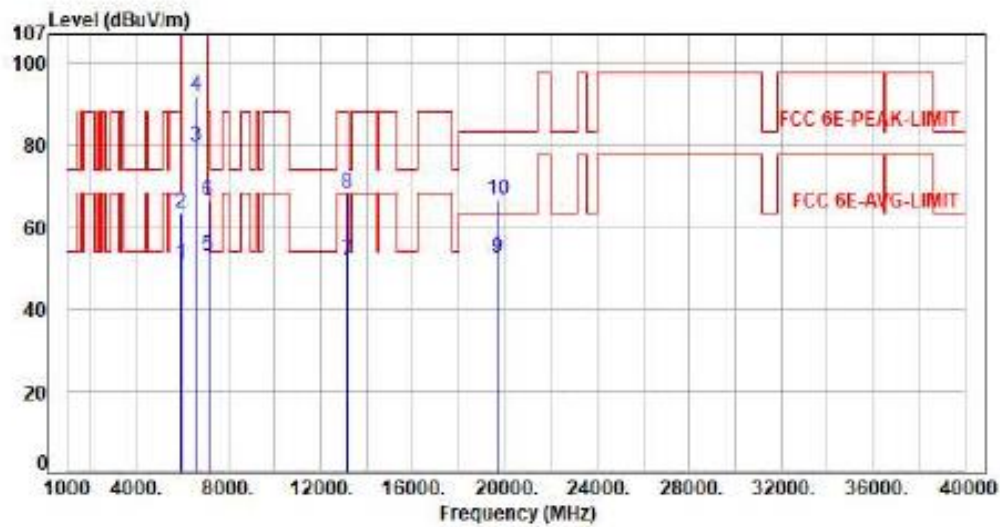

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.98	50.71	68.20	-17.49	Average	172	10	P
2	5925.00	7.73	55.64	63.37	88.20	-24.83	Peak	172	10	P
3	6565.00	8.72	70.99	79.71	200.00	-120.29	Average	172	10	P
4	6565.00	8.72	83.09	91.81	200.00	-108.19	Peak	172	10	P
5	7125.00	9.92	42.99	52.91	68.20	-15.29	Average	172	10	P
6	7125.00	9.92	56.21	66.13	88.20	-22.07	Peak	172	10	P
7	13130.00	19.16	32.38	51.54	68.20	-16.66	Average	100	118	P
8	13130.00	19.16	49.07	68.23	88.20	-19.97	Peak	100	118	P
9	19695.00	10.65	41.63	52.28	63.54	-11.26	Average	150	360	P
10	19695.00	10.65	56.08	66.73	83.54	-16.81	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax48 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

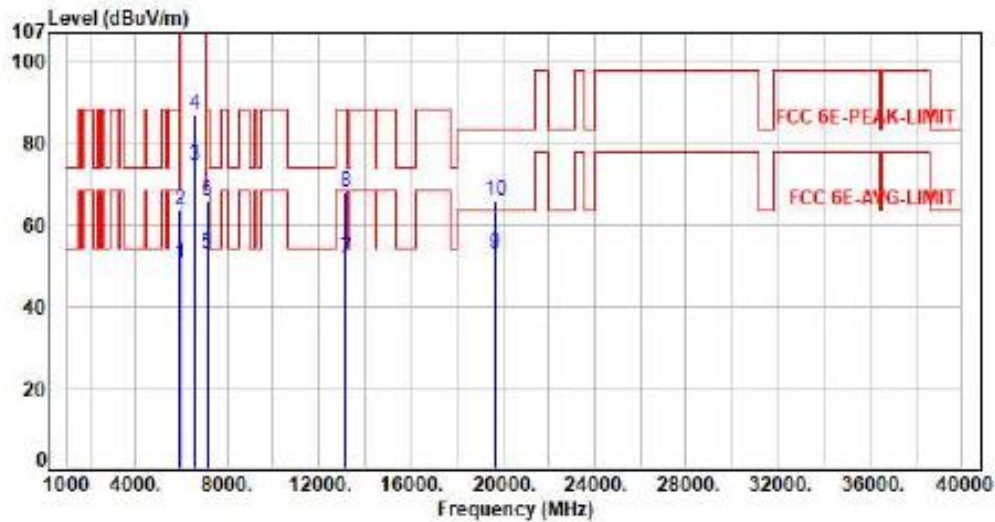

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.88	50.61	68.20	-17.59	Average	102	240	P
2	5925.00	7.73	55.73	63.46	88.20	-24.74	Peak	102	240	P
3	6565.00	8.72	65.75	74.47	200.00	-125.53	Average	102	240	P
4	6565.00	8.72	78.38	87.10	200.00	-112.90	Peak	102	240	P
5	7125.00	9.92	42.92	52.84	68.20	-15.36	Average	102	240	P
6	7125.00	9.92	56.13	66.05	88.20	-22.15	Peak	102	240	P
7	13130.00	19.16	32.40	51.56	68.20	-16.64	Average	100	209	P
8	13130.00	19.16	48.59	67.75	88.20	-20.45	Peak	100	209	P
9	19695.00	10.65	42.13	52.78	63.54	-10.76	Average	150	360	P
10	19695.00	10.65	55.38	66.03	83.54	-17.51	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

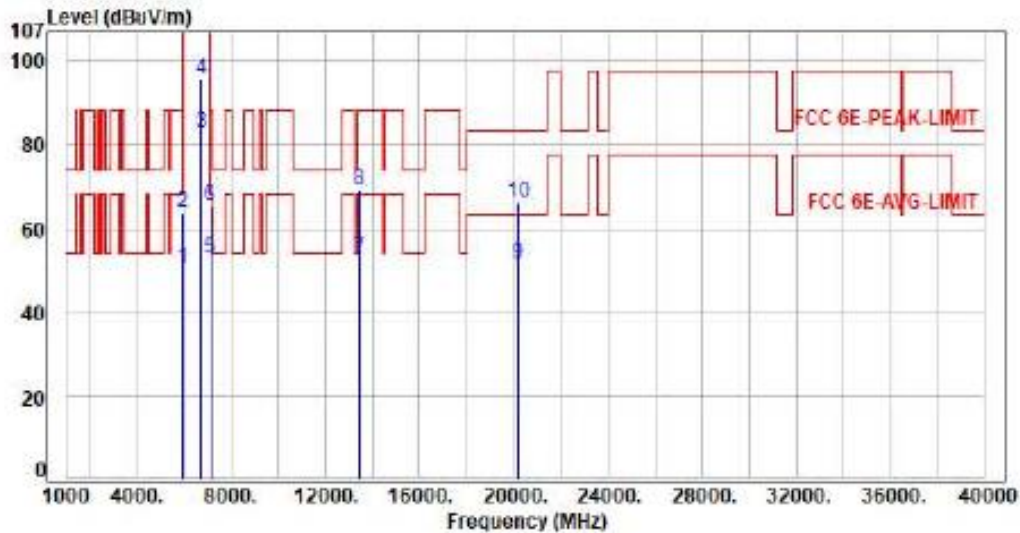

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.84	50.57	68.20	-17.63	Average	154	62	P
2	5925.00	7.73	56.02	63.75	88.20	-24.45	Peak	154	62	P
3	6725.00	9.22	73.69	82.91	200.00	-117.09	Average	154	62	P
4	6725.00	9.22	86.22	95.44	200.00	-104.56	Peak	154	62	P
5	7125.00	9.92	42.78	52.70	68.20	-15.50	Average	154	62	P
6	7125.00	9.92	55.77	65.69	88.20	-22.51	Peak	154	62	P
7	13450.00	20.62	32.39	53.01	68.20	-15.19	Average	100	113	P
8	13450.00	20.62	48.70	69.32	88.20	-18.88	Peak	100	113	P
9	20175.00	10.28	41.30	51.58	63.54	-11.96	Average	150	360	P
10	20175.00	10.28	55.96	66.24	83.54	-17.30	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

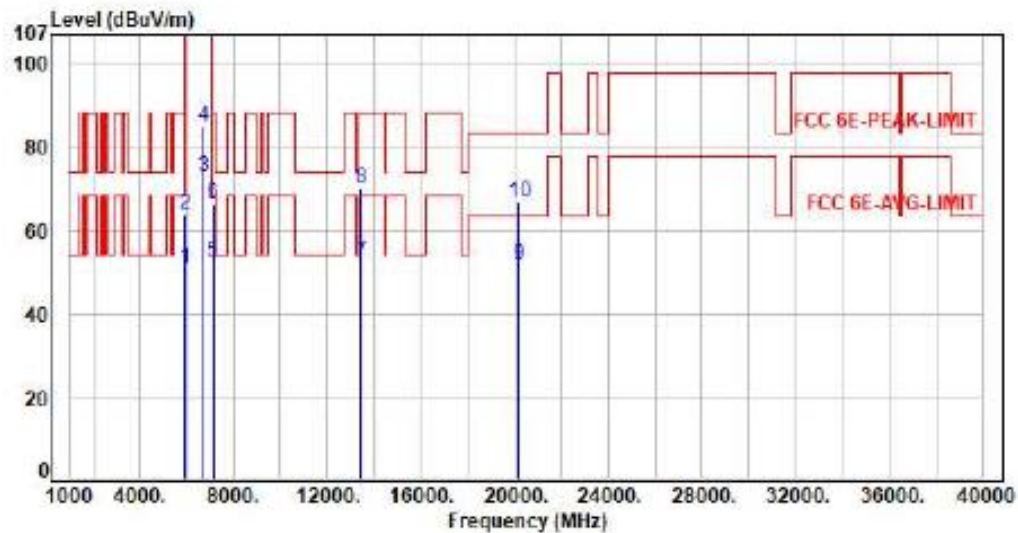

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.93	50.66	68.20	-17.54	Average	276	239	P
2	5925.00	7.73	56.22	63.95	88.20	-24.25	Peak	276	239	P
3	6725.00	9.22	63.78	73.00	200.00	-127.00	Average	276	239	P
4	6725.00	9.22	75.76	84.98	200.00	-115.02	Peak	276	239	P
5	7125.00	9.92	42.72	52.64	68.20	-15.56	Average	276	239	P
6	7125.00	9.92	56.21	66.13	88.20	-22.07	Peak	276	239	P
7	13450.00	20.62	32.06	52.68	68.20	-15.52	Average	100	219	P
8	13450.00	20.62	49.34	69.96	88.20	-18.24	Peak	100	219	P
9	20175.00	10.28	41.57	51.85	63.54	-11.69	Average	150	360	P
10	20175.00	10.28	56.39	66.67	83.54	-16.87	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

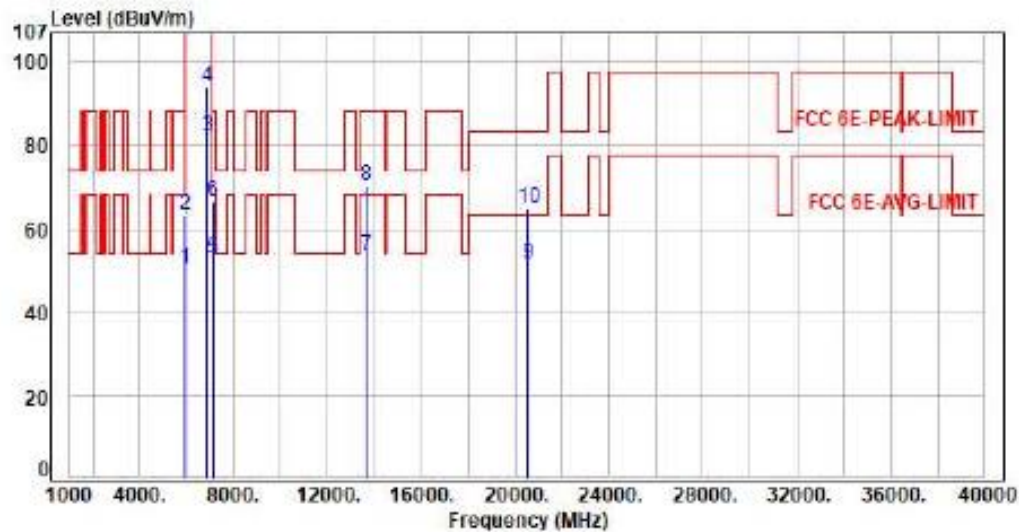

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.87	50.60	68.20	-17.60	Average	167	348	P
2	5925.00	7.73	55.68	63.41	88.20	-24.79	Peak	167	348	P
3	6845.00	9.48	72.81	82.29	200.00	-117.71	Average	167	348	P
4	6845.00	9.48	84.56	94.04	200.00	-105.96	Peak	167	348	P
5	7125.00	9.92	42.82	52.74	68.20	-15.46	Average	167	348	P
6	7125.00	9.92	56.96	66.88	88.20	-21.32	Peak	167	348	P
7	13690.00	21.28	32.37	53.65	68.20	-14.55	Average	100	117	P
8	13690.00	21.28	48.93	70.21	88.20	-17.99	Peak	100	117	P
9	20535.00	9.90	41.84	51.74	63.54	-11.80	Average	150	360	P
10	20535.00	9.90	55.38	65.28	83.54	-18.26	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

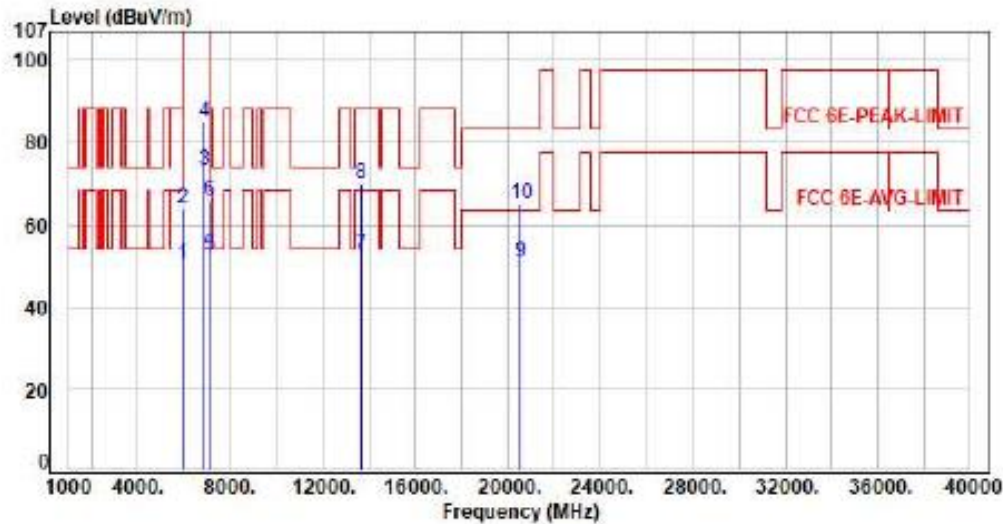

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.92	50.65	68.20	-17.55	Average	100	238	P
2	5925.00	7.73	56.04	63.77	88.20	-24.43	Peak	100	238	P
3	6845.00	9.48	63.61	73.09	200.00	-126.91	Average	100	238	P
4	6845.00	9.48	75.75	85.23	200.00	-114.77	Peak	100	238	P
5	7125.00	9.92	42.66	52.58	68.20	-15.62	Average	100	238	P
6	7125.00	9.92	56.08	66.00	88.20	-22.20	Peak	100	238	P
7	13690.00	21.28	31.76	53.04	68.20	-15.16	Average	100	216	P
8	13690.00	21.28	48.58	69.86	88.20	-18.34	Peak	100	216	P
9	20535.00	9.90	41.13	51.03	63.54	-12.51	Average	150	360	P
10	20535.00	9.90	55.28	65.18	83.54	-18.36	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

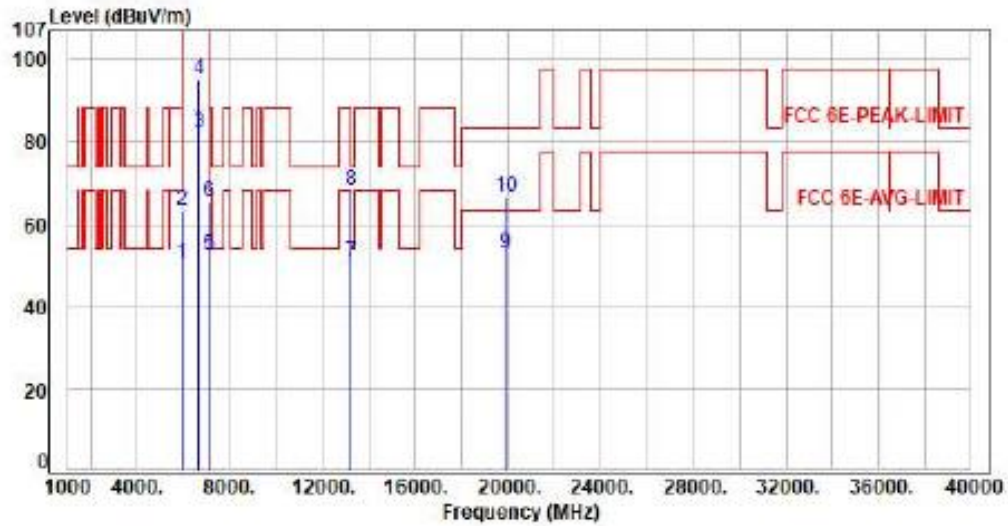

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.87	50.60	68.20	-17.60	Average	160	75	P
2	5925.00	7.73	55.89	63.62	88.20	-24.58	Peak	160	75	P
3	6625.00	8.97	73.15	82.12	200.00	-117.88	Average	160	75	P
4	6625.00	8.97	86.38	95.35	200.00	-104.65	Peak	160	75	P
5	7125.00	9.92	42.68	52.60	68.20	-15.60	Average	160	75	P
6	7125.00	9.92	55.75	65.67	88.20	-22.53	Peak	160	75	P
7	13250.00	19.81	31.21	51.02	54.00	-2.98	Average	100	115	P
8	13250.00	19.81	48.65	68.46	74.00	-5.54	Peak	100	115	P
9	19875.00	10.41	42.60	53.01	63.54	-10.53	Average	150	360	P
10	19875.00	10.41	56.35	66.76	83.54	-16.78	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MC50
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

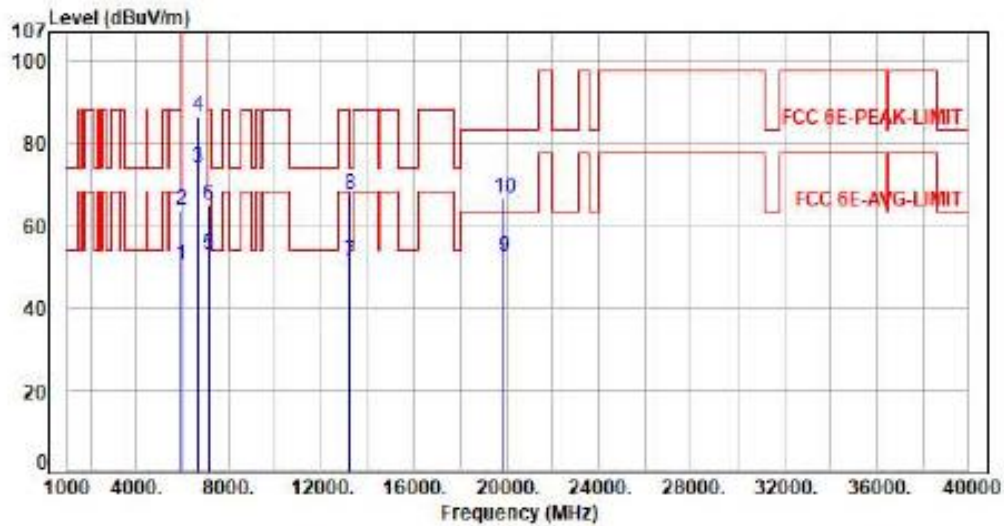

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.84	50.57	68.20	-17.63	Average	102	241	P
2	5925.00	7.73	56.19	63.92	88.20	-24.28	Peak	102	241	P
3	6625.00	8.97	64.95	73.92	200.00	-126.08	Average	102	241	P
4	6625.00	8.97	77.88	86.85	200.00	-113.15	Peak	102	241	P
5	7125.00	9.92	42.85	52.77	68.20	-15.43	Average	102	241	P
6	7125.00	9.92	55.34	65.26	88.20	-22.94	Peak	102	241	P
7	13250.00	19.81	31.48	51.29	54.00	-2.71	Average	100	213	P
8	13250.00	19.81	47.87	67.68	74.00	-6.32	Peak	100	213	P
9	19875.00	10.41	42.01	52.42	63.54	-11.12	Average	150	360	P
10	19875.00	10.41	56.38	66.79	83.54	-16.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11axB0 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

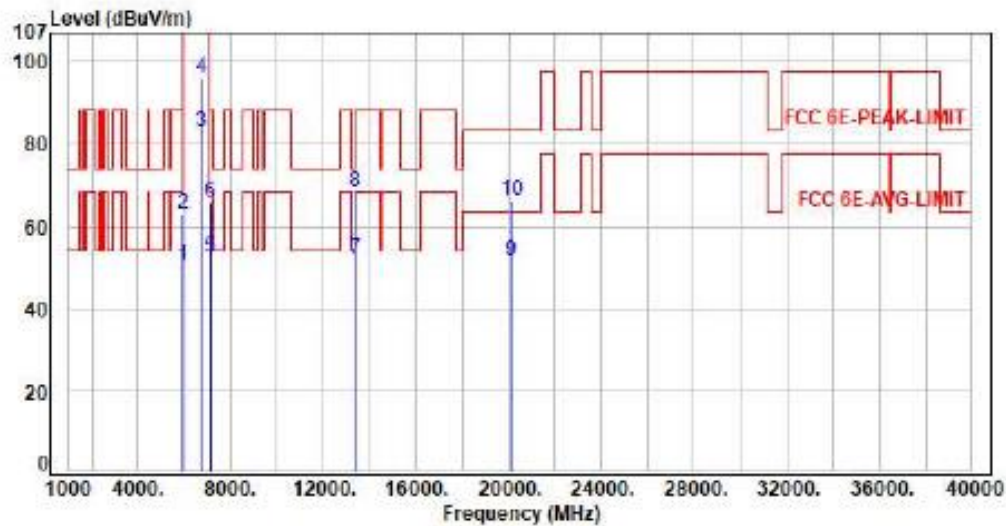

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.85	50.58	68.20	-17.62	Average	173	345	P
2	5925.00	7.73	55.36	63.09	88.20	-25.11	Peak	173	345	P
3	6705.00	9.18	74.02	83.20	200.00	-116.80	Average	173	345	P
4	6705.00	9.18	86.76	95.94	200.00	-104.06	Peak	173	345	P
5	7125.00	9.92	42.74	52.66	68.20	-15.54	Average	173	345	P
6	7125.00	9.92	55.80	65.72	88.20	-22.48	Peak	173	345	P
7	13410.00	20.53	31.48	52.01	68.20	-16.19	Average	100	119	P
8	13410.00	20.53	47.82	68.35	88.20	-19.85	Peak	100	119	P
9	20115.00	10.11	41.53	51.64	63.54	-11.90	Average	150	360	P
10	20115.00	10.11	56.20	66.31	83.54	-17.23	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

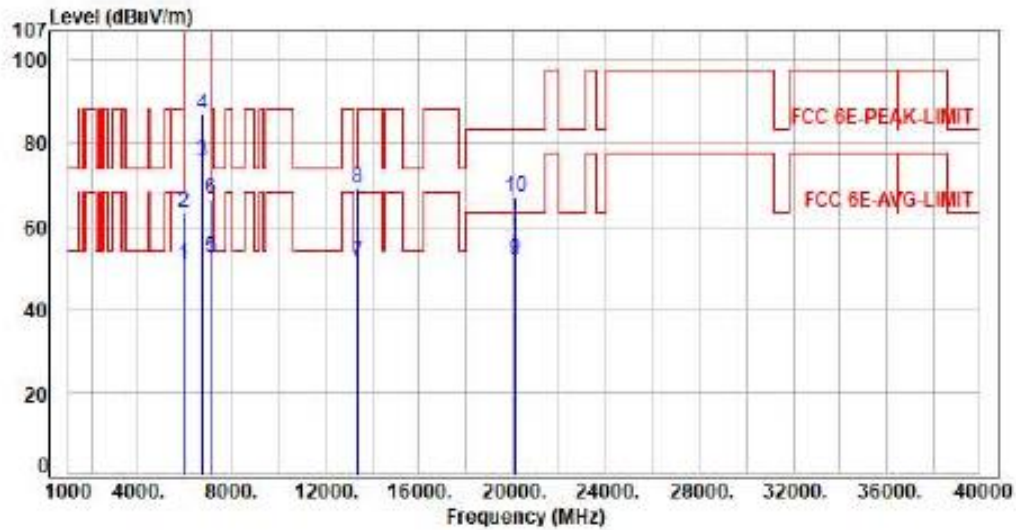

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.96	50.69	68.20	-17.51	Average	113	240	P
2	5925.00	7.73	55.57	63.30	88.20	-24.90	Peak	113	240	P
3	6705.00	9.18	66.39	75.57	200.00	-124.43	Average	113	240	P
4	6705.00	9.18	78.08	87.26	200.00	-112.74	Peak	113	240	P
5	7125.00	9.92	42.76	52.68	68.20	-15.52	Average	113	240	P
6	7125.00	9.92	56.67	66.59	88.20	-21.61	Peak	113	240	P
7	13410.00	20.53	31.29	51.82	68.20	-16.38	Average	100	218	P
8	13410.00	20.53	48.50	69.03	88.20	-19.17	Peak	100	218	P
9	20115.00	10.11	41.79	51.90	63.54	-11.64	Average	150	360	P
10	20115.00	10.11	56.90	67.01	83.54	-16.53	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

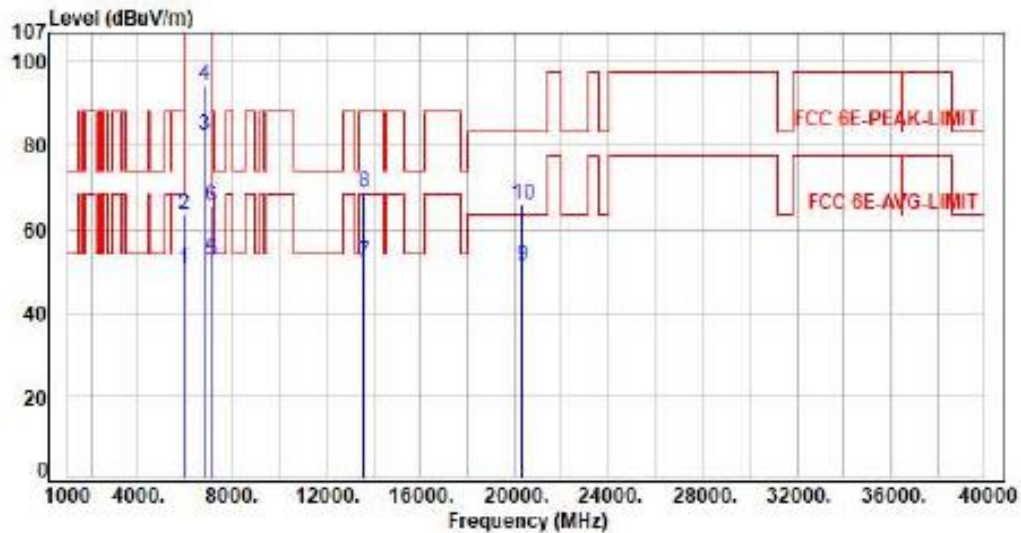

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.89	50.62	68.20	-17.58	Average	169	343	P
2	5925.00	7.73	55.55	63.28	88.20	-24.92	Peak	169	343	P
3	6785.00	9.41	73.20	82.61	200.00	-117.39	Average	169	343	P
4	6785.00	9.41	85.17	94.58	200.00	-105.42	Peak	169	343	P
5	7125.00	9.92	42.75	52.67	68.20	-15.53	Average	169	343	P
6	7125.00	9.92	55.48	65.40	88.20	-22.80	Peak	169	343	P
7	13570.00	20.80	31.41	52.21	68.20	-15.99	Average	100	116	P
8	13570.00	20.80	47.76	68.56	88.20	-19.64	Peak	100	116	P
9	20355.00	9.98	41.47	51.45	63.54	-12.09	Average	150	360	P
10	20355.00	9.98	55.83	65.81	83.54	-17.73	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

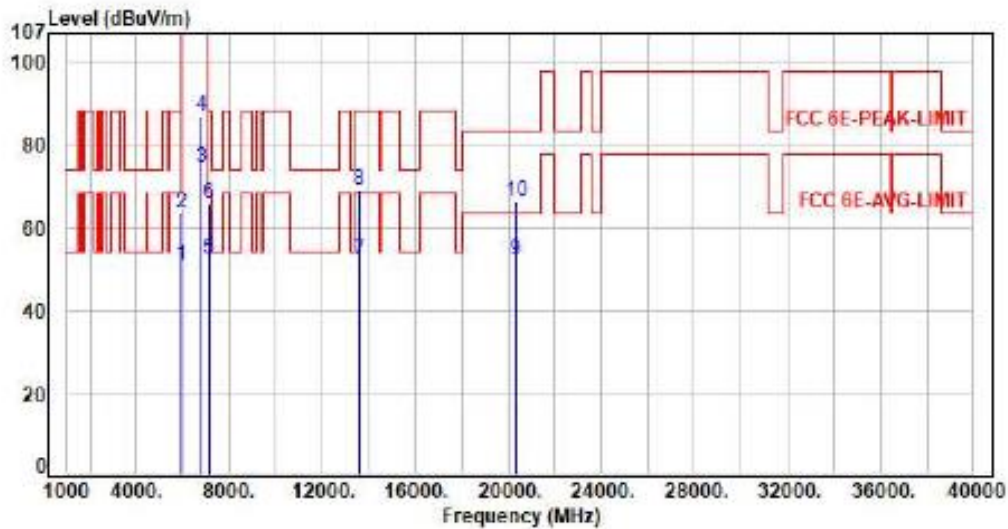

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.94	50.67	68.20	-17.53	Average	100	240	P
2	5925.00	7.73	55.81	63.54	88.20	-24.66	Peak	100	240	P
3	6785.00	9.41	64.87	74.28	200.00	-125.72	Average	100	240	P
4	6785.00	9.41	77.79	87.20	200.00	-112.80	Peak	100	240	P
5	7125.00	9.92	42.71	52.63	68.20	-15.57	Average	100	240	P
6	7125.00	9.92	55.99	65.91	88.20	-22.29	Peak	100	240	P
7	13570.00	20.80	31.17	51.97	68.20	-16.23	Average	100	216	P
8	13570.00	20.80	48.48	69.28	88.20	-18.92	Peak	100	216	P
9	20355.00	9.98	42.00	51.98	63.54	-11.56	Average	150	360	P
10	20355.00	9.98	56.30	66.28	83.54	-17.26	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 MS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

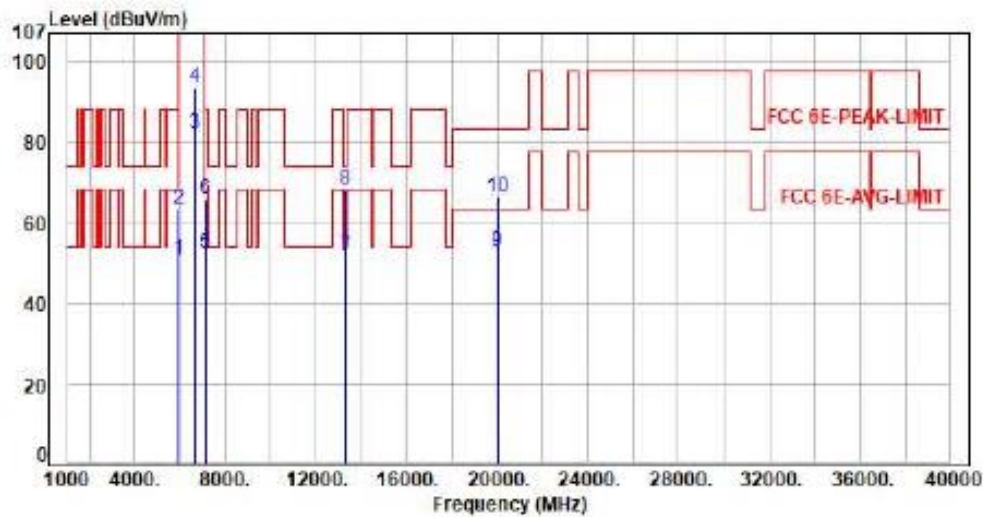

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.06	50.79	68.20	-17.41	Average	182	344	P
2	5925.00	7.73	55.91	63.64	88.20	-24.56	Peak	182	344	P
3	6665.00	9.10	72.92	82.02	200.00	-117.98	Average	182	344	P
4	6665.00	9.10	84.40	93.50	200.00	-106.50	Peak	182	344	P
5	7125.00	9.92	42.69	52.61	68.20	-15.59	Average	182	344	P
6	7125.00	9.92	56.04	65.96	88.20	-22.24	Peak	182	344	P
7	13330.00	20.17	31.69	51.86	54.00	-2.14	Average	100	118	P
8	13330.00	20.17	48.20	68.37	74.00	-5.63	Peak	100	118	P
9	19995.00	10.55	42.38	52.93	63.54	-10.61	Average	150	360	P
10	19995.00	10.55	55.87	66.42	83.54	-17.12	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

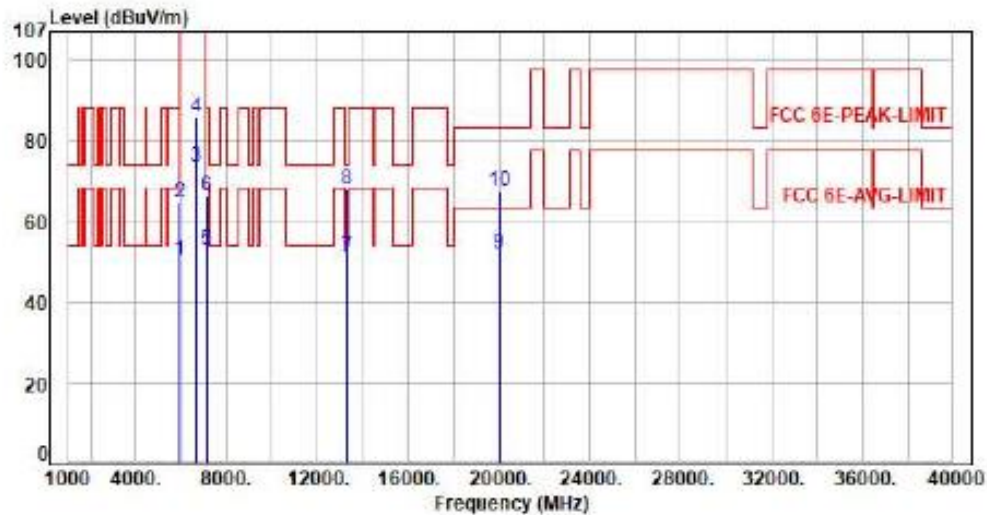

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.84	50.57	68.20	-17.63	Average	100	240	P
2	5925.00	7.73	56.80	64.53	88.20	-23.67	Peak	100	240	P
3	6665.00	9.10	64.57	73.67	200.00	-126.33	Average	100	240	P
4	6665.00	9.10	76.81	85.91	200.00	-114.09	Peak	100	240	P
5	7125.00	9.92	42.85	52.77	68.20	-15.43	Average	100	240	P
6	7125.00	9.92	56.58	66.50	88.20	-21.70	Peak	100	240	P
7	13330.00	20.17	31.20	51.37	54.00	-2.63	Average	100	216	P
8	13330.00	20.17	47.66	67.83	74.00	-6.17	Peak	100	216	P
9	19995.00	10.55	41.39	51.94	63.54	-11.60	Average	150	360	P
10	19995.00	10.55	56.88	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO-B8

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

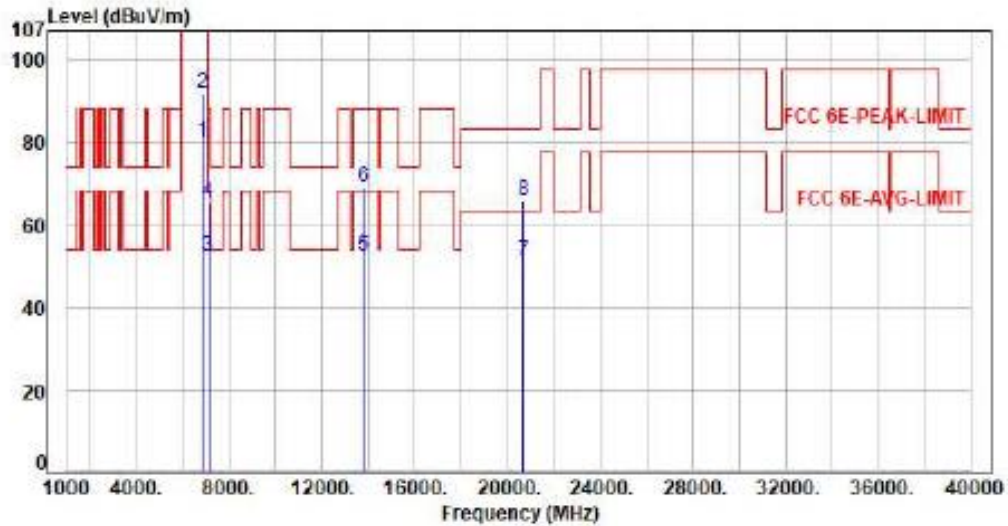

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	70.57	80.05	200.00	-119.95	Average	154	343	P
2	6895.00	9.48	82.48	91.96	200.00	-108.04	Peak	154	343	P
3	7125.00	9.92	42.75	52.67	68.20	-15.53	Average	154	343	P
4	7125.00	9.92	55.65	65.57	88.20	-22.63	Peak	154	343	P
5	13790.00	21.66	30.95	52.61	68.20	-15.59	Average	100	117	P
6	13790.00	21.66	47.69	69.35	88.20	-18.85	Peak	100	117	P
7	20685.00	9.82	41.28	51.10	63.54	-12.44	Average	150	360	P
8	20685.00	9.82	56.28	66.10	83.54	-17.44	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX-11ex20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

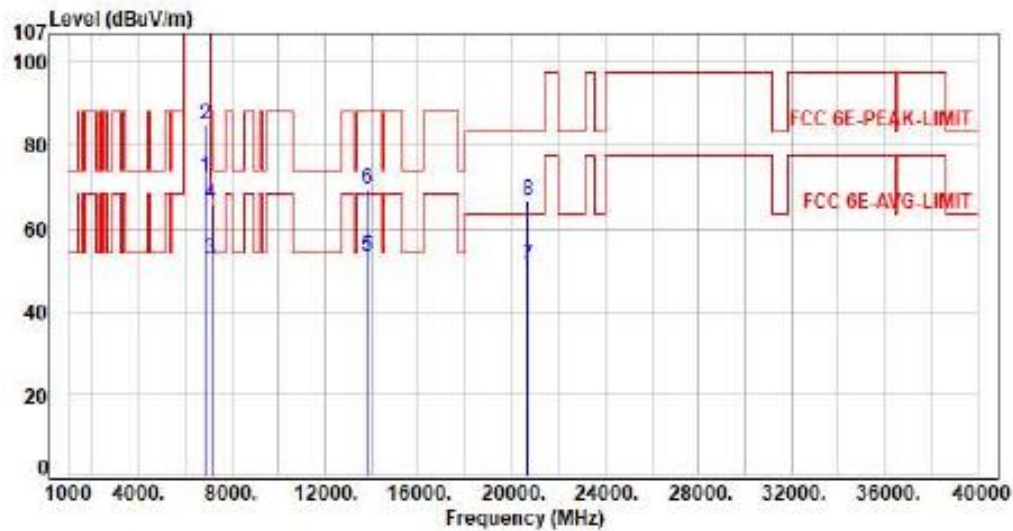

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	62.97	72.45	200.00	-127.55	Average	102	238	P
2	6895.00	9.48	75.73	85.21	200.00	-114.79	Peak	102	238	P
3	7125.00	9.92	42.75	52.67	68.20	-15.53	Average	102	238	P
4	7125.00	9.92	55.83	65.75	88.20	-22.45	Peak	102	238	P
5	13790.00	21.66	31.52	53.18	68.20	-15.02	Average	100	220	P
6	13790.00	21.66	47.76	69.42	88.20	-18.78	Peak	100	220	P
7	20685.00	9.82	41.28	51.10	63.54	-12.44	Average	150	360	P
8	20685.00	9.82	56.73	66.55	83.54	-16.99	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

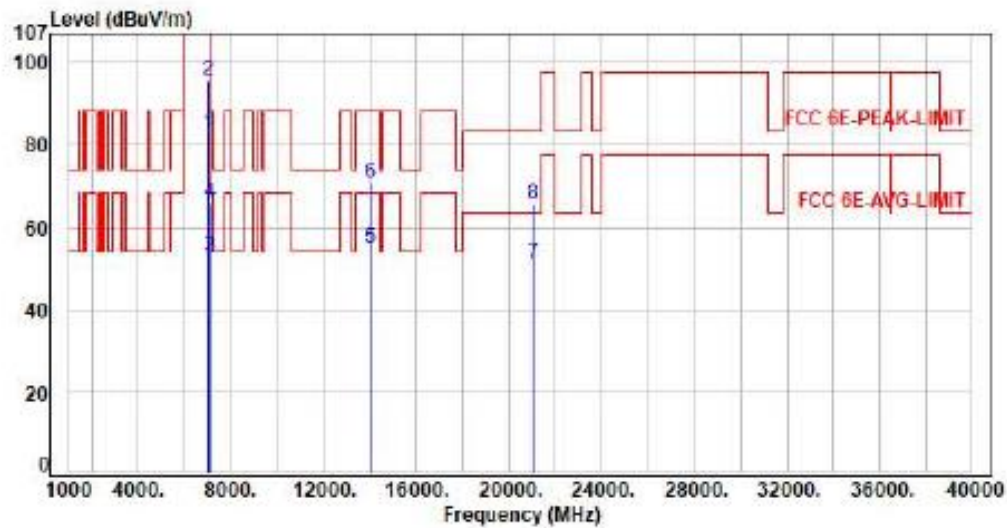

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	73.27	82.86	200.00	-117.14	Average	172	61	P
2	7015.00	9.59	86.16	95.75	200.00	-104.25	Peak	172	61	P
3	7125.00	9.92	42.78	52.70	68.20	-15.50	Average	172	61	P
4	7125.00	9.92	56.06	65.98	88.20	-22.22	Peak	172	61	P
5	14030.00	22.33	32.65	54.98	68.20	-13.22	Average	100	114	P
6	14030.00	22.33	48.62	70.95	88.20	-17.25	Peak	100	114	P
7	21045.00	10.28	41.07	51.35	63.54	-12.19	Average	150	360	P
8	21045.00	10.28	55.18	65.46	83.54	-18.08	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

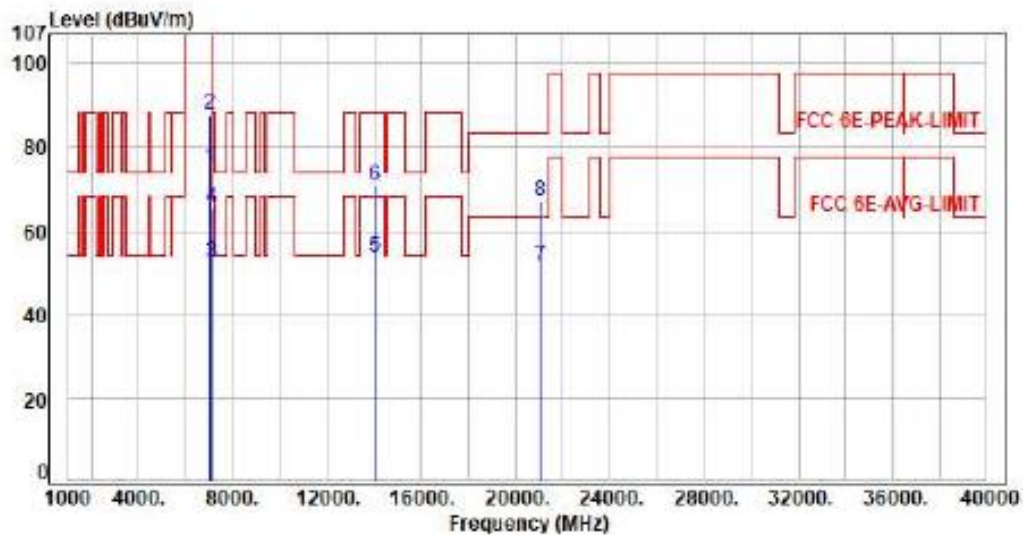

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	65.74	75.33	200.00	-124.67	Average	179	144	P
2	7015.00	9.59	78.28	87.87	200.00	-112.13	Peak	179	144	P
3	7125.00	9.92	42.66	52.58	68.20	-15.62	Average	179	144	P
4	7125.00	9.92	55.59	65.51	88.20	-22.69	Peak	179	144	P
5	14030.00	22.33	31.52	53.85	68.20	-14.35	Average	100	216	P
6	14030.00	22.33	48.59	70.92	88.20	-17.28	Peak	100	216	P
7	21045.00	10.28	41.20	51.48	63.54	-12.06	Average	150	360	P
8	21045.00	10.28	56.75	67.03	83.54	-16.51	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

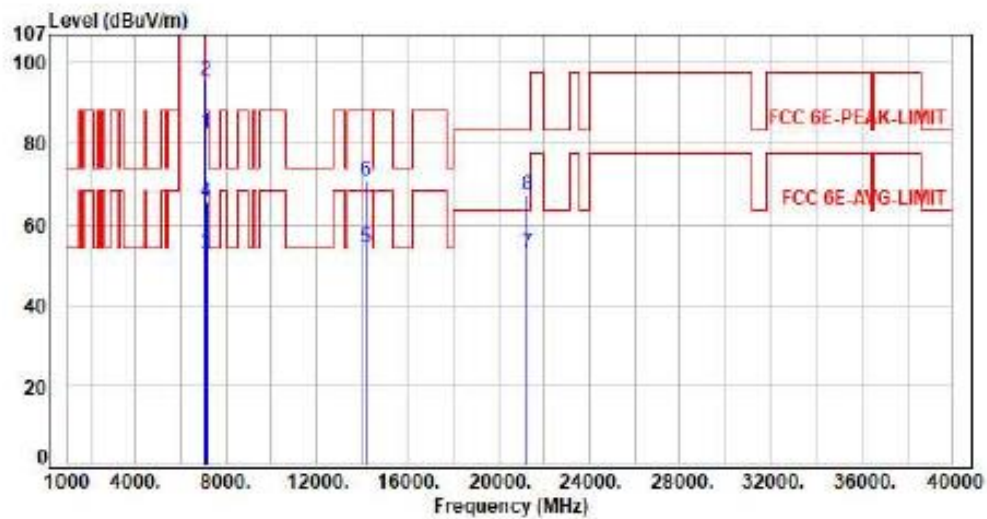

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	72.83	82.62	200.00	-117.38	Average	141	347	P
2	7095.00	9.79	85.70	95.49	200.00	-104.51	Peak	141	347	P
3	7125.00	9.92	42.69	52.61	88.20	-15.59	Average	141	347	P
4	7125.00	9.92	55.61	65.53	88.20	-22.67	Peak	141	347	P
5	14190.00	22.77	31.50	54.27	88.20	-13.93	Average	100	116	P
6	14190.00	22.77	47.94	70.71	88.20	-17.49	Peak	100	116	P
7	21285.00	10.94	41.94	52.88	63.54	-10.66	Average	150	360	P
8	21285.00	10.94	56.36	67.30	83.54	-16.24	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

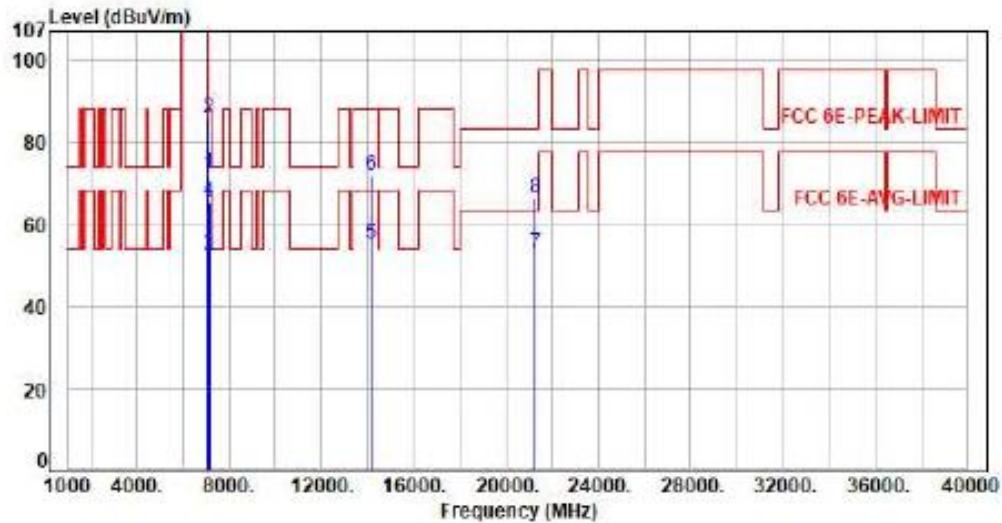

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	62.79	72.58	200.00	-127.42	Average	101	227	P
2	7095.00	9.79	76.15	85.94	200.00	-114.06	Peak	101	227	P
3	7125.00	9.92	42.59	52.51	68.20	-15.69	Average	101	227	P
4	7125.00	9.92	55.53	65.45	88.20	-22.75	Peak	101	227	P
5	14190.00	22.77	32.42	55.19	68.20	-13.01	Average	100	223	P
6	14190.00	22.77	49.17	71.94	88.20	-16.26	Peak	100	223	P
7	21285.00	10.94	41.98	52.92	63.54	-10.62	Average	150	360	P
8	21285.00	10.94	55.40	66.34	83.54	-17.20	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

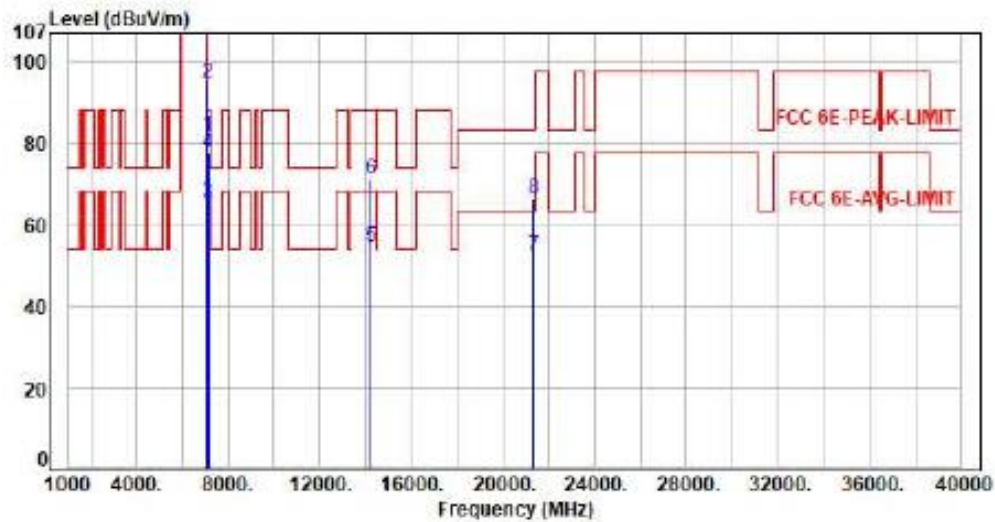

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	72.07	81.94	200.00	-118.06	Average	206	305	P
2	7115.00	9.87	85.12	94.99	200.00	-105.01	Peak	206	305	P
3	7125.00	9.92	55.75	65.67	68.20	-2.53	Average	206	305	P
4	7125.00	9.92	67.67	77.59	88.20	-10.61	Peak	206	305	P
5	14230.00	22.90	31.78	54.68	68.20	-13.52	Average	100	120	P
6	14230.00	22.90	48.15	71.05	88.20	-17.15	Peak	100	120	P
7	21345.00	10.74	41.70	52.44	63.54	-11.10	Average	150	360	P
8	21345.00	10.74	55.53	66.27	83.54	-17.27	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

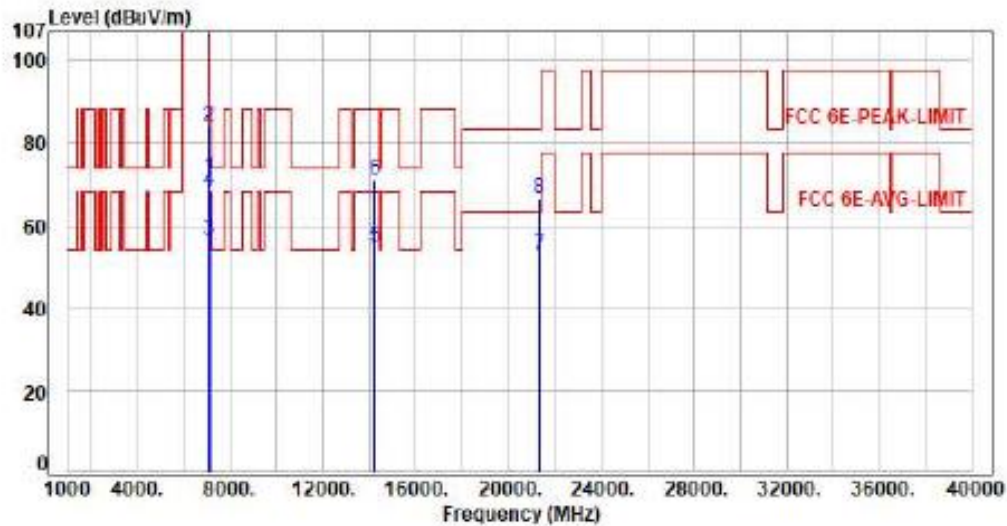

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	61.70	71.57	200.00	-128.43	Average	316	158	P
2	7115.00	9.87	74.17	84.04	200.00	-115.96	Peak	316	158	P
3	7125.00	9.92	46.81	56.73	68.20	-11.47	Average	316	158	P
4	7125.00	9.92	58.61	68.53	88.20	-19.67	Peak	316	158	P
5	14230.00	22.90	32.08	54.98	68.20	-13.22	Average	100	211	P
6	14230.00	22.90	48.40	71.30	88.20	-16.90	Peak	100	211	P
7	21345.00	10.74	42.04	52.78	63.54	-10.76	Average	150	360	P
8	21345.00	10.74	56.15	66.89	83.54	-16.65	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

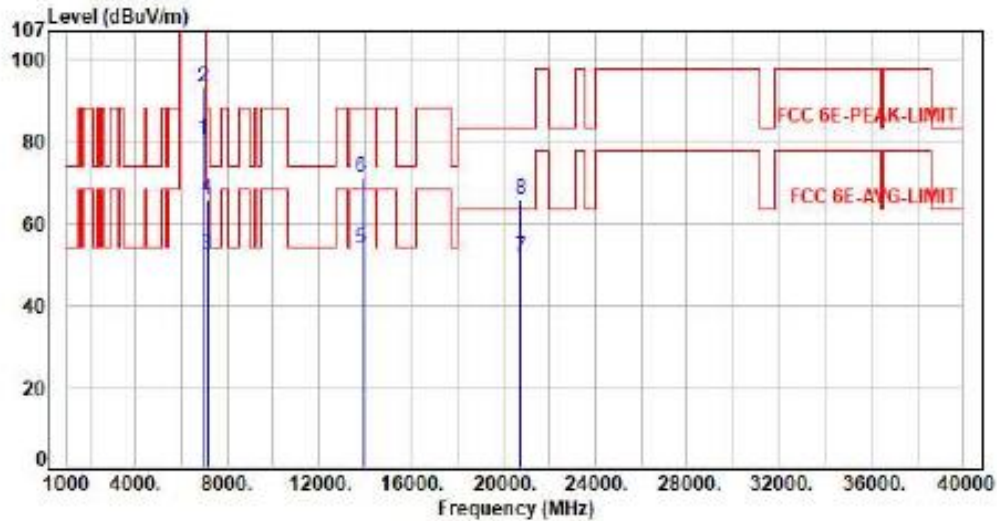

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	70.97	80.49	200.00	-119.51	Average	174	346	P
2	6925.00	9.52	83.79	93.31	200.00	-106.69	Peak	174	346	P
3	7125.00	9.92	42.57	52.49	88.20	-15.71	Average	174	346	P
4	7125.00	9.92	55.94	65.86	88.20	-22.34	Peak	174	346	P
5	13850.00	21.83	31.69	53.52	68.20	-14.68	Average	100	119	P
6	13850.00	21.83	49.23	71.06	88.20	-17.14	Peak	100	119	P
7	20775.00	9.75	41.79	51.54	63.54	-12.00	Average	150	360	P
8	20775.00	9.75	56.08	65.83	83.54	-17.71	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

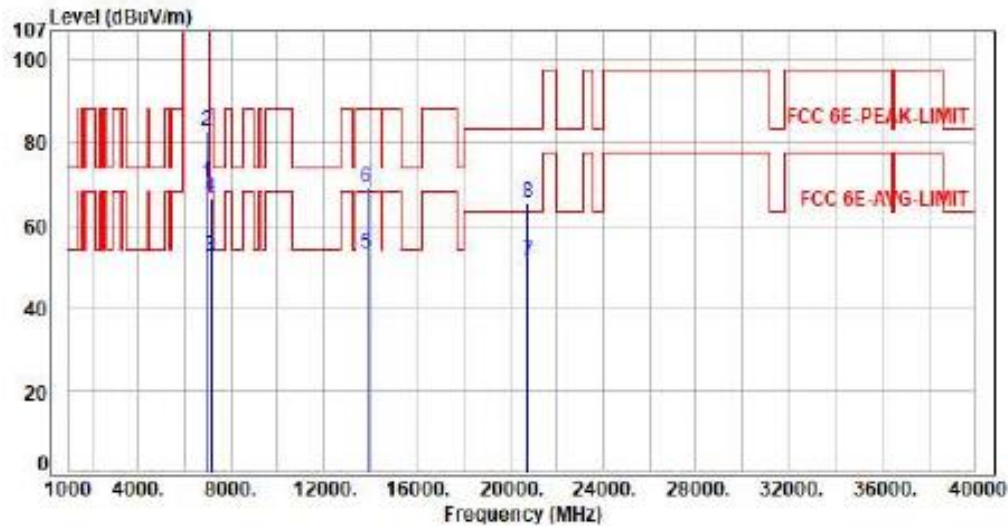

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	60.89	70.41	200.00	-129.59	Average	100	228	P
2	6925.00	9.52	73.64	83.16	200.00	-116.84	Peak	100	228	P
3	7125.00	9.92	42.53	52.45	68.20	-15.75	Average	100	228	P
4	7125.00	9.92	56.79	66.71	88.20	-21.49	Peak	100	228	P
5	13850.00	21.83	31.47	53.30	68.20	-14.90	Average	100	217	P
6	13850.00	21.83	47.29	69.12	88.20	-19.08	Peak	100	217	P
7	20775.00	9.75	41.46	51.21	63.54	-12.33	Average	150	360	P
8	20775.00	9.75	55.92	65.67	83.54	-17.87	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

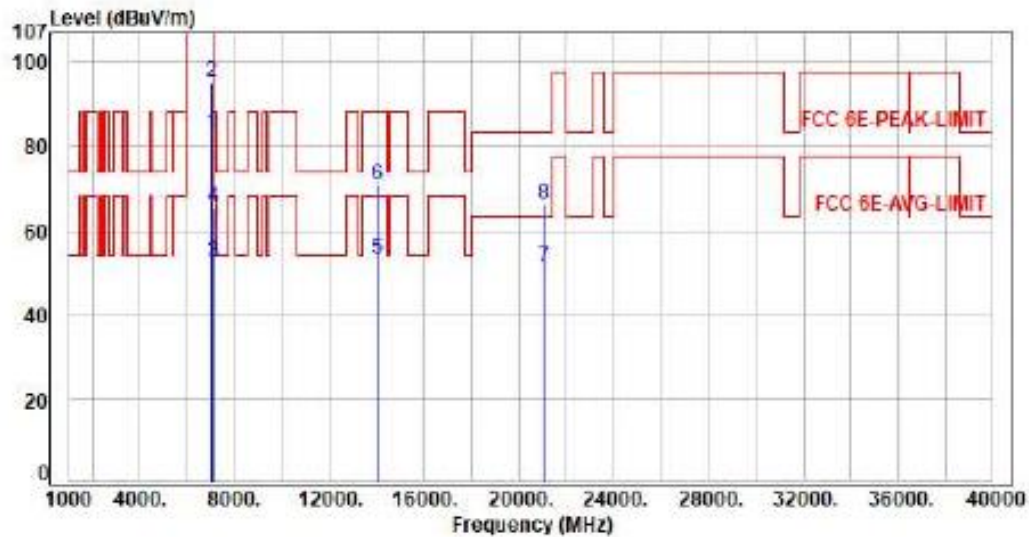

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	73.44	83.02	200.00	-116.98	Average	161	347	P
2	7005.00	9.58	85.77	95.35	200.00	-104.65	Peak	161	347	P
3	7125.00	9.92	42.50	52.42	68.20	-15.78	Average	161	347	P
4	7125.00	9.92	55.78	65.70	88.20	-22.50	Peak	161	347	P
5	14010.00	22.26	31.17	53.43	68.20	-14.77	Average	100	113	P
6	14010.00	22.26	48.66	70.92	88.20	-17.28	Peak	100	113	P
7	21015.00	10.08	41.28	51.36	63.54	-12.18	Average	150	360	P
8	21015.00	10.08	56.30	66.38	83.54	-17.16	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

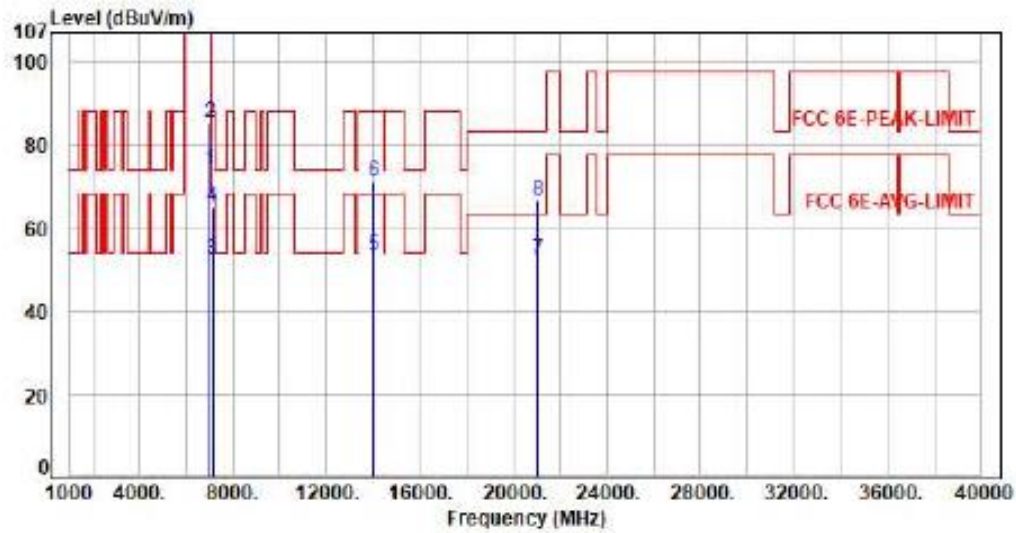

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	64.34	73.92	200.00	-126.08	Average	110	237	P
2	7005.00	9.58	75.99	85.57	200.00	-114.43	Peak	110	237	P
3	7125.00	9.92	42.51	52.43	68.20	-15.77	Average	110	237	P
4	7125.00	9.92	55.29	65.21	88.20	-22.99	Peak	110	237	P
5	14010.00	22.26	31.15	53.41	68.20	-14.79	Average	100	215	P
6	14010.00	22.26	48.76	71.02	88.20	-17.18	Peak	100	215	P
7	21015.00	10.08	42.58	52.66	63.54	-10.88	Average	150	360	P
8	21015.00	10.08	56.72	66.80	83.54	-16.74	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

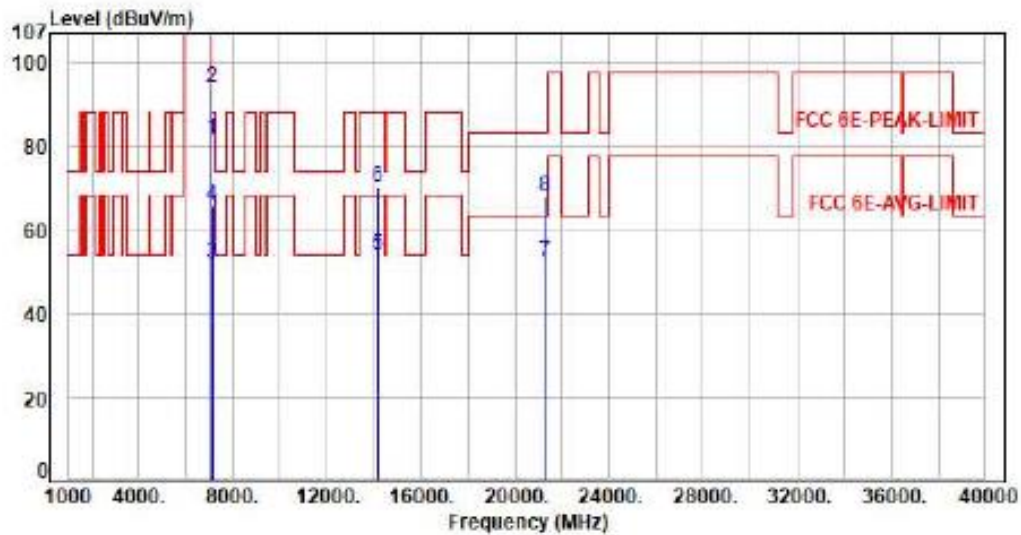

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	72.07	81.82	200.00	-118.18	Average	173	349	P
2	7085.00	9.75	84.10	93.85	200.00	-106.15	Peak	173	349	P
3	7125.00	9.92	42.35	52.27	68.20	-15.93	Average	173	349	P
4	7125.00	9.92	55.80	65.72	88.20	-22.48	Peak	173	349	P
5	14170.00	22.70	31.41	54.11	68.20	-14.09	Average	100	118	P
6	14170.00	22.70	47.87	70.57	88.20	-17.63	Peak	100	118	P
7	21255.00	11.04	41.62	52.66	63.54	-10.88	Average	150	360	P
8	21255.00	11.04	56.95	67.99	83.54	-15.55	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

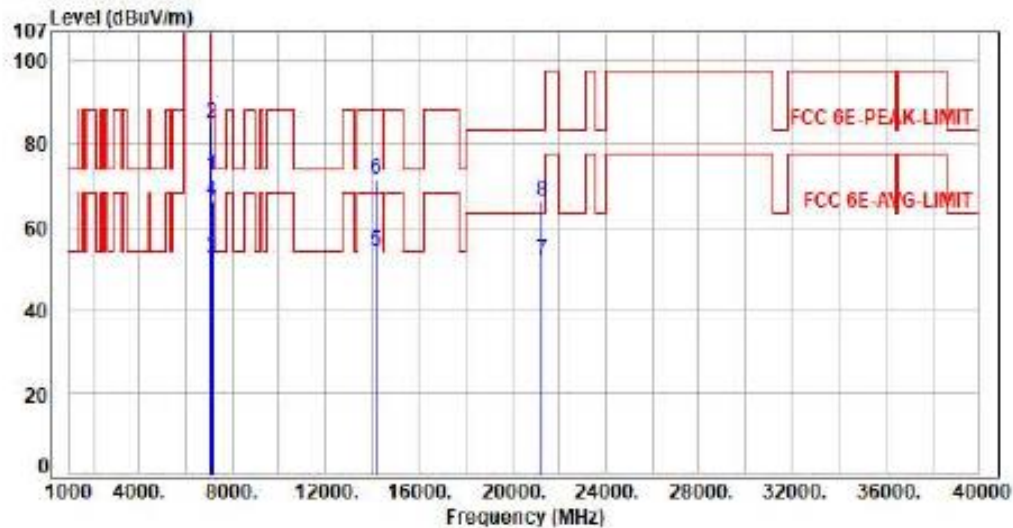

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	62.66	72.41	200.00	-127.59	Average	107	239	P
2	7085.00	9.75	75.45	85.20	200.00	-114.80	Peak	107	239	P
3	7125.00	9.92	42.52	52.44	68.20	-15.76	Average	107	239	P
4	7125.00	9.92	56.22	66.14	88.20	-22.06	Peak	107	239	P
5	14170.00	22.70	31.52	54.22	68.20	-13.98	Average	100	217	P
6	14170.00	22.70	48.95	71.65	88.20	-16.55	Peak	100	217	P
7	21255.00	11.04	41.20	52.24	63.54	-11.30	Average	150	360	P
8	21255.00	11.04	55.17	66.21	83.54	-17.33	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

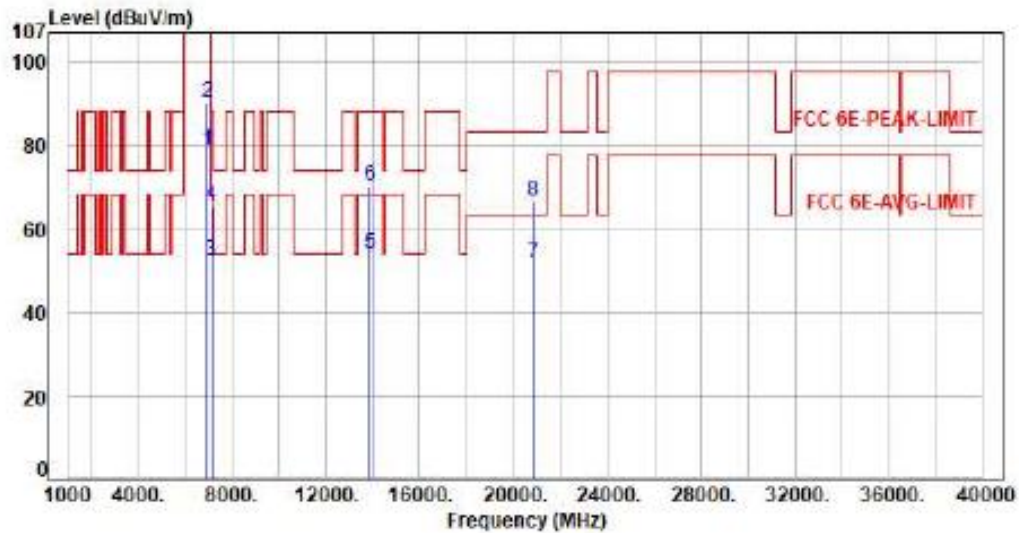

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	69.22	78.79	200.00	-121.21	Average	178	343	P
2	6945.00	9.57	80.80	90.37	200.00	-109.63	Peak	178	343	P
3	7125.00	9.92	42.41	52.33	68.20	-15.87	Average	178	343	P
4	7125.00	9.92	55.65	65.57	88.20	-22.63	Peak	178	343	P
5	13890.00	21.85	32.32	54.17	68.20	-14.03	Average	100	121	P
6	13890.00	21.85	48.55	70.40	88.20	-17.80	Peak	100	121	P
7	20835.00	9.94	41.58	51.52	63.54	-12.02	Average	150	360	P
8	20835.00	9.94	56.97	66.91	83.54	-16.63	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

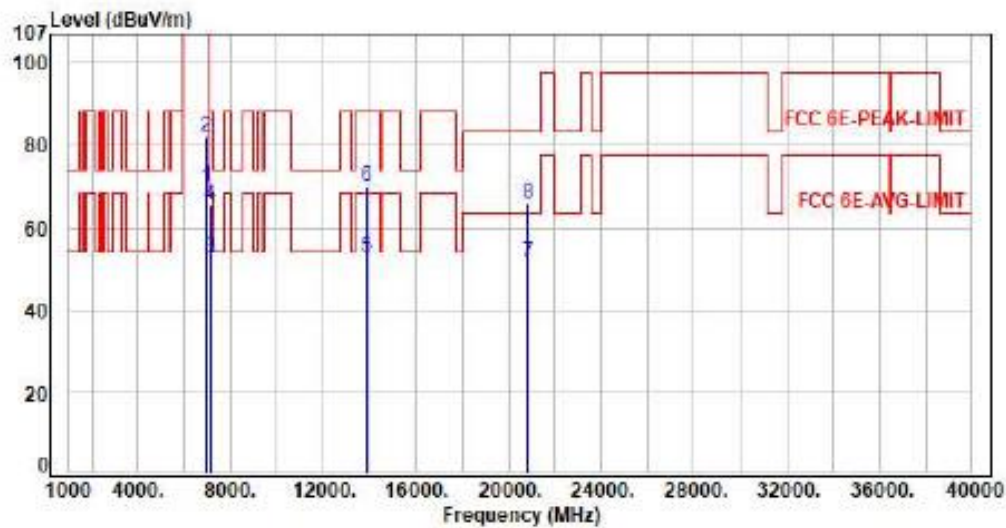

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	60.39	69.96	200.00	-130.04	Average	110	238	P
2	6945.00	9.57	72.58	82.15	200.00	-117.85	Peak	110	238	P
3	7125.00	9.92	42.53	52.45	68.20	-15.75	Average	110	238	P
4	7125.00	9.92	55.45	65.37	88.20	-22.83	Peak	110	238	P
5	13890.00	21.85	30.84	52.69	68.20	-15.51	Average	100	222	P
6	13890.00	21.85	48.13	69.98	88.20	-18.22	Peak	100	222	P
7	20835.00	9.94	41.71	51.65	63.54	-11.89	Average	150	360	P
8	20835.00	9.94	55.85	65.79	83.54	-17.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

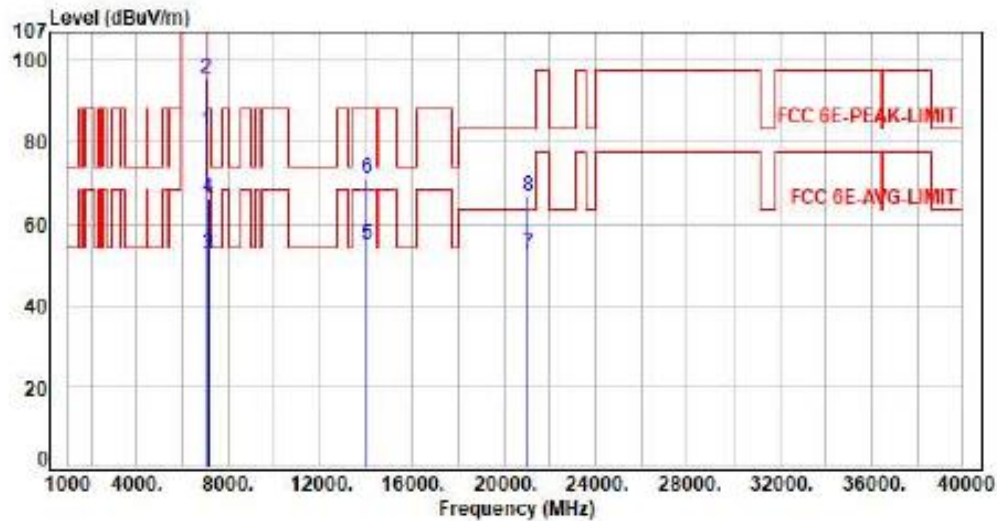

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	73.62	83.20	200.00	-116.80	Average	137	349	P
2	7025.00	9.58	86.19	95.77	200.00	-104.23	Peak	137	349	P
3	7125.00	9.92	42.39	52.31	68.20	-15.89	Average	137	349	P
4	7125.00	9.92	56.34	66.26	88.20	-21.94	Peak	137	349	P
5	14050.00	22.39	32.58	54.97	68.20	-13.23	Average	100	114	P
6	14050.00	22.39	48.89	71.28	88.20	-16.92	Peak	100	114	P
7	21075.00	10.28	42.17	52.45	63.54	-11.09	Average	150	360	P
8	21075.00	10.28	56.33	66.61	83.54	-16.93	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

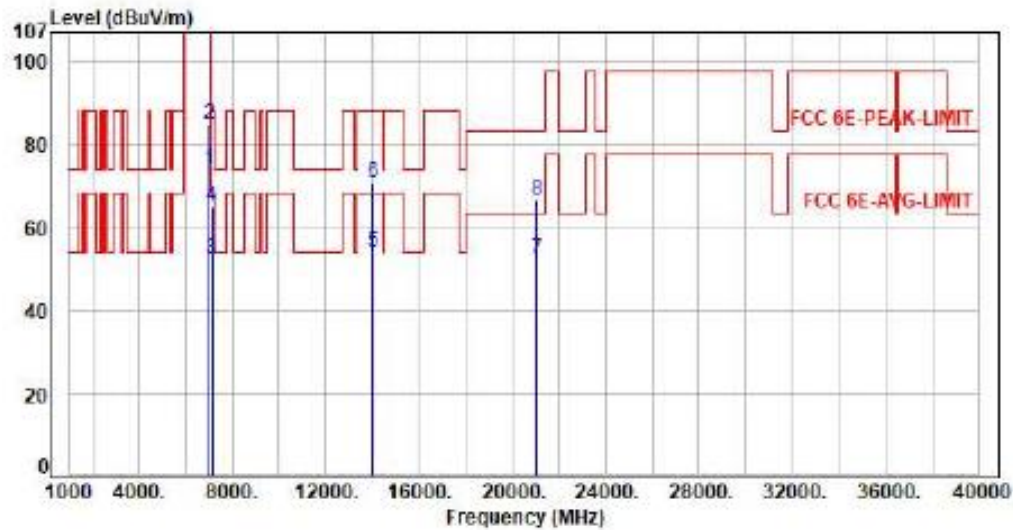

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	64.45	74.03	200.00	-125.97	Average	102	229	P
2	7025.00	9.58	75.43	85.01	200.00	-114.99	Peak	102	229	P
3	7125.00	9.92	42.51	52.43	68.20	-15.77	Average	102	229	P
4	7125.00	9.92	55.17	65.09	88.20	-23.11	Peak	102	229	P
5	14050.00	22.39	31.76	54.15	68.20	-14.05	Average	100	213	P
6	14050.00	22.39	48.39	70.78	88.20	-17.42	Peak	100	213	P
7	21075.00	10.28	42.11	52.39	63.54	-11.15	Average	150	360	P
8	21075.00	10.28	56.50	66.78	83.54	-16.76	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

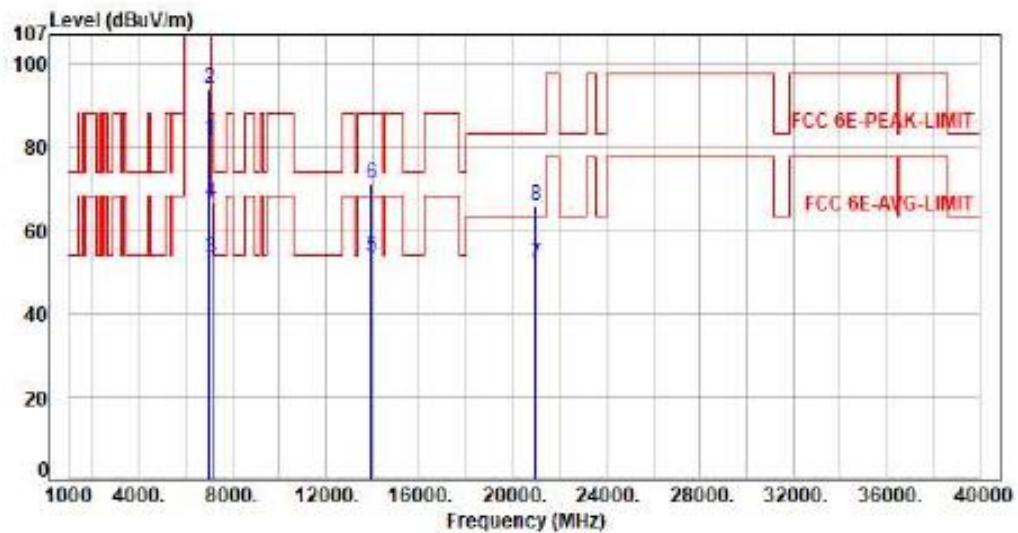

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	72.83	81.61	200.00	-118.39	Average	140	345	P
2	6985.00	9.58	84.55	94.13	200.00	-105.87	Peak	140	345	P
3	7125.00	9.92	43.45	53.37	68.20	-14.83	Average	140	345	P
4	7125.00	9.92	56.88	66.80	88.20	-21.40	Peak	140	345	P
5	13970.00	22.09	31.65	53.74	68.20	-14.46	Average	100	119	P
6	13970.00	22.09	48.93	71.02	88.20	-17.18	Peak	100	119	P
7	20955.00	9.99	41.93	51.92	63.54	-11.62	Average	150	360	P
8	20955.00	9.99	55.88	65.87	83.54	-17.67	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax16Q CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

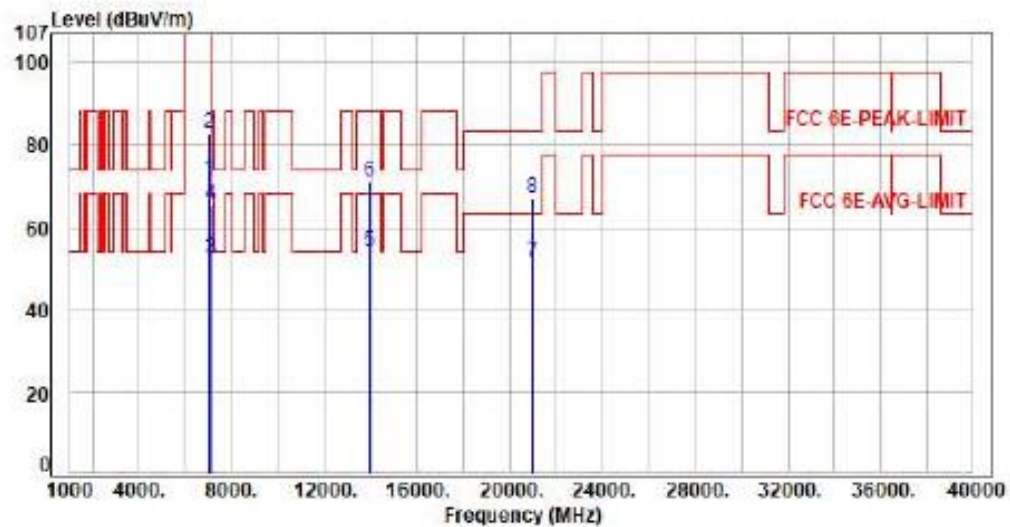

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	62.03	71.61	200.00	-128.39	Average	100	228	P
2	6985.00	9.58	73.56	83.14	200.00	-116.86	Peak	100	228	P
3	7125.00	9.92	42.61	52.53	68.20	-15.67	Average	100	228	P
4	7125.00	9.92	55.48	65.40	88.20	-22.80	Peak	100	228	P
5	13970.00	22.09	31.93	54.02	68.20	-14.18	Average	100	217	P
6	13970.00	22.09	48.98	71.07	88.20	-17.13	Peak	100	217	P
7	20955.00	9.99	41.49	51.48	63.54	-12.06	Average	150	360	P
8	20955.00	9.99	57.03	67.02	83.54	-16.52	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

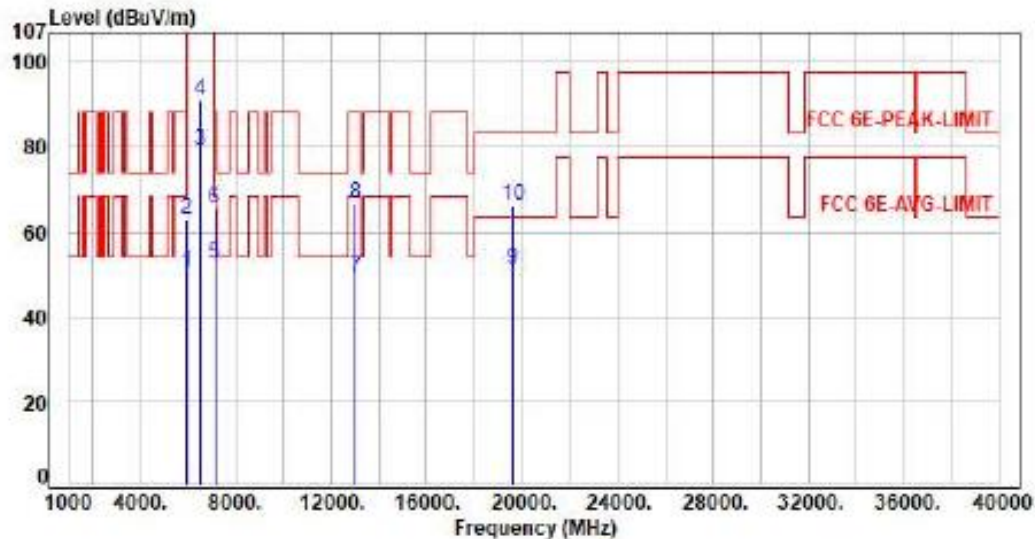

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.65	50.38	68.20	-17.82	Average	151	5	P
2	5925.00	7.73	55.41	63.14	88.20	-25.06	Peak	151	5	P
3	6525.00	8.52	70.89	79.41	200.00	-120.59	Average	151	5	P
4	6525.00	8.52	82.78	91.30	200.00	-108.70	Peak	151	5	P
5	7125.00	9.92	42.40	52.32	68.20	-15.88	Average	151	5	P
6	7125.00	9.92	55.64	65.56	88.20	-22.64	Peak	151	5	P
7	13050.00	18.79	30.58	49.37	68.20	-18.83	Average	100	112	P
8	13050.00	18.79	47.87	66.66	88.20	-21.54	Peak	100	112	P
9	19575.00	10.24	41.11	51.35	63.54	-12.19	Average	150	360	P
10	19575.00	10.24	56.22	66.46	83.54	-17.08	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

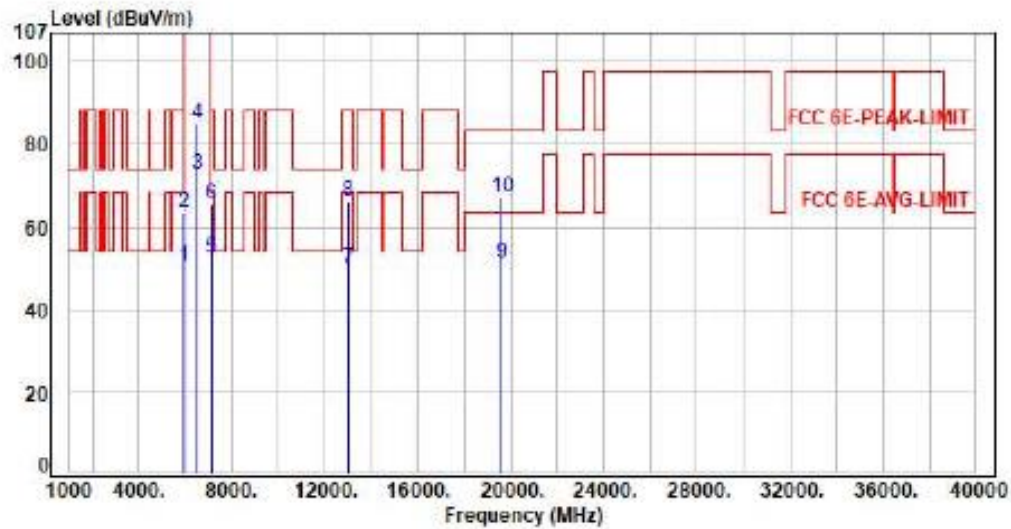

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.62	50.35	68.20	-17.85	Average	136	143	P
2	5925.00	7.73	55.77	63.50	88.20	-24.70	Peak	136	143	P
3	6525.00	8.52	64.39	72.91	200.00	-127.09	Average	136	143	P
4	6525.00	8.52	76.33	84.85	200.00	-115.15	Peak	136	143	P
5	7125.00	9.92	42.52	52.44	68.20	-15.76	Average	136	143	P
6	7125.00	9.92	55.51	65.43	88.20	-22.77	Peak	136	143	P
7	13050.00	18.79	31.11	49.90	68.20	-18.30	Average	100	213	P
8	13050.00	18.79	47.70	66.49	88.20	-21.71	Peak	100	213	P
9	19575.00	10.24	41.14	51.38	63.54	-12.16	Average	150	360	P
10	19575.00	10.24	56.74	66.98	83.54	-16.56	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 110x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

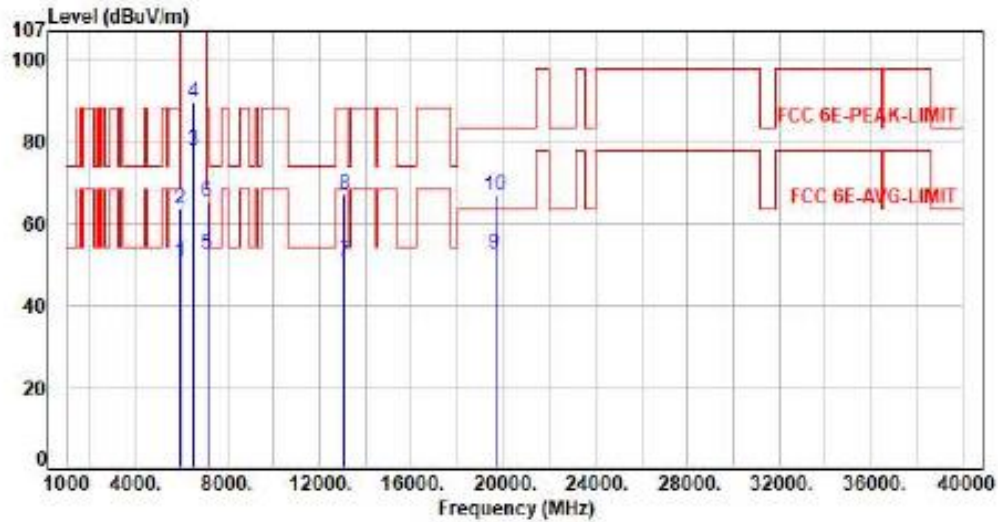

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.59	50.32	68.20	-17.88	Average	181	337	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	181	337	P
3	6545.00	8.63	69.16	77.79	200.00	-122.21	Average	181	337	P
4	6545.00	8.63	80.89	89.52	200.00	-110.48	Peak	181	337	P
5	7125.00	9.92	42.48	52.40	68.20	-15.80	Average	181	337	P
6	7125.00	9.92	55.35	65.27	88.20	-22.93	Peak	181	337	P
7	13090.00	19.04	31.37	50.41	68.20	-17.79	Average	100	115	P
8	13090.00	19.04	48.24	67.28	88.20	-20.92	Peak	100	115	P
9	19635.00	10.48	41.97	52.45	63.54	-11.09	Average	150	360	P
10	19635.00	10.48	56.20	66.68	83.54	-16.86	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

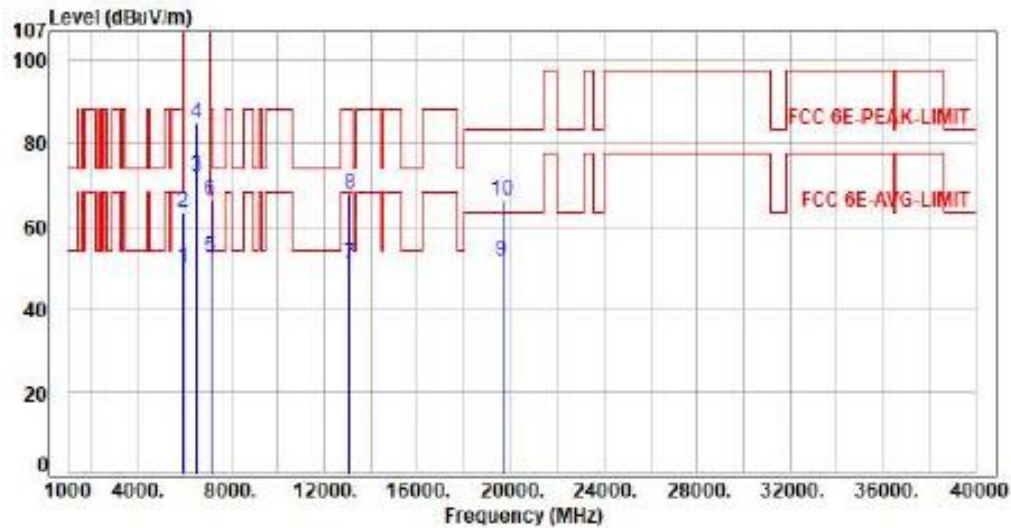

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.48	50.21	68.20	-17.99	Average	137	238	P
2	5925.00	7.73	55.58	63.31	88.20	-24.89	Peak	137	238	P
3	6545.00	8.63	63.44	72.07	200.00	-127.93	Average	137	238	P
4	6545.00	8.63	76.44	85.07	200.00	-114.93	Peak	137	238	P
5	7125.00	9.92	42.49	52.41	68.20	-15.79	Average	137	238	P
6	7125.00	9.92	56.41	66.33	88.20	-21.87	Peak	137	238	P
7	13090.00	19.04	31.75	50.79	68.20	-17.41	Average	100	217	P
8	13090.00	19.04	48.97	68.01	88.20	-20.19	Peak	100	217	P
9	19635.00	10.48	41.17	51.65	63.54	-11.89	Average	150	360	P
10	19635.00	10.48	55.85	66.33	83.54	-17.21	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex168 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

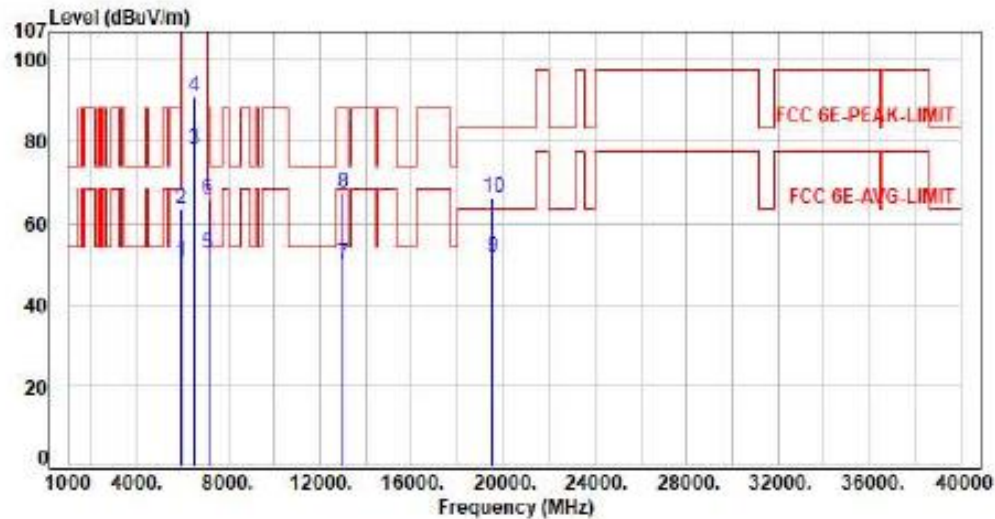

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.59	50.32	68.20	-17.88	Average	177	341	P
2	5925.00	7.73	55.77	63.50	68.20	-24.70	Peak	177	341	P
3	6505.00	8.39	69.59	77.98	200.00	-122.02	Average	177	341	P
4	6505.00	8.39	82.63	91.02	200.00	-108.98	Peak	177	341	P
5	7125.00	9.92	42.51	52.43	68.20	-15.77	Average	177	341	P
6	7125.00	9.92	55.85	65.77	68.20	-22.43	Peak	177	341	P
7	13010.00	18.63	31.38	50.01	68.20	-18.19	Average	100	118	P
8	13010.00	18.63	48.95	67.58	68.20	-20.62	Peak	100	118	P
9	19515.00	10.20	41.52	51.72	63.54	-11.82	Average	150	360	P
10	19515.00	10.20	56.08	66.28	63.54	-17.26	Peak	150	360	P


Note: Level-Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

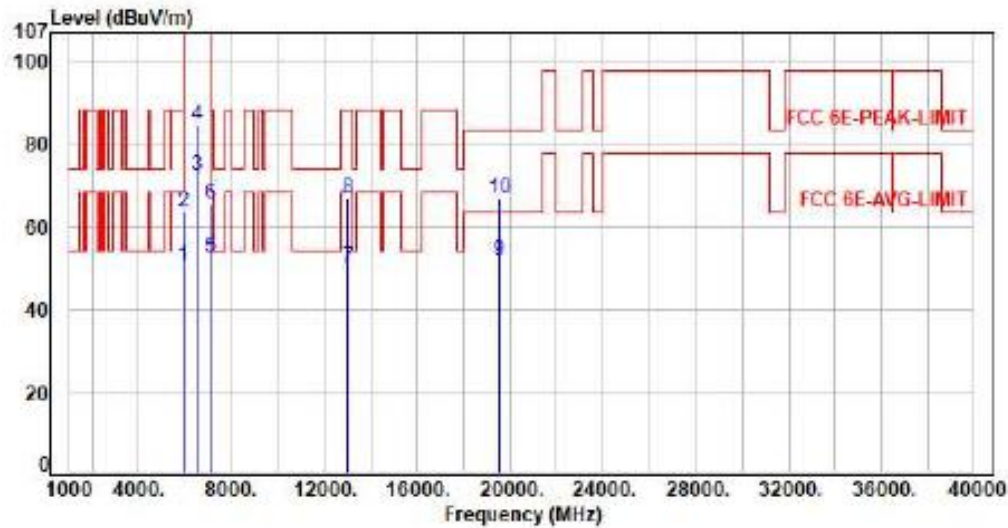

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.73	50.46	68.20	-17.74	Average	137	144	P
2	5925.00	7.73	55.92	63.65	88.20	-24.55	Peak	137	144	P
3	6505.00	8.39	64.08	72.47	200.00	-127.53	Average	137	144	P
4	6505.00	8.39	76.33	84.72	200.00	-115.28	Peak	137	144	P
5	7125.00	9.92	42.51	52.43	68.20	-15.77	Average	137	144	P
6	7125.00	9.92	55.65	65.57	88.20	-22.63	Peak	137	144	P
7	13010.00	18.63	31.30	49.93	68.20	-18.27	Average	100	216	P
8	13010.00	18.63	48.22	66.85	88.20	-21.35	Peak	100	216	P
9	19515.00	10.20	41.33	51.53	63.54	-12.01	Average	150	360	P
10	19515.00	10.20	56.40	66.60	83.54	-16.94	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

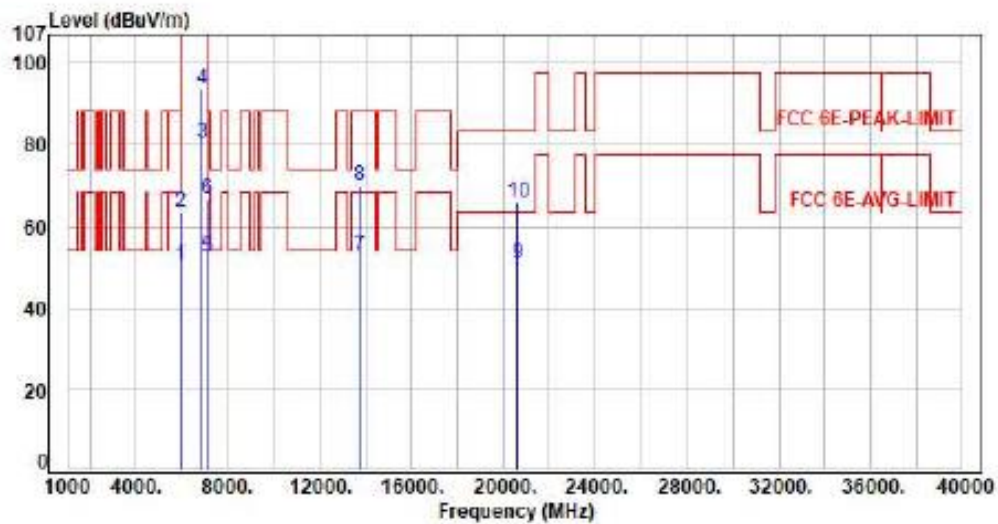

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.69	50.42	68.20	-17.78	Average	154	346	P
2	5925.00	7.73	55.62	63.35	88.20	-24.85	Peak	154	346	P
3	6875.00	9.47	71.19	80.66	200.00	-119.34	Average	154	346	P
4	6875.00	9.47	84.14	93.61	200.00	-106.39	Peak	154	346	P
5	7125.00	9.92	42.49	52.41	68.20	-15.79	Average	154	346	P
6	7125.00	9.92	56.80	66.72	88.20	-21.48	Peak	154	346	P
7	13750.00	21.47	31.48	52.95	68.20	-15.25	Average	100	118	P
8	13750.00	21.47	48.59	70.06	88.20	-18.14	Peak	100	118	P
9	20625.00	9.65	41.17	50.82	63.54	-12.72	Average	150	360	P
10	20625.00	9.65	56.30	65.95	83.54	-17.59	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

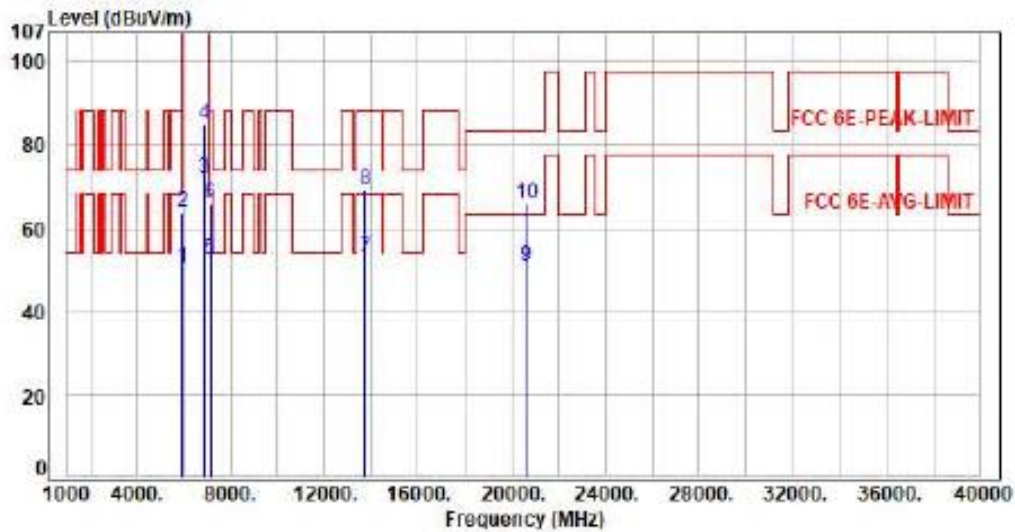

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.61	50.34	68.20	-17.86	Average	120	236	P
2	5925.00	7.73	56.01	63.74	88.20	-24.46	Peak	120	236	P
3	6875.00	9.47	62.68	72.15	200.00	-127.85	Average	120	236	P
4	6875.00	9.47	75.38	84.85	200.00	-115.15	Peak	120	236	P
5	7125.00	9.92	42.55	52.47	68.20	-15.73	Average	120	236	P
6	7125.00	9.92	55.82	65.74	88.20	-22.46	Peak	120	236	P
7	13750.00	21.47	31.51	52.98	68.20	-15.22	Average	100	212	P
8	13750.00	21.47	47.68	69.15	88.20	-19.05	Peak	100	212	P
9	20625.00	9.65	41.16	50.81	63.54	-12.73	Average	150	360	P
10	20625.00	9.65	56.29	65.94	83.54	-17.60	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

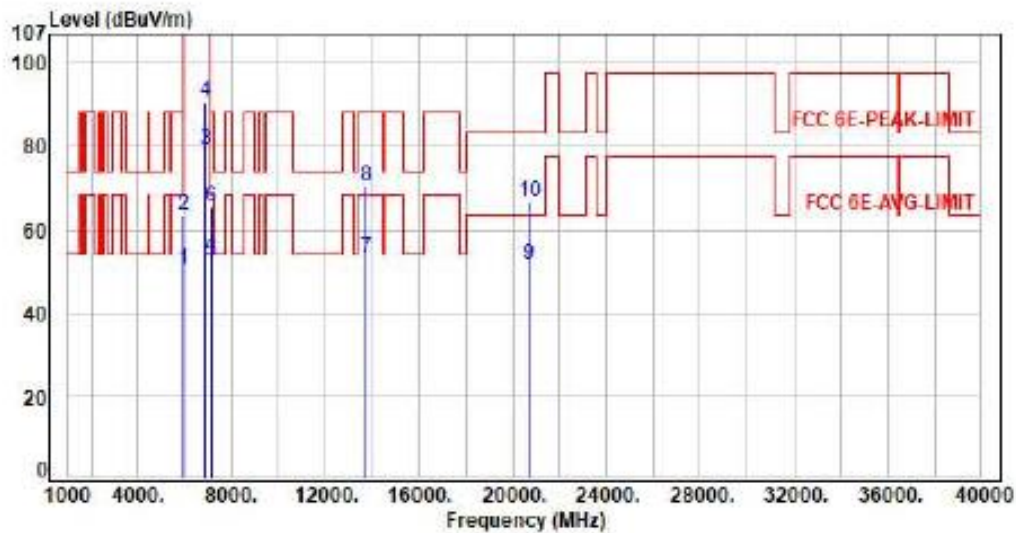

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.60	50.33	68.20	-17.87	Average	204	340	P
2	5925.00	7.73	55.61	63.34	88.20	-24.86	Peak	204	340	P
3	6885.00	9.47	69.87	79.34	200.00	-120.66	Average	204	340	P
4	6885.00	9.47	81.07	90.54	200.00	-109.46	Peak	204	340	P
5	7125.00	9.92	42.64	52.56	68.20	-15.64	Average	204	340	P
6	7125.00	9.92	55.57	65.49	88.20	-22.71	Peak	204	340	P
7	13770.00	21.56	31.64	53.20	68.20	-15.00	Average	100	119	P
8	13770.00	21.56	48.75	70.31	88.20	-17.89	Peak	100	119	P
9	20655.00	9.71	41.84	51.55	63.54	-11.99	Average	150	360	P
10	20655.00	9.71	56.87	66.58	83.54	-16.96	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

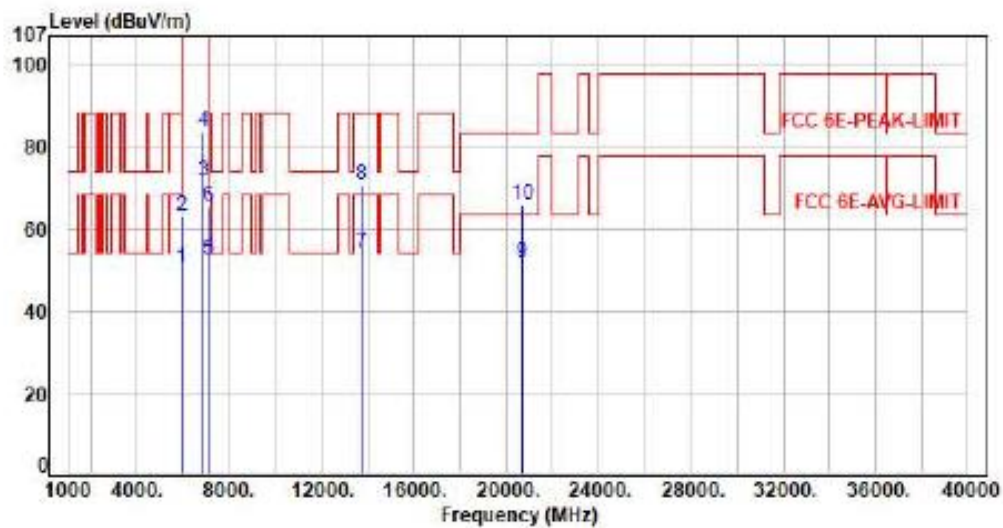

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	120	236	P
2	5925.00	7.73	55.51	63.24	88.20	-24.96	Peak	120	236	P
3	6885.00	9.47	62.24	71.71	200.00	-128.29	Average	120	236	P
4	6885.00	9.47	74.45	83.92	200.00	-116.08	Peak	120	236	P
5	7125.00	9.92	42.52	52.44	68.20	-15.76	Average	120	236	P
6	7125.00	9.92	55.55	65.47	88.20	-22.73	Peak	120	236	P
7	13770.00	21.56	32.58	54.14	68.20	-14.06	Average	100	211	P
8	13770.00	21.56	49.18	70.74	88.20	-17.46	Peak	100	211	P
9	20655.00	9.71	42.07	51.78	63.54	-11.76	Average	150	360	P
10	20655.00	9.71	56.39	66.10	83.54	-17.44	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx80 CH183 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

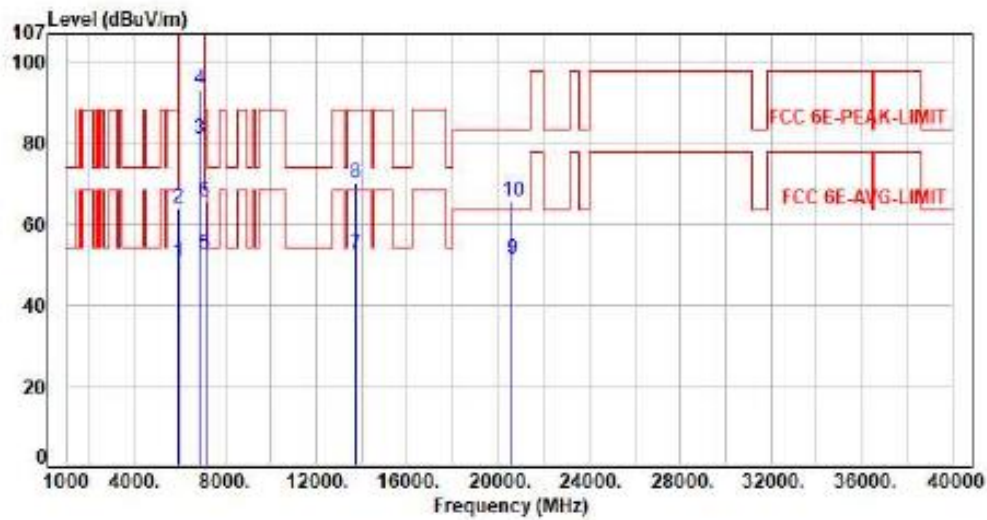

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.62	50.35	68.20	-17.85	Average	167	306	P
2	5925.00	7.73	56.13	63.86	88.20	-24.34	Peak	167	306	P
3	6865.00	9.47	71.32	80.79	200.00	-119.21	Average	167	306	P
4	6865.00	9.47	83.78	93.25	200.00	-106.75	Peak	167	306	P
5	7125.00	9.92	42.56	52.48	68.20	-15.72	Average	167	306	P
6	7125.00	9.92	55.52	65.44	88.20	-22.76	Peak	167	306	P
7	13730.00	21.42	31.13	52.55	68.20	-15.65	Average	100	117	P
8	13730.00	21.42	48.65	70.07	88.20	-18.13	Peak	100	117	P
9	20595.00	9.64	41.74	51.38	63.54	-12.16	Average	150	360	P
10	20595.00	9.64	55.95	65.59	83.54	-17.95	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

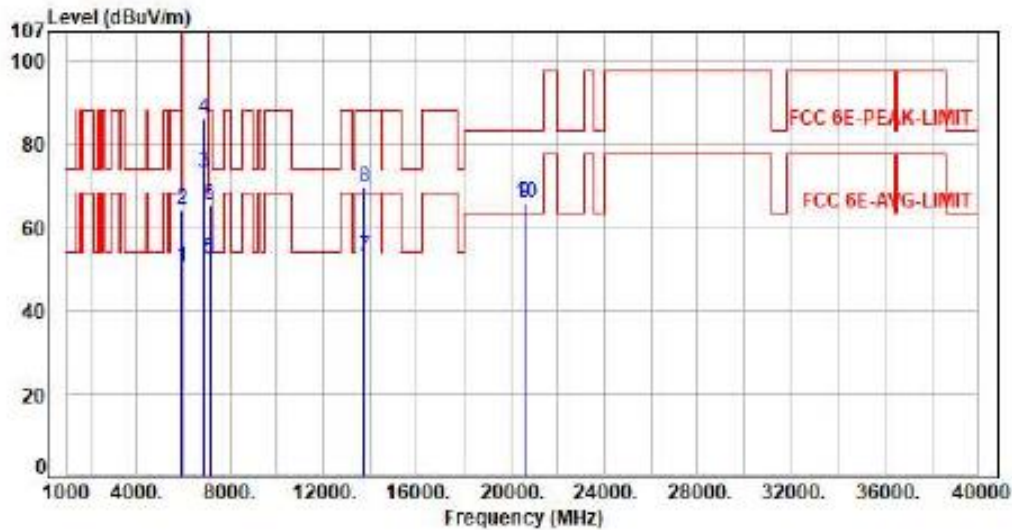

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.82	50.55	68.20	-17.65	Average	127	237	P
2	5925.00	7.73	56.38	64.11	88.20	-24.09	Peak	127	237	P
3	6865.00	9.47	63.89	73.36	200.00	-126.64	Average	127	237	P
4	6865.00	9.47	76.75	86.22	200.00	-113.78	Peak	127	237	P
5	7125.00	9.92	42.70	52.62	68.20	-15.58	Average	127	237	P
6	7125.00	9.92	55.57	65.49	88.20	-22.71	Peak	127	237	P
7	13730.00	21.42	31.44	52.86	68.20	-15.34	Average	100	218	P
8	13730.00	21.42	47.96	69.38	88.20	-18.82	Peak	100	218	P
9	20595.00	9.64	56.17	65.81	83.54	-17.73	Peak	150	360	P
10	20595.00	9.64	56.17	65.81	83.54	-17.73	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

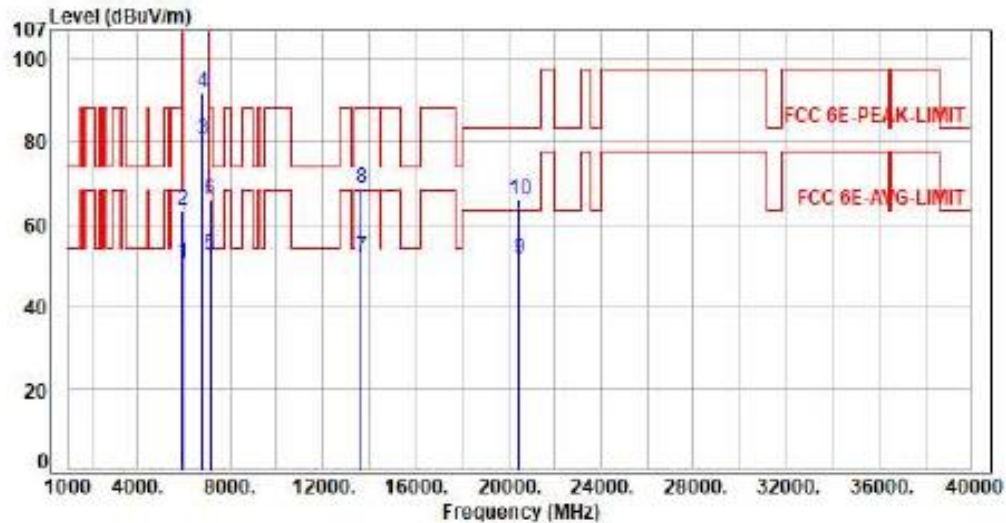

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.63	50.36	68.20	-17.84	Average	146	344	P
2	5925.00	7.73	55.73	63.46	88.20	-24.74	Peak	146	344	P
3	6825.00	9.47	71.22	80.69	200.00	-119.31	Average	146	344	P
4	6825.00	9.47	82.67	92.14	200.00	-107.86	Peak	146	344	P
5	7125.00	9.92	42.60	52.52	68.20	-15.68	Average	146	344	P
6	7125.00	9.92	56.05	65.97	88.20	-22.23	Peak	146	344	P
7	13650.00	21.01	30.96	51.97	68.20	-16.23	Average	100	113	P
8	13650.00	21.01	47.68	68.69	88.20	-19.51	Peak	100	113	P
9	20475.00	9.81	41.88	51.69	63.54	-11.85	Average	150	360	P
10	20475.00	9.81	56.20	66.01	83.54	-17.53	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

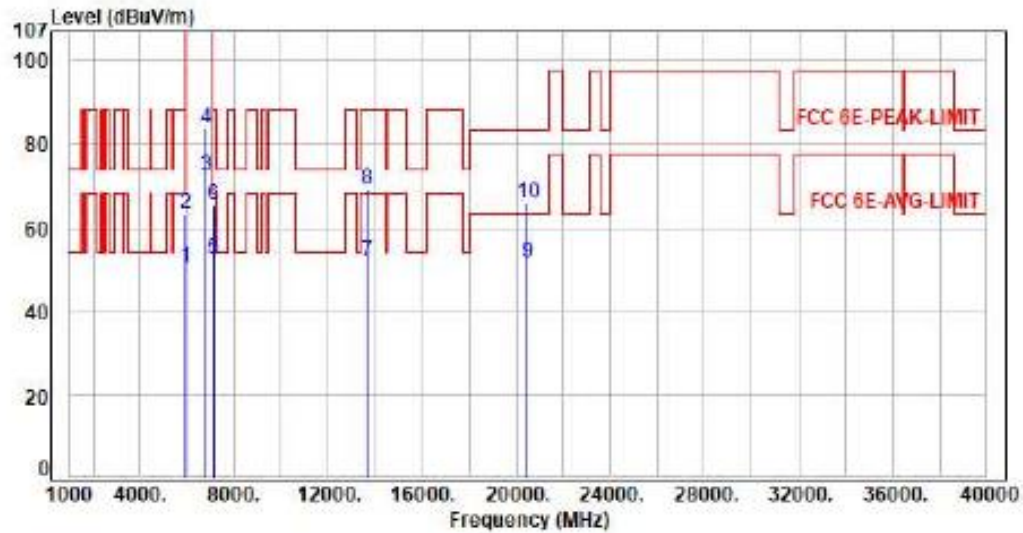

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.68	50.41	68.20	-17.79	Average	122	238	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	122	238	P
3	6825.00	9.47	63.03	72.50	200.00	-127.50	Average	122	238	P
4	6825.00	9.47	74.43	83.90	200.00	-116.10	Peak	122	238	P
5	7125.00	9.92	42.51	52.43	68.20	-15.77	Average	122	238	P
6	7125.00	9.92	55.53	65.45	88.20	-22.75	Peak	122	238	P
7	13650.00	21.01	31.21	52.22	68.20	-15.98	Average	100	214	P
8	13650.00	21.01	47.99	69.00	88.20	-19.20	Peak	100	214	P
9	20475.00	9.81	42.04	51.85	63.54	-11.69	Average	150	360	P
10	20475.00	9.81	56.21	66.02	83.54	-17.52	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor