

FCC Test Report

Report No.: AGC03067201002FE05

FCC ID : 2AXZL-KG02

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: KGateway

BRAND NAME : KBeacon

MODEL NAME : KG02

APPLICANT: KKM Company Limited

DATE OF ISSUE : Jan. 29, 2021

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 100


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 29, 2021	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. IEEE 802.11N MODULATION SCHEME	
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	8
2.6. SPECIAL ACCESSORIES	8
2.7. EQUIPMENT MODIFICATIONS	8
2.8. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	10
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM	12
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	12
6. TEST FACILITY	- GO
6. TEST FACILITY	13
7. OUTPUT POWER	14
7.1. MEASUREMENT PROCEDURE	14
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 6 DB BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	18
9 CONDUCTED SPURIOUS EMISSION	26





9.1. MEASUREMENT PROCEDURE	26
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
9.3. MEASUREMENT EQUIPMENT USEDJN	26
9.4. LIMITS AND MEASUREMENT RESULT	26
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	44
10.1 MEASUREMENT PROCEDURE	44
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	44
10.4 LIMITS AND MEASUREMENT RESULT	44
11. RADIATED EMISSION	58
11.1. MEASUREMENT PROCEDURE	58
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	60
11.4. TEST RESULT	60
12. BAND EDGE EMISSION	
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SET-UP	
12.3. TEST RESULT	67
13. FCC LINE CONDUCTED EMISSION TEST	83
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST	83
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	83
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	84
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	84
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	87
ADDENING B. DHOTOGDADHS OF FIIT	80





1. VERIFICATION OF CONFORMITY

4	
Applicant	KKM Company Limited
Address	4B, Building 6, Baoneng Science & Technology Park, Qingxiang Rd, Longhua Street, Longhua District, Shenzhen City, Guangdong Province, China
manufacturer	KKM Company Limited
Address	4B, Building 6, Baoneng Science & Technology Park, Qingxiang Rd, Longhua Street, Longhua District, Shenzhen City, Guangdong Province, China
Factory	KKM Company Limited
Address	4B, Building 6, Baoneng Science & Technology Park, Qingxiang Rd, Longhua Street, Longhua District, Shenzhen City, Guangdong Province, China
Product Designation	KGateway
Brand Name	KBeacon
Test Model	KG02
Date of test	Oct. 28, 2020 to Jan. 29, 2021
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	kerry chang	
2.C	Kelly Cheng (Project Engineer)	Jan. 29, 2021
Reviewed By	Max Zhang	
GC -	Max Zhang (Reviewer)	Jan. 29, 2021
Approved By	Formare	
,C ,C	Forrest Lei (Authorized Officer)	Jan. 29, 2021



Page 6 of 100

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "KGateway". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following


Operation Frequency	2.412 GHz~2.462GHz
Output Power(Average)	IEEE 802.11b:13.57dBm; IEEE 802.11g:12.91dBm; IEEE 802.11n(20):14.36dBm; IEEE 802.11n(40):14.13dBm
Output Power(Peak)	IEEE 802.11b:18.43dBm; IEEE 802.11g:19.95dBm; IEEE 802.11n(20):21.33dBm; IEEE 802.11n(40):20.81dBm
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11
Hardware Version	V1.0
Software Version	V1.0.0
Antenna Designation	Integral Antenna (Comply with requirements of the FCC part 15.203)
Number of transmit chain	2(802.11b/g/n all used two antennas,but 802.11b/g support SISO and 802.11n support MIMO)
Antenna Gain	Antenna 1:0dBi Antenna 2:0dBi
Power Supply	DC 5V by adapter

Note

- 1. The EUT is designed as indoor access point operating device.
- 2. The maximum antenna gain is 0dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \le 4$;

So: Directional gain = Gant + Array Gain = 0dBi < 6dBi





2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
· ·		2412 MHZ
GC 6	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
30 20	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
0	7	2442 MHZ
1 GC - C	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
C 20	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Page 8 of 100

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC			NDBPS		rate(I	ata Mbps) nsGl
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	<u>1</u>	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation		
NSS	Number of spatial streams		
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI	Guard interval		

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: 2AXZL-KG02 filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules


ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS


Not available for this EUT intended for grant.





2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.





3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB



Page 11 of 100

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(2412/2422MHz)
2	Middle channel TX(2437MHz)
3	High channel TX(2452/2462MHz)

Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. The test software is the MT7603 QA which can set the EUT into the individual test modes.



Page 12 of 100

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:

EUT	- C	AE

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	KGateway	KG02	2AXZL-KG02	EUT
2	Adapter	HW-050200C02	Input:100-240v, 50/60Hz, 0.5A Output:5V, 2A	AE
3	Charger line	N/A	0.8m unshielded	AE
4	LAN line	N/A	1.2m unshielded	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Page 13 of 100

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd						
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China						
Designation Number	CN1259						
FCC Test Firm Registration Number	975832						
A2LA Cert. No.	5054.02						
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA						

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Equipment Manufacturer		Equipment Manufacturer		S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021		
LISN	R&S	ESH2-Z5	100086	Jul. 03,2020	Jul. 02,2021		
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A		

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
Power sensor	Aglient	U2021XA	MY54110007	Jun. 08, 2020	Jun. 07, 2021
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 2021
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



Page 14 of 100

7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





Page 15 of 100


7.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	OUTPUT POWER
TEST MODE	802.11b with data rate 1

Frequency (GHz)	Average Power Antenna 1 (dBm)	Peak Power Antenna 1 (dBm)	Average Power Antenna 2 (dBm)	Peak Power Antenna 2 (dBm)	Average Power Total (dBm)	Peak Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.20	14.79	12.76	17.87	N/A	N/A	30	Pass
2.437	11.35	13.98	13.57	18.43	N/A	N/A	30	Pass
2.462	11.17	13.68	13.10	18.05	N/A	N/A	30	Pass

TEST ITEM	OUTPUT POWER	100	- 60	8
TEST MODE	802.11g with data rate 6	0		

Frequency (GHz)	Average Power Antenna 1 (dBm)	Peak Power Antenna 1 (dBm)	Average Power Antenna 2 (dBm)	Peak Power Antenna 2 (dBm)	Average Power Total (dBm)	Peak Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	11.05	18.11	12.41	19.63	N/A	N/A	30	Pass
2.437	11.76	18.99	12.91	19.95	N/A	N/A	30	Pass
2.462	11.46	18.55	12.37	19.52	N/A	N/A	30	Pass






TEST ITEM	OUTPUT POWER	C	8	(8)	
TEST MODE	802.11n 20 with data rate 6.5		GO.	r.C	

Frequency (GHz)	Average Power Antenna 1 (dBm)	Peak Power Antenna 1 (dBm)	Average Power Antenna 2 (dBm)	Peak Power Antenna 2 (dBm)	Average Power Total (dBm)	Peak Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	10.84	18.22	11.43	18.22	14.16	21.23	30	Pass
2.437	11.83	18.60	10.81	18.02	14.36	21.33	30	Pass
2.462	11.34	18.15	10.51	17.61	13.96	20.90	30	Pass

TEST ITEM	OUTPUT POWER	0		10
TEST MODE	802.11n 40 with data rate 13.5		-C	(0)

Frequency (GHz)	Average Power Antenna 1 (dBm)	Peak Power Antenna 1 (dBm)	Average Power Antenna 2 (dBm)	Peak Power Antenna 2 (dBm)	Average Power Total (dBm)	Peak Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	10.64	17.58	10.52	17.13	13.59	20.37	30	Pass
2.437	11.65	18.00	10.51	17.52	14.13	20.78	30	Pass
2.452	10.41	18.02	10.03	17.57	13.23	20.81	30	Pass






8. 6 DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≫ × RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

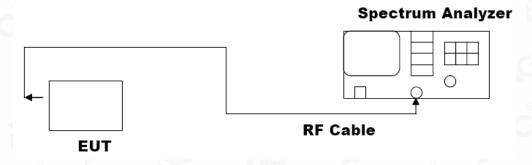



Page 18 of 100

8.3. LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH	-6	®	
TEST MODE	802.11b with data rate 11	100	CO	


LIMITS AND MEASUREMENT RESULT					
Appliachle Limite		Applicable Limits			
Applicable Limits	Test Data (MHz) Criteri				
	Low Channel	9.762	PASS		
>500KHZ	Middle Channel	9.793	PASS		
-C -	High Channel	9.070	PASS		

TEST ITEM	6DB BANDWIDTH	0		
TEST MODE	802.11g with data rate 54		a.C	(8)

LIMITS AND MEASUREMENT RESULT					
Annliaghla Limita	Applicable Limits				
Applicable Limits	Test Data (MHz) Criteria				
	Low Channel	15.07	PASS		
>500KHZ	Middle Channel	15.09	PASS		
	High Channel	15.09	PASS		

TEST ITEM	6DB BANDWIDTH	NO	_ GC
TEST MODE	802.11n 20 with data rate 65		

LIMITS AND MEASUREMENT RESULT				
Applicable Limite		Applicable Limits		
Applicable Limits	Test Data (MHz)		Criteria	
®	Low Channel	15.07	PASS	
>500KHZ	Middle Channel	15.08	PASS	
	High Channel	15.10	PASS	





TEST ITEM	6DB BANDWIDTH	8		
TEST MODE	802.11n 40 with data rate 135	NO	c ₂ C	

	LIMITS AND MEASUREMENT RESULT					
Applicable Limite		Applicable Limits				
Applicable Limits	Test Dat	a (MHz)	Criteria			
00	Low Channel	35.03	PASS			
>500KHZ	Middle Channel	35.07	PASS			
	High Channel	33.78	PASS			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



802.11b TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL




802.11g TEST RESULTTEST PLOT OF BANDWIDTH FOR LOW CHANNEL

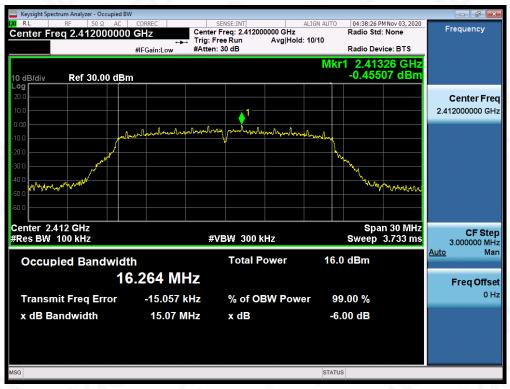

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written each orization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

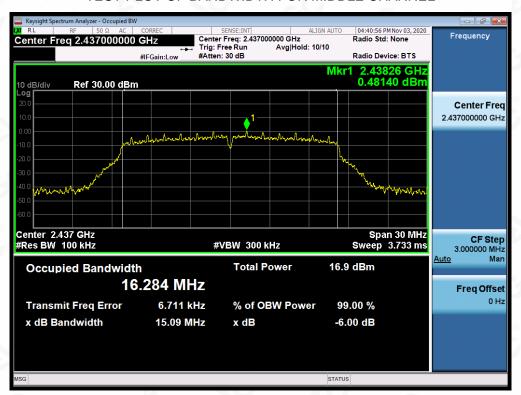

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



802.11n (20) TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

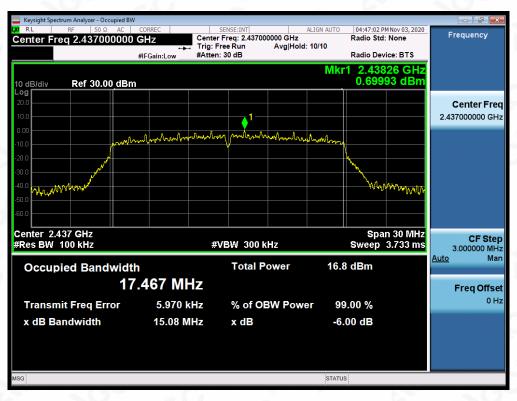

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



802.11n (40) TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written each orization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 26 of 100

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Annilla abila il insita	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Note: The limits reference level is according to the test plot of -6dB bandwidth.



TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b FOR MODULATION IN LOW CHANNEL

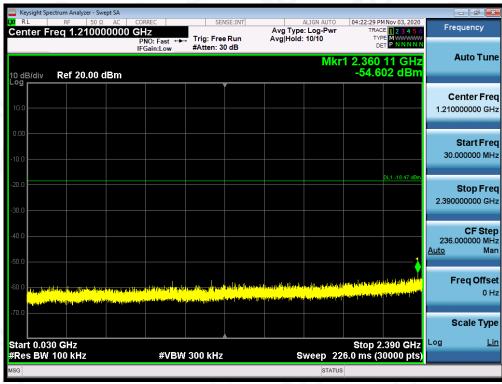








Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN MIDDLE CHANNEL

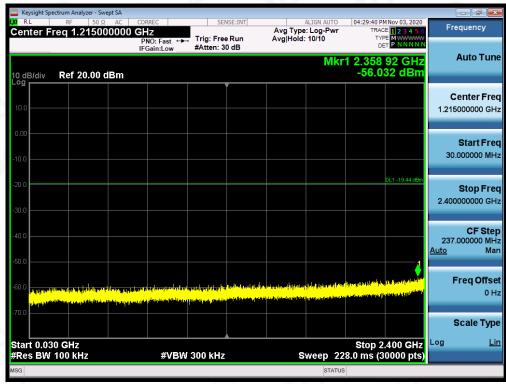






TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN HIGH CHANNEL







TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11g FOR MODULATION IN LOW CHANNEL

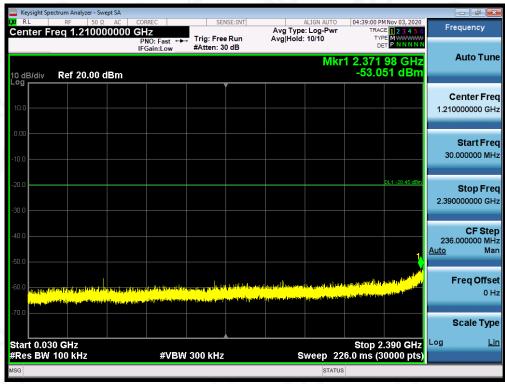



the test report.








TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11g FOR MODULATION IN MIDDLE CHANNEL








TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11g FOR MODULATION IN HIGH CHANNEL

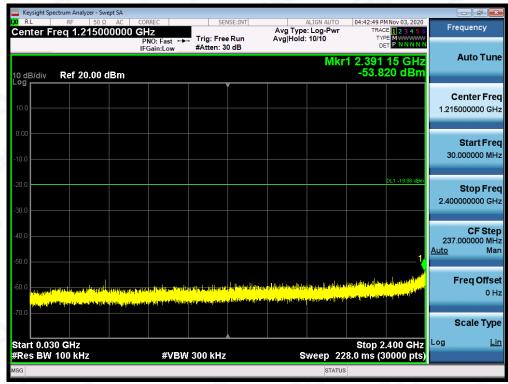






TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11n20 FOR MODULATION IN LOW CHANNEL

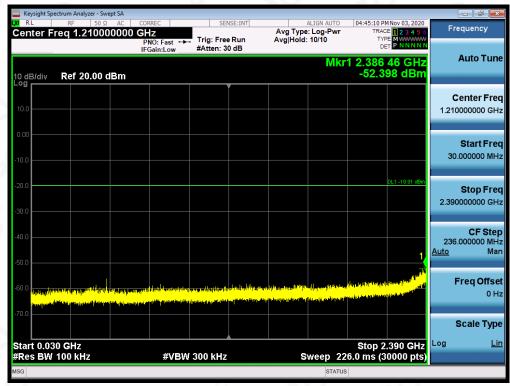






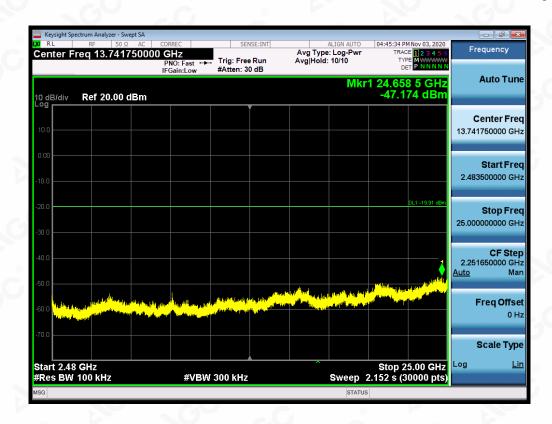

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN MIDDLE CHANNEL

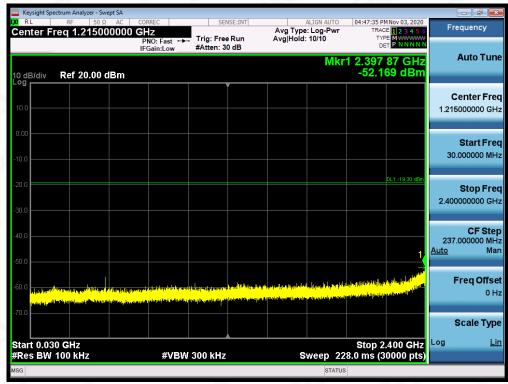






TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN HIGH CHANNEL

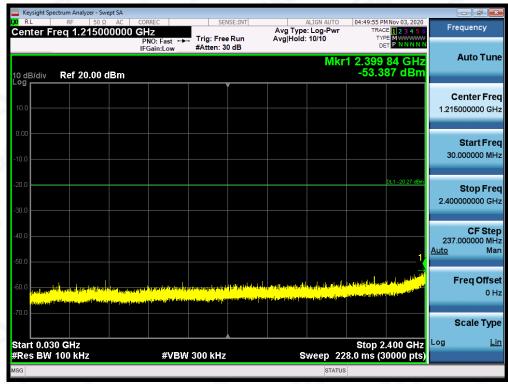






TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11n40 FOR MODULATION IN LOW CHANNEL

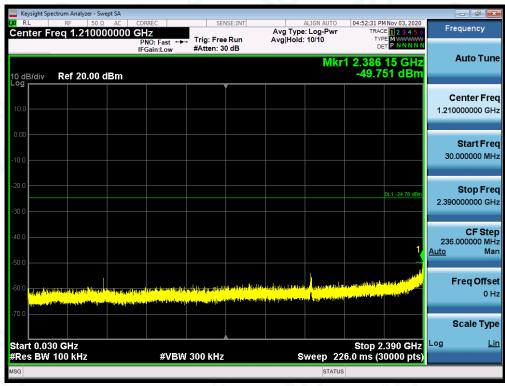

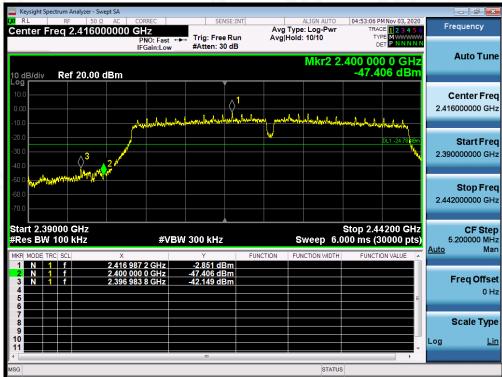






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n40 FOR MODULATION IN MIDDLE CHANNEL




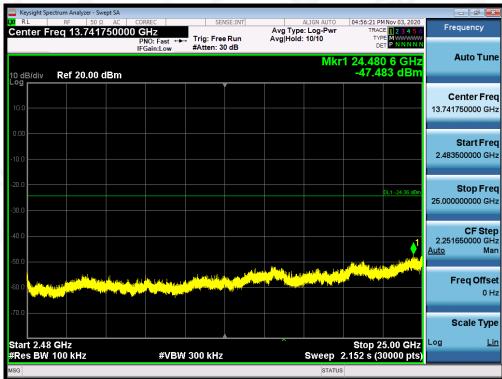



TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n40 FOR MODULATION IN HIGH CHANNEL

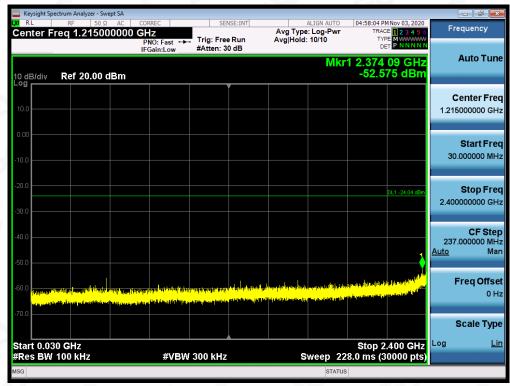

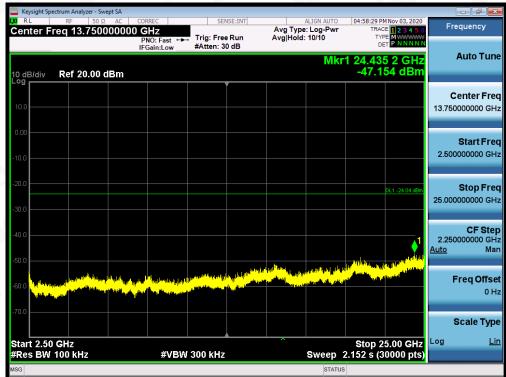

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified. The in 802.11b, 802.11g mode antenna 1 is the worst case and recorded in the report;



For 802.11n mode, the worst case Antenna 1 has more than 3dB margins, so the MIMO mode also compliance the limit.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 44 of 100

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11b with data rate 1

Channel No.	Antenna 1	Power density Antenna 1 (dBm/3kHz)	Power density Antenna 2 (dBm/20kHz)	Power density Antenna 2 (dBm/3kHz)	Power density Total (dBm/20kHz)	Power density Total (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	1.576	-6.66	5.205	-3.03	N/A	N/A	8	Pass
Middle Channel	0.902	-7.34	5.752	-2.49	N/A	N/A	8	Pass
High Channel	0.656	-7.58	5.397	-2.84	N/A	N/A	8	Pass

TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11g with data rate 6

Channel No.	Antenna 1	Power density Antenna 1 (dBm/3kHz)	Power density Antenna 2 (dBm/20kHz)	Power density Antenna 2 (dBm/3kHz)	Power density Total (dBm/20kHz)	Power density Total (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-5.969	-14.21	-5.269	-13.51	N/A	N/A	8	Pass
Middle Channel	-5.524	-13.76	-4.131	-12.37	N/A	N/A	8	Pass
High Channel	-5.750	-13.99	-4.505	-12.74	N/A	N/A	8	Pass





TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5

Channel No.	Antenna 1	Power density Antenna 1 (dBm/3kHz)	Power density Antenna 2 (dBm/20kHz)	Power density Antenna 2 (dBm/3kHz)	Power density Total (dBm/20kHz)	Power density Total (dBm/3kHz)	(dBm/3kHz)	Result
Low Channel	-5.235	-13.47	-4.878	-13.12	-2.04	-10.28	8	Pass
Middle Channel	-5.390	-13.63	-6.077	-14.32	-2.71	-10.95	8	Pass
High Channel	-5.179	-13.42	-5.864	-14.10	-2.50	-10.74	8	Pass

TEST ITEM	POWER SPECTRAL DENSITY	©
TEST MODE	802.11n 40 with data rate 13.5	CC

Channel No.	Antenna 1	Power density Antenna 1 (dBm/3kHz)	Power density Antenna 2 (dBm/20kHz)	Power density Antenna 2 (dBm/3kHz)	Power density Total (dBm/20kHz)		(dBm/3kHz)	Result
Low Channel	-9.926	-18.17	-10.646	-18.89	-7.26	-15.50	8	Pass
Middle Channel	-10.336	-18.58	-9.780	-18.02	-7.04	-15.28	8	Pass
High Channel	-8.893	-17.13	-9.361	-17.60	-6.11	-14.35	8	Pass



802.11b TEST RESULT AT ANTENNA 1 TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL





TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL



802.11b TEST RESULT AT ANTENNA 2 TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

