



TEST REPORT NO: RU1050/4381
COPY NO:
ISSUE NO: 1
FCC ID: OE5S820

**REPORT ON THE CERTIFICATION TESTING OF A
GROUP 4 TECHNOLOGY Ltd.
S820 HID READER
WITH RESPECT TO
THE FCC RULES CFR 47, PART 15.209
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 19th – 20th March 2003

TESTED BY: J CHARTERS
APPROVED BY: P GREEN
PRODUCT MANAGER
DATE:

Distribution:

- Copy Nos:
1. GROUP 4 TECHNOLOGY Ltd.
 2. FCC EVALUATION LABORATORIES
 3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

TRL COMPLIANCE SERVICES LTD EMC DIVISION
LONG GREEN FORTHAMPTON GLOUCESTER GL19 4QH UNITED KINGDOM
TELEPHONE +44 (0)1684 833818 FAX +44 (0)1684 833858
E-MAIL test@trlcompliance.com www.trlcompliance.com



0728

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	6
SAMPLE CALCULATIONS	6
TEST RESULTS	7-12

ANNEX

PHOTOGRAPHS	A
PHOTOGRAPH No. 1: Test setup	
PHOTOGRAPH No. 2: Test setup	
PHOTOGRAPH No. 3: Transmitter front view	
PHOTOGRAPH No. 4: Transmitter rear view	
PHOTOGRAPH No. 5: Transmitter PCB track side	
PHOTOGRAPH No. 6: Transmitter PCB component side	
PHOTOGRAPH No. 7: Antenna PCB track side	
PHOTOGRAPH No.8: Antenna PCB component side	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
BAND OCCUPANCY PLOT	C
CONDUCTED EMISSION PLOTS	D
PEAK EMISSIONS SCANS	E

Notes:

- | | | | |
|----|--|-----|-------------------------------------|
| 1. | Component failure during test | YES | ☐ |
| | | NO | ☒ |
| 2. | If Yes, details of failure: | | |
| 3. | The facilities used for the testing of the product contain in this report are FCC Listed. | | |
| 4. | The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith. | | |



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: OE5S820

PURPOSE OF TEST: CERTIFICATION

TEST SPECIFICATION: FCC RULES CFR 47, Part 15.209

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: S820 HID READER

EQUIPMENT SERIAL No: 0311273789 antenna pcb
0311273788 main pcb

ITU: EMISSION CODE: 17K0A1D

EQUIPMENT TYPE: Inductive card reader

PRODUCT USE: Access control

CARRIER EMISSION: 2.82dB μ V/m @ 300m

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: N/A

BAND OF OPERATION: 0.009MHz – 0.490MHz

CHANNEL SPACING: N/A wideband

NUMBER OF CHANNELS: 1

FREQUENCY GENERATION: SAW Resonator [] Crystal [X] Synthesiser []

MODULATION METHOD: Amplitude [X] Digital [] Angle []

POWER SOURCE(s): +12Vdc

TEST DATE(s): 19th - 20th March 2003

ORDER No(s): PRP10059

APPLICANT: GROUP 4 TECHNOLOGY Ltd.

ADDRESS: CHALLENGE HOUSE
NORHTWAY LANE
TEWKESBURY
GLOUCESTERSHIRE
GL20 8JG
UNITED KINGDOM

TESTED BY: _____ J CHARTERS

APPROVED BY: _____ P GREEN
PRODUCT
MANAGER

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	S820 HID READER
EQUIPMENT TYPE:	Inductive card reader
SERIAL NUMBER OF EUT:	0311273789 ant pcb 0311273788 main pcb
PURPOSE OF TEST:	CERTIFICATION
TEST SPECIFICATION(s):	FCC RULES CFR 47, Part 15.209
TEST RESULT:	COMPLIANT Yes ☒ No ☐
APPLICANT'S CATEGORY:	MANUFACTURER ☒ IMPORTER ☐ DISTRIBUTOR ☐ TEST HOUSE ☐ AGENT ☐
APPLICANT'S ORDER No(s):	PRP10059
APPLICANT'S CONTACT PERSON(s):	Mr Eric Porter
E-mail address:	Eric.porter@g4tech.co.uk
APPLICANT:	GROUP 4 TECHNOLOGY Ltd.
ADDRESS:	Challenge House Northway Lane Tewkesbury Gloucestershire GL20 8JG United kingdom
TEL:	+44 (0) 1684 850977
FAX:	+44 (0) 1684 290166
MANUFACTURER:	GROUP 4 TECHNOLOGY Ltd.
EUT(s) COUNTRY OF ORIGIN:	United Kingdom
TEST LABORATORY:	TRL EMC
UKAS ACCREDITATION No:	0728
TEST DATE(s)	19 th – 20 th March 2003
TEST REPORT No:	RU1050/4381

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.209(a)	Average	Yes
	Intentional Emission Field Strength:	15.209(a)	Average	Yes
	Intentional Emission Band Occupancy:	N/A	Peak	Yes
	Intentional Emission ERP (mW):	N/A	N/A	N/A
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	Yes
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak Average	Yes
	Spurious Emissions – Radiated >1000MHz:	15.209	Average	Yes
	Maximum Frequency of Search:	15.33	N/A	Yes
	Antenna Arrangements Integral:	15.203	N/A	Yes
	Antenna Arrangements External Connector:	15.204	N/A	Yes
	Restricted Bands	15.205	N/A	Yes
	Extrapolation Factor	15.31(f)	N/A	Yes
2.	Product Use:	Access control		
3.	Emission Designator:	17K0A1D		
4.	Duty Cycle:	<100%		
5.	Transmitter bit or pulse rate and level:	1200bps		
6.	Temperatures:	Ambient (Tnom)	24°C	
7.	Supply Voltages:	Vnom	+12Vdc	
	Note: Vnom voltages are as stated above unless otherwise shown on the test report page			
8.	Equipment Category:	Single channel	[X]	
		Two channel	[]	
		Multi-channel	[]	
9.	Channel spacing:	Narrowband	[]	
		Wideband	[X]	

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature	=	24°C(<1GHz)	3m measurements <1GHz	[X]
Relative humidity	=	45% (<1GHz),	1m measurements >1GHz	[X]
Conditions	=	Open Area Test Site (OATS)	3m extrapolated from 1m	[]
Supply voltage	=	+12Vdc		
Channel number	=	1		

	FREQ. (MHz)	MEAS. Rx. (dBμV/m)	CABLE LOSS	EXTRAP. FACT. (dB)	FIELD STRENGTH (μV/m)	LIMIT (μV/m)
9kHz - 490kHz	0.2503	34.9	-	80	0.006	9.6
	0.3754	55.1	-	80	0.057	6.4
490kHz - 1.705MHz	0.5006	35.5	-	40	0.6	47.9
	0.6257	46.9	-	40	2.21	38.4
1.705MHz - 30MHz						
30MHz - 88MHz						
88MHz - 216MHz						
216MHz - 960MHz						
960MHz - 1GHz						
1GHz - 5GHz						
Limit	9kHz – 0.490kHz		2400/F (kHz) @300m			
	490kHz-1.705MHz		24000/F (kHz) @ 30m			
	1.705MHz to 30MHz		30μV/m @ 30m			
	30MHz to 88MHz		100μV/m @ 3m			
	88MHz to 216MHz		150μV/m @ 3m			
	216MHz to 960MHz		200μV/m @ 3m			
	960MHz to 1GHz		500μV/m @ 3m			
	1GHz to 5GHz		500μV/m @ 3m			

See next page for notes and test methods.

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 9.5dB from 1m to 3m, as per Part 15.31f
- 4 Extrapolation factor 80dB from 3m to 300m as per Part 15.31f
- 5 Extrapolation factor 40dB from 3m to 30m as per Part 15.31f
- 6 Measurements >1GHz @ 1m as per Part 15.31f(1)
- 7 Receiver detector 9kHz – 30MHz CISPR, Quasi-Peak, 10kHz bandwidth.
Apart from the bands 9kHz-90kHz and 110kHz-490kHz where an Average detector is used.
- 8 Receiver detector 30MHz<1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 9 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth
- 10 New batteries used for battery powered products.
- 11 Emissions 20dB's below the limit are not recorded
- 12 For emissions below 30MHz, the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz.
- 13 For emissions below 30MHz the cable losses are assumed to be negligible.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 1992
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.(above 30MHz only)
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	X
HORN ANTENNA	EMCO	3115	9010-3580	138	X
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	X
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	X
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	X

TRANSMITTER TESTS

TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.209

Ambient temperature	=	24°C(<1GHz),	3m measurements @ fc	[X]
Relative humidity	=	45%(<1GHz),	10m measurements @ fc	[X]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[]
Supply voltage	=	+12Vdc	300m extrapolated from 3m	[X]
Channel number	=	1	300m extrapolated from 10m	[X]

FREQ. (kHz)	MEASUREMENT DISTANCE (Metres)	MEASUREMENT Rx. READING (dBµV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (µV/m)
125.15	3	81.9	80.0	1.24
125.15	10	61.9	59.08	1.38
Limit value @ fc		19.2µV/m @ 300 m		
Band occupancy @ -30dBc		f lower	f higher	
		107.78kHz	140.55kHz	

See spectrum analyser plot – Annex C

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Receiver detector @ fc = Average 10kHz bandwidth, measurement time = 100ms
- 3 When battery powered the EUT was powered with new batteries
- 4 For emissions below 30MHz the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz.
- 5 For emissions below 30MHz the cable losses are assumed to be negligible.
- 6 Peak emissions were found to be less than or equal to the average emission therefore deemed to comply with 15.35(b). See scan data Annex E

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 1992
- 2 Measuring distances 3m
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.(above 30MHz only)
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	X
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	X
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	
RANGE 1	TRL	3 METRE	N/A	UH06	
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

TRANSMITTER TESTS

TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE Part 15.207

Ambient temperature = 20°C(<1GHz),
Relative humidity = 50%(<1GHz),
Conditions = Power Line Laboratory
Supply voltage = 110V AC
Supply Frequency = 60Hz

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dBμV)	DETECTOR	CONDUCTOR (L or N)	LIMIT (dBμV)
0.15	40.12	QUASI PEAK	L	66.00
0.2	35.47	QUASI PEAK	L	63.61
0.23	33.16	QUASI PEAK	N	33.16
20.155	40.68	QUASI PEAK	L	40.00
8.385	31.67	AVERAGE	N	50.00
10.39	33.40	AVERAGE	L	50.00
12.645	35.10	AVERAGE	L	50.00
12.895	34.83	AVERAGE	L	50.00
14.145	36.82	AVERAGE	N	50.00
19.405	37.62	AVERAGE	L	50.00
20.155	40.06	AVERAGE	L	50.00
24.41	30.49	AVERAGE	L	50.00

Notes: 1 See attached plots annex D


Test Method: 1 As per Radio – Noise Emissions, ANSI C63.4: 1992

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
LISN / AMN	ROHDE & SCHWARZ	ESH3-Z5	83746/010	289	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	


POWER LINE CONDUCTION EMISSIONS

Limit Part 15.207

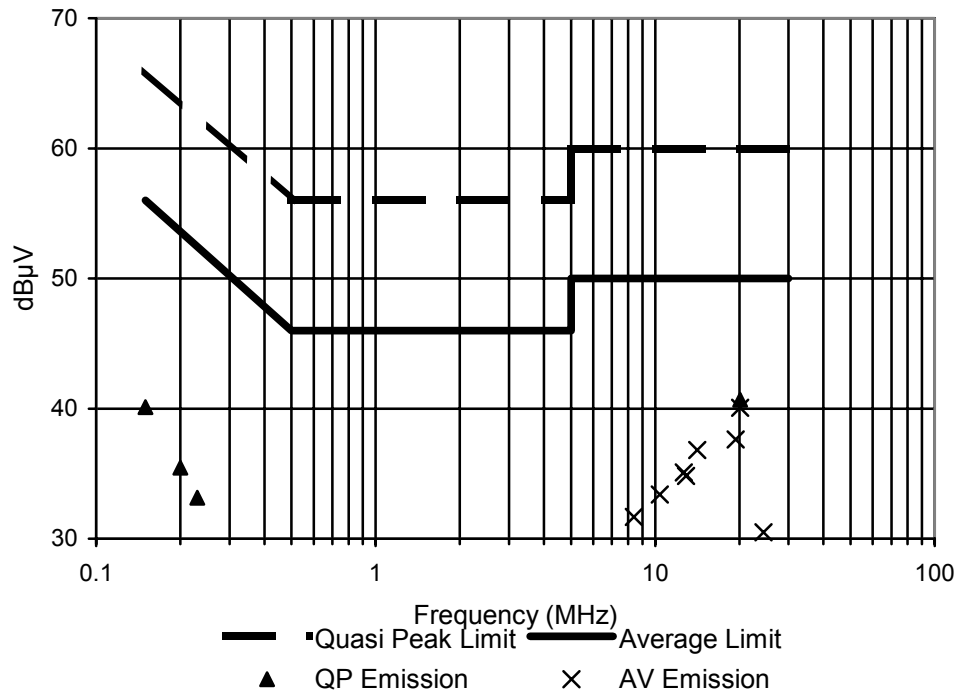

ANNEX A
PHOTOGRAPHS




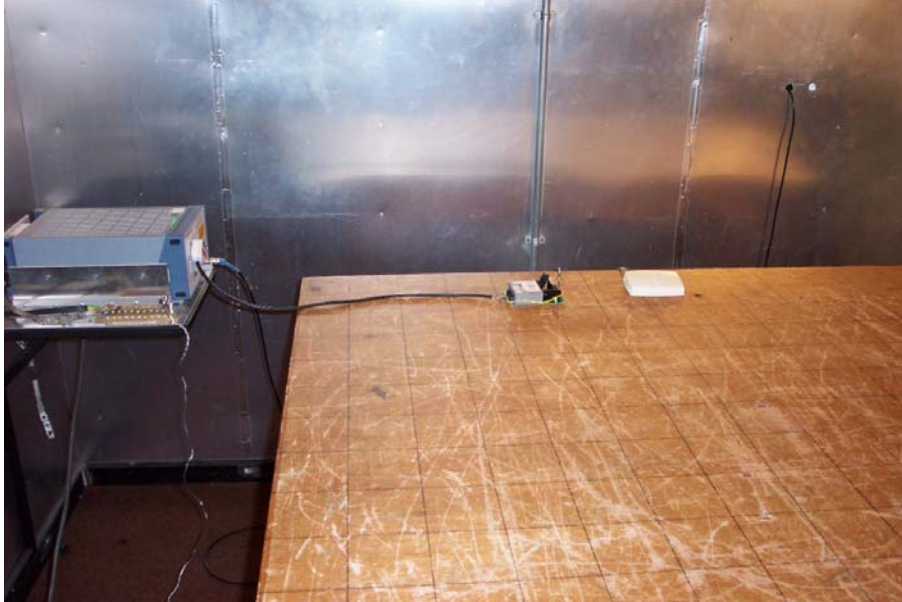



PHOTOGRAPH No. 3


TRANSMITTER FRONT VIEW



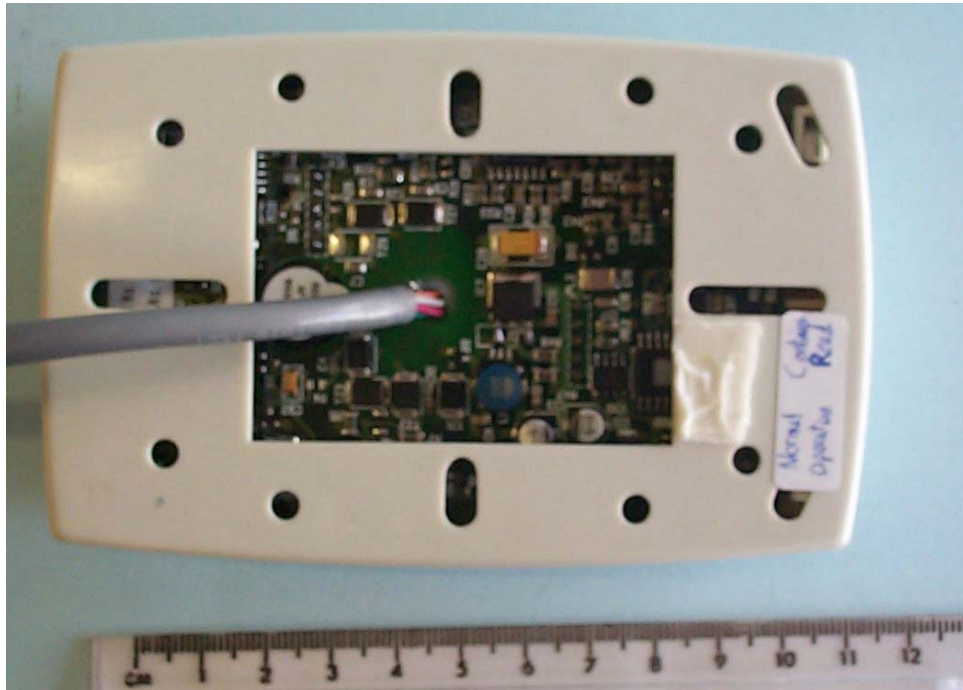

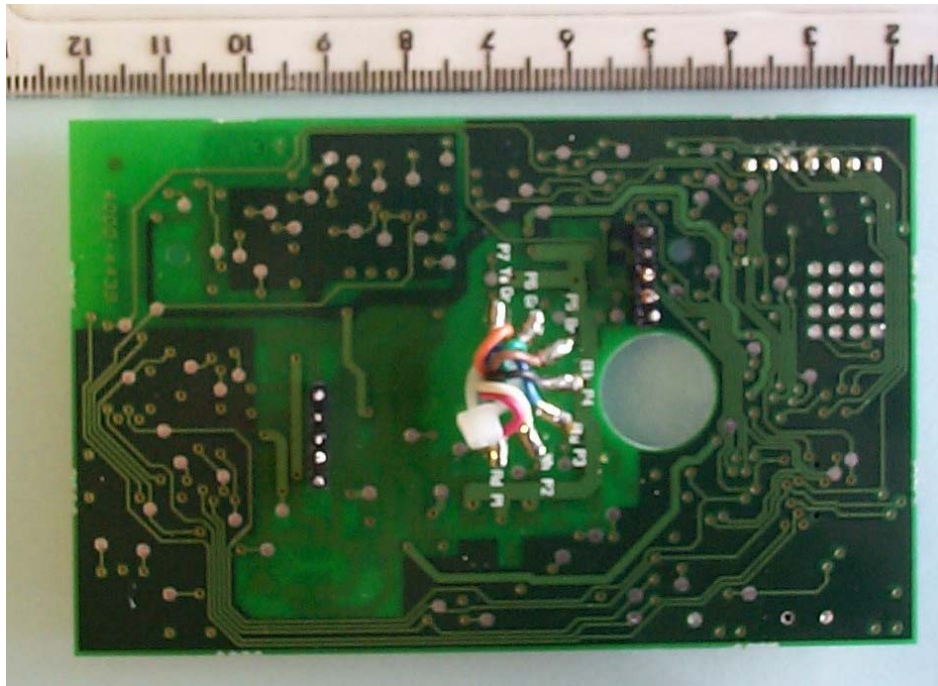


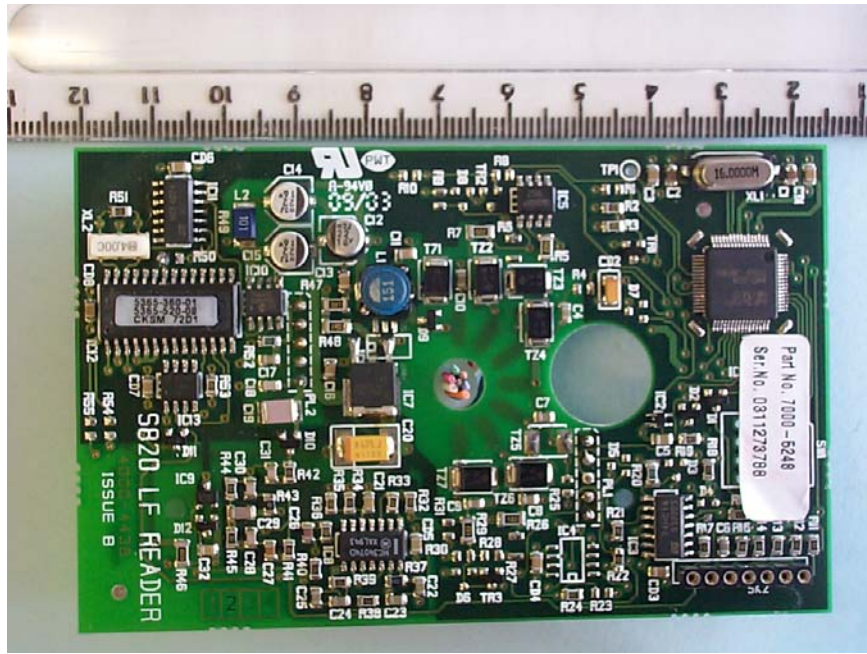

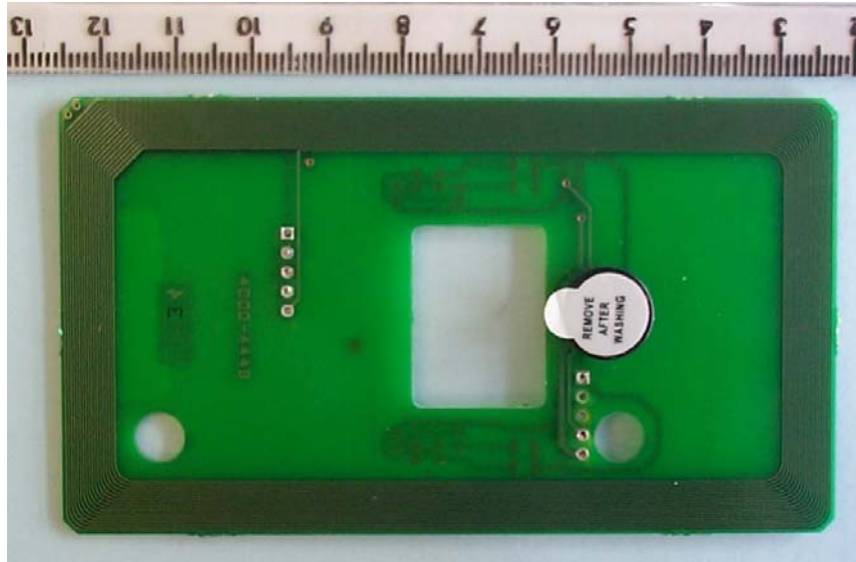

PHOTOGRAPH No. 8

ANTENNA PCB COMPONENT SIDE

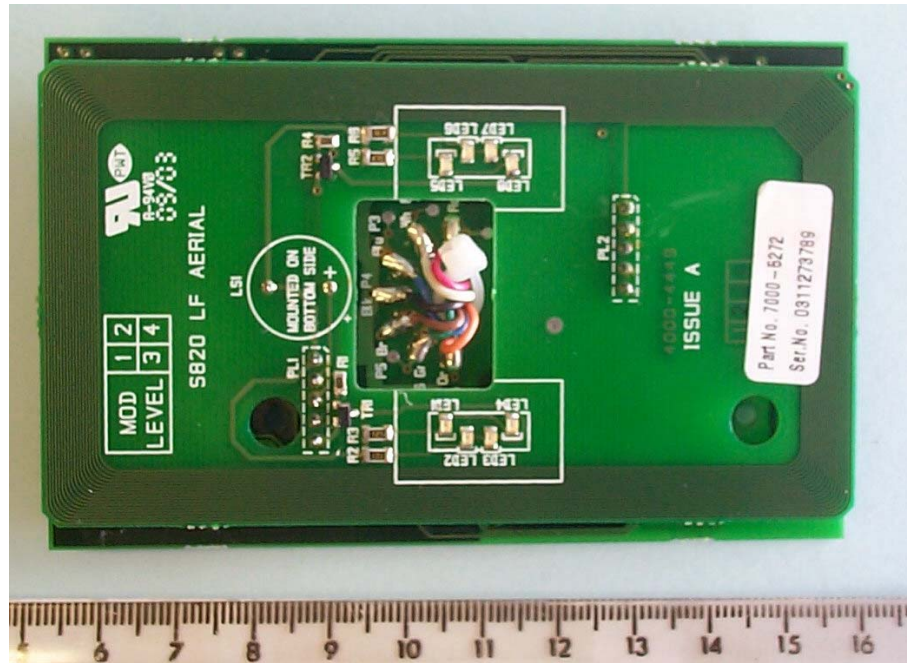

ANNEX B


APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[X]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[X]
e.	LABELLING	-	PHOTOGRAPHS	[]
		-	DECLARATION	[X]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
BANDWIDTH PLOT

BANDWIDTH PLOT

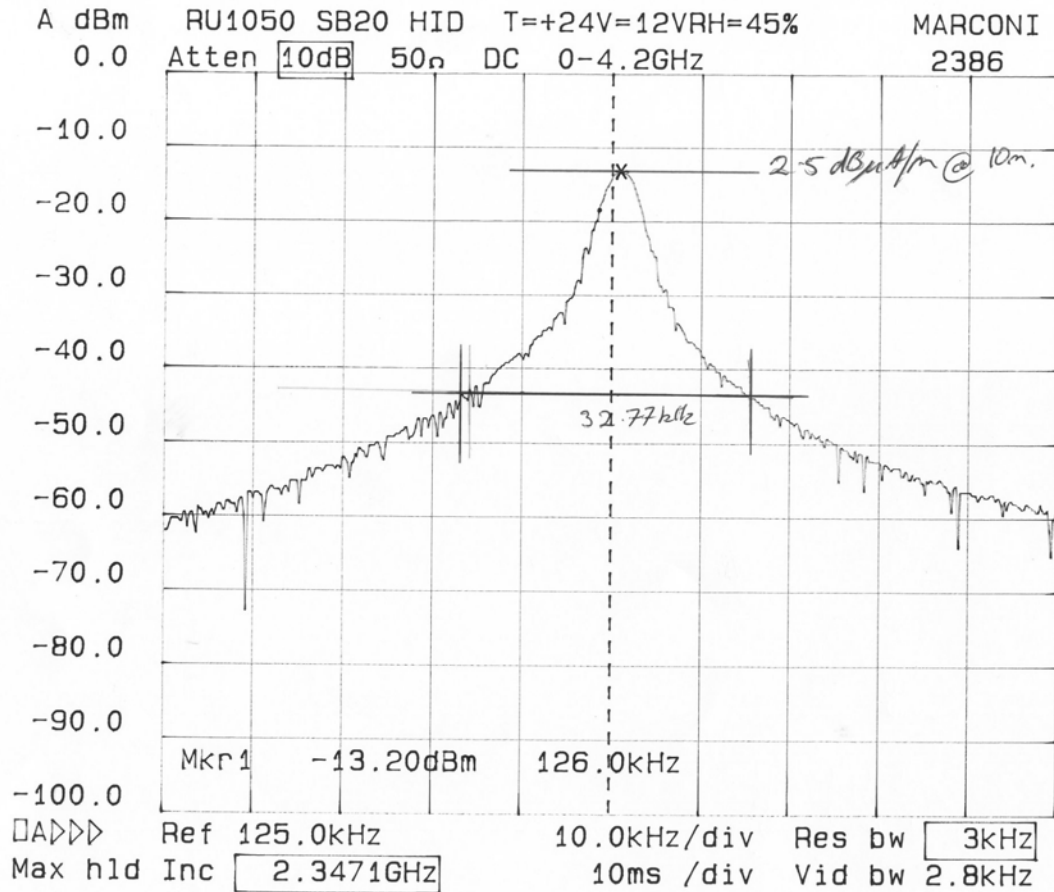

ANNEX D
POWER LINE PLOTS

Power Line Conducted Emissions Live


Powerline Conduction

20 Mar 2003 09:56

150kHz - 30MHz


EUT: S820
Manuf: Group 4
Op Cond: LISN UH5, UH21
Operator: J Charters
Test Spec: FCC part15.207
Comment: Tested using 110V dc psu

Scan Settings			(1 Range)			Receiver Settings			
			Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	1	150kHz	30MHz	UH21					
Final Measurement:			Detectors:	X QP / + AV					
			Meas Time:	2sec					
			Subranges:	25					
			Acc Margin:	20 dB					

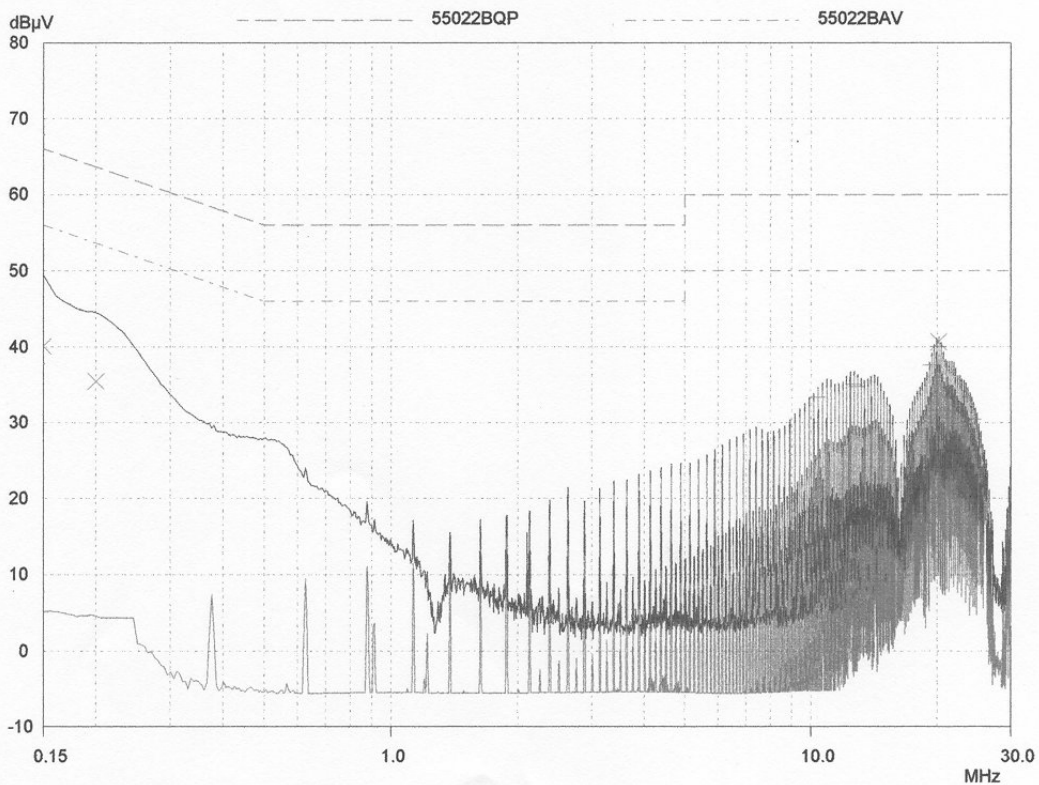

PAGE 1

Power Line Conducted Emissions Neutral

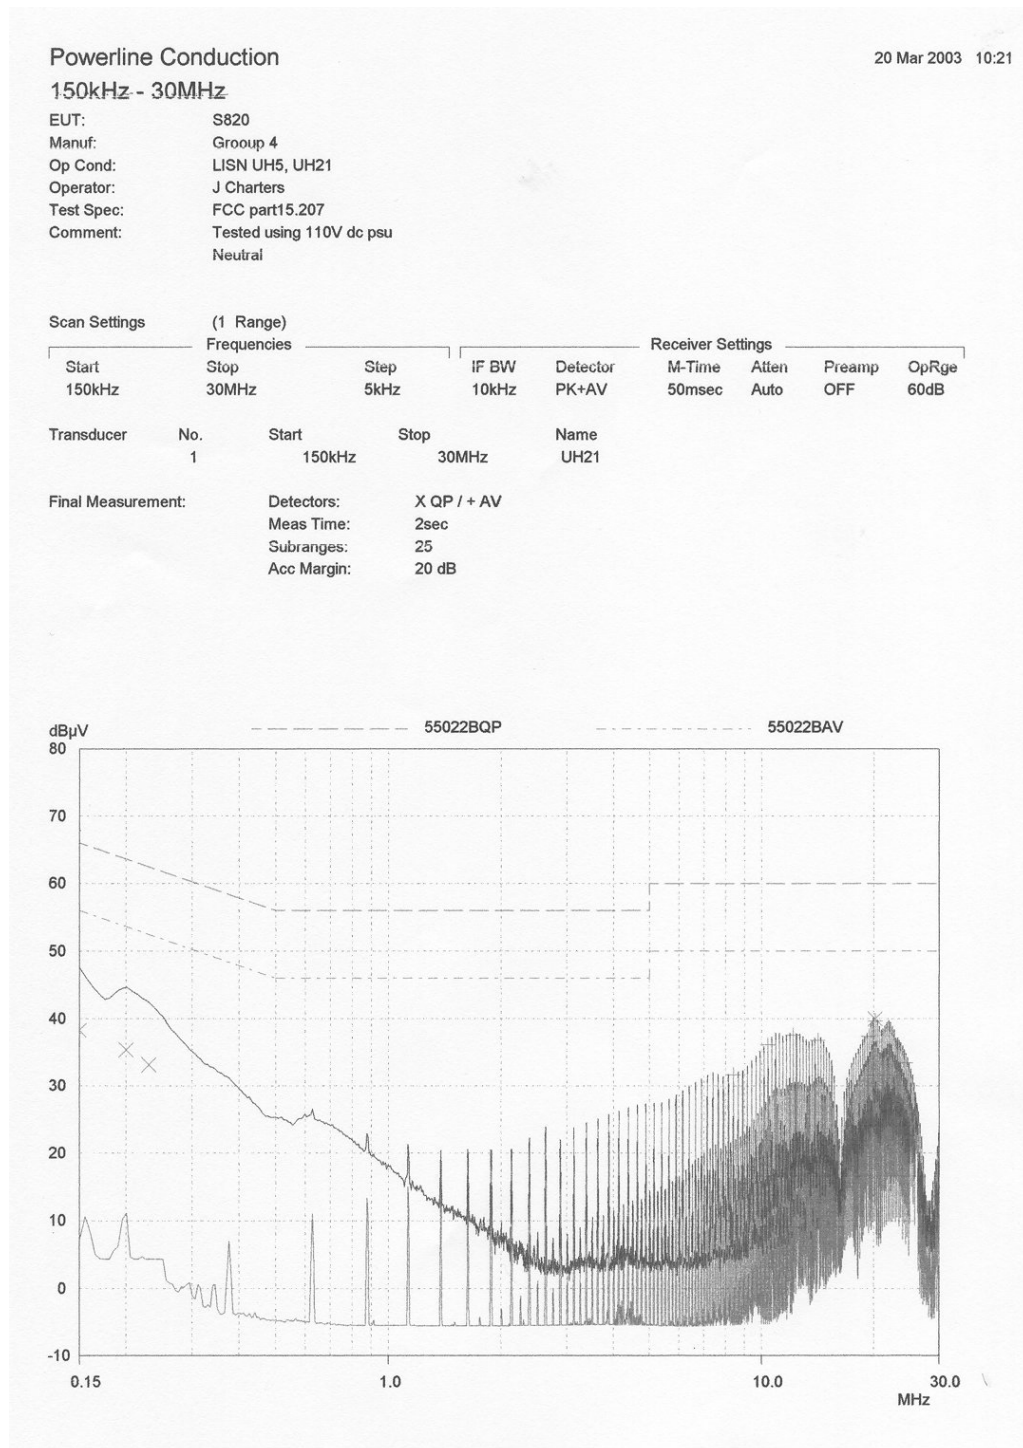

ANNEX E
PEAK EMISSIONS SCANS

TRL COMPLIANCE


19 Mar 2003 13:33

H Field

EUT: tag reader
 Manuf: Group 4
 Op Cond: Pre Scan
 Operator: J Charters
 Test Spec: ETS EN 300 330
 Comment: TX on continuous

Scan Settings			(2 Ranges)		Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9kHz	150kHz	100Hz	200Hz	PK	100msec	Auto	OFF	60dB
150kHz	30MHz	5kHz	10kHz	PK	20msec	Auto	OFF	60dB

Prescan Measurement: Detector: X PK
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

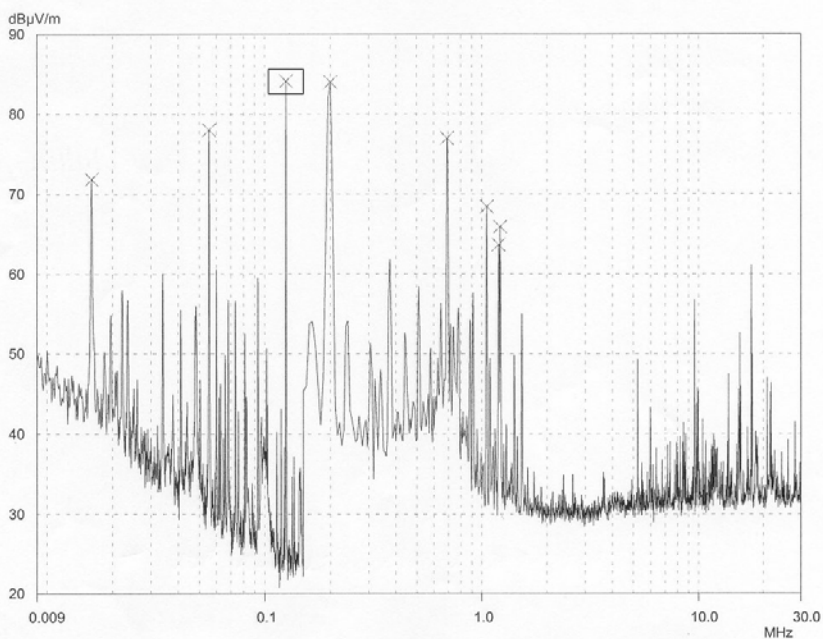

Note: Fc mark with ☐ all other emissions are ambient

TRL Compliance Services Ltd

25 Mar 2003 13:13

E-Field Radiation

EUT: S820
 Manuf: Group 4
 Op Cond: Pre Scan
 Operator: J Charters
 Test Spec: EN55022
 Comment: TX on

Scan Settings		(1 Range)			Receiver Settings			
Frequencies								
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON	60dB
Transducer	No.	Start	Stop	Name				
1	14	30MHz	1000MHz	Cable3m				
	22	30MHz	1000MHz	CBL6112B				
Prescan Measurement:		Detector:	X PK					
		Meas Time:	see scan settings					
		Peaks:	50					
		Acc Margin:	10 dB					

