

CERTIFICATION TEST REPORT

Report Number. : 4790976580-E7V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SC-51E, SCG25

FCC ID : A3LSMS921JPN

EUT Description : GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
NFC and WPT

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2024-01-23

Prepared by:

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-01-23	Initial issue	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULES.....	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. TEST RESULTS SUMMARY	14
8. MEASUREMENT METHODS	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 20 dB BANDWIDTH	17
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	17
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	17
9.3. HOPPING FREQUENCY SEPARATION.....	20
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	21
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	21
9.4. NUMBER OF HOPPING CHANNELS	22
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	23
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	25
9.5. AVERAGE TIME OF OCCUPANCY.....	27
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	28
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	32
9.6. OUTPUT POWER.....	36
9.6.1. BASIC DATA RATE GFSK MODULATION.....	36

9.6.2.	ENHANCED DATA RATE Pi/4-DPSK MODULATION	36
9.6.3.	ENHANCED DATA RATE 8PSK MODULATION	36
9.6.4.	BASIC DATA RATE GFSK MODULATION(DUAL)	37
9.6.5.	ENHANCED DATA RATE Pi/4-DPSK MODULATION(DUAL).....	37
9.6.6.	ENHANCED DATA RATE 8PSK MODULATION(DUAL)	37
9.6.7.	OUTPUT POWER PLOTS.....	38
9.7.	AVERAGE POWER	44
9.7.1.	BASIC DATA RATE GFSK MODULATION.....	44
9.7.2.	ENHANCED DATA RATE PI/4-DQPSK MODULATION	44
9.7.3.	ENHANCED DATA RATE 8PSK MODULATION	44
9.7.4.	BASIC DATA RATE GFSK MODULATION(DUAL)	45
9.7.5.	ENHANCED DATA RATE PI/4-DQPSK MODULATION(DUAL).....	45
9.7.6.	ENHANCED DATA RATE 8PSK MODULATION(DUAL)	45
9.8.	CONDUCTED SPURIOUS EMISSIONS	46
9.8.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	47
9.8.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	51
10.	RADIATED TEST RESULTS	55
10.1.	TRANSMITTER ABOVE 1 GHz	57
10.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	57
10.1.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	71
10.2.	WORST CASE BELOW 1 GHz.....	85
11.	AC POWER LINE CONDUCTED EMISSIONS	86
11.1.	AC Power Line.....	87

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT

MODEL: SC-51E, SCG25

SERIAL NUMBER: R3CWB0FGWAL, R3CWB0FGWFP (CONDUCTED);
R3CWB0FGX5Z, R3CWB0FGXEX (RADIATED);

DATE TESTED: 2023-12-12 ~ 2024-01-22

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. KDB 662911 D01 v02r01
5. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☒	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord} \\ &\text{Loss (dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.06 dB
Radiated Disturbance, 18 GHz to 40 GHz	6.02 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT. This test report addresses the DSS(Bluetooth) operational mode.

Representative model	Difference	Derivative model
		SCG25
SC-51E	Hardware	Same as SC-51E
	Software	Different UI

The model SC-51E was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	18.420	69.502
		Average	18.014	63.299
	Enhanced Pi/4-DPSK	Peak	17.390	54.828
		Average	14.291	26.860
	Enhanced 8PSK	Peak	17.920	61.944
		Average	14.305	26.946

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band[MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain[dBi]
DTS 2400 – 2483.5	-2.44	-3.89	-0.12

Directional gain for the MIMO operations is determined using KDB 662911 D01 Multiple Transmitter Output section F (2)(d)(1) for *Unequal antenna gains, with equal transmit powers*. The gain is calculated using the formula for correlated transmissions across the two transmit antennas.

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.

Sample calculation for this device with $N_{ANT} = 2$

Directional gain = $10 \log[(10^{-3.5/20} + 10^{-7.1/20})^2 / 2] = -2.1$ dBi

“BT/WIFI #1_2.4GHz” and “BT/WIFI #2_2.4GHz (SUB6_Ant J)” as indicated in antenna specification are written as ANT1 and ANT2 in this report.

5.4. WORST-CASE CONFIGURATION AND MODE

Both Bluetooth Diversity mode and DUAL mode have been investigated and confirmed.

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z. It was determined that below table's orientation was the worst-case orientation.

ANT1	ANT2	DUAL
X	X	X

For conducted power test, both Diversity and DUAL mode were verified and reported. In DUAL mode, except power test, no noticeable data was found. Tests was performed on Diversity mode.

Diversity mode test was performed on SISO and DUAL iPA mode.

Radiated and power line conducted tests were performed with EUT connected to AC power adapter as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the Diversity and DUAL mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For Radiated band-edge and spurious test, tests were performed on Diversity mode and DUAL mode.

All radiated and power line conducted tests were performed attached with travel adapter for the worst-case condition mode.

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37W61WENTASEA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02117A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

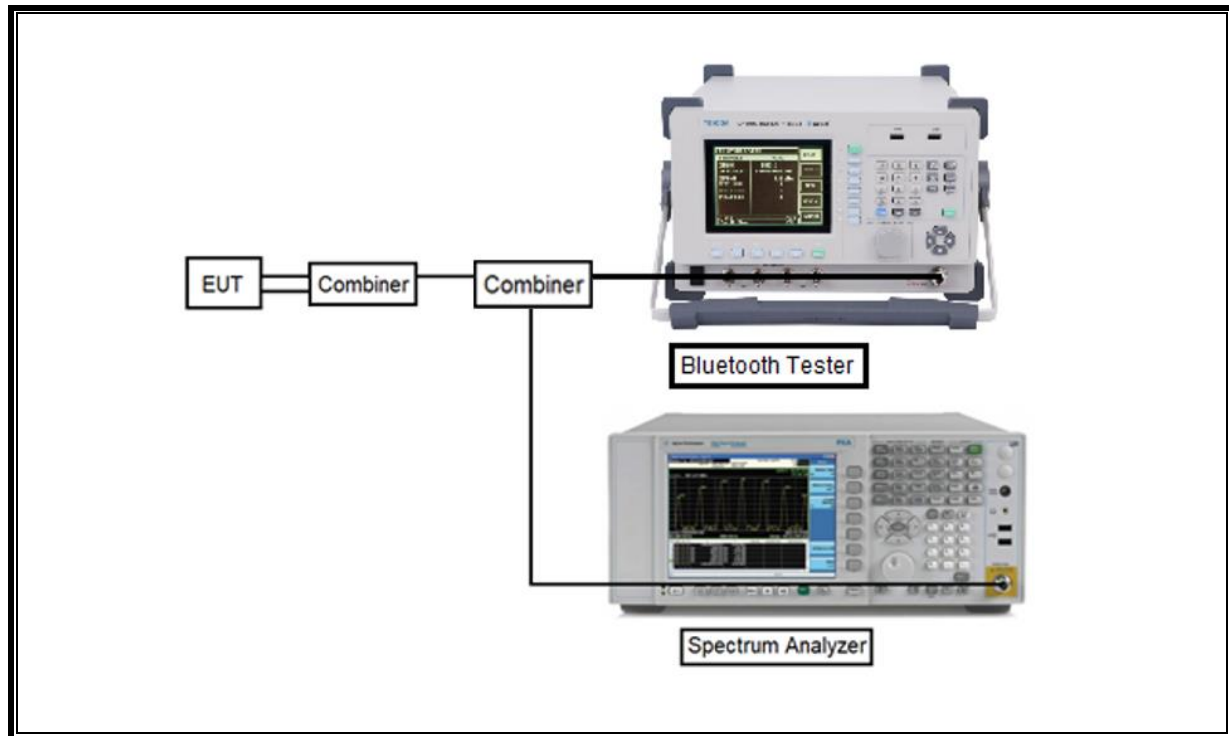

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

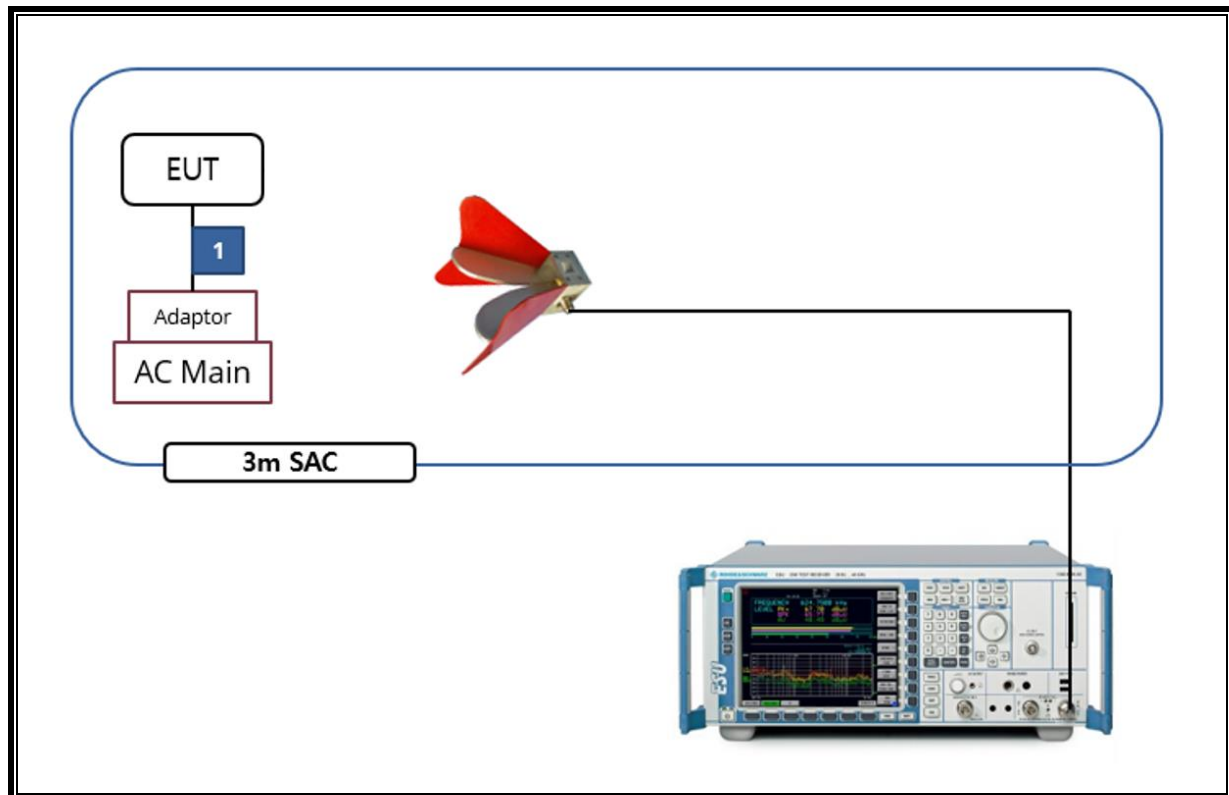

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024-08-04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Preamplifier	ETS	3115-PA	00167475	2024-07-25
Preamplifier	ETS	3116C-PA	00168841	2024-07-25
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2024-07-25
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2024-07-24
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2025-01-03
Average Power Sensor	Agilent / HP	U2000	MY54270007	2024-07-23
Average Power Sensor	Agilent / HP	U2000	MY54260010	2024-07-24
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2024-07-24
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2025-01-03
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2025-01-03
Attenuator	PASTERNAK	PE7087-10	A009	2024-07-24
Attenuator	PASTERNAK	PE7087-10	A001	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2024-07-24
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2024-07-23
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2024-07-23
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2024-07-23
LISN	R&S	ENV-216	101836	2024-07-23
Termination	WEINSCHL	M1406A	T09	2024-07-23
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	Complies
15.247 (b)(1)	TX conducted output power	< 21 dBm		Complies
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Complies
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Complies
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

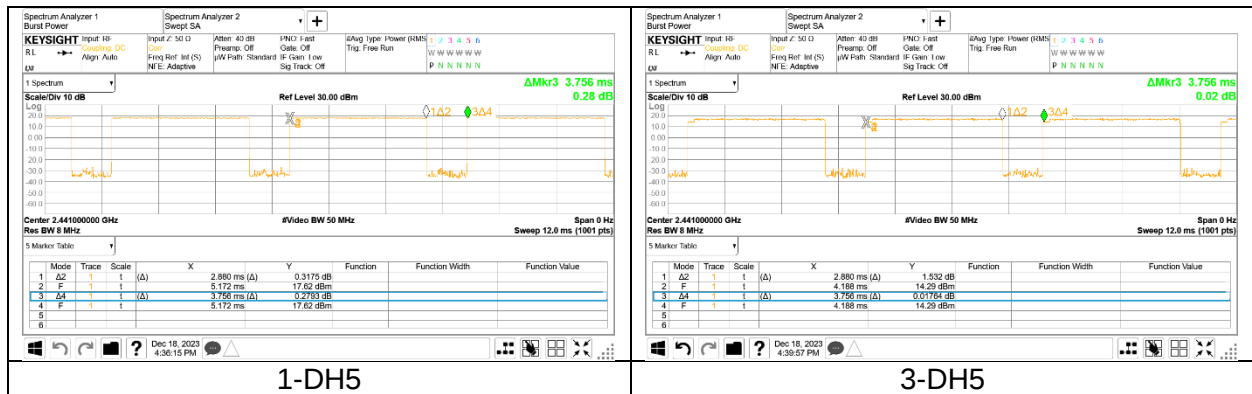

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
2 400 ~ 2 483.5 MHz Band				
BDR	2.880	3.756	76.677	0.35
EDR	2.880	3.756	76.677	0.35

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. The sweep time is coupled.


RESULTS


9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	942.6
	39	2 441	934.4
	78	2 480	938.0
ANT2	0	2 402	952.3
	39	2 441	950.0
	78	2 480	946.8
Worst			952.3

9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Channel		Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	1 279.0
	39	2 441	1 278.0
	78	2 480	1 273.0
ANT2	0	2 402	1 320.0
	39	2 441	1 325.0
	78	2 480	1 328.0
Worst			1 328.0

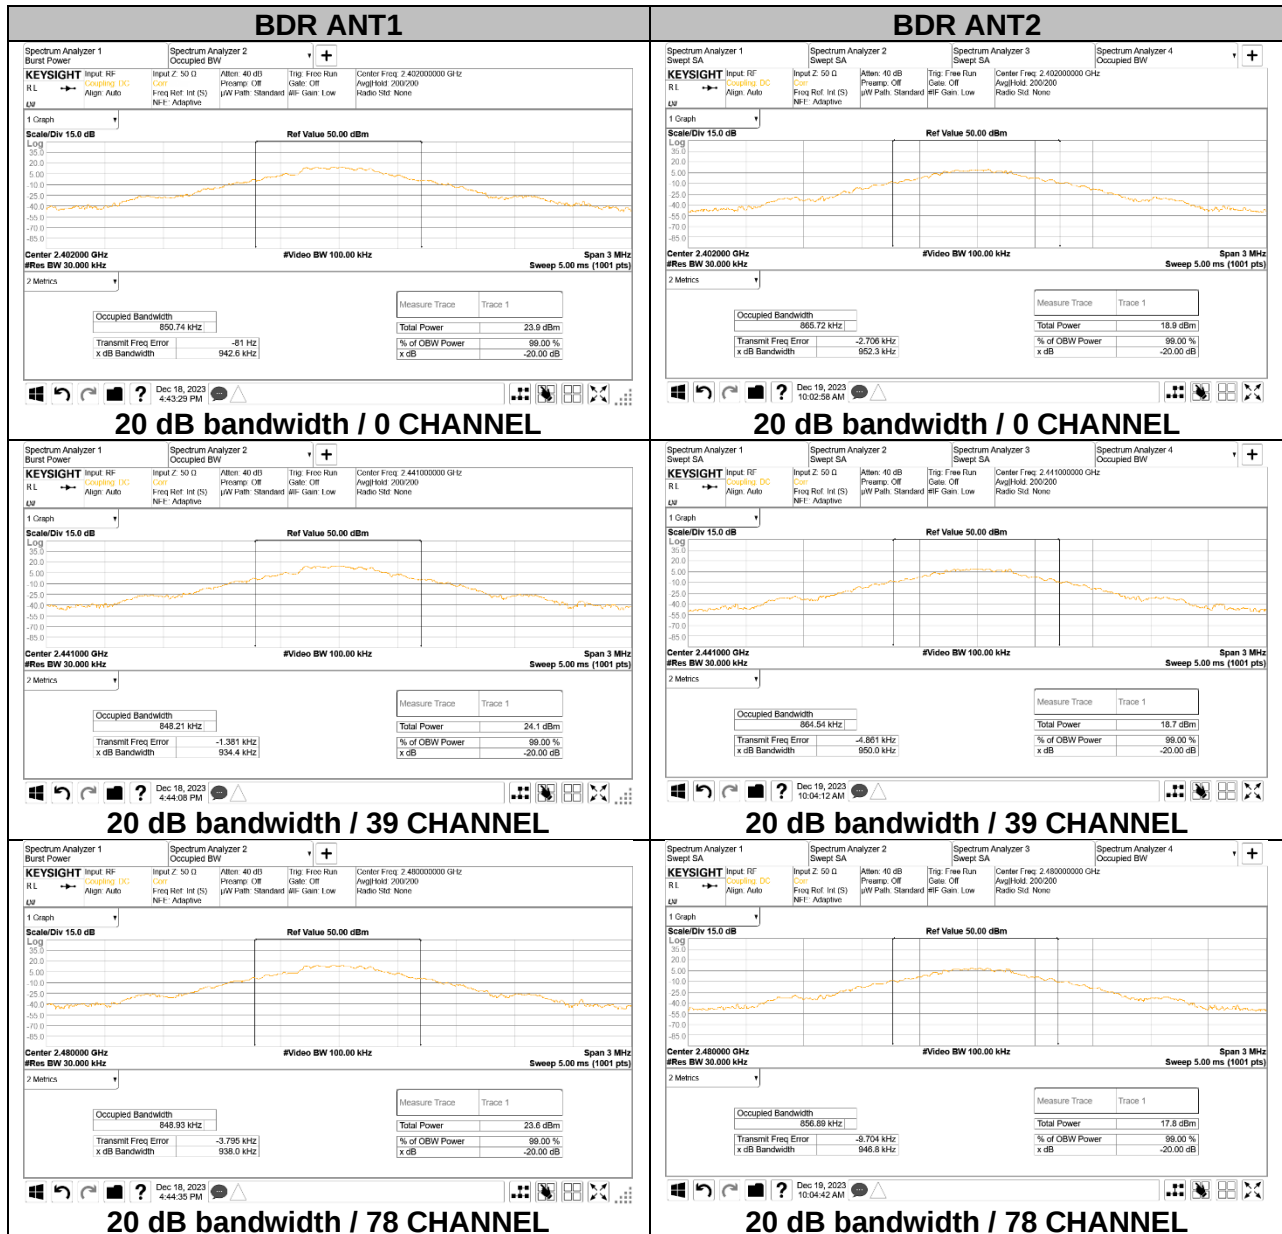

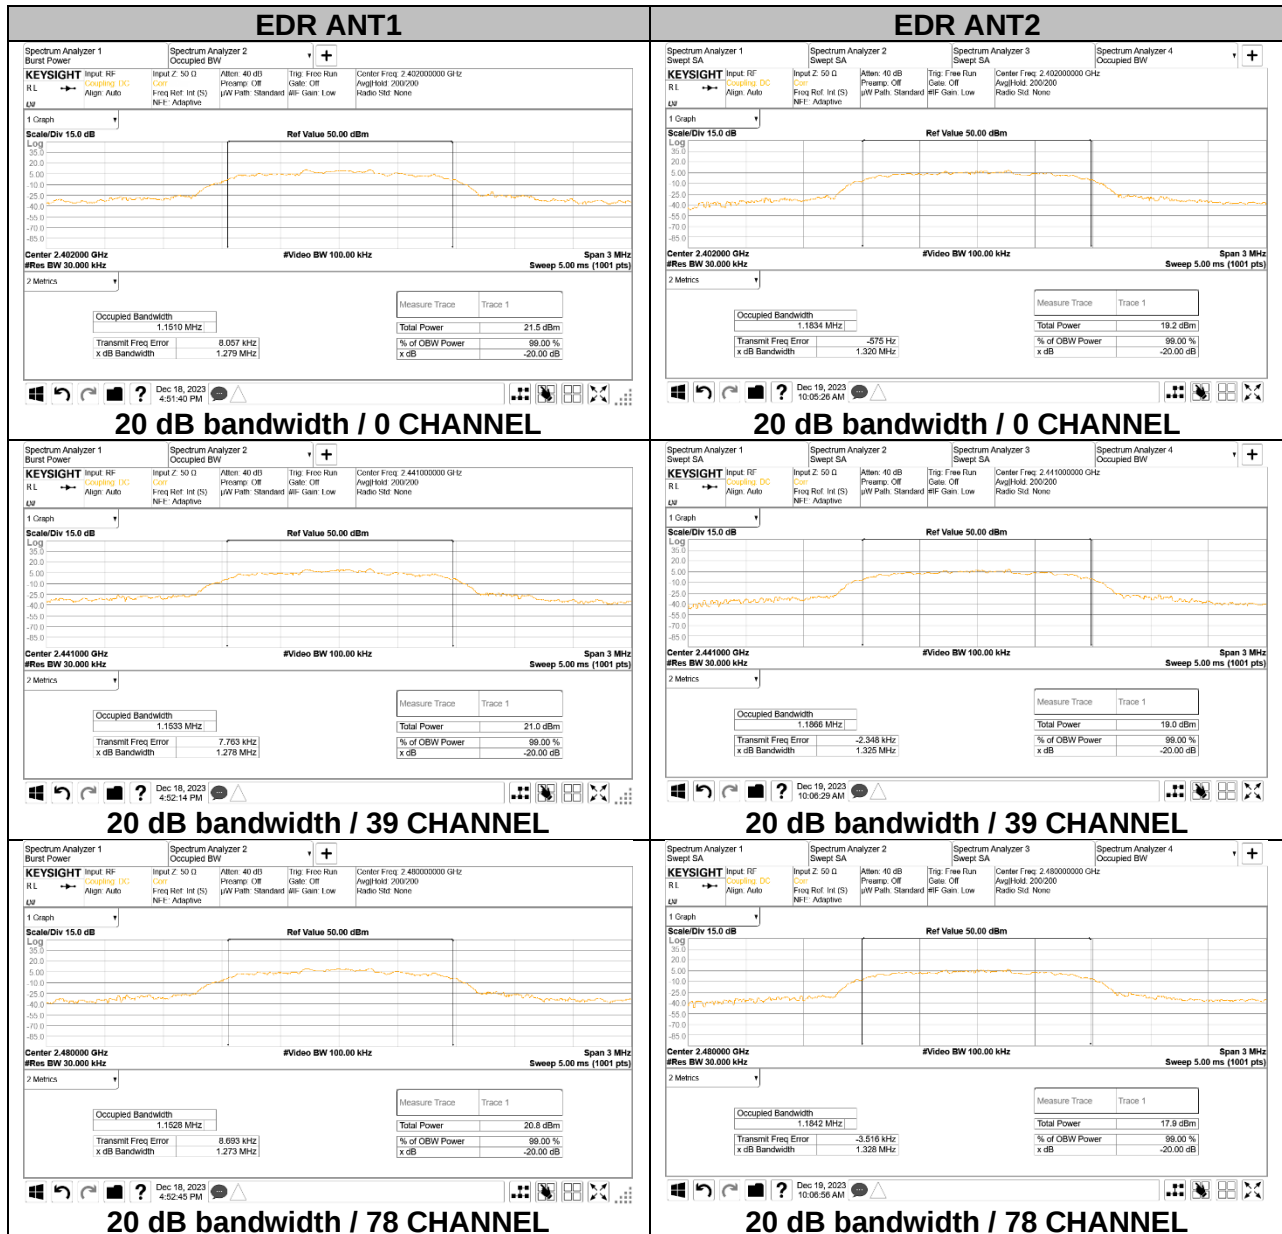

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. The VBW is set to $\text{VBW} \geq \text{RBW}$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

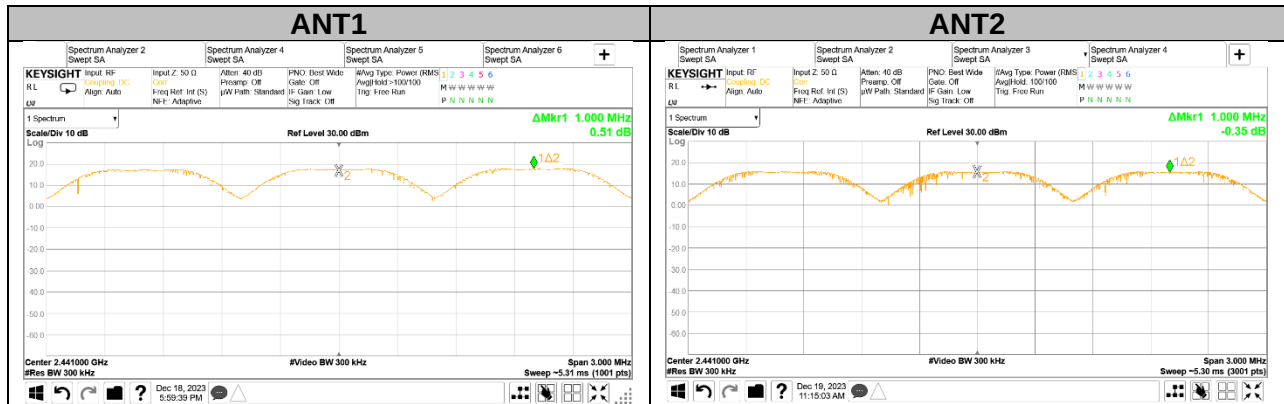

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

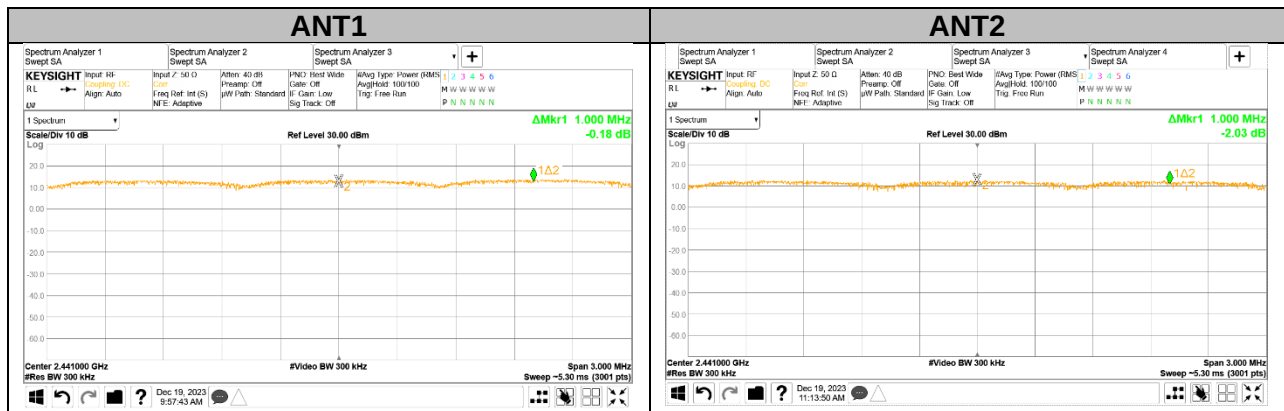

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. The analyzer is set to Max Hold.

RESULTS


Normal Mode: All Channels Observed


9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

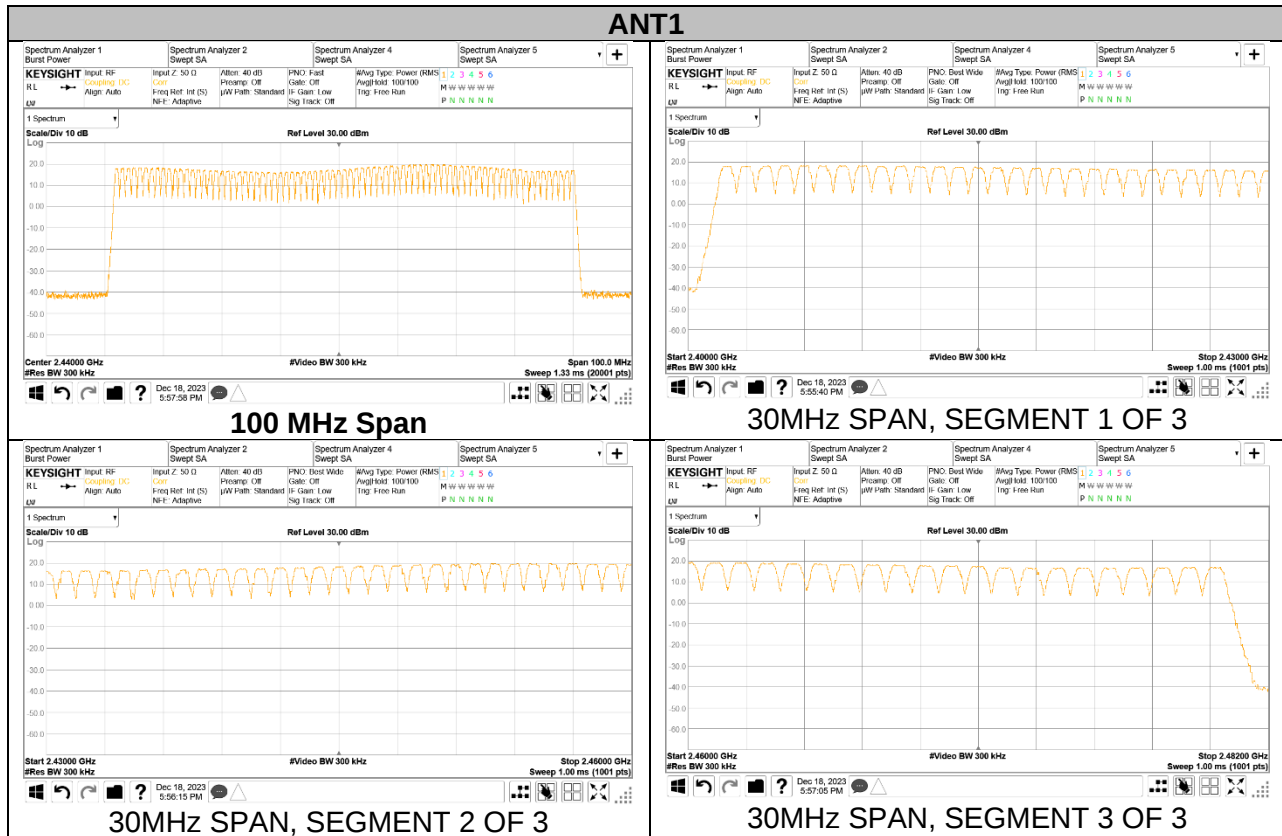

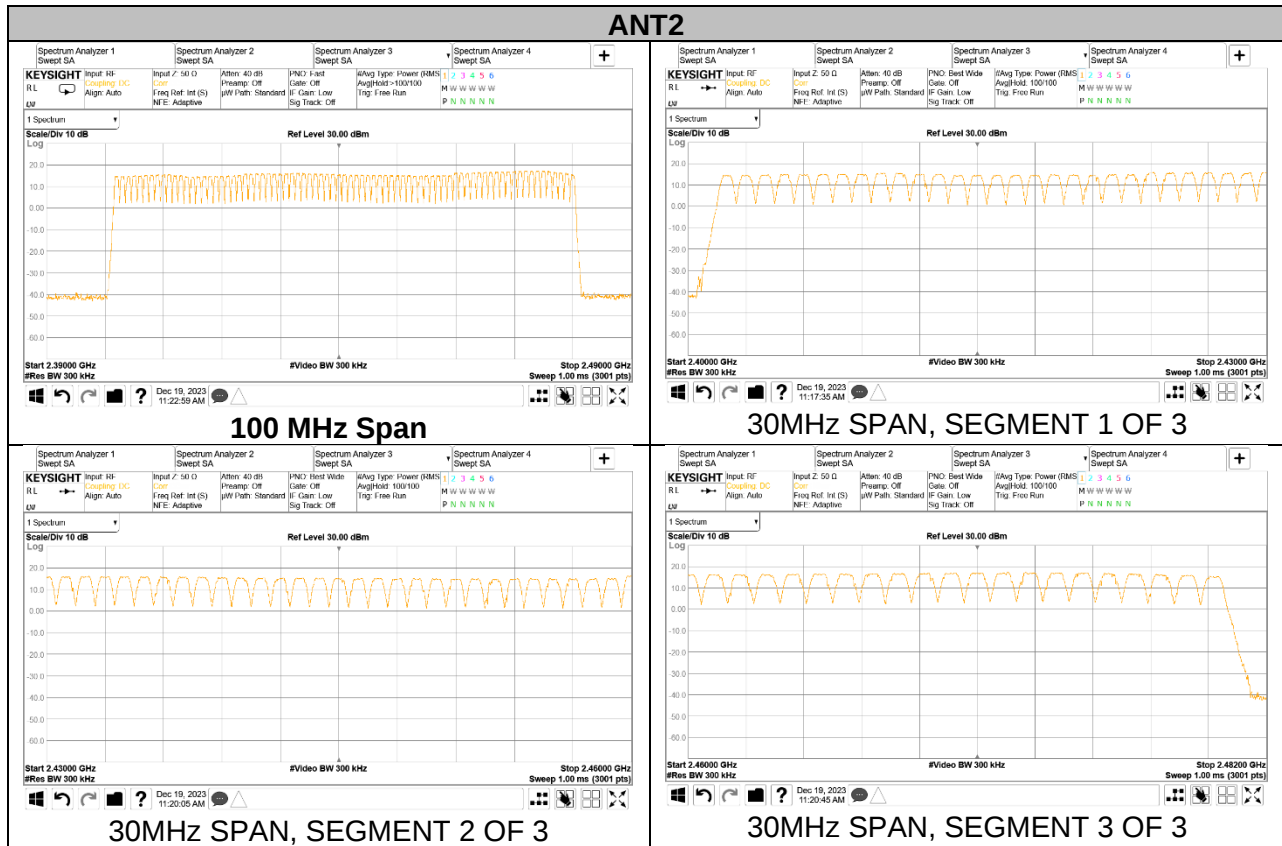

9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

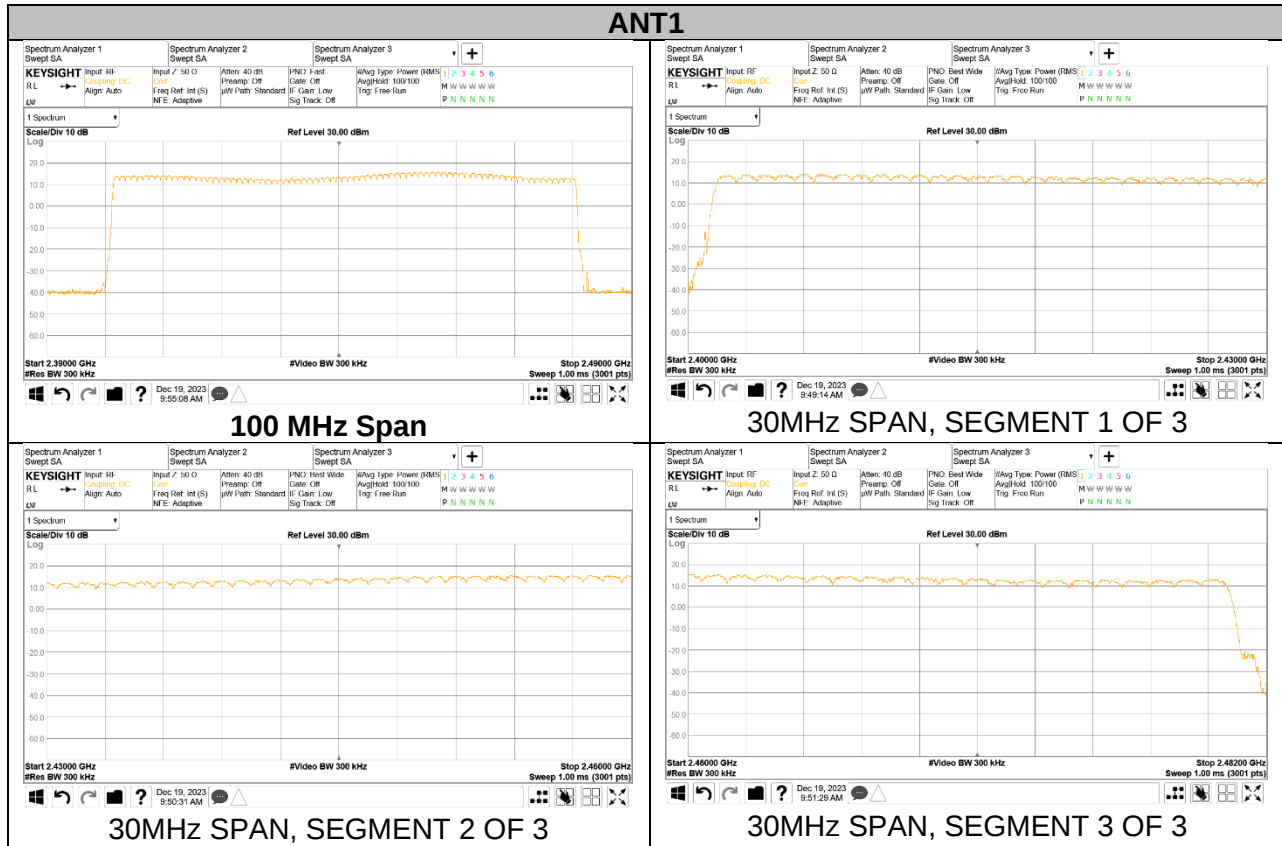

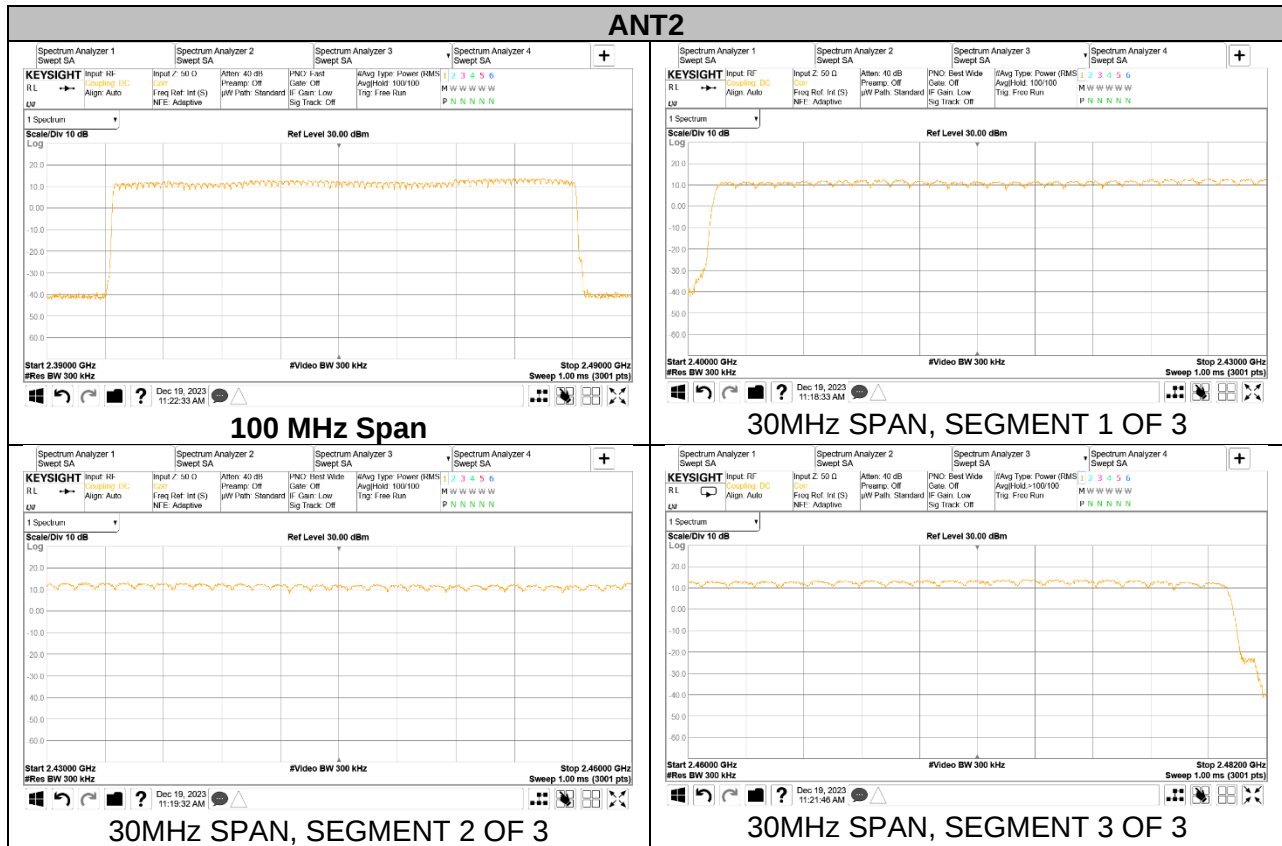

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT1					
DH1	0.378	32	0.121	0.4	-0.279
DH3	1.632	19	0.310	0.4	-0.090
DH5	2.880	13	0.374	0.4	-0.026
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT1					
DH1	0.378	8	0.030	0.4	-0.370
DH3	1.632	4.75	0.078	0.4	-0.322
DH5	2.880	3.25	0.094	0.4	-0.306

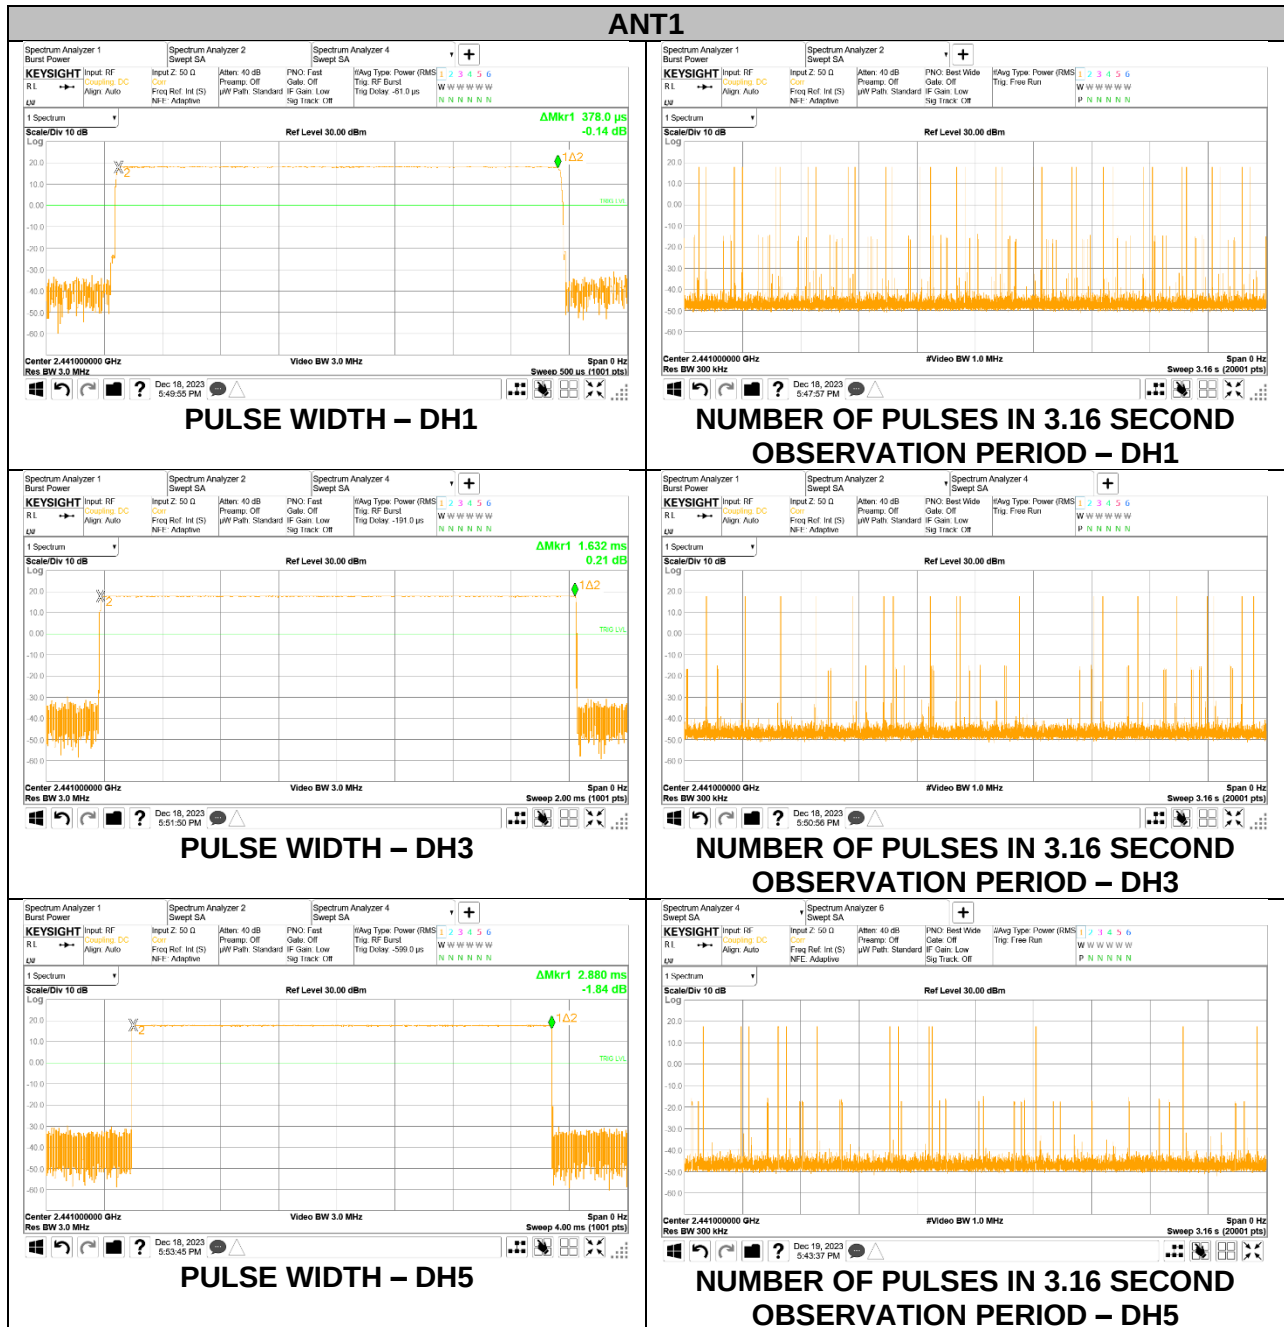


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT2					
DH1	0.379	32	0.121	0.4	-0.279
DH3	1.630	17	0.277	0.4	-0.123
DH5	2.879	13	0.374	0.4	-0.026
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT2					
DH1	0.379	8	0.030	0.4	-0.370
DH3	1.630	4.25	0.069	0.4	-0.331
DH5	2.879	3.25	0.094	0.4	-0.306

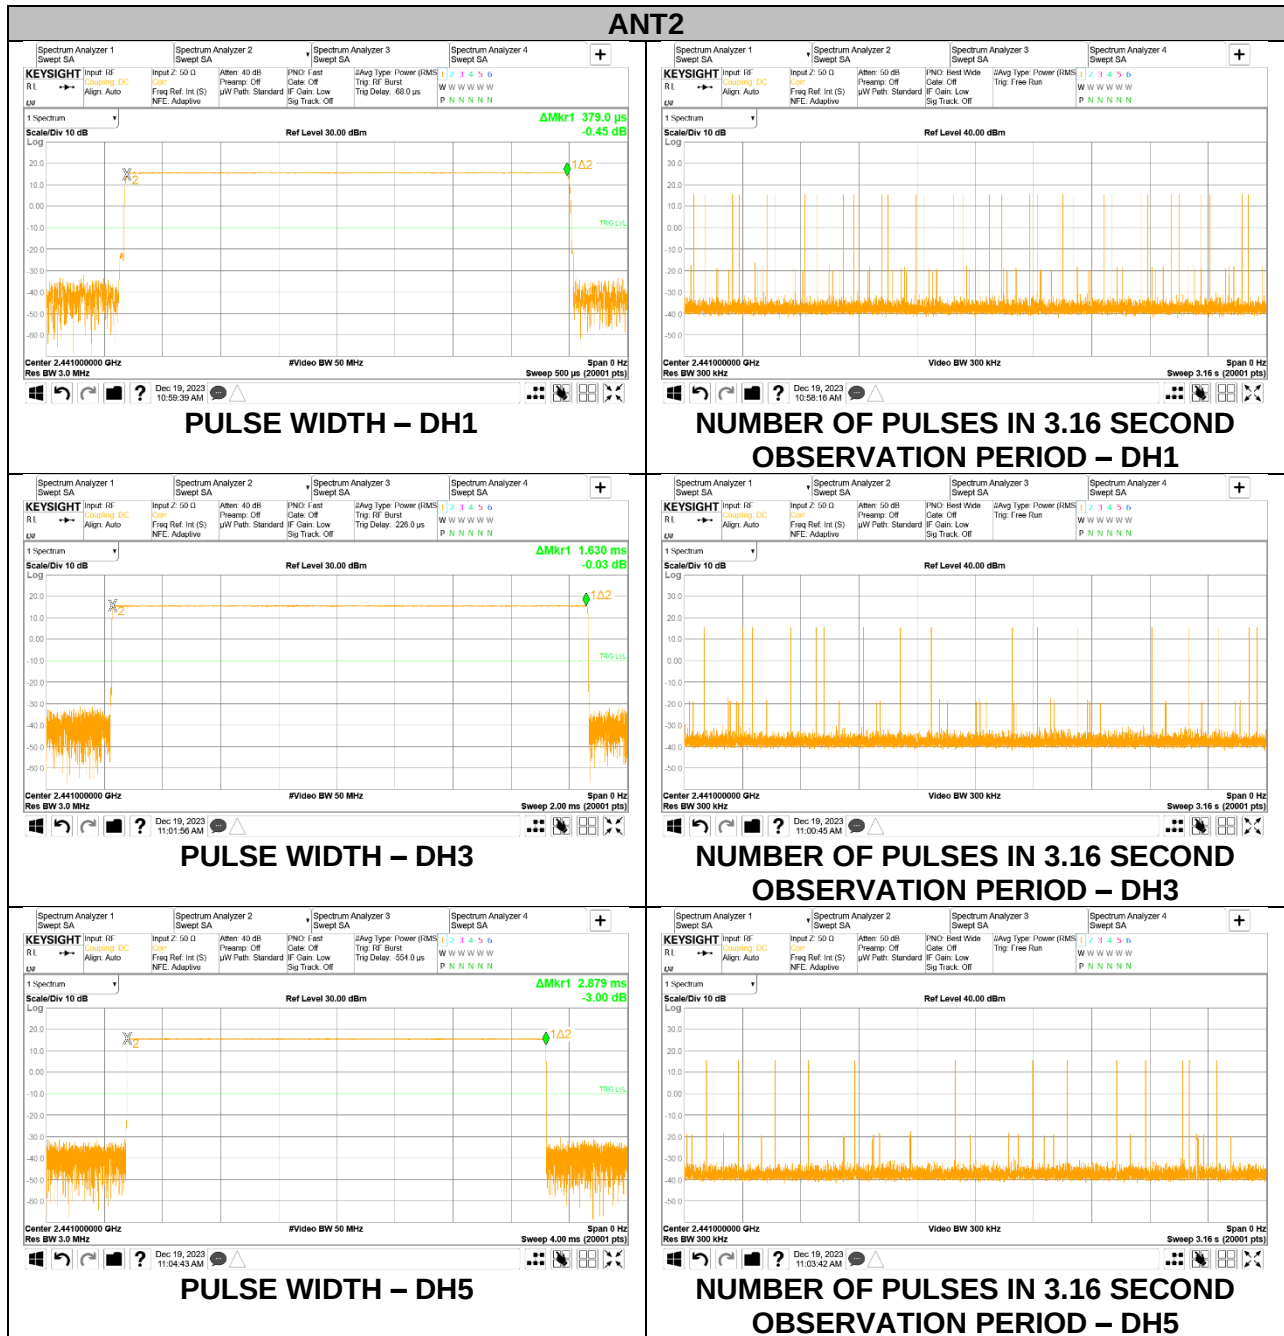


9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK Normal ANT1					
DH1	0.382	32	0.122	0.4	-0.278
DH3	1.630	17	0.277	0.4	-0.123
DH5	2.880	12	0.346	0.4	-0.054
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK AFH ANT1					
DH1	0.382	8	0.031	0.4	-0.369
DH3	1.630	4.25	0.069	0.4	-0.331
DH5	2.880	3	0.086	0.4	-0.314

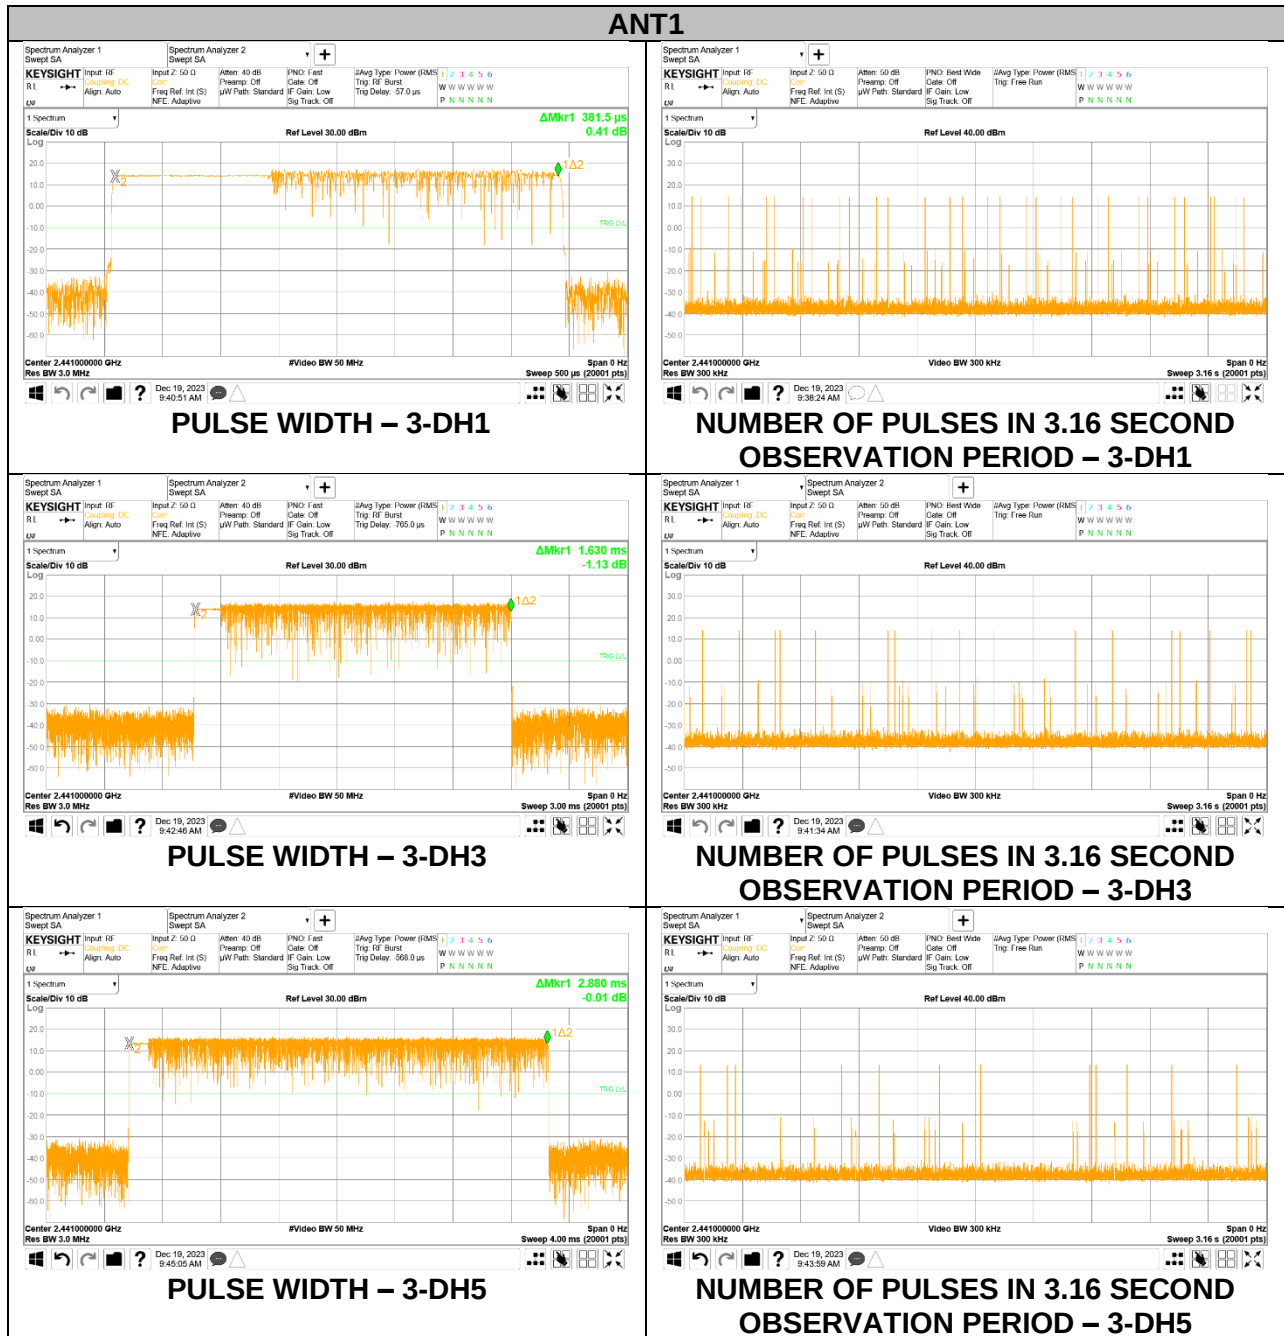

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK Normal ANT2					
DH1	0.383	32	0.123	0.4	-0.277
DH3	1.632	16	0.261	0.4	-0.139
DH5	2.880	11	0.317	0.4	-0.083
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK AFH ANT2					
DH1	0.383	8	0.031	0.4	-0.369
DH3	1.632	4	0.065	0.4	-0.335
DH5	2.880	2.75	0.079	0.4	-0.321

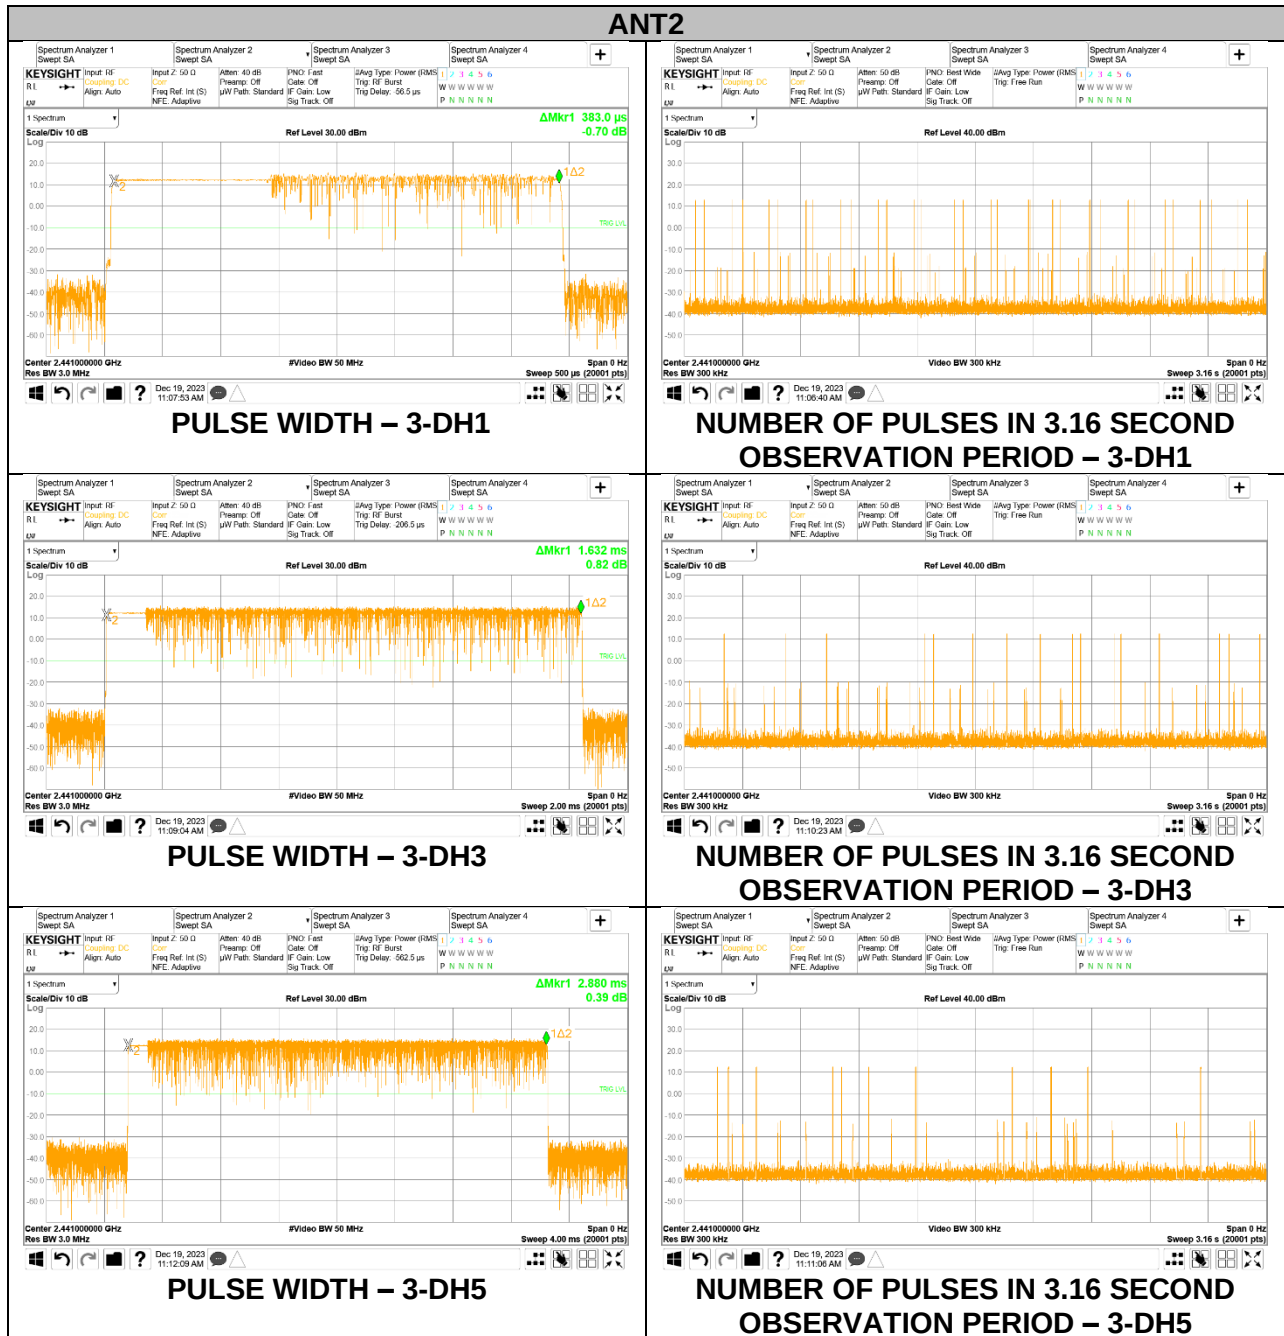

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The correlated maximum antenna gain + Beamforming gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	18.42	21.00	-2.58
	39	2 441	18.37		-2.63
	78	2 480	17.84		-3.16
ANT2	0	2 402	15.52		-5.48
	39	2 441	16.82		-4.18
	78	2 480	14.86		-6.14
Worst			18.42		-2.58

9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	17.18	21.00	-3.82
	39	2 441	17.39		-3.61
	78	2 480	16.62		-4.38
ANT2	0	2 402	14.59		-6.41
	39	2 441	15.44		-5.56
	78	2 480	14.06		-6.94
Worst			17.39		-3.61

9.6.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	17.71	21.00	-3.29
	39	2 441	17.92		-3.08
	78	2 480	17.24		-3.76
ANT2	0	2 402	15.19		-5.81
	39	2 441	15.81		-5.19
	78	2 480	14.74		-6.26
Worst			17.92		-3.08

9.6.4. BASIC DATA RATE GFSK MODULATION(DUAL)

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	11.75	21.00	
	39	2 441	12.05		
	78	2 480	11.23		
DUAL ANT2	0	2 402	10.32		
	39	2 441	11.23		
	78	2 480	10.13		
DUAL ANT1+2	0	2 402	14.10		-6.90
	39	2 441	14.67		-6.33
	78	2 480	13.73		-7.28
Worst			14.67		-6.33

9.6.5. ENHANCED DATA RATE Pi/4-DPSK MODULATION(DUAL)


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	10.92	21.00	
	39	2 441	11.77		
	78	2 480	10.14		
DUAL ANT2	0	2 402	9.10		
	39	2 441	10.14		
	78	2 480	9.31		
DUAL ANT1+2	0	2 402	13.12		-7.89
	39	2 441	14.04		-6.96
	78	2 480	12.76		-8.25
Worst			14.04		-6.96


9.6.6. ENHANCED DATA RATE 8PSK MODULATION(DUAL)


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	11.35	21.00	
	39	2 441	11.57		
	78	2 480	10.46		
DUAL ANT2	0	2 402	9.34		
	39	2 441	10.46		
	78	2 480	9.47		
DUAL ANT1+2	0	2 402	13.47		-7.53
	39	2 441	14.06		-6.94
	78	2 480	13.00		-8.00
Worst			14.06		-6.94


9.6.7. OUTPUT POWER PLOTS


PEAK OUTPUT POWER

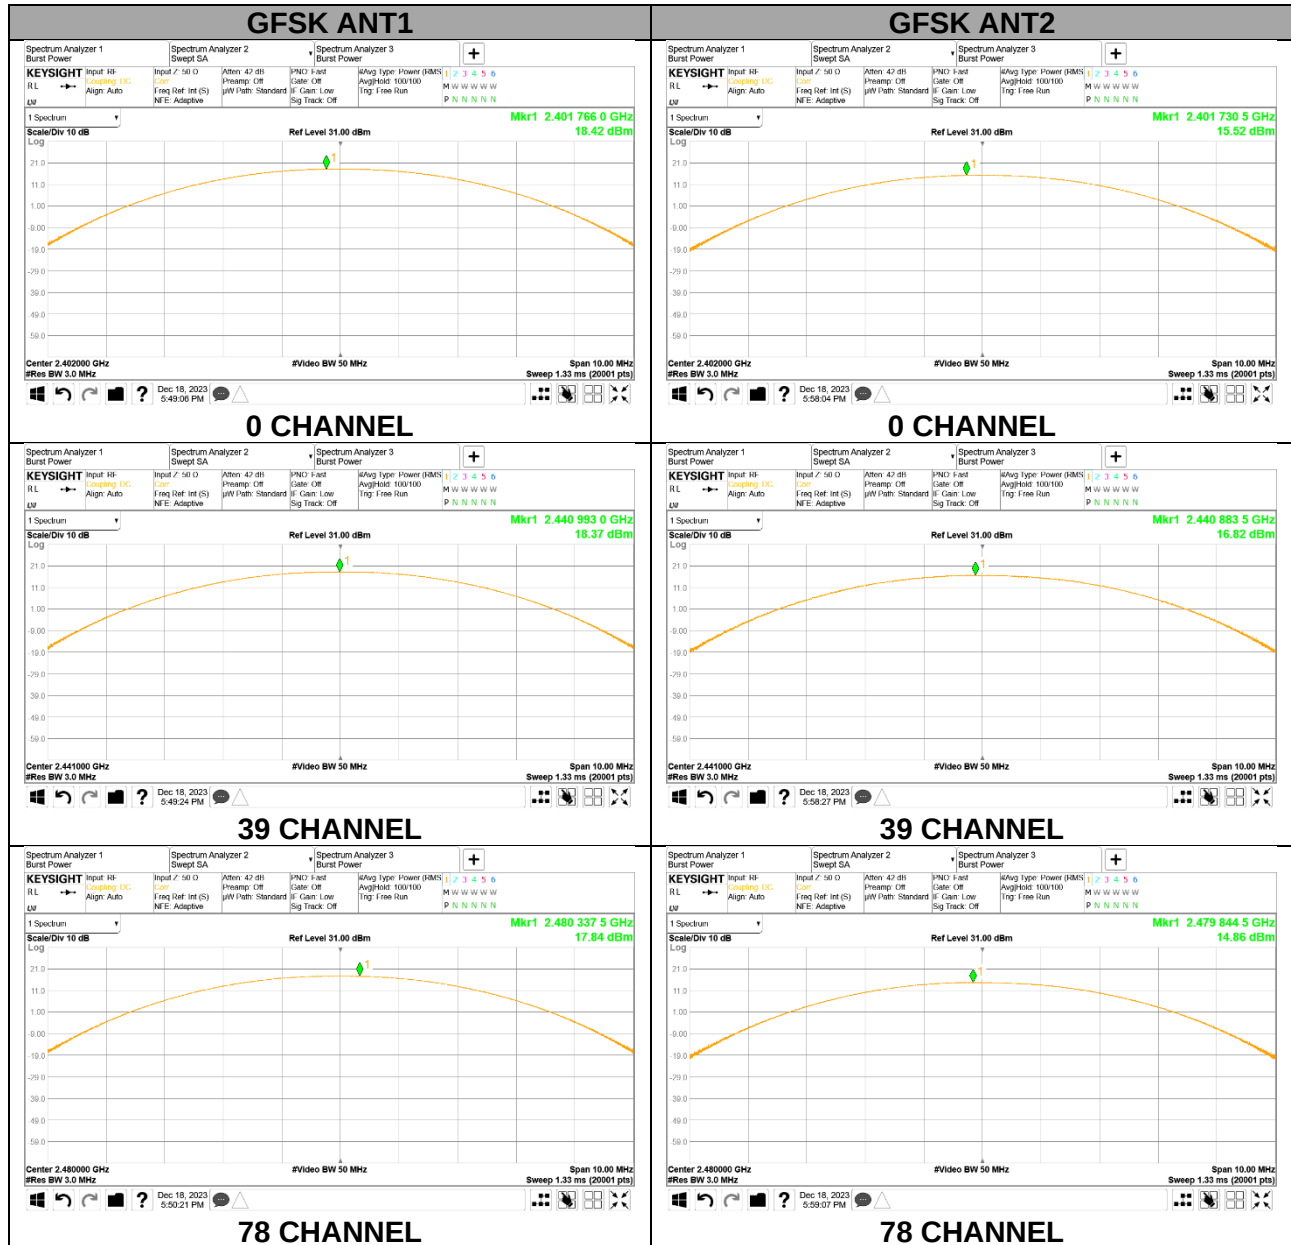


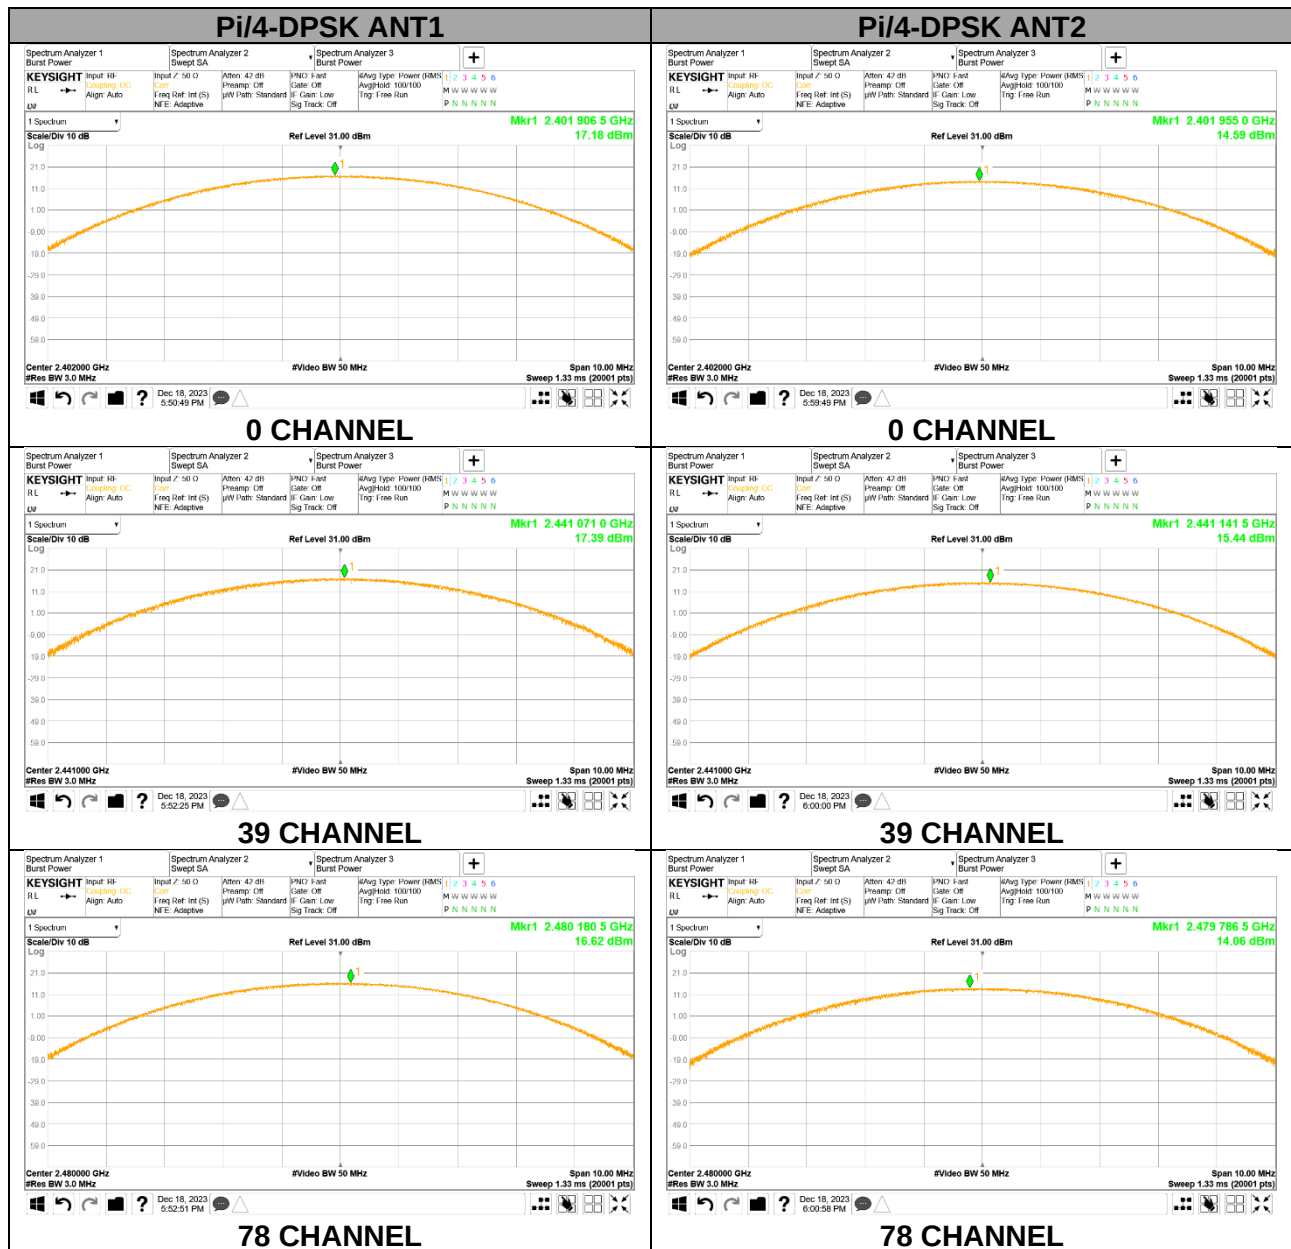

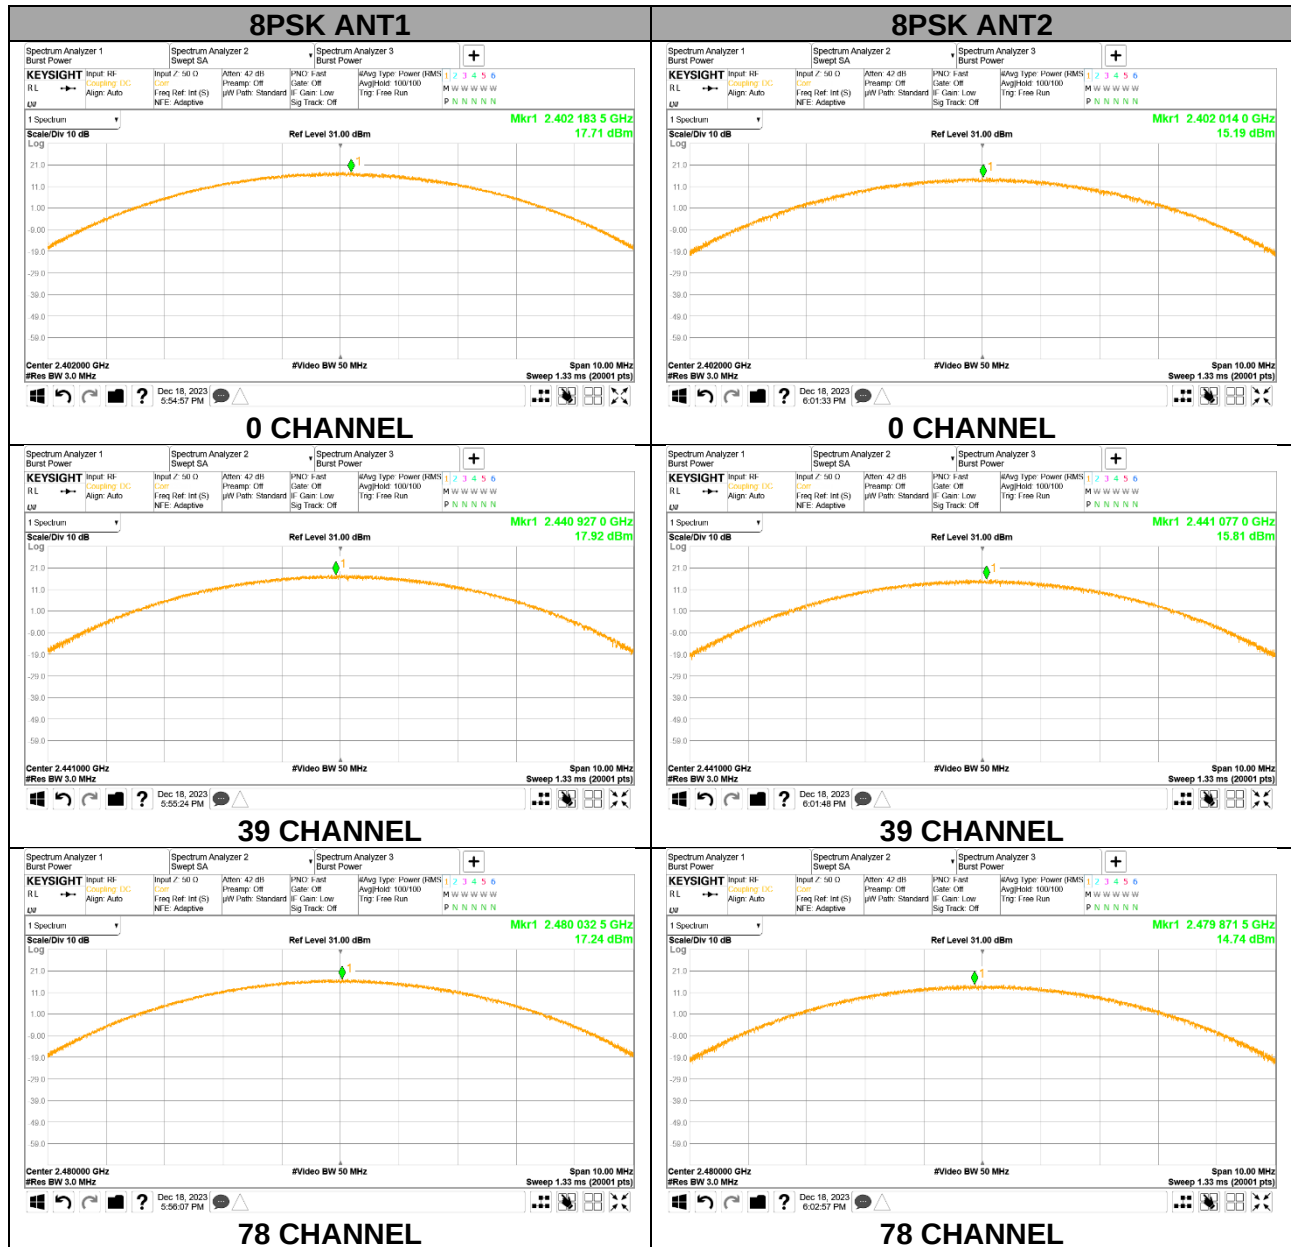

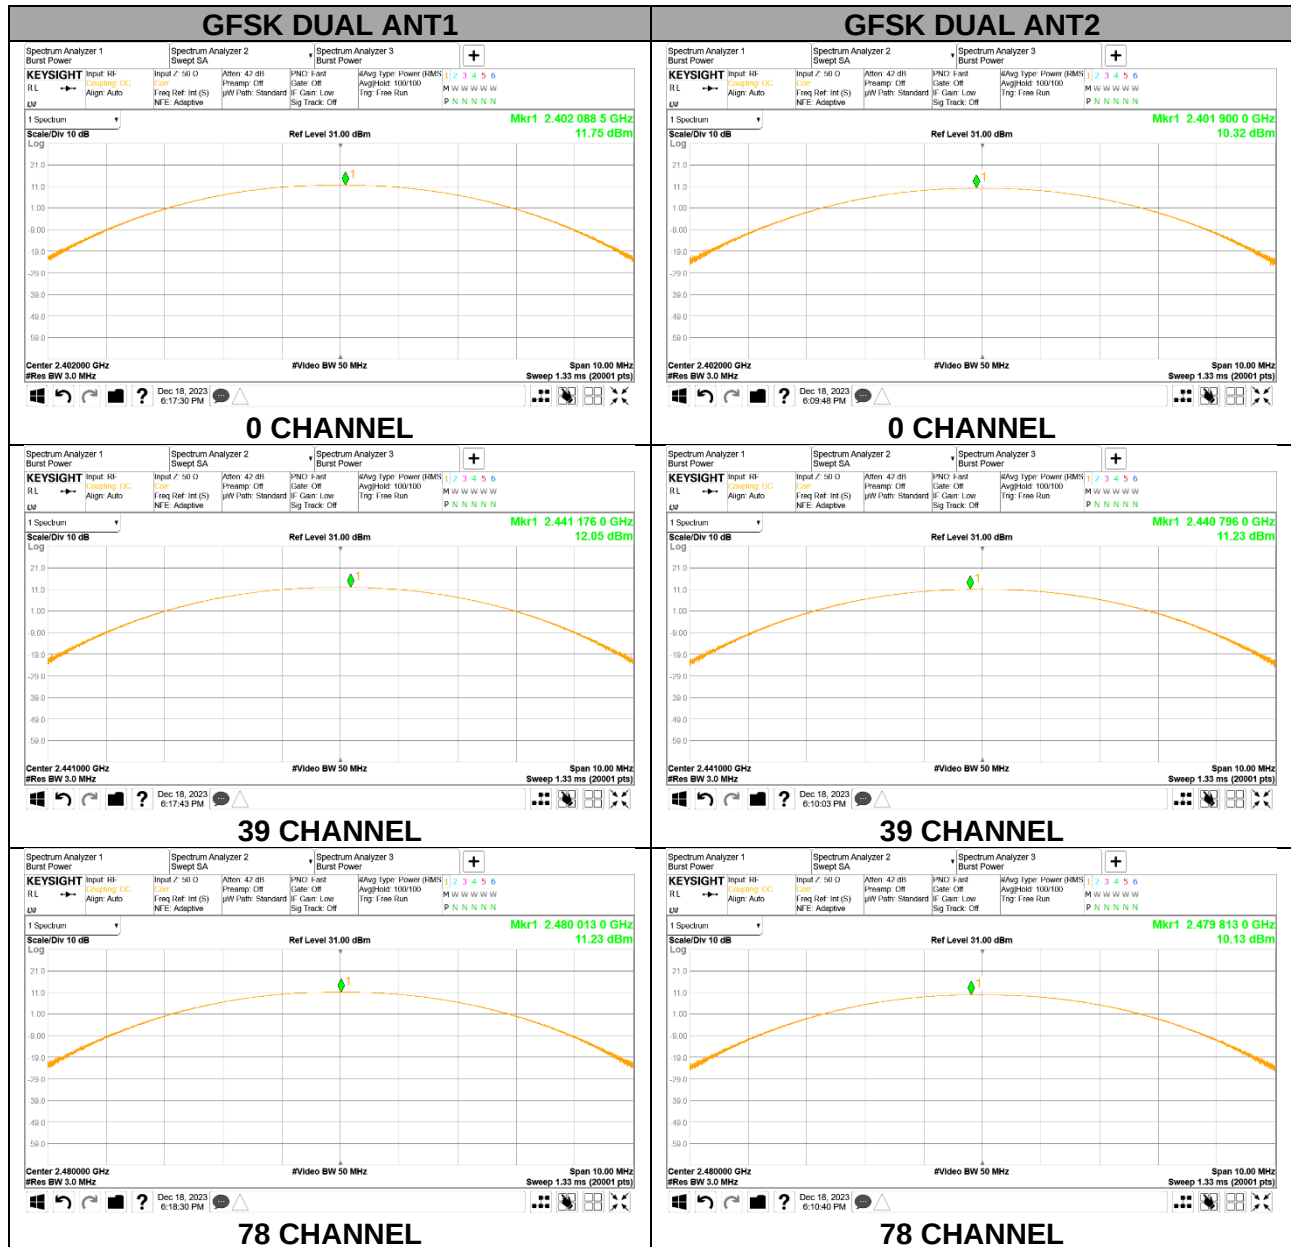

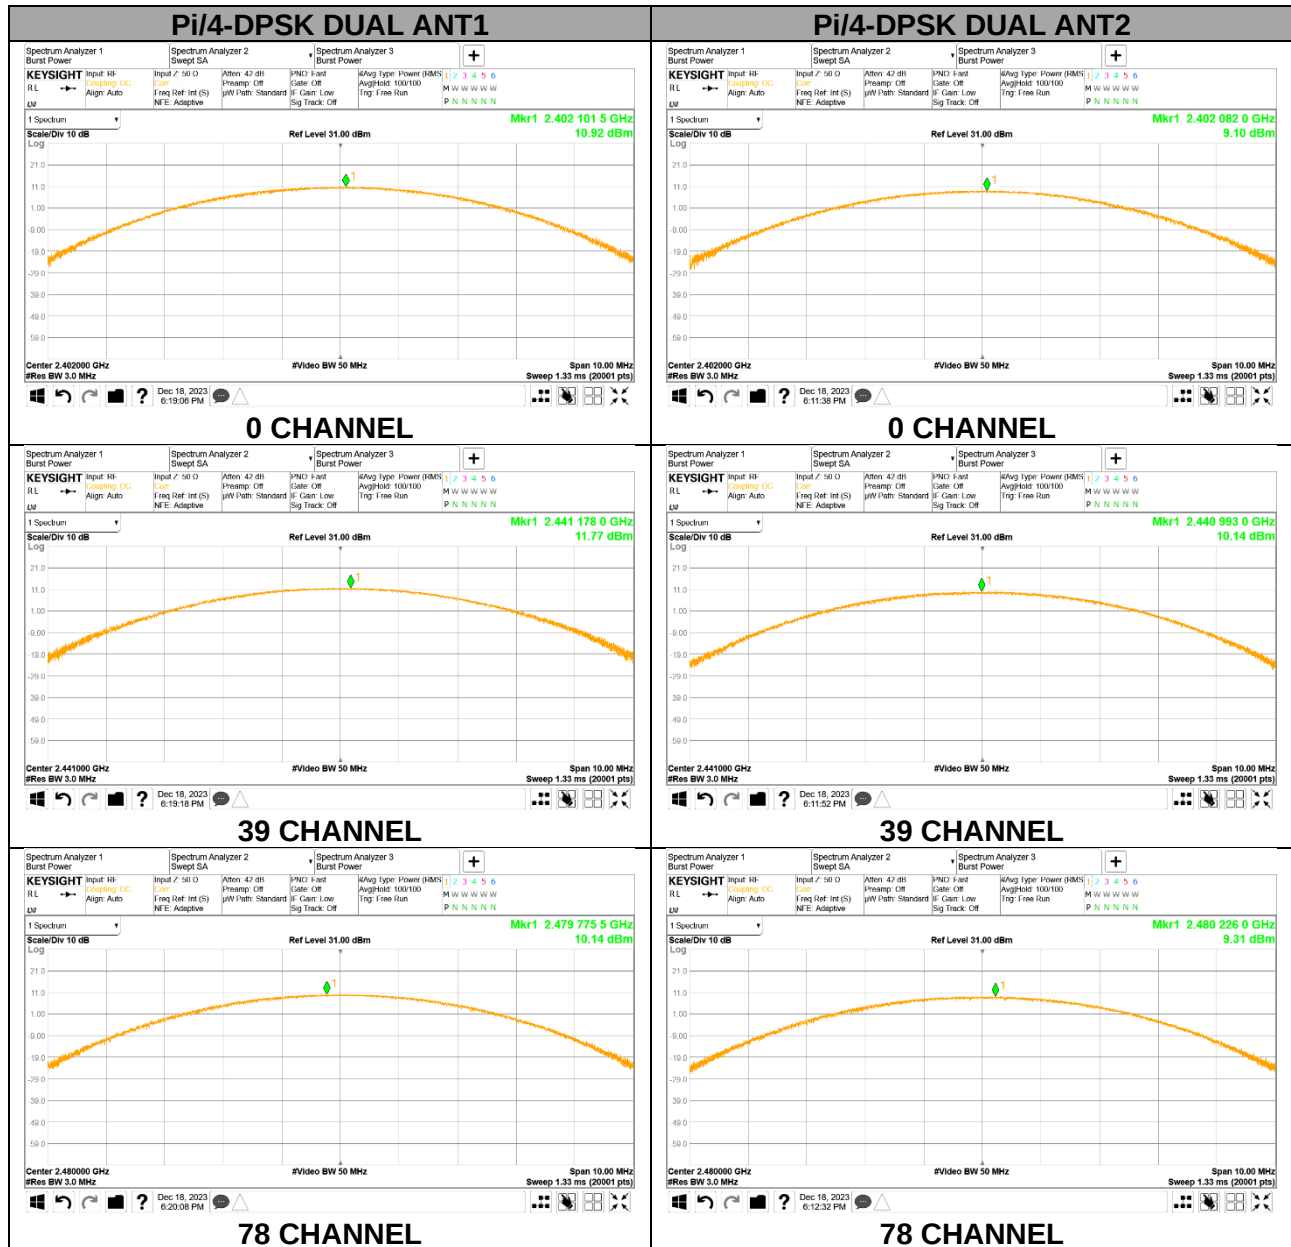

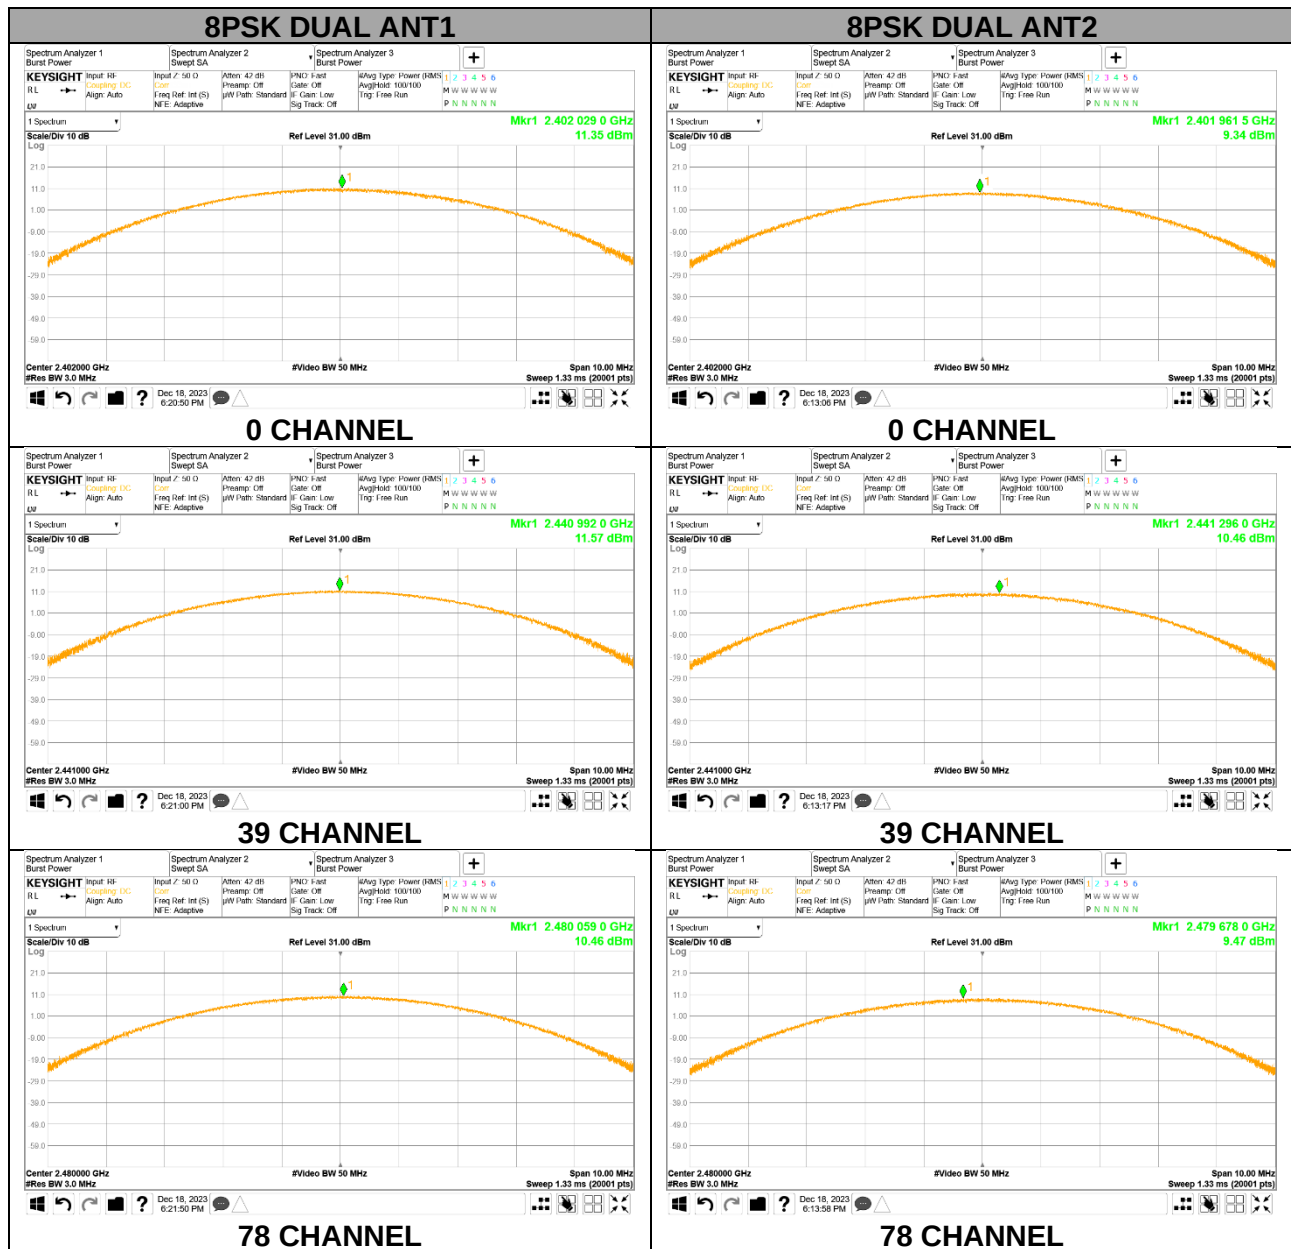

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.
The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	17.914	61.859
	39	2 441	18.014	63.299
	78	2 480	17.497	56.195
ANT2	0	2 402	15.041	31.923
	39	2 441	15.845	38.415
	78	2 480	14.487	28.100

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	13.972	24.957
	39	2 441	14.291	26.860
	78	2 480	13.745	23.686
ANT2	0	2 402	11.712	14.832
	39	2 441	12.340	17.140
	78	2 480	11.286	13.446

9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	14.027	25.276
	39	2 441	14.305	26.946
	78	2 480	13.787	23.917
ANT2	0	2 402	11.718	14.853
	39	2 441	12.366	17.242
	78	2 480	11.304	13.502

9.7.4. BASIC DATA RATE GFSK MODULATION(DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	11.528	
	39	2 441	11.868	
	78	2 480	11.219	
DUAL ANT2	0	2 402	9.774	
	39	2 441	10.921	
	78	2 480	9.777	
DUAL ANT1+2	0	2 402	13.749	23.709
	39	2 441	14.431	27.737
	78	2 480	13.568	22.740

9.7.5. ENHANCED DATA RATE PI/4-DQPSK MODULATION(DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	8.550	
	39	2 441	10.400	
	78	2 480	7.980	
DUAL ANT2	0	2 402	6.674	
	39	2 441	7.490	
	78	2 480	6.839	
DUAL ANT1+2	0	2 402	10.723	11.810
	39	2 441	12.194	16.575
	78	2 480	10.457	11.110

9.7.6. ENHANCED DATA RATE 8PSK MODULATION(DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	8.545	
	39	2 441	10.059	
	78	2 480	7.992	
DUAL ANT2	0	2 402	6.716	
	39	2 441	7.730	
	78	2 480	6.593	
DUAL ANT1+2	0	2 402	10.736	11.847
	39	2 441	12.059	16.066
	78	2 480	10.359	10.862

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.







The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, NON-HOPPING – ANT1

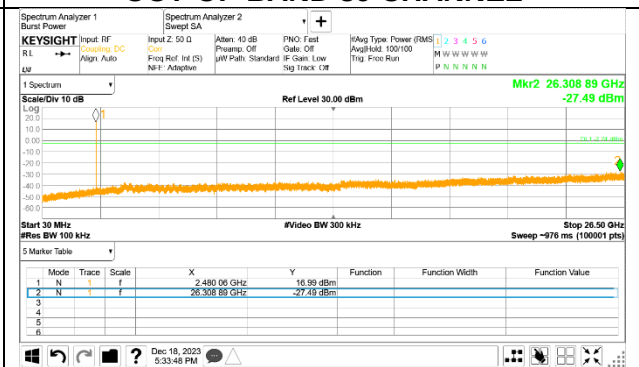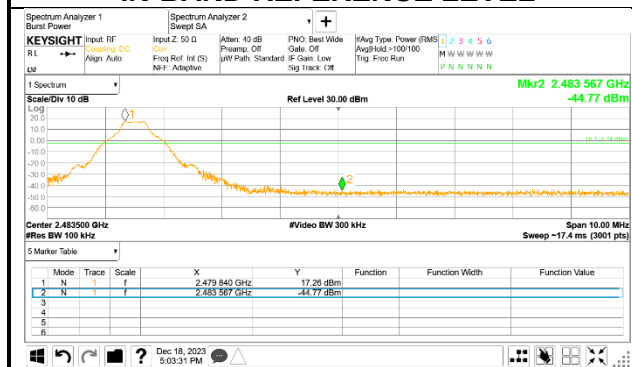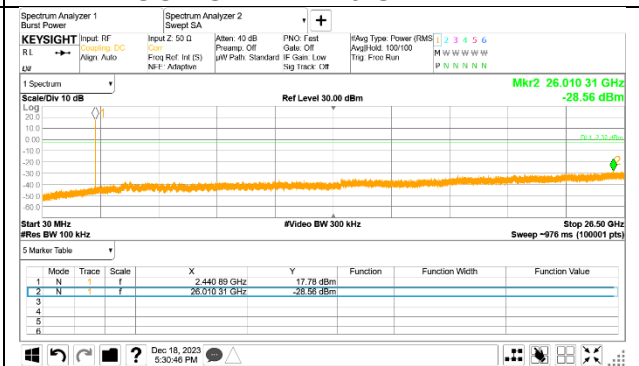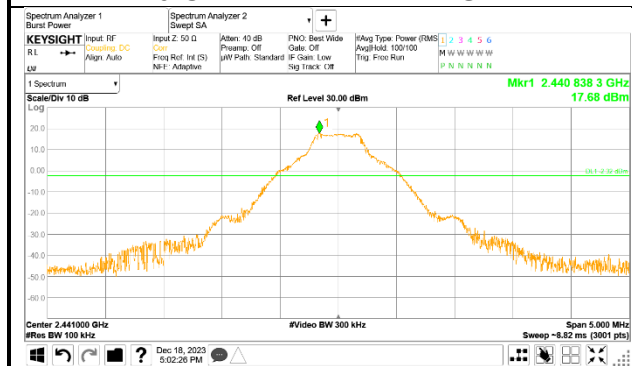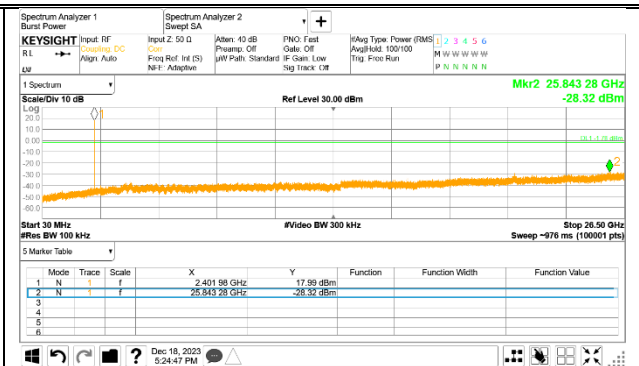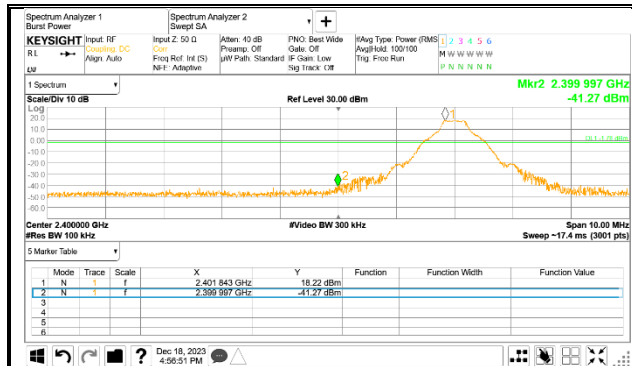

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1

