

*FCC PART 15, SUBPART C
TEST METHOD: ANSI C63.4-1992*

for

900 MHz SPREAD SPECTRUM PHONE

Model: EXS2010

Prepared for

UNIDEN AMERICA CORPORATION
ENGINEERING SERVICES OFFICE
216 JOHN STREET, PO BOX 580
LAKE CITY, SOUTH CAROLINA 29560

Prepared by: Kyle Fujimoto

KYLE FUJIMOTO

Approved by: Scott McCutchan

SCOTT McCUTCHAN

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: OCTOBER 5, 1999

	REPORT	APPENDICES				TOTAL
	BODY	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	
PAGES	24	3	2	14	83	126

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

**TABLE OF CONTENTS**

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. Description of Test Configuration	9
4.1 Description of Test Configuration - EMI	9
4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
5.3 Processing Gain Test Equipment	13
6. TEST SITE DESCRIPTION	14
6.1 Test Facility Description	14
6.2 EUT Mounting, Bonding and Grounding	14
7. CHARACTERISTICS OF THE TRANSMITTER	15
7.1 Transmitter Power	15
7.2 Channel Number and Frequencies	15
7.3 Chipping Rate	15
7.4 Spreading Gain	15
7.5 Antenna Gain	15
7.6 Description of Transmitter	16
7.7 Processing Gain	17
8. Test Procedures	18
8.1 RF Emissions	18
8.1.1 Conducted Emissions Test	18
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	19
8.2 6 dB Bandwidth for Direct Sequence Systems	21
8.3 Peak Output Power	21
8.4 Spectral Density Output	21
8.5 RF Antenna Conducted Test	22
8.6 RF Band Edges	22
8.7 Processing Gain	23
9. CONCLUSIONS	24



LIST OF APPENDICES

APPENDIX	TITLE
A	Modifications to the EUT
B	Additional Models Covered Under this Report
C	Diagrams, Charts and Photos • Test Setup Diagrams • Radiated and Conducted Emissions Photos • Antenna and Effective Gain Factors
D	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Test Site
3	Processing Gain Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Device Tested: 900 MHz Spread Spectrum Phone
Model: EXS2010
S/N: N/A

Modifications: The EUT was not modified in order to meet the specifications.

Manufacturer: Uniden America Corporation
Engineering Services Office 216 John Street, PO Box 580
Lake City, South Carolina 29560

Test Dates: October 1, 4, and 5, 1999

Test Specifications: EMI requirements
FCC Title 47, Part 15 Subpart B; and Subpart C, sections 15.205, 15.207,
15.209, and 15.247

Test Procedure: ANSI C63.4: 1992

Test Deviations: The test procedure was not deviated from during the testing.



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 450 kHz – 30 MHz	Complies with the Class B limits of FCC Title 47, Part 15 Subpart B; and Subpart C, section 15.207
2	Spurious Radiated RF Emissions, 10 kHz – 9300 MHz	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.209(a)
3	Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 10 kHz – 9300 MHz	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247(c)
4	Emissions produced by the intentional radiator in restricted bands, 10 kHz – 9300 MHz	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.209(a)
5	6 dB Bandwidth	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (a)(2)
6	Maximum Peak Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(1)
7	RF Antenna Conducted	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (c)
8	Peak Power Spectral Density Conducted from the Intentional Radiator to the Antenna	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (d)
9	Processing Gain	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (e)



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the 900 MHz Spread Spectrum Phone Model: EXS2010. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 1992. The tests were performed in order to determine whether the electromagnetic emissions from the 900 MHz Spread Spectrum Phone, referred to as EUT hereafter, are within the specification limits defined by FCC Title 47, Part 15, Subpart C, sections 15.205, 15.207, 15.209, and 15.247.



**2. ADMINISTRATIVE DATA****2.1 Location of Testing**

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Uniden America Corporation

James R. Haynes Vice President

Compatible Electronics Inc.

Kyle Fujimoto Test Engineer
Scott McCutchan Lab Manager

2.4 Date Test Sample was Received

The test sample was received on September 29, 1999

2.5 Disposition of the Test Sample

The test sample was returned to Uniden Corporation on October 6, 1999.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NCR	No Calibration Required



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators.
ANSI C63.4 1992	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators.



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Specifics of the EUT and Peripherals Tested

Handset being tested: The 900 MHz Spread Spectrum Phone - Handset Model: EXS2010 (EUT) was placed on the wooden table and tested in three orthogonal axis. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The handset was transmitting to and receiving from the base unit. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix C. **The final radiated data was taken in the Y axis, which was the orthogonal axis that produced the highest emissions during the initial investigation.**

Base being tested: The 900 MHz Spread Spectrum Phone - Base Model: EXS2010 (EUT) was placed on the wooden table. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The base was connected to a line simulator and AC adapter via its RJ-11 and power ports, respectively. The line simulator was connected to the Northern Telecom telephone. The base was transmitting and receiving from the handset. The handset was also used to dial out a number on the simulator that caused the Northern Telecom telephone to ring. The Northern Telecom telephone was then taken off hook to allow for normal communications between the base unit and handset. The conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix C. **The final radiated as well as conducted data was taken in the X axis, which was the orthogonal axis that produced the highest emissions during the initial investigation.**





4.1.1 Cable Construction and Termination

Cable 1

This is a 6 foot unshielded cable connecting the base to the line simulator. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 2

This is a 6 foot unshielded cable connecting the telephone to the line simulator. It has an RJ-11 connector at each end. The cable was bundled to a length of 1 meter.

Cable 3

This is a 6 foot unshielded round cable connecting the base to the class 2 transformer. It has a 1/8" power jack at the base end and is hard wired into the class 2 transformer.

Cable 4

This is a 6 foot unshielded round cable connecting the handset to the headset. It has a special headset connector at the EUT end and is hard wired into the headset.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
900 MHz Spread Spectrum Phone - Base (EUT)	UNIDEN AMERICA CORPORATION	EXS2010	N/A	AMWUC668
900 MHz Spread Spectrum Phone - Handset (EUT)	UNIDEN AMERICA CORPORATION	EXS2010	N/A	AMWUC668
AC ADAPTOR	UNIDEN AMERICA CORPORATION	AD-310	N/A	N/A
REGULAR TELEPHONE	NORTHERN TELECOM	N/A	N/A	N/A
HEADSET	N/A	N/A	N/A	N/A
TEST LINE SIMULATOR	TELTONE	TLS-3	N/A	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Spectrum Analyzer	Hewlett Packard	8566B	3638A08784	Nov. 16, 1998	May 16, 1999
Preamplifier	Com Power	PA-102	1017	Jan. 16, 1999	Jan. 16, 2000
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	July 14, 1999	July 14, 2000
RF Attenuator	Com-Power	412-10	N/A	Nov. 20, 1998	Nov. 20, 1999
LISN	Com Power	LI-200	1764	Jan. 3, 1999	Jan. 3, 2000
LISN	Com Power	LI-200	1771	Jan. 3, 1999	Jan. 3, 2000
LISN	Com Power	LI-200	1775	Jan. 3, 1999	Jan. 3, 2000
LISN	Com Power	LI-200	1780	Jan. 3, 1999	Jan. 3, 2000
Biconical Antenna	Com Power	AB-100	1548	Oct. 15, 1998	Oct. 15, 1999
Log Periodic Antenna	Com Power	AL-100	1117	Oct. 15, 1998	Oct. 15, 1999
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Hewlett Packard	D5251A 888	US74458128	N/A	N/A
Printer	Hewlett Packard	C5886A	SG7CM1P090	N/A	N/A
Monitor	Hewlett Packard	D5258A	DK74889705	N/A	N/A
Loop Antenna	Com-Power	AL-130	25309	Feb. 5, 1999	Feb. 5, 2000
Horn Antenna	Antenna Research	DRG-118/A	1053	Dec. 8, 1995	N/A
Microwave Preamplifier	Hewlett Packard	8449B	3008A008766	Jan. 30, 1999	Jan. 30, 2000



**5.3 Processing Gain Test Equipment**

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Variable Attenuator	Hewlett Packard	HP8496A/002	3308A14623	Oct. 12, 1998	Oct. 31, 1999
Variable Attenuator	Hewlett Packard	HP8494A/002	3308A32418	Oct. 16, 1998	Oct. 31, 1999
BER Counter	JRC	NJZ-940	ED24250	Oct. 20, 1998	Oct. 31, 1999
Signal Generator	Hewlett Packard	ESG-D3000A	US37231038	Aug. 17, 1999	Aug. 17, 2000
Combiner	Anritsu	MA1612A	M08562	N/A	N/A



6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 8.1.2 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.





7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Transmitter Power

Transmit power is herein defined as the power delivered to a 50 Ohm load at the antenna port of the T/R switch.

HANDSET UNIT

Power	Channel Number	Accuracy
+6.40 dBm	1	+3/-3 dB
+4.20 dBm	11	+3/-3 dB
+4.40 dBm	20	+3/-3 dB

BASE UNIT

Power	Channel Number	Accuracy
+5.60 dBm	1	+3/-3 dB
+5.10 dBm	11	+3/-3 dB
+5.40 dBm	20	+3/-3 dB

7.2 Channel Number and Frequencies

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	905.280	11	914.880
2	906.240	12	915.840
3	907.200	13	916.800
4	908.160	14	917.760
5	909.120	15	918.720
6	910.080	16	919.680
7	911.040	17	920.640
8	912.000	18	921.600
9	912.960	19	922.560
10	913.920	20	923.520

7.3 Chipping Rate

1.366 M cps


7.4 Spreading Gain

The theoretical spreading gain, is 10.8 dB.

7.5 Antenna Gain

The antenna gain is 3.34 dBi for the base.
The antenna gain is 1.74 dBi for the handset.

Note that antenna gain measurement was conducted based on substitution method using with double ridged antenna.



7.6**Description of Transmitter**

The transmitter takes baseband data, high pass filters it to remove any DC contributed by bias networks, then lowpass filters it to provide spectral shaping. After filtering, the resultant signal is modulated to the synthesized RF carrier. The modulated signal is then amplified at the buffer for driving the final stage. The harmonics of the amplified signal are removed with a lowpass filter. Finally, the signal is routed through the T/R switch for transmission by the antenna.



7.7**Processing Gain**

The Processing Gain is measured using the CW jamming margin method. Figure 1 shows the test configuration. The test consists of stepping a signal generator in 50 kHz increments across the passband of the system (up to 1 MHz away from the center frequency). At each point, the generator level required to produce the recommended Bit Error Rate (BER) (Set at BER=1.0E-3) is recorded. This level is the jamming level. The output power of the transmitter unit is measured at the same point. The Jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data point. The lowest remaining J/S ratio is used to calculate the processing gain. The maximum implementation loss a system can claim in calculating processing gain is 2 dB. The equation to calculate the processing gain (Gp) is the following:

$$G_p = (S/N)_o + M_j + L_{sys}$$

Where (S/N)_o = signal to noise ratio required for a FSK system with BER of 1.0E-3 = 11 dB,
M_j = jamming margin (J/S) in dB,
L_{sys} = system implementation loss = 2 dB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions


8.1.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak detector was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage, and the spectrum analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 1992. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.45 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the HP 9000/300 in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.



8.1.2

Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Hewlett Packard Microwave Amplifier Model: 8449B was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets. The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 1992. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.



**Radiated Emissions (Spurious and Harmonics) Test (con't)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data.





8.2 6 dB Bandwidth for Direct Sequence Systems

The 6 dB Bandwidth was taken using the spectrum analyzer. The bandwidth was measured using a direct connection from the RF out on the RF board. The resolution bandwidth was 100 kHz, and the video bandwidth 1 MHz. Both the base and handset were tested.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.209 (a)(2). The bandwidth is at least 500 kHz. Please see the data sheets located in Appendix D.

8.3 Peak Output Power

The peak output power was taken using the spectrum analyzer. The peak output power was measured using a direct connection from the RF out on the RF board. The resolution bandwidth was 3 MHz, and the video bandwidth 1 MHz. Both the base and handset were tested.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.209 (b)(1). The maximum peak output power is less than 1 watt. Please see the data sheets located in Appendix D.

8.4 Spectral Density Output

The spectral density output was using the spectrum analyzer. The spectral density output power was measured using a direct connection from the RF out on the RF board into the input of the analyzer. The resolution bandwidth was 3 kHz, and the video bandwidth 10 kHz. The highest 1.5 MHz of the signal was used as the frequency span with the sweep rate being 1 second for every 3 kHz of span.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.209 (d). The spectral density output does not exceed 8 dBm in any 3 kHz band. Please see the data sheets located in Appendix D.



**8.5 RF Antenna Conducted Test**

The RF antenna conducted test was taken using the spectrum analyzer. The RF antenna conducted test was measured using a direct connection from the RF out on the RF board into the input of the analyzer. The resolution bandwidth was 100 kHz, and the video bandwidth 1 MHz. The spans were wide enough to include all the harmonics and emissions that were produced by the intentional radiator. Both the base and handset were tested.

Test Results:


The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (c). The RF power that is produced by the intentional radiator is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. Please see the data sheets located in Appendix D.

8.6 RF Band Edges

The RF band edges were taken at the edges of the ISM spectrum (902 MHz when the EUT was on channel 1 and 928 MHz when the EUT was on channel 20) using the spectrum analyzer. The RF band edges were measured using a direct connection from the RF out on the RF board into the input of the analyzer. Both the handset and base were tested.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247(c). The RF power at the band edges at 902 MHz and 928 MHz are at least 20 dB below the fundamental. Please see the data sheets located in Appendix D.



8.7 Processing Gain

1. B/S output to H/S input

- (1) The B/S is connected by its RF test connector to the fixed attenuator which is 50 dB. The output of the fixed attenuator is combined with the output of the signal generator through a combiner. The output of the combiner is connected by the H/S RF test connector. The H/S is connected by the BB-ASIC(UC2484)'s test pins to the BER counter (RX data is pin 32 and RX clock is pin 41).
- (2) The PULSE/TONE SW of the B/S is set at PULSE. The B/S is powered by the adapter while pushing the PAGE-KEY. The PAGE-KEY shall be held at least for 3 seconds. Then the PAGE-KEY is released and pushed 11 times. The H/S is powered by the battery while pushing the *-KEY and #-Key. Those keys are held at least for 2 seconds. Then those keys are released and the #-KEY is pushed once.
- (3) BER counter is JRC NJZ-940 (Continuous mode, PN15, and the receive clock uses an external clock with its leading edge.).
- (4) The signal generator is stepped in 50 kHz increments. The required BER is 1.0×10^{-3} . When this error rate is achieved (displayed on the BER counter), the reading of signal generator is taken. This reading is then subtracted from the signal level of the B/S (while adding in the combiner loss and signal generator calibration factor) to obtain the J/S ratio. The J/S ratio is then combined with the system loss (2 dB) and signal to noise ratio (11 dB) of the unit to obtain the processing gain.

2. H/S output to B/S input

- (1) The H/S is connected by its RF test connector to the fixed attenuator which is 50 dB. The output of the fixed attenuator is combined with the output of the signal generator through a combiner. The output of the combiner is connected by the B/S RF test connector. The B/S is connected by the BB-ASIC(UC2484)'s test pins to the BER counter (RX data is pin 32 and RX clock is pin 41).
- (2) The PULSE/TONE SW of the B/S is set at PULSE. The B/S is powered by the adapter while pushing the PAGE-KEY. The PAGE-KEY shall be held at least for 3 seconds. Then the PAGE-KEY is released and pushed 11 times. The H/S is powered by the battery while pushing the *-KEY and #-Key. Those keys are held at least for 2 seconds. Then those keys are released and the #-KEY is pushed once.
- (3) BER counter is JRC NJZ-940 (Continuous mode, PN15, and the receive clock uses an external clock with its leading edge.).
- (4) The signal generator is stepped in 50 kHz increments. The required BER is 1.0×10^{-3} . When this error rate is achieved (displayed on the BER counter), the reading of signal generator is taken. This reading is then subtracted from the signal level of the H/S (while adding in the combiner loss and signal generator calibration factor) to obtain the J/S ratio. The J/S ratio is then combined with the system loss (2 dB) and signal to noise ratio (11 dB) of the unit to obtain the processing gain.





9.

CONCLUSIONS

The 900 MHz Spread Spectrum Phone Model: EXS2010 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247.



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850



APPENDIX A

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT


The modifications listed below were made to the EUT to pass FCC Subpart B and C specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

Modifications:

- 1) Soldered the Shield Case to the RF – P.C. Board ground. Please see the next page for a diagram of the exact location.



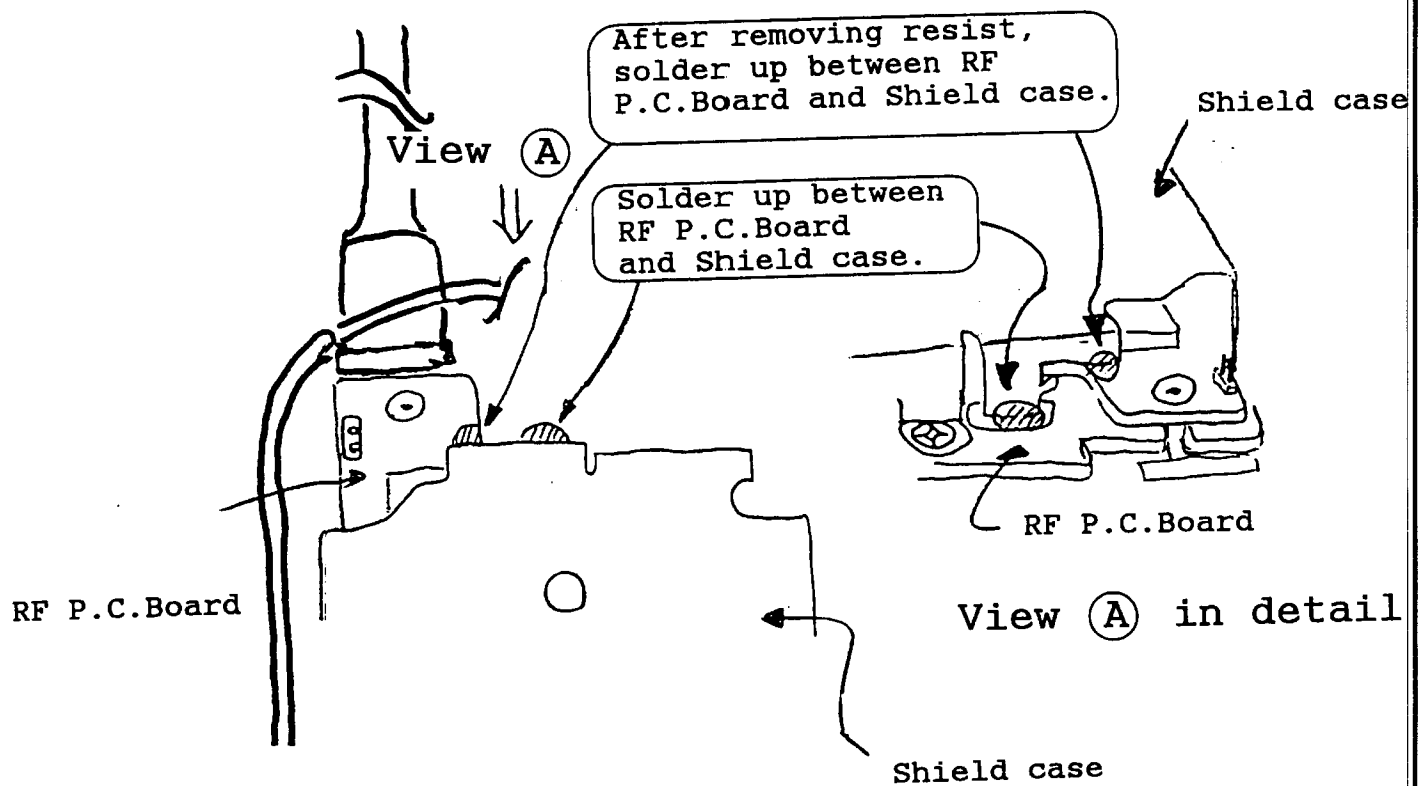

APPENDIX B***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

ADDITIONAL MODELS COVERED UNDER THIS REPORT

The EUT will be sold under three separate company names, model numbers and FCC ID's:

Uniden 900 MHz Spread Spectrum Cordless Phone
Model: EXS2010
S/N: N/A
FCC ID: AMWUC668

Toshiba 900 MHz Spread Spectrum Cordless Phone
Model: To Be Determined
S/N: N/A
FCC ID: AJXUC675

Radio Shack 900 MHz Spread Spectrum Cordless Phone
Model: 43-1124
S/N: N/A
FCC ID: AAO4301124



APPENDIX C***DIAGRAMS, CHARTS AND PHOTOS***

FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


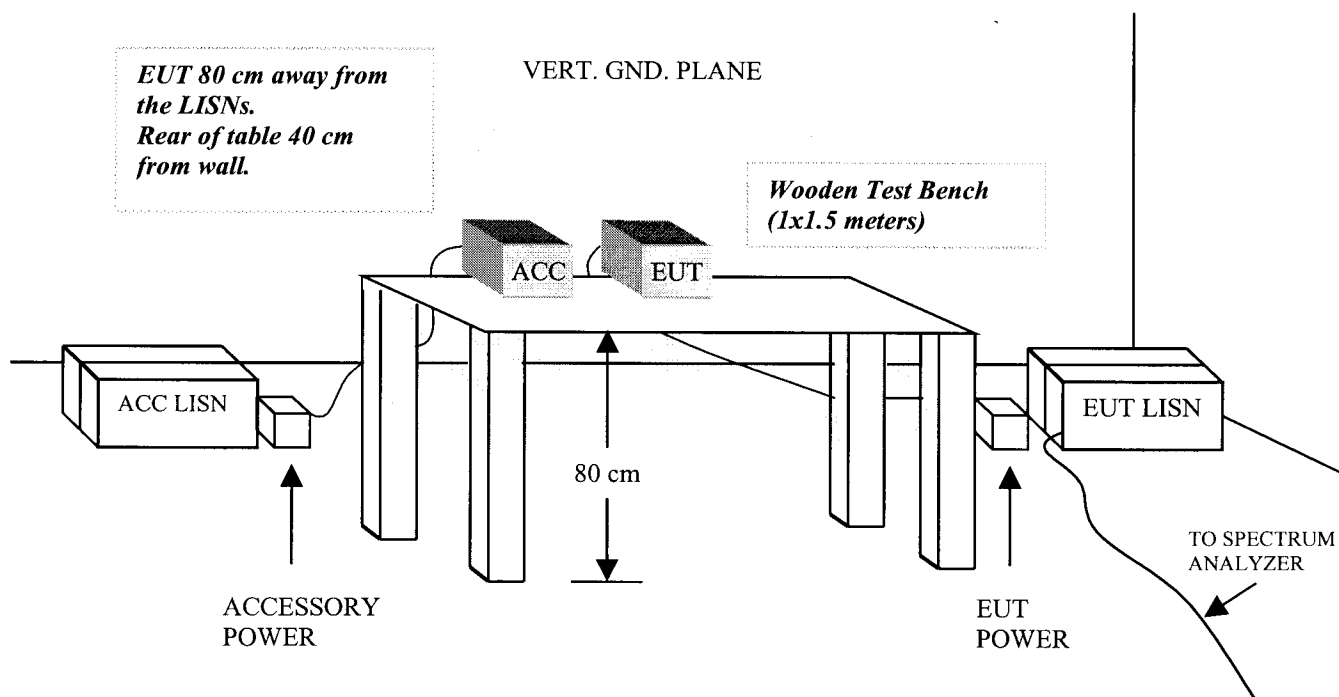


FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

OPEN LAND > 15 METERS

OPEN LAND > 15 METERS

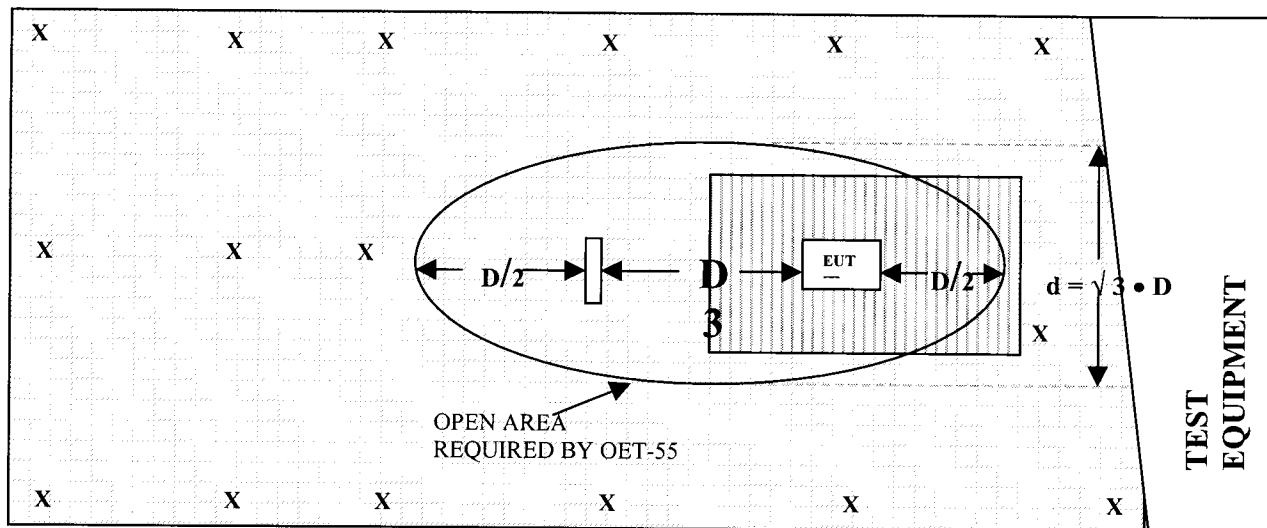

OPEN LAND > 15 METERS

X = GROUND RODS

[Shaded Box] = GROUND SCREEN


D = TEST DISTANCE (meters)

[Hatched Box] = WOOD COVER






FIGURE 3: PROCESSING GAIN SETUP

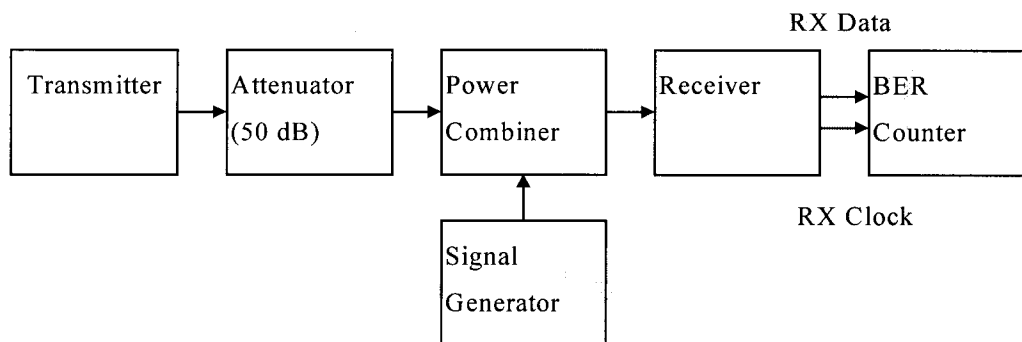





LAB "D" BICONICAL ANTENNA AB-100 S/N 01548 Cal: 10-15-98

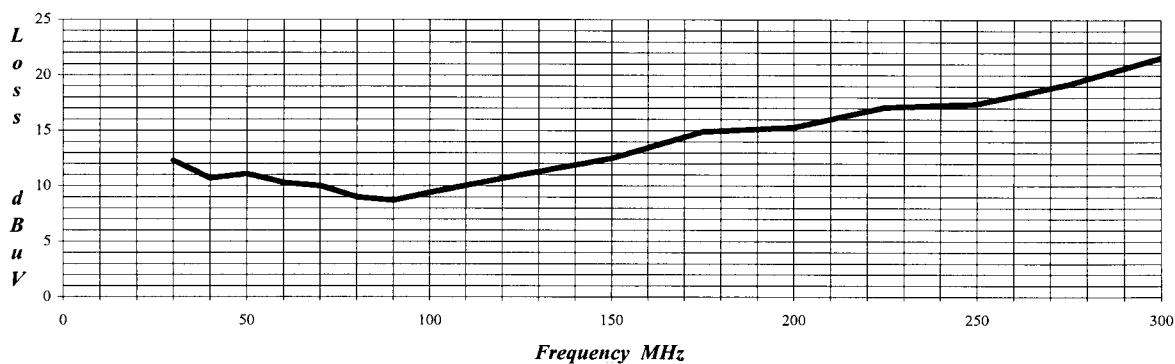

LAB "D" LOG PERIODIC ANTENNA AL-100 S/N 01117 Cal: 10-15-98

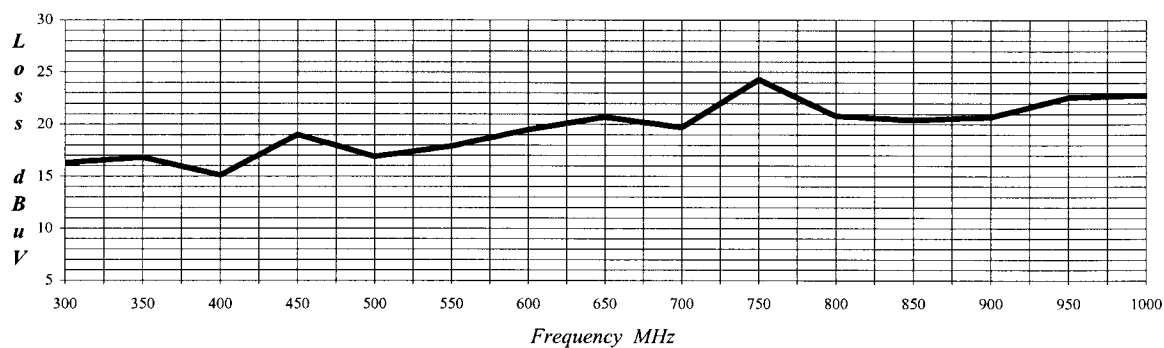

PREAMPLIFIER EFFECTIVE GAIN AT 3 METERS PA-102 S/N: 1017 Lab "D"
Effective 1-16-99

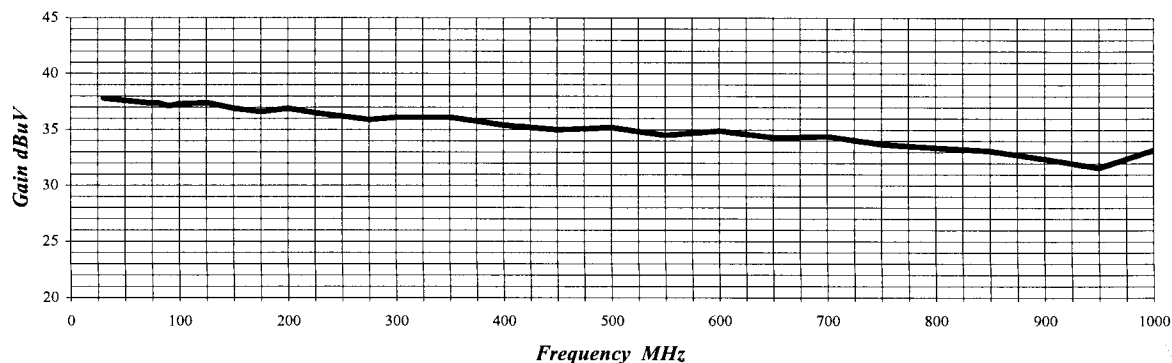

HEWLETT PACKARD 8449B
MICROWAVE PREAMPLIFIER

S/N: 3008A008766

CALIBRATION DATE: JANUARY 30, 1999

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.9	9.5	34.3
1.1	36.3	10.0	33.7
1.2	36.4	10.5	34.1
1.3	36.2	11.0	33.7
1.4	36.3	11.5	34.0
1.5	35.7	12.0	33.9
1.6	35.9	12.5	34.4
1.7	35.7	13.0	32.9
1.8	35.6	13.5	31.6
1.9	35.5	14.0	31.8
2.0	35.4	14.5	31.9
2.5	35.6	15.0	32.2
3.0	35.2	15.5	32.8
3.5	35.2	16.0	32.4
4.0	34.3	16.5	32.1
4.5	34.1	17.0	32.3
5.0	34.3	17.5	30.3
5.5	33.0	18.0	31.5
6.0	34.1	18.5	31.2
6.5	34.5	19.0	32.2
7.0	34.3	19.5	32.0
7.5	33.9	20.0	32.0
8.0	34.5	20.5	33.2
8.5	34.5	21.0	30.9
9.0	34.4	22.0	32.1

ANTENNA RESEARCH DRG-118/A

HORN ANTENNA

S/N: 1053

CALIBRATION DATE: DECEMBER 8, 1995

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	22.3	2.0	26.7
3.0	29.7	4.0	29.5
5.0	32.3	6.0	32.4
7.0	36.1	8.0	37.4
9.0	36.8	10.0	39.5




COM POWER AL-130

LOOP ANTENNA

S/N: 25309

CALIBRATION DATE: APRIL 13, 1999

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
0.01	10.9	0.02	10.0
0.03	11.6	0.04	11.3
0.05	10.0	0.06	10.4
0.07	10.2	0.08	9.9
0.09	9.8	0.1	9.8
0.2	7.5	0.3	9.9
0.4	9.9	0.5	9.8
0.6	10.0	0.7	10.1
0.8	10.0	0.9	9.9
1	10.3	2	11.0
3	10.7	4	10.5
5	11.0	6	11.0
7	10.8	8	10.7
9	11.4	10	11.1
12	10.5	14	9.4
16	8.8	18	10.5
20	10.4	25	8.1
30	6.2		



APPENDIX D***DATA SHEETS***



***CONDUCTED EMISSIONS
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850



**COMPATIBLE
ELECTRONICS**

10/05/1999

8:31:47

UNIDEN CORPORATION

900 MHz SPREAD SPEC. PHONE

MODEL: EXS2010

FCC B - BLACK LEAD

TEST ENGINEER : *Kyle Fujimoto*
KYLE FUJIMOTO-----
20 highest peaks above -50.00 dB of CLASS B limit line

Peak criteria : 0.10 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.641	43.37	48.00	-4.63
2	0.464	39.97	48.00	-8.03
3	0.502	39.47	48.00	-8.53
4	0.474	39.17	48.00	-8.83
5	0.454	39.07	48.00	-8.93
6	0.517	38.77	48.00	-9.23
7	0.574	38.37	48.00	-9.63
8	0.492	38.37	48.00	-9.63
9	0.526	38.27	48.00	-9.73
10	0.513	38.27	48.00	-9.73
11	0.498	38.17	48.00	-9.83
12	0.460	38.17	48.00	-9.83
13	0.470	38.07	48.00	-9.93
14	0.655	37.97	48.00	-10.03
15	0.487	37.97	48.00	-10.03
16	0.482	37.97	48.00	-10.03
17	0.509	37.87	48.00	-10.13
18	0.551	37.67	48.00	-10.33
19	0.542	37.67	48.00	-10.33
20	0.627	37.57	48.00	-10.43




COMPATIBLE
ELECTRONICS

8:31:47

10/05/1999

EMISSION LEVEL [dBuV] PEAK
Graph for Peak

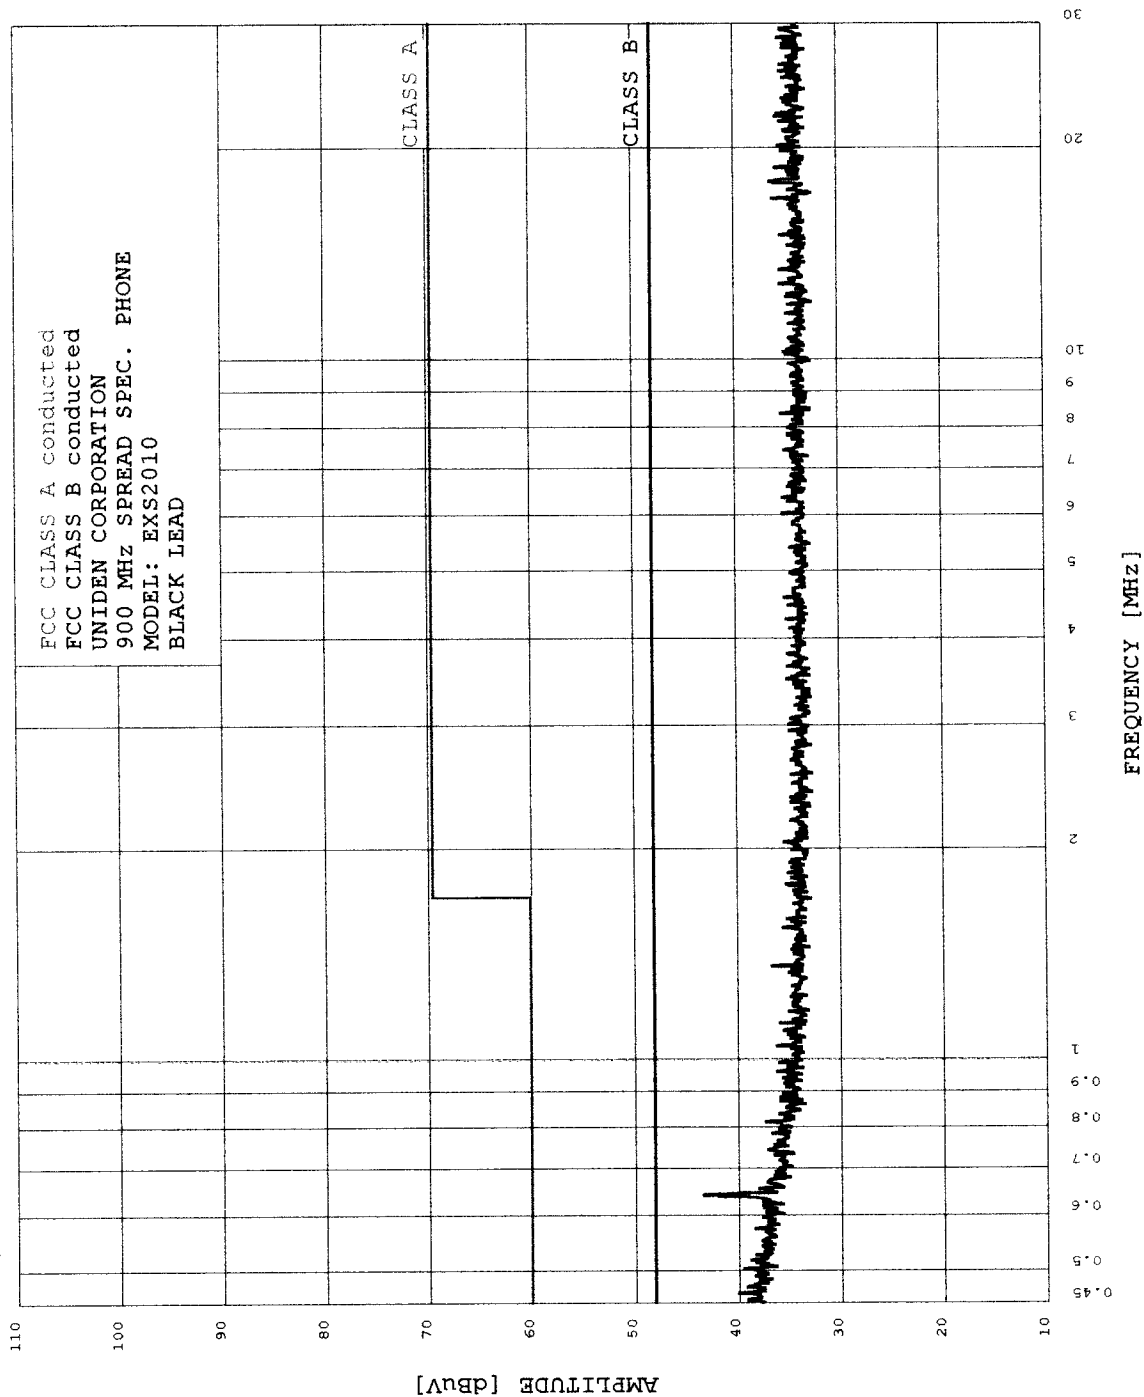

**COMPATIBLE
ELECTRONICS**

10/05/1999

8:37:45

UNIDEN CORPORATION

900 MHz SPREAD SPEC. PHONE

MODEL: EXS2010

FCC B - WHITE LEAD

TEST ENGINEER : *Kyle Fujimoto*
KYLE FUJIMOTO-----
20 highest peaks above -50.00 dB of CLASS B limit line

Peak criteria : 0.10 dB, Curve : Peak


Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.641	42.78	48.00	-5.22
2	20.576	38.50	48.00	-9.50
3	18.759	36.64	48.00	-11.36
4	16.956	36.54	48.00	-11.46
5	17.832	36.49	48.00	-11.51
6	4.294	35.98	48.00	-12.02
7	29.517	35.75	48.00	-12.25
8	0.931	35.58	48.00	-12.42
9	0.509	35.58	48.00	-12.42
10	20.230	35.50	48.00	-12.50
11	8.168	35.48	48.00	-12.52
12	11.961	35.41	48.00	-12.59
13	10.376	35.39	48.00	-12.61
14	7.996	35.38	48.00	-12.62
15	1.093	35.38	48.00	-12.62
16	0.677	35.38	48.00	-12.62
17	0.535	35.28	48.00	-12.72
18	15.198	35.25	48.00	-12.75
19	13.633	35.22	48.00	-12.78
20	10.464	35.19	48.00	-12.81



COMPATIBLE
ELECTRONICS

10/05/1999 8:37:45

EMISSION LEVEL [dBuV] PEAK
Graph for Peak

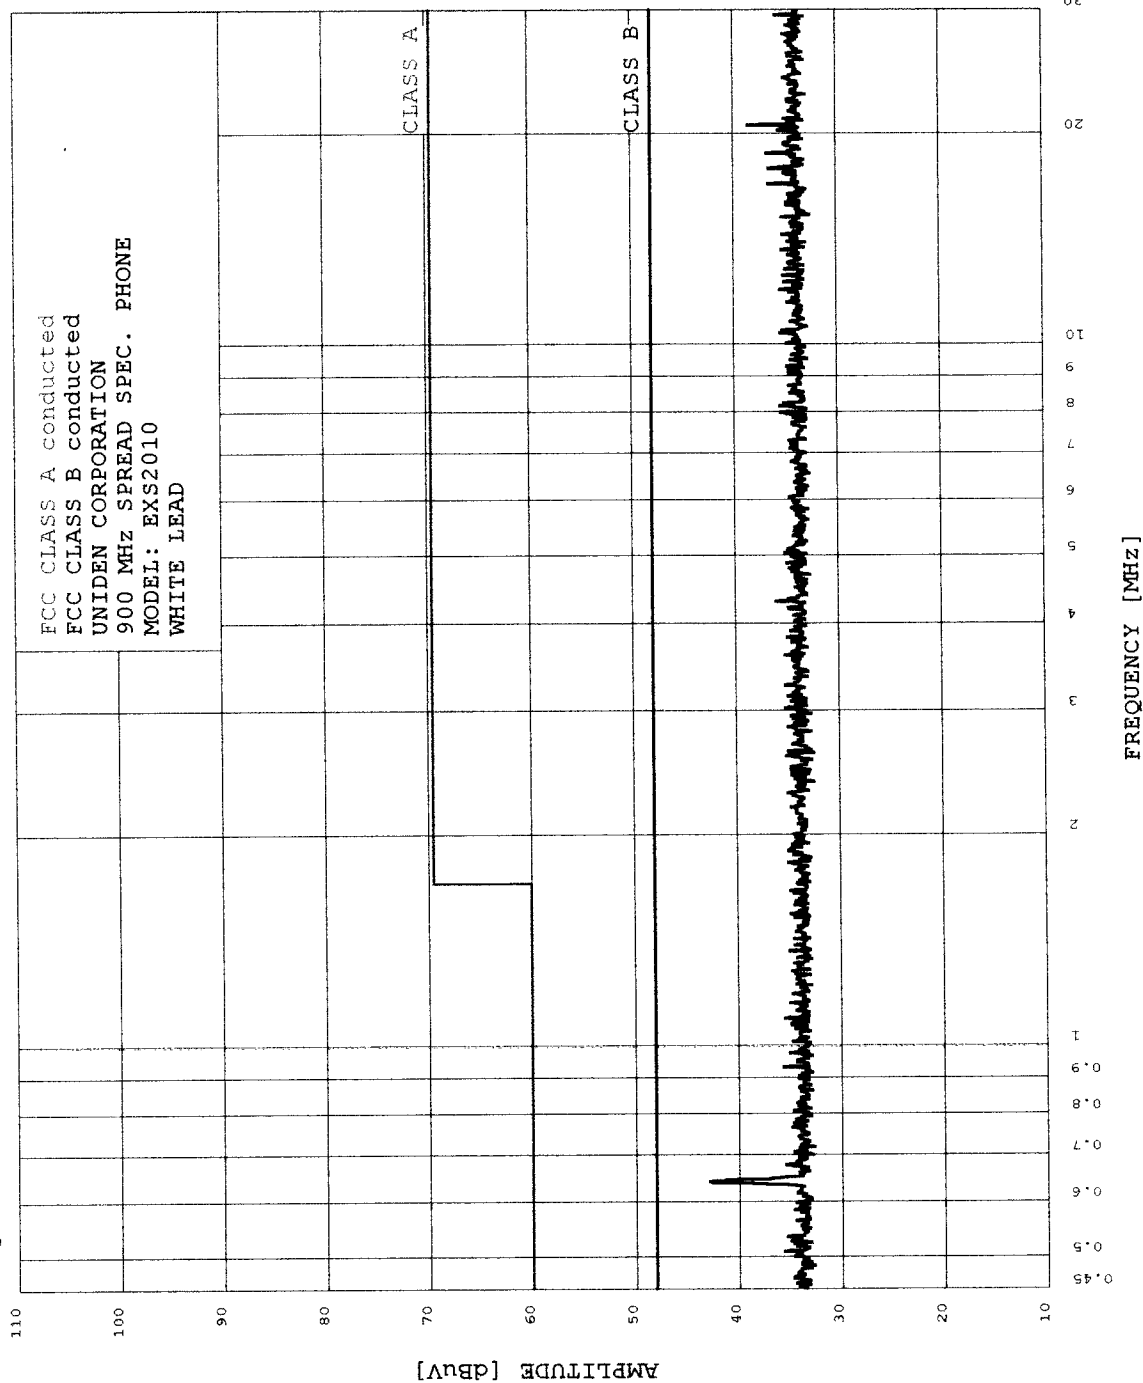

***RADIATED EMISSIONS
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

Test location: Compatible Electronics

Customer : UNIDEN CORP.

Date : 10/ 1/1999

Manufacturer : UNIDEN CORP.

Time : 17.46

EUT name : 900 MHz SPREAD SPECTRUM PHONE

Model: EXS2010

Specification: Fcc_B Test distance: 3.0 mtrs

Lab: D

Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$)

: 0.00

Test Mode : BASE UNIT - SPURIOUS EMISSIONS

10 kHz to 30 MHz

TEMPERATURE 81 DEGREES F.

RELATIVE HUMIDITY 35%

TESTED BY:

Kyle Fujimoto
KYLE FUJIMOTO

NO EMISSIONS FOUND FROM 10 kHz to 30 MHz
IN EITHER POLARIZATION FOR THE EUT

Test location: Compatible Electronics

Customer : UNIDEN CORP.

Date : 10/ 1/1999

Manufacturer : UNIDEN CORP.

Time : 13.46

EUT name : 900 MHz SPREAD SPECTRUM PHONE

Model: EXS2010

Specification: Fcc_B Test distance: 3.0 mtrs

Lab: D

Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$)

: 0.00

Test Mode : BASE UNIT - SPURIOUS EMISSIONS

TEMPERATURE 90 DEGREES F.

RELATIVE HUMIDITY 25%

VERTICAL POLARIZATION 30 - 300 MHz

TESTED BY: Kyle Fujimoto

KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	39.77	54.00	0.90	10.74	38.60	27.03	40.00	-12.97
2V	49.95	51.10	0.90	11.10	38.60	24.50	40.00	-15.50
3V	52.90	53.50	0.93	10.87	38.60	26.70	40.00	-13.30
4V	66.06	54.30	1.12	10.12	38.60	26.94	40.00	-13.06
5V	74.37	49.70	1.20	9.56	38.60	21.86	40.00	-18.14
6V	79.41	48.30	1.20	9.06	38.60	19.96	40.00	-20.04
7V	79.41	45.30	1.20	9.06	38.60	16.96	40.00	-23.04
8V	111.06	49.80	1.44	10.11	38.69	22.66	43.50	-20.84
9V	114.65	49.70	1.46	10.34	38.72	22.78	43.50	-20.72
10V	145.45	48.60	1.66	12.23	38.55	23.94	43.50	-19.56

Test location: Compatible Electronics
 Customer : UNIDEN CORP. Date : 10/ 1/1999
 Manufacturer : UNIDEN CORP. Time : 14.00
 EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 90 DEGREES F.
 RELATIVE HUMIDITY 25%
 HORIZONTAL POLARIZATION 30 - 300 MHz
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	42.13	55.20	0.90	10.79	38.60	28.29	40.00	-11.71
2H	46.93	46.00	0.90	10.98	38.60	19.28	40.00	-20.72
3H	63.98	45.40	1.08	10.18	38.60	18.06	40.00	-21.94
4H	76.17	47.40	1.20	9.38	38.60	19.38	40.00	-20.62
5H	110.88	54.30	1.44	10.10	38.69	27.15	43.50	-16.35
6H	152.09	51.10	1.70	12.70	38.49	27.01	43.50	-16.49
7H	205.34	44.90	2.02	15.68	38.69	23.91	43.50	-19.59

Test location: Compatible Electronics
 Customer : UNIDEN CORP. Date : 10/ 1/1999
 Manufacturer : UNIDEN CORP. Time : 11.49
 EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 90 DEGREES F.
 RELATIVE HUMIDITY 25%
 VERTICAL POLARIZATION 300 - 1000 MHz
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	337.98	41.90	2.73	16.68	38.58	22.73	46.00	-23.27
2V	406.46	44.20	3.11	15.60	38.15	24.77	46.00	-21.23
3V	429.30	41.60	3.16	17.39	37.97	24.18	46.00	-21.82

Test location: Compatible Electronics
 Customer : UNIDEN CORP. Date : 10/ 1/1999
 Manufacturer : UNIDEN CORP. Time : 11.16
 EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 90 DEGREES F.
 RELATIVE HUMIDITY 25%
 HORIZONTAL POLARIZATION 300 - 1000 MHz
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	301.12	42.00	2.51	16.31	38.50	22.32	46.00	-23.68
2H	339.23	43.70	2.74	16.69	38.58	24.55	46.00	-21.45
3H	339.21	47.10	2.74	16.69	38.58	27.95	46.00	-18.05
4H	432.11	41.70	3.16	17.60	37.94	24.53	46.00	-21.47
5H	447.57	45.90	3.20	18.81	37.82	30.09	46.00	-15.91
6H	453.73	54.70	3.22	18.84	37.84	38.93	46.00	-7.07
7H	459.17	42.30	3.26	18.61	37.89	26.28	46.00	-19.72
8H	511.07	47.90	3.57	17.12	38.21	30.38	46.00	-15.62
9H	534.62	45.80	3.71	17.59	38.02	29.08	46.00	-16.92



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
905.2800	68.9	62.9 A	H	1.0	0	X	LOW	20.9	5.0	0.0	88.8			
905.2800	72.7	66.7 A	V	1.0	90	X	LOW	20.9	5.0	0.0	92.6			
914.8800	66.8	60.8 A	H	1.0	180	X	MID	21.3	4.9	0.0	87.0			
914.8800	71.1	65.1 A	V	1.0	180	X	MID	21.3	4.9	0.0	91.3			
923.5200	63.4	57.4 A	H	1.5	180	X	HIGH	21.6	4.8	0.0	83.8			
923.5200	71.7	65.7 A	V	1.0	180	X	HIGH	21.6	4.8	0.0	92.1			

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION		DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE		DUTY CYCLE	50.00 %
MODEL	EXS2010		PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668		TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO		LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1810.5600	49.8	43.8 A	H	1.0	180	X	LOW	24.5	3.5	35.6	36.2	-36.4	72.6	
1810.5600	53.2	47.2 A	V	1.0	180	X	LOW	24.5	3.5	35.6	39.6	-33.0	72.6	
1829.7600	51.5	45.5 A	H	1.0	180	X	MID	24.5	3.5	35.6	37.9	-34.7	72.6	
1829.7600	52.8	46.8 A	V	1.0	180	X	MID	24.5	3.5	35.6	39.2	-33.4	72.6	
1847.0400	49.8	43.8 A	H	1.0	180	X	HIGH	24.5	3.7	35.5	36.5	-36.1	72.6	
1847.0400	49.2	43.2 A	V	1.0	180	X	HIGH	24.5	3.7	35.5	35.9	-36.7	72.6	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS + AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION		DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE		DUTY CYCLE	50.00 %
MODEL	EXS2010		PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668		TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO		LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2715.8400	53.3	47.3 A	H	1.0	90	X	LOW	28.2	4.5	35.6	44.4	-9.6	54.0	
2715.8400	52.3	46.3 A	V	1.0	180	X	LOW	28.2	4.5	35.6	43.4	-10.6	54.0	
2744.6400	52.7	46.7 A	H	1.0	180	X	MID	28.2	4.5	35.6	43.8	-10.2	54.0	
2744.6400	53.9	47.9 A	V	1.5	180	X	MID	28.2	4.5	35.6	45.0	-9.0	54.0	
2770.5600	51.5	45.5 A	H	1.0	180	X	HIGH	29.7	4.6	35.2	44.6	-9.4	54.0	
2770.5600	53.7	47.7 A	V	1.0	180	X	HIGH	29.7	4.6	35.2	46.8	-7.2	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3621.1200	53.6	47.6 A	H	1.0	180	X	LOW	29.6	5.0	35.2	47.0	-7.0	54.0	
3621.1200	53.8	47.8 A	V	1.5	180	X	LOW	29.6	5.0	35.2	47.2	-6.8	54.0	
3659.5200	51.7	45.7 A	H	2.0	180	X	MID	29.6	5.0	35.2	45.1	-8.9	54.0	
3659.5200	51.5	45.5 A	V	1.5	270	X	MID	29.6	5.0	35.2	44.9	-9.1	54.0	
3694.0800	52.6	46.6 A	H	2.5	180	X	HIGH	29.6	5.0	35.2	46.0	-8.0	54.0	
3694.0800	52.9	46.9 A	V	1.0	0	X	HIGH	29.6	5.0	35.2	46.3	-7.7	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
4526.4000	44.4	38.4 A	H	1.5	90	X	LOW	30.9	5.6	34.1	40.8	-13.2	54.0	
4526.4000	45.4	39.4 A	V	1.0	180	X	LOW	30.9	5.6	34.1	41.8	-12.2	54.0	
4574.4000	44.7	38.7 A	H	2.5	180	X	MID	30.9	5.6	34.1	41.1	-12.9	54.0	
4574.4000	45.6	39.6 A	V	1.0	90	X	MID	30.9	5.6	34.1	42.0	-12.0	54.0	
4617.6000	44.7	38.7 A	H	1.0	90	X	HIGH	30.9	5.6	34.1	41.1	-12.9	54.0	
4617.6000	45.3	39.3 A	V	1.0	180	X	HIGH	30.9	5.6	34.1	41.7	-12.3	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - BASE			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
5431.6800	50.7	44.7 A	H	2.0	180	X	LOW	32.4	6.0	33.0	50.1	-3.9	54.0	
5431.6800	47.2	41.2 A	V	1.0	180	X	LOW	32.4	6.0	33.0	46.6	-7.4	54.0	
5489.2800	50.6	44.6 A	H	2.0	180	X	MID	32.4	6.0	33.0	50.0	-4.0	54.0	
5489.2800	50.4	44.4 A	V	1.5	270	X	MID	32.4	6.0	33.0	49.8	-4.2	54.0	
5541.1200	49.3	43.3 A	H	1.0	90	X	HIGH	32.4	6.0	33.0	48.7	-5.3	54.0	
5541.1200	49.6	43.6 A	V	1.5	180	X	HIGH	32.4	6.0	33.0	49.0	-5.0	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
** DELTA = SPEC LIMIT - CORRECTED READING

Note: No Harmonics found after
the 6th Harmonic for the Base

***-6 dB BANDWIDTH
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99


h_p -6 dB BANDWIDTH OF CHANNEL 1 - BASE MKR Δ 1.267 MHz
REF 20.0 dBm ATTEN 30 dB 0.00 dB

10 dB/

MARKER Δ
1.267 MHz
0.00 dB

DL
-20.0
dBm


CORR'D

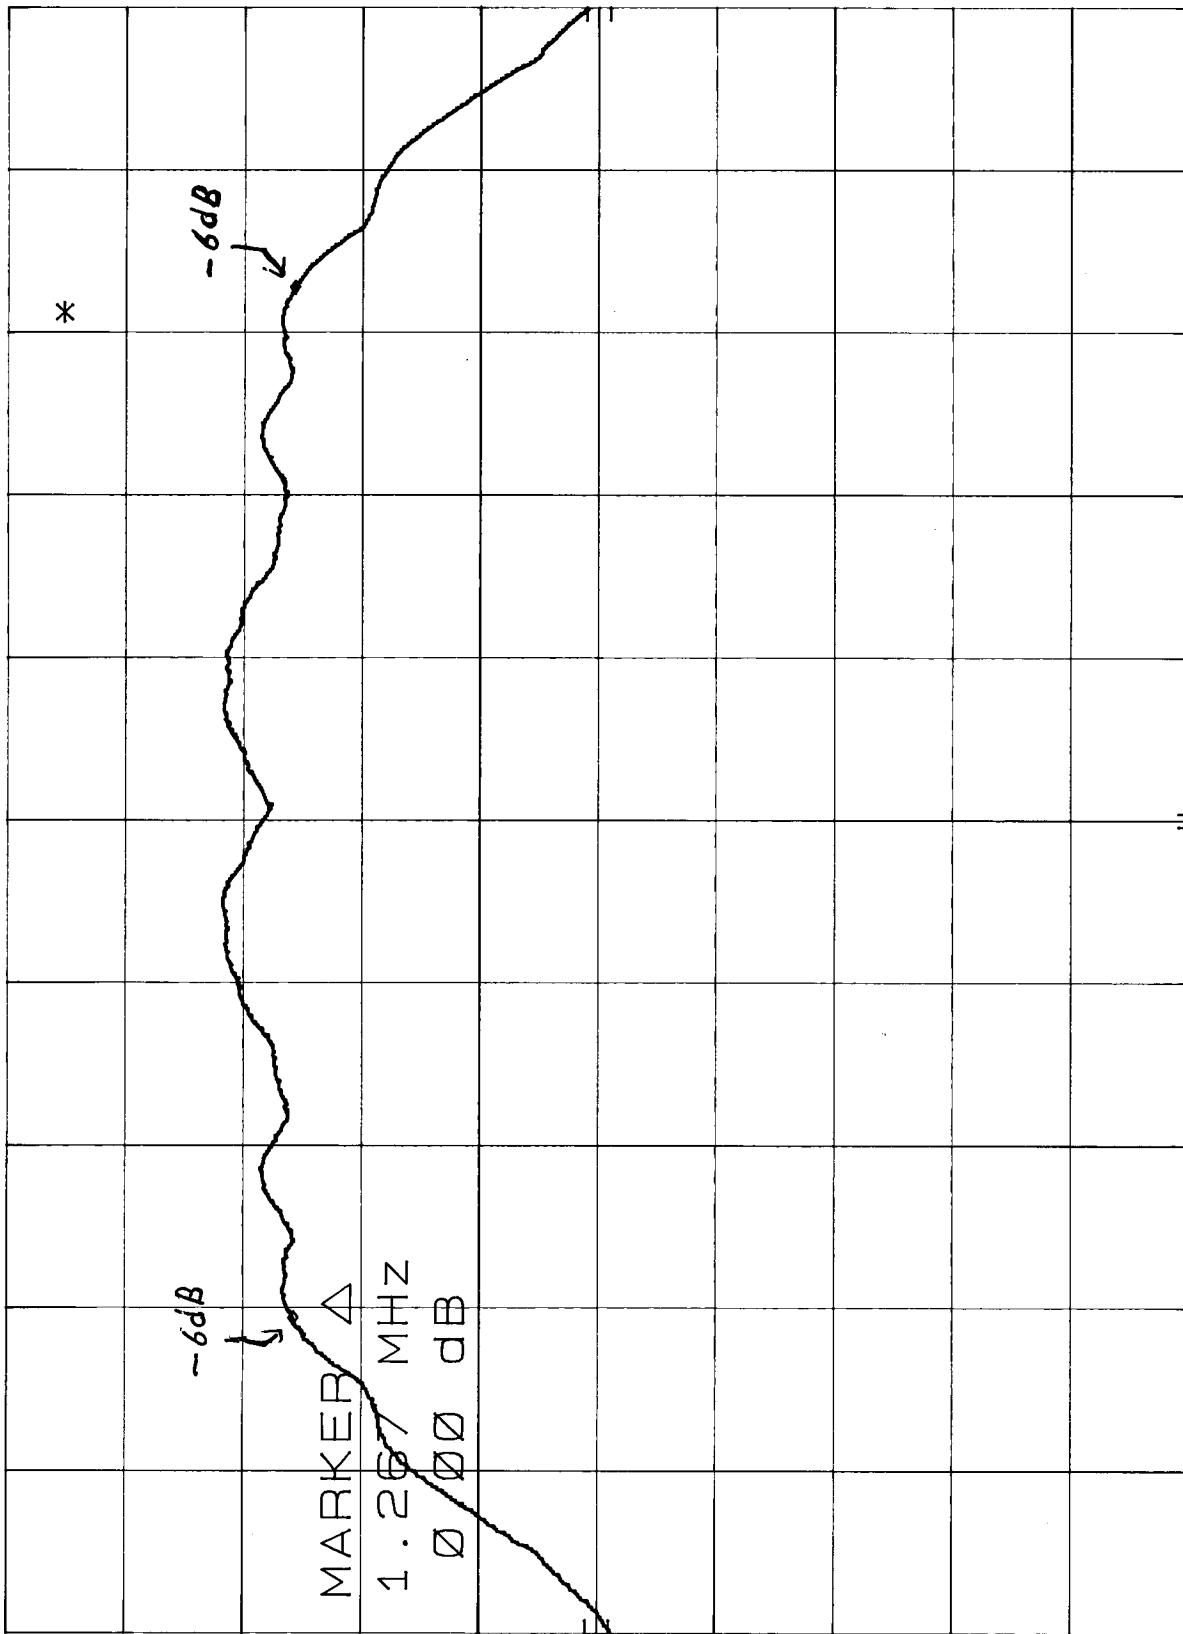

CENTER 905.46 MHz RES BW 100 kHz VBW 1 MHz SPAN 2.00 MHz SWP 20.0 msec

10-4-99

h_p -6 dB BANDWIDTH OF CHANNEL 11 - BASE MKR Δ 1.218 MHz
REF 20.0 dBm ATTEN 30 dB 0.00 dB

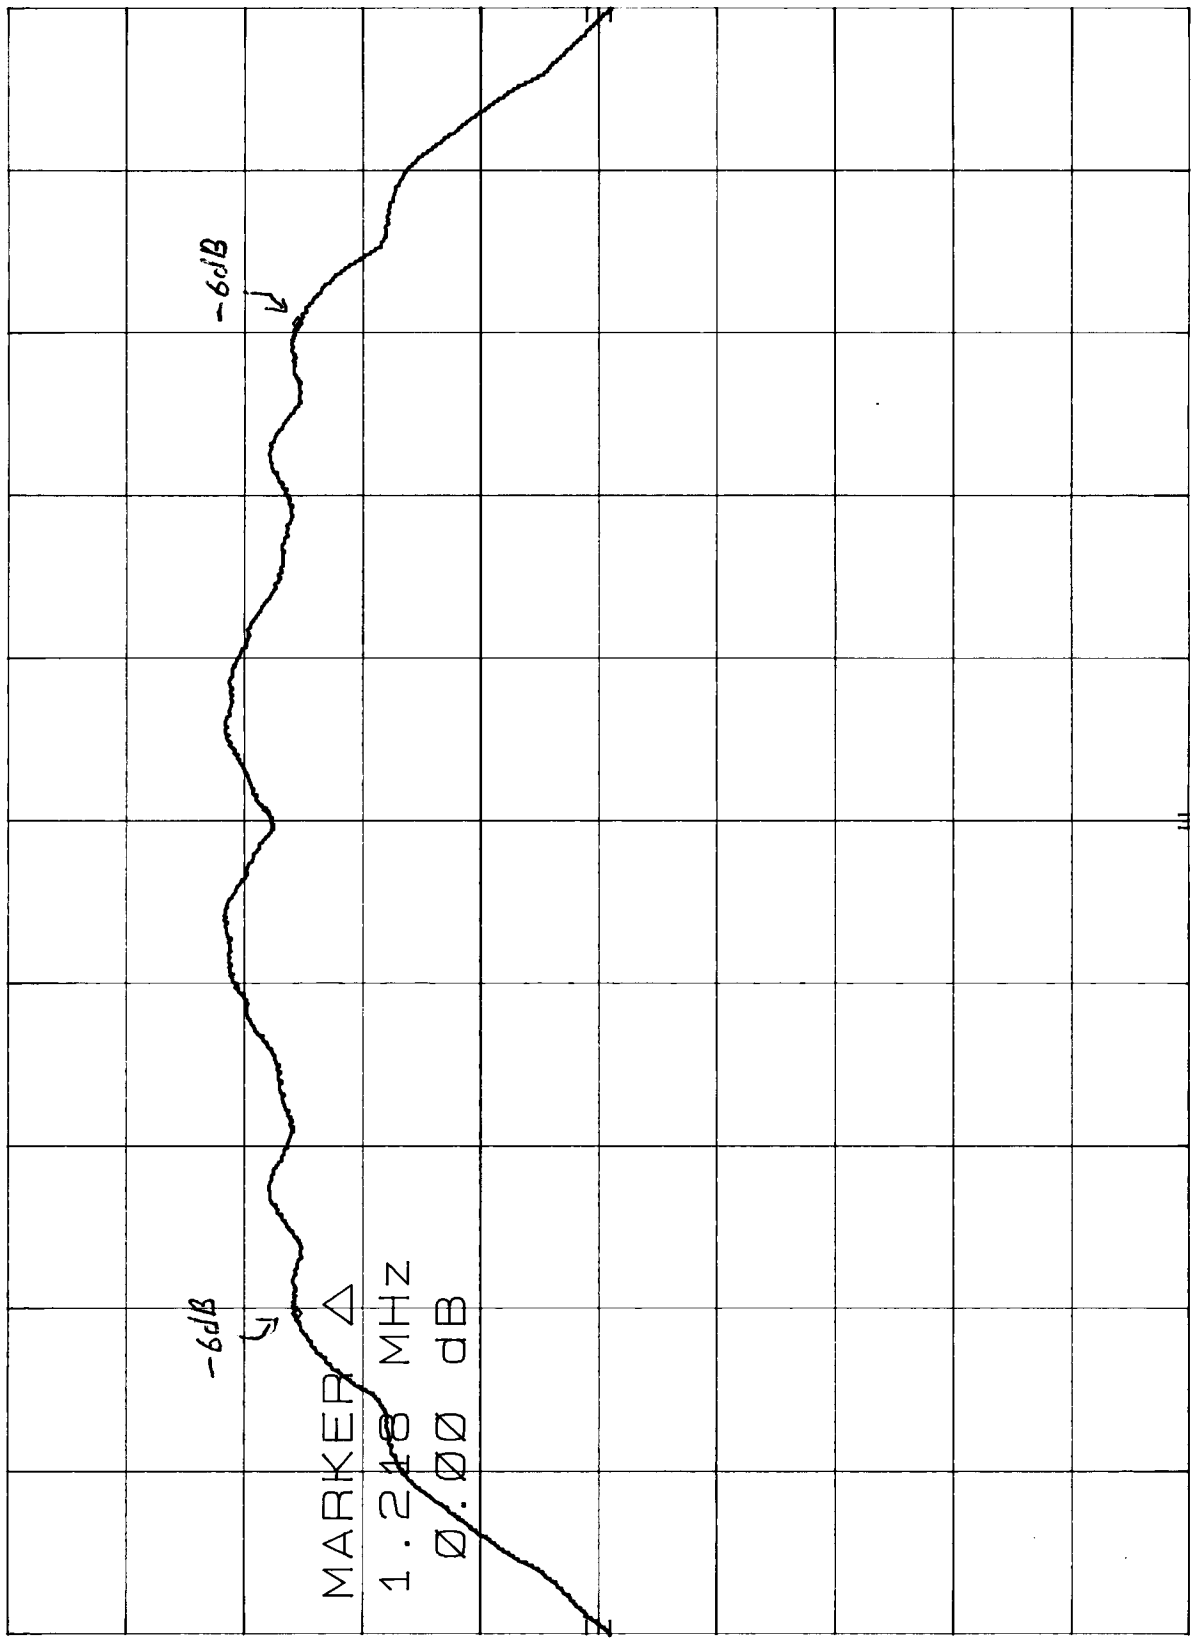

10 dB/


DL
-20.0
dBm
MARKER Δ
1.218 MHz
0.00 dB

CORR'D

CENTER 914.88 MHz RES BW 100 KHz SPAN 2.00 MHz
VBW 1 MHz SWP 20.0 msec

10-4-99


HP
-6 dB BANDWIDTH OF CHANNEL 20 - BASE
REF 20.0 dBm ATTEN 30 dB
MKR Δ 1.192 MHz
0.00 dB

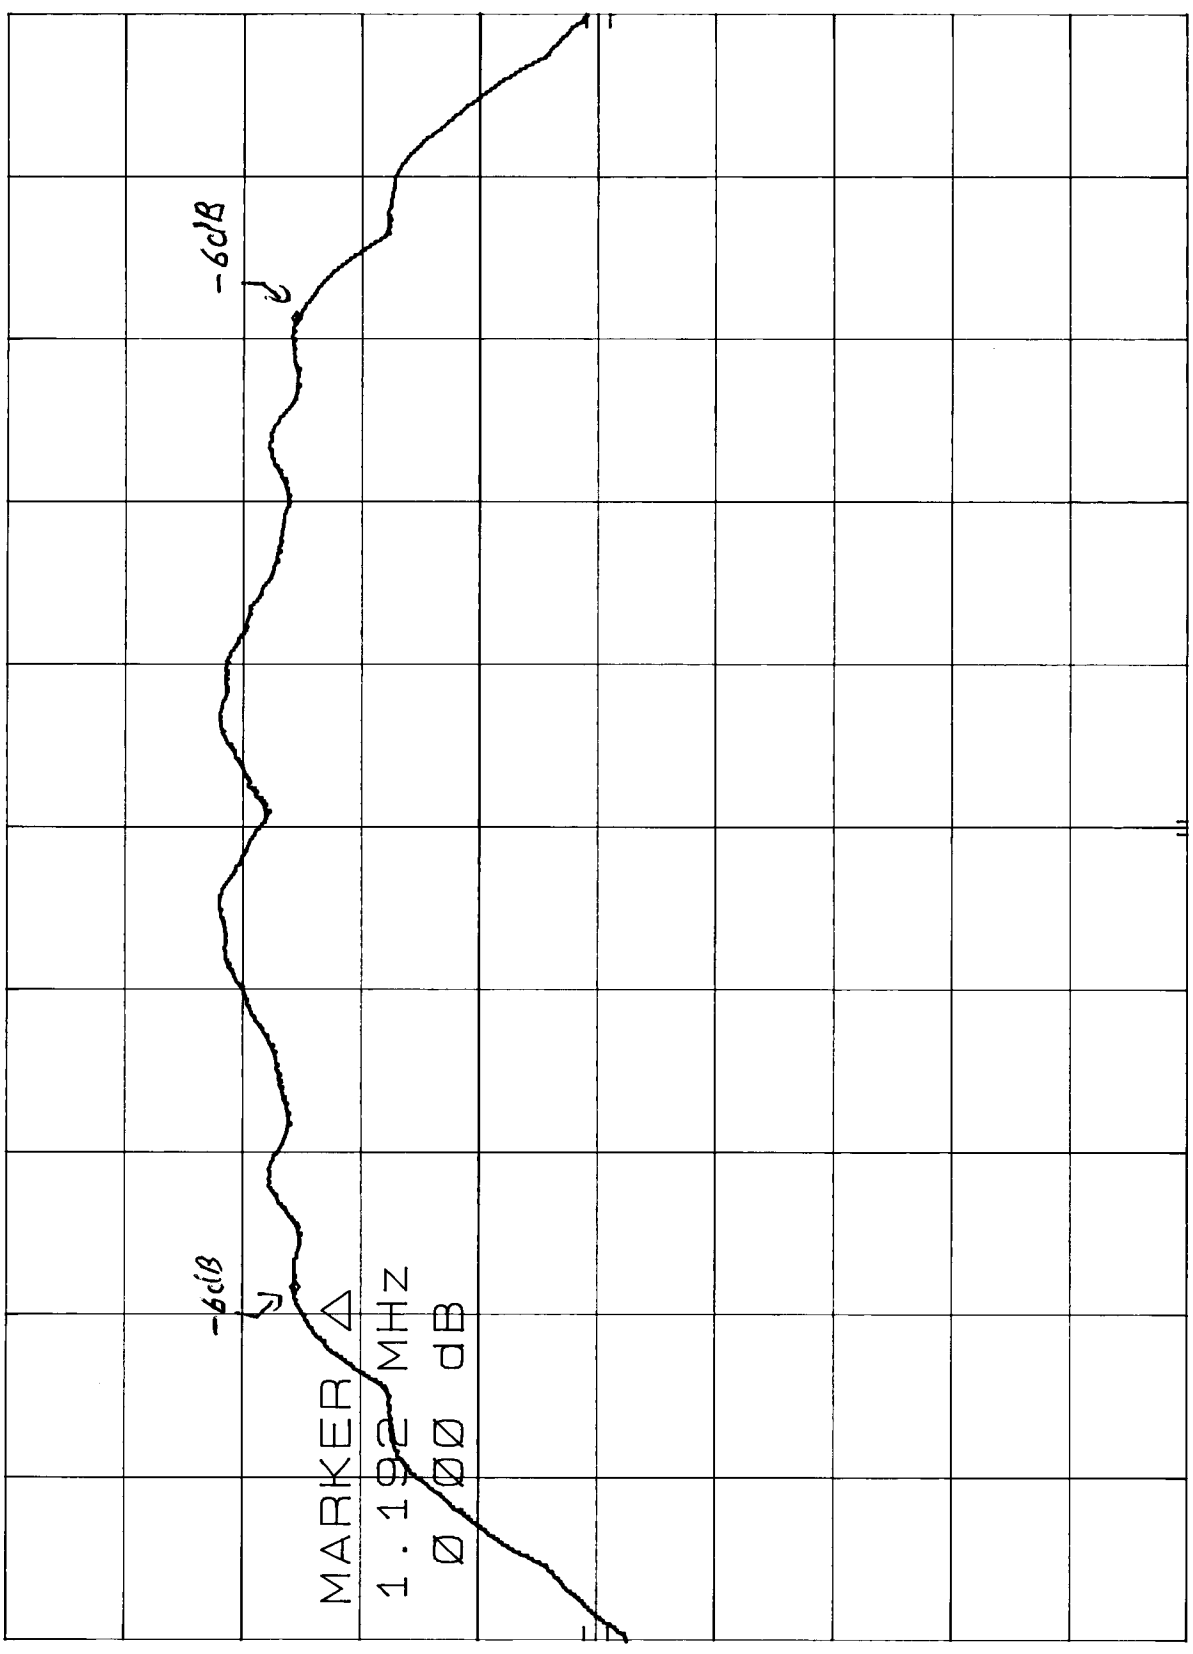

CENTER 923.50 MHz
RES BW 100 kHz
SPAN 2.00 MHz
SWP 20.0 msec
VBW 1 MHz



***PEAK OUTPUT POWER
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99

POWER OUTPUT OF CHANNEL 1 - BASE
h_p REF 20.0 dBm ATTN 30 dB

MKR 905.46 MHz
5.60 dBm


10 dB/

MARKER
905.46 MHz
5.60 dBm
DL
-20.0
dBm

CORR'D

CENTER 905.5 MHz
RES BW 3 MHz
VBW 1 MHz

SPAN 50.0 MHz
SWP 20.0 msec

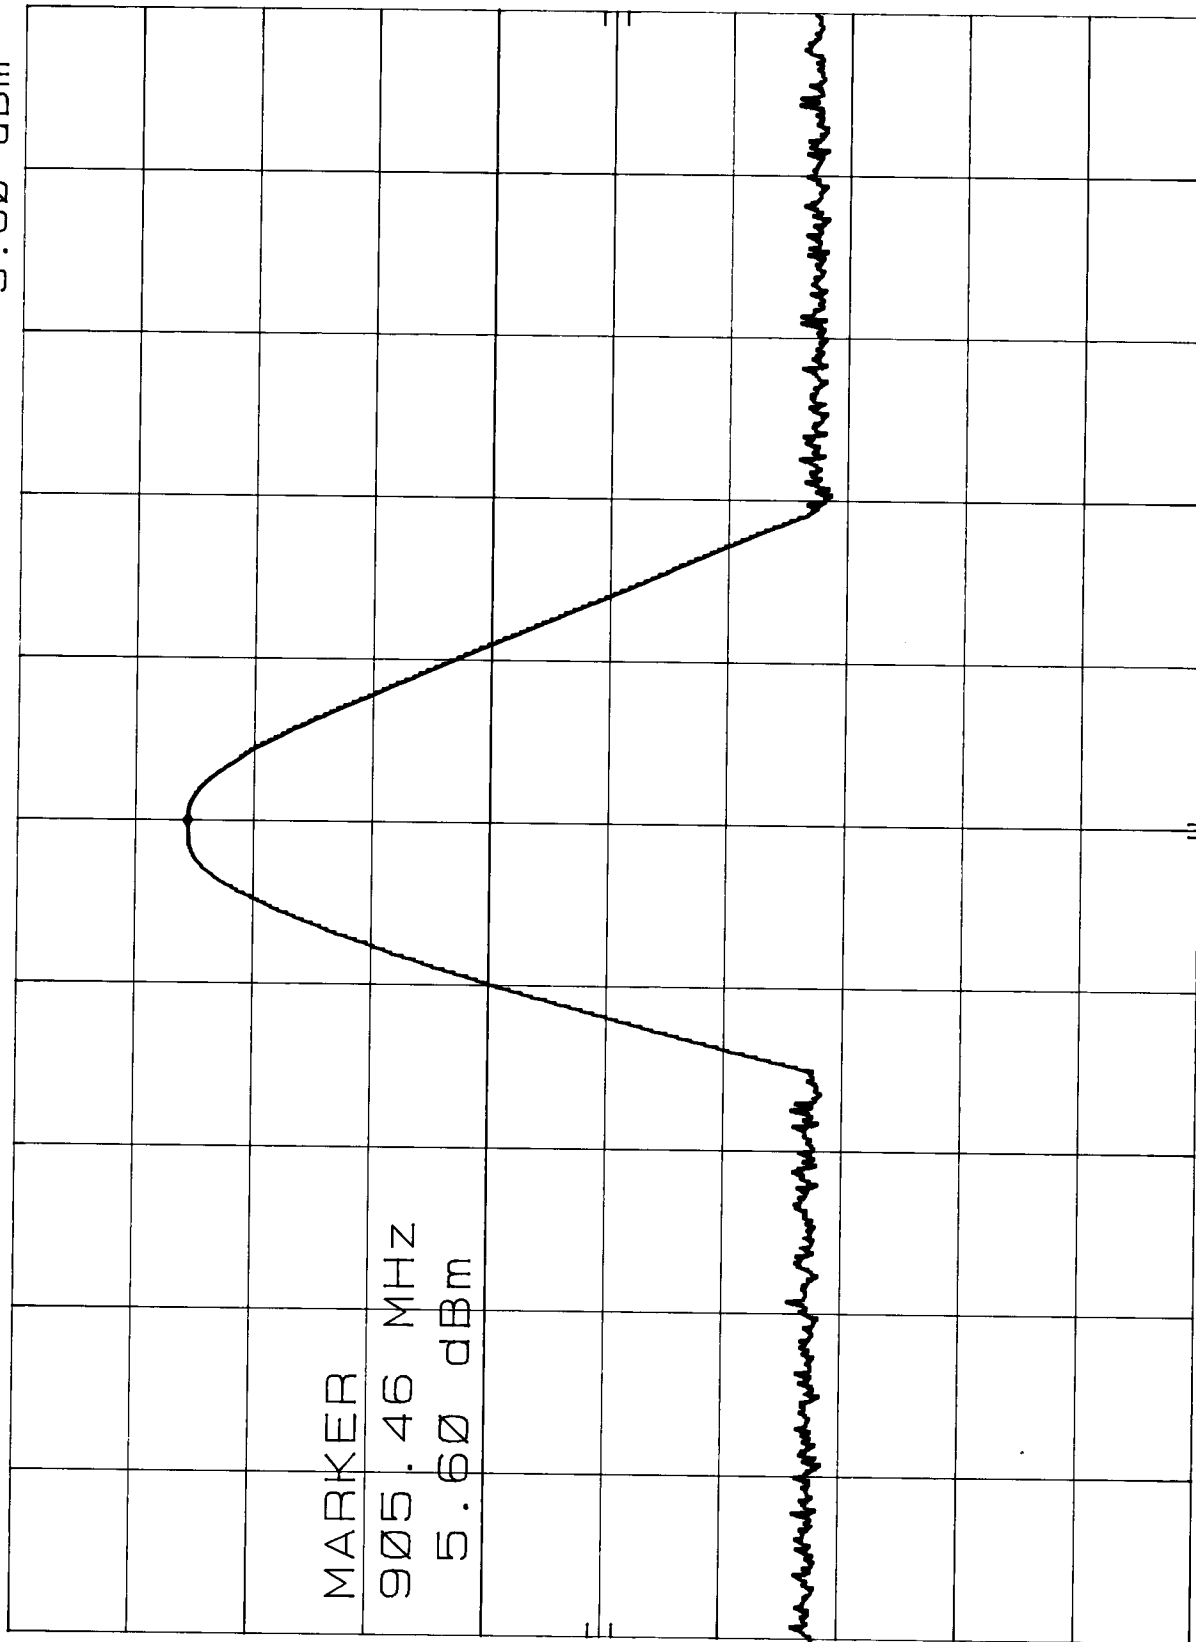

10-4-99

POWER OUTPUT OF CHANNEL 11 - BASE
MKR 914.26 MHz
5.10 dBm


hp

10 dB/

MARKER
914.26 MHz
5.10 dBm

DL
-27.0
dBm

CORR'D

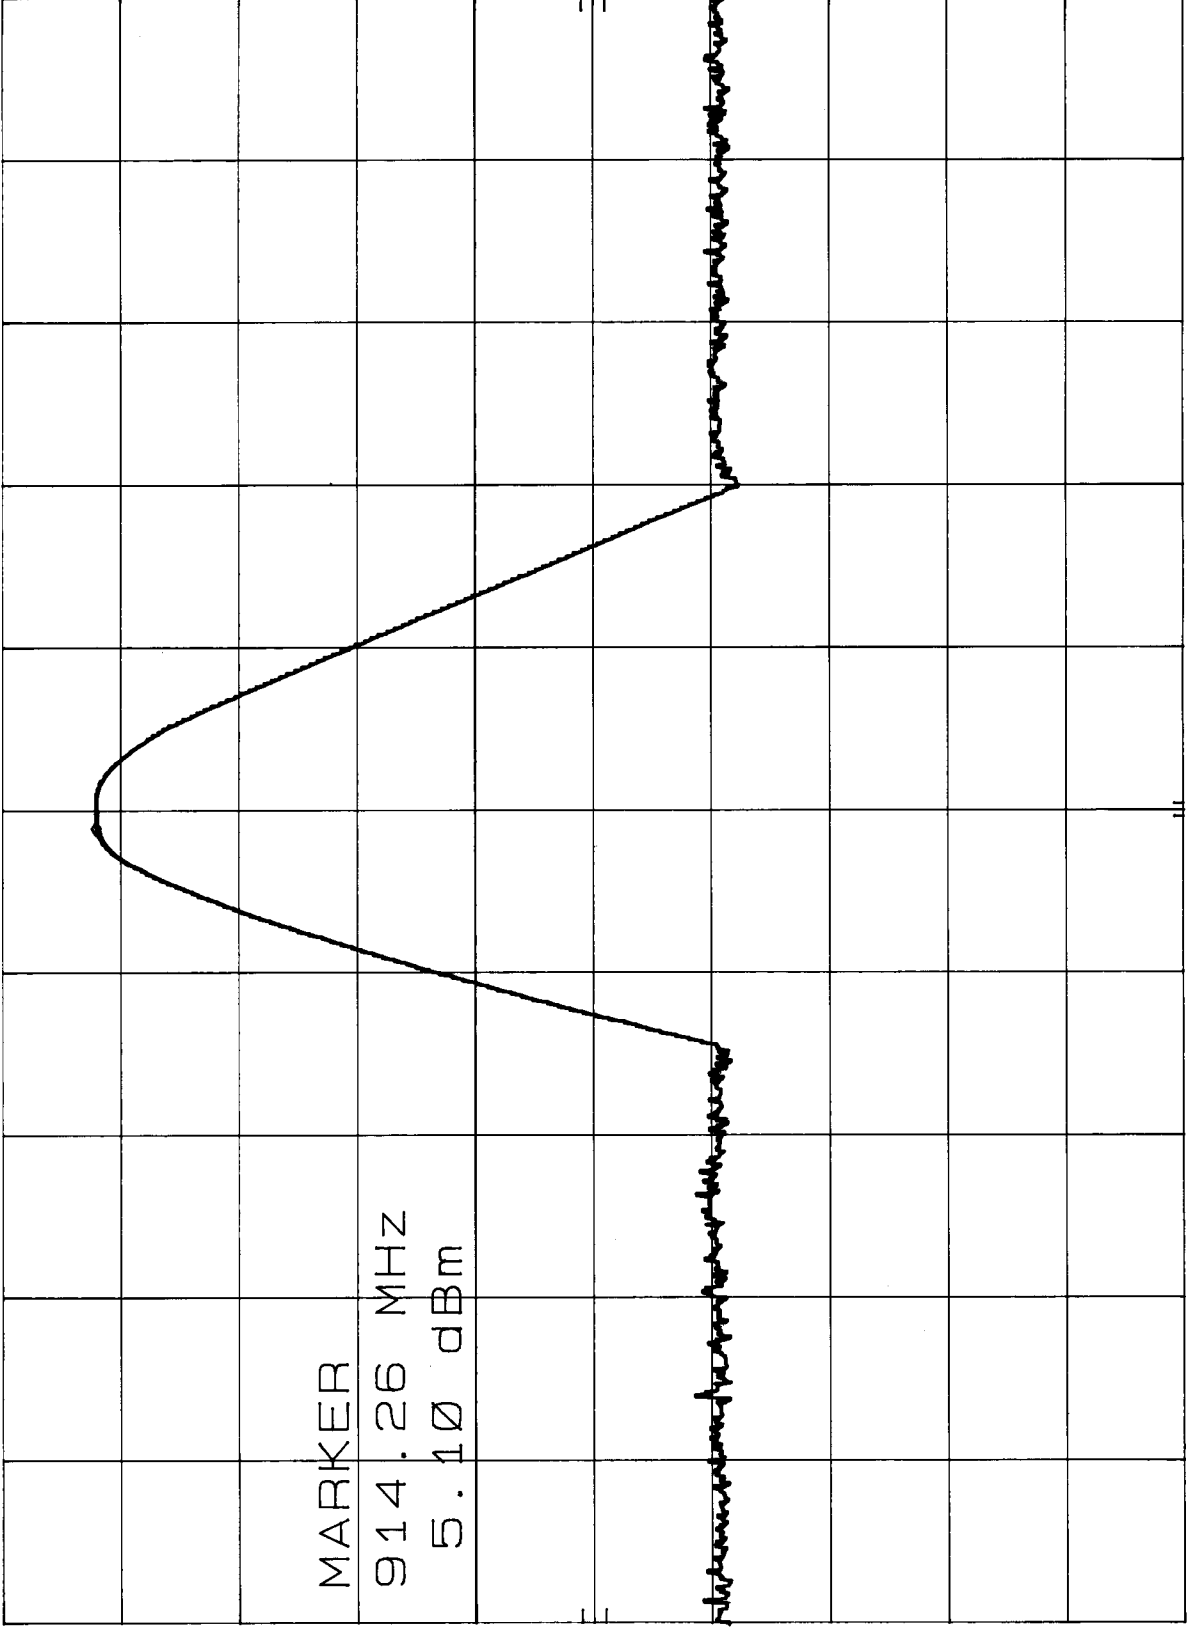

SPAN 50.0 MHz
SWP 20.0 msec

VBW 1 MHz

CENTER 914.8 MHz
RES BW 3 MHz

10-4-99

MKR 923.76 MHz
5.40 dBm

POWER OUTPUT OF CHANNEL 20 - BASE
REF 20.0 dBm ATTN 30 dB

hp

10 dB/

CENTER

923.5 MHz
STEP 800 KHz

DL
-20.0
dBm

CORR'D

SPAN 50.0 MHz
SWP 20.0 msec

VBW 1 MHz

CENTER 923.5 MHz
RES BW 3 MHz

***SPECTRAL DENSITY OUTPUT
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99

SPECTRAL DENSITY OUTPUT CHANNEL 1 - BASE MKR 905.166 MHz
REF 20.0 dBm ATTEN 30 dB -2.10 dBm

hp

10 dB/

MARKER

905.166 MHz

DL
8.0
dBm

2.10 dBm

CORR'D

CENTER 905.29 MHz
RES BW 3 kHz

VBW 10 kHz

SPAN 1.27 MHz
SWP 423 sec

10-4-99

SPECTRAL DENSITY OUTPUT CHANNEL 11 - BASE MKR 914.765 MHZ
REF 20.0 dBm ATTEN 30 dB

HP

10 dB/

MARKER

914.765 MHZ

DL
8.0
dBm

1.90 dB

CORR'D

CENTER 914.89 MHZ
RES BW 3 KHz
SPAN 1.27 MHZ
SWP 423 sec
VBW 10 KHz

10-4-99

SPECTRAL DENSITY OUTPUT CHANNEL 20 - BASE MKR 923.406 MHz
REF 20.0 dBm ATTN 30 dB -1.20 dBm


hp

10 dB/

MARKER

923.406 MHz

DL
8.0
dBm

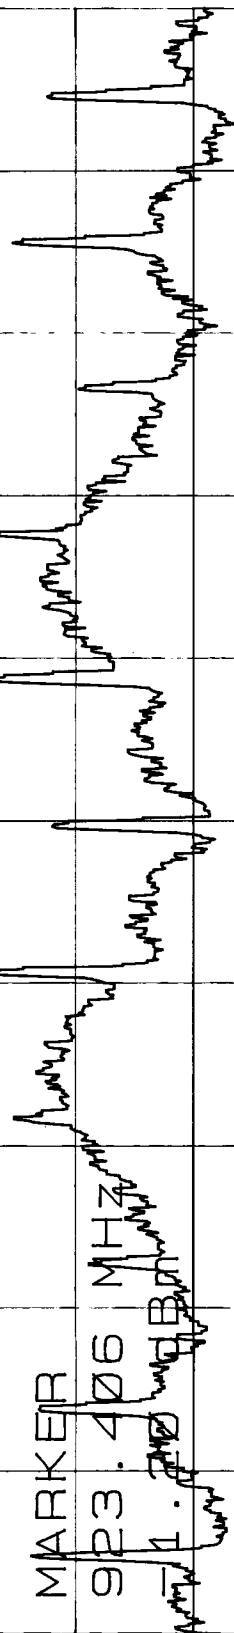

CORR'D

CENTER 923.52 MHz

RES BW 3 kHz

VBW 10 kHz

SPAN 1.27 MHz

SWP 423 sec



***RF ANTENNA CONDUCTED
DATA SHEETS FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850


10-4-99

RF ANT. COND. TEST BASE CH. 1 - 2MHZ-1GHZ MKR 905 MHZ
REF 20.0 dBm ATTN 30 dB 1.30 dBm

hp

10 dB/

DL
-18.7
dBm

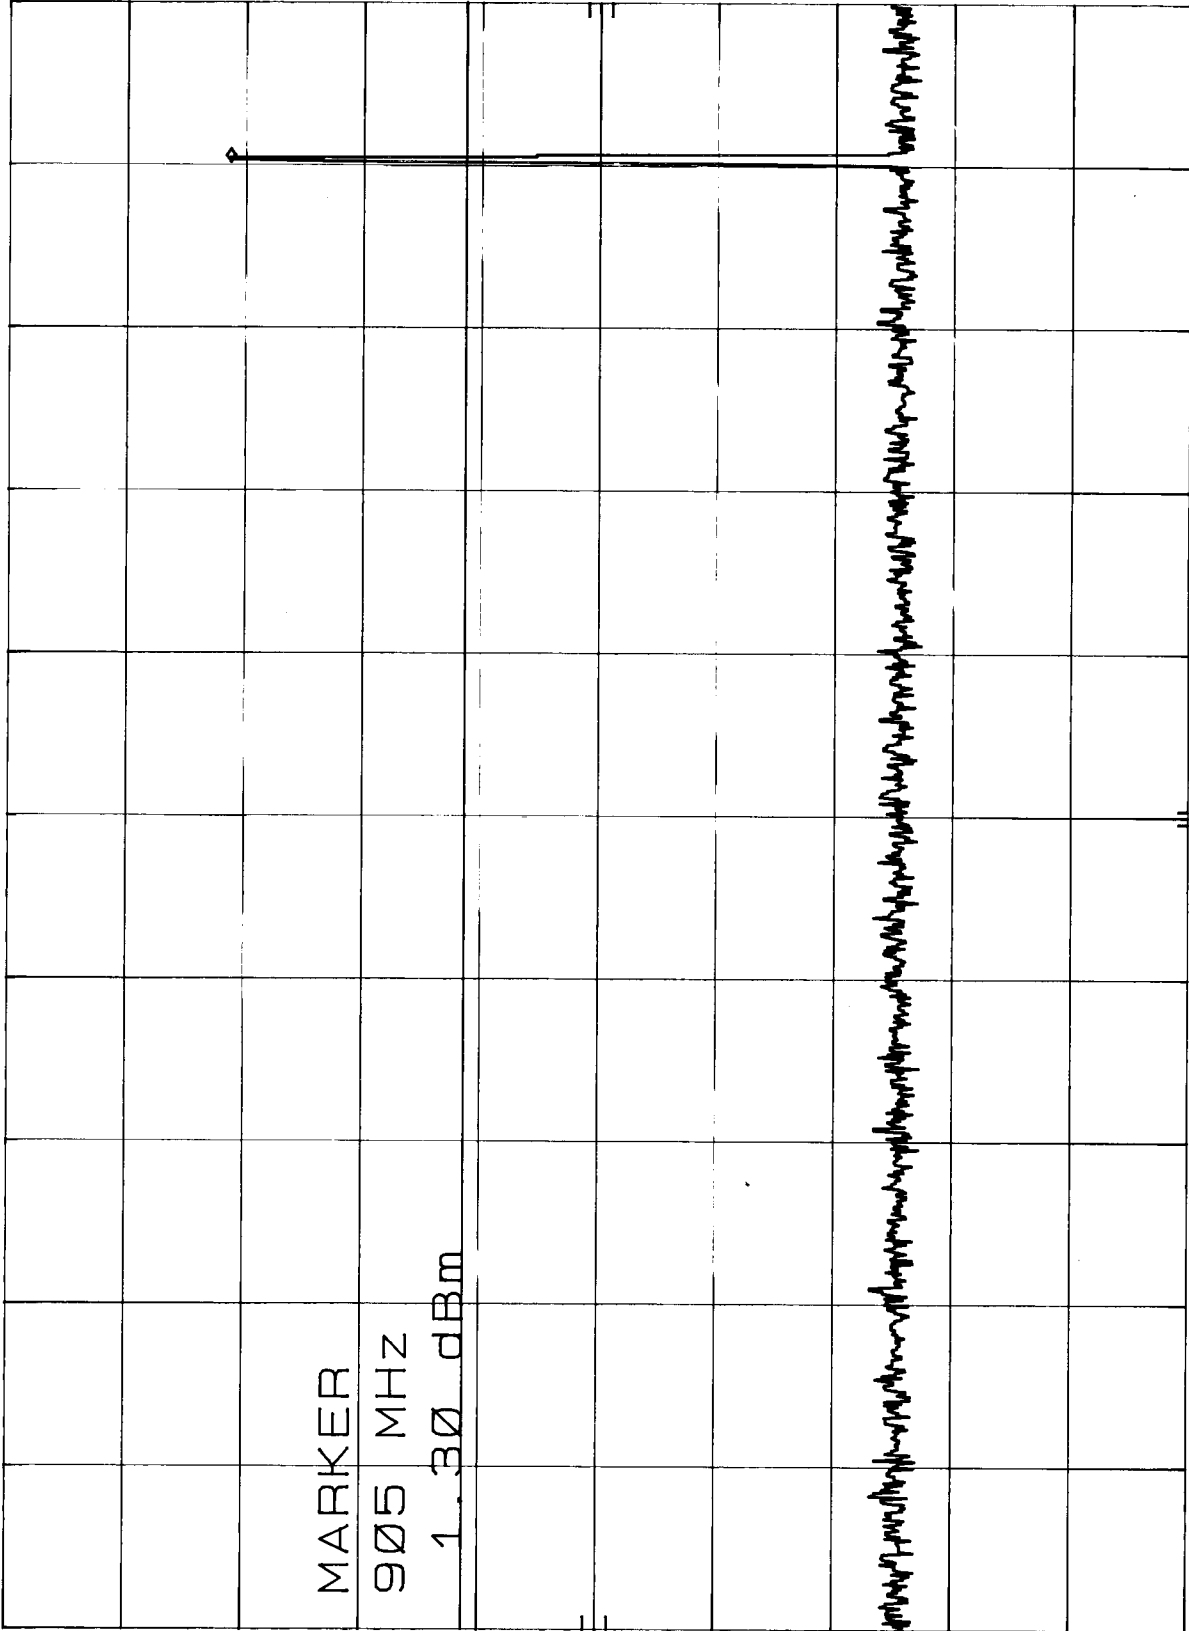

CORR'D

START 2 MHZ RES BW 100 KHZ STOP 1.00 GHZ
SWP 299 msec VBW 1 MHZ

10-4-99

RF ANT. COND. TEST BASE CH. 1 - 1GHZ-2GHZ MKR 1.313 GHZ
REF 20.0 dBm ATTN 30 dB -52.80 dBm

HP

10 dB/

MARKER

1.313 GHZ

-52.80 dBm

DL

-18.7

dBm

CORR'D

RF ANT. COND. TEST BASE CH. 1 - 1GHZ-2GHZ MKR 1.313 GHZ
REF 20.0 dBm ATTN 30 dB -52.80 dBm

START 1.00 GHZ

RES BW 100 KHZ

VBW 1 MHZ

STOP 2.00 GHZ

SWP 300 msec

10-4-99

RF ANT. COND. TEST BASE CH. 1 - 2GHZ-10GHZ MKR 6.896 GHZ
REF 20.0 dBm ATTEN 30 dB -47.60 dBm

hp

10 dB/

MARKER

6.896 GHZ

DL
-18.7
dBm

-47.60 dBm

CORR'D

Handwritten notes and markings on the grid, including a vertical line and some illegible scribbles.

START 2.00 GHZ

RES BW 100 KHZ

VBW 1 MHZ

STOP 10.00 GHZ
SWP 2.40 sec

10-4-99


RF ANT. COND. TEST BASE CH. 11 - 2MHZ-1GHZ
h_p REF 13.0 dBm ATTEN 30 dB MKR 914 MHZ
1.30 dBm

10 dB/

DL
-18.7
dBm

MARKER
914 MHZ
1.30 dBm

CORR'D

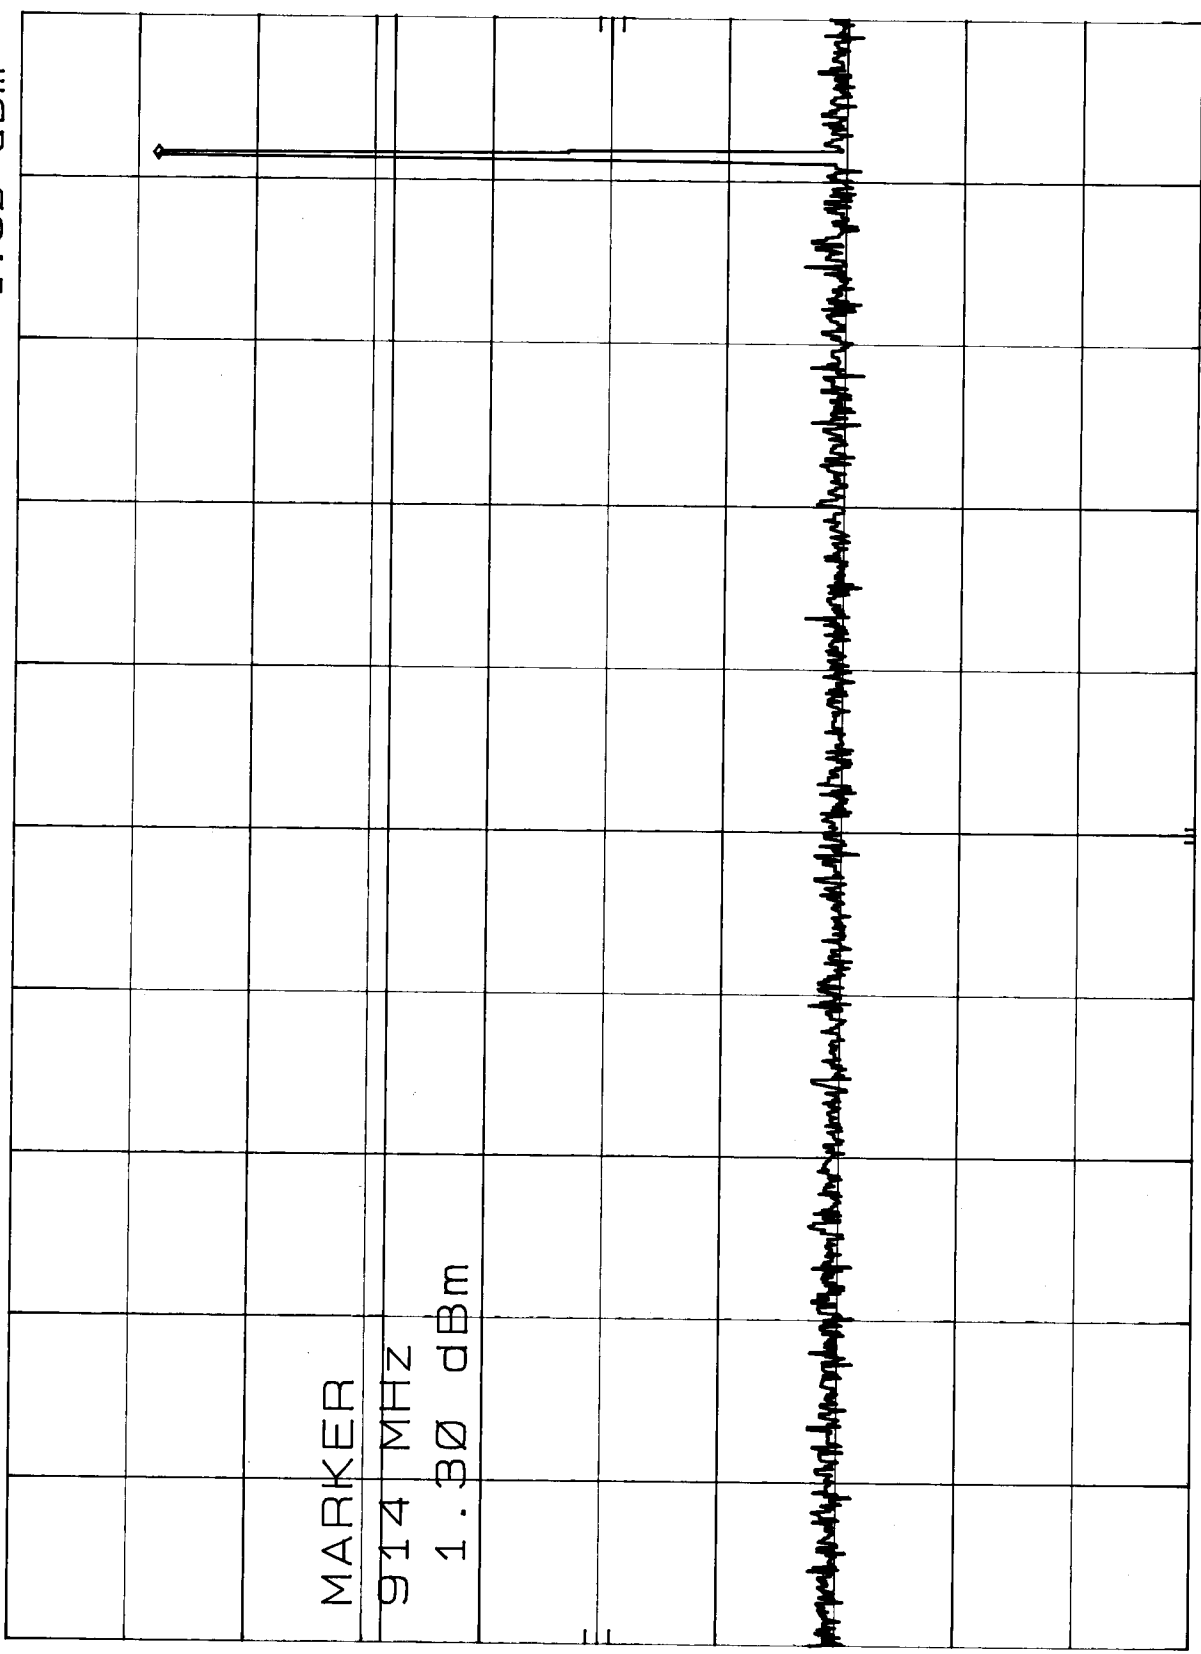

START 2 MHZ RES BW 100 KHZ STOP 1.00 GHZ
VBW 1 MHZ SWP 299 msec

10-4-99

RF ANT. COND. TEST BASE CH. 11 - 1GHZ-2GHZ MKR 1.174 GHZ
REF 13.0 dBm ATTEN 30 dB -54.00 dBm

HP

10 dB/

MARKER

1.174 GHZ
-54.00 dBm

DL
-18.7
dBm

CORR'D

START 1.00 GHZ STOP 2.00 GHZ
RES BW 100 KHZ SWP 300 msec
VBW 1 MHZ

10-4-99

RF ANT. COND. TEST BASE CH. 11 - 2GHZ-10GHZ MKR 6.896 GHZ
REF 13.0 dBm ATTEN 30 dB -47.70 dBm

hp

10 dB/

MARKER

6.896 GHZ
-47.70 dBm

DL
-18.7
dBm

CORR'D

START 2.00 GHZ RES BW 100 KHZ VBW 1 MHZ STOP 10.00 GHZ
SWP 2.40 sec

RF ANT. COND. TEST BASE CH. 20 - 2MHZ-1GHZ
REF 20.0 dBm ATTEN 30 dB MKR 923 MHz
1.30 dBm

RF ANT. COND. TEST BASE CH. 20 - 2MHZ-1GHZ
REF 20.0 dBm ATTEN 30 dB MKR 923 MHz
1.30 dBm

47

REF 20.0 dBm

ATTEN 30 dB

1.30 dBm

10 dB/

DISPLAY LINE

-18.7 dBm

DL
-18.7
dBm

CORR.D

START 2 MHZ

STOP 1.00 GHz

RES BW 100 KHZ

VBW 1 MHz

SWP 299 msec

10-4-99

RF ANT. COND. TEST BASE CH. 20 - 1GHZ-2GHZ MKR 1.935 GHZ
REF 20.0 dBm ATTEN 30 dB -52.30 dBm

HP

10 dB/

MARKER

1.935 GHZ

-52.30 dBm

DL

-18.7

dBm

CORR'D

START 1.00 GHZ RES BW 100 KHZ VBW 1 MHZ STOP 2.00 GHZ
SWP 300 msec


10-4-99

RF ANT. COND. TEST BASE CH. 20 - 20GHz-10GHz MKR 7.352 GHz
HP REF 20.0 dBm ATTEN 30 dB -47.90 dBm


10 dB/

DL
-18.7
dBm

CORR'D

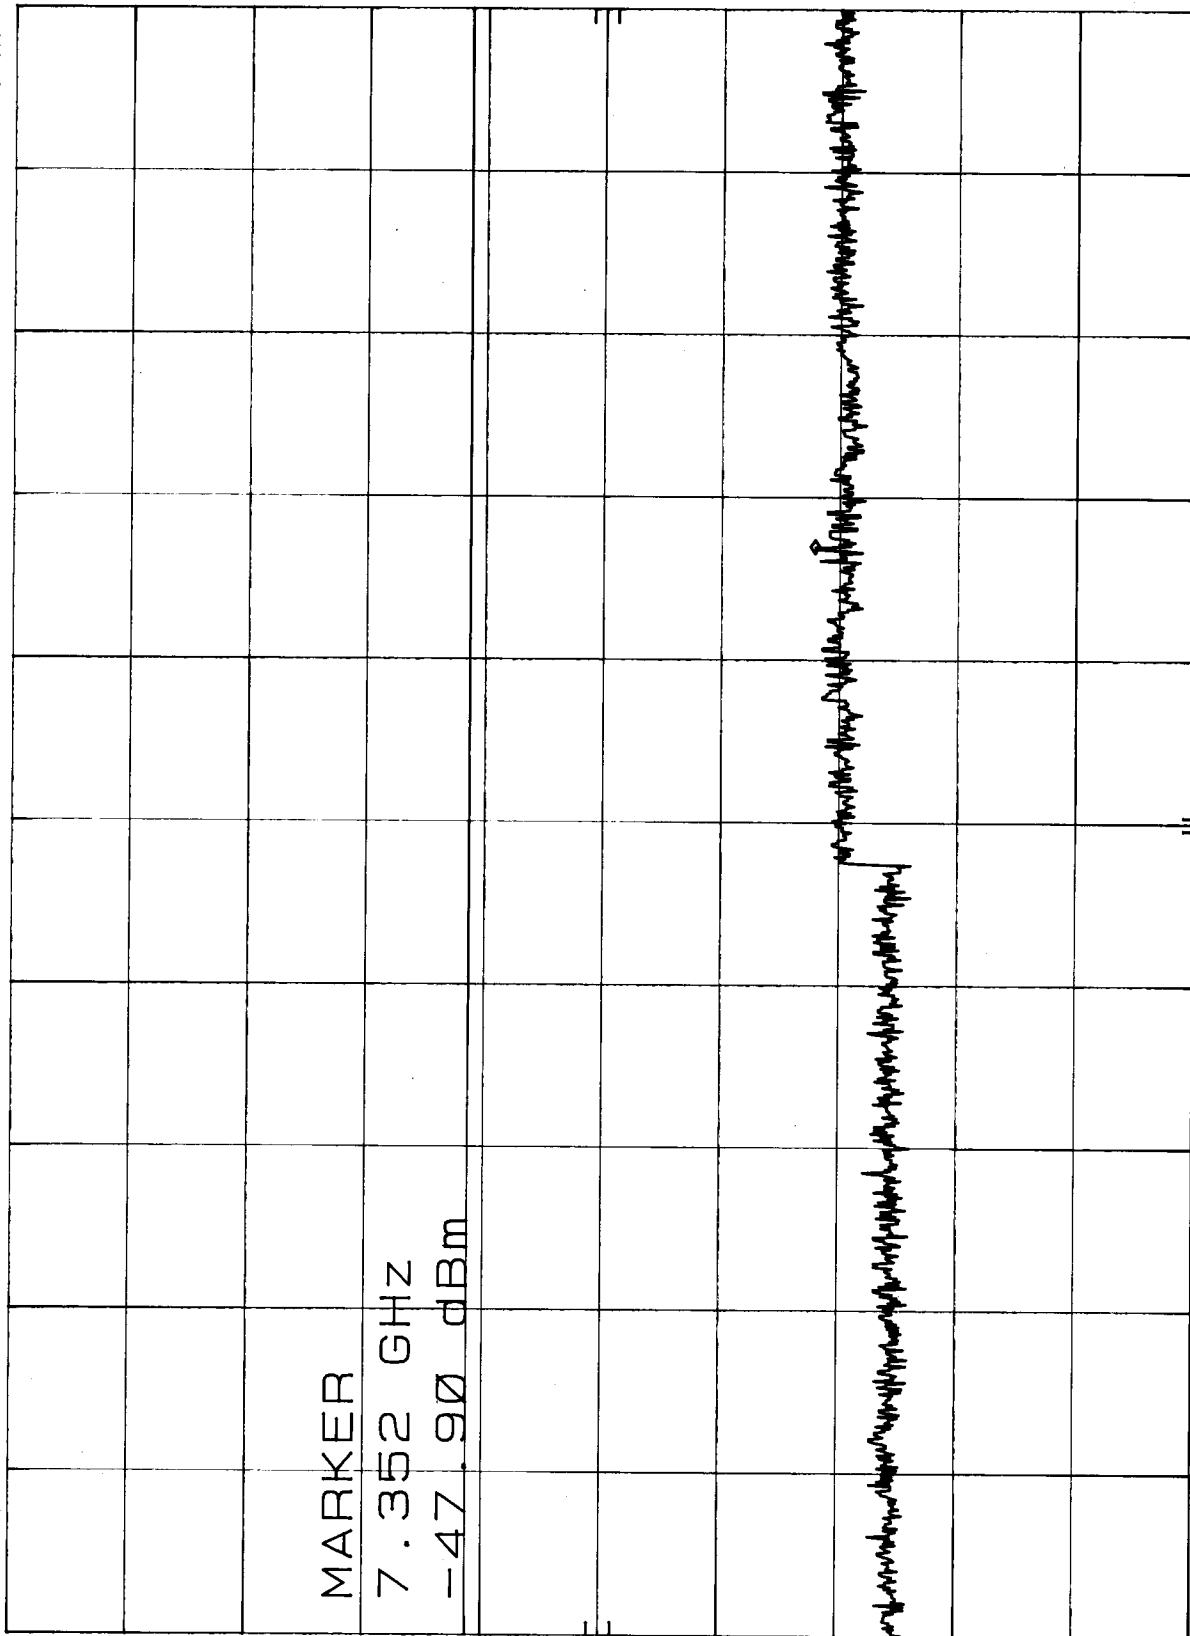

START 2.00 GHz RES BW 100 kHz STOP 10.00 GHz
VBW 1 MHz SWP 2.40 sec

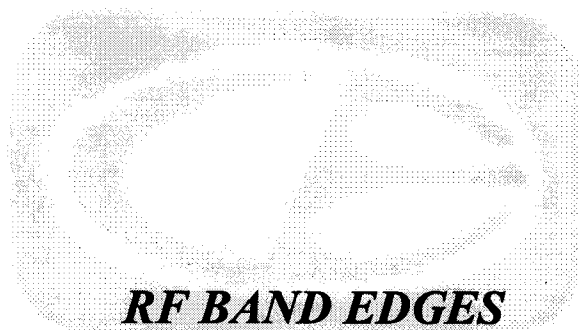

***RF BAND EDGES
FOR THE BASE***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99

MR 902.00 MHz
-56.20 dBm

BAND EDGE OF BASE CHANNEL 1
REF 20.0 dBm ATTN 30 dB


hp

10 dB/

MARKER
902.00 MHz
-56.20 dBm

DL
-18.3
dBm

CORR'D

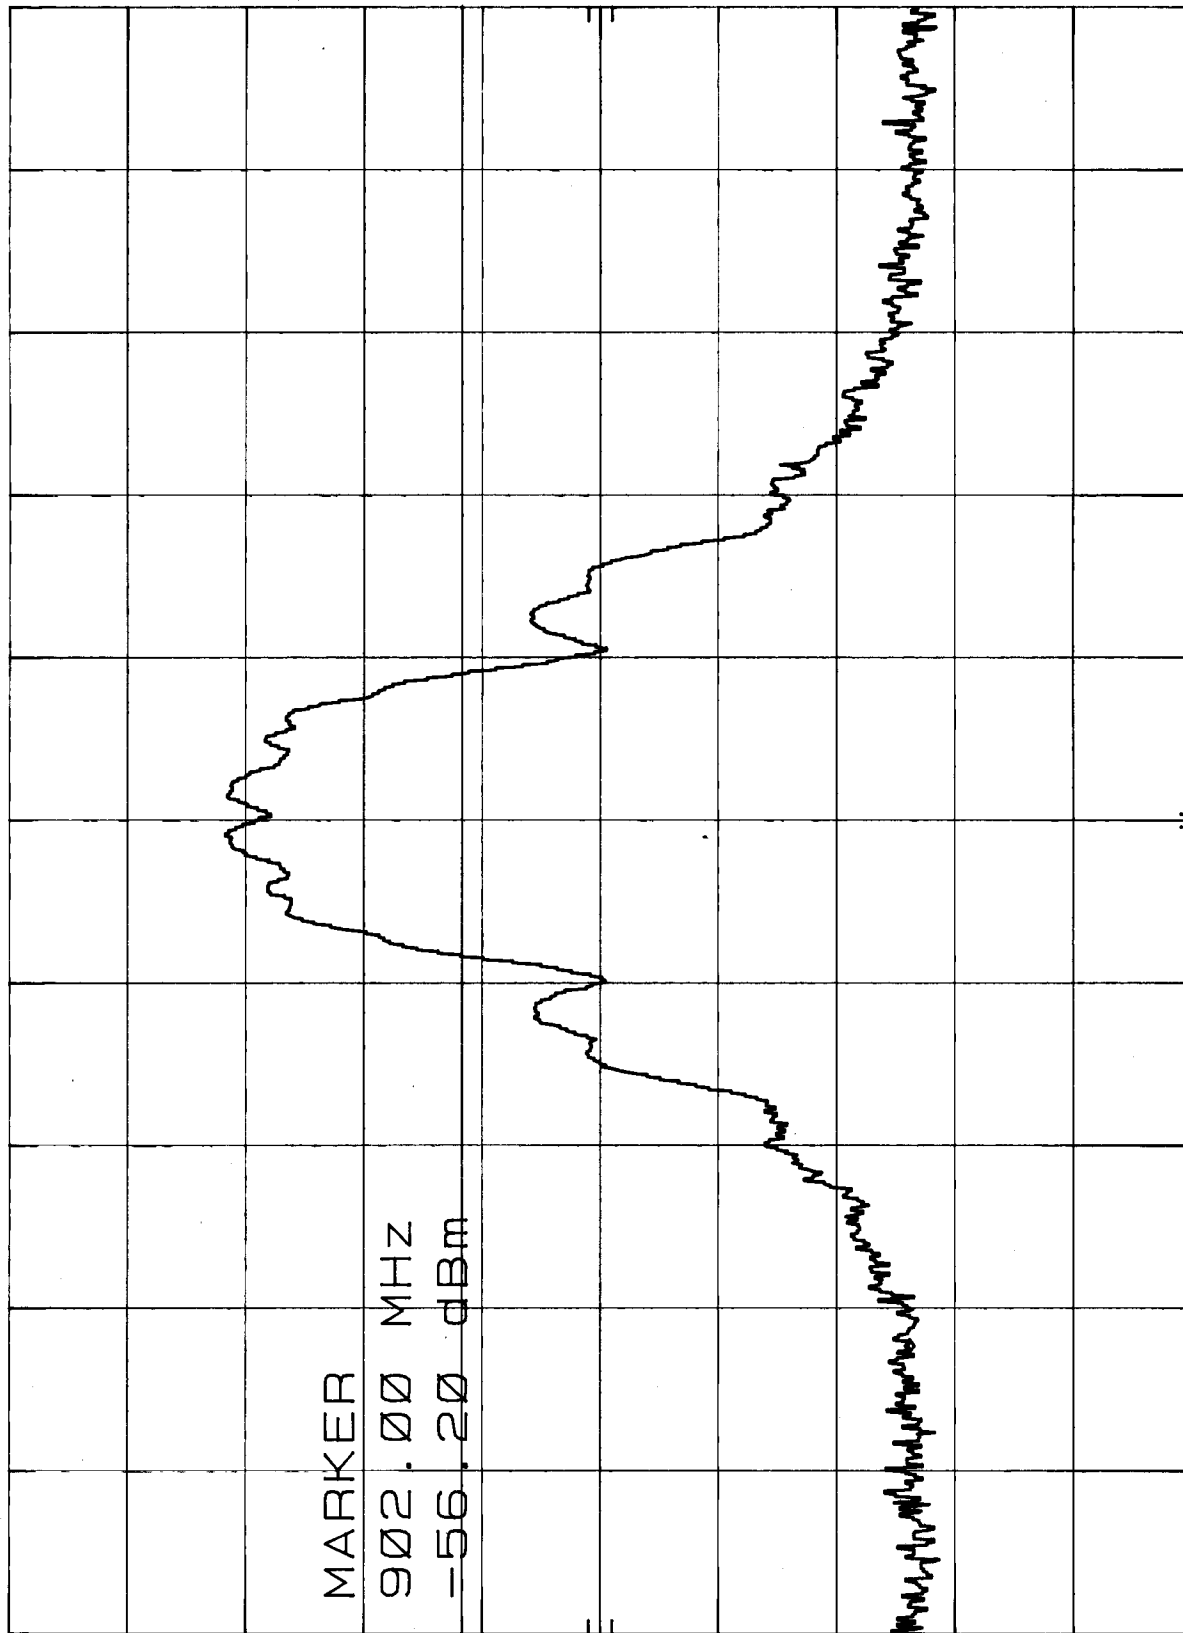

STOP 910.2 MHz
SWP 20.0 msec

VBW 1 MHz

RES BW 100 kHz

START 900.2 MHz

10-4-99

BAND EDGE OF CHANNEL 20 - BASE
REF 20.0 dBm ATTEN 30 dB

MKR 928.00 MHz
-55.30 dBm

hp

10 dB/


MARKER

928.00 MHz

-55.30 dBm

DL
-18.1
dBm

CORR'D

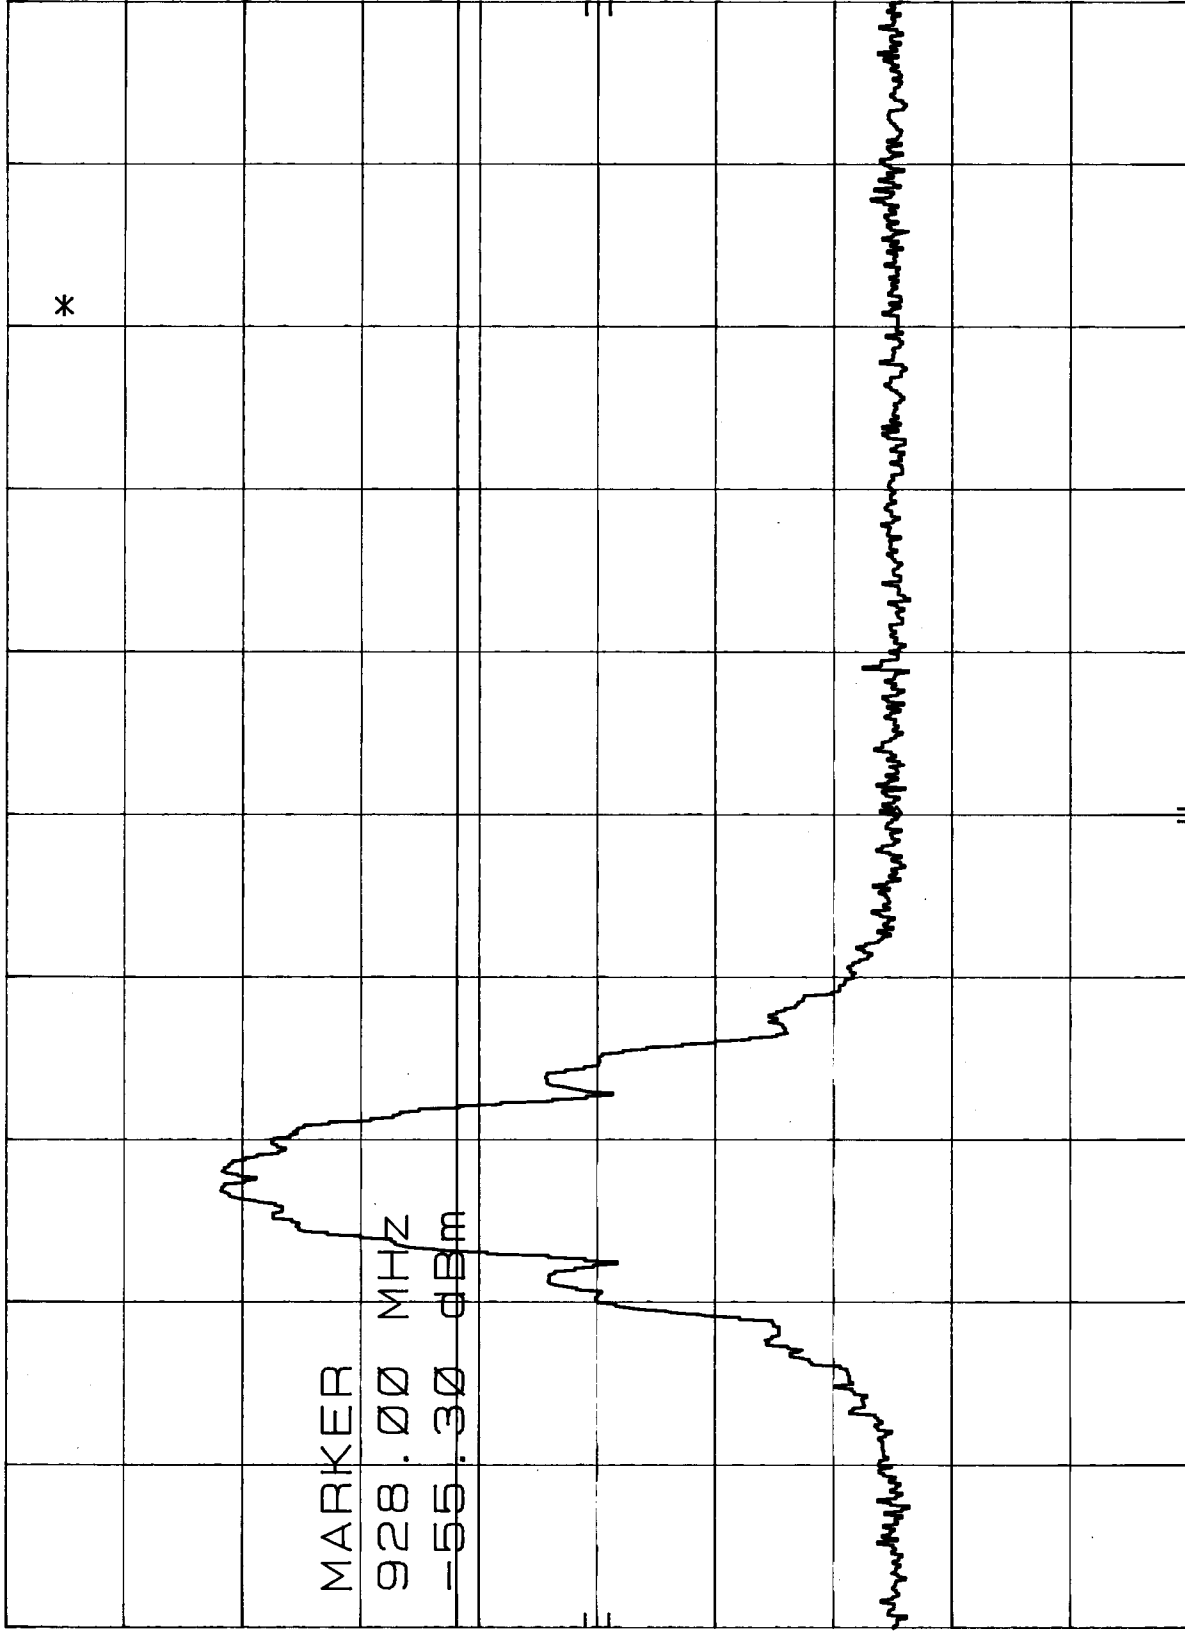

SPAN 20.0 MHz
SWP 20.0 msec

VBW 1 MHz

RES BW 100 kHz

CENTER 928.00 MHz

***RADIATED EMISSIONS
DATA SHEETS FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

Test location: Compatible Electronics
Customer : UNIDEN CORP. Date : 10/ 1/1999
Manufacturer : UNIDEN CORP. Time : 17.59
EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
Test Mode : HANDSET UNIT - SPURIOUS EMISSIONS
10 kHz to 30 MHz
TEMPERATURE 81 DEGREES F.
RELATIVE HUMIDITY 35%
TESTED BY: Kyle Fujimoto
KYLE FUJIMOTO

NO EMISSIONS FOUND FROM 10 kHz to 30 MHz
IN EITHER POLARIZATION FOR THE EUT

Test location: Compatible Electronics
 Customer : UNIDEN CORP. Date : 10/ 1/1999
 Manufacturer : UNIDEN CORP. Time : 15.30
 EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : HANDSET UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 90 DEGREES F.
 RELATIVE HUMIDITY 25%
 VERTICAL POLARIZATION 30 TO 300 MHz
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	30.79	44.60	0.72	12.17	38.60	18.89	40.00	-21.11
2V	36.91	51.40	0.84	11.19	38.60	24.83	40.00	-15.17
3V	43.06	45.00	0.90	10.82	38.60	18.12	40.00	-21.88
4V	61.51	44.10	1.03	10.25	38.60	16.78	40.00	-23.22
5V	85.98	48.10	1.20	8.82	38.48	19.64	40.00	-20.36
6V	258.12	33.90	2.40	17.98	38.40	15.88	46.00	-30.12

Test location: Compatible Electronics
 Customer : UNIDEN CORP. Date : 10/ 1/1999
 Manufacturer : UNIDEN CORP. Time : 15.34
 EUT name : 900 MHz SPREAD SPECTRUM PHONE Model: EXS2010
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
 Test Mode : HANDSET UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 90 DEGREES F.
 RELATIVE HUMIDITY 25%
 HORIZONTAL POLARIZATION 30 TO 300 MHz
 TESTED BY: Kyle Fujimoto
 KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	30.80	45.10	0.72	12.17	38.60	19.39	40.00	-20.61
2H	36.92	43.50	0.84	11.19	38.60	16.93	40.00	-23.07
3H	43.07	47.80	0.90	10.82	38.60	20.92	40.00	-19.08
4H	61.52	39.90	1.03	10.25	38.60	12.58	40.00	-27.42
5H	85.99	46.80	1.20	8.82	38.48	18.34	40.00	-21.66
6H	258.13	35.00	2.40	17.99	38.40	16.99	46.00	-29.01

Test location: Compatible Electronics

Customer : UNIDEN CORP.

Date : 10/ 1/1999

Manufacturer : UNIDEN CORP.

Time : 15.24

EUT name : 900 MHz SPREAD SPECTRUM PHONE

Model: EXS2010

Specification: Fcc_B Test distance: 3.0 mtrs

Lab: D

Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00

HANDSET UNIT - SPURIOUS EMISSIONS

TEMPERATURE 90 DEGREES F.

RELATIVE HUMIDITY 25%

VERTICAL POLARIZATION 300 - 1000 MHz

TESTED BY: Kyle Fujimoto

KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	460.87	55.50	3.27	18.54	37.91	39.40	46.00	-6.60
2V	317.40	36.70	2.60	16.47	38.53	17.24	46.00	-28.76
3V	339.24	39.10	2.74	16.69	38.58	19.95	46.00	-26.05
4V	406.48	44.50	3.11	15.61	38.15	25.07	46.00	-20.93
5V	510.89	52.70	3.57	17.12	38.21	35.17	46.00	-10.83
6V	952.95	40.90	4.62	22.61	36.59	31.54	46.00	-14.46

Test location: Compatible Electronics

Customer : UNIDEN CORP.

Date : 10/ 1/1999

Manufacturer : UNIDEN CORP.

Time : 14.59

EUT name : 900 MHz SPREAD SPECTRUM PHONE

Model: EXS2010

Specification: Fcc_B Test distance: 3.0 mtrs

Lab: D

Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$)

: 0.00

Test Mode : HANDSET UNIT - SPURIOUS EMISSIONS

TEMPERATURE 90 DEGREES F.

RELATIVE HUMIDITY 25%

HORIZONTAL POLARIZATION 300 - 1000 MHz

TESTED BY:

Kyle Fujimoto
KYLE FUJIMOTO

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	317.13	42.70	2.60	16.47	38.53	23.24	46.00	-22.76
2H	339.19	46.80	2.74	16.69	38.58	27.65	46.00	-18.35
3H	460.84	45.50	3.27	18.54	37.91	29.40	46.00	-16.60
4H	510.88	50.10	3.57	17.12	38.21	32.57	46.00	-13.43
5H	952.94	39.40	4.62	22.61	36.59	30.04	46.00	-15.96



COMPATIBLE
ELECTRONICS

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
905.2800	62.7	56.7 A	H	1.5	180	Y	LOW	20.9	5.0	0.0	82.6			
905.2800	70.6	64.6 A	V	1.0	270	Y	LOW	20.9	5.0	0.0	90.5			
914.8800	64.5	58.5 A	H	2.0	180	Y	MID	21.3	4.9	0.0	84.7			
914.8800	62.1	66.1 A	V	1.0	90	Y	MID	21.3	4.9	0.0	92.3			
923.5200	65.8	59.8 A	H	1.0	180	Y	HIGH	21.6	4.8	0.0	86.2			
923.5200	70.7	64.7 A	V	1.0	180	Y	HIGH	21.6	4.8	0.0	91.1			

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1810.5600	70.8	64.8 A	H	1.5	180	Y	LOW	24.5	3.5	35.6	57.2	-15.1	72.3	
1810.5600	72.4	66.4 A	V	2.0	180	Y	LOW	24.5	3.5	35.6	58.8	-13.5	72.3	
1829.7600	68.4	62.4 A	H	2.0	0	Y	MID	24.5	3.5	35.6	54.8	-17.5	72.3	
1829.7600	73.4	67.4 A	V	1.0	270	Y	MID	24.5	3.5	35.6	59.8	-12.5	72.3	
1847.0400	71.6	65.6 A	H	1.0	90	Y	HIGH	24.5	3.7	35.5	58.3	-14.0	72.3	
1847.0400	70.9	64.9 A	V	1.0	180	Y	HIGH	24.5	3.7	35.5	57.6	-14.7	72.3	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
** DELTA = SPEC LIMIT - CORRECTED READING



**COMPATIBLE
ELECTRONICS**

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2715.8400	59.6	53.6 A	H	1.0	90	Y	LOW	28.2	4.5	35.6	50.7	-3.3	54.0	
2715.8400	56.9	50.9 A	V	2.0	180	Y	LOW	28.2	4.5	35.6	48.0	-6.0	54.0	
2744.6400	60.5	54.5 A	H	2.0	0	Y	MID	28.2	4.5	35.6	51.6	-2.4	54.0	
2744.6400	59.3	53.3 A	V	2.0	0	Y	MID	28.2	4.5	35.6	50.4	-3.6	54.0	
2770.5600	58.0	52.0 A	H	1.0	270	Y	HIGH	29.7	4.6	35.2	51.1	-2.9	54.0	
2770.5600	55.3	49.3 A	V	1.5	90	Y	HIGH	29.7	4.6	35.2	48.4	-5.6	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



COMPATIBLE
ELECTRONICS

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3621.1200	53.2	47.2 A	H	1.0	180	Y	LOW	29.6	5.0	35.2	46.6	-7.4	54.0	
3621.1200	51.6	45.6 A	V	3.0	180	Y	LOW	29.6	5.0	35.2	45.0	-9.0	54.0	
3659.5200	55.3	49.3 A	H	2.5	180	Y	MID	29.6	5.0	35.2	48.7	-5.3	54.0	
3659.5200	50.2	44.2 A	V	2.0	180	Y	MID	29.6	5.0	35.2	43.6	-10.4	54.0	
3694.0800	55.7	49.7 A	H	1.5	0	Y	HIGH	29.6	5.0	35.2	49.1	-4.9	54.0	
3694.0800	54.7	48.7 A	V	2.0	180	Y	HIGH	29.6	5.0	35.2	48.1	-5.9	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees) (X,Y,Z)	EUT Axis	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
4526.4000	49.9	43.4 A	H	2.0	0	Y	LOW	30.9	5.6	34.1	45.8	-8.2	54.0	
4526.4000	51.0	45.0 A	V	2.0	180	Y	LOW	30.9	5.6	34.1	47.4	-6.6	54.0	
4574.4000	44.9	38.9 A	H	1.5	180	Y	MID	30.9	5.6	34.1	41.3	-12.7	54.0	
4574.4000	49.1	43.1 A	V	2.0	180	Y	MID	30.9	5.6	34.1	45.5	-8.5	54.0	
4617.6000	49.5	43.5 A	H	1.5	270	Y	HIGH	30.9	5.6	34.1	45.9	-8.1	54.0	
4617.6000	50.9	44.9 A	V	1.0	180	Y	HIGH	30.9	5.6	34.1	47.3	-6.7	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.247)

COMPANY	UNIDEN CORPORATION			DATE	10/1/99
EUT	900 MHz SPREAD SPECTRUM CORDLESS PHONE - HANDSET			DUTY CYCLE	50.00 %
MODEL	EXS2010			PEAK TO AVG	-6.02 dB
FCC ID:	AMWUC668			TEST DIST.	3 METERS
TEST ENGINEER	KYLE FUJIMOTO			LAB	D

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
5431.6800	50.0	44.0 A	H	2.0	270	Y	LOW	32.4	6.0	33.0	49.4	-4.6	54.0	
5431.6800	48.9	42.9 A	V	1.0	90	Y	LOW	32.4	6.0	33.0	48.3	-5.7	54.0	
5489.2800	47.2	41.2 A	H	1.0	0	Y	MID	32.4	6.0	33.0	46.6	-7.4	54.0	
5489.2800	48.7	42.7 A	V	1.0	180	Y	MID	32.4	6.0	33.0	48.1	-5.9	54.0	
5541.1200	47.1	41.1 A	H	2.0	0	Y	HIGH	32.4	6.0	33.0	46.5	-7.5	54.0	
5541.1200	47.8	41.8 A	V	1.5	180	Y	HIGH	32.4	6.0	33.0	47.2	-6.8	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
 ** DELTA = SPEC LIMIT - CORRECTED READING

***-6 dB BANDWIDTH
DATA SHEETS FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99


HP -6dB BANDWIDTH OF HANDSET CHANNEL 1 MKR Δ 1.314 MHz
REF 20.0 dBm ATTEN 30 dB 0.10 dB

HP

10 dB/

DL
-20.0
dBm

CORR'D

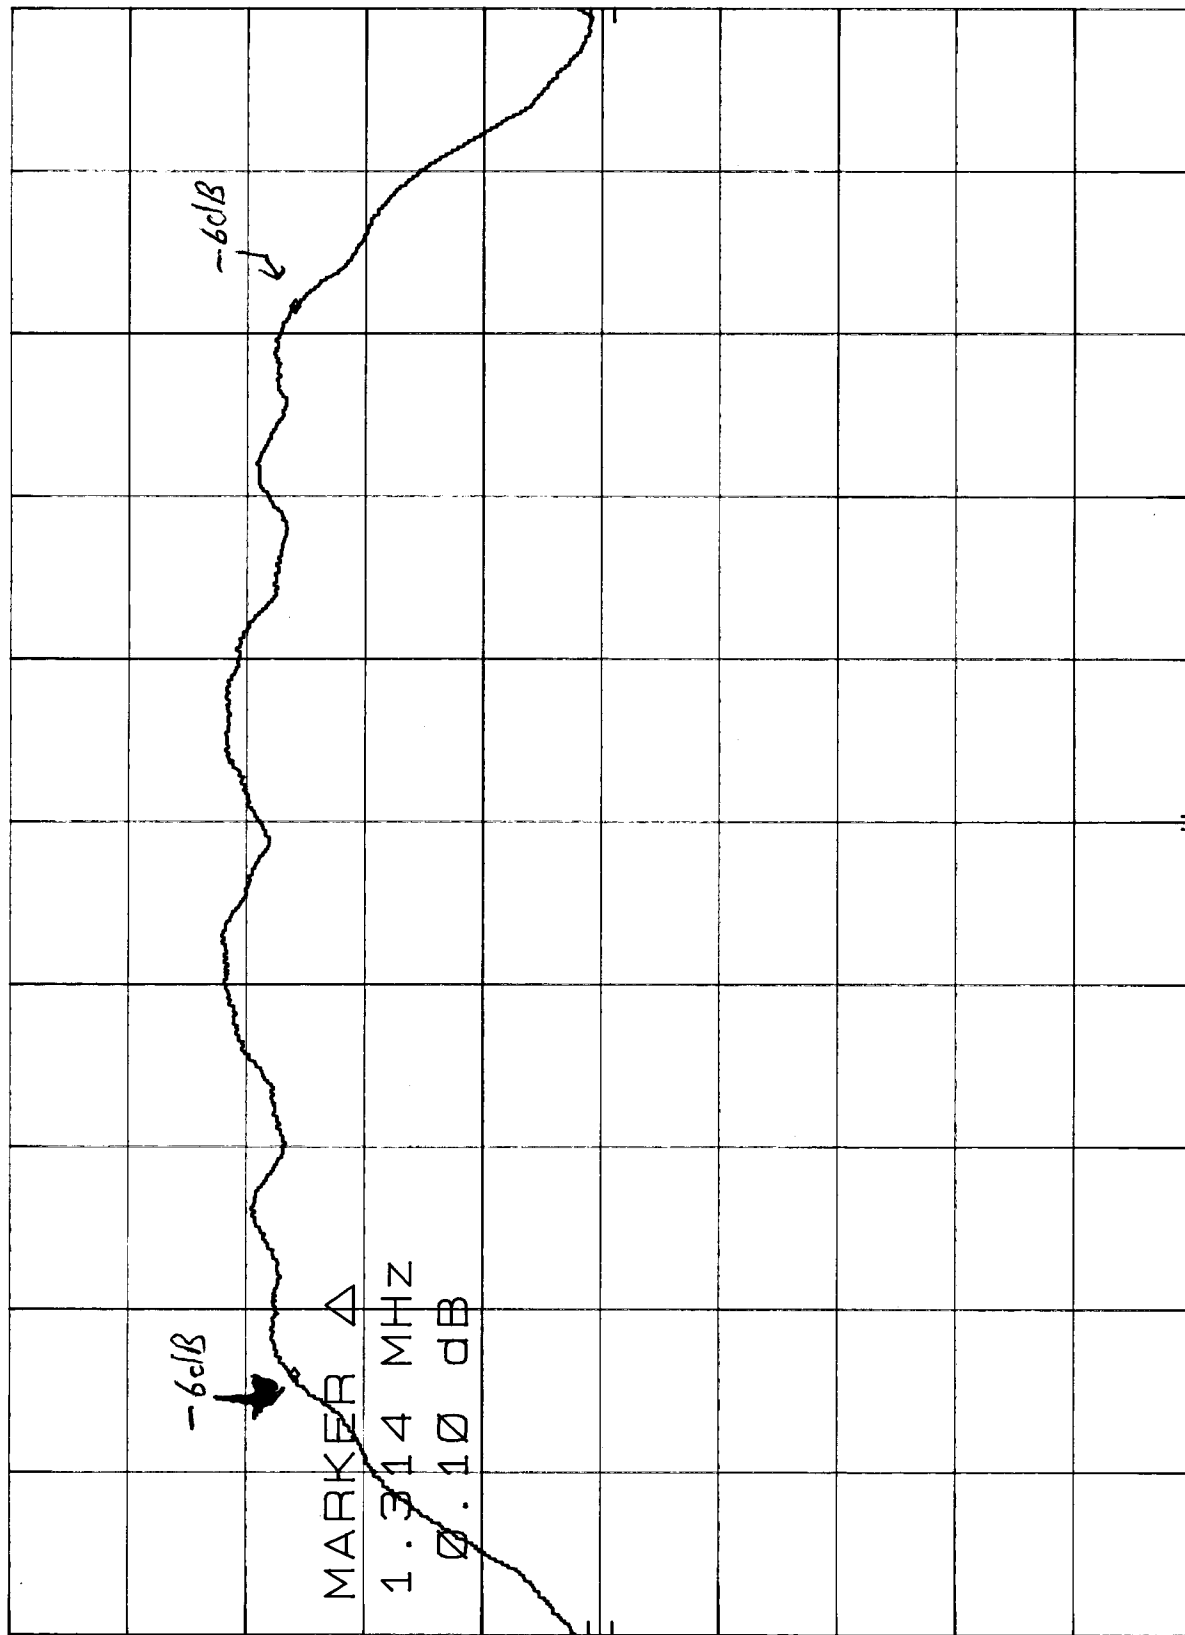

CENTER 905.30 MHz RES BW 100 KHZ VBW 1 MHz SPAN 2.00 MHz SWP 20.0 msec

10-4-99

BANDWIDTH OF HANDSET CHANNEL 11

REF 20.0 dBm ATTN 30 dB

MKR Δ 1.268 MHz


0.10 dB

hp

10 dB/

DL
-20.0
dBm

CORR'D

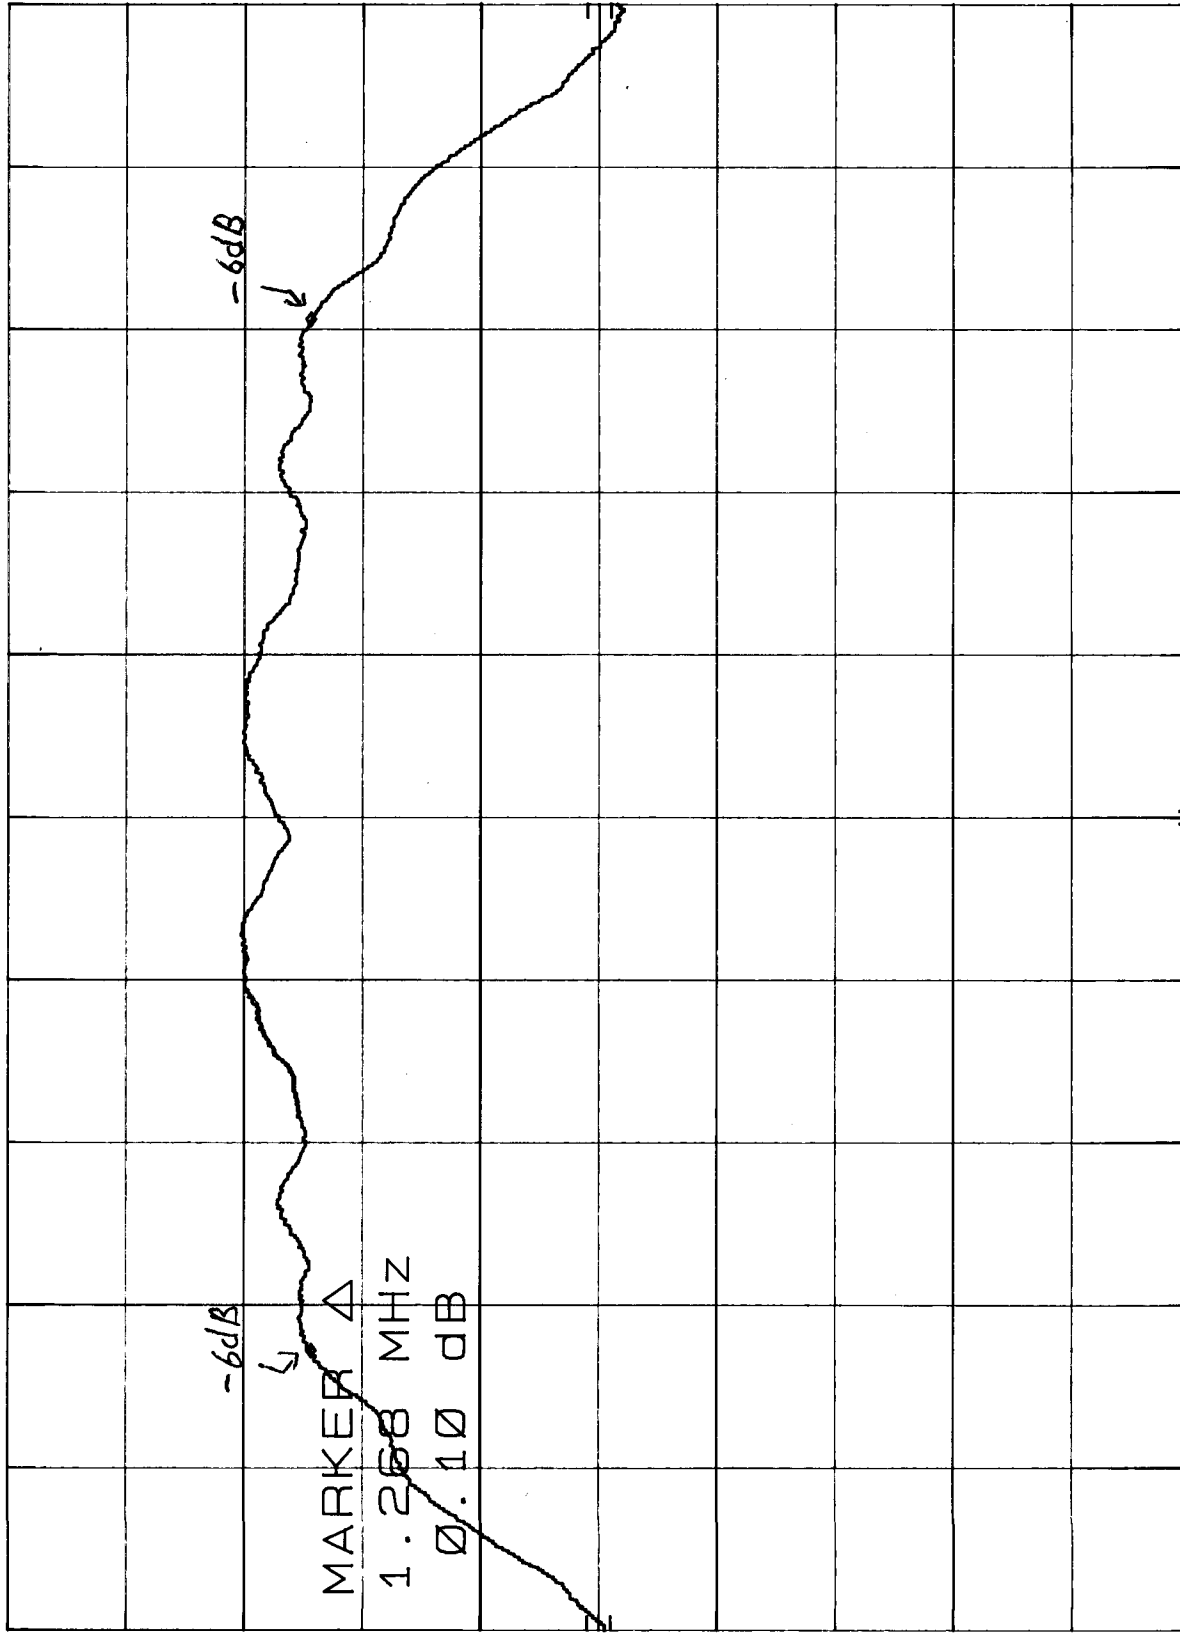

CENTER 914.90 MHz

RES BW 100 kHz

VBW 1 MHz

SPAN 2.00 MHz

SWP 20.0 msec

10-4-99

hp -6dB BANDWIDTH OF HANDSET CHANNEL 20 MKR Δ 1.232 MHz
REF 20.0 dBm ATTEN 30 dB 0.10 dB

10 dB/

DL
-20.0
dBm
MARKER Δ
1.232 MHz
0.10 dB

-6dB

-6dB

CORR'D

CENTER 923.50 MHz RES BW 100 kHz SPAN 2.00 MHz
VBW 1 MHz SWP 20.0 msec



***PEAK OUTPUT POWER
DATA SHEETS FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99

POWER OUTPUT OF HANDSET CHANNEL 1

hp REF 20.0 dBm ATTEN 30 dB

MR 905.00 MHz
6.40 dBm

10 dB/


MARKER

905.00 MHz

6.40 dBm

DL
-20.0
dBm

CORR'D

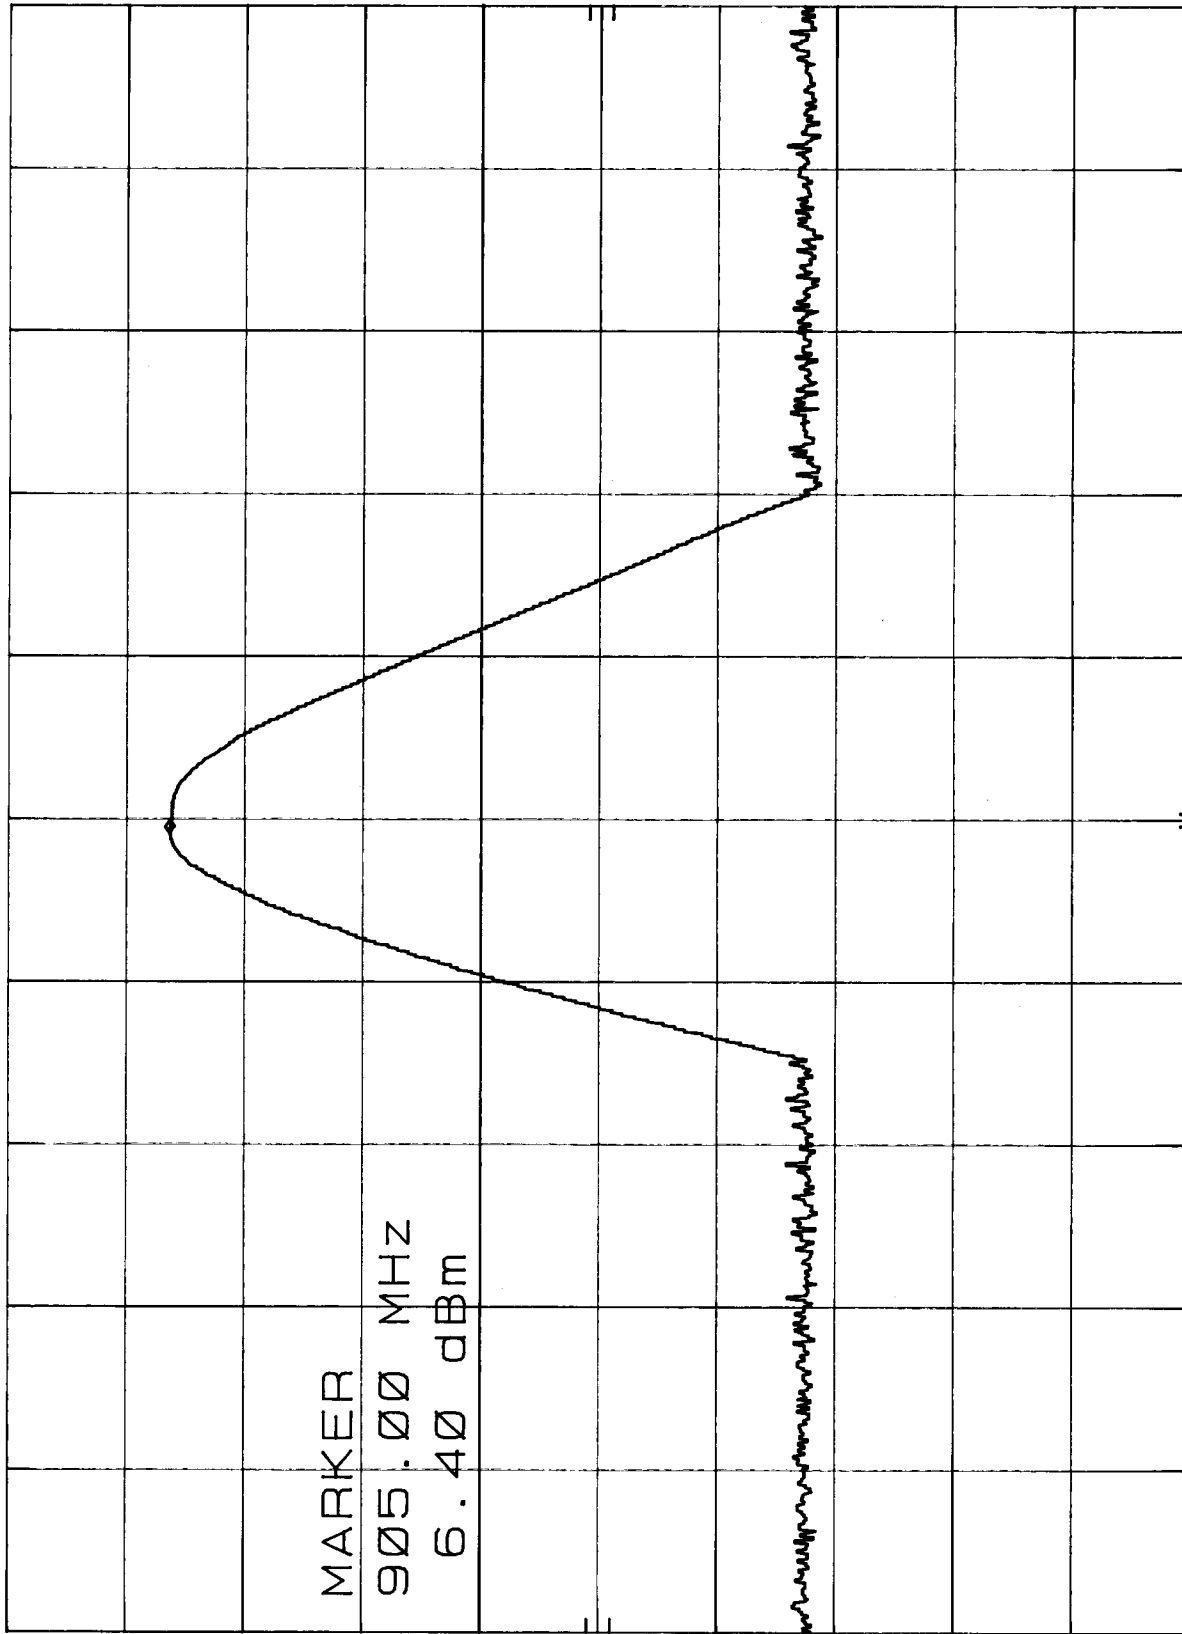

CENTER 905.3 MHz

RES BW 3 MHz

VBW 1 MHz

SPAN 50.0 MHz
SWP 20.0 msec

10-4-99

POWER OUTPUT OF HANDSET CHANNEL 11
MKR 915.00 MHz
4.20 dBm

HP REF 20.0 dBm
ATTEN 30 dB

10 dB/

DL
-20.0
dBm

MARKER

915.00 MHz
4.20 dBm

CORR'D

CENTER 914.9 MHz
RES BW 3 MHz
SPAN 50.0 MHz
SWP 20.0 msec

VBW 1 MHz

10-4-99


POWER OUTPUT OF HANDSET CHANNEL 20
hp REF 20.0 dBm ATTEN 30 dB MKR 923.65 MHz 4.40 dBm

10 dB/

MARKER
923.65 MHz
4.40 dBm

DL
-20.0
dBm


CORR'D

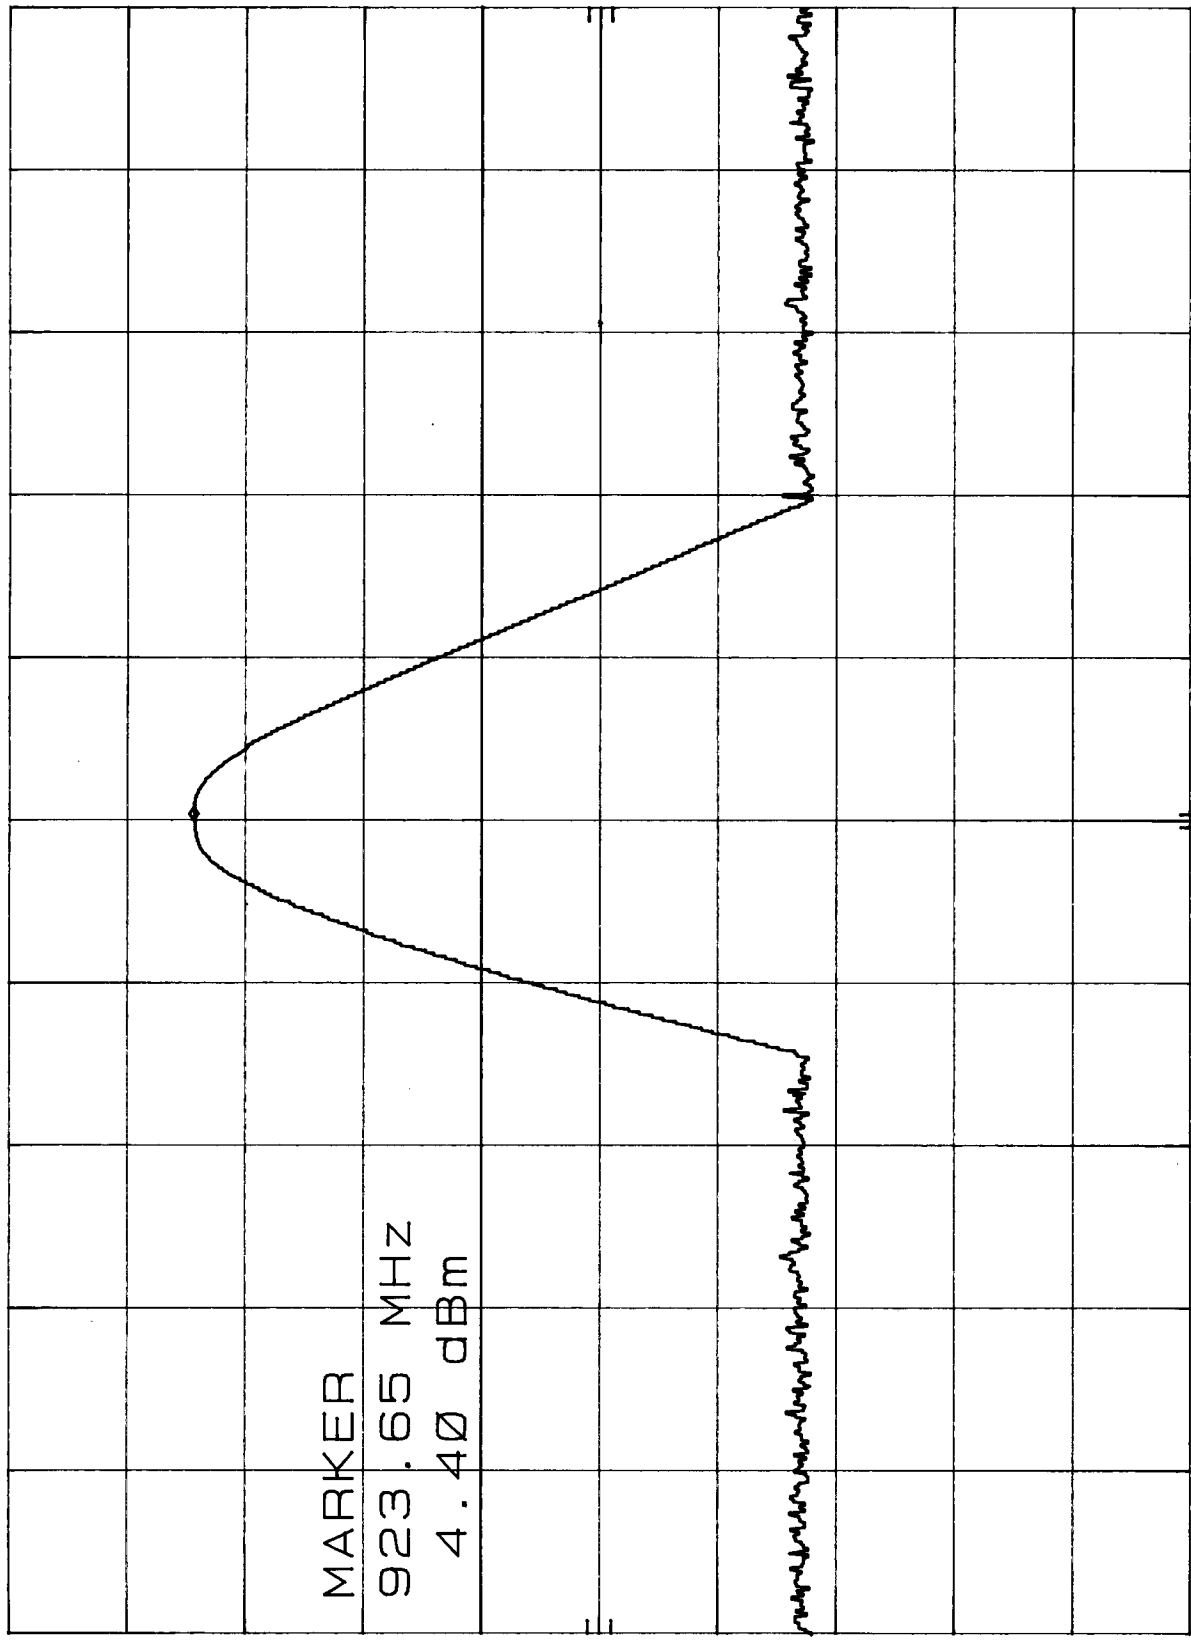

CENTER 923.5 MHz RES BW 3 MHz SPAN 50.0 MHz SWP 20.0 msec



***SPECTRAL DENSITY OUTPUT
DATA SHEETS FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850


10-4-99

SPECTRAL DENSITY OUTPUT HANDSET CHANNEL 1 MKR 905.164 MHz
REF 20.0 dBm ATTN 30 dB

hp

10 dB/

DL
8.0
dBm

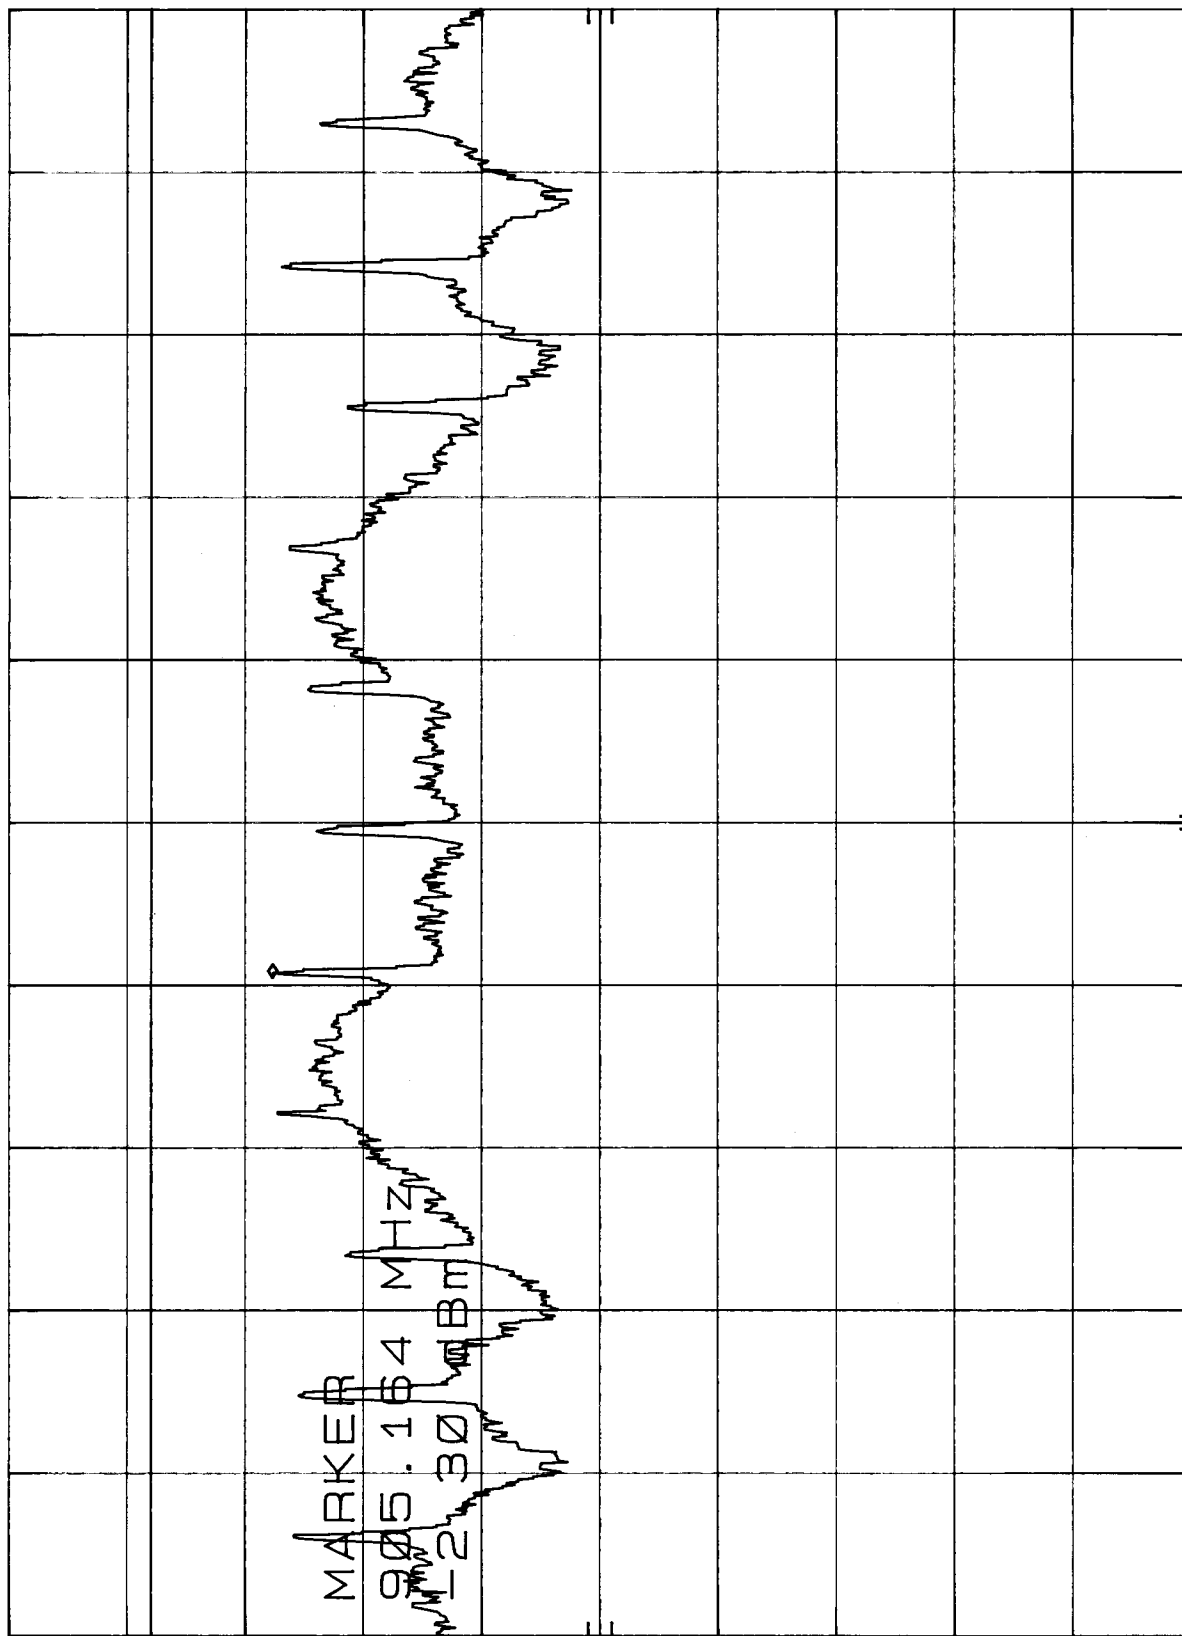

CORR'D

CENTER 905.28 MHz RES BW 3 KHZ
SPAN 1.31 MHz SWP 437 sec
VBW 10 KHZ

10-4-99

SPECTRAL DENSITY OUTPUT HANDSET CH. 11 MKR 914.764 MHz
REF 20.0 dBm ATTN 30 dB -3.80 dBm

hp

10 dB/


DL
8.0
dBm

MARKER

914.764 MHz

-3.80 dBm

CORR'D

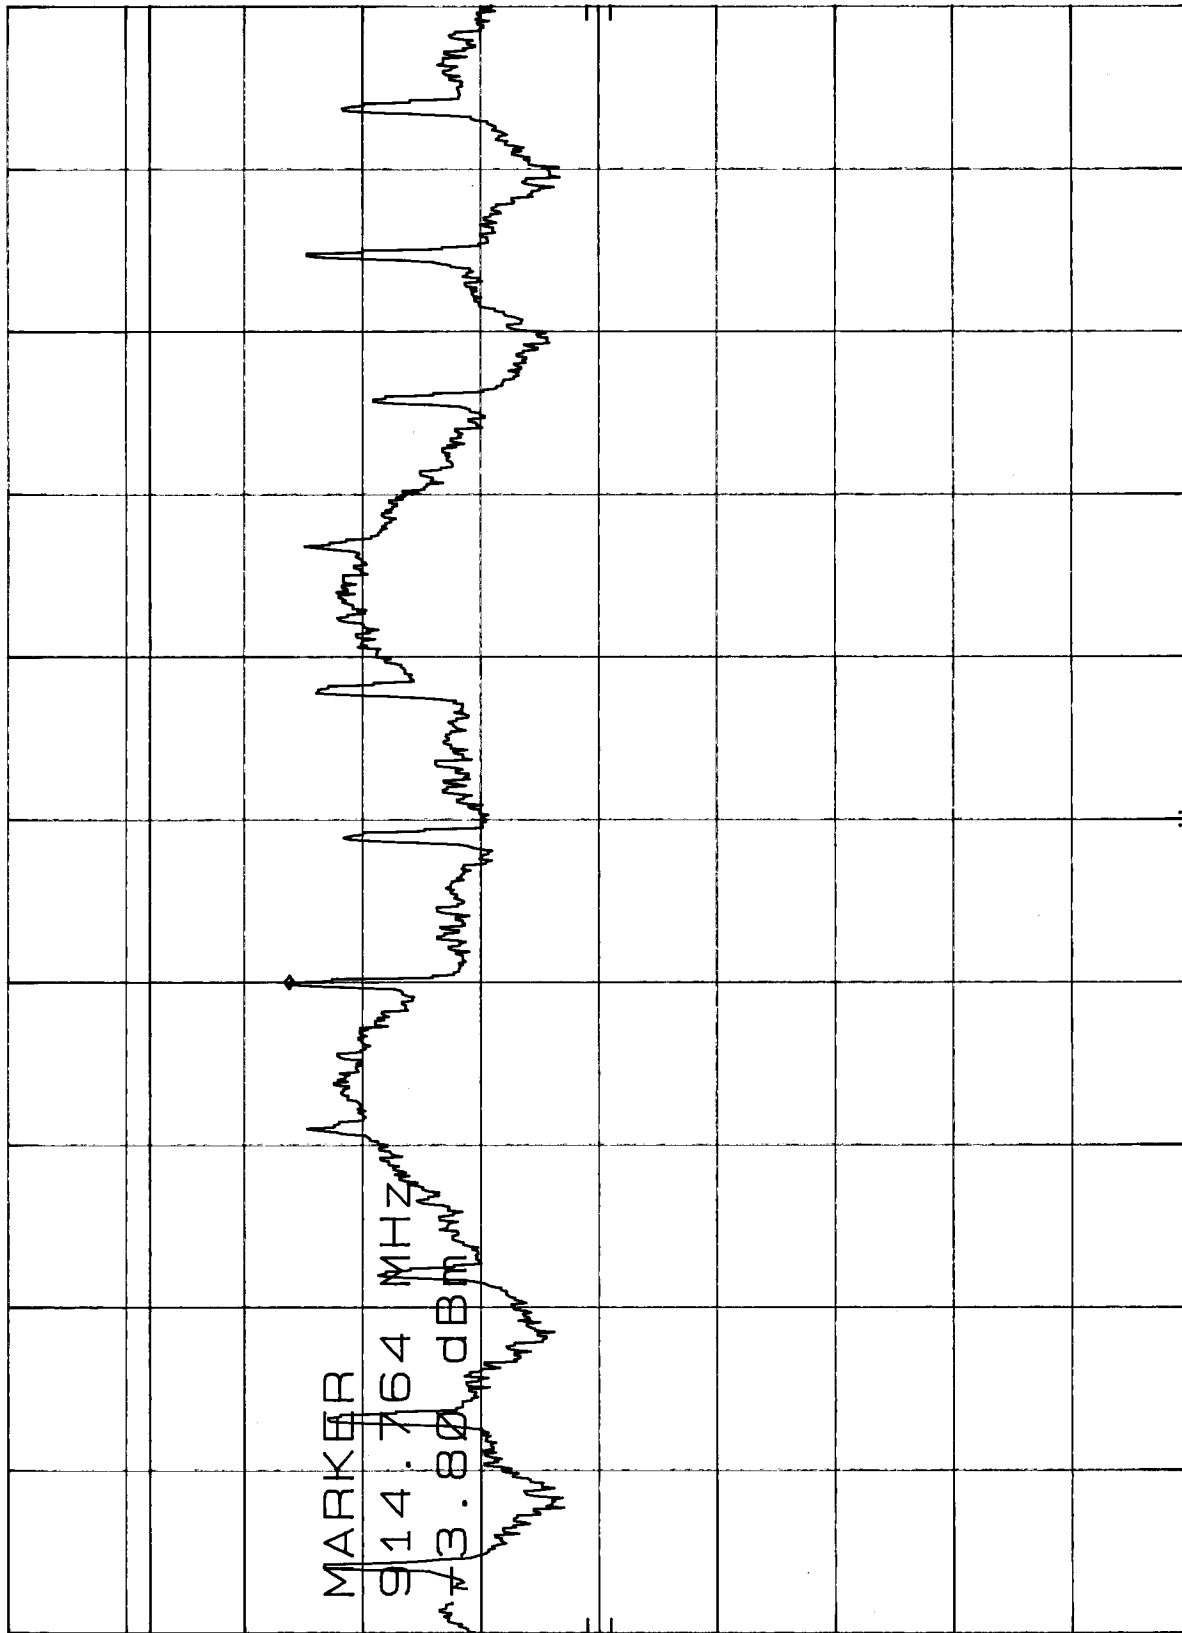

CENTER 914.89 MHz

RES BW 3 KHz

VBW 1 MHz

SWP 423 sec

SPAN 1.27 MHz


10-4-99

SPECTRAL DENSITY OUTPUT HANDSET CHANNEL 20 MKR 923.403 MHZ
REF 20.0 dBm ATTEN 30 dB

hp

10 dB/

DL
8.0
dBm

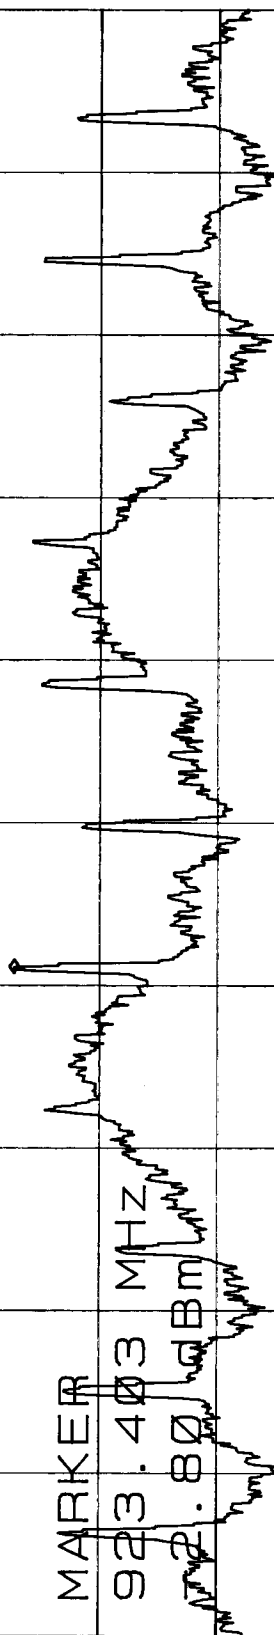

CORR'D

CENTER 923.51 MHZ
RES BW 3 KHZ
V BW 100 KHZ
SPAN 1.31 MHZ
SWP 437 sec



**COMPATIBLE
ELECTRONICS**

FCC ID: AMWUC668 Report Number: B91005D1



***RF ANTENNA CONDUCTED
DATA SHEETS FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

10-4-99

RF ANT. COND. TEST HANDSET CH.1 2MHZ-1GHZ MKR 905 MHZ
REF 20.0 dBm ATTEN 30 dB 1.40 dBm

hp

10 dB/

MARKER

905 MHZ

1.40 dBm

DL

-18.6

dBm

CORR'D


START 2 MHZ

RES BW 100 KHZ

VBW 1 MHZ

SWP 299 msec

STOP 1.00 GHZ

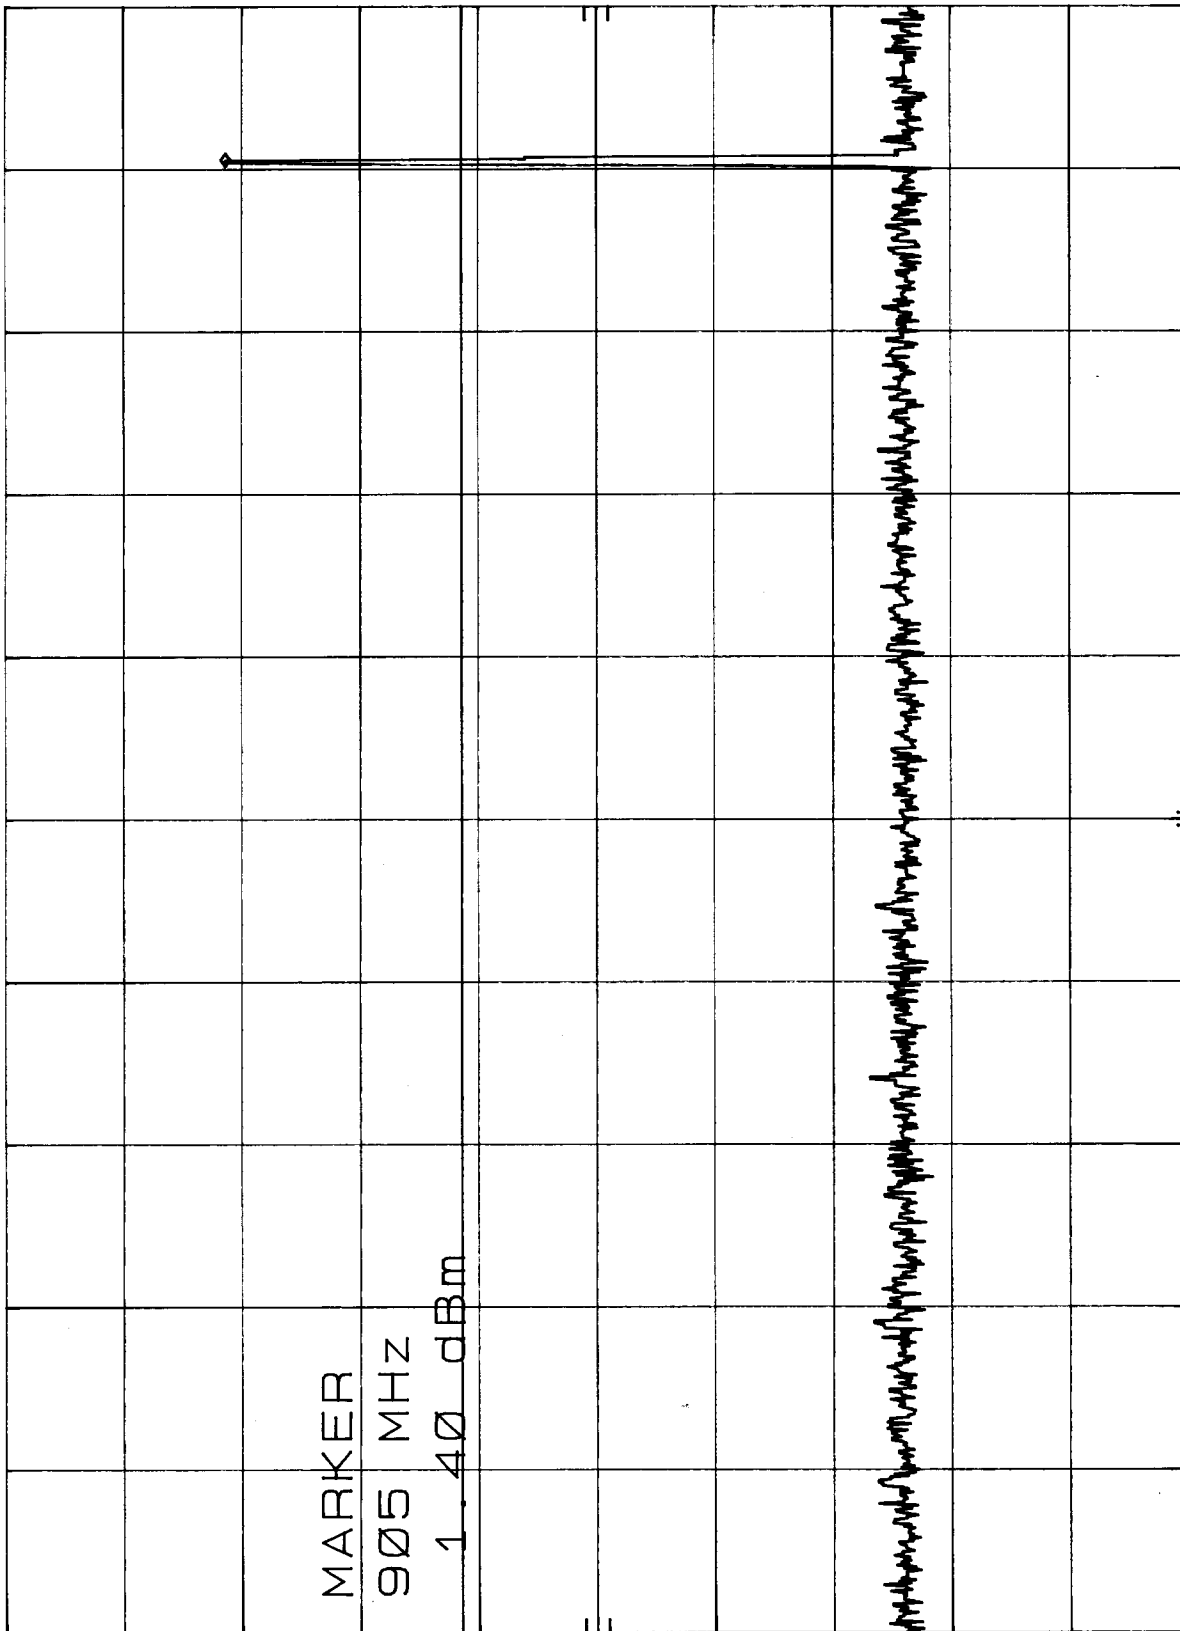

10-4-99

RF ANT. COND. HANDSET CH. 1 - 1GHZ-2GHZ
REF 20.0 dBm ATTEN 30 dB
MKR 1.357 GHz
-52.10 dBm

hp

10 dB/


MARKER

1.357 GHz

DL
-18.6
dBm

-52.10 dBm

CORR'D



START 1.00 GHz
RES BW 100 KHz
STOP 2.00 GHz
SWP 300 msec
VBW 1 MHz

10-4-99

RF ANT. COND. HANDSET CH. 1 - 2GHZ-10GHZ MKR 3.160 GHZ
HP REF 20.0 dBm ATTN 30 dB -44.80 dBm

10 dB/


MARKER

3.160 GHZ

-44.80 dBm

DL
-18.6
dBm

CORR'D

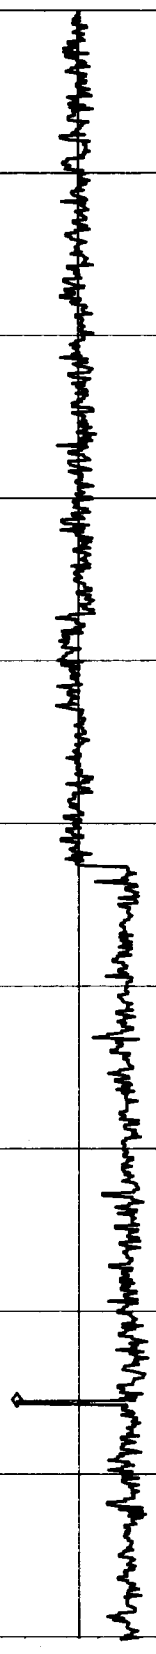

START 2.00 GHZ RES BW 100 KHZ VBW 1 MHZ STOP 10.00 GHZ
SWP 2.40 sec

10-4-99

RF ANT. COND. HANDSET CH. 11 - 2MHZ-1GHZ MKR 915 MHZ
REF 20.0 dBm ATTEN 30 dB -0.30 dBm

hp

10 dB/

DISPLAY LINE

-19.7 dBm

DL
-19.7
dBm

CORR'D

START 2 MHz RES BW 100 KHZ STOP 1.00 GHZ
SWP 299 msec VBW 1 MHz

10-4-99

RF ANT. COND. HANDSET CH. 11 - 1GHZ-2GHZ MKR 1.154 GHZ
REF 20.0 dBm ATTN 30 dB -53.20 dBm

hp

10 dB/

MARKER

1.154 GHZ

DL
-19.7
dBm

-53.20 dBm

CORR'D

RF ANT. COND. HANDSET CH. 11 - 1GHZ-2GHZ MKR 1.154 GHZ
REF 20.0 dBm ATTN 30 dB -53.20 dBm

START 1.00 GHZ RES BW 100 KHZ STOP 2.00 GHZ
VBW 1 MHZ SWP 300 msec

10-4-99

RF ANT. COND. HANDSET CH. 11 - 2GHZ-10GHZ MKR 3.200 GHZ
 HP REF 20.0 dBm ATTN 30 dB -46.30 dBm

10 dB/

DL
 -19.7
 dBm

MARKER

3.200 GHZ

-46.30 dBm

CORR'D

START 2.00 GHZ RES BW 100 KHZ VBW 1 MHZ STOP 10.00 GHZ
 SWP 2.40 sec

10-4-99

RF. ANT. COND. HANDSET CH. 20 2MHZ-1GHZ MKR 924 MHZ
REF 20.0 dBm ATTEN 30 dB 0.60 dBm

HP

10 dB/

MARKER

924 MHZ

0.60 dBm

DL
-19.4
dBm

CORR'D

START 2 MHZ RES BW 100 KHZ VBW 1 MHZ STOP 1.00 GHZ
SWP 299 msec

10-4-99

RF ANT. COND. HANDSET CH. 20 1GHZ-2GHZ MKR 1.402 GHZ
REF 20.0 dBm ATTEN 30 dB -52.30 dBm

hp

10 dB/

MARKER

1.402 GHZ

DL

-52.30 dBm

-19.4

dBm

CORR'D

RF ANT. COND. HANDSET CH. 20 1GHZ-2GHZ MKR 1.402 GHZ
REF 20.0 dBm ATTEN 30 dB -52.30 dBm

START 1.00 GHZ RES BW 100 KHZ STOP 2.00 GHZ
VBW 1 MHZ SWP 300 msec

10-4-99

RF ANT. COND. HANDSET CH. 20 - 2GHZ-10GHZ MKR 3.224 GHZ
REF 20.0 dBm ATTEN 30 dB -46.80 dBm

hp

10 dB/


MARKER

3.224 GHZ


-46.80 dBm

DL
-19.4
dBm

CORR'D



START 2.00 GHZ RES BW 100 KHZ VBW 1 MHZ STOP 10.00 GHZ
SWP 2.40 sec

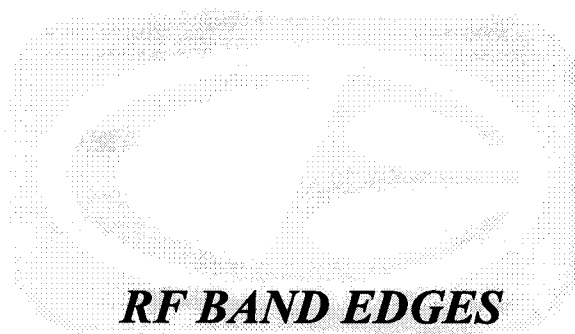

***RF BAND EDGES
FOR THE HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850


10-4-99

hpd
BAND EDGE OF HANDSET CHANNEL 1
REF 20.0 dBm ATTEN 30 dB
MKR 902.00 MHz
-53.10 dBm

10 dB/

DL
-18.2
dBm
MARKER
902.00 MHz
-53.10 dBm

CORR'D

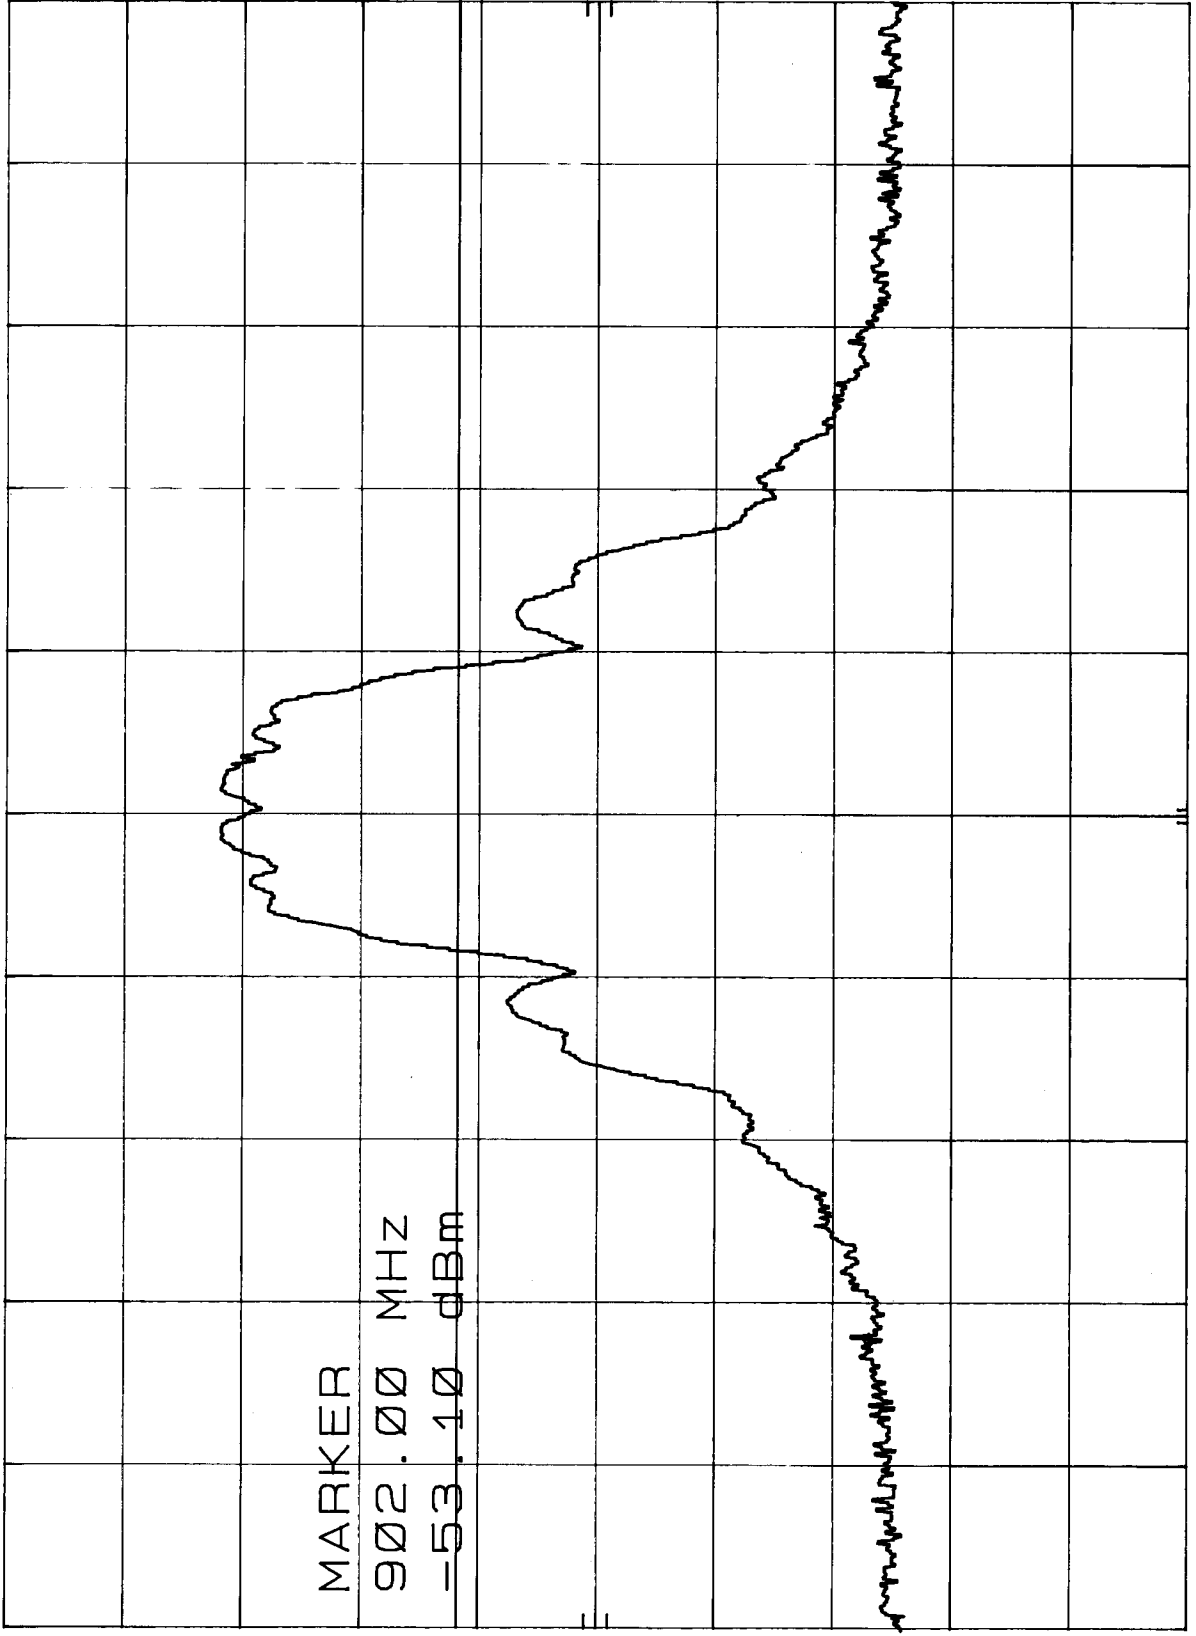

START 900.2 MHz
RES BW 100 kHz
STOP 910.2 MHz
SWP 20.0 msec
VBW 1 MHz


10-4-99

h_p BAND EDGE OF HANDSET CH. 20
REF 20.0 dBm ATTEN 30 dB
MKR 928.00 MHz
-56.40 dBm

10 dB/

MARKER
928.00 MHz
-56.40 dBm
DL
-19.6
dBm

CORR'D

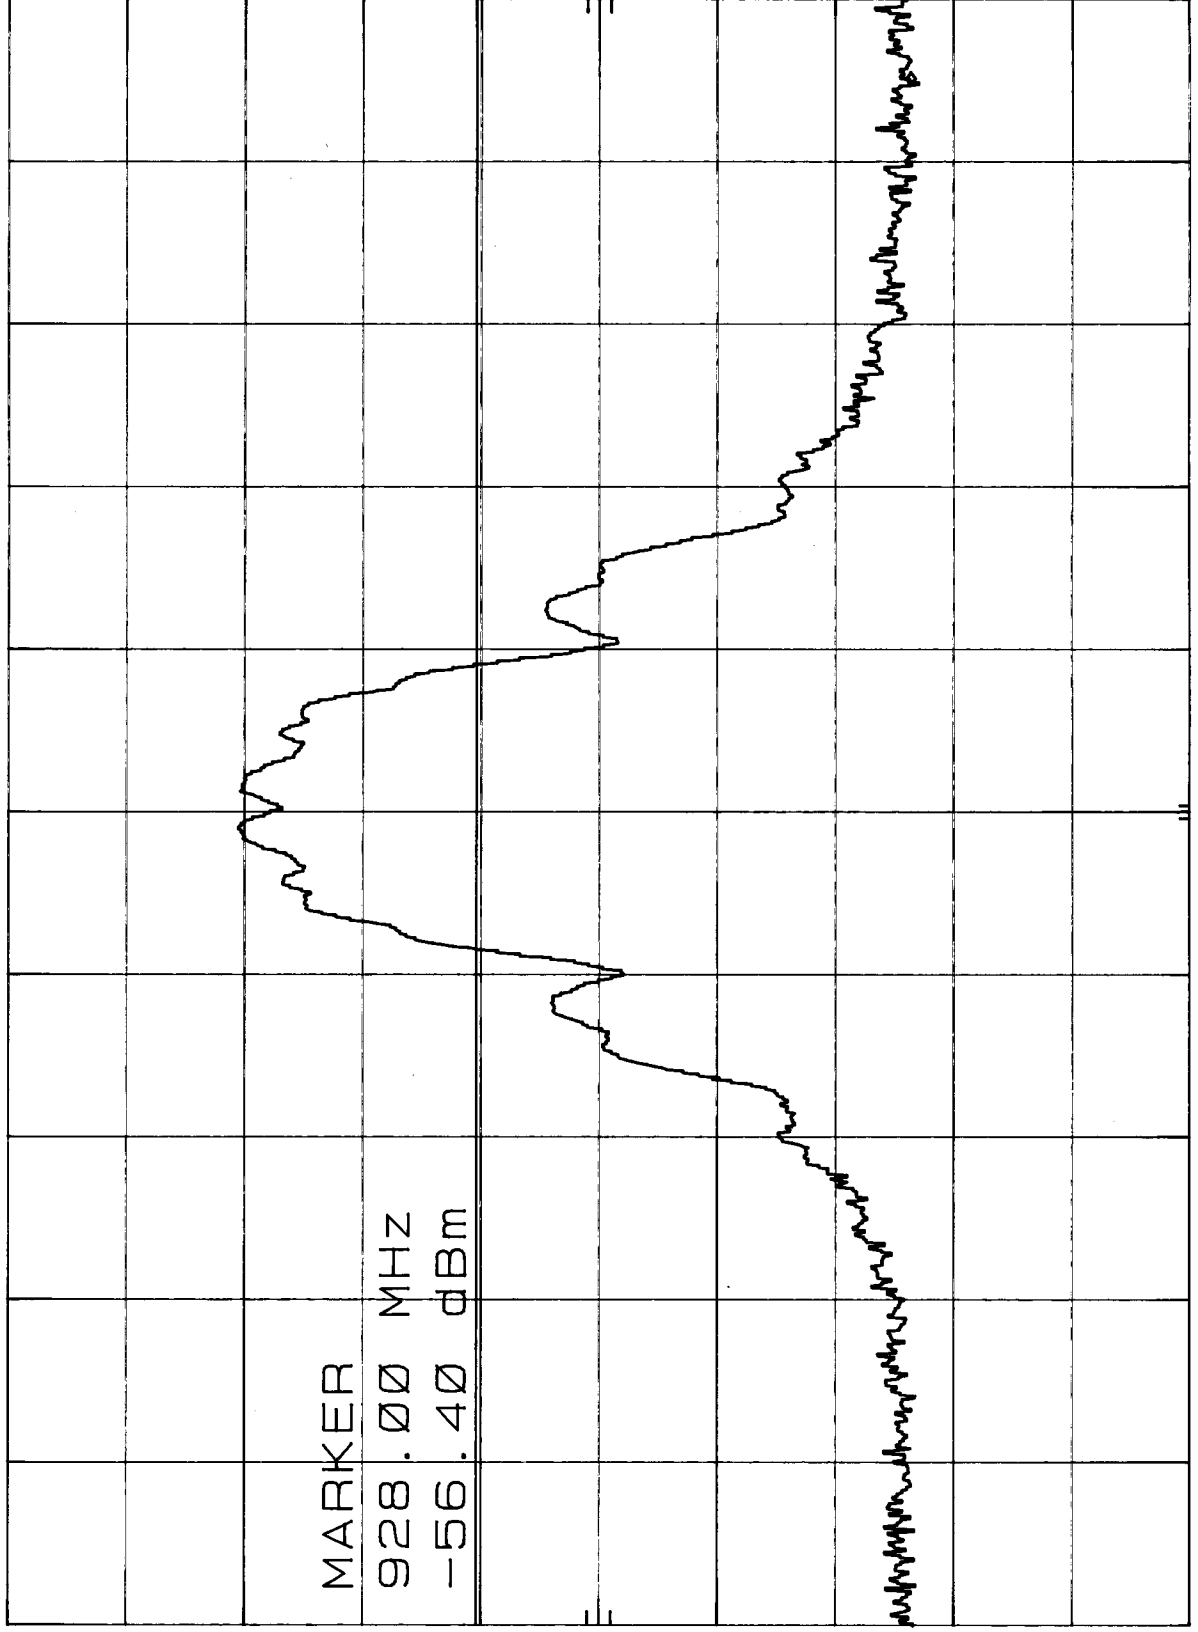

CENTER 923.4 MHz
RES BW 100 kHz
SPAN 10.0 MHz
SWP 20.0 msec
VBW 1 MHz



***PROCESSING GAIN
DATA SHEETS FOR THE BASE AND HANDSET***



114 OLINDA DRIVE, BREA, CALIFORNIA 92823 PHONE: (714) 579-0500 FAX: (714) 579-1850

PROCESSING GAIN TEST

CHANNEL11(914.88MHz) - Base station output to handset input

Jammer Freq. (MHz)	Transmitter Outputs (dBm)	Signal Level (dBm)	CW Level (dBm)	Mj J/S ratio (dB)	Processing Gain (dB)	LOSSES(dB) Attenuation System Loss S/N ratio
						50 2 11
913.88	5.4	-44.6	-37.0	7.6	20.6	
913.93	5.4	-44.6	-37.6	7.0	20.0	
913.98	5.4	-44.6	-38.3	6.3	19.3	
914.03	5.4	-44.6	-39.3	5.3	18.3	
914.08	5.4	-44.6	-39.9	4.7	17.7	
914.13	5.4	-44.6	-40.3	4.3	17.3	
914.18	5.4	-44.6	-41.1	3.5	16.5	
914.23	5.4	-44.6	-42.0	2.6	15.6	
914.28	5.4	-44.6	-42.6	2.0	15.0	
914.33	5.4	-44.6	-43.0	1.6	14.6	
914.38	5.4	-44.6	-43.6	1.0	14.0	
914.43	5.4	-44.6	-43.7	0.9	13.9	
914.48	5.4	-44.6	-44.1	0.5	13.5	
914.53	5.4	-44.6	-44.1	0.5	13.5	
914.58	5.4	-44.6	-44.5	0.1	13.1	
914.63	5.4	-44.6	-44.8	-0.2	12.8	
914.68	5.4	-44.6	-44.5	0.1	13.1	
914.73	5.4	-44.6	-44.5	0.1	13.1	
914.78	5.4	-44.6	-44.5	0.1	13.1	
914.83	5.4	-44.6	-44.5	0.1	13.1	

Mj J/S ratio =
CW Noise- SigLevel

ProcessingGain =
Mj J/S ratio + Sytem Loss + S/N rat

CHANNEL9(912.96MHz) - Handset output to base station input

Jammer Freq. (MHz)	Transmitter Outputs (dBm)	Signal Level (dBm)	CW Level (dBm)	Mj J/S ratio (dB)	Processing Gain (dB)
911.96	1.0	-49.0	-40.7	8.3	21.3
912.01	1.0	-49.0	-41.7	7.3	20.3
912.06	1.0	-49.0	-42.5	6.5	19.5
912.11	1.0	-49.0	-43.4	5.6	18.6
912.16	1.0	-49.0	-44.6	4.4	17.4
912.21	1.0	-49.0	-45.1	3.9	16.9
912.26	1.0	-49.0	-44.7	4.3	17.3
912.31	1.0	-49.0	-45.6	3.4	16.4
912.36	1.0	-49.0	-46.4	2.6	15.6
912.41	1.0	-49.0	-46.7	2.3	15.3
912.46	1.0	-49.0	-47.8	1.2	14.2
912.51	1.0	-49.0	-48.3	0.7	13.7
912.56	1.0	-49.0	-48.6	0.4	13.4
912.61	1.0	-49.0	-48.6	0.4	13.4
912.66	1.0	-49.0	-49.2	-0.2	12.8
912.71	1.0	-49.0	-49.2	-0.2	12.8
912.76	1.0	-49.0	-48.2	0.8	13.8
912.81	1.0	-49.0	-49.4	-0.4	12.6
912.86	1.0	-49.0	-49.1	-0.1	12.9
912.91	1.0	-49.0	-49.0	0.0	13.0

PROCESSING GAIN TEST

CHANNEL11(914.88MHz) - Base station output to handset input

Jammer Freq. (MHz)	Transmitter Outputs (dBm)	Signal Level (dBm)	CW Level (dBm)	Mj J/S ratio (dB)	Processing Gain (dB)
914.88	5.4	-44.6	-44.9	-0.3	12.7
914.93	5.4	-44.6	-44.7	-0.1	12.9
914.98	5.4	-44.6	-44.5	0.1	13.1
915.03	5.4	-44.6	-44.3	0.3	13.3
915.08	5.4	-44.6	-44.3	0.3	13.3
915.13	5.4	-44.6	-44.0	0.6	13.6
915.18	5.4	-44.6	-43.9	0.7	13.7
915.23	5.4	-44.6	-43.9	0.7	13.7
915.28	5.4	-44.6	-43.6	1.0	14.0
915.33	5.4	-44.6	-42.6	2.0	15.0
915.38	5.4	-44.6	-42.3	2.3	15.3
915.43	5.4	-44.6	-42.1	2.5	15.5
915.48	5.4	-44.6	-41.7	2.9	15.9
915.53	5.4	-44.6	-41.5	3.1	16.1
915.58	5.4	-44.6	-40.9	3.7	16.7
915.63	5.4	-44.6	-40.1	4.5	17.5
915.68	5.4	-44.6	-39.5	5.1	18.1
915.73	5.4	-44.6	-39.0	5.6	18.6
915.78	5.4	-44.6	-38.3	6.3	19.3
915.83	5.4	-44.6	-37.5	7.1	20.1
915.88	5.4	-44.6	-36.6	8.0	21.0

LOSSES(dB)

Attenuation	50
System Loss	2
S/N ratio	11

Mj J/S ratio =

CW Noise- Sig.Level

ProcessingGain =

Mj J/S ratio + Sytem Loss + S/N rat

CHANNEL9(912.96MHz) - Handset output to base station input

Jammer Freq. (MHz)	Transmitter Outputs (dBm)	Signal Level (dBm)	CW Level (dBm)	Mj J/S ratio (dB)	Processing Gain (dB)
912.96	1.0	-49.0	-48.4	0.6	13.6
913.01	1.0	-49.0	-48.6	0.4	13.4
913.06	1.0	-49.0	-48.9	0.1	13.1
913.11	1.0	-49.0	-48.6	0.4	13.4
913.16	1.0	-49.0	-47.7	1.3	14.3
913.21	1.0	-49.0	-48.0	1.0	14.0
913.26	1.0	-49.0	-47.5	1.5	14.5
913.31	1.0	-49.0	-47.4	1.6	14.6
913.36	1.0	-49.0	-47.5	1.5	14.5
913.41	1.0	-49.0	-46.8	2.2	15.2
913.46	1.0	-49.0	-46.1	2.9	15.9
913.51	1.0	-49.0	-46.1	2.9	15.9
913.56	1.0	-49.0	-46.1	2.9	15.9
913.61	1.0	-49.0	-46.7	2.3	15.3
913.66	1.0	-49.0	-48.0	1.0	14.0
913.71	1.0	-49.0	-46.5	2.5	15.5
913.76	1.0	-49.0	-44.8	4.2	17.2
913.81	1.0	-49.0	-44.8	4.2	17.2
913.86	1.0	-49.0	-44.7	4.3	17.3
913.91	1.0	-49.0	-44.6	4.4	17.4
913.96	1.0	-49.0	-43.8	5.2	18.2