



A Test Lab Techno Corp.

Changan Lab : No. 140-1, Changan Street, Bade District, Taoyuan City 33465, Taiwan (R.O.C.)

Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT



Applicant	: D-Link Corporation
Applicant Address	: 17595 Mt. Herrmann, Fountain Valley, CA 92708, United States
Product Type	: AC1300 MU-MIMO Wi-Fi Nano USB Adapter
Trade Name	: D-Link
Model Number	: DWA-181
Received Date	: Jul. 27, 2016
Test Period	: Sep. 05 ~ Oct. 21, 2016
Issue Date	: Apr. 23, 2019
Test Environment	: Ambient Temperature : 22 $\pm$ 2 °C Relative Humidity : 40 - 70 %
Standard	: ANSI/IEEE C95.1-1992 / IEEE Std. 1528-2013 47 CFR Part §2.1093 / KDB 248227 D01 v02r02 KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02 KDB 447498 D01 v06 / KDB 447498 D02 v02r01



1. A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Approved By

Edison Hu

(Edison Hu)

Tested By

Kris Pan

(Kris Pan)



Contents

1. Summary of Maximum Reported SAR Value.....	4
2. Description of Equipment under Test (EUT).....	5
3. Introduction	6
3.1 SAR Definition	6
4. SAR Measurement Setup	7
4.1 DASY E-Field Probe System.....	8
4.1.1 E-Field Probe Specification	9
4.1.2 E-Field Probe Calibration process.....	10
4.2 Data Acquisition Electronic (DAE) System	11
4.3 Robot.....	11
4.4 Measurement Server	11
4.5 Device Holder	12
4.6 Oval Flat Phantom - ELI 4.0	12
4.7 Data Storage and Evaluation	13
4.7.1 Data Storage	13
4.7.2 Data Evaluation	13
5. Tissue Simulating Liquids.....	15
5.1 Ingredients.....	16
5.2 Recipes	16
5.3 Liquid Depth	17
6. SAR Testing with RF Transmitters.....	18
6.1 SAR Testing with 802.11 Transmitters.....	18
6.2 Conducted Power	19
6.3 Antenna location.....	24
6.4 Stand-alone SAR Evaluate.....	24
6.5 Simultaneous Transmitting Evaluate	26
6.5.1 Sum of 1-g SAR of all simultaneously transmitting.....	26
6.5.2 SAR to peak location separation ratio (SPLSR)	27
6.6 SAR test reduction according to KDB.....	27
7. System Verification and Validation	28
7.1 Symmetric Dipoles for System Verification.....	28
7.2 Liquid Parameters	29
7.3 Verification Summary	32
7.4 Validation Summary.....	33
8. Test Equipment List	34
9. Measurement Uncertainty	35



10. Measurement Procedure	37
10.1 Spatial Peak SAR Evaluation	37
10.2 Area & Zoom Scan Procedures	38
10.3 Volume Scan Procedures	38
10.4 SAR Averaged Methods	38
10.5 Power Drift Monitoring	38
11. SAR Test Results Summary	39
11.1 Head Measurement SAR	39
11.2 Body Measurement SAR	40
11.3 Hot-spot mode Measurement SAR	45
11.4 Extremity Measurement SAR	45
11.5 Std. C95.1-1992 RF Exposure Limit	45
12. References	46
Appendix A - System Performance Check	47
Appendix B -SAR Measurement Data	58
Appendix C -Calibration	150

1. Summary of Maximum Reported SAR Value

Equipment Class	Mode	Highest Reported			
		Head SAR _{1g} (W/kg)	Body-Worn SAR _{1g} (1.0 cm) (W/kg)	Body-Worn stand alone SAR _{1g} (1.0 cm) (W/kg)	Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)
DTS	2.4 GHz WLAN	N/A	N/A	0.05	N/A
NII	5 GHz WLAN U-NII-1	N/A	N/A	0.64	N/A
	5 GHz WLAN U-NII-3	N/A	N/A	0.74	N/A
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-Worn (W/kg)	Body-Worn Stand alone (W/kg)	Hotspot (W/kg)
NII (ANT-0+ANT-1)		N/A	N/A	1.03	N/A

NOTE: 1. The N/A is EUT not apply to the assessment of the exposure conditions.

- The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 were employed and they specify the maximum exposure limit of Body is SAR_{1g} 1.6 W/kg of tissue for portable devices being used within 20 cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.



2. Description of Equipment under Test (EUT)

Applicant	D-Link Corporation 17595 Mt. Herrmann, Fountain Valley, CA 92708, United States		
Manufacture	EDIMAX TECHNOLOGY CO., LTD. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan		
Product Type	AC1300 MU-MIMO Wi-Fi Nano USB Adapter		
Trade Name	D-Link		
Model Number	DWA-181		
FCC ID	KA2WA181A1		
RF Function	IEEE 802.11b / 802.11g / 802.11n 2.4 GHz 20 MHz / 802.11n 2.4 GHz 40 MHz IEEE 802.11a / 802.11n 5 GHz 20 MHz / 802.11n 5 GHz 40 MHz IEEE 802.11ac 20 MHz / 40 MHz / 80 MHz		
Tx Frequency	Band	Operate Frequency (MHz)	
	IEEE 802.11b / 802.11g / 802.11n 2.4 GHz 20 MHz	2412 - 2462	
	IEEE 802.11n 2.4 GHz 40 MHz	2422 - 2452	
	IEEE 802.11a / 802.11n 5 GHz 20 MHz / 802.11ac 20 MHz U-NII Band I	5180 - 5240	
	IEEE 802.11n 5 GHz 40 MHz / 802.11ac 40 MHz U-NII Band I	5190 - 5230	
	IEEE 802.11ac 80 MHz U-NII Band I	5210	
	IEEE 802.11a / 802.11n 5 GHz 20 MHz / 802.11ac 20 MHz U-NII Band III	5745 - 5825	
	IEEE 802.11n 5 GHz 40 MHz / 802.11ac 40 MHz U-NII Band III	5755 - 5795	
	IEEE 802.11ac 80 MHz U-NII Band III	5775	
RF Conducted Power (Avg.)	Band	Power	
		W	dBm
	IEEE 802.11b	0.028	14.45
	IEEE 802.11g	0.042	16.26
	IEEE 802.11n 2.4 GHz 20 MHz	0.081	19.07
	IEEE 802.11n 2.4 GHz 40 MHz	0.070	18.48
	IEEE 802.11a U-NII Band I	0.032	15.08
	IEEE 802.11ac 20 MHz U-NII Band I	0.057	17.59
	IEEE 802.11ac 40 MHz U-NII Band I	0.052	17.18
	IEEE 802.11ac 80 MHz U-NII Band I	0.041	16.12
	IEEE 802.11a U-NII Band III	0.027	14.32
	IEEE 802.11ac 20 MHz U-NII Band III	0.051	17.08
	IEEE 802.11ac 40 MHz U-NII Band III	0.054	17.29
	IEEE 802.11ac 80 MHz U-NII Band III	0.040	16.03
Antenna Type	Monopole Antenna		
Device Category	Portable Device		
Application Type	Certification		

Note: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

EUT Modify Description :

Modify Description : Change the applicant, applicant address, manufacturer address, product name, trade name, model number, FCC ID, the logo of the product and remove label. The difference won't influence the test results. Therefore, all test items don't need to be re-evaluated. All test data refer to the original report. Original Report : 1611FS17 Modify : 1903FS11-01

3. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **D-Link Corporation Trade Name : D-Link Model(s) : DWA-181**. The test procedures, as described in American National Standards, Institute C95.1-1999 [1] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

3.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$SAR = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)


ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

* Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

4. SAR Measurement Setup

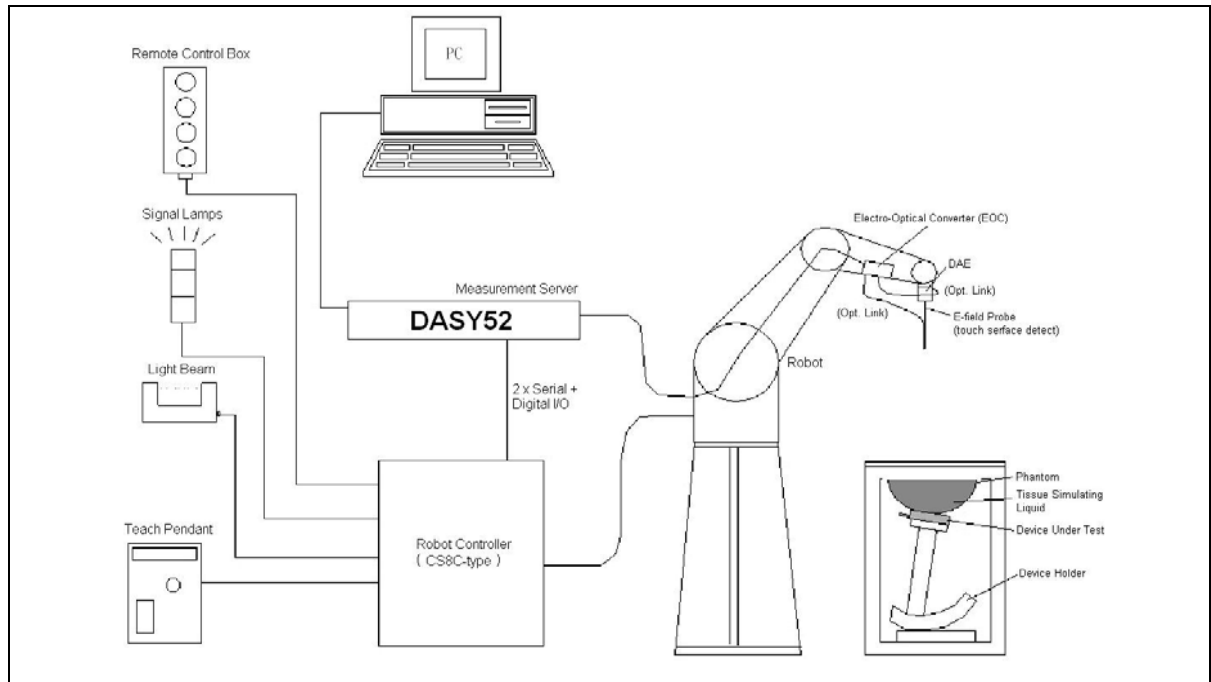

The DASY52 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY52 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.



4.1 DASY E-Field Probe System

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

4.1.1 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in brain tissue (rotation around probe axis) ± 0.5 dB in brain tissue (rotation normal probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

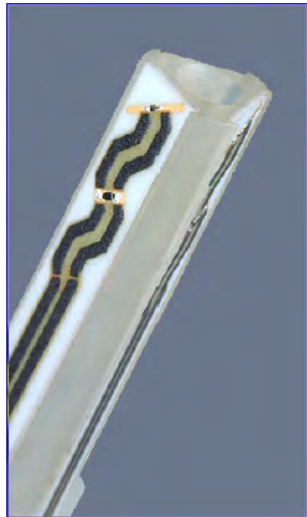


Figure 3. E-field Probe



Figure 4. Probe setup on robot



4.1.2 E-Field Probe Calibration process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

$$\text{Or } SAR = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).



4.2 Data Acquisition Electronic (DAE) System

Model : DAE3, DAE4
Construction : Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range : -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset Voltage : < 5 μ V (with auto zero)
Input Bias Current : < 50 fA
Dimensions : 60 x 60 x 68 mm

4.3 Robot


Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ± 0.02 mm
No. of Axis : 6

4.4 Measurement Server

Processor : PC/104 with a 400 MHz intel ULV Celeron
I/O-board : Link to DAE4 (or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

4.5 Device Holder


The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

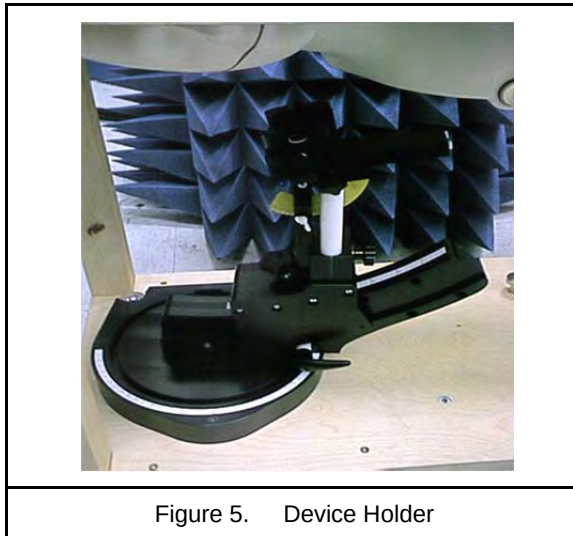

4.6 Oval Flat Phantom - ELI 4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 $\pm$ 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190×600×400 mm (H×L×W)
Table 1. Specification of ELI 4.0	

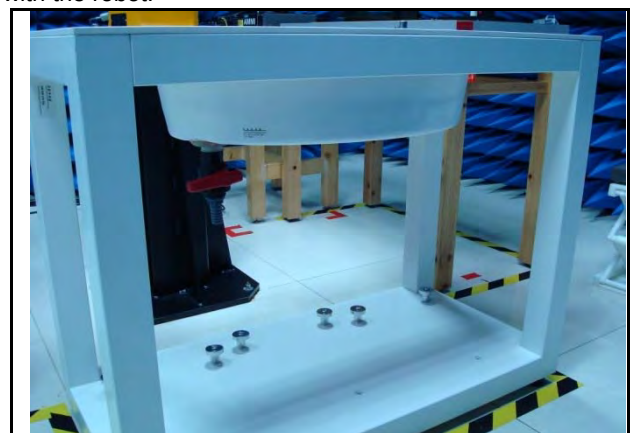

4.7 Data Storage and Evaluation

4.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA4 or DA5. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

4.7.2 Data Evaluation

The DASY post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

- Probe parameters :
- Sensitivity $Norm_i, ai0, ai1, ai2$
 - Conversion factor $ConvFi$
 - Diode compression point dcp_i
- Device parameters :
- Frequency f
 - Crest factor cf
- Media parameters :
- Conductivity σ
 - Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

- With
- V_i = compensated signal of channel i (i = x, y, z)
 - U_i = input signal of channel i (i = x, y, z)
 - cf = crest factor of exciting field (DASY parameter)
 - dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

$$E\text{-field probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H\text{-field probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
 $\mu\text{V}/(\text{V/m})^2$ for *E-field Probes*
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

* Note : That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = \frac{E_{\text{tot}}^2}{3770} \quad \text{or} \quad P_{\text{pwe}} = \frac{H_{\text{tot}}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

5. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m ³)				

Table 2. Tissue dielectric parameters for head and body phantoms



5.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylene glycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

5.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

Ingredients (% by weight)	Frequency (MHz)												Frequency (GHz)	
	750		835		1750		1900		2450		2600		5 GHz	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	39.28	51.30	41.45	52.40	54.50	40.20	54.90	40.40	62.70	73.20	60.30	71.40	65.5	78.6
Salt (NaCl)	1.47	1.42	1.45	1.50	0.17	0.49	0.18	0.50	0.50	0.10	0.60	0.20	0.00	0.00
Sugar	58.15	46.18	56.00	45.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HEC	1.00	1.00	1.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Bactericide	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.2	10.7
DGBE	0.00	0.00	0.00	0.00	45.33	59.31	44.92	59.10	36.80	26.70	39.10	28.40	0.00	0.00
Dielectric Constant	41.88	54.60	42.54	56.10	40.10	53.60	39.90	54.00	39.80	52.50	39.80	52.50	35.1~ 36.2	47.9~ 49.3
Conductivity (S/m)	0.90	0.97	0.91	0.95	1.39	1.49	1.42	1.45	1.88	1.78	1.88	1.78	4.45~ 5.48	5.07~ 6.23
Diethylene Glycol Mono-hexlether	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.3	10.7

Salt: 99⁺ % Pure Sodium Chloride

Sugar: 98⁺ % Pure Sucrose

Water: De-ionized, 16 M Ω ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99⁺ % Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

5.3 Liquid Depth

According to KDB865664 ,the depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.



Figure 7. Body-Position



6. SAR Testing with RF Transmitters

6.1 SAR Testing with 802.11 Transmitters

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.



6.2 Conducted Power

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			ANT-0	ANT-1	ANT-0+1
IEEE 802.11b	1	2412	14.25	---	---
		2437	14.23	---	---
		2462	14.45	---	---
	2	2437	14.20	---	---
	5.5	2437	14.19	---	---
	11	2437	14.15	---	---
IEEE 802.11g	6	2412	14.62	---	---
		2437	16.26	---	---
		2462	14.20	---	---
	9	2437	16.25	---	---
	12	2437	16.20	---	---
	18	2437	16.24	---	---
	24	2437	16.19	---	---
	36	2437	16.22	---	---
	48	2437	16.20	---	---
IEEE 802.11n 2.4 GHz 20 MHz	13	2412	15.41	15.49	18.46
		2437	15.46	15.48	18.48
		2462	15.44	15.42	18.44
	26	2437	15.26	15.18	18.23
	39	2437	15.40	15.45	18.44
	52	2437	15.45	15.47	18.47
	78	2437	15.43	15.40	18.43
	104	2437	15.39	15.42	18.42
	117	2437	15.37	15.41	18.40
	130	2437	15.44	15.46	18.46
	156	2437	15.41	15.38	18.41
IEEE 802.11n 2.4 GHz 40 MHz	27	2422	15.26	15.39	18.34
		2437	15.37	15.47	18.43
		2452	15.45	15.48	18.48
	54	2437	15.35	15.41	18.39
	81	2437	15.30	15.39	18.36
	108	2437	15.36	15.45	18.42
	162	2437	15.34	15.44	18.40
	216	2437	15.29	15.38	18.35
	243	2437	15.36	15.42	18.40
	135	2437	15.32	15.40	18.37
	324	2437	15.31	15.36	18.35
	360	2437	15.33	15.38	18.37

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			ANT-0	ANT-1	ANT-0+1
IEEE 802.11a	6	5180	14.70	---	---
		5200	15.08	---	---
		5220	14.96	---	---
		5240	14.66	---	---
		5745	13.67	---	---
		5765	14.32	---	---
		5785	14.21	---	---
		5805	13.99	---	---
		5825	14.27	---	---
	54	5180	14.65	---	---
		5200	15.04	---	---
		5220	14.91	---	---
		5240	14.63	---	---
		5745	13.63	---	---
		5765	14.28	---	---
		5785	14.17	---	---
		5805	13.95	---	---
		5825	14.23	---	---
IEEE 802.11ac 20 MHz	13	5180	13.58	13.77	16.69
		5200	13.53	15.43	17.59
		5220	13.75	15.27	17.59
		5240	13.65	15.20	17.50
		5745	14.24	13.55	16.92
		5765	14.19	13.94	17.08
		5785	14.12	13.87	17.01
		5805	14.30	13.79	17.06
		5825	14.03	13.74	16.90
	156	5180	13.56	13.72	16.65
		5200	13.50	15.38	17.55
		5220	13.71	15.23	17.55
		5240	13.63	15.18	17.48
		5745	14.21	13.52	16.89
		5765	14.16	13.92	17.05
		5785	14.10	13.82	16.97
		5805	14.26	13.77	17.03
		5825	13.98	13.69	16.85

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			ANT-0	ANT-1	ANT-0+1
IEEE 802.11ac 40 MHz	27	5190	13.39	13.48	16.45
		5230	14.22	14.11	17.18
		5755	14.23	14.33	17.29
		5795	14.34	14.22	17.29
	360	5190	13.33	13.46	16.41
		5230	14.20	14.06	17.14
		5755	14.20	14.28	17.25
		5795	14.30	14.19	17.26
IEEE 802.11ac 80 MHz	58.6	5290	13.06	13.15	16.12
		5775	12.68	13.33	16.03
	780	5290	13.04	13.10	16.08
		5775	12.67	13.30	16.01

Beamforming on					
Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			ANT-0	ANT-1	ANT-0+1
IEEE 802.11n 2.4 GHz 20 MHz	13	2412	14.05	14.17	17.12
		2437	15.73	16.36	19.07
		2462	14.94	15.02	17.99
	26	2437	15.60	16.27	18.96
	39	2437	15.57	16.32	18.97
	52	2437	15.70	16.30	19.02
	78	2437	15.68	16.25	18.98
	104	2437	15.65	16.20	18.94
	117	2437	15.71	16.29	19.02
	130	2437	15.66	16.22	18.96
	156	2437	15.63	16.25	18.96
IEEE 802.11n 2.4 GHz 40 MHz	27	2422	13.84	13.98	16.92
		2437	15.26	15.02	18.15
		2452	12.39	12.37	15.39
	54	2437	15.20	15.00	18.11
	81	2437	15.23	14.95	18.10
	108	2437	15.17	14.97	18.08
	162	2437	15.12	14.98	18.06
	216	2437	15.15	14.92	18.05
	243	2437	15.21	14.99	18.11
	135	2437	15.19	14.99	18.10
	324	2437	15.13	14.95	18.05
	360	2437	15.12	14.91	18.03

Beamforming on					
Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			ANT-0	ANT-1	ANT-0+1
IEEE 802.11ac 20 MHz	13	5180	13.22	13.17	16.21
		5200	14.65	14.21	17.45
		5220	14.14	14.13	17.15
		5240	14.15	14.12	17.15
		5745	14.20	13.96	17.09
		5765	14.36	14.22	17.30
		5785	14.39	14.26	17.34
		5805	14.43	13.57	17.03
		5825	14.01	12.62	16.38
	156	5180	13.20	13.13	16.18
		5200	14.60	14.14	17.39
		5220	14.10	14.08	17.10
		5240	14.09	14.07	17.09
		5745	14.17	13.94	17.07
		5765	14.33	14.13	17.24
		5785	14.34	14.21	17.29
		5805	14.38	13.51	16.98
		5825	13.99	12.60	16.36
IEEE 802.11ac 40 MHz	27	5190	11.82	11.03	14.45
		5230	14.24	13.61	16.95
		5755	14.01	13.91	16.97
		5795	14.04	13.60	16.84
	360	5190	11.81	11.00	14.43
		5230	14.20	13.57	16.91
		5755	13.99	13.88	16.95
		5795	14.00	13.52	16.78
IEEE 802.11ac 80 MHz	58.6	5290	10.25	10.18	13.23
		5775	14.24	13.53	16.91
	780	5290	10.23	10.10	13.18
		5775	14.18	13.50	16.86



6.3 Antenna location

Antenna-User (mm)		
Side	WLAN_ANT-0	WLAN_ANT-1
Horizontal-UP	5	5
Horizontal-Down	5	5
Vertical-Front	5	5
Vertical-Back	5	5

6.4 Stand-alone SAR Evaluate

Stand-alone transmission configurations as below:

Band	Horizontal-UP	Horizontal-Down	Vertical-Front	Vertical-Back
IEEE 802.11b	V	V	V	V
IEEE 802.11g	-	-	-	-
IEEE 802.11n 2.4 GHz 20 MHz	V	V	V	V
IEEE 802.11n 2.4 GHz 40 MHz	V	V	V	V
IEEE 802.11a	V	V	V	V
IEEE 802.11ac 20 MHz	V	V	V	V
IEEE 802.11ac 40 MHz	V	V	V	V
IEEE 802.11ac 80 MHz	V	V	V	V

Antenna	Operate Band	Channel	Frequency (GHz)	Tune-Power		Calculated value and evaluated result (mm)			
				(dBm)	(mW)	Horizontal-UP	Horizontal-Down	Vertical-Front	Vertical-Back
WLAN ANT-0	IEEE 802.11 b	11	2.462	14.5	28	8.8	8.8	8.8	8.8
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11 g	11	2.462	16.5	45	14.1	14.1	14.1	14.1
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11 n 2.4 GHz 20 MHz	11	2.462	16	40	12.6	12.6	12.6	12.6
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11 n 2.4 GHz 40 MHz	11	2.462	15.5	35	11	11	11	11
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11a Band I	48	5.24	15.5	35	16	16	16	16
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11a Band III	165	5.825	15.5	35	16.9	16.9	16.9	16.9
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 20 MHz Band I	48	5.24	15	32	14.7	14.7	14.7	14.7
						MEASURE	MEASURE	MEASURE	MEASURE
WLAN ANT-1	IEEE 802.11ac 20 MHz Band III	165	5.825	15	32	15.4	15.4	15.4	15.4
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 40 MHz Band I	46	5.23	14.5	28	12.8	12.8	12.8	12.8
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 40 MHz Band III	159	5.795	14.5	28	13.5	13.5	13.5	13.5
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 80 MHz Band I	42	5.21	14.5	28	12.8	12.8	12.8	12.8
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 80 MHz Band III	155	5.775	14.5	28	13.5	13.5	13.5	13.5
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11 n 2.4 GHz 20 MHz	11	2.462	16.5	45	14.1	14.1	14.1	14.1
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11 n 2.4 GHz 40 MHz	11	2.462	15.5	35	11	11	11	11
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 20 MHz Band I	48	5.24	15.5	35	16	16	16	16
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 20 MHz Band III	165	5.825	15.5	35	16.9	16.9	16.9	16.9
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 40 MHz Band I	46	5.23	14.5	28	12.8	12.8	12.8	12.8
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 40 MHz Band III	159	5.795	14.5	28	13.5	13.5	13.5	13.5
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 80 MHz Band I	42	5.21	14	25	11.4	11.4	11.4	11.4
						MEASURE	MEASURE	MEASURE	MEASURE
	IEEE 802.11ac 80 MHz Band III	155	5.775	14	25	12	12	12	12
						MEASURE	MEASURE	MEASURE	MEASURE

- Note: 1. Calculated Value include string "mW",that is mean through comapre output power with threshold,if the output power more than threshold value the SAR test should be perform. Otherwise,the SAR test could be exempt. (> 50 mm).
- 2.Calculated Value only include number format,that is mean through comapre output power with threshold,if the Calculated value more than 3 the SAR test should be perform. Otherwise,the SAR test could be exempt. (<50 mm).

3. When an antenna qualifies for the standalone SAR test exclusion of KDB 447498 section 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to KDB 447498 section "4.3.2. Simultaneous transmission SAR test exclusion considerations b) ".
4. The ch and frequency used highest frequency, that result should be evaluated the worst case.
5. Power and distance are rounded to the nearest mW and mm before calculation.
6. The result is rounded to one decimal place for comparison.

6.5 Simultaneous Transmitting Evaluate

Simultaneous transmission configurations as below:

Condition	Side	Frequency Band	
		WLAN_ANT-0	WLAN_ANT-1
1	Horizontal-UP	V	V
2	Horizontal-Down	V	V
3	Vertical-Front	V	V
4	Vertical-Back	V	V

6.5.1 Sum of 1-g SAR of all simultaneously transmitting

When the sum of 1-g SAR of all simultaneously transmitting antennas in and operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

Sum of 1-g SAR of summary as below:

Phantom Position		Spacing (mm)	ASSY	WLAN_ANT-0		WLAN_ANT-1		$\sum SAR^{1g}$ (W/kg)	Event
				Band	SAR^{1g} (W/kg)	Band	SAR^{1g} (W/kg)		
Flat	Horizontal-UP	5	N/A	IEEE 802.11ac	0.33	IEEE 802.11ac	0.34	0.67	<1.6
Flat	Horizontal-Down	5	USB cable	IEEE 802.11ac	0.29	IEEE 802.11ac	0.74	1.03	<1.6
Flat	Vertical-Front	5	USB cable	IEEE 802.11ac	0.18	IEEE 802.11ac	0.48	0.66	<1.6
Flat	Vertical-Back	5	N/A	IEEE 802.11ac	0.32	IEEE 802.11ac	0.3	0.62	<1.6

Note :1. *=Estimated SAR

2. **The Estimated SAR 0.4 W/Kg , test separation distances is > 50 mm
3. The device is designed to Wi-Fi 2.4 GHz and Wi-Fi 5 GHz can not be transmitted simultaneously, combine SAR is not required.



6.5.2 SAR to peak location separation ratio (SPLSR)

When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

All of sum of SAR < 1.6 W/kg, therefore SPLSR is not required.

6.6 SAR test reduction according to KDB

General:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to FCC, Supplement C [June 2001], IEEE1528-2013.
- All modes of operation were investigated, and worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plots.
- Batteries are fully charged for all readings.
- When the Channel's SAR 1 g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.

KDB 447498:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to IEEE1528-2013.

KDB 865664:

- Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
- When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg.
- Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.


KDB 248227:

- Refer 6.1 SAR Testing with 802.11 Transmitters.

7. System Verification and Validation

7.1 Symmetric Dipoles for System Verification

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	2450, 5200 and 5800 MHz
Return Loss	> 20 dB at specified verification position
Power Capability	> 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D2450V2: dipole length 51.5 mm; overall height 300 mm D5 GHzV2: dipole length 20.6 mm; overall height 300 mm

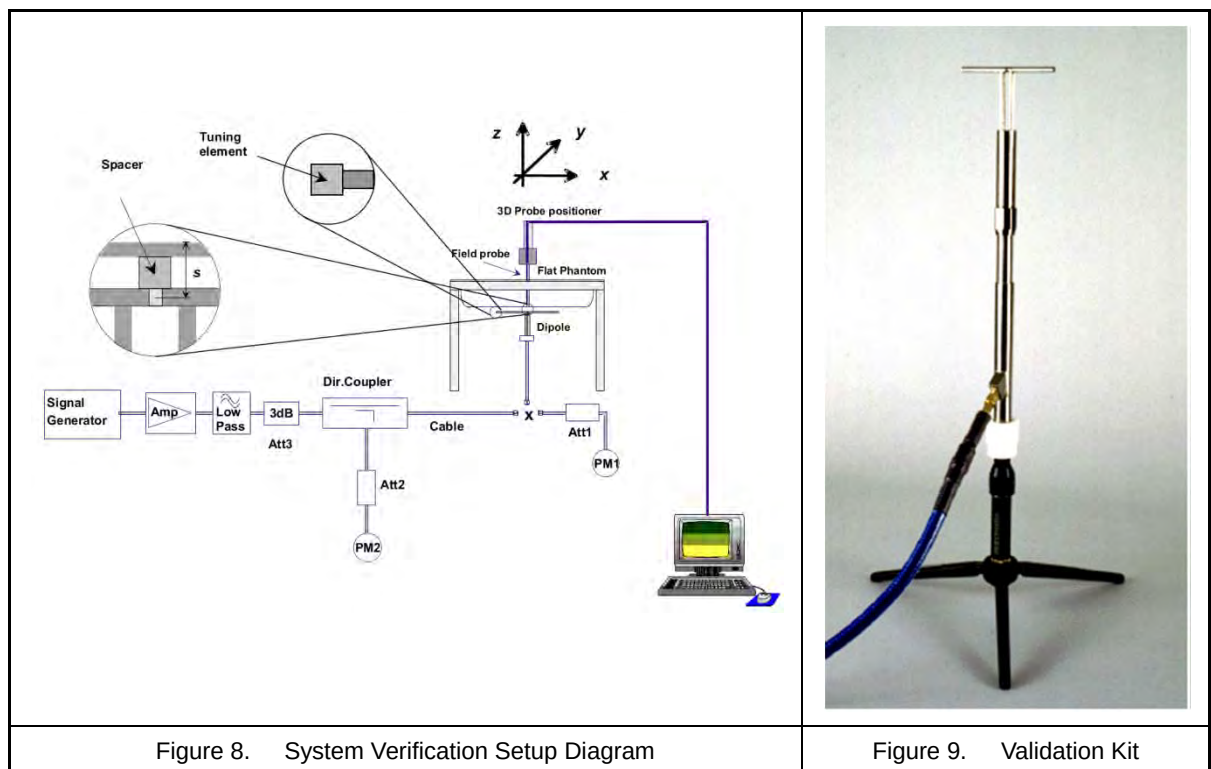

7.2 Liquid Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
2450 MHz (Body)	2400 MHz	22.0	ϵ_r	52.77	52.71	-0.19	± 5	Sep. 05, 2016
			σ	1.902	1.919	1.05	± 5	
	2450 MHz	22.0	ϵ_r	52.70	52.40	-0.57	± 5	
			σ	1.950	1.964	0.51	± 5	
	2500 MHz	22.0	ϵ_r	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
2450 MHz (Body)	2400 MHz	22.0	ϵ_r	52.77	52.71	-0.19	± 5	Oct. 21, 2016
			σ	1.902	1.919	1.05	± 5	
	2450 MHz	22.0	ϵ_r	52.70	52.40	-0.57	± 5	
			σ	1.950	1.964	0.51	± 5	
	2500 MHz	22.0	ϵ_r	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
5200 MHz (Body)	5150 MHz	22.0	ϵ_r	49.08	48.80	-0.61	± 5	Sep. 06, 2016
			σ	5.241	5.167	-1.34	± 5	
	5200 MHz	22.0	ϵ_r	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250 MHz	22.0	ϵ_r	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
5200 MHz (Body)	5150 MHz	22.0	ϵ_r	49.08	48.80	-0.61	± 5	Sep. 07, 2016
			σ	5.241	5.167	-1.34	± 5	
	5200 MHz	22.0	ϵ_r	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250 MHz	22.0	ϵ_r	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
5200 MHz (Body)	5150 MHz	22.0	ϵ_r	49.08	48.80	-0.61	± 5	Sep. 08, 2016
			σ	5.241	5.167	-1.34	± 5	
	5200 MHz	22.0	ϵ_r	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250 MHz	22.0	ϵ_r	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	

Table 3. Measured Tissue dielectric parameters for body phantoms -1

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5200 MHz (Body)	5150 MHz	22.0	ϵ_r	49.08	48.80	-0.61	± 5	Oct. 20, 2016
			σ	5.241	5.167	-1.34	± 5	
	5200 MHz	22.0	ϵ_r	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250 MHz	22.0	ϵ_r	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
5800 MHz (Body)	5750 MHz	22.0	ϵ_r	48.27	47.46	-1.66	± 5	Sep. 06, 2016
			σ	5.942	6.036	1.68	± 5	
	5800 MHz	22.0	ϵ_r	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850 MHz	22.0	ϵ_r	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800 MHz (Body)	5750 MHz	22.0	ϵ_r	48.27	47.46	-1.66	± 5	Sep. 07, 2016
			σ	5.942	6.036	1.68	± 5	
	5800 MHz	22.0	ϵ_r	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850 MHz	22.0	ϵ_r	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800 MHz (Body)	5750 MHz	22.0	ϵ_r	48.27	47.46	-1.66	± 5	Sep. 08, 2016
			σ	5.942	6.036	1.68	± 5	
	5800 MHz	22.0	ϵ_r	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850 MHz	22.0	ϵ_r	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800 MHz (Body)	5750 MHz	22.0	ϵ_r	48.27	47.46	-1.66	± 5	Oct. 19, 2016
			σ	5.942	6.036	1.68	± 5	
	5800 MHz	22.0	ϵ_r	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850 MHz	22.0	ϵ_r	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	

Table 4. Measured Tissue dielectric parameters for body phantoms -2

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5800 MHz (Body)	5750 MHz	22.0	ϵ_r	48.27	47.46	-1.66	± 5	Oct. 20, 2016
			σ	5.942	6.036	1.68	± 5	
	5800 MHz	22.0	ϵ_r	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850 MHz	22.0	ϵ_r	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	

Table 5. Measured Tissue dielectric parameters for body phantoms -3

7.3 Verification Summary

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The verification was performed at 2450 MHz, 5200 MHz and 5800 MHz.

Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (dB)	Difference percentage		Probe Model / Serial No.	Dipole Model / Serial No.	1W Target		Date
						1 g	10 g			SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	
Body	2450	250 mW	12.8	5.98	0	-1.7 %	-2.4 %	EX3DV4 SN:3977	D2450V2 SN:712	52.10	24.50	Sep. 05, 2016
		Normalize to 1 Watt	51.20	23.92								
Body	2450	250 mW	13.1	6.05	0	0.6 %	-1.2 %	EX3DV4 SN:3977	D2450V2 SN:712	52.10	24.50	Oct. 21, 2016
		Normalize to 1 Watt	52.40	24.20								
Body	5200	100 mW	7.45	2.12	0.06	-1.6 %	-0.9 %	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Sep. 06, 2016
		Normalize to 1 Watt	74.50	21.20								
Body	5200	100 mW	7.51	2.13	0.07	-0.8 %	-0.5 %	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Sep. 07, 2016
		Normalize to 1 Watt	75.10	21.30								
Body	5200	100 mW	7.53	2.13	0.04	-0.5 %	-0.5 %	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Sep. 08, 2016
		Normalize to 1 Watt	75.30	21.30								
Body	5200	100 mW	7.89	2.23	0.17	4.2 %	4.2 %	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Oct. 20, 2016
		Normalize to 1 Watt	78.90	22.30								
Body	5800	100 mW	7.52	2.11	-0.18	-2.7 %	-1.4 %	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Sep. 06, 2016
		Normalize to 1 Watt	75.20	21.10								
Body	5800	100 mW	7.46	2.07	-0.03	-3.5 %	-3.3 %	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Sep. 07, 2016
		Normalize to 1 Watt	74.60	20.70								
Body	5800	100 mW	7.65	2.13	0.06	-1.0 %	-0.5 %	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Sep. 08, 2016
		Normalize to 1 Watt	76.50	21.30								
Body	5800	100 mW	7.8	2.16	0.05	0.9 %	0.9 %	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Oct. 19, 2016
		Normalize to 1 Watt	78.00	21.60								
Body	5800	100 mW	7.81	2.16	0.07	1.0 %	0.9 %	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Oct. 20, 2016
		Normalize to 1 Watt	78.10	21.60								



7.4 Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters as below.

Probe Type Model / Serial No.	Prob Cal. Point (MHz)	Head / Body	Cond.	Perm.	CW Validation			Mod. Validation			Date
			εr	σ	Sensitivity	Probe	Probe	Mod. Type	Duty Factor	PAR	
						Linearity	Isotropy				
EX3DV4 SN:3977	2450	Body	52.40	1.964	Pass	Pass	Pass	DSSS/OFDM	N/A	Pass	Sep. 05, 2016
EX3DV4 SN:3977	2450	Body	52.40	1.964	Pass	Pass	Pass	DSSS/OFDM	N/A	Pass	Oct. 21, 2016
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 06, 2016
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 07, 2016
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 08, 2016
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 20, 2016
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 06, 2016
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 07, 2016
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 08, 2016
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 19, 2016
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 20, 2016



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450 MHz System Validation Kit	D2450V2	712	Apr. 01, 2016	Apr. 01, 2017
SPEAG	5 GHz System Validation Kit	D5GHZV2	1021	Apr. 08, 2016	Apr. 08, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3977	Mar. 09, 2016	Mar. 09, 2017
SPEAG	Data Acquisition Electronics	DAE4	779	Mar. 02, 2016	Mar. 02, 2017
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
SPEAG	Phantom (ELI V4.0)	QDOVA001BB	1036	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY52 V52.8 (8)	N/A	NCR	
SPEAG	Software	SEMCAD X V14.6.10 (7331)	N/A	NCR	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	Apr. 13, 2016	Apr. 13, 2017
R&S	Power Sensor	NRP-Z22	100179	NCR	
Agilent	Power Sensor	8481H	3318A20779	Jun. 06, 2016	Jun. 06, 2017
Agilent	Power Meter	EDM Series E4418B	GB40206143	Jun. 06, 2016	Jun. 06, 2017
Anritsu	Power Meter	ML2495A	1135009	Aug. 24, 2016	Aug. 24, 2017
Agilent	MXF-G-B RF Vector Signal Generator	N5182B	MY53050382	May 20, 2016	May 20, 2017
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	
Aisi	Attenuator	IEAT 3dB	N/A	NCR	

Table 6. Test Equipment List

9. Measurement Uncertainty

Uncertainty of a Measure SAR of EUT with DASY System

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	C_i (1 g)	C_i (10 g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	$\pm 6.0 \%$	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
u2	Axial Isotropy	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9 \%$	$\pm 1.9 \%$	∞
u3	Hemispherical Isotropy	$\pm 9.6 \%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
u4	Boundary Effect	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$	∞
u5	Linearity	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7 \%$	$\pm 2.7 \%$	∞
u6	System Detection Limit	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$	∞
u7	Readout Electronics	$\pm 0.3 \%$	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
u8	Response Time	$\pm 0.8 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$	∞
u9	Integration Time	$\pm 1.9 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.1 \%$	$\pm 1.1 \%$	∞
u10	RF Ambient Conditions	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
u11	RF Ambient Reflections	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
u12	Probe Positioner Mechanical Tolerance	$\pm 0.4 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2 \%$	$\pm 0.2 \%$	∞
u13	Probe Positioning with respect to Phantom Shell	$\pm 2.9 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$	∞
Test sample Related									
u15	Test sample Positioning	$\pm 2.9 \%$	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	89
u16	Device Holder Uncertainty	$\pm 3.6 \%$	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
u17	Output Power Variation - SAR drift measurement	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
u19	Liquid Conductivity - deviation from target values	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
u20	Liquid Conductivity - measurement uncertainty	$\pm 2.5 \%$	Normal	1	0.64	0.43	$\pm 1.6 \%$	$\pm 1.08 \%$	69
u21	Liquid Permittivity - deviation from target values	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
u22	Liquid Permittivity - measurement uncertainty	$\pm 2.5 \%$	Normal	1	0.6	0.49	$\pm 1.5 \%$	$\pm 1.23 \%$	69
Combined standard uncertainty			RSS				$\pm 10.94 \%$	$\pm 10.71 \%$	380
Expanded uncertainty (95 % CONFIDENCE LEVEL)			$k=2$				$\pm 21.88 \%$	$\pm 21.41 \%$	

Table 7. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Uncertainty of a Measure SAR of EUT with DASY System

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	C_i (1 g)	C_i (10 g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	$\pm 6.5 \%$	Normal	1	1	1	$\pm 6.5 \%$	$\pm 6.5 \%$	∞
u2	Axial Isotropy	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9 \%$	$\pm 1.9 \%$	∞
u3	Hemispherical Isotropy	$\pm 9.6 \%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
u4	Boundary Effect	$\pm 2.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
u5	Linearity	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7 \%$	$\pm 2.7 \%$	∞
u6	System Detection Limit	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$	∞
u7	Readout Electronics	$\pm 0.0 \%$	Normal	1	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
u8	Response Time	$\pm 0.8 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$	∞
u9	Integration Time	$\pm 2.8 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.8 \%$	$\pm 2.8 \%$	∞
u10	RF Ambient Conditions	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
u11	RF Ambient Reflections	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
u12	Probe Positioner Mechanical Tolerance	$\pm 0.7 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.7 \%$	$\pm 0.7 \%$	∞
u13	Probe Positioning with respect to Phantom Shell	$\pm 9.9 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 5.7 \%$	$\pm 5.7 \%$	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Test sample Related									
u15	Test sample Positioning	$\pm 2.9 \%$	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	89
u16	Device Holder Uncertainty	$\pm 3.6 \%$	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
u17	Output Power Variation - SAR drift measurement	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0 \%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
u19	Liquid Conductivity - deviation from target values	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
u20	Liquid Conductivity - measurement uncertainty	$\pm 2.5 \%$	Normal	1	0.64	0.43	$\pm 1.6 \%$	$\pm 1.08 \%$	69
u21	Liquid Permittivity - deviation from target values	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
u22	Liquid Permittivity - measurement uncertainty	$\pm 2.5 \%$	Normal	1	0.6	0.49	$\pm 1.5 \%$	$\pm 1.23 \%$	69
Combined standard uncertainty			RSS				$\pm 12.68 \%$	$\pm 12.48 \%$	700
Expanded uncertainty (95 % CONFIDENCE LEVEL)			$k=2$				$\pm 25.37 \%$	$\pm 24.97 \%$	

Table 8. Uncertainty Budget for frequency range 3 GHz to 6 GHz

10. Measurement Procedure

The measurement procedures are as follows:

1. For WLAN function, engineering testing software installed on Notebook can provide continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1 g and 10 g



10.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

Grid Type	Frequency		Step size (mm)			X*Y*Z (Point)	Cube size			Step size		
			X	Y	Z		X	Y	Z	X	Y	Z
uniform grid	≤ 3 GHz	≤ 2 GHz	≤ 8	≤ 8	≤ 5	5*5*7	32	32	30	8	8	5
		2G - 3G	≤ 5	≤ 5	≤ 5	7*7*7	30	30	30	5	5	5
	3 – 6 GHz	3 - 4GHz	≤ 5	≤ 5	≤ 4	7*7*8	30	30	28	5	5	4
		4 - 5 GHz	≤ 4	≤ 4	≤ 3	8*8*10	28	28	27	4	4	3
		5 - 6GHz	≤ 4	≤ 4	≤ 2	8*8*12	28	28	22	4	4	2

(Our measure settings are refer KDB Publication 865664 D01v01r04)

10.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1 g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5 %, the SAR will be retested.



11. SAR Test Results Summary

1. According KDB 447498 D01 V06 section 4.1.4, the "Reported" explanation as below:
"When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported."
2. If actual power less than tune-up power that Scaling SAR is required.
3. The formula of Reported SAR, that represent as below:
$$\text{Reported SAR} = \text{Original SAR} * 10^{[(\text{Tune-up power} - \text{Actual power})/10]}$$
4. When the reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required for IEEE 802.11b DSSS.
5. When SAR measurement is required for 2.4 GHz IEEE 802.11 g OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - (a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - (b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
6. Considering the sum of simultaneous transmission, so the n/ac mode must perform the test.
7. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the IEEE 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band.
8. SAR is measured using the highest measured maximum output power channel.
9. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.
10. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
11. We used the worst-case position to test TX BF ON configurations with highest power. The results show that all SAR1 g are smaller than TX BF OFF.

11.1 Head Measurement SAR

Evaluated head SAR is not available.

11.2 Body Measurement SAR

WLAN ANT-0 test results											
Index.	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#1	Flat	IEEE 802.11b	11	1	Horizontal-UP	5	0.023	-0.16	14.45	14.5	0.02
#2	Flat	IEEE 802.11b	11	1	Horizontal-Down (with USB cable)	5	0.046	0.16	14.45	14.5	0.05
#3	Flat	IEEE 802.11b	11	1	Vertical-Front (with USB cable)	5	0.014	0.04	14.45	14.5	0.01
#4	Flat	IEEE 802.11b	11	1	Vertical-Back	5	0.039	0.02	14.45	14.5	0.04
#5	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Horizontal-UP	5	0.017	-0.03	15.46	15.5	0.02
#87	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Horizontal-Down (with USB cable)	5	0.04	-0.13	15.46	15.5	0.04
#7	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Vertical-Front (with USB cable)	5	0.00889	0.14	15.46	15.5	0.01
#8	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Vertical-Back	5	0.026	0.15	15.46	15.5	0.03
#6	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Horizontal-Down (with USB cable) BF ON	5	0.028	-0.11	15.73	16	0.03
#17	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Horizontal-UP	5	0.017	0.12	15.45	15.5	0.02
#18	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Horizontal-Down (with USB cable)	5	0.041	0	15.45	15.5	0.04
#19	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Vertical-Front (with USB cable)	5	0.033	0.08	15.45	15.5	0.03
#20	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Vertical-Back	5	0.022	0.09	15.45	15.5	0.02
#88	Flat	IEEE 802.11n 2.4 GHz 40 MHz	6	13.5	Horizontal-Down (with USB cable) BF ON	5	0.039	-0.12	15.26	15.5	0.04

WLAN ANT-0 test results											
Index.	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#53	Flat	IEEE 802.11a	40	6	Horizontal-UP	5	0.04	0.13	15.08	15.5	0.04
#54	Flat	IEEE 802.11a	40	6	Horizontal-Down (with USB cable)	5	0.056	-0.12	15.08	15.5	0.06
#55	Flat	IEEE 802.11a	40	6	Vertical-Front (with USB cable)	5	0.03	-0.09	15.08	15.5	0.03
#56	Flat	IEEE 802.11a	40	6	Vertical-Back	5	0.024	-0.08	15.08	15.5	0.03
#57	Flat	IEEE 802.11a	153	6	Horizontal-UP	5	0.189	0.04	14.32	15.5	0.25
#58	Flat	IEEE 802.11a	153	6	Horizontal-Down (with USB cable)	5	0.173	-0.01	14.32	15.5	0.23
#59	Flat	IEEE 802.11a	153	6	Vertical-Front (with USB cable)	5	0.085	0.1	14.32	15.5	0.11
#60	Flat	IEEE 802.11a	153	6	Vertical-Back	5	0.093	-0.16	14.32	15.5	0.12
#21	Flat	IEEE 802.11ac 20 MHz	44	6.5	Horizontal-UP	5	0.261	-0.04	13.75	14.5	0.31
#22	Flat	IEEE 802.11ac 20 MHz	44	6.5	Horizontal-Down (with USB cable)	5	0.038	-0.11	13.75	14.5	0.05
#23	Flat	IEEE 802.11ac 20 MHz	44	6.5	Vertical-Front (with USB cable)	5	0.029	-0.02	13.75	14.5	0.03
#24	Flat	IEEE 802.11ac 20 MHz	44	6.5	Vertical-Back	5	0.02	0.02	13.75	14.5	0.02
#73	Flat	IEEE 802.11ac 20 MHz	40	6.5	Horizontal-UP BF ON	5	0.246	-0.14	14.65	15	0.27
#25	Flat	IEEE 802.11ac 20 MHz	161	6.5	Horizontal-UP	5	0.227	-0.04	14.3	14.5	0.24
#26	Flat	IEEE 802.11ac 20 MHz	161	6.5	Horizontal-Down (with USB cable)	5	0.063	-0.06	14.3	14.5	0.07
#27	Flat	IEEE 802.11ac 20 MHz	161	6.5	Vertical-Front (with USB cable)	5	0.027	-0.16	14.3	14.5	0.03
#28	Flat	IEEE 802.11ac 20 MHz	161	6.5	Vertical-Back	5	0.075	-0.18	14.3	14.5	0.08
#74	Flat	IEEE 802.11ac 20 MHz	161	6.5	Horizontal-UP BF ON	5	0.21	-0.18	14.43	15	0.24



WLAN ANT-0 test results											
Index.	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#37	Flat	IEEE 802.11ac 40 MHz	46	13.5	Horizontal-UP	5	0.05	-0.19	14.22	14.5	0.05
#38	Flat	IEEE 802.11ac 40 MHz	46	13.5	Horizontal-Down (with USB cable)	5	0.21	0.13	14.22	14.5	0.22
#39	Flat	IEEE 802.11ac 40 MHz	46	13.5	Vertical-Front (with USB cable)	5	0.053	-0.14	14.22	14.5	0.06
#40	Flat	IEEE 802.11ac 40 MHz	46	13.5	Vertical-Back	5	0.024	-0.03	14.22	14.5	0.03
#75	Flat	IEEE 802.11ac 40 MHz	46	13.5	Horizontal-Down (with USB cable) BF ON	5	0.07	-0.15	14.24	14.5	0.07
#41	Flat	IEEE 802.11ac 40 MHz	159	13.5	Horizontal-UP	5	0.32	-0.09	14.34	14.5	0.33
#42	Flat	IEEE 802.11ac 40 MHz	159	13.5	Horizontal-Down (with USB cable)	5	0.277	-0.06	14.34	14.5	0.29
#43	Flat	IEEE 802.11ac 40 MHz	159	13.5	Vertical-Front (with USB cable)	5	0.17	-0.12	14.34	14.5	0.18
#44	Flat	IEEE 802.11ac 40 MHz	159	13.5	Vertical-Back	5	0.071	0.1	14.34	14.5	0.07
#76	Flat	IEEE 802.11ac 40 MHz	159	13.5	Horizontal-UP BF ON	5	0.244	0.1	14.04	14.5	0.27
#61	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-UP	5	0.049	-0.19	13.06	13.5	0.05
#62	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-Down (with USB cable)	5	0.231	0.13	13.06	13.5	0.26
#63	Flat	IEEE 802.11ac 80 MHz	42	29.3	Vertical-Front (with USB cable)	5	0.135	-0.12	13.06	13.5	0.15
#64	Flat	IEEE 802.11ac 80 MHz	42	29.3	Vertical-Back	5	0.093	0.1	13.06	13.5	0.10
#65	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-Down (with USB cable) BF ON	5	0.22	-0.06	10.25	10.5	0.23
#91	Flat	IEEE 802.11ac 80 MHz	155	29.3	Horizontal-UP	5	0.147	-0.13	12.68	13.5	0.18
#92	Flat	IEEE 802.11ac 80 MHz	155	29.3	Horizontal-Down (with USB cable)	5	0.177	0.11	12.68	13.5	0.21
#93	Flat	IEEE 802.11ac 80 MHz	155	29.3	Vertical-Front (with USB cable)	5	0.022	-0.07	12.68	13.5	0.03
#94	Flat	IEEE 802.11ac 80 MHz	155	29.3	Vertical-Back	5	0.268	0.14	12.68	13.5	0.32
#95	Flat	IEEE 802.11ac 80 MHz	155	29.3	Vertical-Back BF ON	5	0.257	0.09	14.24	14.5	0.27

WLAN ANT-1 test results											
Index.	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#9	Flat	IEEE 802.11n 2.4 GHz 20 MHz	1	6.5	Horizontal-UP	5	0.011	0.08	15.49	15.5	0.01
#10	Flat	IEEE 802.11n 2.4 GHz 20 MHz	1	6.5	Horizontal-Down (with USB cable)	5	0.033	0.12	15.49	15.5	0.03
#11	Flat	IEEE 802.11n 2.4 GHz 20 MHz	1	6.5	Vertical-Front (with USB cable)	5	0.00245	-0.13	15.49	15.5	0.00
#12	Flat	IEEE 802.11n 2.4 GHz 20 MHz	1	6.5	Vertical-Back	5	0.013	-0.06	15.49	15.5	0.01
#89	Flat	IEEE 802.11n 2.4 GHz 20 MHz	6	6.5	Horizontal-Down (with USB cable) BF ON	5	0.028	-0.11	16.36	16.5	0.03
#13	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Horizontal-UP	5	0.00873	-0.06	15.48	15.5	0.01
#14	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Horizontal-Down (with USB cable)	5	0.014	0.07	15.48	15.5	0.01
#15	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Vertical-Front (with USB cable)	5	0.0021	-0.13	15.48	15.5	0.00
#16	Flat	IEEE 802.11n 2.4 GHz 40 MHz	9	13.5	Vertical-Back	5	0.01	0	15.48	15.5	0.01
#90	Flat	IEEE 802.11n 2.4 GHz 40 MHz	6	13.5	Horizontal-Down (with USB cable) BF ON	5	0.00224	-0.19	15.02	15.5	0.00
#29	Flat	IEEE 802.11ac 20 MHz	40	6.5	Horizontal-UP	5	0.338	0.13	15.43	15.5	0.34
#30	Flat	IEEE 802.11ac 20 MHz	40	6.5	Horizontal-Down (with USB cable)	5	0.628	0.11	15.43	15.5	0.64
#31	Flat	IEEE 802.11ac 20 MHz	40	6.5	Vertical-Front (with USB cable)	5	0.463	-0.17	15.43	15.5	0.47
#32	Flat	IEEE 802.11ac 20 MHz	40	6.5	Vertical-Back	5	0.272	0.18	15.43	15.5	0.28
#77	Flat	IEEE 802.11ac 20 MHz	40	6.5	Horizontal-Down (with USB cable) BF ON	5	0.535	-0.15	14.21	14.5	0.57
#33	Flat	IEEE 802.11ac 20 MHz	153	6.5	Horizontal-UP	5	0.202	-0.16	13.94	15.5	0.29
#34	Flat	IEEE 802.11ac 20 MHz	153	6.5	Horizontal-Down (with USB cable)	5	0.514	0	13.94	15.5	0.74
#35	Flat	IEEE 802.11ac 20 MHz	153	6.5	Vertical-Front (with USB cable)	5	0.335	-0.14	13.94	15.5	0.48
#36	Flat	IEEE 802.11ac 20 MHz	153	6.5	Vertical-Back	5	0.104	0.19	13.94	15.5	0.15
#78	Flat	IEEE 802.11ac 20 MHz	157	6.5	Horizontal-Down (with USB cable) BF ON	5	0.505	-0.16	14.26	14.5	0.53

WLAN ANT-1 test results											
Index.	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#45	Flat	IEEE 802.11ac 40 MHz	46	13.5	Horizontal-UP	5	0.0042	-0.18	14.11	14.5	0.00
#46	Flat	IEEE 802.11ac 40 MHz	46	13.5	Horizontal-Down (with USB cable)	5	0.00716	-0.09	14.11	14.5	0.01
#47	Flat	IEEE 802.11ac 40 MHz	46	13.5	Vertical-Front (with USB cable)	5	0.00166	-0.11	14.11	14.5	0.00
#48	Flat	IEEE 802.11ac 40 MHz	46	13.5	Vertical-Back	5	0.276	0.07	14.11	14.5	0.30
#79	Flat	IEEE 802.11ac 40 MHz	46	13.5	Vertical-Back BF ON	5	0.258	-0.14	13.61	14	0.28
#49	Flat	IEEE 802.11ac 40 MHz	151	13.5	Horizontal-UP	5	0.02	0	14.33	14.5	0.02
#50	Flat	IEEE 802.11ac 40 MHz	151	13.5	Horizontal-Down (with USB cable)	5	0.021	0.08	14.33	14.5	0.02
#51	Flat	IEEE 802.11ac 40 MHz	151	13.5	Vertical-Front (with USB cable)	5	0.029	-0.18	14.33	14.5	0.03
#52	Flat	IEEE 802.11ac 40 MHz	151	13.5	Vertical-Back	5	0.114	0.1	14.33	14.5	0.12
#80	Flat	IEEE 802.11ac 40 MHz	151	13.5	Vertical-Back BF ON	5	0.101	-0.11	13.91	14	0.10
#96	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-UP	5	0.09	-0.04	13.15	13.5	0.10
#97	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-Down (with USB cable)	5	0.273	-0.14	13.15	13.5	0.30
#98	Flat	IEEE 802.11ac 80 MHz	42	29.3	Vertical-Front (with USB cable)	5	0.02	0.16	13.15	13.5	0.02
#99	Flat	IEEE 802.11ac 80 MHz	42	29.3	Vertical-Back	5	0.029	-0.04	13.15	13.5	0.03
#100	Flat	IEEE 802.11ac 80 MHz	42	29.3	Horizontal-Down (with USB cable) BF ON	5	0.254	-0.18	10.18	10.5	0.27
#101	Flat	IEEE 802.11ac 80 MHz	155	29.3	Horizontal-UP	5	0.273	-0.12	13.33	13.5	0.28
#102	Flat	IEEE 802.11ac 80 MHz	155	29.3	Horizontal-Down (with USB cable)	5	0.259	0.13	13.33	13.5	0.27
#103	Flat	IEEE 802.11ac 80 MHz	155	29.3	Vertical-Front (with USB cable)	5	0.036	-0.11	13.33	13.5	0.04
#104	Flat	IEEE 802.11ac 80 MHz	155	29.3	Vertical-Back	5	0.074	-0.08	13.33	13.5	0.08
#105	Flat	IEEE 802.11ac 80 MHz	155	29.3	Horizontal-UP BF ON	5	0.241	-0.04	13.53	14	0.27



11.3 Hot-spot mode Measurement SAR

This device is not support Hot-spot function.

11.4 Extremity Measurement SAR

Evaluated extremity SAR is not available.

11.5 Std. C95.1-1992 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 9. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole – body.
- *** The Spatial Average value of the SAR averaged over the partial – body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

12. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Pokovi^C, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Pokovi^C, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz, Jan. 1995.
- [11] IEEE Std 1528™-2013 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques



Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 AM 09:56:56

System Performance Check at 2450MHz_20160905_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 52.402$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 2450MHz/Area Scan (61x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 19.2 W/kg

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 102.3 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 24.9 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.98 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

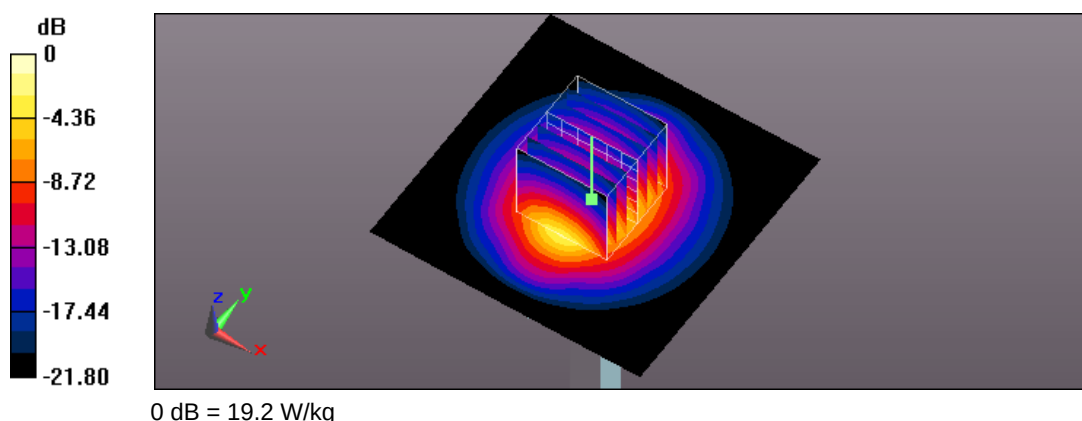

Test Laboratory: A Test Lab Techno Corp.
Date/Time: 2016/10/21 AM 09:42:15

System Performance Check at 2450MHz_20161021_Body
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 52.402$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 2450MHz/Area Scan (61x61x1):
Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 20.1 W/kg

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 102.2 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 27.2 W/kg
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.05 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

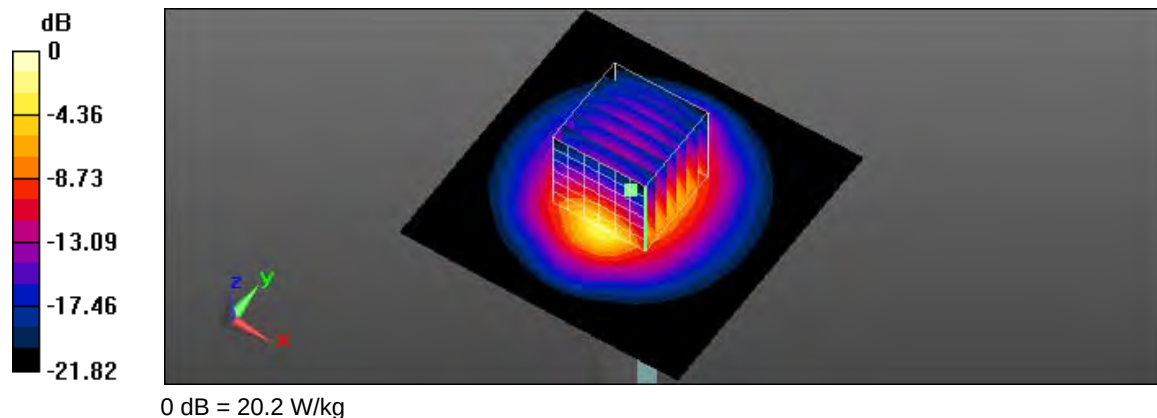



Test Laboratory: A Test Lab Techno Corp.
Date/Time: 2016/9/6 PM 07:32:54

System Performance Check at 5200MHz_20160906_Body
DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021


Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5200MHz/Area Scan (91x91x1):
Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 14.1 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 57.22 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 29.0 W/kg
 $SAR(1\text{ g}) = 7.45$ W/kg; $SAR(10\text{ g}) = 2.12$ W/kg
Maximum value of SAR (measured) = 14.3 W/kg

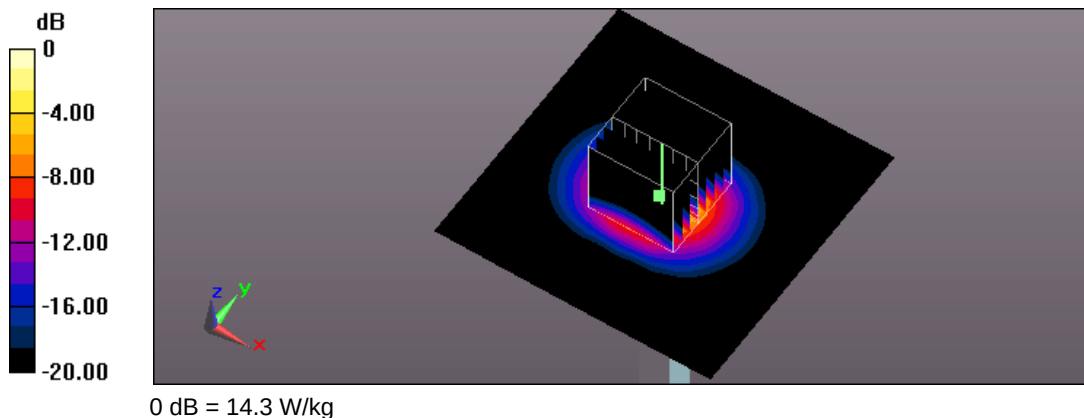



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 07:15:21

System Performance Check at 5200MHz_20160907_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.4 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 57.10 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

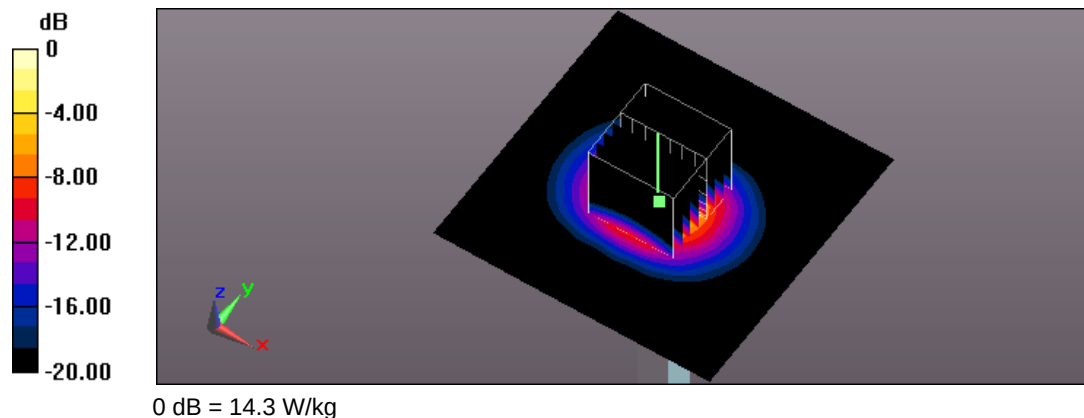



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 08:47:34

System Performance Check at 5200MHz_20160908_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.5 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 57.88 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

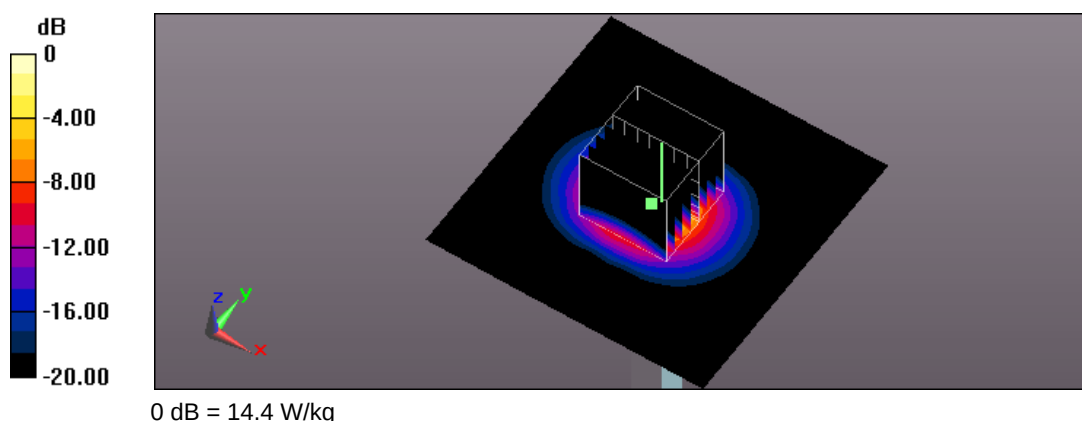

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 03:14:58

System Performance Check at 5200MHz_20161020_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.3 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.82 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

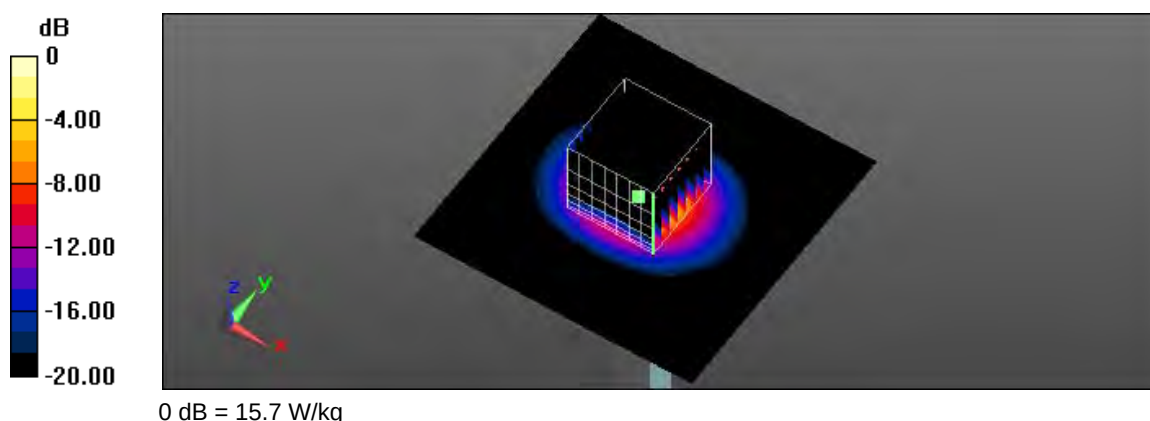

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 PM 08:55:31

System Performance Check at 5800MHz_20160906_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.131$ S/m; $\epsilon_r = 47.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.2 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 55.25 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.52 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

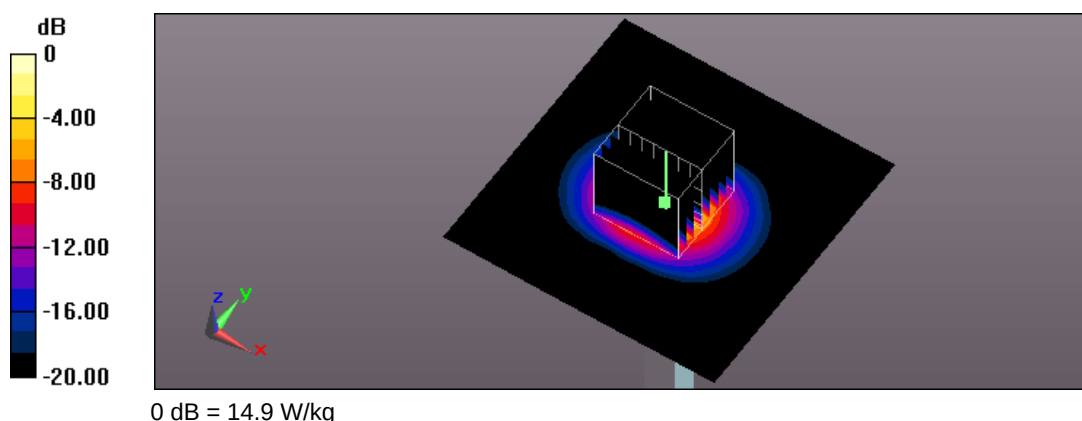



Test Laboratory: A Test Lab Techno Corp.
Date/Time: 2016/9/7 PM 08:12:19

System Performance Check at 5800MHz_20160907_Body
DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 6.131$ S/m; $\epsilon_r = 47.276$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5800MHz/Area Scan (91x91x1):
Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 14.5 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 54.20 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 33.5 W/kg
 $SAR(1\text{ g}) = 7.46$ W/kg; $SAR(10\text{ g}) = 2.07$ W/kg
Maximum value of SAR (measured) = 14.7 W/kg

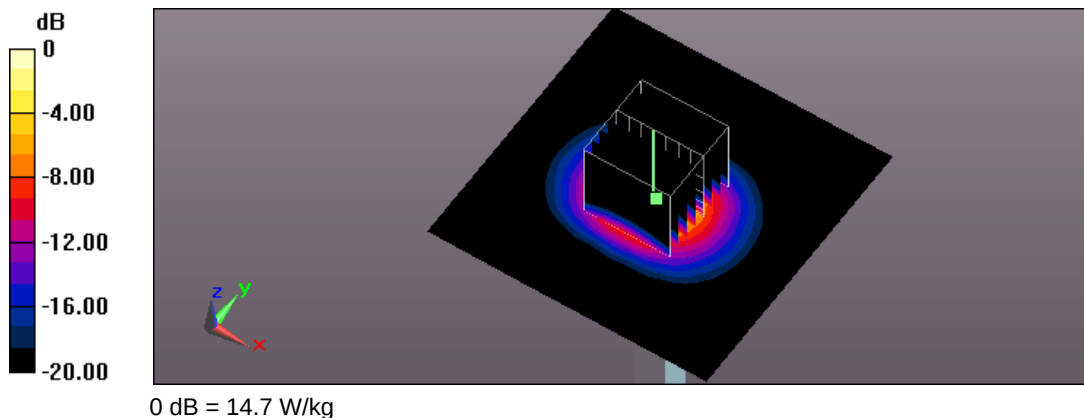



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 09:45:33

System Performance Check at 5800MHz_20160908_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.131$ S/m; $\epsilon_r = 47.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.0 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 55.35 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

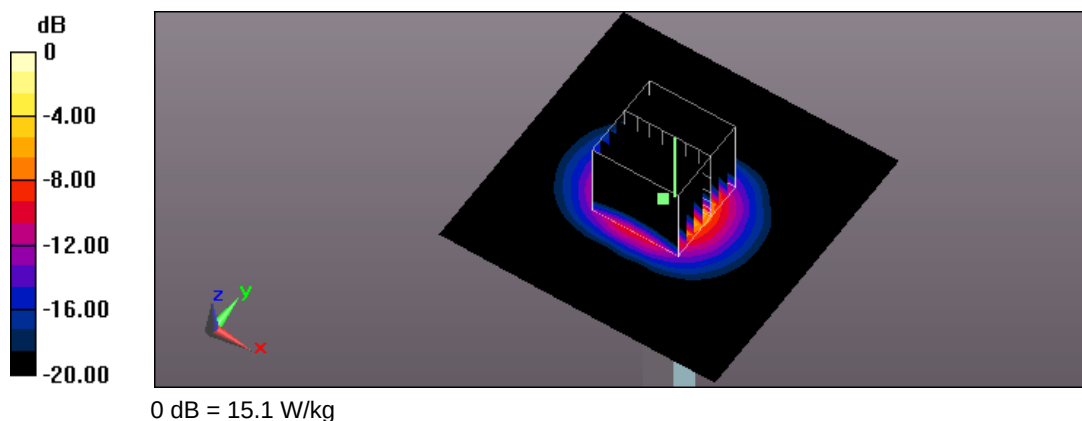

Test Laboratory: A Test Lab Techno Corp.
Date/Time: 2016/10/19 PM 03:06:34

System Performance Check at 5800MHz_20161019_Body
DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 6.131$ S/m; $\epsilon_r = 47.276$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5800MHz/Area Scan (91x91x1):
Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 15.1 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 57.72 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 33.2 W/kg
SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.16 W/kg
Maximum value of SAR (measured) = 15.8 W/kg

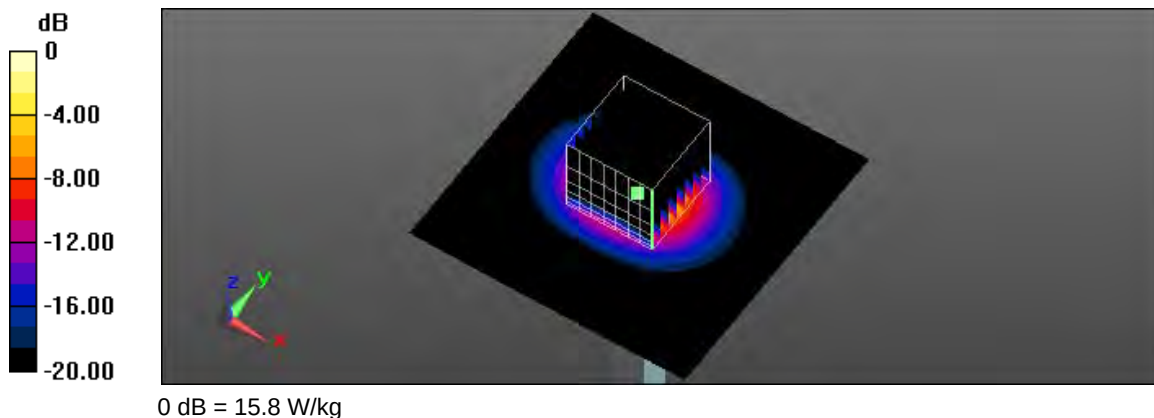

Test Laboratory: A Test Lab Techno Corp.
Date/Time: 2016/10/20 PM 03:41:57

System Performance Check at 5800MHz_20161020_Body
DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 6.131$ S/m; $\epsilon_r = 47.276$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 5800MHz/Area Scan (91x91x1):
Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 15.8 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 57.34 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 33.9 W/kg
SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.16 W/kg
Maximum value of SAR (measured) = 16.0 W/kg

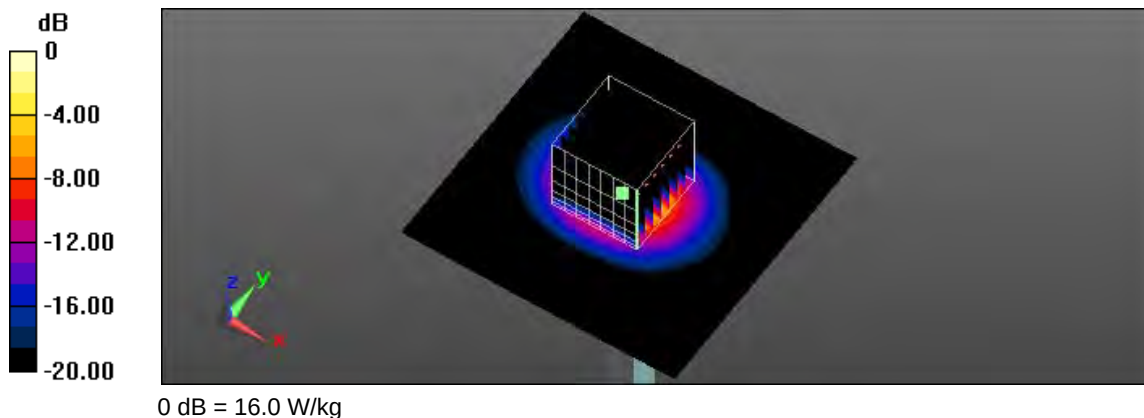



Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 01:31:00

1_802.11b CH11_1M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0517 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.725 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.0087 W/kg

Maximum value of SAR (measured) = 0.0362 W/kg

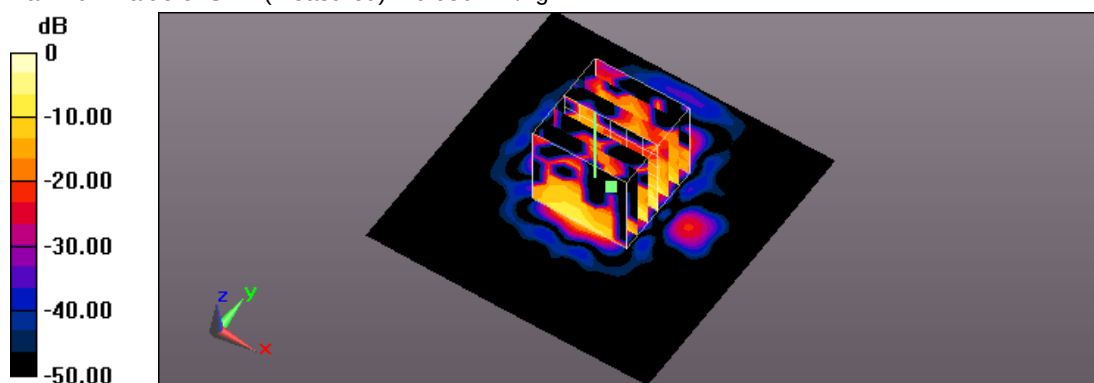

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 02:08:04

2_802.11b CH11_1M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0973 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.359 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0819 W/kg

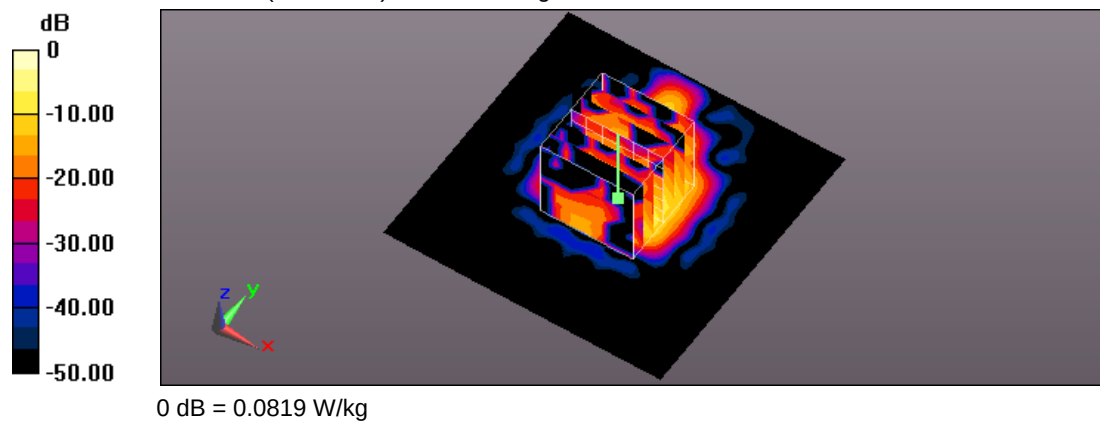

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 02:41:17

3_802.11b CH11_1M_Verical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0304 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.272 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00519 W/kg

Maximum value of SAR (measured) = 0.0221 W/kg

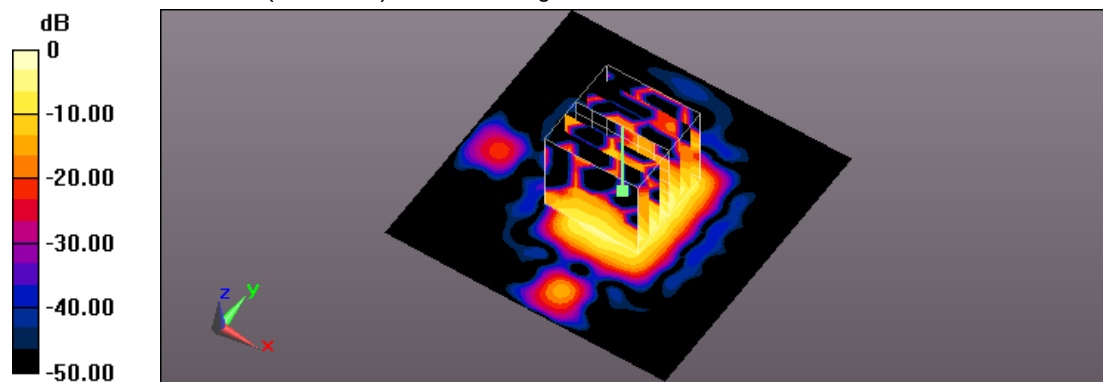

0 dB = 0.0221 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 03:12:04

4_802.11b CH11_1M_Verical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0750 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.440 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0633 W/kg

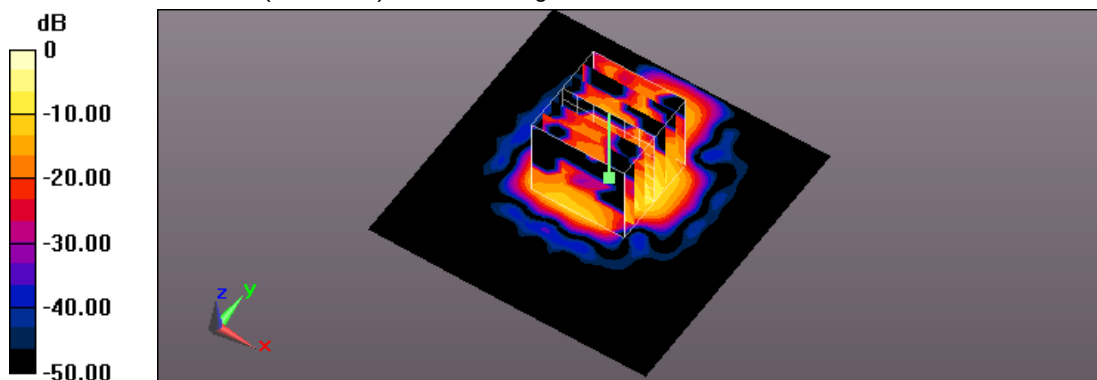

0 dB = 0.0633 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 05:14:52

5_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0325 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.333 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00655 W/kg

Maximum value of SAR (measured) = 0.0262 W/kg

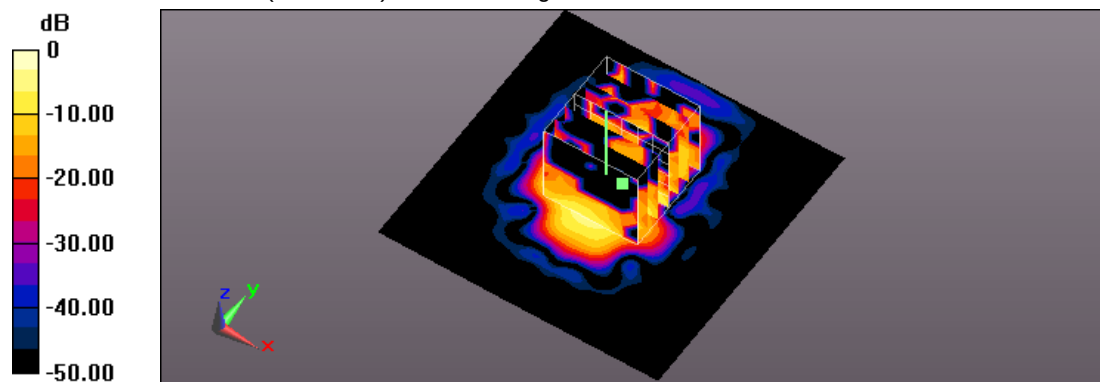

0 dB = 0.0262 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/22 AM 12:10:06

87_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0695 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.429 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0650 W/kg

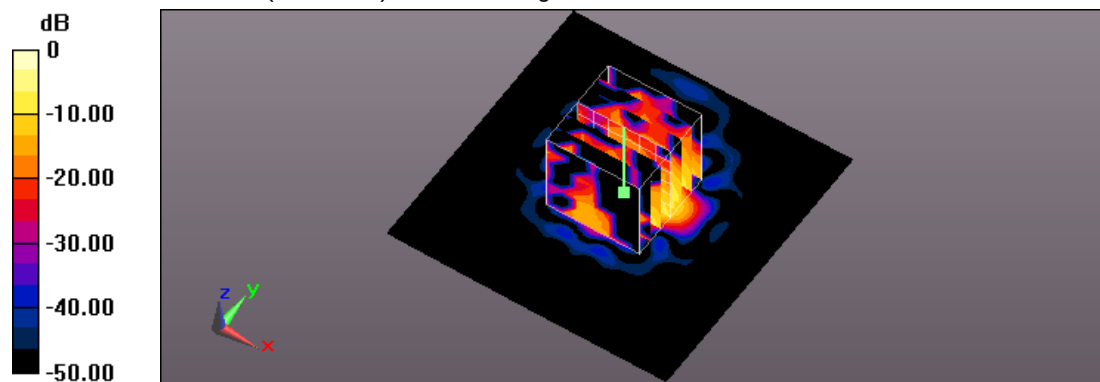

0 dB = 0.0650 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 04:16:07

7_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0264 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.666 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.00889 W/kg; SAR(10 g) = 0.00286 W/kg

Maximum value of SAR (measured) = 0.0154 W/kg

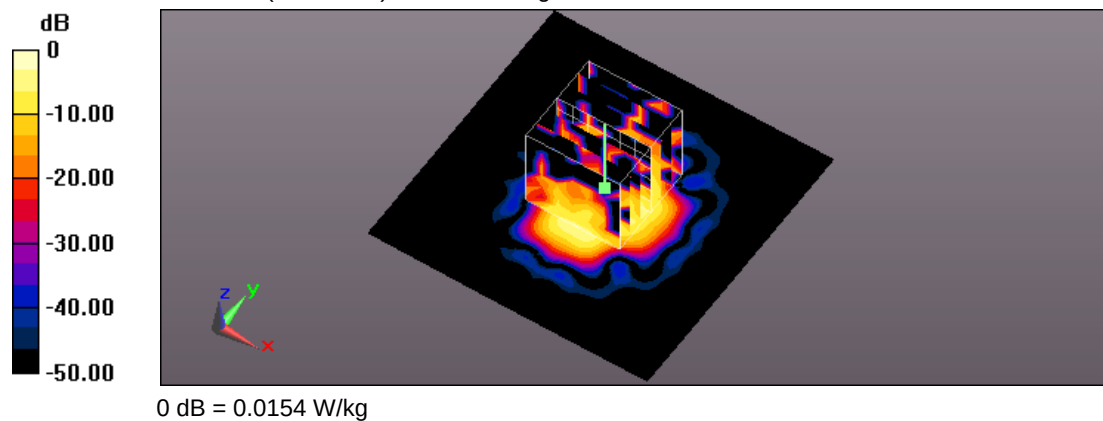

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 03:46:01

8_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Vetical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0562 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.369 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.00946 W/kg

Maximum value of SAR (measured) = 0.0421 W/kg

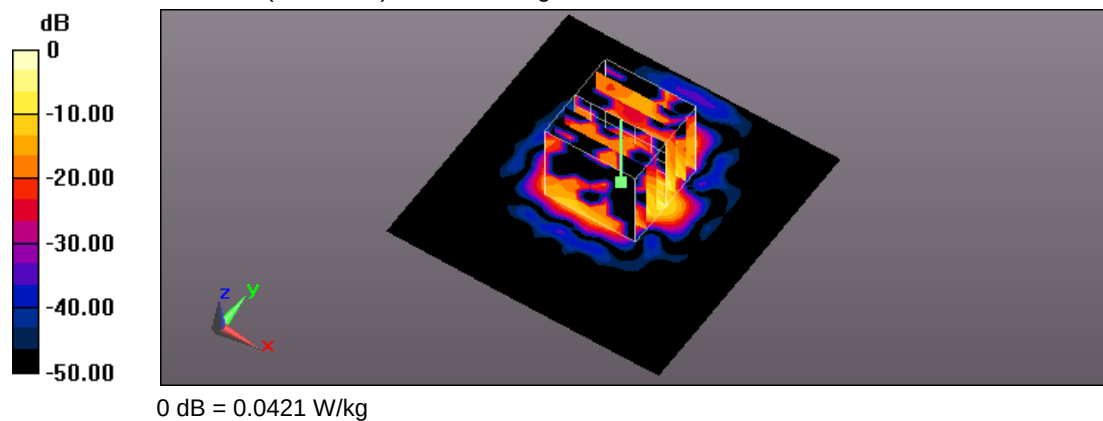

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 04:48:12

6_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0787 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.332 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0497 W/kg

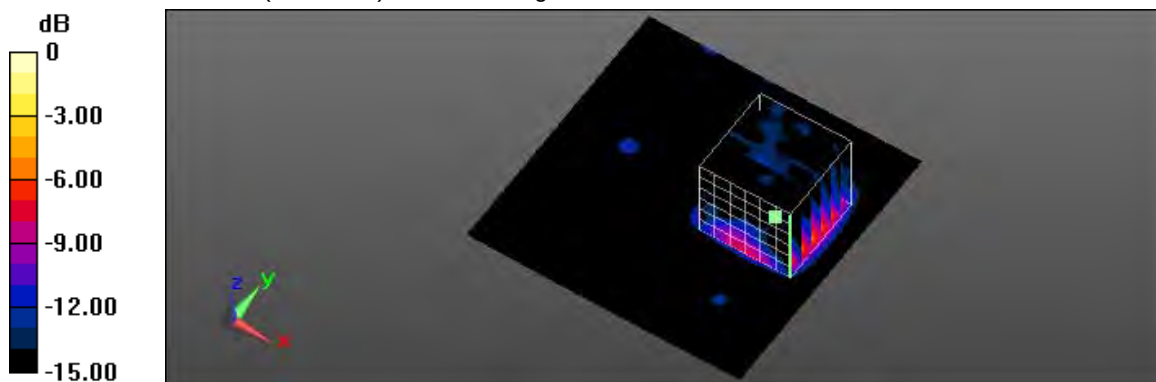

0 dB = 0.0497 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 AM 12:18:18

17_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0375 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.576 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00662 W/kg

Maximum value of SAR (measured) = 0.0262 W/kg

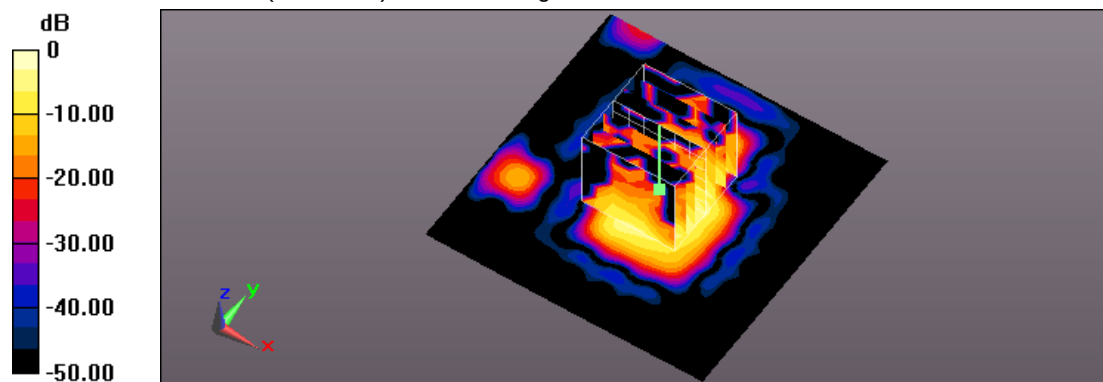

0 dB = 0.0262 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 AM 12:44:59

18_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0887 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.988 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.0993 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0658 W/kg

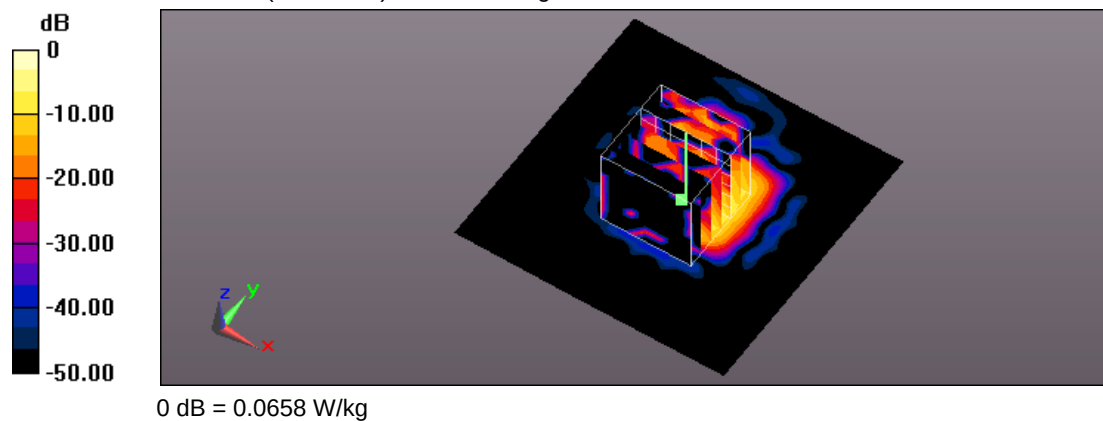

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 AM 09:34:10

19_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0579 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.862 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0508 W/kg

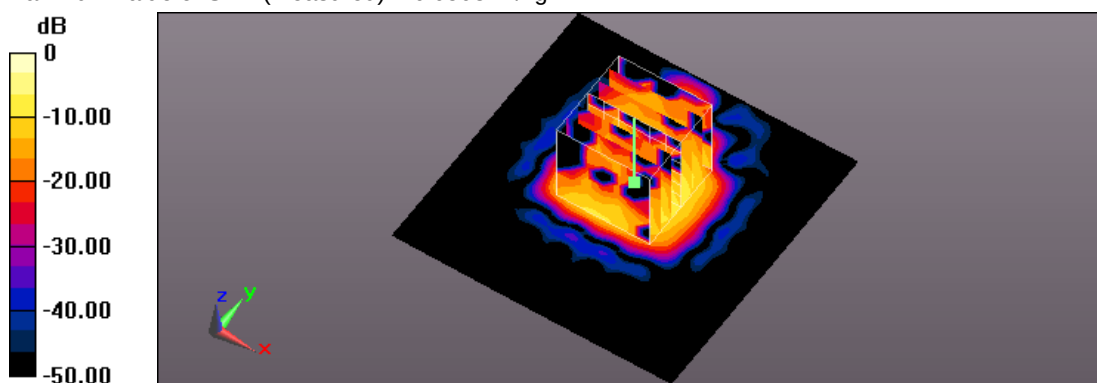

0 dB = 0.0508 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 AM 02:10:22

20_IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Vetical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.966 \text{ S/m}$; $\epsilon_r = 52.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0452 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.595 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00805 W/kg

Maximum value of SAR (measured) = 0.0351 W/kg

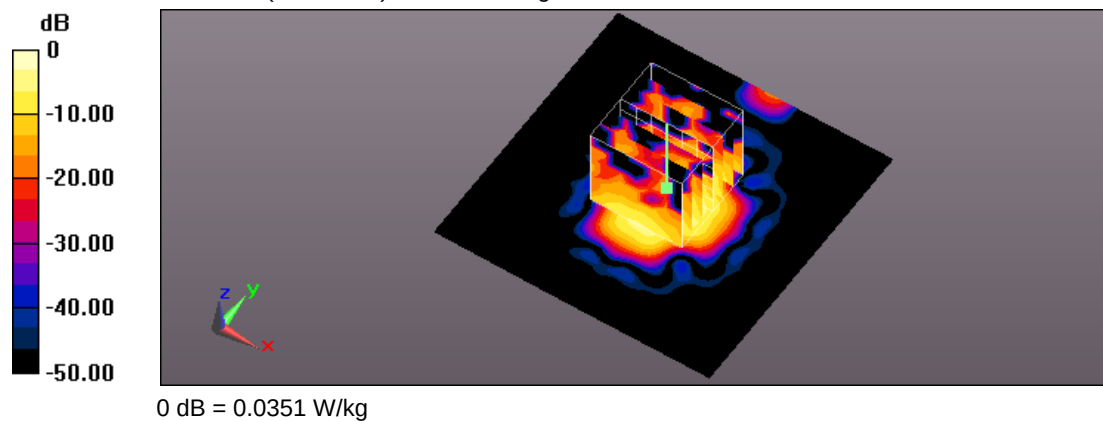

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 PM 10:16:58

88_ IEEE 802.11n 2.4GHz 40MHz CH6_13.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0691 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.492 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0627 W/kg

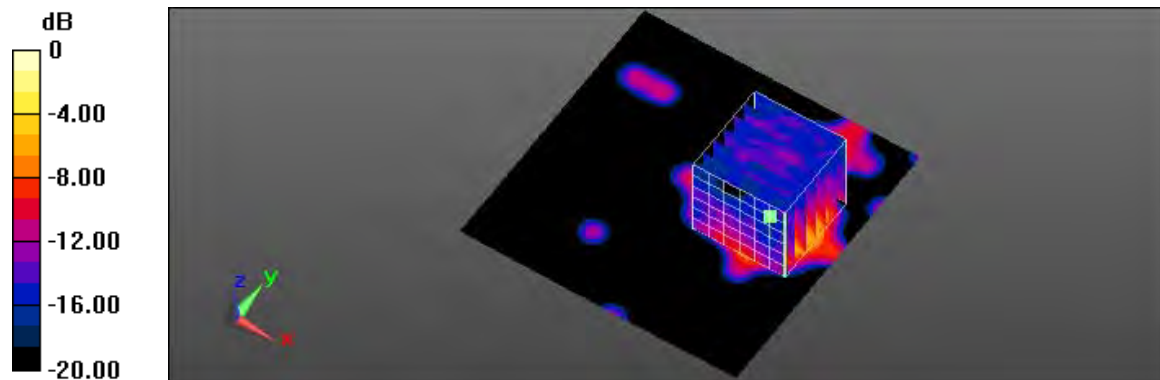

0 dB = 0.0627 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 06:40:46

53_ IEEE 802.11a CH40_6M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.102 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.809 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

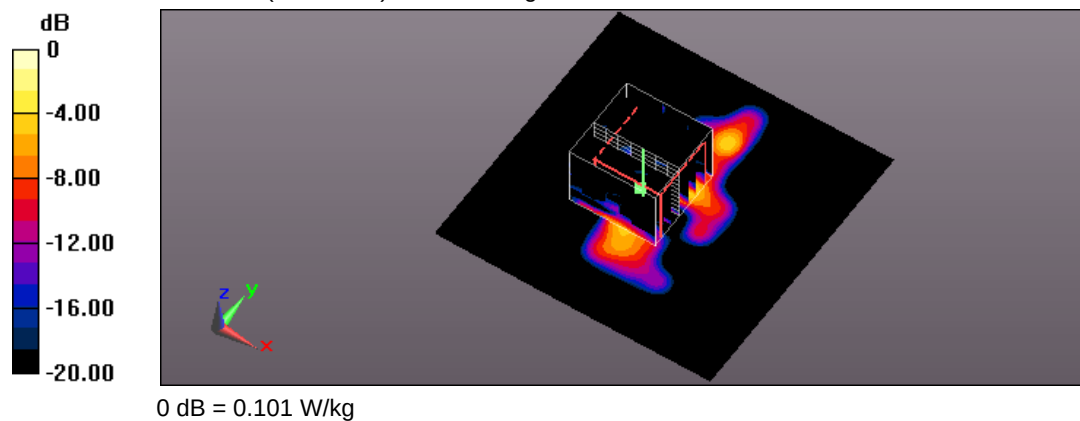

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 05:13:13

54_IEEE 802.11a CH40_6M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.468 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

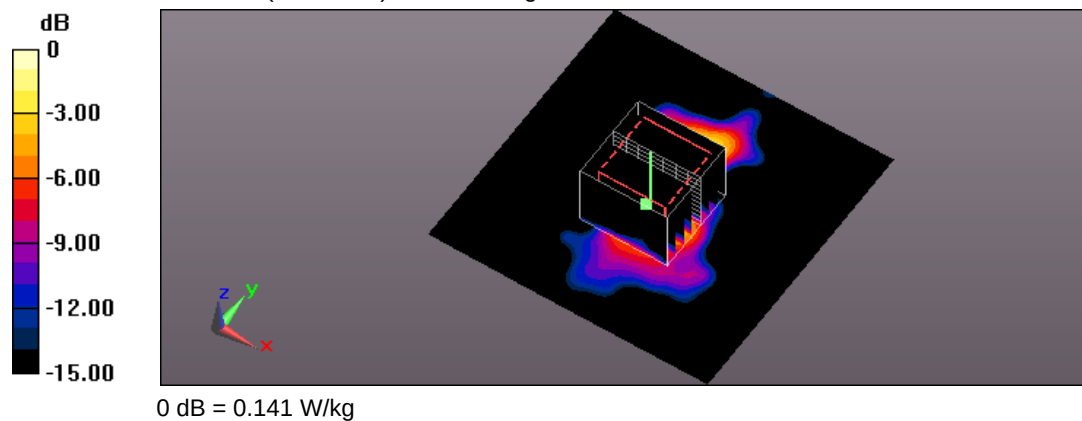

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 02:49:25

55_IEEE 802.11a CH40_6M_Verical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0770 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.679 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.00618 W/kg

Maximum value of SAR (measured) = 0.0828 W/kg

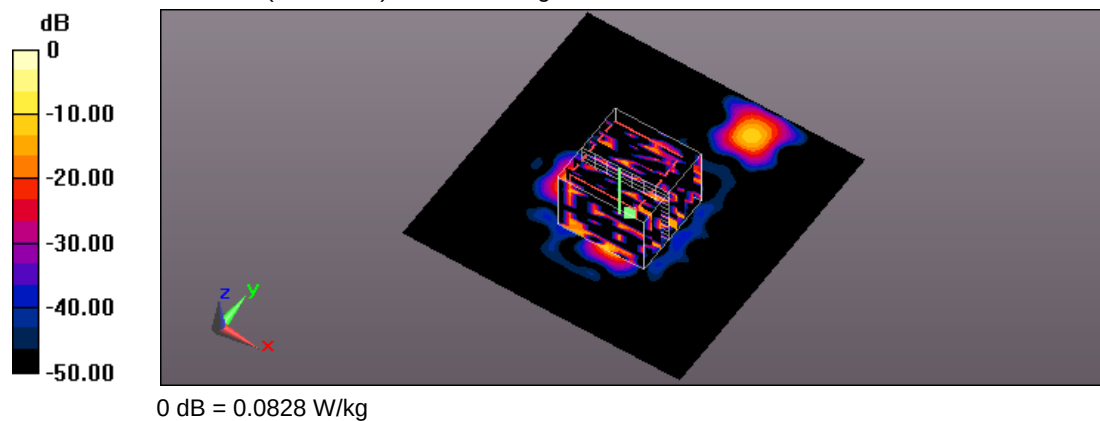

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 12:03:13

56_IEEE 802.11a CH40_6M_Verical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0955 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.813 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.007 W/kg

Maximum value of SAR (measured) = 0.0597 W/kg

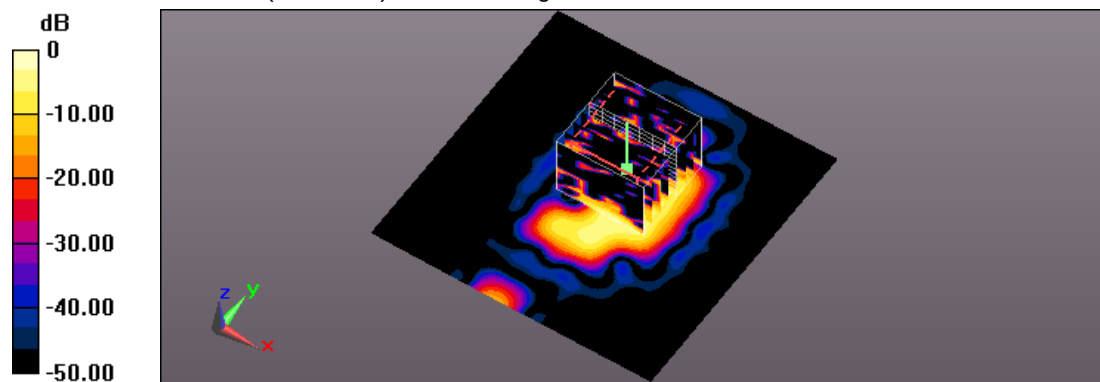

0 dB = 0.0597 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 07:32:01

57_IEEE 802.11a CH153_6M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5765 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.382 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.237 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

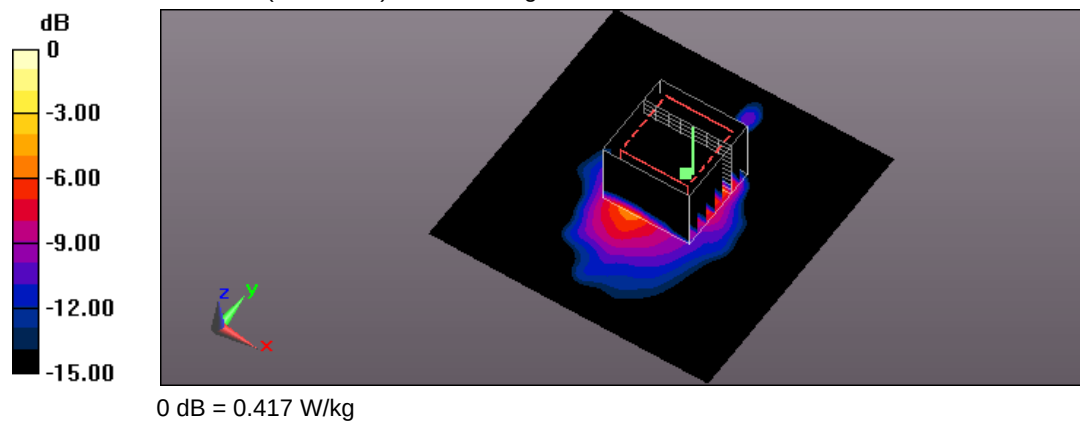

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 04:10:16

58_IEEE 802.11a CH153_6M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5765 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.332 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.607 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.741 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

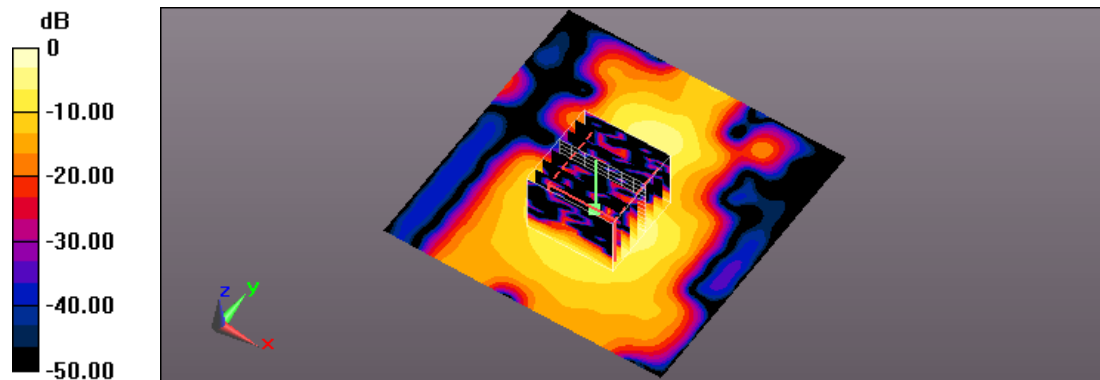

0 dB = 0.379 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 03:26:19

59_IEEE 802.11a CH153_6M_Verical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5765 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.247 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.370 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

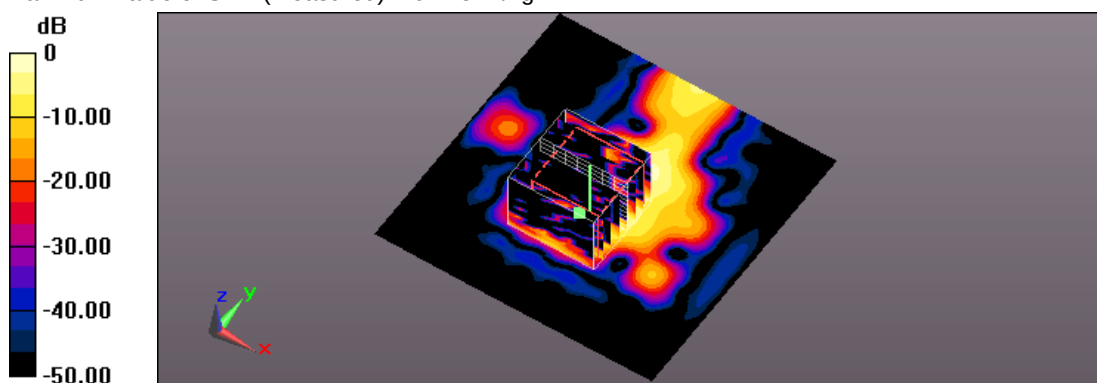

0 dB = 0.213 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 11:25:44

60_IEEE 802.11a CH153_6M_Verical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5765 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765 \text{ MHz}$; $\sigma = 6.055 \text{ S/m}$; $\epsilon_r = 47.374$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.236 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.771 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

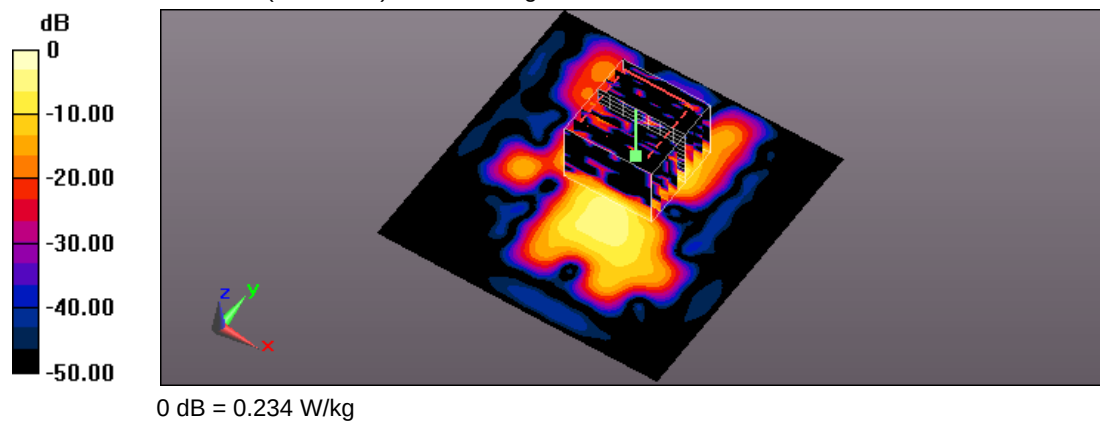

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/6 PM 10:24:52

21_ IEEE 802.11ac 5GHz 20MHz CH44_6.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5220 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.263 \text{ S/m}$; $\epsilon_r = 48.715$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.578 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.179 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

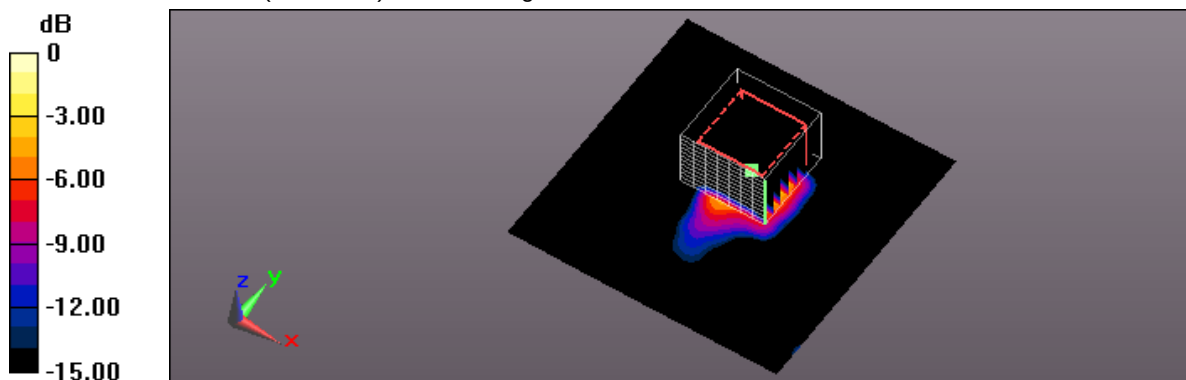

0 dB = 0.481 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 12:05:20

22_ IEEE 802.11ac 5GHz 20MHz CH44_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5220 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.263 \text{ S/m}$; $\epsilon_r = 48.715$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.170 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.285 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0888 W/kg

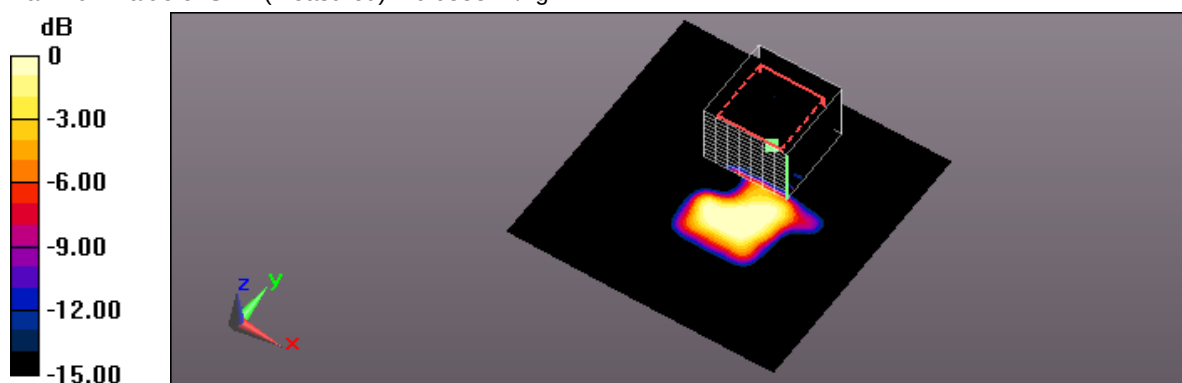

0 dB = 0.0888 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 12:53:59

23_ IEEE 802.11ac 5GHz 20MHz CH44_6.5M_Vertical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5220 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.263 \text{ S/m}$; $\epsilon_r = 48.715$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0835 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.801 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00518 W/kg

Maximum value of SAR (measured) = 0.0756 W/kg

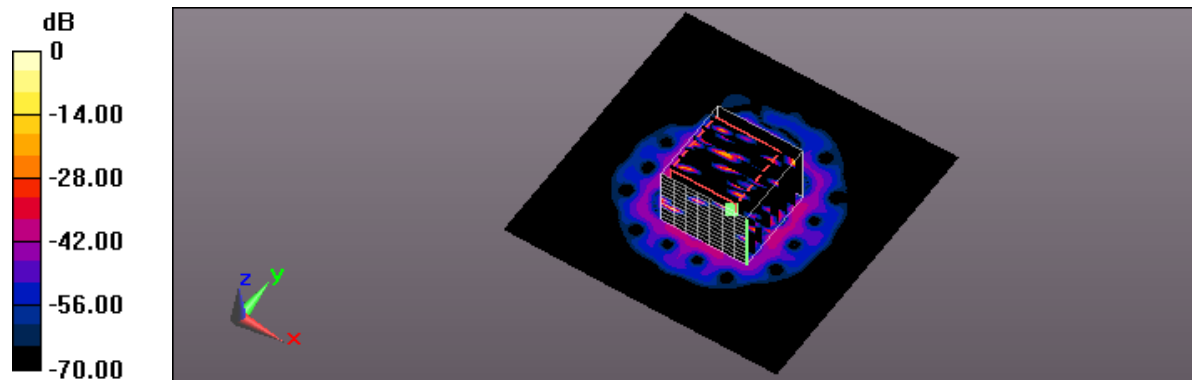

0 dB = 0.0756 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 01:39:53

24_IEEE 802.11ac 5GHz 20MHz CH44_6.5M_Verical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5220 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.263 \text{ S/m}$; $\epsilon_r = 48.715$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0862 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.616 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00334 W/kg

Maximum value of SAR (measured) = 0.0329 W/kg

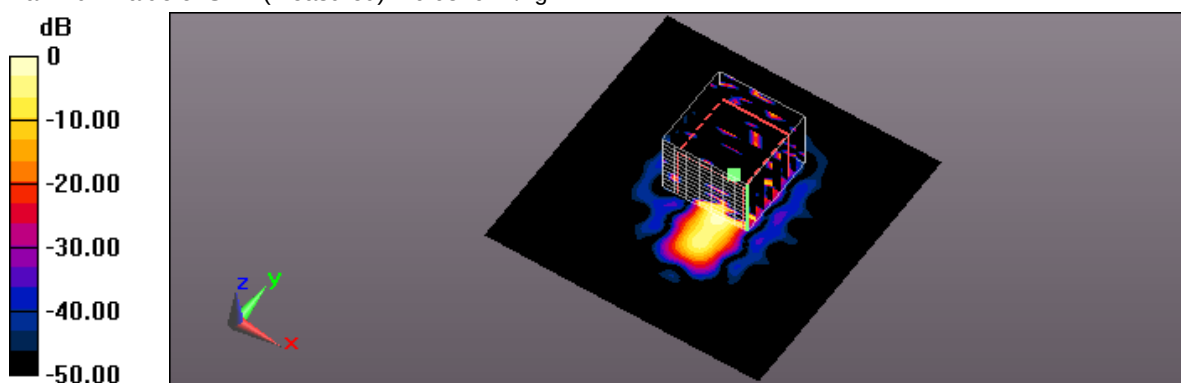

0 dB = 0.0329 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 08:14:35

73_ IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Horizontal-UP_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.765$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.556 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.157 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

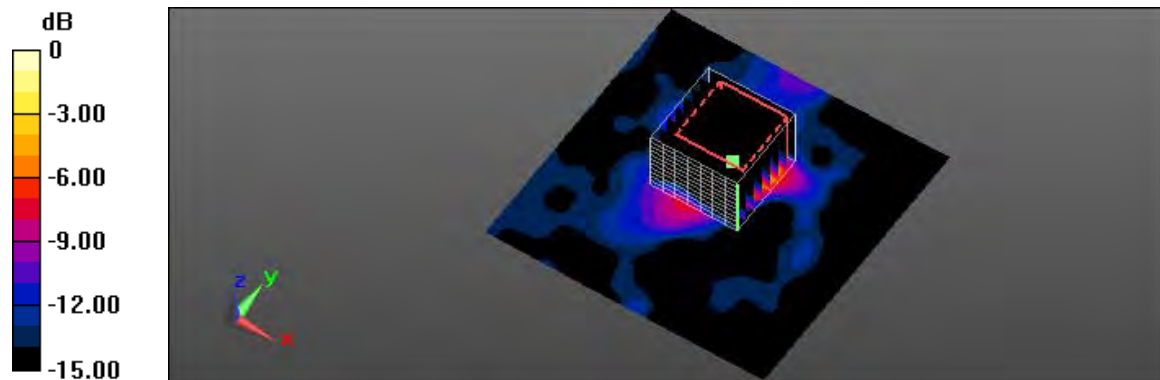

0 dB = 0.470 W/kg



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 09:34:57

25_ IEEE 802.11ac 5GHz 20MHz CH161_6.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5805 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.143$ S/m; $\epsilon_r = 47.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.336 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.843 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

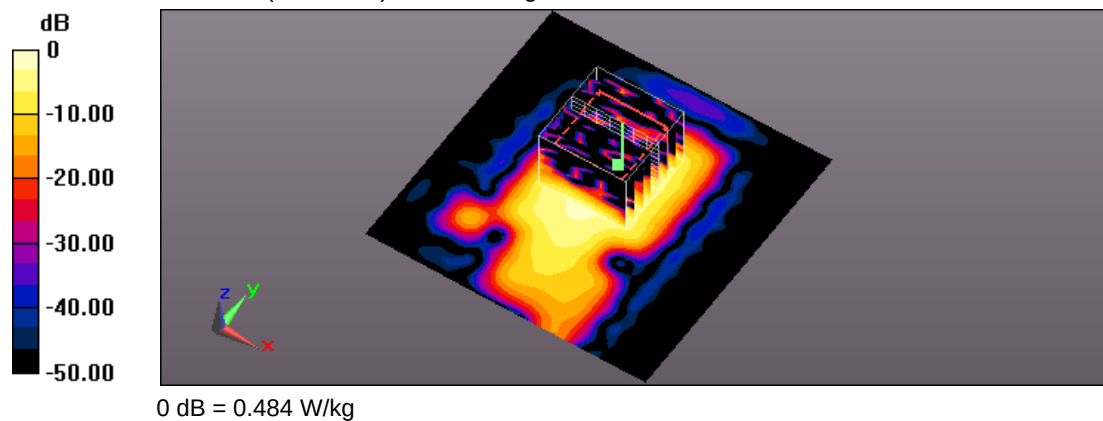

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 10:37:29

26_IEEE 802.11ac 5GHz 20MHz CH161_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5805 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.143$ S/m; $\epsilon_r = 47.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.163 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.432 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

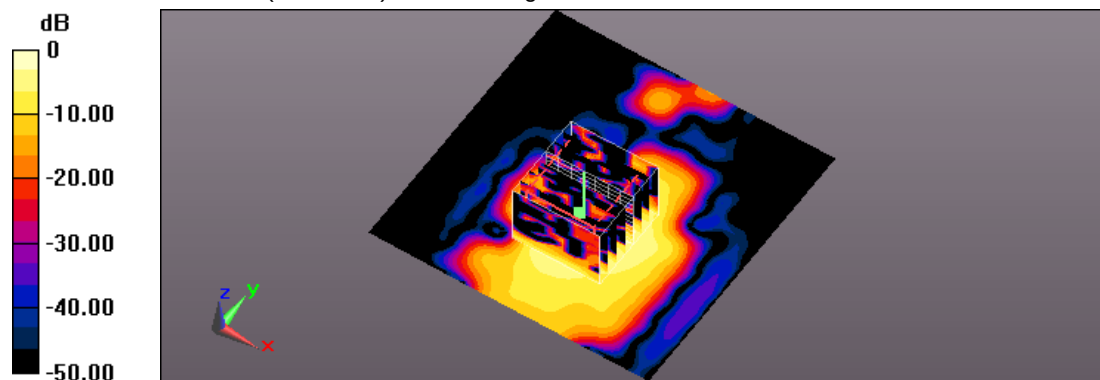

0 dB = 0.144 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 AM 11:45:57

27_ IEEE 802.11ac 5GHz 20MHz CH161_6.5M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5805 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.143$ S/m; $\epsilon_r = 47.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.138 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.404 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.00597 W/kg

Maximum value of SAR (measured) = 0.0732 W/kg

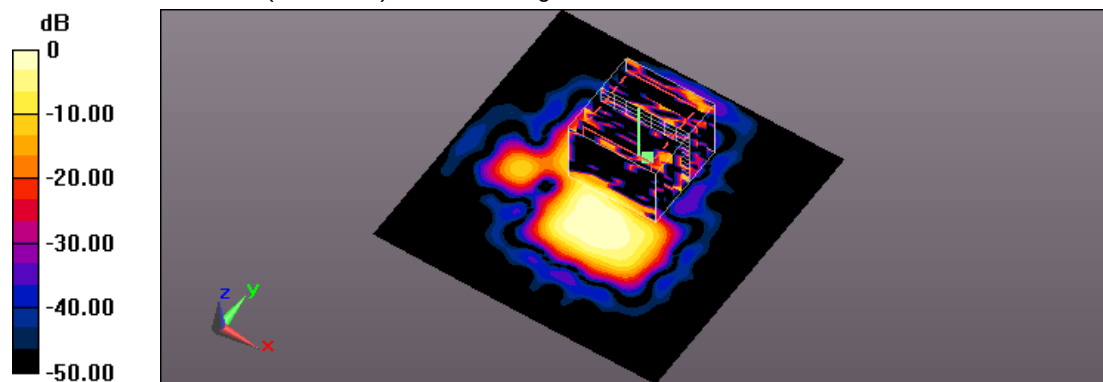

0 dB = 0.0732 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 01:07:45

28_IEEE 802.11ac 5GHz 20MHz CH161_6.5M_Vetical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5805 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.143$ S/m; $\epsilon_r = 47.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.187 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.769 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

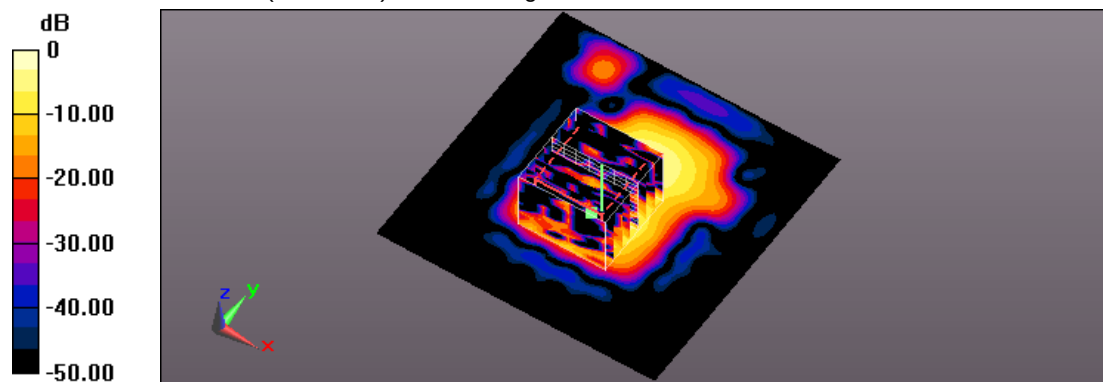

0 dB = 0.192 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 06:24:35

74_ IEEE 802.11ac 5GHz 20MHz CH161_6.5M_Horizontal-UP_BF_ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5805 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.143$ S/m; $\epsilon_r = 47.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.312 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.579 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

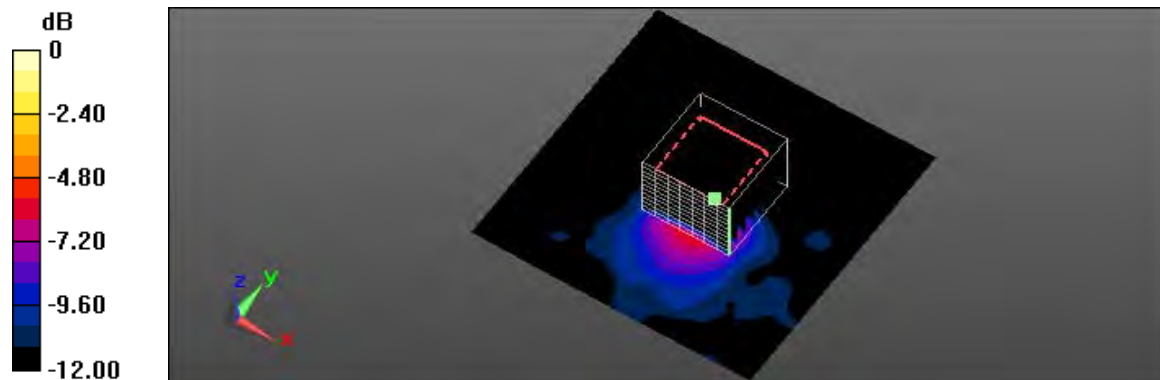

0 dB = 0.442 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 09:22:11

37_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 5.274 \text{ S/m}$; $\epsilon_r = 48.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.129 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.137 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

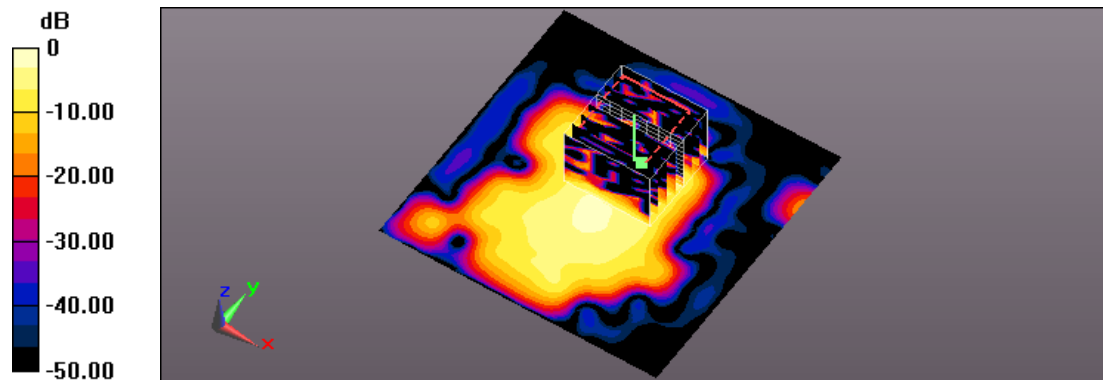

0 dB = 0.112 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 06:01:48

38_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.428 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.953 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

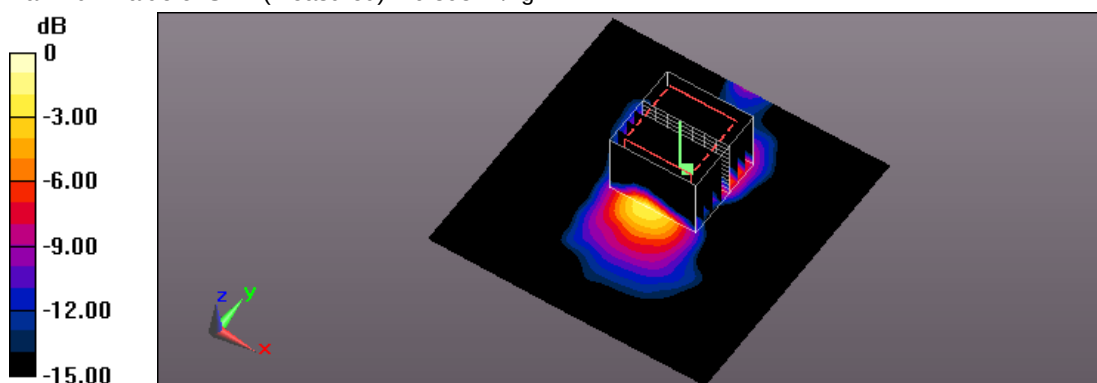

0 dB = 0.393 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 10:41:24

39_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.105 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

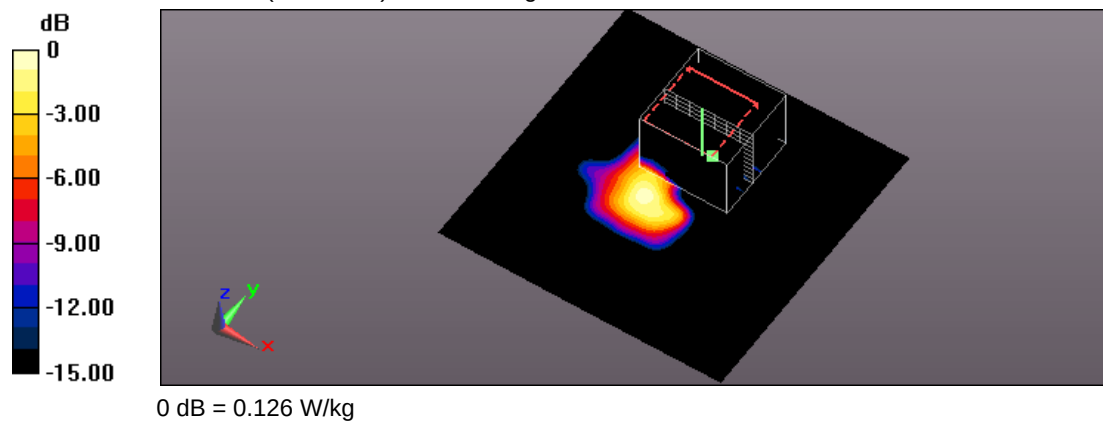

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 10:06:23

40_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Vetical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0773 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.431 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.0069 W/kg

Maximum value of SAR (measured) = 0.0635 W/kg

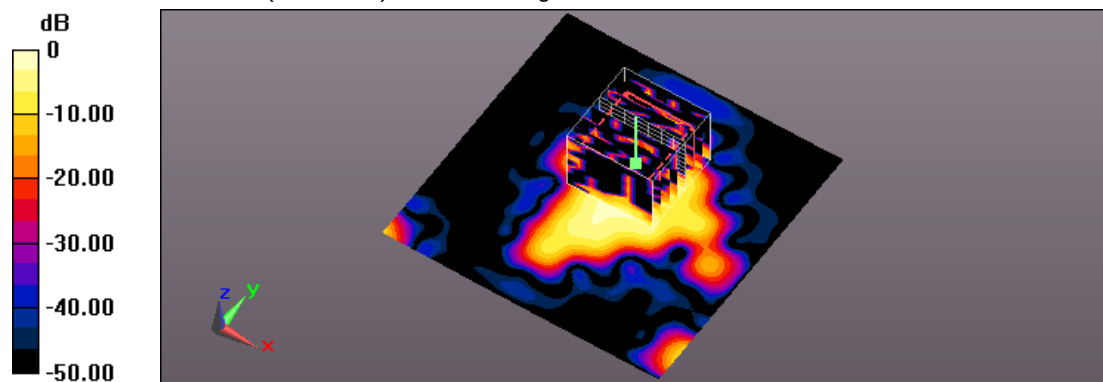

0 dB = 0.0635 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 10:11:25

75_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 5.274 \text{ S/m}$; $\epsilon_r = 48.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.135 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.888 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

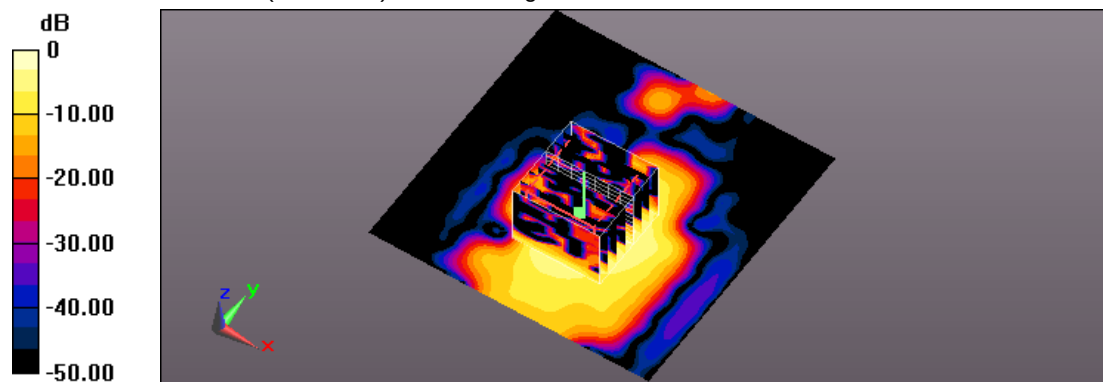

0 dB = 0.141 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 09:59:30

41_ IEEE 802.11ac 5GHz 40MHz CH159_13.5M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 47.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.635 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.079 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

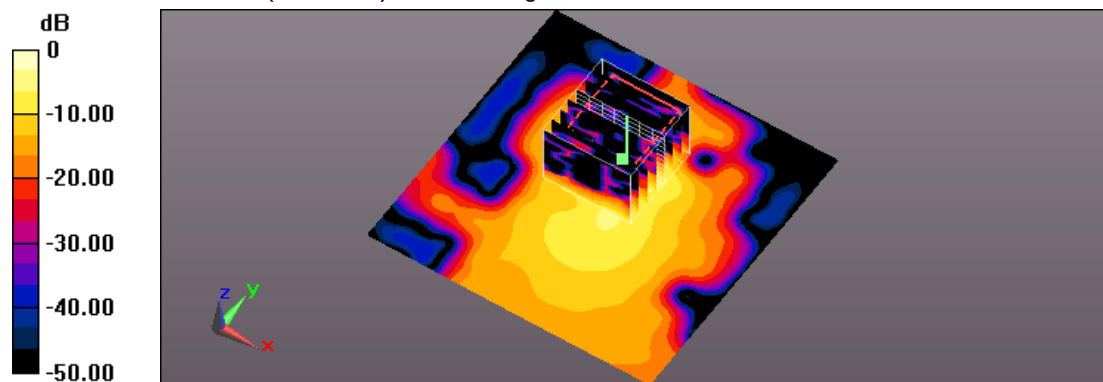

0 dB = 0.698 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 07:20:27

42_ IEEE 802.11ac 5GHz 40MHz CH159_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 47.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.397 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

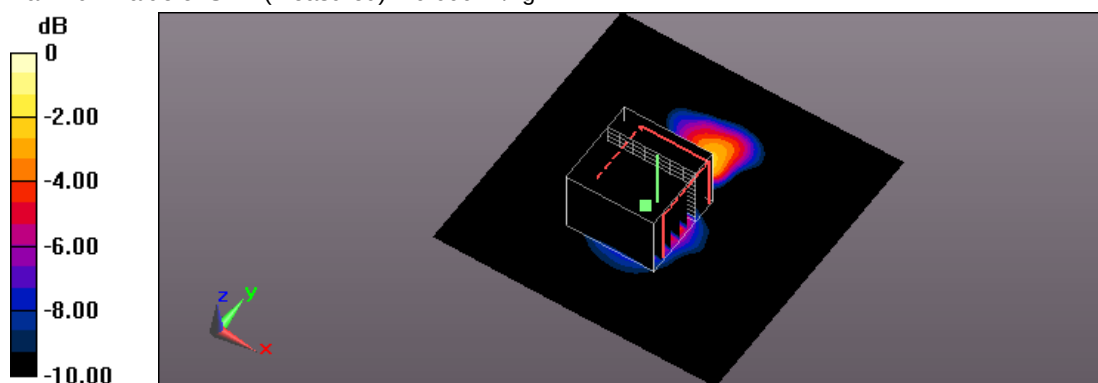

0 dB = 0.600 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 12:06:54

43_ IEEE 802.11ac 5GHz 40MHz CH159_13.5M_Verical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 47.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.350 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.576 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

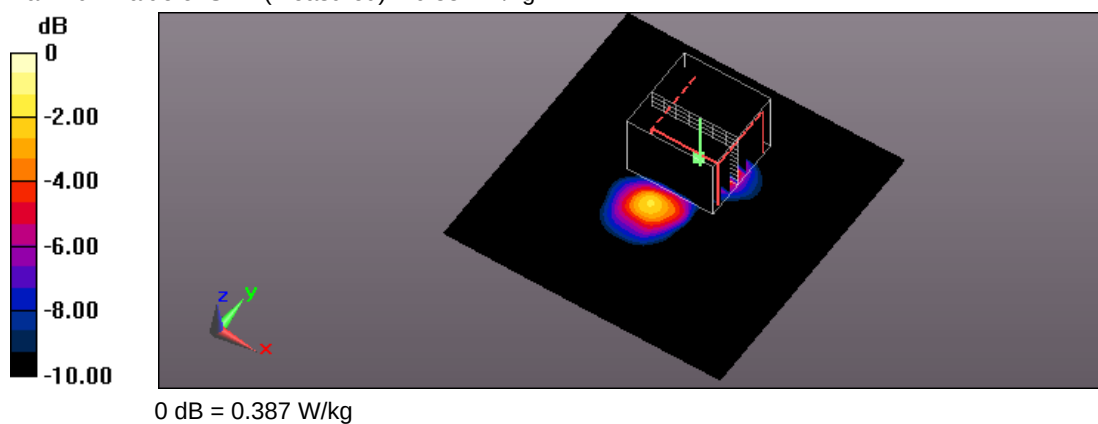



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 09:29:26

44_ IEEE 802.11ac 5GHz 40MHz CH159_13.5M_Veritical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 47.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.169 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.692 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

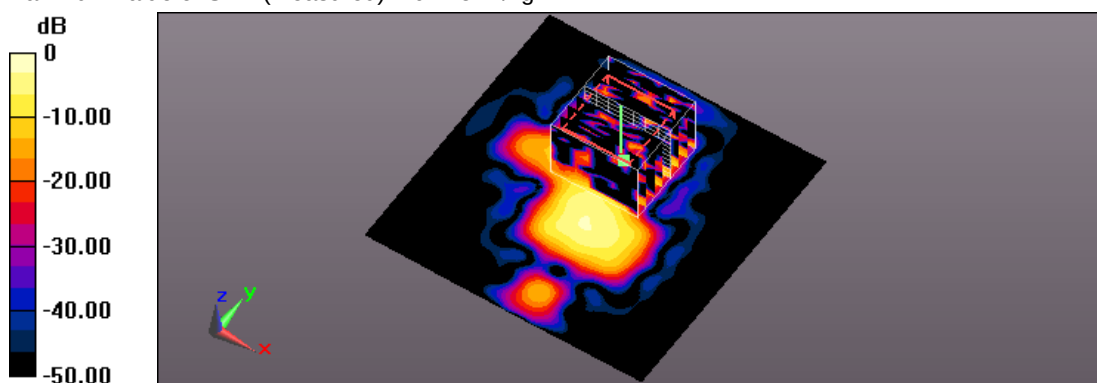

0 dB = 0.175 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 09:24:03

76_IEEE 802.11ac 5GHz 40MHz CH159_13.5M_Horizontal-UP_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 47.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.461 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.292 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.464 W/kg

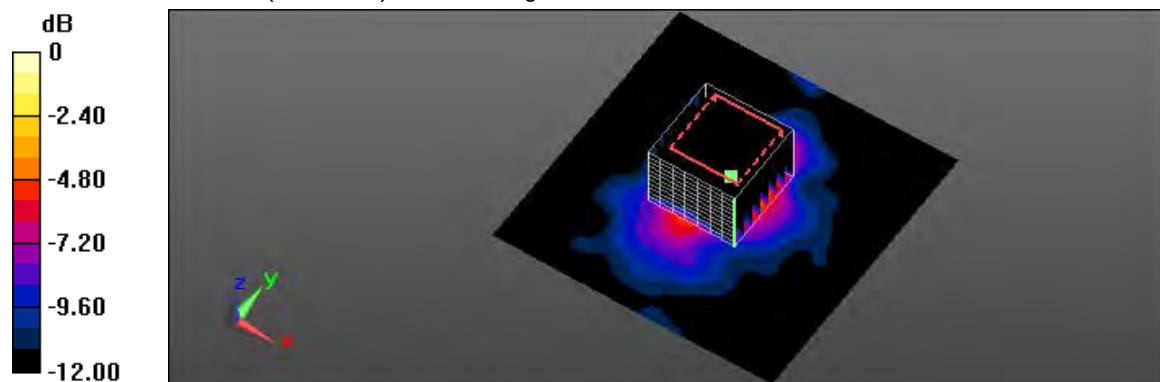

0 dB = 0.464 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 01:13:25

61_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.128 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.129 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

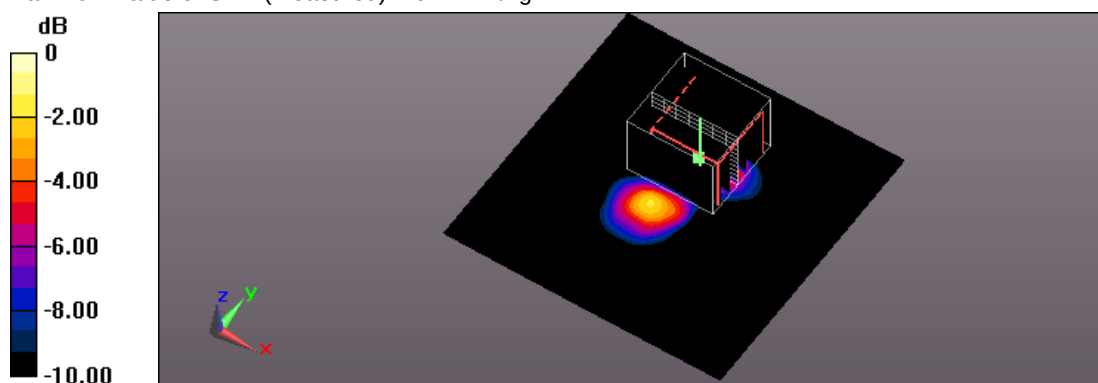

0 dB = 0.111 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 01:57:43

62_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.423 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 9.027 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.495 W/kg

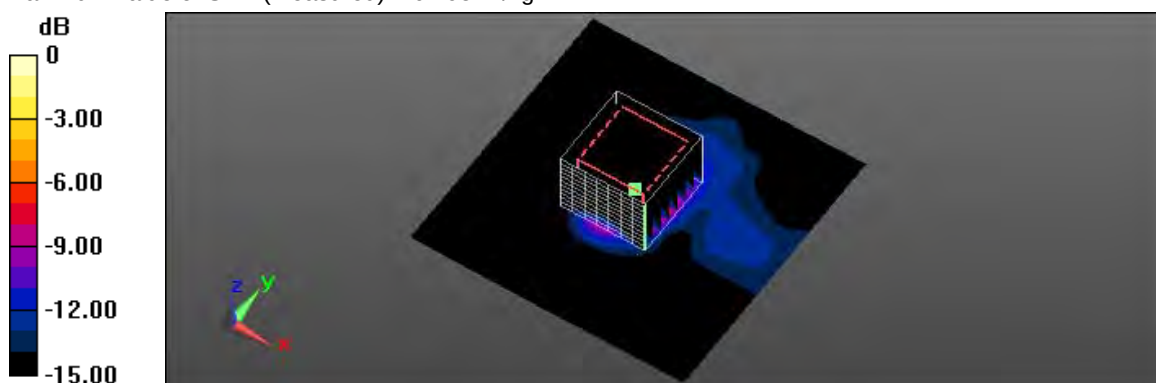

0 dB = 0.495 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 02:48:55

63_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.278 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.353 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

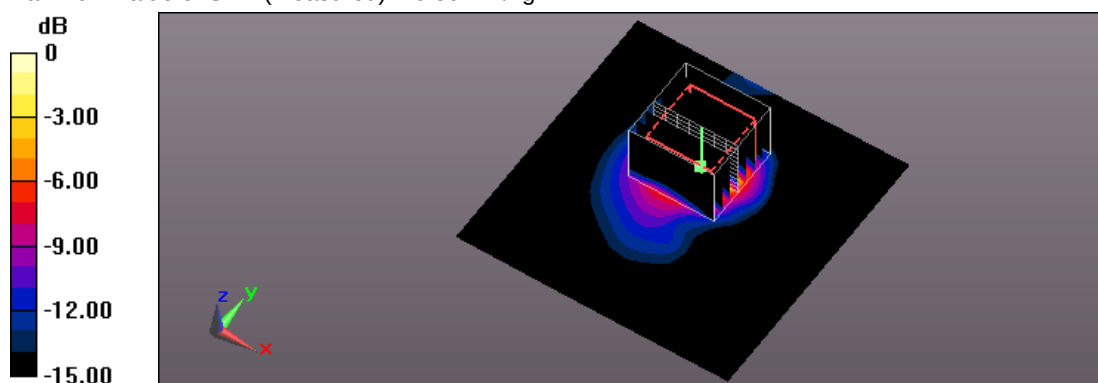

0 dB = 0.307 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 03:37:12

64_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Vetical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.177 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.560 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.227 W/kg

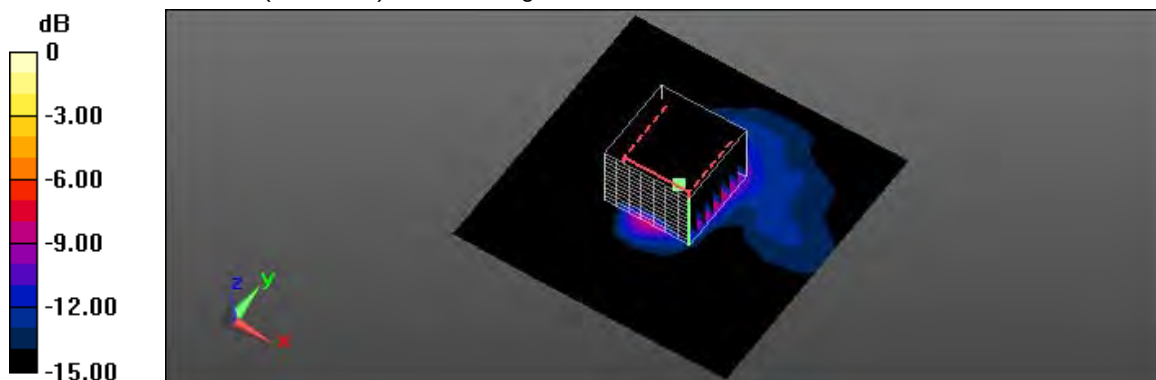

0 dB = 0.227 W/kg



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 04:26:39

65_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.384 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 8.938 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

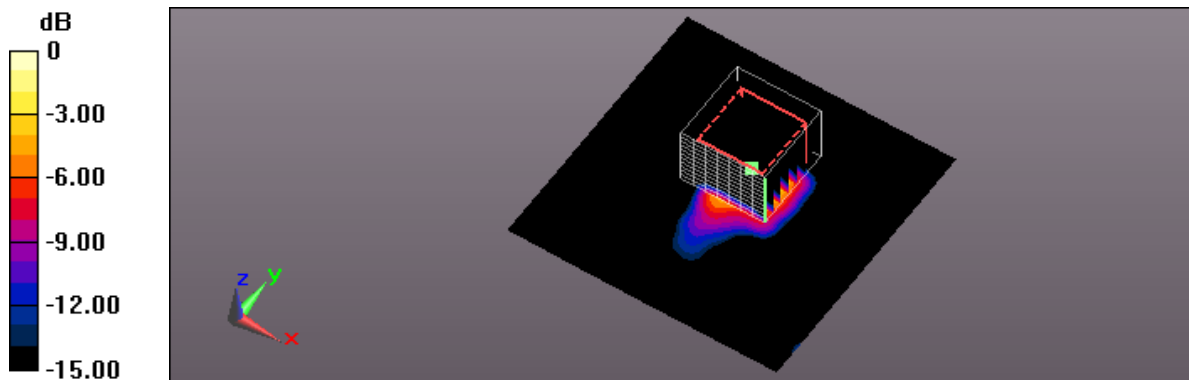

0 dB = 0.476 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 05:16:03

91_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Horizontal-UP_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.439 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.109 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

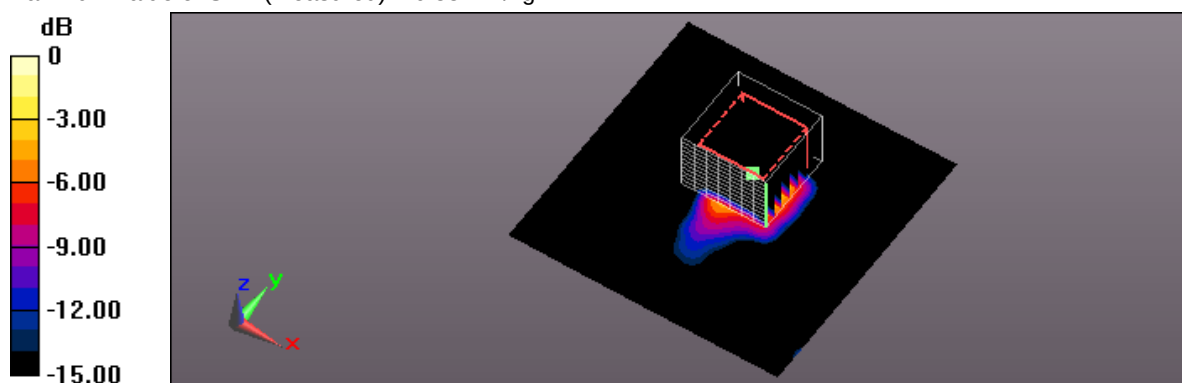

0 dB = 0.381 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 05:58:47

92_ IEEE 802.11ac 5GHz 80MHz_29.3M_Horizontal-Down (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.377 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.218 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.406 W/kg

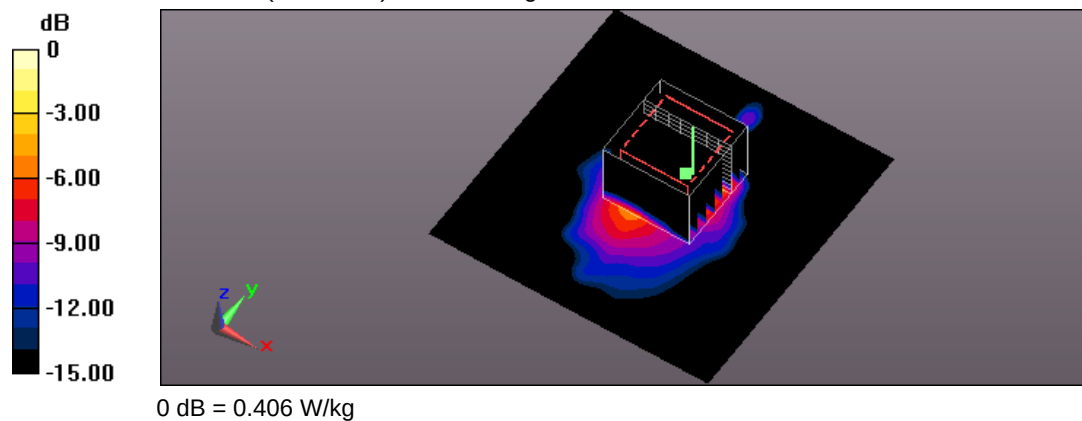

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 06:49:33

93_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Vetical-Front (with USB cable)_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0828 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.784 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00498 W/kg

Maximum value of SAR (measured) = 0.0744 W/kg

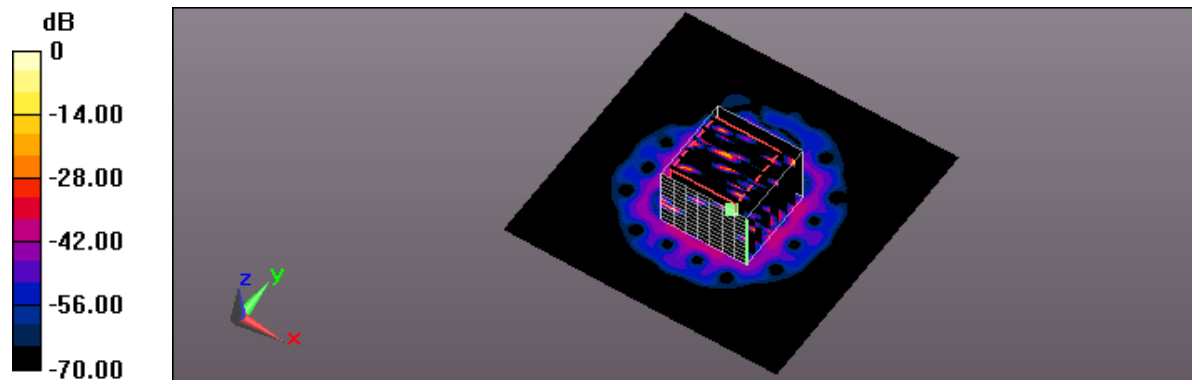

0 dB = 0.0744 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 07:47:58

94_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Verical-Back_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.499 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.922 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.536 W/kg

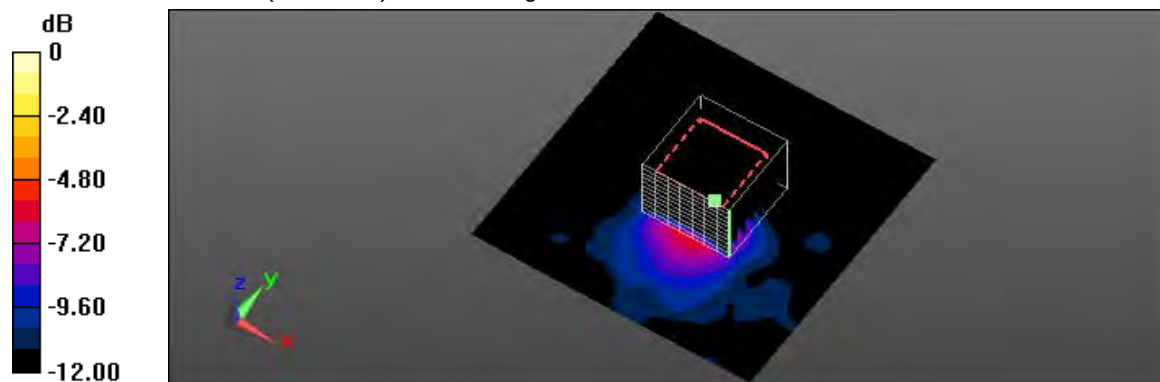

0 dB = 0.536 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 08:55:34

95_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Verical-Back_BF ON_5mm_ANT-0

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.491 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.917 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.521 W/kg

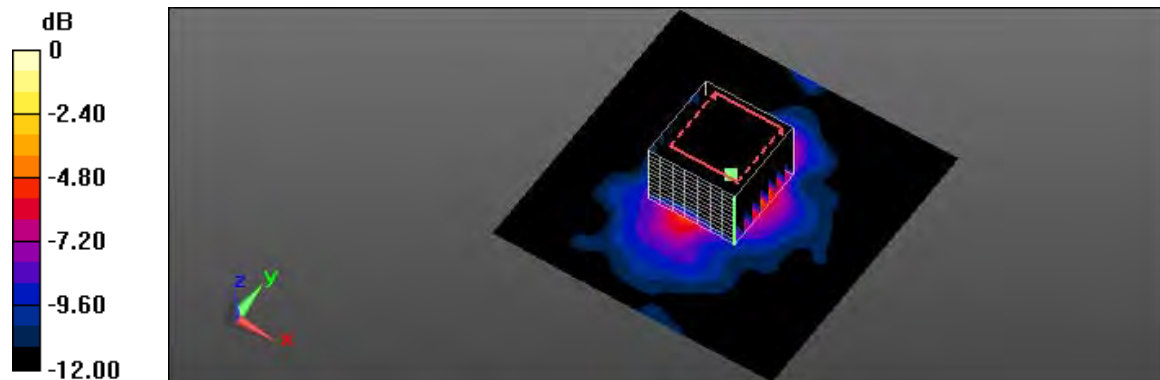

0 dB = 0.521 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 05:51:11

9_ IEEE 802.11n 2.4GHz 20MHz CH1_6.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 52.681$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0414 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.243 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.0031 W/kg

Maximum value of SAR (measured) = 0.0189 W/kg

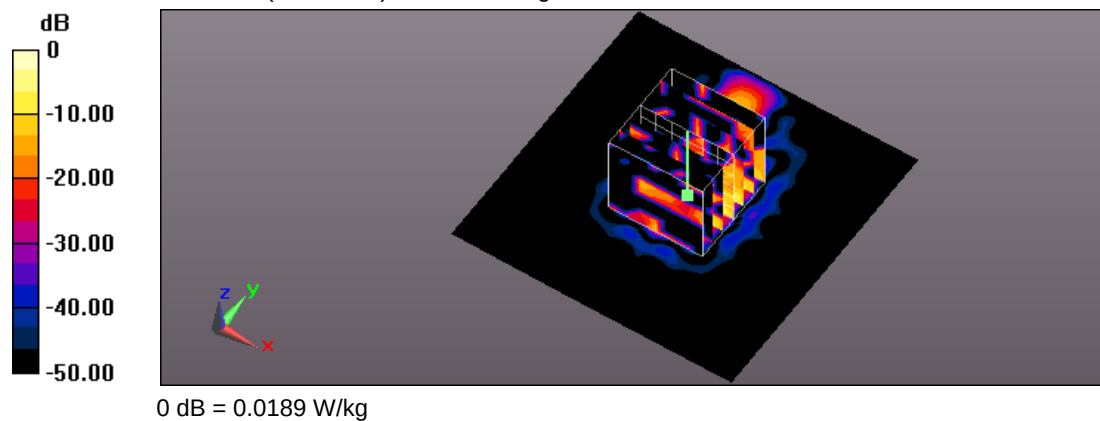

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 06:26:55

10_IEEE 802.11n 2.4GHz 20MHz CH1_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 52.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0581 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.687 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0437 W/kg

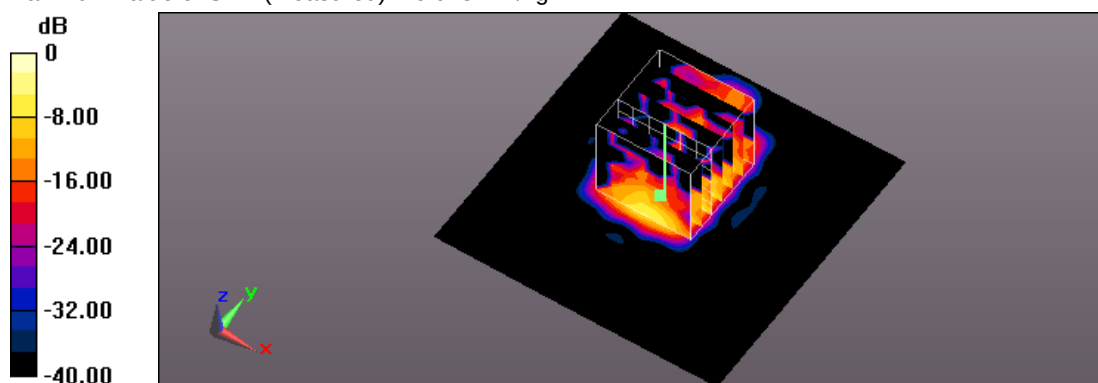

0 dB = 0.0437 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 07:48:31

11_ IEEE 802.11n 2.4GHz 20MHz CH1_6.5M_Vertical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 52.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0167 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.685 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0140 W/kg

SAR(1 g) = 0.00245 W/kg; SAR(10 g) = 0.000532 W/kg

Maximum value of SAR (measured) = 0.00569 W/kg

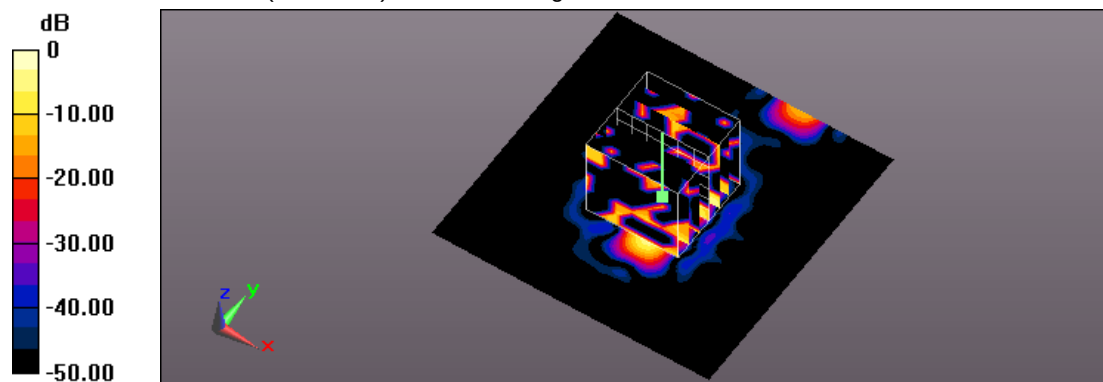

0 dB = 0.00569 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 07:16:28

12_IEEE 802.11n 2.4GHz 20MHz CH1_6.5M_Veritical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 52.681$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0414 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.590 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00393 W/kg

Maximum value of SAR (measured) = 0.0209 W/kg

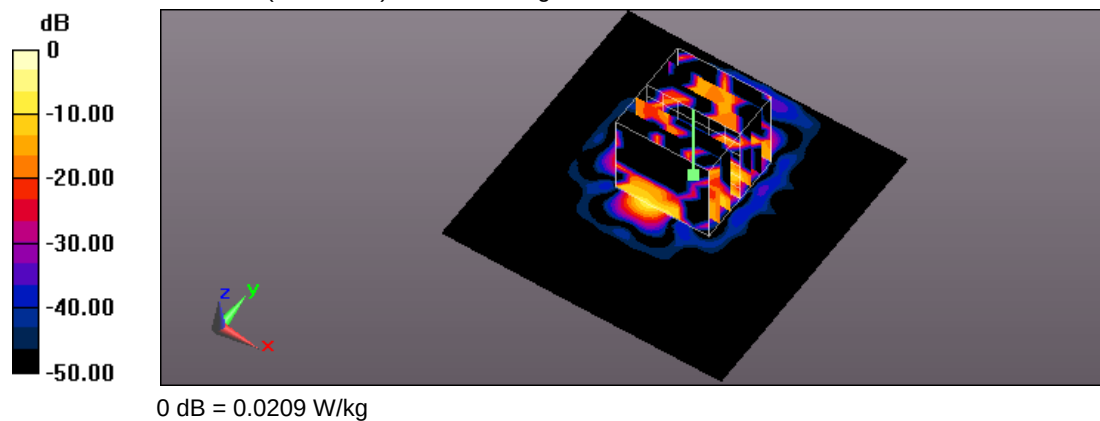

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/22 AM 01:39:49

89_ IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0550 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.530 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0412 W/kg

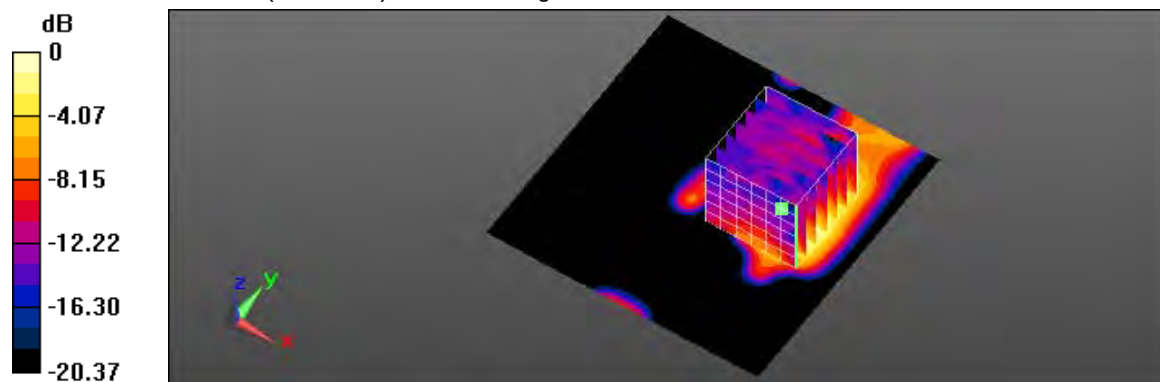

0 dB = 0.0412 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 09:00:17

13_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.966 \text{ S/m}$; $\epsilon_r = 52.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0243 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.690 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.00873 W/kg; SAR(10 g) = 0.00238 W/kg

Maximum value of SAR (measured) = 0.0162 W/kg

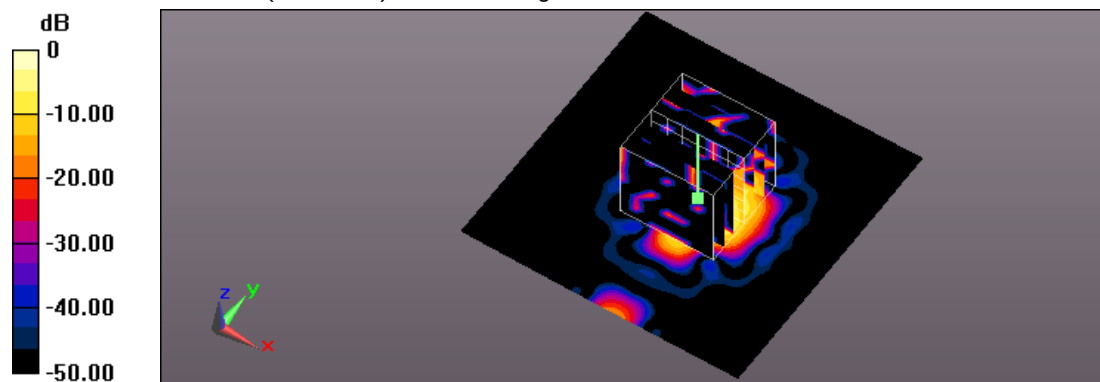

0 dB = 0.0162 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 09:34:58

14_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0280 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.155 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00457 W/kg

Maximum value of SAR (measured) = 0.0218 W/kg

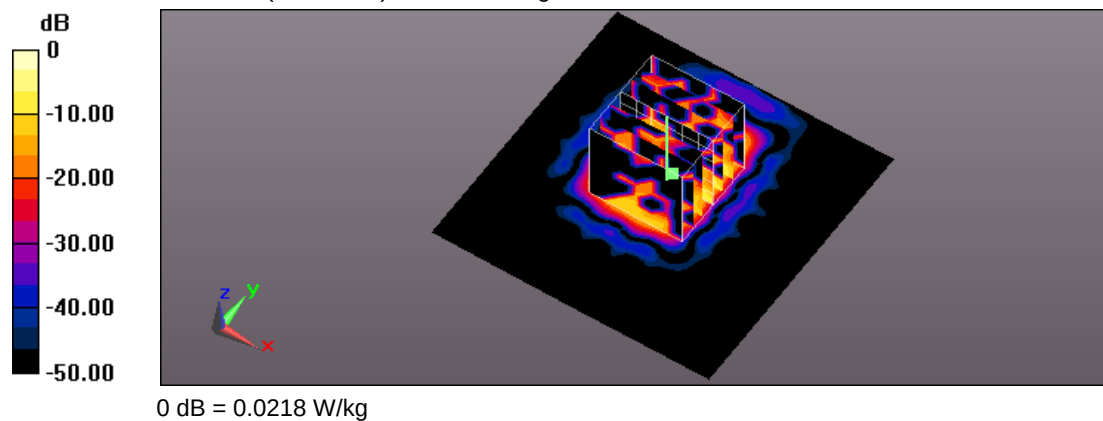

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 10:14:45

15_ IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Veritical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0166 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.733 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0140 W/kg

SAR(1 g) = 0.0021 W/kg; SAR(10 g) = 0.00057 W/kg

Maximum value of SAR (measured) = 0.00479 W/kg

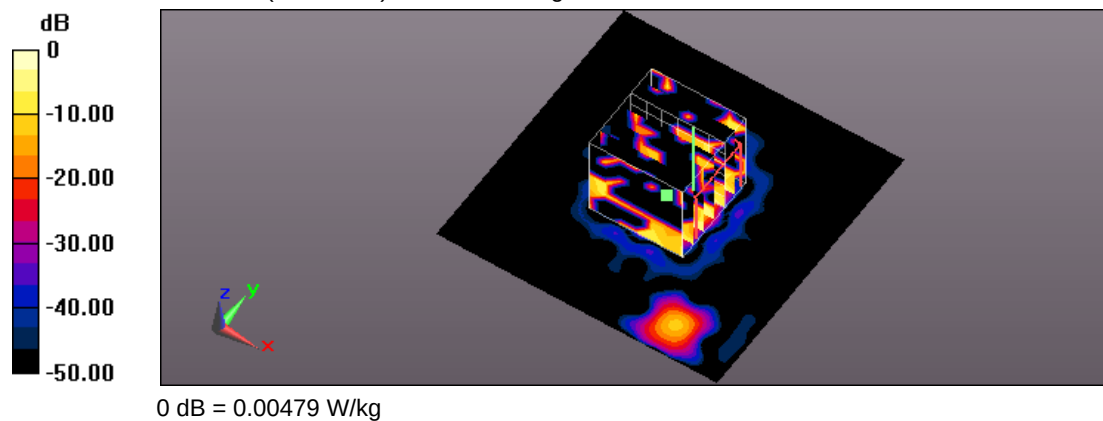

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/5 PM 10:42:30

16_IEEE 802.11n 2.4GHz 40MHz CH9_13.5M_Veritical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2452 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0319 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.993 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00319 W/kg

Maximum value of SAR (measured) = 0.0175 W/kg

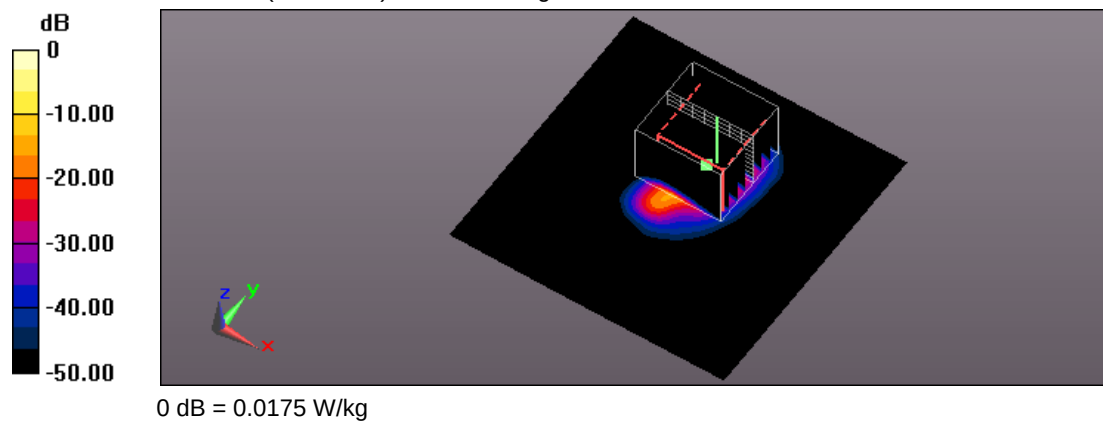

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 PM 08:10:16

90_ IEEE 802.11n 2.4GHz 40MHz CH6_13.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 52.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.00773 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.689 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.00508 W/kg

SAR(1 g) = 0.00224 W/kg; SAR(10 g) = 0.00133 W/kg

Maximum value of SAR (measured) = 0.00397 W/kg

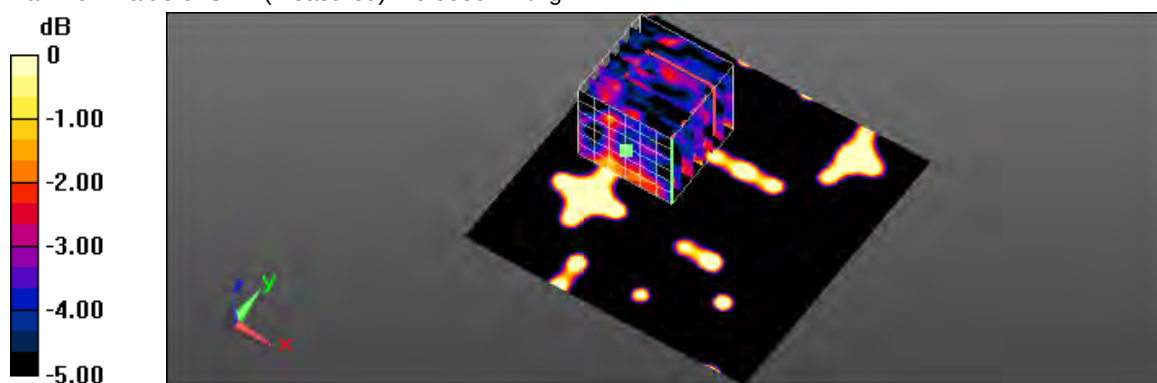

0 dB = 0.00397 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 04:03:54

29_IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.698 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.613 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

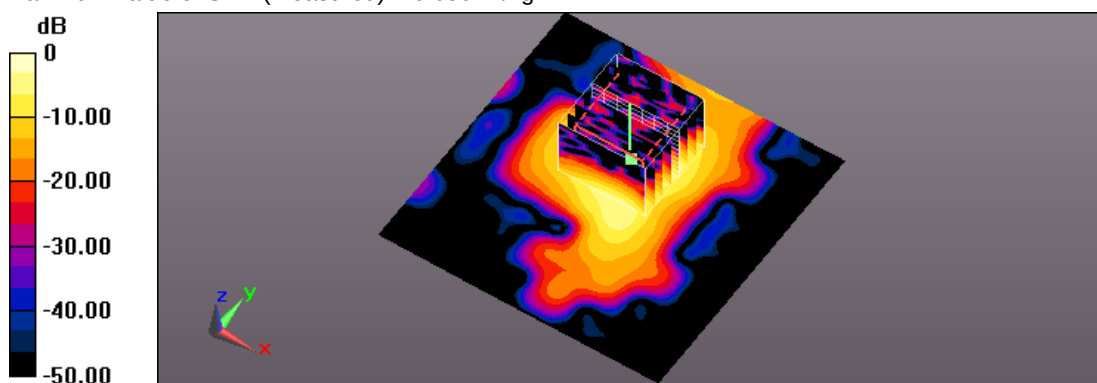

0 dB = 0.650 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 09:13:04

30_ IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.68 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

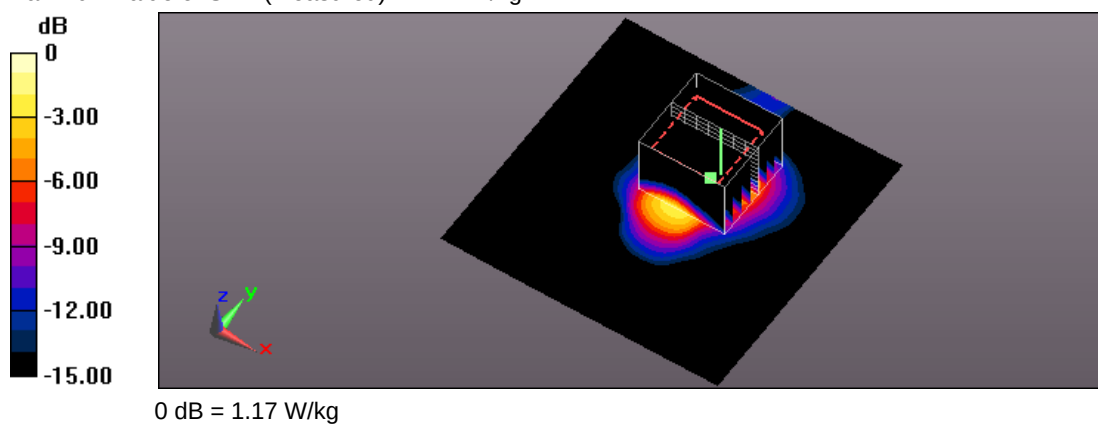

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 12:05:57

31_ IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Vertical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.845 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.187 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.922 W/kg

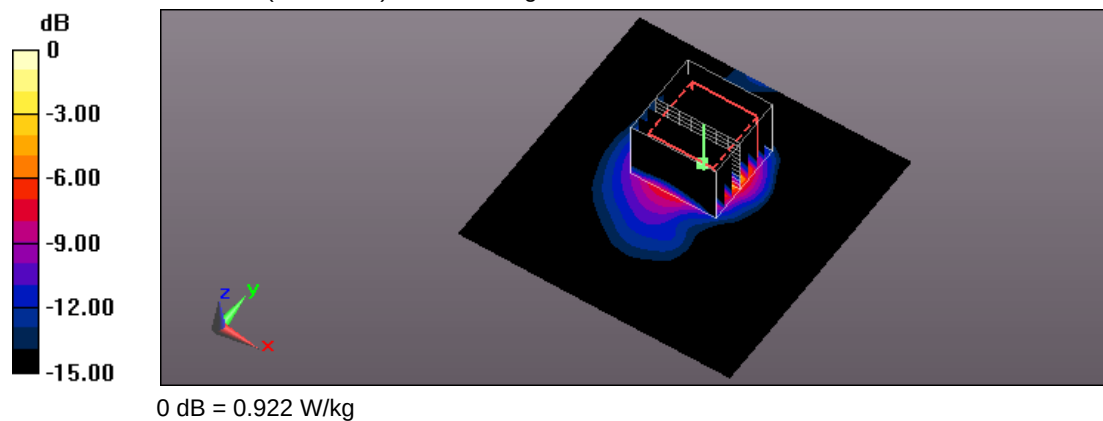

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 12:56:16

32_IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Verical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 48.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.950 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

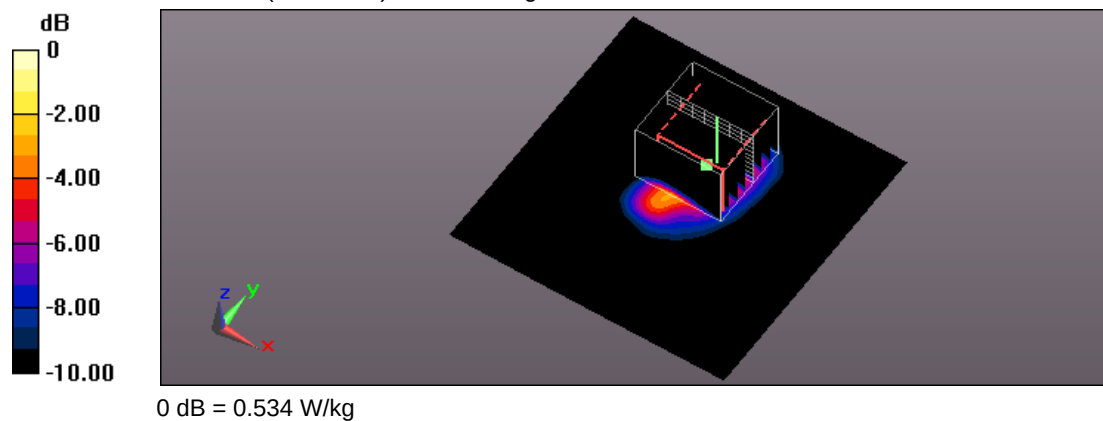

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 04:12:43

77_ IEEE 802.11ac 5GHz 20MHz CH40_6.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.02 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 15.85 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

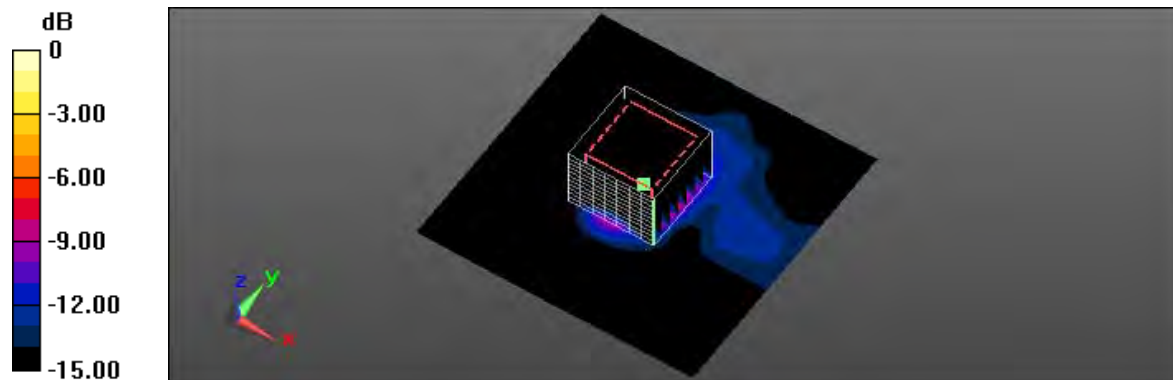

0 dB = 1.06 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 05:06:33

33_ IEEE 802.11ac 5GHz 20MHz CH153_6.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5765 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.444 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.828 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.433 W/kg

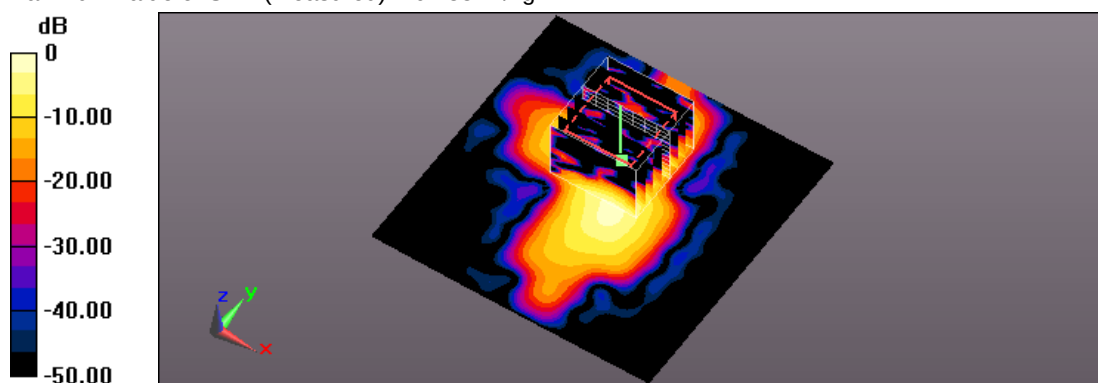

0 dB = 0.433 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 09:49:41

34_IEEE 802.11ac 5GHz 20MHz CH153_6.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5765 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.981 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 15.34 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 15.34 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

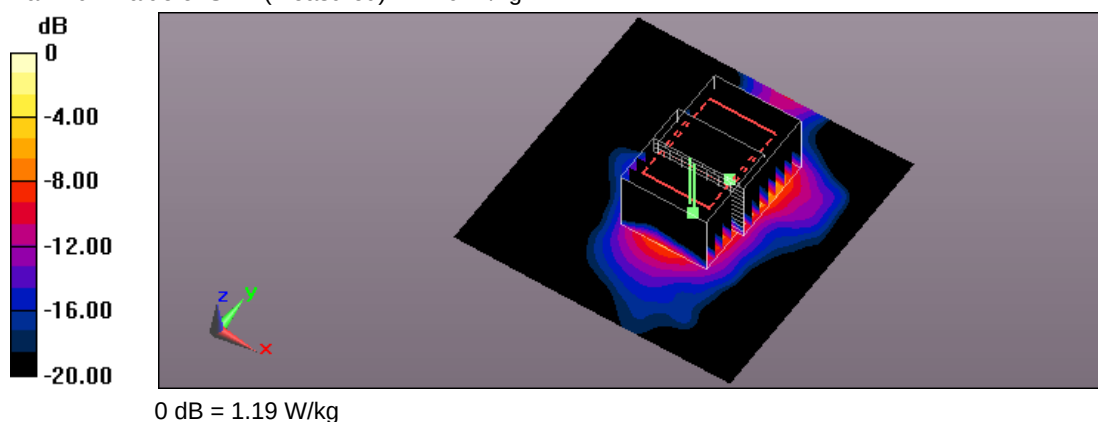

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/7 PM 10:58:50

35_ IEEE 802.11ac 5GHz 20MHz CH153_6.5M_Vetical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5765 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.529 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.854 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.702 W/kg

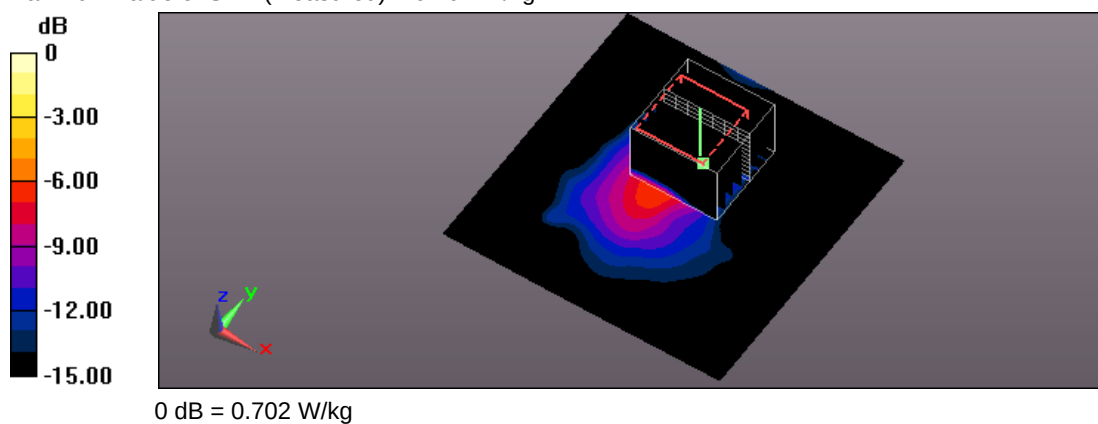

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 01:35:23

36_IEEE 802.11ac 5GHz 20MHz CH153_6.5M_Vetical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5765 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.055$ S/m; $\epsilon_r = 47.374$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.202 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.250 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

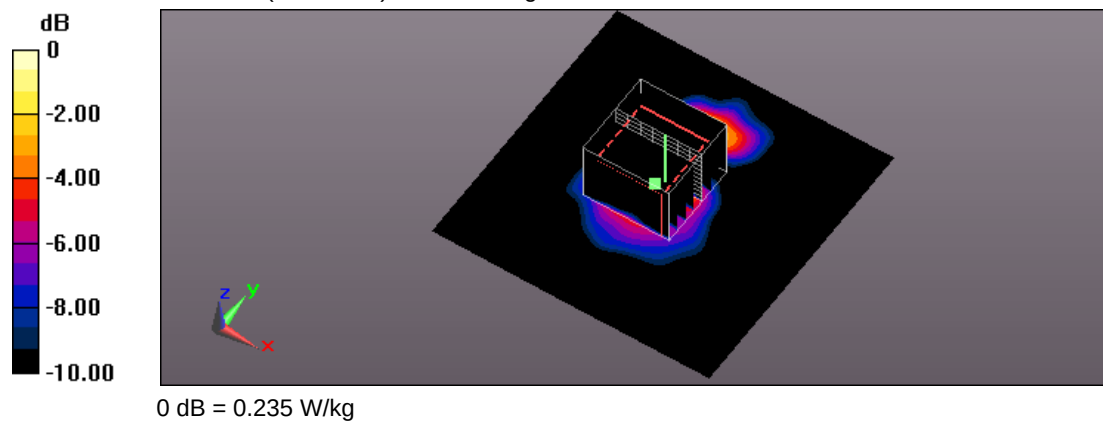

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 04:44:16

78_ IEEE 802.11ac 5GHz 20MHz CH157_6.5M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT20 (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.094$ S/m; $\epsilon_r = 47.324$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.939 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 15.19 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

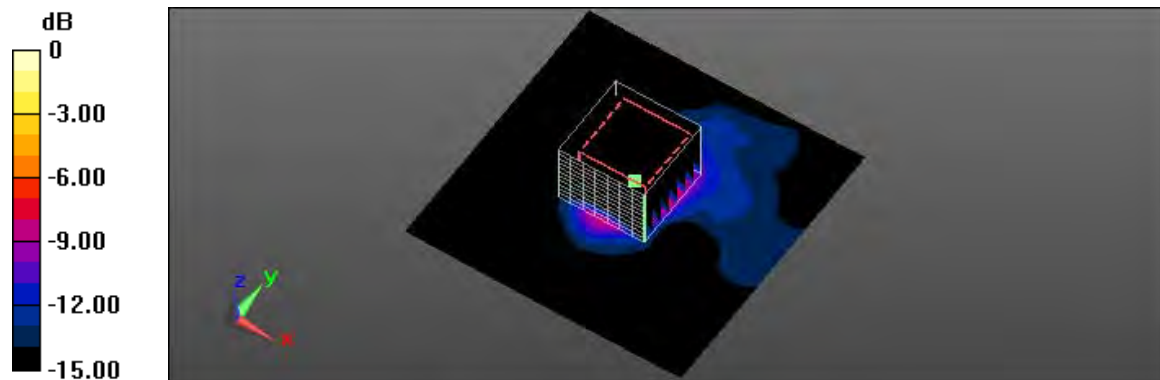

0 dB = 1.01 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 AM 11:14:53

45_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.00816 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.346 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.0042 W/kg; SAR(10 g) = 0.000668 W/kg

Maximum value of SAR (measured) = 0.0169 W/kg

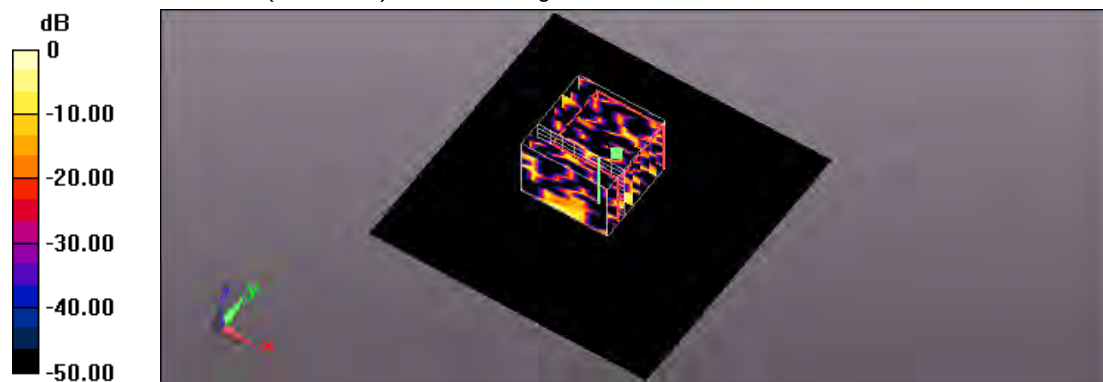

0 dB = 0.0169 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 04:30:04

46_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0154 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.9100 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.00716 W/kg; SAR(10 g) = 0.00114 W/kg

Maximum value of SAR (measured) = 0.0169 W/kg

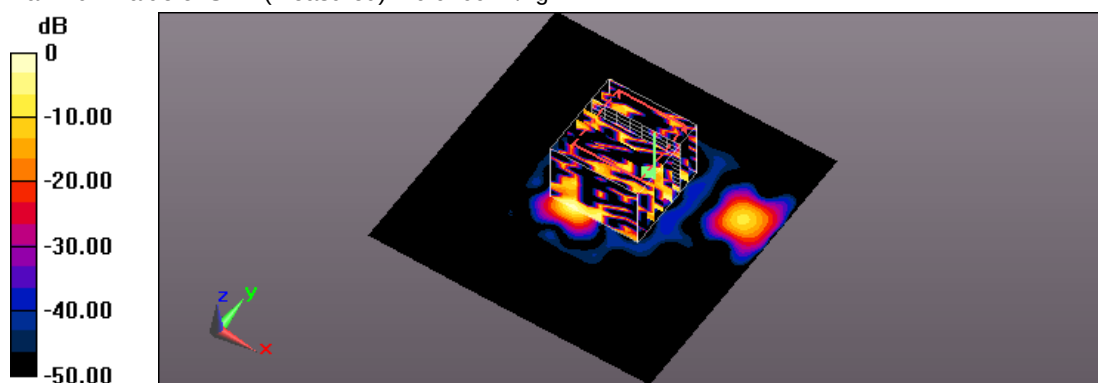

0 dB = 0.0169 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 12:53:18

47_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Vetical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0182 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.4560 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.00166 W/kg; SAR(10 g) = 0.000256 W/kg

Maximum value of SAR (measured) = 0.0152 W/kg

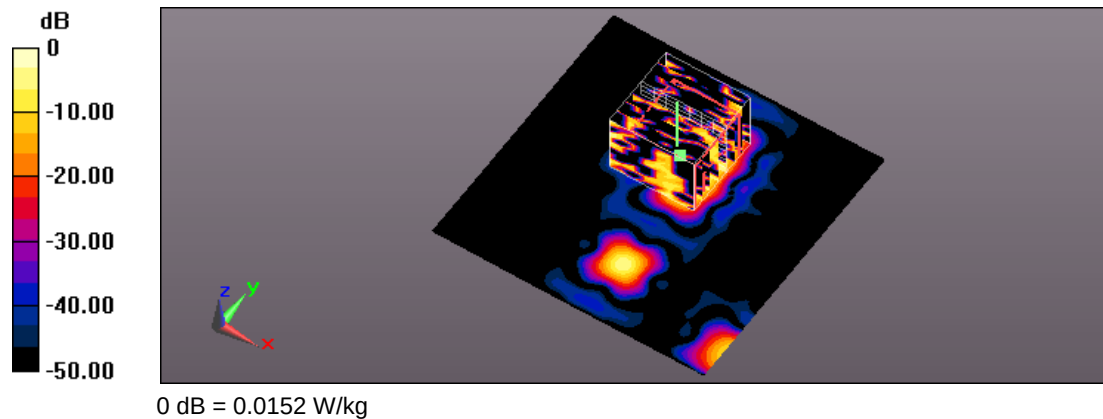

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 01:16:54

48_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Vetical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 48.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.932 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.544 W/kg

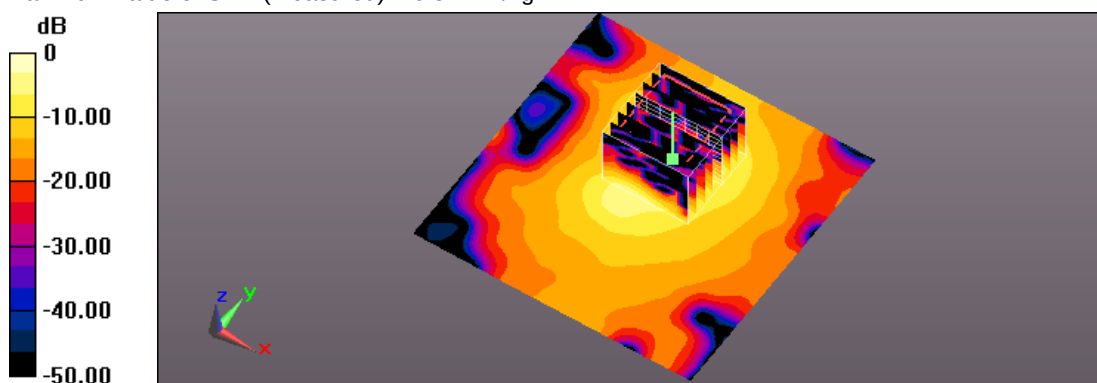

0 dB = 0.544 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 05:15:40

79_ IEEE 802.11ac 5GHz 40MHz CH46_13.5M_Vetical-Back_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 5.274 \text{ S/m}$; $\epsilon_r = 48.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.463 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.874 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

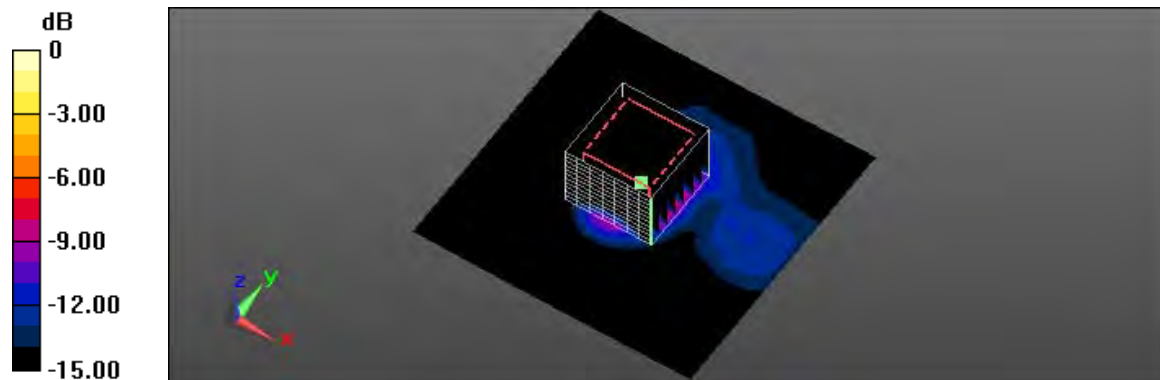

0 dB = 0.532 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 01:57:56

49_ IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755 \text{ MHz}$; $\sigma = 6.041 \text{ S/m}$; $\epsilon_r = 47.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS5, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0355 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.612 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00318 W/kg

Maximum value of SAR (measured) = 0.0352 W/kg

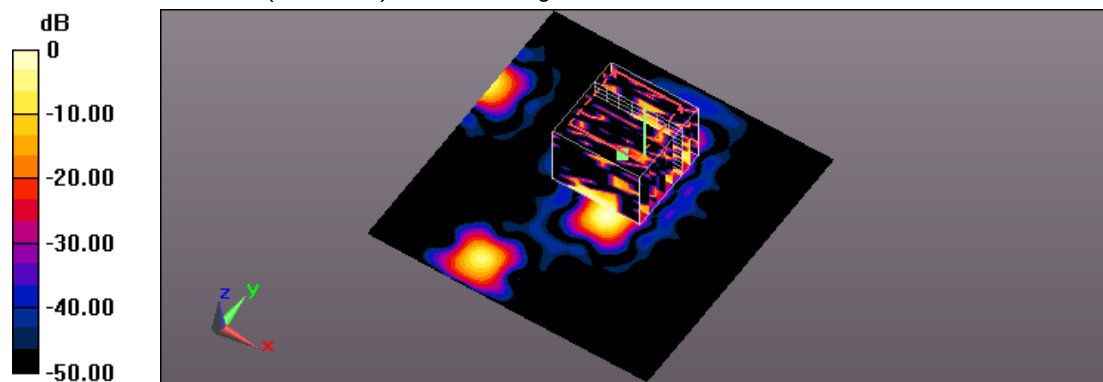

0 dB = 0.0352 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/8 PM 03:26:40

50_IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.041$ S/m; $\epsilon_r = 47.438$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0301 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.799 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.0039 W/kg

Maximum value of SAR (measured) = 0.0348 W/kg

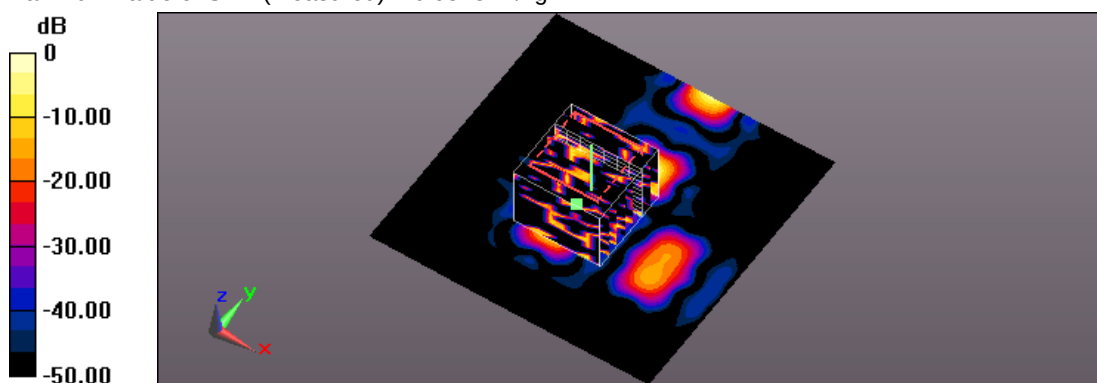

0 dB = 0.0348 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 AM 01:55:46

51_ IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Verical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.041$ S/m; $\epsilon_r = 47.438$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0461 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.152 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00497 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

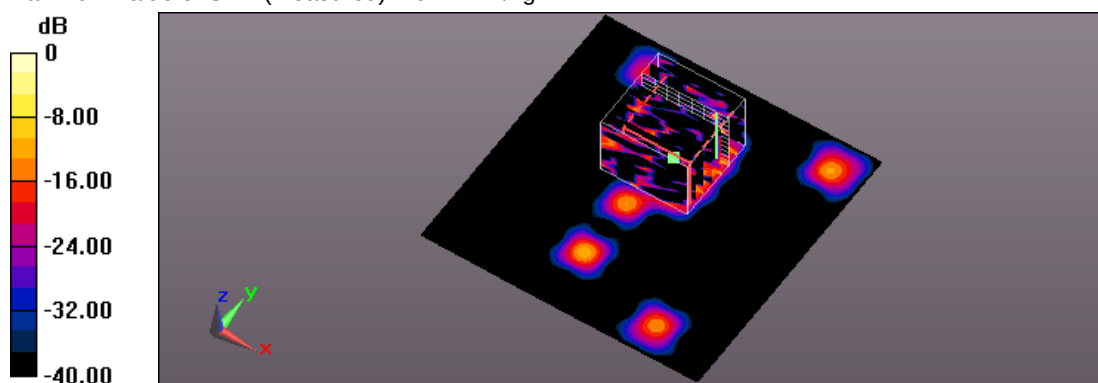

0 dB = 0.144 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/9/9 PM 01:58:25

52_ IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Verical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.041$ S/m; $\epsilon_r = 47.438$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.217 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.852 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

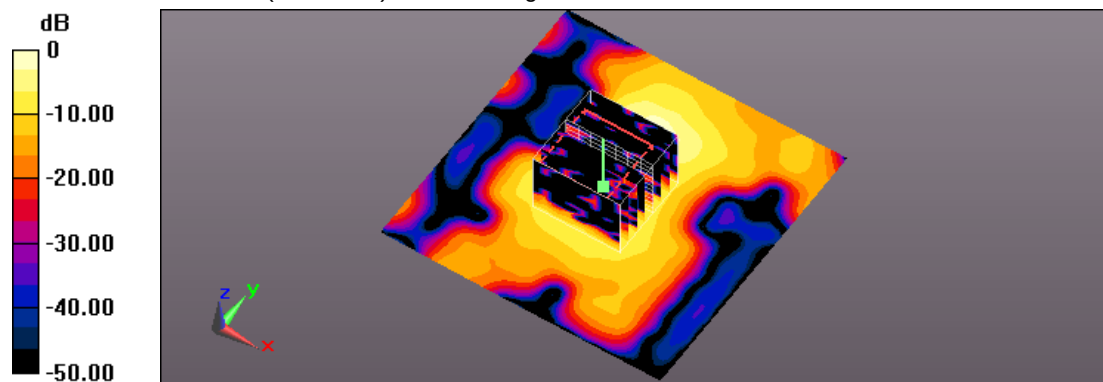

0 dB = 0.279 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 PM 05:46:45

80_ IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Verical-Back_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT40 (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 6.041$ S/m; $\epsilon_r = 47.438$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/3/9;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2016/3/2
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.203 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.774 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

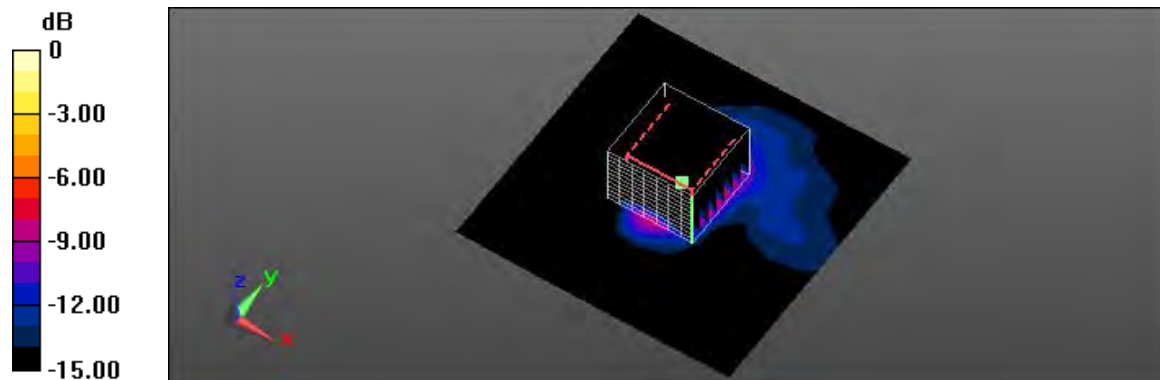

0 dB = 0.263 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 09:48:41

96_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.247 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.188 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

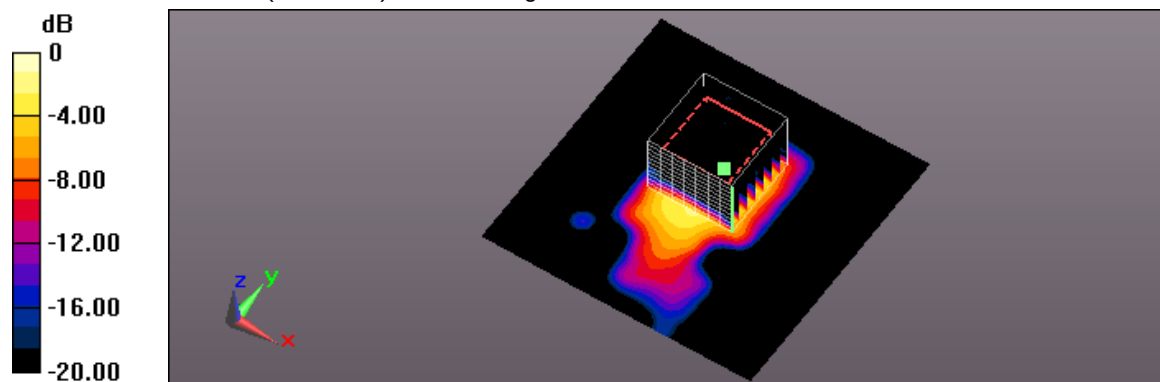

0 dB = 0.187 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 10:38:53

97_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_ Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.521 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.108 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.220 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

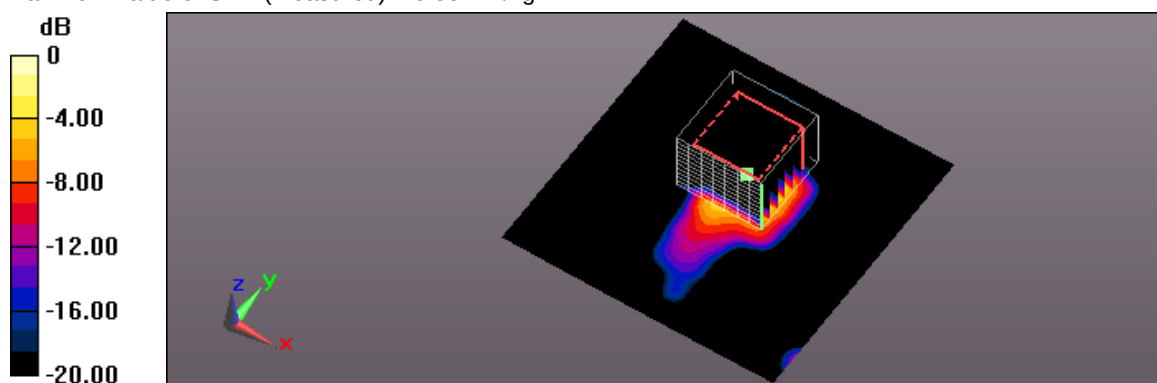

0 dB = 0.584 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 AM 11:42:57

98_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Vetical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210$ MHz; $\sigma = 5.253$ S/m; $\epsilon_r = 48.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0857 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.613 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00332 W/kg

Maximum value of SAR (measured) = 0.0328 W/kg

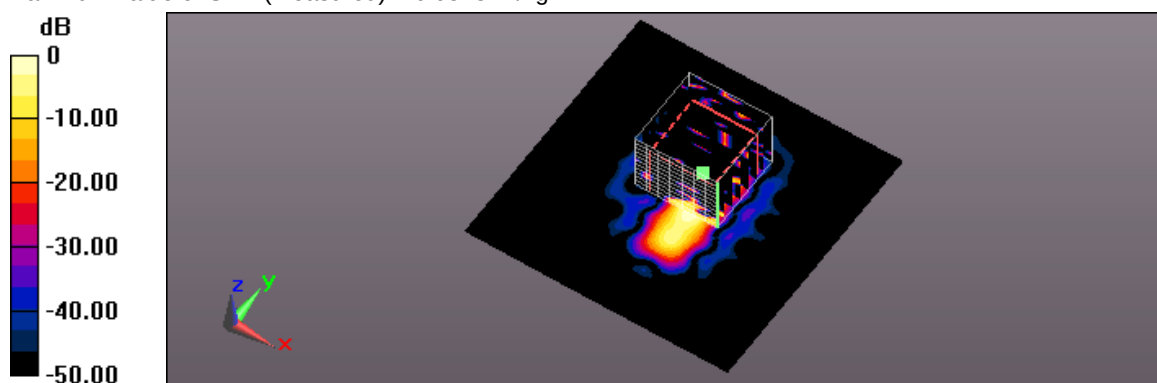

0 dB = 0.0328 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 PM 12:58:44

99_IEEE 802.11ac 5GHz 80MHz CH36_29.3M_Vetical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0830 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.797 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00515 W/kg

Maximum value of SAR (measured) = 0.0752 W/kg

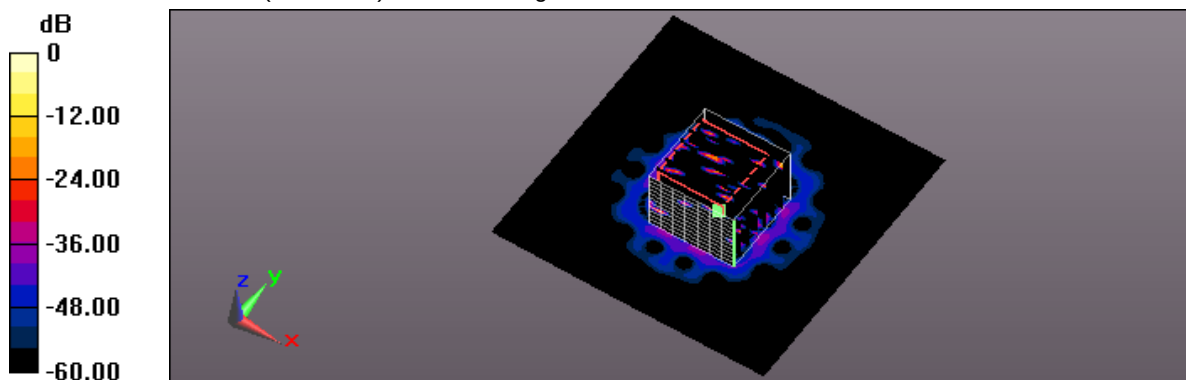

0 dB = 0.0752 W/kg



Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 PM 01:47:25

100_ IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Horizontal-Down (with USB cable)_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.504 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.879 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

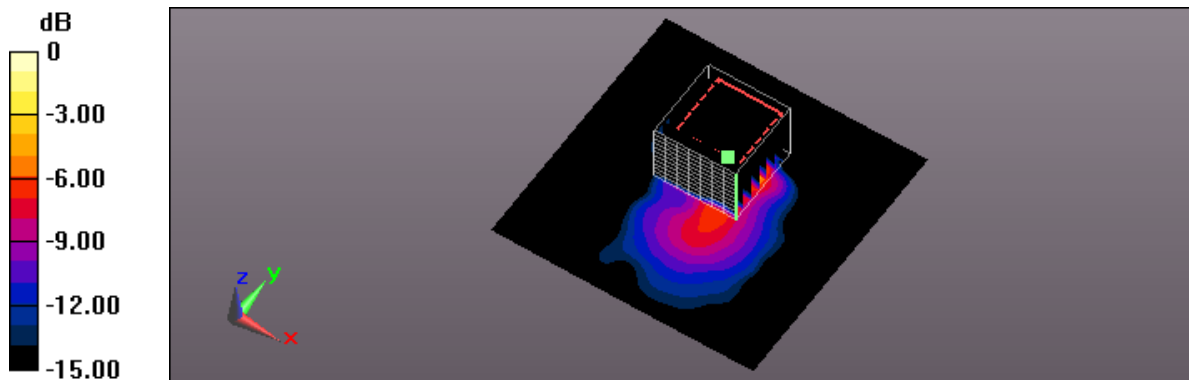

0 dB = 0.555 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/21 PM 02:52:26

101 IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Horizontal-UP_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.367 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

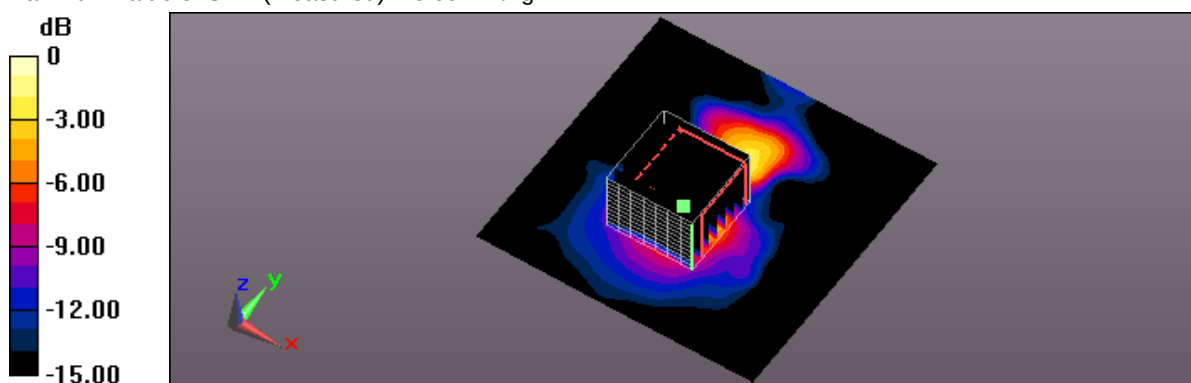

0 dB = 0.591 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 AM 01:48:52

102_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Horizontal-Down (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.525 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.306 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

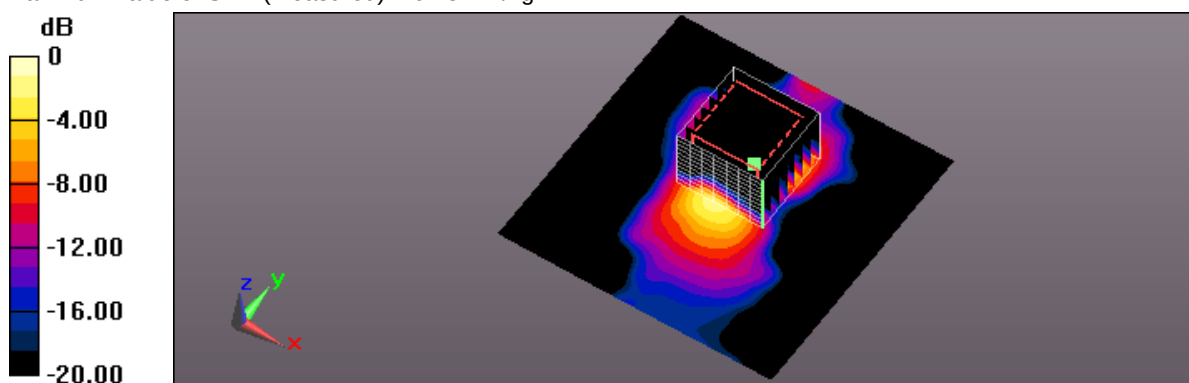

0 dB = 0.482 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 AM 02:59:31

103_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Vetical-Front (with USB cable)_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.103 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.931 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.00638 W/kg

Maximum value of SAR (measured) = 0.0934 W/kg

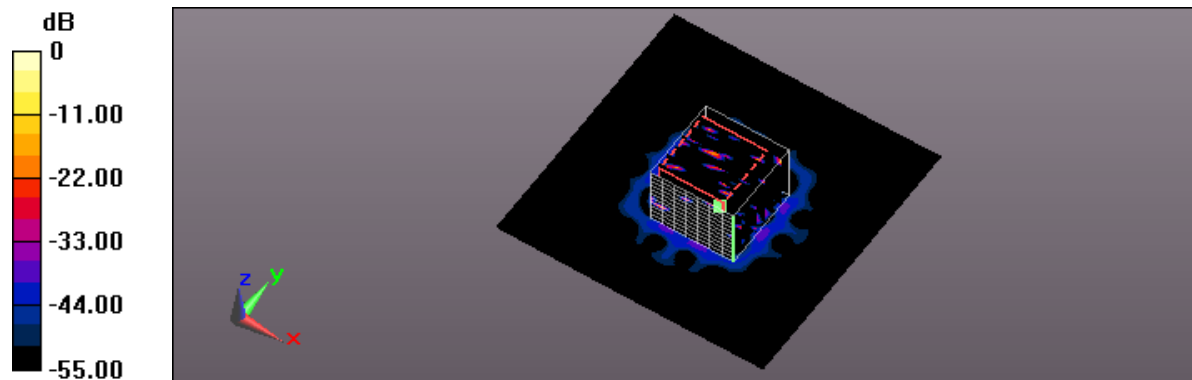

0 dB = 0.0934 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 AM 03:55:11

104_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Vetical-Back_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.186 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.763 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

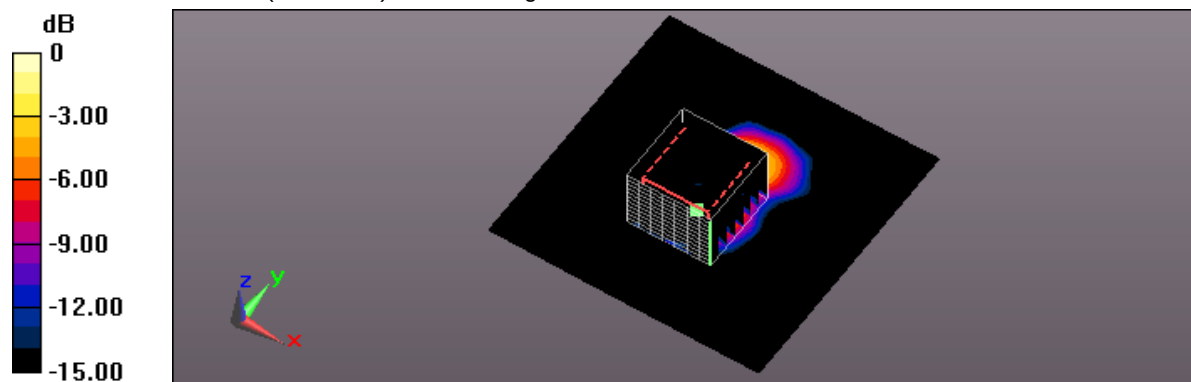

0 dB = 0.191 W/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2016/10/20 AM 04:51:16

105_ IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Horizontal-UP_BF ON_5mm_ANT-1

DUT: DWA-181; Type: AC1300 MU-MIMO Wi-Fi Nano USB Adapter; FCC ID: KA2WA181A1

Communication System: UID 0, IEEE 802.11ac(5GHz)HT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 6.072$ S/m; $\epsilon_r = 47.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1036
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (91x91x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.547 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.400 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

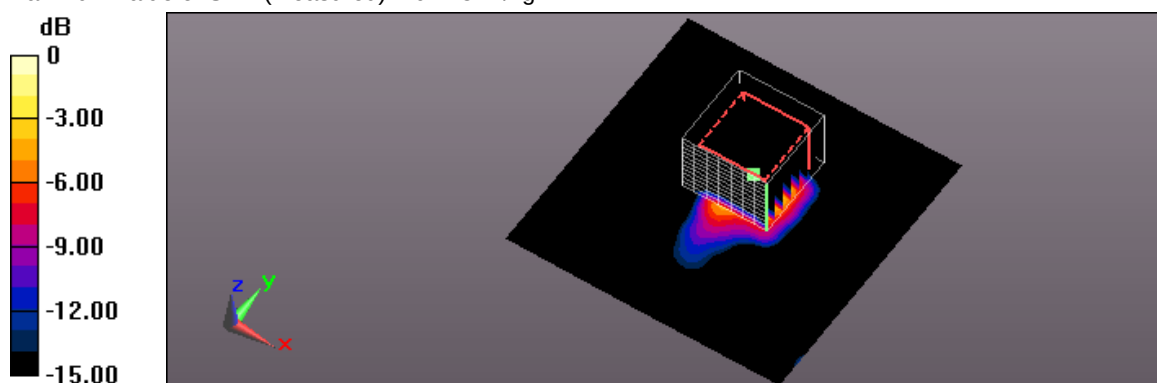

0 dB = 0.478 W/kg



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D2450V2 SN:712 Calibration No.Z16-97032
- Dipole _ D5GHzV2 SN:1021 Calibration No.Z16-97033
- Probe _ EX3DV4 SN:3977 Calibration No. Z16-97020
- DAE _ DAE4 SN:779 Calibration No. Z16-97019



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

ATL

Certificate No: Z16-97032

CALIBRATION CERTIFICATE

Object D2450V2 - SN: 712

Calibration Procedure(s) FD-Z11-2-003-01
Calibration Procedures for dipole validation kits

Calibration date: April 1, 2016

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference Probe EX3DV4	SN 7307	19-Feb-16(SPEAG,No.EX3-7307_Feb16)	Feb-17
DAE4	SN 771	02-Feb-16(CTTL-SPEAG,No.Z16-97011)	Feb-17
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-16 (CTTL, No.J16X00893)	Jan-17
Network Analyzer E5071C	MY46110673	26-Jan-16 (CTTL, No.J16X00894)	Jan-17

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: April 6, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z16-97032

Page 1 of 8



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1258
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.3 $\pm$ 6 %	1.82 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.4 mW / g $\pm$ 20.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.12 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.5 mW / g $\pm$ 20.4 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.3 $\pm$ 6 %	2.00 mho/m $\pm$ 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	52.1 mW / g $\pm$ 20.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.16 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.5 mW / g $\pm$ 20.4 % (k=2)



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.4Ω+ 5.10jΩ
Return Loss	- 25.7dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.6Ω+ 6.31jΩ
Return Loss	- 23.9dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.255 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 04.01.2016

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 40.25$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7307; ConvF(7.36, 7.36, 7.36); Calibrated: 2/19/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn771; Calibrated: 2/2/2016
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

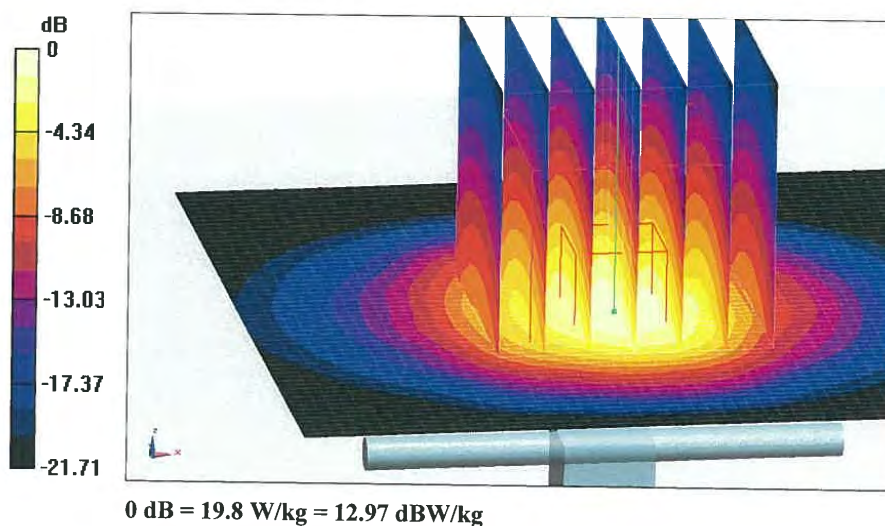




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

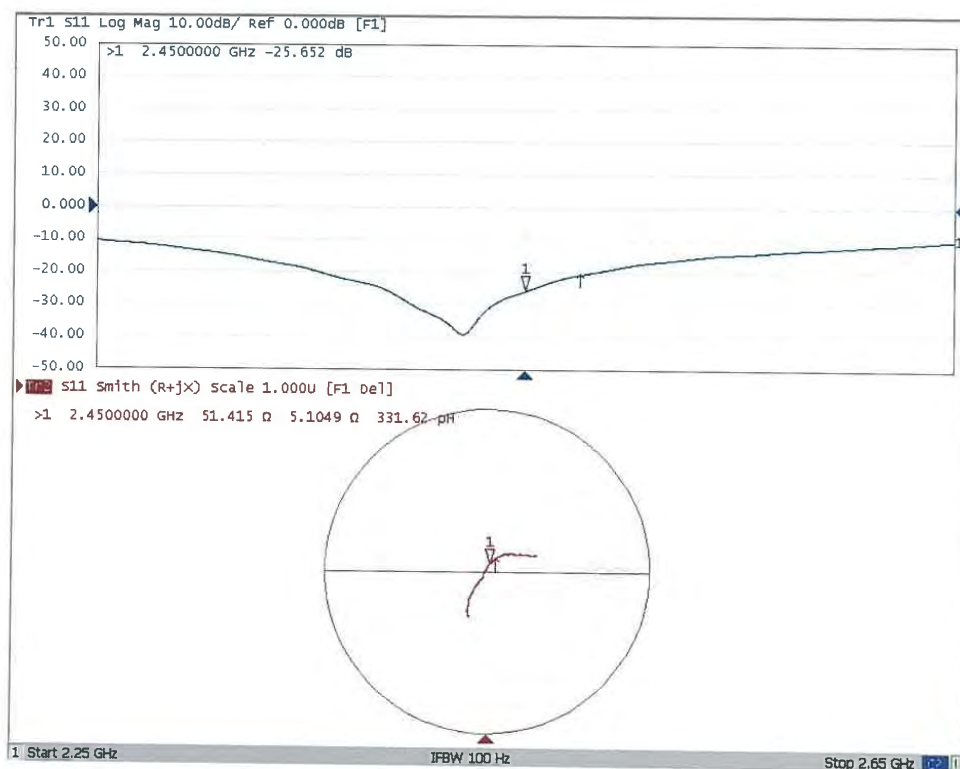



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 04.01.2016

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.996 \text{ S/m}$; $\epsilon_r = 52.25$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7307; ConvF(7.22, 7.22, 7.22); Calibrated: 2/19/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn771; Calibrated: 2/2/2016
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 97.15 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 19.9 W/kg

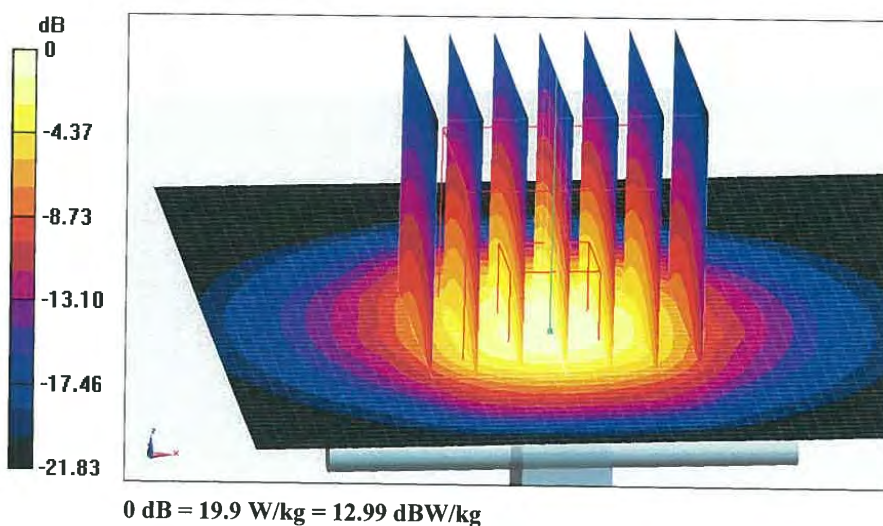




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

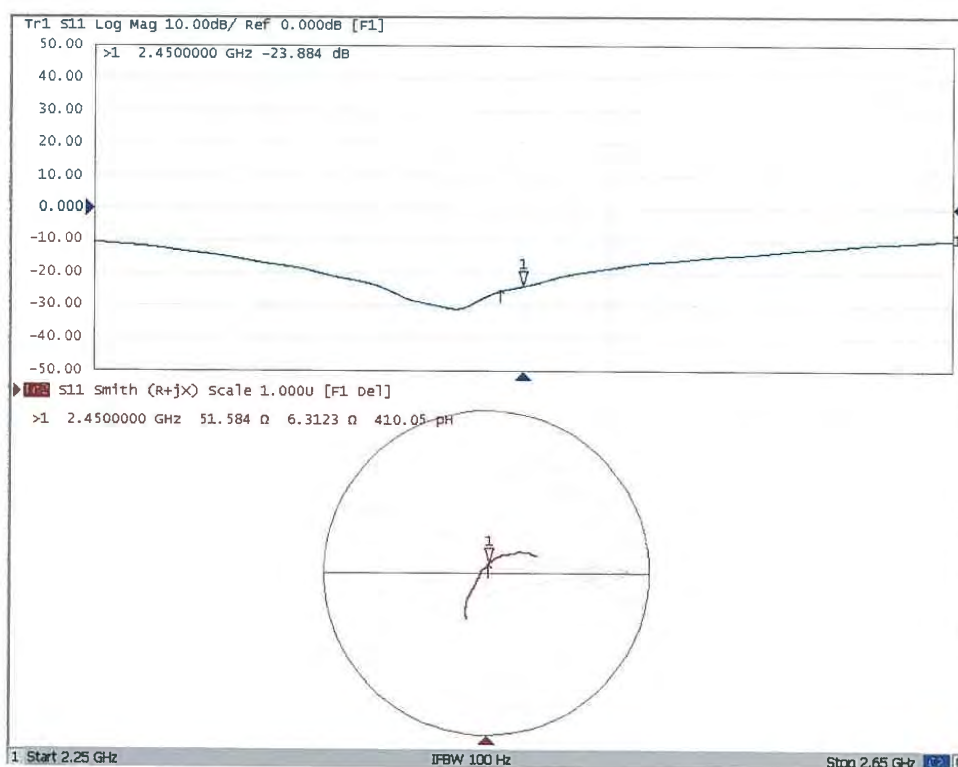



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

ATL

Certificate No: Z16-97033

CALIBRATION CERTIFICATE

Object D5GHzV2 - SN: 1021

Calibration Procedure(s) FD-Z11-2-003-01
Calibration Procedures for dipole validation kits

Calibration date: April 8, 2016

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
ReferenceProbe EX3DV4	SN 3617	26-Aug-15(SPEAG,No.EX3-3617_Aug15)	Aug-16
DAE4	SN 771	02-Feb-16(CTTL-SPEAG,No.Z16-97011)	Feb-17
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-16 (CTTL, No.J16X00893)	Jan-17
NetworkAnalyzer E5071C	MY46110673	26-Jan-16 (CTTL, No.J16X00894)	Jan-17

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: April 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z16-97033

Page 1 of 14

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.8.1258
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.4 $\pm$ 6 %	4.60 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.88 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	79.0 mW /g $\pm$ 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.24 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.5 mW /g $\pm$ 22.2 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	4.89 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.15 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	81.7 mW / g ± 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.31 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.2 mW / g ± 22.2 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	5.16 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.98 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	80.0 mW / g ± 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.25 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.6 mW / g ± 22.2 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.7 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.55 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	75.7 mW /g ± 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.13 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.4 mW /g ± 22.2 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.6 ± 6 %	5.73 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.19 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	82.3 mW /g ± 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.29 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.0 mW /g ± 22.2 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.3 ± 6 %	6.10 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.69 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	77.3 mW /g ± 23.0 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.13 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.4 mW /g ± 22.2 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.4 Ω - 6.48j Ω
Return Loss	- 23.8dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	53.5 Ω - 3.96j Ω
Return Loss	- 25.8dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.4 Ω - 2.19j Ω
Return Loss	- 24.0dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	51.8 Ω - 6.34j Ω
Return Loss	- 23.8dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	54.4 Ω - 1.35j Ω
Return Loss	- 27.1dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.9 Ω - 1.98j Ω
Return Loss	- 23.4dB



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

General Antenna Parameters and Design

Electrical Delay (one direction)	1.305 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 04.07.2016

Test Laboratory: CCTL, Beijing, China

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1021

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz,
Frequency: 5800 MHz,

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.599$ mho/m; $\epsilon_r = 36.41$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5500$ MHz; $\sigma = 4.891$ mho/m; $\epsilon_r = 36.03$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.163$ mho/m; $\epsilon_r = 35.97$; $\rho = 1000$ kg/m³,

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(5.46,5.46,5.46); Calibrated: 2015/8/26, ConvF(5.05,5.05,5.05); Calibrated: 2015/8/26, ConvF(4.85,4.85,4.85); Calibrated: 2015/8/26,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn771; Calibrated: 2016/2/02
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 71.81 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.24 W/kg
Maximum value of SAR (measured) = 18.8 W/kg


Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 70.82 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 37.0 W/kg
SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.31 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 68.77 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 37.2 W/kg
SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

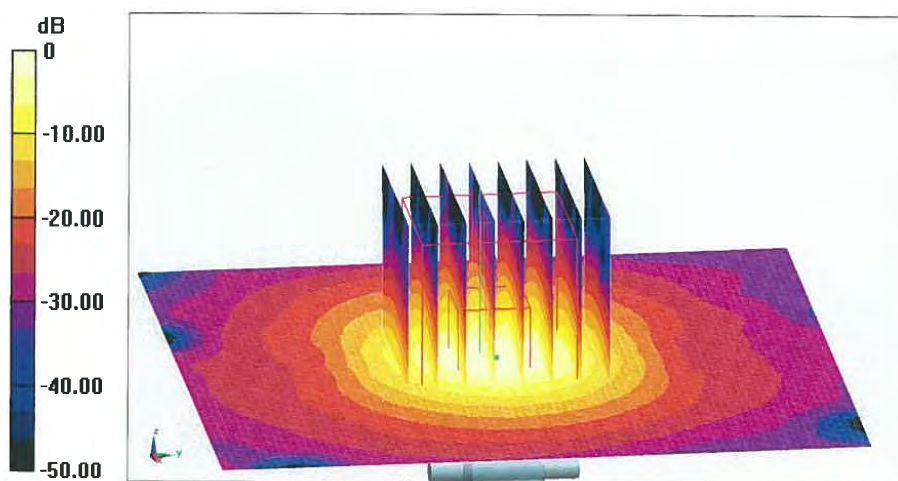

0 dB = 20.2 W/kg = 13.05 dBW/kg

Impedance Measurement Plot for Head TSL

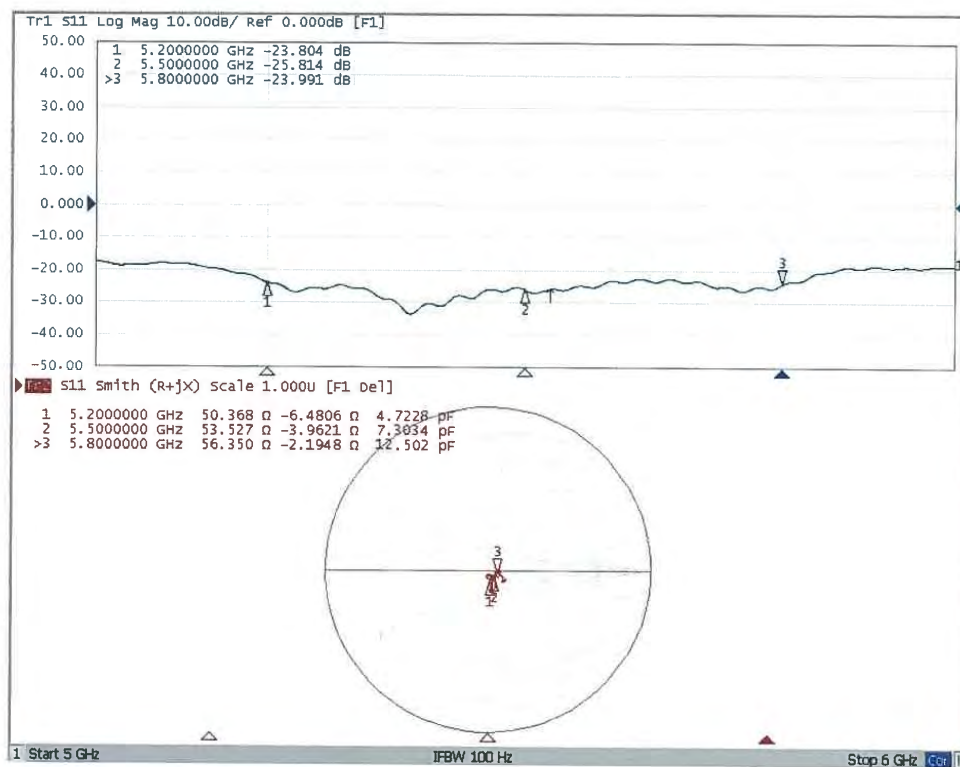

DASY5 Validation Report for Body TSL

Date: 04.08.2016

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1021

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz,

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.355$ mho/m; $\epsilon_r = 49.72$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.726$ mho/m; $\epsilon_r = 49.58$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.096$ mho/m; $\epsilon_r = 49.25$; $\rho = 1000$ kg/m³,

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(4.88,4.88,4.88); Calibrated: 2015/8/26, ConvF(4.41,4.41,4.41); Calibrated: 2015/8/26, ConvF(4.41,4.41,4.41); Calibrated: 2015/8/26,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn771; Calibrated: 2016/2/02
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/3
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 61.18 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 30.9 W/kg
SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.13 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.40 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 37.4 W/kg
SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.29 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.24 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 37.0 W/kg
SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.13 W/kg
Maximum value of SAR (measured) = 19.6 W/kg

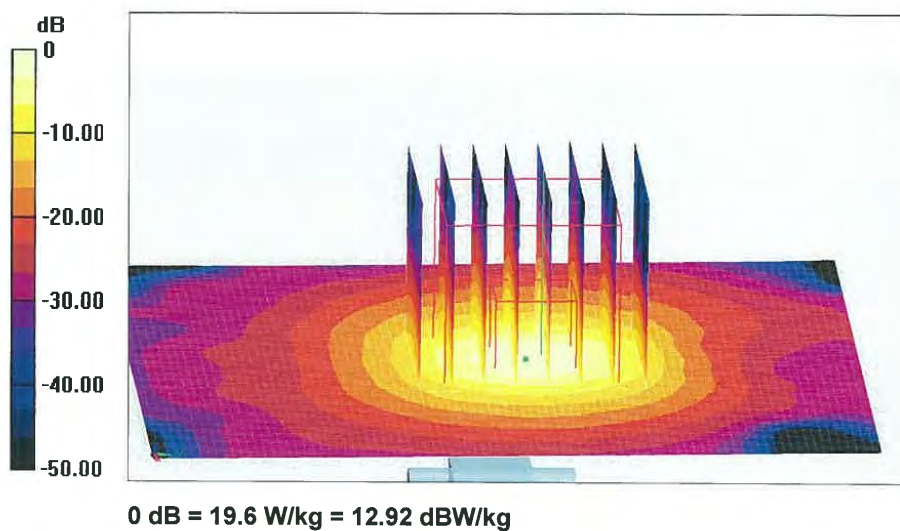




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

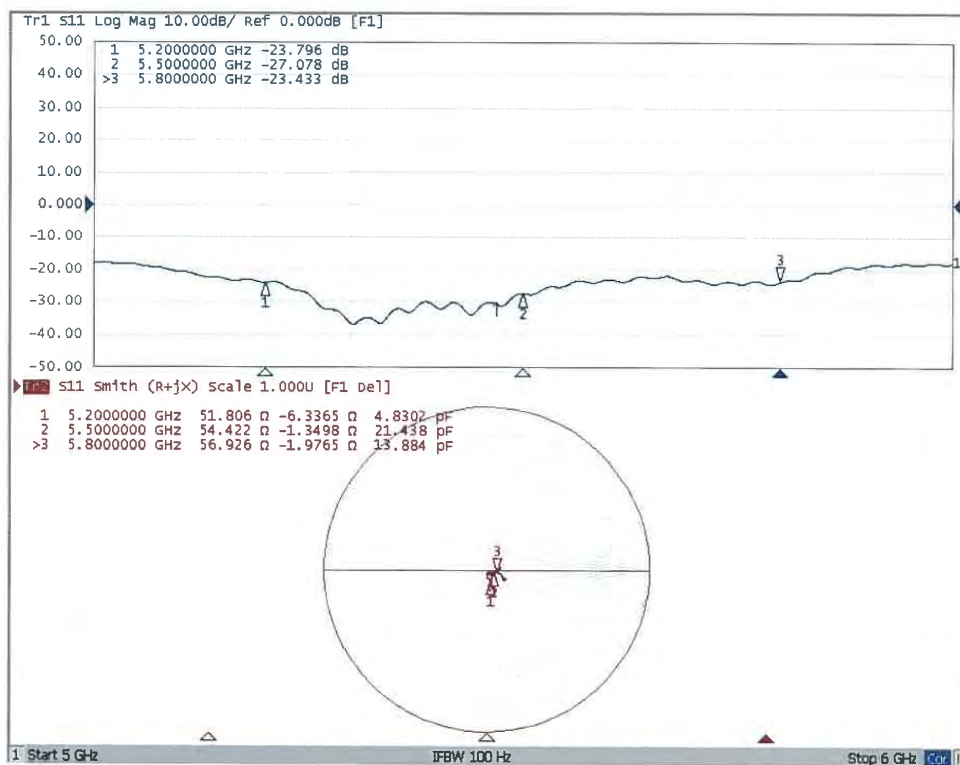



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

ATL

Certificate No: Z16-97020

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3977

Calibration Procedure(s)

FD-Z11-2-004-01

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

March 09, 2016

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101548	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference10dBAttenuator	18N50W-10dB	13-Mar-14(TMC,No.JZ14-1103)	Mar-16
Reference20dBAttenuator	18N50W-20dB	13-Mar-14(TMC,No.JZ14-1104)	Mar-16
Reference Probe EX3DV4	SN 3617	26-Aug-15(SPEAG,No.EX3-3617_Aug15)	Aug-16
DAE4	SN 1331	21-Jan-16(SPEAG, No.DAE4-1331_Jan15)	Jan -17
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-15 (CTTL, No.J15X04255)	Jun-16
Network Analyzer E5071C	MY46110673	26-Jan-16 (CTTL, No.J16X00894)	Jan -17

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: March 10, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z16-97020

Page 1 of 11

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Probe EX3DV4

SN: 3977

Calibrated: March 09, 2016

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3977

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.53	0.58	0.51	±10.8%
DCP(mV) ^B	102.9	103.1	100.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	208.7	±2.2%
		Y	0.0	0.0	1.0		215.6	
		Z	0.0	0.0	1.0		202.6	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3977

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.82	9.82	9.82	0.30	0.75	± 12%
835	41.5	0.90	9.62	9.62	9.62	0.15	1.37	± 12%
900	41.5	0.97	9.55	9.55	9.55	0.12	1.62	± 12%
1750	40.1	1.37	8.36	8.36	8.36	0.14	1.88	± 12%
1900	40.0	1.40	8.02	8.02	8.02	0.14	1.96	± 12%
2000	40.0	1.40	8.02	8.02	8.02	0.12	2.81	± 12%
2300	39.5	1.67	7.69	7.69	7.69	0.37	0.92	± 12%
2450	39.2	1.80	7.28	7.28	7.28	0.29	1.21	± 12%
2600	39.0	1.96	7.18	7.18	7.18	0.31	1.20	± 12%
5200	36.0	4.66	5.45	5.45	5.45	0.48	1.28	± 13%
5300	35.9	4.76	5.25	5.25	5.25	0.48	1.32	± 13%
5500	35.6	4.96	5.05	5.05	5.05	0.48	1.25	± 13%
5600	35.5	5.07	4.82	4.82	4.82	0.50	1.33	± 13%
5800	35.3	5.27	4.83	4.83	4.83	0.50	1.41	± 13%

^C Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3977

Calibration Parameter Determined in Body Tissue Simulating Media


f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	9.95	9.95	9.95	0.38	0.82	± 12%
835	55.2	0.97	9.82	9.82	9.82	0.14	1.60	± 12%
900	55.0	1.05	9.67	9.67	9.67	0.18	1.35	± 12%
1750	53.4	1.49	8.00	8.00	8.00	0.15	2.18	± 12%
1900	53.3	1.52	7.66	7.66	7.66	0.15	2.66	± 12%
2000	53.3	1.52	7.80	7.80	7.80	0.15	3.21	± 12%
2300	52.9	1.81	7.33	7.33	7.33	0.28	1.43	± 12%
2450	52.7	1.95	7.30	7.30	7.30	0.30	1.40	± 12%
2600	52.5	2.16	7.08	7.08	7.08	0.37	1.05	± 12%
5200	49.0	5.30	4.81	4.81	4.81	0.44	1.58	± 13%
5300	48.9	5.42	4.61	4.61	4.61	0.44	1.80	± 13%
5500	48.6	5.65	4.31	4.31	4.31	0.46	1.80	± 13%
5600	48.5	5.77	4.21	4.21	4.21	0.48	1.85	± 13%
5800	48.2	6.00	4.33	4.33	4.33	0.50	1.60	± 13%

^C Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

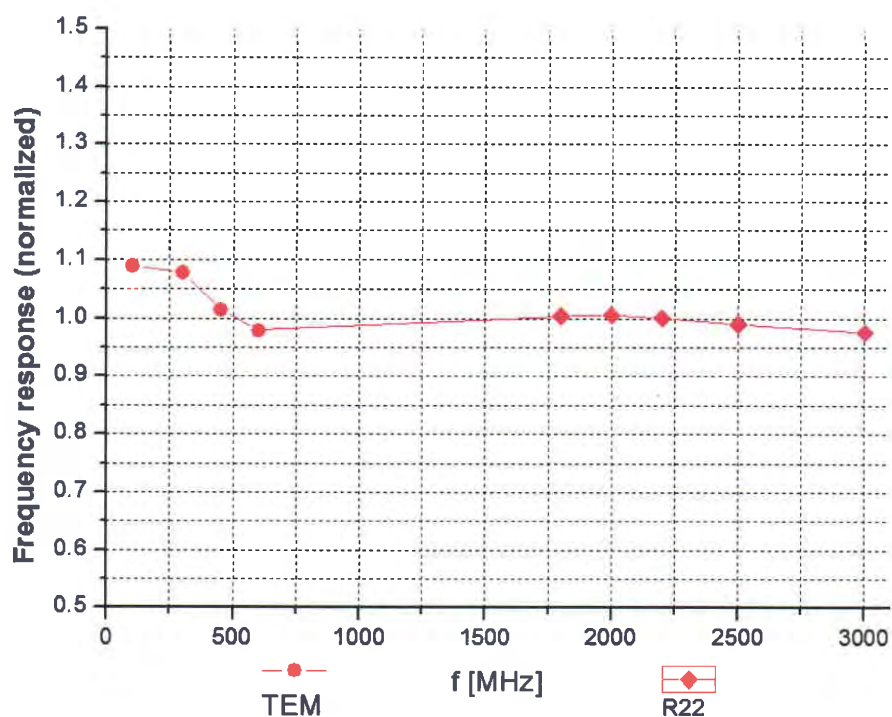

Uncertainty of Frequency Response of E-field: $\pm 7.5\%$ ($k=2$)






In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

f=1800 MHz, R22

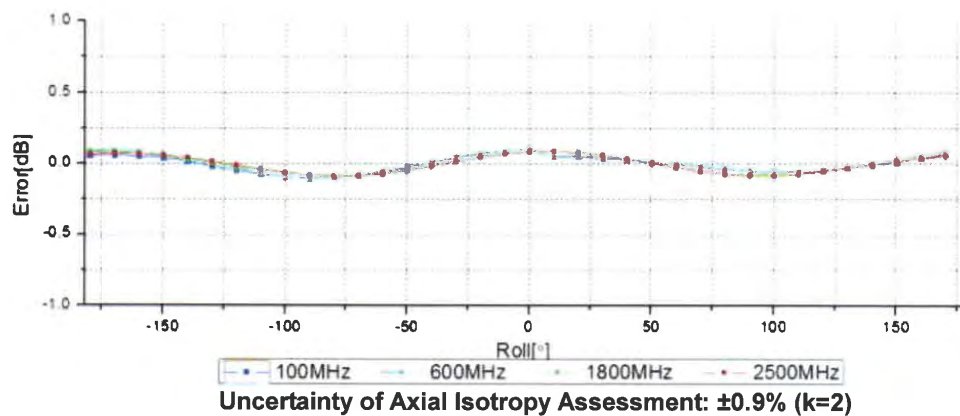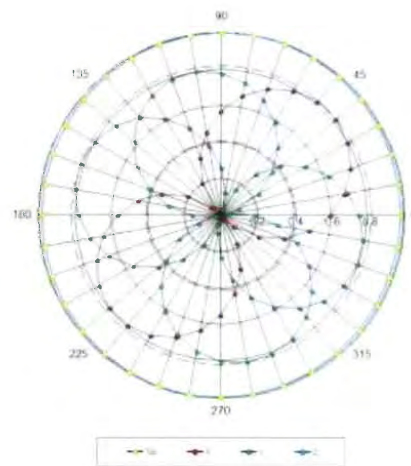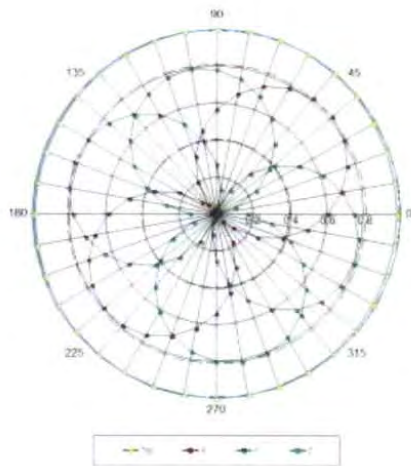

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)


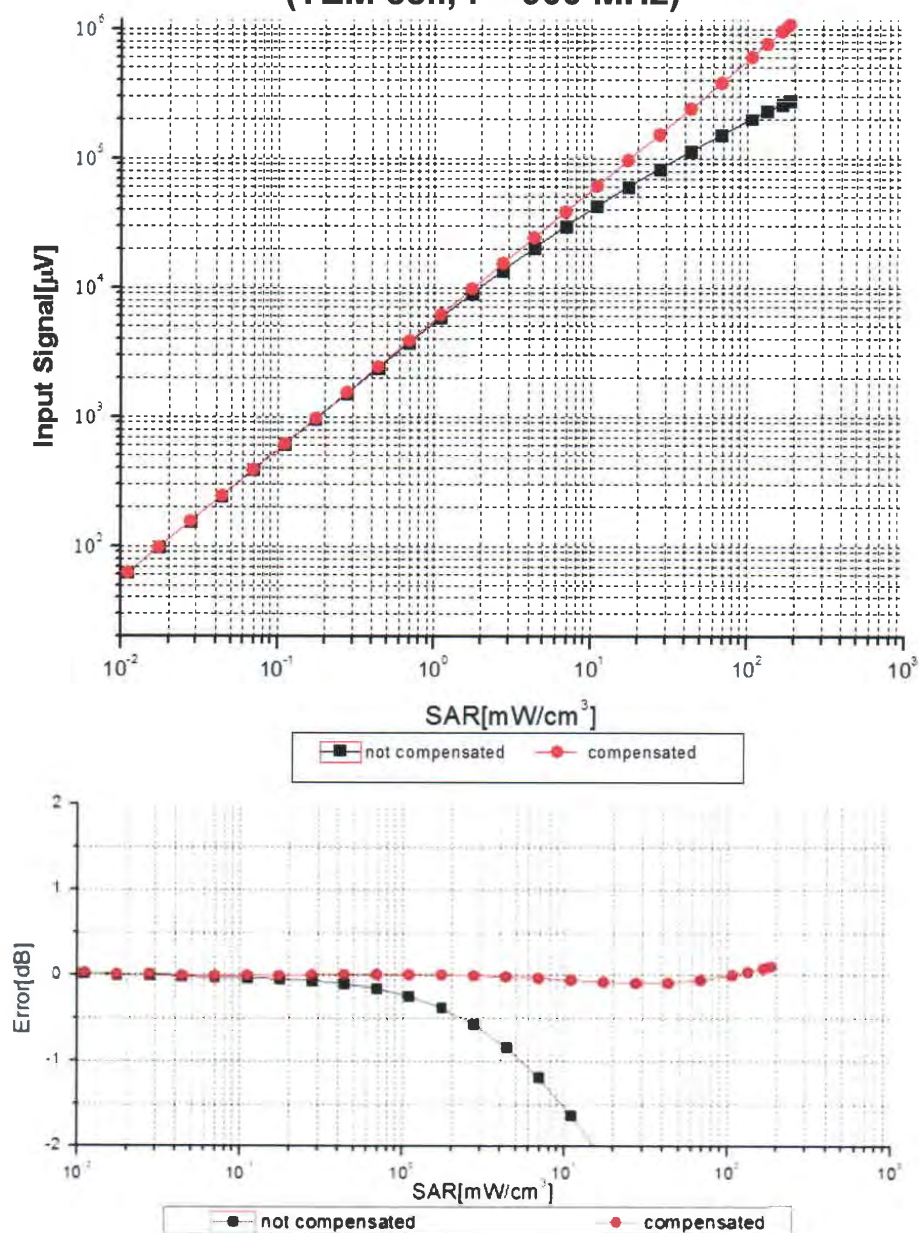


Uncertainty of Linearity Assessment: $\pm 0.9\%$ (k=2)


Conversion Factor Assessment

f=900 MHz, WGLS R9(H_convF)

f=1750 MHz, WGLS R22(H_convF)

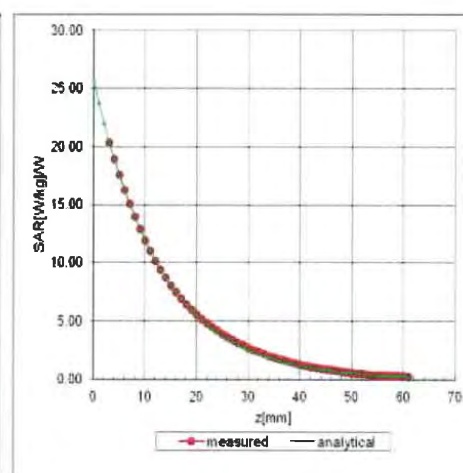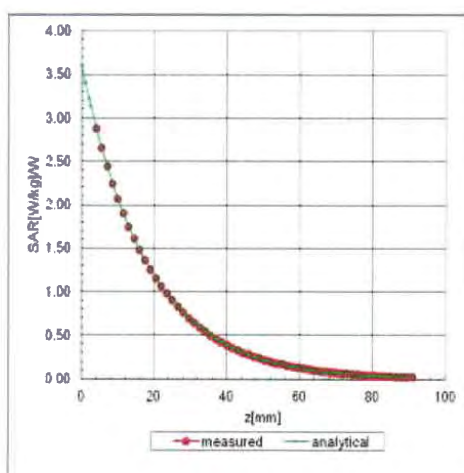

Deviation from Isotropy in Liquid

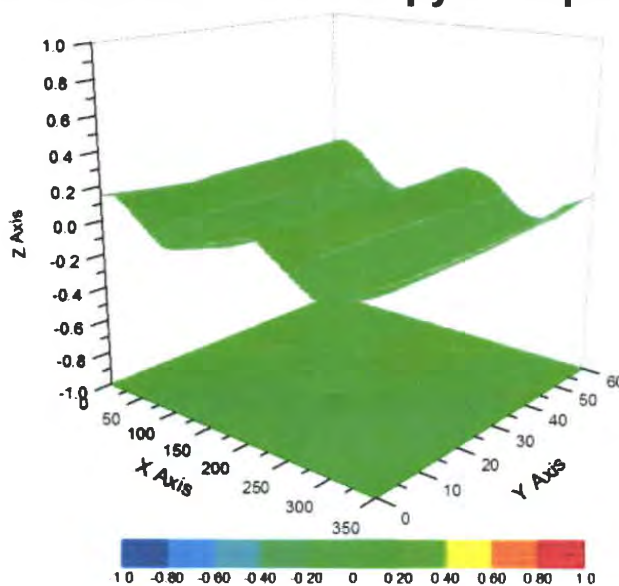

Uncertainty of Spherical Isotropy Assessment: $\pm 2.8\%$ (K=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: ctl@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3977

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



In Collaboration with
CTTL
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client : **ATL**

Certificate No: **Z16-97019**

CALIBRATION CERTIFICATE

Object **DAE4 - SN: 779**

Calibration Procedure(s) **FD-Z11-2-002-01**
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: **March 2, 2016**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	06-July-15 (CTTL, No:J15X04257)	July-16

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: **March 3, 2016**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z16-97019

Page 1 of 3



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu\text{V}$, full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$404.044 \pm 0.15\% (k=2)$	$403.722 \pm 0.15\% (k=2)$	$403.947 \pm 0.15\% (k=2)$
Low Range	$3.97041 \pm 0.7\% (k=2)$	$3.98123 \pm 0.7\% (k=2)$	$3.99689 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$158 \pm 1^\circ$
---	-------------------