

FCC Test Report

Report No.: AGC10648220706FE05

FCC ID	:	2AXBN-DX2				
APPLICATION PURPOSE	:	Original Equipment				
PRODUCT DESIGNATION	:	Wireless Smart Battery Camera				
BRAND NAME	:	N/A				
MODEL NAME	:	DX2, HGWBC-351, HGWBC-356, HGWBC-358, DX1, DX5, DX4, DX6, DX7, DX8, DG1, DG4, DG5, DG6, DG8, Q1, Q2, Q3, Q5, Q6, Q7, Q8, CG1, CG2, CG5, CG6, CG7, CQ1				
APPLICANT	:	SHENZHEN CYTON Intelligence Technology CO., LTD				
DATE OF ISSUE	:	Nov. 14, 2022				
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15.247				
REPORT VERSION	:	V1.0				
		Compliance Grennen Co				
<u>Attestation of</u>	<u>G</u>](obal C ompliance (Shenzhen) Co., Ltd				





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 14, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. IEEE 802.11N MODULATION SCHEME	8
2.4. RELATED SUBMITTAL(S) / GRANT (S)	
2.5. TEST METHODOLOGY	
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	9
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	14
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3. LIMITS AND MEASUREMENT RESULT	15
8. BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USEDJN	
9.4. LIMITS AND MEASUREMENT RESULT	



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	40
10.1 MEASUREMENT PROCEDURE	40
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
10.3 MEASUREMENT EQUIPMENT USED	40
10.4 LIMITS AND MEASUREMENT RESULT	40
11. RADIATED EMISSION	46
11.1. MEASUREMENT PROCEDURE	46
11.2. TEST SETUP	47
11.3. LIMITS AND MEASUREMENT RESULT	48
11.4. TEST RESULT	48
12. LINE CONDUCTED EMISSION TEST	66
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	66
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	66
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	67
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	68
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX B: PHOTOGRAPHS OF EUT	70



1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN CYTON Intelligence Technology CO., LTD
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China
manufacturer	SHENZHEN CYTON Intelligence Technology CO., LTD
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China
Factory	SHENZHEN CYTON Intelligence Technology CO., LTD
Address	F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China
Product Designation	Wireless Smart Battery Camera
Brand Name	N/A
Test Model	DX2
Series Model	HGWBC-351, HGWBC-356, HGWBC-358, DX1, DX5, DX4, DX6, DX7, DX8, DG1, DG4, DG5, DG6, DG8, Q1, Q2, Q3, Q5, Q6, Q7, Q8, CG1, CG2, CG5, CG6, CG7, CQ1
Declaration of Difference	The only difference is the model number
Date of receipt of test item	Oct. 31, 2022
Date of test	Oct. 31, 2022 to Nov. 14, 2022
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Alan Duan Prepared By Nov. 14, 2022 (Project Engineer) **Reviewed By** Calvin Liu Nov. 14, 2022 (Reviewer) Max Zhan Approved By Max Zhang Nov. 14, 2022 (Authorized Officer)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Smart Battery Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

WLAN 2.4G **Equipment Type Frequency Band** 2400MHz ~ 2483.5MHz **Operation Frequency** 2412MHz ~ 2462MHz IEEE 802.11b: 17.63dBm; IEEE 802.11g: 23.87dBm; **Output Power (Average)** IEEE 802.11n(HT20): 23.21dBm; IEEE 802.11b: 20.26dBm; IEEE 802.11g: 23.08dBm; **Output Power (Peak)** IEEE 802.11n(HT20): 22.08dBm; 802.11b:DQPSK, DBPSK, CCK Modulation 802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK 802.11b: 1/2/5.5/11Mbps **Data Rate** 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps Number of channels 11 **Hardware Version** Flight B12T_V1.0 Software Version V3.3.0 **Antenna Designation** FPC antenna (Comply with requirements of the FCC part 15.203) Antenna Gain 2.62dBi DC 3.7V by battery or DC 5V by adapter **Power Supply**

A major technical description of EUT is described as following



2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency		
	1	2412 MHZ		
	2	2417 MHZ		
	3	2422 MHZ		
	4	2427 MHZ		
	5	2432 MHZ		
2400~2483.5MHZ	6	2437 MHZ		
	7	2442 MHZ		
	8	2447 MHZ		
	9	2452 MHZ		
	10	2457 MHZ		
	11	2462 MHZ		

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11.



2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	RI	NBPSC		BPS	NDBPS			ata //bps) nsGl
macx					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AXBN-DX2** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmissio n system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd



2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION					
1	Low channel transmitting (TX)					
2	Middle channel transmitting (TX)					
3	High channel transmitting (TX)					
Transm Transm						

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

● 美词串口 ② 重多串口设置	
0K 16:38:57.596]发→◇AT+IFCFG=1am0, down 16:38:57.591]发→◇AT+IFCFG=1am0, down 0C 16:37:02.056]发→◇AT+ALTT=1,2,20,1,1 16:37:02.070]版→◆AT+ALTT=1,2,20,1,1 16:37:11.814]版→ ◆acception heartbeat 16:37:11.814]版→ ◆acception heartbeat 16:37:11.924]版→ ◆ait card ready 16:37:12.380]版→ ◆ait card ready 16:37:12.380]版→ ◆ait ok	
[16:35:57.591]版+◆AT+REFG=sland, down [16:37:502.006]发+◇AT+ALTX=1, 2, 20, 1, 1 [16:37:02.006]发+◇AT+ALTX=1, 2, 20, 1, 1 [16:37:11.014]版+◆AT+ALTX=1, 2, 20, 1, 1 [16:37:11.014]版+◆AT+ALTX=1, 2, 20, 1, 1 [16:37:11.024]版+◆rait card ready [16:37:12.380]版+◆rait ok [16:37:12.380]L [16:37:12.	
0K 16:37:02.066]发→◇AT+ALTX=1, 2, 20, 1, 1 16:37:02.070]收→◆AT+ALTX=1, 2, 20, 1, 1 0K 16:37:11.814]收→◆exception heartbeat 16:37:12.380]收→◆rait card ready 16:37:12.380]收→◆rait ok	
□ 16:37:02.070]收+◆AT+ALTX=1,2,20,1,1 0X 16:37:11.814]收+◆rati card ready 16:37:12.360]收+◆rati card ready 17:42[1](12:10](1	
0K [16:37:11.814]版+ ◆ szception heartbeat [16:37:11.924]版+ ◆ rait card ready [16:37:12.360]版+ ◆ rait ok	
[16:37:11.924]版+ ◆ nait card ready [16:37:12.380]版+ ◆ nait ok 清除窗口 打开文件 開Vill61aHil91-sscom-认证串口工具 vscom51.ini 发送文件 停止 清发送区 □ 最前 □ English 强i 端口号 [Coll8 USB-SERIAL CR340] [16:37:12.380]版+ ◆ nait ok [16:37:12.380]版+ ◆ nait ok [16:37:12.380]L [
[16:37:12 360]收+◆vait ok	
第四号 [COMB USB-SZEIAL CK340] □ IRX認示 保存動援 [□ 指收数据到文件 [□ IRX或法 [□ 定加封阅数机分包显示 ● 美初串口 ●	
第四号(DOMB USB-SZETAL CK340 □ IRX認示 保存動振 「 地球機構型文件 [地工发送 [定时发送:] = x/次 ● 美词串口 ●	(275年秋) 计图
● <u>美词串口</u> ● <u>●</u> 多串口设置 ■ <u>●</u> 多串口设置 ■ <u>下加时间歇和分包显示</u> 超加时间: 20 mc 第1 字节 至 末尾 ▼加校验 ^{None} ■ TTS IF DTR 波特室: 115200 ▼ AT+ALIX=1, 2, 20, 1, 1	」「休行参数」11版
TRTS ▼ DTR 波特室: 115200 ▼ AT+ALTX=1, 2, 20, 1, 1	
I HIS IV DIR 波特车. I Hacob 二	
	-
为了更好地发展SSCOM软件 请您注册嘉立创P结尾客户	-
【升级到15.13.1】★合亩高性价比46模块值得一试、★RT-Thread中国人的开源免费操作系统 ★新一代#iFi芯片兼容8266支持BT-	


Software Setting



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

Ite	em Equipment	Model No.	ID or Specification	Remark
1	1 Wireless Smart Battery Camera	DX2	2AXBN-DX2	EUT
2	2 Battery	N/A	DC 3.7V, 9000mAh	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note : The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	17.40	20.03	≤30	Pass
802.11b	2437	17.36	20.03	≤30	Pass
	2462	17.63	20.26	≤30	Pass
	2412	20.21	23.08	≤30	Pass
802.11g	2437	23.87	22.58	≤30	Pass
	2462	19.91	22.19	≤30	Pass
802.11n20	2412	23.21	22.01	≤30	Pass
	2437	19.72	22.08	≤30	Pass
	2462	19.69	22.06	≤30	Pass



8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

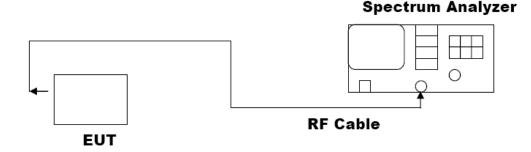




8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2412	13.165	10.092	≥0.5	Pass
802.11b	2437	13.160	10.097	≥0.5	Pass
	2462	13.035	10.094	≥0.5	Pass
802.11g	2412	16.544	16.471	≥0.5	Pass
	2437	16.540	16.429	≥0.5	Pass
	2462	16.551	16.472	≥0.5	Pass
802.11n20	2412	17.616	17.628	≥0.5	Pass
	2437	17.628	17.633	≥0.5	Pass
	2462	17.617	17.639	≥0.5	Pass




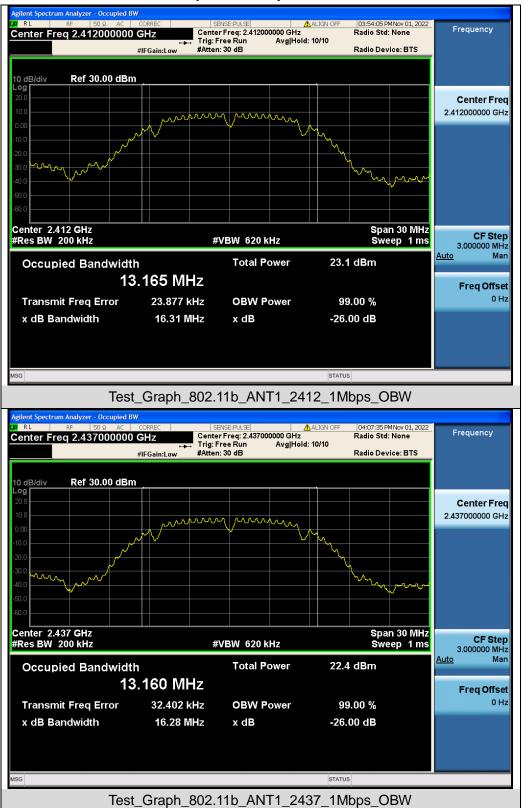


Test Graphs of Occupied Bandwidth






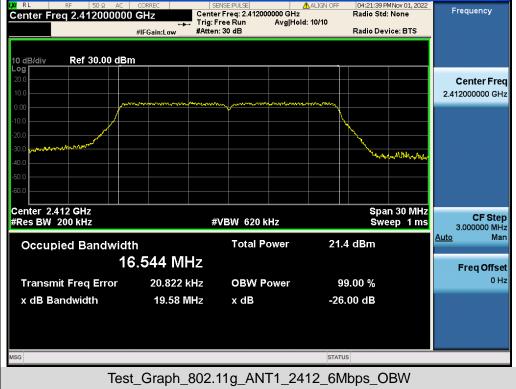




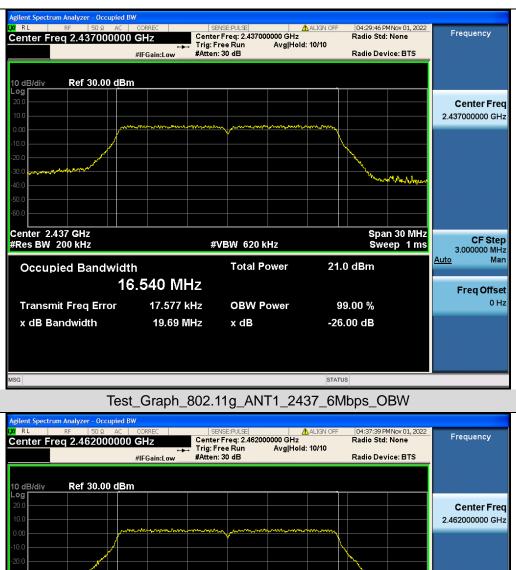


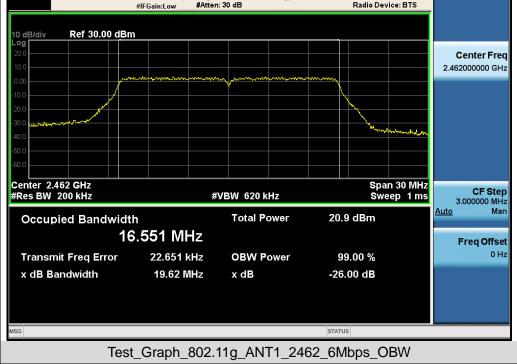




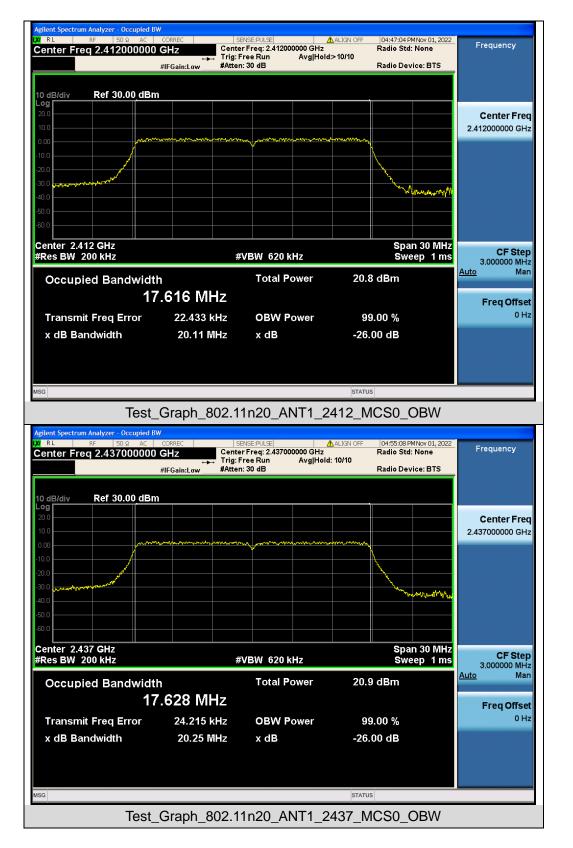



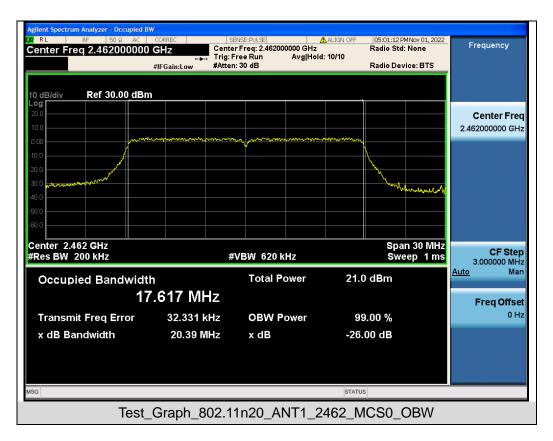



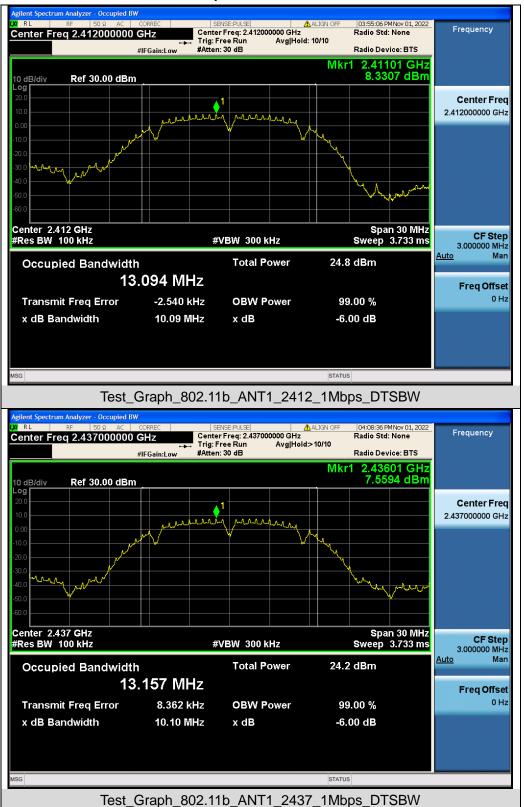


Test Graphs of DTS Bandwidth







Test_Graph_802.11g_ANT1_2412_6Mbps_DTSBW



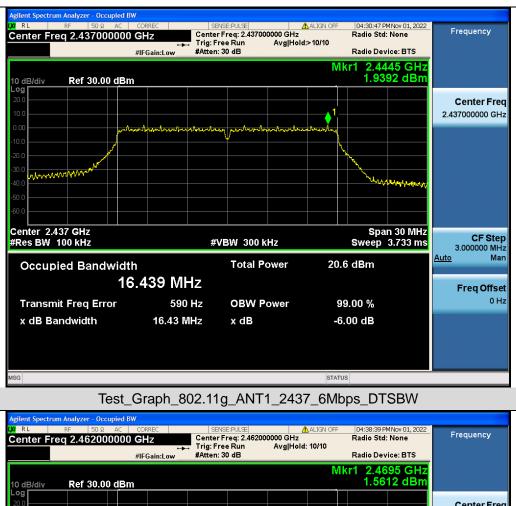


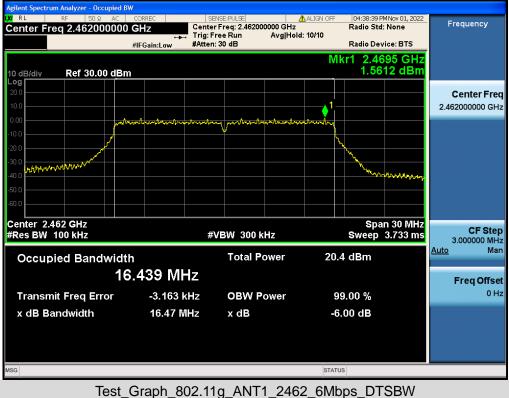



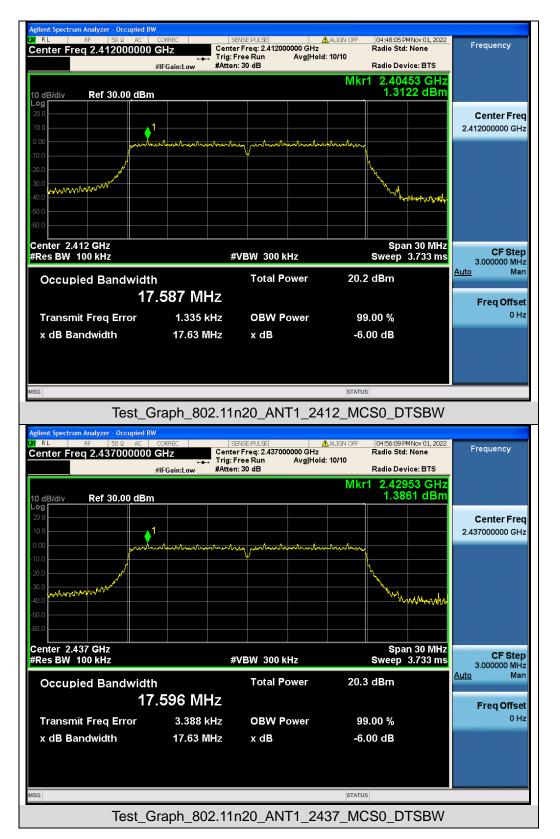



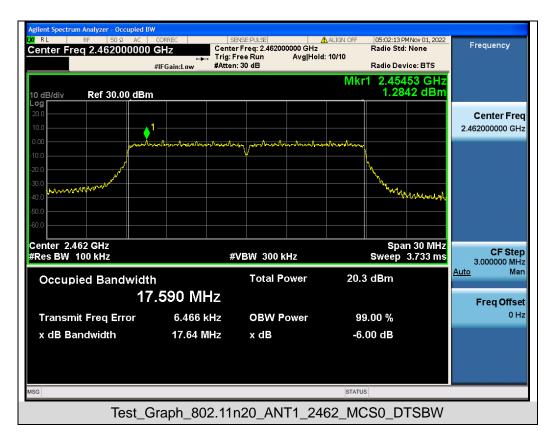



9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.
- **Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.


9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applieghte Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Note: The limits reference level is according to the test plot of -6dB bandwidth.






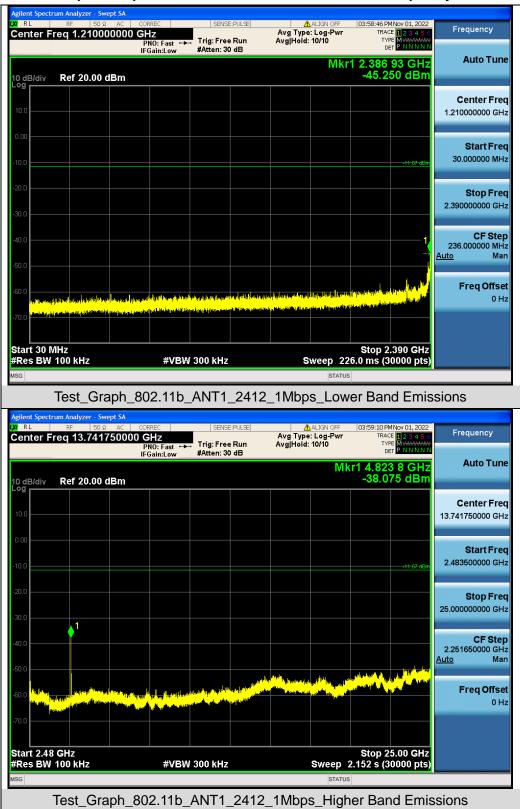


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




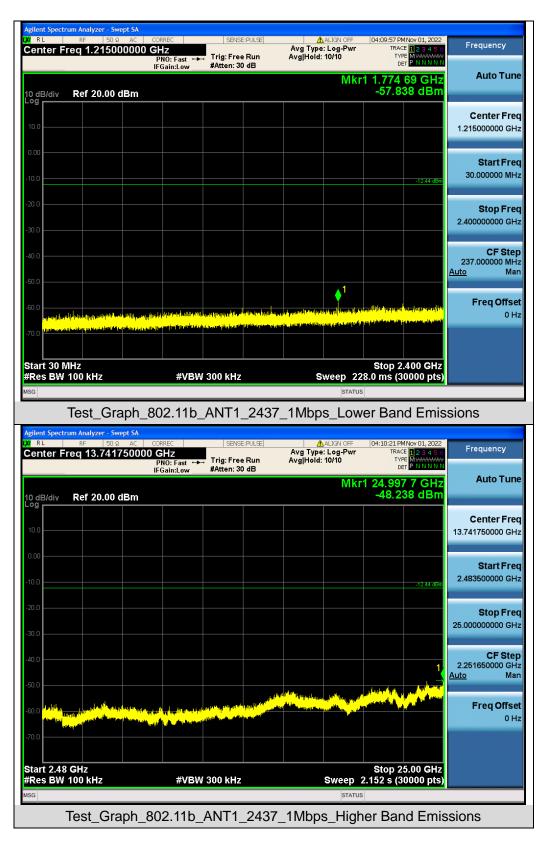




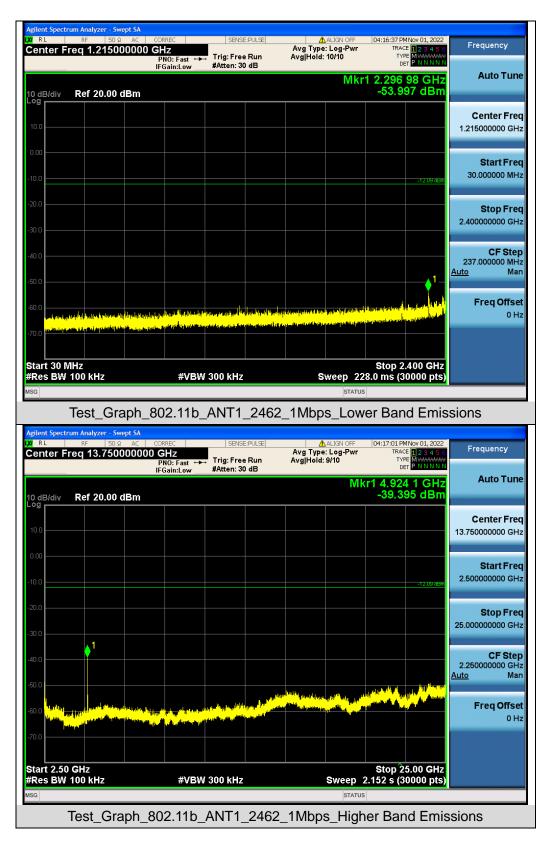




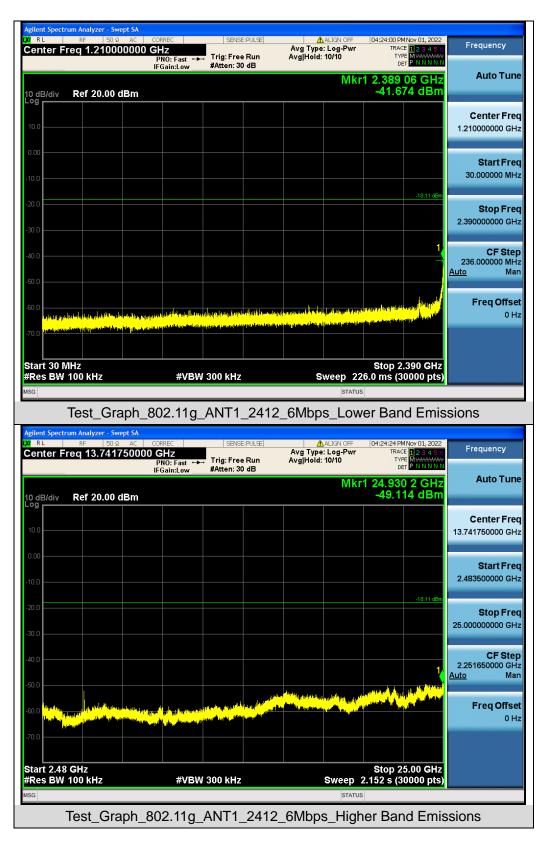




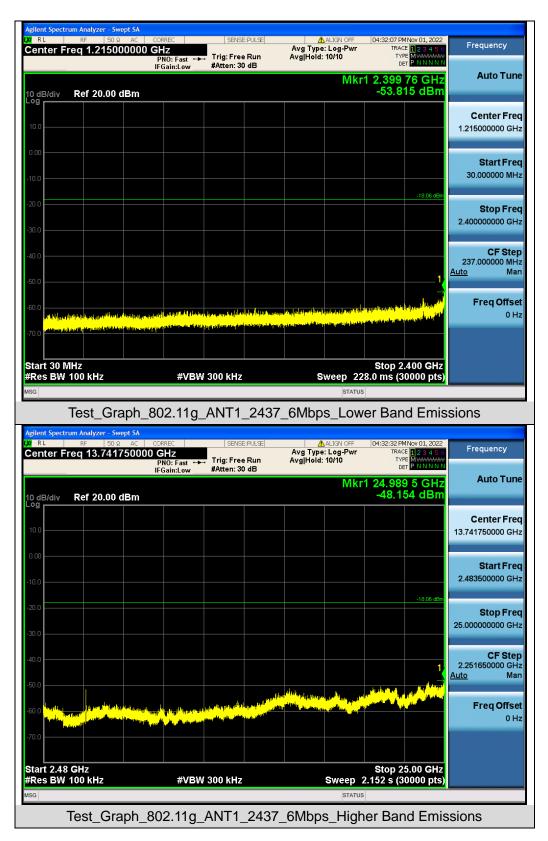




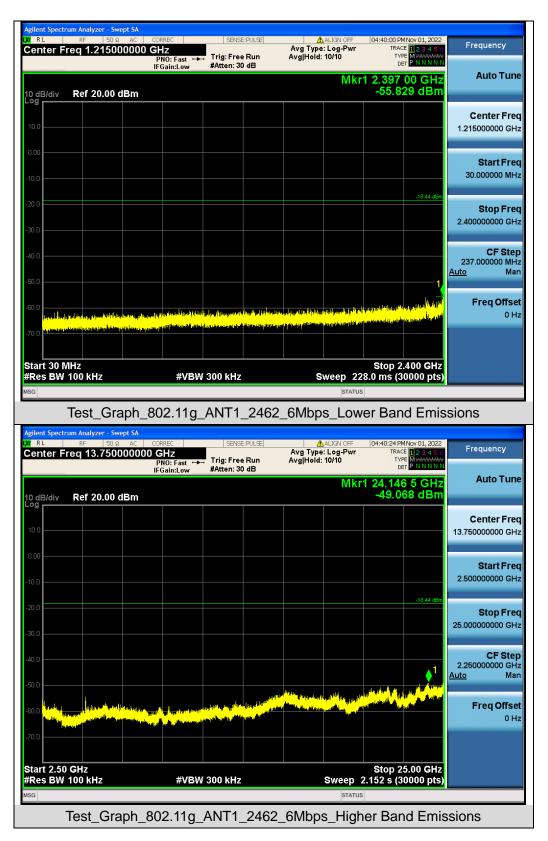




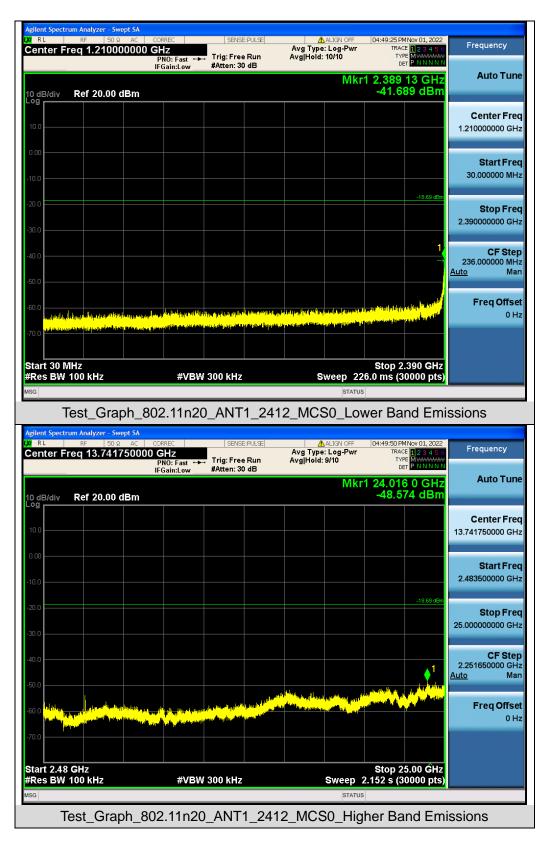



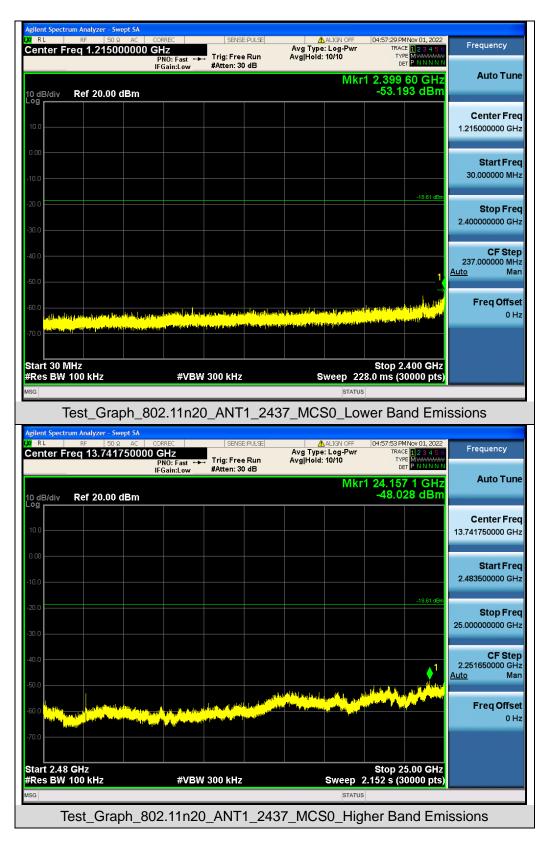



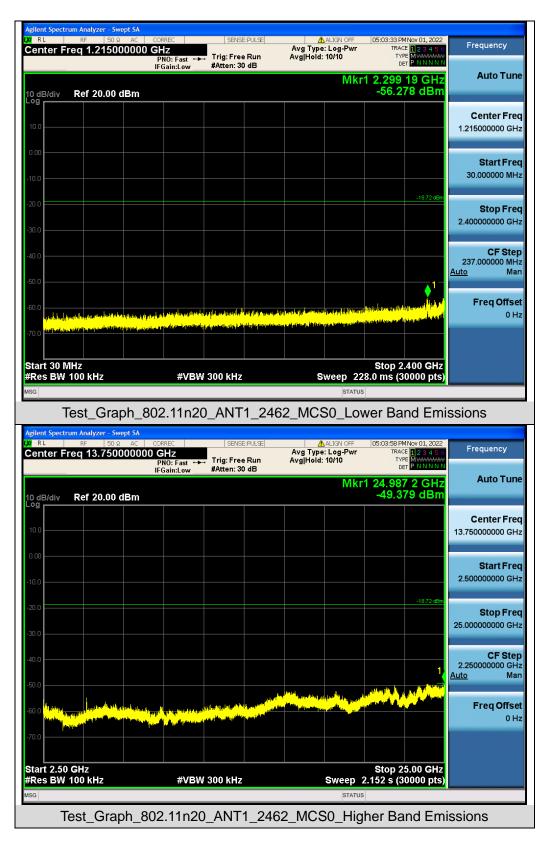





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Agilent Spectrum Analyzer - Swept S					
Center Freg 2.4060000		SENSE:PULSE	ALIGN OFF Avg Type: Log-Pwr	04:49:58 PMNov 01, 2022 TRACE 1 2 3 4 5 6	Frequency
	PNO: Fast +++ IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg Hold: 10/10	TYPE MWWWW DET PNNNN	Auto Tune
10 dB/div Ref 20.00 dBr	n		Mkr2 2	.400 000 0 GHz -35.115 dBm	Auto Tune
Log 10.0 0.00		Jan Martinet	all and the second s	dragen have so produced a	Center Freq 2.406000000 GHz
-20.0 -30.0 -40.0	www.war			-18.69 (Bm	Start Freq 2.390000000 GHz
-50.0					Stop Freq 2.422000000 GHz
Start 2.39000 GHz #Res BW 100 kHz		300 kHz		Stop 2.42200 GHz 000 ms (30000 pts)	CF Step 3.200000 MHz Auto Man
MKR MODE TRC SCL	× 04 528 5 GHz	Y FUI 2.095 dBm	NCTION FUNCTION WIDTH	FUNCTION VALUE	
2 N 1 f 2.4	00 000 0 GHz	-35.115 dBm -34.972 dBm			Freq Offset 0 Hz
6 7 8 9					
10					
<			STATU		
MSG			STATUS		
Test_Graph_80	02.11n20_A	NT1_2412_	MCS0_Lower	Band Edge E	missions

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.


10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2412	2.946	-5.293	≤8	Pass			
802.11b	2437	2.383	-5.856	≤8	Pass			
	2462	3.376	-4.863	≤8	Pass			
	2412	-1.894	-10.133	≤8	Pass			
802.11g	2437	-2.264	-10.503	≤8	Pass			
	2462	-2.676	-10.915	≤8	Pass			
	2412	-2.681	-10.92	≤8	Pass			
802.11n20	2437	-2.958	-11.197	≤8	Pass			
	2462	-2.997	-11.236	≤8	Pass			

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).









Test Graphs of Conducted Output Power Spectral Density




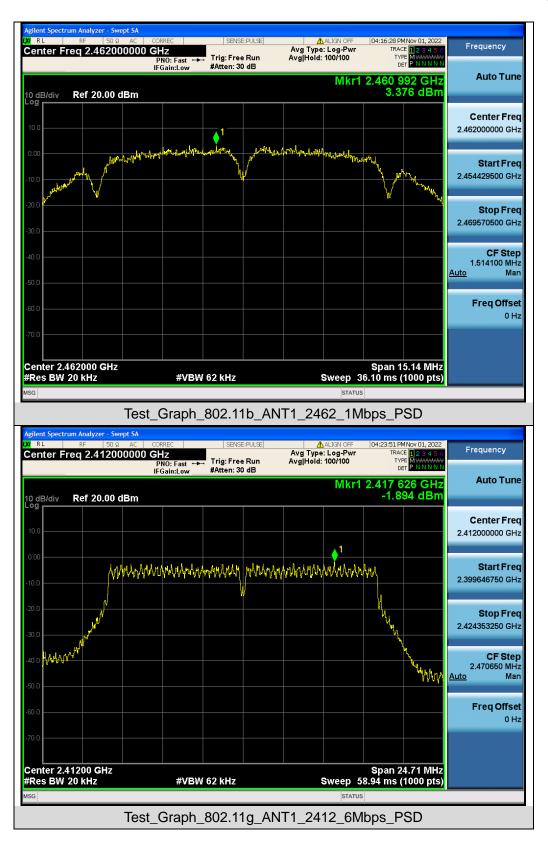




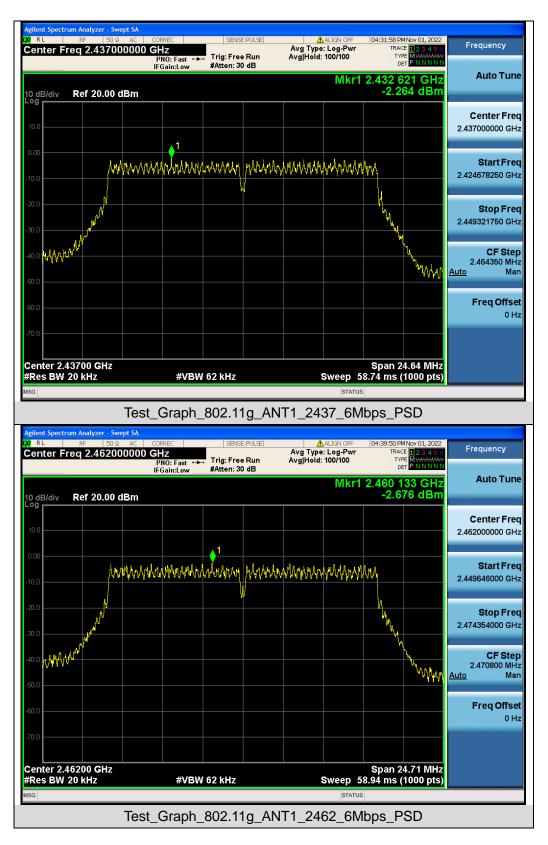



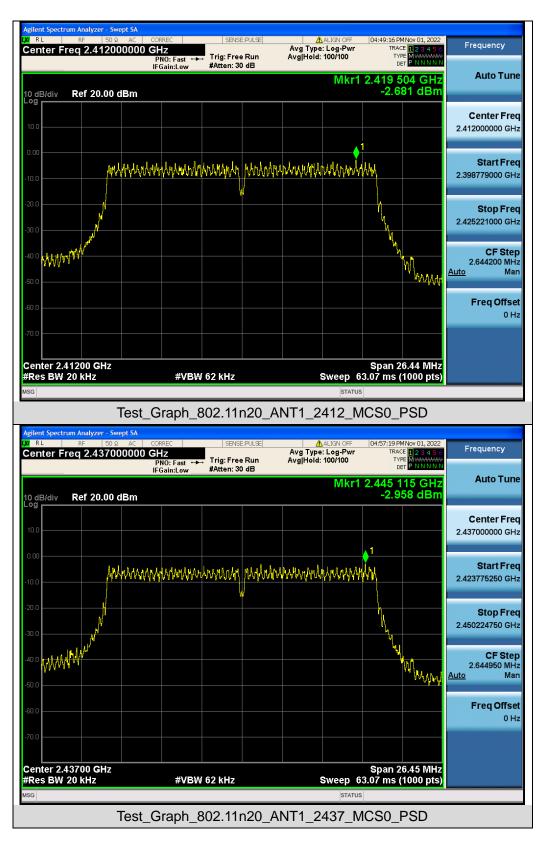



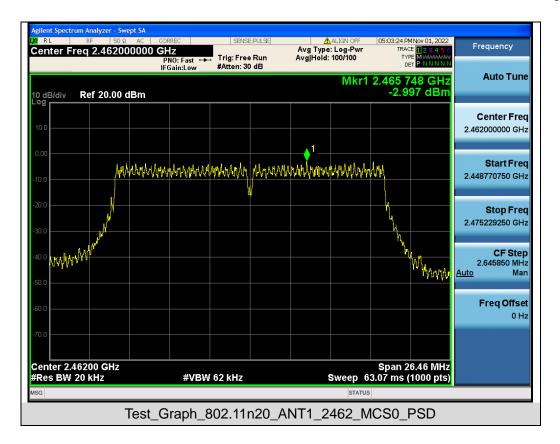



11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

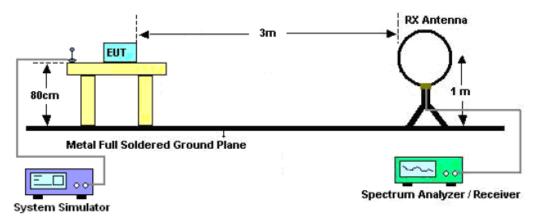

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

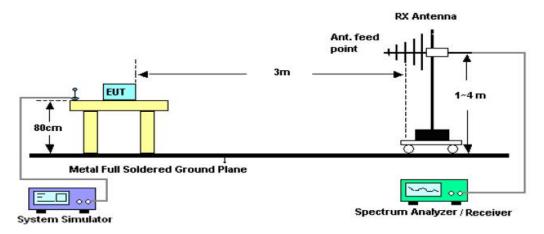

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

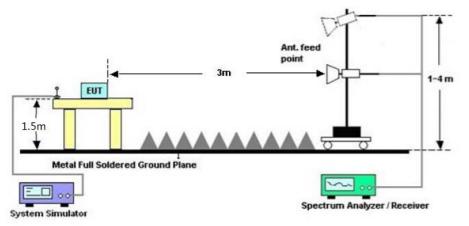



11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Radiated emission from 30MHz to 1000MHz

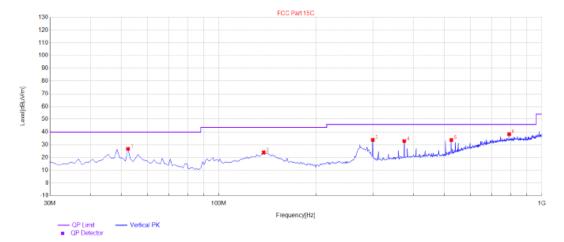

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.31	22.91	11.49	40.00	17.09	100	153	Horizontal
2	139.61	22.38	17.79	43.50	21.12	100	106	Horizontal
3	269.59	27.47	15.38	46.00	18.53	100	23	Horizontal
4	504.33	31.23	20.01	46.00	14.77	100	51	Horizontal
5	600.36	33.62	22.72	46.00	12.38	100	263	Horizontal
6	936.95	37.42	31.22	46.00	8.58	100	134	Horizontal

RESULT: PASS



EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical



NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polority
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	52.31	26.77	11.73	40.00	13.23	100	337	Vertical
2	137.67	23.88	19.36	43.50	19.62	100	160	Vertical
3	299.66	33.83	14.73	46.00	12.17	100	46	Vertical
4	375.32	32.89	16.64	46.00	13.11	100	42	Vertical
5	524.7	33.74	20.33	46.00	12.26	100	42	Vertical
6	792.42	38.33	31.34	46.00	7.67	100	267	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Radiated	emission	above	1GHz
----------	----------	-------	------

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	54.86	0.08	54.94	74	-19.06	peak			
4824.000	45.22	0.08	45.3	54	-8.7	AVG			
7236.000	49.43	2.21	51.64	74	-22.36	peak			
7236.000	40.36	2.21	42.57	54	-11.43	AVG			
Remark:									
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.						

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	55.36	0.08	55.44	74	-18.56	peak			
4824.000	45.43	0.08	45.51	54	-8.49	AVG			
7236.000	51.62	2.21	53.83	74	-20.17	peak			
7236.000	40.79	2.21	43	54	-11	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									



EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.47	0.14	56.61	74	-17.39	peak
4874.000	45.86	0.14	46	54	-8	AVG
7311.000	51.37	2.36	53.73	74	-20.27	peak
7311.000	40.41	2.36	42.77	54	-11.23	AVG
Remark:						
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.39	0.14	55.53	74	-18.47	peak
4874.000	46.24	0.14	46.38	54	-7.62	AVG
7311.000	50.39	2.36	52.75	74	-21.25	peak
7311.000	40.44	2.36	42.8	54	-11.2	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					



EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	54.66	0.22	54.88	74	-19.12	peak
4924.000	43.41	0.22	43.63	54	-10.37	AVG
7386.000	49.39	2.64	52.03	74	-21.97	peak
7386.000	40.09	2.64	42.73	54	-11.27	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.29	0.22	56.51	74	-17.49	peak
4924.000	45.33	0.22	45.55	54	-8.45	AVG
7386.000	51.12	2.64	53.76	74	-20.24	peak
7386.000	42.43	2.64	45.07	54	-8.93	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Test result for band edge emission at restricted bands
--

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

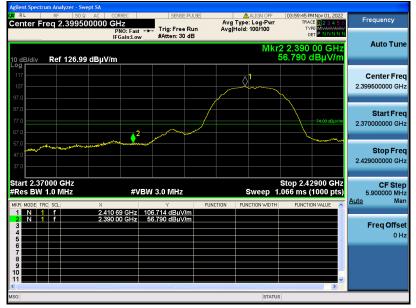

Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd



Report No.: AGC10648220706FE05 Page 55 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 56 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

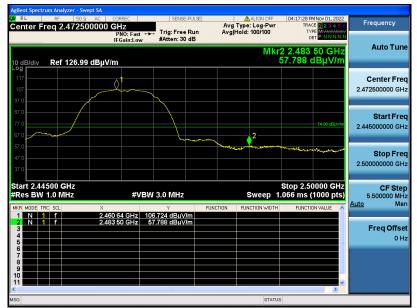

Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 57 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 58 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 59 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC10648220706FE05 Page 60 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

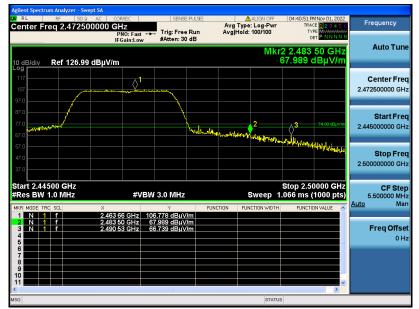

Test Graph for Average Measurement

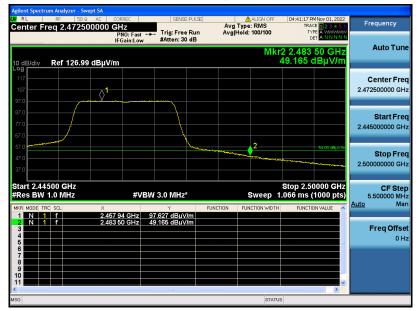

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 61 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC10648220706FE05 Page 62 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

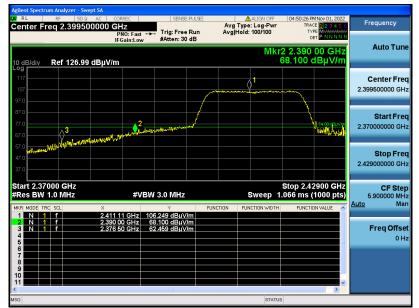

Test Graph for Average Measurement

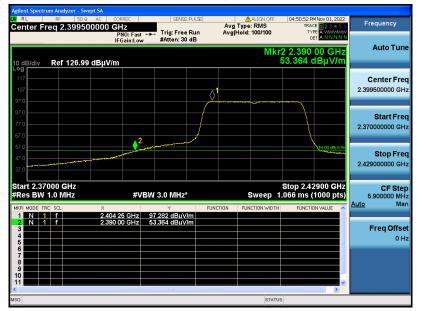

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220706FE05 Page 63 of 70

EUT	Wireless Smart Battery Camera	Model Name	DX2
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

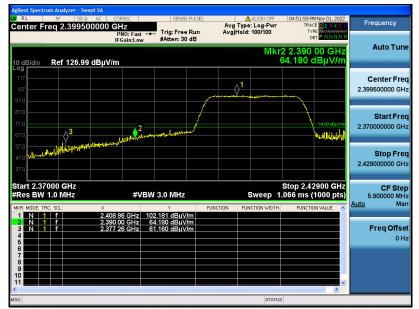

Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.