



MEASUREMENT REPORT

FCC Part 15B

FCC ID: SFK-WB60
APPLICANT: CIG Shanghai Co., Ltd.

Application Type: Certification
Product: WF-630R1 Radio Module
Model No.: WF-630R1
FCC Classification: FCC Class B Digital Device (JBP)
FCC Rule Part(s): FCC Part 15 Subpart B
Test Procedure(s): ANSI C63.4: 2014
Test Date: August 20 ~ 23, 2015

Reviewed By : Robin Wu
(Robin Wu)
Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1506RSU01403	Rev. 01	Initial report	08-23-2015

CONTENTS

Description	Page
§2.1033 General Information	4
1. INTRODUCTION	5
1.1. Scope	5
1.2. MRT Test Location	5
2. PRODUCT INFORMATION	6
2.1. Equipment Description.....	6
2.2. Description of Available Antennas	7
2.3. Device Capabilities	7
2.4. Test Configuration	8
2.5. Test Software	8
2.6. EMI Suppression Device(s)/Modifications	8
2.7. Labeling Requirements.....	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. TEST EQUIPMENT CALIBRATION DATE	12
5. MEASUREMENT UNCERTAINTY	13
6. TEST RESULT	14
6.1. Summary	14
6.2. Conducted Emission Measurement	15
6.2.1. Test Limit	15
6.2.2. Test Setup.....	15
6.2.3. Test Result of Conducted Emissions.....	16
6.3. Radiated Emission Measurement	18
6.3.1. Test Limit	18
6.3.2. Test Setup.....	18
6.3.3. Test Result of Radiated Emissions	20
7. CONCLUSION.....	24

§2.1033 General Information

Applicant:	CIG Shanghai Co., Ltd.
Applicant Address:	F/5, 8 Building No.2388 Chenhang Road, Minhang District, Shanghai
Manufacturer:	CIG Shanghai Co., Ltd.
Manufacturer Address:	F/5, 8 Building No.2388 Chenhang Road, Minhang District, Shanghai
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
Model No.:	WF-630R1
FCC ID:	SFK-WB60
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	FCC Class B Digital Device (JBP)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	WF-630R1 Radio Module
Model No.	WF-630R1
Frequency Range	<u>For 2.4GHz Band:</u> 802.11b/g/n: 2412 ~ 2462 MHz <u>For 5.0GHz Band:</u> For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5775MHz
Type of Modulation	802.11b: DSSS 802.11g/a/n/ac: OFDM

2.2. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Tx Paths	Max Peak Gain (dBi)	Beam Forming Directional Gain (dBi)	CDD Directional Gain (dBi)
PCB Antenna	2.4	2	10	10	10
	5	2	12	12	12

Note: The antenna is belong to cross-polarized antenna (horizontal and vertical polarizations) refer to antenna specification.

For a system in which the antennas have fixed orientations relative to one another that ensure that the antennas are cross-polarized regardless of any user actions, the directional gain is computed as follows.

- Cross-polarized antennas with $N_{ANT} = 2$. In the case of a transmitter with only two outputs driving a pair of antennas that are cross-polarized (e.g., vertical and horizontal), directional gain is the gain of an individual antenna. If the two antennas have different gains, the larger gain applies.

2.3. Device Capabilities


This device contains the following capabilities:

2.4GHz & 5GHz Wi-Fi Device (DTS/UNII)

2.4. Test Configuration

The WF-630R1 Radio Module FCC ID: SFK-WB60 was tested per the guidance FCC Part 15 Subpart B: 2013 and ANSI C63.4: 2014 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram

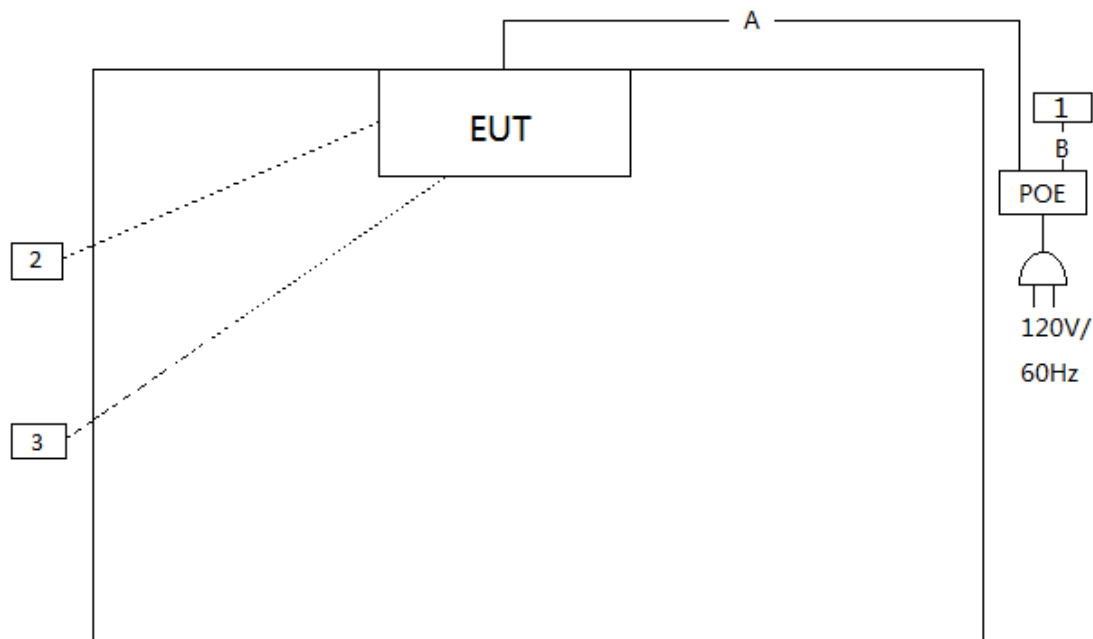

Signal Cable Type		Signal cable Description			
A	LAN Cable	Non-shielding, >10m			
B	LAN Cable	Non-shielding, 1m			
Product	Manufacturer	Model No.	Serial No.	Power Cord	
1	Notebook	Lenovo	E430c	MP-4CFX213/10	Non-Shielded, 1.8m
2	Notebook	Lenovo	X201	3626AM3	Non-Shielded, 1.8m
3	Notebook	Lenovo	E431	OC17836	Non-Shielded, 1.8m

2.5. Test Software

Not applicable.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the **WF-630R1 Radio Module FCC ID: SFK-WB60**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50 μ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150 kHz to 30 MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. Line conducted emissions test results are shown in Section 6.2.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30 MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30 MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB beam-width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2015/11/07
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2015/11/20

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/10/09
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2015/12/13
Preamplifier	Schwarzbeck	BBV9721	MRTSUE06121	1 year	2016/04/15
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2015/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.5dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~1GHz: 4.07dB 1GHz~18GHz: 4.16 dB Vertical: 30MHz~1GHz: 4.18 dB 1GHz~18GHz: 4.76 dB

6. TEST RESULT

6.1. Summary

Product Name: WF-630R1 Radio Module
FCC ID: SFK-WB60
FCC Classification: FCC Class B Digital Device (JBP)
Test Mode: Communication with Notebook

FCC Part Section(s)	Test Description	Test Result
15.107	Conducted Emissions	Pass
15.109	Radiated Emissions	Pass

6.2. Conducted Emission Measurement


6.2.1. Test Limit

FCC Part 15.107 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.2.2. Test Setup

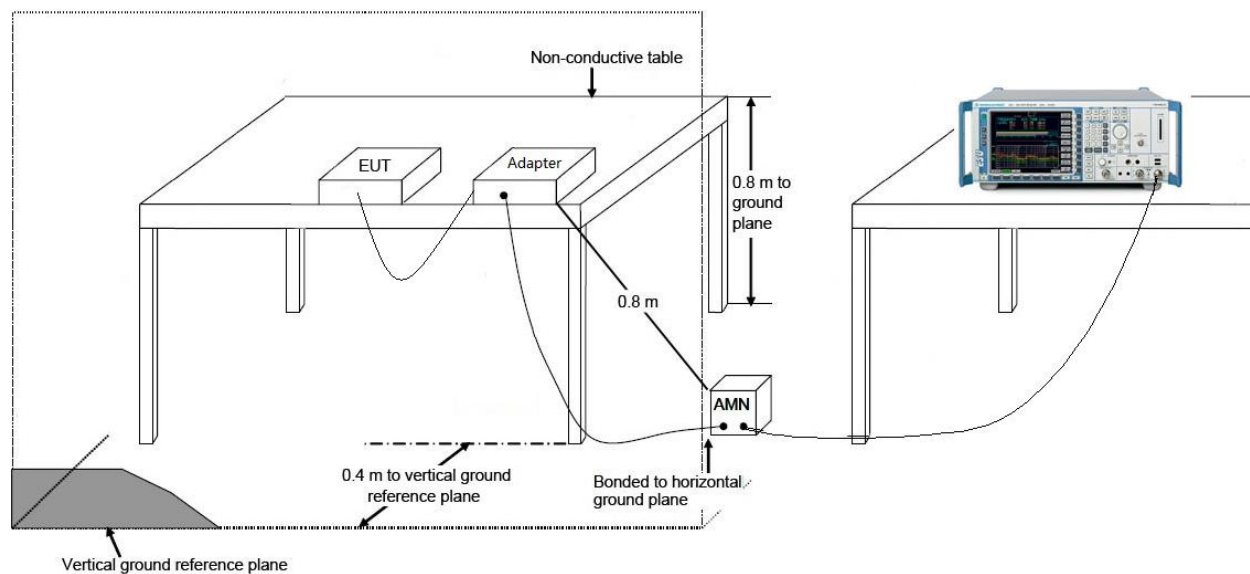

6.2.3. Test Result of Conducted Emissions

Site: SR2	Time: 2015/08/23 - 16:00
Limit: FCC_Part15.107_CE_ClassB	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

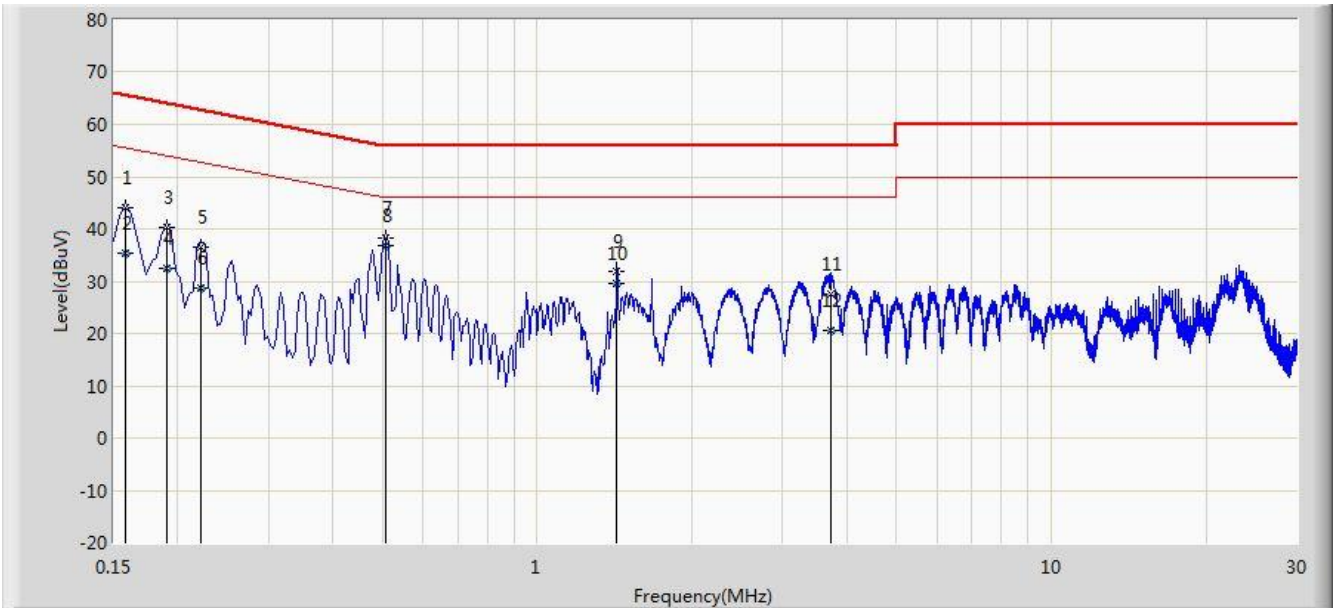


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Over Limit (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	44.170	33.859	-21.399	65.568	10.311	QP
2			0.158	35.333	25.022	-20.236	55.568	10.311	AV
3			0.190	40.330	30.301	-23.707	64.037	10.029	QP
4			0.190	32.454	22.425	-21.583	54.037	10.029	AV
5			0.222	36.539	26.598	-26.205	62.744	9.941	QP
6			0.222	28.838	18.897	-23.906	52.744	9.941	AV
7			0.506	38.261	28.104	-17.739	56.000	10.157	QP
8		*	0.506	36.823	26.667	-9.177	46.000	10.157	AV
9			1.430	31.998	22.107	-24.002	56.000	9.892	QP
10			1.430	29.671	19.780	-16.329	46.000	9.892	AV
11			3.714	27.575	17.628	-28.425	56.000	9.946	QP
12			3.714	20.578	10.632	-25.422	46.000	9.946	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2015/08/23 - 16:05
Limit: FCC_Part15.107_CE_ClassB	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

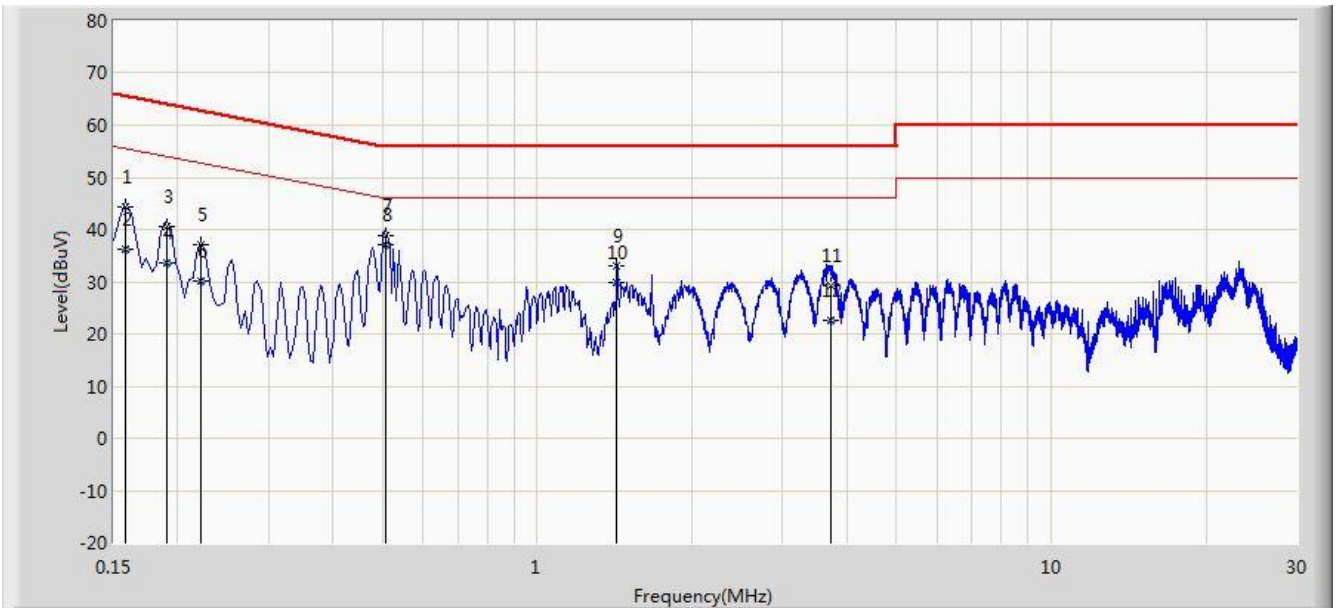

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	44.382	34.092	-21.187	65.568	10.290	QP
2			0.158	36.177	25.888	-19.391	55.568	10.290	AV
3			0.190	40.647	30.619	-23.390	64.037	10.028	QP
4			0.190	33.536	23.508	-20.501	54.037	10.028	AV
5			0.222	36.995	27.016	-25.749	62.744	9.980	QP
6			0.222	30.264	20.285	-22.479	52.744	9.980	AV
7			0.506	38.726	28.549	-17.274	56.000	10.177	QP
8		*	0.506	37.181	27.004	-8.819	46.000	10.177	AV
9			1.430	32.979	23.086	-23.021	56.000	9.893	QP
10			1.430	29.971	20.078	-16.029	46.000	9.893	AV
11			3.722	29.336	19.379	-26.664	56.000	9.956	QP
12			3.722	22.729	12.773	-23.271	46.000	9.956	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

6.3. Radiated Emission Measurement

6.3.1. Test Limit

FCC Part 15.109 Limits		
Frequency (MHz)	Distance (m)	Level (dB μ V/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54


Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dB μ V/m) = 20 log E field strength (μ V/m)

6.3.2. Test Setup

30MHz ~ 1GHz Test Setup:

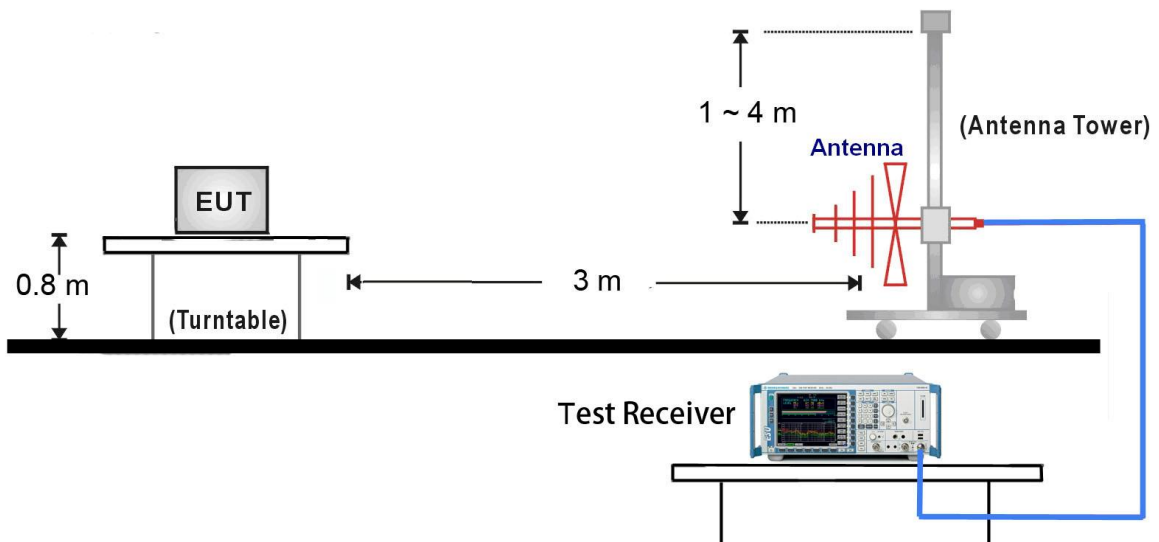


1GHz ~18GHz Test Setup:

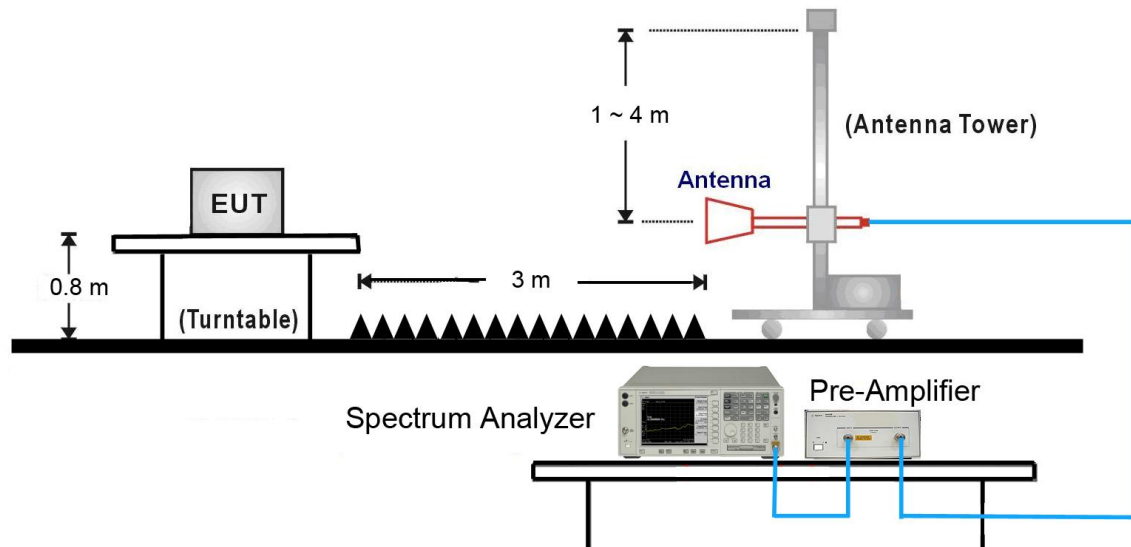

6.3.3. Test Result of Radiated Emissions

Site: AC1	Time: 2015/08/23 - 15:07
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

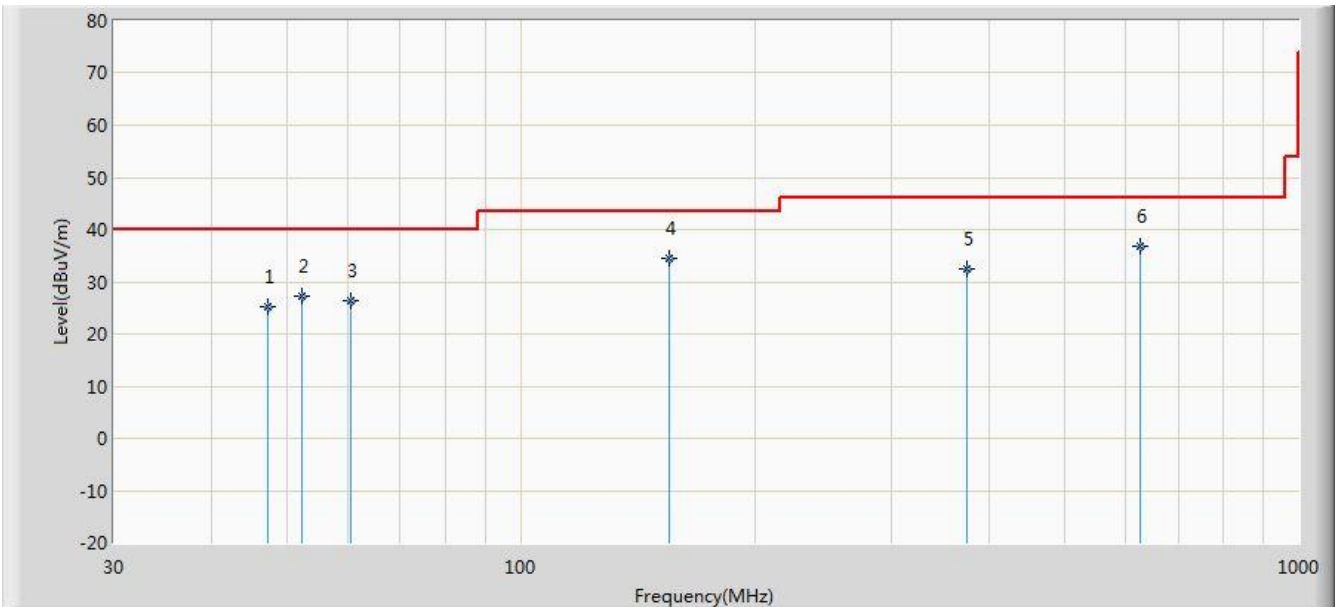


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			47.341	25.202	10.254	-14.798	40.000	14.948	QP
2			52.250	27.309	12.440	-12.691	40.000	14.870	QP
3			60.432	26.328	12.544	-13.672	40.000	13.784	QP
4		*	155.056	34.428	24.800	-9.072	43.500	9.629	QP
5			375.055	32.411	16.258	-13.589	46.000	16.153	QP
6			625.020	36.785	16.524	-9.215	46.000	20.261	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/08/23 - 15:07
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

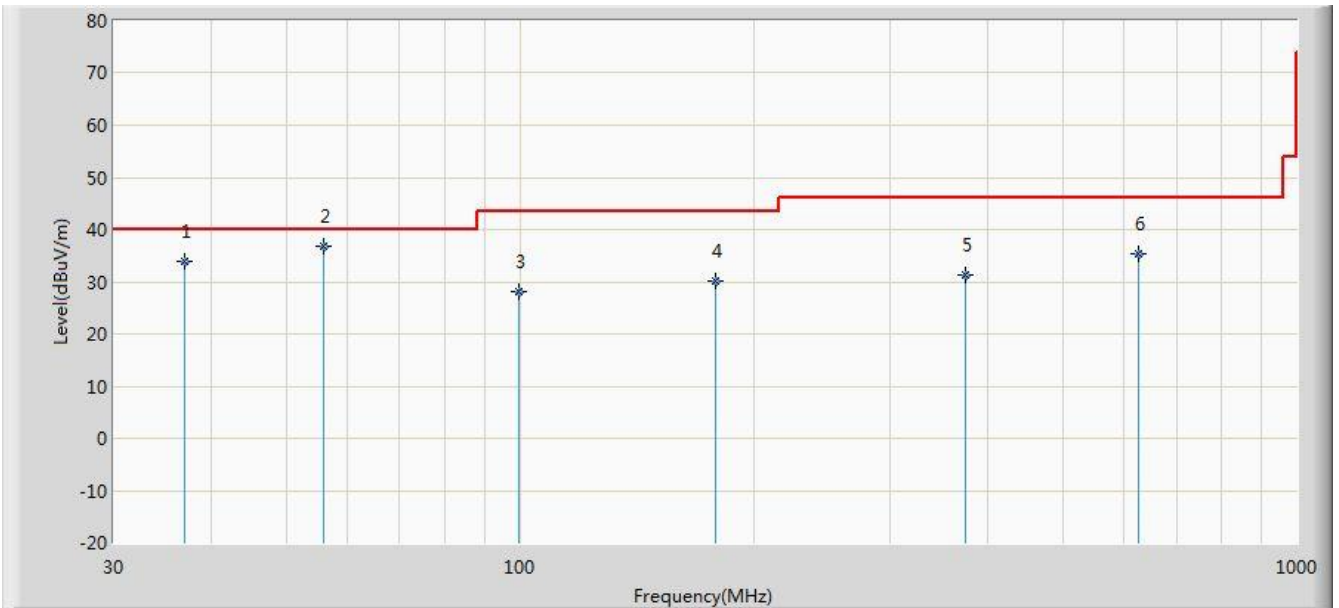


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			36.952	33.796	20.525	-6.204	40.000	13.271	QP
2		*	56.024	36.940	22.441	-3.060	40.000	14.499	QP
3			99.824	28.170	15.244	-15.330	43.500	12.926	QP
4			178.524	30.029	19.254	-13.471	43.500	10.774	QP
5			375.020	31.377	15.224	-14.623	46.000	16.152	QP
6			625.040	35.505	15.244	-10.495	46.000	20.261	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/08/23 - 16:16
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

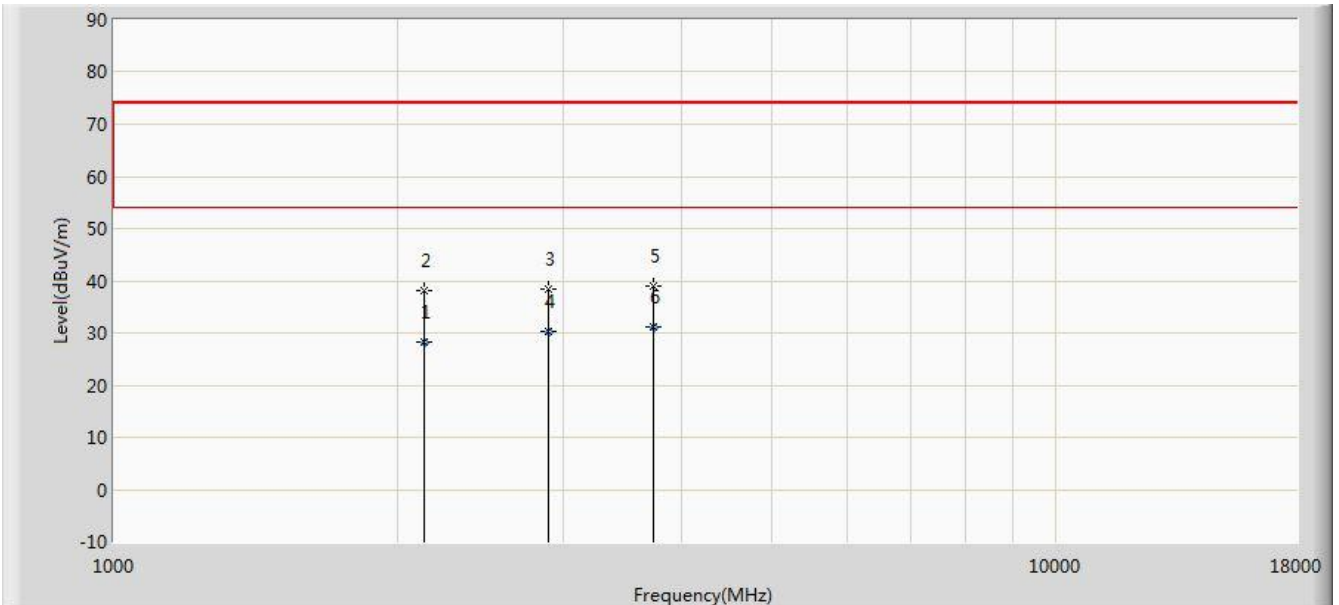


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2137.325	28.288	32.580	-25.712	54.000	-4.291	AV
2			2137.500	38.126	42.416	-35.874	74.000	-4.289	PK
3			2895.000	38.412	40.663	-35.588	74.000	-2.250	PK
4			2895.635	30.206	32.454	-23.794	54.000	-2.248	AV
5			3742.500	38.976	39.401	-35.024	74.000	-0.424	PK
6		*	3742.625	31.118	31.542	-22.882	54.000	-0.424	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2015/08/23 - 15:07
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-630R1 Radio Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

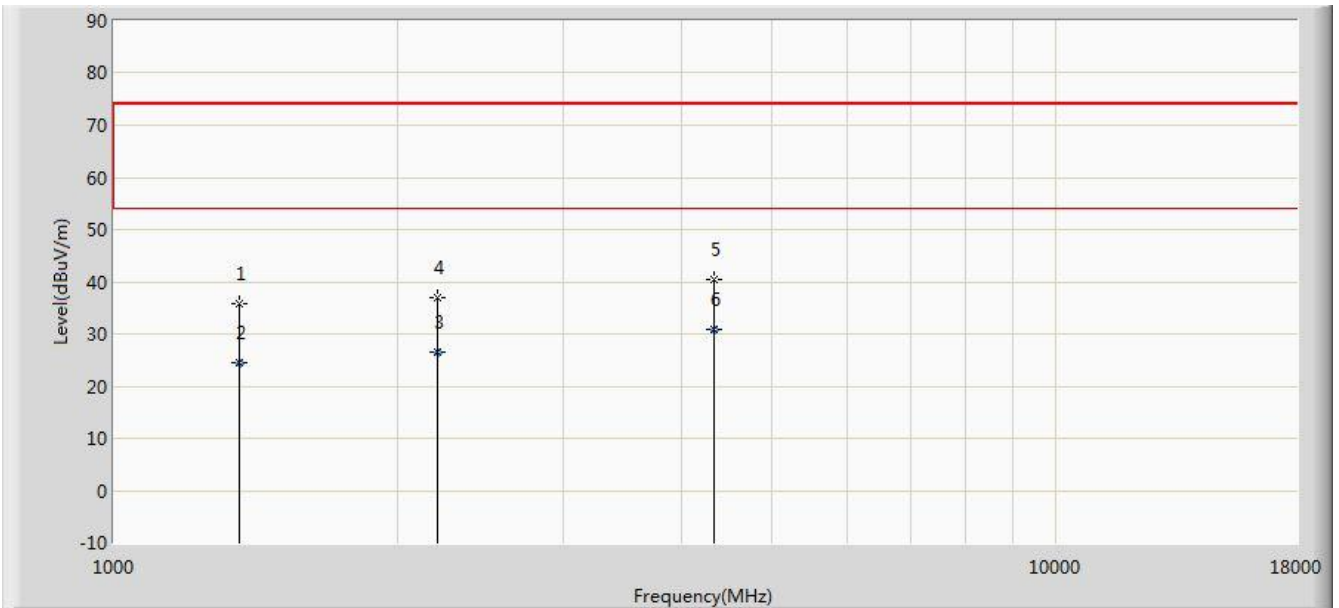

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			1360.000	35.776	43.660	-38.224	74.000	-7.884	PK
2			1360.250	24.366	32.250	-29.634	54.000	-7.883	AV
3			2207.265	26.657	30.254	-27.343	54.000	-3.597	AV
4			2207.500	37.055	40.651	-36.945	74.000	-3.596	PK
5			4342.500	40.538	39.248	-33.462	74.000	1.290	PK
6		*	4342.625	30.978	29.688	-23.022	54.000	1.291	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

7. CONCLUSION

The data collected relate only the item(s) tested and show that the **WF-630R1 Radio Module FCC ID: SFK-WB60** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC Rules.

The End