



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 1 of 193

TEST REPORT

Application No.: KSCR2408001626AT
FCC ID: 2ASCB-DH055TLB
Name of Testing Laboratory preparing the Report: Compliance Certification Services (Kunshan) Inc.
Address of Testing Laboratory preparing the Report: No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.
Applicant: D2G Group LLC
Address of Applicant: 81 Commerce Drive Fall River, MA 02720 USA
Manufacturer: D2G Group LLC
Address of Manufacturer: 81 Commerce Drive Fall River, MA 02720 USA
Factory: Zhejiang Uniview System Technology Co., Ltd.
Address of Factory: No.1277 Qingfeng South Road (South), Tongxiang Economic Development Zone, Tongxiang City, Jiaxing City, 314500, Zhejiang, China
Equipment Under Test (EUT):
EUT Name: Digital Signage
Model No.: DH055TLB, DH055NLB ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-08-23
Date of Test: 2024-09-12 to 2024-10-12
Date of Issue: 2024-10-15

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 2 of 193

Revision Record			
Version	Description	Date	Remark
00	Original	2024-10-15	/

Authorized for issue by:			
Tested By		Make Qi	
		Make Qi /Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 3 of 193

2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	Test Lab*
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Customer Declaration	N/A

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	Test Lab*
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass	B
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Conducted Average Output Power		ANSI C63.10 (2013) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A

Note: There are series models mentioned in this report and they are the Identical in electrical and electronic characters. Only the model DH055TLB was tested since their differences were the model number and appearance.

3 Contents

	Page
1 COVER PAGE.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.....	5
4.2 Description of Support Units	5
4.3 Power level setting using in test	5
4.4 Measurement Uncertainty.....	6
4.5 Test Location	7
4.6 Test Facility.....	8
4.7 Deviation from Standards	8
4.8 Abnormalities from Standard Conditions	8
5 Equipment List.....	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
7 Radio Spectrum Matter Test Results.....	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Radiated Emissions which fall in the restricted bands.....	16
7.3 Radiated Spurious Emissions Below 1GHz.....	67
7.4 Radiated Spurious Emissions Above 1GHz	71
7.5 Conducted Average Output Power	109
7.6 Minimum 6dB Bandwidth	111
7.7 Power Spectrum Density	112
7.8 Conducted Band Edges Measurement.....	113
7.9 Conducted Spurious Emissions	115
8 Test Setup Photo	117
9 EUT Constructional Details (EUT Photos)	117
10 Appendix	118

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 120V/60Hz
Test voltage:	AC 120V/60Hz
Operation Frequency:	802.11b/g/n(HT20)/ax(HE20):2412MHz to 2462MHz; 802.11n(HT40)/ax(HE40):2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK), 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK), 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)
Number of Channels:	802.11b/g/n(HT20)/ax(HE20):11;802.11n(HT40)/ax(HE40):7
Channel Spacing:	5MHz
Antenna Type:	Dipole Antenna
Antenna Gain:	3dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

4.3 Power level setting using in test

Channel	802.11b	802.11g	802.11n(HT20)	802.11ax(HE20)
	Ant 1	Ant 1	Ant 1	Ant 1
1	15	14	14	14
6	15	13	12	12
11	15	13	12	12
Channel	802.11n(HT40)	802.11ax(HE40)		
	Ant 1	Ant 1		
3	14	14		
6	13	13		
9	13	13		

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 7 of 193

4.5 Test Location

Lab A:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

Lab B:

Conducted Emissions at AC Power Line (150kHz-30MHz); Radiated Emissions; Radiated Emissions which fall in the restricted bands test at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)

Pilot Free Trade Zone

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 8 of 193

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

Lab B:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 9 of 193

5 Equipment List

Lab A:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2024	08/23/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2024	08/23/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2024	08/23/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2024	08/23/2025
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2024	08/23/2025
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2024	08/23/2025
10	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/15/2024	01/14/2025
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/24/2024	08/23/2025
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
16	Software	BST	TST-PASS	/	NCR	NCR



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 10 of 193

Lab B:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2/1/2024	1/31/2025
2	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/8/2024	2/7/2025
3	Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2/4/2024	2/3/2025
4	Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2/4/2024	2/3/2025
5	Measurement Software	Tonscend	JS32-CE	SUWI-02-09-05	NCR	NCR
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	6/3/2023	6/2/2026
2	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2/8/2024	2/7/2025
3	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	5/8/2024	5/7/2025
4	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	11/21/2023	11/20/2024
5	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2/1/2024	1/31/2025
6	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/25/2023	11/24/2024
7	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	11/25/2023	11/24/2024
8	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/12/2023	5/11/2025
9	Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023	5/12/2025
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2/1/2024	1/31/2025
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2/1/2024	1/31/2025
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2/1/2024	1/31/2025
13	Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR
14	Measurement Software	Tonscend	JS32-RSE	SUWI-02-09-06	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Dipole Antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.


7.1.3 Test Setup Diagram

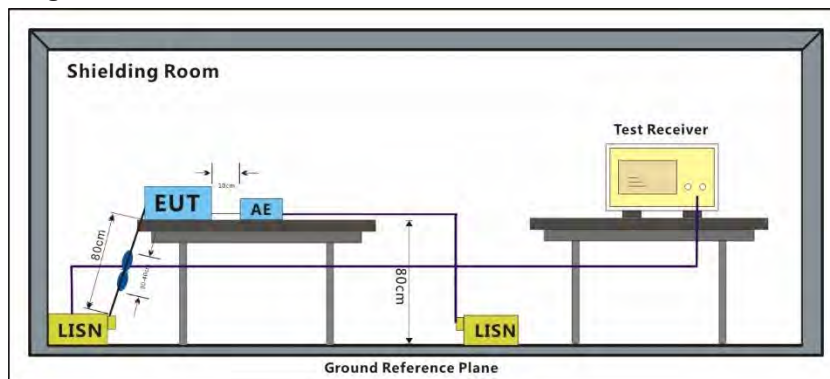

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

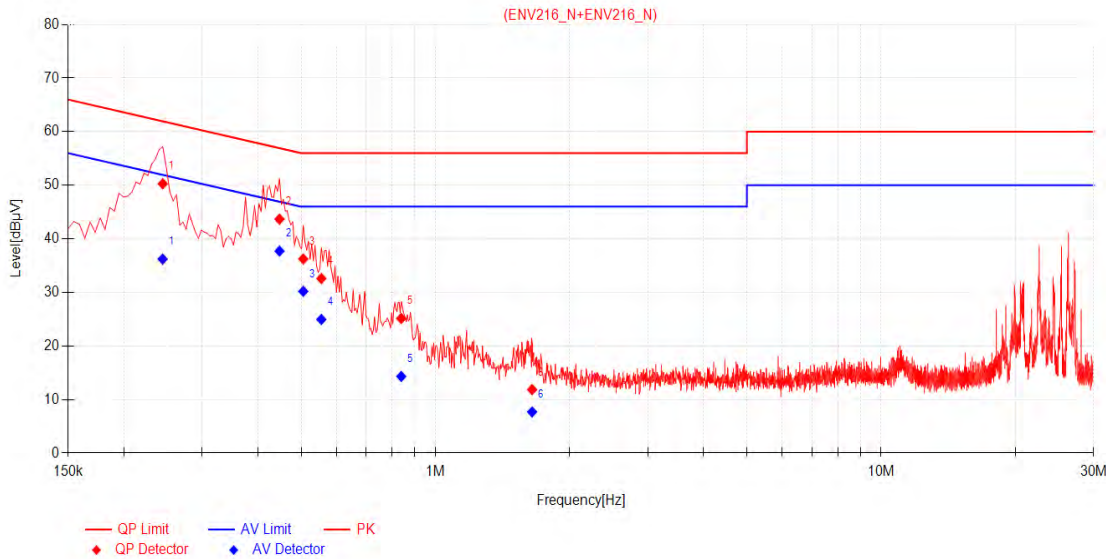


NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2445	10.16	40.12	50.28	61.94	11.66	26.05	36.21	51.94	15.73	PASS
2	0.4470	10.16	33.52	43.68	56.93	13.25	27.56	37.72	46.93	9.21	PASS
3	0.5055	10.17	26.06	36.23	56.00	19.77	20.03	30.20	46.00	15.80	PASS
4	0.5550	10.18	22.42	32.60	56.00	23.40	14.77	24.95	46.00	21.05	PASS
5	0.8385	10.14	15.00	25.14	56.00	30.86	4.18	14.32	46.00	31.68	PASS
6	1.6485	10.13	1.72	11.85	56.00	44.15	-2.45	7.68	46.00	38.32	PASS

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 15 of 193

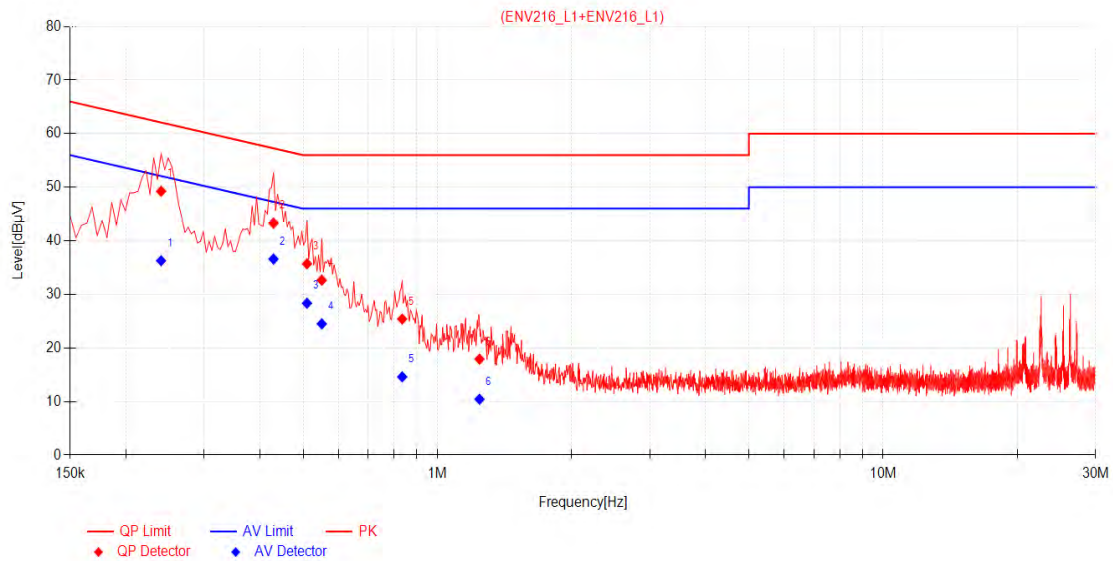

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2400	10.16	39.09	49.25	62.10	12.85	26.13	36.29	52.10	15.81	PASS
2	0.4290	10.17	33.13	43.30	57.27	13.97	26.43	36.60	47.27	10.67	PASS
3	0.5100	10.18	25.54	35.72	56.00	20.28	18.17	28.35	46.00	17.65	PASS
4	0.5505	10.18	22.48	32.66	56.00	23.34	14.32	24.50	46.00	21.50	PASS
5	0.8340	10.14	15.26	25.40	56.00	30.60	4.47	14.61	46.00	31.39	PASS
6	1.2435	10.08	7.84	17.92	56.00	38.08	0.35	10.43	46.00	35.57	PASS

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 16 of 193

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 46 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

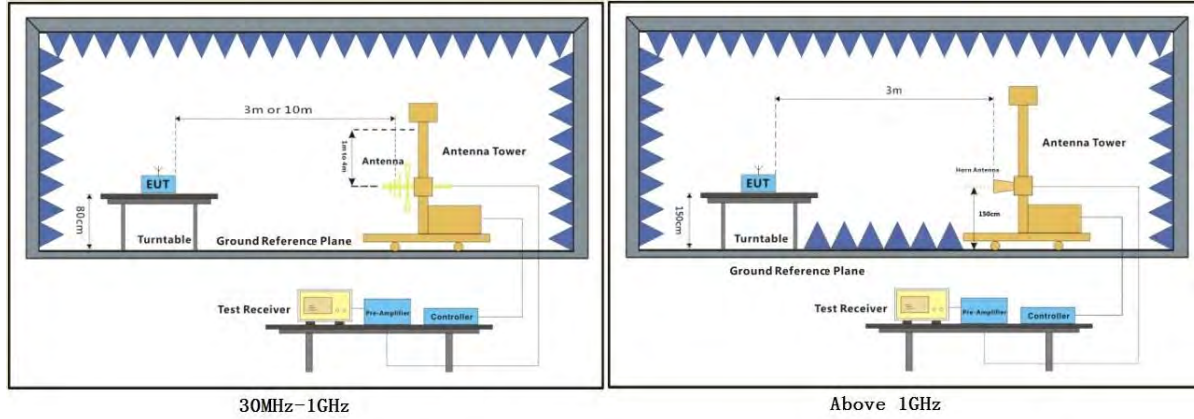

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
4. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 19 of 193

802.11b_Channel 01

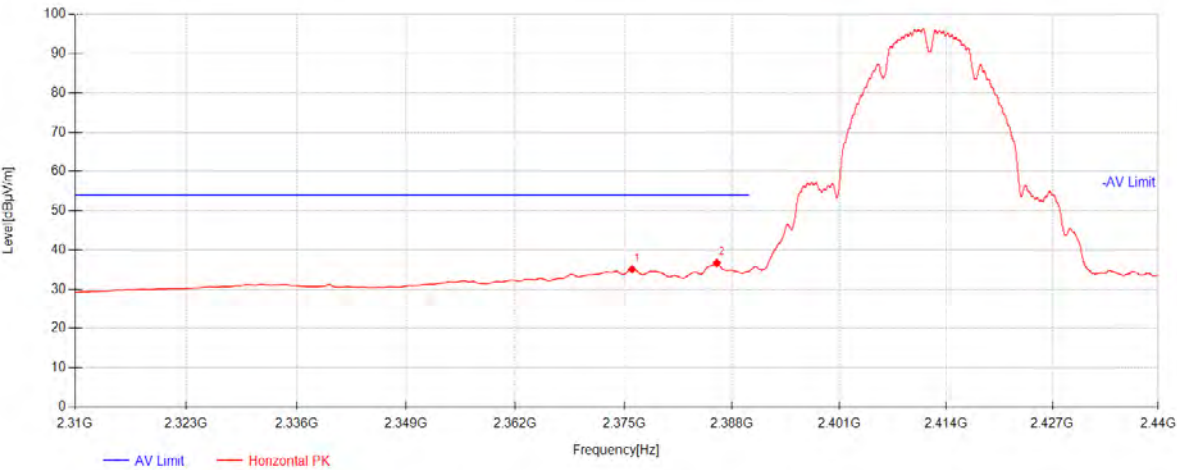

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.975	31.73	26.95	-23.57	35.11	54.00	18.89	Horizontal
2	2386.18	33.31	26.97	-23.57	36.71	54.00	17.29	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 20 of 193

802.11b_Channel 01

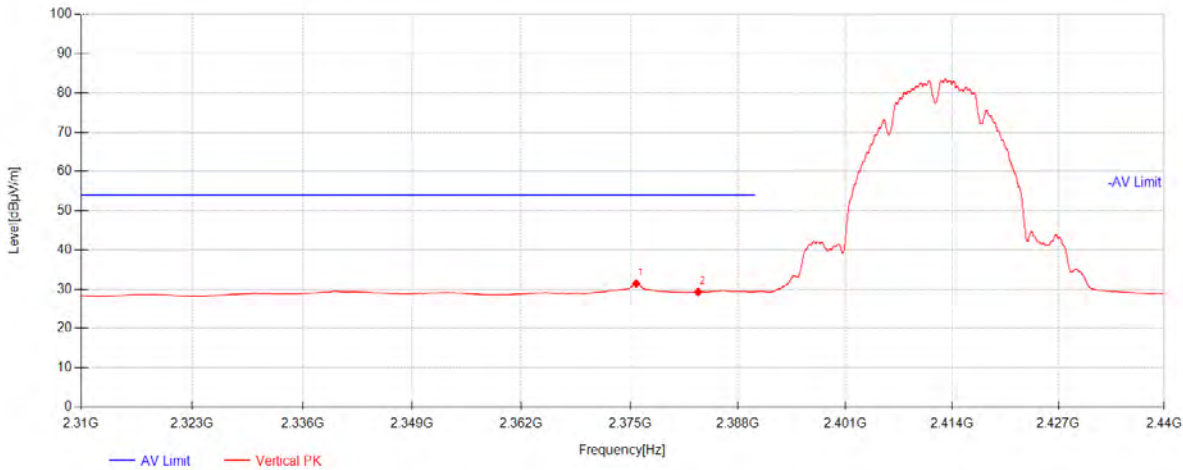

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.7475	28.08	26.95	-23.57	31.46	54.00	22.54	Vertical
2	2383.19	25.95	26.97	-23.57	29.34	54.00	24.66	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 21 of 193


802.11b_Channel 01

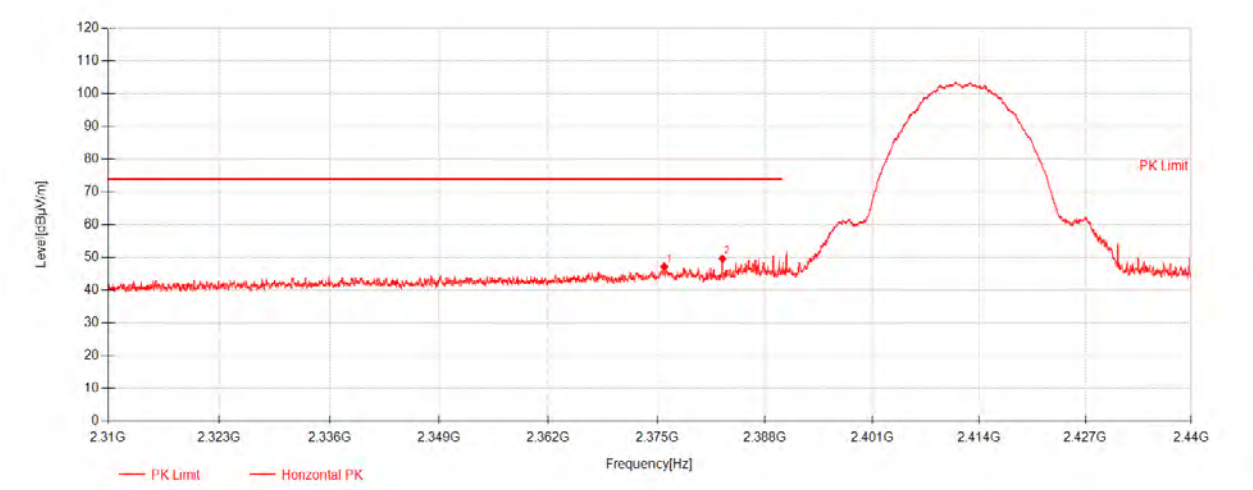

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.8775	43.77	26.95	-23.57	47.15	74.00	26.85	Horizontal
2	2382.8812	46.24	26.97	-23.57	49.63	74.00	24.37	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11b_Channel 01

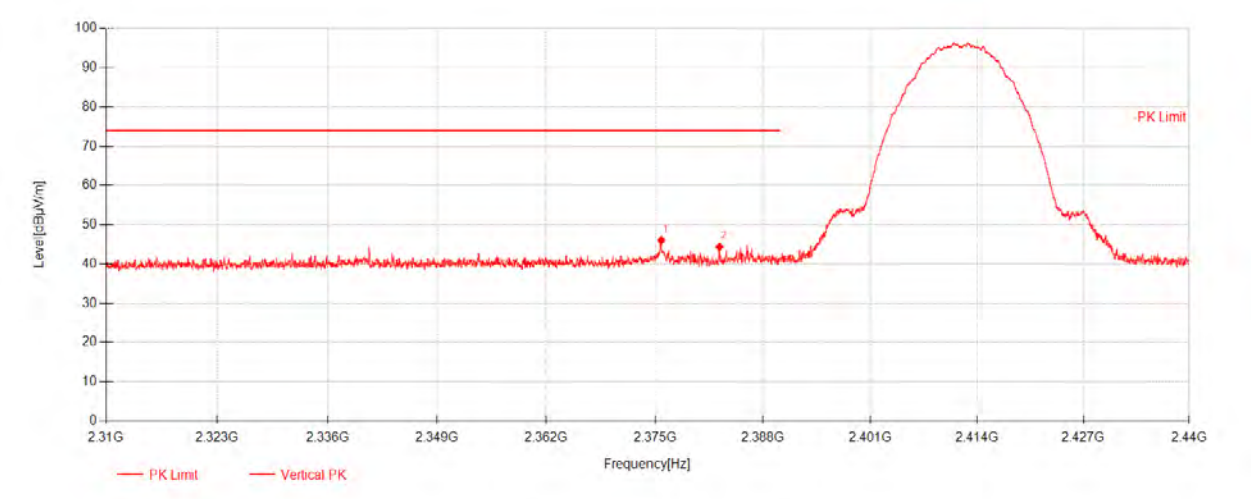

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.7638	42.64	26.95	-23.57	46.02	74.00	27.98	Vertical
2	2382.7512	40.98	26.97	-23.57	44.37	74.00	29.63	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 23 of 193

802.11b_Channel 11

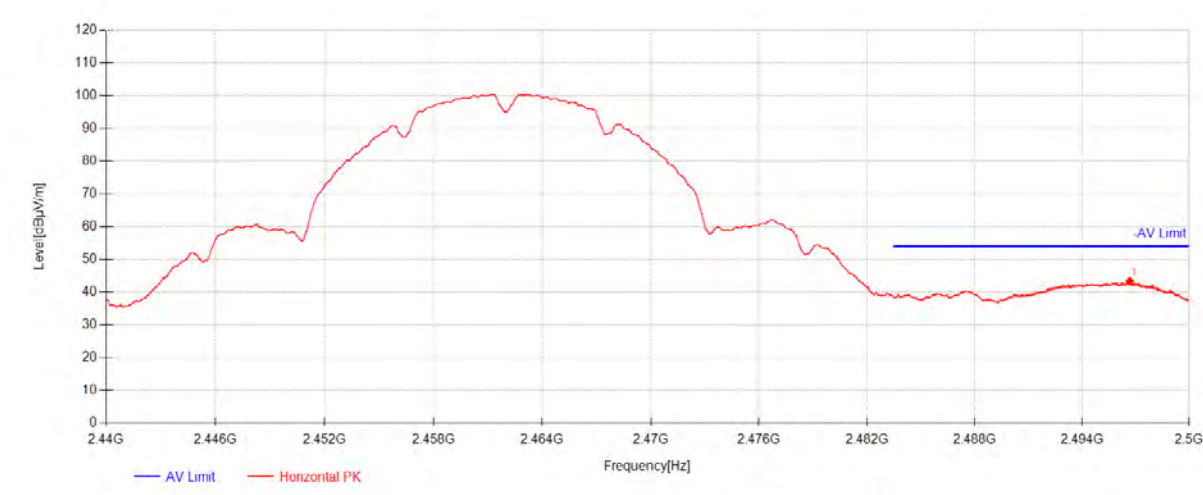

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2496.6775	39.76	27.19	-23.54	43.41	54.00	10.59	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 24 of 193

802.11b_Channel 11

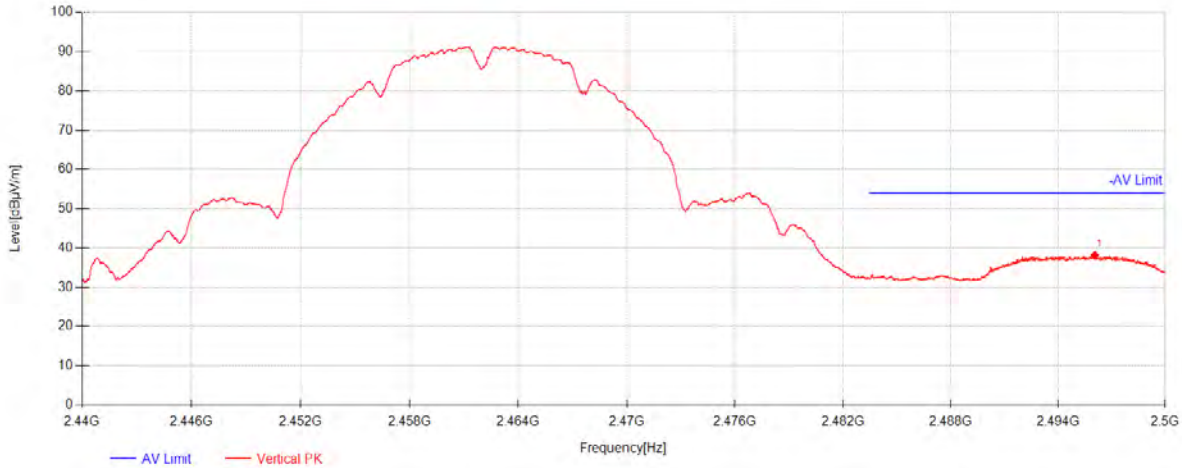

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2496.0625	34.51	27.19	-23.54	38.16	54.00	15.84	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 25 of 193


802.11b_Channel 11

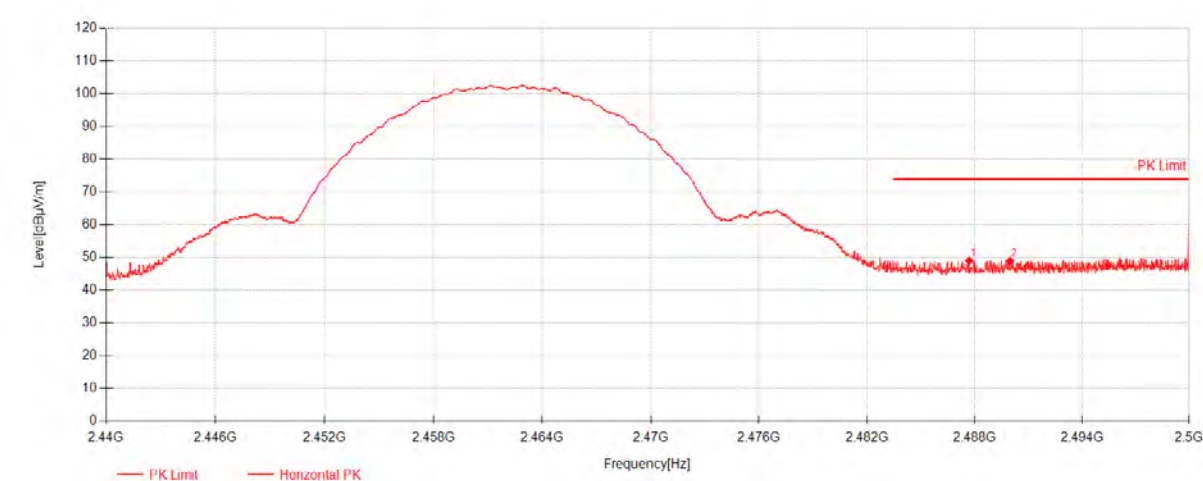

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2487.7	45.38	27.18	-23.54	49.01	74.00	24.99	Horizontal
2	2489.98	45.36	27.18	-23.54	49.00	74.00	25.00	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11b_Channel 11

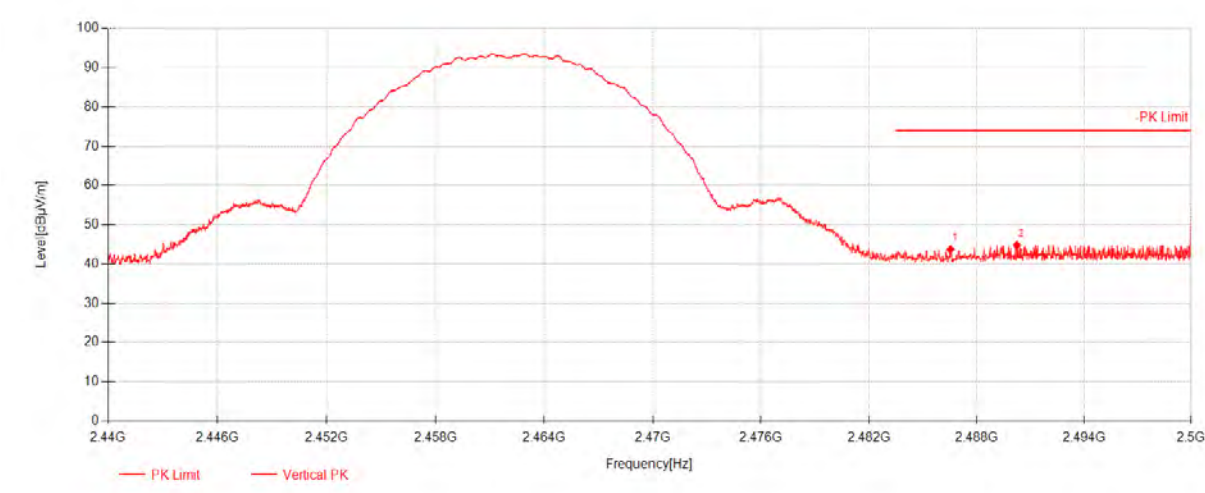

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2486.545	40.08	27.17	-23.54	43.71	74.00	30.29	Vertical
2	2490.25	41.12	27.18	-23.54	44.76	74.00	29.24	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 27 of 193

802.11g_Channel 01

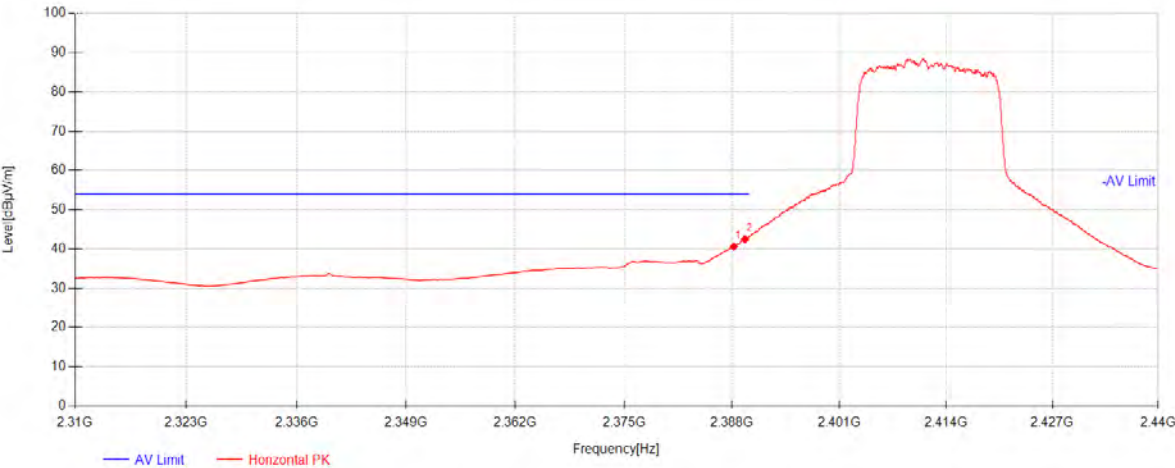


Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.2275	37.21	26.98	-23.57	40.62	54.00	13.38	Horizontal
2	2389.56	39.09	26.98	-23.57	42.50	54.00	11.50	Horizontal

Compliance Certification Services (Kunshan) Inc.


802.11g_Channel 01

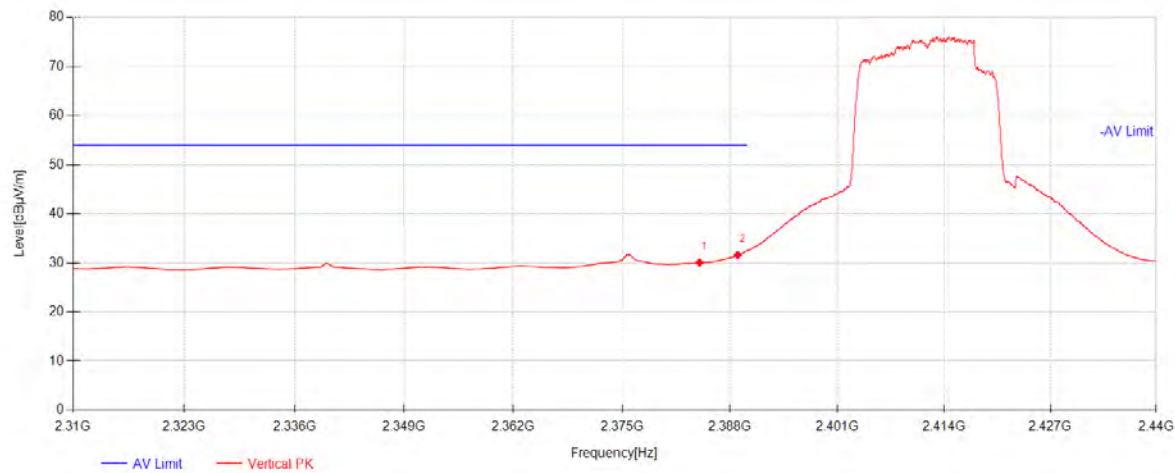

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.3275	26.66	26.97	-23.57	30.06	54.00	23.94	Vertical
2	2388.9425	28.16	26.98	-23.57	31.57	54.00	22.43	Vertical

Compliance Certification Services (Kunshan) Inc.

802.11g_Channel 01

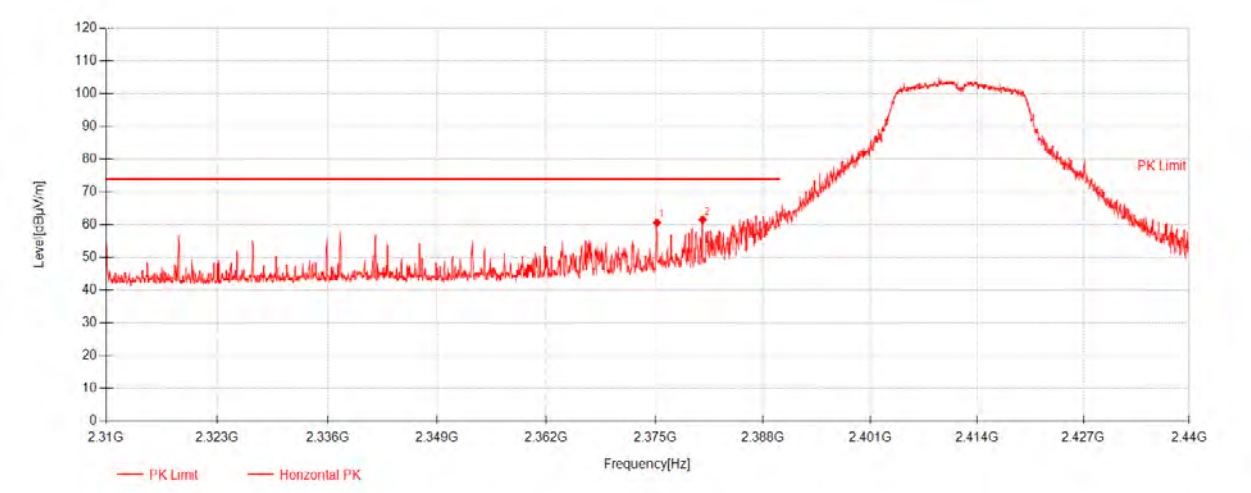

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2375.2438	57.24	26.95	-23.57	60.62	74.00	13.38	Horizontal
2	2380.72	58.20	26.96	-23.57	61.59	74.00	12.41	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 30 of 193

802.11g_Channel 01

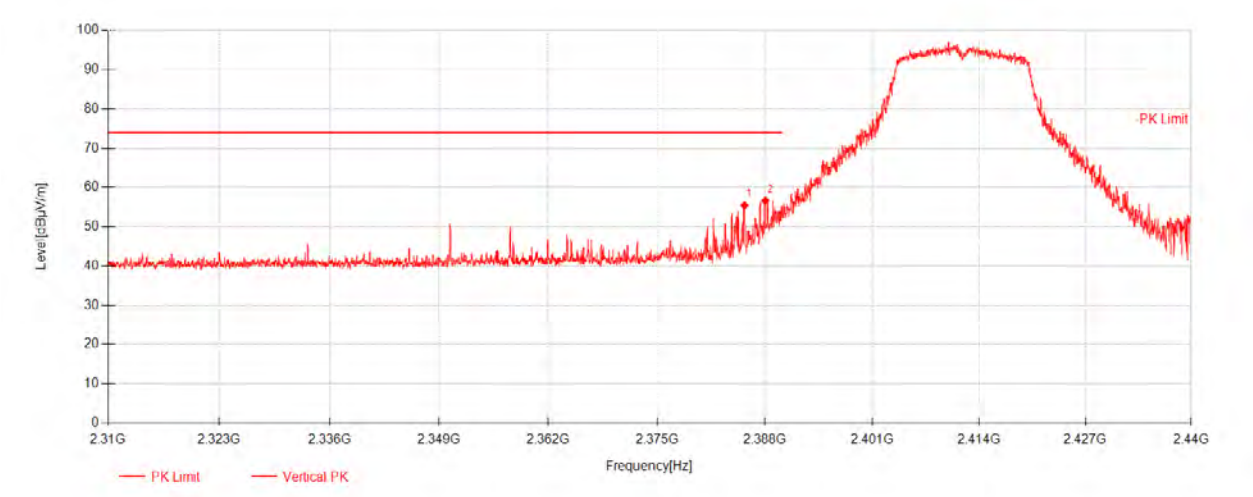

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.53	52.08	26.97	-23.57	55.48	74.00	18.52	Vertical
2	2388.0488	53.21	26.98	-23.57	56.61	74.00	17.39	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 31 of 193

802.11g_Channel 11

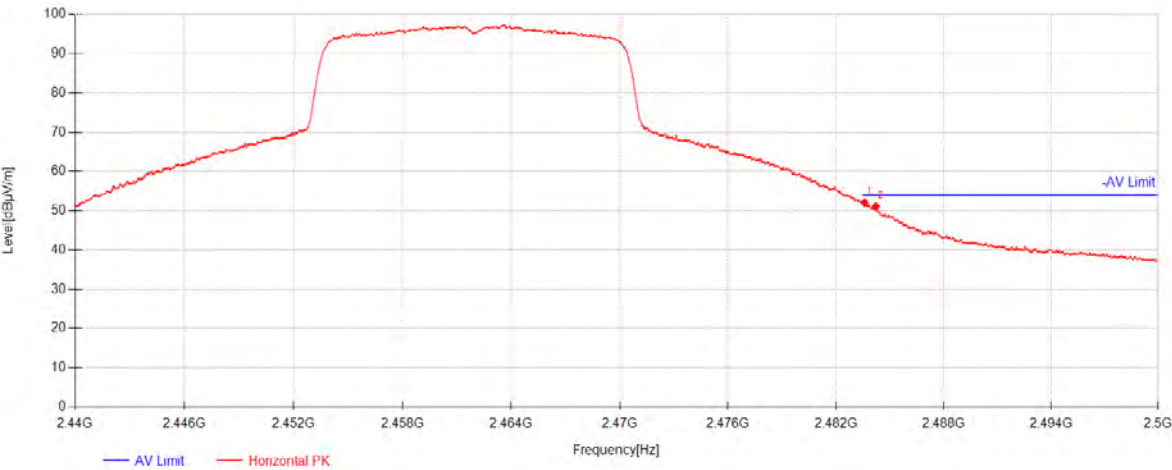

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.59	48.41	27.17	-23.54	52.03	54.00	1.97	Horizontal
2	2484.22	47.45	27.17	-23.54	51.07	54.00	2.93	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 32 of 193


802.11g_Channel 11

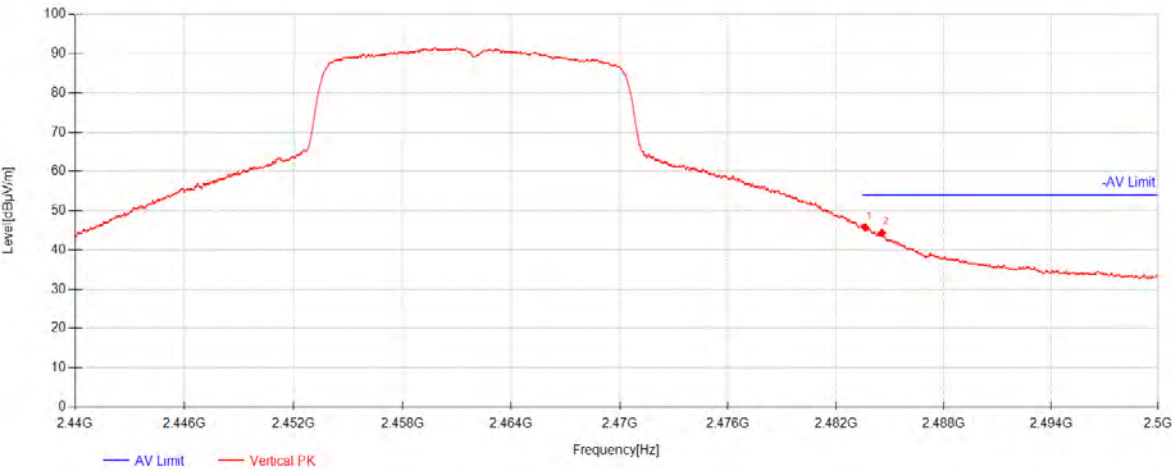

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	42.14	27.17	-23.54	45.76	54.00	8.24	Vertical
2	2484.565	40.72	27.17	-23.54	44.34	54.00	9.66	Vertical

Compliance Certification Services (Kunshan) Inc.

802.11g_Channel 11

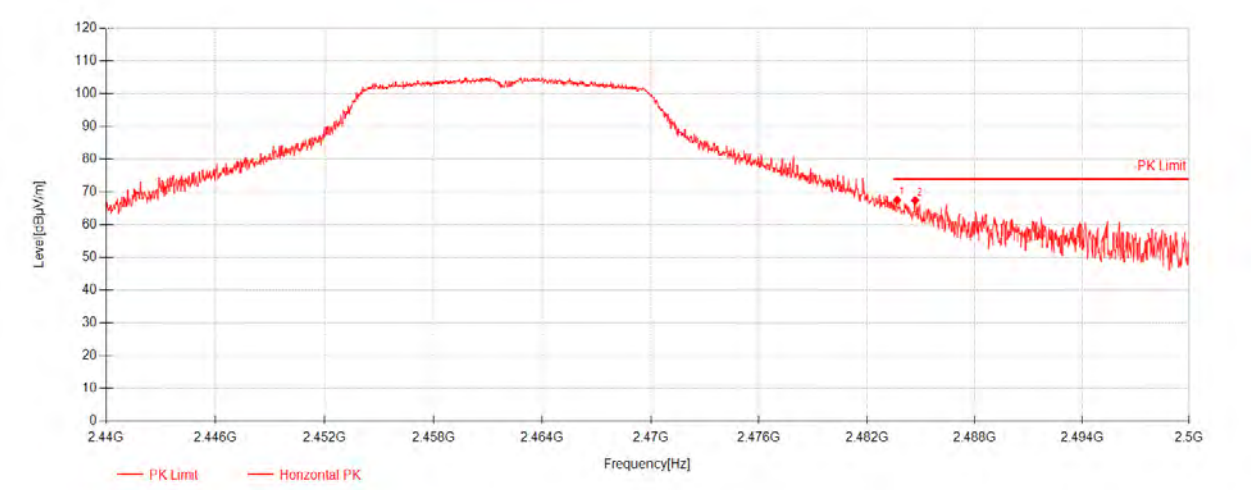

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	63.99	27.17	-23.54	67.61	74.00	6.39	Horizontal
2	2484.685	63.85	27.17	-23.54	67.47	74.00	6.53	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 34 of 193

802.11g_Channel 11

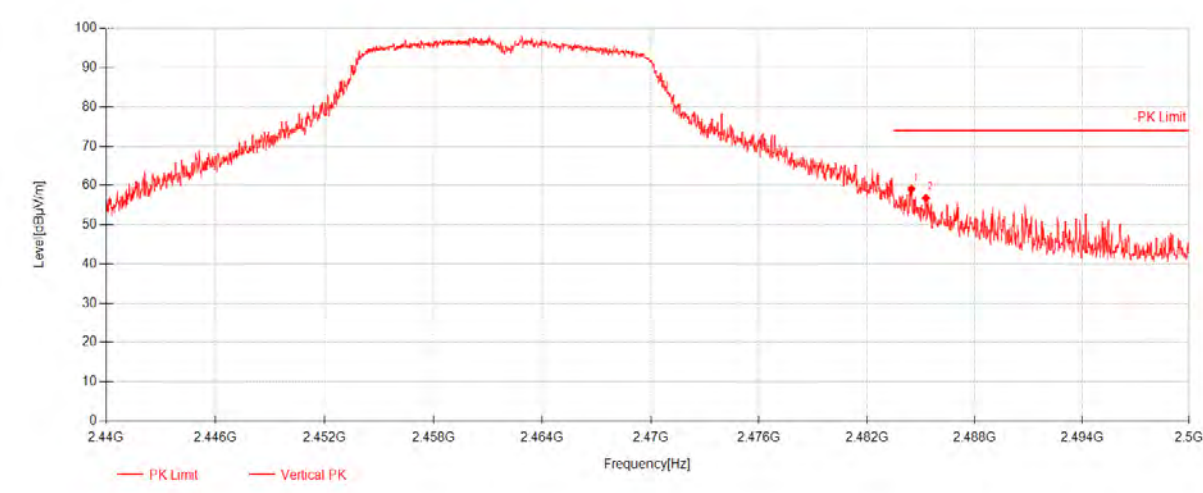

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.475	55.45	27.17	-23.54	59.07	74.00	14.93	Vertical
2	2485.285	53.16	27.17	-23.54	56.79	74.00	17.21	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 35 of 193

802.11n20_Channel 01

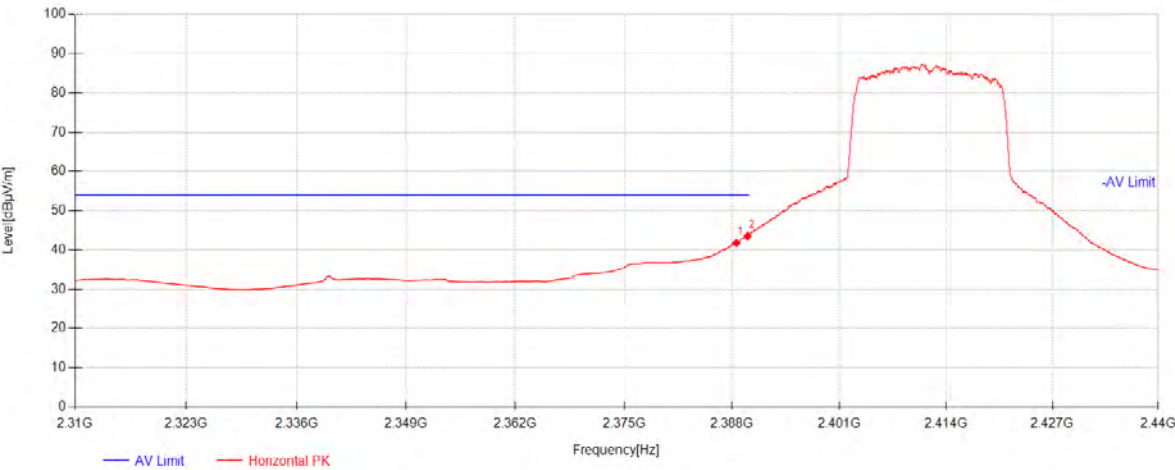

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.52	38.38	26.98	-23.57	41.79	54.00	12.21	Horizontal
2	2389.885	40.13	26.98	-23.57	43.54	54.00	10.46	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 36 of 193


802.11n20_Channel 01

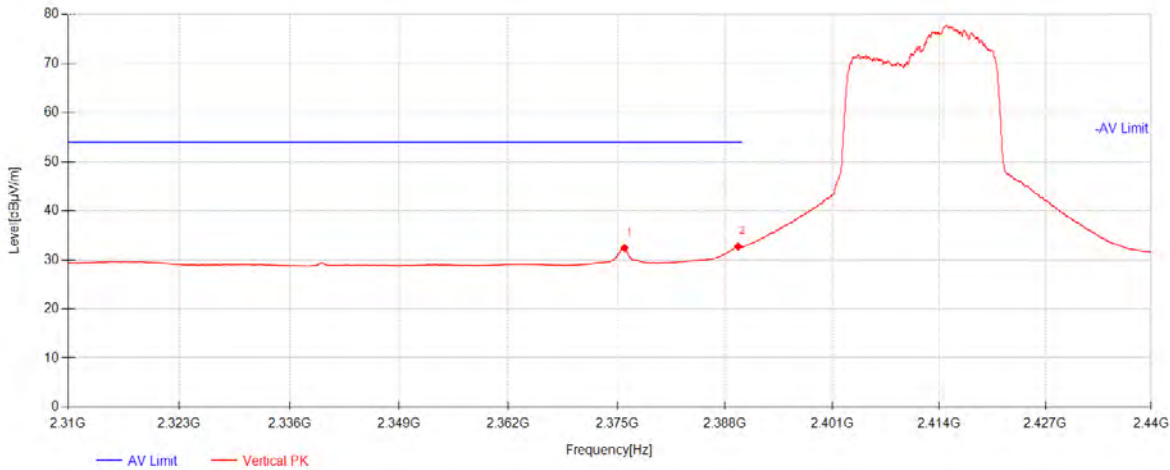

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.91	29.01	26.95	-23.57	32.39	54.00	21.61	Vertical
2	2389.5925	29.30	26.98	-23.57	32.71	54.00	21.29	Vertical

Compliance Certification Services (Kunshan) Inc.


802.11n20_Channel 01

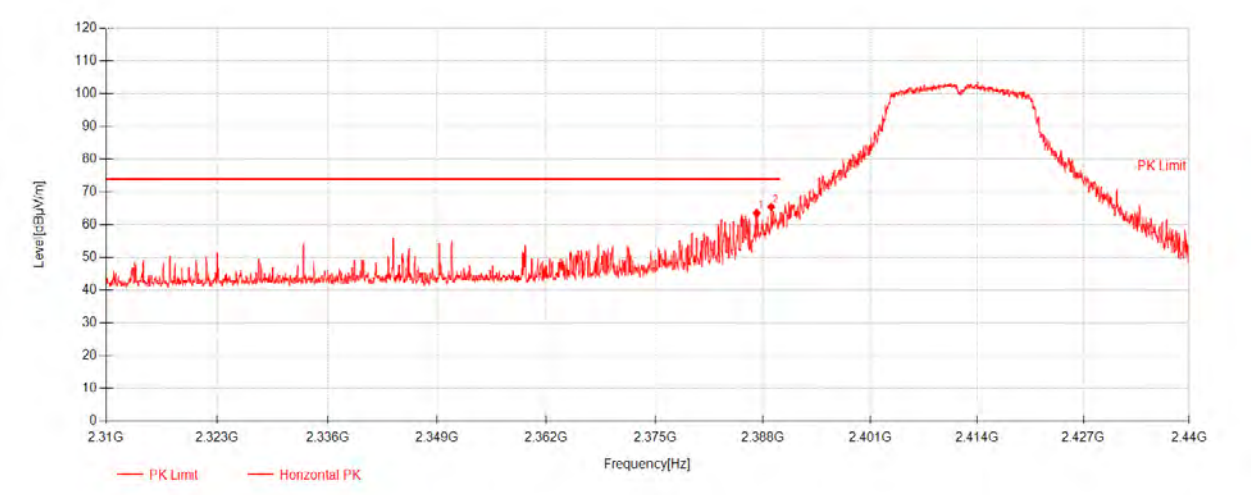

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.2362	60.11	26.97	-23.57	63.51	74.00	10.49	Horizontal
2	2389.0075	62.01	26.98	-23.57	65.42	74.00	8.58	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11n20_Channel 01

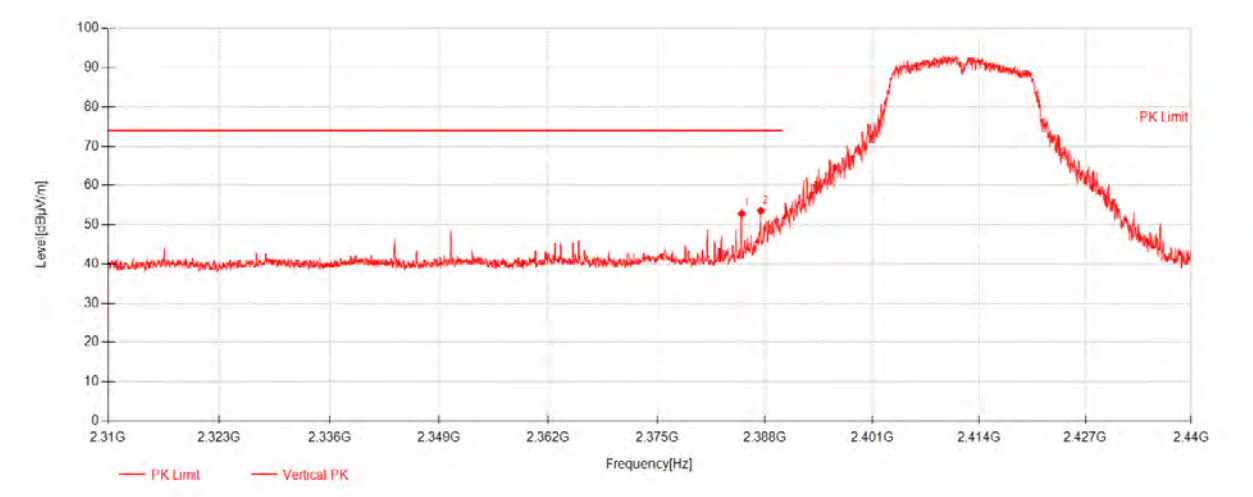

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.205	49.39	26.97	-23.57	52.79	74.00	21.21	Vertical
2	2387.5125	50.11	26.98	-23.57	53.51	74.00	20.49	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 39 of 193

802.11n20_Channel 11

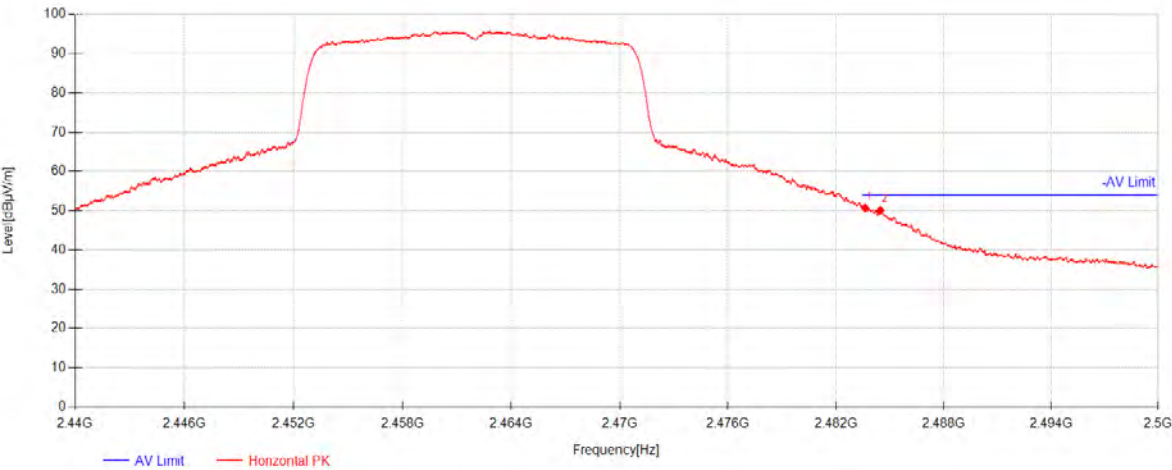

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	47.13	27.17	-23.54	50.75	54.00	3.25	Horizontal
2	2484.475	46.52	27.17	-23.54	50.14	54.00	3.86	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 40 of 193

802.11n20_Channel 11

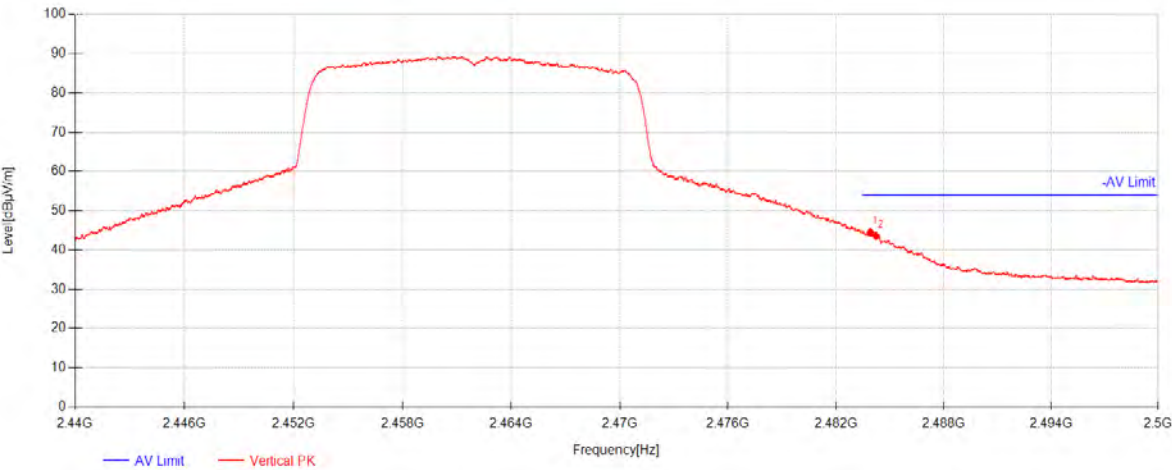

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.92	40.93	27.17	-23.54	44.55	54.00	9.45	Vertical
2	2484.235	39.99	27.17	-23.54	43.61	54.00	10.39	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 41 of 193

802.11n20_Channel 11

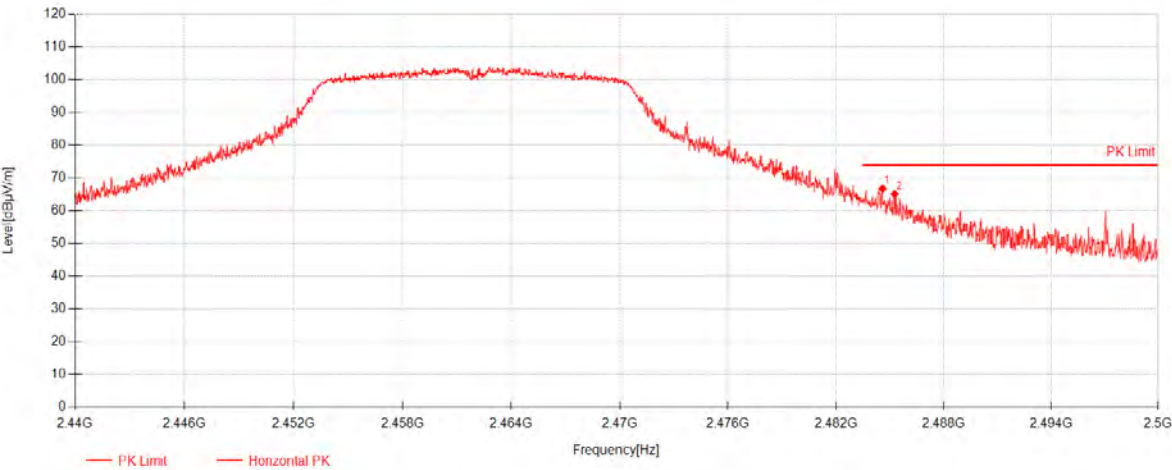

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.595	63.18	27.17	-23.54	66.80	74.00	7.20	Horizontal
2	2485.27	61.51	27.17	-23.54	65.14	74.00	8.86	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 42 of 193

802.11n20_Channel 11

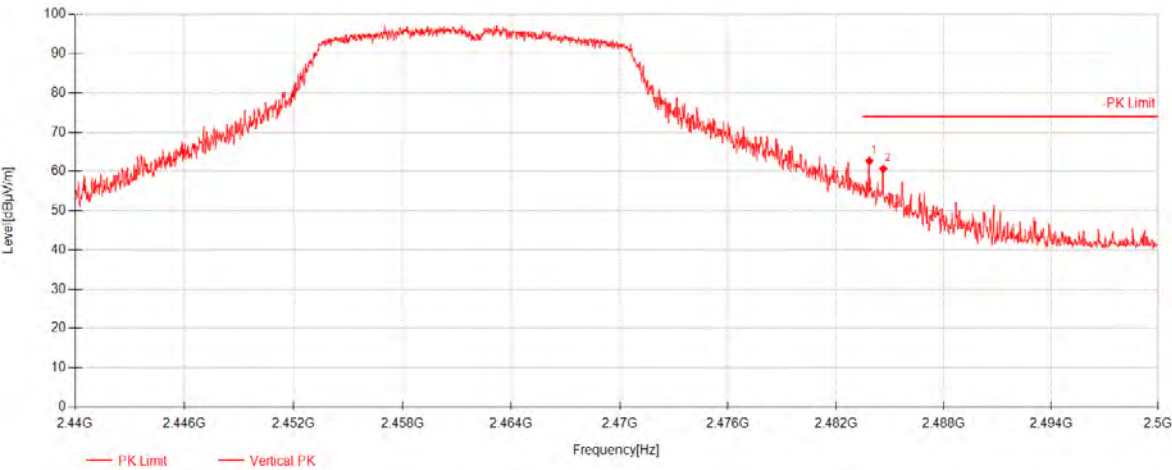

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.86	59.08	27.17	-23.54	62.70	74.00	11.30	Vertical
2	2484.64	57.03	27.17	-23.54	60.65	74.00	13.35	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 43 of 193

802.11n40_Channel 03

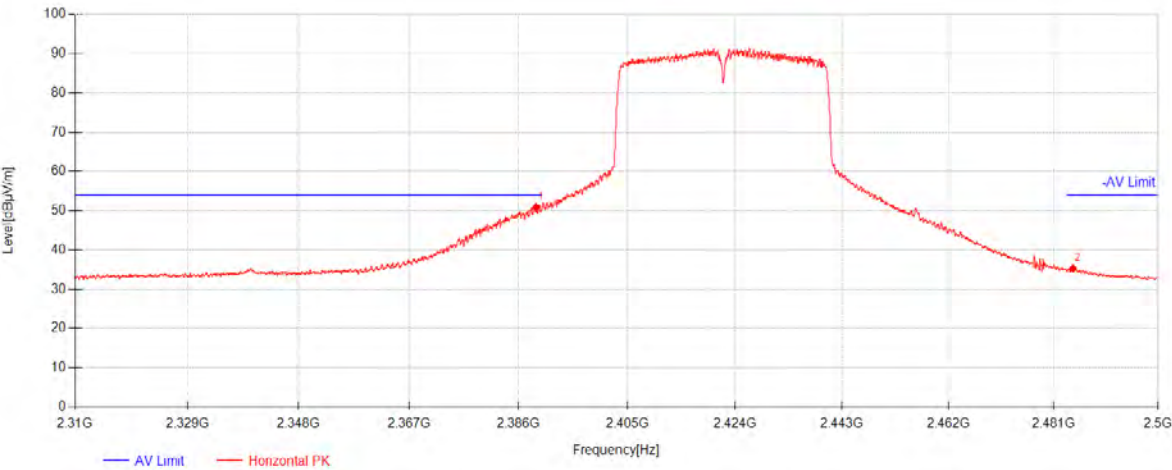

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.04	47.46	26.98	-23.57	50.87	54.00	3.13	Horizontal
2	2484.52	31.69	27.17	-23.54	35.31	54.00	18.69	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 44 of 193


802.11n40_Channel 03

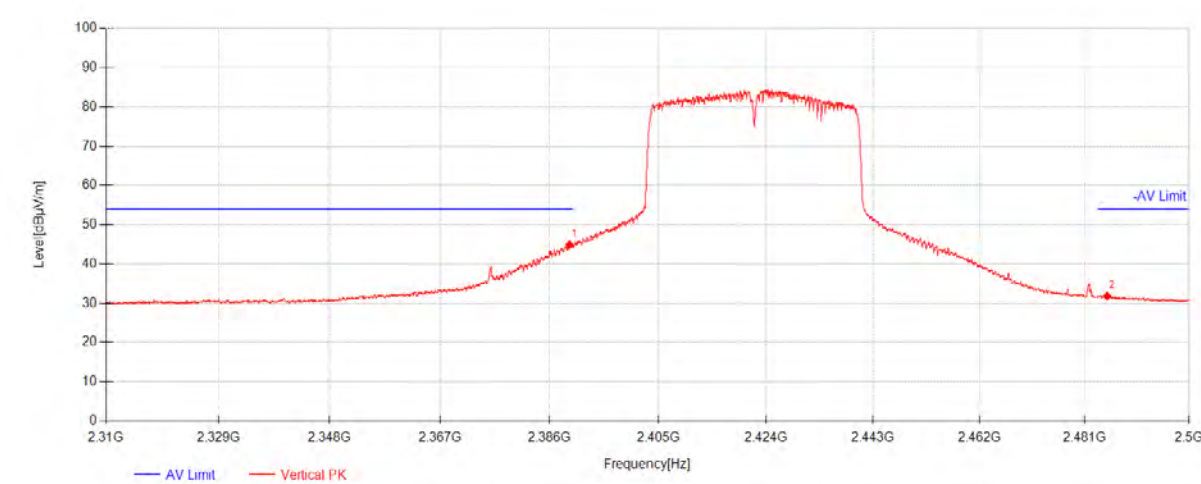

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.4733	41.49	26.98	-23.57	44.90	54.00	9.10	Vertical
2	2485.12	28.21	27.17	-23.54	31.84	54.00	22.16	Vertical

Compliance Certification Services (Kunshan) Inc.


802.11n40_Channel 03

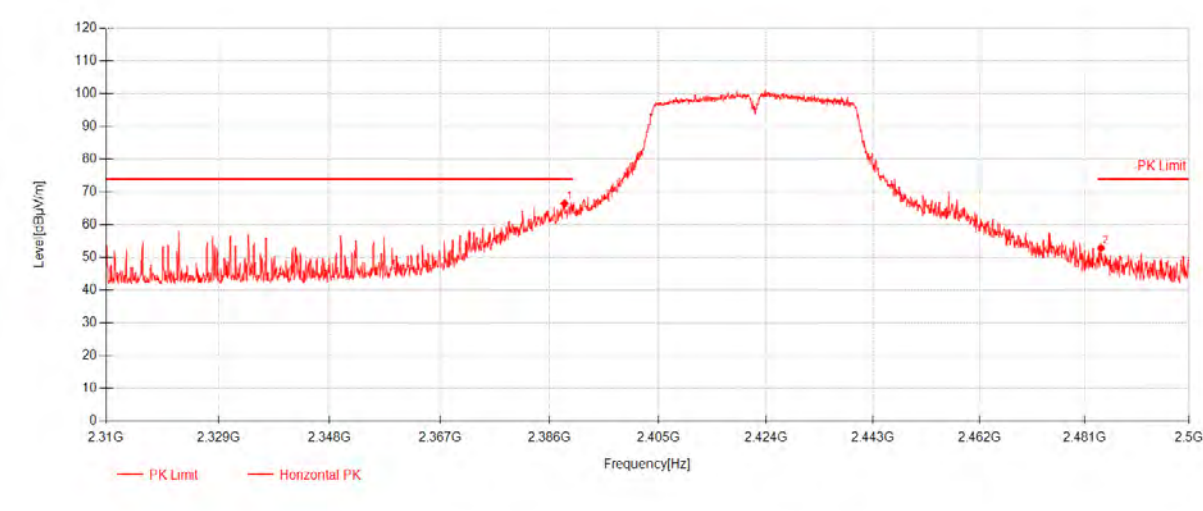

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.6067	63.07	26.98	-23.57	66.48	74.00	7.52	Horizontal
2	2483.98	49.26	27.17	-23.54	52.88	74.00	21.12	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11n40_Channel 03

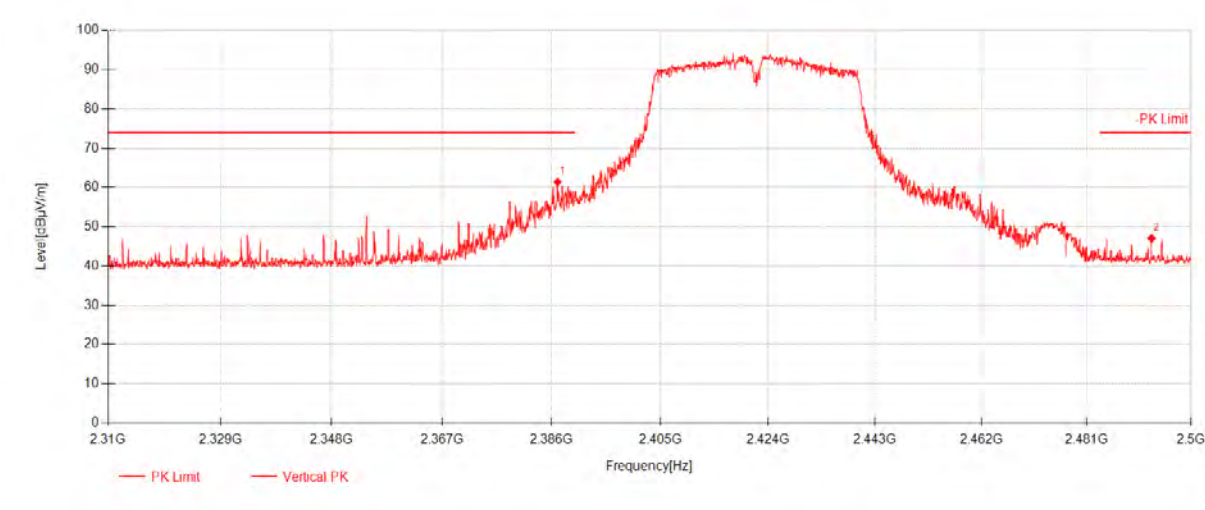

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2387.0467	57.98	26.97	-23.57	61.38	74.00	12.62	Vertical
2	2492.8	43.38	27.19	-23.54	47.02	74.00	26.98	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 47 of 193

802.11n40_Channel 09

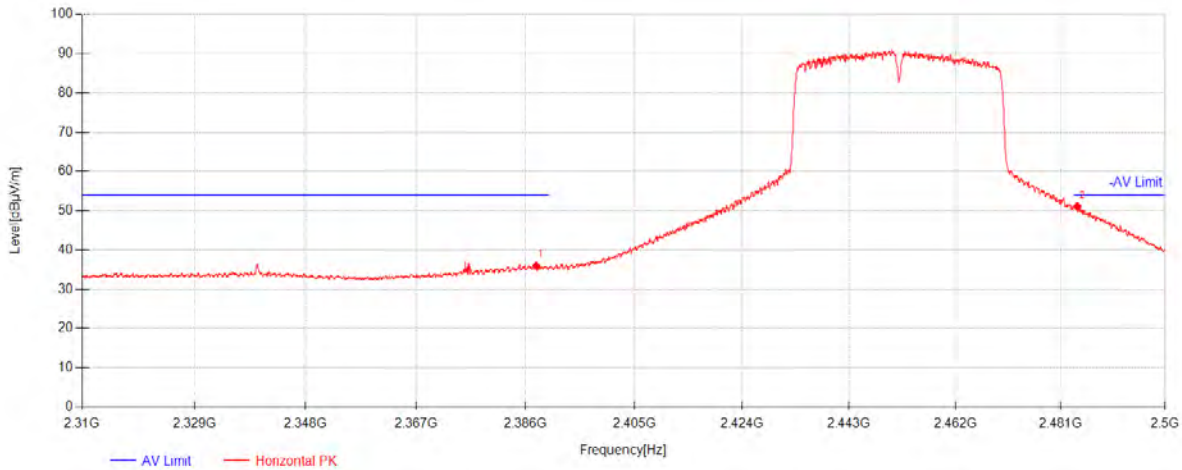


Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.87	32.61	26.98	-23.57	36.01	54.00	17.99	Horizontal
2	2484.04	47.50	27.17	-23.54	51.12	54.00	2.88	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11n40_Channel 09

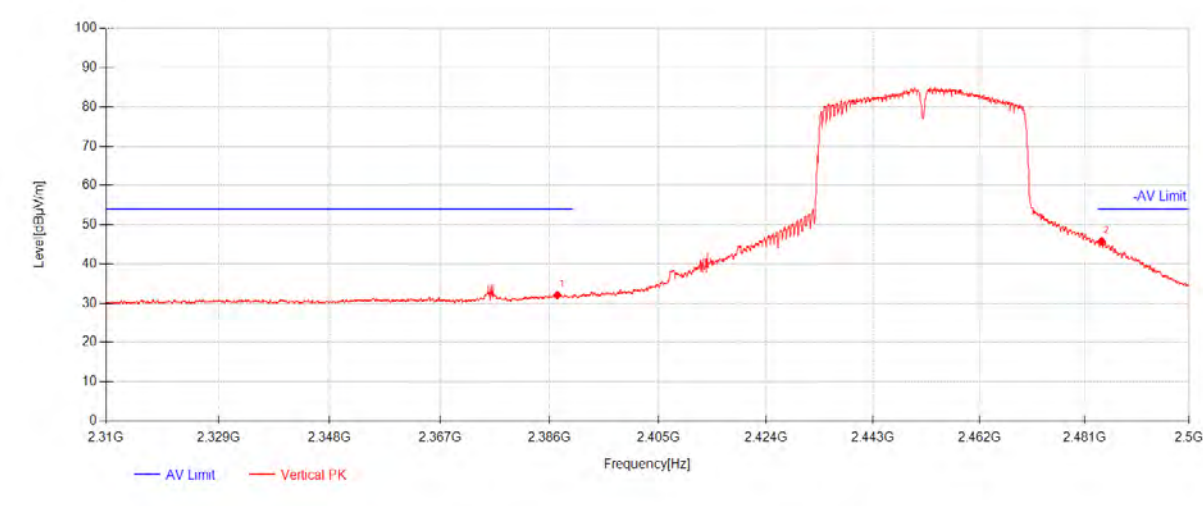

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	28.69	26.97	-23.57	32.09	54.00	21.91	Vertical
2	2484.1	42.19	27.17	-23.54	45.81	54.00	8.19	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 49 of 193


802.11n40_Channel 09

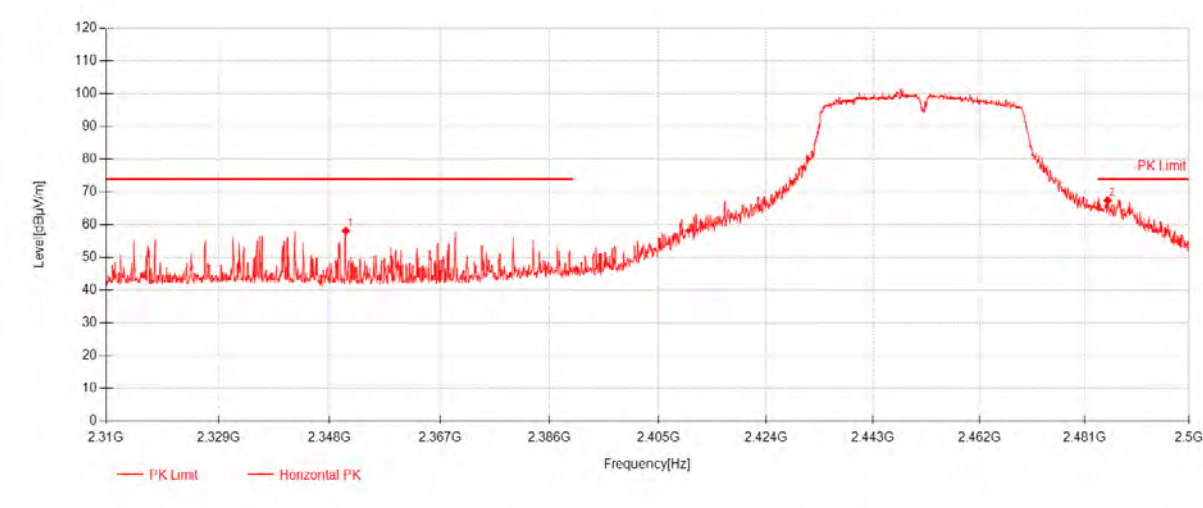

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2350.7767	54.77	26.90	-23.57	58.10	74.00	15.90	Horizontal
2	2485.18	63.81	27.17	-23.54	67.44	74.00	6.56	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11n40_Channel 09

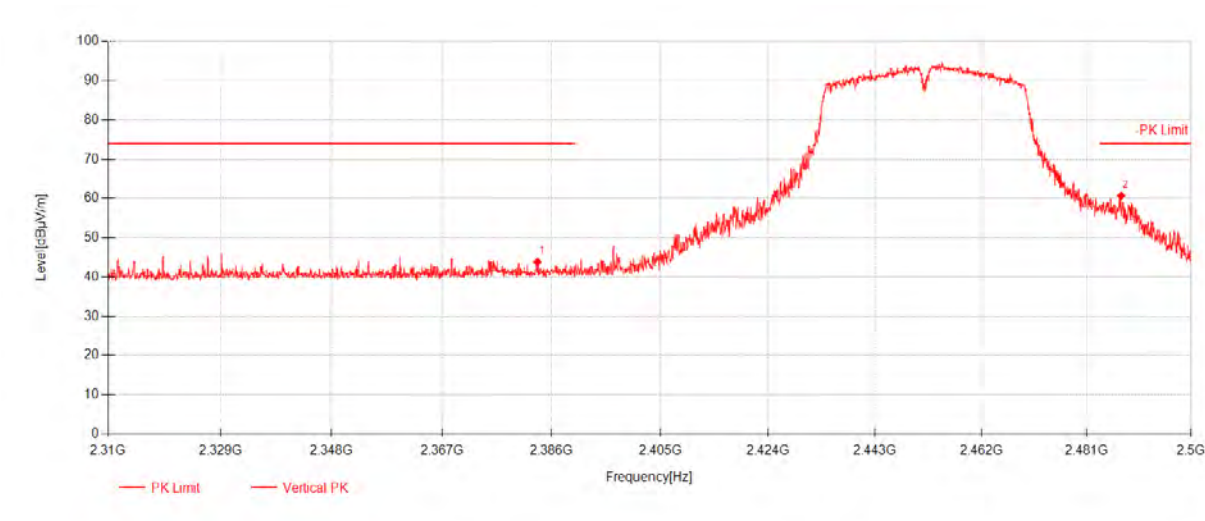

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.5367	40.47	26.97	-23.57	43.87	74.00	30.13	Vertical
2	2487.28	57.04	27.17	-23.54	60.67	74.00	13.33	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 51 of 193

802.11ax20_Channel 01

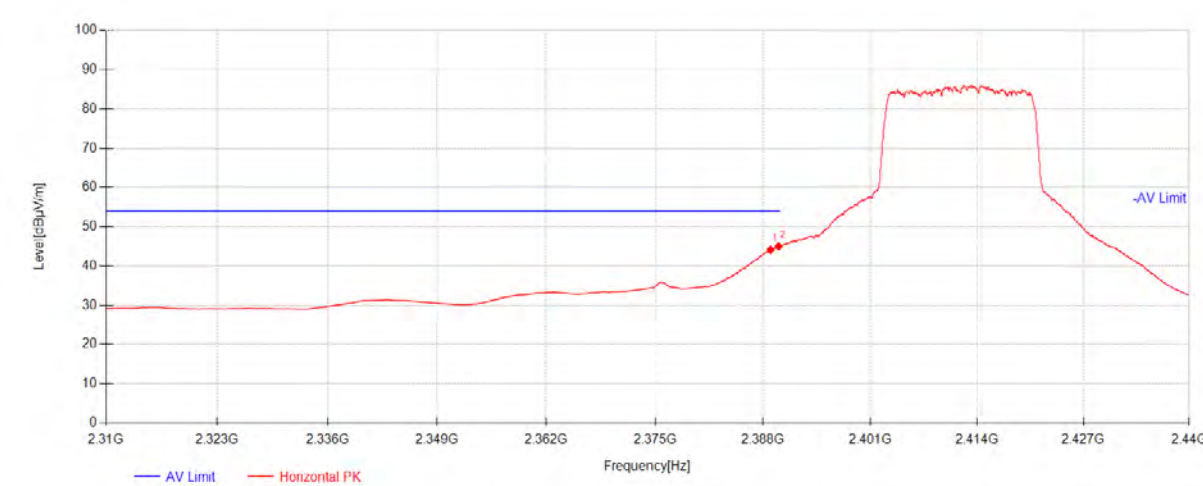

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.91	40.71	26.98	-23.57	44.12	54.00	9.88	Horizontal
2	2389.885	41.60	26.98	-23.57	45.01	54.00	8.99	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 52 of 193


802.11ax20_Channel 01

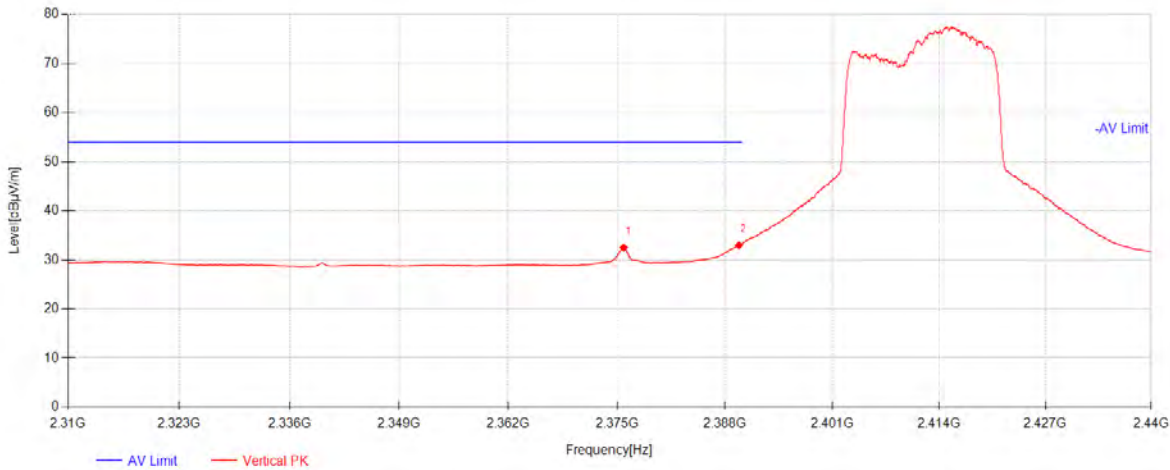

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2375.8125	29.09	26.95	-23.57	32.47	54.00	21.53	Vertical
2	2389.69	29.56	26.98	-23.57	32.97	54.00	21.03	Vertical

Compliance Certification Services (Kunshan) Inc.


802.11ax20_Channel 01

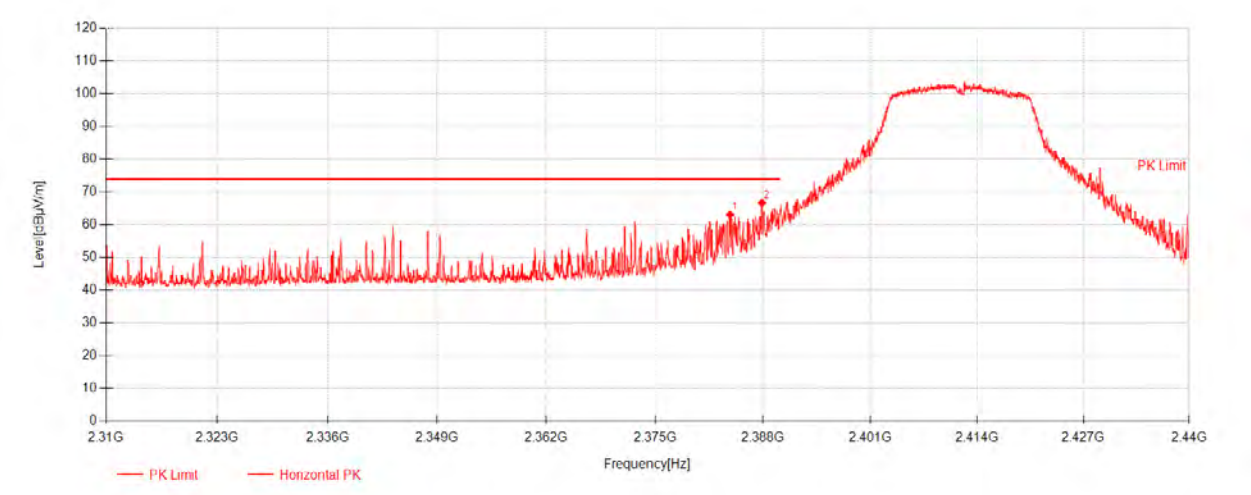

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2384.035	59.64	26.97	-23.57	63.04	74.00	10.96	Horizontal
2	2387.8862	63.30	26.98	-23.57	66.70	74.00	7.30	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11ax20_Channel 01

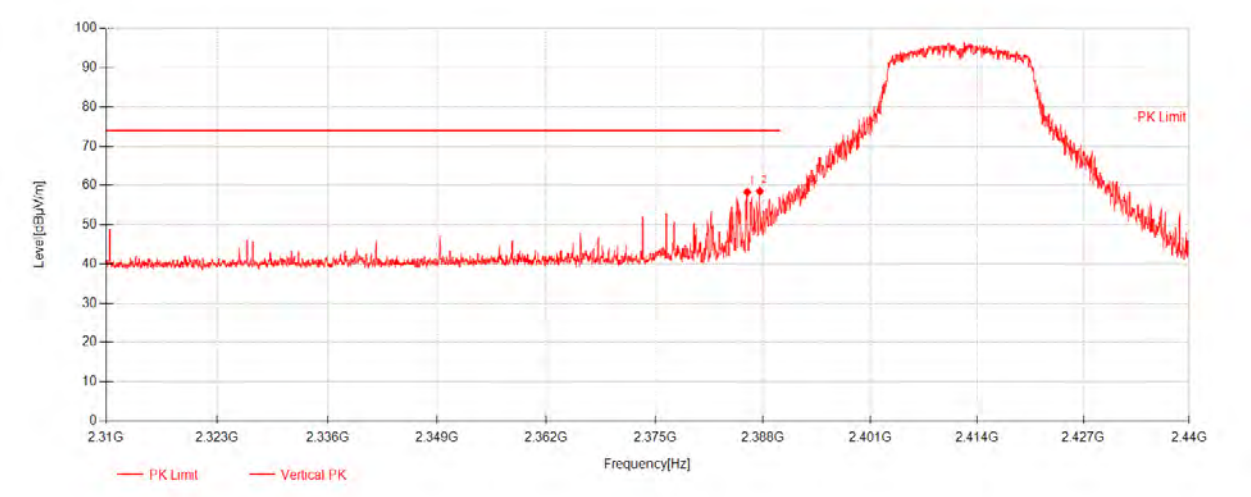

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.115	54.89	26.97	-23.57	58.29	74.00	15.71	Vertical
2	2387.6262	55.11	26.98	-23.57	58.51	74.00	15.49	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 55 of 193

802.11ax20_Channel 11

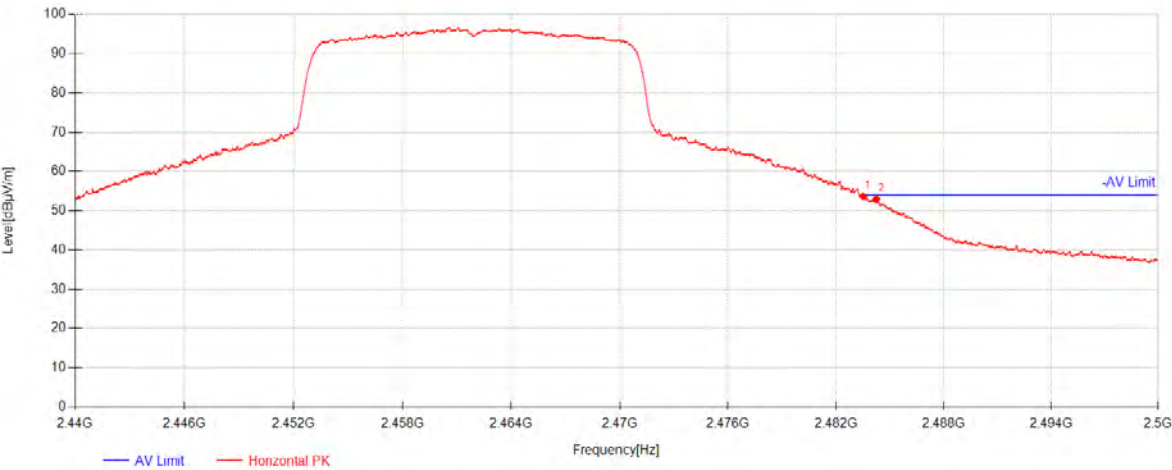

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.515	50.04	27.17	-23.54	53.66	54.00	0.34	Horizontal
2	2484.2575	49.28	27.17	-23.54	52.90	54.00	1.10	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 56 of 193

802.11ax20_Channel 11

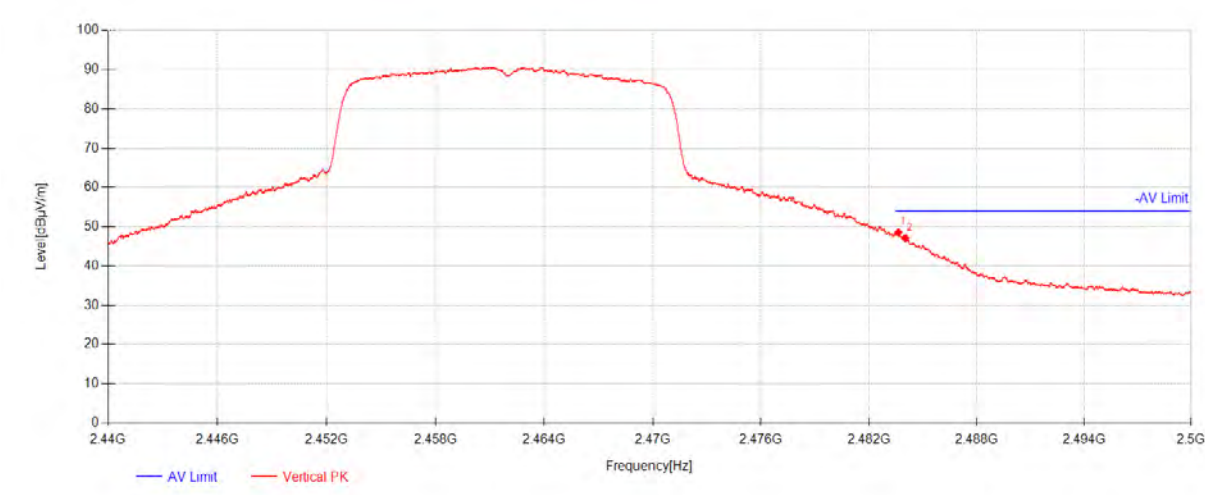

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.635	44.94	27.17	-23.54	48.56	54.00	5.44	Vertical
2	2484.025	43.46	27.17	-23.54	47.08	54.00	6.92	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 57 of 193

802.11ax20_Channel 11

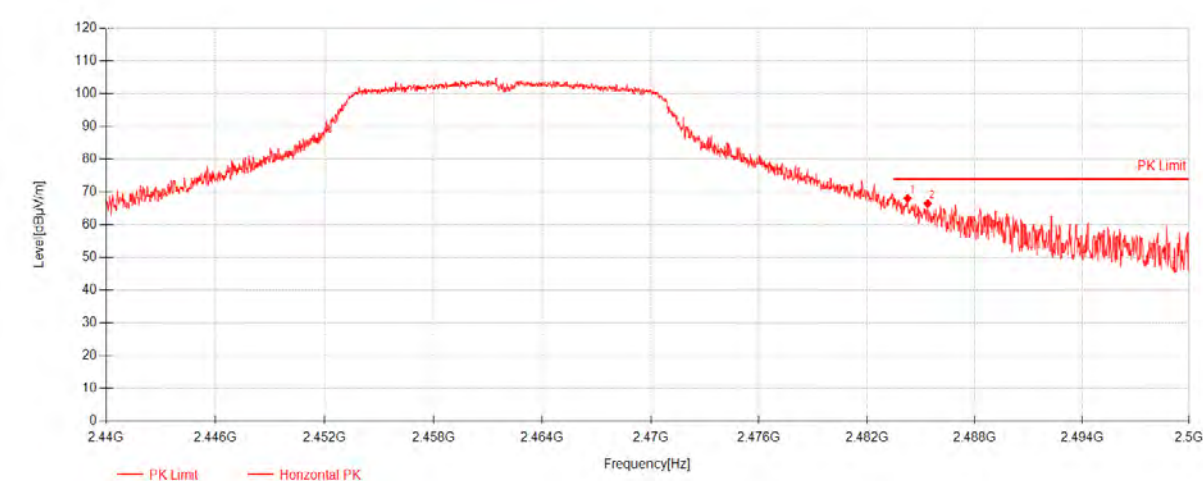

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.265	64.44	27.17	-23.54	68.06	74.00	5.94	Horizontal
2	2485.39	62.88	27.17	-23.54	66.51	74.00	7.49	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 58 of 193

802.11ax20_Channel 11

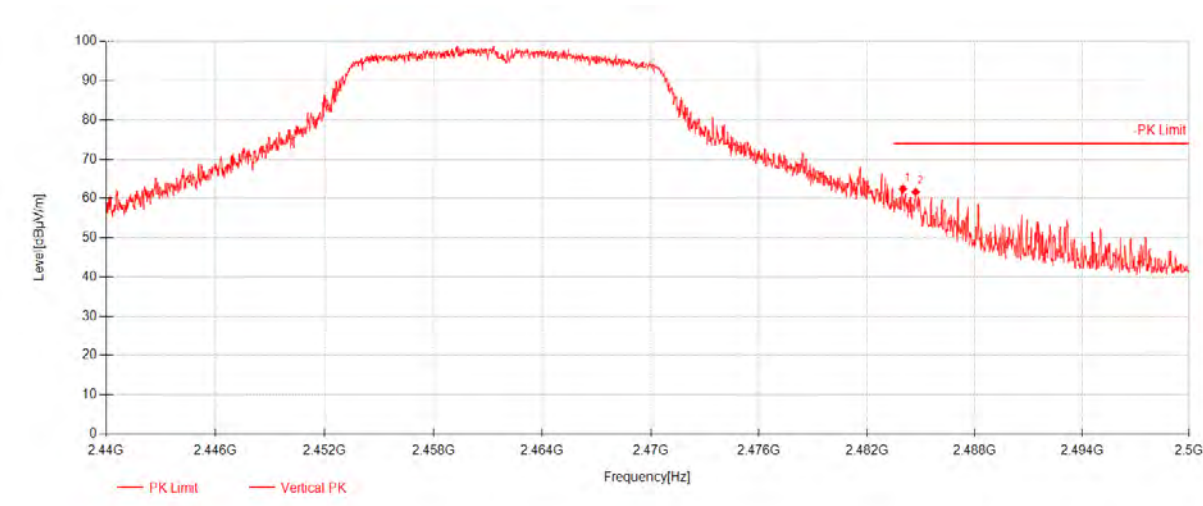

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.01	58.87	27.17	-23.54	62.49	74.00	11.51	Vertical
2	2484.715	58.03	27.17	-23.54	61.65	74.00	12.35	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 59 of 193

802.11ax40_Channel 03

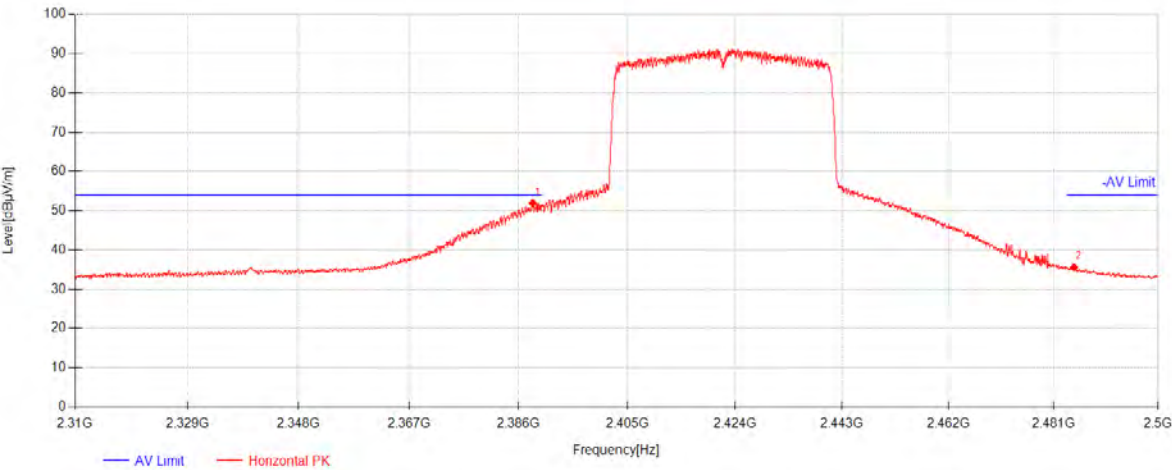

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.4767	48.50	26.98	-23.57	51.91	54.00	2.09	Horizontal
2	2484.7	31.98	27.17	-23.54	35.60	54.00	18.40	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 60 of 193

802.11ax40_Channel 03

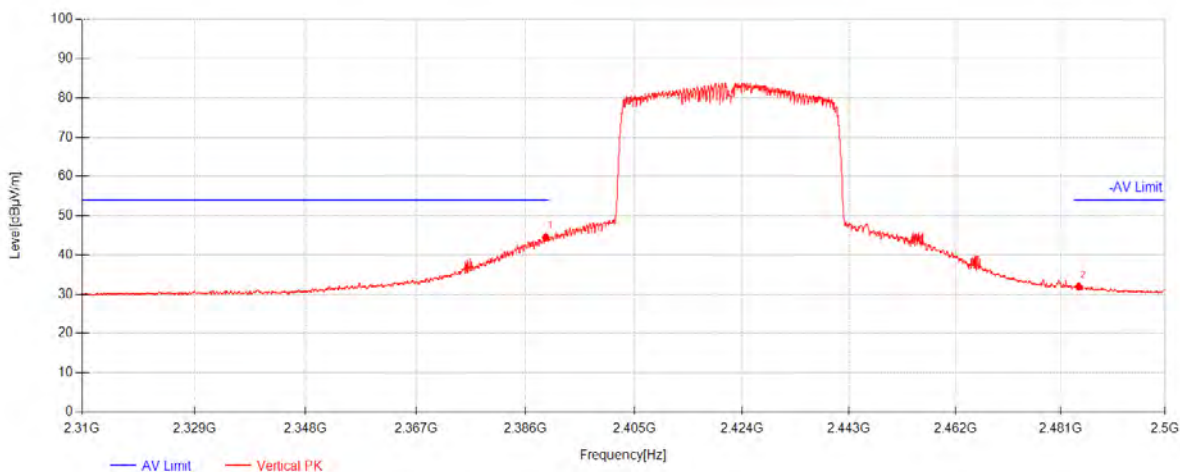

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.5167	41.16	26.98	-23.57	44.57	54.00	9.43	Vertical
2	2484.28	28.35	27.17	-23.54	31.97	54.00	22.03	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 61 of 193


802.11ax40_Channel 03

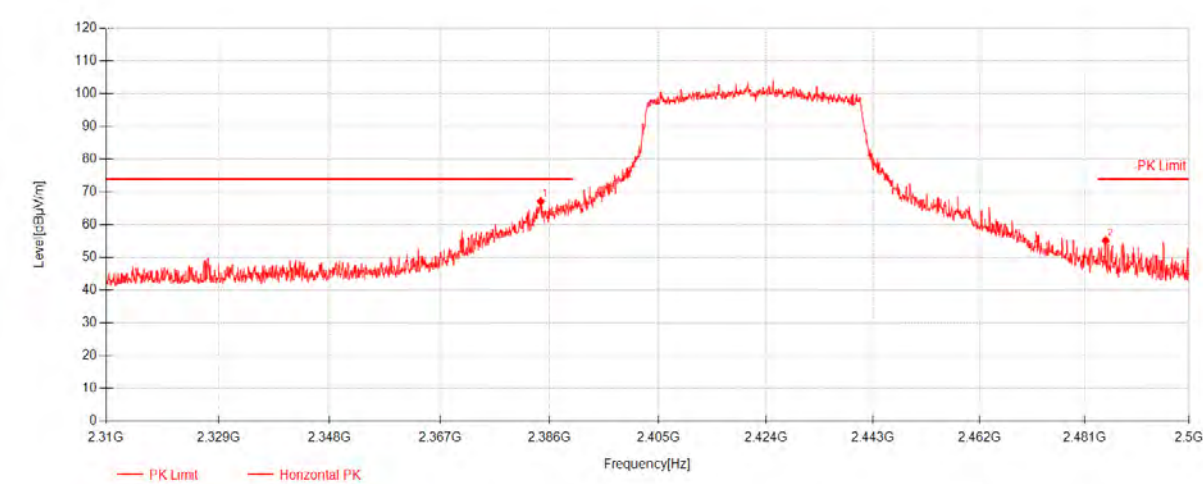

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.4467	63.74	26.97	-23.57	67.14	74.00	6.86	Horizontal
2	2484.82	51.50	27.17	-23.54	55.13	74.00	18.87	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11ax40_Channel 03

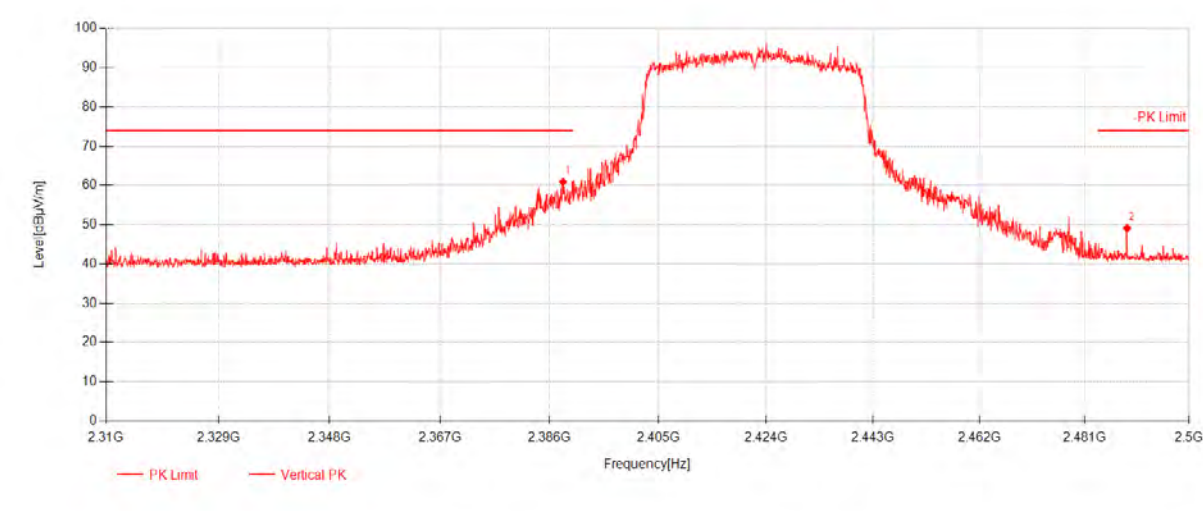

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.3467	57.48	26.98	-23.57	60.89	74.00	13.11	Vertical
2	2488.72	45.51	27.18	-23.54	49.14	74.00	24.86	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 63 of 193

802.11ax40_Channel 09

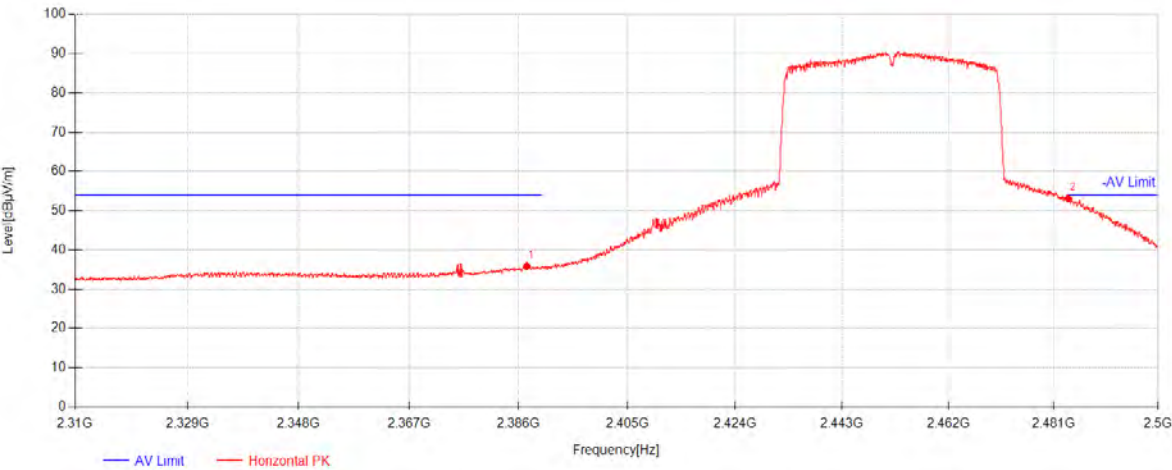

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.4367	32.54	26.97	-23.57	35.94	54.00	18.06	Horizontal
2	2483.62	49.48	27.17	-23.54	53.10	54.00	0.90	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 64 of 193

802.11ax40_Channel 09

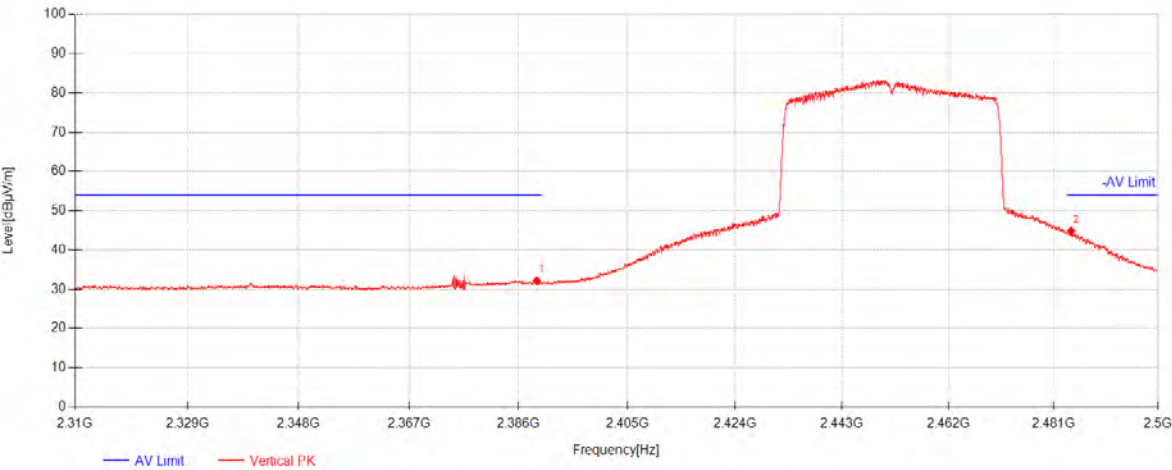

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.17	28.77	26.98	-23.57	32.18	54.00	21.82	Vertical
2	2484.22	41.23	27.17	-23.54	44.85	54.00	9.15	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 65 of 193


802.11ax40_Channel 09

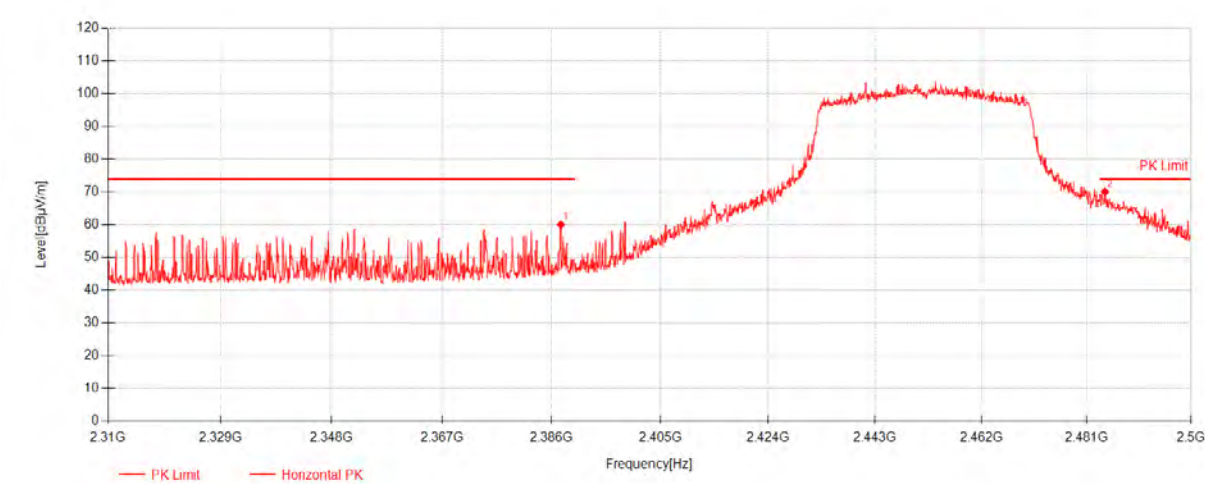

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.61	56.68	26.98	-23.57	60.08	74.00	13.92	Horizontal
2	2484.34	66.43	27.17	-23.54	70.05	74.00	3.95	Horizontal

Compliance Certification Services (Kunshan) Inc.

802.11ax40_Channel 09

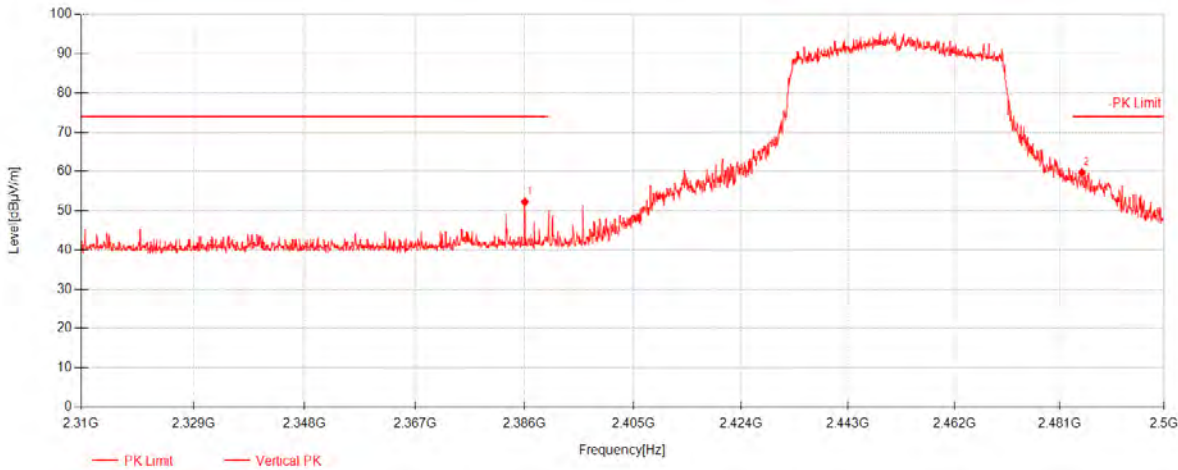

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.05	48.83	26.97	-23.57	52.23	74.00	21.77	Vertical
2	2485.06	56.06	27.17	-23.54	59.69	74.00	14.31	Vertical

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 46 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

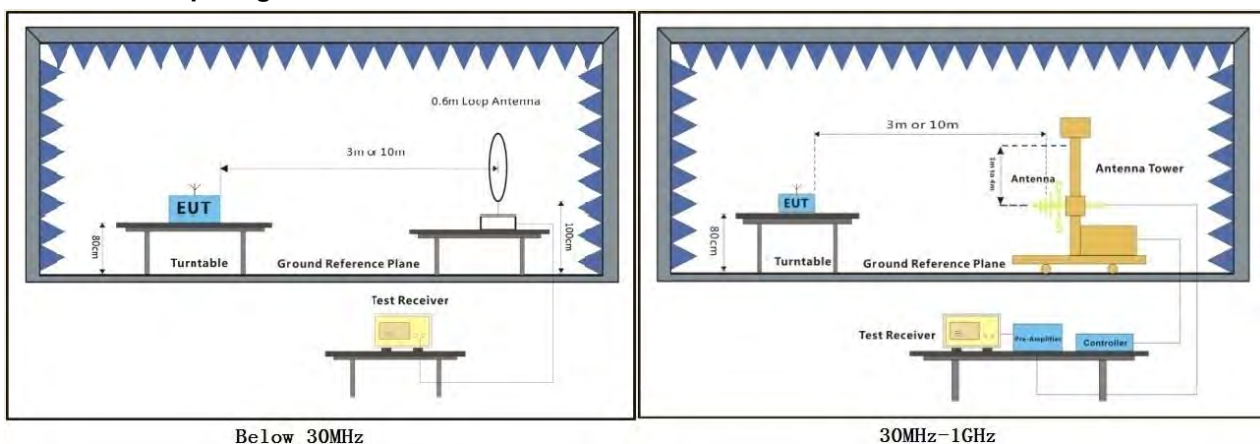

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 69 of 193

802.11n40_Channel 09

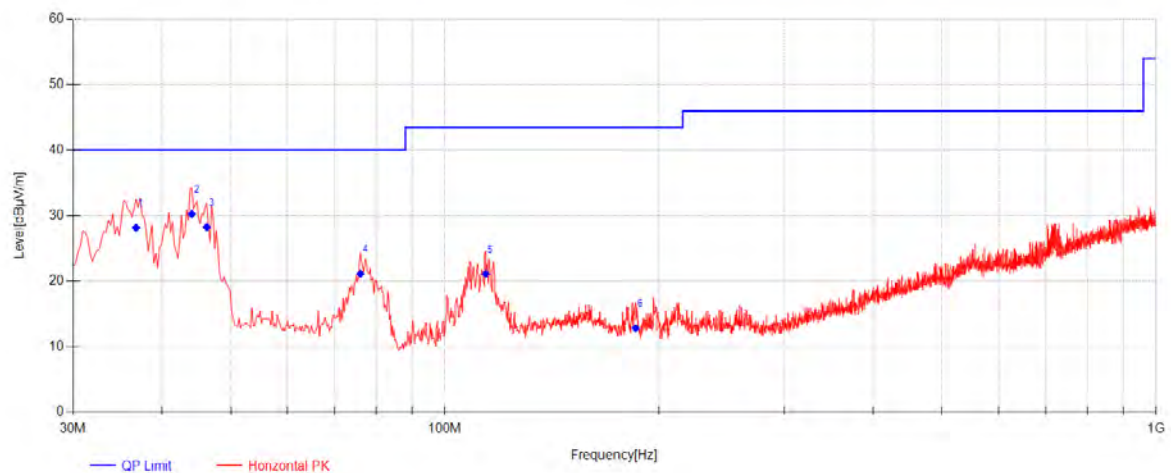

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	36.79	51.46	-42.35	19.02	28.14	40.00	11.86	Horizontal
2	44.065	53.29	-42.34	19.32	30.26	40.00	9.74	Horizontal
3	46.2475	51.42	-42.36	19.16	28.23	40.00	11.77	Horizontal
4	76.075	46.89	-41.93	16.17	21.13	40.00	18.87	Horizontal
5	114.1475	46.20	-41.77	16.69	21.12	43.50	22.38	Horizontal
6	185.4425	37.49	-40.98	16.29	12.80	43.50	30.70	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 70 of 193

802.11n40_Channel 09

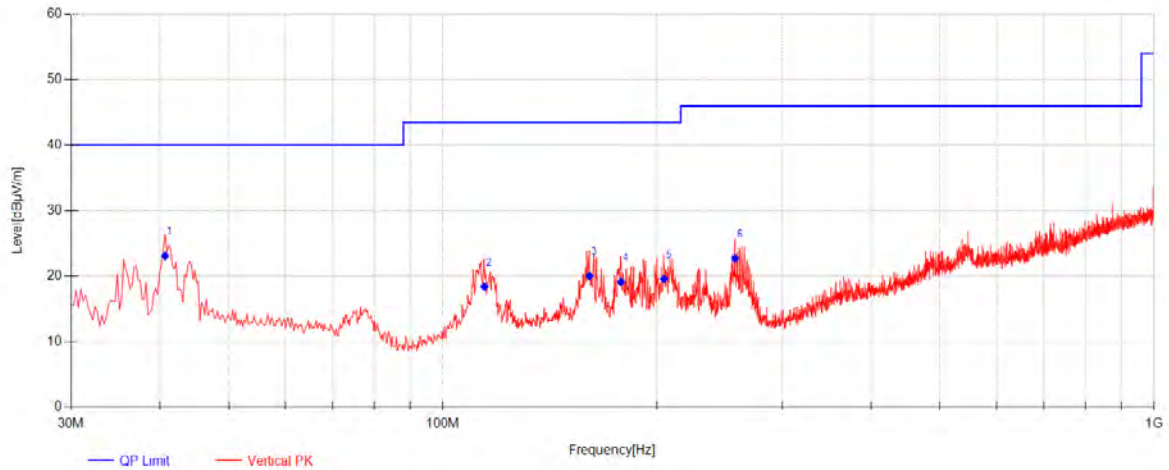

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	40.67	45.86	-42.32	19.55	23.09	40.00	16.91	Vertical
2	114.39	43.45	-41.77	16.71	18.39	43.50	25.11	Vertical
3	160.7075	42.36	-40.80	18.44	20.00	43.50	23.50	Vertical
4	177.925	43.21	-41.00	16.89	19.10	43.50	24.40	Vertical
5	204.6	45.19	-41.00	15.38	19.57	43.50	23.93	Vertical
6	257.465	45.85	-40.38	17.25	22.72	46.00	23.28	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 46 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

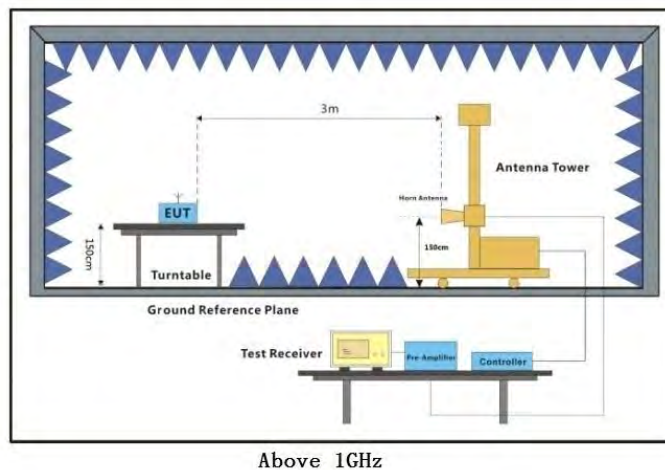

7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
5. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 73 of 193

802.11b_Channel 01

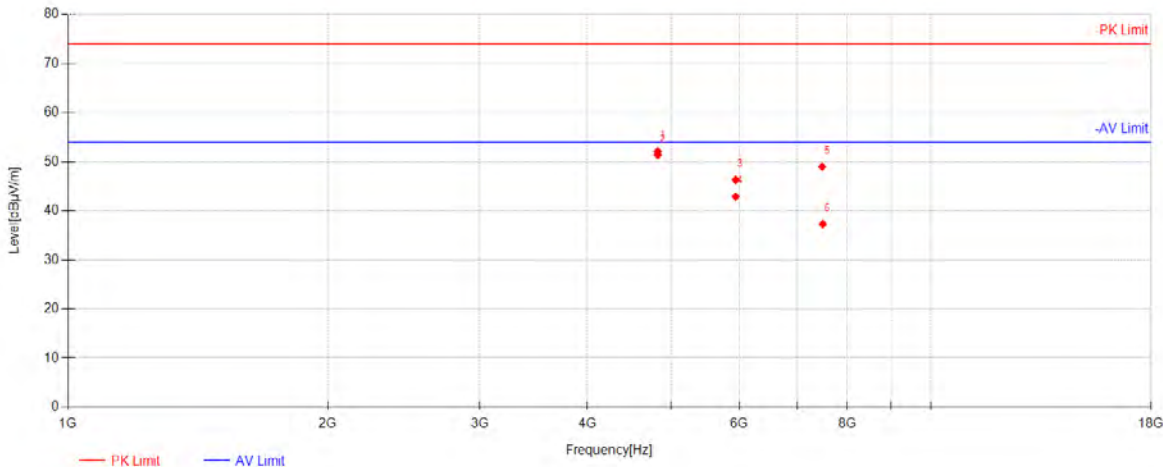

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824	66.50	31.12	-45.54	52.08	74.00	21.92	Horizontal
2	4824.375	65.78	31.12	-45.54	51.36	54.00	2.64	Horizontal
3	5939.25	58.81	32.39	-44.92	46.28	74.00	27.72	Horizontal
4	5940	55.37	32.39	-44.91	42.84	54.00	11.16	Horizontal
5	7483.125	55.79	36.35	-43.19	48.96	74.00	25.04	Horizontal
6	7495.875	44.02	36.39	-43.15	37.26	54.00	16.74	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 74 of 193

802.11b_Channel 01

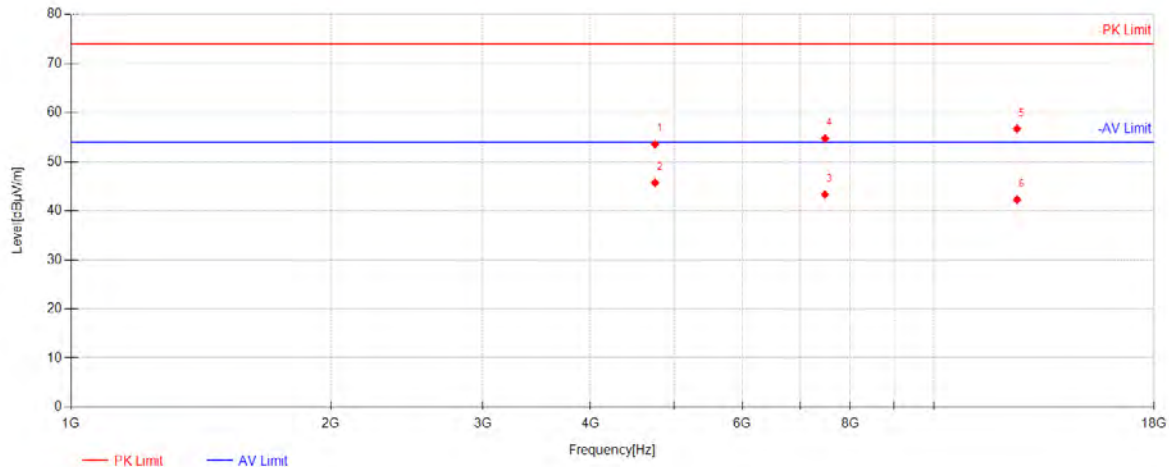

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.10	31.00	-45.57	53.53	74.00	20.47	Vertical
2	4752	60.28	31.00	-45.57	45.71	54.00	8.29	Vertical
3	7477.5	50.17	36.34	-43.20	43.31	54.00	10.69	Vertical
4	7481.25	61.57	36.35	-43.19	54.73	74.00	19.27	Vertical
5	12486.375	54.48	39.25	-37.03	56.69	74.00	17.31	Vertical
6	12487.875	40.01	39.25	-37.02	42.23	54.00	11.77	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 75 of 193

802.11b_Channel 06

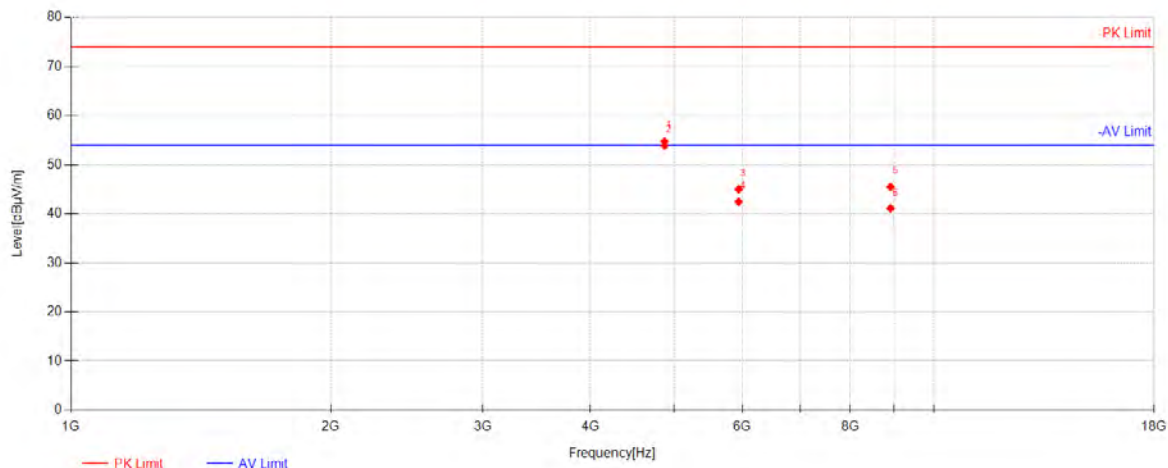

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4873.875	69.05	31.20	-45.53	54.72	74.00	19.28	Horizontal
2	4874.25	68.15	31.20	-45.53	53.82	54.00	0.18	Horizontal
3	5939.625	57.54	32.39	-44.91	45.01	74.00	28.99	Horizontal
4	5940	54.93	32.39	-44.91	42.40	54.00	11.60	Horizontal
5	8909.25	50.15	36.55	-41.22	45.49	74.00	28.51	Horizontal
6	8909.625	45.77	36.55	-41.22	41.11	54.00	12.89	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 76 of 193

802.11b_Channel 06

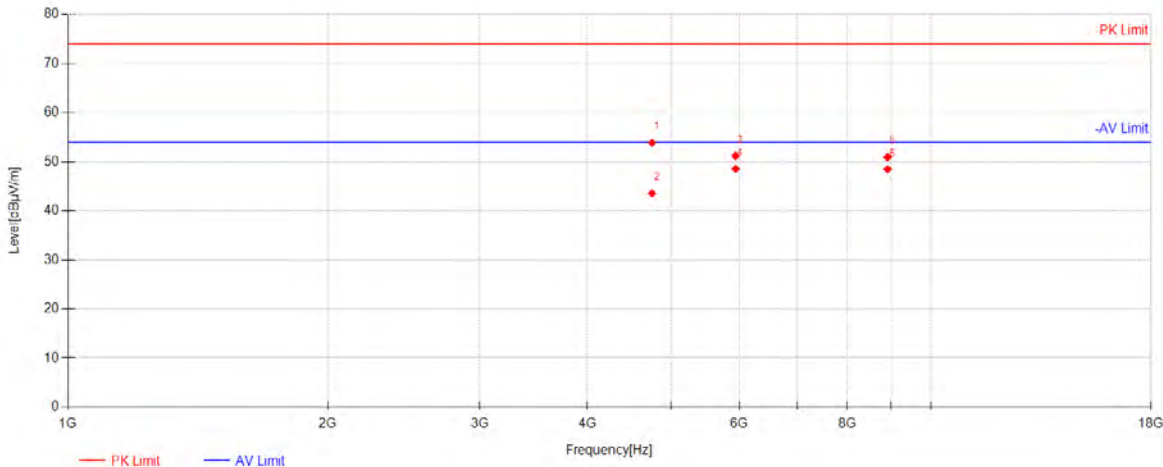

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.41	31.00	-45.57	53.84	74.00	20.16	Vertical
2	4751.625	58.10	31.00	-45.57	43.53	54.00	10.47	Vertical
3	5939.625	63.71	32.39	-44.91	51.18	74.00	22.82	Vertical
4	5940	61.04	32.39	-44.91	48.51	54.00	5.49	Vertical
5	8909.625	55.59	36.55	-41.22	50.93	74.00	23.07	Vertical
6	8909.625	53.10	36.55	-41.22	48.44	54.00	5.56	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 77 of 193

802.11b_Channel 11

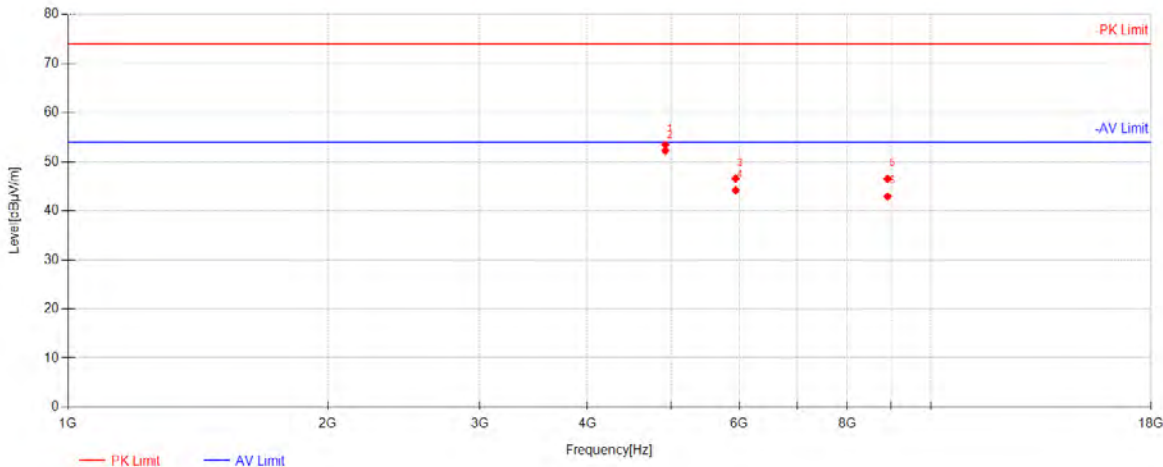

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4923.75	67.69	31.28	-45.56	53.41	74.00	20.59	Horizontal
2	4924.5	66.49	31.28	-45.56	52.21	54.00	1.79	Horizontal
3	5939.625	59.08	32.39	-44.91	46.55	74.00	27.45	Horizontal
4	5940	56.71	32.39	-44.91	44.18	54.00	9.82	Horizontal
5	8909.25	51.15	36.55	-41.22	46.49	74.00	27.51	Horizontal
6	8909.625	47.55	36.55	-41.22	42.89	54.00	11.11	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 78 of 193

802.11b_Channel 11

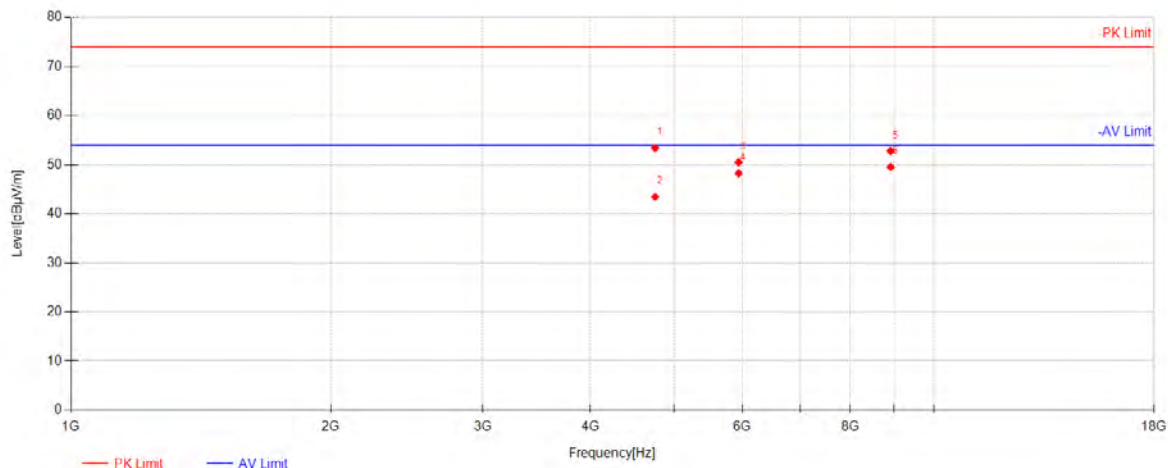

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	67.94	31.00	-45.57	53.37	74.00	20.63	Vertical
2	4752.375	58.00	31.00	-45.57	43.44	54.00	10.56	Vertical
3	5939.625	63.04	32.39	-44.91	50.51	74.00	23.49	Vertical
4	5940	60.74	32.39	-44.91	48.21	54.00	5.79	Vertical
5	8909.25	57.40	36.55	-41.22	52.74	74.00	21.26	Vertical
6	8909.625	54.20	36.55	-41.22	49.54	54.00	4.46	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 79 of 193

802.11g_Channel 01

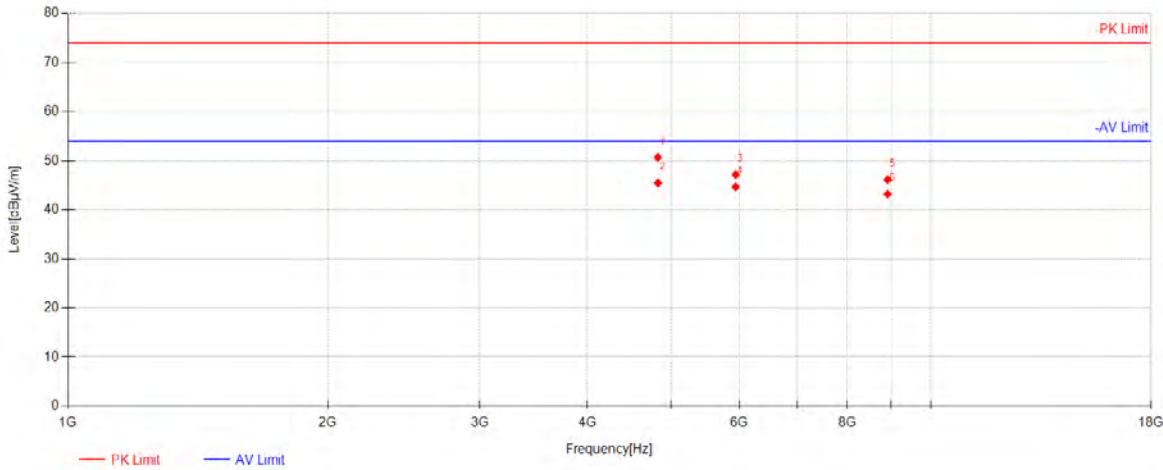

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4826.625	65.08	31.12	-45.54	50.67	74.00	23.33	Horizontal
2	4828.125	59.88	31.13	-45.54	45.47	54.00	8.53	Horizontal
3	5939.625	59.66	32.39	-44.91	47.13	74.00	26.87	Horizontal
4	5940	57.20	32.39	-44.91	44.67	54.00	9.33	Horizontal
5	8909.25	50.79	36.55	-41.22	46.13	74.00	27.87	Horizontal
6	8909.625	47.85	36.55	-41.22	43.19	54.00	10.81	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 80 of 193

802.11g_Channel 01

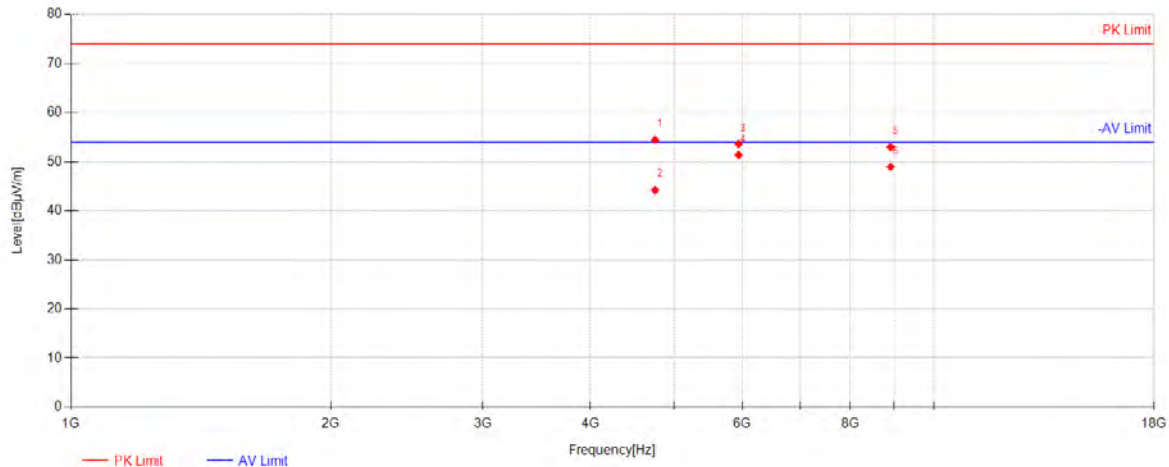

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	69.01	31.00	-45.57	54.44	74.00	19.56	Vertical
2	4752	58.79	31.00	-45.57	44.22	54.00	9.78	Vertical
3	5939.625	66.13	32.39	-44.91	53.60	74.00	20.40	Vertical
4	5940	63.88	32.39	-44.91	51.35	54.00	2.65	Vertical
5	8909.25	57.60	36.55	-41.22	52.94	74.00	21.06	Vertical
6	8910	53.59	36.55	-41.22	48.93	54.00	5.07	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 81 of 193

802.11g_Channel 06

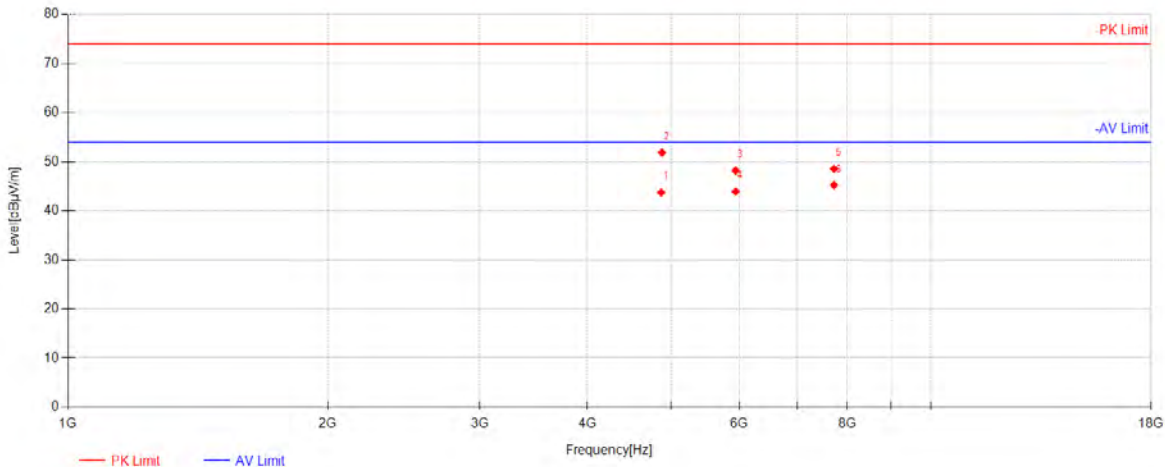

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4869.75	58.05	31.19	-45.53	43.71	54.00	10.29	Horizontal
2	4879.875	66.15	31.21	-45.53	51.83	74.00	22.17	Horizontal
3	5939.625	60.68	32.39	-44.91	48.15	74.00	25.85	Horizontal
4	5940	56.45	32.39	-44.91	43.92	54.00	10.08	Horizontal
5	7721.625	54.75	36.71	-42.94	48.52	74.00	25.48	Horizontal
6	7722	51.45	36.71	-42.94	45.22	54.00	8.78	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 82 of 193

802.11g_Channel 06

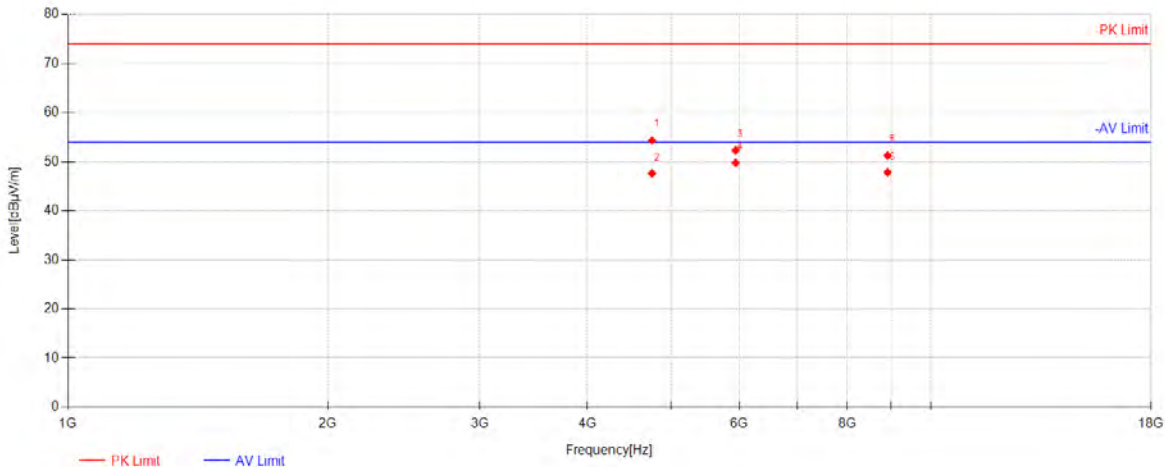

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.87	31.00	-45.57	54.30	74.00	19.70	Vertical
2	4752	62.17	31.00	-45.57	47.60	54.00	6.40	Vertical
3	5939.625	64.80	32.39	-44.91	52.27	74.00	21.73	Vertical
4	5940	62.31	32.39	-44.91	49.78	54.00	4.22	Vertical
5	8909.25	55.89	36.55	-41.22	51.23	74.00	22.77	Vertical
6	8909.625	52.45	36.55	-41.22	47.79	54.00	6.21	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 83 of 193

802.11g_Channel 11

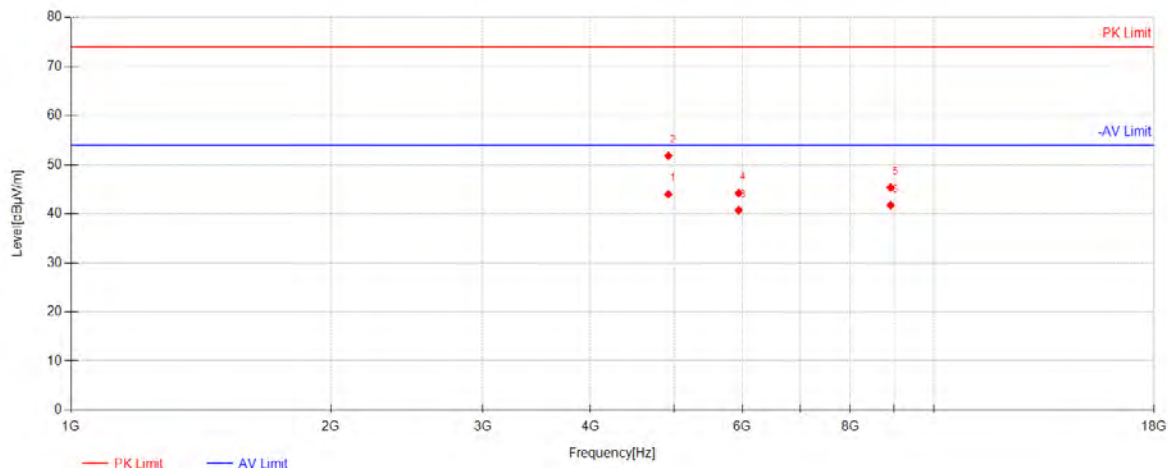

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4923	58.26	31.28	-45.56	43.98	54.00	10.02	Horizontal
2	4924.125	66.06	31.28	-45.56	51.78	74.00	22.22	Horizontal
3	5940	53.24	32.39	-44.91	40.71	54.00	13.29	Horizontal
4	5940	56.74	32.39	-44.91	44.21	74.00	29.79	Horizontal
5	8909.625	50.01	36.55	-41.22	45.35	74.00	28.65	Horizontal
6	8909.625	46.38	36.55	-41.22	41.72	54.00	12.28	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 84 of 193

802.11g_Channel 11

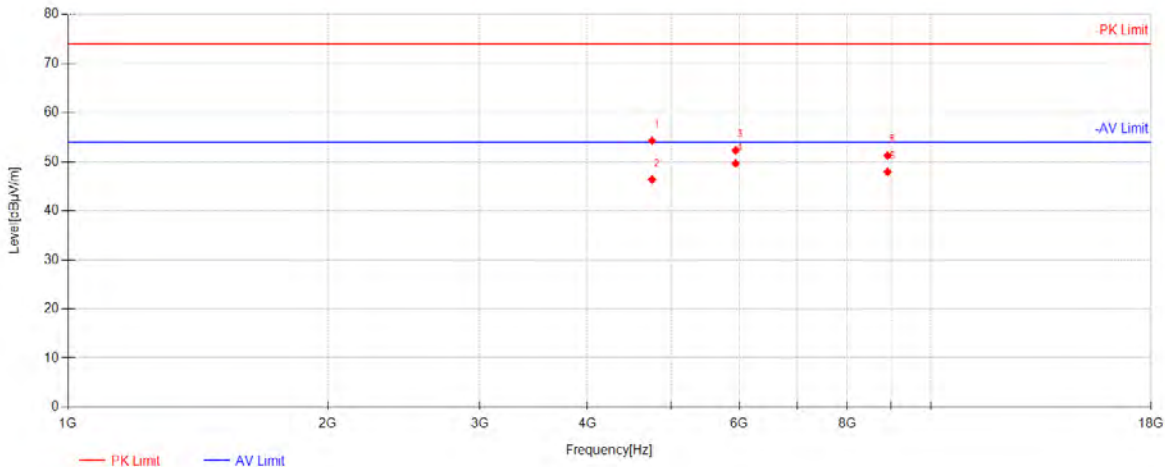

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.81	31.00	-45.57	54.24	74.00	19.76	Vertical
2	4752	60.91	31.00	-45.57	46.34	54.00	7.66	Vertical
3	5939.25	64.79	32.39	-44.92	52.26	74.00	21.74	Vertical
4	5940	62.19	32.39	-44.91	49.66	54.00	4.34	Vertical
5	8909.25	55.89	36.55	-41.22	51.23	74.00	22.77	Vertical
6	8909.625	52.53	36.55	-41.22	47.87	54.00	6.13	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 85 of 193

802.11n20_Channel 01

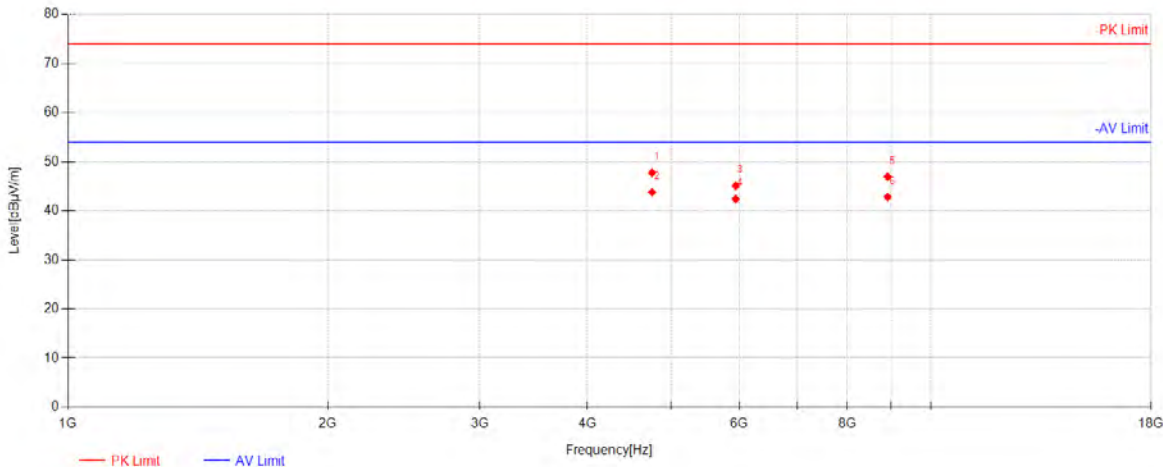

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	62.29	31.00	-45.57	47.72	74.00	26.28	Horizontal
2	4752	58.35	31.00	-45.57	43.78	54.00	10.22	Horizontal
3	5939.625	57.63	32.39	-44.91	45.10	74.00	28.90	Horizontal
4	5940	54.89	32.39	-44.91	42.36	54.00	11.64	Horizontal
5	8909.625	51.57	36.55	-41.22	46.91	74.00	27.09	Horizontal
6	8909.625	47.45	36.55	-41.22	42.79	54.00	11.21	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 86 of 193

802.11n20_Channel 01

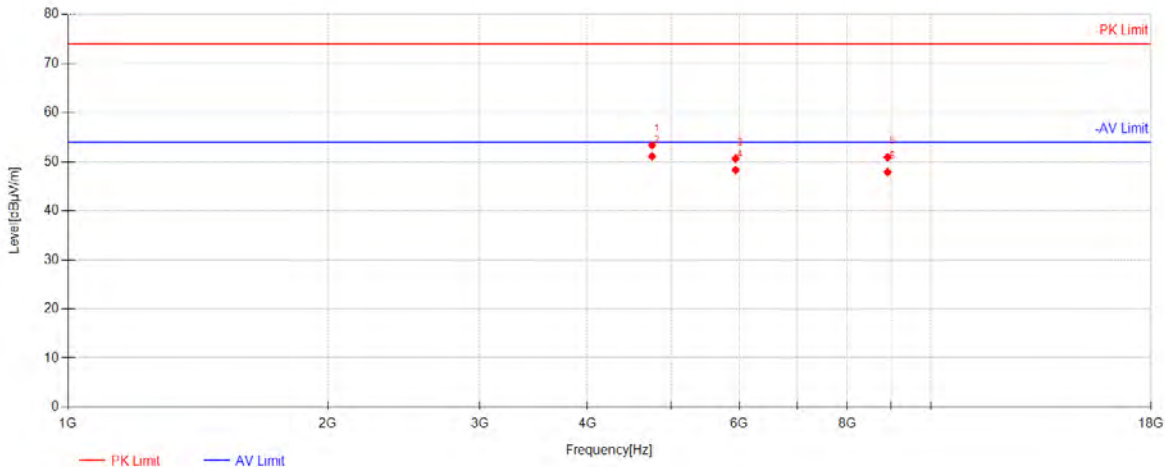

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	67.87	31.00	-45.57	53.30	74.00	20.70	Vertical
2	4752	65.64	31.00	-45.57	51.07	54.00	2.93	Vertical
3	5939.625	63.17	32.39	-44.91	50.64	74.00	23.36	Vertical
4	5940	60.79	32.39	-44.91	48.26	54.00	5.74	Vertical
5	8909.25	55.55	36.55	-41.22	50.89	74.00	23.11	Vertical
6	8909.625	52.49	36.55	-41.22	47.83	54.00	6.17	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 87 of 193

802.11n20_Channel 06

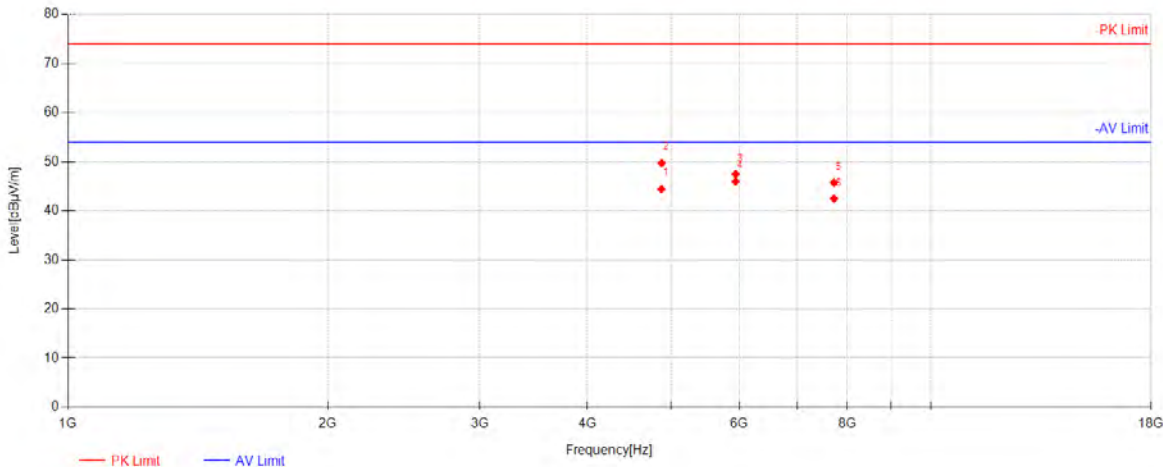

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4872.75	58.75	31.20	-45.53	44.41	54.00	9.59	Horizontal
2	4875.375	64.04	31.20	-45.53	49.71	74.00	24.29	Horizontal
3	5939.625	59.97	32.39	-44.91	47.44	74.00	26.56	Horizontal
4	5940	58.47	32.39	-44.91	45.94	54.00	8.06	Horizontal
5	7721.625	51.95	36.71	-42.94	45.72	74.00	28.28	Horizontal
6	7722	48.66	36.71	-42.94	42.43	54.00	11.57	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 88 of 193

802.11n20_Channel 06

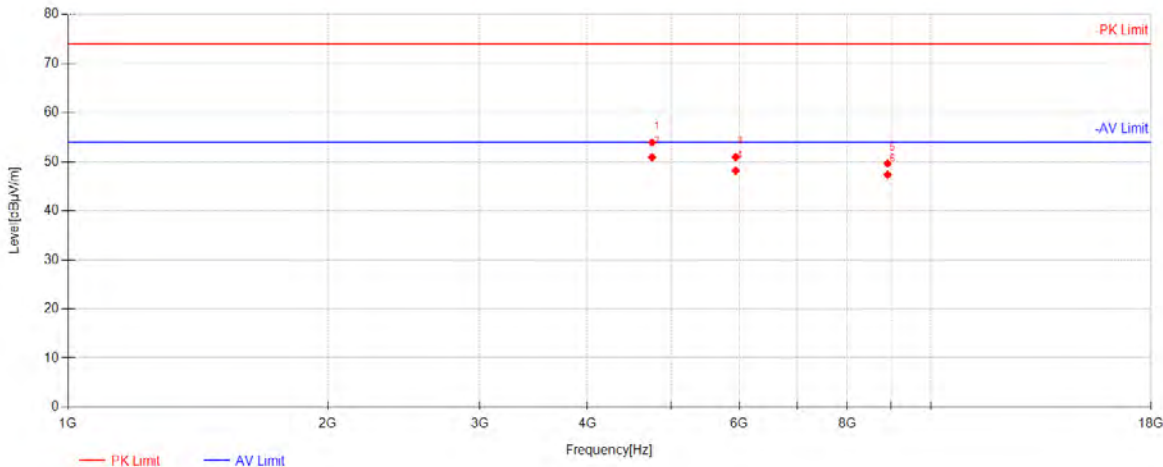

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.46	31.00	-45.57	53.89	74.00	20.11	Vertical
2	4752	65.45	31.00	-45.57	50.88	54.00	3.12	Vertical
3	5939.625	63.46	32.39	-44.91	50.93	74.00	23.07	Vertical
4	5940	60.66	32.39	-44.91	48.13	54.00	5.87	Vertical
5	8909.25	54.28	36.55	-41.22	49.62	74.00	24.38	Vertical
6	8909.625	51.97	36.55	-41.22	47.31	54.00	6.69	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 89 of 193

802.11n20_Channel 11

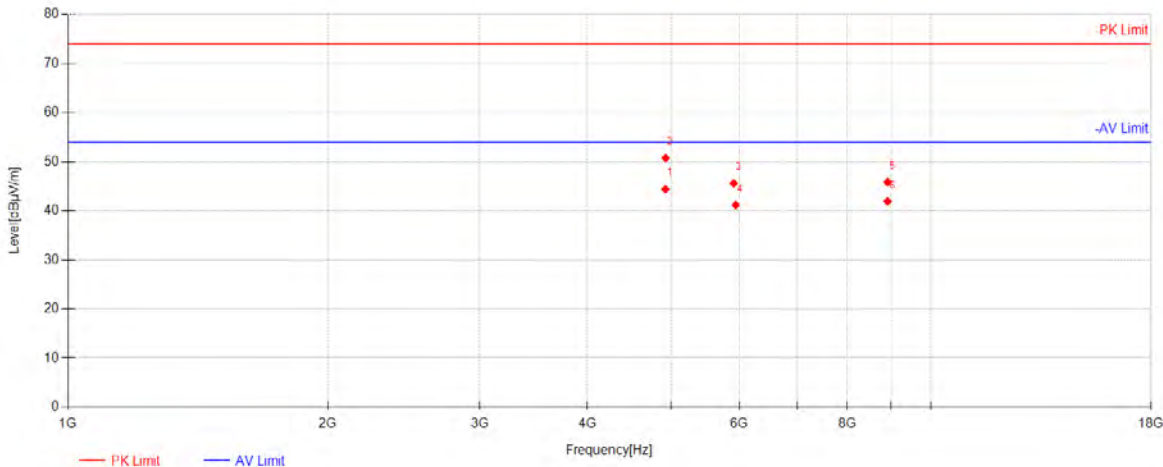

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4925.25	58.68	31.28	-45.56	44.40	54.00	9.60	Horizontal
2	4927.125	65.01	31.28	-45.56	50.73	74.00	23.27	Horizontal
3	5909.25	58.17	32.38	-44.96	45.59	74.00	28.41	Horizontal
4	5940	53.70	32.39	-44.91	41.17	54.00	12.83	Horizontal
5	8909.625	50.46	36.55	-41.22	45.80	74.00	28.20	Horizontal
6	8909.625	46.56	36.55	-41.22	41.90	54.00	12.10	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 90 of 193

802.11n20_Channel 11

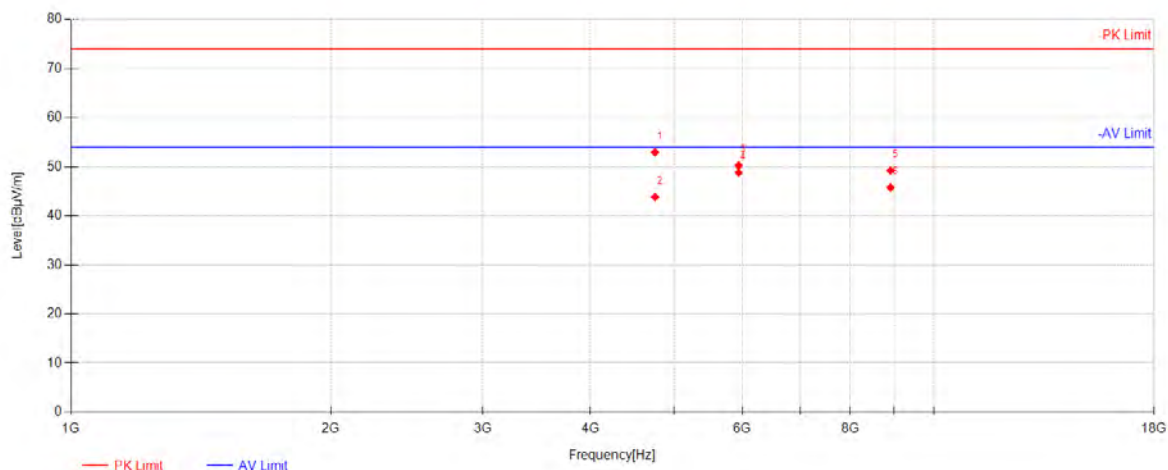

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	67.46	31.00	-45.57	52.89	74.00	21.11	Vertical
2	4752	58.40	31.00	-45.57	43.83	54.00	10.17	Vertical
3	5939.625	62.76	32.39	-44.91	50.23	74.00	23.77	Vertical
4	5940	61.31	32.39	-44.91	48.78	54.00	5.22	Vertical
5	8909.25	53.85	36.55	-41.22	49.19	74.00	24.81	Vertical
6	8909.625	50.41	36.55	-41.22	45.75	54.00	8.25	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603


Page: 91 of 193

802.11n40_Channel 03

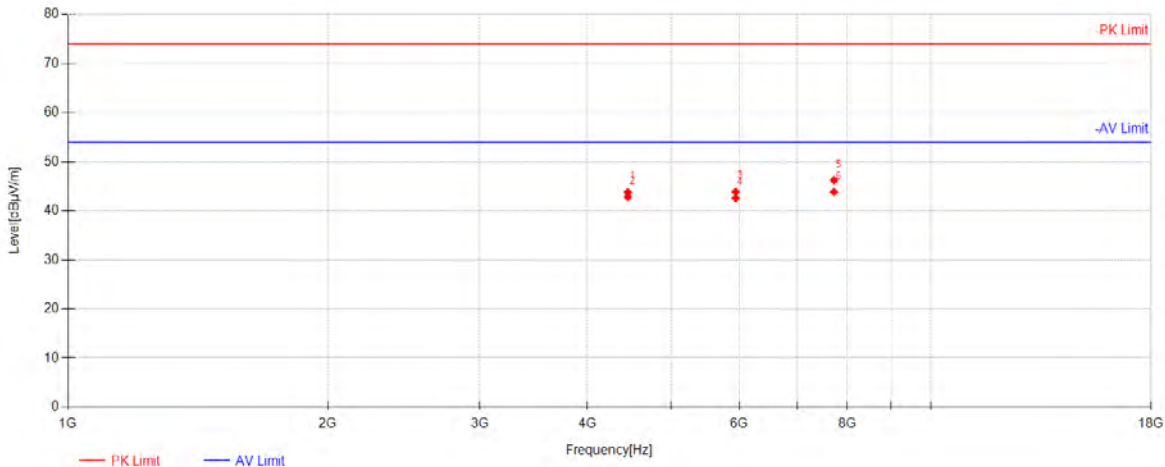

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4454.625	59.05	30.49	-45.76	43.78	74.00	30.22	Horizontal
2	4455	58.06	30.49	-45.76	42.79	54.00	11.21	Horizontal
3	5939.625	56.41	32.39	-44.91	43.88	74.00	30.12	Horizontal
4	5940	55.08	32.39	-44.91	42.55	54.00	11.45	Horizontal
5	7721.625	52.44	36.71	-42.94	46.21	74.00	27.79	Horizontal
6	7722	50.06	36.71	-42.94	43.83	54.00	10.17	Horizontal

802.11n40_Channel 03

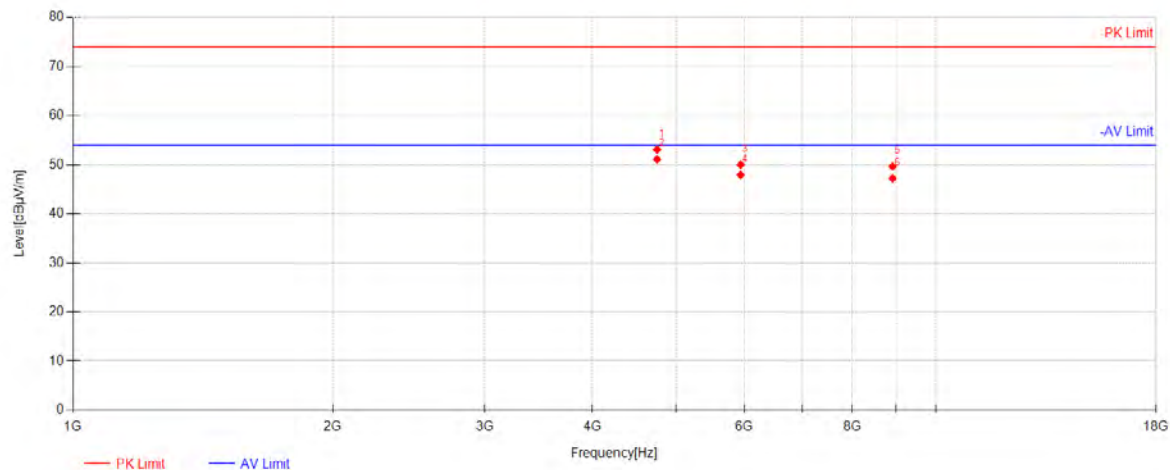

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	4751.625	67.62	31.00	-45.57	53.05	74.00	20.95	Vertical
2	4752	65.66	31.00	-45.57	51.09	54.00	2.91	Vertical
3	5939.625	62.55	32.39	-44.91	50.02	74.00	23.98	Vertical
4	5940	60.41	32.39	-44.91	47.88	54.00	6.12	Vertical
5	8909.25	54.30	36.55	-41.22	49.64	74.00	24.36	Vertical
6	8909.625	51.85	36.55	-41.22	47.19	54.00	6.81	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 93 of 193

802.11n40_Channel 06

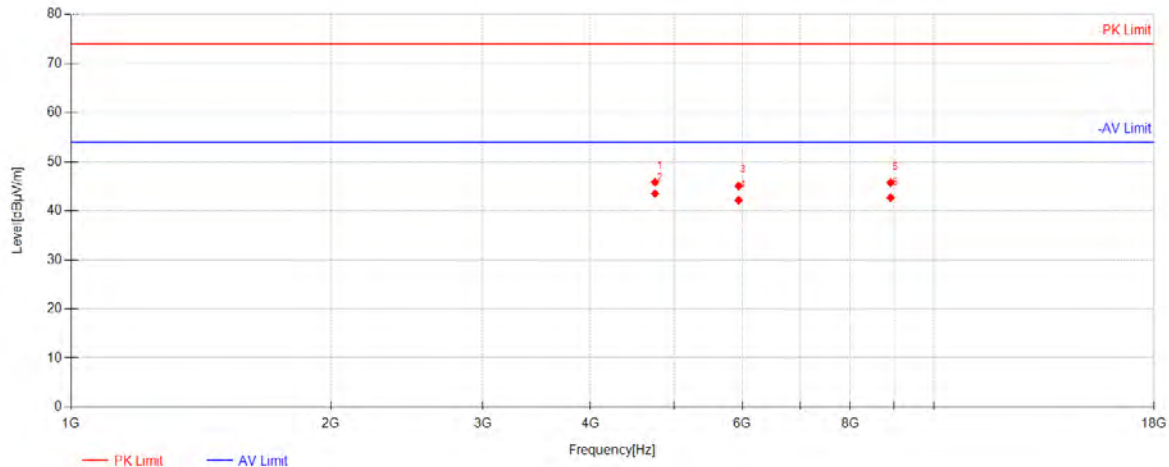

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	60.37	31.00	-45.57	45.80	74.00	28.20	Horizontal
2	4752	58.06	31.00	-45.57	43.49	54.00	10.51	Horizontal
3	5939.25	57.60	32.39	-44.92	45.07	74.00	28.93	Horizontal
4	5940	54.65	32.39	-44.91	42.12	54.00	11.88	Horizontal
5	8909.25	50.38	36.55	-41.22	45.72	74.00	28.28	Horizontal
6	8909.625	47.29	36.55	-41.22	42.63	54.00	11.37	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 94 of 193

802.11n40_Channel 06

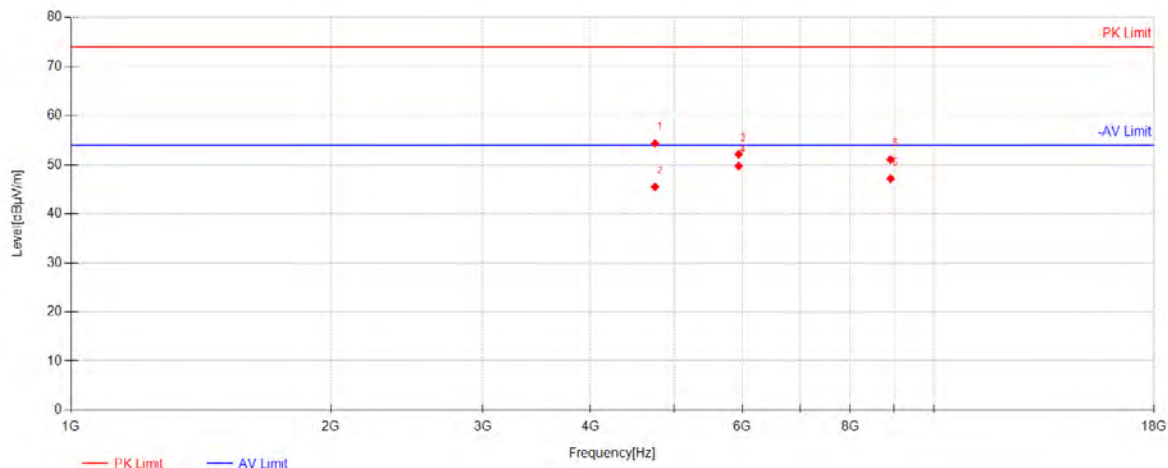

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.90	31.00	-45.57	54.33	74.00	19.67	Vertical
2	4752	60.06	31.00	-45.57	45.49	54.00	8.51	Vertical
3	5939.625	64.64	32.39	-44.91	52.11	74.00	21.89	Vertical
4	5940	62.27	32.39	-44.91	49.74	54.00	4.26	Vertical
5	8909.25	55.71	36.55	-41.22	51.05	74.00	22.95	Vertical
6	8909.625	51.79	36.55	-41.22	47.13	54.00	6.87	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 95 of 193

802.11n40_Channel 09

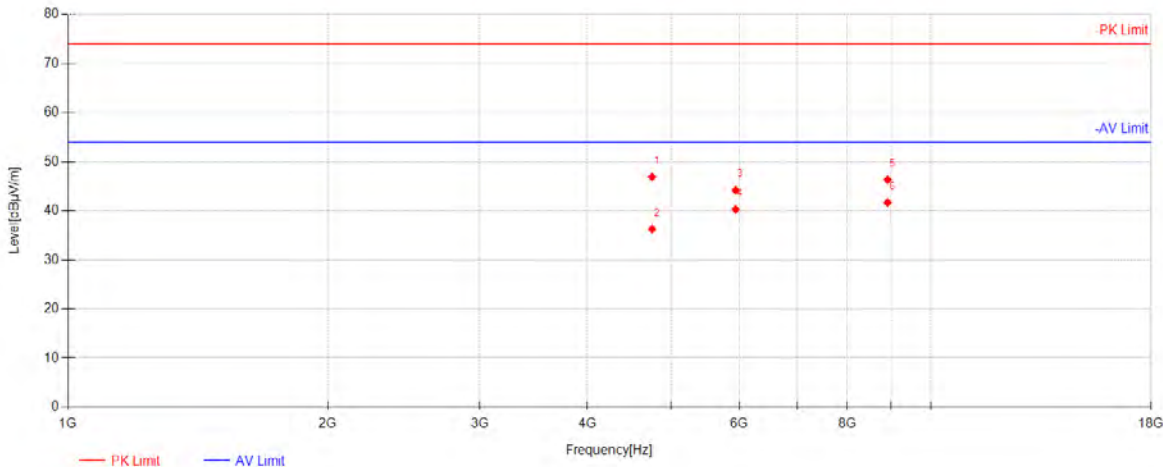

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	61.44	31.00	-45.57	46.87	74.00	27.13	Horizontal
2	4752	50.81	31.00	-45.57	36.24	54.00	17.76	Horizontal
3	5939.625	56.74	32.39	-44.91	44.21	74.00	29.79	Horizontal
4	5940	52.82	32.39	-44.91	40.29	54.00	13.71	Horizontal
5	8909.625	50.96	36.55	-41.22	46.30	74.00	27.70	Horizontal
6	8909.625	46.32	36.55	-41.22	41.66	54.00	12.34	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 96 of 193

802.11n40_Channel 09

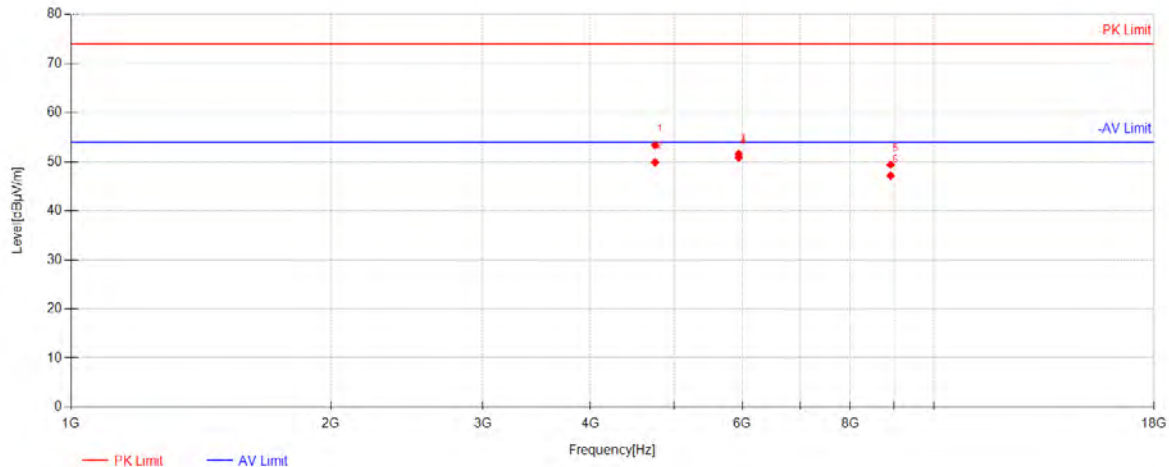

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	67.87	31.00	-45.57	53.30	74.00	20.70	Vertical
2	4752	64.46	31.00	-45.57	49.89	54.00	4.11	Vertical
3	5939.625	64.09	32.39	-44.91	51.56	74.00	22.44	Vertical
4	5940	63.35	32.39	-44.91	50.82	54.00	3.18	Vertical
5	8909.25	54.04	36.55	-41.22	49.38	74.00	24.62	Vertical
6	8909.625	51.79	36.55	-41.22	47.13	54.00	6.87	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 97 of 193

802.11ax20_Channel 01

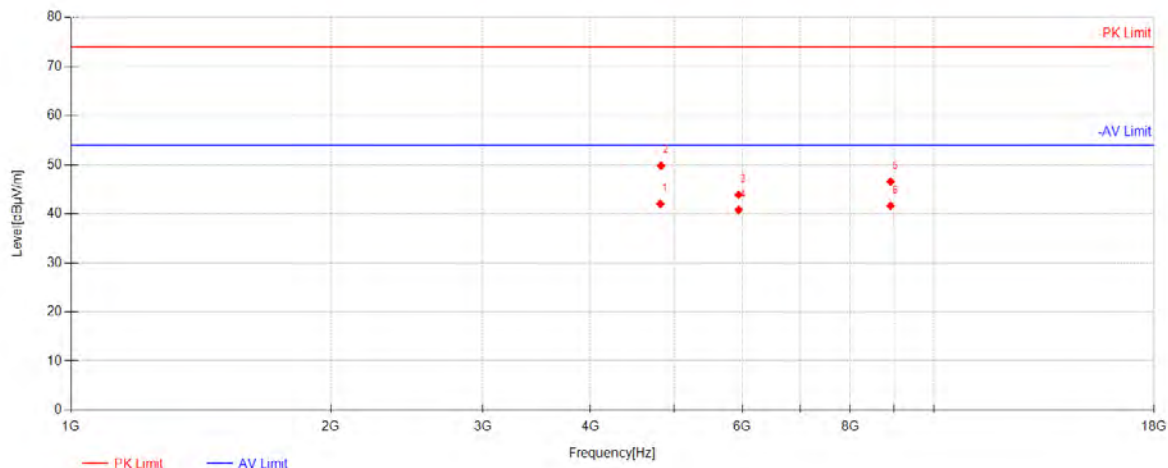

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4819.5	56.40	31.11	-45.54	41.97	54.00	12.03	Horizontal
2	4828.125	64.20	31.13	-45.54	49.79	74.00	24.21	Horizontal
3	5939.25	56.39	32.39	-44.92	43.86	74.00	30.14	Horizontal
4	5940	53.31	32.39	-44.91	40.78	54.00	13.22	Horizontal
5	8909.25	51.19	36.55	-41.22	46.53	74.00	27.47	Horizontal
6	8909.625	46.28	36.55	-41.22	41.62	54.00	12.38	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 98 of 193

802.11ax20_Channel 01

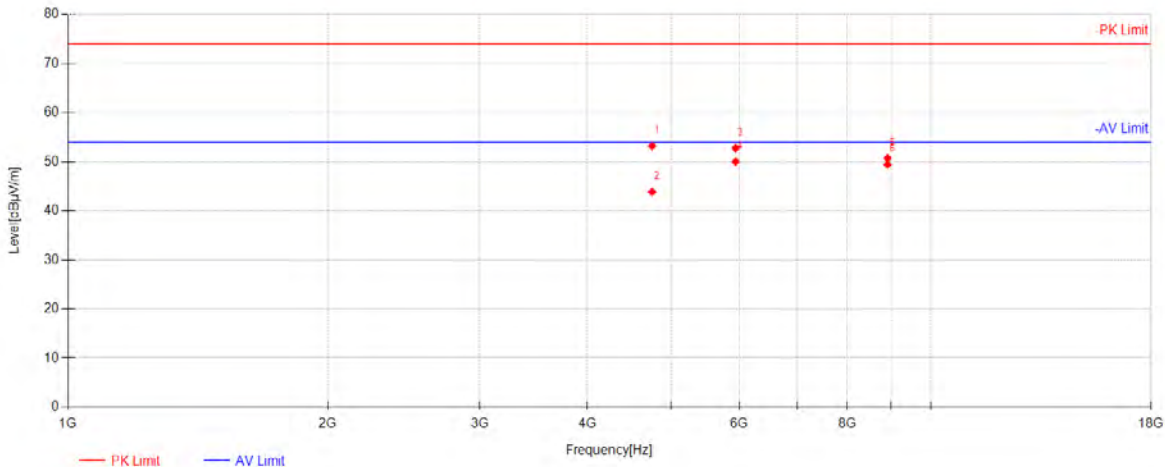

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	67.75	31.00	-45.57	53.18	74.00	20.82	Vertical
2	4751.625	58.42	31.00	-45.57	43.85	54.00	10.15	Vertical
3	5939.625	65.25	32.39	-44.91	52.72	74.00	21.28	Vertical
4	5940	62.55	32.39	-44.91	50.02	54.00	3.98	Vertical
5	8909.25	55.36	36.55	-41.22	50.70	74.00	23.30	Vertical
6	8909.625	54.07	36.55	-41.22	49.41	54.00	4.59	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 99 of 193

802.11ax20_Channel 06

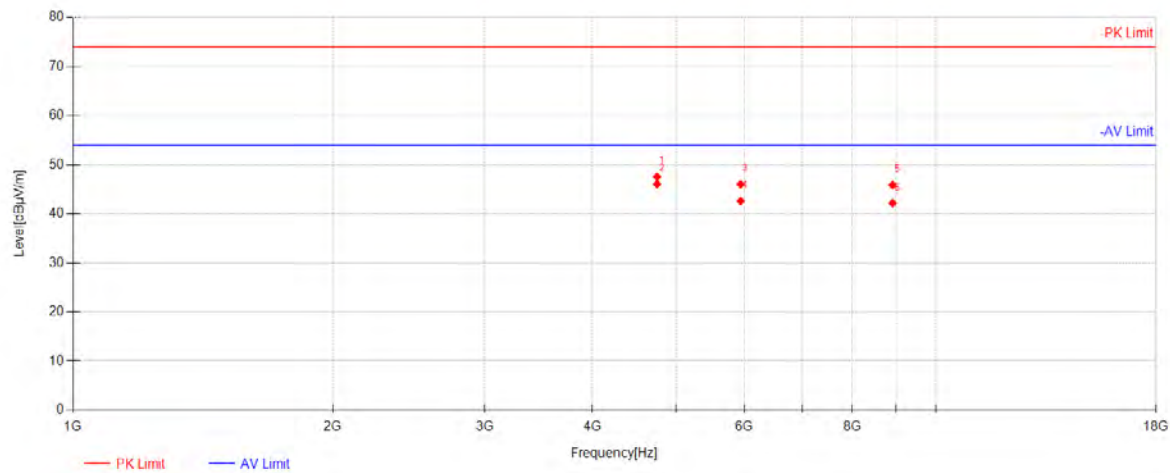

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	4751.625	62.09	31.00	-45.57	47.52	74.00	26.48	Horizontal
2	4752	60.61	31.00	-45.57	46.04	54.00	7.96	Horizontal
3	5939.625	58.54	32.39	-44.91	46.01	74.00	27.99	Horizontal
4	5940	55.09	32.39	-44.91	42.56	54.00	11.44	Horizontal
5	8909.625	50.51	36.55	-41.22	45.85	74.00	28.15	Horizontal
6	8909.625	46.81	36.55	-41.22	42.15	54.00	11.85	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 100 of 193

802.11ax20_Channel 06

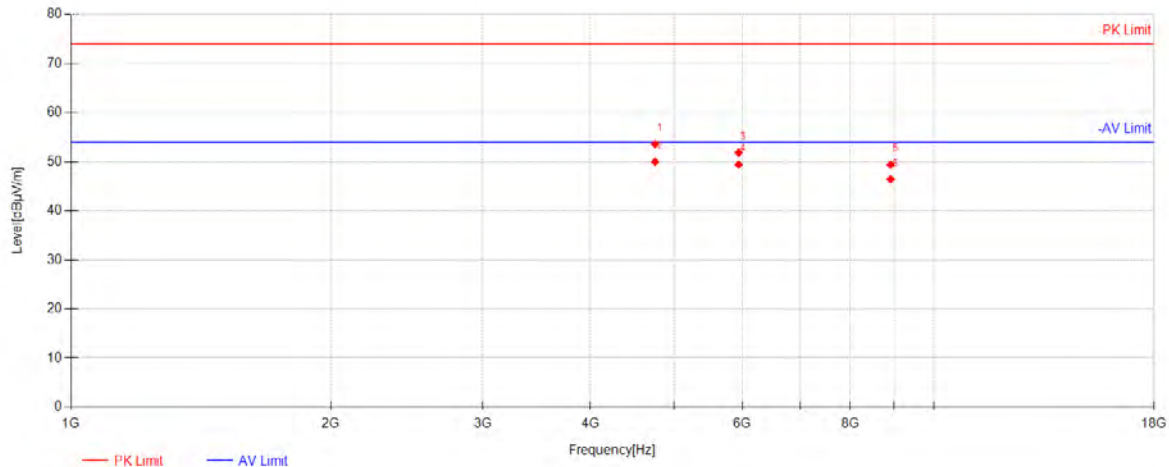

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.13	31.00	-45.57	53.56	74.00	20.44	Vertical
2	4752	64.57	31.00	-45.57	50.00	54.00	4.00	Vertical
3	5939.625	64.34	32.39	-44.91	51.81	74.00	22.19	Vertical
4	5940	61.93	32.39	-44.91	49.40	54.00	4.60	Vertical
5	8909.625	54.03	36.55	-41.22	49.37	74.00	24.63	Vertical
6	8909.625	51.07	36.55	-41.22	46.41	54.00	7.59	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 101 of 193

802.11ax20_Channel 11

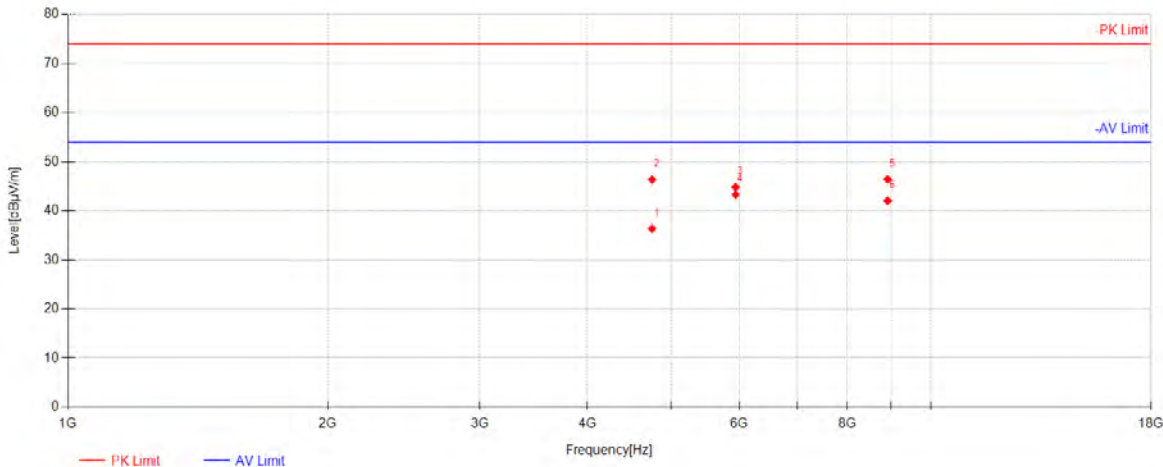

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	50.89	31.00	-45.57	36.32	54.00	17.68	Horizontal
2	4752	60.90	31.00	-45.57	46.33	74.00	27.67	Horizontal
3	5939.625	57.36	32.39	-44.91	44.83	74.00	29.17	Horizontal
4	5940	55.81	32.39	-44.91	43.28	54.00	10.72	Horizontal
5	8909.25	51.06	36.55	-41.22	46.40	74.00	27.60	Horizontal
6	8909.625	46.68	36.55	-41.22	42.02	54.00	11.98	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 102 of 193

802.11ax20_Channel 11

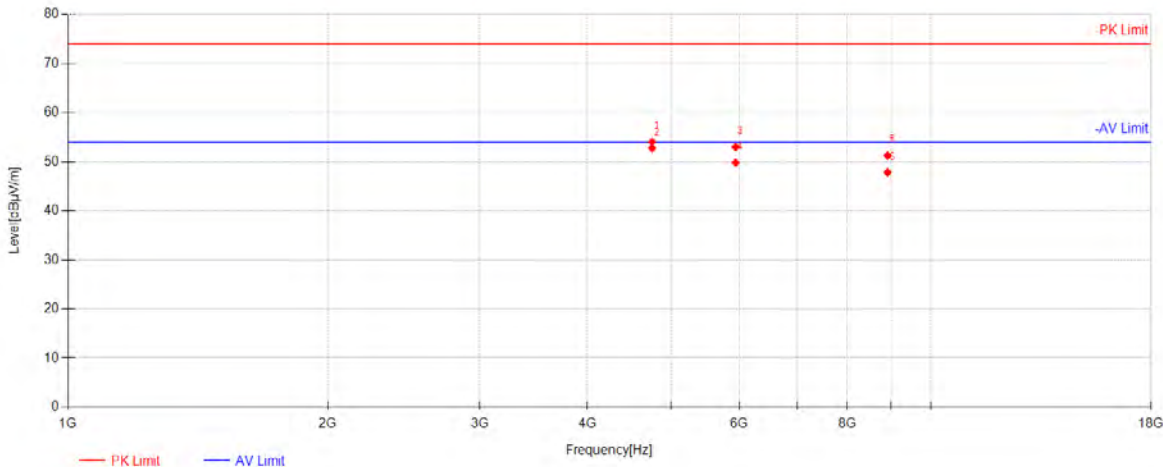

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4752	68.59	31.00	-45.57	54.02	74.00	19.98	Vertical
2	4752	67.30	31.00	-45.57	52.73	54.00	1.27	Vertical
3	5939.625	65.48	32.39	-44.91	52.95	74.00	21.05	Vertical
4	5940	62.34	32.39	-44.91	49.81	54.00	4.19	Vertical
5	8909.25	55.89	36.55	-41.22	51.23	74.00	22.77	Vertical
6	8909.625	52.44	36.55	-41.22	47.78	54.00	6.22	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 103 of 193

802.11ax40_Channel 03

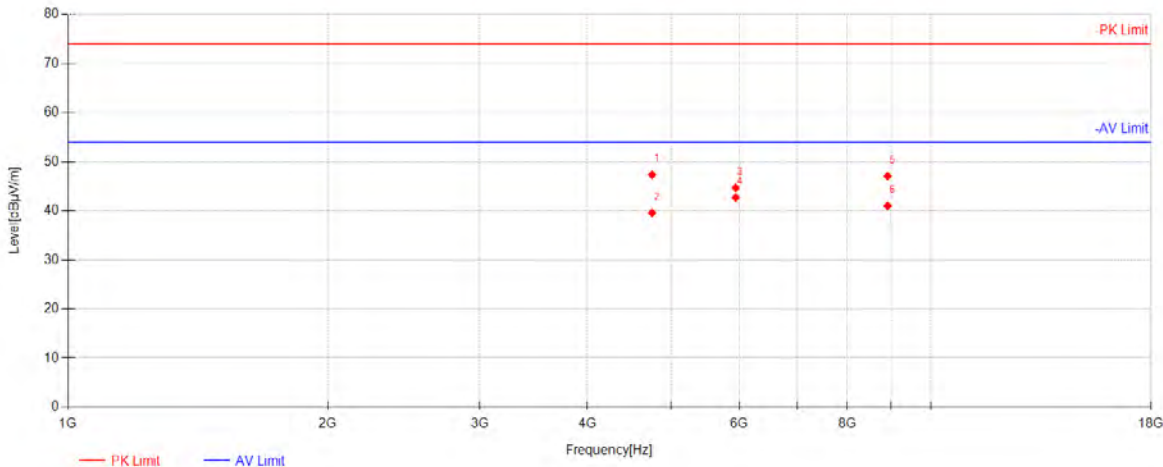

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	61.87	31.00	-45.57	47.30	74.00	26.70	Horizontal
2	4751.625	54.15	31.00	-45.57	39.58	54.00	14.42	Horizontal
3	5939.625	57.22	32.39	-44.91	44.69	74.00	29.31	Horizontal
4	5940	55.20	32.39	-44.91	42.67	54.00	11.33	Horizontal
5	8909.25	51.71	36.55	-41.22	47.05	74.00	26.95	Horizontal
6	8909.625	45.63	36.55	-41.22	40.97	54.00	13.03	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 104 of 193

802.11ax40_Channel 03

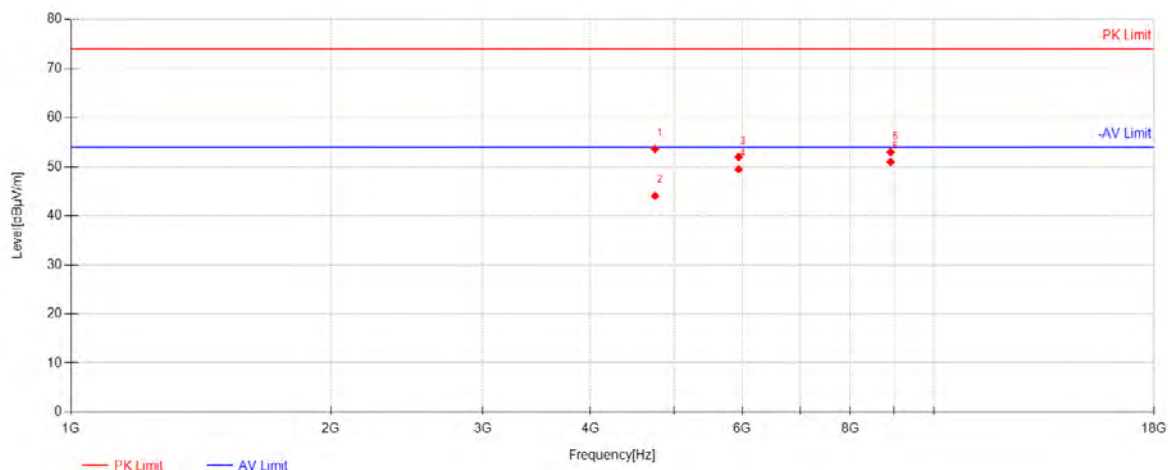

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	68.16	31.00	-45.57	53.59	74.00	20.41	Vertical
2	4752	58.63	31.00	-45.57	44.06	54.00	9.94	Vertical
3	5939.625	64.49	32.39	-44.91	51.96	74.00	22.04	Vertical
4	5940	62.00	32.39	-44.91	49.47	54.00	4.53	Vertical
5	8909.625	57.58	36.55	-41.22	52.92	74.00	21.08	Vertical
6	8909.625	55.64	36.55	-41.22	50.98	54.00	3.02	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 105 of 193

802.11ax40_Channel 06

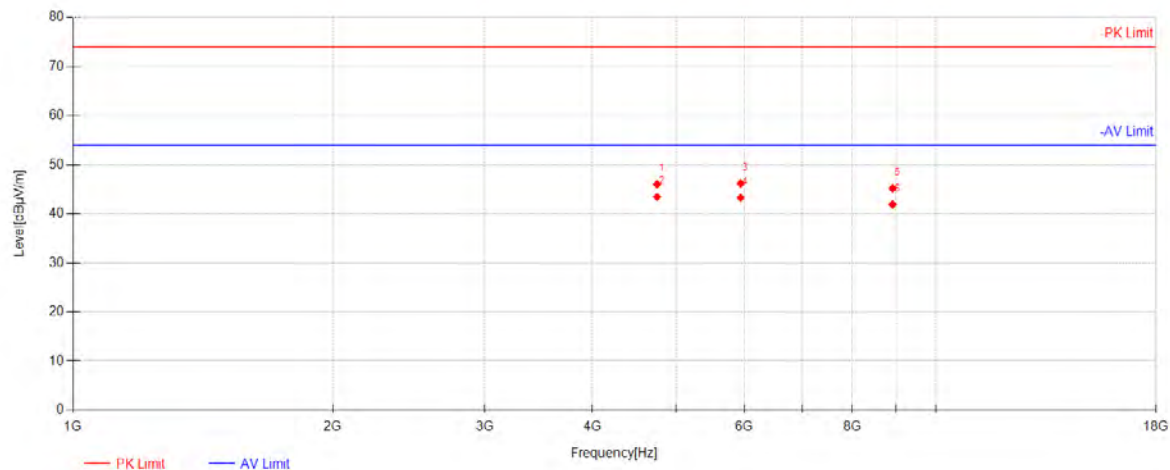

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	60.58	31.00	-45.57	46.01	74.00	27.99	Horizontal
2	4752	58.01	31.00	-45.57	43.44	54.00	10.56	Horizontal
3	5939.625	58.69	32.39	-44.91	46.16	74.00	27.84	Horizontal
4	5940	55.80	32.39	-44.91	43.27	54.00	10.73	Horizontal
5	8909.25	49.84	36.55	-41.22	45.18	74.00	28.82	Horizontal
6	8909.625	46.54	36.55	-41.22	41.88	54.00	12.12	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 106 of 193

802.11ax40_Channel 06

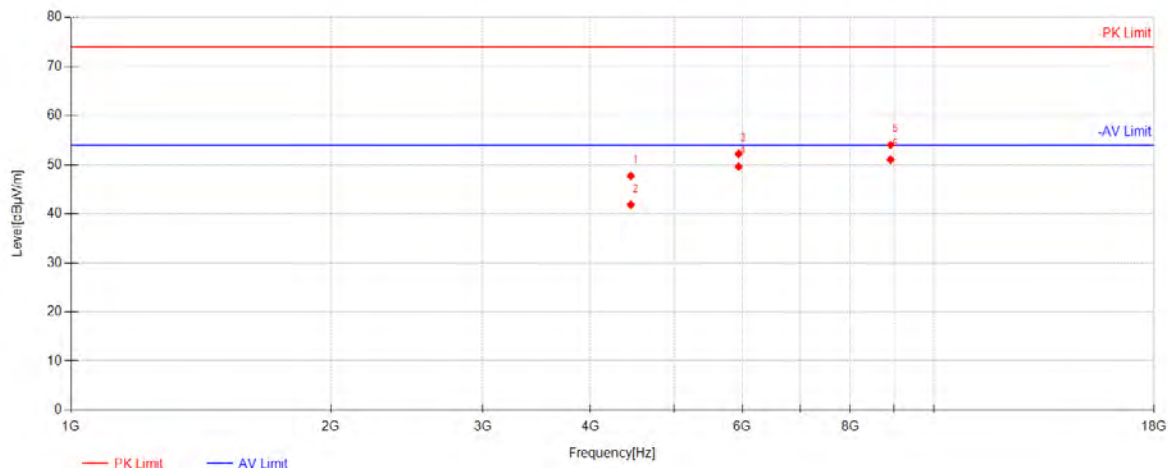

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4454.625	62.95	30.49	-45.76	47.68	74.00	26.32	Vertical
2	4455	57.08	30.49	-45.76	41.81	54.00	12.19	Vertical
3	5939.625	64.71	32.39	-44.91	52.18	74.00	21.82	Vertical
4	5940	62.15	32.39	-44.91	49.62	54.00	4.38	Vertical
5	8909.25	58.68	36.55	-41.22	54.02	74.00	19.98	Vertical
6	8909.625	55.71	36.55	-41.22	51.05	54.00	2.95	Vertical


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 107 of 193

802.11ax40_Channel 09

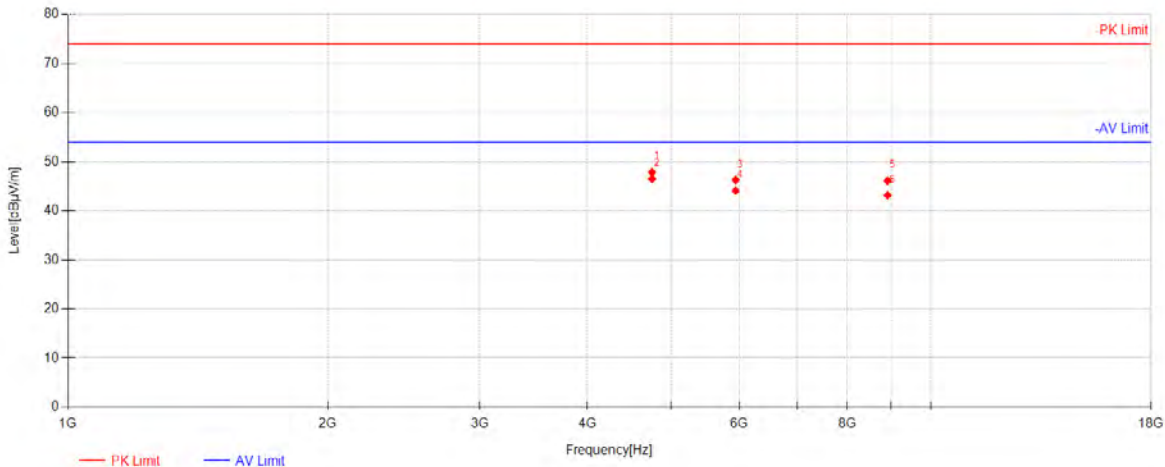

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	62.37	31.00	-45.57	47.80	74.00	26.20	Horizontal
2	4752	61.06	31.00	-45.57	46.49	54.00	7.51	Horizontal
3	5939.625	58.78	32.39	-44.91	46.25	74.00	27.75	Horizontal
4	5940	56.63	32.39	-44.91	44.10	54.00	9.90	Horizontal
5	8909.625	50.75	36.55	-41.22	46.09	74.00	27.91	Horizontal
6	8909.625	47.82	36.55	-41.22	43.16	54.00	10.84	Horizontal


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 108 of 193

802.11ax40_Channel 09

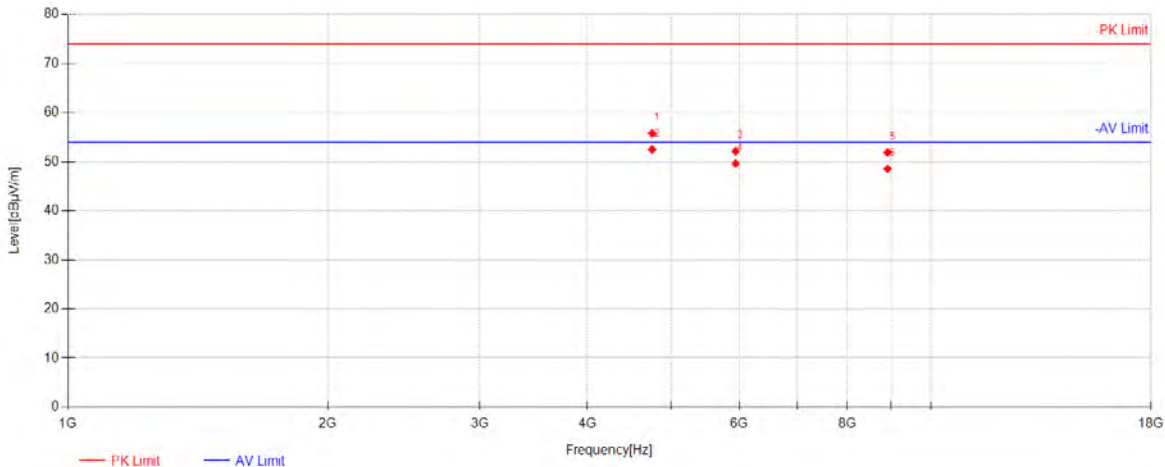

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4751.625	70.34	31.00	-45.57	55.77	74.00	18.23	Vertical
2	4752	67.04	31.00	-45.57	52.47	54.00	1.53	Vertical
3	5939.625	64.63	32.39	-44.91	52.10	74.00	21.90	Vertical
4	5940	62.18	32.39	-44.91	49.65	54.00	4.35	Vertical
5	8909.25	56.52	36.55	-41.22	51.86	74.00	22.14	Vertical
6	8909.625	53.20	36.55	-41.22	48.54	54.00	5.46	Vertical

7.5 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

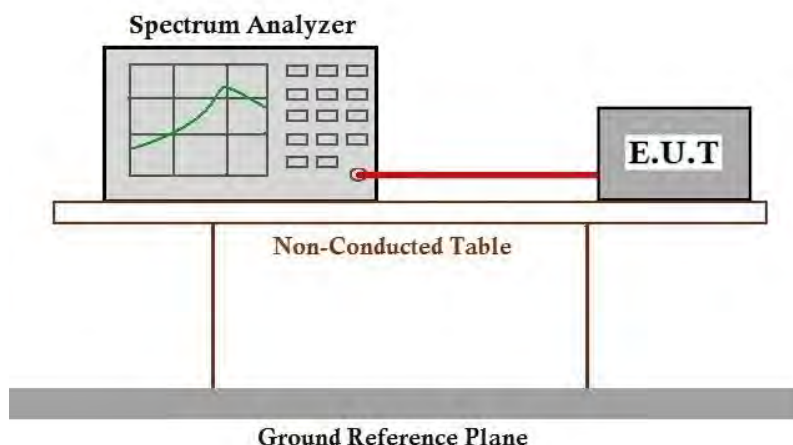



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 110 of 193

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

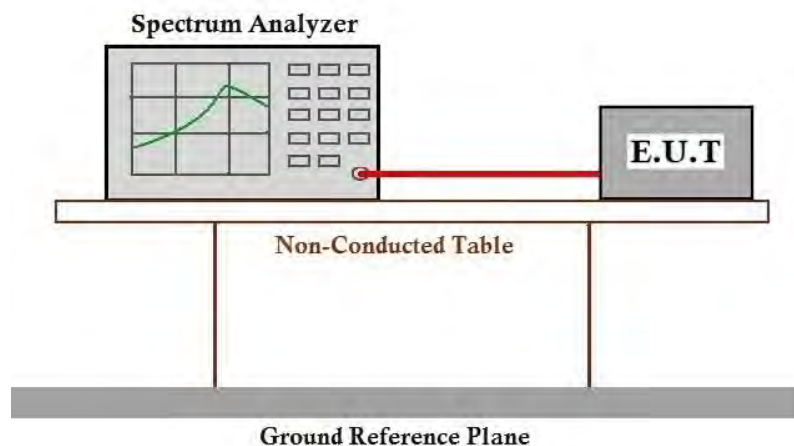

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

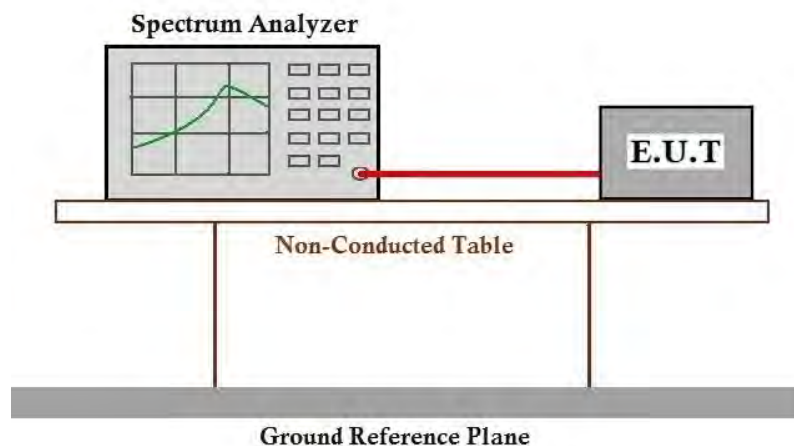

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 113 of 193

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 23.1 °C Humidity: 53.3 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

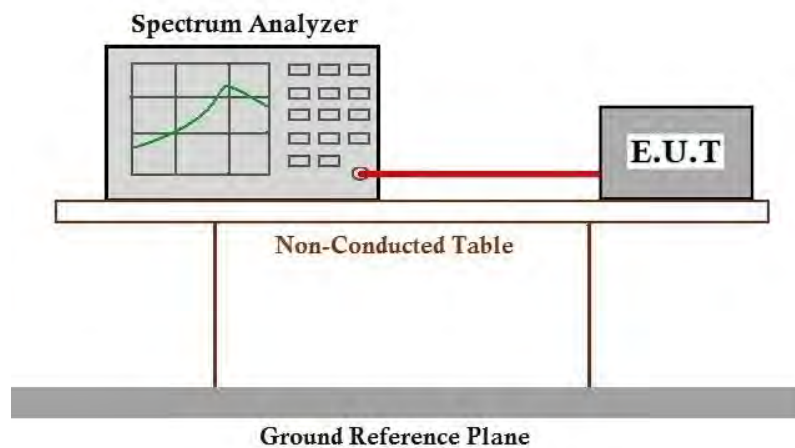

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 115 of 193

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

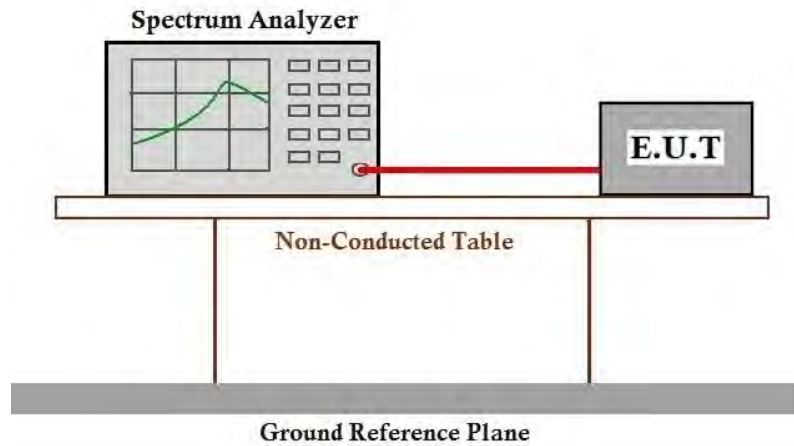

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 117 of 193

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2408001626AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2408001626AT

10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	8.227	8.437	97.51	0.11	1.05
		2437	/	/	8.253	8.353	98.80	0.05	0.08
		2462	/	/	8.227	8.354	98.48	0.07	0.12
802.11g	SISO	2412	/	/	1.364	1.585	86.06	0.65	5.23
		2437	/	/	1.364	1.627	83.84	0.77	7.71
		2462	/	/	1.364	1.584	86.11	0.65	5.20
802.11n (HT20)	SISO	2412	/	/	1.276	1.456	87.64	0.57	3.41
		2437	/	/	1.276	1.402	91.01	0.41	0.03
		2462	/	/	1.276	1.487	85.81	0.66	4.96
802.11n (HT40)	SISO	2422	/	/	0.638	0.806	79.16	1.02	4.66
		2437	/	/	0.638	0.864	73.84	1.32	9.57
		2452	/	/	0.638	0.865	73.76	1.32	9.55
802.11ax (HE20)	SISO	2412	RU242	Left	0.999	1.228	81.35	0.90	7.14
		2437	RU242	Left	0.999	1.170	85.38	0.69	3.39
		2462	RU242	Left	0.999	1.237	80.76	0.93	7.73
802.11ax (HE40)	SISO	2422	RU484	Left	0.533	0.710	75.07	1.25	6.16
		2437	RU484	Left	0.533	0.750	71.07	1.48	9.68
		2452	RU484	Left	0.533	0.760	70.13	1.54	10.51

1.2 Test Graph


1.2.1 Ant1

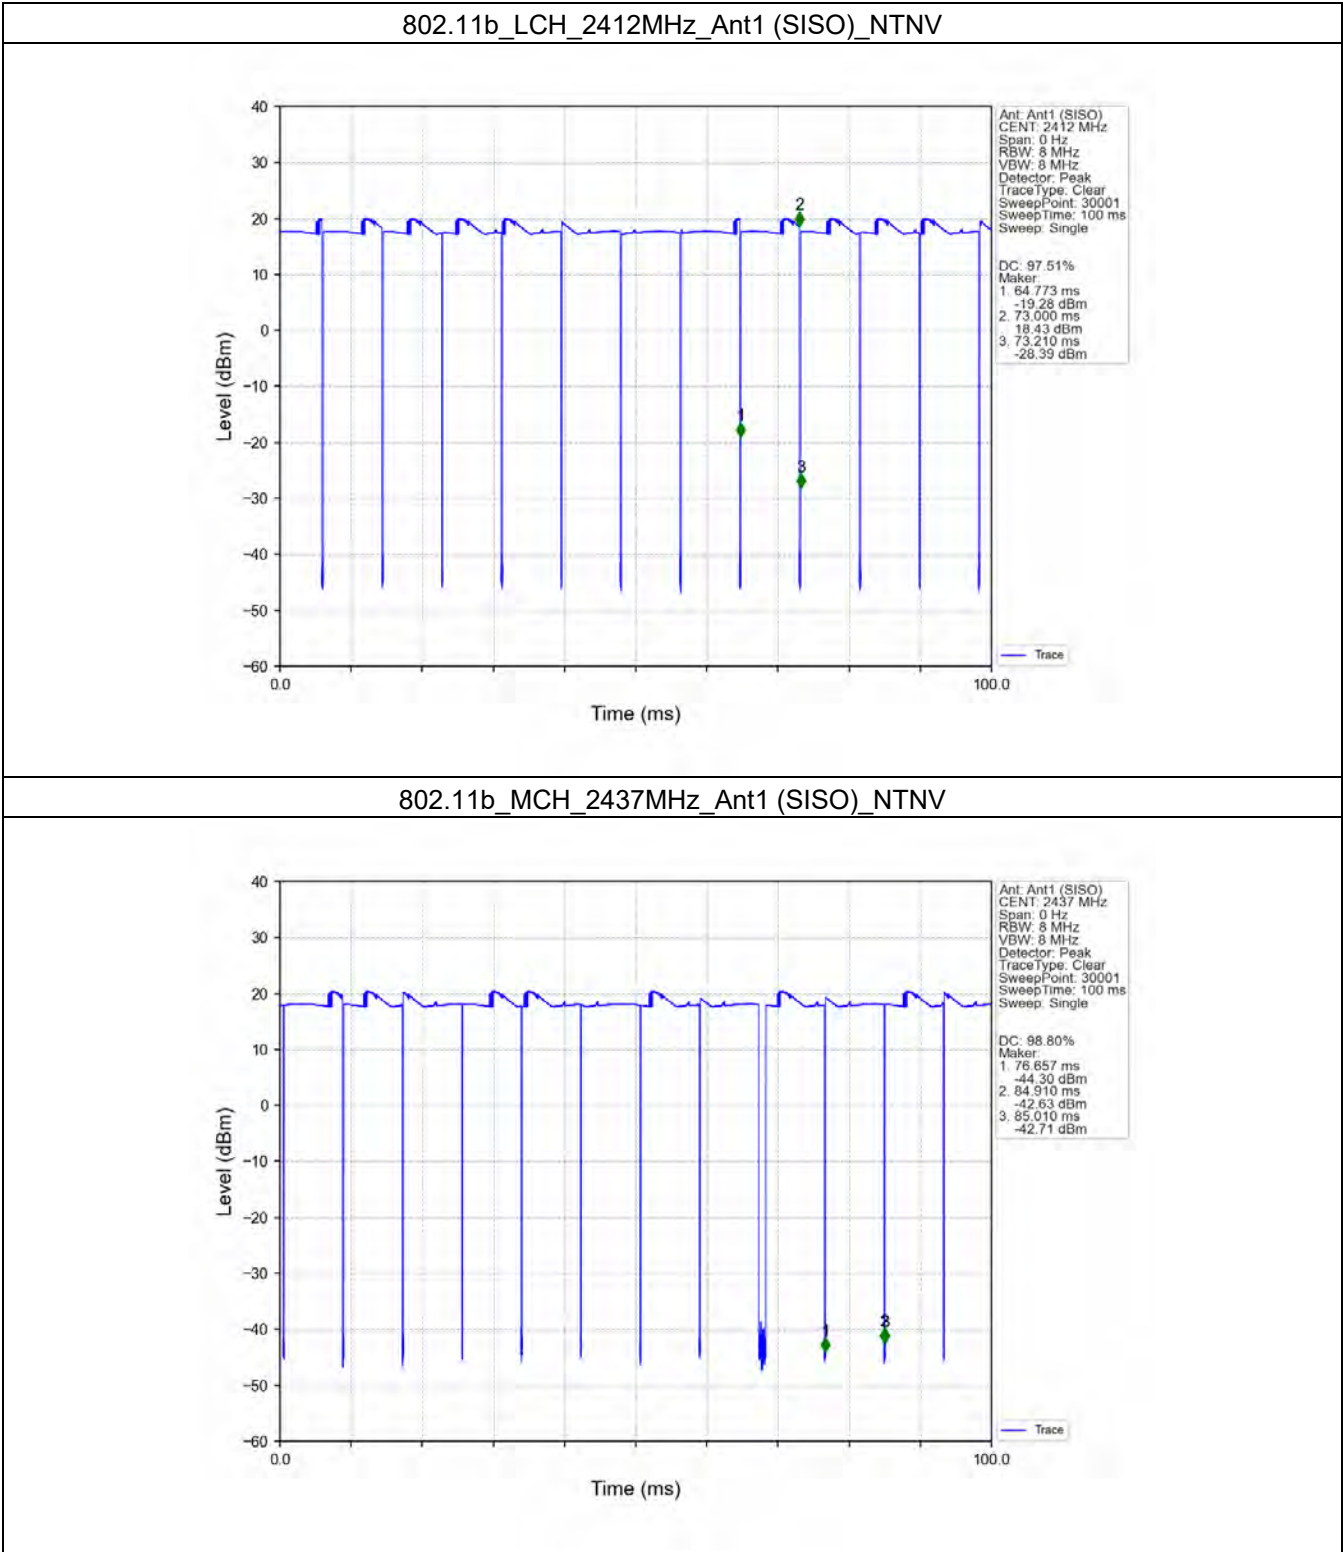


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

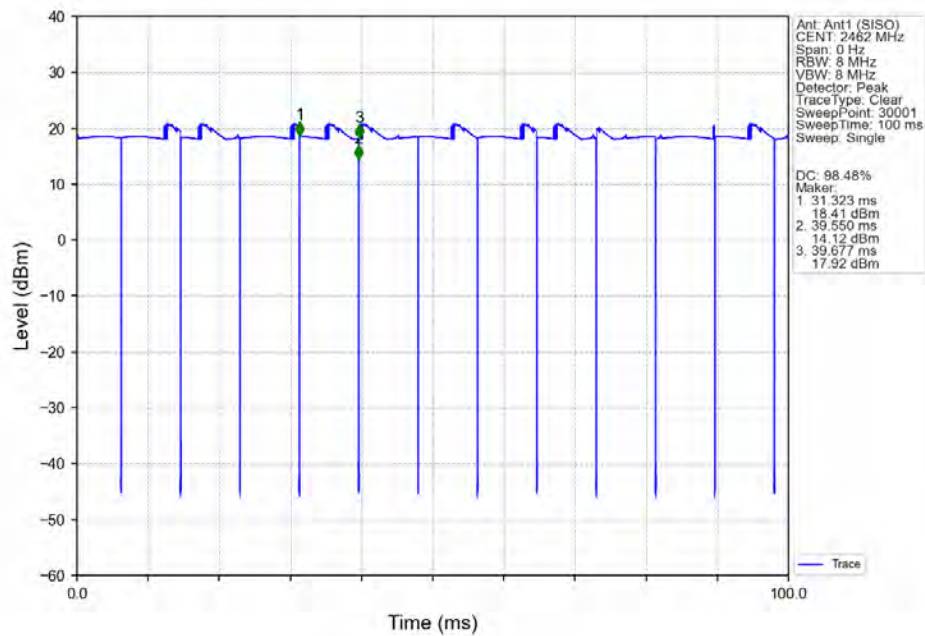


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

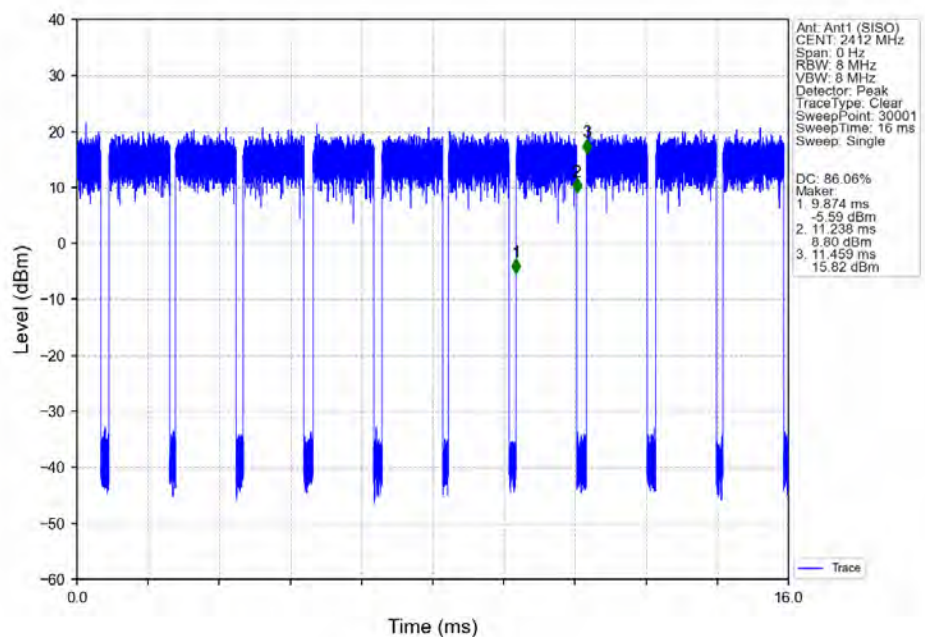


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

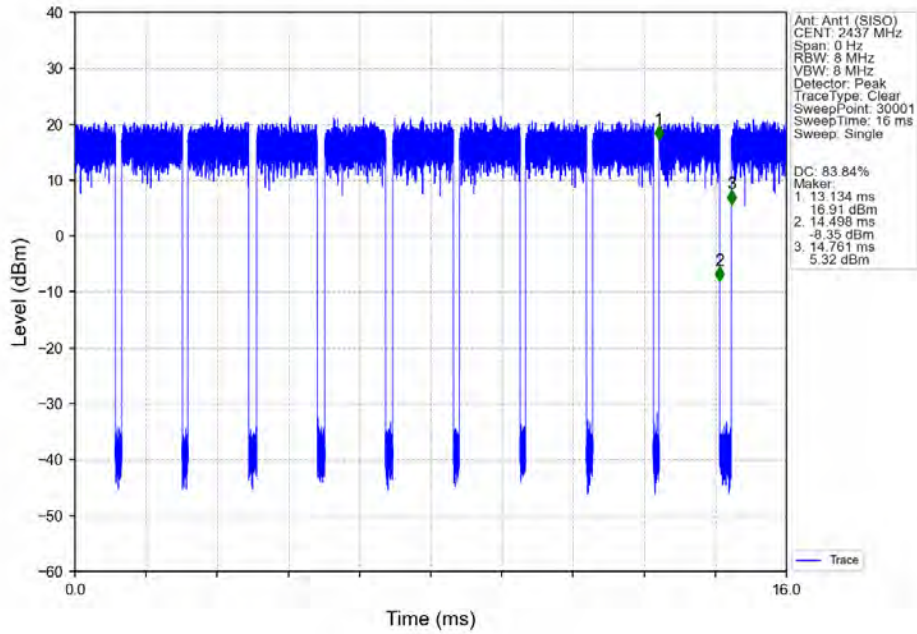


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

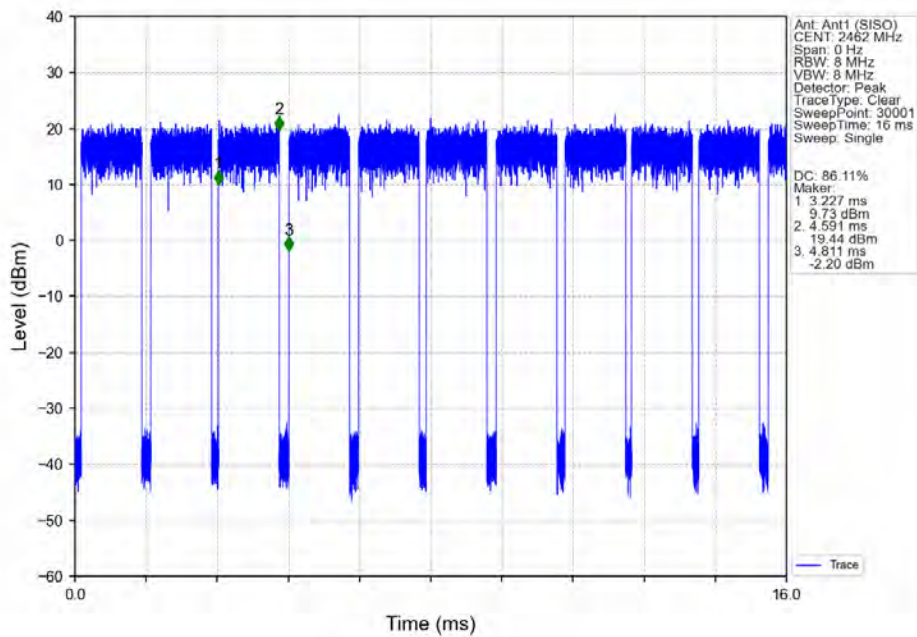

802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

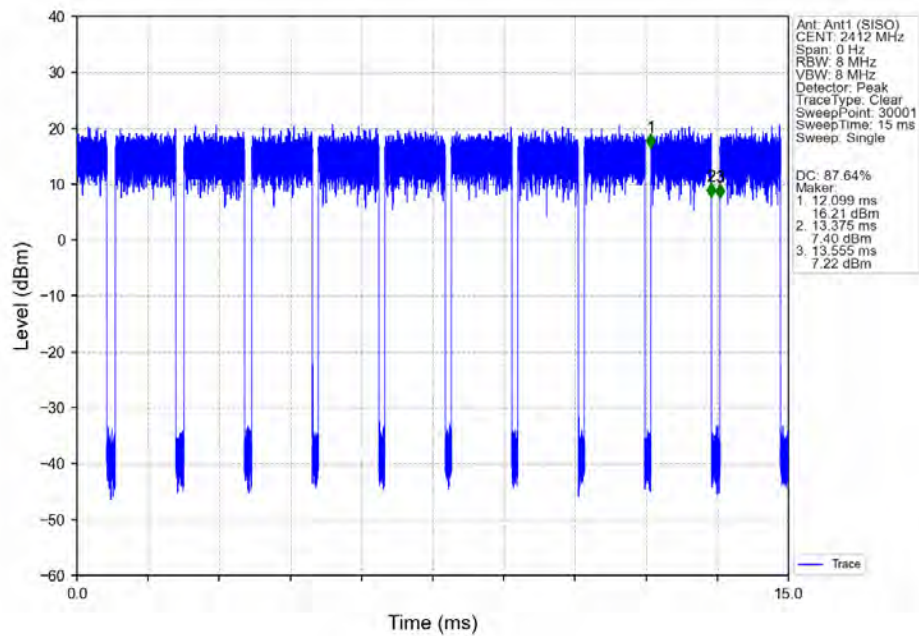

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

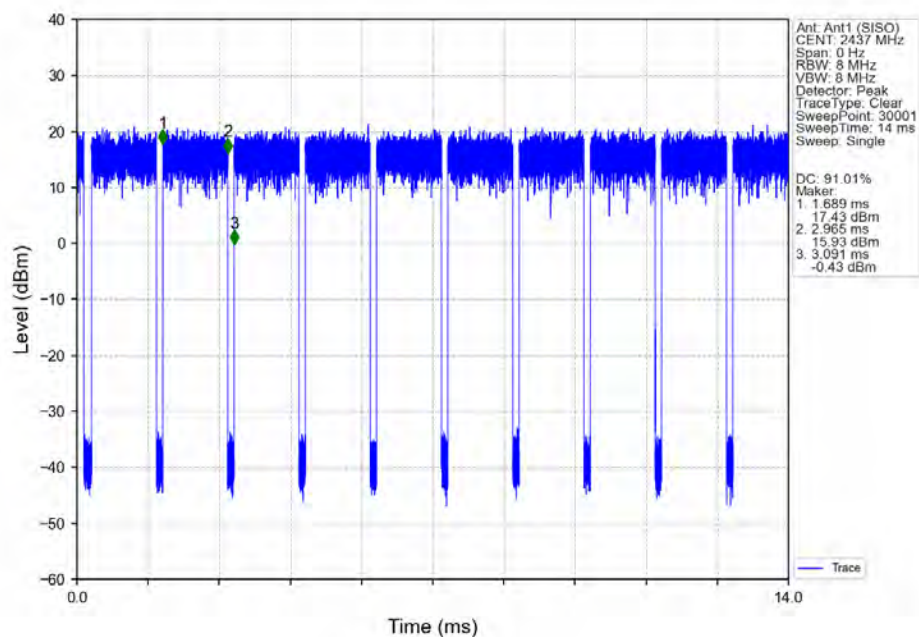


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 123 of 193


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

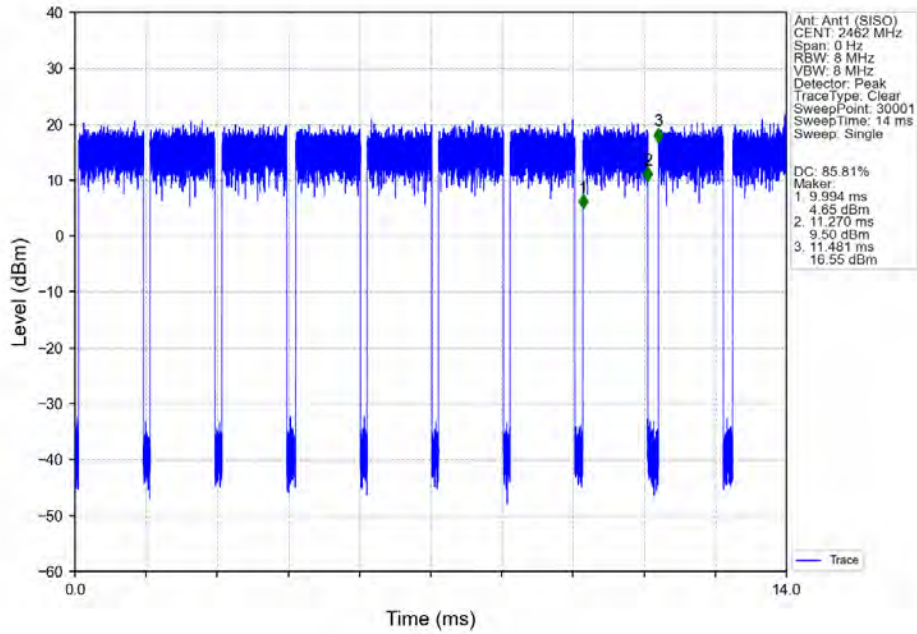


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

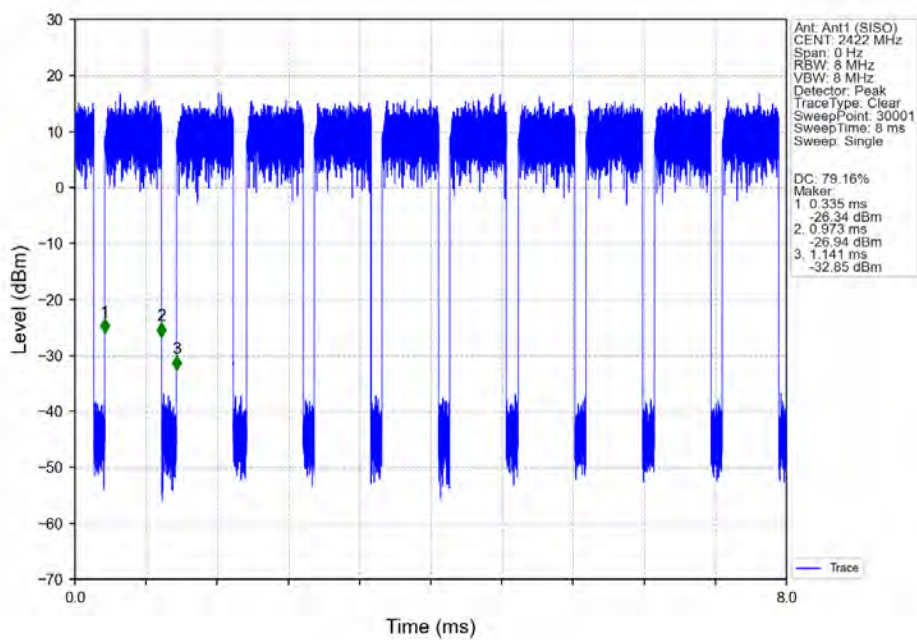


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

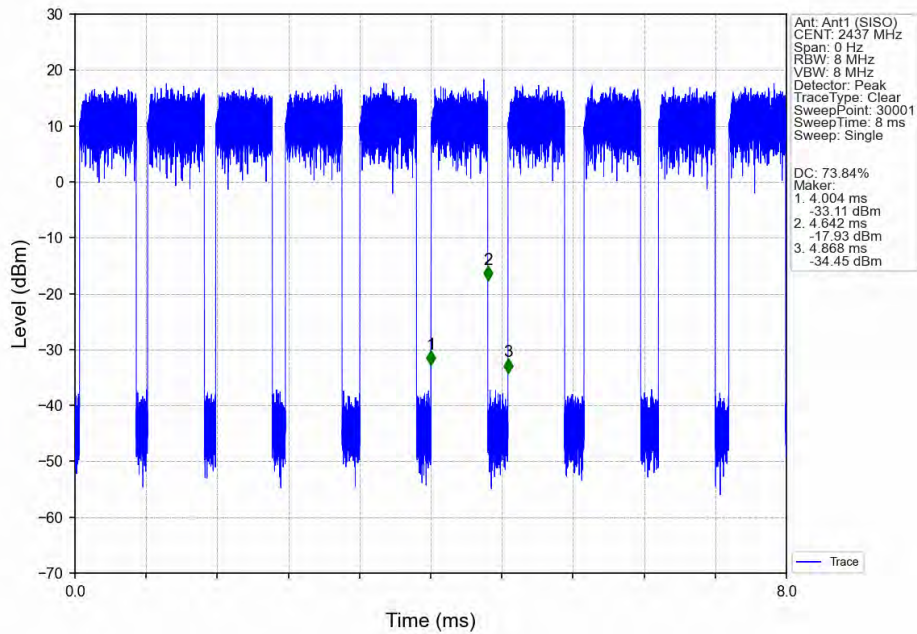


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

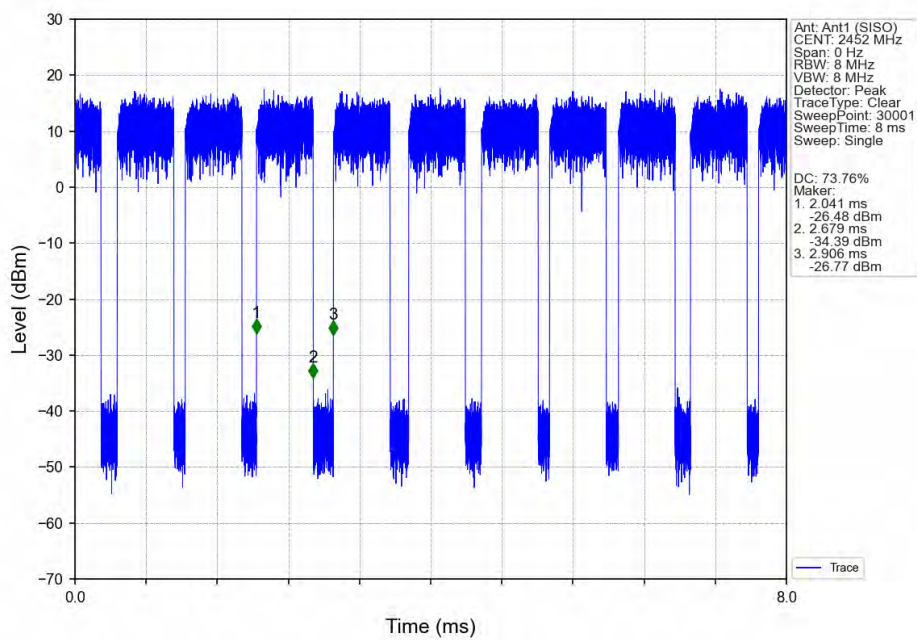


802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

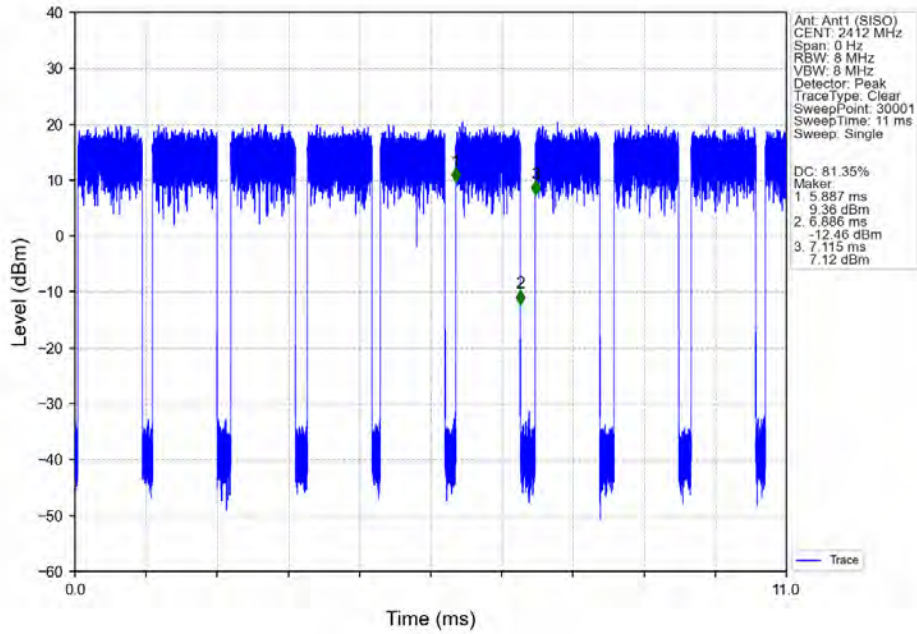


802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

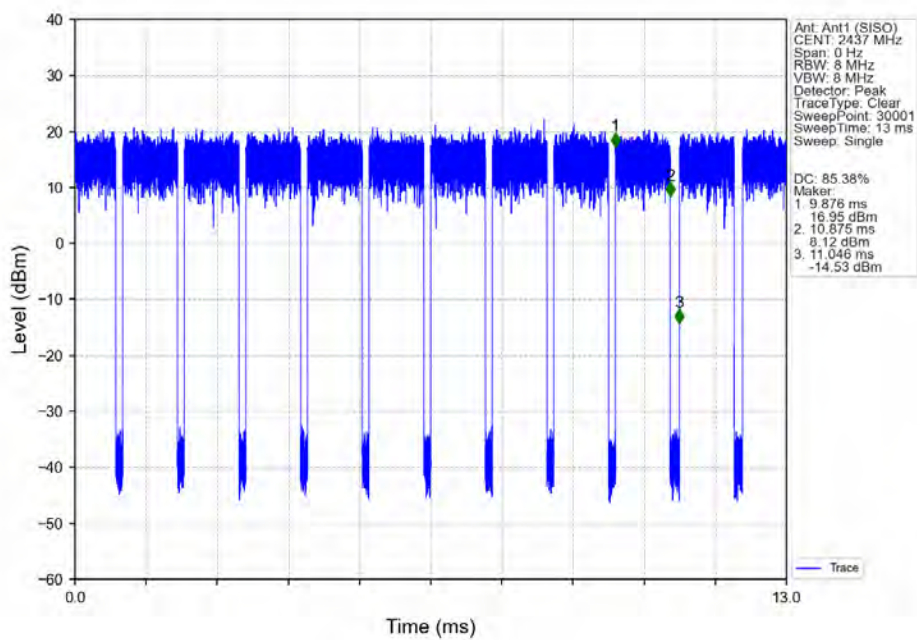


802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

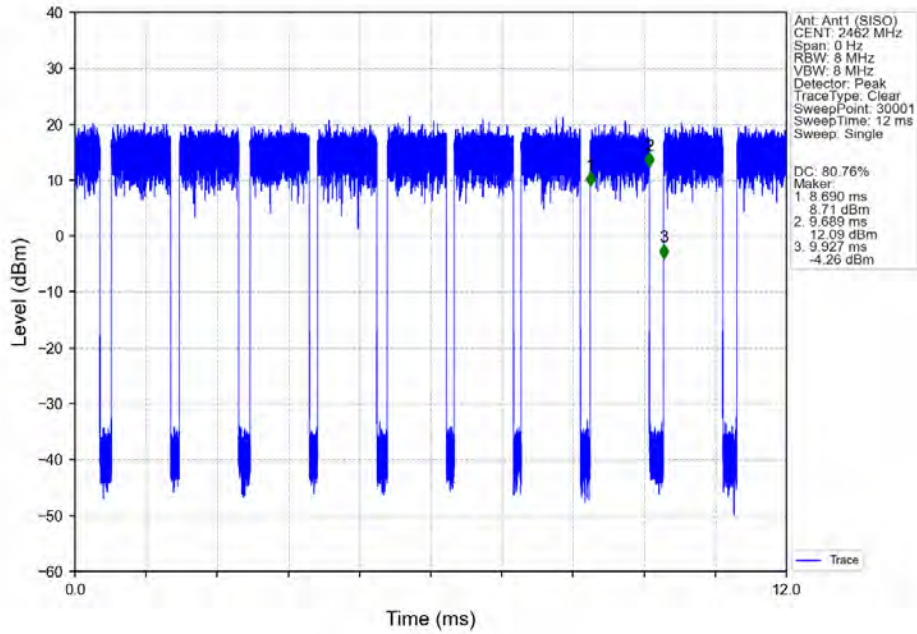


802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

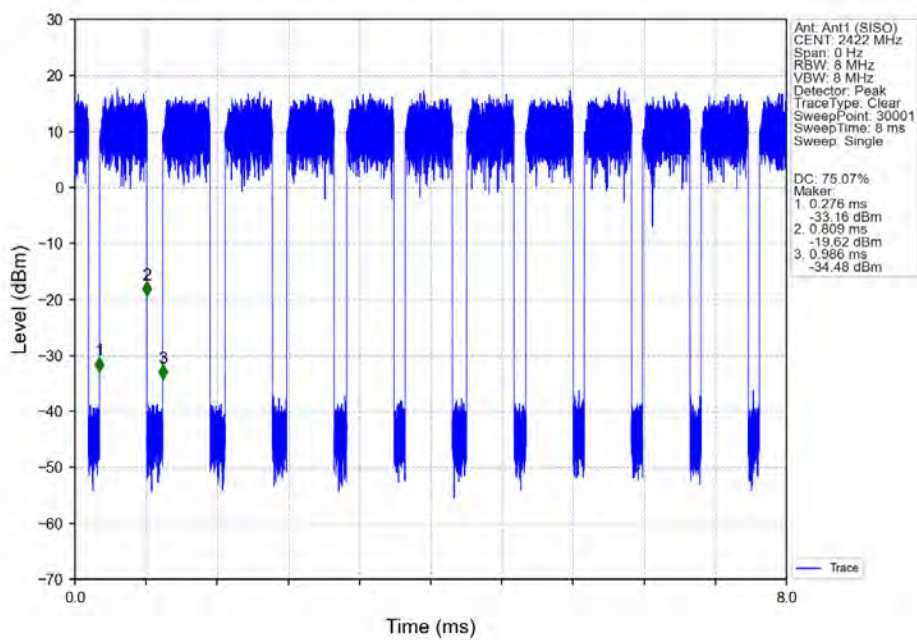

802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

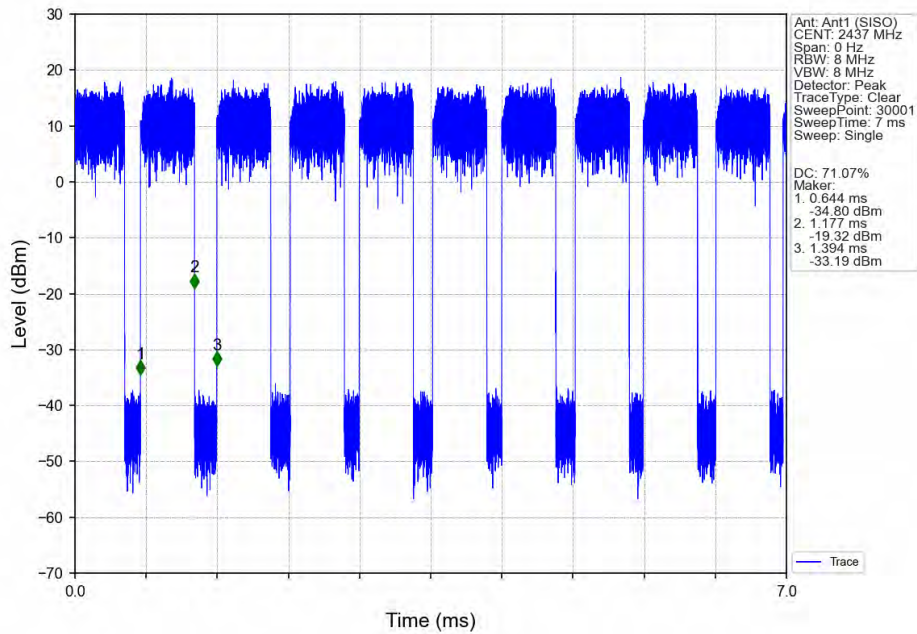

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

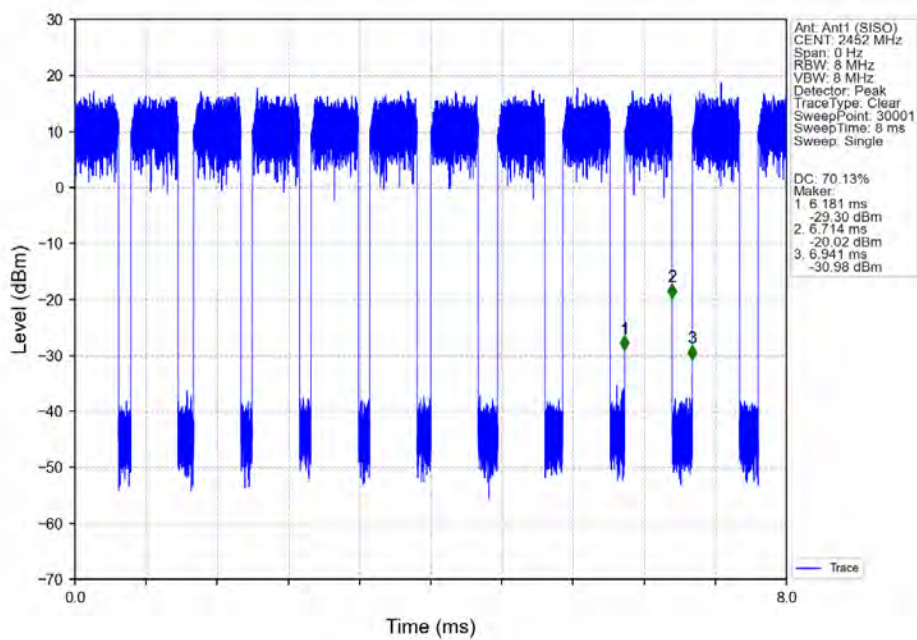

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 128 of 193

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	14.932	/	Pass
		2437	/	/	1	15.030	/	Pass
		2462	/	/	1	15.125	/	Pass
802.11g	SISO	2412	/	/	1	18.729	/	Pass
		2437	/	/	1	18.899	/	Pass
		2462	/	/	1	18.883	/	Pass
802.11n (HT20)	SISO	2412	/	/	1	19.498	/	Pass
		2437	/	/	1	19.669	/	Pass
		2462	/	/	1	19.808	/	Pass
802.11n (HT40)	SISO	2422	/	/	1	37.730	/	Pass
		2437	/	/	1	37.633	/	Pass
		2452	/	/	1	37.519	/	Pass
802.11ax (HE20)	SISO	2412	RU242	Left	1	19.838	/	Pass
		2437	RU242	Left	1	19.791	/	Pass
		2462	RU242	Left	1	19.826	/	Pass
802.11ax (HE40)	SISO	2422	RU484	Left	1	38.583	/	Pass
		2437	RU484	Left	1	38.541	/	Pass
		2452	RU484	Left	1	38.463	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	10.042	≥ 0.5	Pass
		2437	/	/	1	10.043	≥ 0.5	Pass
		2462	/	/	1	10.074	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	15.494	≥ 0.5	Pass
		2437	/	/	1	15.476	≥ 0.5	Pass
		2462	/	/	1	15.511	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	15.513	≥ 0.5	Pass
		2437	/	/	1	15.747	≥ 0.5	Pass
		2462	/	/	1	15.506	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	35.155	≥ 0.5	Pass
		2437	/	/	1	35.159	≥ 0.5	Pass
		2452	/	/	1	35.155	≥ 0.5	Pass



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 129 of 193

802.11ax (HE20)	SISO	2412	RU242	Left	1	18.063	≥ 0.5	Pass
		2437	RU242	Left	1	18.156	≥ 0.5	Pass
		2462	RU242	Left	1	16.630	≥ 0.5	Pass
802.11ax (HE40)	SISO	2422	RU484	Left	1	35.627	≥ 0.5	Pass
		2437	RU484	Left	1	36.380	≥ 0.5	Pass
		2452	RU484	Left	1	36.386	≥ 0.5	Pass

2.2 Test Graph

2.2.1 OBW

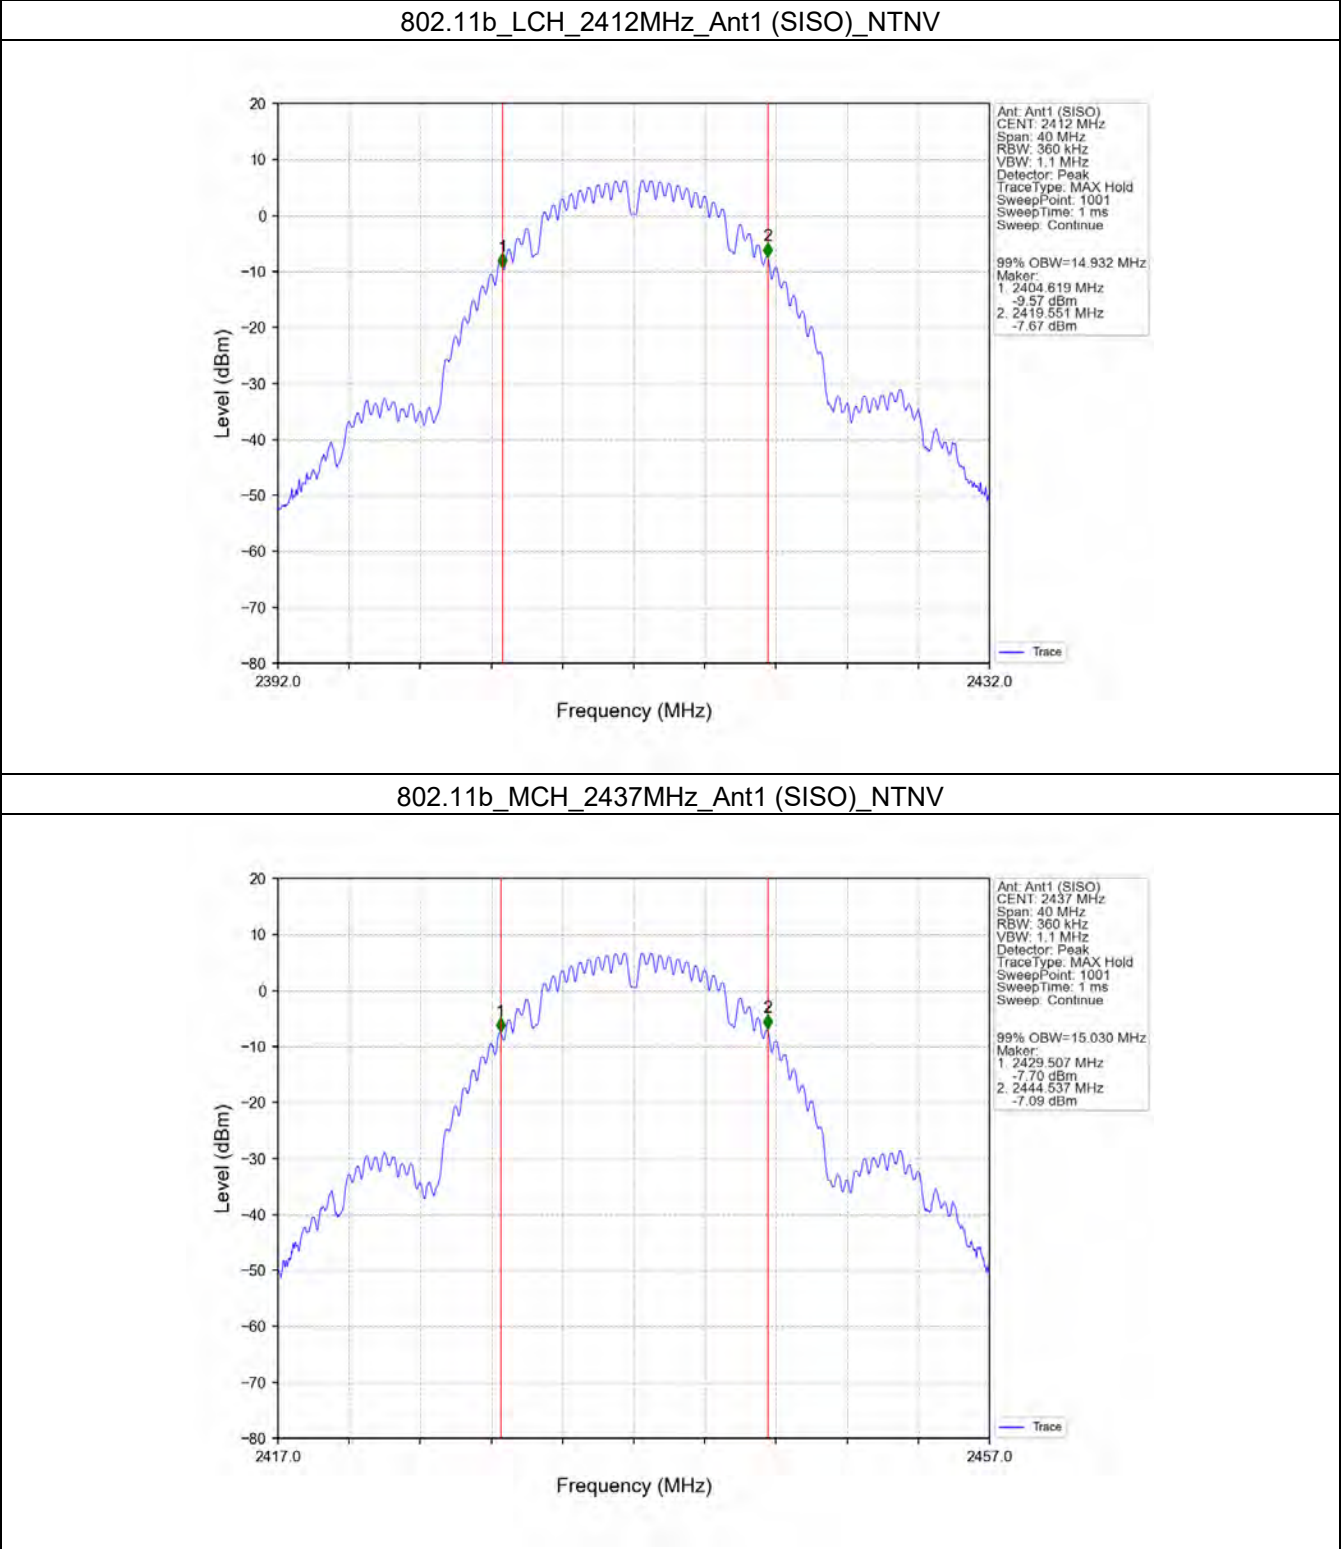


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 131 of 193


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

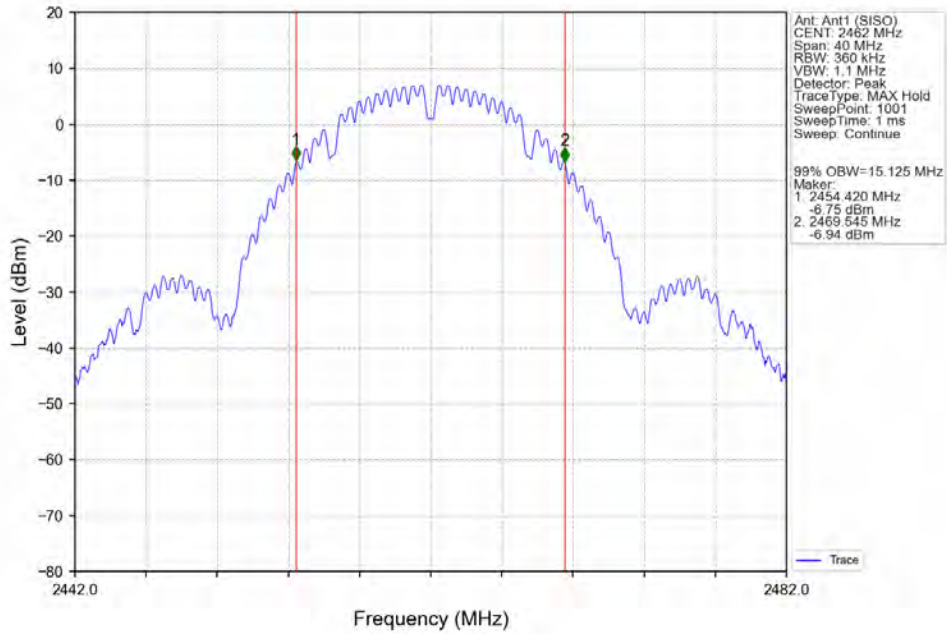


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

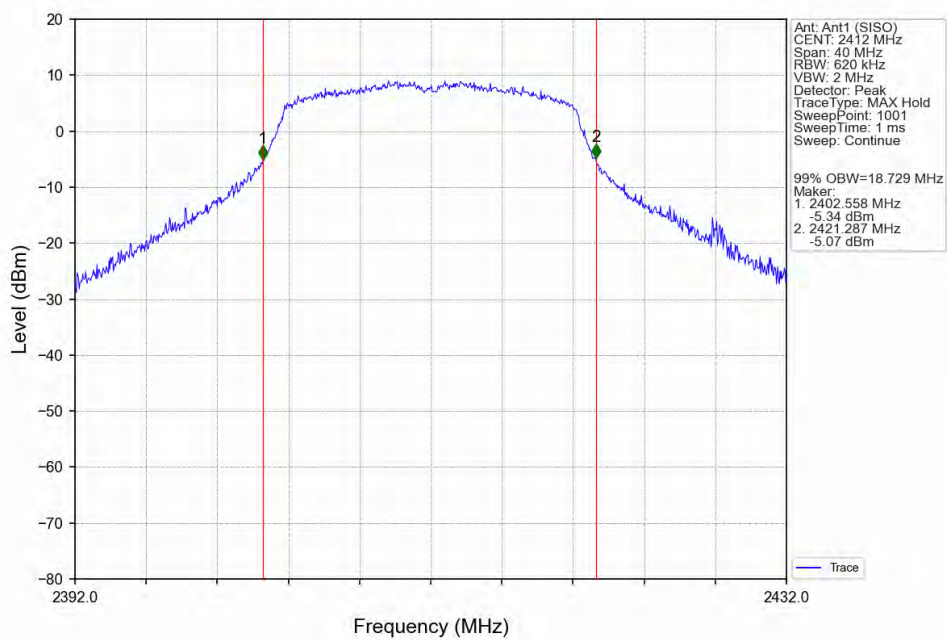


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

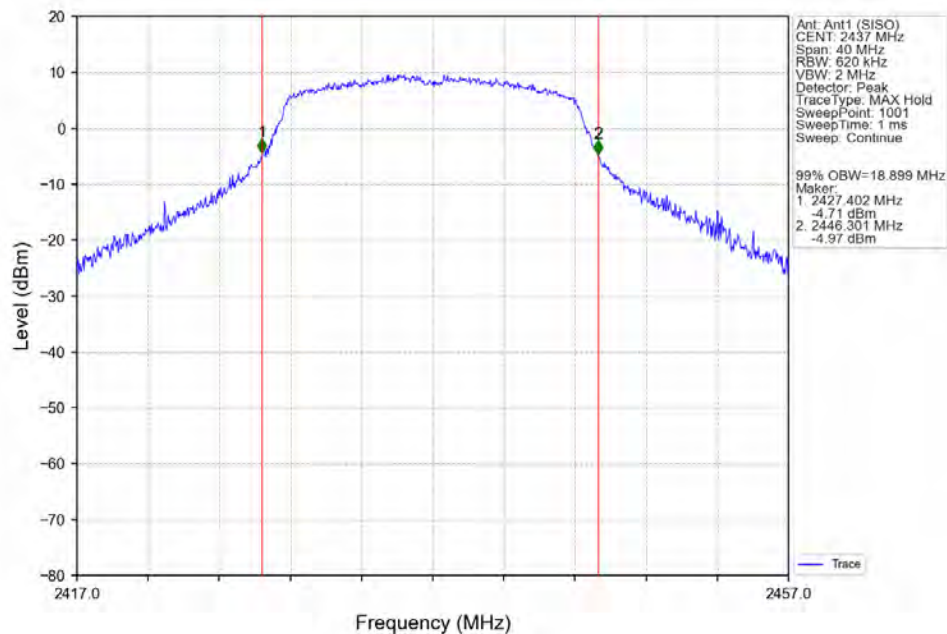


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

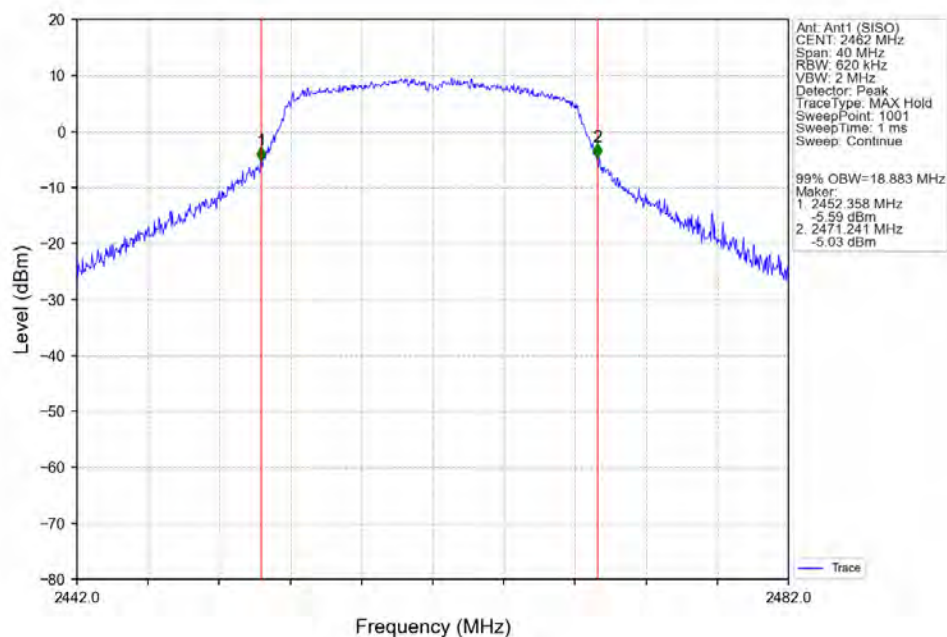


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

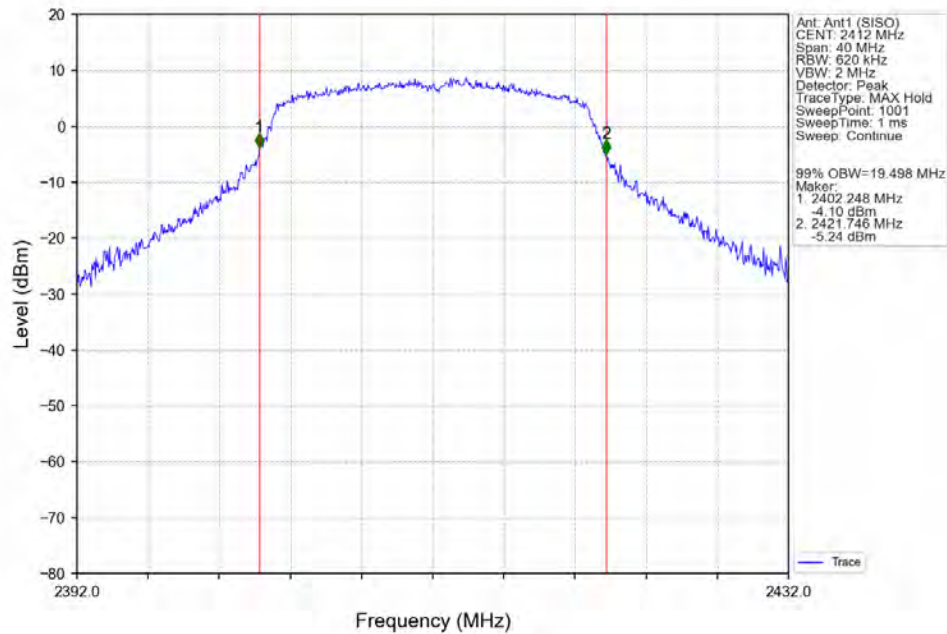


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

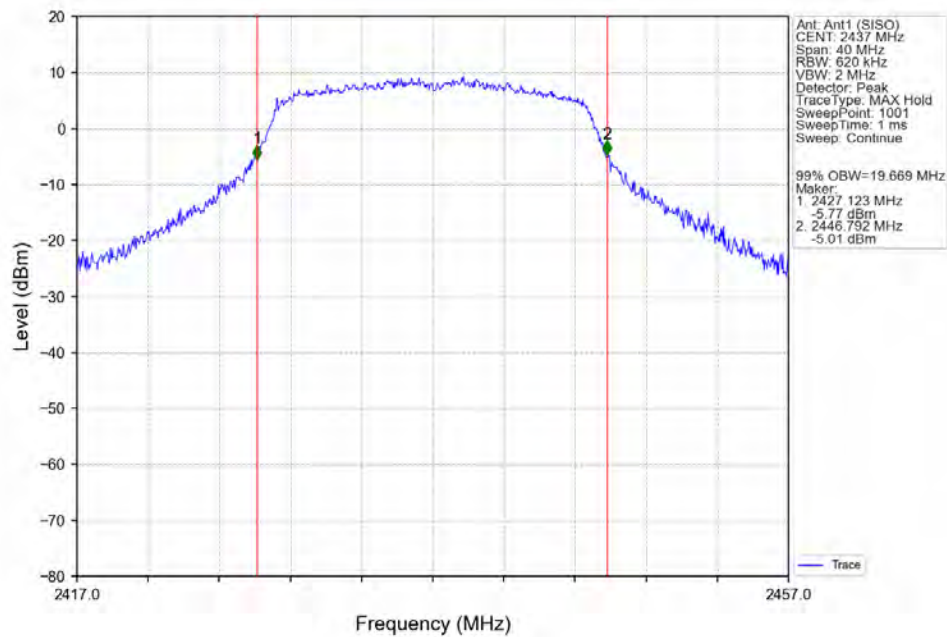


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

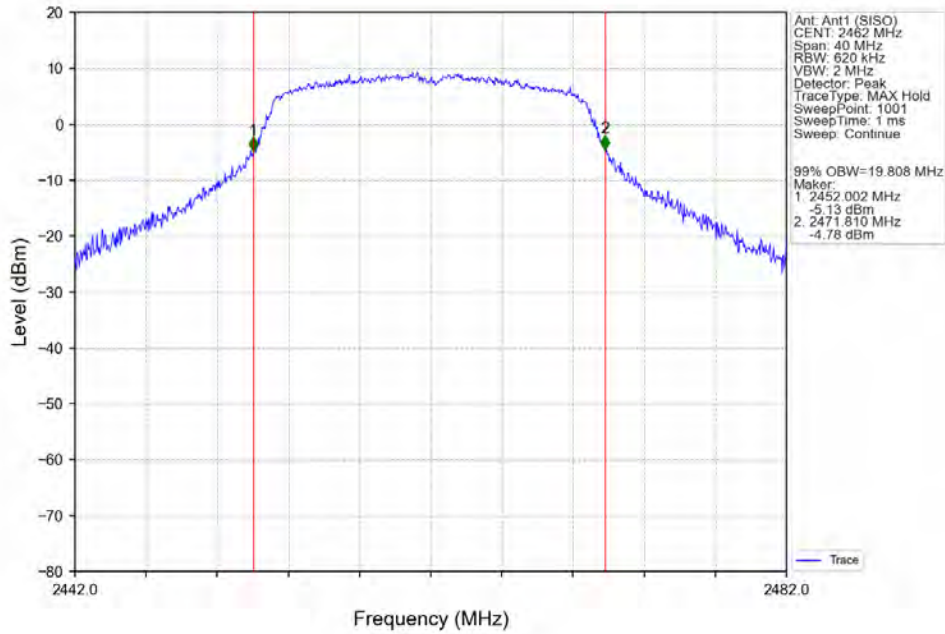


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

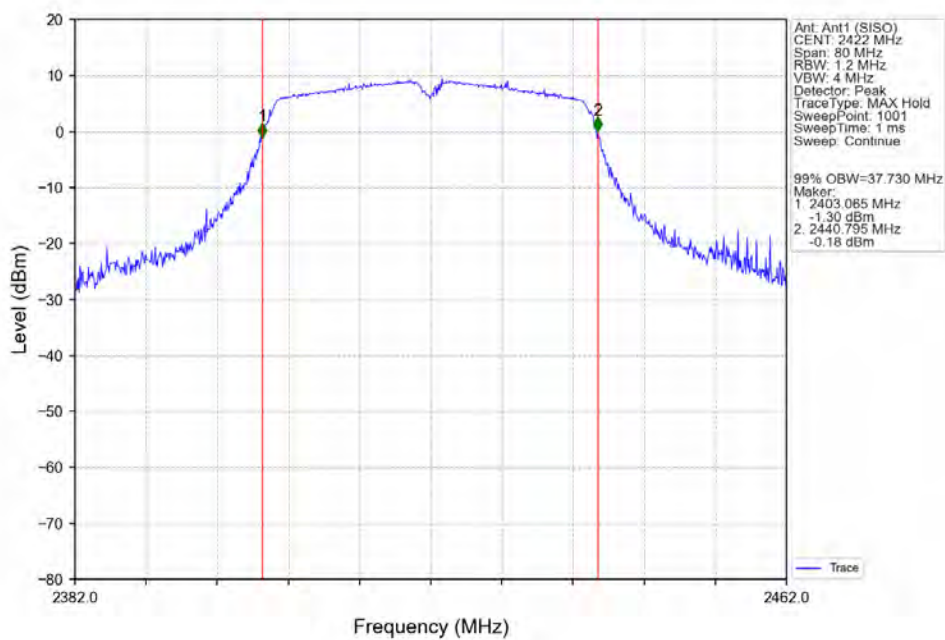


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

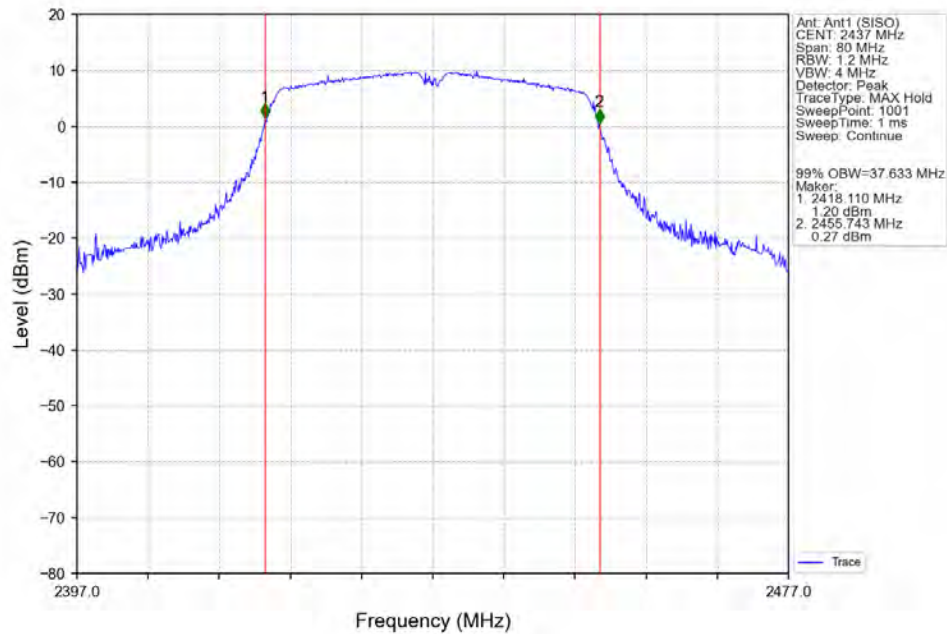


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

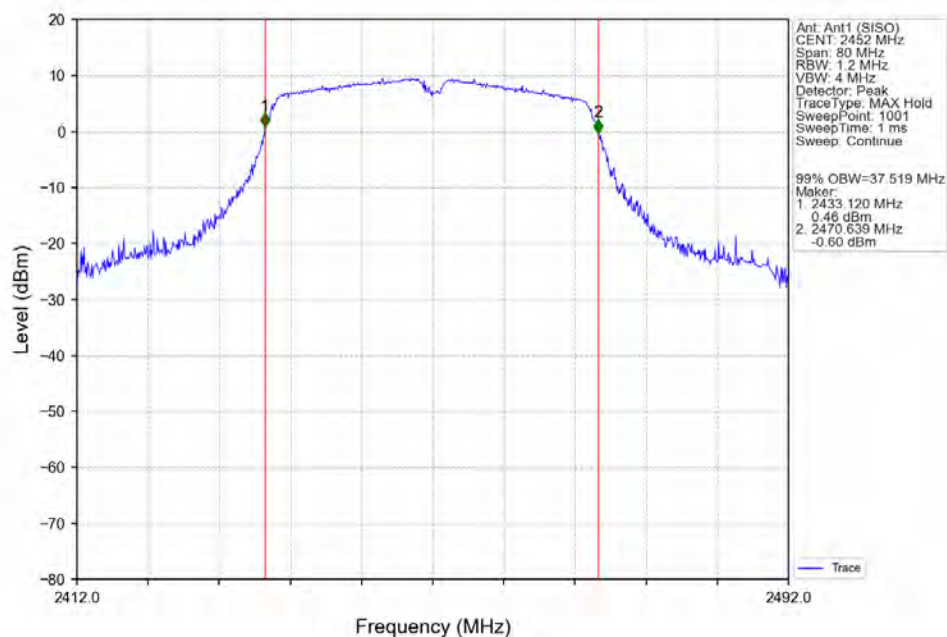


802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

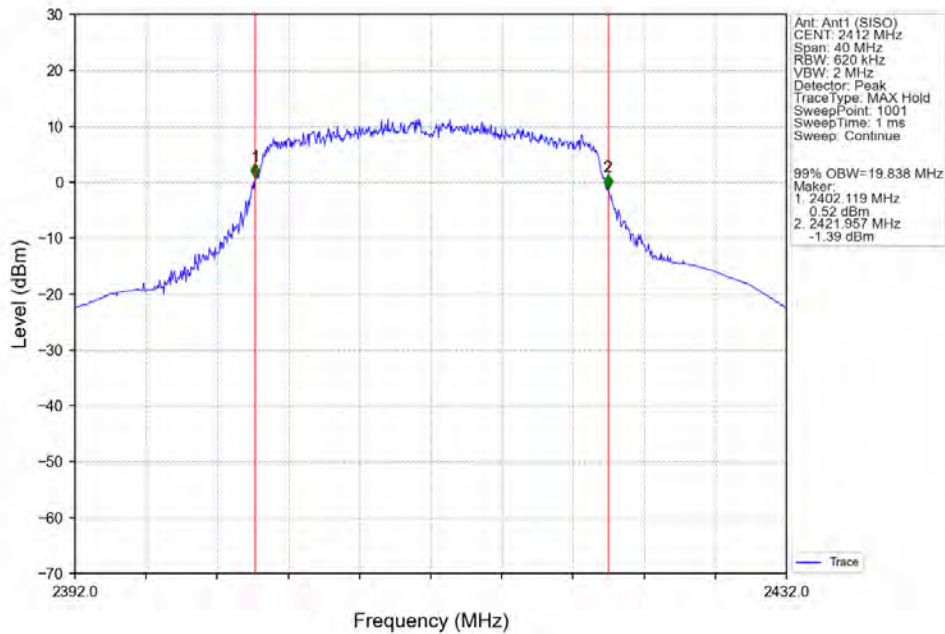


802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

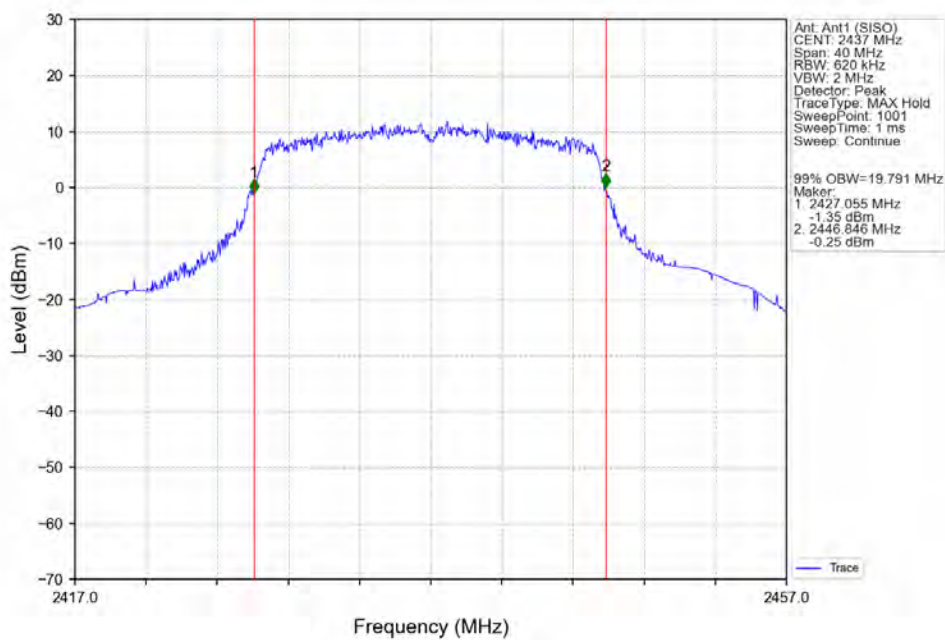

802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

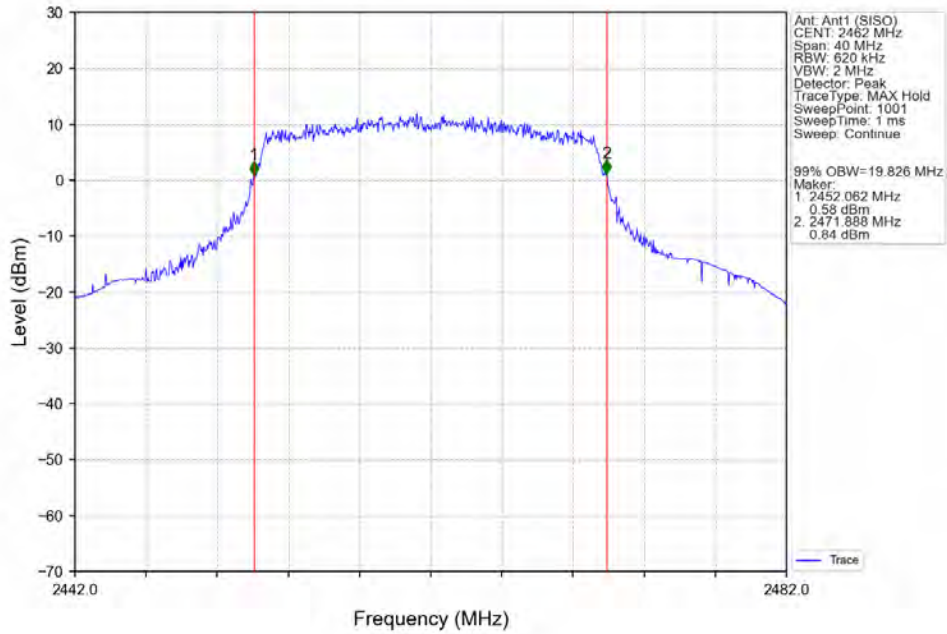

802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

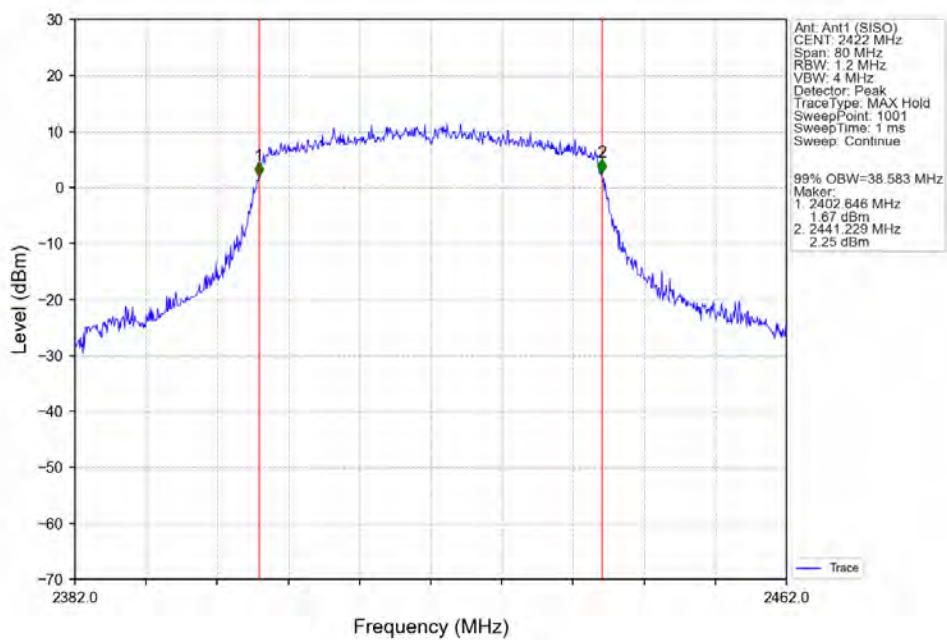


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 138 of 193


802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

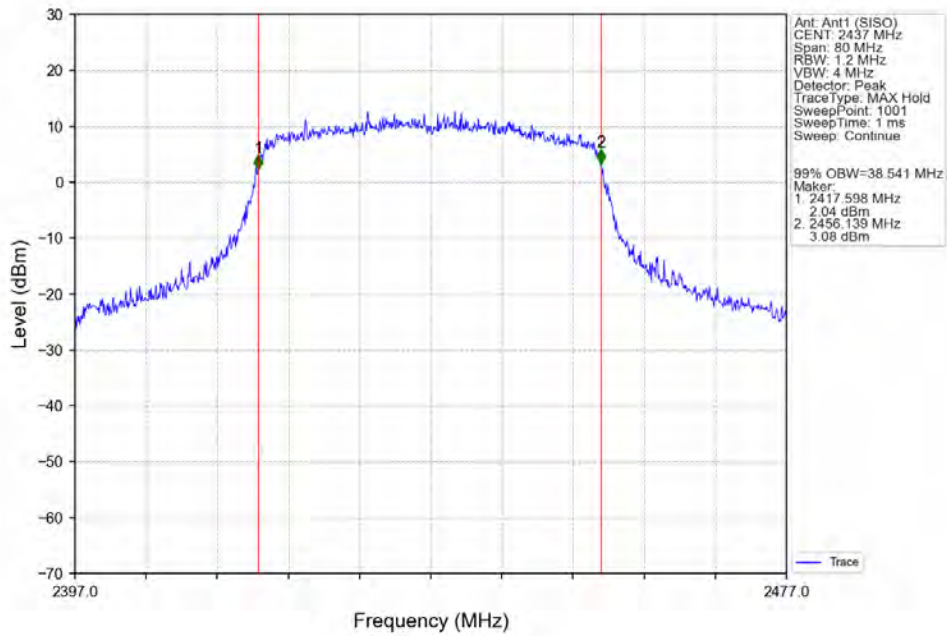


802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

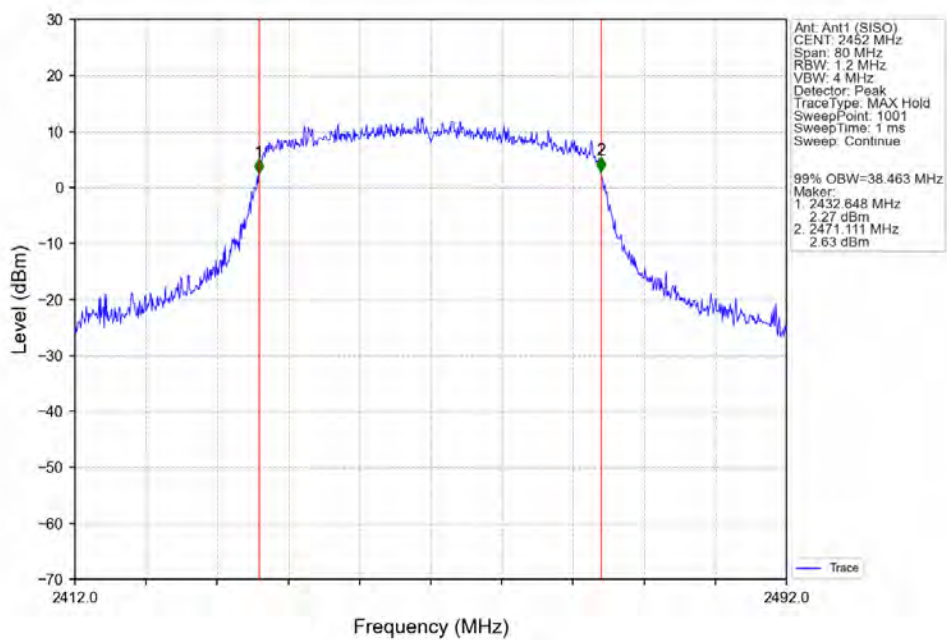


2.2.2 6dB BW

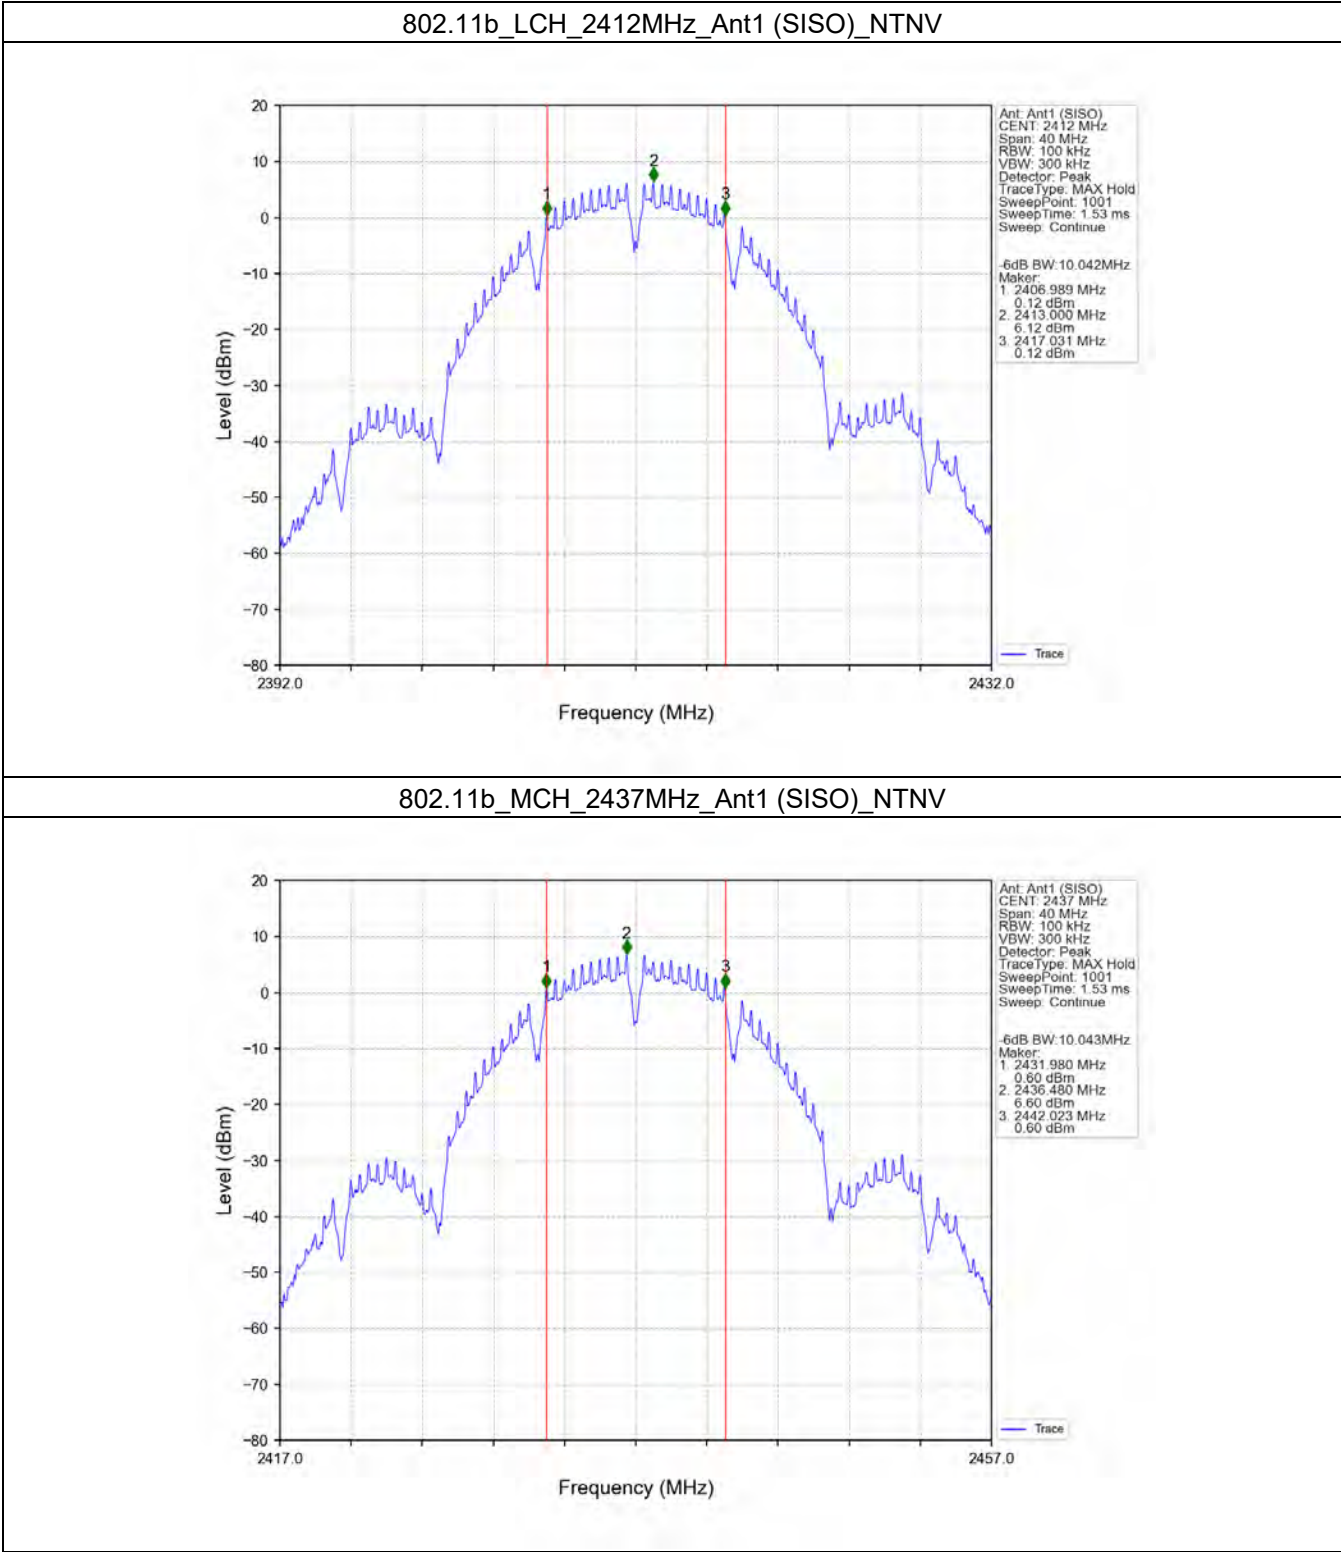


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

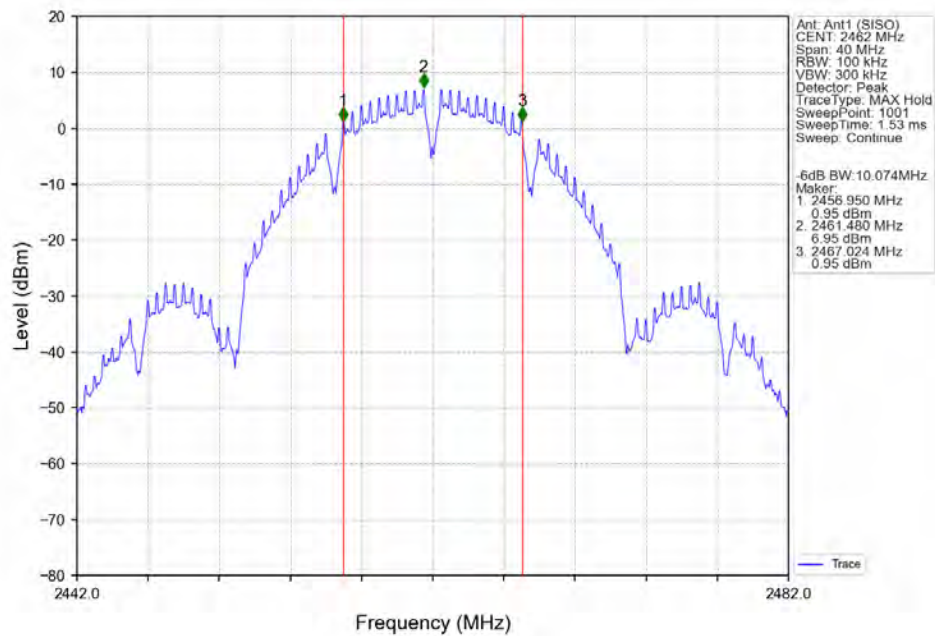


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

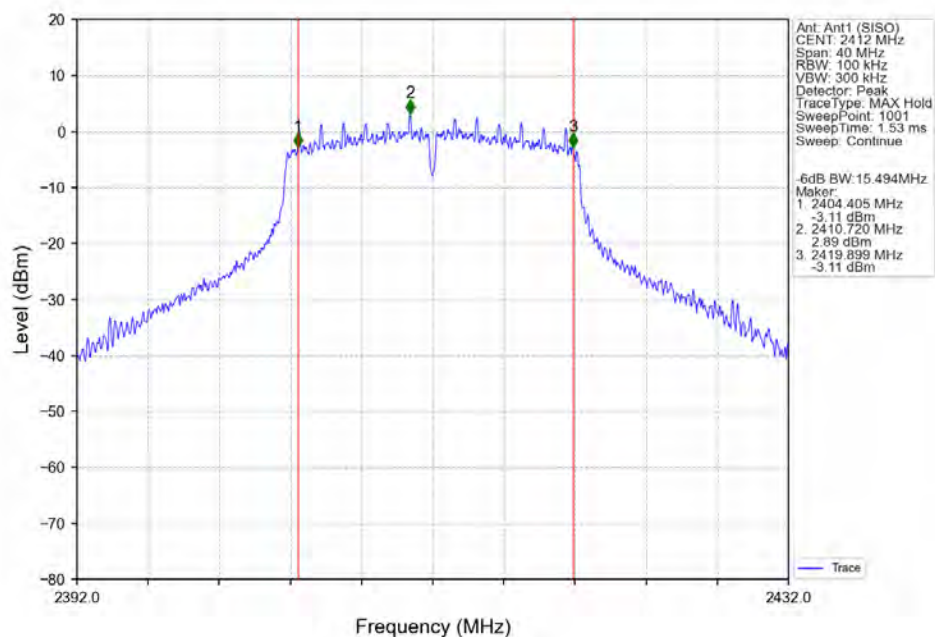


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

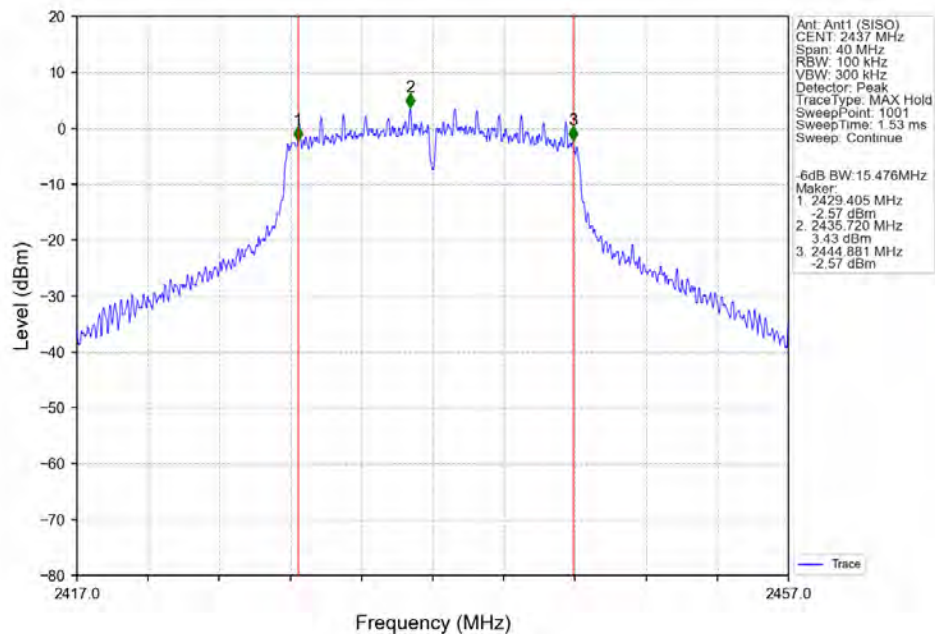


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

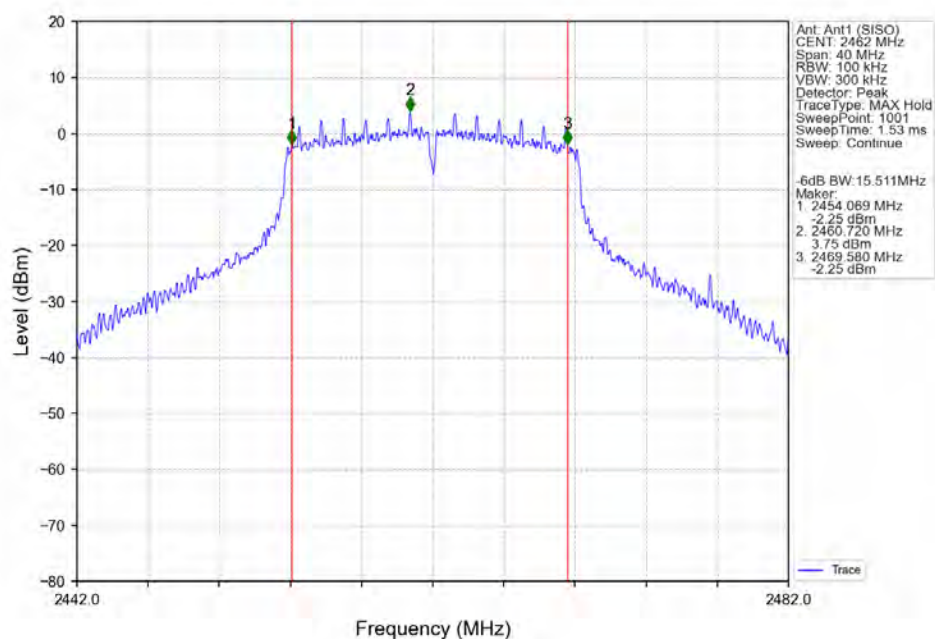


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

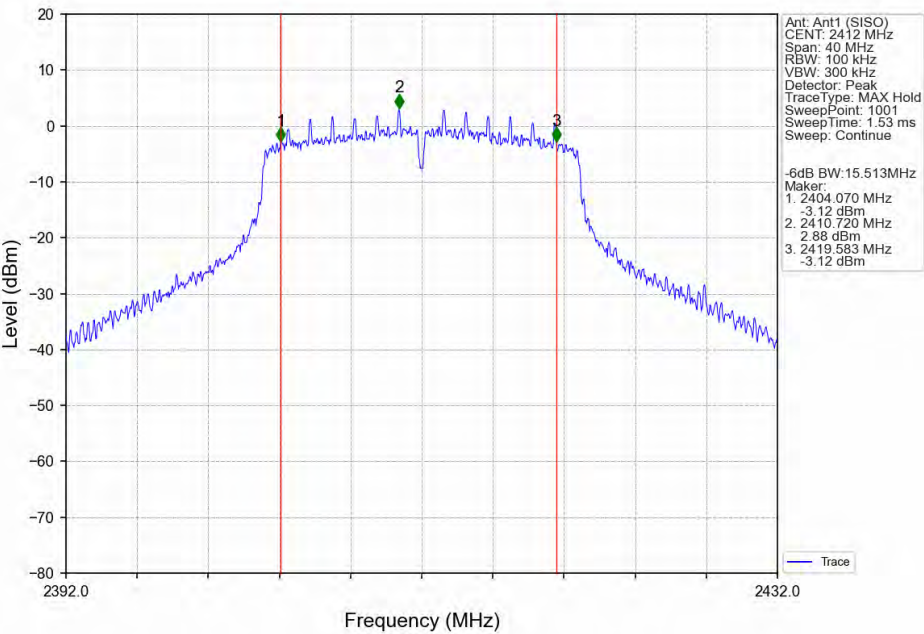


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

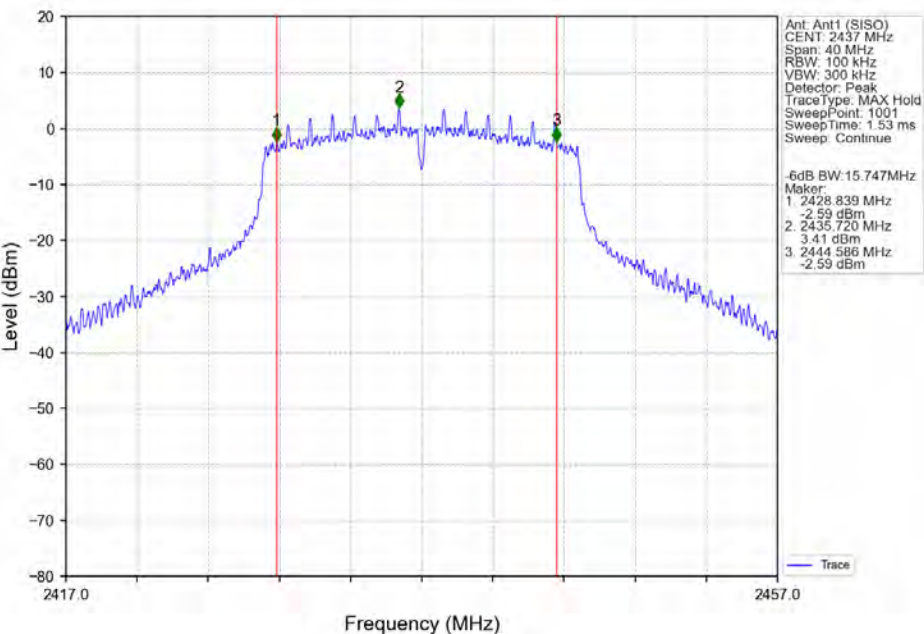

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

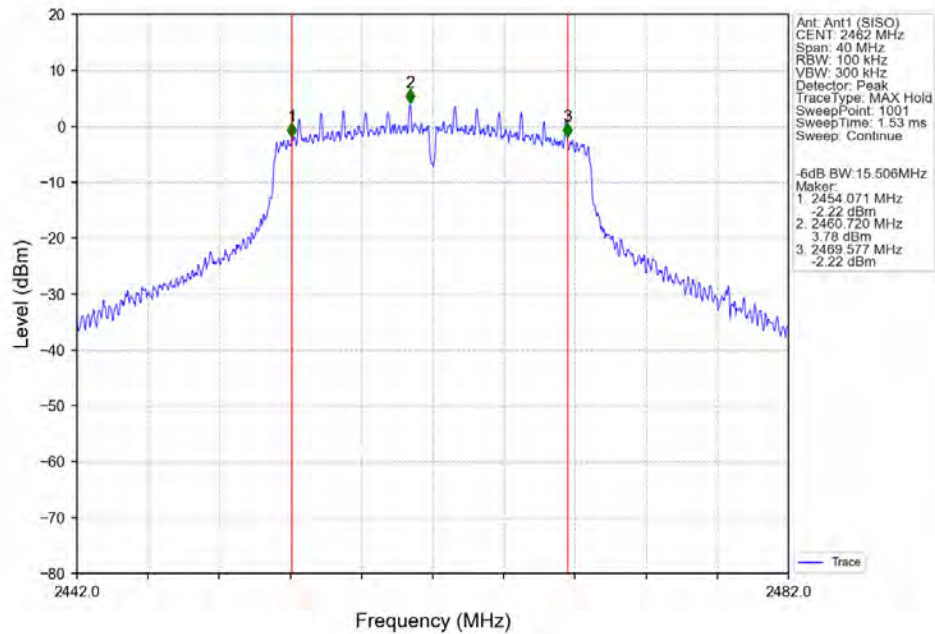

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

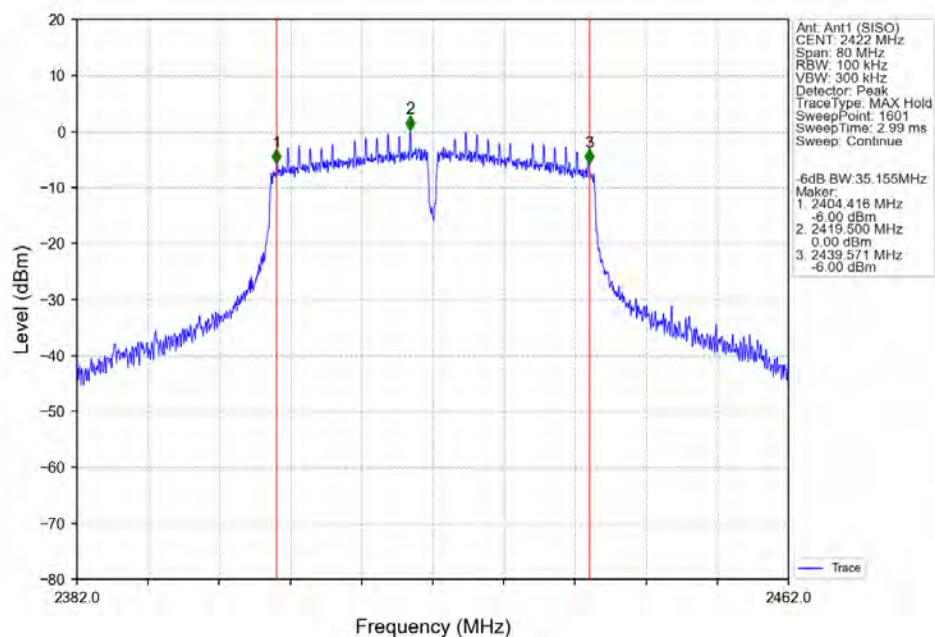


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 144 of 193


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

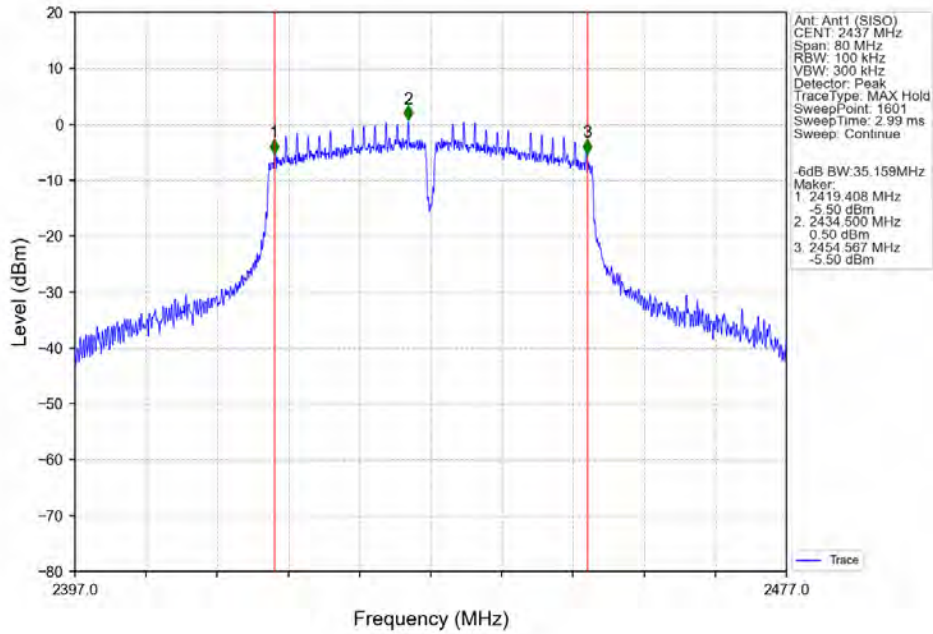


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

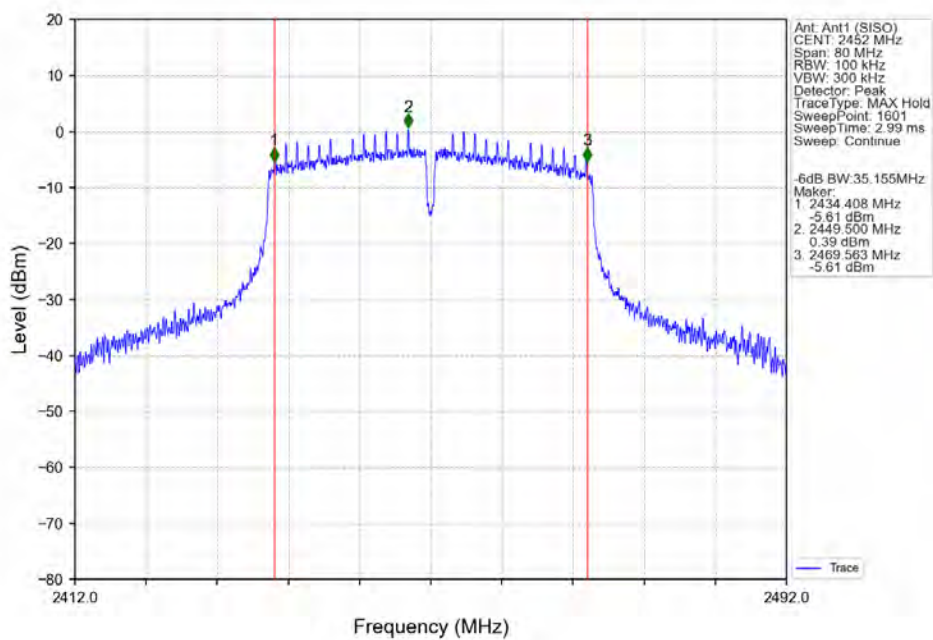


802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

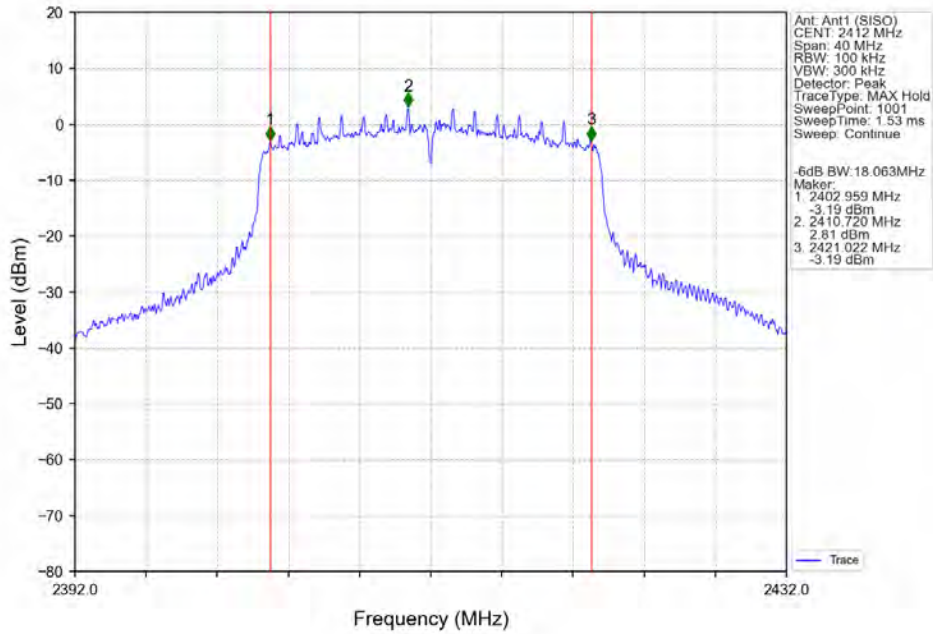


802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

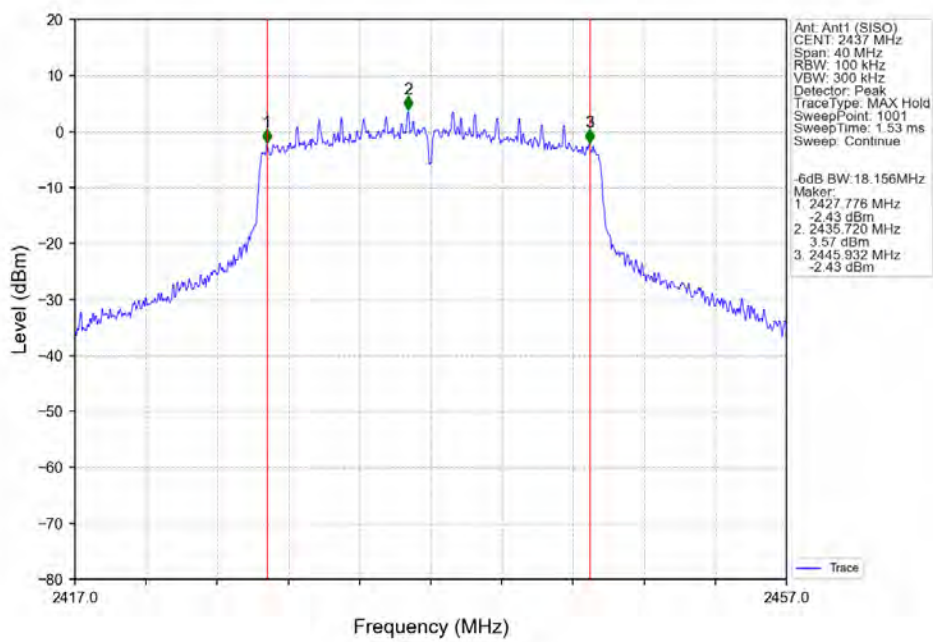


802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

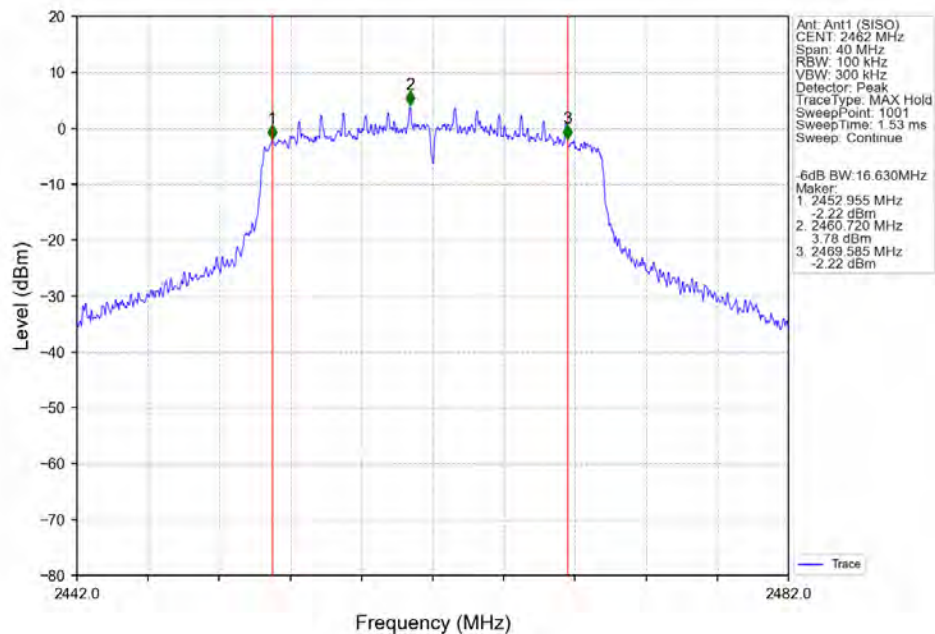


802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

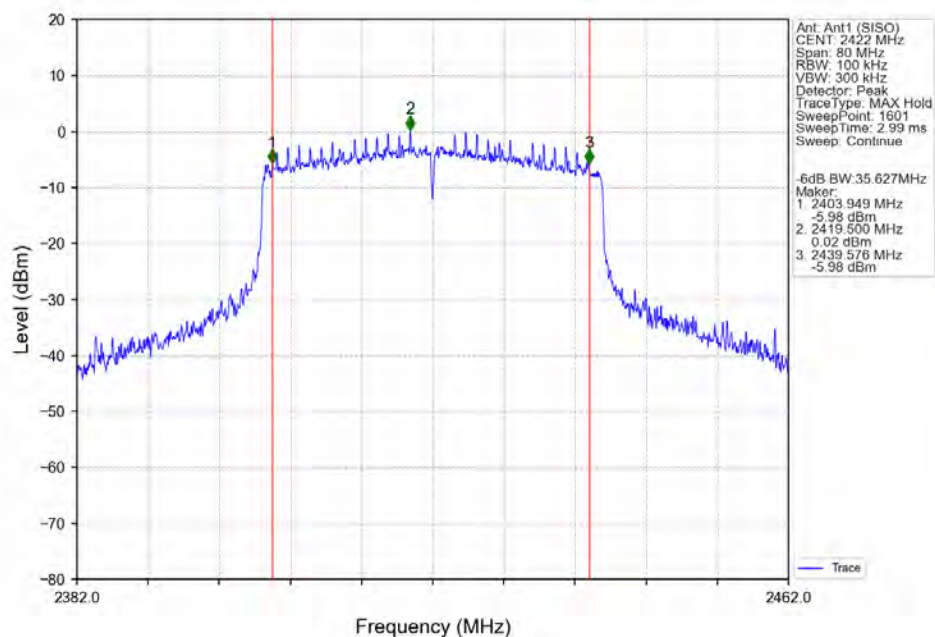

802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

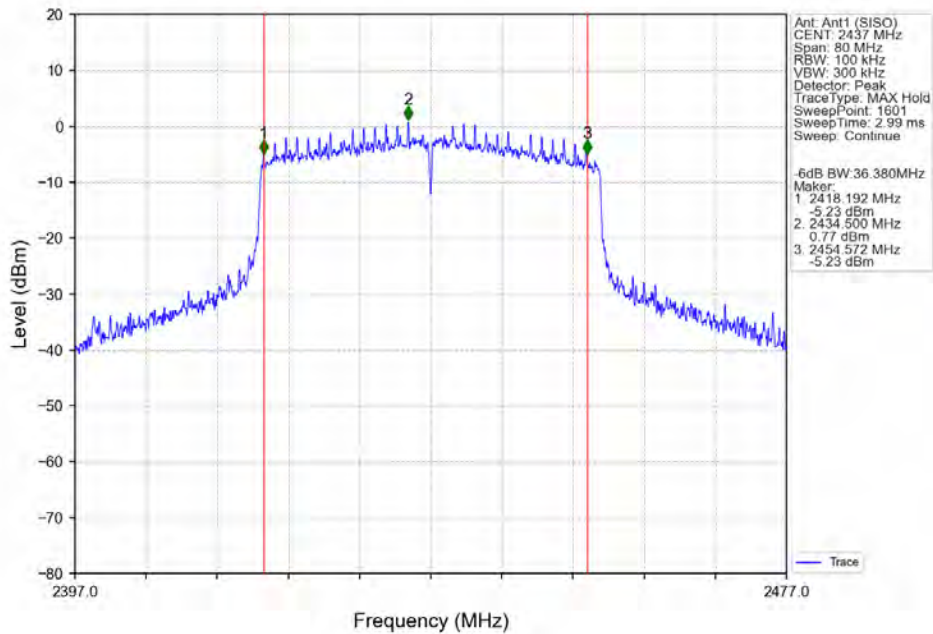

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

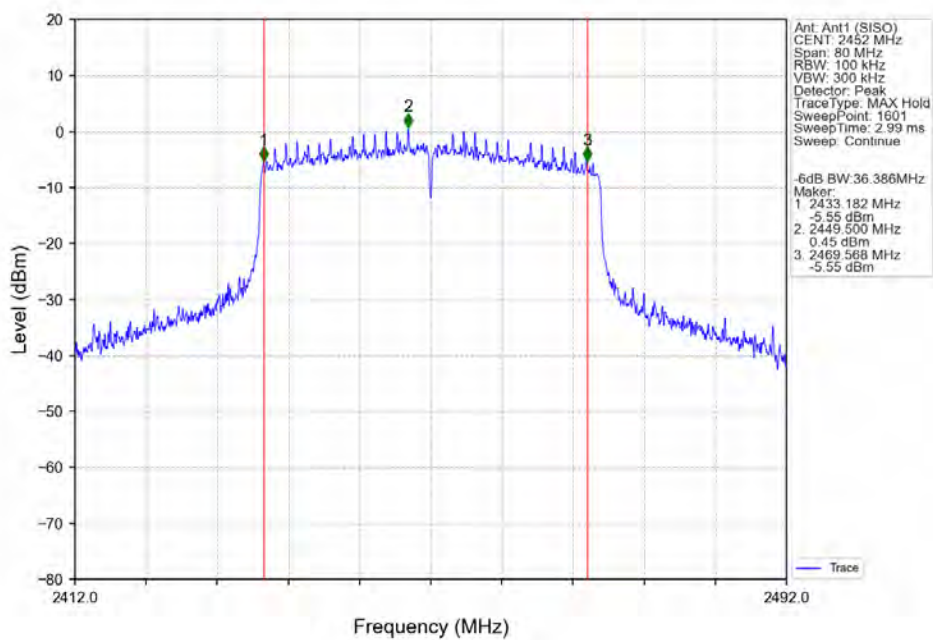

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 148 of 193

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
					ANT1	Limit	
802.11b	SISO	2412	/	/	14.86	<=30	Pass
		2437	/	/	15.22	<=30	Pass
		2462	/	/	15.58	<=30	Pass
802.11g	SISO	2412	/	/	13.55	<=30	Pass
		2437	/	/	14.14	<=30	Pass
		2462	/	/	14.28	<=30	Pass
802.11n (HT20)	SISO	2412	/	/	13.42	<=30	Pass
		2437	/	/	12.83	<=30	Pass
		2462	/	/	13.45	<=30	Pass
802.11n (HT40)	SISO	2422	/	/	13.30	<=30	Pass
		2437	/	/	12.97	<=30	Pass
		2452	/	/	12.74	<=30	Pass
802.11ax (HE20)	SISO	2412	RU242	Left	13.31	<=30	Pass
		2437	RU242	Left	13.95	<=30	Pass
		2462	RU242	Left	14.11	<=30	Pass
802.11ax (HE40)	SISO	2422	RU484	Left	13.26	<=30	Pass
		2437	RU484	Left	13.94	<=30	Pass
		2452	RU484	Left	13.59	<=30	Pass


Note1: Antenna Gain: Ant1: 3.00dBi;

3.2 Test Graph


3.2.1 Power

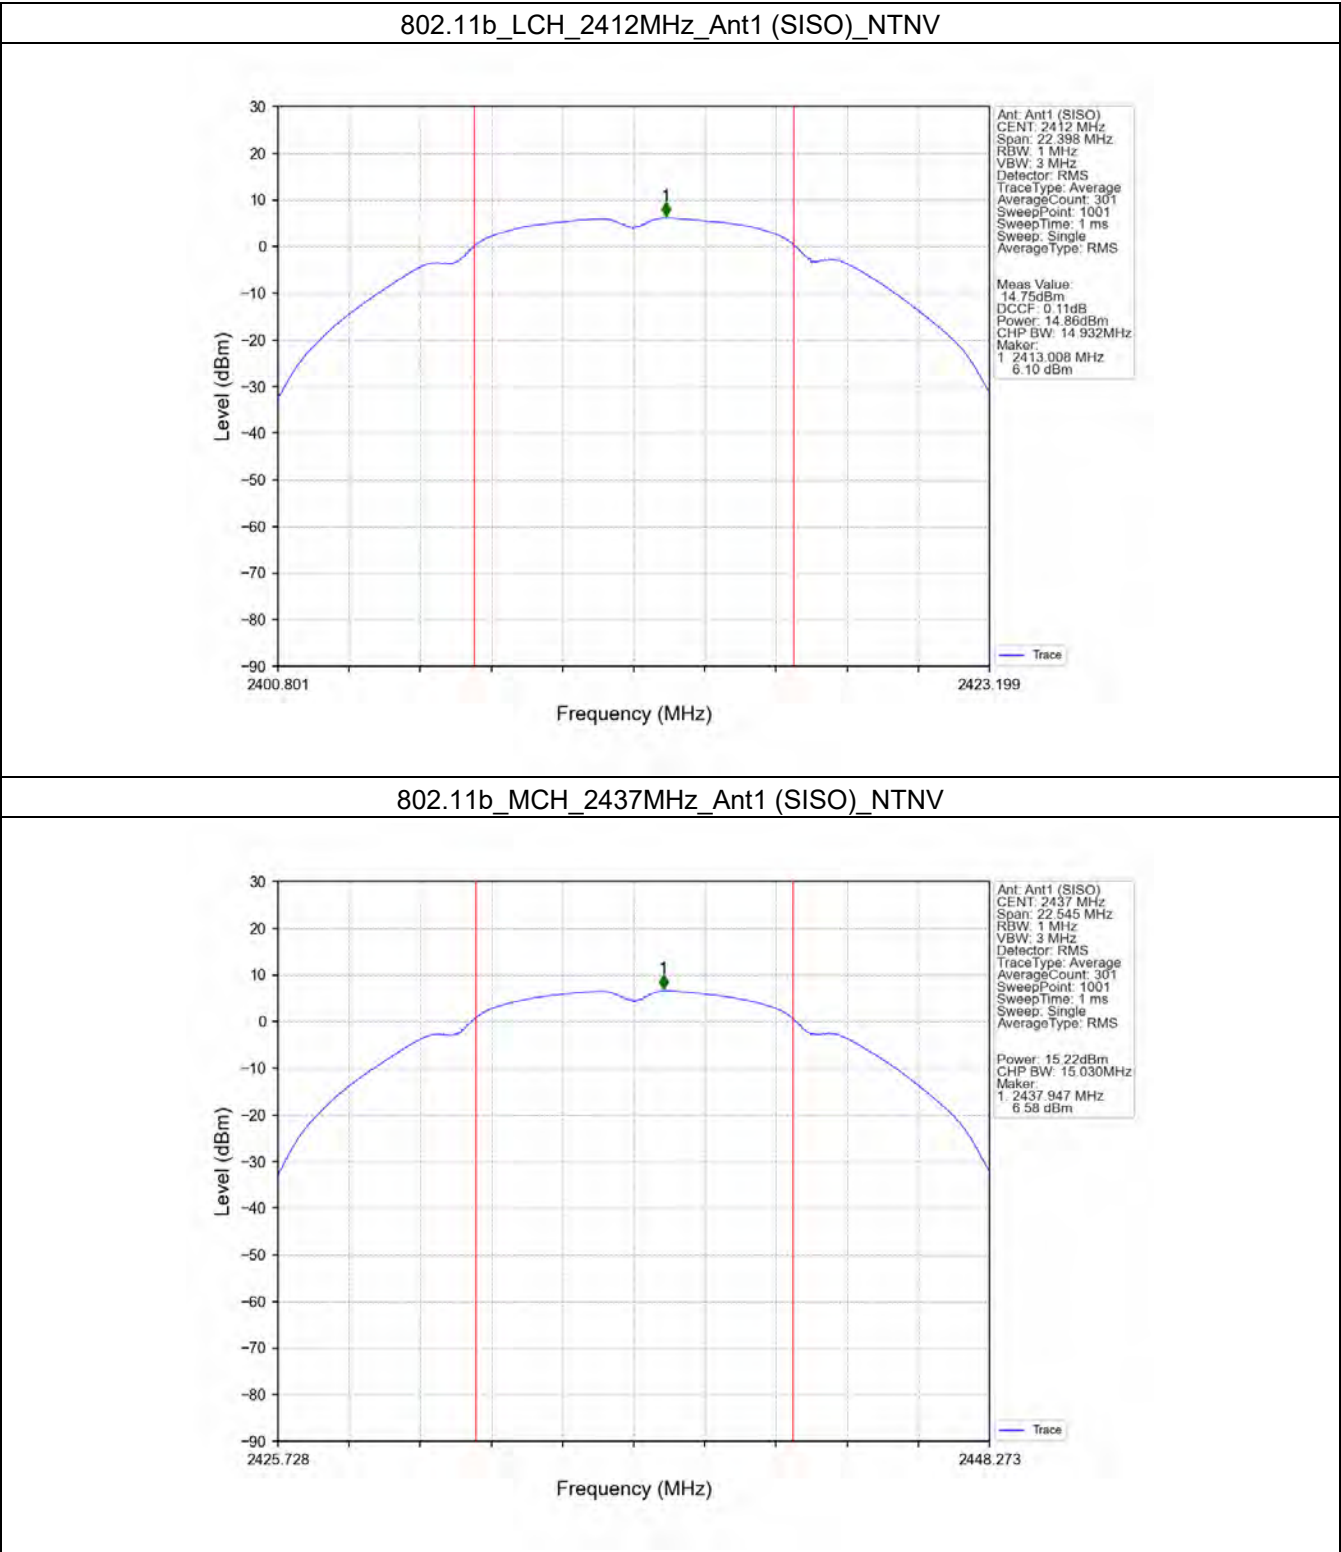


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

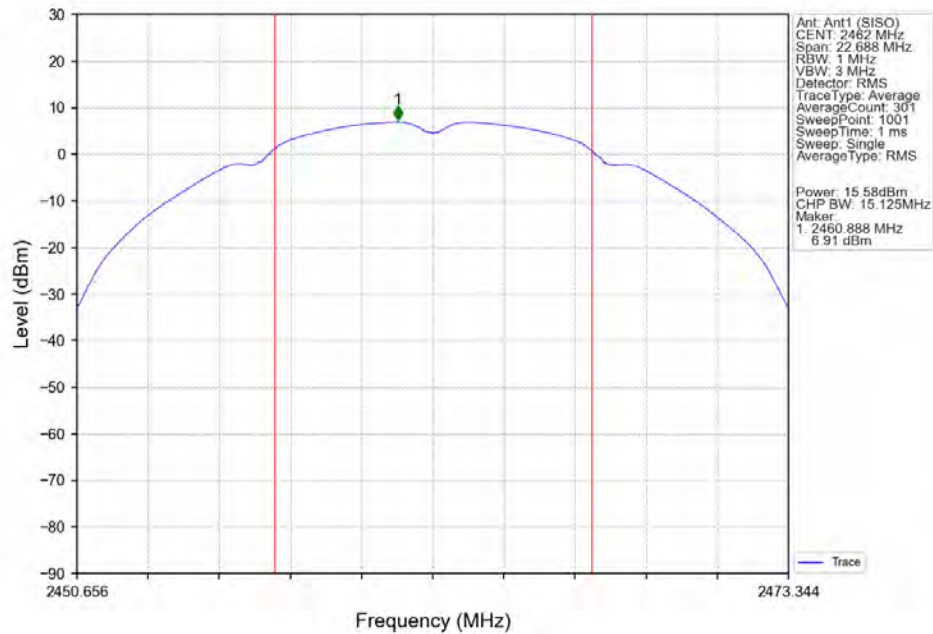


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

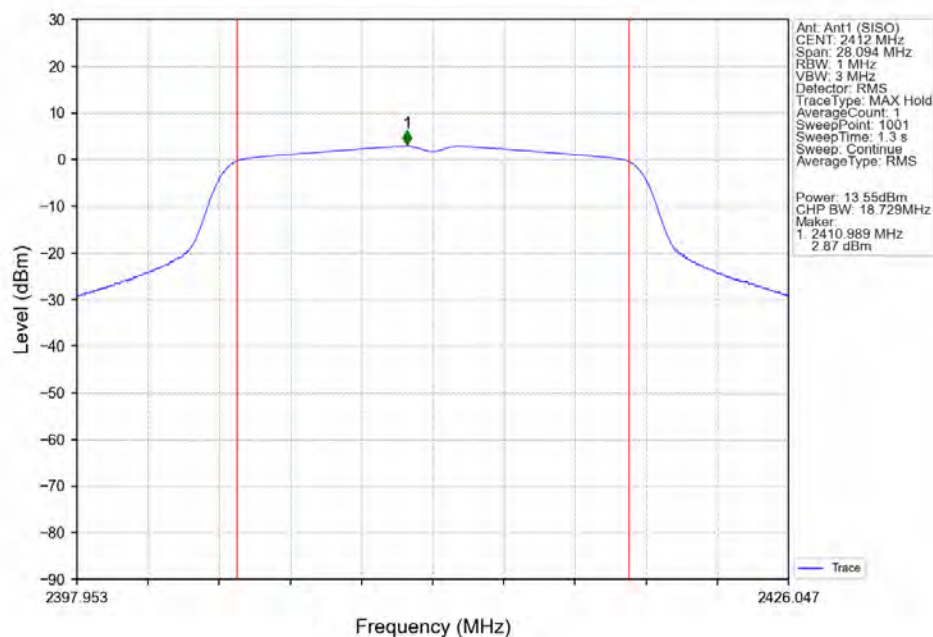

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

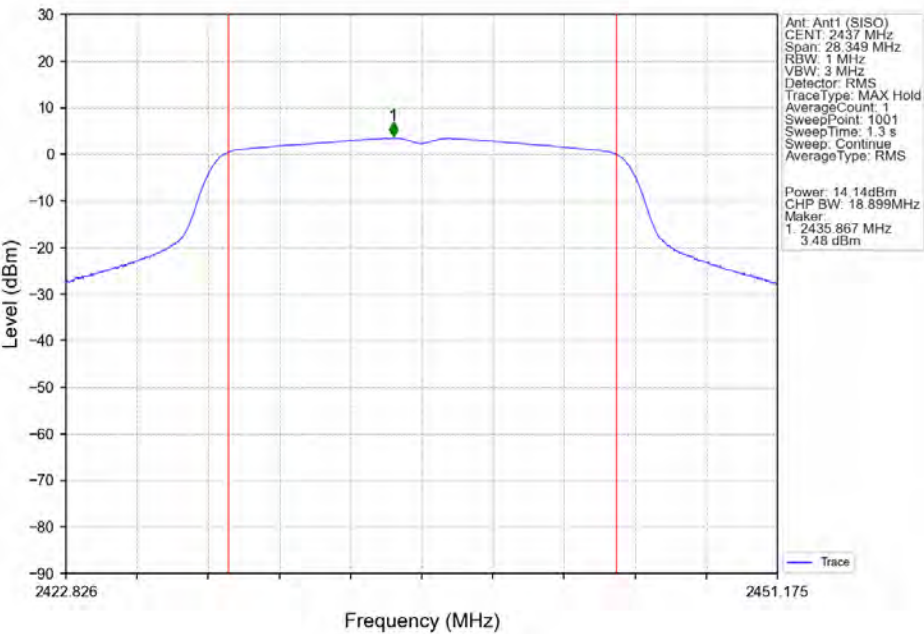

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

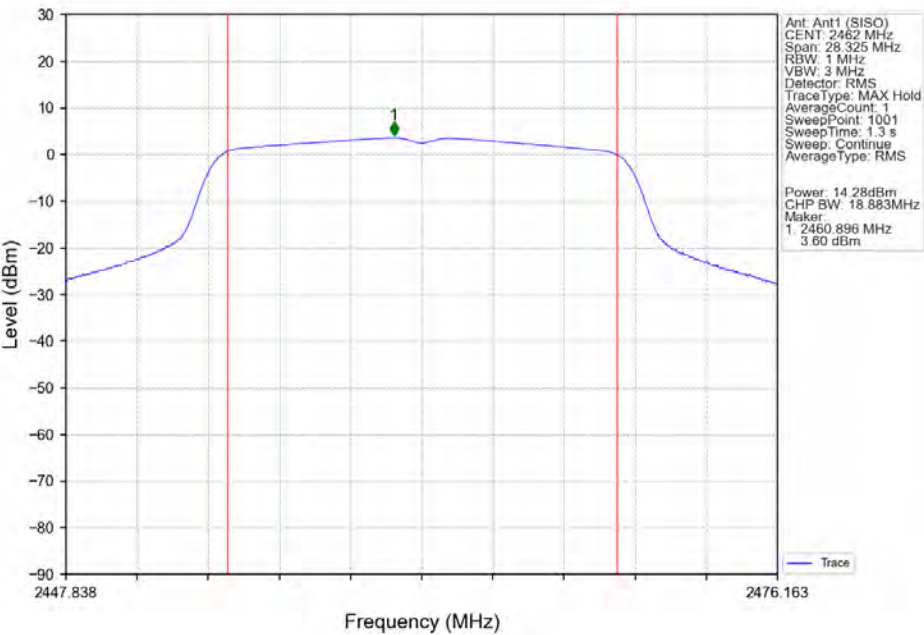


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 152 of 193


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

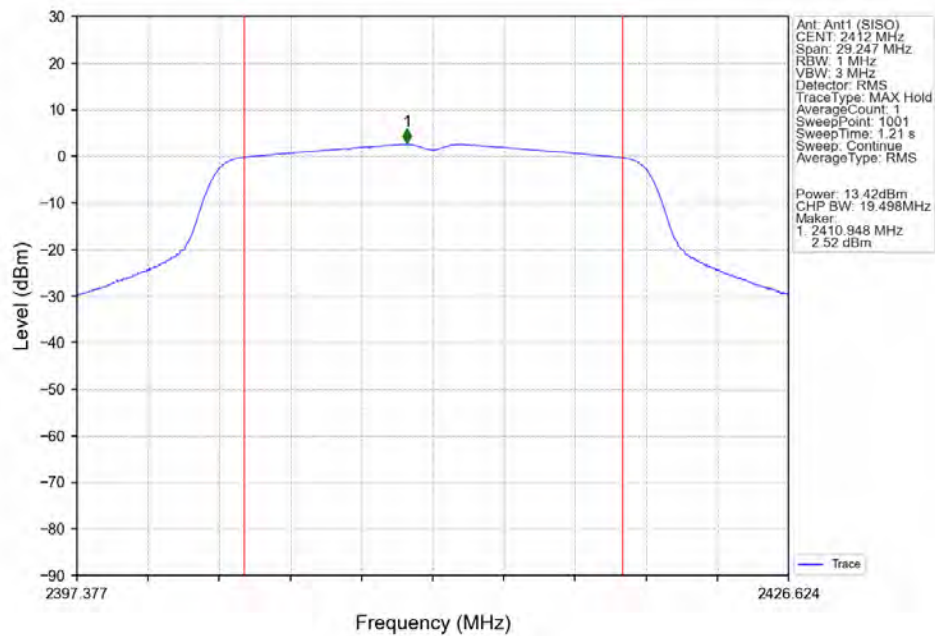


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

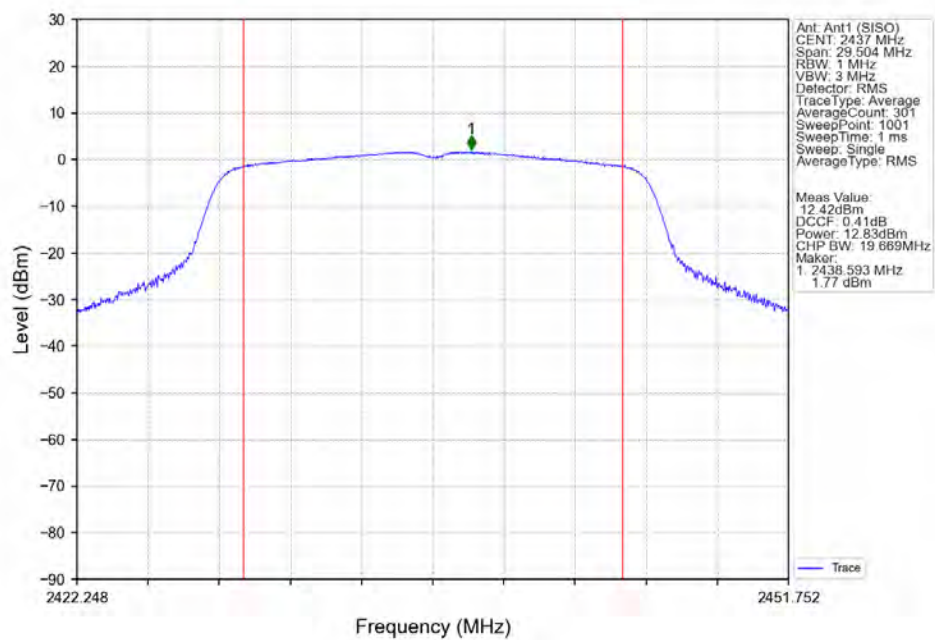


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

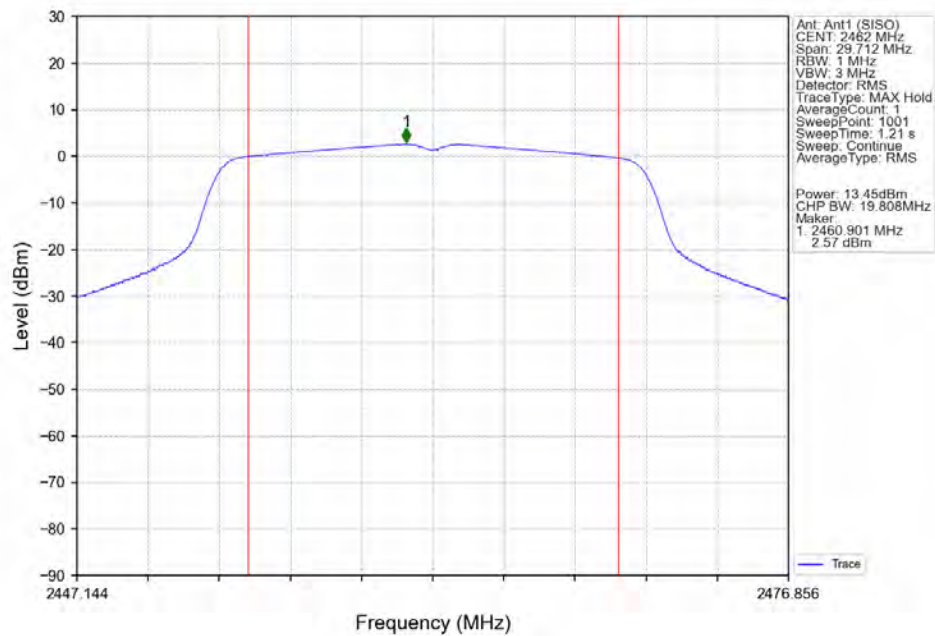


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

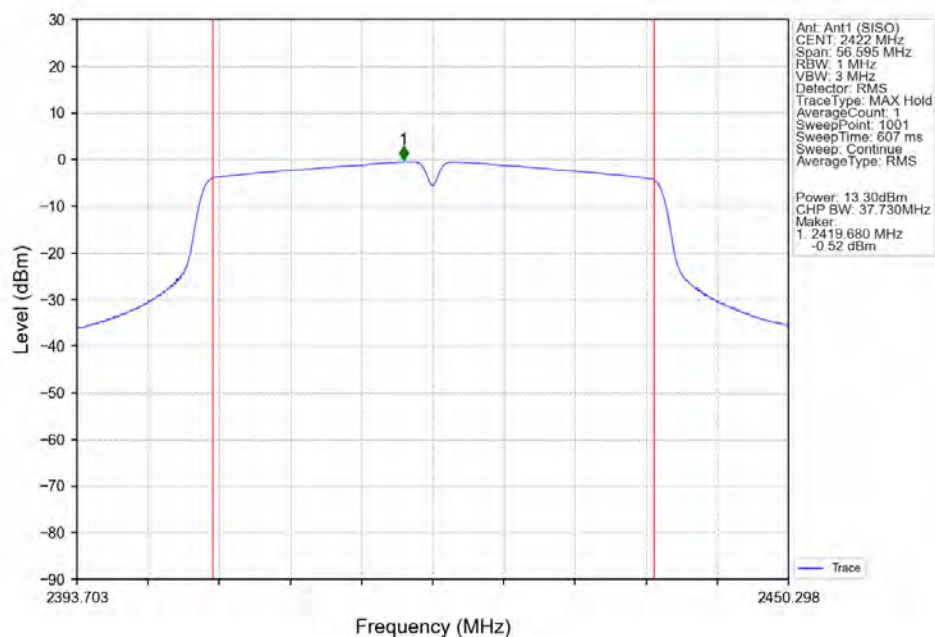

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

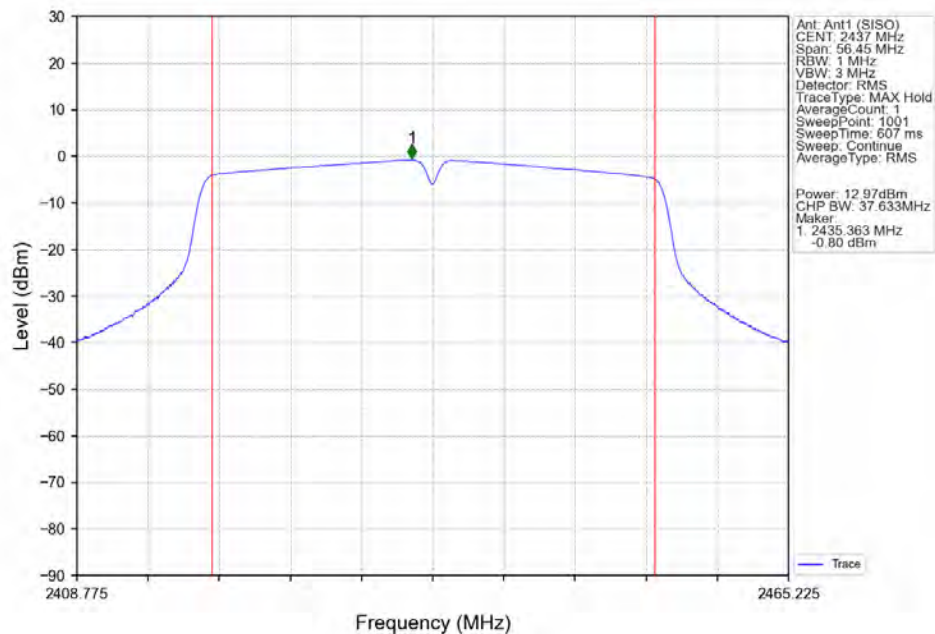

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

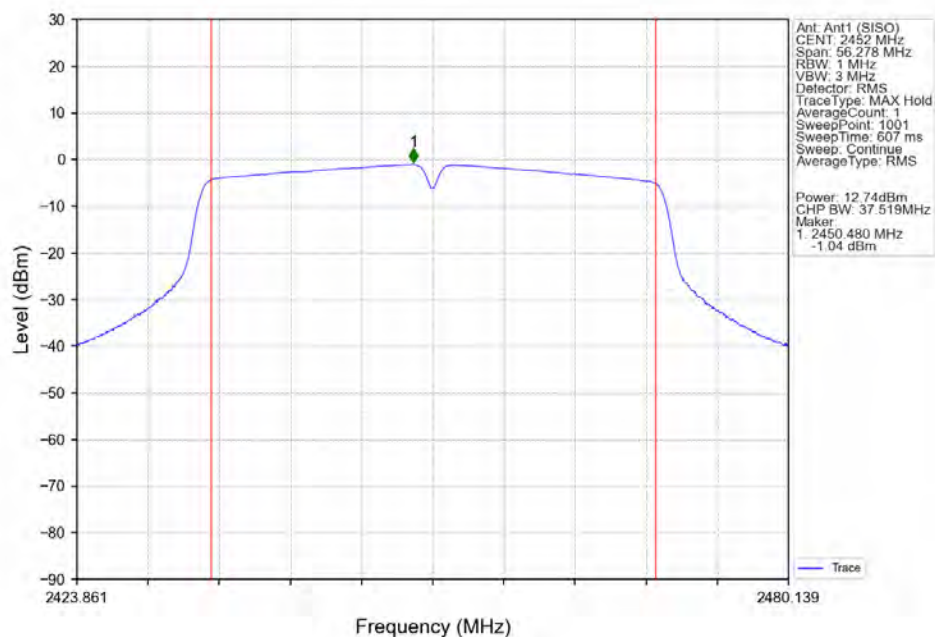


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 155 of 193

802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

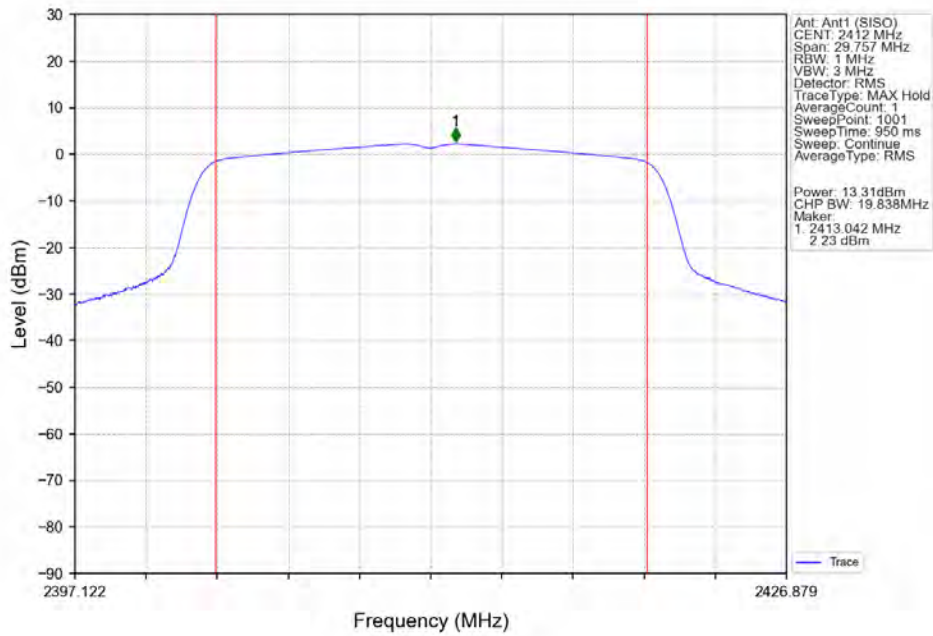

802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

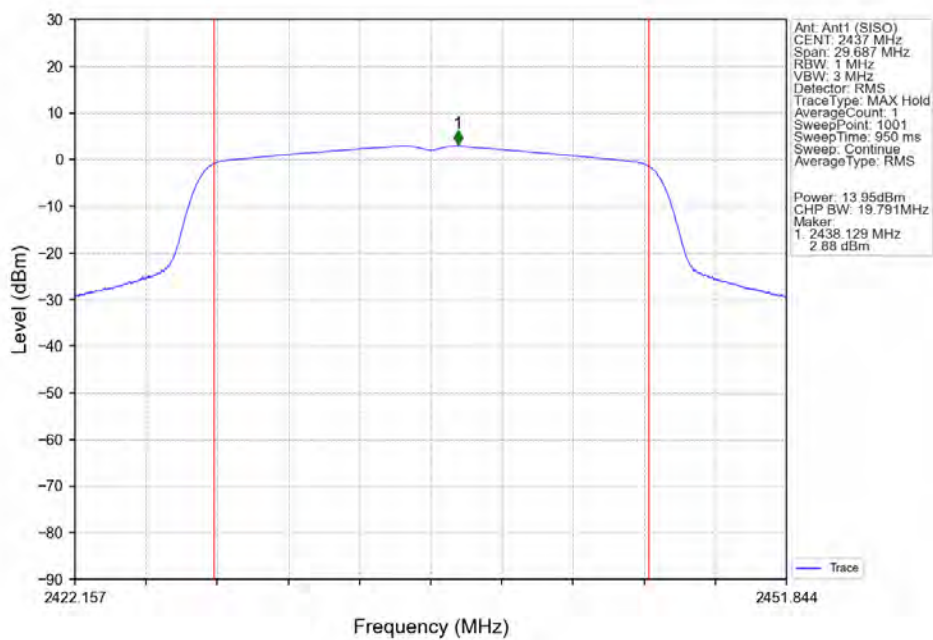


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 156 of 193

802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

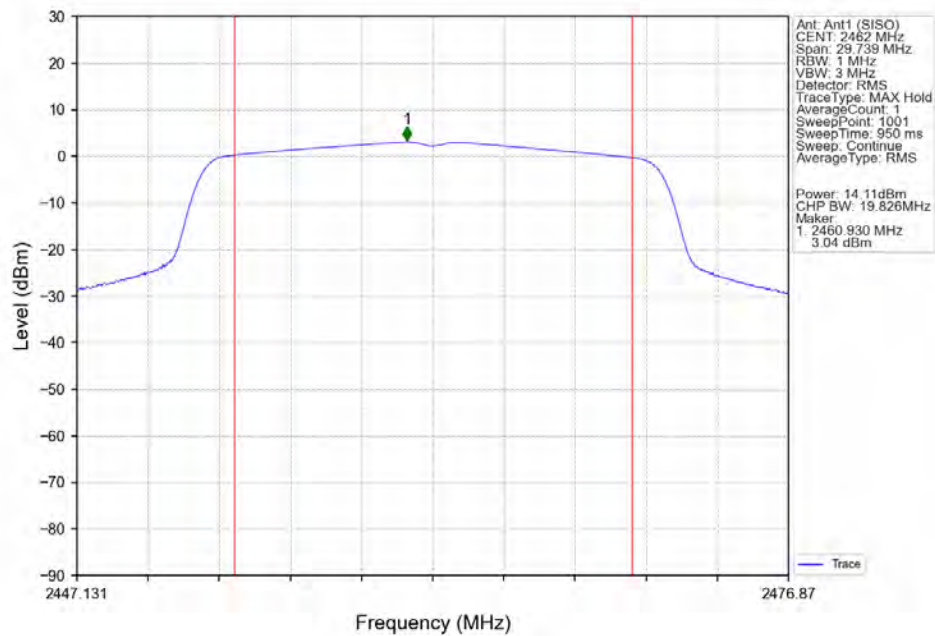

802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

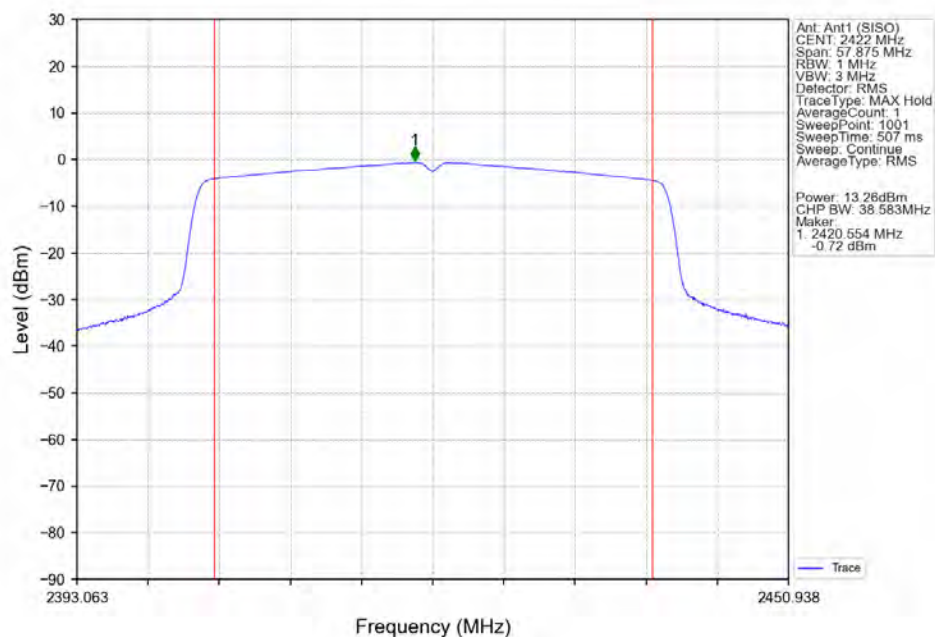


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 157 of 193

802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

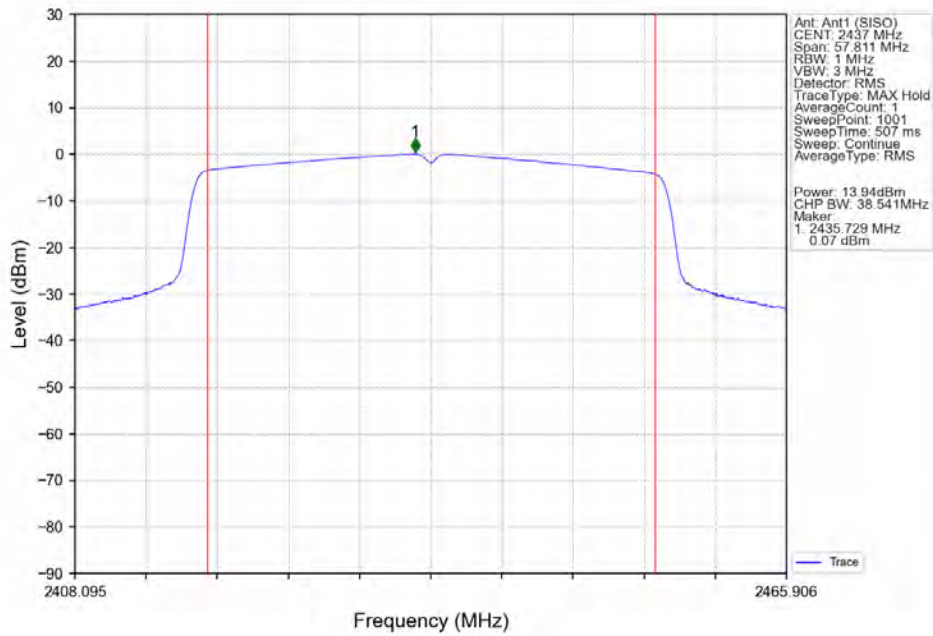

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

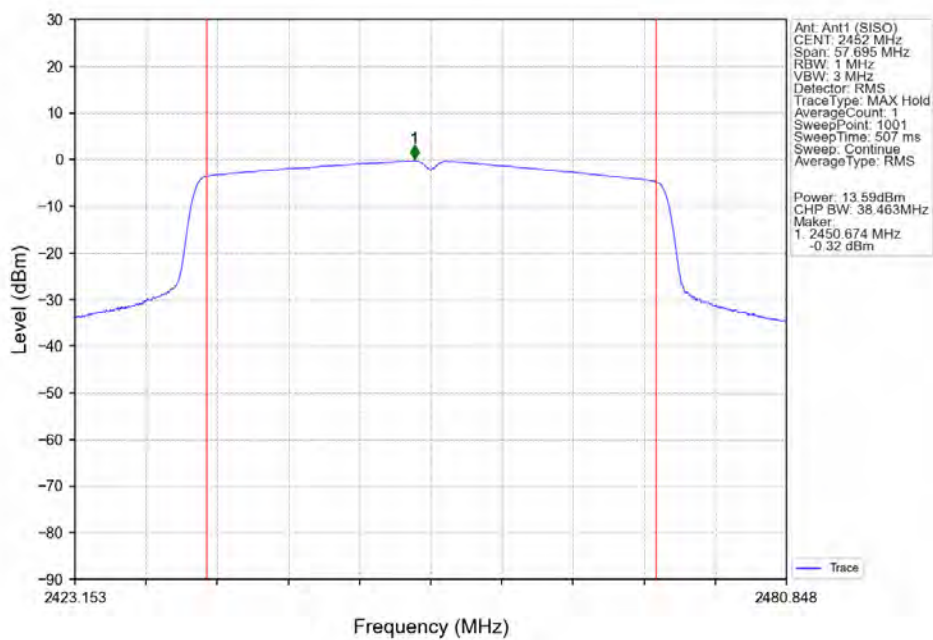

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603

Page: 158 of 193

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/3kHz)		Verdict
					ANT1	Limit	
802.11b	SISO	2412	/	/	-8.01	<=8	Pass
		2437	/	/	-8.12	<=8	Pass
		2462	/	/	-8.33	<=8	Pass
802.11g	SISO	2412	/	/	-11.93	<=8	Pass
		2437	/	/	-11.17	<=8	Pass
		2462	/	/	-11.40	<=8	Pass
802.11n (HT20)	SISO	2412	/	/	-12.14	<=8	Pass
		2437	/	/	-12.17	<=8	Pass
		2462	/	/	-11.44	<=8	Pass
802.11n (HT40)	SISO	2422	/	/	-14.47	<=8	Pass
		2437	/	/	-14.60	<=8	Pass
		2452	/	/	-15.71	<=8	Pass
802.11ax (HE20)	SISO	2412	RU242	Left	-12.00	<=8	Pass
		2437	RU242	Left	-11.74	<=8	Pass
		2462	RU242	Left	-11.55	<=8	Pass
802.11ax (HE40)	SISO	2422	RU484	Left	-15.65	<=8	Pass
		2437	RU484	Left	-14.68	<=8	Pass
		2452	RU484	Left	-15.31	<=8	Pass


Note1: Antenna Gain: Ant1: 3.00dBi;

4.2 Test Graph


4.2.1 PSD

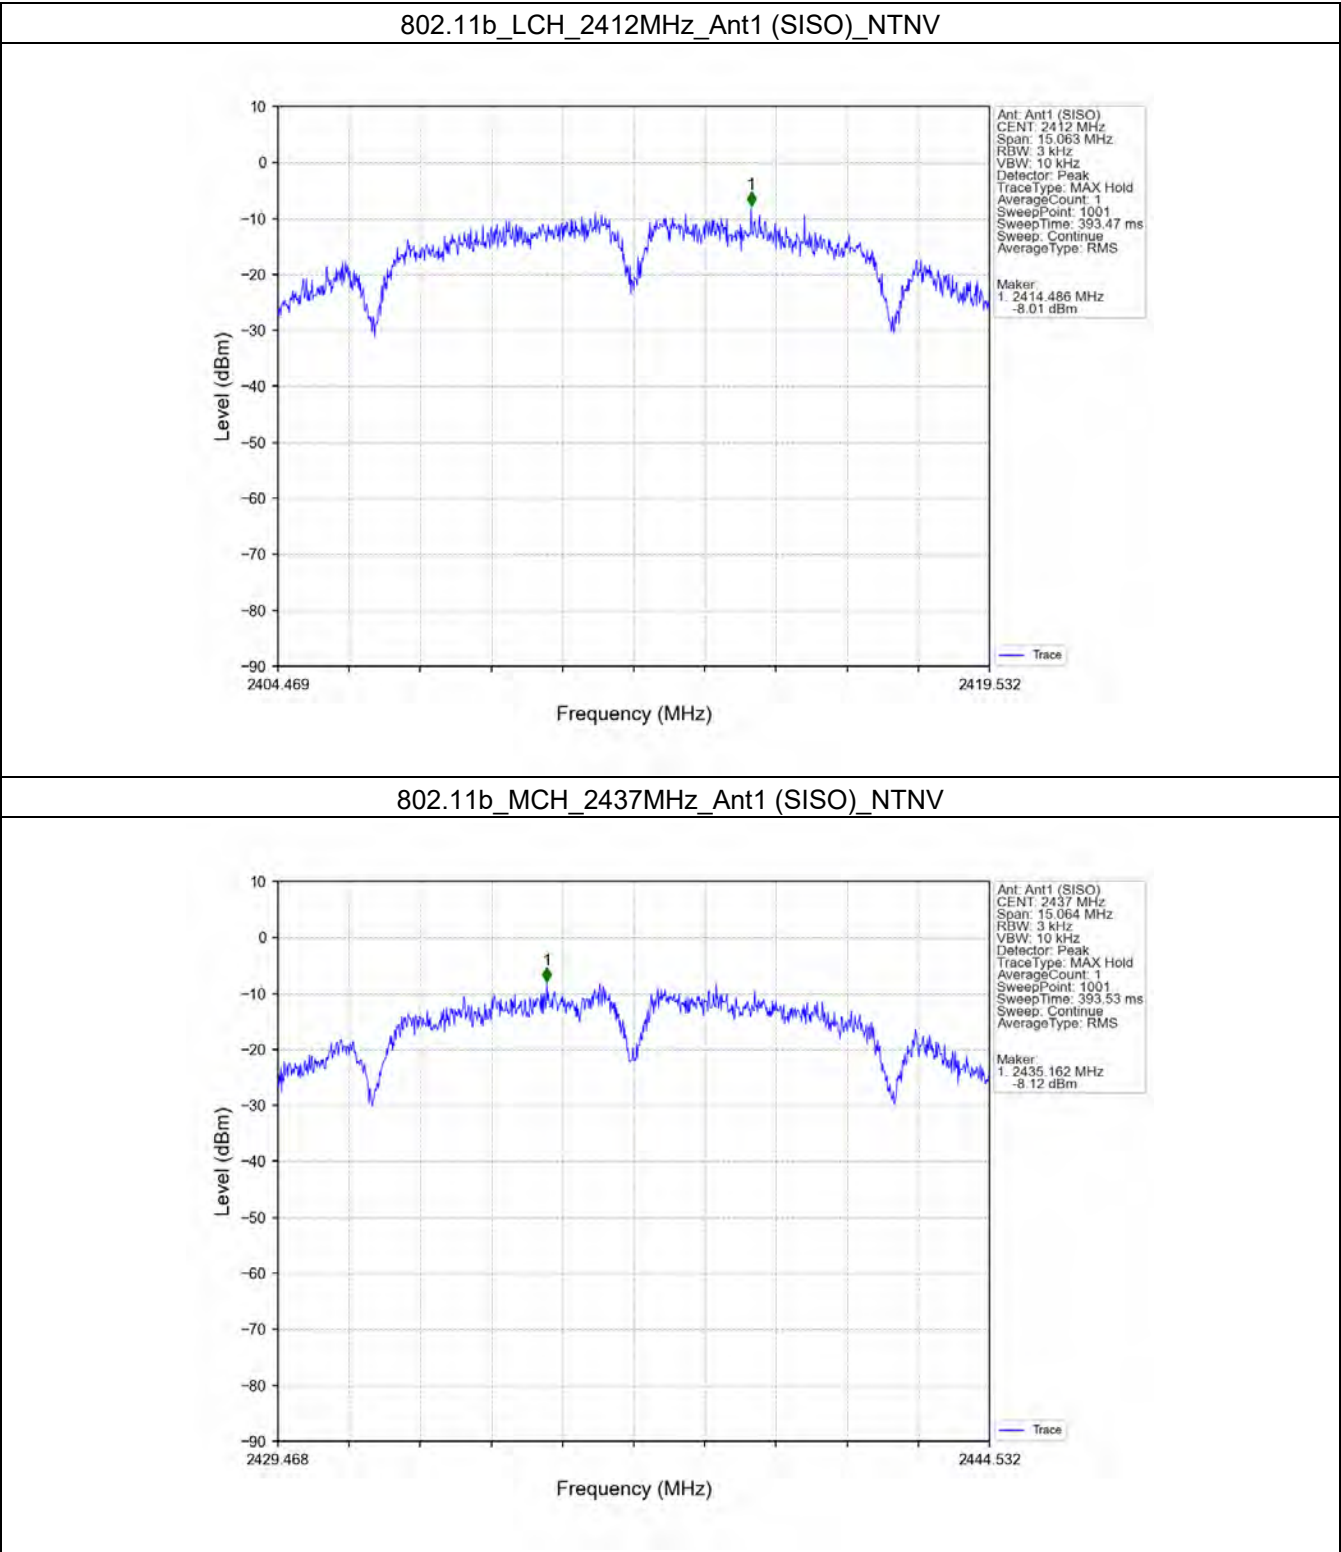


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

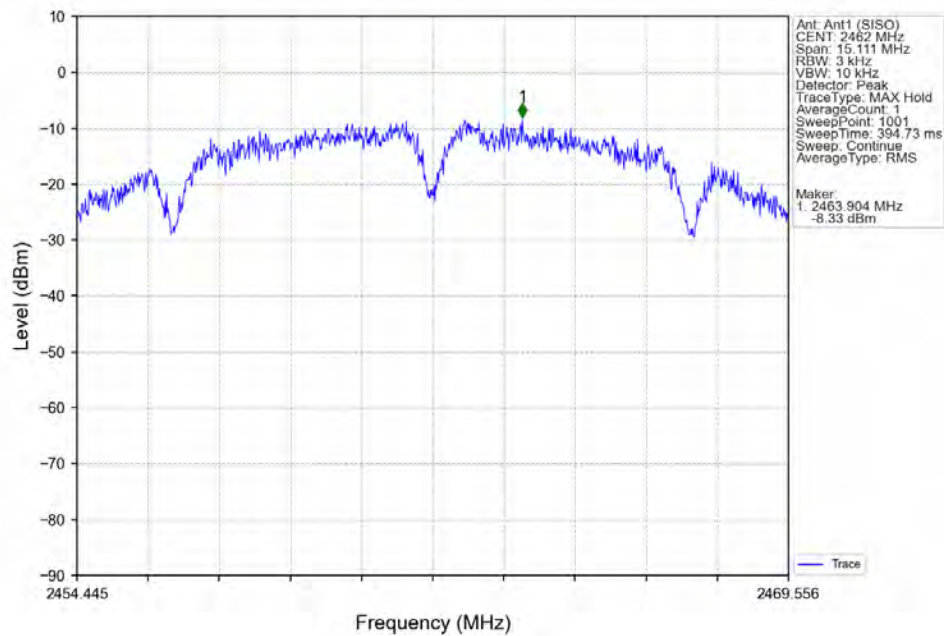


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

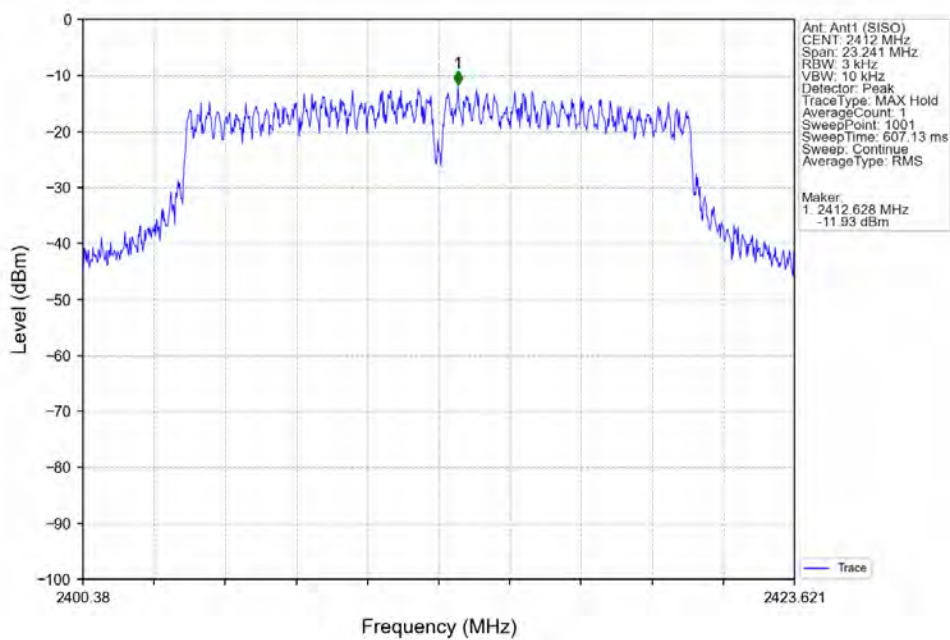

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

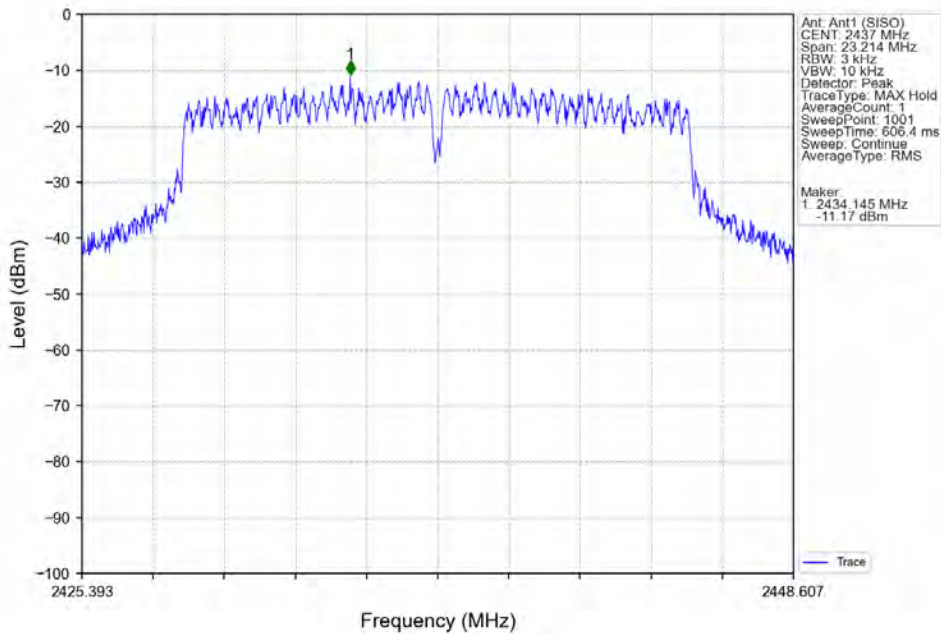

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

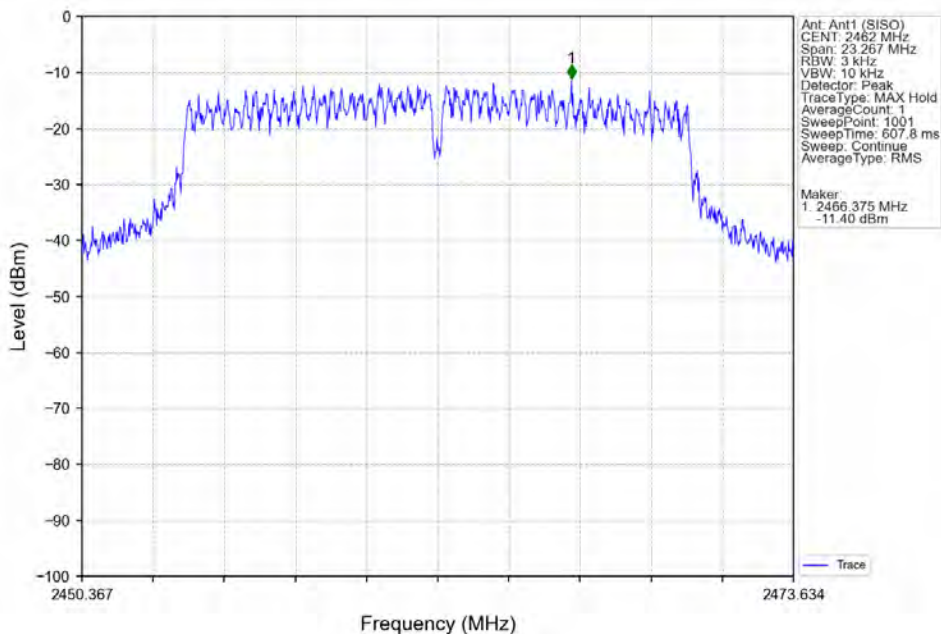


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 162 of 193


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

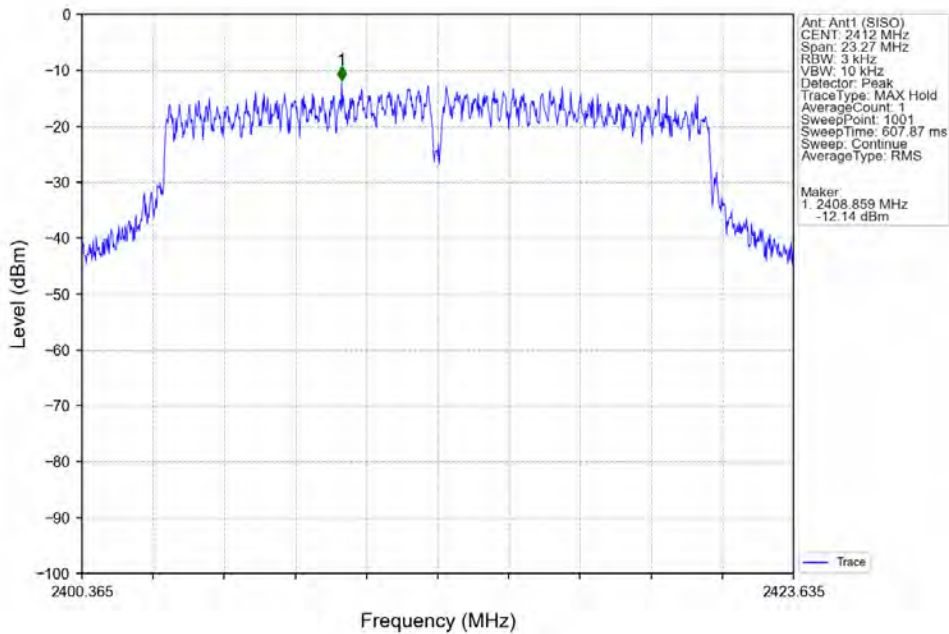


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

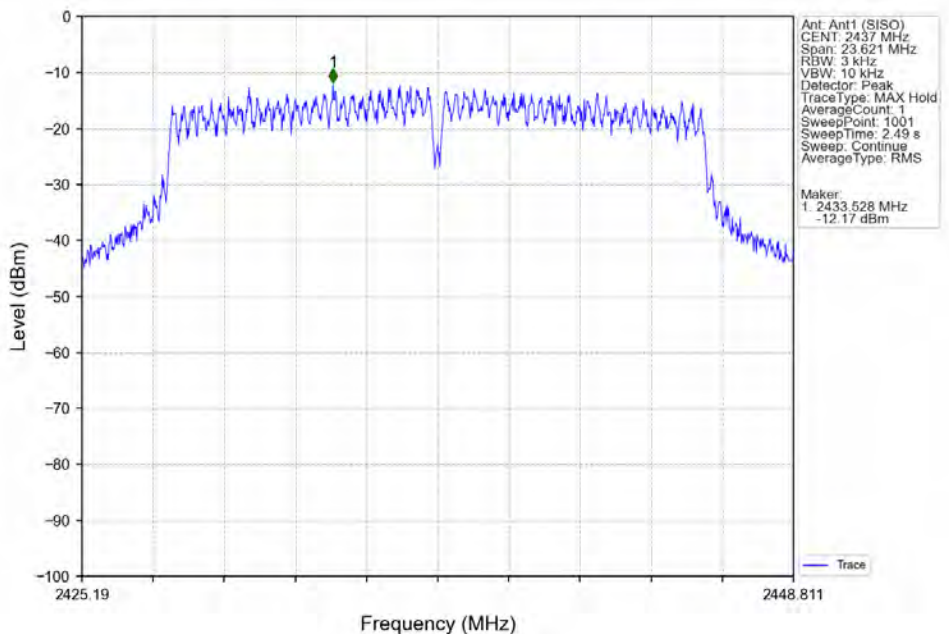

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

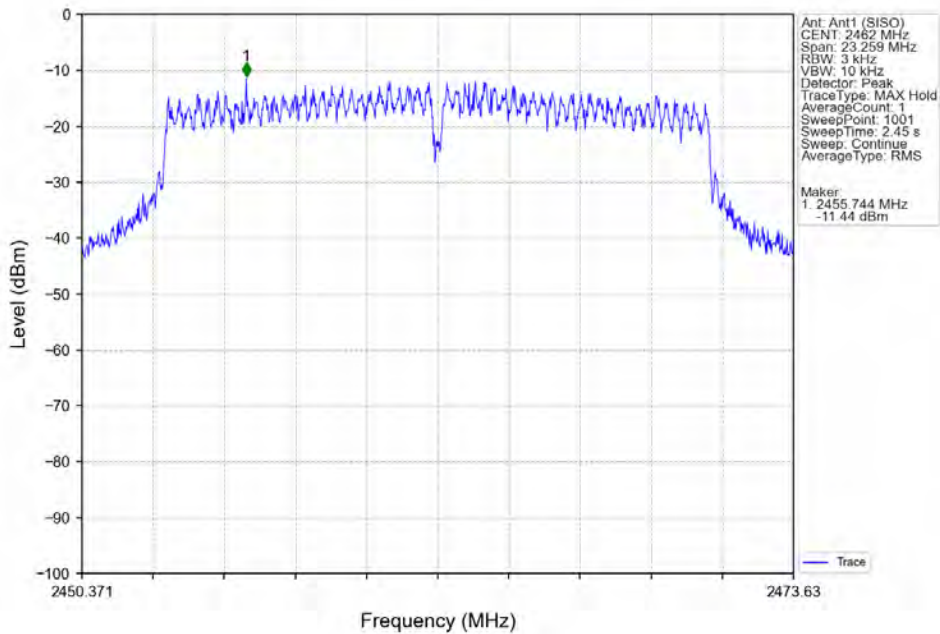

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

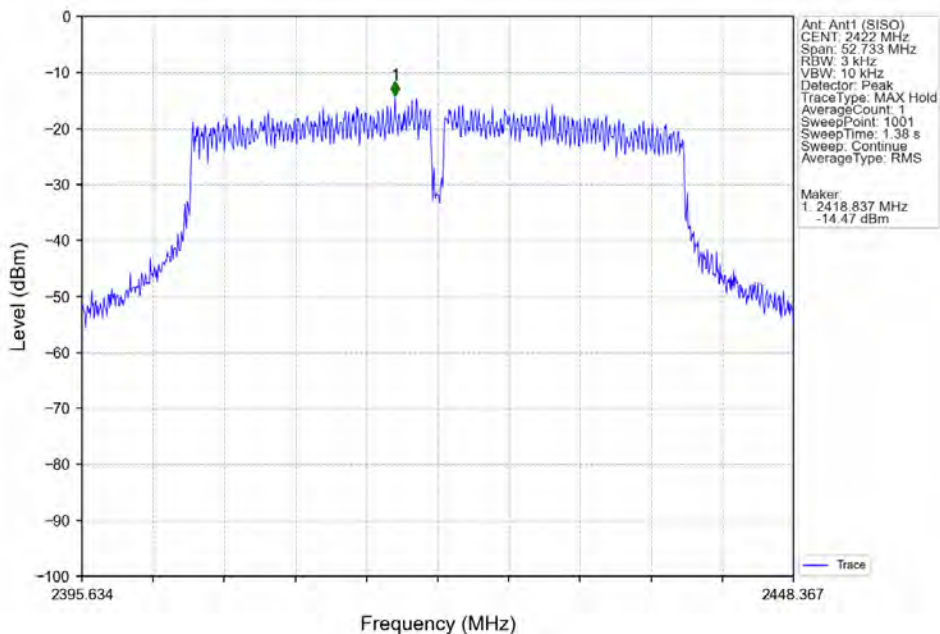


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 164 of 193

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

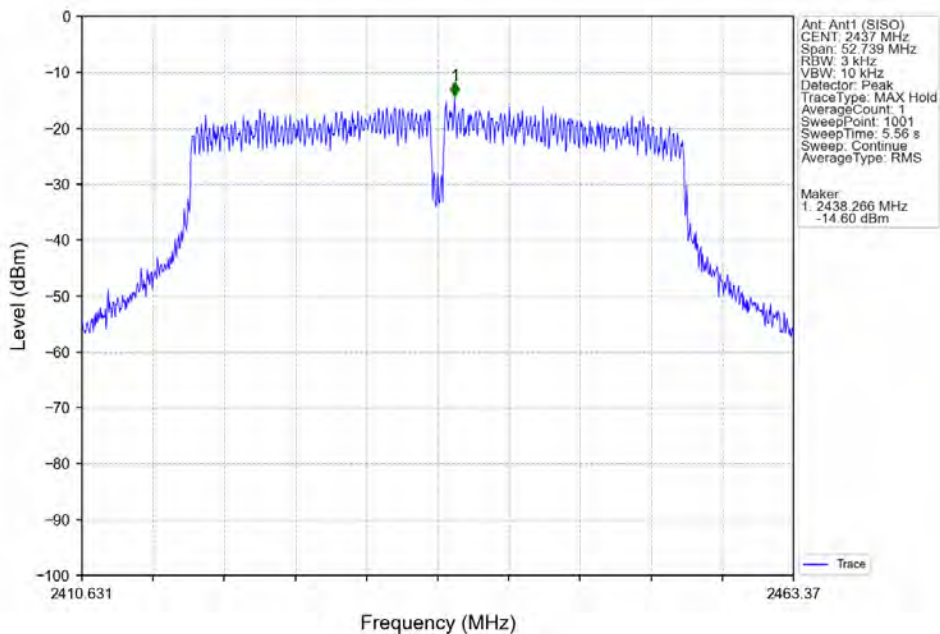

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

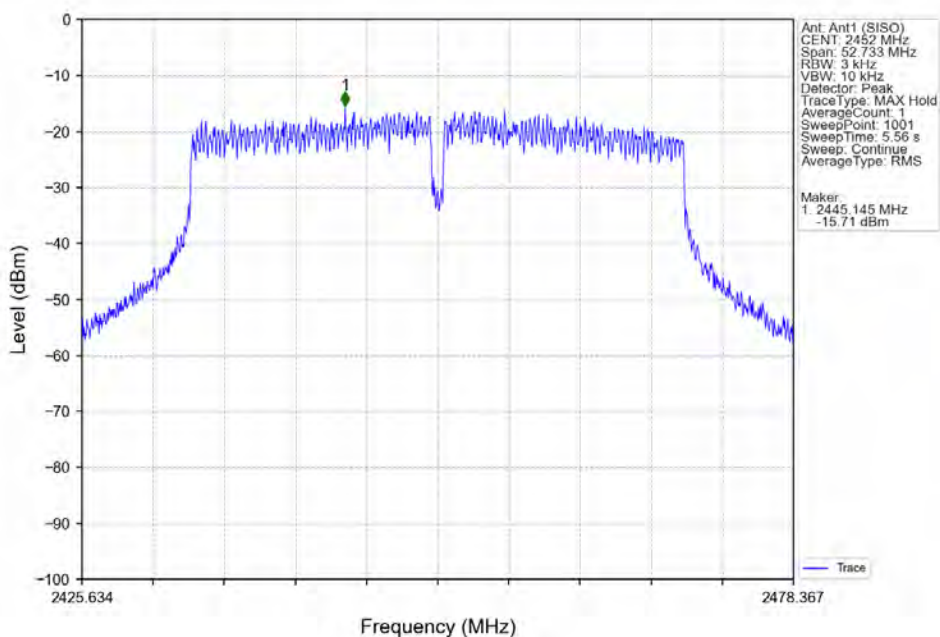


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 165 of 193

802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

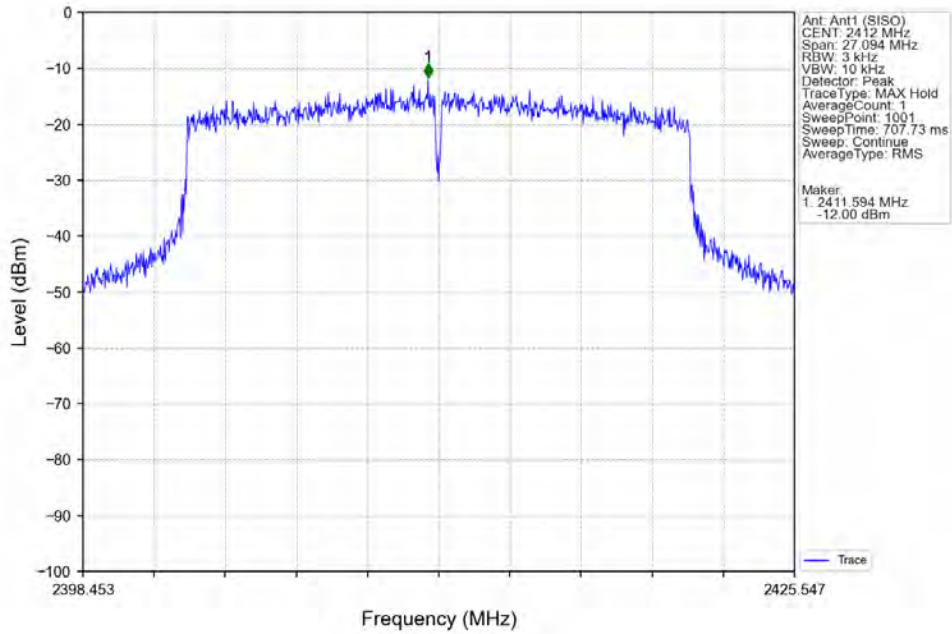

802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

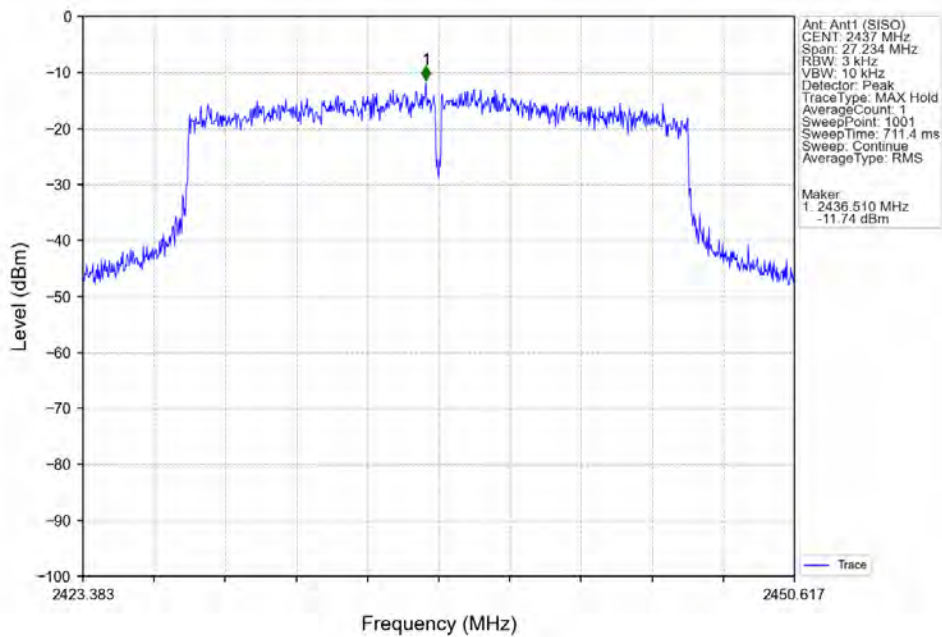


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 166 of 193

802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

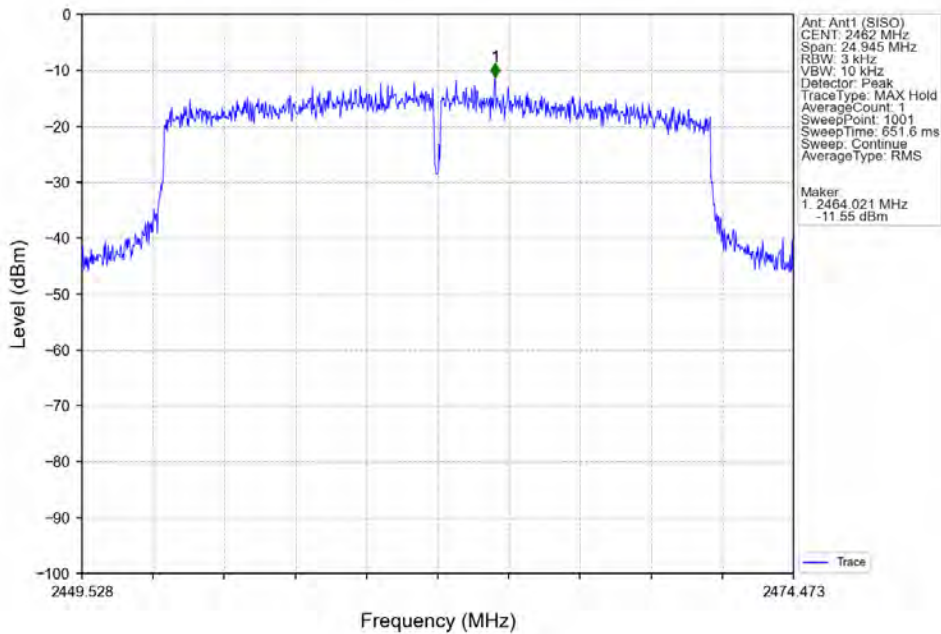

802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

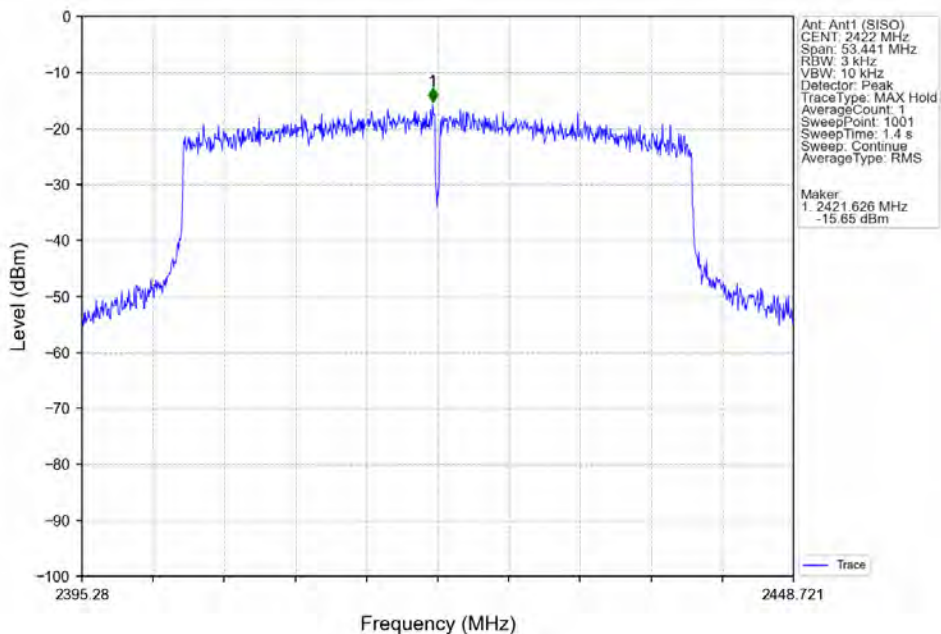


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 167 of 193

802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

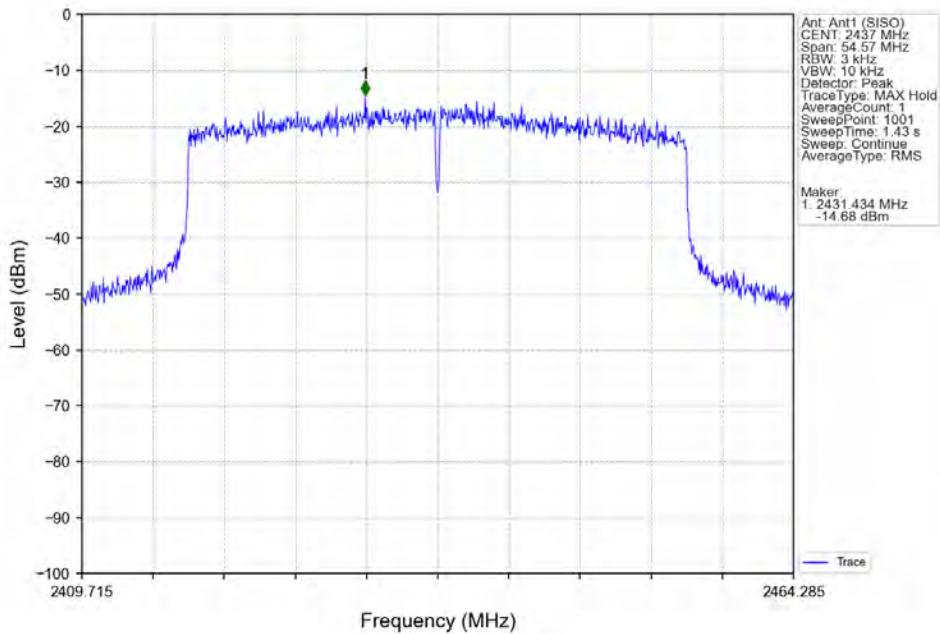

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

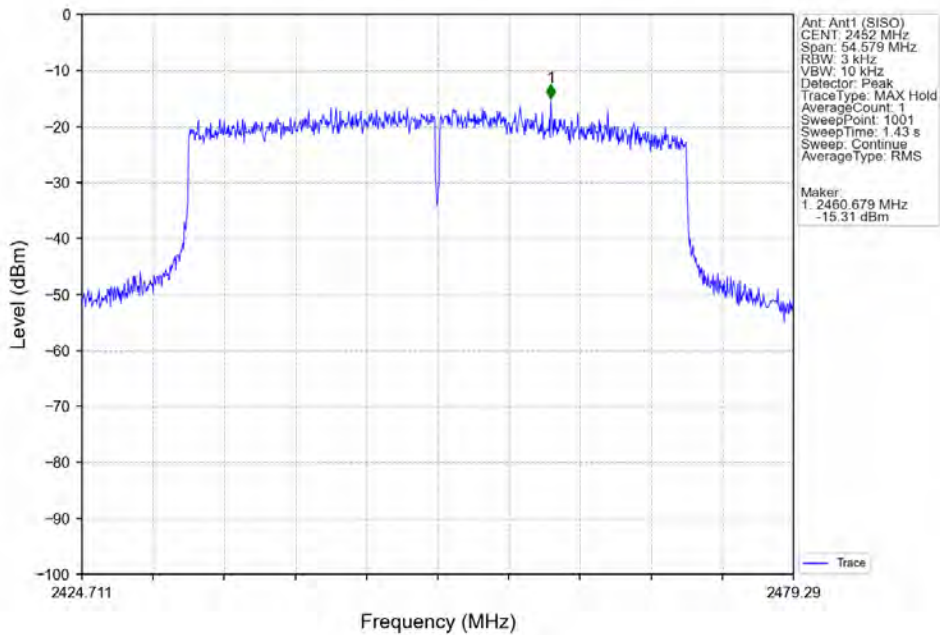

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)
802.11b	SISO	2412	/	/	1	6.23
		2437	/	/	1	6.62
		2462	/	/	1	6.97
802.11g	SISO	2412	/	/	1	2.82
		2437	/	/	1	4.48
		2462	/	/	1	4.35
802.11n (HT20)	SISO	2412	/	/	1	2.82
		2437	/	/	1	4.18
		2462	/	/	1	3.64
802.11n (HT40)	SISO	2422	/	/	1	-0.27
		2437	/	/	1	-0.45
		2452	/	/	1	-0.54
802.11ax (HE20)	SISO	2412	RU242	Left	1	2.89
		2437	RU242	Left	1	3.55
		2462	RU242	Left	1	3.58
802.11ax (HE40)	SISO	2422	RU484	Left	1	0.01
		2437	RU484	Left	1	0.77
		2452	RU484	Left	1	0.10

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	/	/	1	6.97	-23.03	Pass
		2437	/	/	1	6.97	-23.03	Pass
		2462	/	/	1	6.97	-23.03	Pass
802.11g	SISO	2412	/	/	1	4.48	-25.52	Pass
		2437	/	/	1	4.48	-25.52	Pass
		2462	/	/	1	4.48	-25.52	Pass



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240800162603


Page: 169 of 193

802.11n (HT20)	SISO	2412	/	/	1	4.18	-25.82	Pass
		2437	/	/	1	4.18	-25.82	Pass
		2462	/	/	1	4.18	-25.82	Pass
802.11n (HT40)	SISO	2422	/	/	1	-0.27	-30.27	Pass
		2437	/	/	1	-0.27	-30.27	Pass
		2452	/	/	1	-0.27	-30.27	Pass
802.11ax (HE20)	SISO	2412	RU242	Left	1	3.58	-26.42	Pass
		2437	RU242	Left	1	3.58	-26.42	Pass
		2462	RU242	Left	1	3.58	-26.42	Pass
802.11ax (HE40)	SISO	2422	RU484	Left	1	0.77	-29.23	Pass
		2437	RU484	Left	1	0.77	-29.23	Pass
		2452	RU484	Left	1	0.77	-29.23	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph

5.2.1 Ref

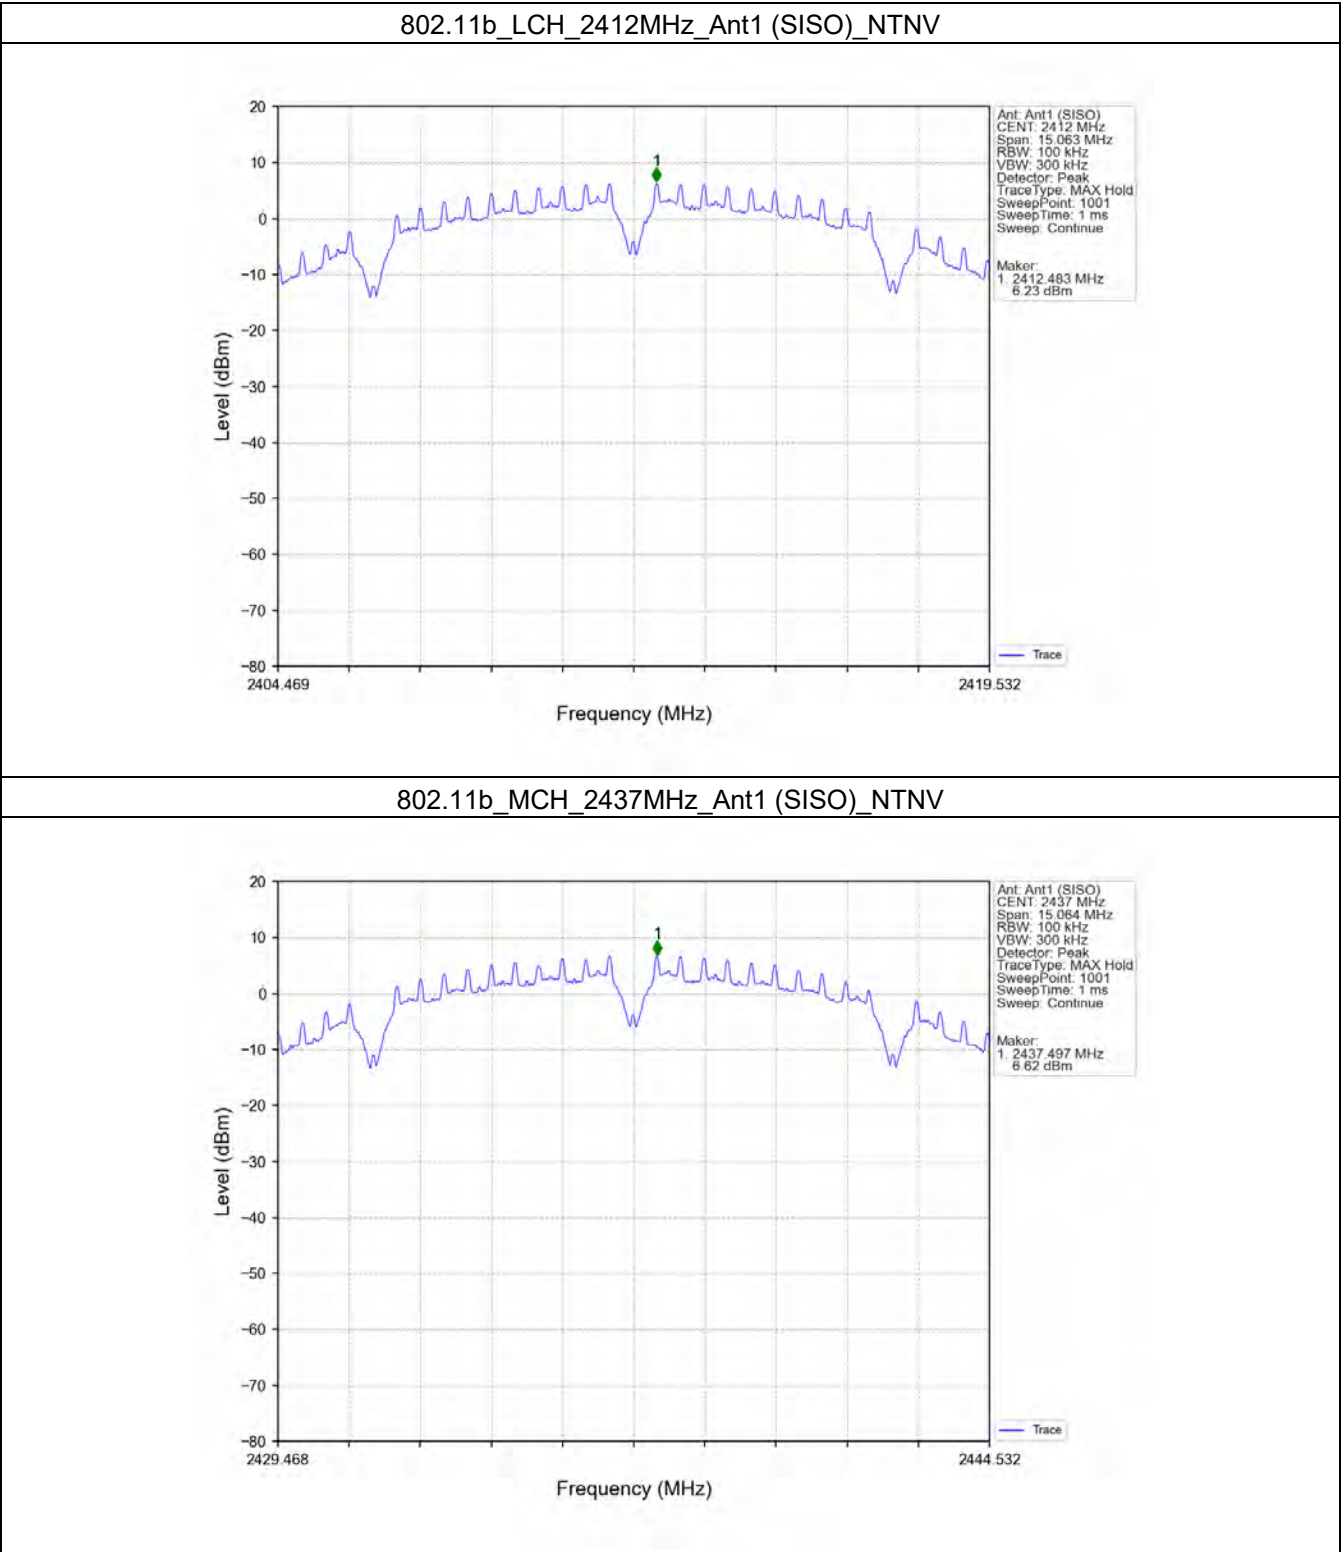


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 171 of 193


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

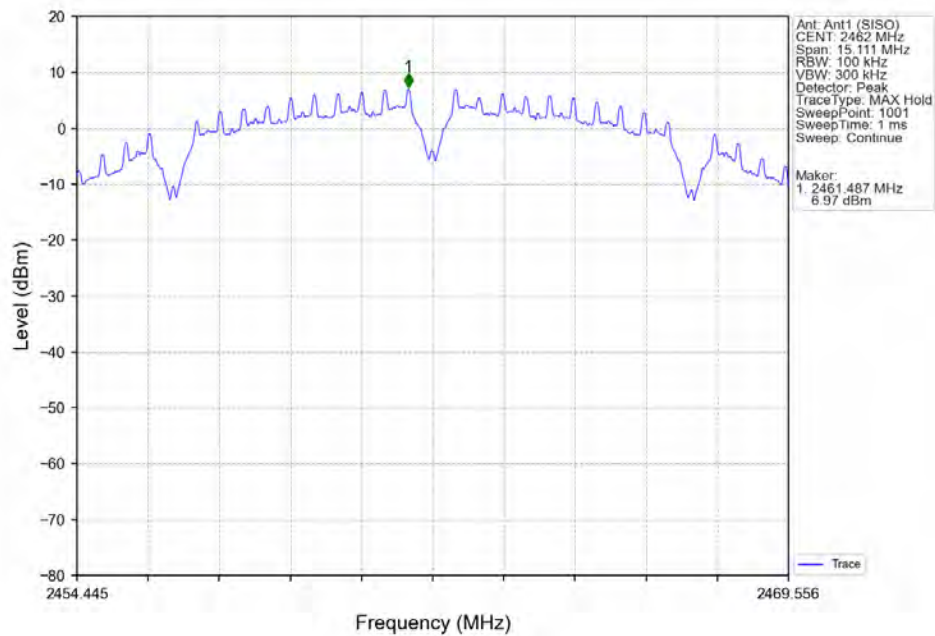


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

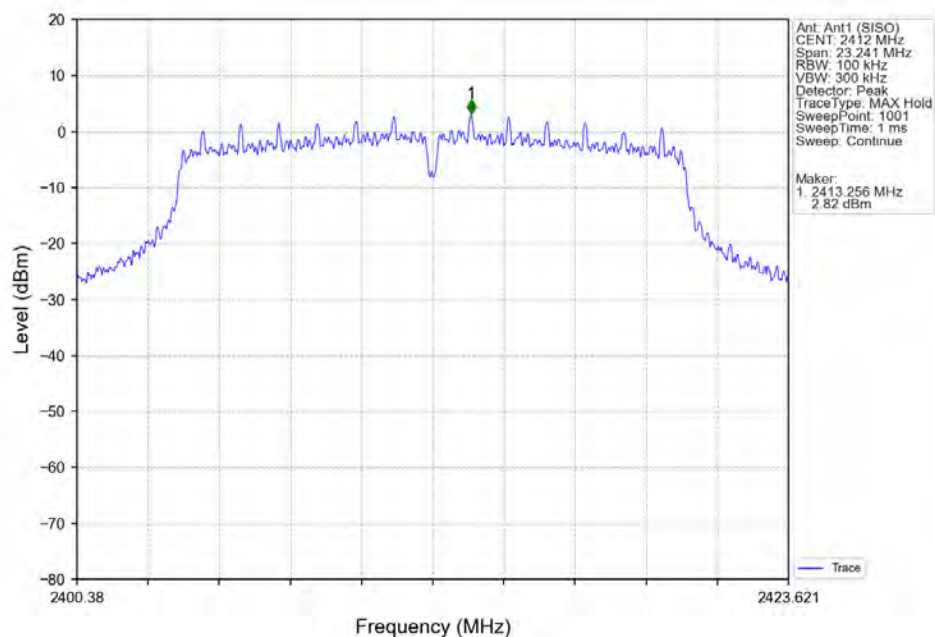

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

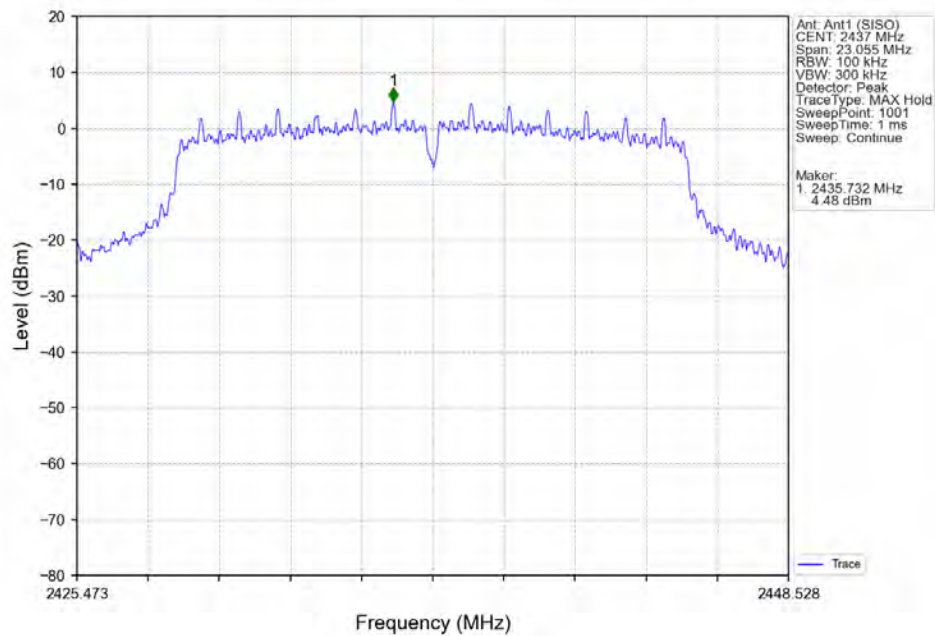

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

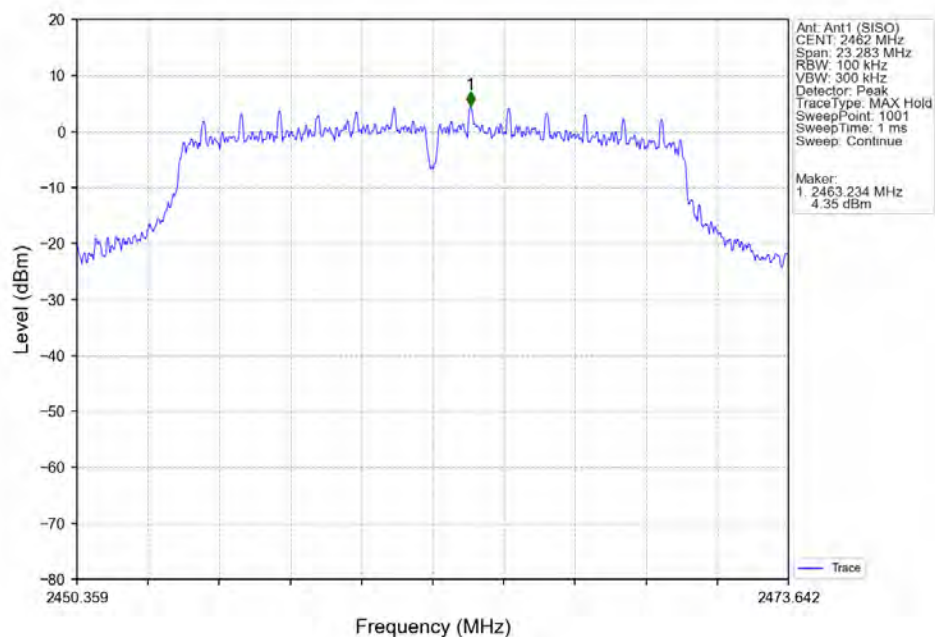


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 173 of 193


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

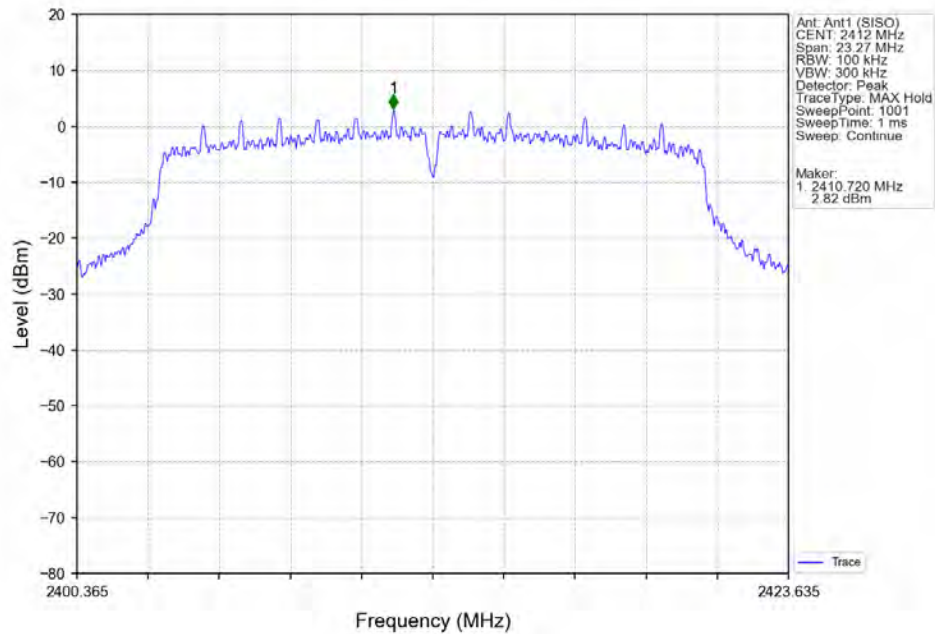


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

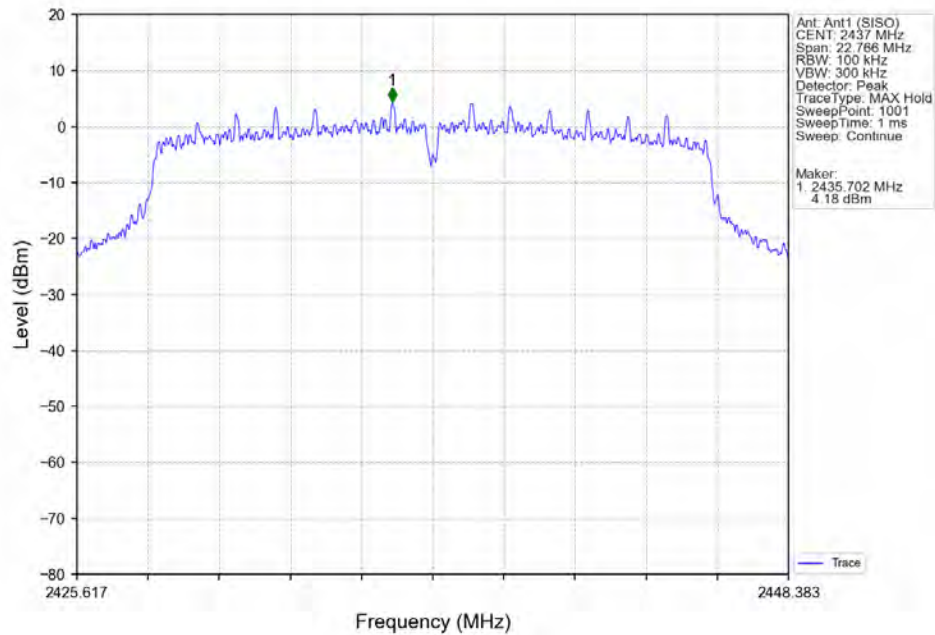


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

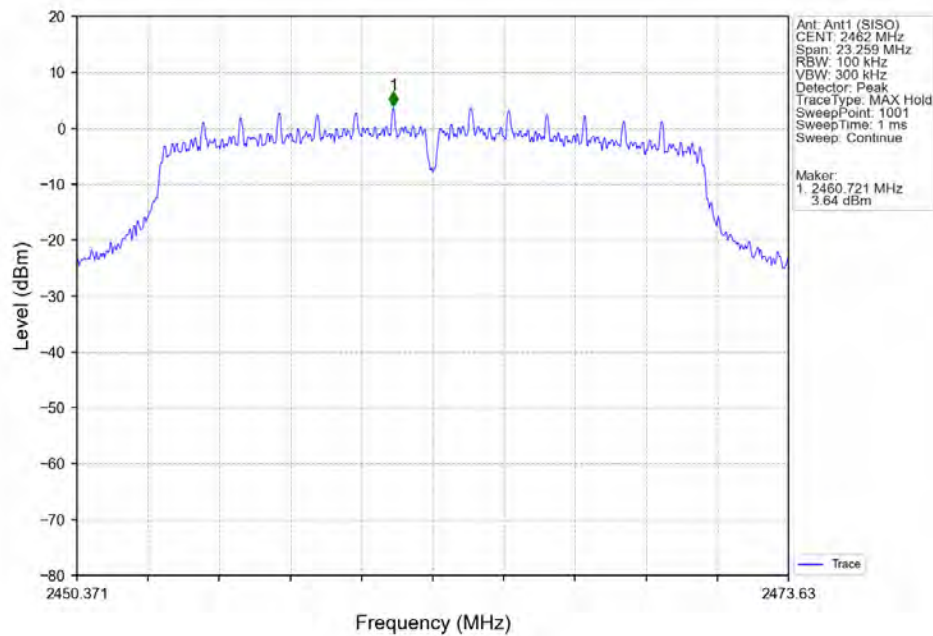


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

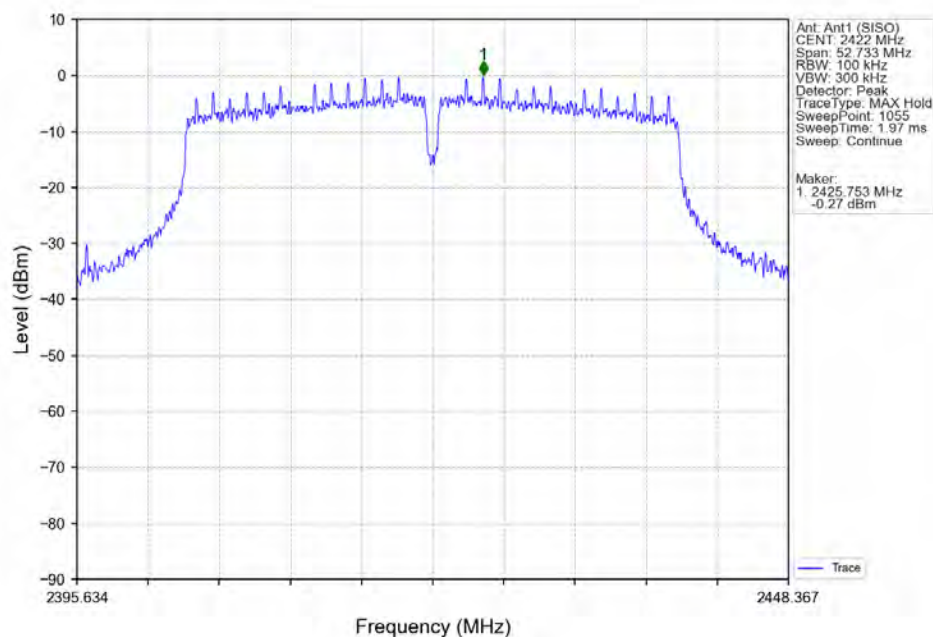

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

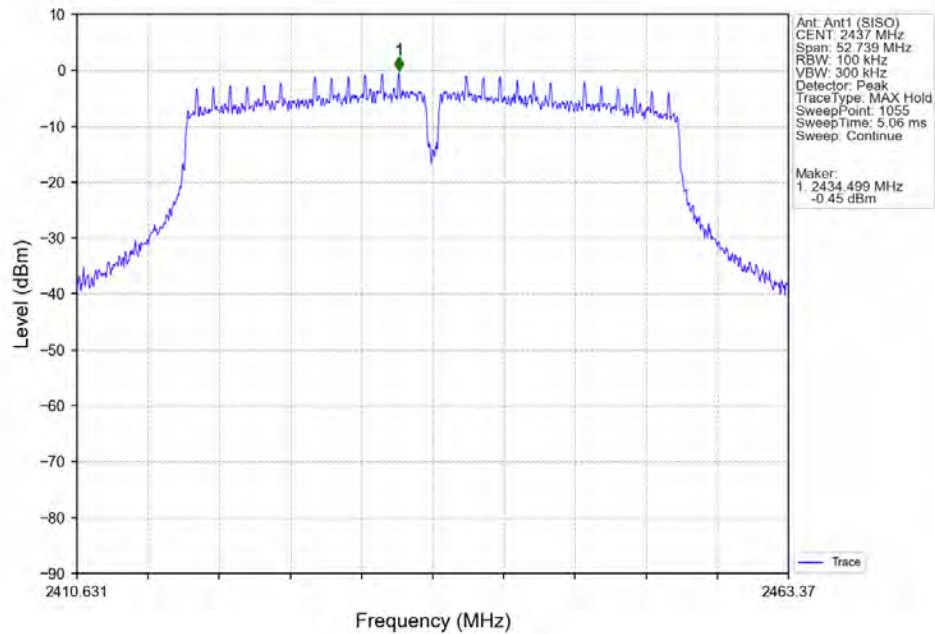

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

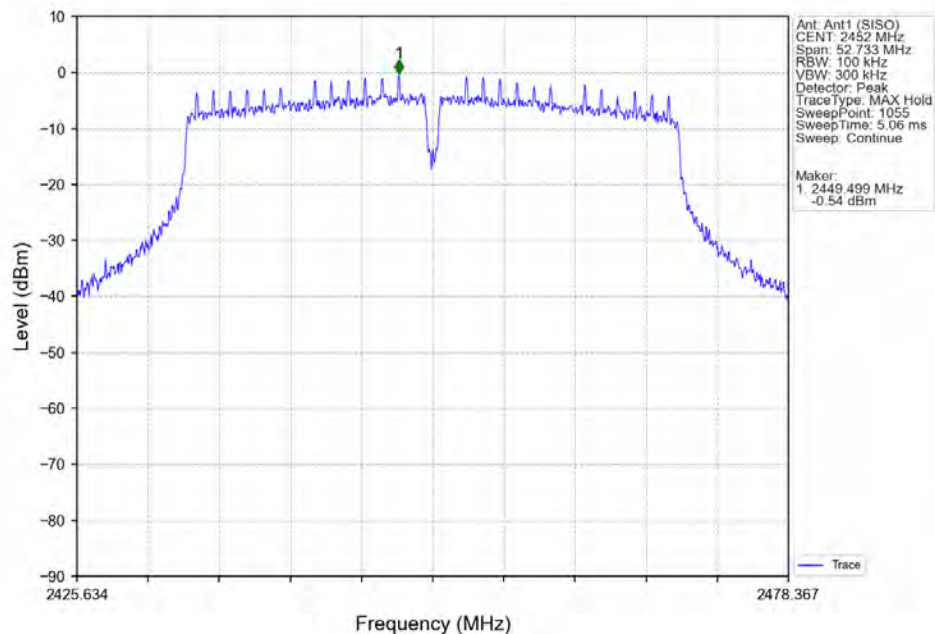


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 176 of 193

802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

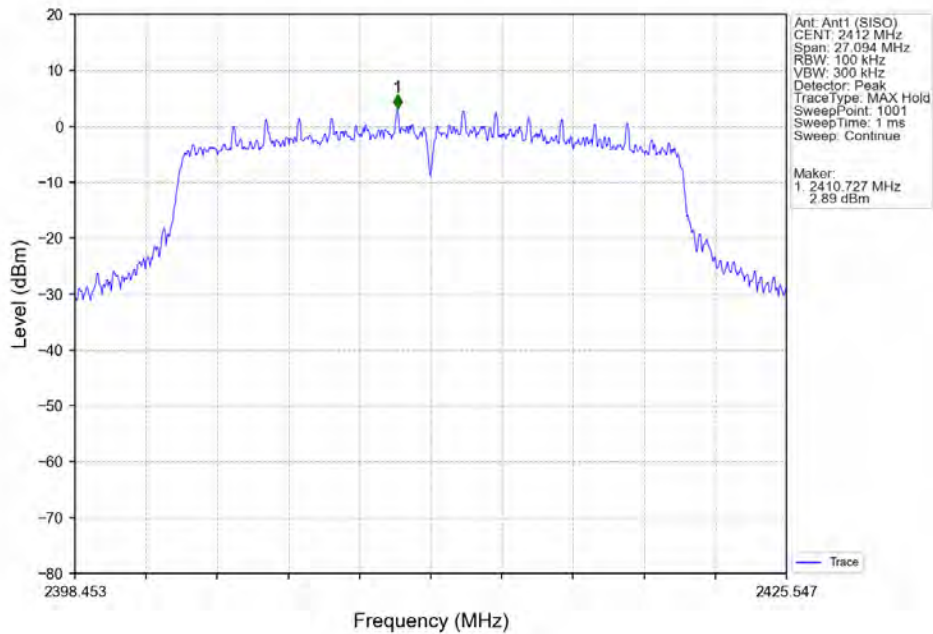

802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

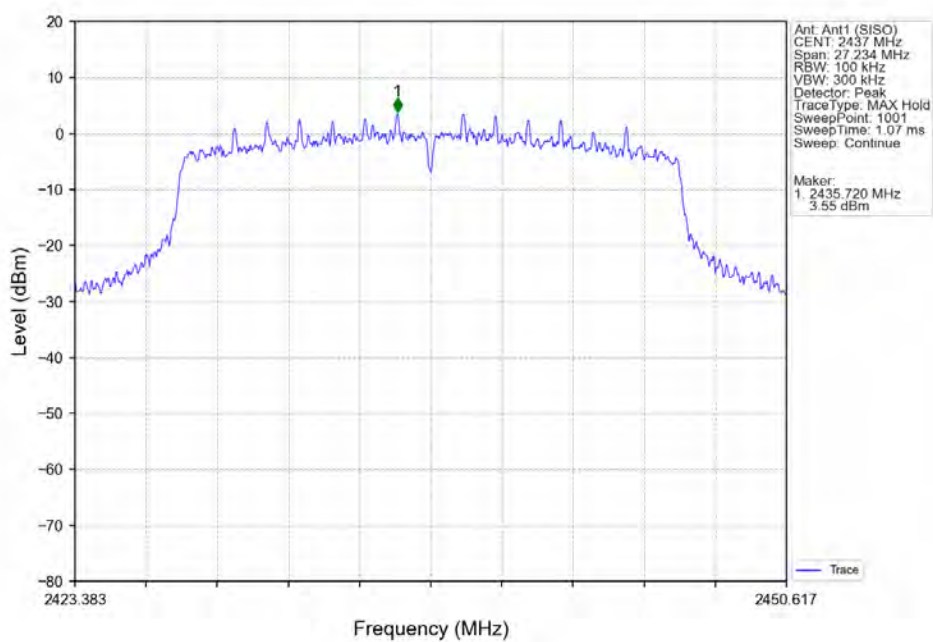


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 177 of 193

802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

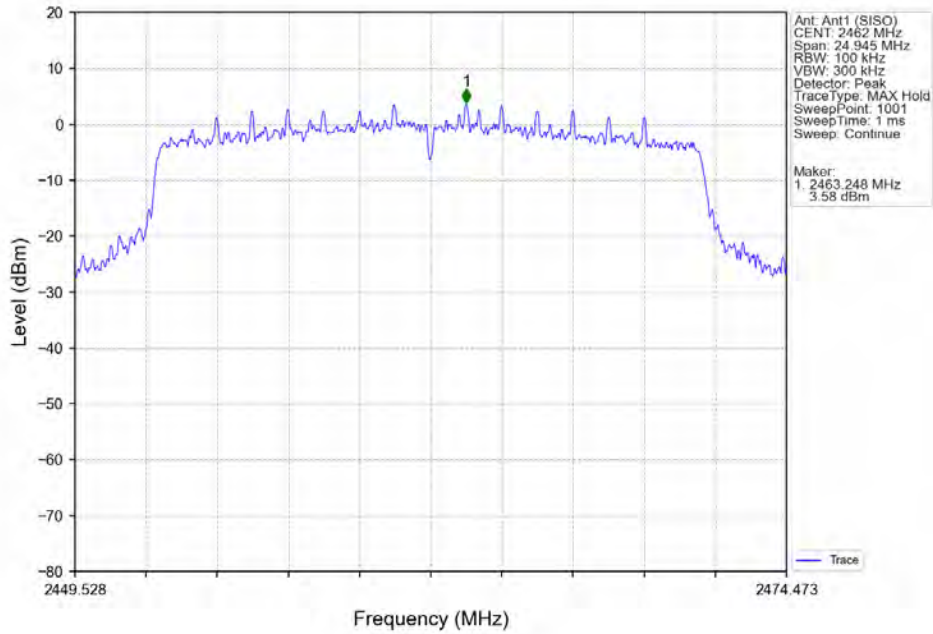

802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

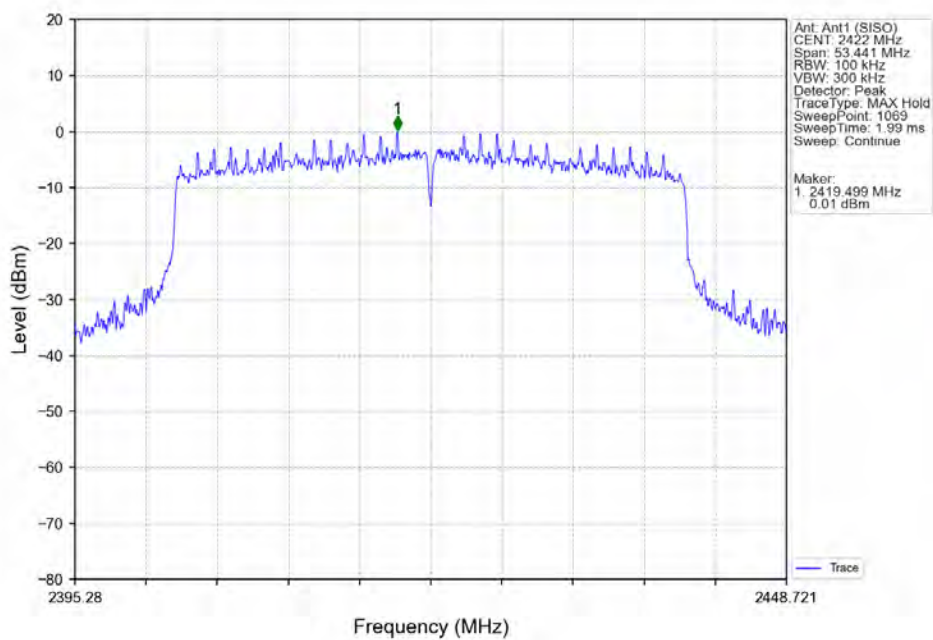


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 178 of 193


802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

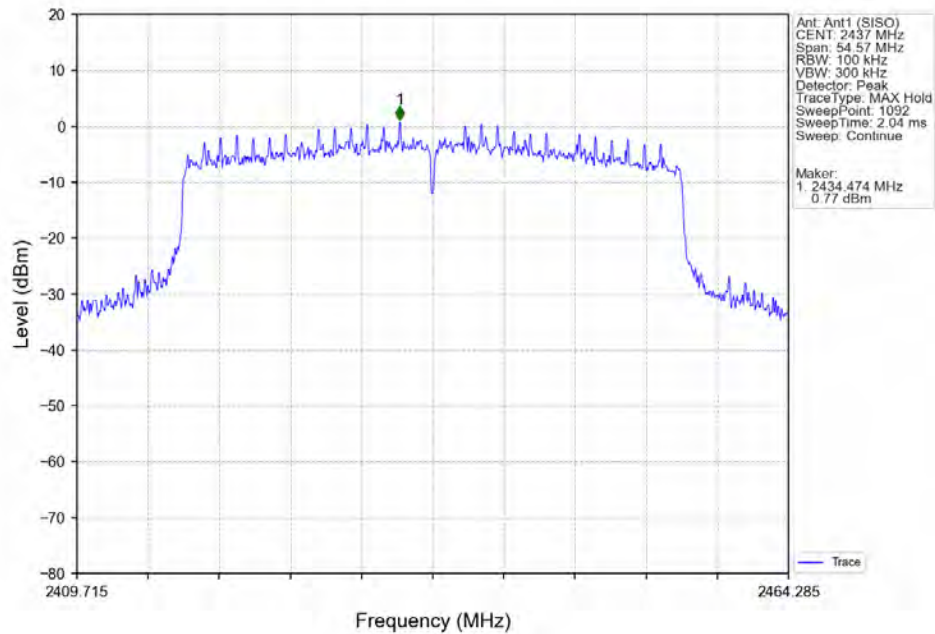


802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

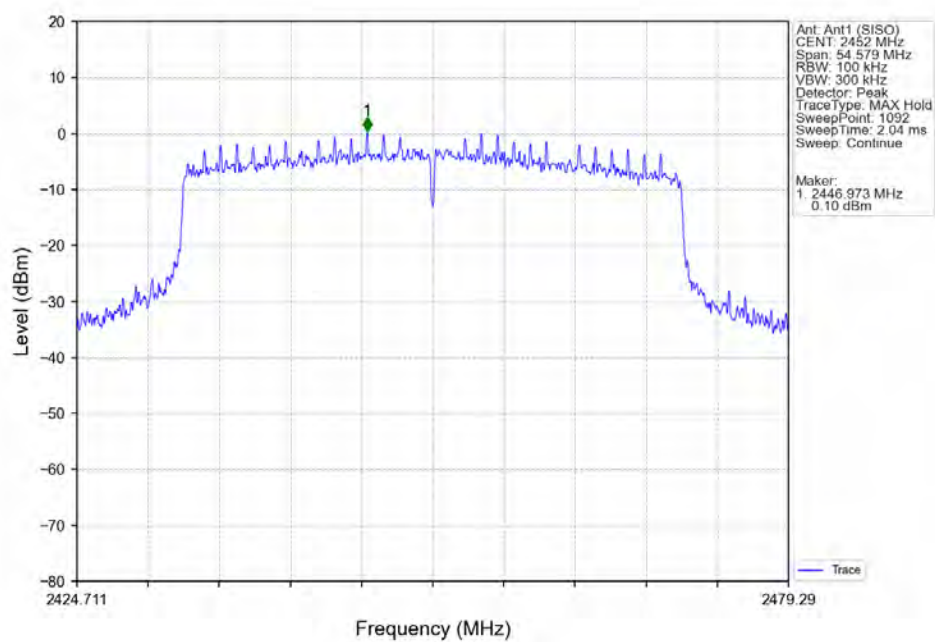


5.2.2 CSE

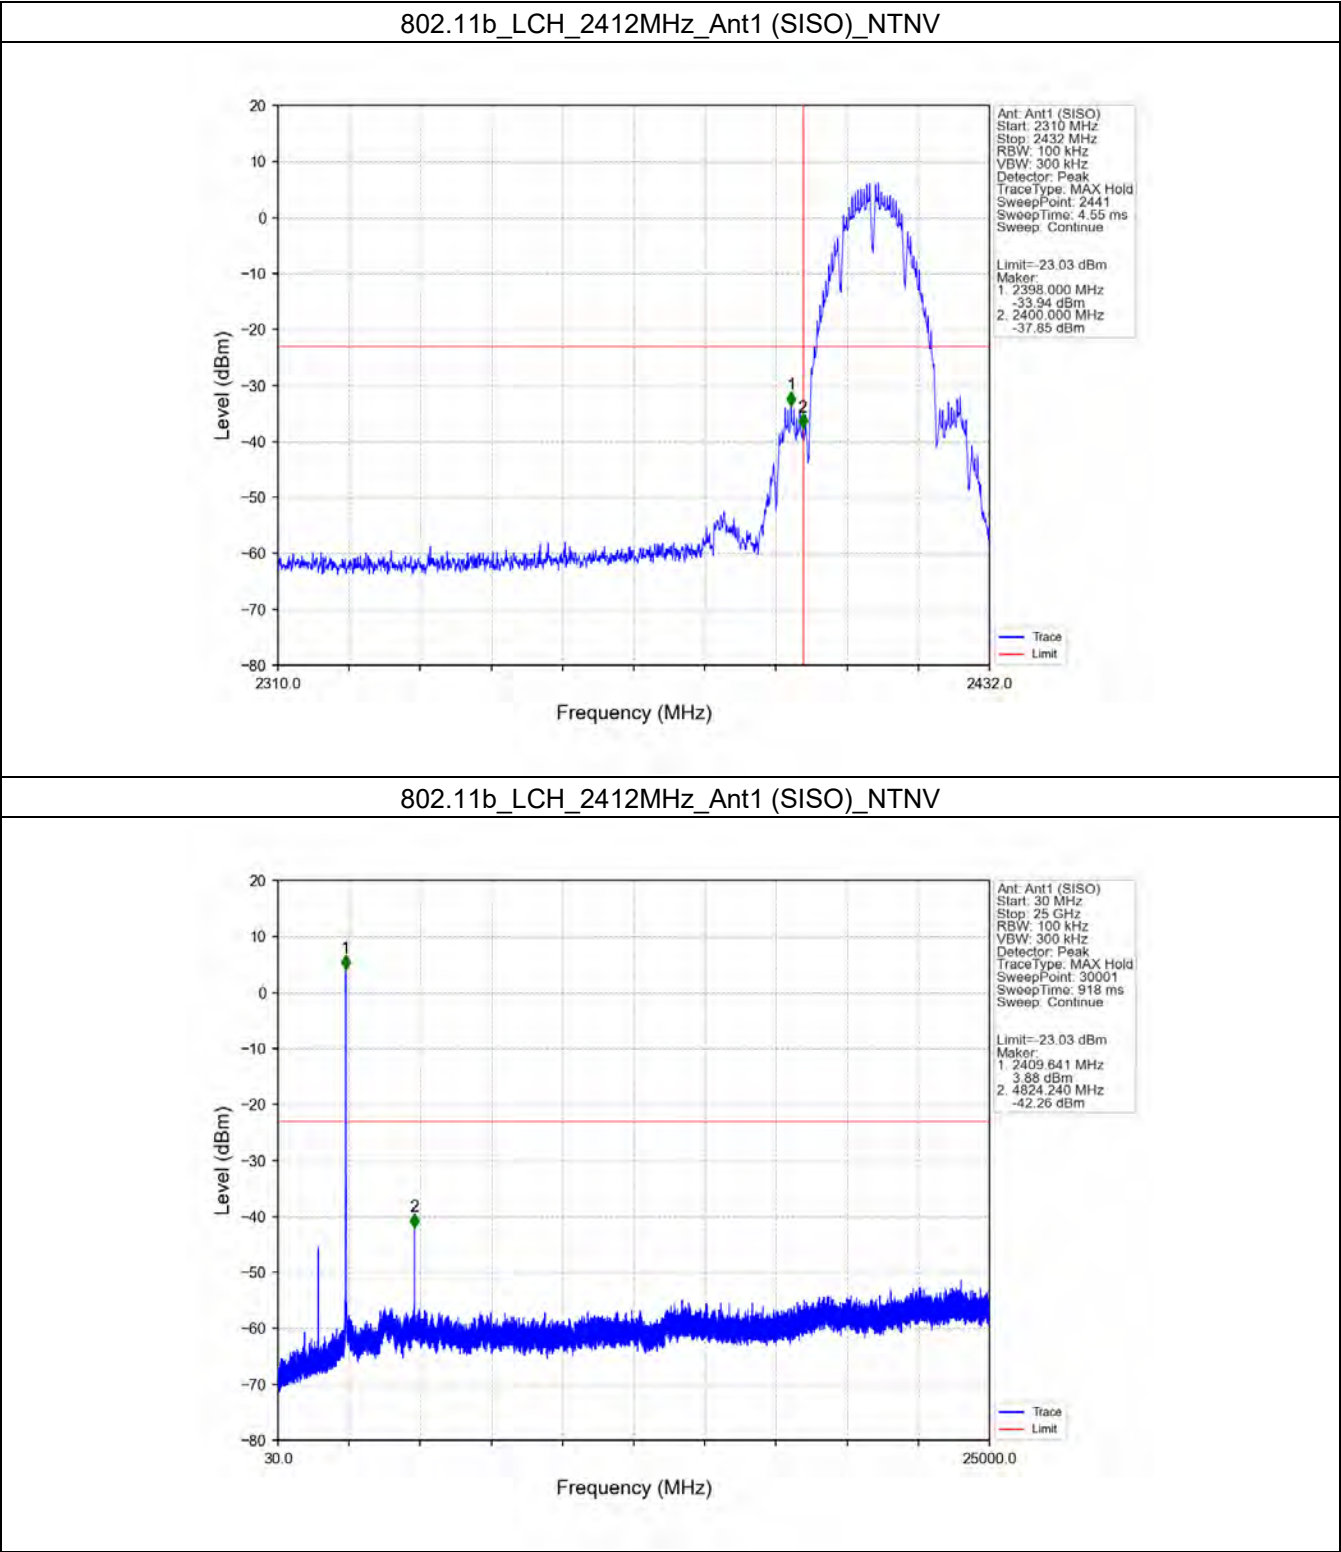


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

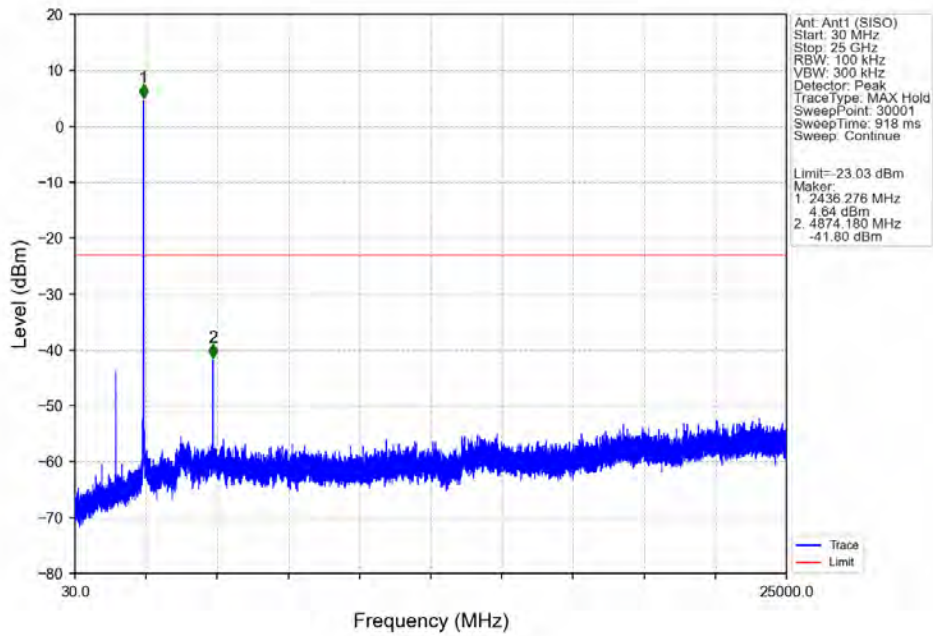


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

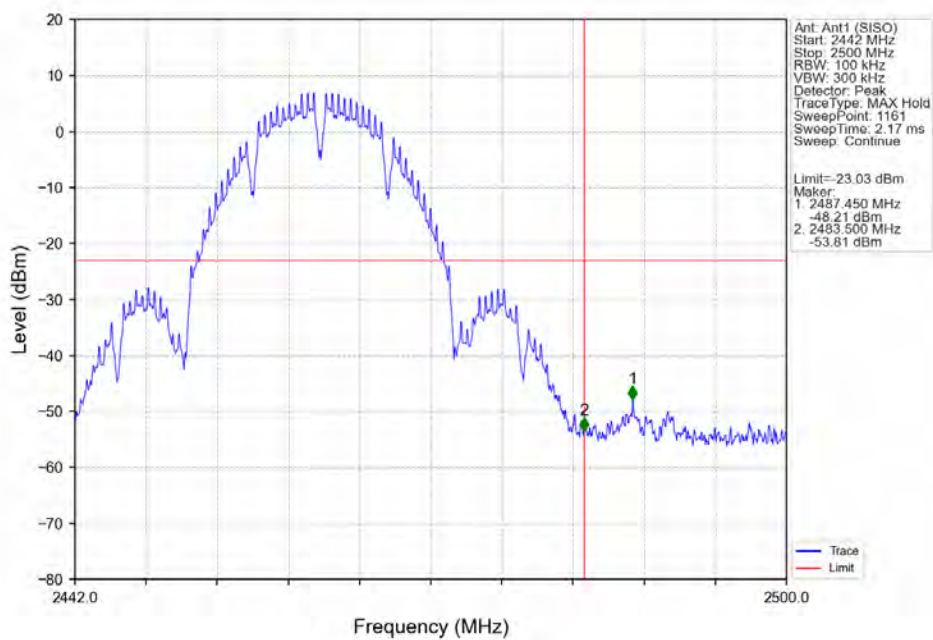


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

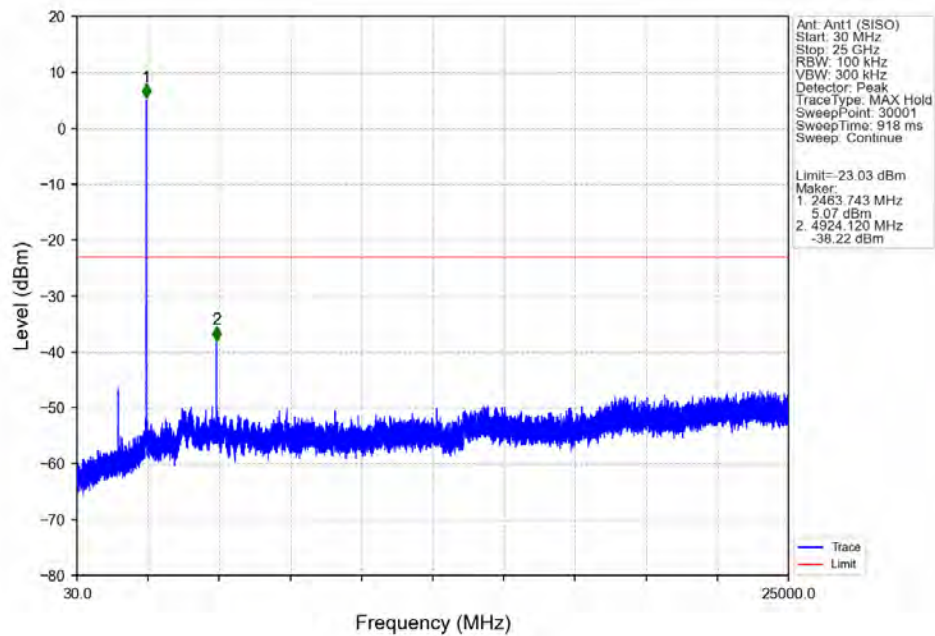


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

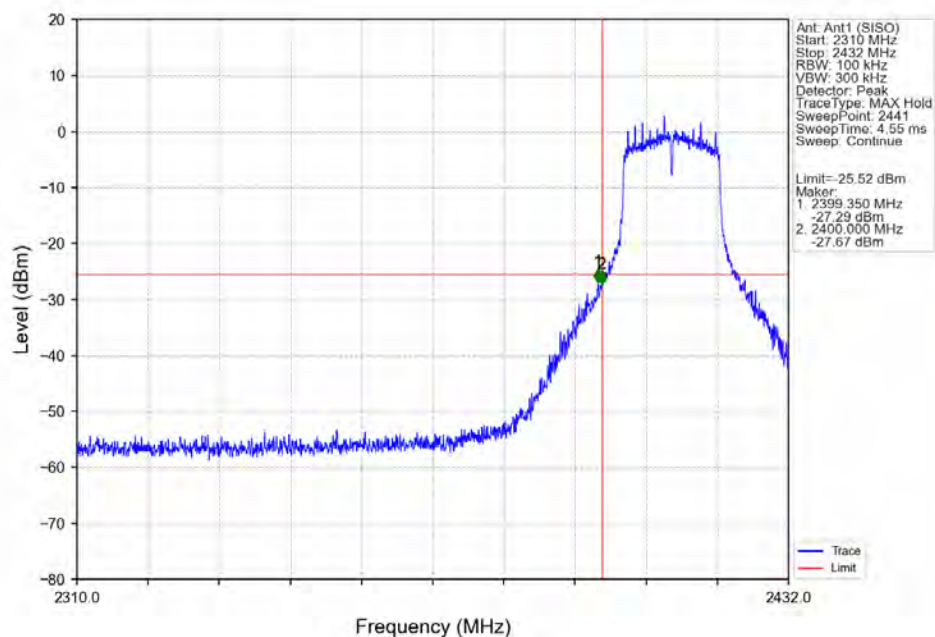


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

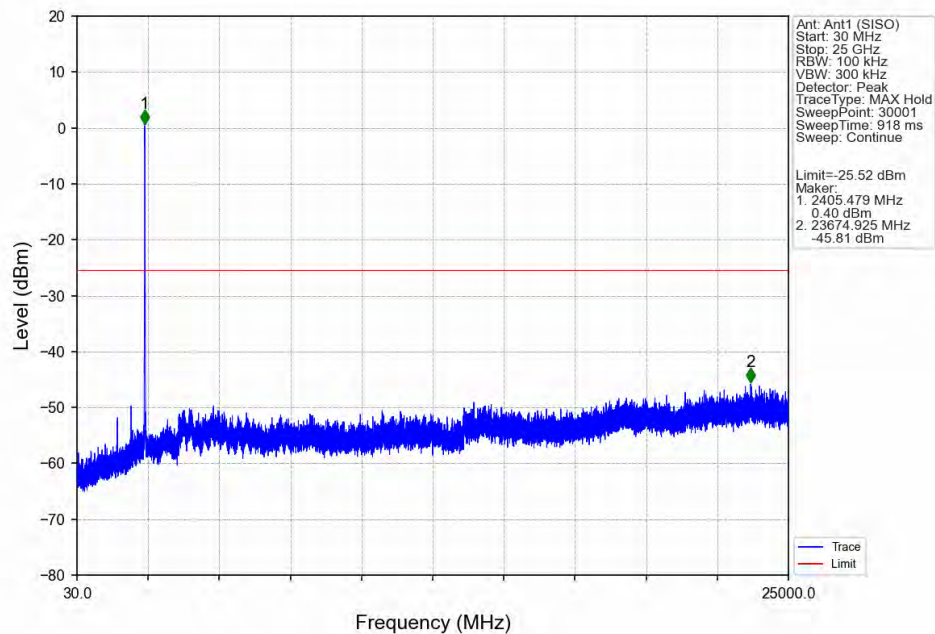


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

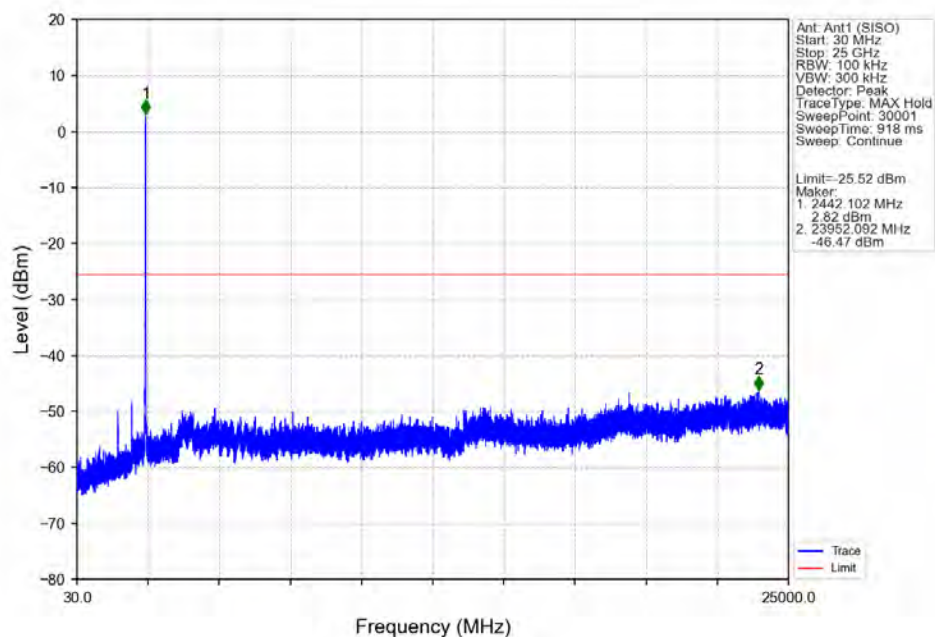

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

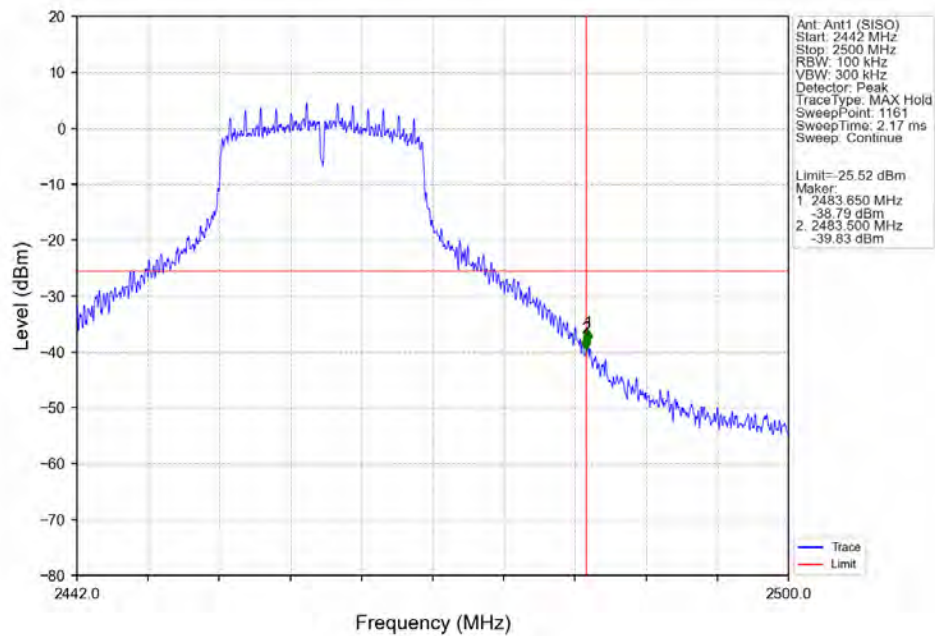

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

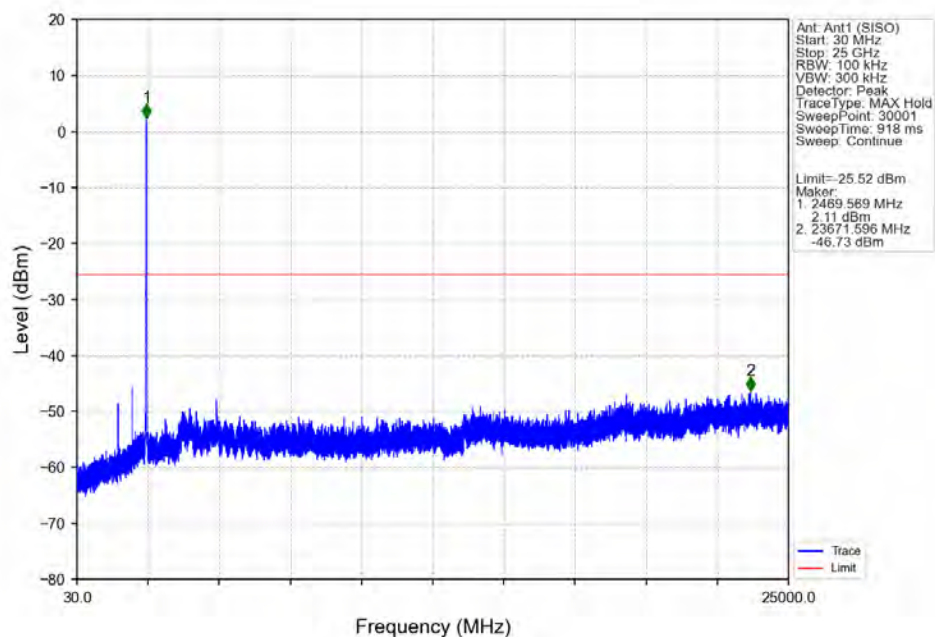


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 184 of 193


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

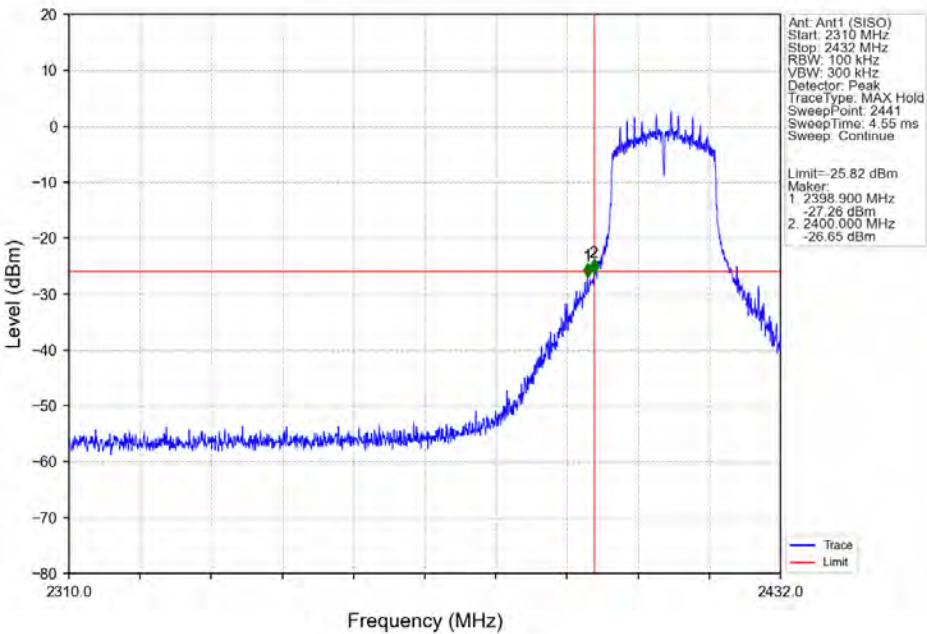


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

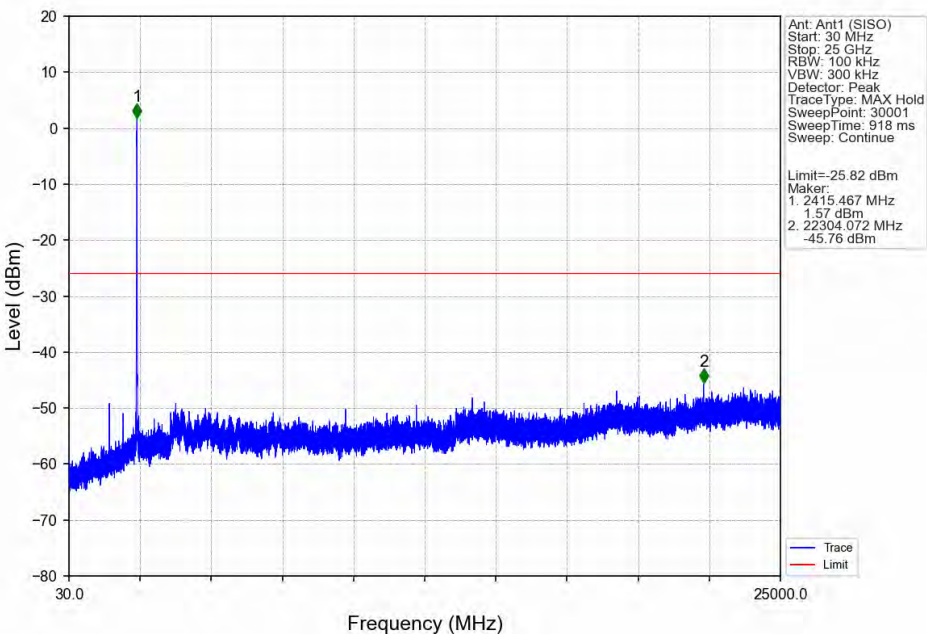


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

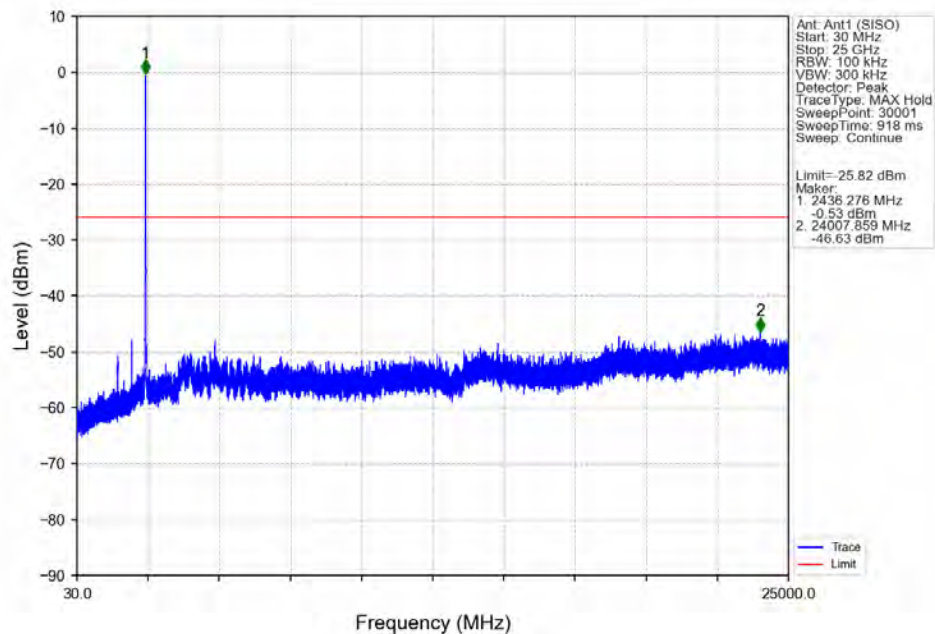


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

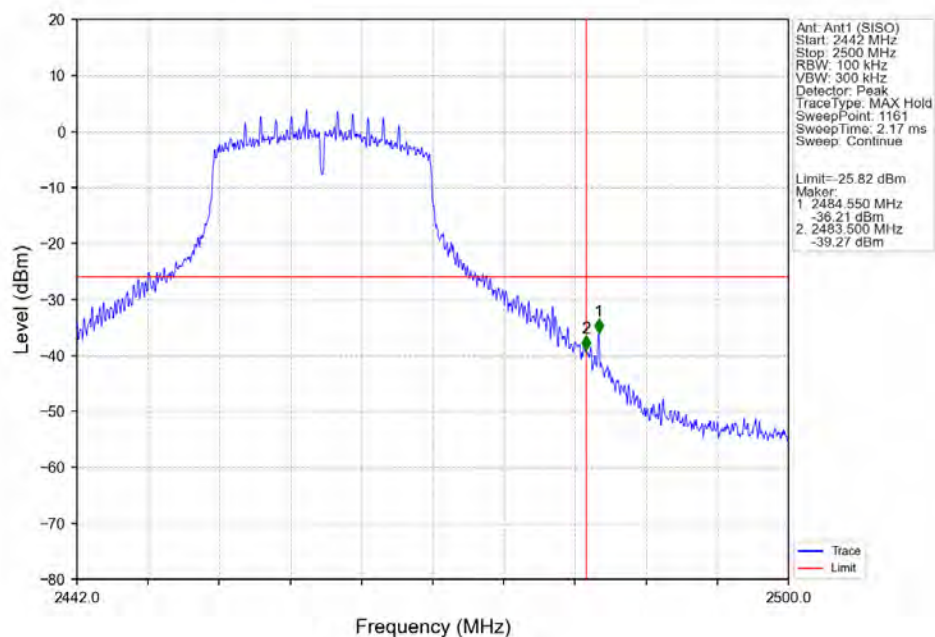

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

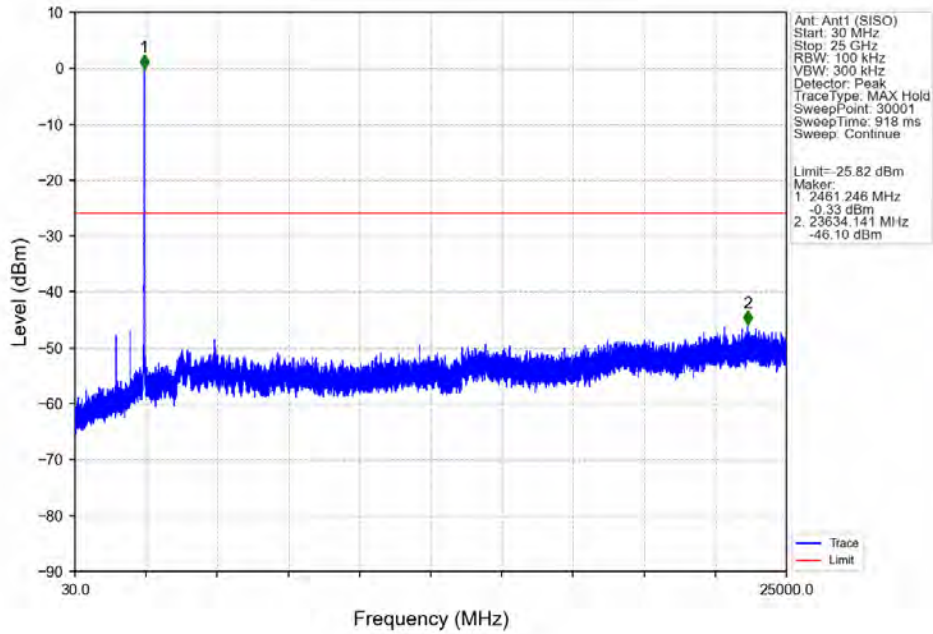

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

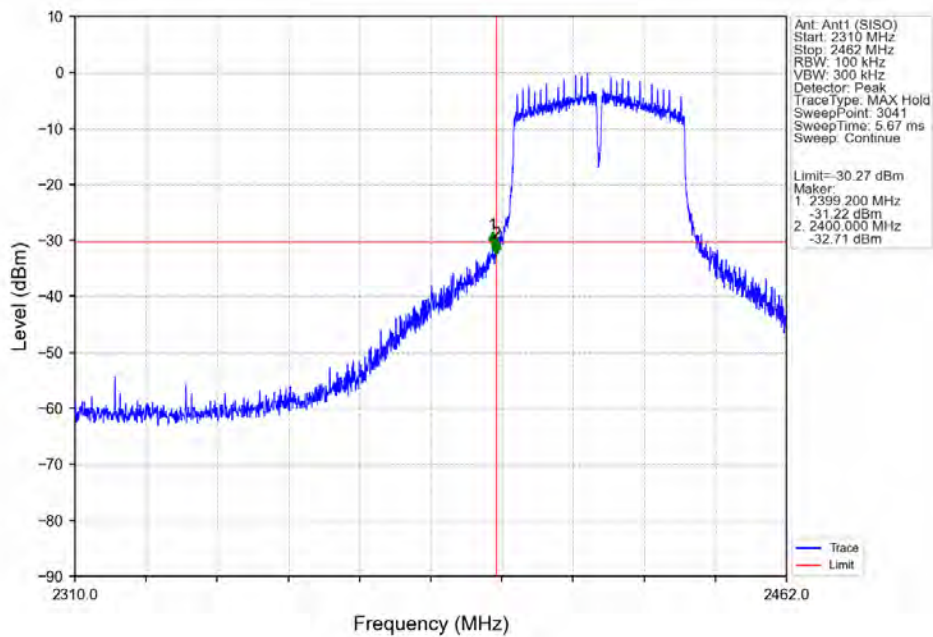


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240800162603

Page: 187 of 193


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

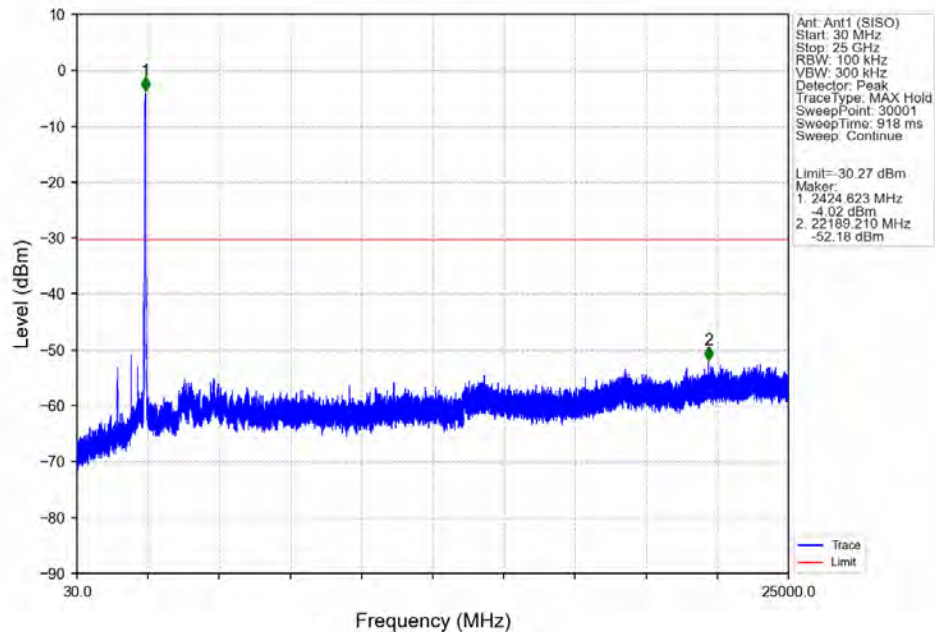


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

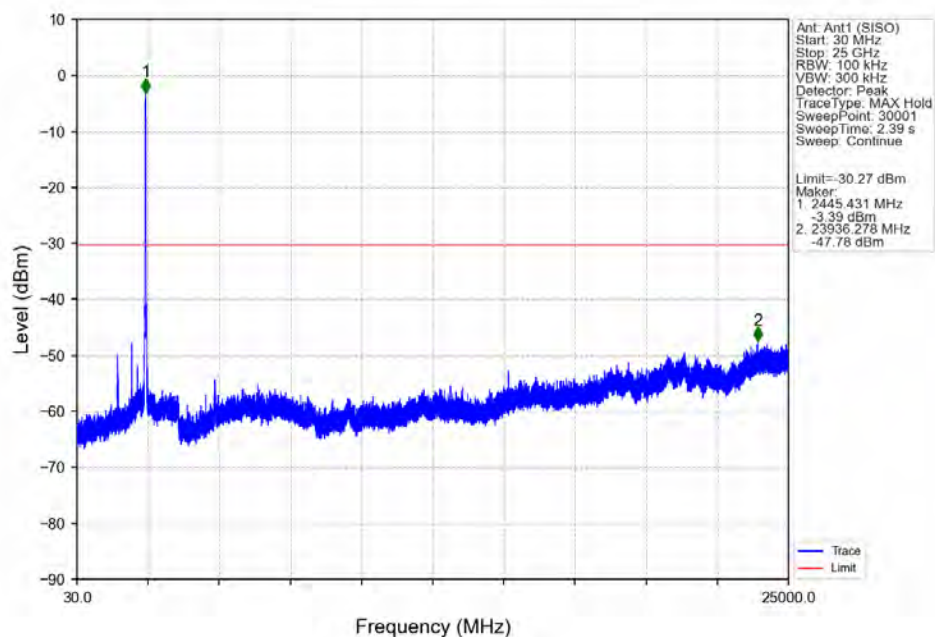


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

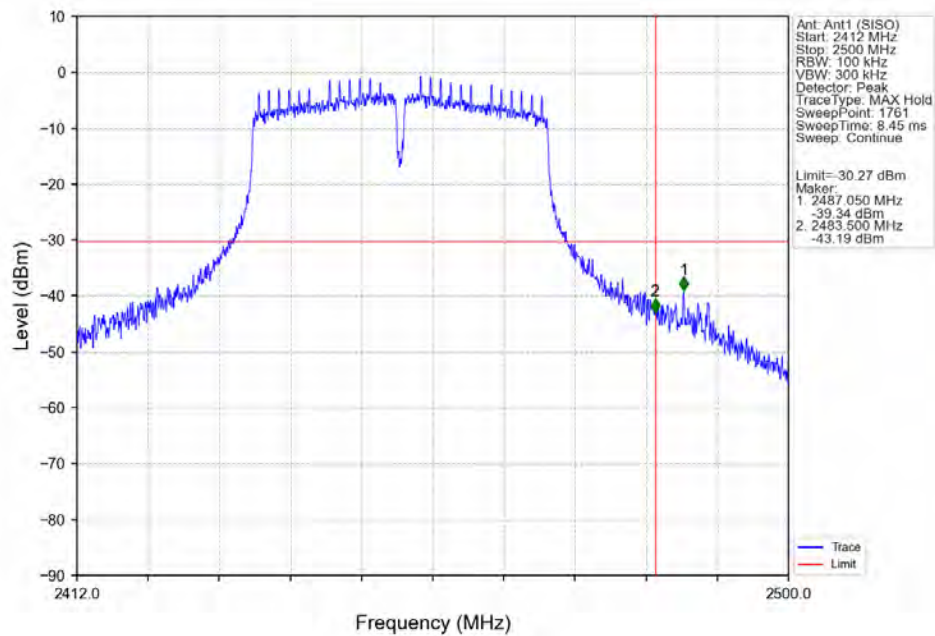


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

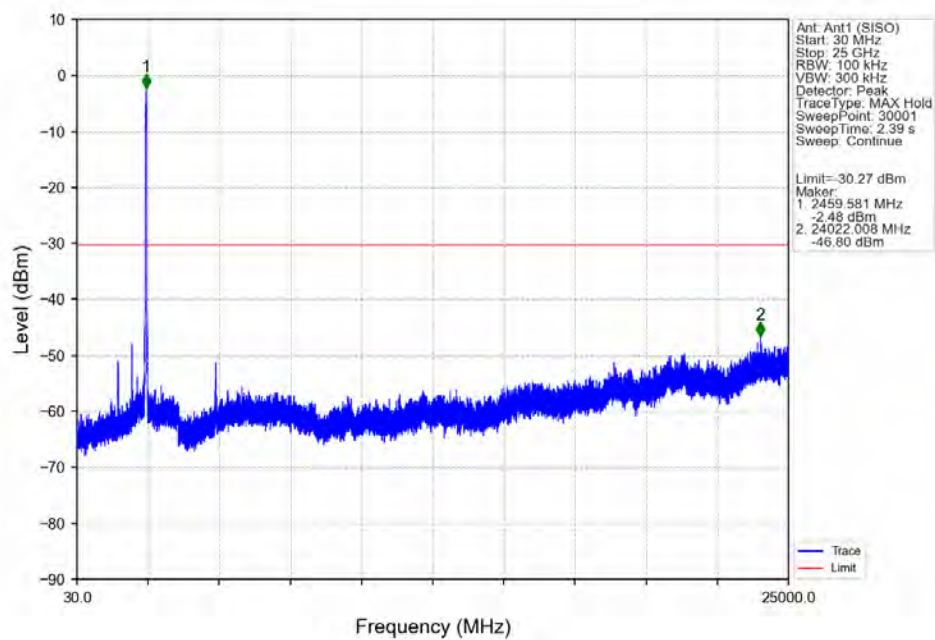


802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

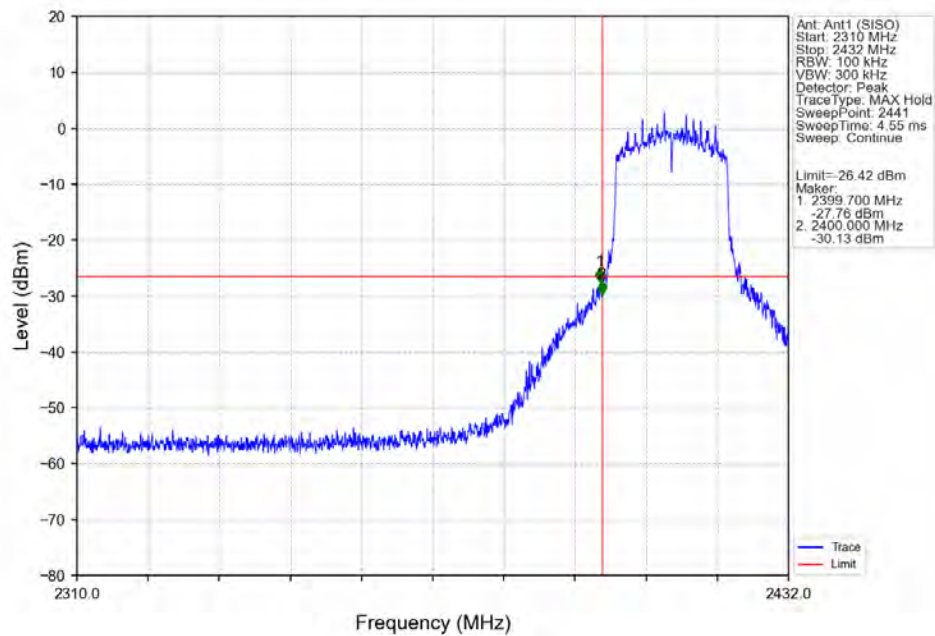


802.11ax(HE20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

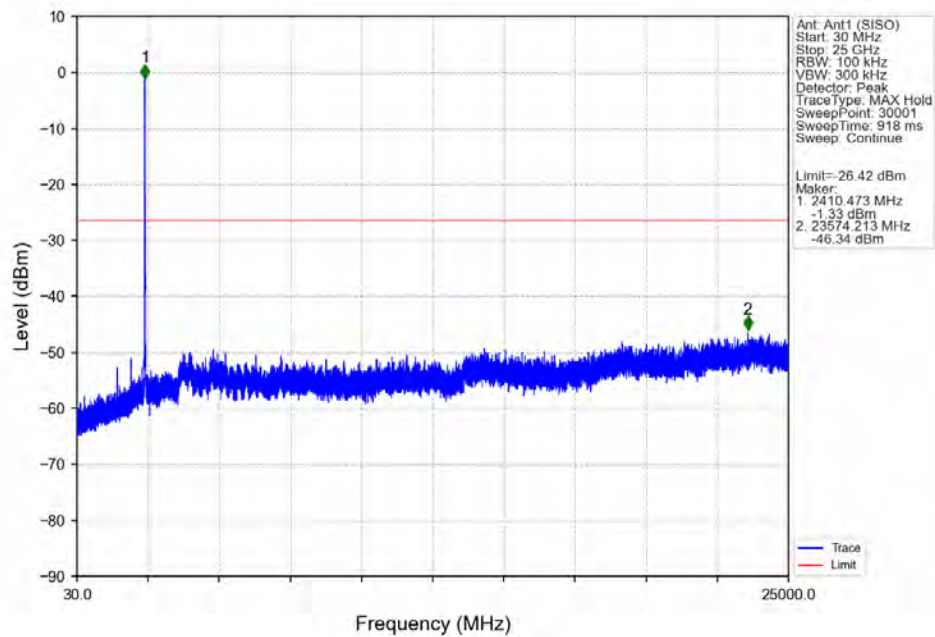


802.11ax(HE20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

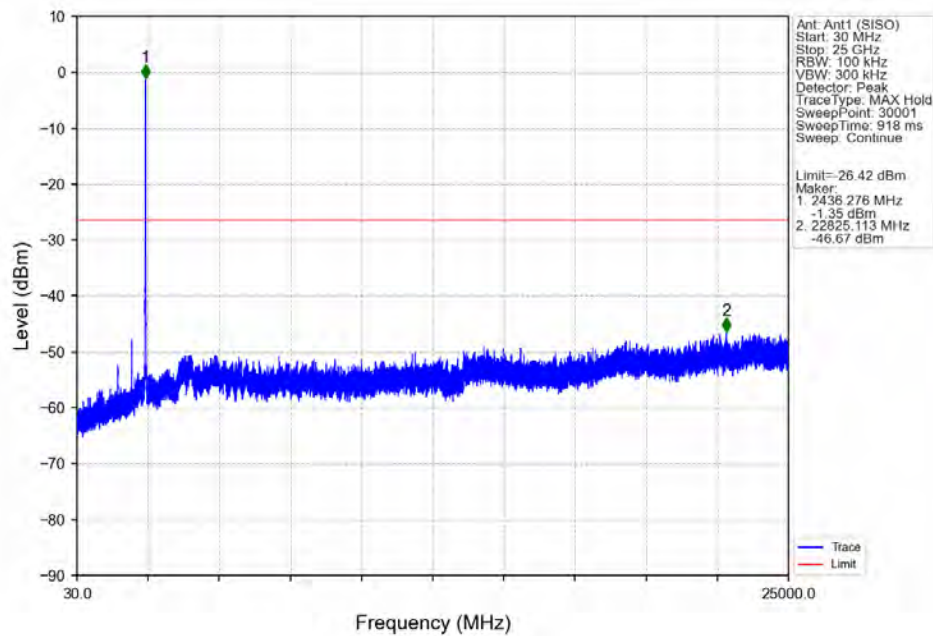


802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

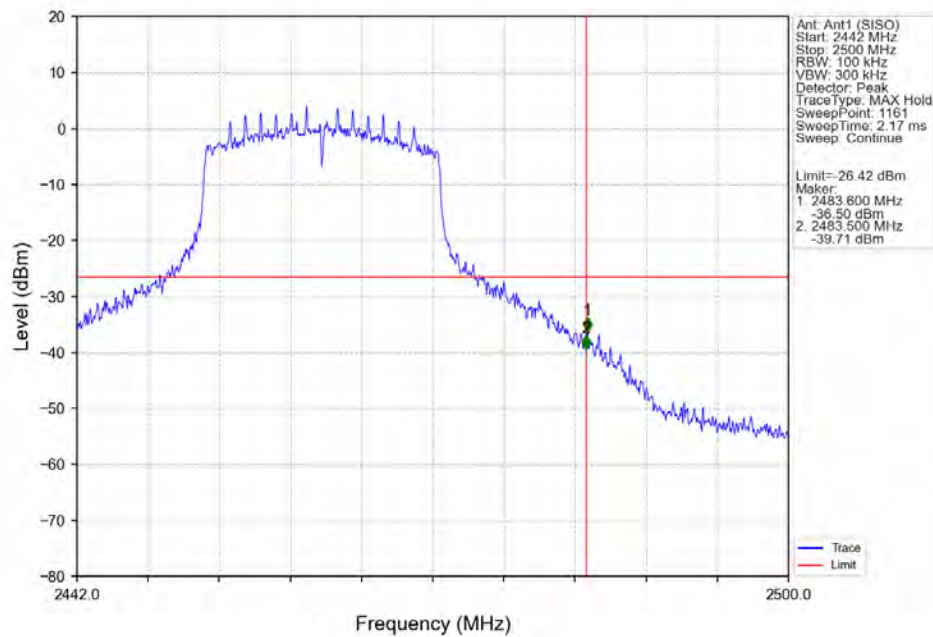


802.11ax(HE20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

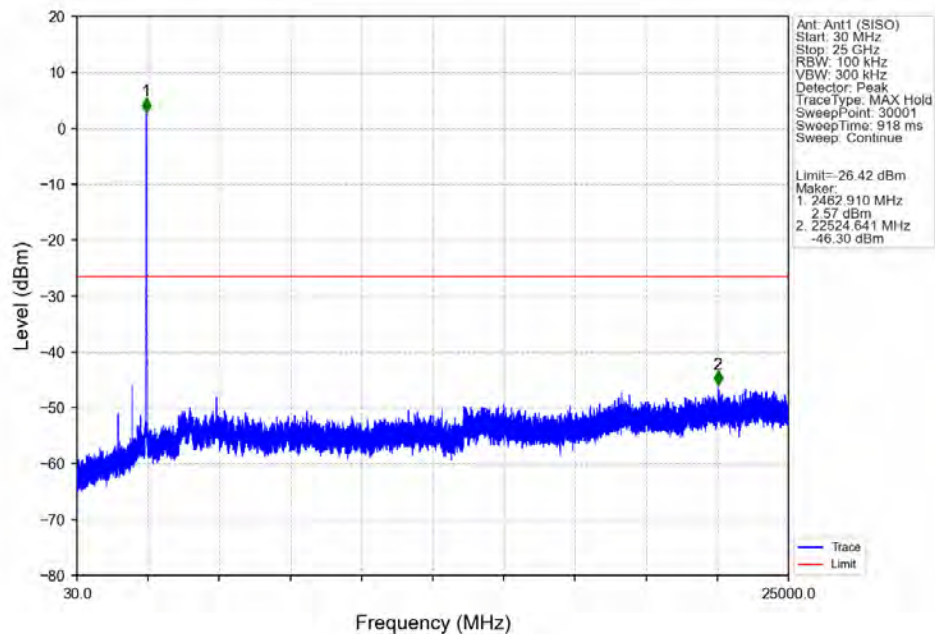


802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

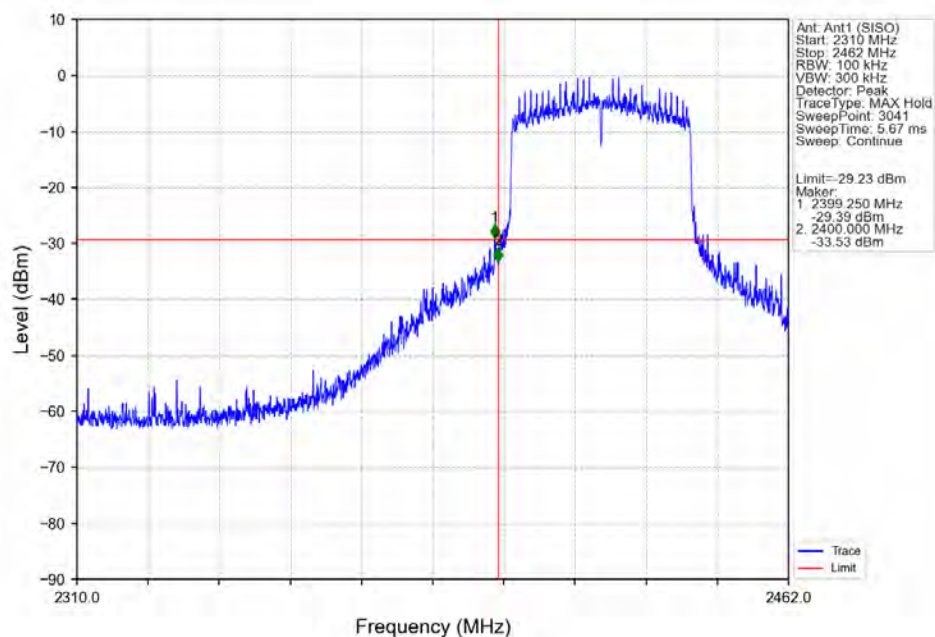


802.11ax(HE40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

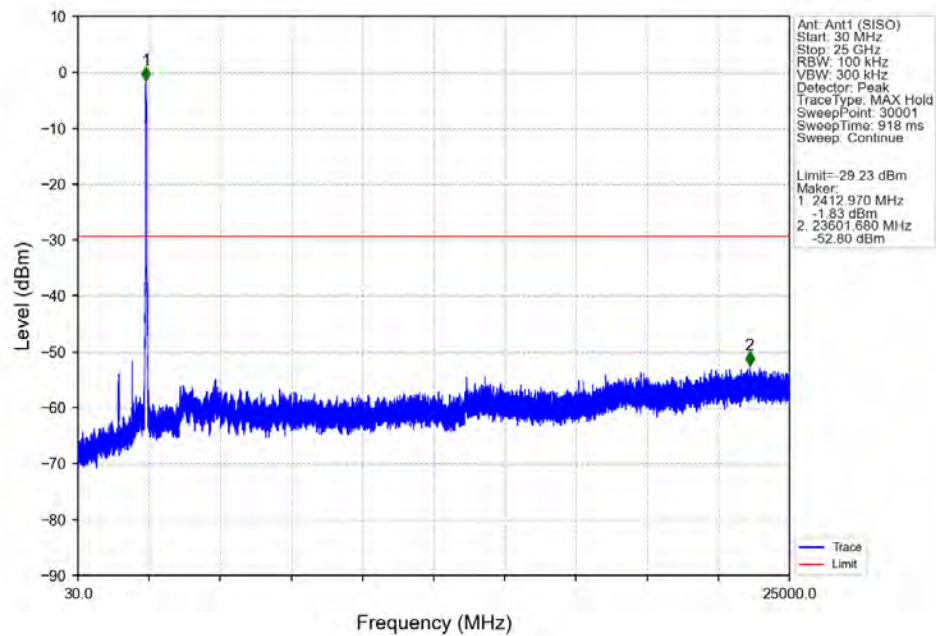

802.11ax(HE40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

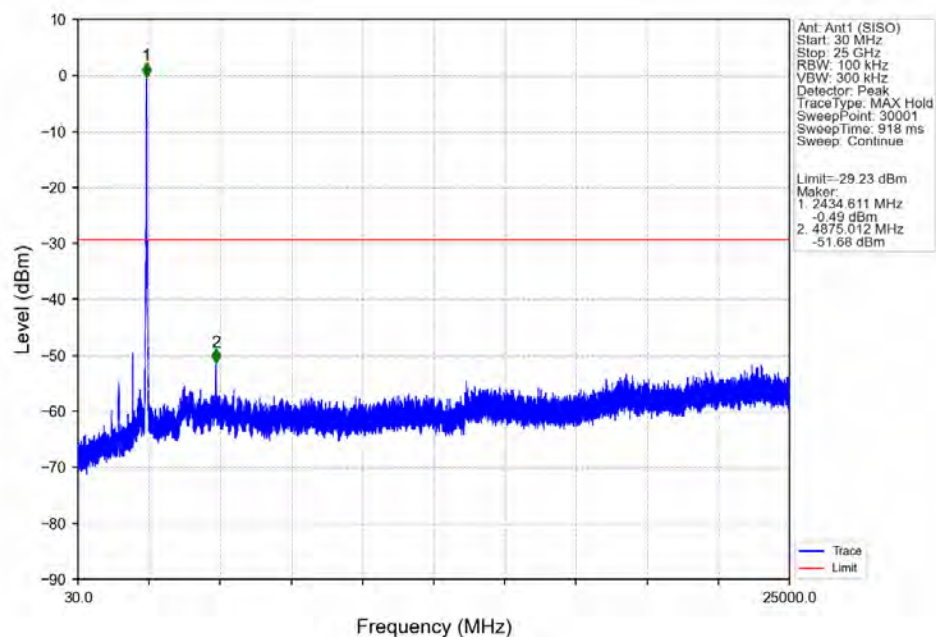

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

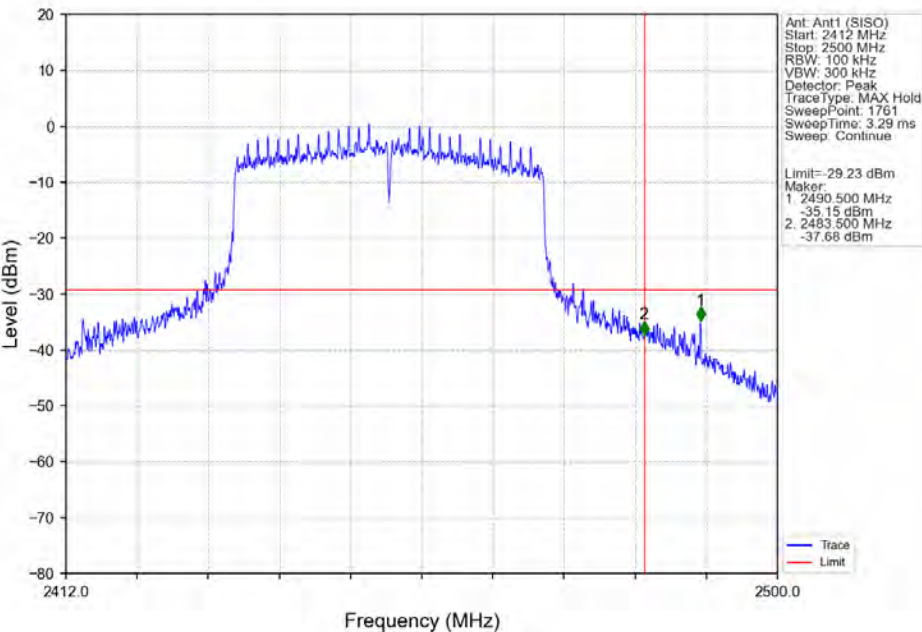

802.11ax(HE40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

