

Appendix A: Test Results of FCC 15B


APPENDIX A: TEST RESULTS OF FCC 15B.....	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	2
<i>Charging box without Earbuds as charging by PC.....</i>	<i>2</i>
<i>Charging box with Earbuds as charging by PC.....</i>	<i>4</i>
APPENDIX A.2: TEST RESULTS OF RADIATED EMISSION, BELOW 1GHz	6
<i>Earbuds operation</i>	<i>6</i>
<i>Charging box without Earbuds as charging by PC</i>	<i>8</i>
<i>Charging box with Earbuds as charging by PC.....</i>	<i>10</i>
APPENDIX A.3: TEST RESULTS OF RADIATED EMISSION, ABOVE 1GHz.....	12
<i>Earbuds operation</i>	<i>12</i>
<i>Charging box without Earbuds as charging by PC</i>	<i>14</i>
<i>Charging box with Earbuds as charging by PC.....</i>	<i>16</i>

Appendix A.1: Test Results of Conducted Emission on AC Mains

Charging box without Earbuds as charging by PC

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order No	168412847
Model:	WIRTWSBKPRM
Test Mode:	Charging box without Earbuds as charging by PC
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Guangshen cen/Gary Chen
Standard:	FCC Part 15B
Tem./Hum./Pressure:	23.2°C/50.8%/101kPa
Remark:	SR2

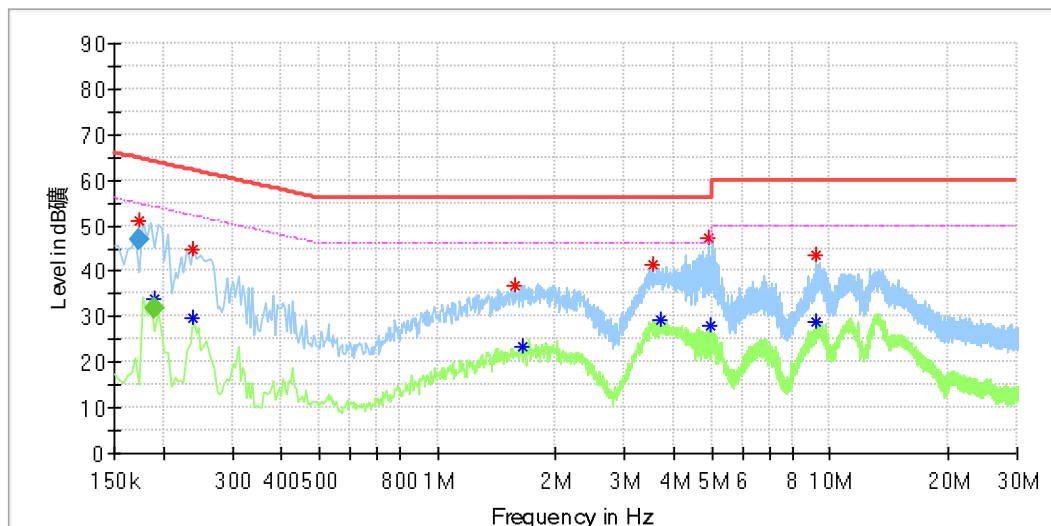

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.173500	51.09	---	64.58	13.49	L1	9.9
0.189500	---	34.00	54.21	20.22	L1	9.9
0.238000	---	29.88	52.17	22.28	L1	9.9
0.238000	44.87	---	62.17	17.29	L1	9.9
1.574000	36.82	---	56.00	19.18	L1	10.1
1.638000	---	23.63	46.00	22.37	L1	10.1
3.538000	41.65	---	56.00	14.35	L1	10.2
3.686000	---	29.25	46.00	16.75	L1	10.2
4.906000	47.11	---	56.00	8.89	L1	10.2
4.934000	---	27.92	46.00	18.08	L1	10.2
9.198000	43.39	---	60.00	16.61	L1	10.3
9.250000	---	28.94	50.00	21.06	L1	10.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.173500	46.70	---	64.79	18.09	1000.0	9.000	L1	9.9
0.189500	---	31.63	54.06	22.42	1000.0	9.000	L1	9.9

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order No: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box without Earbuds as charging by PC
Test Voltage: AC 120V/60Hz
Test By:/Review By: Guangshen cen/Gary Chen
Standard: FCC Part 15B
Tem./Hum./Pressure: 23.2°C/50.8%/101kPa
Remark: SR2

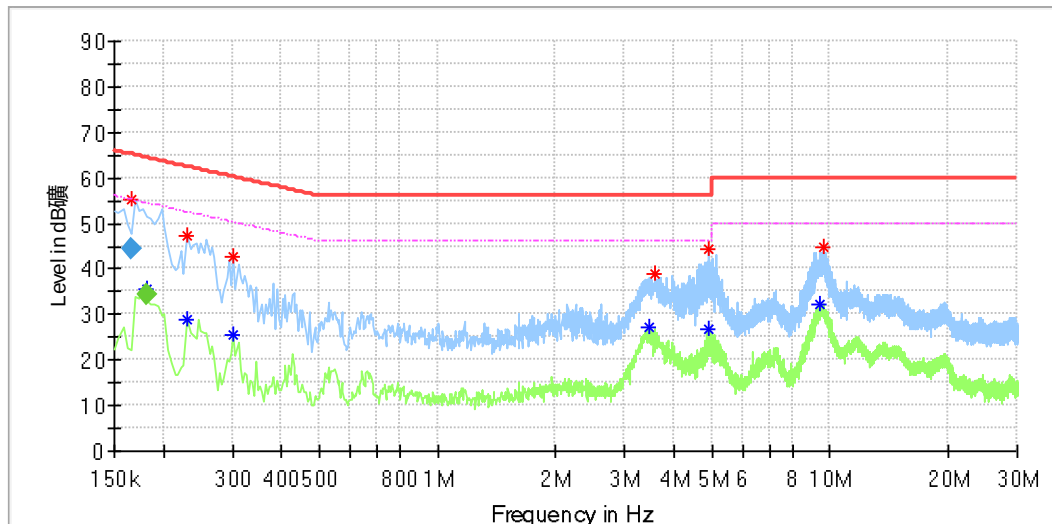

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.165500	55.31	---	64.96	9.65	N	9.8
0.181500	---	35.61	54.58	18.96	N	9.8
0.230000	---	29.05	52.45	23.40	N	9.8
0.230000	47.33	---	62.45	15.12	N	9.8
0.302000	---	25.39	50.19	24.80	N	9.8
0.302000	42.66	---	60.19	17.52	N	9.8
3.458000	---	27.26	46.00	18.74	N	9.9
3.566000	38.93	---	56.00	17.07	N	9.9
4.926000	44.31	---	56.00	11.69	N	9.9
4.926000	---	26.78	46.00	19.22	N	9.9
9.470000	---	32.43	50.00	17.57	N	10.0
9.638000	44.86	---	60.00	15.14	N	10.0


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165500	44.42	---	65.18	20.76	1000.0	9.000	N	9.8
0.181500	---	34.14	54.42	20.27	1000.0	9.000	N	9.8

Charging box with Earbuds as charging by PC

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box with Earbuds as charging by PC
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen cen/Gary Chen
Tem./Hum./Pressure: 23.2°C/50.6%/101kPa
Remark: SR2

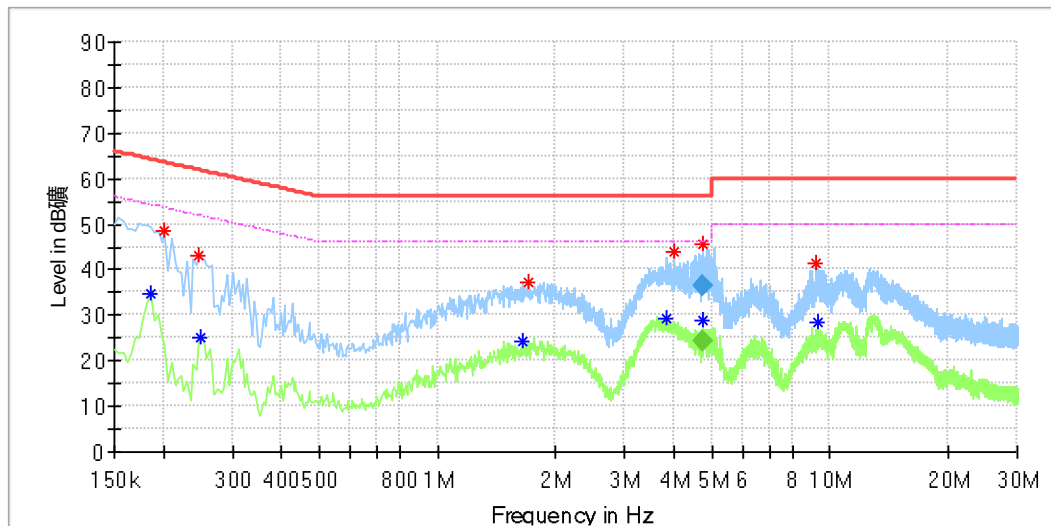

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.186000	---	34.57	54.21	19.64	L1	9.9
0.202000	48.64	---	63.53	14.89	L1	9.9
0.246000	43.09	---	61.89	18.80	L1	9.9
0.250000	---	25.18	51.76	26.58	L1	9.9
1.650000	---	24.37	46.00	21.63	L1	10.1
1.694000	37.41	---	56.00	18.59	L1	10.1
3.830000	---	29.36	46.00	16.64	L1	10.2
4.010000	43.76	---	56.00	12.24	L1	10.2
4.742500	45.52	---	56.00	10.48	L1	10.2
4.749500	---	29.03	46.00	16.97	L1	10.2
9.226000	41.25	---	60.00	18.75	L1	10.3
9.286000	---	28.46	50.00	21.54	L1	10.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
4.742500	36.23	---	56.00	19.77	1000.0	9.000	L1	10.2
4.749500	---	24.15	46.00	21.85	1000.0	9.000	L1	10.2

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box with Earbuds as charging by PC
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen cen/Gary Chen
Tem./Hum./Pressure: 23.2°C/50.6%/101kPa
Remark: SR2

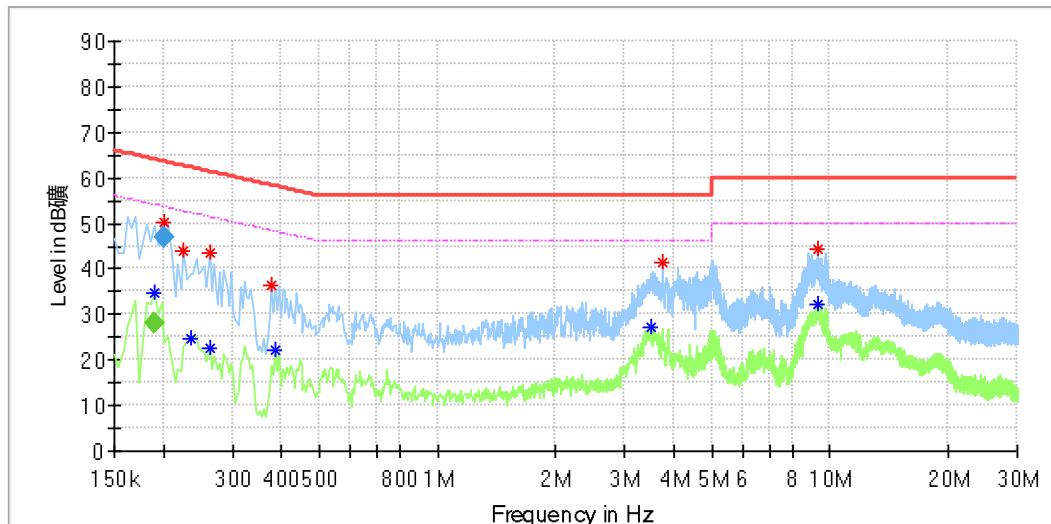

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.189500	---	34.68	54.04	19.36	N	9.8
0.201500	50.04	---	63.37	13.33	N	9.8
0.226000	44.12	---	62.60	18.48	N	9.8
0.234000	---	24.89	52.31	27.41	N	9.8
0.262000	---	22.74	51.37	28.63	N	9.8
0.262000	43.51	---	61.37	17.85	N	9.8
0.378000	36.36	---	58.32	21.96	N	9.8
0.386000	---	22.24	48.15	25.91	N	9.8
3.494000	---	27.31	46.00	18.69	N	9.9
3.730000	41.46	---	56.00	14.54	N	9.9
9.338000	44.38	---	60.00	15.62	N	10.0
9.350000	---	32.16	50.00	17.84	N	10.0

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.189500	---	28.24	54.06	25.81	1000.0	9.000	N	9.8
0.201500	47.02	---	63.55	16.53	1000.0	9.000	N	9.8

Appendix A.2: Test Results of Radiated Emission, Below 1GHz

Earbuds operation

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Earbuds operation
Test Voltage:	Battery
Test Standard:	FCC Part 15B
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

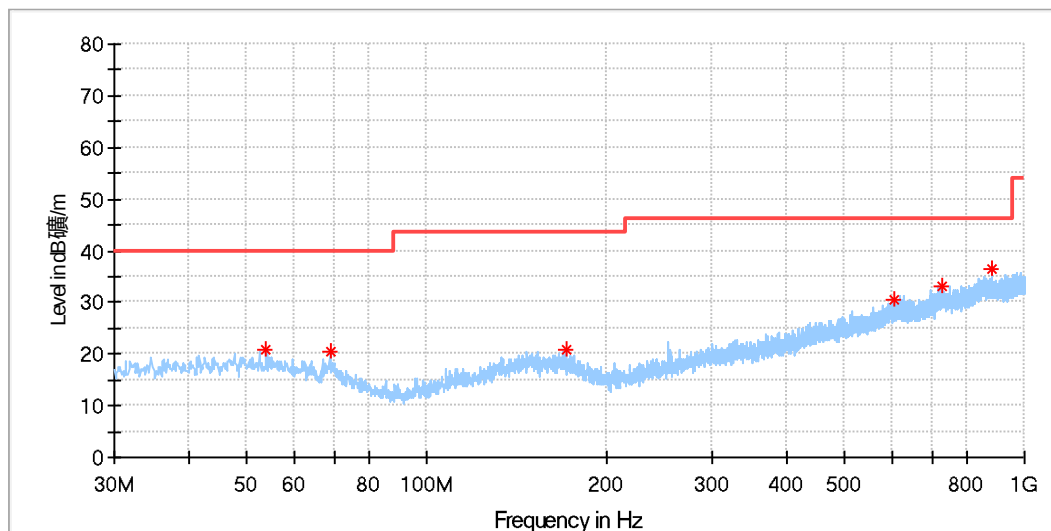


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.862000	21.02	40.00	18.98	100.0	H	0.0	20.6
170.844000	20.78	43.50	22.72	100.0	H	255.0	20.4
726.169000	33.18	46.00	12.82	100.0	H	358.0	31.4
881.175000	36.49	46.00	9.51	200.0	H	121.0	33.4
69.091000	20.50	40.00	19.50	200.0	H	170.0	18.6
605.598000	30.62	46.00	15.38	200.0	H	302.0	29.4

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Earbuds operation
Test Voltage: Battery
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

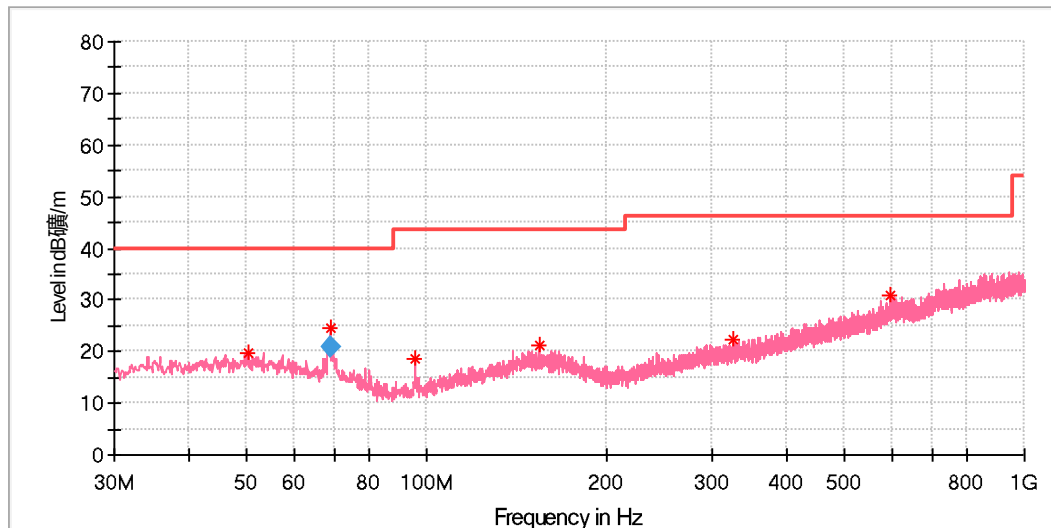

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.273000	19.55	40.00	20.45	100.0	V	354.0	20.7
68.977000	24.63	40.00	15.37	200.0	V	69.0	18.7
95.766000	18.57	43.50	24.94	200.0	V	16.0	15.4
153.966000	21.12	43.50	22.38	100.0	V	45.0	20.9
326.044000	22.30	46.00	23.70	100.0	V	286.0	22.4
598.323000	30.71	46.00	15.29	100.0	V	45.0	29.1


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
68.977000	20.99	40.00	19.01	1000.0	120.000	200.0	V	69.0	18.6

Charging box without Earbuds as charging by PC

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Charging box without Earbuds as charging by PC
Test Voltage:	AC 120V, 60Hz
Test Standard:	FCC Part 15B
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

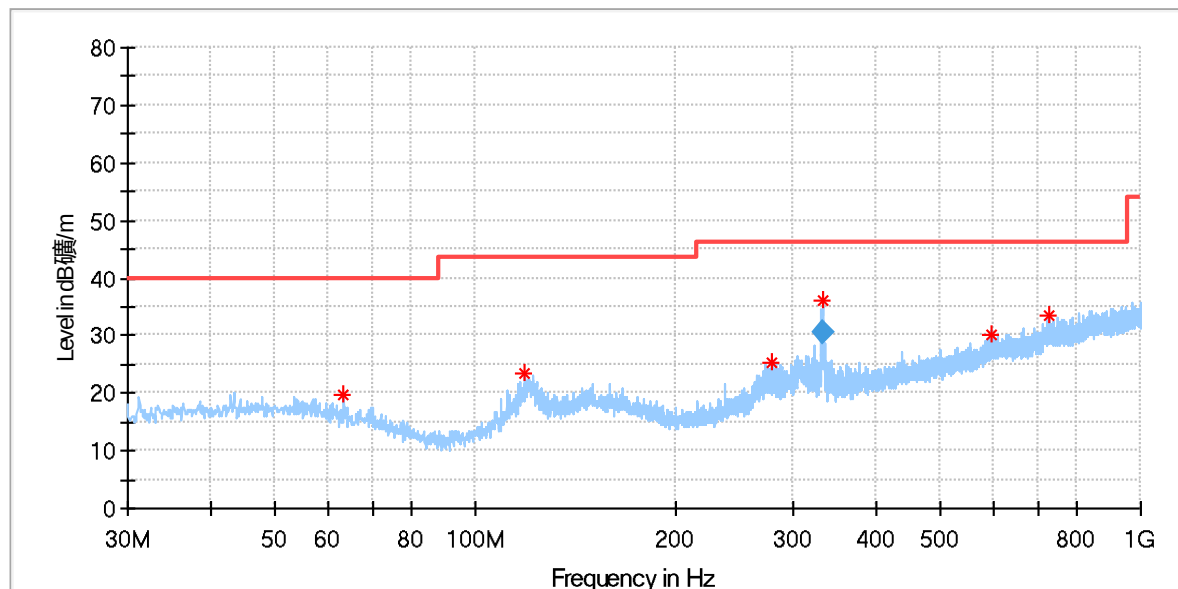

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
63.465000	19.59	40.00	20.41	100.0	H	325.0	19.5
118.852000	23.37	43.50	20.13	200.0	H	173.0	18.3
278.805000	25.24	46.00	20.76	100.0	H	215.0	21.0
331.824000	36.16	46.00	9.84	100.0	H	317.0	22.6
597.838000	30.08	46.00	15.92	100.0	H	328.0	29.1
728.497000	33.34	46.00	12.66	200.0	H	150.0	31.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
331.824000	30.55	46.00	15.45	1000.0	120.000	100.0	H	317.0	22.6

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box without Earbuds as charging by PC
Test Voltage: AC 120V, 60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

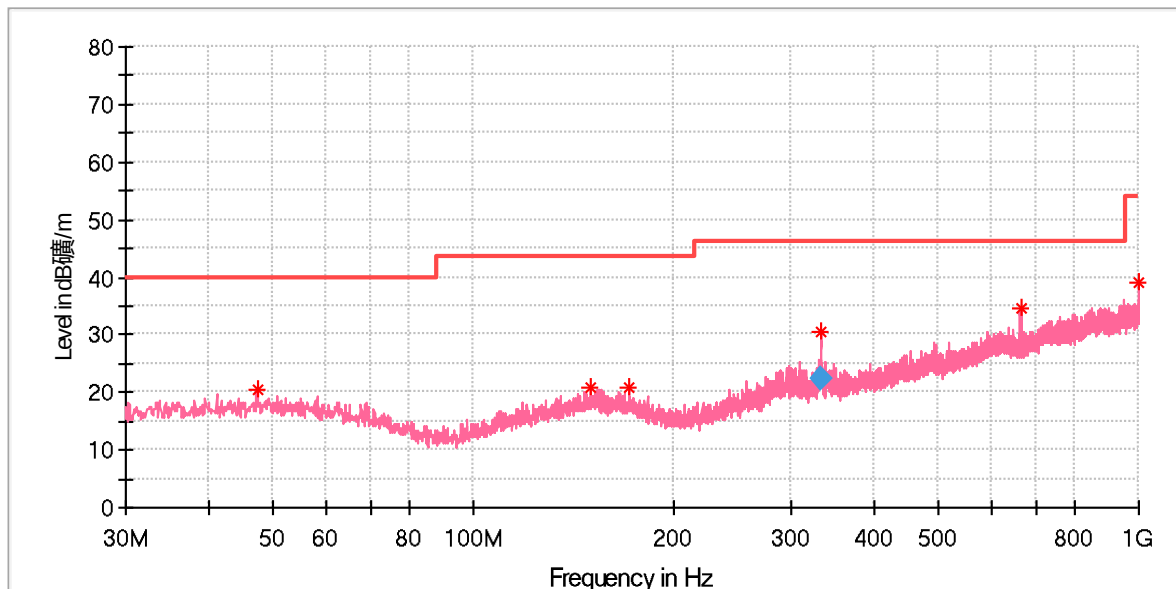

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.266000	20.44	40.00	19.56	100.0	V	31.0	20.7
149.989000	20.66	43.50	22.84	100.0	V	116.0	20.8
171.135000	20.68	43.50	22.82	200.0	V	115.0	20.3
333.308000	30.63	46.00	15.37	100.0	V	216.0	22.6
663.992000	34.48	46.00	11.52	100.0	V	6.0	29.8
997.963000	38.94	54.00	15.06	100.0	V	221.0	34.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
333.308000	22.27	46.00	23.73	1000.0	120.000	100.0	V	216.0	22.6

Charging box with Earbuds as charging by PC

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Charging box with Earbuds as charging by PC
Test Voltage:	AC 120V, 60Hz
Test Standard:	EN 55032
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

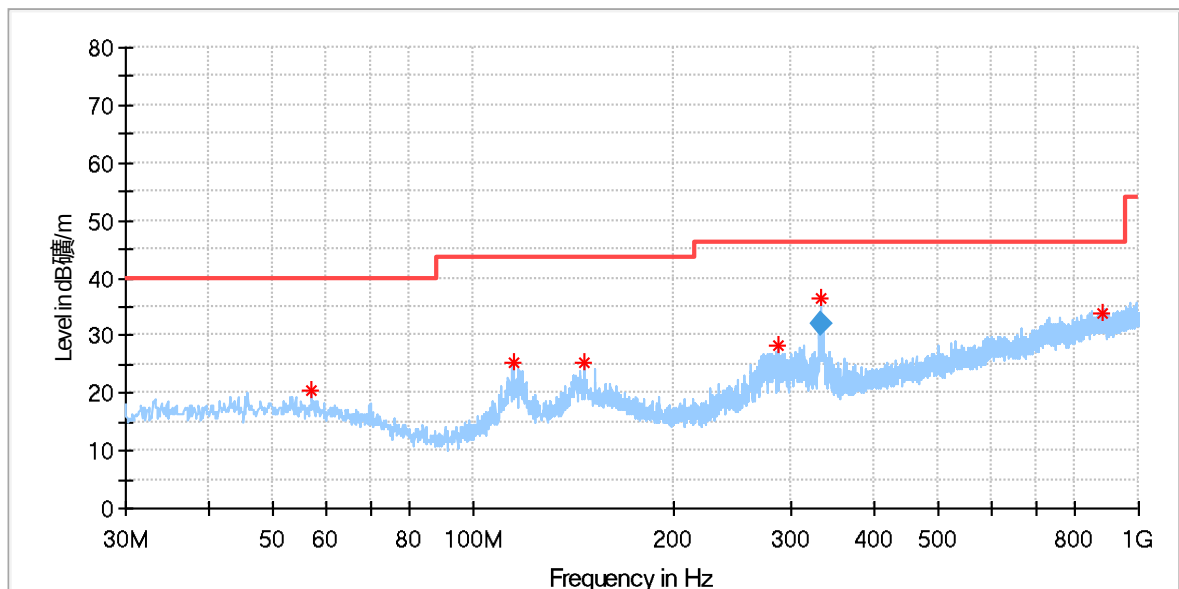

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
57.063000	20.31	40.00	19.69	100.0	H	246.0	20.4
114.584000	25.23	43.50	18.27	200.0	H	183.0	17.9
146.982000	25.27	43.50	18.23	200.0	H	290.0	20.7
287.244000	28.28	46.00	17.72	100.0	H	50.0	21.3
332.583000	36.31	46.00	9.69	100.0	H	110.0	22.6
881.078000	33.83	46.00	12.17	200.0	H	93.0	33.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
332.583000	32.08	46.00	13.92	1000.0	120.000	100.0	H	110.0	22.6

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box with Earbuds as charging by PC
Test Voltage: AC 120V, 60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

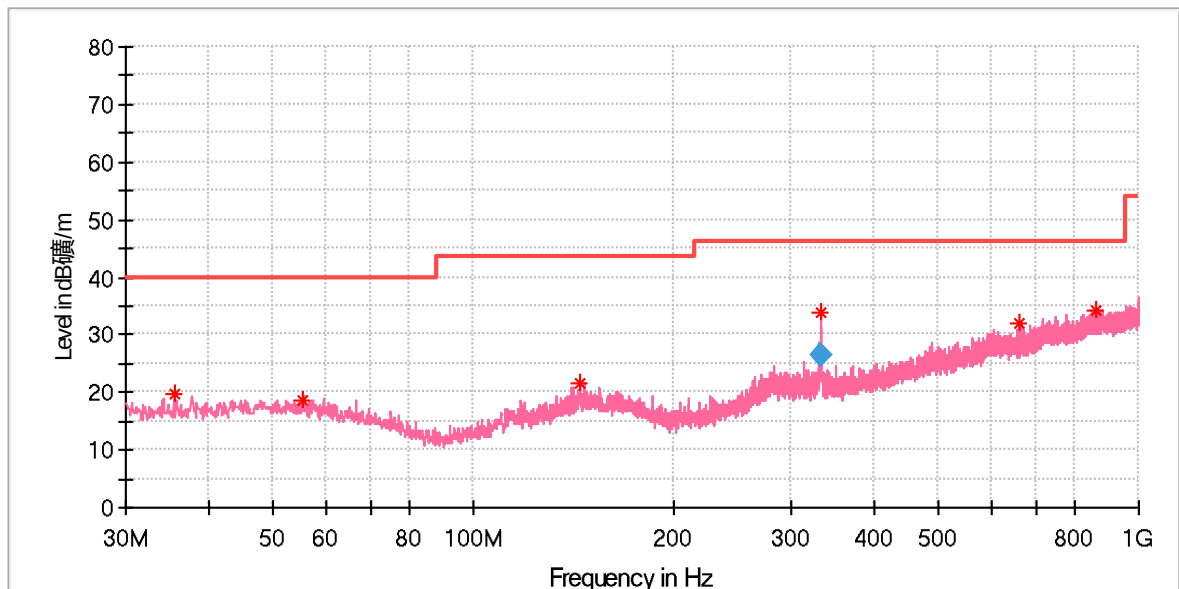

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.432000	19.81	40.00	20.19	200.0	V	222.0	19.6
55.511000	18.56	40.00	21.44	200.0	V	12.0	20.5
144.460000	21.61	43.50	21.89	100.0	V	18.0	20.6
332.543000	33.83	46.00	12.17	200.0	V	297.0	22.6
663.798000	32.01	46.00	13.99	100.0	V	0.0	29.8
865.364000	34.33	46.00	11.67	200.0	V	164.0	33.3

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
333.240000	26.30	46.00	19.70	1000.0	120.000	200.0	V	297.0	22.6

Appendix A.3: Test Results of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.
Earbuds operation

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Earbuds operation
Test Voltage:	Battery
Test Standard:	FCC Part 15B
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

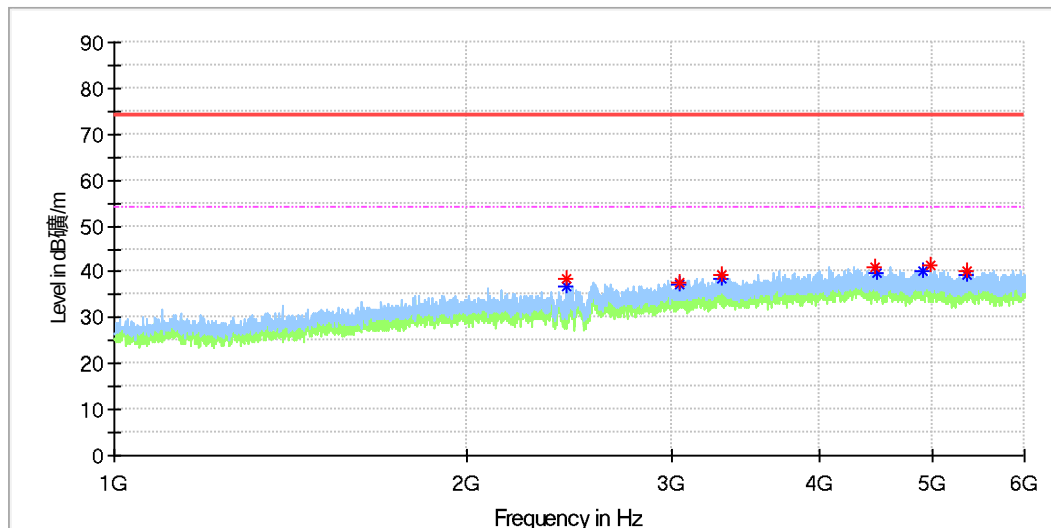


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2438.000000	---	36.82	54.00	17.18	100.0	H	129.0	-5.7
2438.000000	38.60	---	74.00	35.40	100.0	H	129.0	-5.7
3041.000000	---	37.40	54.00	16.60	100.0	H	0.0	-3.3
3041.000000	37.85	---	74.00	36.15	100.0	H	0.0	-3.3
3308.000000	39.17	---	74.00	34.83	100.0	H	356.0	-1.9
3308.000000	---	38.33	54.00	15.67	100.0	H	356.0	-1.9
4476.500000	40.87	---	74.00	33.13	100.0	H	180.0	0.6
4482.000000	---	39.85	54.00	14.15	100.0	H	255.0	0.5
4918.500000	---	40.17	54.00	13.83	100.0	H	322.0	1.9
4995.000000	41.29	---	74.00	32.71	100.0	H	119.0	1.9
5363.500000	---	39.27	54.00	14.73	100.0	H	268.0	2.1
5363.500000	40.39	---	74.00	33.61	100.0	H	268.0	2.1

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Earbuds operation
Test Voltage: Battery
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

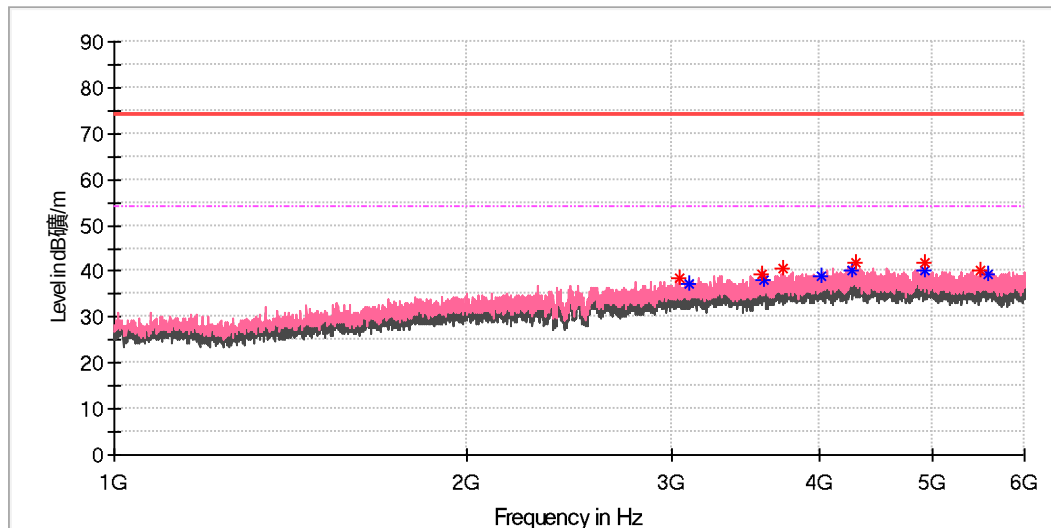


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3728.000000	40.63	---	74.00	33.37	100.0	V	4.0	-0.8
5590.000000	---	39.33	54.00	14.67	100.0	V	4.0	2.1
5492.500000	40.18	---	74.00	33.82	100.0	V	8.0	1.9
3596.000000	---	38.07	54.00	15.93	100.0	V	48.0	-1.4
4019.000000	---	38.91	54.00	15.09	100.0	V	58.0	0.0
3583.500000	39.19	---	74.00	34.81	100.0	V	105.0	-1.4
3100.500000	---	37.20	54.00	16.80	100.0	V	150.0	-2.6
3038.500000	38.42	---	74.00	35.58	100.0	V	234.0	-3.3
4269.000000	---	39.98	54.00	14.02	100.0	V	284.0	1.2
4934.000000	41.77	---	74.00	32.23	100.0	V	293.0	1.8
4934.000000	---	40.19	54.00	13.81	100.0	V	293.0	1.8
4310.500000	41.75	---	74.00	32.25	100.0	V	308.0	1.1

Charging box without Earbuds as charging by PC

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Charging box without Earbuds as charging by PC
Test Voltage:	AC 120V, 60Hz
Test Standard:	FCC Part 15B
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

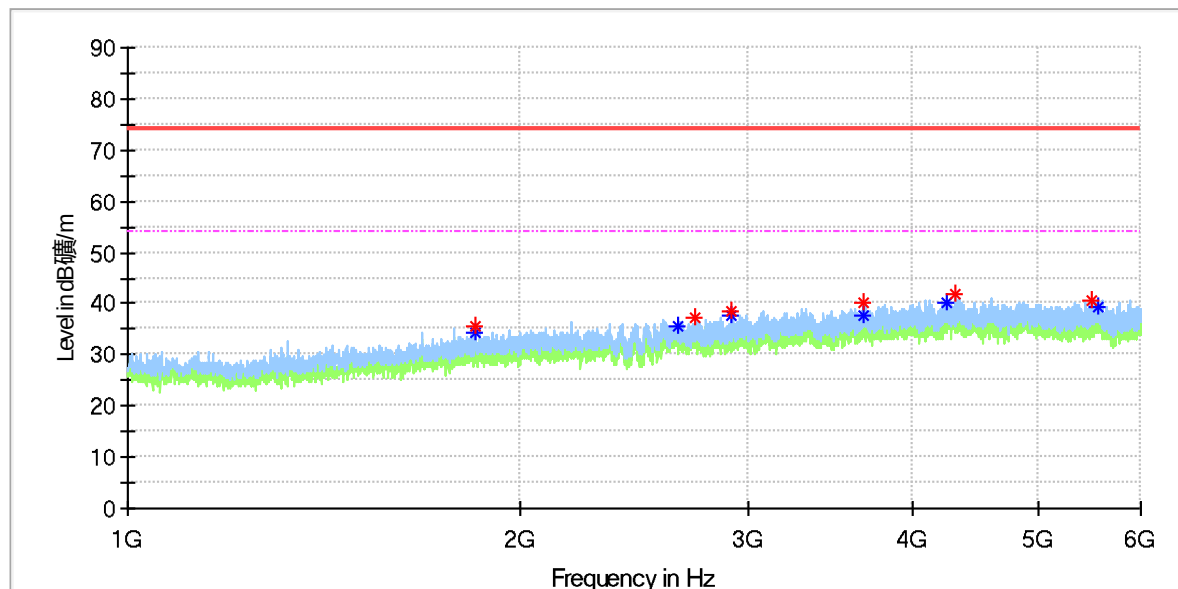


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1848.000000	---	34.15	54.00	19.85	100.0	H	17.0	-8.0
1848.000000	35.64	---	74.00	38.36	100.0	H	17.0	-8.0
2646.000000	---	35.60	54.00	18.40	100.0	H	335.0	-4.7
2725.500000	37.07	---	74.00	36.93	100.0	H	126.0	-5.2
2911.000000	---	37.64	54.00	16.36	100.0	H	257.0	-4.1
2911.000000	38.41	---	74.00	35.59	100.0	H	257.0	-4.1
3671.500000	---	37.75	54.00	16.25	100.0	H	235.0	-1.2
3671.500000	40.38	---	74.00	33.62	100.0	H	235.0	-1.2
4261.000000	---	40.35	54.00	13.65	100.0	H	246.0	1.2
4315.000000	41.79	---	74.00	32.21	100.0	H	246.0	1.1
5492.500000	40.52	---	74.00	33.48	100.0	H	92.0	1.9
5561.500000	---	39.51	54.00	14.49	100.0	H	273.0	2.4

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box without Earbuds as charging by PC
Test Voltage: AC 120V, 60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

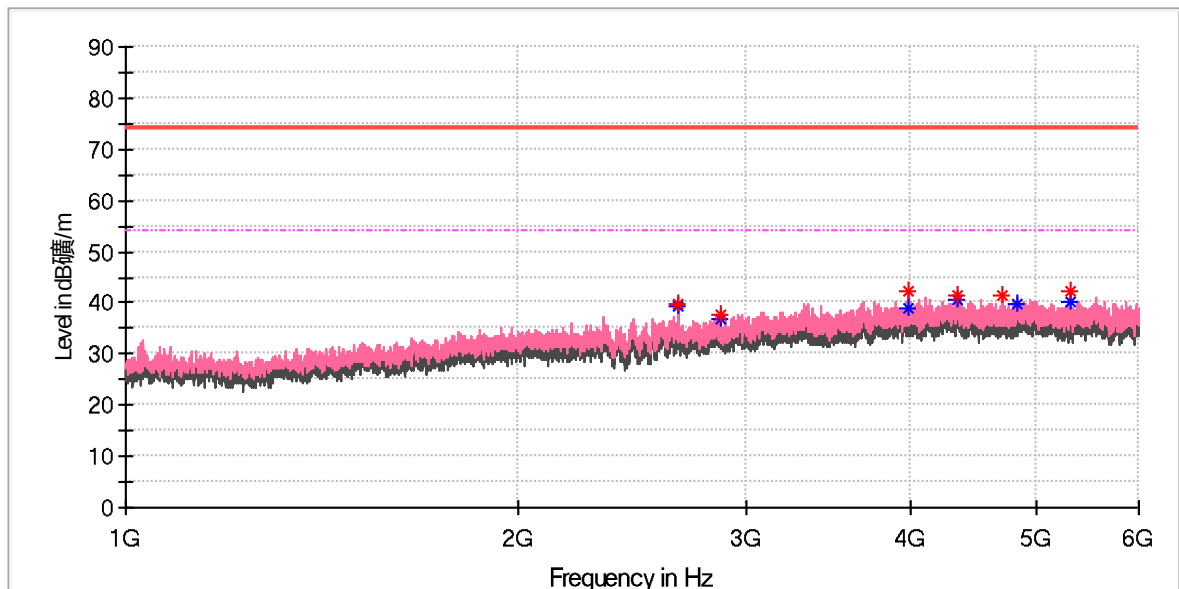


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2659.500000	---	39.48	54.00	14.52	100.0	V	343.0	-4.8
2659.500000	39.71	---	74.00	34.29	100.0	V	343.0	-4.8
2862.500000	---	36.69	54.00	17.31	100.0	V	204.0	-4.4
2862.500000	37.80	---	74.00	36.20	100.0	V	204.0	-4.4
3993.500000	42.30	---	74.00	31.71	100.0	V	58.0	0.0
3993.500000	---	39.07	54.00	14.93	100.0	V	58.0	0.0
4348.000000	41.52	---	74.00	32.48	100.0	V	256.0	1.1
4348.000000	---	40.58	54.00	13.42	100.0	V	256.0	1.1
4710.000000	41.37	---	74.00	32.63	100.0	V	121.0	0.8
4847.500000	---	39.97	54.00	14.03	100.0	V	58.0	1.7
5314.000000	---	40.14	54.00	13.86	100.0	V	188.0	1.5
5314.000000	42.23	---	74.00	31.77	100.0	V	188.0	1.5

Charging box with Earbuds as charging by PC

EUT Information

EUT Name:	True Wireless Stereo Earbuds
Order Number:	168412847
Model:	WIRTWSBKPRM
Test Mode:	Charging box with Earbuds as charging by PC
Test Voltage:	AC 120V, 60Hz
Test Standard:	FCC Part 15B
Test By:/Review By:	Guangshen / Gary Chen
Tem./Hum./Pressure:	23.3°C/50.6%/101kPa
Remark:	3m chamber

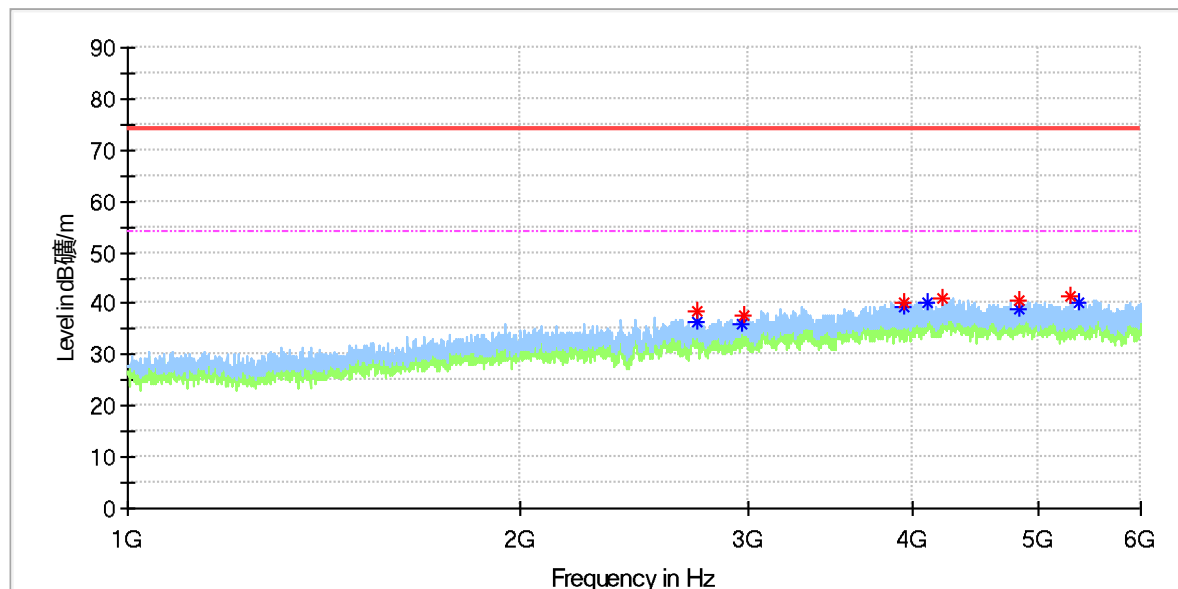


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2741.500000	38.65	---	74.00	35.35	100.0	H	318.0	-5.0
2741.500000	---	36.46	54.00	17.54	100.0	H	318.0	-5.0
2958.000000	---	36.17	54.00	17.83	100.0	H	234.0	-3.6
2973.000000	37.63	---	74.00	36.37	100.0	H	330.0	-3.5
3941.000000	40.28	---	74.00	33.72	100.0	H	269.0	-0.4
3941.000000	---	39.15	54.00	14.85	100.0	H	269.0	-0.4
4121.500000	---	40.08	54.00	13.92	100.0	H	306.0	0.4
4226.000000	41.03	---	74.00	32.97	100.0	H	262.0	0.6
4845.500000	---	39.07	54.00	14.93	100.0	H	200.0	1.6
4845.500000	40.46	---	74.00	33.54	100.0	H	200.0	1.6
5307.500000	41.25	---	74.00	32.75	100.0	H	350.0	1.4
5376.000000	---	40.06	54.00	13.94	100.0	H	154.0	2.1

EUT Information

EUT Name: True Wireless Stereo Earbuds
Order Number: 168412847
Model: WIRTWSBKPRM
Test Mode: Charging box with Earbuds as charging by PC
Test Voltage: AC 120V, 60Hz
Test Standard: FCC Part 15B
Test By:/Review By: Guangshen / Gary Chen
Tem./Hum./Pressure: 23.3°C/50.6%/101kPa
Remark: 3m chamber

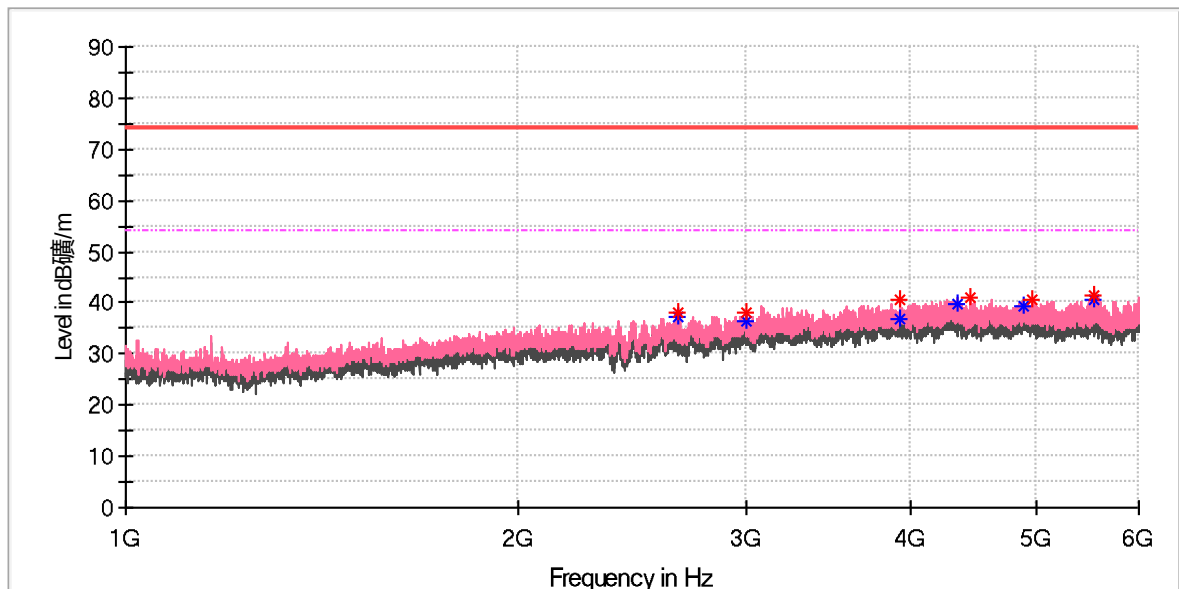

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2658.000000	---	37.17	54.00	16.83	100.0	V	335.0	-4.8
2658.000000	38.08	---	74.00	35.92	100.0	V	335.0	-4.8
2999.000000	---	36.49	54.00	17.51	100.0	V	176.0	-3.2
2999.000000	38.22	---	74.00	35.78	100.0	V	176.0	-3.2
3927.500000	40.41	---	74.00	33.59	100.0	V	106.0	-0.4
3927.500000	---	36.78	54.00	17.22	100.0	V	106.0	-0.4
4360.000000	---	39.76	54.00	14.24	100.0	V	35.0	0.9
4460.000000	41.02	---	74.00	32.98	100.0	V	0.0	0.9
4887.000000	---	39.18	54.00	14.82	100.0	V	22.0	1.9
4975.000000	40.67	---	74.00	33.33	100.0	V	118.0	1.8
5550.000000	41.55	---	74.00	32.45	100.0	V	324.0	2.6
5550.000000	---	40.81	54.00	13.19	100.0	V	324.0	2.6