4	3	
Specification Of TLS 2200®/TLS PC Link™ BradyBor Agency Approval(s)/Compliance: CSA Approved, UL Size: 2.35" W x 1.42" H (59.8 mm W x 36.1 mm H) Color: Silver Finish: Matte Material Type: Polyester Material Description: Ultra Aggressive Metallized Polyes Surface: Highly Textured, Low Surface Energy, Smooth Special Properties: Designed for powder coated surface RoHS Compatibility: Compliant with RoHS Directive. N RoHS Directive compliance refer to 2005/618/EC MCV a 2002/95/EC. Product compliance is based upon informat materials used by Brady to manufacture these products, these products. As such, Brady makes no independent r implied, and assumes no liability in connection with the u	Recognized ester , Textured/Rough es, Ultra-aggressive adhesive OTE: All statements concerning amendment to RoHS Directive tion provided by suppliers of the raw or by independent laboratory testing of epresentations or warranties, express or	
HELVETICA NEUE	Trimble +1 (888) 819 4355 +1 (281) 664 1330 www. trimble.com/liftingsolutions	PMN:GI HVIN:M
	IC: 5817A-G\$000G	FCC II
	This Device complies with Part Operation is subject to the follo 1. This device may not cause h 2. This device must accept any including interference that may	owing two o narmful inte y interferen

4

D

С

В

А

3


2.36

	2			1	
			REVISIONS		
	REV ECO) #	DESCRIPTION	DATE	APPRVD
	A		INITIAL RELEASE	09-SEP-2024	
	L				
					D
DM-	1125-	FCC-V2			C
MB10	03-00-	SD-A			
ID: 🤅	59E-(G\$200G			
			1.42		
e FCC	Rules.				
CON	ditons:				
torfoi	rence, a	and			
	-				B
nce i	n recei	ived.			
luesi	ieu ope	eration.			
	_				
			¥		

А

TO OTHERS, I	OR USED F	CONFI INS TRIMBLE INFORMATIC OR PURPOSES OTHER THA D UNLESS WRITTEN CONS	N TO CARRY OU	T THE INTEN	T FOR WHICH THIS			rim	h α ģ	Frimble Inc. 235 Stewart Sunnyvale, (Drive	ia 940	85
.X ± .XX ±	UNLESS (.06 .015 .005	$\begin{array}{rrrr} \mbox{THERWISE SPECIFIED} \\ \mbox{mm:X.} & \pm & 1.0 \\ \mbox{mm:} & .X & \pm & .70 \\ \mbox{mm:} & .XX \pm & .40 \end{array}$	THIRD A	NGLE P	ROJECTION	FCC LABEL - GS SERIES SENSORS							
SURF. FIN	1:63	ANGLES:± 1 °		NG PREPARED IN WITH ASME Y14.		SIZE			DWG. NO.				REV
TREATMENT			DRAWN BY:		PMR	C			UB250-GD	M-1125	-FCC	-V2	A
FINISH			ENGINEER:			SCALE	5:1			SHEET	1	OF	1
2									1				

 \mathcal{O}

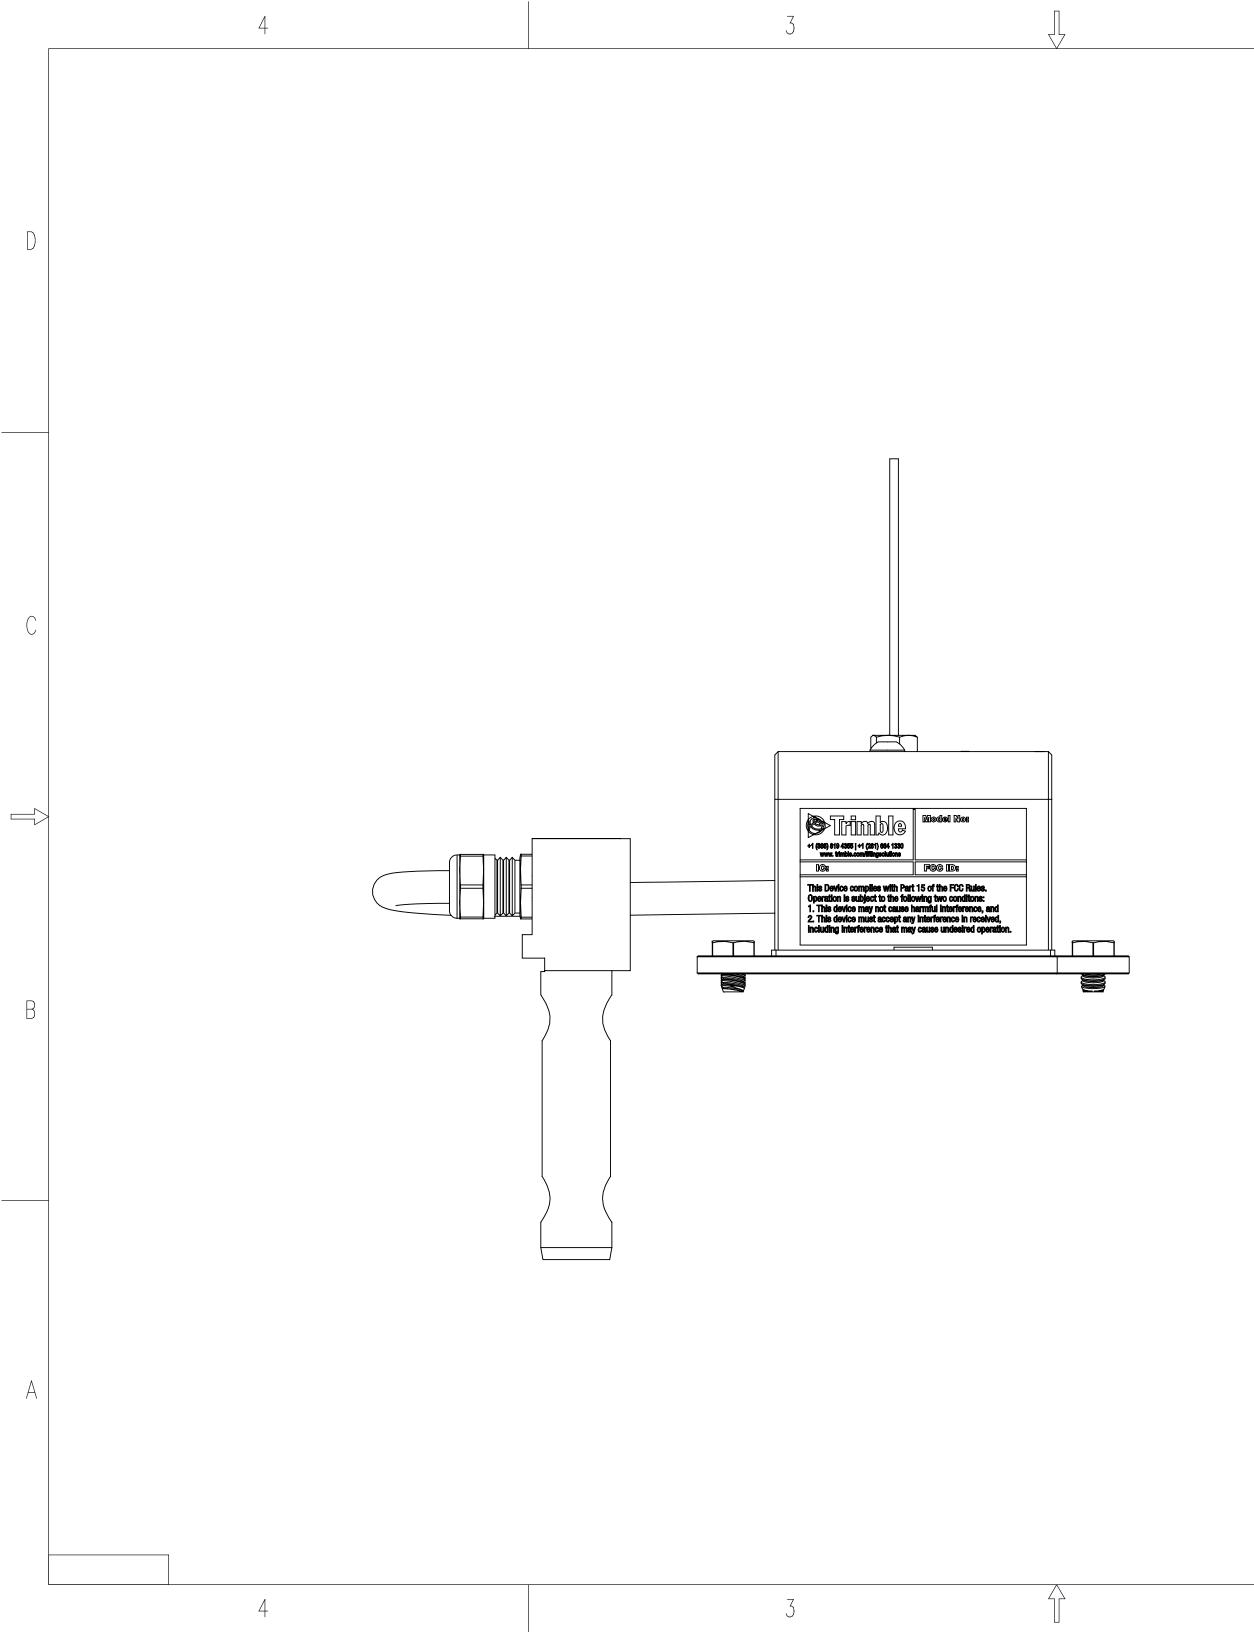

CONFIDENTIAL THIS DOCUMENT CONTAINS TRIMBLE INFORMATION AND SHALL NOT BE DUPLICATED. DISCLOSED TO OTHERS, OR USED FOR PURPOSES OTHER THAN TO CARRY OUT THE INTENT FOR WHICH THIS MATERIAL IS DELIVERED UNLESS WRITTEN CONSENT IS FIRST OBTAINED FROM TRIMBLE.				Trimble . Trimble Inc. 935 Stewart Drive Sunnyvale, California 94085					
TOLERANCES UNLESS OTHERWISE SPECIFIED.X \pm .06mm:X. \pm 1.0.XX \pm .015mm: .X \pm .70.XXX \pm .005mm: .XX \pm .40	THIRD A	NGLE PROJECTION	LABEL LOCATION GS SERIES LINE RIDER						
SURF. FIN:63 ANGLES:± 1 °		NG PREPARED IN ACCORDANCE VITH ASME Y14.5M-1994	SIZE		DWG. NO.				REV
TREATMENT	DRAWN BY:	PMR	C						А
FINISH	ENGINEER:		SCALE	1:2	•	SHEET	1	OF	1

1

0 DO 20000 To 0

REV	ECO #	DESCRIPTION	DATE	APPRVD
А		PRELIMINARY RELEASE	27/10/23	

2

2

D

С

В

А