



Excellence in Compliance Solutions

## **Certification Test Report**

**FCC ID: 2ADCB-RMODIT**

**IC: 6715C-RMODIT**

**FCC Rule Part: 15.247**

**ISED Canada's Radio Standards Specification: RSS-247**

**ACS Report Number: 16-3027.W06.1A**

**Manufacturer: Acuity Brands Lighting, Inc.  
Model: RMODIT**

**Test Begin Date: April 26, 2016**

**Test End Date: July 5, 2016**

**Report Issue Date: July 5, 2016**



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

**Randle Sherian  
Wireless Test Engineer  
Advanced Compliance Solutions, Inc.**

**Reviewed by:**

**Ryan McGann  
Wireless Program Manager  
Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 21 pages**

# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS .....	4
<b>2</b>	<b>TEST FACILITIES.....</b>	<b>5</b>
2.1	LOCATION .....	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS .....	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION .....	6
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	<i>6</i>
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION .....	7
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>8</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT .....</b>	<b>8</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>9</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>9</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>10</b>
7.1	ANTENNA REQUIREMENT – FCC 15.203 .....	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207, ISED CANADA: RSS-GEN 8.8.....	10
7.2.1	<i>Measurement Procedure.....</i>	<i>10</i>
7.2.2	<i>Measurement Results.....</i>	<i>10</i>
7.3	6dB / 99% BANDWIDTH – FCC 15.247(A)(2), ISED CANADA: RSS-247 5.2(1).....	13
7.3.1	<i>Measurement Procedure.....</i>	<i>13</i>
7.3.2	<i>Measurement Results.....</i>	<i>13</i>
7.4	FUNDAMENTAL EMISSION OUTPUT POWER – FCC 15.247(B)(3), ISED CANADA: RSS-247 5.4(4).....	15
7.4.1	<i>Measurement Procedure.....</i>	<i>15</i>
7.4.2	<i>Measurement Results.....</i>	<i>15</i>
7.5	EMISSION LEVELS – FCC 15.247(D), 15.205, 15.209; ISED CANADA RSS-247 5.5, RSS-GEN	
8.9/8.10	.....	16
7.5.1	<i>Emissions into Non-restricted Frequency Bands.....</i>	<i>16</i>
7.5.1.1	<i>Measurement Procedure.....</i>	<i>16</i>
7.5.1.2	<i>Measurement Results .....</i>	<i>16</i>
7.5.2	<i>Emissions into Restricted Frequency Bands.....</i>	<i>18</i>
7.5.2.1	<i>Measurement Procedure.....</i>	<i>18</i>
7.5.2.2	<i>Duty Cycle Correction .....</i>	<i>18</i>
7.5.2.3	<i>Measurement Results .....</i>	<i>18</i>
7.5.2.4	<i>Sample Calculation: .....</i>	<i>19</i>
7.6	POWER SPECTRAL DENSITY – FCC 15.247(E) ISED CANADA: RSS-247 5.2(2).....	20
7.6.1	<i>Measurement Procedure.....</i>	<i>20</i>
7.6.2	<i>Measurement Results .....</i>	<i>20</i>
<b>8</b>	<b>CONCLUSION .....</b>	<b>21</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and ISED Canada's Radio Standards Specification RSS-247 Certification.

### 1.2 Product Description

The RMODIT RF Module is a device designed to solder directly to another PCB using castellated edges and uses a Molex 47948-0001 surface mount antenna. The product is intended to allow a variety of Acuity Brands devices to communicate in a wireless network. This can either be done by using an external host processor, or by using the processor on the module.

There are two radios on the module. One radio is a 2.4GHz Bluetooth Low Energy radio. The other radio is a proprietary 902-928MHz (915MHz) Implementation. These radios are capable of transmitting and receiving at the same time.

Technical Information:

Detail	Description
Frequency Range	2402 to 2480 MHz
Number of Channels	3 advertising and 37 data
Modulation Format	GFSK (F1D)
Data Rates	To 1 Mbps
Number of Inputs/Outputs	1/1
Operating Voltage	3.3 VDC
Antenna Type / Gain	Surface Mount chip / 3.0dBi

Manufacturer Information:  
Acuity Brands Lighting, Inc.  
One Lithonia Way  
Conyers, GA 30012

EUT Serial Numbers: Acuity #1 was used for TX radiated and powerline conducted emissions and Acuity #2 was used for TX RF conducted emissions.

Test Sample Condition: The test samples were provided in good working order with no visible defects.

This report documents the 2.4GHz transmitter only. The 900MHz transmitter evaluation is documented in a separate report.

### **1.3 Test Methodology and Considerations**

The manufacturer provided test software to configure and exercise the transmitter. Acuity #1 and #2 were tested affixed to the Silicon Labs dev board to facilitate the testing. All transmitter RF conducted measurements were performed on Acuity #2 sample which was supplied with a temporary SMA antenna connector.

Three orientations of the EUT were investigated and X – orientation (laying flat) was the worst case.

This device contains two independent radios which can transmit simultaneously. Radiated inter-modulation testing was performed for all combinations of simultaneous transmission and found to be in compliance.

All testing was performed between April 26, 2016 and April 28, 2016 except for the low channel bandwidth measurement which was performed on July 5, 2016.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
2320 Presidential Drive, Suite 101  
Durham, NC 27703  
Phone: (919) 381-4235

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Registered Test Site Number: 637011  
ISED Test Site Registration Number: 20446

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is an aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

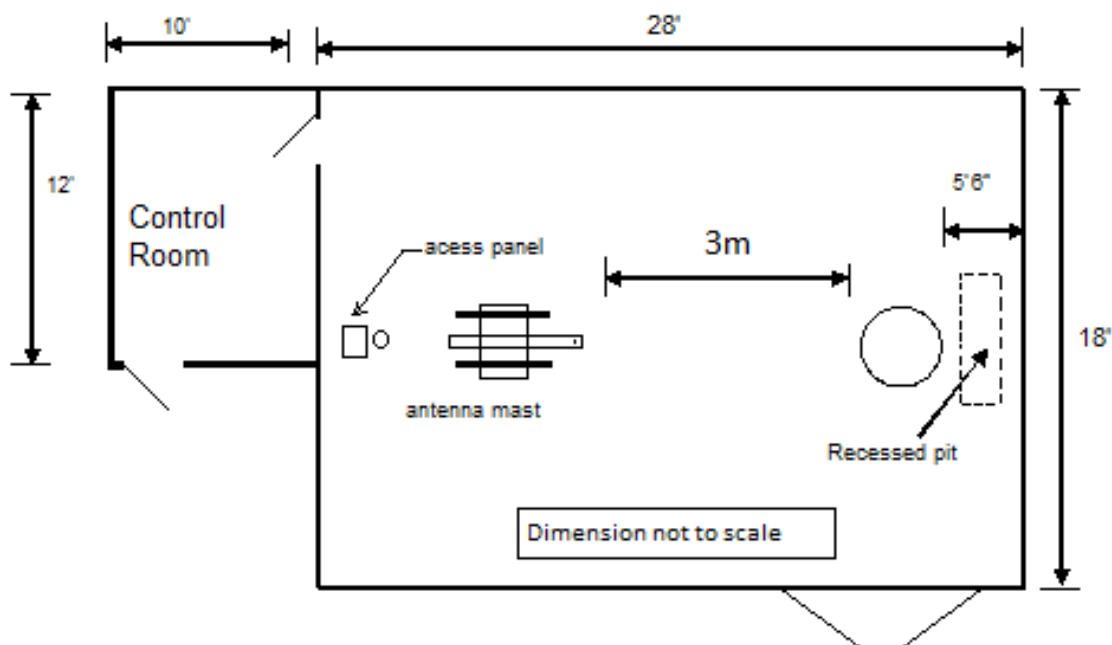


Figure 2.3-1: Semi-Anechoic Chamber Test Site

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.4-1:

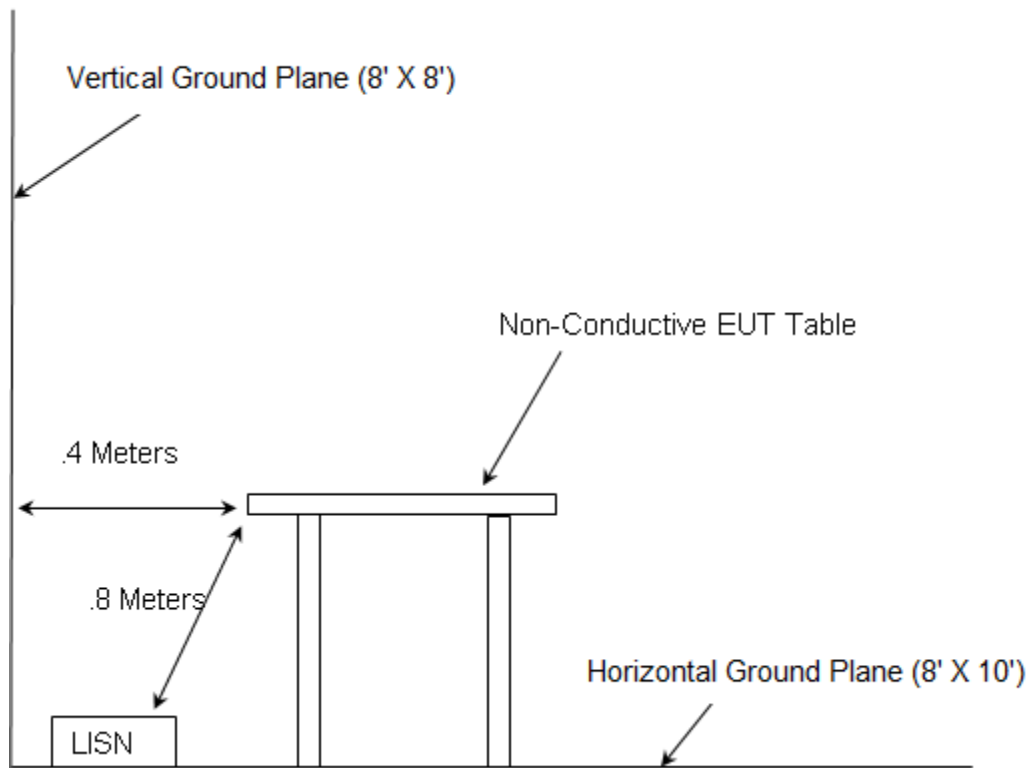


Figure 2.4-1: AC Mains Conducted EMI Site

### 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2014 - American National Standard for Methods of Measurement of Radio-Noise Emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v03r05 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 2016
- ❖ ISED Canada Radio Standards Specification: RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014

### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
277	EMCO	93146	Antennas	9904-5199	9/2/2014	9/2/2016
626	EMCO	3110B	Antennas	9411-1945	2/29/2016	2/28/2017
3002	Rohde & Schwarz	ESU40	Receiver	100346	1/8/2016	1/8/2017
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	6/29/2015	6/29/2016
3007	Rohde & Schwarz	TS-PR26	Amplifiers	100051	6/29/2015	6/29/2016
3008	Rohde & Schwarz	NRP2	Meter	103131	1/28/2016	1/28/2017
3009	Rohde & Schwarz	NRP-Z81	Meter	102397	1/28/2016	1/28/2017
3011	Rohde & Schwarz	ENV216	LISN	3011	7/10/2015	7/10/2016
3012	Rohde & Schwarz	EMC32-EB	Software	100731	2/2/2016	8/2/2016
3016	Technology	HA-07M18G-NF	Antennas	2013120203	1/26/2016	1/26/2017
3027	Micro-Tronics	BRM50702	Filter	175	12/21/2015	12/21/2016
3033	Hasco, Inc.	HLL142-S1-S1-36	Cables	1435	1/7/2016	1/7/2017
3038	Florida RF Labs	60.0-NMSE	Cable Set	1448	12/22/2015	12/22/2016
3045	Aeroflex Inmet	18N10W-20	Attenuator	1437	1/8/2016	1/8/2017
3051	Mountain View Cable	264.0-BMS	Cables	3051	12/30/2015	12/30/2016
3055	Rohde & Schwarz	3005	Cables	3055	12/30/2015	12/30/2016
3057	Materials	42-441-6/BR	Antennas	R110602	NCR	NCR

DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.

NCR = No Calibration Required

Firmware Version: ESU40 is 4.73 SP4

Software Version: EMC32-B is 9.15




## 5 SUPPORT EQUIPMENT

**Table 5-1: Support Equipment**

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	EUT	Acuity	RMODIT	Acuity #1 and 2
2	Power Module	Apple	A1265	1X1023QQ98Q7
3	Dev Board	Silicon Lab	PCB 4001 Rev. A03	151704857

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

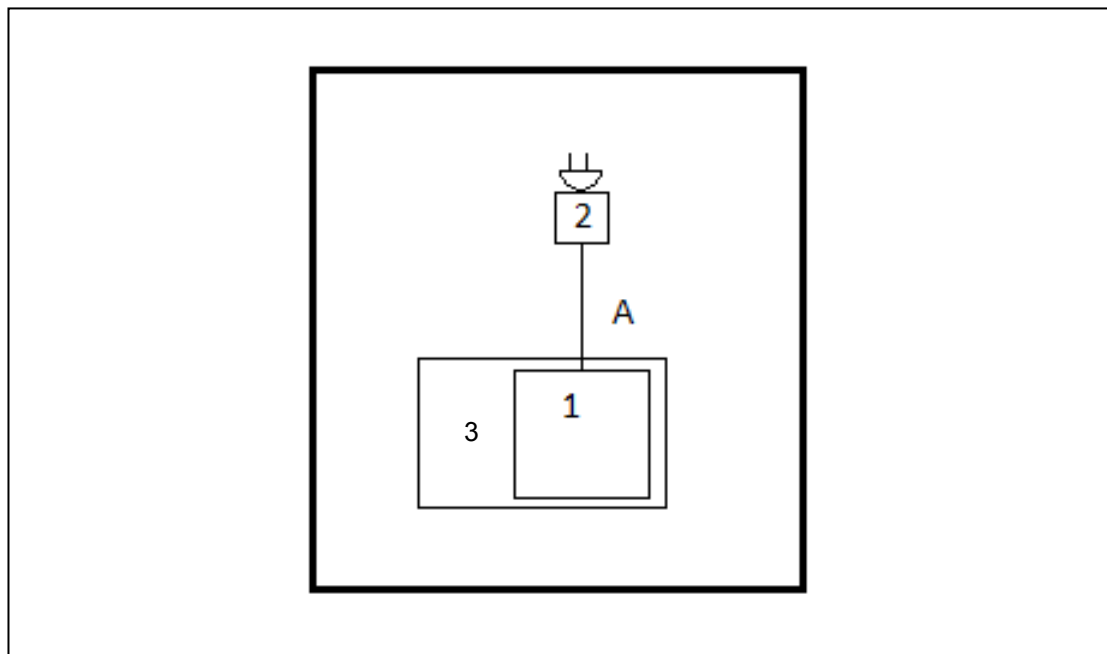

**Figure 6-1: Test Setup Block Diagram**

**Table 6-1: Cable Description**

Cable #	Cable Type	Length	Shield	Termination
A	USB A to mini USB	1.0m	No	Power Supply to EUT

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC 15.203

The antenna is a chip antenna with 3 dBi gain. The antenna is integral to the PCB and therefore satisfies the requirements of Section 15.203.

### 7.2 Power Line Conducted Emissions – FCC 15.207, ISED Canada: RSS-Gen 8.8

#### 7.2.1 Measurement Procedure

ANSI C63.4-2014 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**

**Margin = Applicable Limit - Corrected Reading**

#### 7.2.2 Measurement Results

**Table 7.2.2-1: Conducted EMI Results – Line - Nitol 900MHz Antenna**

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.230000	---	32.98	52.22	19.24	2000.0	9.000	L1	OFF	9.6
0.230000	49.79	---	62.26	12.47	2000.0	9.000	L1	OFF	9.6
0.464000	---	29.71	46.57	16.86	2000.0	9.000	L1	OFF	9.6
0.464000	42.20	---	56.57	14.37	2000.0	9.000	L1	OFF	9.6
0.696000	---	23.05	46.00	22.95	2000.0	9.000	L1	OFF	9.6
0.696000	37.30	---	56.00	18.70	2000.0	9.000	L1	OFF	9.6
0.700000	---	22.42	46.00	23.58	2000.0	9.000	L1	OFF	9.6
0.700000	38.22	---	56.00	17.78	2000.0	9.000	L1	OFF	9.6
0.920000	36.77	---	56.00	19.23	2000.0	9.000	L1	OFF	9.6
0.920000	---	19.19	46.00	26.81	2000.0	9.000	L1	OFF	9.6
0.924000	35.38	---	56.00	20.62	2000.0	9.000	L1	OFF	9.6
0.924000	---	21.14	46.00	24.86	2000.0	9.000	L1	OFF	9.6
1.148000	---	19.67	46.00	26.33	2000.0	9.000	L1	OFF	9.6
1.148000	39.84	---	56.00	16.16	2000.0	9.000	L1	OFF	9.6
1.452000	---	15.70	46.00	30.30	2000.0	9.000	L1	OFF	9.6
1.452000	35.34	---	56.00	20.66	2000.0	9.000	L1	OFF	9.6
2.064000	---	11.41	46.00	34.59	2000.0	9.000	L1	OFF	9.7
2.064000	34.87	---	56.00	21.13	2000.0	9.000	L1	OFF	9.7
2.176000	---	14.31	46.00	31.69	2000.0	9.000	L1	OFF	9.7
2.176000	34.49	---	56.00	21.51	2000.0	9.000	L1	OFF	9.7
2.296000	---	11.27	46.00	34.73	2000.0	9.000	L1	OFF	9.7
2.296000	33.73	---	56.00	22.27	2000.0	9.000	L1	OFF	9.7
2.992000	---	11.23	46.00	34.77	2000.0	9.000	L1	OFF	9.7
2.992000	31.39	---	56.00	24.61	2000.0	9.000	L1	OFF	9.7

Table 7.2.2-2: Conducted EMI Results – Neutral - Nitel 900MHz Antenna

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.230000	---	35.51	52.22	16.71	2000.0	9.000	N	OFF	9.7
0.230000	50.26	---	62.26	12.00	2000.0	9.000	N	OFF	9.7
0.468000	---	33.58	46.50	12.92	2000.0	9.000	N	OFF	9.7
0.468000	44.21	---	56.51	12.30	2000.0	9.000	N	OFF	9.7
0.696000	---	27.76	46.00	18.24	2000.0	9.000	N	OFF	9.8
0.696000	37.07	---	56.00	18.93	2000.0	9.000	N	OFF	9.8
0.700000	---	27.04	46.00	18.96	2000.0	9.000	N	OFF	9.8
0.700000	38.08	---	56.00	17.92	2000.0	9.000	N	OFF	9.8
0.932000	---	24.64	46.00	21.36	2000.0	9.000	N	OFF	9.8
0.932000	36.86	---	56.00	19.14	2000.0	9.000	N	OFF	9.8
1.164000	---	25.53	46.00	20.47	2000.0	9.000	N	OFF	9.8
1.164000	37.10	---	56.00	18.90	2000.0	9.000	N	OFF	9.8
1.460000	---	22.39	46.00	23.61	2000.0	9.000	N	OFF	9.8
1.460000	35.97	---	56.00	20.03	2000.0	9.000	N	OFF	9.8
1.468000	---	20.13	46.00	25.87	2000.0	9.000	N	OFF	9.8
1.468000	37.70	---	56.00	18.30	2000.0	9.000	N	OFF	9.8
2.100000	---	21.12	46.00	24.88	2000.0	9.000	N	OFF	9.9
2.100000	35.19	---	56.00	20.81	2000.0	9.000	N	OFF	9.9

Table 7.2.2-3: Conducted EMI Results – Line - Taoglas 900MHz Antenna

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.222000	---	35.50	52.53	17.03	2000.0	9.000	L1	OFF	9.5
0.222000	51.83	---	62.56	10.73	2000.0	9.000	L1	OFF	9.5
0.444000	---	30.00	46.90	16.90	2000.0	9.000	L1	OFF	9.6
0.444000	43.35	---	56.92	13.57	2000.0	9.000	L1	OFF	9.6
0.664000	37.25	---	56.00	18.75	2000.0	9.000	L1	OFF	9.6
0.664000	---	22.01	46.00	23.99	2000.0	9.000	L1	OFF	9.6
0.668000	38.55	---	56.00	17.45	2000.0	9.000	L1	OFF	9.6
0.668000	---	22.55	46.00	23.45	2000.0	9.000	L1	OFF	9.6
0.944000	---	11.31	46.00	34.69	2000.0	9.000	L1	OFF	9.6
0.944000	33.11	---	56.00	22.89	2000.0	9.000	L1	OFF	9.6
1.100000	40.56	---	56.00	15.44	2000.0	9.000	L1	OFF	9.6
1.100000	---	22.79	46.00	23.21	2000.0	9.000	L1	OFF	9.6
1.116000	---	24.39	46.00	21.61	2000.0	9.000	L1	OFF	9.6
1.116000	40.58	---	56.00	15.42	2000.0	9.000	L1	OFF	9.6
1.120000	40.06	---	56.00	15.94	2000.0	9.000	L1	OFF	9.6
1.120000	---	23.01	46.00	22.99	2000.0	9.000	L1	OFF	9.6
1.336000	---	16.88	46.00	29.12	2000.0	9.000	L1	OFF	9.6
1.336000	32.65	---	56.00	23.35	2000.0	9.000	L1	OFF	9.6
1.392000	---	20.16	46.00	25.84	2000.0	9.000	L1	OFF	9.6
1.392000	39.61	---	56.00	16.39	2000.0	9.000	L1	OFF	9.6
1.752000	---	10.27	46.00	35.73	2000.0	9.000	L1	OFF	9.6
1.752000	44.09	---	56.00	11.91	2000.0	9.000	L1	OFF	9.6
1.968000	---	6.03	46.00	39.97	2000.0	9.000	L1	OFF	9.7
1.968000	29.48	---	56.00	26.52	2000.0	9.000	L1	OFF	9.7
2.088000	---	13.72	46.00	32.28	2000.0	9.000	L1	OFF	9.7
2.088000	34.00	---	56.00	22.00	2000.0	9.000	L1	OFF	9.7
2.852000	---	10.69	46.00	35.31	2000.0	9.000	L1	OFF	9.7
2.852000	33.57	---	56.00	22.43	2000.0	9.000	L1	OFF	9.7
4.168000	---	12.25	46.00	33.75	2000.0	9.000	L1	OFF	9.7
4.168000	32.40	---	56.00	23.60	2000.0	9.000	L1	OFF	9.7

Table 7.2.2-4: Conducted EMI Results – Neutral - Taoglas 900MHz Antenna

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.222000	---	37.18	52.53	15.35	2000.0	9.000	N	OFF	9.7
0.222000	51.84	---	62.56	10.72	2000.0	9.000	N	OFF	9.7
0.444000	---	33.96	46.90	12.94	2000.0	9.000	N	OFF	9.7
0.444000	44.48	---	56.92	12.44	2000.0	9.000	N	OFF	9.7
0.664000	---	25.17	46.00	20.83	2000.0	9.000	N	OFF	9.8
0.664000	36.72	---	56.00	19.28	2000.0	9.000	N	OFF	9.8
0.672000	---	25.77	46.00	20.23	2000.0	9.000	N	OFF	9.8
0.672000	38.31	---	56.00	17.69	2000.0	9.000	N	OFF	9.8
0.892000	---	24.83	46.00	21.17	2000.0	9.000	N	OFF	9.8
0.892000	37.38	---	56.00	18.62	2000.0	9.000	N	OFF	9.8
1.120000	---	24.67	46.00	21.33	2000.0	9.000	N	OFF	9.8
1.120000	37.17	---	56.00	18.83	2000.0	9.000	N	OFF	9.8
1.336000	---	22.70	46.00	23.30	2000.0	9.000	N	OFF	9.8
1.336000	36.08	---	56.00	19.92	2000.0	9.000	N	OFF	9.8
1.416000	---	15.66	46.00	30.34	2000.0	9.000	N	OFF	9.8
1.416000	36.61	---	56.00	19.39	2000.0	9.000	N	OFF	9.8
2.016000	---	19.94	46.00	26.06	2000.0	9.000	N	OFF	9.8
2.016000	34.76	---	56.00	21.24	2000.0	9.000	N	OFF	9.8

Note: Power line conducted emissions was performed with the 900MHz and 2.4GHz radio in Transmit. The above tables document the 900MHz antenna variables with the 2.4GHz surface mount antenna combinations.

### 7.3 6dB / 99% Bandwidth – FCC 15.247(a)(2), ISED Canada: RSS-247 5.2(1)

#### 7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r05. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to  $\geq 3$  times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth.

#### 7.3.2 Measurement Results

Table 7.3.2-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth [MHz]
2402	745.00	1.09
2440	745.19	1.09
2480	753.21	1.10

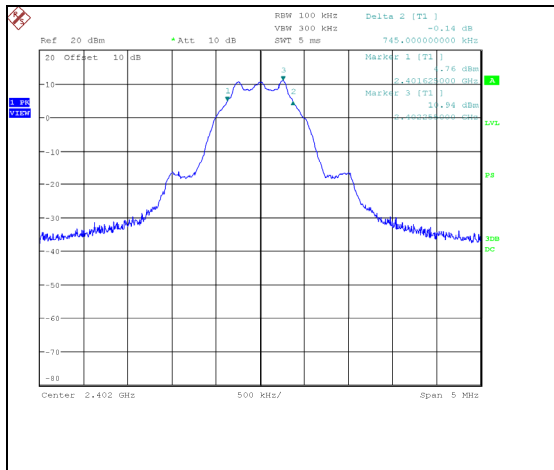


Figure 7.3.2-1: 6dB Bandwidth Low Channel

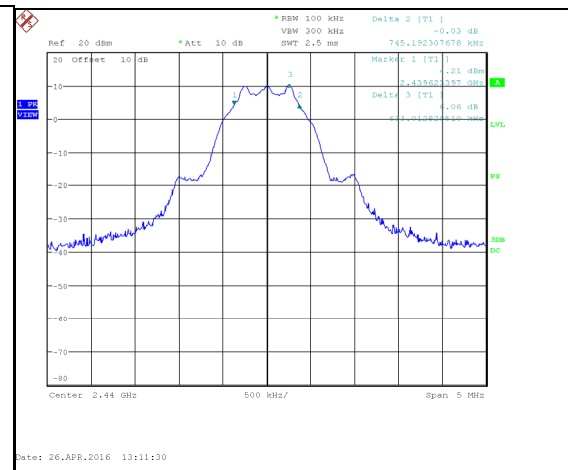


Figure 7.3.2-2: 6dB Bandwidth Mid Channel

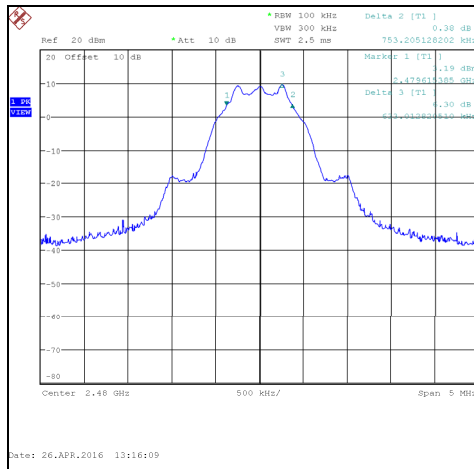


Figure 7.3.2-3: 6dB Bandwidth High Channel

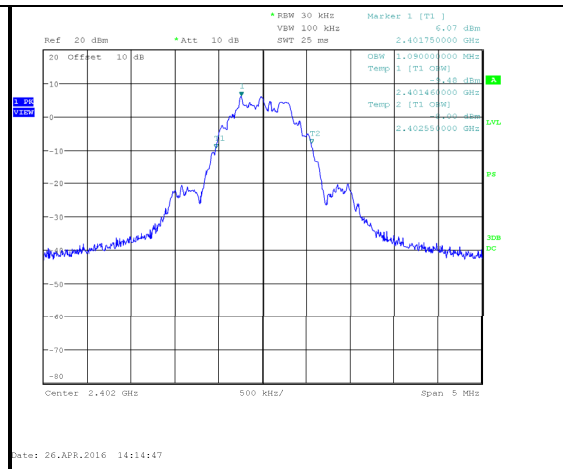


Figure 7.3.2-4: 99% Bandwidth Low Channel

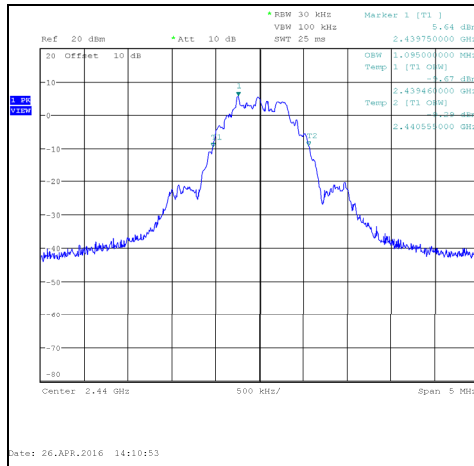


Figure 7.3.2-5: 99% Bandwidth Mid Channel

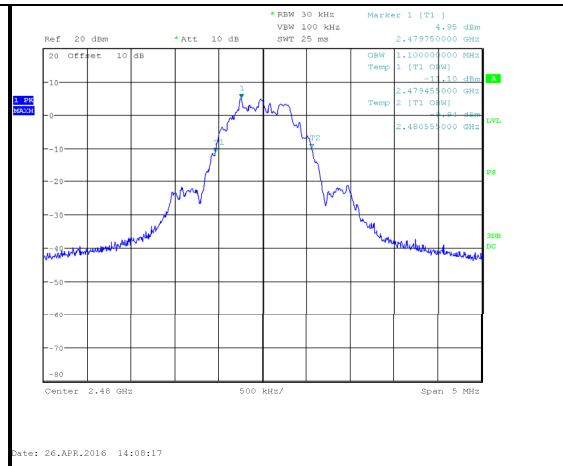


Figure 7.3.2-6: 99% Bandwidth High Channel

**7.4 Fundamental Emission Output Power – FCC 15.247(b)(3), ISED Canada: RSS-247 5.4(4)****7.4.1 Measurement Procedure**

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Measurement Guidance v03r05 utilizing the PKPM1 Peak power meter method. The RF output of the equipment under test was directly connected to the input of the peak power meter applying suitable attenuation.

**7.4.2 Measurement Results****Table 7.4.2-1: Maximum Peak Conducted Output Power**

Frequency (MHz)	Output Power (dBm)	Output Power (Watts)
2402	9.55	0.009
2440	9.03	0.008
2480	8.25	0.007

## 7.5 Emission Levels – FCC 15.247(d), 15.205, 15.209; ISCED Canada RSS-247 5.5, RSS-Gen 8.9/8.10

### 7.5.1 Emissions into Non-restricted Frequency Bands

#### 7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Measurement Guidance v03r05. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to  $\geq 300$  kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30 MHz to 25 GHz, 10 times the highest fundamental frequency. Additionally a prescan was performed from 9 kHz or the lowest frequency generated to 30 MHz.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

#### 7.5.1.2 Measurement Results

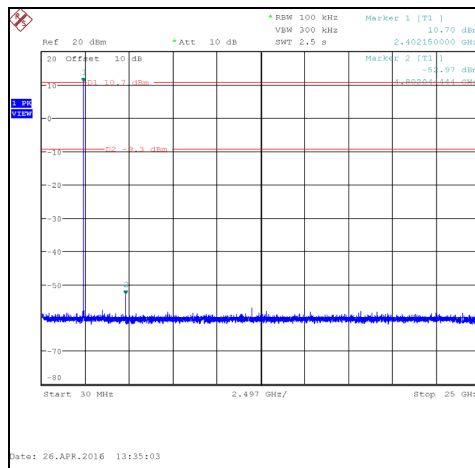


Figure 7.5.1.2-1: 30 MHz – 25 GHz – LCH

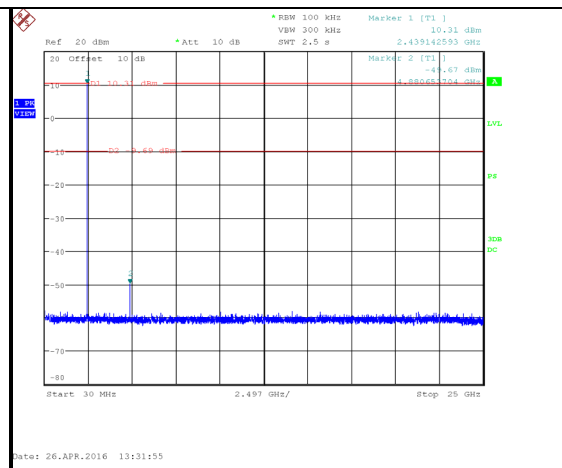


Figure 7.5.1.2-2: 30 MHz – 25 GHz – MCH

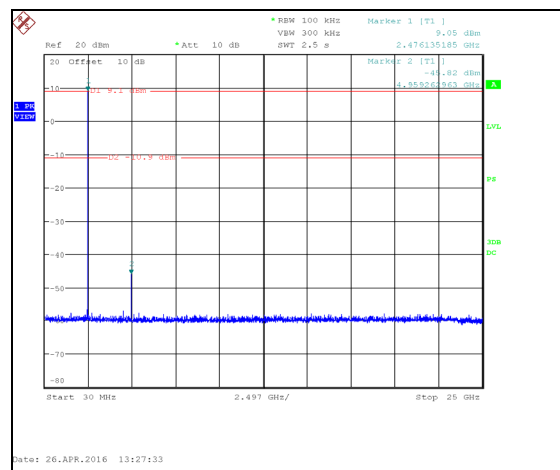


Figure 7.5.1.2-3: 30 MHz – 25 GHz – HCH



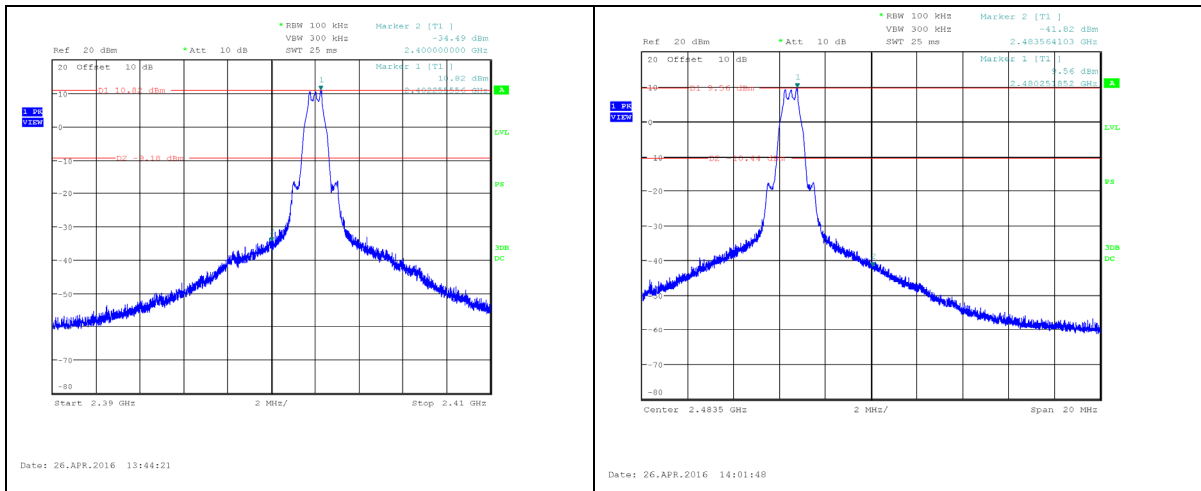


Figure 7.5.1.2-4: Lower Band-edge - LCH

Figure 7.5.1.2-5: Upper Band-edge - HCH

## 7.5.2 Emissions into Restricted Frequency Bands

### 7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30 MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

### 7.5.2.2 Duty Cycle Correction

For average radiated measurements, using a 4.88% duty cycle, the measured level was reduced by a factor 26.23 dB. The duty cycle correction factor is determined using the formula:  $20\log(4.88/100) = -26.23$  dB.

A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the application for certification.

### 7.5.2.3 Measurement Results

**Table 7.5.2.3-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4804	55.70	46.70	H	6.50	62.20	26.97	74.0	54.0	11.8	27.0
4804	51.30	42.00	V	6.50	57.80	22.27	74.0	54.0	16.2	31.7
Middle Channel										
4880	57.00	48.30	H	6.50	63.50	28.57	74.0	54.0	10.5	25.4
4880	53.90	45.00	V	6.50	60.40	25.27	74.0	54.0	13.6	28.7
7320	38.17	24.83	H	9.19	47.36	7.79	74.0	54.0	26.6	46.2
High Channel										
4960	53.70	43.50	H	6.50	60.20	23.77	74.0	54.0	13.8	30.2
4960	52.30	42.00	V	6.50	58.80	22.27	74.0	54.0	15.2	31.7
7440	43.40	29.60	H	9.75	53.15	13.11	74.0	54.0	20.9	40.9
7440	41.70	27.50	V	9.75	51.45	11.01	74.0	54.0	22.6	43.0
2483.5	70.80	53.70	H	-1.47	69.33	26.00	74.0	54.0	4.7	28.0
2483.5	58.90	41.50	V	-1.47	57.43	13.80	74.0	54.0	16.6	40.2

**7.5.2.4 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level:  $55.70 + 6.50 = 62.20\text{dBuV/m}$

Margin:  $74\text{dBuV/m} - 62.20\text{dBuV/m} = 11.80\text{ dB}$

**Example Calculation: Average**

Corrected Level:  $46.70 + 6.50 - 26.23 = 26.97\text{dBuV/m}$

Margin:  $54\text{dBuV/m} - 26.97\text{dBuV/m} = 27.0\text{ dB}$

## 7.6 Power Spectral Density – FCC 15.247(e) ISED Canada: RSS-247 5.2(2)


### 7.6.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Measurement Guidance v03r05 utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

### 7.6.2 Measurement Results


**Table 7.6.2-1: Peak Power Spectral Density**

Frequency (MHz)	PSD Level (dBm)
2402	-3.63
2440	-4.10
2480	-4.87

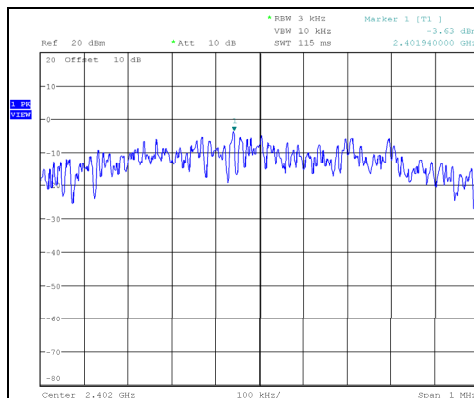


Date: 26.APR.2016 14:30:21

**Figure 7.6.2-1: PSD Plot –LCH**

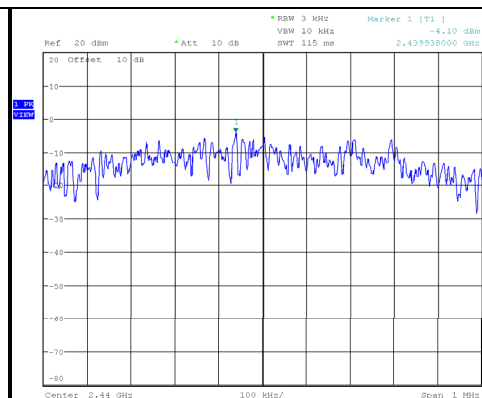

Date: 26.APR.2016 14:33:50

**Figure 7.6.2-2: PSD Plot – MCH**

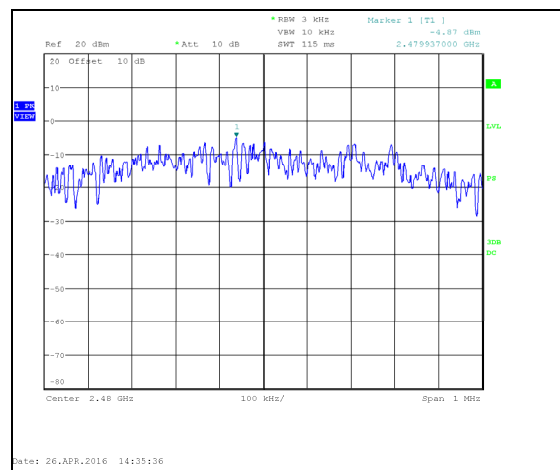

Date: 26.APR.2016 14:35:36

**Figure 7.6.2-3: PSD Plot – HCH**

**8 CONCLUSION**

In the opinion of ACS, Inc. the RMODIT, manufactured by Acuity Brands Lighting, Inc. meets the requirements of FCC Part 15 subpart C and ISED Canada's Radio Standards Specification RSS-247.

**END REPORT**