


# System Validation - D2450V2 S/N:706

(Antenna input power: 250 mW)

SAM-2; Flat  
Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50); Crest factor: 1.0  
Head 2450MHz:  $\sigma = 1.97 \text{ mho/m}$   $\epsilon_r = 39.6$   $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: Peak: 29.6 mW/g, SAR (1g): 14.2 mW/g, SAR (10g): 6.53 mW/g, (Worst-case extrapolation)  
Penetration depth: 6.4 (6.2, 7.0) [mm]  
Powerdrift: 0.01 dB

Ambient Temperature (degree C): 22.0  
Liquid Temperature (degree C): 20.5

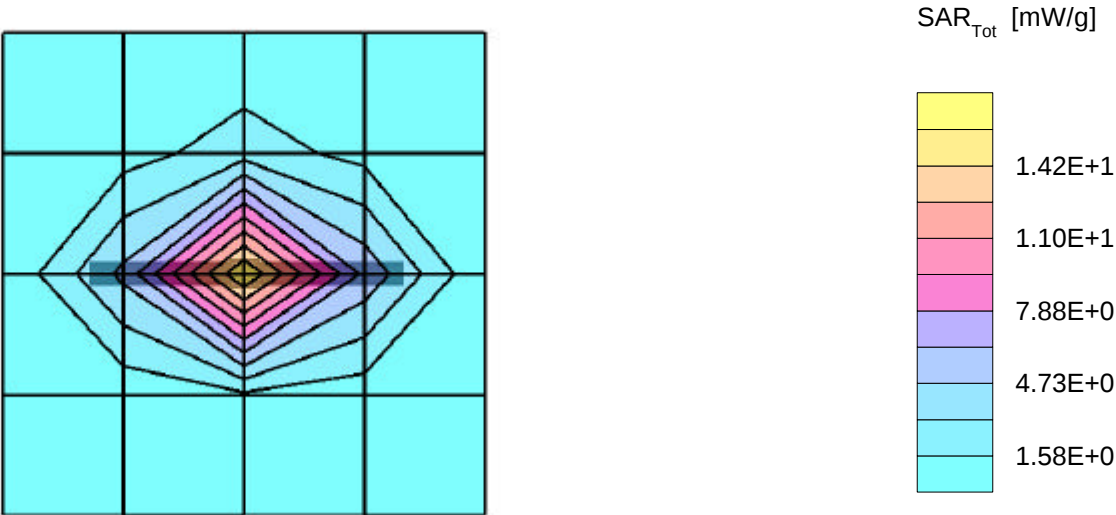

# System Validation - D2450V2 S/N:706

(Antenna input power: 250 mW)

SAM-2;  
Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50); Crest factor: 1.0  
Head 2450MHz:  $\sigma = 1.97 \text{ mho/m}$   $\epsilon_r = 39.6$   $\rho = 1.00 \text{ g/cm}^3$   
: , , ()  
Penetration depth: 6.4 (6.1, 7.0) [mm]

Ambient Temperature (degree C): 22.0  
Liquid Temperature (degree C): 20.5

