TEST REPORT

Application No.:	FYCR2208000294AT
Applicant:	Wyze Labs, Inc.
Address of Applicant:	5808 Lake Washington Blvd NE Ste 300, Kirkland, Washington 98033 United States
Manufacturer:	ShenZhen Dophigo IoT Technology Co.,Ltd.
Address of Manufacturer:	B02, first floor, building No.9, Nanshan Yungu start-up business industrial park second part, No.2, Pingshan first road, Pingshan Community, Taoyuan Street, Nanshan district, Shenzhen.
Factory:	Shenzhen Sunwinon Electronic Co., LTD
Address of Factory:	1-6 Floor, No.101, Building 4, 6-6 Yanshan Avenue, Yanchuan Community, Yanluo Street, Baoan District, Shenzhen, China
Equipment Under Test (EUT):	
EUT Name:	Wyze Cam OG, Wyze Cam OG Telephoto 3x
Model No.:	WYZECGS, WYZECGT ♣
♣	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark:	WYZE
FCC ID:	2AUIUWYZECGS
Standard(s) :	47 CFR Part 15, Subpart C 15.247
Date of Receipt:	2022-08-03
Date of Test:	2022-08-08 to 2022-08-30
Date of Issue:	2022-09-20
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Winkey Wang
EMC Technical Manager

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2022-09-20		Original

Authorized for issue by:				
		Tree Zhan		
		Tree Zhan/Project Engineer		
		Winkey Wang		
		Winkey Wang/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	**Standard**	**Method**	**Requirement**	**Result**
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Declaration of EUT Family Grouping:

Model No.: WYZECGS, WYZECGT

Since according to the declaration from the applicant, the electrical circuit design, PCB layout, components used, internal wiring and functions were identical for all the above models, with only difference on model name and the following information.

Differentiators		Wyze Cam Gemini T, WYZECGT			Wyze Cam Gemini S, WYZECGS		
		Explain	Specifications	Illustration	Explain	Specifications	Illustration
Electronics	Lamp panel	No white light; Drive circuit and components without white light Infrared lamps have different focal lengths	/		With white light; Driving circuit and components with white light Infrared lamps have different focal lengths	/	
	Camera lens	Long focus lens - Liding Secondary lens - Taiyi	Long focus lens, F1.83 long focus lens TTL23.97mm, E3401B-R3, Liding FL-018I+FL-ICR143, Taiyi		Short focus lens - Yu T	1.6 Lens YT10131-HD+H97+IR0716, Yutong	
Structure	Front shell	No white light opening	Infrared PC, surface highlight, 45.4X45.4X29.6 (MM)		Opening with white lig	Infrared PC, surface highlight, 45.4X45.4X29.6 (MM)	
	Decorative sheet	With golden silk screen	UV resistant/aging resistant PC+ABS, high gloss surface, white material, silk screen ring on the surface, 0.5MM wide, after UV specification 46X46X1.2 (MM)		No gold screen	UV resistant/aging resistant PC+ABS, high gloss, white material, UV specification 46X46X1.2 (MM)	
	Lens waterproof sleeve	φ19.2X5.4	Silicone, 50 degree, black, specification: φ 19.2X5.4		φ18.2X5.4	Silicone, 50 degree, black, specification: φ 18.2X5.4	
	White light lens	No lens	/	/	Lensed	Transparent PC, internally etched Fresnel lens surface, specification: 11.8X5.3X5.4 (MM)	
	Other						
Packaging materials							
Parts	Adapter		5V, 1A			5V, 1A	
	1/2 wire rod		/			/	
	Combined support		/			/	

Certification Difference List	Short focus version A	Long focus version A
Name	Wyze Cam Gemini S	Wyze Cam Gemini T
Model	WYZECGS	WYZECGT
Adapter	Adapter 1 GangQi 5V,1A	Adapter 1 GangQi 5V,1A
Secondary supply adapter	Adapter 2 Dee Van 5V,1A	Adapter 2 Dee Van 5V,1A
Brand difference of inductance between antenna matching and WIFI chip matching	Qilixin CHQ0606T series	Qilixin CHQ0606T series
Sensor IC power supply IC LDO	ME6212	ME6212
Interface TVS pipe	LESD5D5 of LRC	LESD5D5 of LRC
Power inlet fuse	JK-nSMD200/F1206	JK-nSMD200/F1206
PCB board	The material of supplier A is the same	The material of supplier A is the same
Audio power amplifier chip	LTK5135	LTK5135

Based on these differences, WYZECGS has tested all items with adapter 1, tested Conducted Emissions at AC Power Line (150kHz-30MHz) and Radiated Spurious Emissions Below 1GHz with adapter 2. WYZECGT(Liding lens) tested Radiated Spurious Emissions Below 1GHz with adapter 1 and adapter 2.

3 Contents

Page

1 COVER PAGE 1

2 TEST SUMMARY 3

3 CONTENTS 6

4 GENERAL INFORMATION 8

4.1 DETAILS OF E.U.T. 8
4.2 DESCRIPTION OF SUPPORT UNITS 8
4.3 MEASUREMENT UNCERTAINTY 9
4.4 TEST LOCATION 10
4.5 TEST FACILITY 10
4.6 DEVIATION FROM STANDARDS 10
4.7 ABNORMALITIES FROM STANDARD CONDITIONS 10

5 EQUIPMENT LIST 11

6 RADIO SPECTRUM TECHNICAL REQUIREMENT 16

6.1 ANTENNA REQUIREMENT 16
6.1.1 Test Requirement: *16*
6.1.2 Conclusion *16*

7 RADIO SPECTRUM MATTER TEST RESULTS 17

7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) 17
7.1.1 E.U.T. Operation *17*
7.1.2 Test Mode Description *17*
7.1.3 Test Setup Diagram *18*
7.1.4 Measurement Procedure and Data *18*
7.2 CONDUCTED PEAK OUTPUT POWER 23
7.2.1 E.U.T. Operation *23*
7.2.2 Test Mode Description *23*
7.2.3 Test Setup Diagram *24*
7.2.4 Measurement Procedure and Data *24*
7.3 MINIMUM 6DB BANDWIDTH 25
7.3.1 E.U.T. Operation *25*
7.3.2 Test Mode Description *25*
7.3.3 Test Setup Diagram *25*
7.3.4 Measurement Procedure and Data *25*
7.4 POWER SPECTRUM DENSITY 26
7.4.1 E.U.T. Operation *26*
7.4.2 Test Mode Description *26*
7.4.3 Test Setup Diagram *26*
7.4.4 Measurement Procedure and Data *26*
7.5 CONDUCTED BAND EDGES MEASUREMENT 27
7.5.1 E.U.T. Operation *27*

7.5.2 Test Mode Description 27
7.5.3 Test Setup Diagram 28
7.5.4 Measurement Procedure and Data 28
7.6 CONDUCTED SPURIOUS EMISSIONS 29
7.6.1 E.U.T. Operation 29
7.6.2 Test Mode Description 29
7.6.3 Test Setup Diagram 30
7.6.4 Measurement Procedure and Data 30
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS 31
7.7.1 E.U.T. Operation 31
7.7.2 Test Mode Description 31
7.7.3 Test Setup Diagram 32
7.7.4 Measurement Procedure and Data 32
7.8 RADIATED SPURIOUS EMISSIONS BELOW 1GHZ 65
7.8.1 E.U.T. Operation 65
7.8.2 Test Mode Description 65
7.8.3 Test Setup Diagram 67
7.8.4 Measurement Procedure and Data 67
7.9 RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ 76
7.9.1 E.U.T. Operation 76
7.9.2 Test Mode Description 76
7.9.3 Test Setup Diagram 76
7.9.4 Measurement Procedure and Data 77

8 TEST SETUP PHOTO 102

9 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) 102

10 APPENDIX 103

4 General Information

4.1 Details of E.U.T.

Power Supply:	Adapter 1 GangQi: Model: GQ06A-050100-ZUU Input: 100-240V 50/60Hz 0.3A Output: 5V 1A 5W Adapter 2 Dee Van: Model: DSA-5PF16-05 FUS 050100U Input: 100-240V 50/60Hz 0.2A Output: 5V 1A 5W
Cable(s):	USB cable 182cm unshielded WYZECGS & WYZECGT built-in USB cable 17cm unshielded
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK);802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Number of Channels:	802.11b/g/n(HT20):11;802.11n(HT40):7
Channel Spacing:	5MHz
Antenna Type:	Metal antenna
Antenna Gain:	2.36dBi

Remark 1: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Remark 2: EUT was tested at 120 VAC, 50 / 60Hz and 240 VAC, 50 / 60Hz, and only the worst data 120 VAC, 60Hz were retained in the report.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 2.1 dB (9kHz to 30MHz)
Conducted Peak Output Power	± 0.8dB
Minimum 6dB Bandwidth	± 0.3%
Power Spectrum Density	± 0.4dB
Conducted Band Edges Measurement	± 2.7dB
Conducted Spurious Emissions	± 2.7dB
Radiated Emissions which fall in the restricted bands	± 4.4dB (Above 1GHz)
Radiated Spurious Emissions Below 1GHz	± 3.1dB (Below 1GHz)
Radiated Spurious Emissions Above 1GHz	± 4.4dB (Above 1GHz)

4.4 Test Location

All tests were performed at:

Compliance Certification Services（Kunshan）Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark,Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China

Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6606.01)

Compliance Certification Services（Kunshan）Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

• FCC –Designation Number: CN1322

Compliance Certification Services（Kunshan）Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

• Innovation, Science and Economic Development Canada

Compliance Certification Services（Kunshan）Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Shielding Room	CRT	N/A	SEM001-14	2021/7/13	2024/7/12
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-01	2022/7/12	2023/7/11
Two-Line V-Network	Rohde & Schwarz	ENV216	SEM007-16	2022/7/12	2023/7/11
Two-Line V-Network	Rohde & Schwarz	ESH3-Z5	SEM007-22	2022/1/10	2023/1/9
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

Conducted Peak Output Power					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-15	2022/7/12	2023/7/11
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/7/12	2023/7/11
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2022/7/12	2023/7/11

Minimum 6dB Bandwidth					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/7/12	2023/7/11
MXA Signal Analyzer	Agilent	N9020A	SEM004-20	2022/7/12	2023/7/11
Signal Generator	Agilent	N5173B	SEM006-05	2022/7/12	2023/7/11
ESG Vector Signal Generator	Agilent	E4438C	SEM006-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-16	2022/7/12	2023/7/11
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-08	2022/7/12	2023/7/11
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/7/12	2023/7/11
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2022/7/12	2023/7/11
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A

Power Spectrum Density					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/7/12	2023/7/11
MXA Signal Analyzer	Agilent	N9020A	SEM004-20	2022/7/12	2023/7/11
Signal Generator	Agilent	N5173B	SEM006-05	2022/7/12	2023/7/11
ESG Vector Signal Generator	Agilent	E4438C	SEM006-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-16	2022/7/12	2023/7/11
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-08	2022/7/12	2023/7/11
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/7/12	2023/7/11
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2022/7/12	2023/7/11
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A

Conducted Band Edges Measurement					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/7/12	2023/7/11
MXA Signal Analyzer	Agilent	N9020A	SEM004-20	2022/7/12	2023/7/11
Signal Generator	Agilent	N5173B	SEM006-05	2022/7/12	2023/7/11
ESG Vector Signal Generator	Agilent	E4438C	SEM006-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-16	2022/7/12	2023/7/11
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-08	2022/7/12	2023/7/11
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/7/12	2023/7/11
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2022/7/12	2023/7/11
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A

Conducted Spurious Emissions					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/7/12	2023/7/11
MXA Signal Analyzer	Agilent	N9020A	SEM004-20	2022/7/12	2023/7/11
Signal Generator	Agilent	N5173B	SEM006-05	2022/7/12	2023/7/11
ESG Vector Signal Generator	Agilent	E4438C	SEM006-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-15	2022/7/12	2023/7/11
Power Sensor	Erika Fiedler	U2021XA	SEM009-16	2022/7/12	2023/7/11
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-08	2022/7/12	2023/7/11
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/7/12	2023/7/11
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2022/7/12	2023/7/11
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-33	2021/9/25	2024/9/24
Biconical Antenna	Schwarzbeck	VUBA9117	SEM003-35	2021/12/26	2024/12/25
Loop Antenna	ETS-LINDGREN	6502	SEM003-36	2021/9/26	2024/9/25
MXE EMI receiver	Agilent	N9038A	SEM004-05	2022/7/12	2023/7/11
Pre-amplifier	HP	8447D	SEM005-02	2022/7/12	2023/7/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/7/11	2024/7/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/9/26	2024/9/25
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/9/25	2024/9/24
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2022/7/12	2023/7/11
Low Noise Amplifier	CLAVIIO	BDLNA-0118-352810	SEM005-05	2022/7/12	2023/7/11
Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2022/7/12	2023/7/11
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2022/7/12	2023/7/11

Pre-amplifier	TST PASS	LNA04080G30	SEM005-27	2022/4/15	2023/4/14
Pre-amplifier	TST PASS	LNA10180G45	SEM005-28	2022/4/15	2023/4/14
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

Radiated Spurious Emissions Below 1GHz					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
3m Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2024/7/12
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-33	2021/9/25	2024/9/24
Biconical Antenna	Schwarzbeck	VUBA9117	SEM003-35	2021/12/26	2024/12/25
Loop Antenna	ETS-LINDGREN	6502	SEM003-36	2021/9/26	2024/9/25
MXE EMI receiver	Agilent	N9038A	SEM004-05	2022/7/12	2023/7/11
Pre-amplifier	HP	8447D	SEM005-02	2022/7/12	2023/7/11
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

Radiated Spurious Emissions Above 1GHz					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
3m Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2024/7/12
MXE EMI receiver	Agilent	N9038A	SEM004-05	2022/7/12	2023/7/11
Pre-amplifier	HP	8447D	SEM005-02	2022/7/12	2023/7/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/7/11	2024/7/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/9/26	2024/9/25
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/9/25	2024/9/24
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2022/7/12	2023/7/11
Low Noise Amplifier	CLAVIIO	BDLNA-0118-352810	SEM005-05	2022/7/12	2023/7/11
Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2022/7/12	2023/7/11
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2022/7/12	2023/7/11
Pre-amplifier	TST PASS	LNA04080G30	SEM005-27	2022/4/15	2023/4/14
Pre-amplifier	TST PASS	LNA10180G45	SEM005-28	2022/4/15	2023/4/14
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

General used equipment					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-22	2022-07-12	2023-07-11
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-23	2022-07-12	2023-07-11
Barometer	DUMAI	DYM3	SEM002-24	2022-07-12	2023-07-11

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.36 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C Humidity: 52.4 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
Final test	05	(WYZECGS + Adapter 2) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

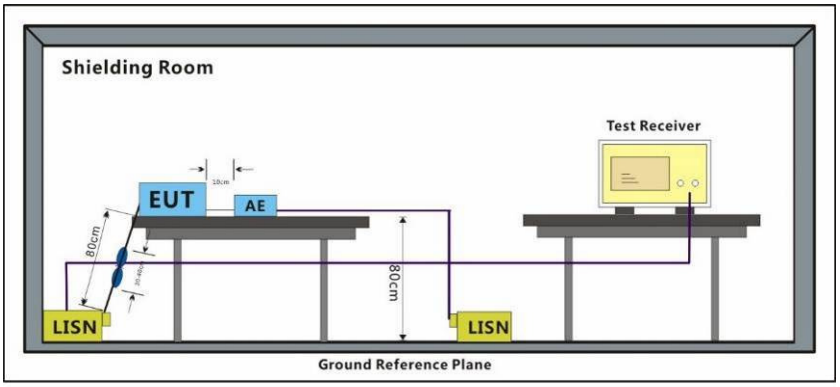

7.1.4 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 04; Line: Live line

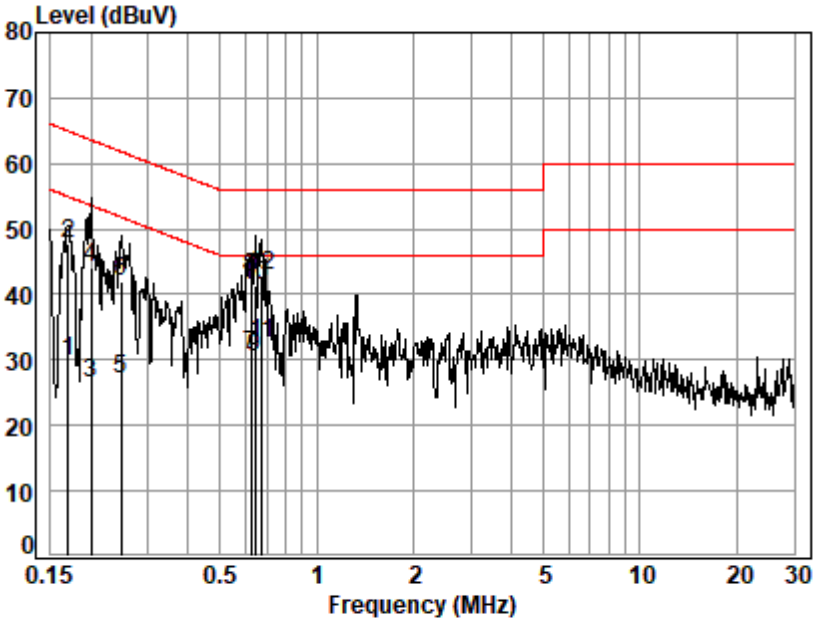

Site : Shielding Room
Condition: Line
Job No. : 00294AT
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1694	0.02	0.25	29.63	29.90	54.99	-25.09	Average
2	0.1694	0.02	0.25	47.60	47.87	64.99	-17.12	QP
3	0.1997	0.02	0.26	26.24	26.52	53.62	-27.10	Average
4	0.1997	0.02	0.26	43.70	43.98	63.62	-19.64	QP
5	0.2481	0.03	0.26	26.73	27.02	51.82	-24.80	Average
6	0.2481	0.03	0.26	41.81	42.10	61.82	-19.72	QP
7	0.6238	0.04	0.24	30.48	30.76	46.00	-15.24	Average
8	0.6238	0.04	0.24	42.23	42.51	56.00	-13.49	QP
9	0.6440	0.03	0.23	30.04	30.30	46.00	-15.70	Average
10	0.6440	0.03	0.23	40.97	41.23	56.00	-14.77	QP
11	0.6754	0.02	0.23	32.31	32.56	46.00	-13.44	Average
12	0.6754	0.02	0.23	42.56	42.81	56.00	-13.19	QP

Test Mode: 04; Line: Neutral Line

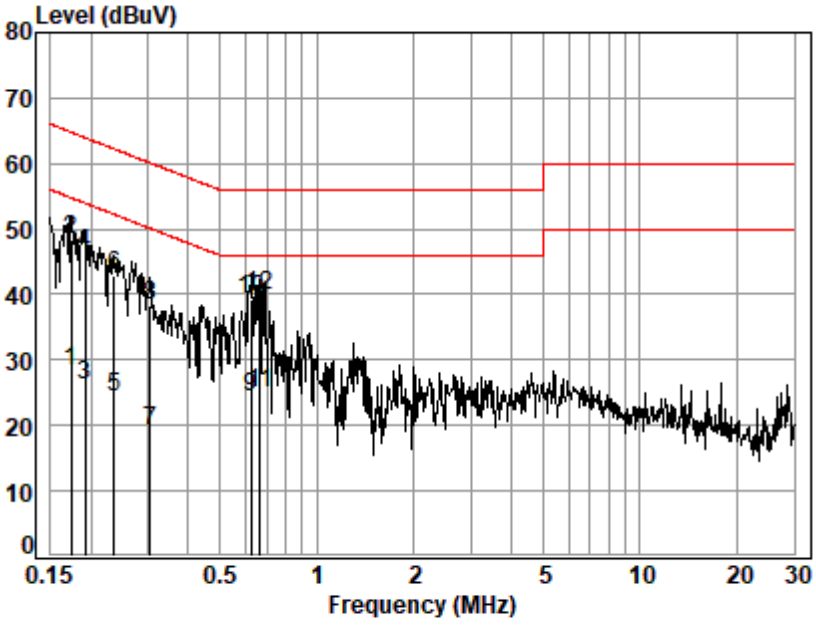

Site : Shielding Room
Condition: Neutral
Job No. : 00294AT
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1740	0.02	0.30	27.90	28.22	54.77	-26.55	Average
2	0.1740	0.02	0.30	48.04	48.36	64.77	-16.41	QP
3	0.1914	0.02	0.29	25.77	26.08	53.98	-27.90	Average
4	0.1914	0.02	0.29	45.86	46.17	63.98	-17.81	QP
5	0.2353	0.02	0.29	24.05	24.36	52.26	-27.90	Average
6	0.2353	0.02	0.29	42.61	42.92	62.26	-19.34	QP
7	0.3051	0.03	0.28	18.75	19.06	50.10	-31.04	Average
8	0.3051	0.03	0.28	37.98	38.29	60.10	-21.81	QP
9	0.6271	0.04	0.20	23.96	24.20	46.00	-21.80	Average
10	0.6271	0.04	0.20	39.13	39.37	56.00	-16.63	QP
11	0.6648	0.02	0.18	24.89	25.09	46.00	-20.91	Average
12	0.6648	0.02	0.18	39.65	39.85	56.00	-16.15	QP

Test Mode: 05; Line: Live line

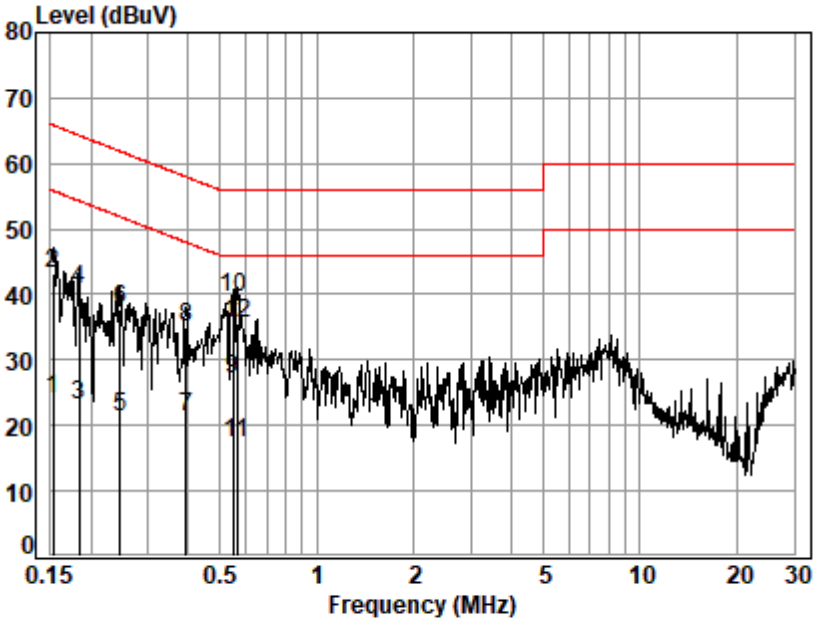

Site : Shielding Room
Condition: Line
Job No. : 00294AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1532	0.02	0.25	23.80	24.07	55.82	-31.75	Average
2	0.1532	0.02	0.25	42.90	43.17	65.82	-22.65	QP
3	0.1835	0.02	0.26	22.87	23.15	54.33	-31.18	Average
4	0.1835	0.02	0.26	40.37	40.65	64.33	-23.68	QP
5	0.2455	0.03	0.26	20.92	21.21	51.91	-30.70	Average
6	0.2455	0.03	0.26	37.33	37.62	61.91	-24.29	QP
7	0.3934	0.03	0.27	20.97	21.27	47.99	-26.72	Average
8	0.3934	0.03	0.27	34.70	35.00	57.99	-22.99	QP
9	0.5493	0.03	0.26	26.67	26.96	46.00	-19.04	Average
10	0.5493	0.03	0.26	39.14	39.43	56.00	-16.57	QP
11	0.5671	0.04	0.25	17.18	17.47	46.00	-28.53	Average
12	0.5671	0.04	0.25	35.32	35.61	56.00	-20.39	QP

Test Mode: 05; Line: Neutral Line

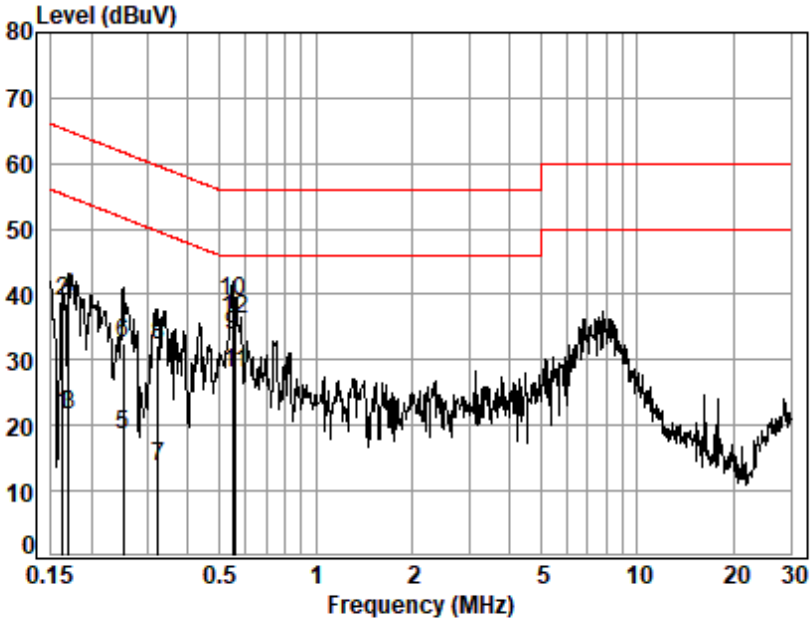

Site : Shielding Room
Condition: Neutral
Job No. : 00294AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1633	0.02	0.30	21.30	21.62	55.30	-33.68	Average
2	0.1633	0.02	0.30	38.48	38.80	65.30	-26.50	QP
3	0.1703	0.02	0.30	21.38	21.70	54.94	-33.24	Average
4	0.1703	0.02	0.30	39.13	39.45	64.94	-25.49	QP
5	0.2508	0.03	0.29	18.22	18.54	51.73	-33.19	Average
6	0.2508	0.03	0.29	32.25	32.57	61.73	-29.16	QP
7	0.3217	0.03	0.28	13.27	13.58	49.66	-36.08	Average
8	0.3217	0.03	0.28	31.81	32.12	59.66	-27.54	QP
9	0.5493	0.03	0.24	33.39	33.66	46.00	-12.34	Average
10	0.5493	0.03	0.24	38.72	38.99	56.00	-17.01	QP
11	0.5641	0.04	0.23	27.85	28.12	46.00	-17.88	Average
12	0.5641	0.04	0.23	36.04	36.31	56.00	-19.69	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 27.0 °C Humidity: 47.7 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

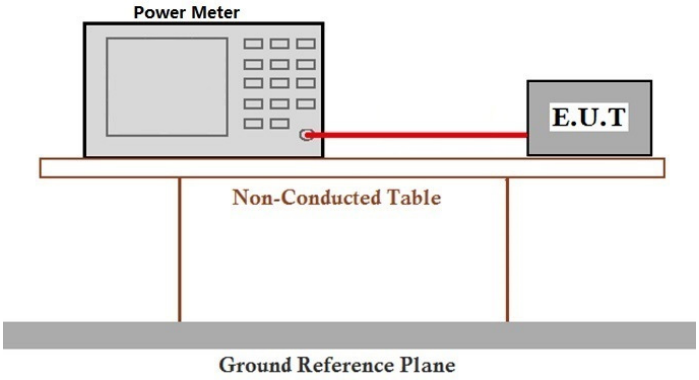

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 27.0 °C Humidity: 47.7 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

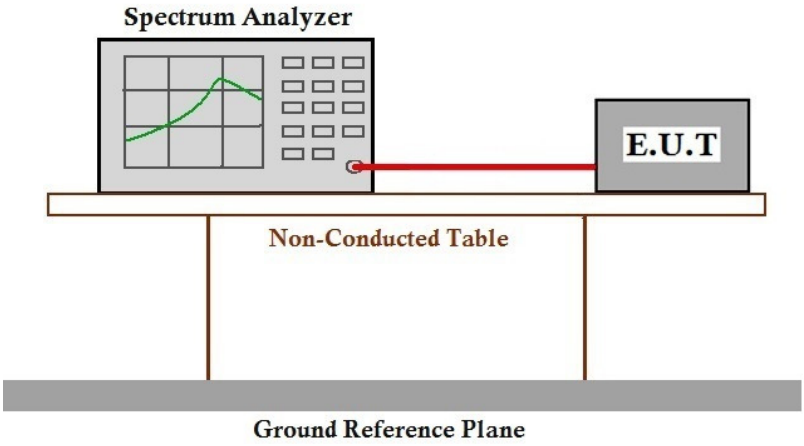

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 27.0 °C Humidity: 47.7 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

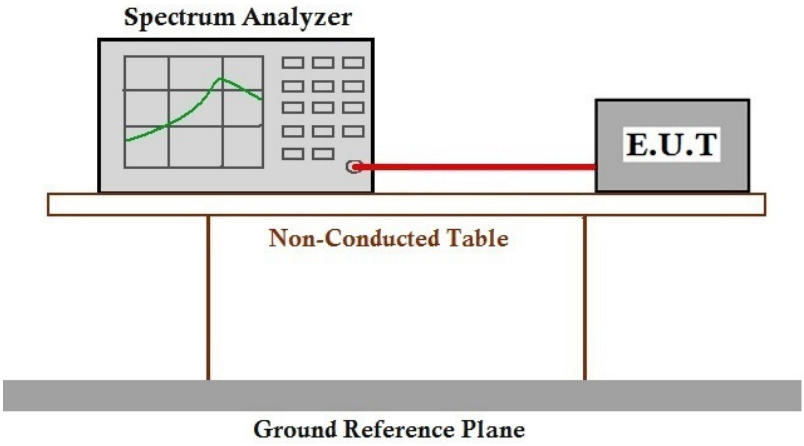

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 27.0 °C Humidity: 47.7 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

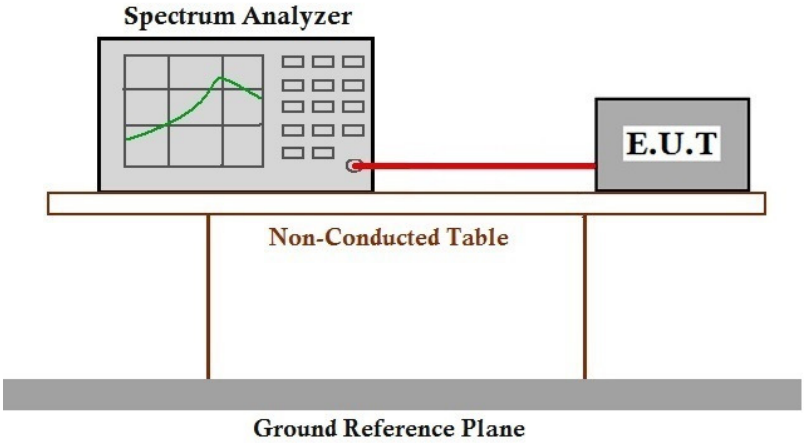

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 27.0 °C Humidity: 47.7 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

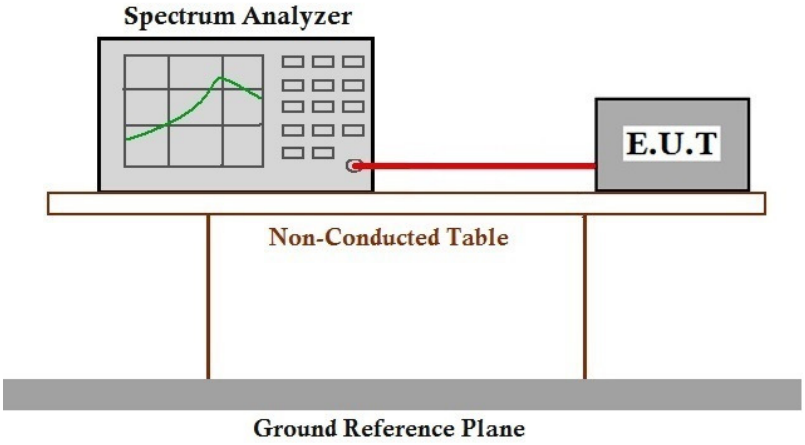

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 51.5 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

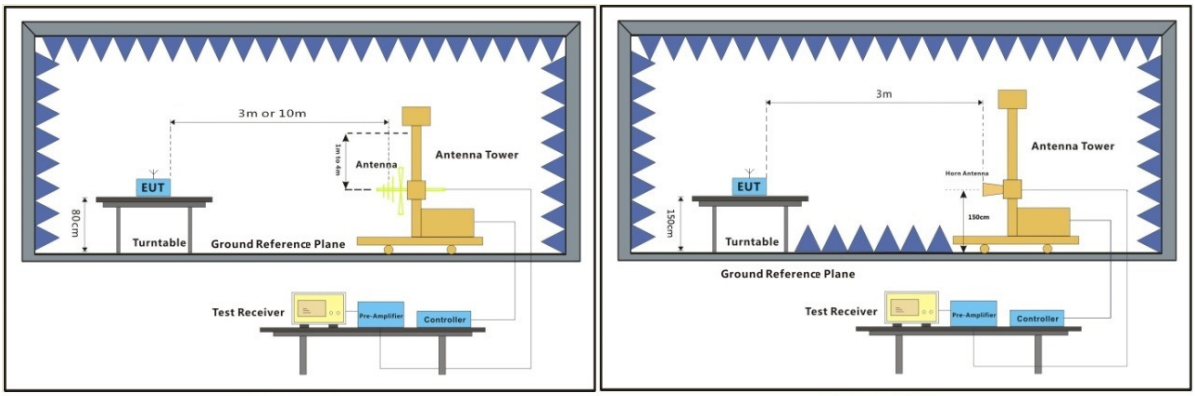

30MHz-1GHz　　Above 1GHz

7.7.4 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

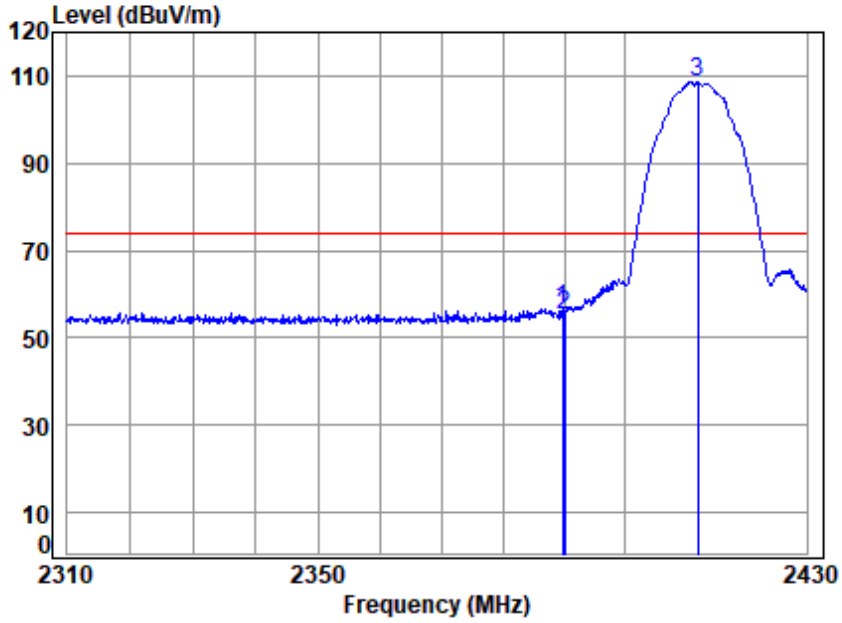

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.726	5.05	27.16	32.50	56.81	56.52	74.00	-17.48	peak
2	2390.000	5.05	27.16	32.50	55.38	55.09	74.00	-18.91	peak
3	2412.000	5.07	27.21	32.50	109.02	108.80	74.00	34.80	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

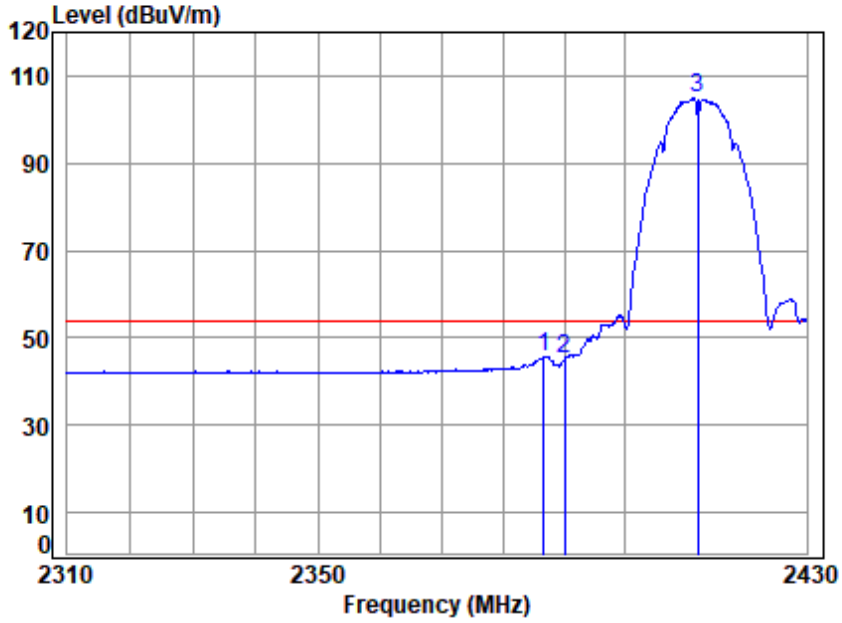

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.582	5.05	27.15	32.50	46.09	45.79	54.00	-8.21	Average
2	2390.000	5.05	27.16	32.50	45.32	45.03	54.00	-8.97	Average
3	2412.000	5.07	27.21	32.50	105.11	104.89	54.00	50.89	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

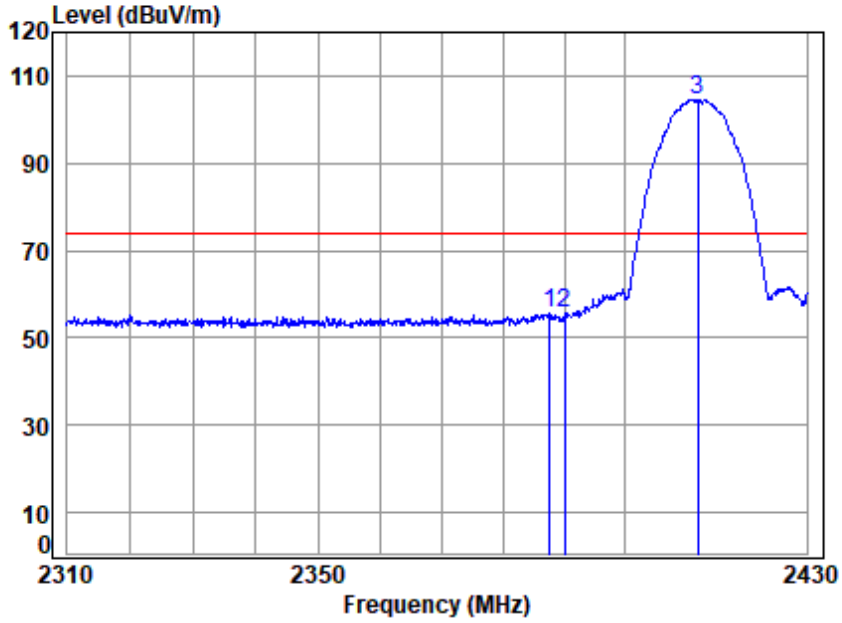

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.670	5.05	27.15	32.50	56.16	55.86	74.00	-18.14	Peak
2	2390.000	5.05	27.16	32.50	55.80	55.51	74.00	-18.49	Peak
3 .	2412.000	5.07	27.21	32.50	104.72	104.50	74.00	30.50	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

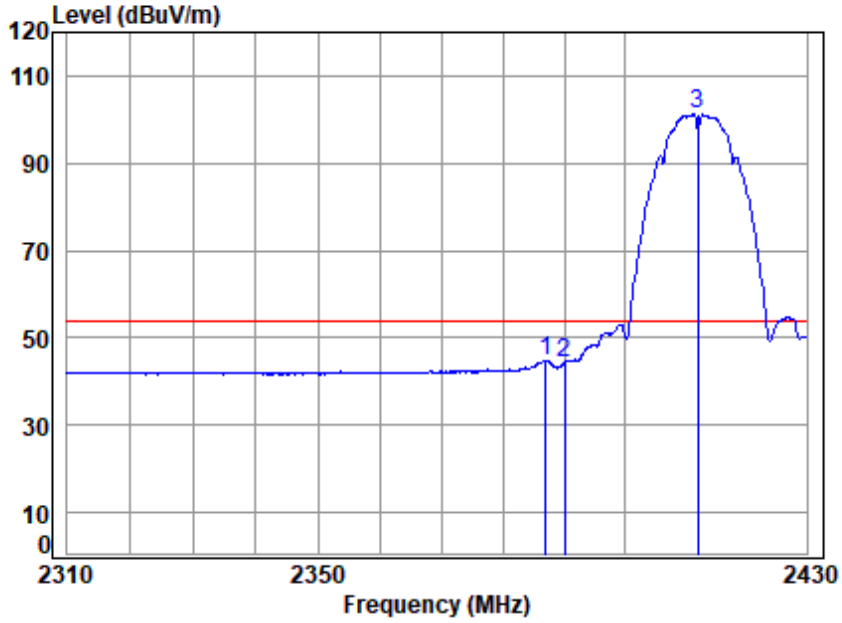

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.944	5.05	27.15	32.50	45.23	44.93	54.00	-9.07	Average
2	2390.000	5.05	27.16	32.50	44.67	44.38	54.00	-9.62	Average
3	2412.000	5.07	27.21	32.50	101.66	101.44	54.00	47.44	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

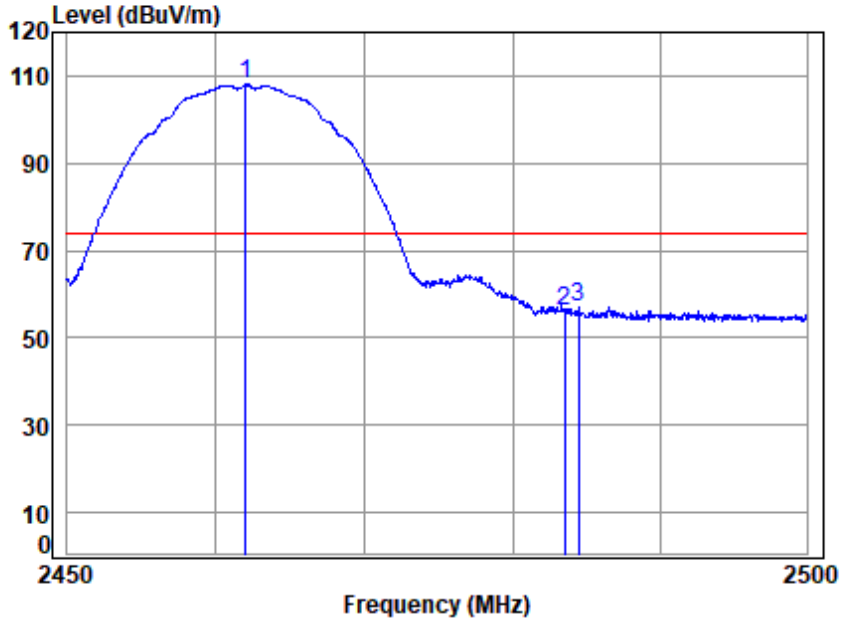

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	108.06	107.98	74.00	33.98	peak
2	2483.500	5.12	27.36	32.50	55.99	55.97	74.00	-18.03	peak
3	2484.442	5.12	27.37	32.50	57.10	57.09	74.00	-16.91	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

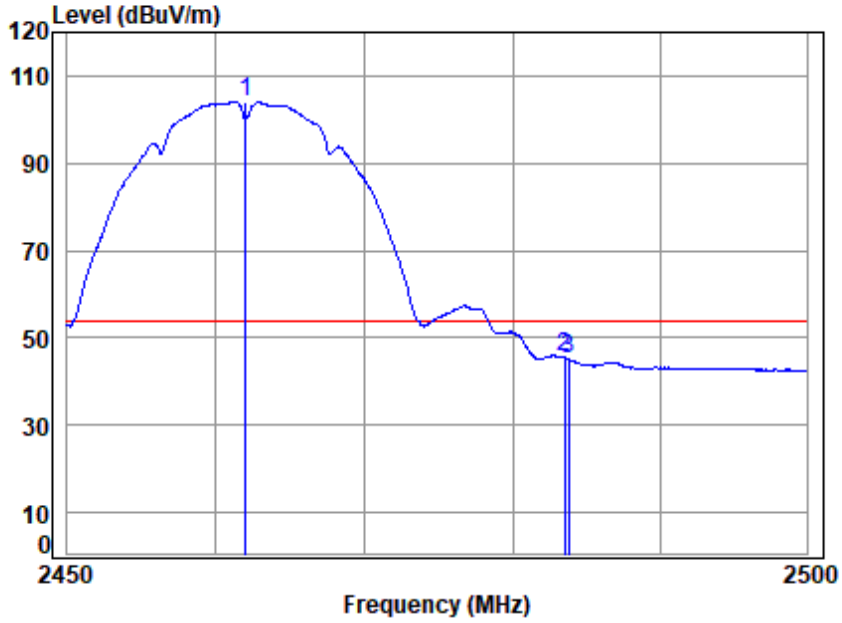

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	104.32	104.24	54.00	50.24	Average
2	2483.500	5.12	27.36	32.50	45.45	45.43	54.00	-8.57	Average
3	2483.790	5.12	27.37	32.50	45.02	45.01	54.00	-8.99	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

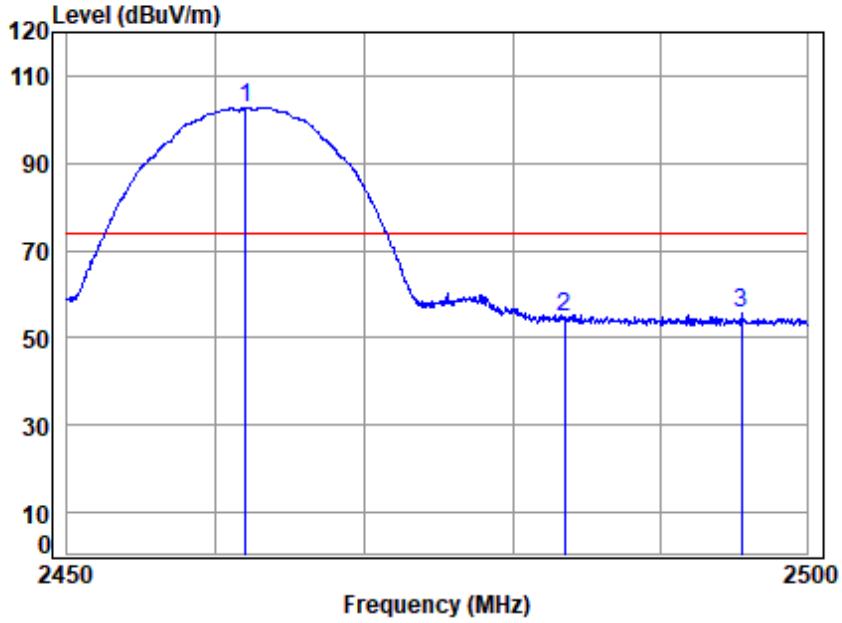

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	102.84	102.76	74.00	28.76	Peak
2	2483.500	5.12	27.36	32.50	54.81	54.79	74.00	-19.21	Peak
3	2495.559	5.13	27.39	32.50	55.50	55.52	74.00	-18.48	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

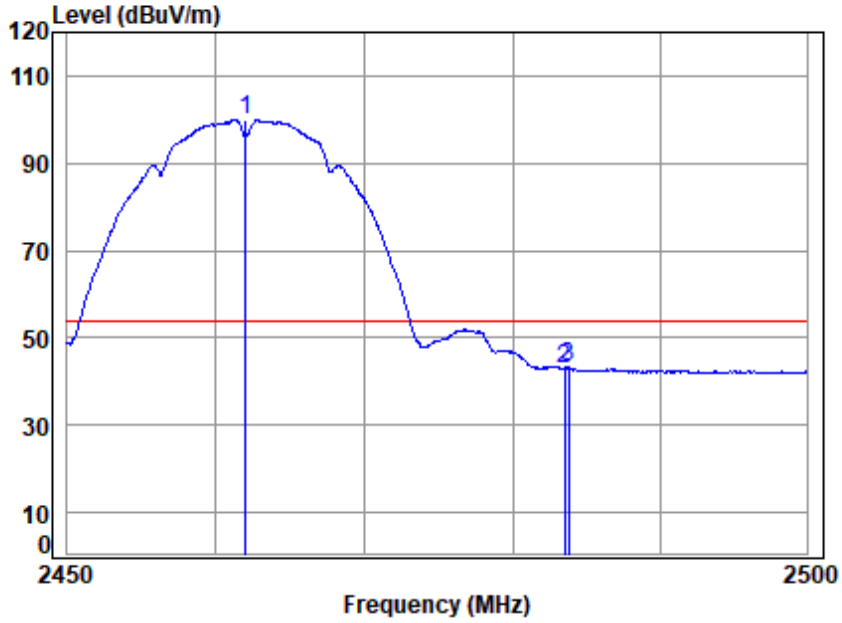

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2462.000	5.10	27.32	32.50	100.00	99.92	54.00	45.92	Average
2	2483.500	5.12	27.36	32.50	43.11	43.09	54.00	-10.91	Average
3	2483.790	5.12	27.37	32.50	43.16	43.15	54.00	-10.85	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

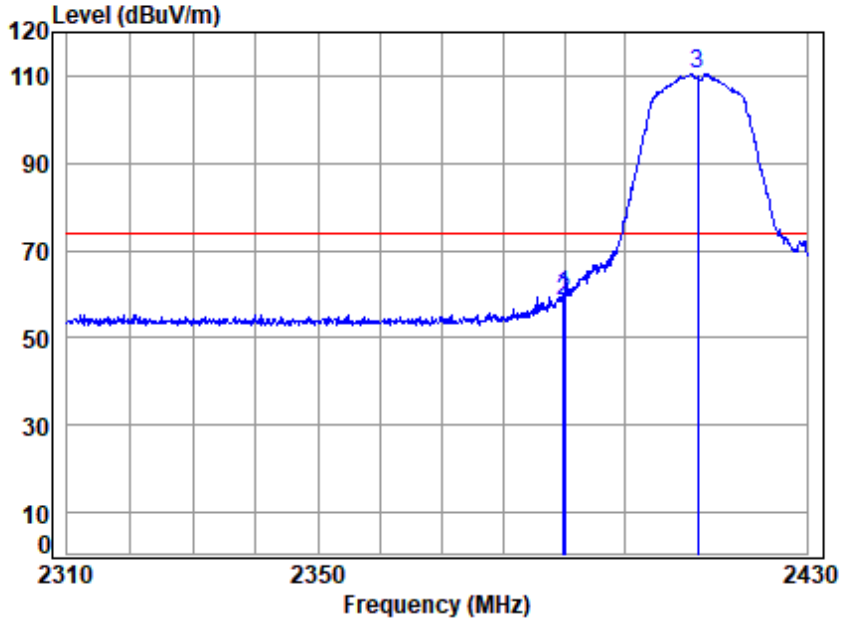

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.05	27.16	32.50	59.87	59.58	74.00	-14.42	peak
2	2390.000	5.05	27.16	32.50	58.60	58.31	74.00	-15.69	peak
3	2412.000	5.07	27.21	32.50	110.54	110.32	74.00	36.32	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

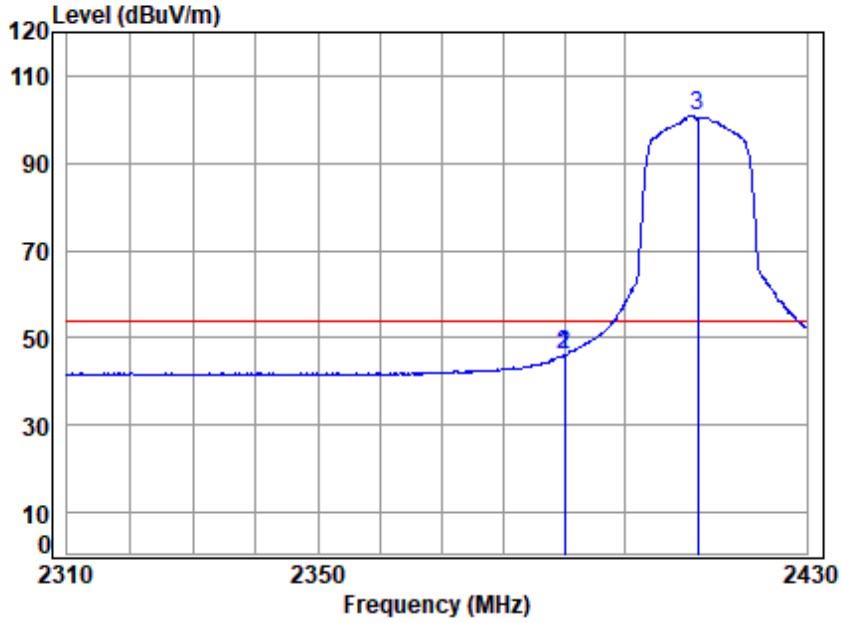

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.05	27.16	32.50	46.43	46.14	54.00	-7.86	Average
2	2390.000	5.05	27.16	32.50	46.43	46.14	54.00	-7.86	Average
3 .	2412.000	5.07	27.21	32.50	101.04	100.82	54.00	46.82	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

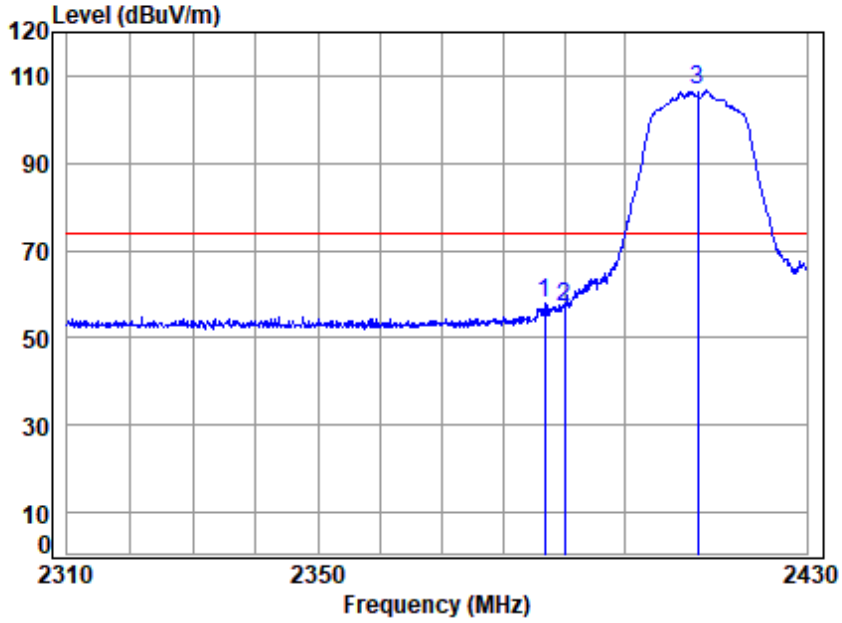

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.823	5.05	27.15	32.50	58.10	57.80	74.00	-16.20	Peak
2	2390.000	5.05	27.16	32.50	57.14	56.85	74.00	-17.15	Peak
3	2412.000	5.07	27.21	32.50	106.88	106.66	74.00	32.66	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

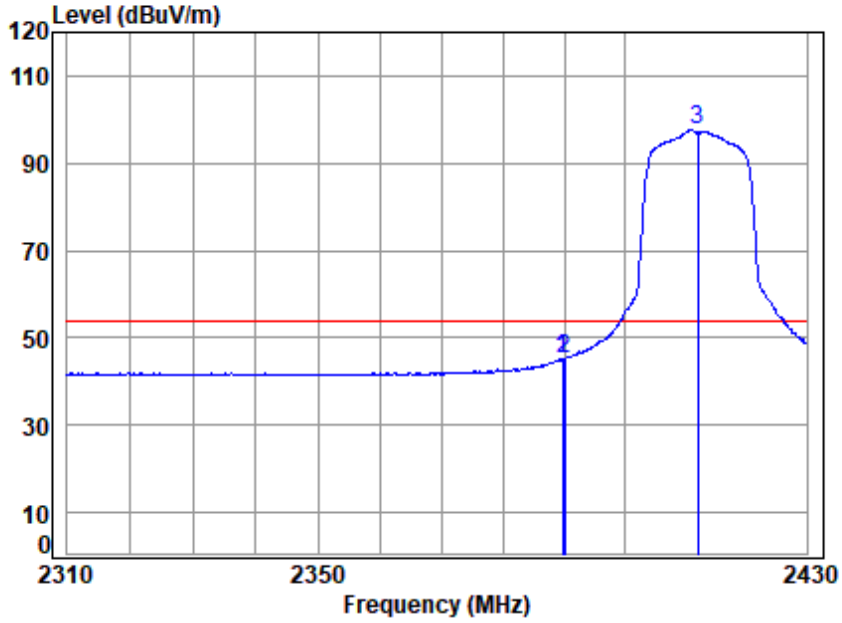

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.726	5.05	27.16	32.50	45.56	45.27	54.00	-8.73	Average
2	2390.000	5.05	27.16	32.50	45.36	45.07	54.00	-8.93	Average
3	2412.000	5.07	27.21	32.50	97.85	97.63	54.00	43.63	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

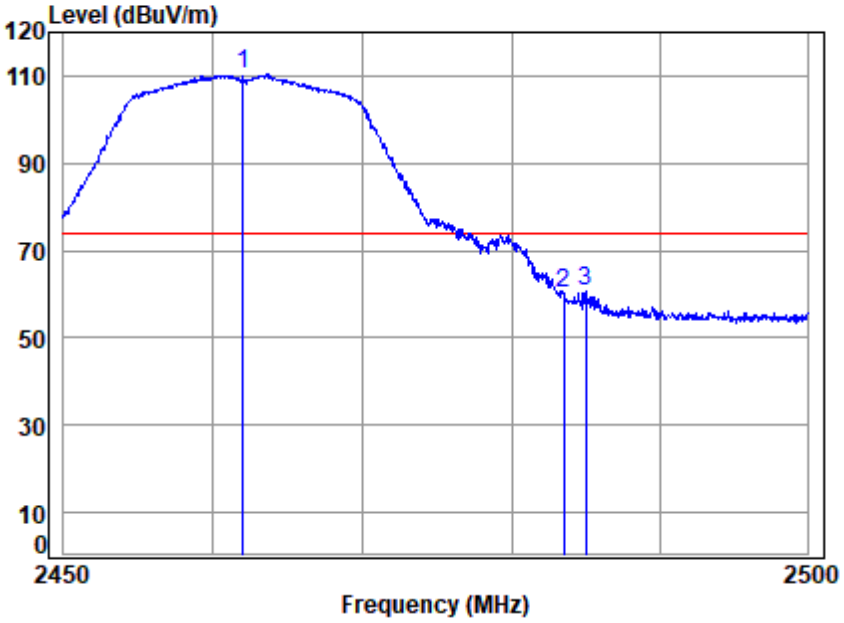

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	110.41	110.33	74.00	36.33	peak
2	2483.500	5.12	27.36	32.50	60.19	60.17	74.00	-13.83	peak
3	2484.994	5.12	27.37	32.50	60.65	60.64	74.00	-13.36	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

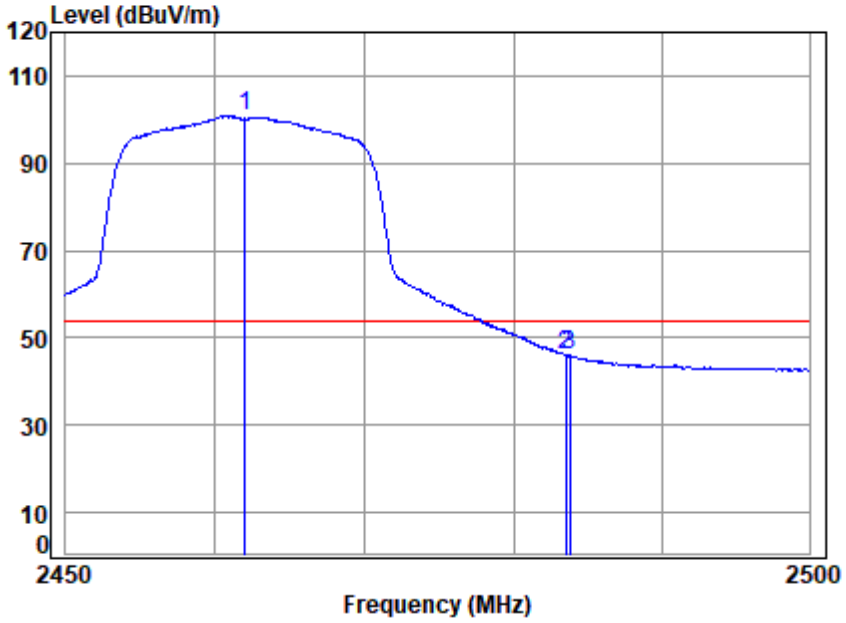

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	100.93	100.85	54.00	46.85	Average
2	2483.500	5.12	27.36	32.50	46.17	46.15	54.00	-7.85	Average
3	2483.790	5.12	27.37	32.50	45.97	45.96	54.00	-8.04	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

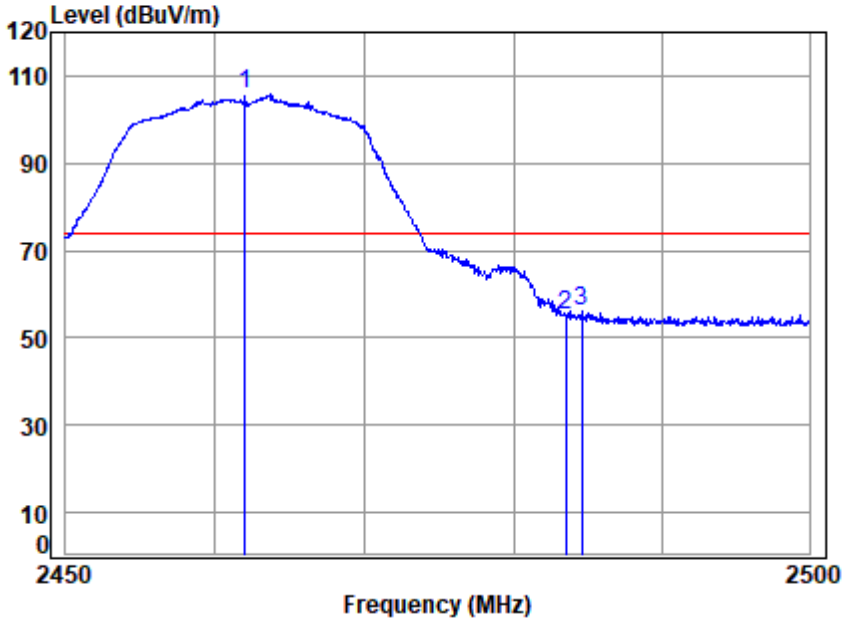

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	105.74	105.66	74.00	31.66	Peak
2	2483.500	5.12	27.36	32.50	55.02	55.00	74.00	-19.00	Peak
3	2484.593	5.12	27.37	32.50	55.97	55.96	74.00	-18.04	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

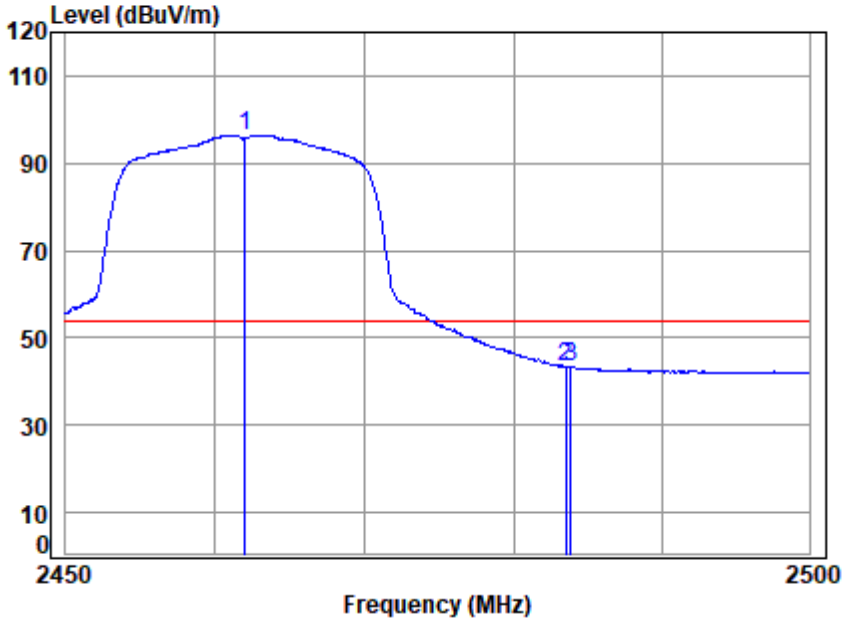

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	96.49	96.41	54.00	42.41	Average
2	2483.500	5.12	27.36	32.50	43.49	43.47	54.00	-10.53	Average
3	2483.890	5.12	27.37	32.50	43.35	43.34	54.00	-10.66	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

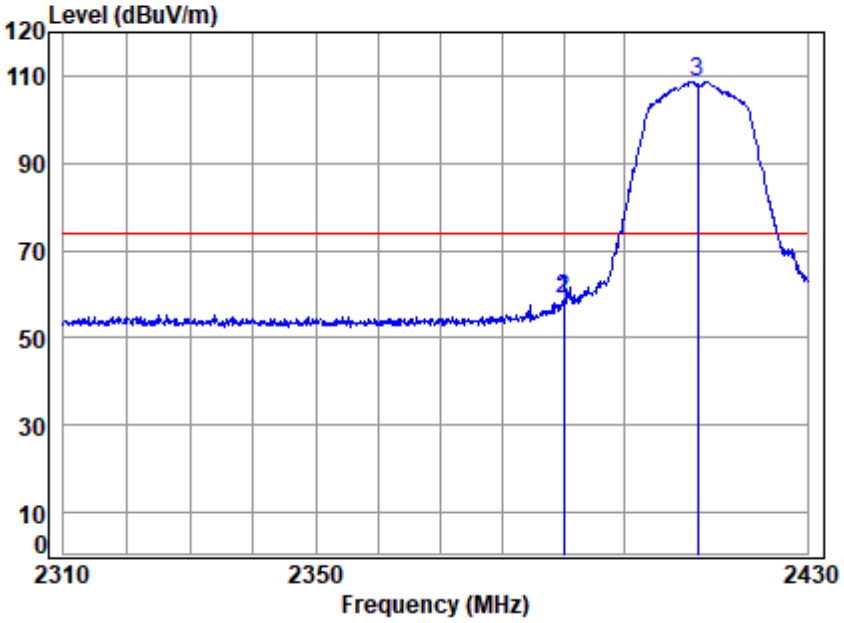

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.05	27.16	32.50	59.03	58.74	74.00	-15.26	peak
2	2390.000	5.05	27.16	32.50	59.03	58.74	74.00	-15.26	peak
3	2412.000	5.07	27.21	32.50	109.00	108.78	74.00	34.78	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

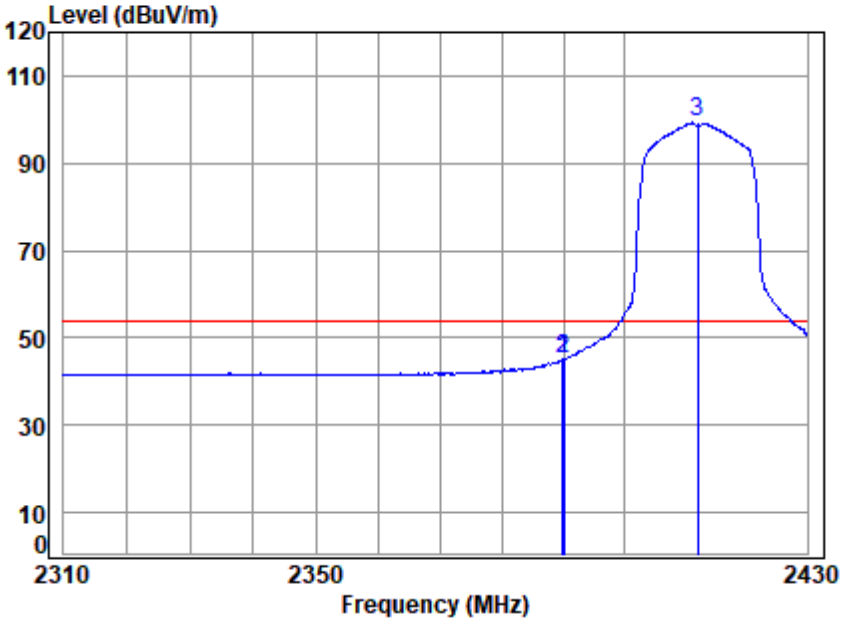

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.05	27.16	32.50	45.52	45.23	54.00	-8.77	Average
2	2390.000	5.05	27.16	32.50	45.50	45.21	54.00	-8.79	Average
3	2412.000	5.07	27.21	32.50	99.56	99.34	54.00	45.34	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

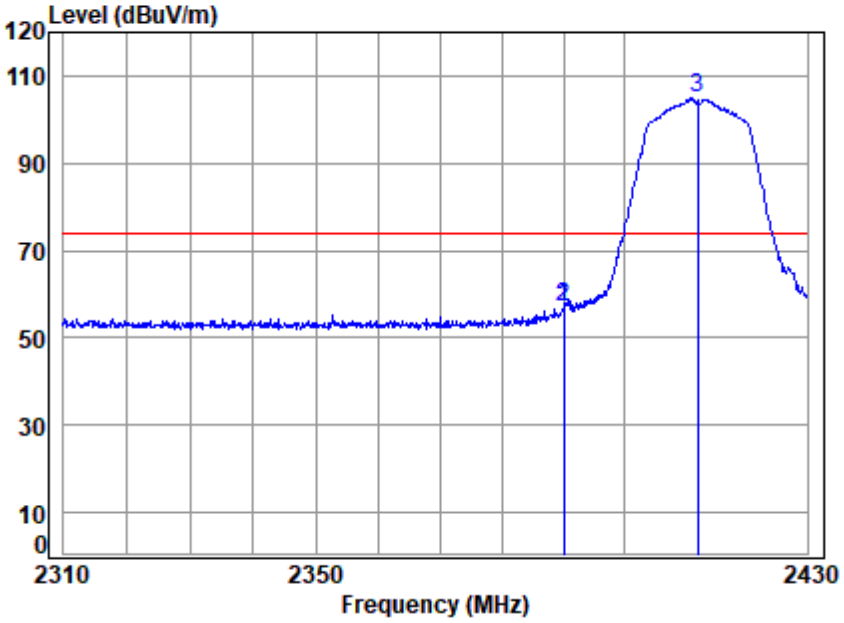

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.05	27.16	32.50	57.38	57.09	74.00	-16.91	Peak
2	2390.000	5.05	27.16	32.50	57.38	57.09	74.00	-16.91	Peak
3 .	2412.000	5.07	27.21	32.50	105.08	104.86	74.00	30.86	Peak

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

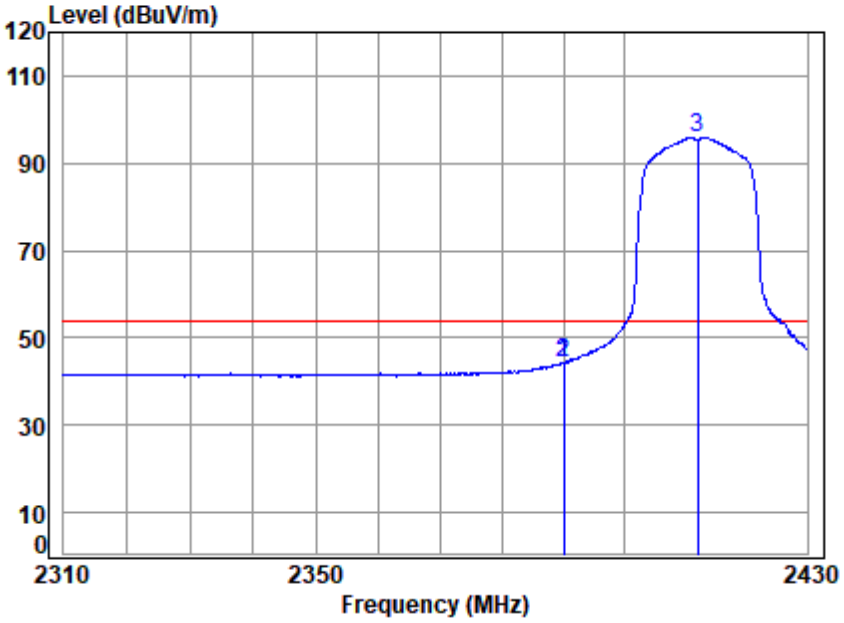

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.05	27.16	32.50	44.62	44.33	54.00	-9.67	Average
2	2390.000	5.05	27.16	32.50	44.62	44.33	54.00	-9.67	Average
3 .	2412.000	5.07	27.21	32.50	96.25	96.03	54.00	42.03	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

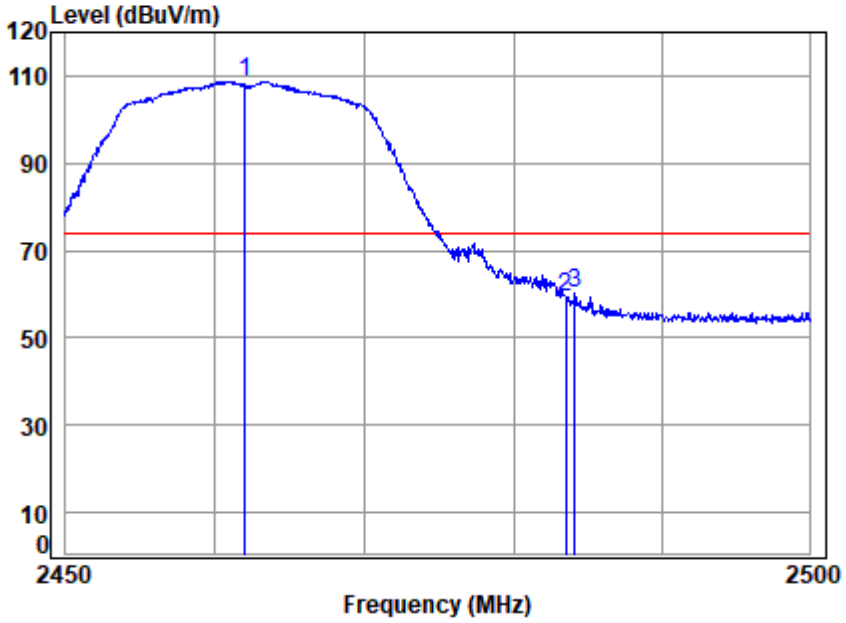

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	108.88	108.80	74.00	34.80	peak
2	2483.500	5.12	27.36	32.50	59.48	59.46	74.00	-14.54	peak
3	2484.141	5.12	27.37	32.50	60.46	60.45	74.00	-13.55	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

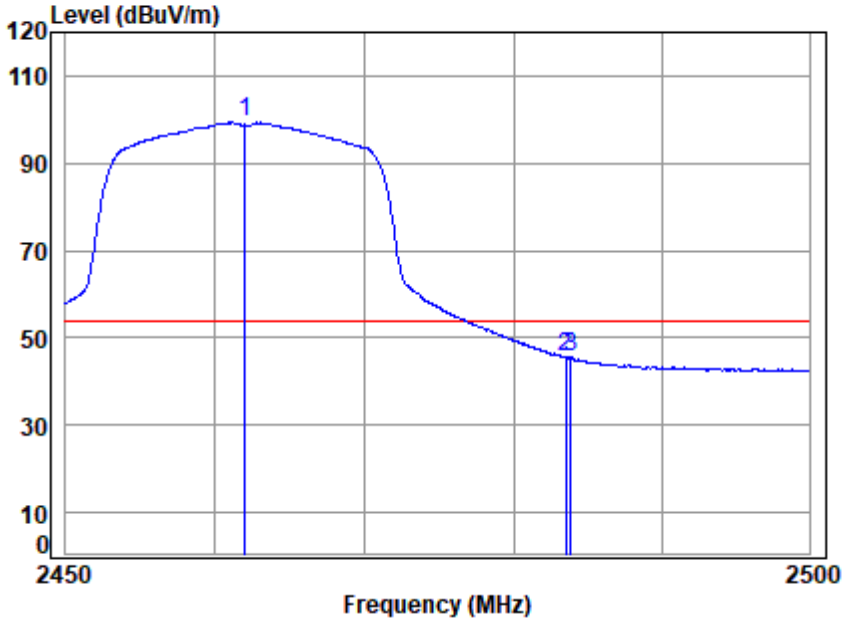

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2462.000	5.10	27.32	32.50	99.43	99.35	54.00	45.35	Average
2	2483.500	5.12	27.36	32.50	45.70	45.68	54.00	-8.32	Average
3	2483.890	5.12	27.37	32.50	45.46	45.45	54.00	-8.55	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

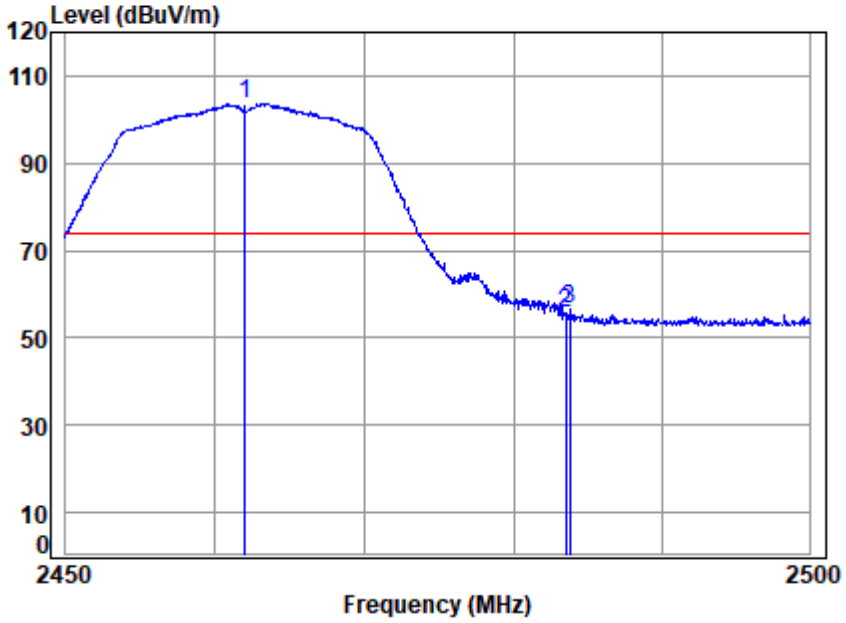

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2462.000	5.10	27.32	32.50	103.65	103.57	74.00	29.57	Peak
2	2483.500	5.12	27.36	32.50	55.67	55.65	74.00	-18.35	Peak
3	2483.790	5.12	27.37	32.50	56.75	56.74	74.00	-17.26	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

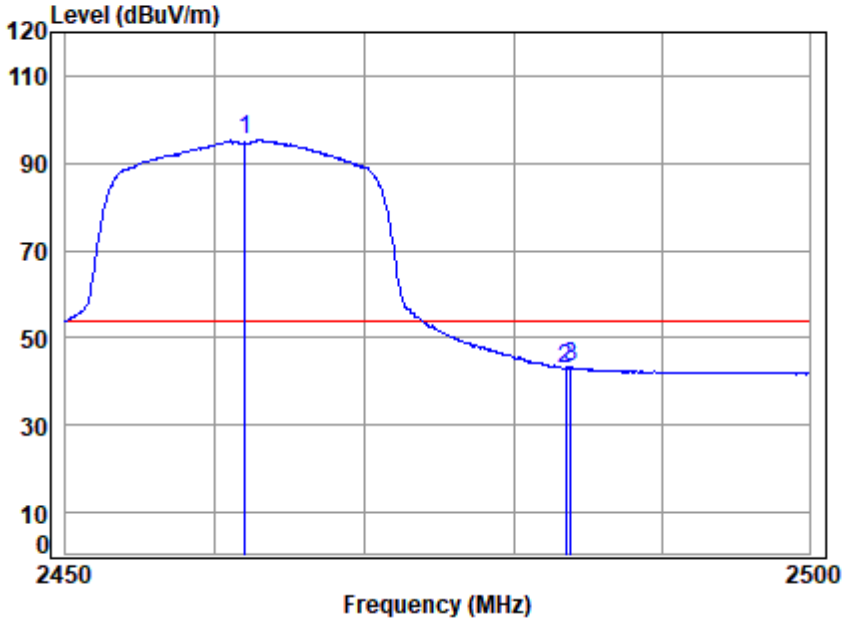

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 Band edge
Note : 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2462.000	5.10	27.32	32.50	95.43	95.35	54.00	41.35	Average
2	2483.500	5.12	27.36	32.50	43.09	43.07	54.00	-10.93	Average
3	2483.840	5.12	27.37	32.50	43.20	43.19	54.00	-10.81	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

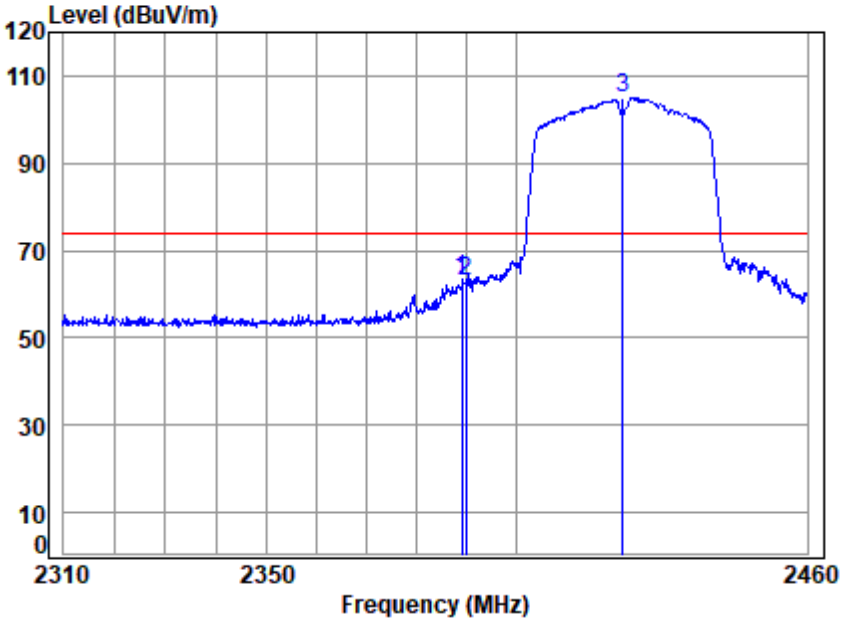

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2422 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.226	5.05	27.16	32.50	63.77	63.48	74.00	-10.52	peak
2	2390.000	5.05	27.16	32.50	63.10	62.81	74.00	-11.19	peak
3	2422.000	5.08	27.23	32.50	105.27	105.08	74.00	31.08	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

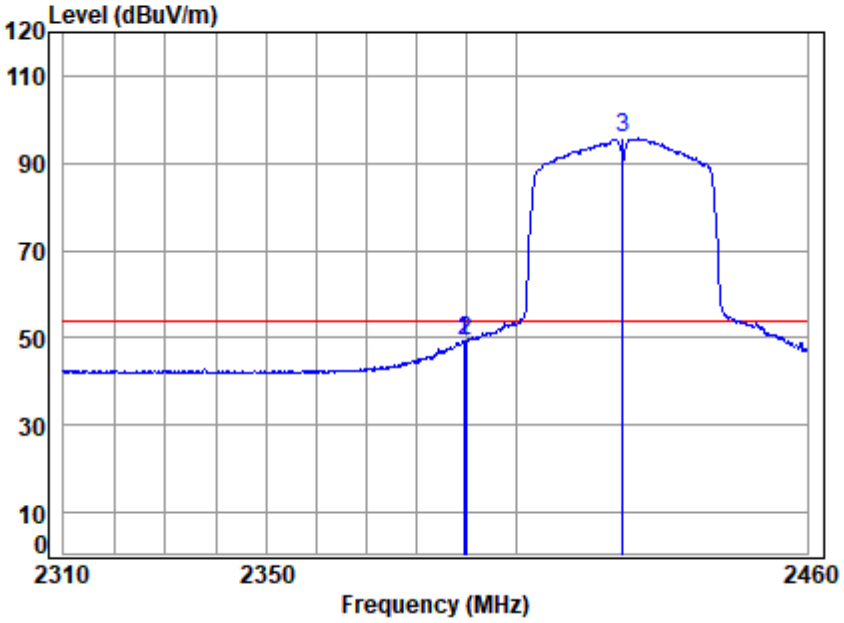

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2422 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.526	5.05	27.16	32.50	49.62	49.33	54.00	-4.67	Average
2	2390.000	5.05	27.16	32.50	49.40	49.11	54.00	-4.89	Average
3 .	2422.000	5.08	27.23	32.50	95.86	95.67	54.00	41.67	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

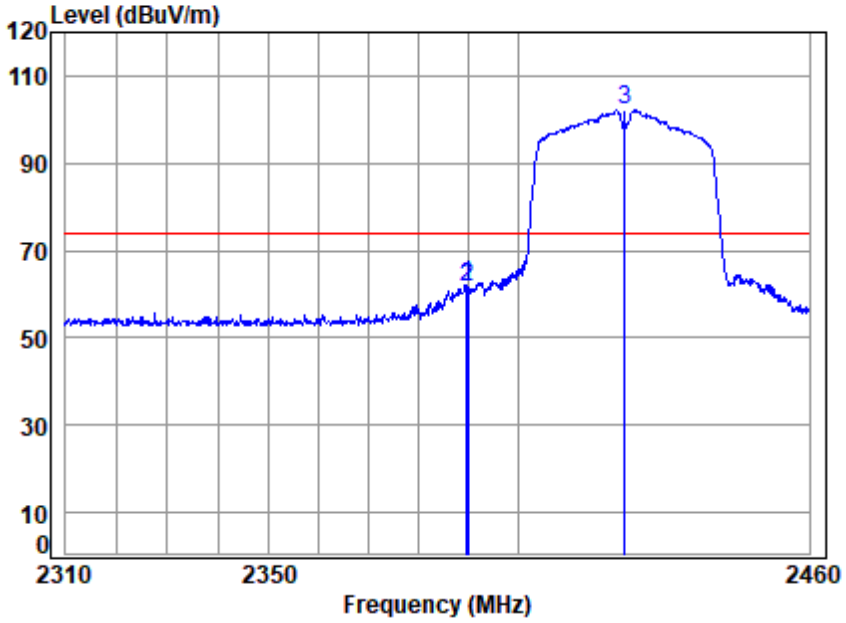

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2422 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.677	5.05	27.16	32.50	62.23	61.94	74.00	-12.06	Peak
2	2390.000	5.05	27.16	32.50	61.77	61.48	74.00	-12.52	Peak
3 .	2422.000	5.08	27.23	32.50	102.21	102.02	74.00	28.02	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

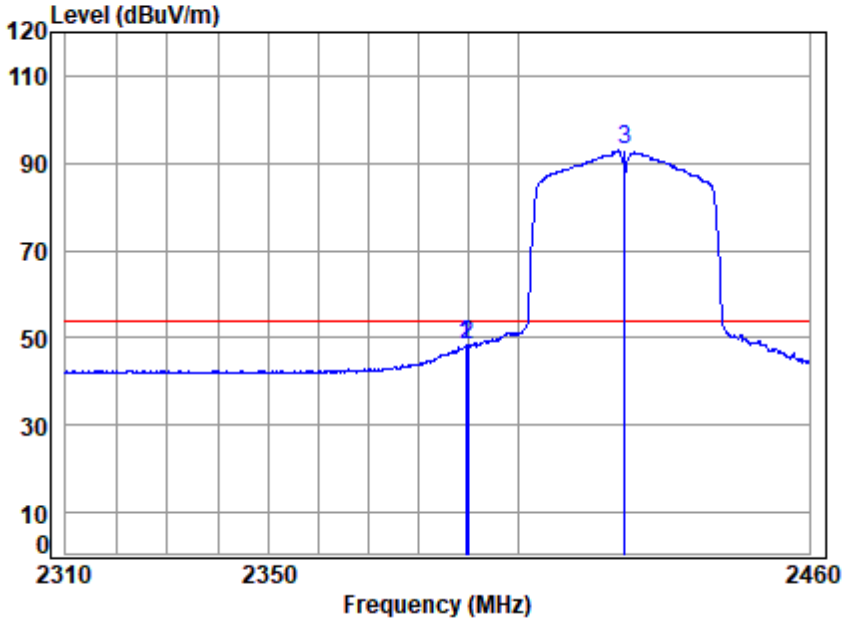

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2422 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.526	5.05	27.16	32.50	48.68	48.39	54.00	-5.61	Average
2	2390.000	5.05	27.16	32.50	48.69	48.40	54.00	-5.60	Average
3 .	2422.000	5.08	27.23	32.50	93.07	92.88	54.00	38.88	Average

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

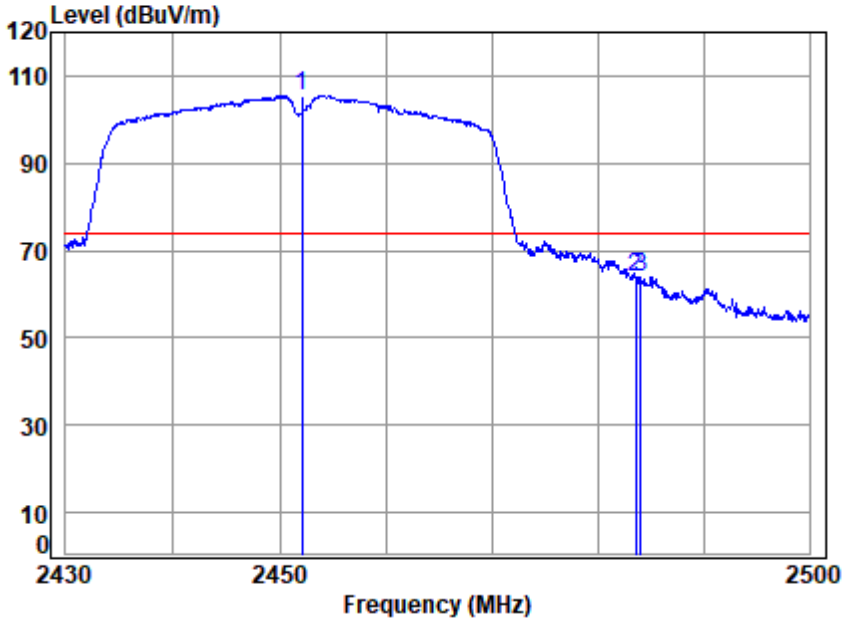

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2452 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2452.000	5.10	27.30	32.50	105.52	105.42	74.00	31.42	peak
2	2483.500	5.12	27.36	32.50	64.00	63.98	74.00	-10.02	peak
3	2483.935	5.12	27.37	32.50	64.07	64.06	74.00	-9.94	peak

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

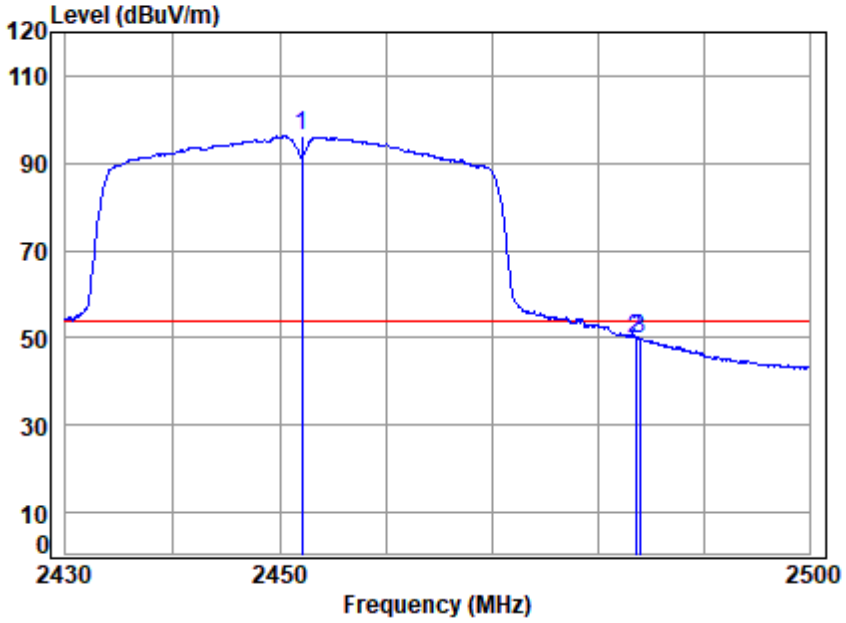

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2452 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2452.000	5.10	27.30	32.50	96.34	96.24	54.00	42.24	Average
2	2483.500	5.12	27.36	32.50	49.97	49.95	54.00	-4.05	Average
3	2483.865	5.12	27.37	32.50	49.85	49.84	54.00	-4.16	Average

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

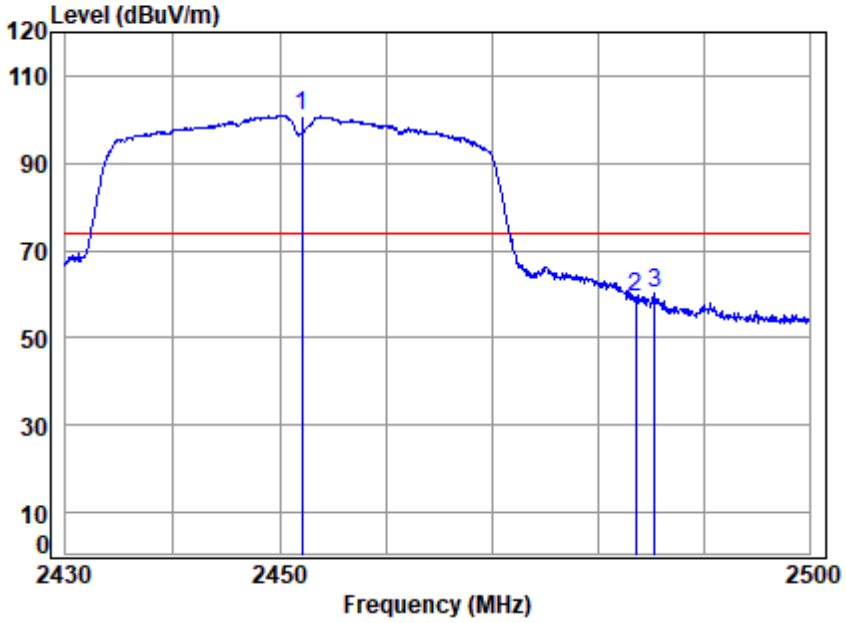

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2452 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2452.000	5.10	27.30	32.50	101.11	101.01	74.00	27.01	Peak
2	2483.500	5.12	27.36	32.50	59.12	59.10	74.00	-14.90	Peak
3	2485.276	5.12	27.37	32.50	60.05	60.04	74.00	-13.96	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

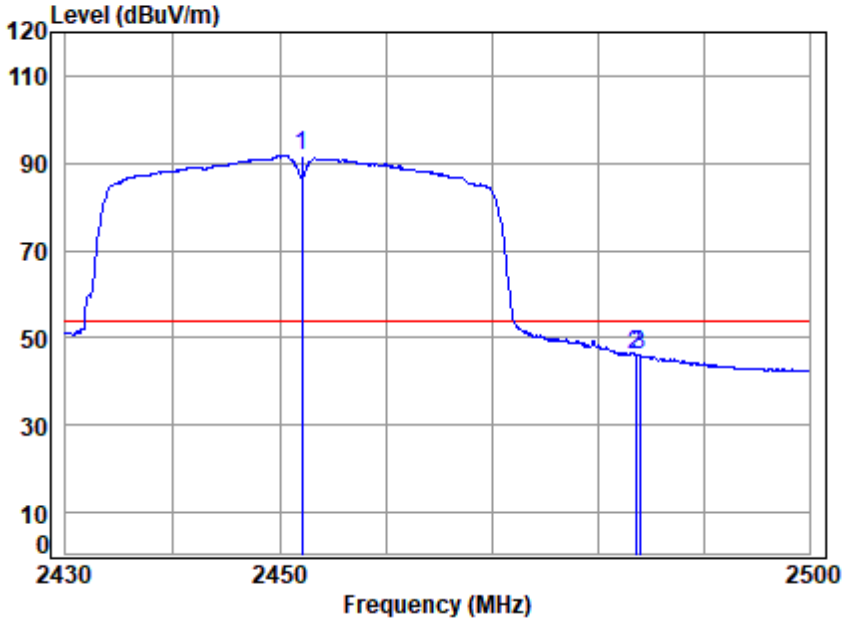

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2452 Band edge
Note : 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 .	2452.000	5.10	27.30	32.50	91.85	91.75	54.00	37.75	Average
2	2483.500	5.12	27.36	32.50	46.24	46.22	54.00	-7.78	Average
3	2483.865	5.12	27.37	32.50	45.99	45.98	54.00	-8.02	Average

7.8 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.6 °C Humidity: 51.9 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
Final test	05	(WYZECGS + Adapter 2) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
Final test	10	(WYZECGT + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of

		IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
Final test	11	(WYZECGT + Adapter 2) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

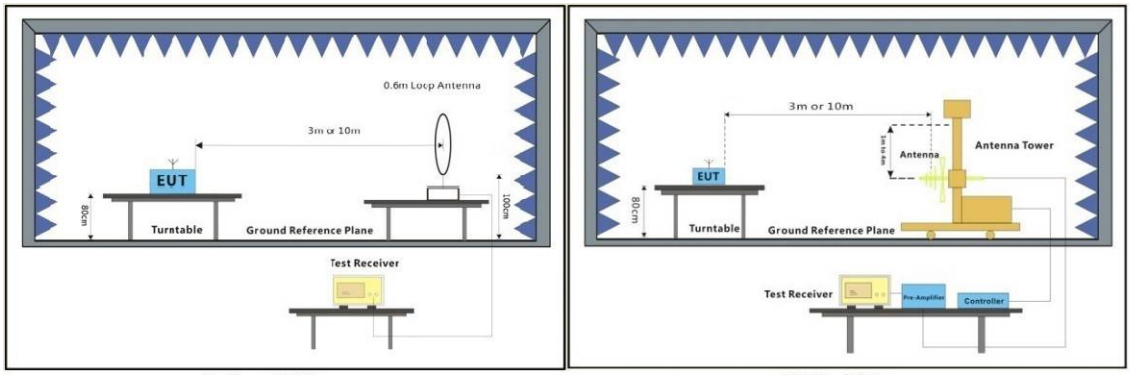

Below 30MHz 30MHz-1GHz

7.8.4 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Test Mode: 04; Polarity: Horizontal

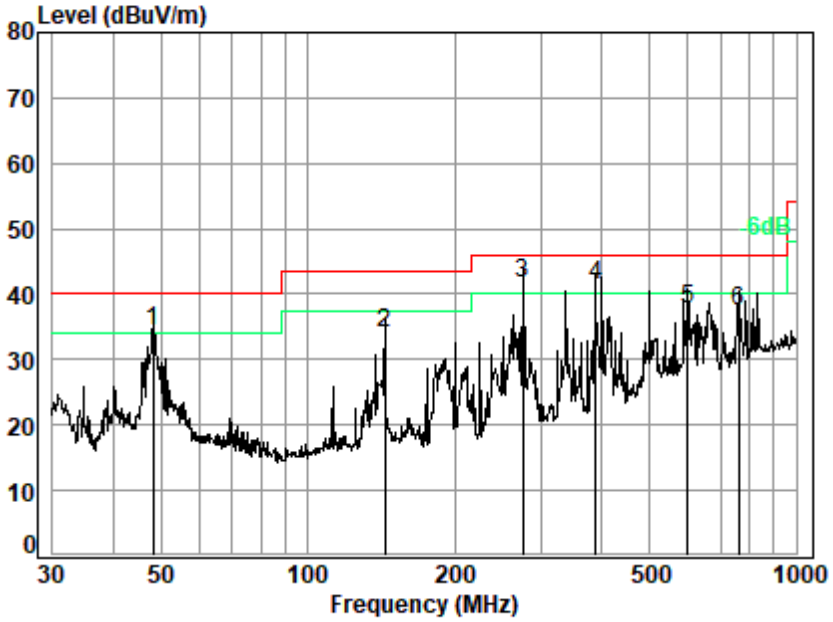

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT
Mode : 04

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	48.1626	0.22	17.28	24.91	41.68	34.27	40.00	-5.73	QP
2	143.8295	0.89	17.44	25.53	41.31	34.11	43.50	-9.39	QP
3	275.1570	0.92	17.53	25.59	48.84	41.70	46.00	-4.30	QP
4	387.9920	1.66	20.52	25.65	44.81	41.34	46.00	-4.66	QP
5	599.3213	2.13	24.34	25.70	37.07	37.84	46.00	-8.16	QP
6	760.7036	2.07	26.49	25.70	34.53	37.39	46.00	-8.61	QP

Test Mode: 04; Polarity: Vertical

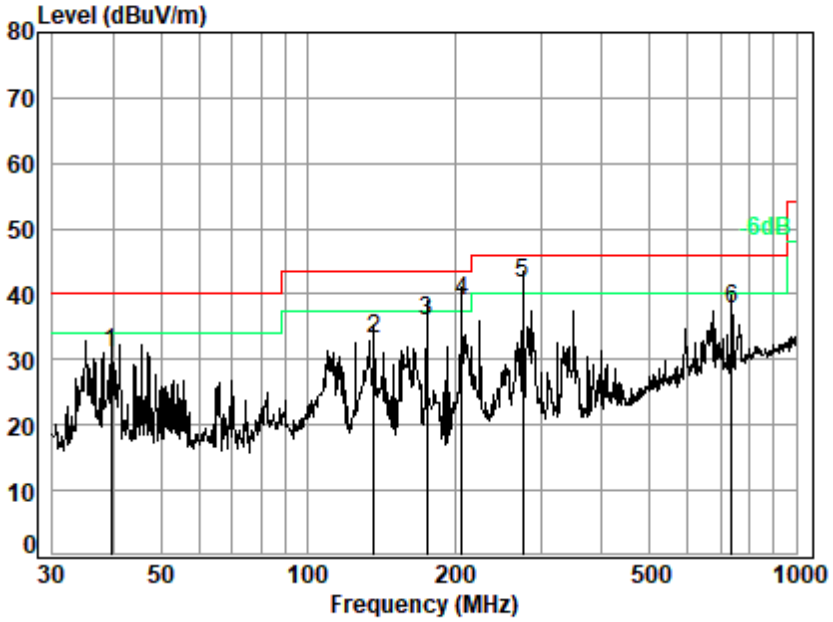

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT
Mode : 04

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	39.5757	0.20	16.63	24.94	39.25	31.14	40.00	-8.86	QP
2	136.4598	0.91	17.16	25.53	40.70	33.24	43.50	-10.26	QP
3	175.0368	0.69	16.52	25.55	44.19	35.85	43.50	-7.65	QP
4	206.3976	0.72	15.38	25.57	48.55	39.08	43.50	-4.42	QP
5	275.1570	0.92	17.53	25.59	48.69	41.55	46.00	-4.45	QP
6	737.0714	1.84	26.02	25.70	35.61	37.77	46.00	-8.23	QP

Test Mode: 05; Polarity: Horizontal

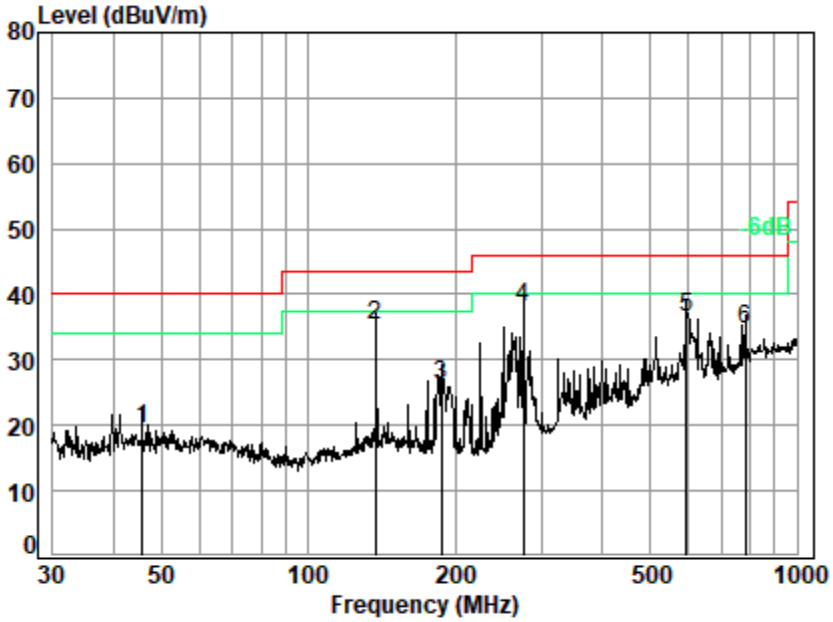

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT
Mode : 05

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	45.6948	0.21	17.27	24.92	27.02	19.58	40.00	-20.42	QP
2	137.4202	0.91	17.23	25.53	42.63	35.24	43.50	-8.26	QP
3	187.0958	0.67	15.70	25.56	35.42	26.23	43.50	-17.27	QP
4	275.1570	0.92	17.53	25.59	45.11	37.97	46.00	-8.03	QP
5	593.0497	2.09	24.20	25.70	35.78	36.37	46.00	-9.63	QP
6	785.0934	2.45	26.87	25.70	31.10	34.72	46.00	-11.28	QP

Test Mode: 05; Polarity: Vertical

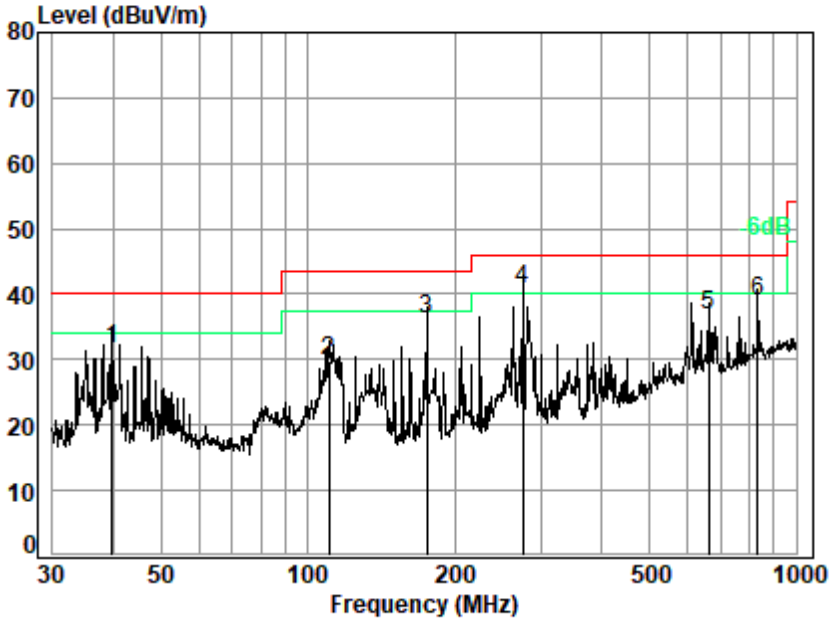

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT
Mode : 05

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	39.7147	0.20	16.66	24.94	39.87	31.79	40.00	-8.21	QP
2	110.5687	0.89	15.24	25.51	39.30	29.92	43.50	-13.58	QP
3	175.0368	0.69	16.52	25.55	44.45	36.11	43.50	-7.39	QP
4	275.1570	0.92	17.53	25.59	48.00	40.86	46.00	-5.14	QP
5	661.1505	1.96	25.36	25.70	35.07	36.69	46.00	-9.31	QP
6	833.3171	2.87	27.76	25.65	33.92	38.90	46.00	-7.10	QP

Test Mode: 10; Polarity: Horizontal

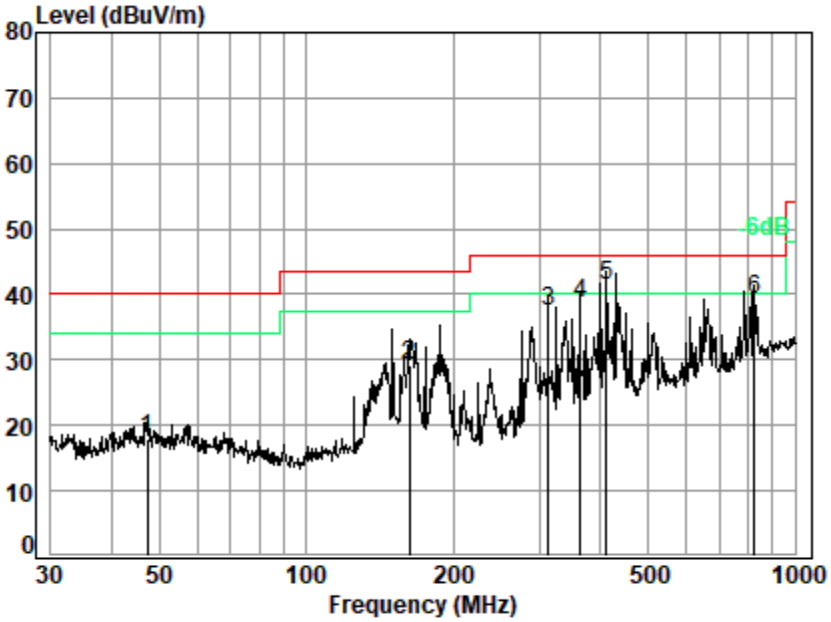

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT
Mode : 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	47.3255	0.21	17.27	24.91	25.24	17.81	40.00	-22.19	QP
2	162.6106	0.77	17.12	25.54	36.87	29.22	43.50	-14.28	QP
3	312.1794	1.14	18.87	25.61	43.11	37.51	46.00	-8.49	QP
4	362.9845	1.56	19.69	25.64	42.99	38.60	46.00	-7.40	QP
5	411.8240	1.64	20.95	25.66	44.53	41.46	46.00	-4.54	QP
6	824.5969	2.81	27.67	25.66	34.47	39.29	46.00	-6.71	QP

Test Mode: 10; Polarity: Vertical

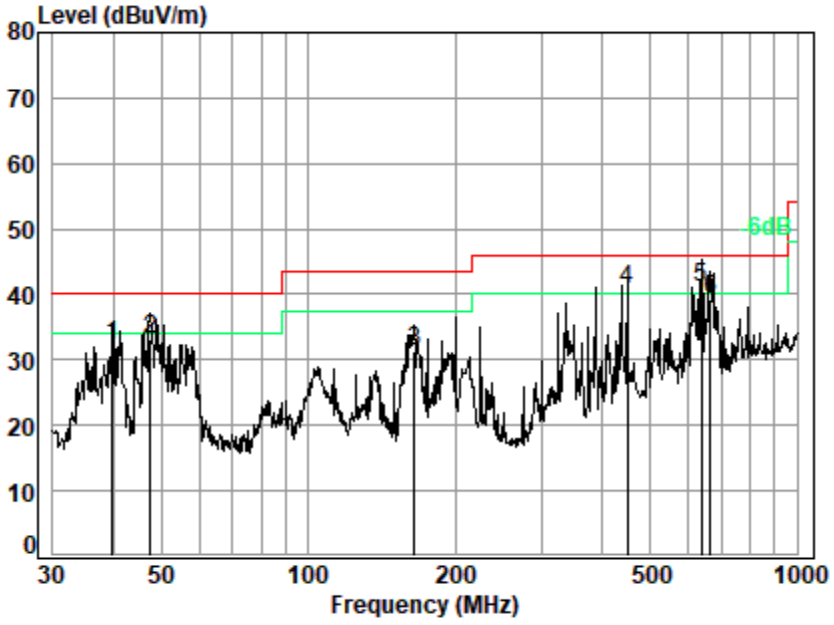

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT
Mode : 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	39.7147	0.20	16.66	24.94	40.33	32.25	40.00	-7.75	QP
2	47.4918	0.22	17.27	24.91	40.61	33.19	40.00	-6.81	QP
3	164.9075	0.76	17.05	25.55	39.07	31.33	43.50	-12.17	QP
4	449.5558	1.44	21.68	25.68	43.25	40.69	46.00	-5.31	QP
5	638.3686	2.07	25.00	25.70	39.81	41.18	46.00	-4.82	QP
6	665.8035	1.92	25.42	25.70	37.72	39.36	46.00	-6.64	QP

Test Mode: 11; Polarity: Horizontal

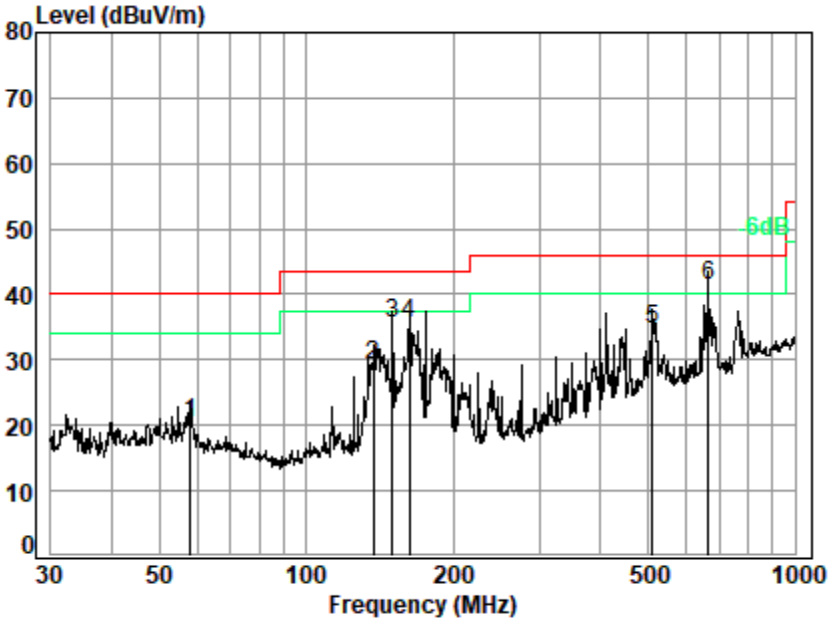

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT
Mode : 11

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	57.9993	0.24	17.00	24.87	28.14	20.51	40.00	-19.49	QP
2	137.4202	0.91	17.23	25.53	36.66	29.27	43.50	-14.23	QP
3	150.0108	0.85	17.43	25.54	42.74	35.48	43.50	-8.02	QP
4	162.6106	0.77	17.12	25.54	43.19	35.54	43.50	-7.96	QP
5	511.8352	1.51	23.23	25.70	35.63	34.67	46.00	-11.33	QP
6	663.4729	1.94	25.39	25.70	39.83	41.46	46.00	-4.54	QP

Test Mode: 11; Polarity: Vertical

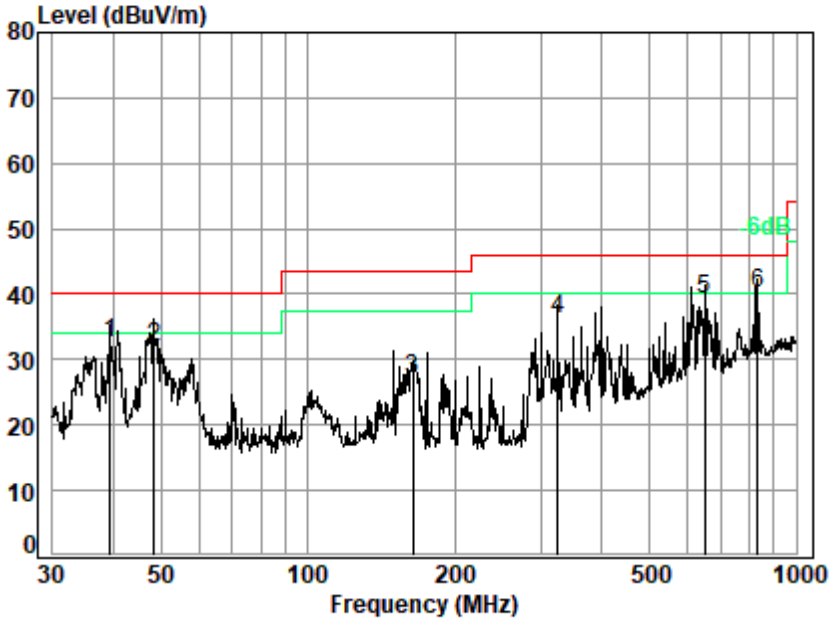

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT
Mode : 11

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	39.2991	0.20	16.57	24.94	40.57	32.40	40.00	-7.60	QP
2	48.3318	0.22	17.29	24.91	39.49	32.09	40.00	-7.91	QP
3	163.7550	0.76	17.09	25.54	34.62	26.93	43.50	-16.57	QP
4	324.4561	1.26	19.37	25.62	41.25	36.26	46.00	-9.74	QP
5	649.6597	2.05	25.19	25.70	37.85	39.39	46.00	-6.61	QP
6	833.3171	2.87	27.76	25.65	35.24	40.22	46.00	-5.78	QP

7.9 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 51.5 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	(WYZECGS + Adapter 1) TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

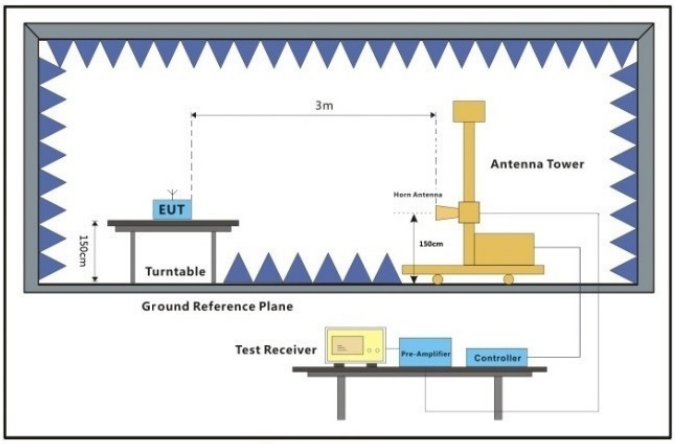

Above 1GHz

7.9.4 Measurement Procedure and Data

a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

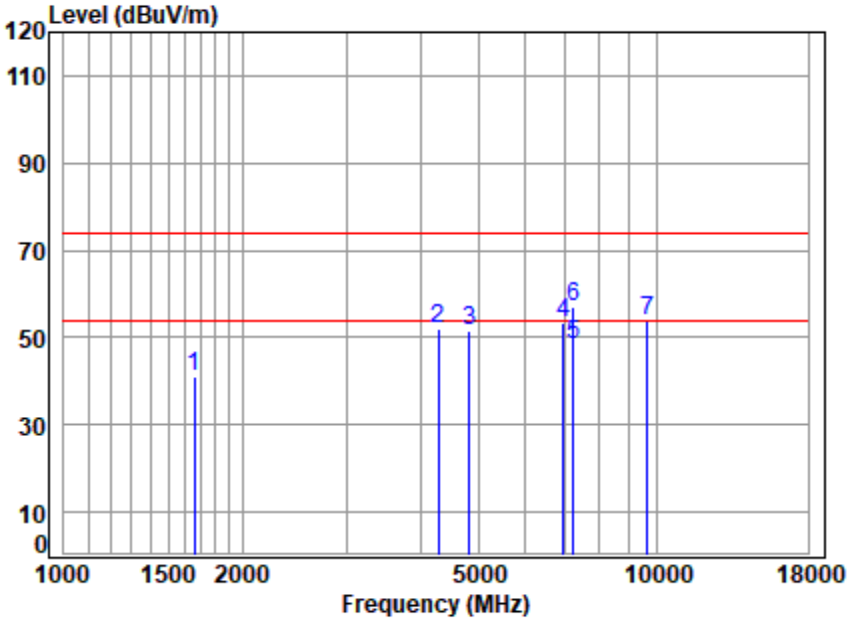

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	65.00	41.11	74.00	-32.89	peak
2	4279.589	7.48	29.90	52.89	67.49	51.98	74.00	-22.02	peak
3	4824.000	8.02	30.99	53.05	65.42	51.38	74.00	-22.62	peak
4	6954.852	8.15	35.70	53.47	63.11	53.49	74.00	-20.51	peak
5	7236.000	8.31	36.09	53.52	57.46	48.34	54.00	-5.66	Average
6	7236.000	8.31	36.09	53.52	66.20	57.08	74.00	-16.92	peak
7	9648.000	11.38	37.62	53.54	58.38	53.84	74.00	-20.16	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

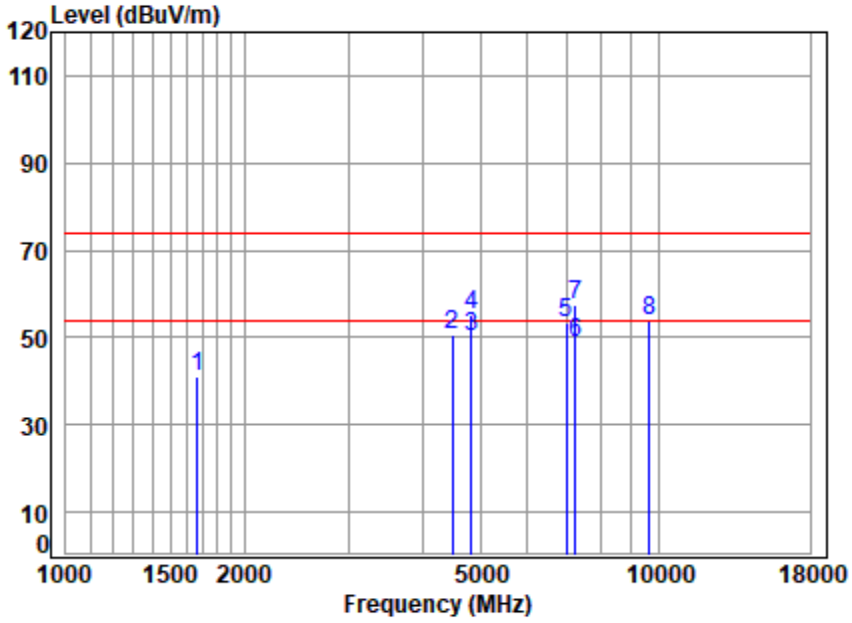

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	4.13	24.94	52.94	64.94	41.07	74.00	-32.93	peak
2	4482.150	7.47	30.18	52.95	66.03	50.73	74.00	-23.27	peak
3	4824.000	8.02	30.99	53.05	64.02	49.98	54.00	-4.02	Average
4	4824.000	8.02	30.99	53.05	69.12	55.08	74.00	-18.92	peak
5	6995.172	8.19	35.79	53.50	63.10	53.58	74.00	-20.42	peak
6	7236.000	8.31	36.09	53.52	57.75	48.63	54.00	-5.37	Average
7	7236.000	8.31	36.09	53.52	66.39	57.27	74.00	-16.73	peak
8	9648.000	11.38	37.62	53.54	58.54	54.00	74.00	-20.00	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

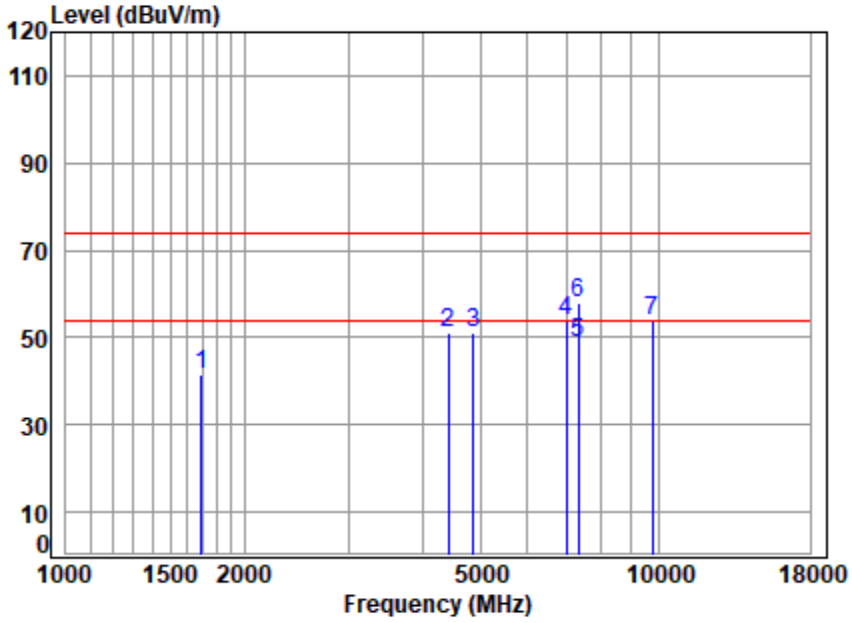

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	4.18	24.99	52.96	65.14	41.35	74.00	-32.65	peak
2	4417.841	7.47	30.09	52.93	66.47	51.10	74.00	-22.90	peak
3	4874.000	8.10	31.11	53.07	64.82	50.96	74.00	-23.04	peak
4	6974.982	8.17	35.74	53.48	63.44	53.87	74.00	-20.13	peak
5	7311.000	8.34	36.18	53.53	58.06	49.05	54.00	-4.95	Average
6	7311.000	8.34	36.18	53.53	67.05	58.04	74.00	-15.96	peak
7	9748.000	11.30	37.84	53.44	58.09	53.79	74.00	-20.21	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

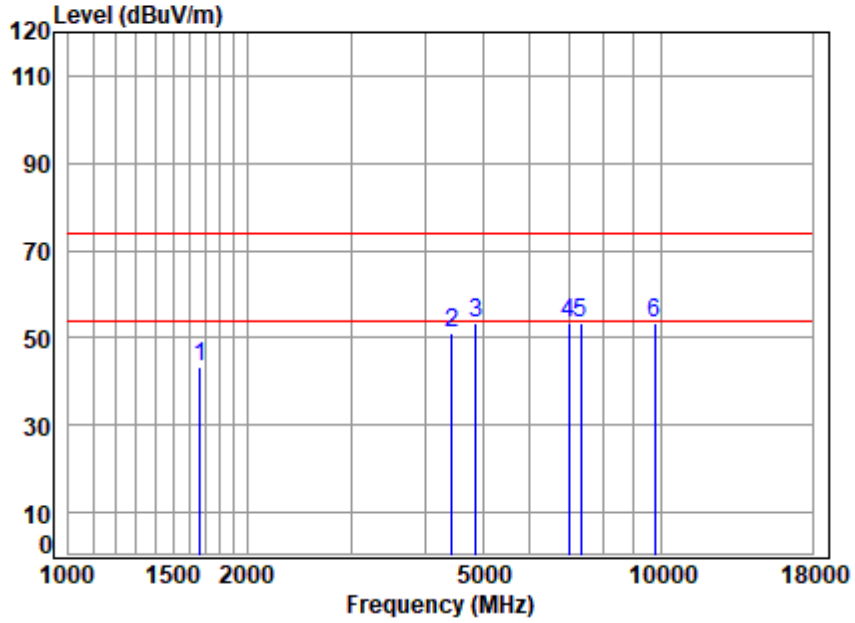

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	4.13	24.94	52.94	67.08	43.21	74.00	-30.79	peak
2	4443.453	7.47	30.12	52.94	66.55	51.20	74.00	-22.80	peak
3	4874.000	8.10	31.11	53.07	67.02	53.16	74.00	-20.84	peak
4	6995.172	8.19	35.79	53.50	62.78	53.26	74.00	-20.74	peak
5	7311.000	8.34	36.18	53.53	62.33	53.32	74.00	-20.68	peak
6	9748.000	11.30	37.84	53.44	57.91	53.61	74.00	-20.39	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

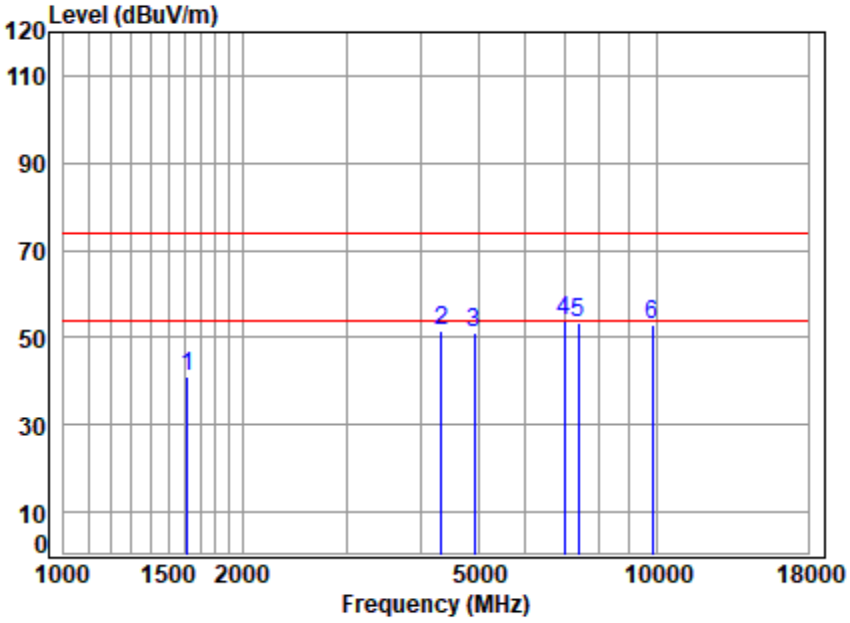

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1615.754	4.02	24.83	52.92	65.07	41.00	74.00	-33.00	peak
2	4341.886	7.48	29.99	52.91	66.82	51.38	74.00	-22.62	peak
3	4924.000	8.18	31.23	53.08	64.83	51.16	74.00	-22.84	peak
4	6974.982	8.17	35.74	53.48	63.26	53.69	74.00	-20.31	peak
5	7386.000	8.38	36.27	53.54	62.21	53.32	74.00	-20.68	peak
6	9848.000	11.23	38.07	53.35	57.15	53.10	74.00	-20.90	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

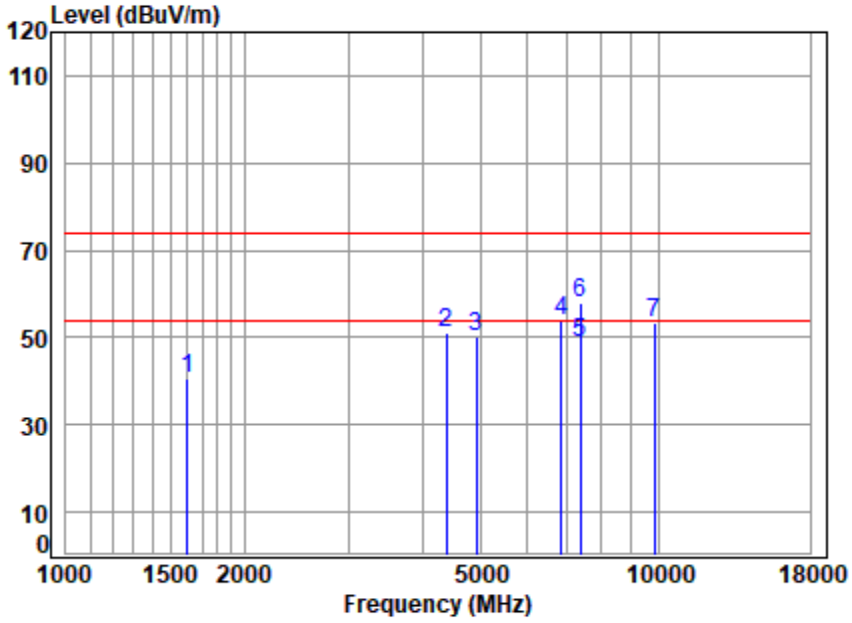

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	3.99	24.80	52.91	64.90	40.78	74.00	-33.22	peak
2	4392.376	7.47	30.06	52.93	66.57	51.17	74.00	-22.83	peak
3	4924.000	8.18	31.23	53.08	63.82	50.15	74.00	-23.85	peak
4	6855.063	8.05	35.46	53.40	63.66	53.77	74.00	-20.23	peak
5	7386.000	8.38	36.27	53.54	57.85	48.96	54.00	-5.04	Average
6	7386.000	8.38	36.27	53.54	66.89	58.00	74.00	-16.00	peak
7	9848.000	11.23	38.07	53.35	57.51	53.46	74.00	-20.54	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

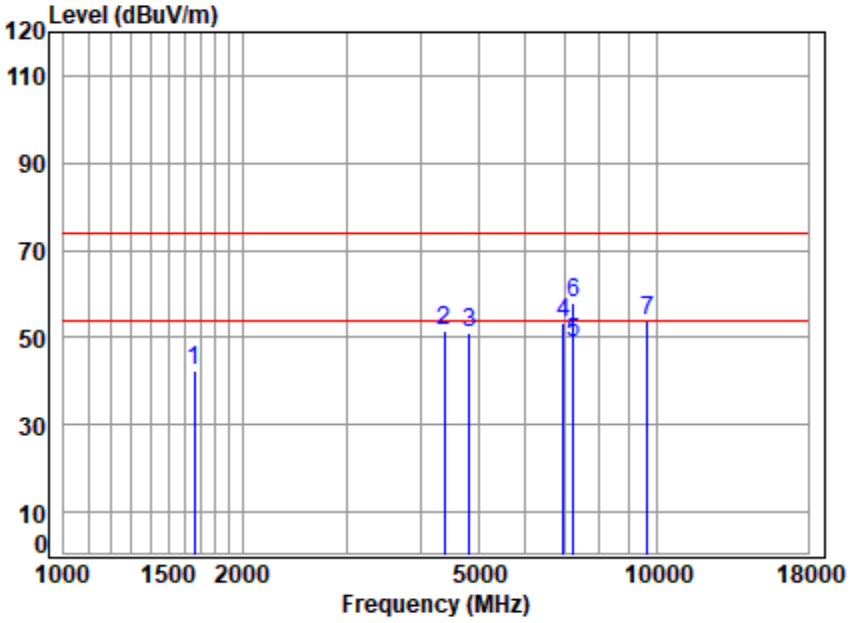

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	66.14	42.25	74.00	-31.75	peak
2	4392.376	7.47	30.06	52.93	67.08	51.68	74.00	-22.32	peak
3	4824.000	8.02	30.99	53.05	65.22	51.18	74.00	-22.82	peak
4	6954.852	8.15	35.70	53.47	63.19	53.57	74.00	-20.43	peak
5	7236.000	8.31	36.09	53.52	58.10	48.98	54.00	-5.02	Average
6	7236.000	8.31	36.09	53.52	67.26	58.14	74.00	-15.86	peak
7	9648.000	11.38	37.62	53.54	58.50	53.96	74.00	-20.04	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

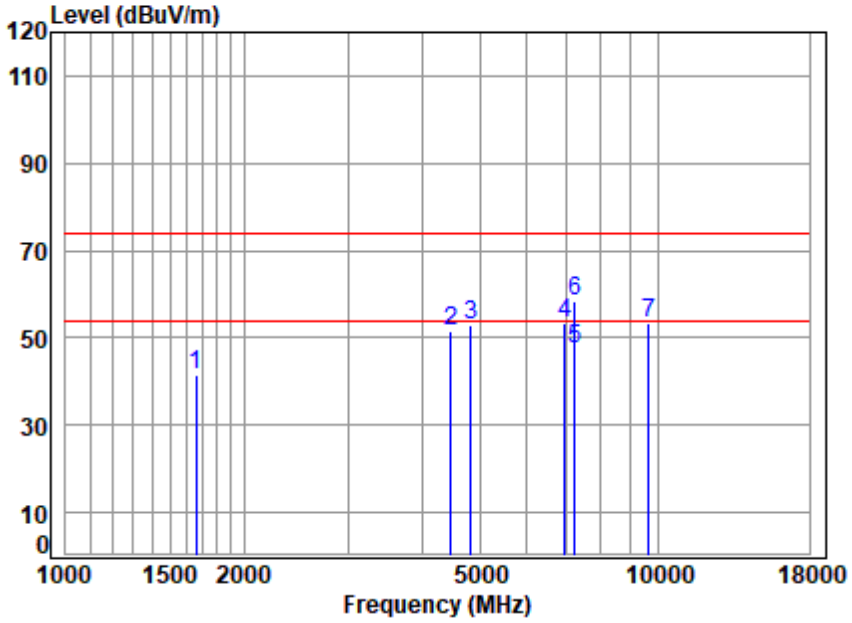

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1658.337	4.11	24.92	52.94	65.49	41.58	74.00	-32.42	peak
2	4469.214	7.47	30.16	52.95	66.91	51.59	74.00	-22.41	peak
3	4824.000	8.02	30.99	53.05	67.06	53.02	74.00	-20.98	peak
4	6954.852	8.15	35.70	53.47	63.17	53.55	74.00	-20.45	peak
5	7236.000	8.31	36.09	53.52	56.64	47.52	54.00	-6.48	Average
6	7236.000	8.31	36.09	53.52	67.48	58.36	74.00	-15.64	peak
7	9648.000	11.38	37.62	53.54	57.76	53.22	74.00	-20.78	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

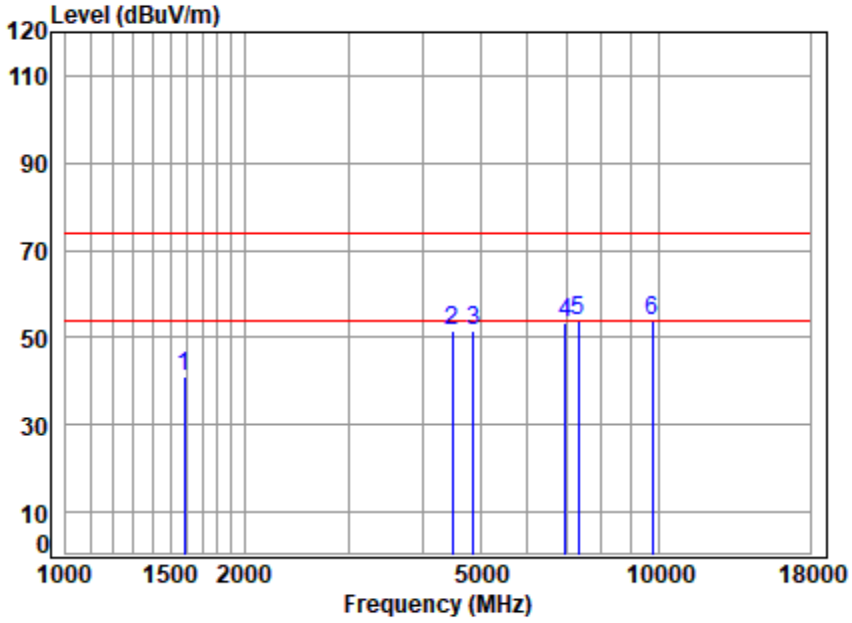

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	3.95	24.75	52.90	65.11	40.91	74.00	-33.09	peak
2	4482.150	7.47	30.18	52.95	66.89	51.59	74.00	-22.41	peak
3	4874.000	8.10	31.11	53.07	65.53	51.67	74.00	-22.33	peak
4	6954.852	8.15	35.70	53.47	62.87	53.25	74.00	-20.75	peak
5	7311.000	8.34	36.18	53.53	62.93	53.92	74.00	-20.08	peak
6	9748.000	11.30	37.84	53.44	58.28	53.98	74.00	-20.02	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

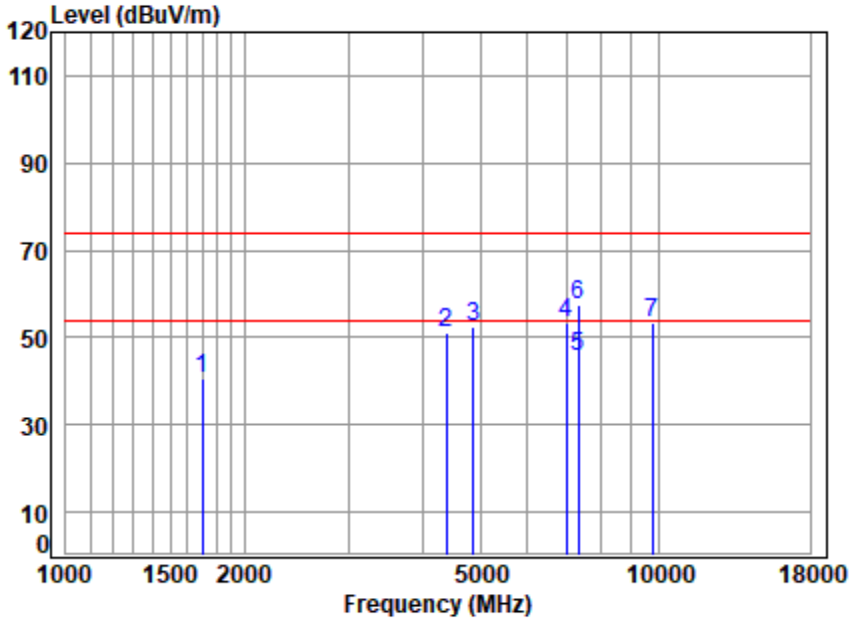

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	4.19	25.00	52.96	64.52	40.75	74.00	-33.25	peak
2	4392.376	7.47	30.06	52.93	66.43	51.03	74.00	-22.97	peak
3	4874.000	8.10	31.11	53.07	66.24	52.38	74.00	-21.62	peak
4	6974.982	8.17	35.74	53.48	62.90	53.33	74.00	-20.67	peak
5	7311.000	8.34	36.18	53.53	54.47	45.46	54.00	-8.54	Average
6	7311.000	8.34	36.18	53.53	66.29	57.28	74.00	-16.72	peak
7	9748.000	11.30	37.84	53.44	57.70	53.40	74.00	-20.60	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

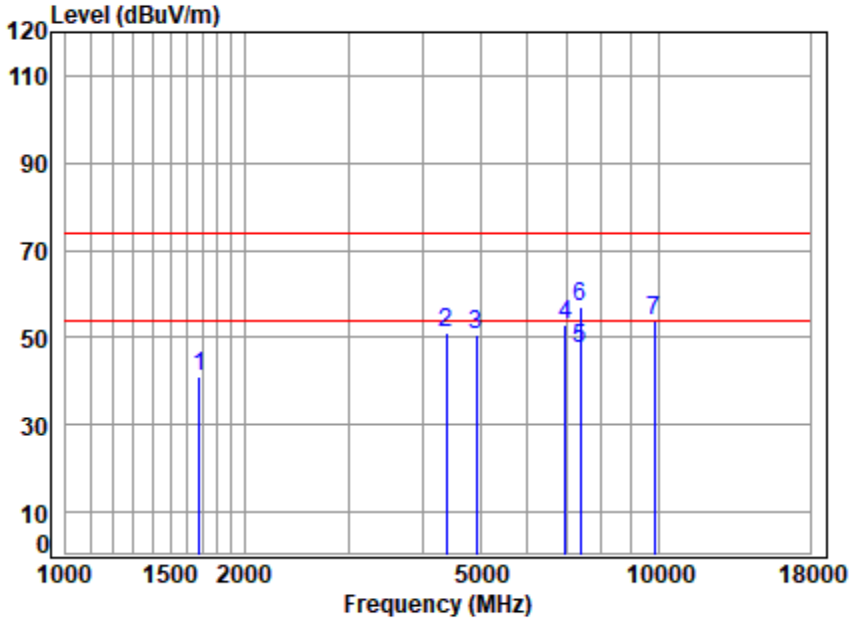

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1682.477	4.16	24.97	52.95	64.78	40.96	74.00	-33.04	peak
2	4392.376	7.47	30.06	52.93	66.34	50.94	74.00	-23.06	peak
3	4924.000	8.18	31.23	53.08	64.21	50.54	74.00	-23.46	peak
4	6954.852	8.15	35.70	53.47	62.76	53.14	74.00	-20.86	peak
5	7386.000	8.38	36.27	53.54	56.22	47.33	54.00	-6.67	Average
6	7386.000	8.38	36.27	53.54	66.09	57.20	74.00	-16.80	peak
7	9848.000	11.23	38.07	53.35	57.92	53.87	74.00	-20.13	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

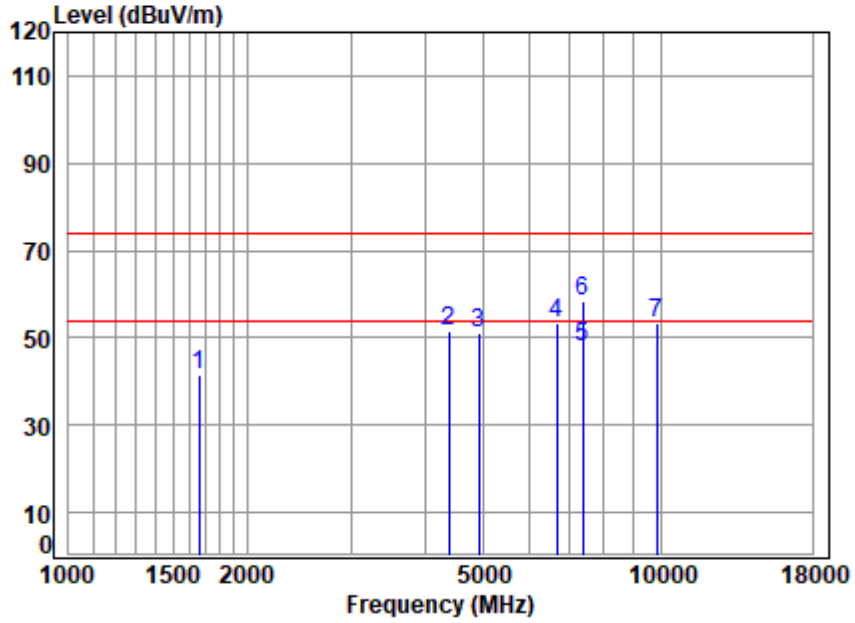

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	65.44	41.55	74.00	-32.45	peak
2	4379.699	7.47	30.04	52.92	66.80	51.39	74.00	-22.61	peak
3	4924.000	8.18	31.23	53.08	64.64	50.97	74.00	-23.03	peak
4	6679.040	7.88	35.04	53.29	63.86	53.49	74.00	-20.51	peak
5	7386.000	8.38	36.27	53.54	56.80	47.91	54.00	-6.09	Average
6	7386.000	8.38	36.27	53.54	67.30	58.41	74.00	-15.59	peak
7	9848.000	11.23	38.07	53.35	57.26	53.21	74.00	-20.79	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

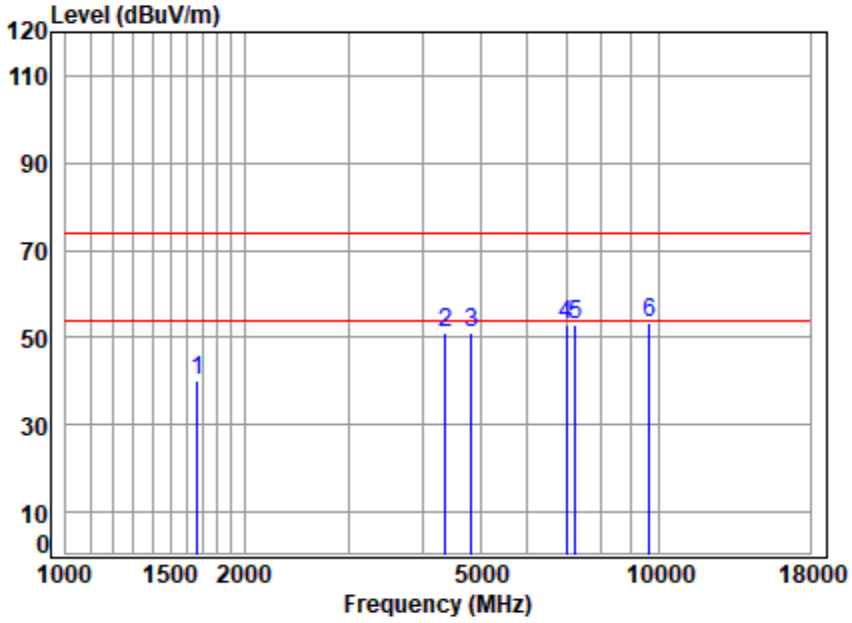

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	4.13	24.94	52.94	64.02	40.15	74.00	-33.85	peak
2	4367.058	7.48	30.02	52.92	66.31	50.89	74.00	-23.11	peak
3	4824.000	8.02	30.99	53.05	65.22	51.18	74.00	-22.82	peak
4	6974.982	8.17	35.74	53.48	62.50	52.93	74.00	-21.07	peak
5	7236.000	8.31	36.09	53.52	62.27	53.15	74.00	-20.85	peak
6	9648.000	11.38	37.62	53.54	57.78	53.24	74.00	-20.76	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

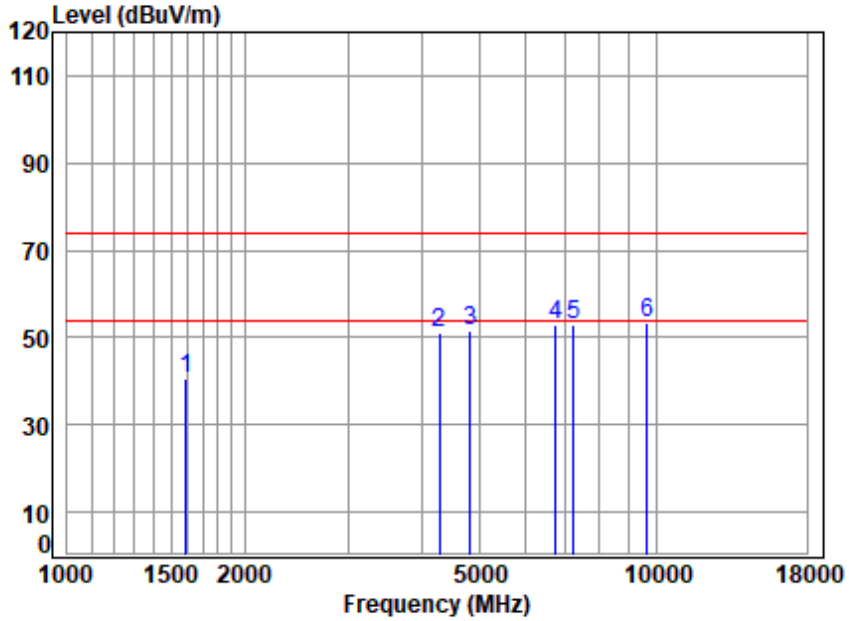

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2412 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1592.571	3.97	24.78	52.90	64.61	40.46	74.00	-33.54	peak
2	4291.977	7.48	29.92	52.89	66.49	51.00	74.00	-23.00	peak
3	4824.000	8.02	30.99	53.05	65.67	51.63	74.00	-22.37	peak
4	6737.207	7.94	35.18	53.33	63.33	53.12	74.00	-20.88	peak
5	7236.000	8.31	36.09	53.52	62.19	53.07	74.00	-20.93	peak
6	9648.000	11.38	37.62	53.54	58.00	53.46	74.00	-20.54	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

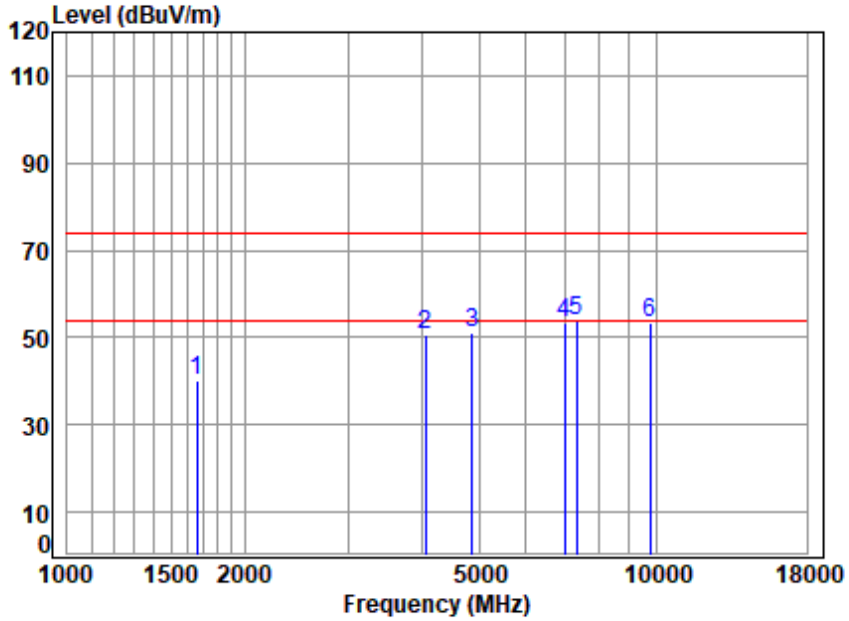

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	64.26	40.37	74.00	-33.63	peak
2	4062.629	7.49	29.59	52.82	66.55	50.81	74.00	-23.19	peak
3	4874.000	8.10	31.11	53.07	65.18	51.32	74.00	-22.68	peak
4	6995.172	8.19	35.79	53.50	62.96	53.44	74.00	-20.56	peak
5	7311.000	8.34	36.18	53.53	62.72	53.71	74.00	-20.29	peak
6	9748.000	11.30	37.84	53.44	57.71	53.41	74.00	-20.59	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

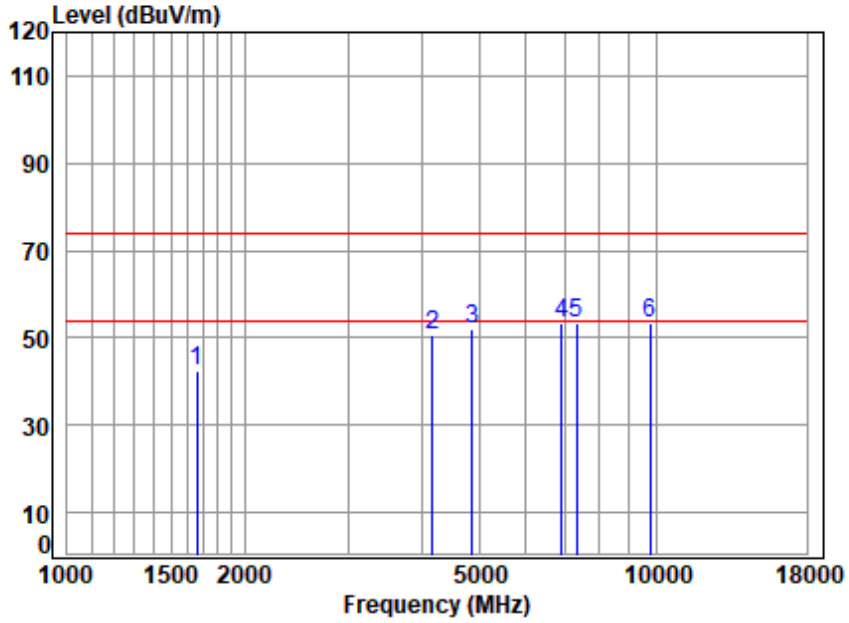

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	66.34	42.45	74.00	-31.55	peak
2	4169.698	7.48	29.75	52.86	66.49	50.86	74.00	-23.14	peak
3	4874.000	8.10	31.11	53.07	65.76	51.90	74.00	-22.10	peak
4	6894.806	8.09	35.55	53.43	63.11	53.32	74.00	-20.68	peak
5	7311.000	8.34	36.18	53.53	62.23	53.22	74.00	-20.78	peak
6	9748.000	11.30	37.84	53.44	57.63	53.33	74.00	-20.67	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

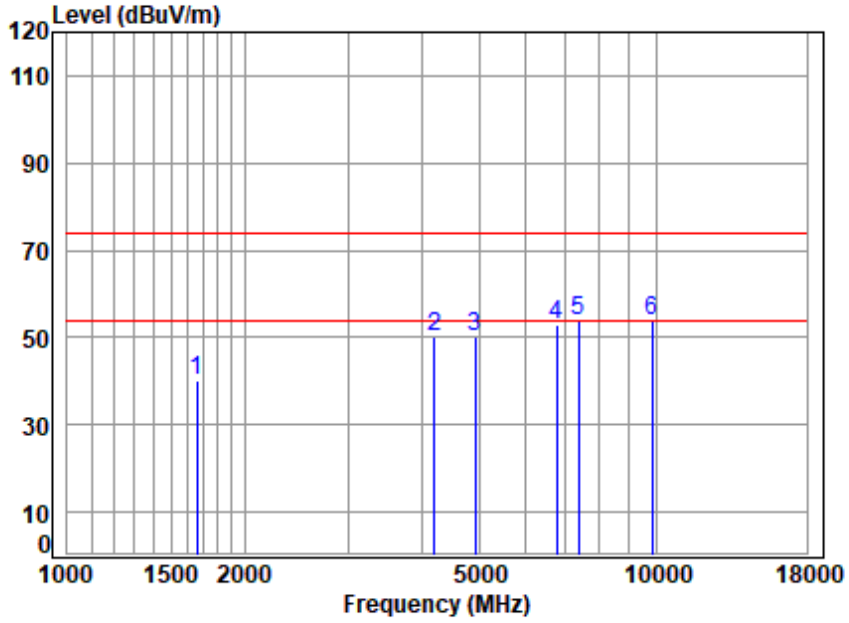

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	64.01	40.12	74.00	-33.88	peak
2	4206.011	7.48	29.80	52.87	65.89	50.30	74.00	-23.70	peak
3	4924.000	8.18	31.23	53.08	63.77	50.10	74.00	-23.90	peak
4	6776.265	7.98	35.27	53.35	63.18	53.08	74.00	-20.92	peak
5	7386.000	8.38	36.27	53.54	62.65	53.76	74.00	-20.24	peak
6	9848.000	11.23	38.07	53.35	57.74	53.69	74.00	-20.31	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

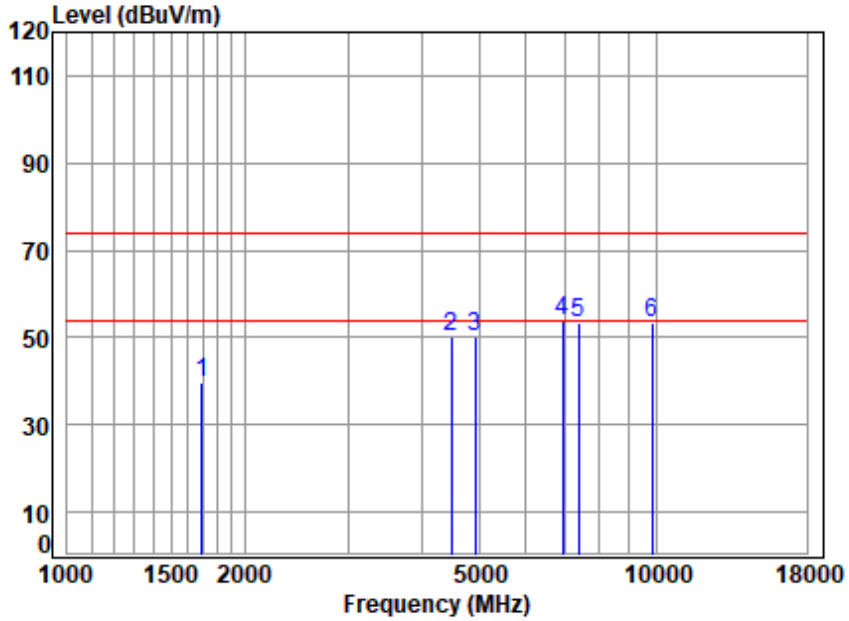

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2462 TX RSE
: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	4.18	24.99	52.96	63.53	39.74	74.00	-34.26	peak
2	4482.150	7.47	30.18	52.95	65.65	50.35	74.00	-23.65	peak
3	4924.000	8.18	31.23	53.08	63.92	50.25	74.00	-23.75	peak
4	6934.778	8.13	35.65	53.46	63.32	53.64	74.00	-20.36	peak
5	7386.000	8.38	36.27	53.54	62.39	53.50	74.00	-20.50	peak
6	9848.000	11.23	38.07	53.35	57.36	53.31	74.00	-20.69	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

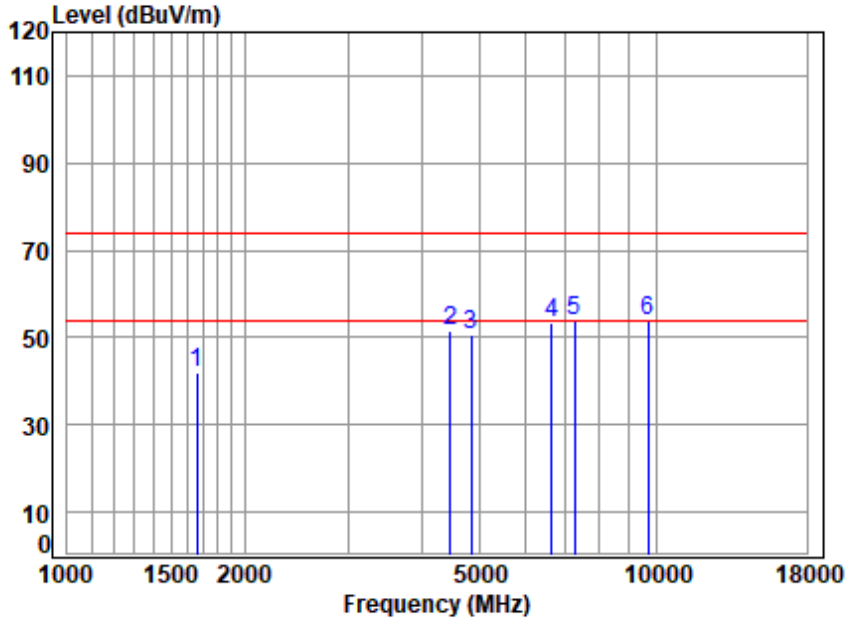

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2422 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1658.337	4.11	24.92	52.94	65.94	42.03	74.00	-31.97	peak
2	4469.214	7.47	30.16	52.95	66.79	51.47	74.00	-22.53	peak
3	4844.000	8.05	31.04	53.06	64.83	50.86	74.00	-23.14	peak
4	6640.542	7.84	34.95	53.26	63.65	53.18	74.00	-20.82	peak
5	7266.000	8.32	36.12	53.53	62.97	53.88	74.00	-20.12	peak
6	9688.000	11.35	37.71	53.50	58.37	53.93	74.00	-20.07	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

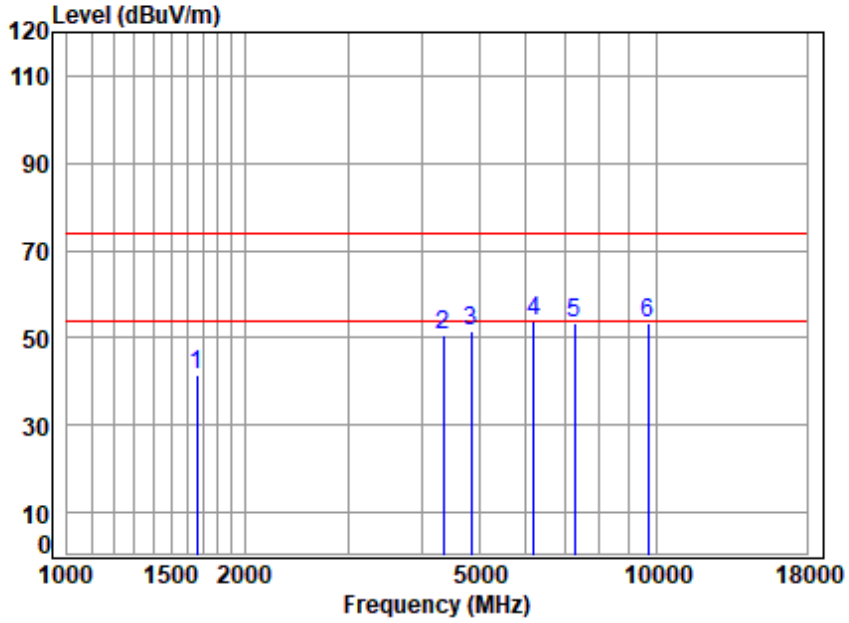

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2422 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1658.337	4.11	24.92	52.94	65.46	41.55	74.00	-32.45	peak
2	4354.454	7.48	30.00	52.91	66.23	50.80	74.00	-23.20	peak
3	4844.000	8.05	31.04	53.06	65.44	51.47	74.00	-22.53	peak
4	6195.508	7.66	33.28	52.95	65.90	53.89	74.00	-20.11	peak
5	7266.000	8.32	36.12	53.53	62.38	53.29	74.00	-20.71	peak
6	9688.000	11.35	37.71	53.50	57.64	53.20	74.00	-20.80	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

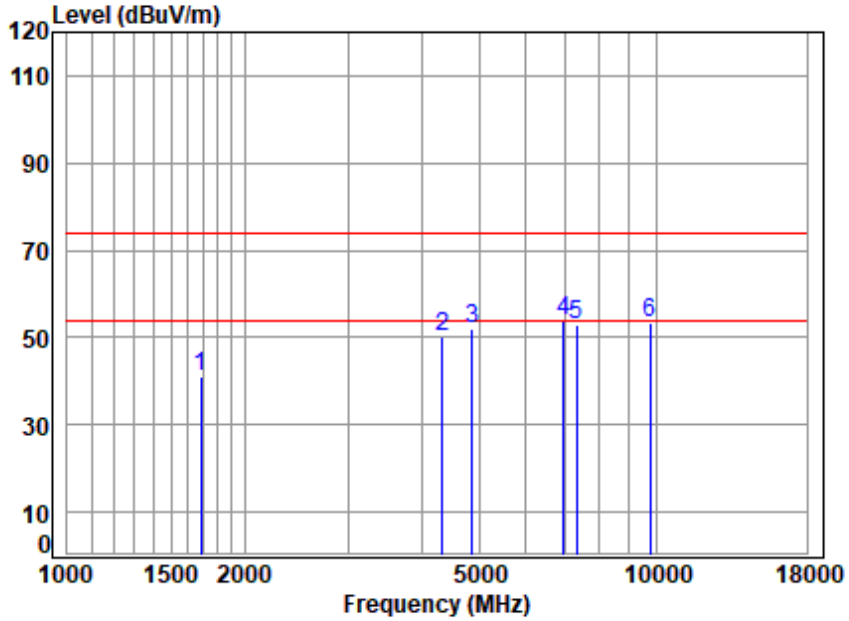

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	4.17	24.98	52.95	64.81	41.01	74.00	-32.99	peak
2	4341.886	7.48	29.99	52.91	65.61	50.17	74.00	-23.83	peak
3	4874.000	8.10	31.11	53.07	65.89	52.03	74.00	-21.97	peak
4	6954.852	8.15	35.70	53.47	63.36	53.74	74.00	-20.26	peak
5	7311.000	8.34	36.18	53.53	62.10	53.09	74.00	-20.91	peak
6	9748.000	11.30	37.84	53.44	57.53	53.23	74.00	-20.77	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

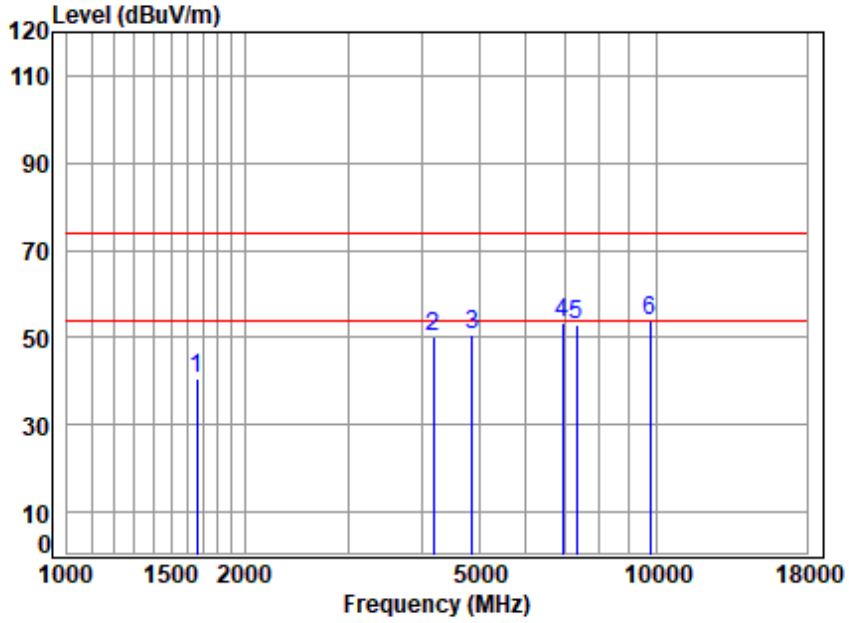

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2437 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1658.337	4.11	24.92	52.94	64.46	40.55	74.00	-33.45	peak
2	4181.768	7.48	29.76	52.86	65.91	50.29	74.00	-23.71	peak
3	4874.000	8.10	31.11	53.07	64.47	50.61	74.00	-23.39	peak
4	6934.778	8.13	35.65	53.46	63.28	53.60	74.00	-20.40	peak
5	7311.000	8.34	36.18	53.53	62.17	53.16	74.00	-20.84	peak
6	9748.000	11.30	37.84	53.44	58.06	53.76	74.00	-20.24	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

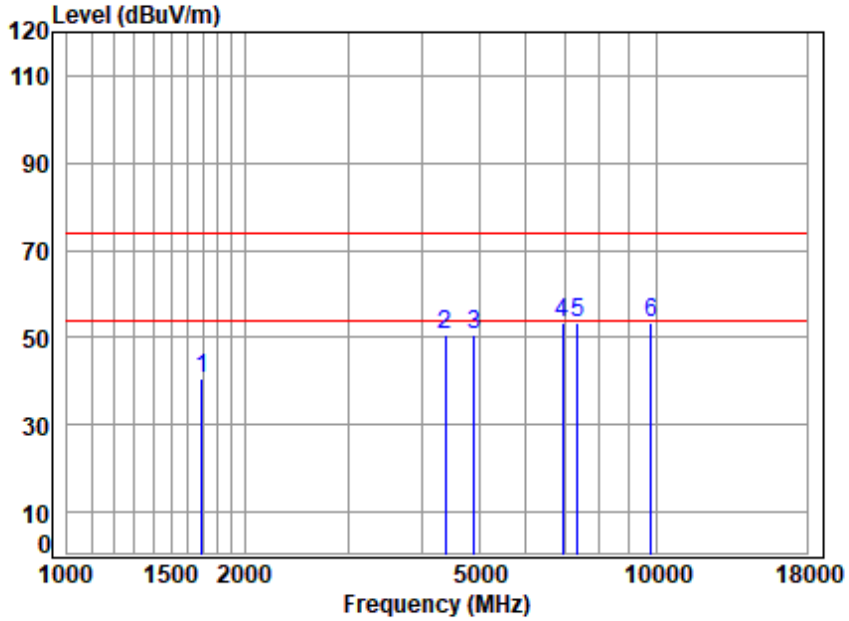

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00294AT/00295AT
Mode : 2452 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	4.18	24.99	52.96	64.42	40.63	74.00	-33.37	peak
2	4379.699	7.47	30.04	52.92	66.28	50.87	74.00	-23.13	peak
3	4904.000	8.15	31.18	53.07	64.34	50.60	74.00	-23.40	peak
4	6934.778	8.13	35.65	53.46	63.08	53.40	74.00	-20.60	peak
5	7356.000	8.36	36.23	53.54	62.23	53.28	74.00	-20.72	peak
6	9808.000	11.26	37.98	53.38	57.47	53.33	74.00	-20.67	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

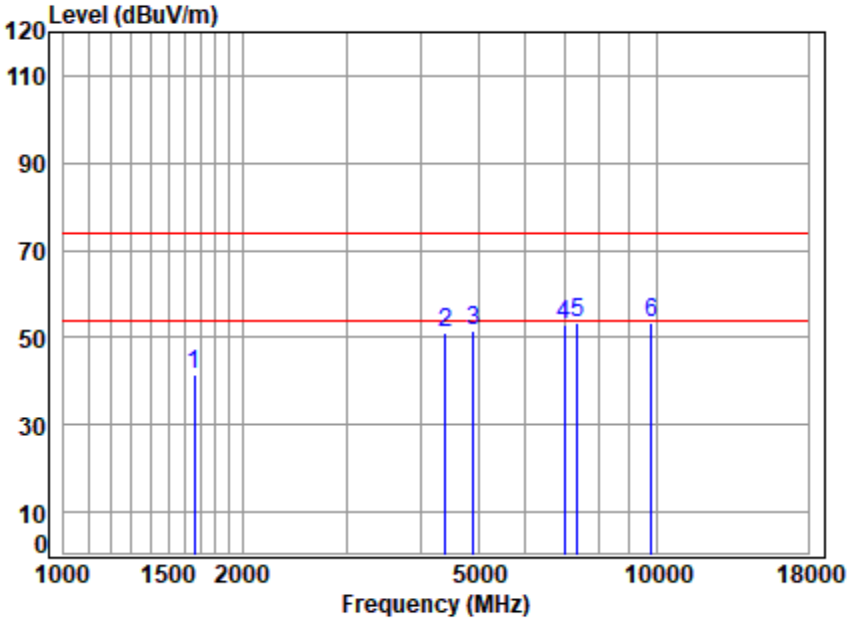

Site : chamber
Condition: 3m VERTICAL
Job No : 00294AT/00295AT
Mode : 2452 TX RSE
: 2.4G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	4.12	24.93	52.94	65.21	41.32	74.00	-32.68	peak
2	4405.090	7.47	30.07	52.93	66.49	51.10	74.00	-22.90	peak
3	4904.000	8.15	31.18	53.07	65.18	51.44	74.00	-22.56	peak
4	6974.982	8.17	35.74	53.48	62.44	52.87	74.00	-21.13	peak
5	7356.000	8.36	36.23	53.54	62.22	53.27	74.00	-20.73	peak
6	9808.000	11.26	37.98	53.38	57.40	53.26	74.00	-20.74	peak

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for FYCR2208000294AT.

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for FYCR2208000294AT.

10 Appendix

1. Duty Cycle

1.1 Ant1

1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.190	8.207	99.79	0.01	0.03
		2437	8.190	8.206	99.81	0.01	0.04
		2462	8.190	8.207	99.79	0.01	0.03
802.11g	SISO	2412	1.360	1.364	99.71	0.01	0.08
		2437	1.360	1.364	99.71	0.01	0.04
		2462	1.359	1.364	99.63	0.02	0.07
802.11n (HT20)	SISO	2412	1.272	1.277	99.61	0.02	0.07
		2437	1.272	1.276	99.69	0.01	0.04
		2462	1.273	1.276	99.76	0.01	0.03
802.11n (HT40)	SISO	2422	0.633	0.636	99.53	0.02	0.03
		2437	0.632	0.636	99.37	0.03	0.04
		2452	0.634	0.637	99.53	0.02	0.04

1.1.2 Test Graph

802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

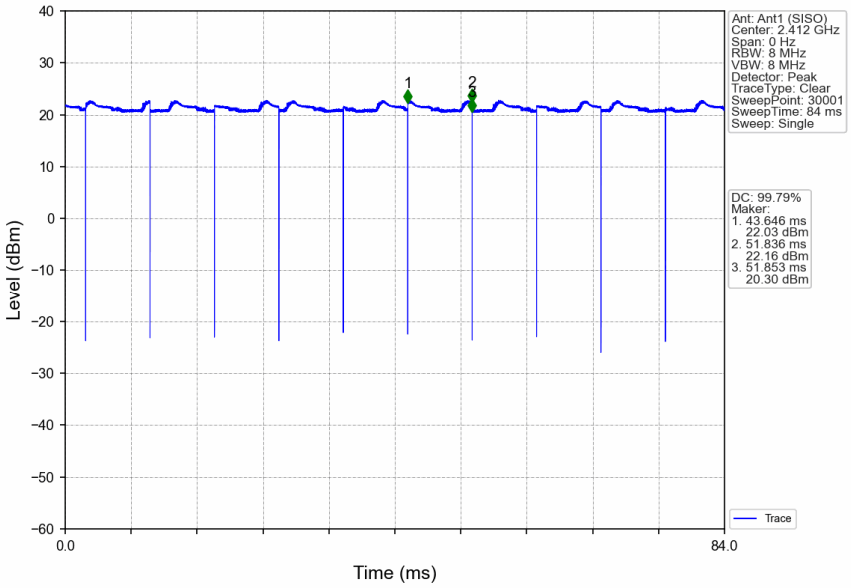

802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

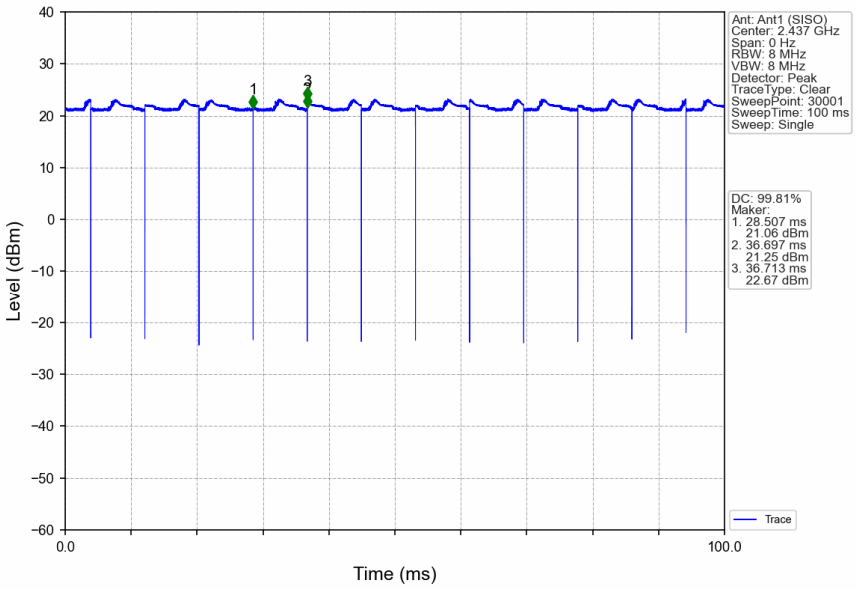

802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

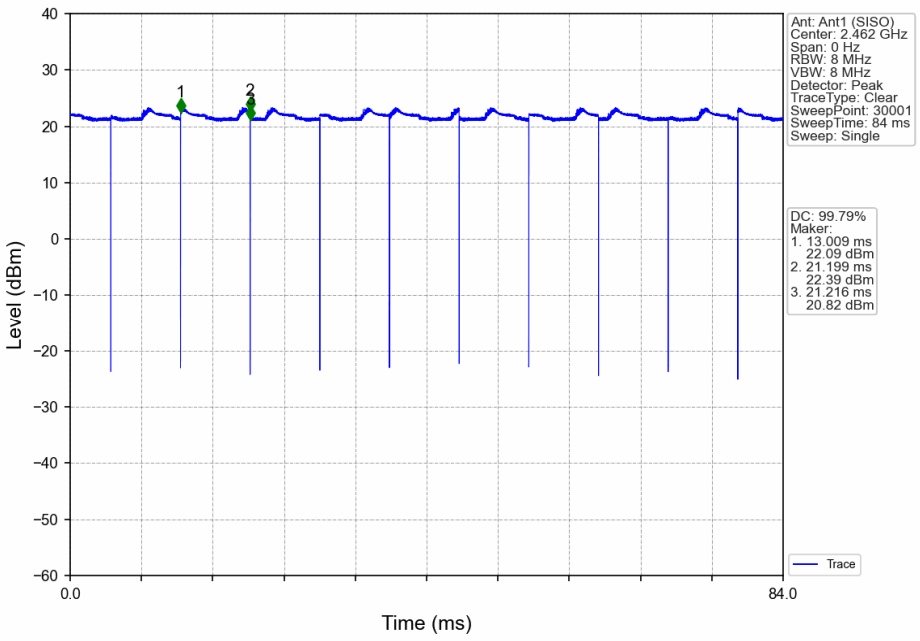

802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

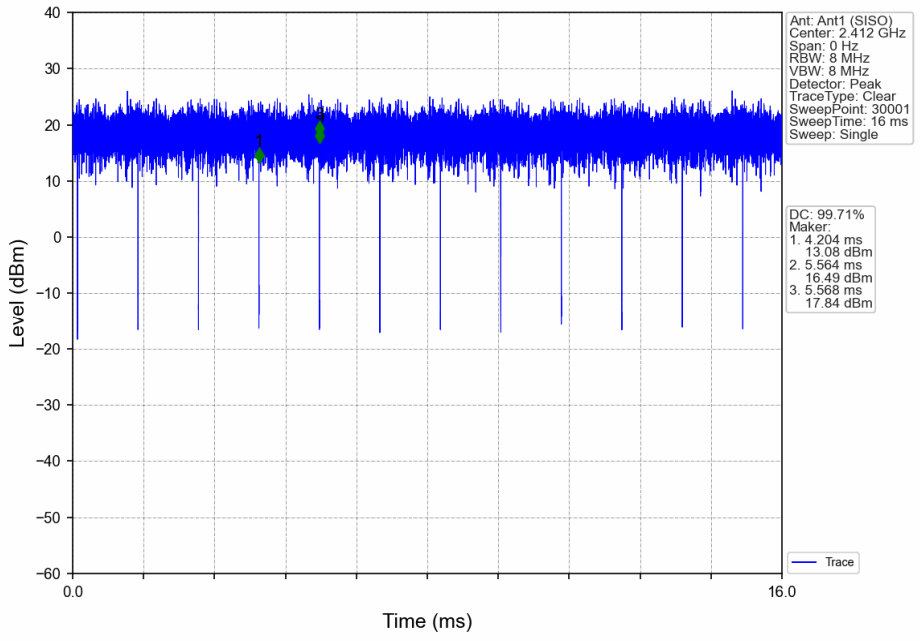

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

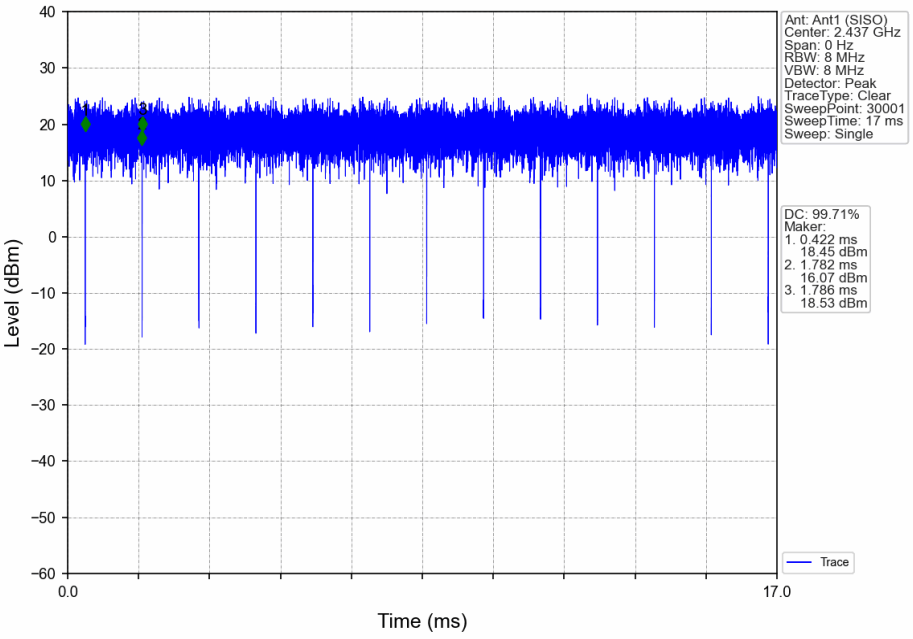

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

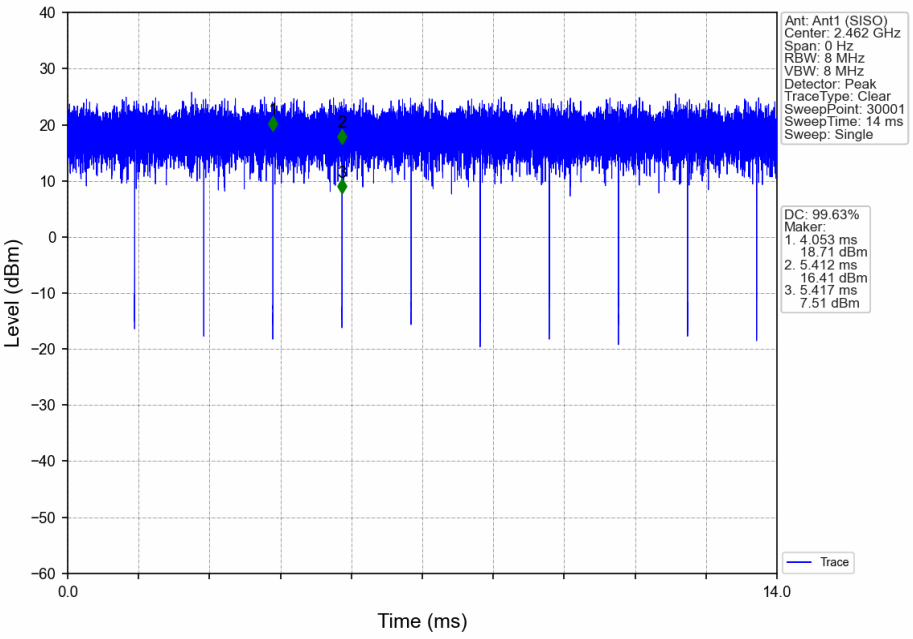

802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

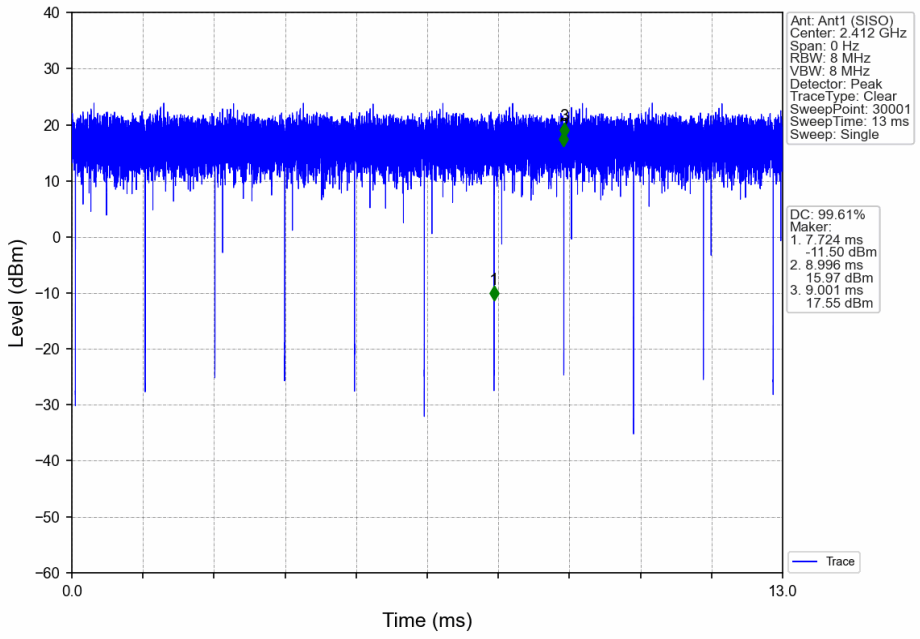

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

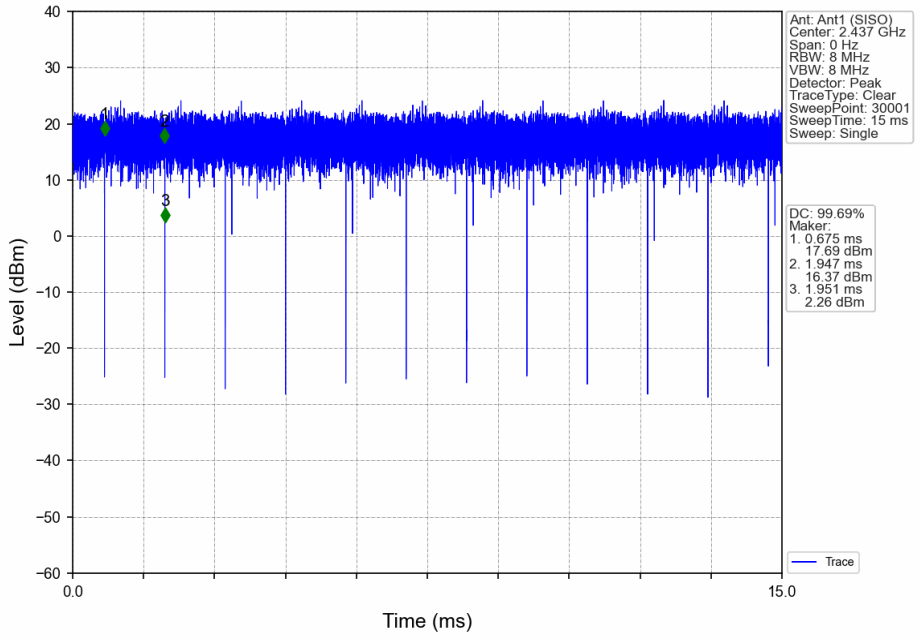

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

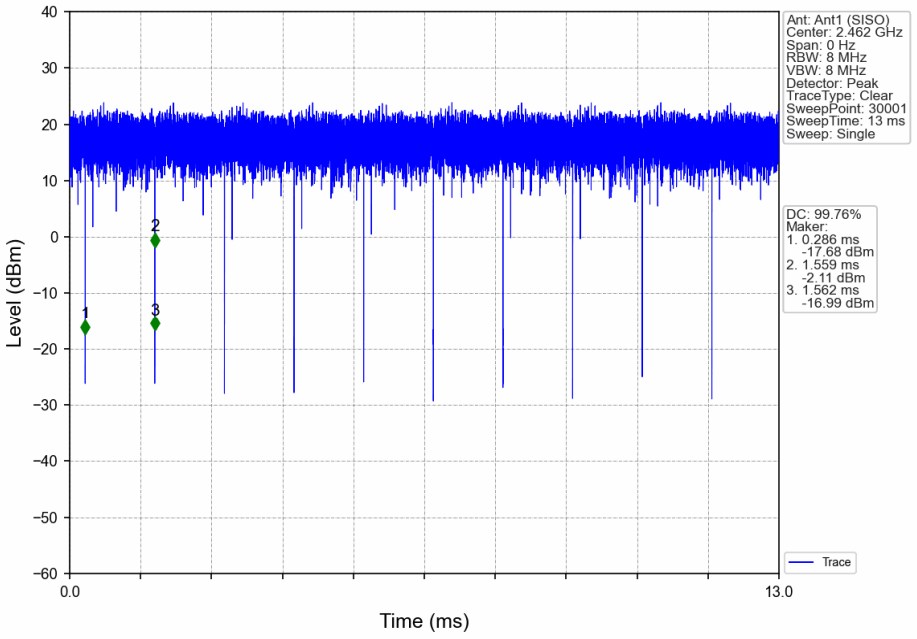

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

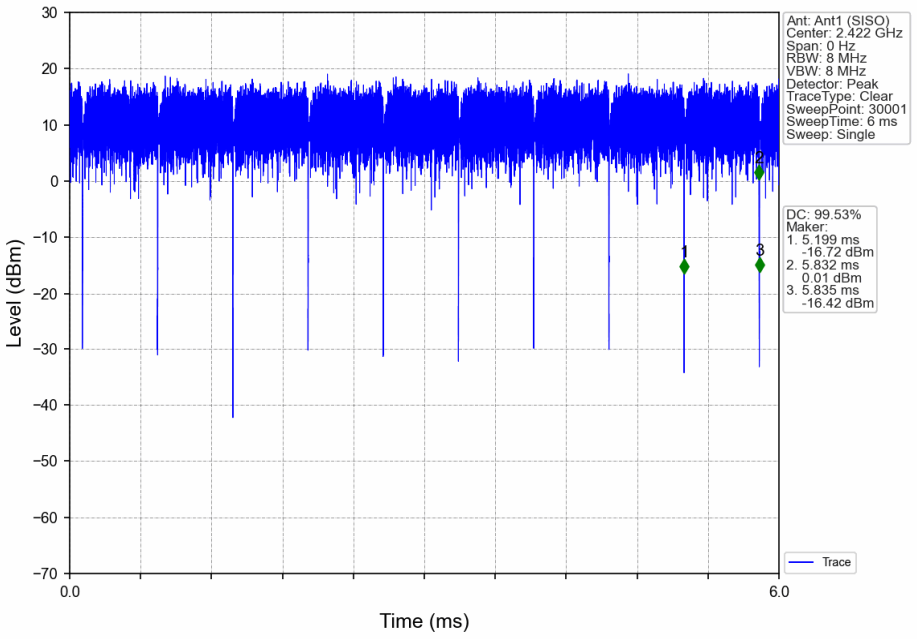

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

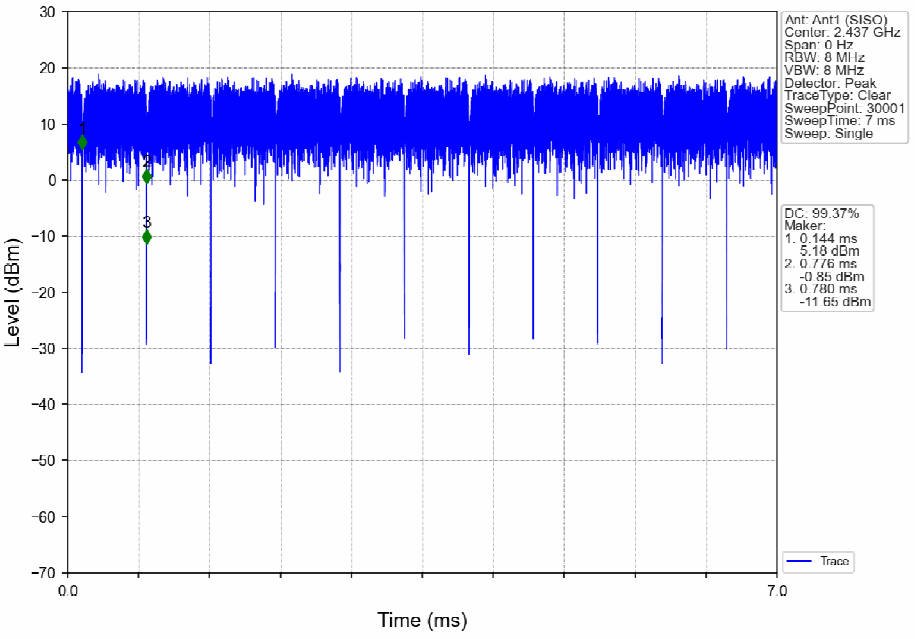

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

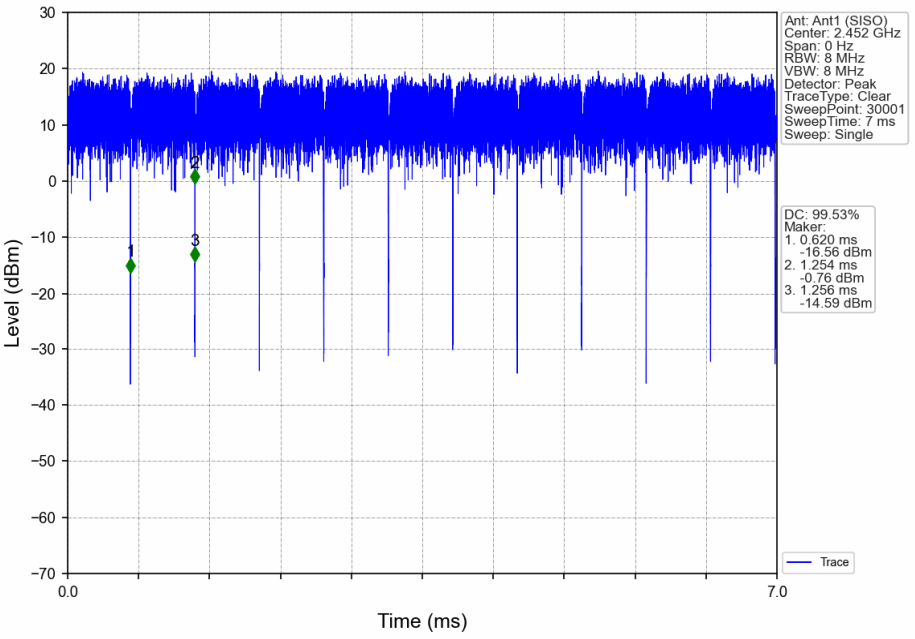

2. Bandwidth

2.1 OBW

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
802.11b	SISO	2412	1	14.147	Pass
		2437	1	14.079	Pass
		2462	1	14.070	Pass
802.11g	SISO	2412	1	17.079	Pass
		2437	1	17.070	Pass
		2462	1	17.048	Pass
802.11n (HT20)	SISO	2412	1	18.232	Pass
		2437	1	18.293	Pass
		2462	1	18.217	Pass
802.11n (HT40)	SISO	2422	1	35.626	Pass
		2437	1	35.661	Pass
		2452	1	35.692	Pass

2.1.2 Test Graph

802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

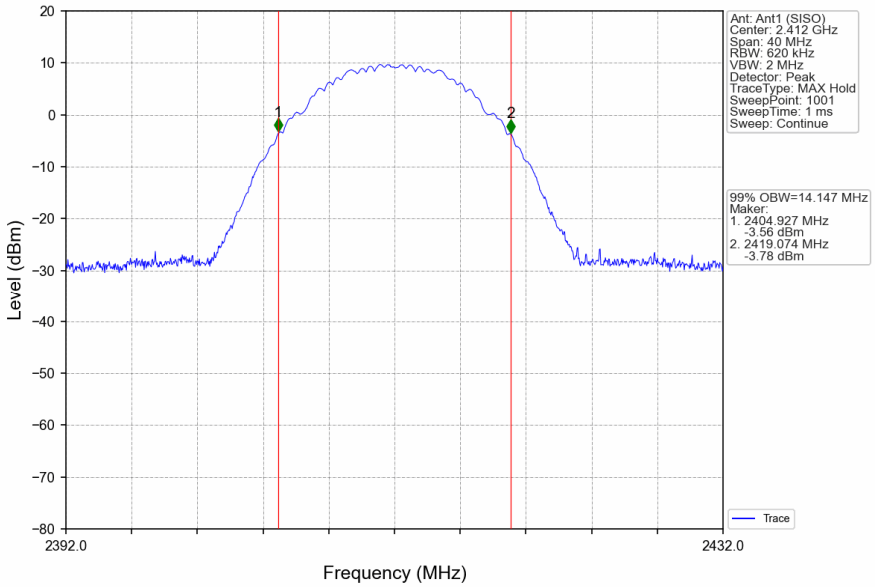

802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

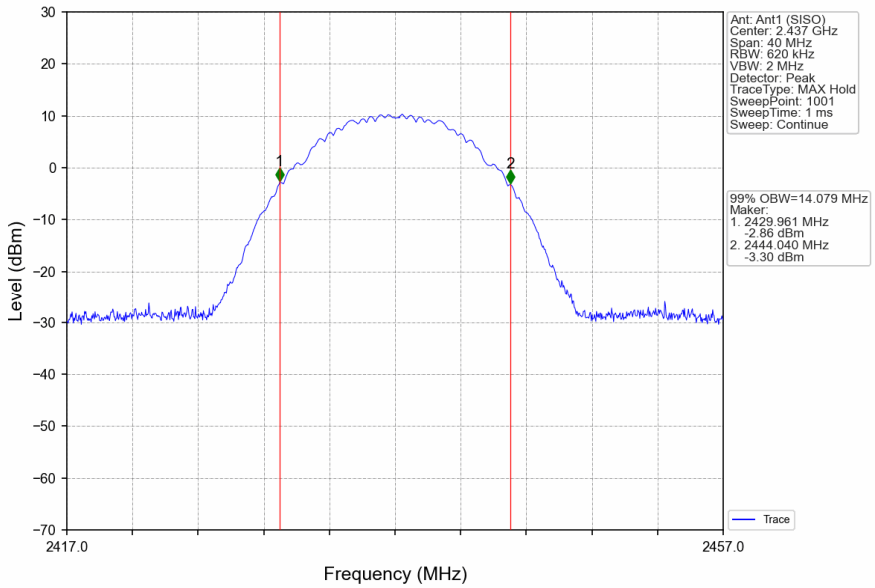

802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

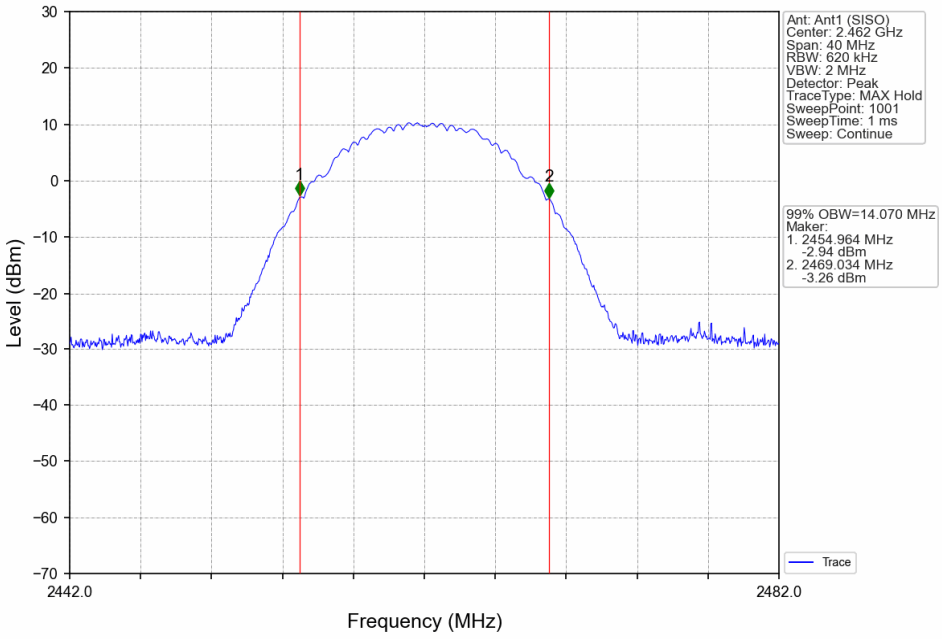

802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

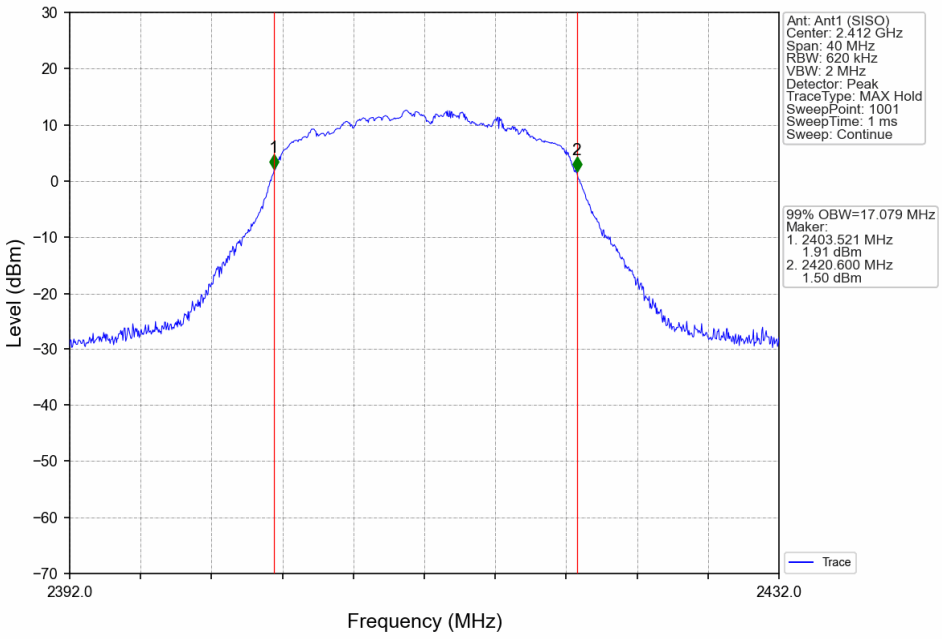

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

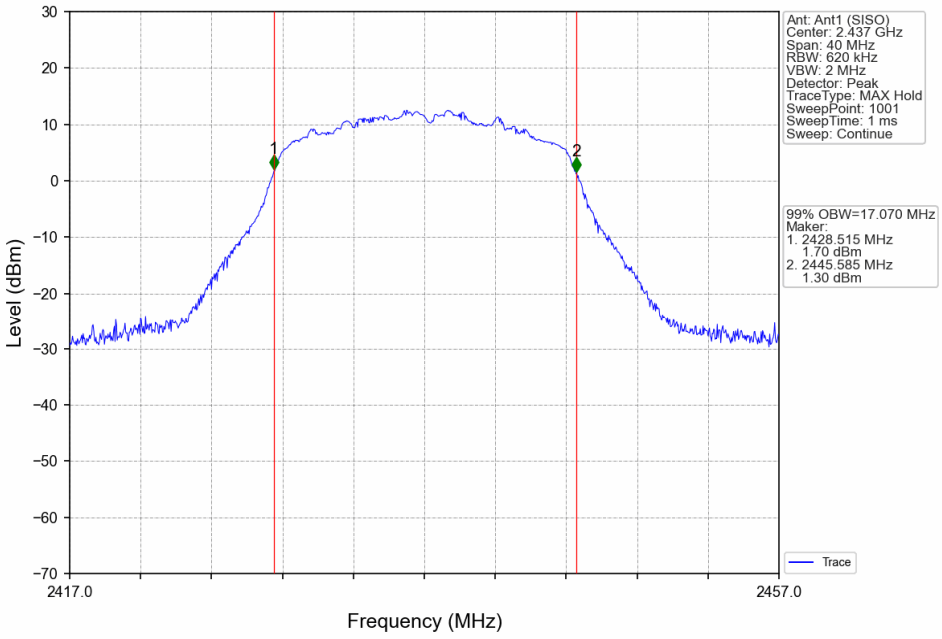

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

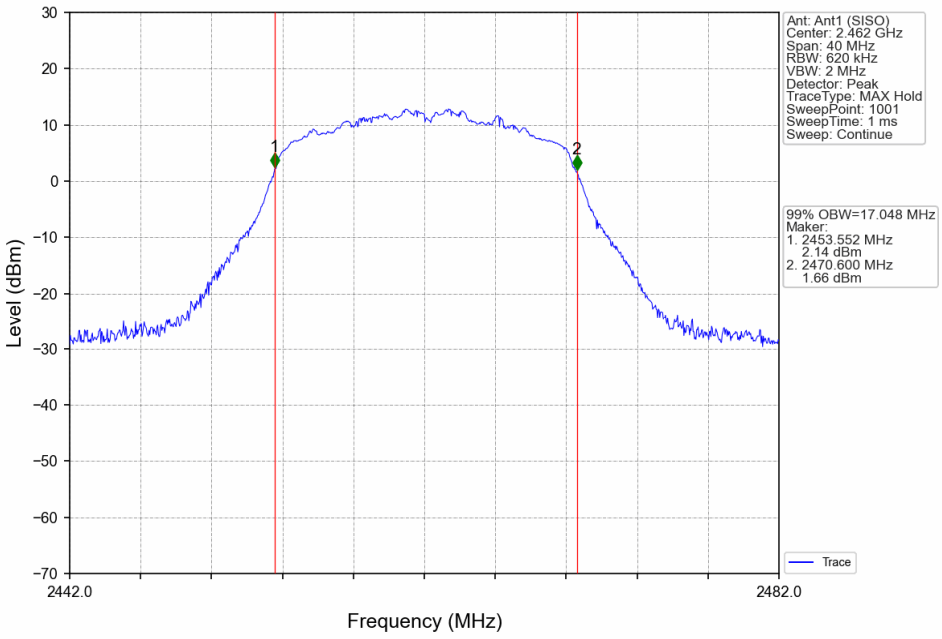

802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

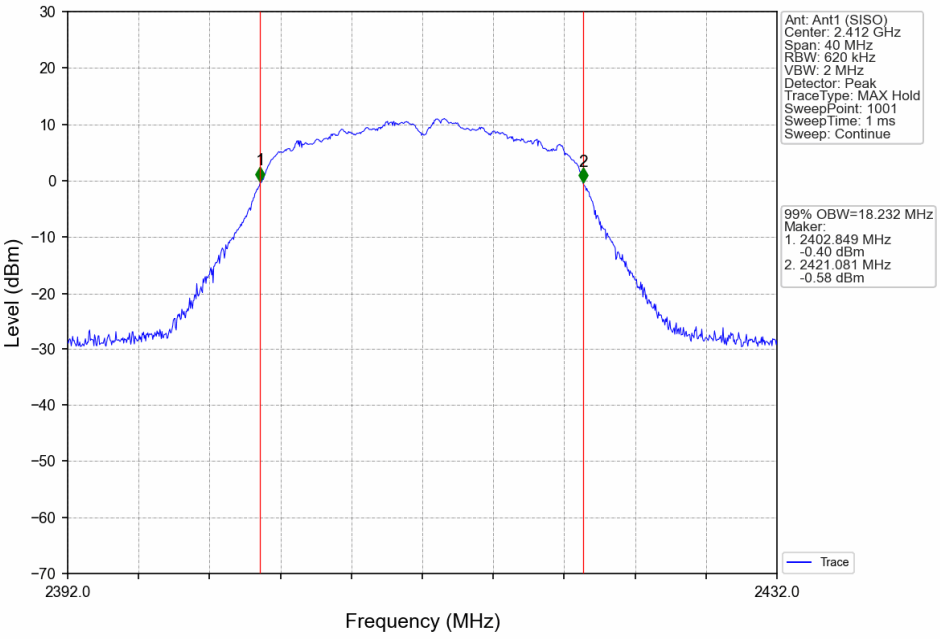

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

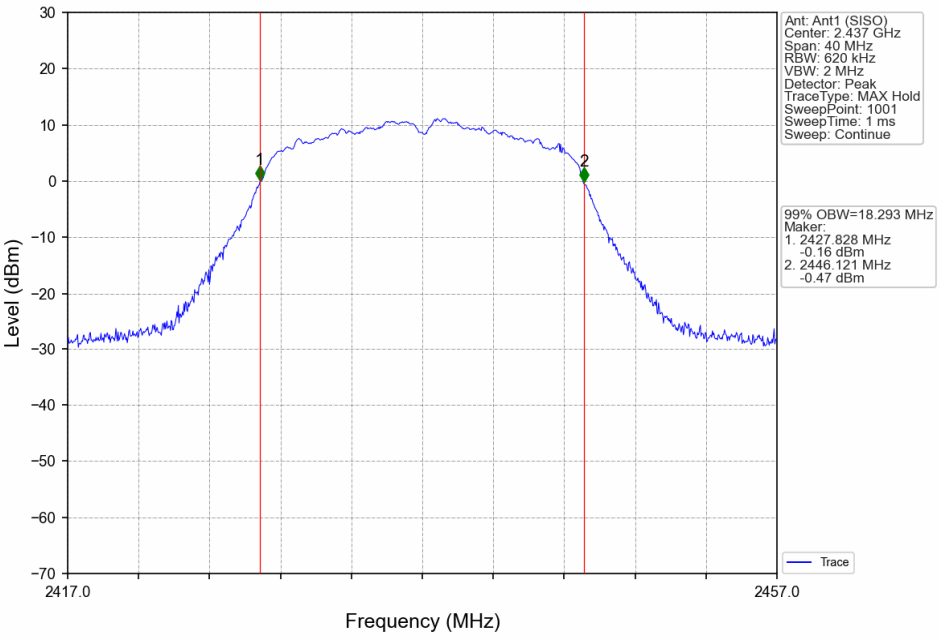

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

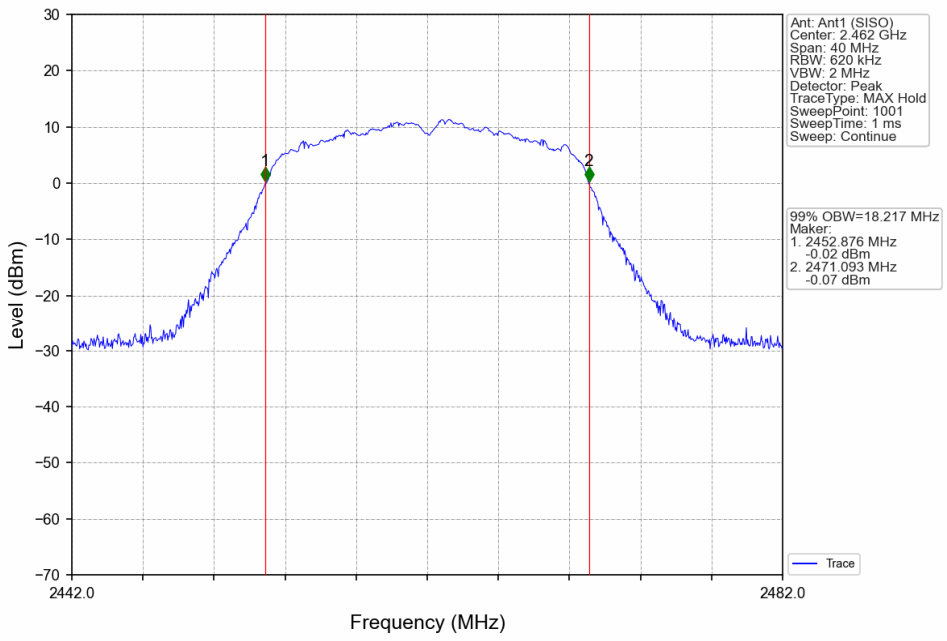

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

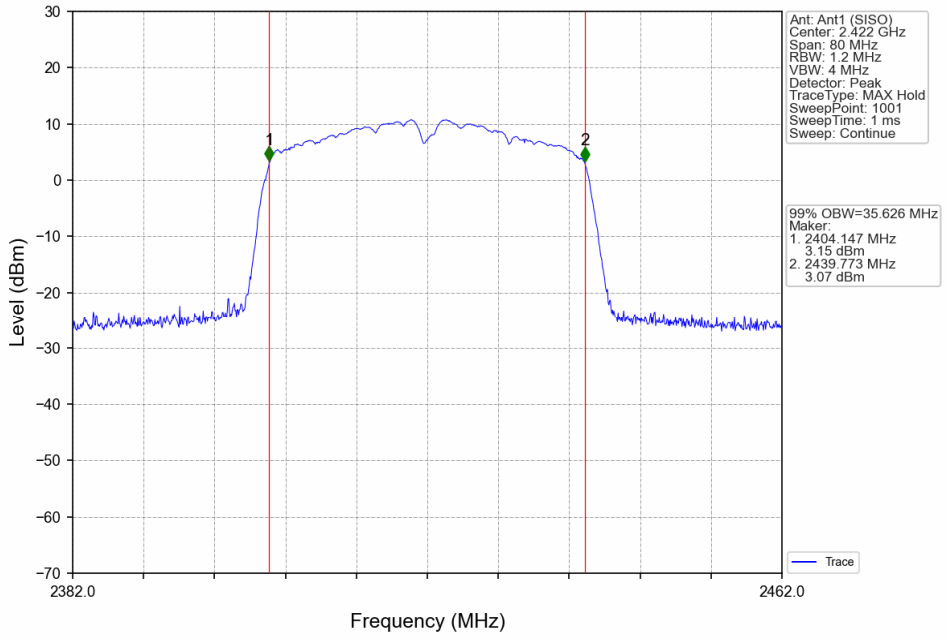

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

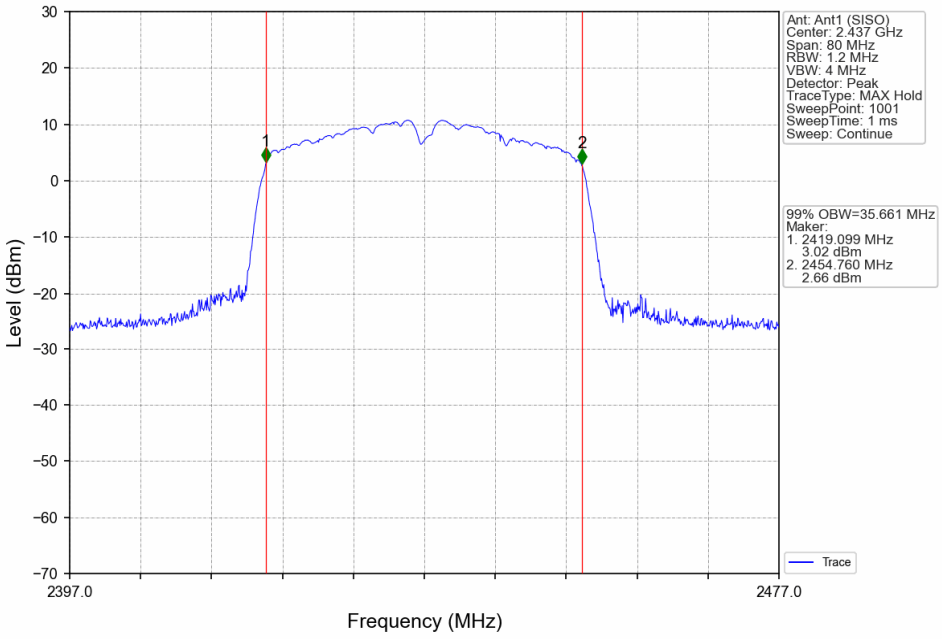

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

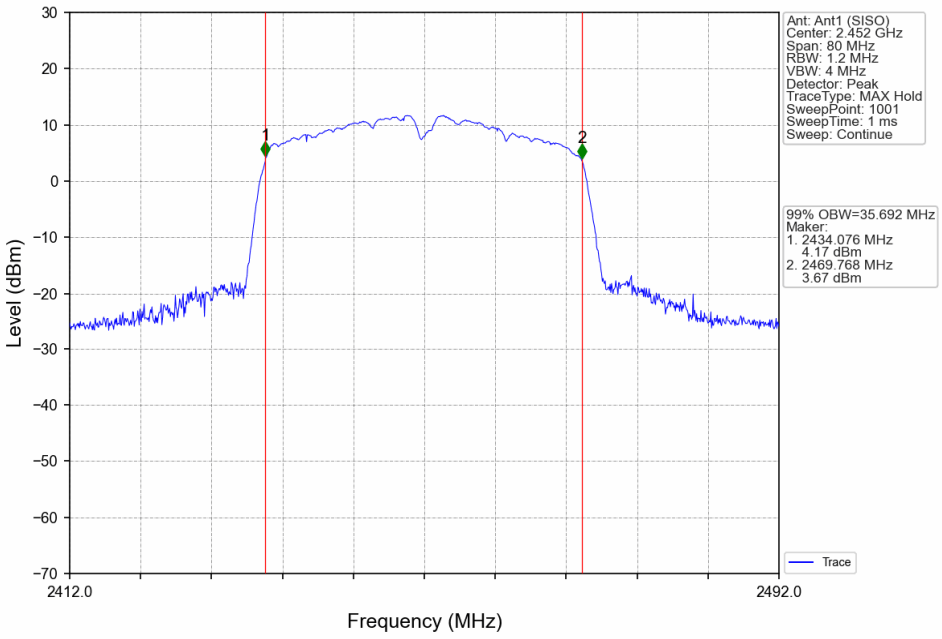

2.2 6dB BW

2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	9.587	>=0.5	Pass
		2437	1	9.592	>=0.5	Pass
		2462	1	9.133	>=0.5	Pass
802.11g	SISO	2412	1	15.105	>=0.5	Pass
		2437	1	15.046	>=0.5	Pass
		2462	1	15.098	>=0.5	Pass
802.11n (HT20)	SISO	2412	1	15.096	>=0.5	Pass
		2437	1	15.102	>=0.5	Pass
		2462	1	15.103	>=0.5	Pass
802.11n (HT40)	SISO	2422	1	33.841	>=0.5	Pass
		2437	1	35.072	>=0.5	Pass
		2452	1	33.811	>=0.5	Pass

2.2.2 Test Graph

802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

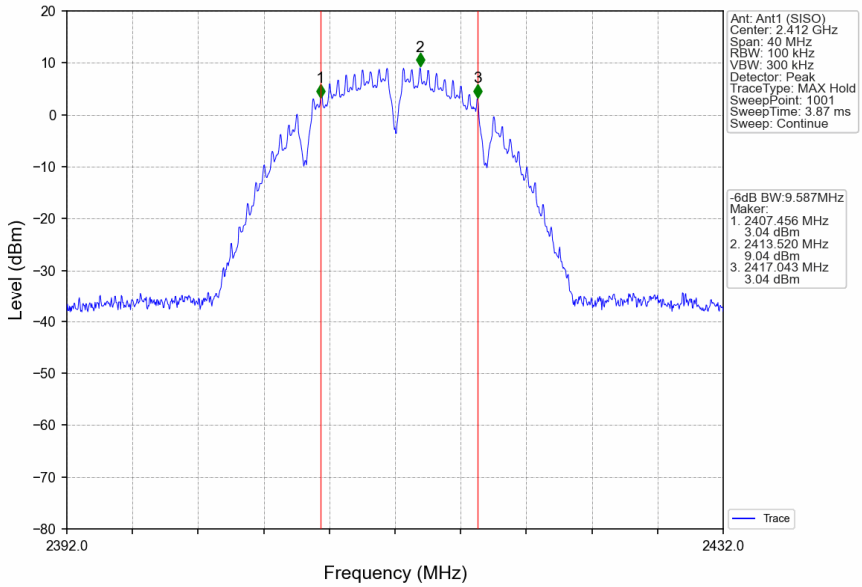

802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

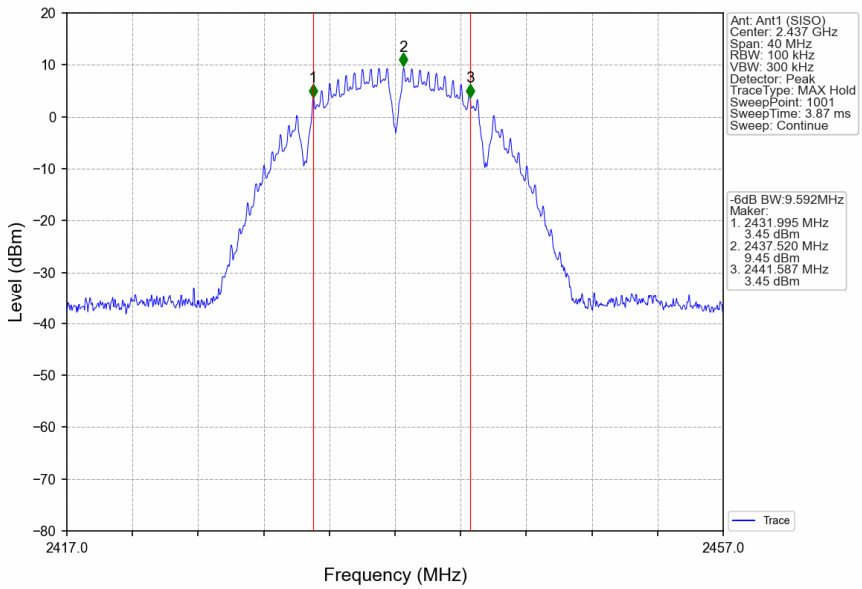

802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

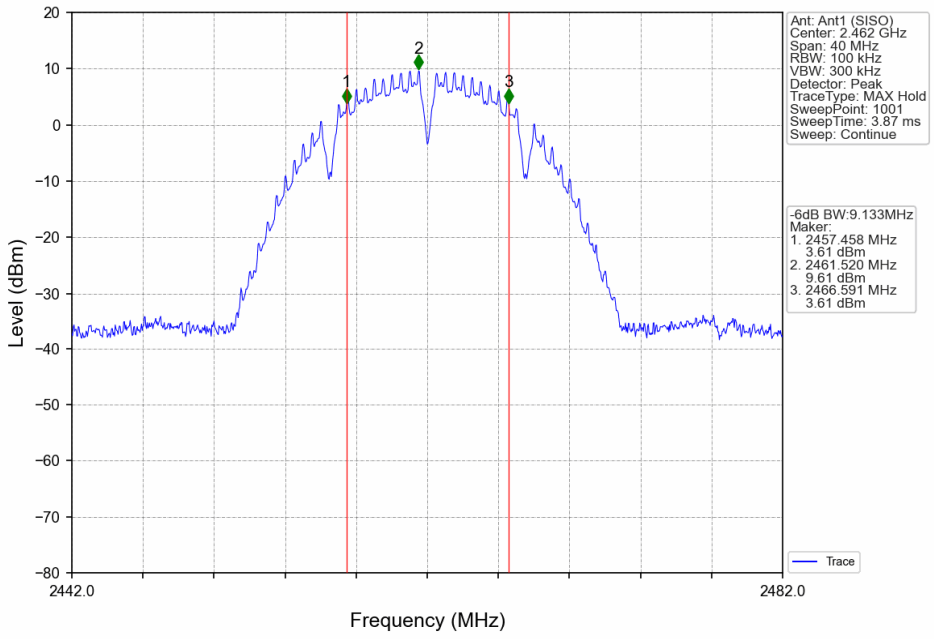

802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

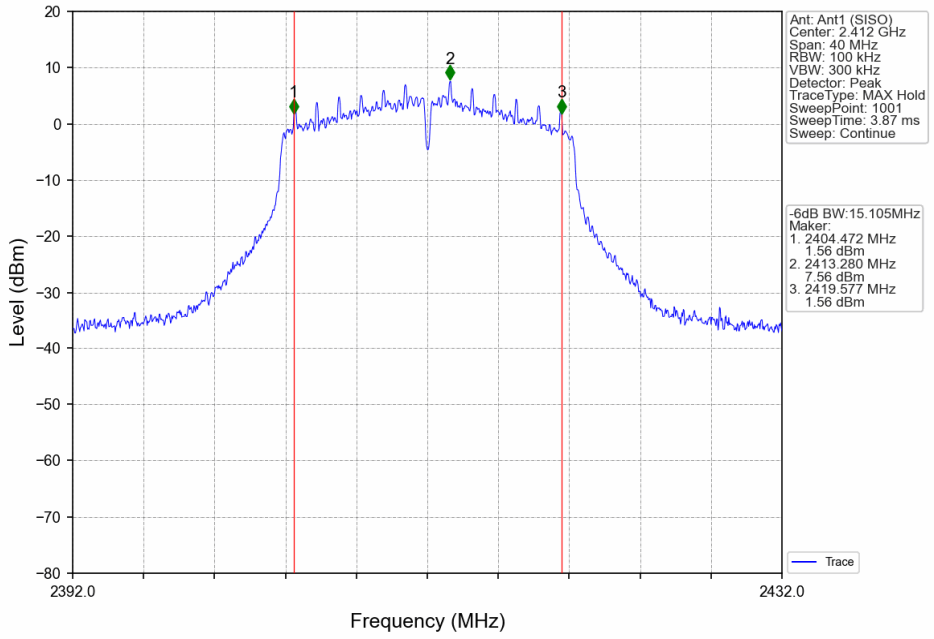

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

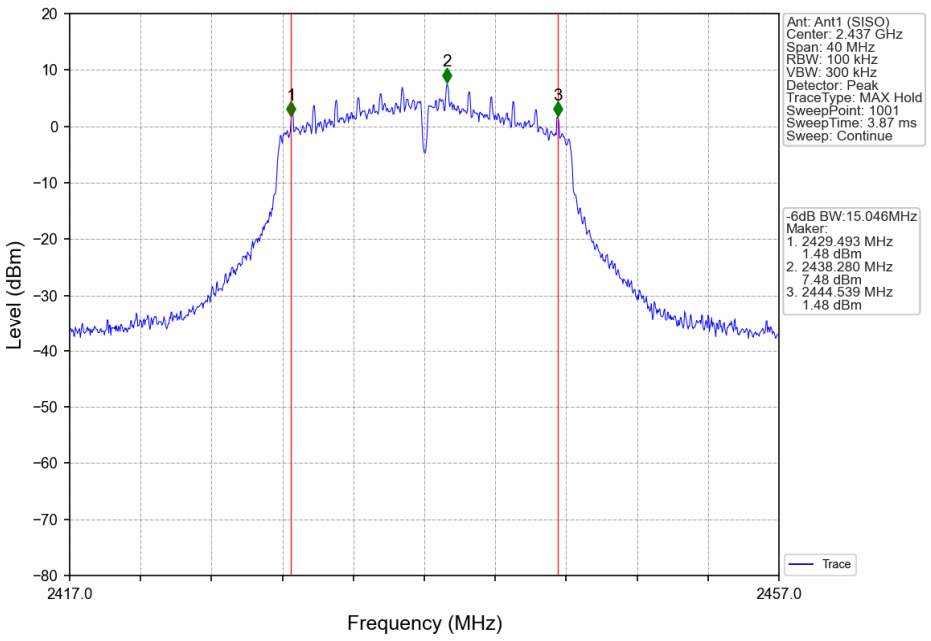

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

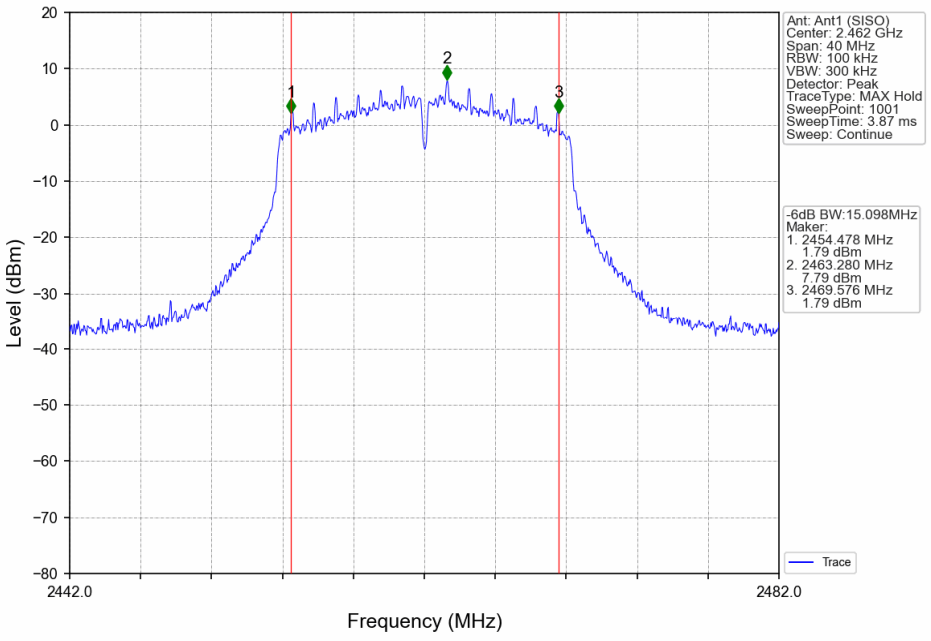

802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

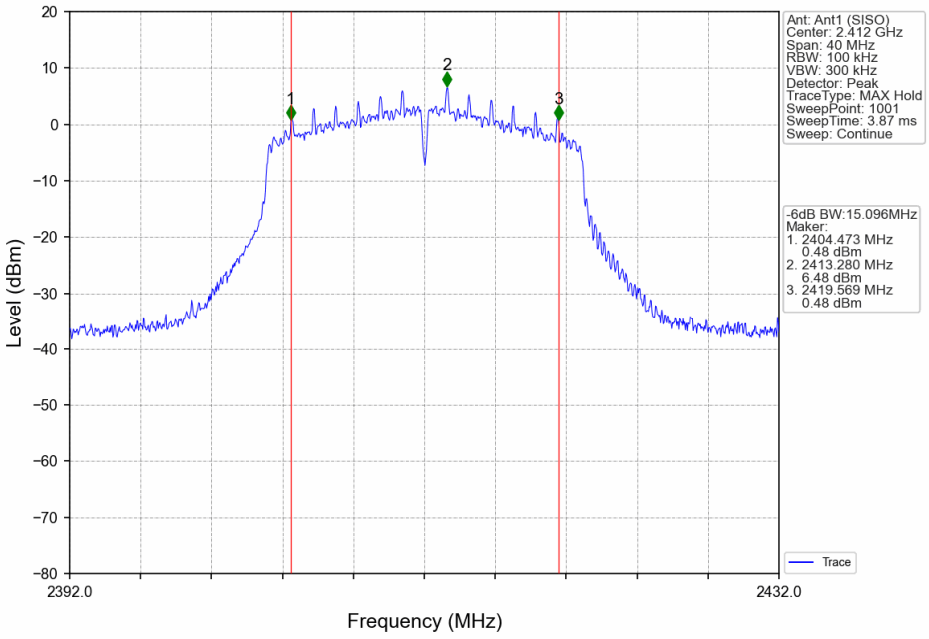

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

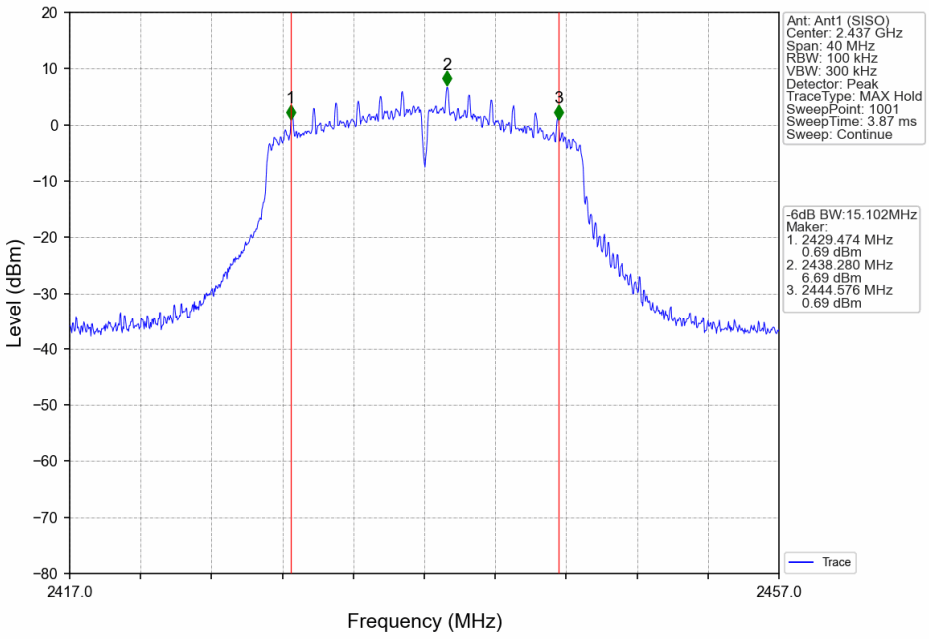

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

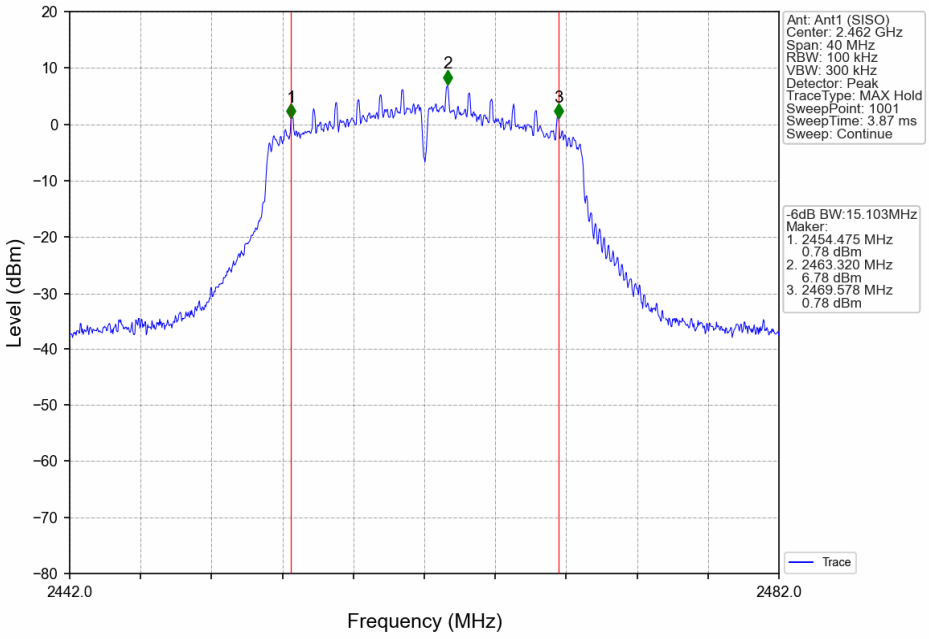

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

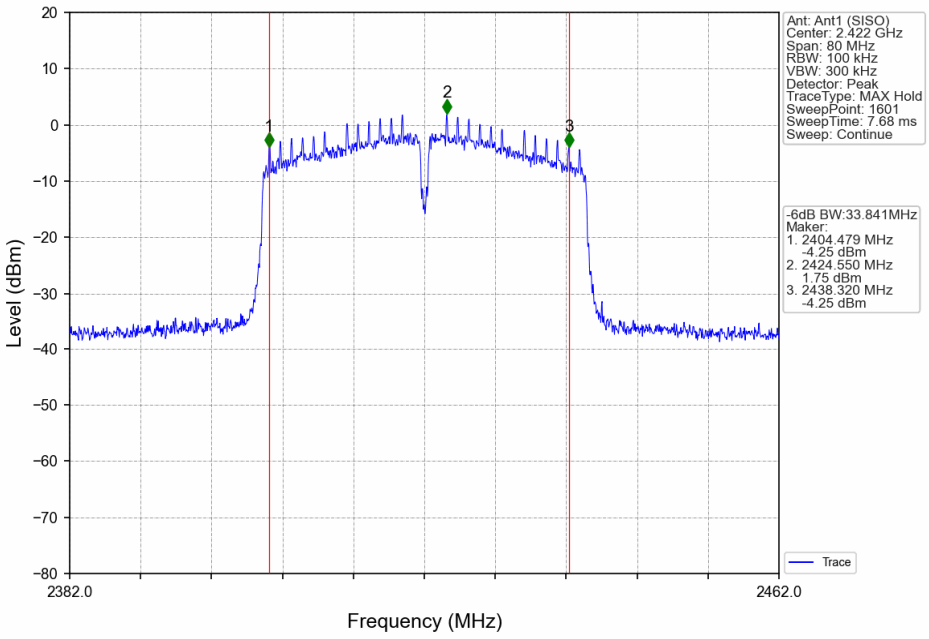

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

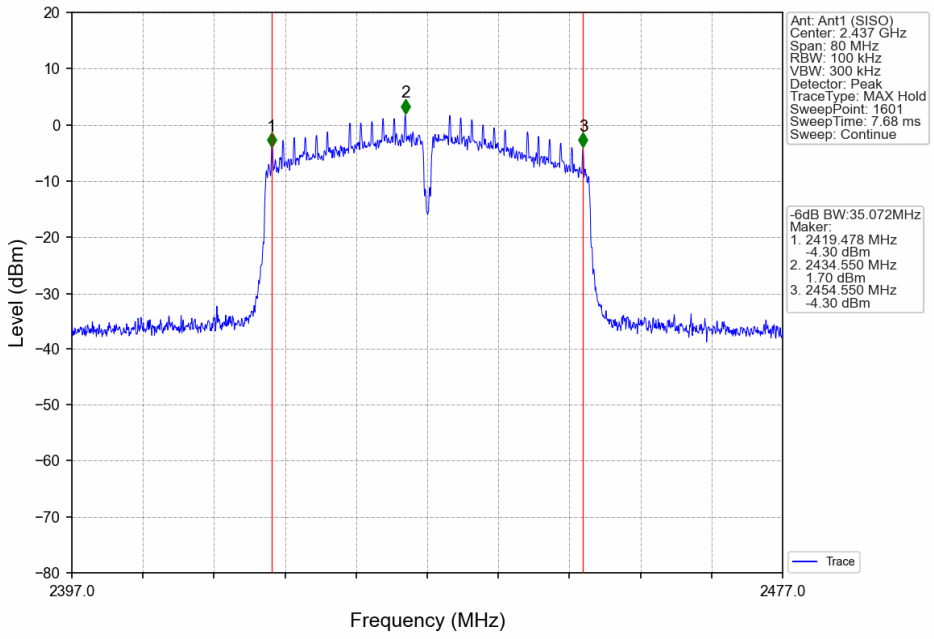

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV