




FCC SAR TEST REPORT

FCC ID : A4RG020D
Equipment : Smartphone
Model Name : G020D
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA 94043, USA
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Sep. 26, 2019 and testing was started from Oct. 30, 2019 and completed on Dec. 10, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	5
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 Maximum Tune-up Limit.....	6
3.3 General LTE SAR Test and Reporting Considerations	11
4. RF Exposure Limits.....	13
4.1 Uncontrolled Environment.....	13
4.2 Controlled Environment.....	13
5. Specific Absorption Rate (SAR).....	14
5.1 Introduction	14
5.2 SAR Definition.....	14
6. System Description and Setup	15
6.1 E-Field Probe	16
6.2 Data Acquisition Electronics (DAE)	16
6.3 Phantom.....	17
6.4 Device Holder.....	18
7. Measurement Procedures	19
7.1 Spatial Peak SAR Evaluation.....	19
7.2 Power Reference Measurement.....	20
7.3 Area Scan	20
7.4 Zoom Scan.....	21
7.5 Volume Scan Procedures.....	21
7.6 Power Drift Monitoring.....	21
8. Test Equipment List.....	22
9. System Verification	23
9.1 Tissue Simulating Liquids.....	23
9.2 Tissue Verification	24
9.3 System Performance Check Results.....	26
10. RF Exposure Positions	28
10.1 Ear and handset reference point.....	28
10.2 Definition of the cheek position	29
10.3 Definition of the tilt position	30
10.4 Body Worn Accessory	30
10.5 Wireless Router.....	31
10.6 Product Specific Exposure	31
11. WWAN Conducted RF Output Power (Unit: dBm)	32
12. LTE Carrier Aggregation combinations	94
13. WLAN Conducted Power	95
14. Bluetooth Conducted Power	102
15. Exposure Conditions	102
16. SAR Test Results	103
16.1 Head SAR	105
16.2 Hotspot SAR	110
16.3 Body Worn Accessory SAR.....	120
16.4 Product Specific SAR.....	126
16.5 Repeated SAR Measurement	126
17. Simultaneous Transmission Analysis.....	127
17.1 Head Exposure Conditions	128
17.2 Hotspot Exposure Conditions.....	130
17.3 Body-Worn Accessory Exposure Conditions	134
17.4 Product Specific Exposure Conditions	135
18. Uncertainty Assessment	136
19. References.....	136
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA891147-05	01	Initial issue of report	Dec. 03, 2019
FA891147-05	02	Additional SAR testing	Dec. 20, 2019
FA891147-05	03	Update section 3.2	Jan. 31, 2020
FA891147-05	04	Update section 11, 16.2 and 17	Feb. 12, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Google LLC, Smartphone, G020D, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)		10g SAR (W/kg)		
Licensed	GSM850	0.37	0.50	0.50		1.42
	GSM1900	0.28	0.64	0.77		
	WCDMA II	0.69	1.19	1.19		
	WCDMA IV	0.26	0.50	0.50		
	WCDMA V	0.32	0.48	0.48		
	LTE Band 2	0.58	0.97	0.98		
	LTE Band 4	0.34	0.68	0.83		
	LTE Band 12 / 17	0.20	0.39	0.44		
	LTE Band 13	0.31	0.48	0.48		
	LTE Band 5 / 26	0.35	0.54	0.54		
	LTE Band 38	0.36	0.61	0.61		
	LTE Band 41	0.23	0.50	0.50		
DTS	2.4GHz WLAN	0.43	0.57	0.57		1.38
NII	5GHz WLAN	0.40	0.71	0.81	1.99	1.42
2.4GHz Band	Bluetooth	0.61	0.19	0.19		1.42
Date of Testing:		2019/10/30 ~ 2019/12/10				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang

Report Producer: Wan Liu



2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smartphone
Model Name	G020D
FCC ID	A4RG020D
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth: BR/EDR/LE NFC: ASK
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
Remark: 1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications. 2. In this report the Bluetooth test result is refer to Sporton SAR test report (FCC ID: A4RG020D, Report No.: FA891147-01). 3. This is a Class II permissive change test report and the test plan is included in the operational description. 4. For spot check worst case of body exposure condition was referring to Sporton SAR test report (FCC ID: A4RG020D, Report No.: FA891147-01).	

3.2 Maximum Tune-up Limit

General Note:

1. For the cellular band is including in 0/1/2/3 transmit antennas, the antenna selection are based on the connection quality condition, and only one antenna will transmit at a time.
2. The device has several power modes which are determined by the exposure conditions for head/hotspot/body-worn and also the simultaneous transmission conditions, the detailed implementation of the detection of the use cases and the power table control is illustrated in the operational description exhibit.
3. This device uses different power reduction mechanisms based on a proprietary detection mechanism for next-to-ear operation (head mode). When detected in head mode, WLAN ON or OFF status will activate 2 different power tables. Full details are provided in the operational description exhibit. The power tables below show the maximum powers for the various combinations of antennas when the WLAN is off or on and when a voice call is active (Head Mode) and inactive (Body-Worn / Hotspot Mode).

Maximum WWAN Tune up Power table (WLAN off)

Power Condition			RF Exposure Conditions			
			Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)
Antenna				Ant 1 Power table 2	Ant 0 Default Power	Ant 1 Default Power
						Ant 0 Default Power
GSM850	GSM 1 Tx slot		34	NA	34	34
	GPRS 1 Tx slot		34	NA	34	34
	GPRS 2 Tx slots		32	NA	32	32
	GPRS 3 Tx slots		30	NA	30	30
	GPRS 4 Tx slots		29	NA	29	29
	EDGE 1 Tx slot		28	NA	28	28
	EDGE 2 Tx slots		27	NA	27	27
	EDGE 3 Tx slots		25	NA	25	25
	EDGE 4 Tx slots		23	NA	23	23
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	NA	32	32
		GPRS 1 Tx slot	32	NA	32	32
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	NA	32	32
		GPRS 1 Tx slot	32	NA	32	32
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	NA	30	30
		GPRS 2 Tx slot	30	NA	30	30
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	NA	32	32
		EDGE 1 Tx slot	27	NA	27	27
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	NA	32	32
		EDGE 1 Tx slot	27	NA	27	27
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	NA	30	30
		EDGE 2 Tx slot	25	NA	25	25
GSM1900	GSM 1 Tx slot		31	NA	31	31
	GPRS 1 Tx slot		31	NA	31	31
	GPRS 2 Tx slots		29.5	NA	29.5	29.5
	GPRS 3 Tx slots		27.5	NA	27.5	27.5
	GPRS 4 Tx slots		26.5	NA	26.5	26.5
	EDGE 1 Tx slot		27	NA	27	27
	EDGE 2 Tx slots		26	NA	26	26
	EDGE 3 Tx slots		25	NA	25	25
	EDGE 4 Tx slots		24	NA	24	24
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	29.5
		GPRS 1 Tx slot	29.5	NA	29.5	29.5
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	29.5
		GPRS 1 Tx slot	29.5	NA	29.5	29.5
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	NA	27.5	27.5
		GPRS 2 Tx slot	27.5	NA	27.5	27.5
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	29.5
		EDGE 1 Tx slot	26	NA	26	26
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	29.5
		EDGE 1 Tx slot	26	NA	26	26
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	NA	27.5	27.5
		EDGE 2 Tx slot	25	NA	25	25



Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
Antenna		Ant 1 Power table 2	Ant 0 Default Power	Ant 1 Default Power	Ant 0 Default Power
WCDMA II	25.1	NA	25.1	25.1	25.1
WCDMA IV	24	NA	24	24	NA
WCDMA V	24.5	NA	24.5	24.5	24.5
LTE 2	25.1	NA	25.1	25.1	25.1
LTE 4	24.5	NA	24.5	24.5	24.5
LTE 5	25.7	NA	25.7	25.7	25.7
LTE 12	25.7	NA	25.7	25.7	25.7
LTE 13	25.3	NA	25.3	25.3	25.3
LTE 17	25.7	NA	25.7	25.7	25.7
LTE 26	25.7	NA	25.7	25.7	25.7

Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
Antenna		Ant 3 Power table 2	Ant 2 Default Power	Ant 3 Default Power	Ant 2 Default Power
LTE 38	25.7	NA	25.7	NA	25.7
LTE 41	25	NA	25	NA	25



Maximum WWAN Tune up Power table (WLAN on)

Power Condition			RF Exposure Conditions				
			Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
Antenna		Ant 1 Power table 2		Ant 0 Default Power	Ant 1 Default Power	Ant 0 Default Power	
GSM850	GSM 1 Tx slot		34	NA	34	NA	31
	GPRS 1 Tx slot		34	NA	34	NA	31
	GPRS 2 Tx slots		32	NA	32	NA	29
	GPRS 3 Tx slots		30	NA	30	NA	27
	GPRS 4 Tx slots		29	NA	29	NA	26
	EDGE 1 Tx slot		28	NA	28	NA	25
	EDGE 2 Tx slots		27	NA	27	NA	24
	EDGE 3 Tx slots		25	NA	25	NA	22
	EDGE 4 Tx slots		23	NA	23	NA	20
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	NA	32	NA	29
		GPRS 1 Tx slot	32	NA	32	NA	29
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	NA	32	NA	29
		GPRS 1 Tx slot	32	NA	32	NA	29
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	NA	30	NA	27
		GPRS 2 Tx slot	30	NA	30	NA	27
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	NA	32	NA	29
		EDGE 1 Tx slot	27	NA	27	NA	24
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	NA	32	NA	29
		EDGE 1 Tx slot	27	NA	27	NA	24
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	NA	30	NA	27
EDGE 2 Tx slot		25	NA	25	NA	22	
GSM1900	GSM 1 Tx slot		31	NA	31	NA	26.5
	GPRS 1 Tx slot		31	NA	31	NA	26.5
	GPRS 2 Tx slots		29.5	NA	29.5	NA	25
	GPRS 3 Tx slots		27.5	NA	27.5	NA	23
	GPRS 4 Tx slots		26.5	NA	26.5	NA	22
	EDGE 1 Tx slot		27	NA	27	NA	22.5
	EDGE 2 Tx slots		26	NA	26	NA	21.5
	EDGE 3 Tx slots		25	NA	25	NA	20.5
	EDGE 4 Tx slots		24	NA	24	NA	19.8
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	NA	25
		GPRS 1 Tx slot	29.5	NA	29.5	NA	25
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	NA	25
		GPRS 1 Tx slot	29.5	NA	29.5	NA	25
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	NA	27.5	NA	23
		GPRS 2 Tx slot	27.5	NA	27.5	NA	23
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	NA	25
		EDGE 1 Tx slot	26	NA	26	NA	21.5
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	NA	29.5	NA	25
		EDGE 1 Tx slot	26	NA	26	NA	21.5
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	NA	27.5	NA	23
EDGE 2 Tx slot		25	NA	25	NA	20.5	

Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
Antenna		Ant 1 Power table 2	Ant 0 Default Power	Ant 1 Default Power	Ant 0 Default Power
WCDMA II	25.1	NA	23.2	NA	20.2
WCDMA IV	24	NA	24	NA	19
WCDMA V	24.5	NA	24.5	NA	22.5
LTE 2	25.1	NA	23.2	NA	20.2
LTE 4	24.5	NA	24.5	NA	21
LTE 5	25.7	NA	25.7	NA	23.7
LTE 12	25.7	NA	25.7	NA	24.7
LTE 13	25.3	NA	25.3	NA	23.3
LTE 17	25.7	NA	25.7	NA	24.7
LTE 26	25.7	NA	25.7	NA	23.7

Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
Antenna		Ant 3 Power table 2	Ant 2 Default Power	Ant 3 Default Power	Ant 2 Default Power
LTE 38	25.7	NA	25.7	NA	22.7
LTE 41	25	NA	25	NA	23

WLAN SISO Power table

Frequency Band	Modulation	WWAN On/Off			
		Head Power table 1		Body Worn/Hotspot Power table 2	
		Ant 4	Ant 5	Ant 4	Ant 5
WLAN 2.4GHz	802.11b	15	14	18	18
	802.11g	15	14	18	18
	802.11n HT20	15	14	18	18
WLAN5GHz UNII 1	802.11a	12	12	17.5	17.5
	802.11n HT20	12	12	17.5	17.5
	802.11n HT40	12	12	17.5	17.5
	802.11ac VHT20	12	12	17.5	17.5
	802.11ac VHT40	12	12	17.5	17.5
	802.11ac VHT80	12	12	11.5	11.5
WLAN5GHz UNII 2A	802.11a	12	12	17.5	17.5
	802.11n HT20	12	12	17.5	17.5
	802.11n HT40	12	12	17.5	17.5
	802.11ac VHT20	12	12	17.5	17.5
	802.11ac VHT40	12	12	17.5	17.5
	802.11ac VHT80	12	12	12	12
WLAN5GHz UNII 2C	802.11a	11.5	13.5	17.5	17.5
	802.11n HT20	11.5	13.5	17.5	17.5
	802.11n HT40	11.5	13.5	17.5	17.5
	802.11ac VHT20	11.5	13.5	17.5	17.5
	802.11ac VHT40	11.5	13.5	17.5	17.5
	802.11ac VHT80	11.5	13.5	17.5	17.5
WLAN5GHz UNII 3	802.11a	12	12	17.5	17.5
	802.11n HT20	12	12	17.5	17.5
	802.11n HT40	12	12	17.5	17.5
	802.11ac VHT20	12	12	17.5	17.5
	802.11ac VHT40	12	12	17.5	17.5
	802.11ac VHT80	12	12	17.5	17.5

WLAN MIMO Power table

Frequency Band	Modulation	WWAN On/Off					
		Head Power table 1			Body Worn/Hotspot Power table 2		
		Ant4	Ant5	Ant 4+5	Ant4	Ant5	Ant 4+5
WLAN 2.4GHz	802.11b	13	13	16	18	18	21
	802.11g	13	13	16	18	18	21
	802.11n HT20	13	13	16	18	18	21
WLAN5GHz UNII 1	802.11a	12	12	15	17.5	17.5	20.5
	802.11n HT20	12	12	15	17.5	17.5	20.5
	802.11n HT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT20	12	12	15	17.5	17.5	20.5
	802.11ac VHT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT80	12	12	15	11.5	11.5	14.5
WLAN5GHz UNII 2A	802.11a	12	12	15	17.5	17.5	20.5
	802.11n HT20	12	12	15	17.5	17.5	20.5
	802.11n HT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT20	12	12	15	17.5	17.5	20.5
	802.11ac VHT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT80	12	12	15	12	12	15
WLAN5GHz UNII 2C	802.11a	12	12	15	17.5	17.5	20.5
	802.11n HT20	12	12	15	17.5	17.5	20.5
	802.11n HT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT20	12	12	15	17.5	17.5	20.5
	802.11ac VHT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT80	12	12	15	17.5	17.5	20.5
WLAN5GHz UNII 3	802.11a	12	12	15	17.5	17.5	20.5
	802.11n HT20	12	12	15	17.5	17.5	20.5
	802.11n HT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT20	12	12	15	17.5	17.5	20.5
	802.11ac VHT40	12	12	15	17.5	17.5	20.5
	802.11ac VHT80	12	12	15	17.5	17.5	20.5

<Bluetooth Power table>

Frequency Band	Mode	Tune up Power (dBm)	
		Ant 4	
Bluetooth	BR/EDR	1Mbps	18
		2Mbps	13
		3Mbps	13
	LE	1Mbps	10
		2Mbps	10

3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID			A4RG020D																																																																							
Equipment Name			Smartphone																																																																							
Operating Frequency Range of each LTE transmission band			LTE Band 2: 1850.7 MHz ~ 1909.3 MHz																																																																							
			LTE Band 4: 1710.7 MHz ~ 1754.3 MHz																																																																							
			LTE Band 5: 824.7 MHz ~ 848.3 MHz																																																																							
			LTE Band 12: 699.7 MHz ~ 715.3 MHz																																																																							
			LTE Band 13: 779.5 MHz ~ 784.5 MHz																																																																							
			LTE Band 17: 706.5 MHz ~ 713.5 MHz																																																																							
			LTE Band 26: 814.7 MHz ~ 848.3 MHz																																																																							
			LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																																							
Channel Bandwidth			LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																																							
			LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																							
			LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																							
			LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz																																																																							
			LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz																																																																							
			LTE Band 13: 5MHz, 10MHz																																																																							
			LTE Band 17: 5MHz, 10MHz																																																																							
			LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz																																																																							
uplink modulations used			QPSK / 16QAM / 64QAM																																																																							
			Voice and Data																																																																							
			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>										Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
														Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																					
1.4 MHz	3.0 MHz	5 MHz											10 MHz		15 MHz	20 MHz																																																										
QPSK	> 5	> 4											> 8	> 12	> 16	> 18	≤ 1																																																									
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR			In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																							
Spectrum plots for RB configuration			A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																							
Power reduction applied to satisfy SAR compliance			The device has several different power modes for head / hotspot / body-worn / Product Specific conditions SAR compliance; power selection is determined by the device's positioning and usage scenarios, the power selection is defined in the section3.2.																																																																							
LTE Carrier Aggregation Combinations			Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section12																																																																							
LTE Carrier Aggregation Additional Information			This device supports maximum of 3 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																							
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 13												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	23205		779.5			23230		782				
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	839
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37875	2582.5	37900	2585
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38125	2607.5	38100	2605
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39775	2508.5	39800	2511
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40197	2550.5	40210	2551.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41042	2635	41030	2634
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41465	2677.5	41440	2675

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

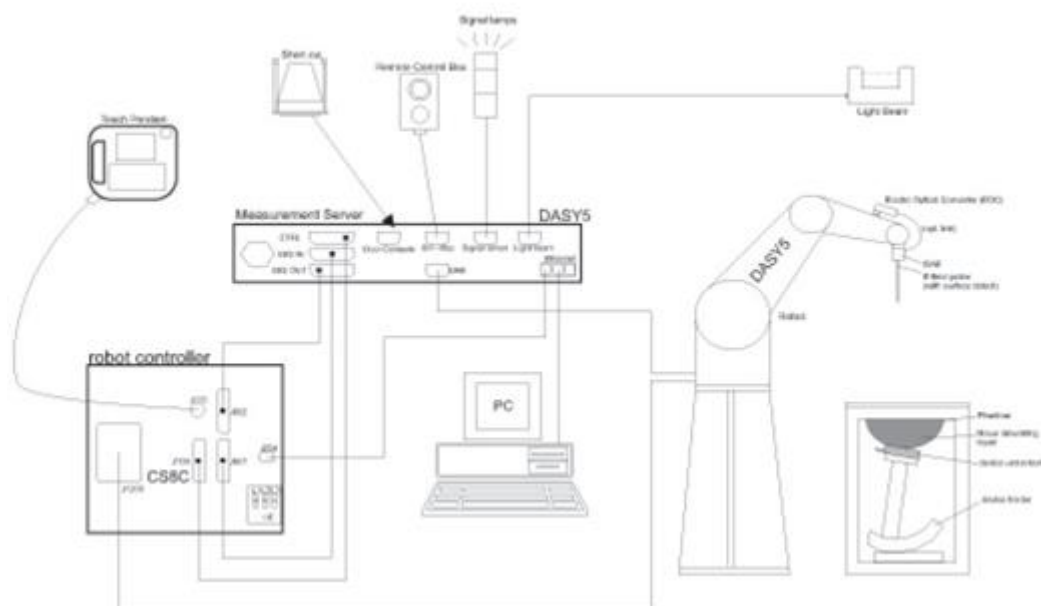The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 07, 2020
SPEAG	835MHz System Validation Kit	D835V2	4d167	Mar. 08, 2019	Mar. 07, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 06, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d185	Mar. 07, 2019	Mar. 06, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 09, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 06, 2019	Mar. 05, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1078	Mar. 06, 2019	Mar. 05, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2020
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 18, 2019	Jul. 17, 2020
SPEAG	Data Acquisition Electronics	DAE4	1311	Aug. 27, 2019	Aug. 26, 2020
SPEAG	Data Acquisition Electronics	DAE4	699	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 14, 2019	Nov. 13, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	Apr. 29, 2019	Apr. 28, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	Apr. 25, 2019	Apr. 24, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3170	Nov. 21, 2019	Nov. 20, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 25, 2019	Sep. 24, 2020
TECPEL	Hygro meter	DTM-303B	TP140320	Nov. 25, 2018	Nov. 24, 2019
TECPEL	Hygro meter	DTM-303B	TP161233	Nov. 25, 2018	Nov. 24, 2019
Testo	Hygro meter	608-H1	34893240	Nov. 07, 2019	Nov. 06, 2020
Testo	Hygro meter	608-H1	34913912	Nov. 07, 2019	Nov. 06, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 21, 2019	Apr. 20, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2019	May. 26, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 03, 2019	Jul. 02, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 12, 2019	Aug. 11, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 10, 2019	May. 09, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole D5GHzV2, SN: 1006 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

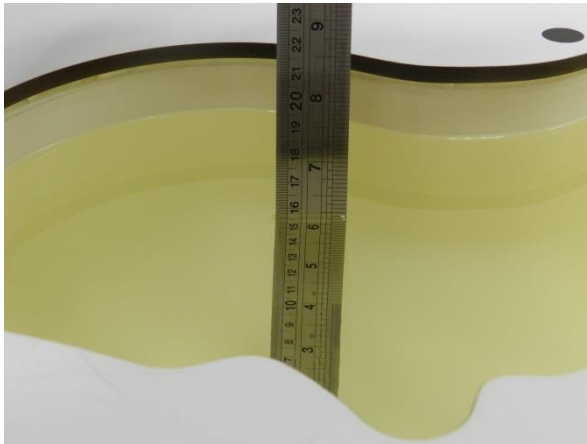


Fig 10.1Photo of Liquid Height for Head SAR

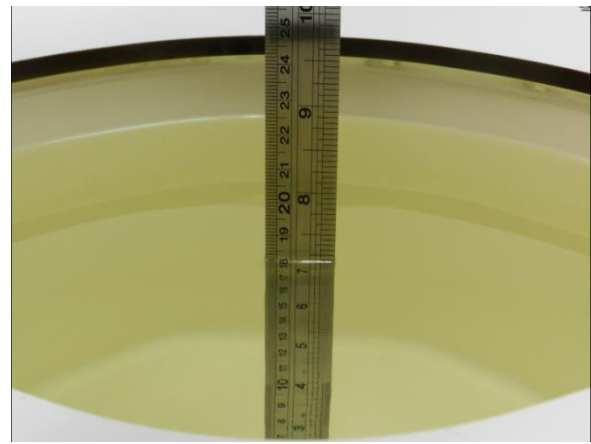


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.7	0.903	43.280	0.89	41.90	1.46	3.29	±5	2019/11/7
750	22.8	0.899	43.060	0.89	41.90	1.01	2.77	±5	2019/11/17
750	22.6	0.904	40.750	0.89	41.90	1.57	-2.74	±5	2019/12/9
835	22.3	0.901	42.330	0.90	41.50	0.11	2.00	±5	2019/11/6
835	22.9	0.937	42.653	0.90	41.50	4.11	2.78	±5	2019/11/16
835	22.6	0.878	41.198	0.90	41.50	-2.44	-0.73	±5	2019/11/18
835	22.3	0.912	42.515	0.90	41.50	1.33	2.45	±5	2019/12/8
1750	22.2	1.389	39.608	1.37	40.10	1.39	-1.23	±5	2019/10/30
1750	22.5	1.403	39.430	1.37	40.10	2.41	-1.67	±5	2019/11/13
1750	22.6	1.393	39.330	1.37	40.10	1.68	-1.92	±5	2019/11/14
1750	22.2	1.381	39.095	1.37	40.10	0.80	-2.51	±5	2019/11/15
1750	22.5	1.350	40.759	1.37	40.10	-1.46	1.64	±5	2019/12/6
1900	22.2	1.461	38.666	1.40	40.00	4.36	-3.34	±5	2019/10/30
1900	22.3	1.417	40.819	1.40	40.00	1.21	2.05	±5	2019/11/6
1900	22.5	1.443	40.071	1.40	40.00	3.07	0.18	±5	2019/11/13
1900	22.6	1.438	40.275	1.40	40.00	2.71	0.69	±5	2019/11/14
1900	22.2	1.425	40.040	1.40	40.00	1.79	0.10	±5	2019/11/15
1900	22.5	1.457	39.815	1.40	40.00	4.07	-0.46	±5	2019/12/6
2450	22.7	1.808	38.961	1.80	39.20	0.44	-0.61	±5	2019/10/31
2450	22.8	1.785	37.908	1.80	39.20	-0.83	-3.30	±5	2019/12/10
2600	22.7	1.998	39.272	1.96	39.00	1.94	0.70	±5	2019/11/7
2600	22.9	1.980	37.552	1.96	39.00	1.02	-3.71	±5	2019/11/15
2600	22.1	1.990	37.779	1.96	39.00	1.53	-3.13	±5	2019/11/16
2600	22.6	1.952	39.788	1.96	39.00	-0.41	2.02	±5	2019/12/9
5250	22.3	4.578	37.610	4.71	35.95	-2.80	4.62	±5	2019/11/17
5250	22.5	4.559	37.536	4.71	35.95	-3.21	4.41	±5	2019/11/18
5250	22.2	4.499	37.642	4.71	35.95	-4.48	4.71	±5	2019/11/19
5600	22.3	4.930	37.083	5.07	35.50	-2.76	4.46	±5	2019/11/17
5600	22.5	4.908	37.019	5.07	35.50	-3.20	4.28	±5	2019/11/18
5600	22.2	4.845	37.112	5.07	35.50	-4.44	4.54	±5	2019/11/19
5750	22.3	5.064	36.945	5.22	35.35	-2.99	4.51	±5	2019/11/17
5750	22.5	5.041	36.881	5.22	35.35	-3.43	4.33	±5	2019/11/18

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/11/7	750	250	D750V3-1107	ES3DV3 - SN3124	DAE4 Sn316	2.14	8.32	8.56	2.88
2019/11/17	750	250	D750V3-1107	ES3DV3 - SN3124	DAE4 Sn316	2.13	8.32	8.52	2.40
2019/12/9	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.16	8.32	8.64	3.85
2019/11/6	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.44	9.50	9.76	2.74
2019/11/16	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.52	9.50	10.08	6.11
2019/11/18	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.20	9.50	8.8	-7.37
2019/12/8	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.52	9.55	10.08	5.55
2019/10/30	1750	250	D1750V2-1112	EX3DV4 - SN3642	DAE4 Sn1311	9.72	36.70	38.88	5.94
2019/11/13	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.75	36.70	35	-4.63
2019/11/14	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.69	36.70	34.76	-5.29
2019/11/15	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.89	36.70	35.56	-3.11
2019/12/6	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn699	9.41	36.70	37.64	2.56
2019/10/30	1900	250	D1900V2-5d185	EX3DV4 - SN3642	DAE4 Sn1311	10.60	39.40	42.4	7.61
2019/11/6	1900	250	D1900V2-5d185	ES3DV3 - SN3124	DAE4 Sn316	9.21	39.40	36.84	-6.50
2019/11/13	1900	250	D1900V2-5d185	ES3DV3 - SN3124	DAE4 Sn316	9.70	39.40	38.8	-1.52
2019/11/14	1900	250	D1900V2-5d185	ES3DV3 - SN3124	DAE4 Sn316	9.34	39.40	37.36	-5.18
2019/11/15	1900	250	D1900V2-5d185	ES3DV3 - SN3124	DAE4 Sn316	9.43	39.40	37.72	-4.26
2019/12/6	1900	250	D1900V2-5d041	ES3DV3 - SN3184	DAE4 Sn699	10.60	40.20	42.4	5.47
2019/10/31	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	12.90	52.10	51.6	-0.96
2019/12/10	2450	250	D2450V2-929	ES3DV3 - SN3170	DAE4 Sn1399	12.90	53.10	51.6	-2.82
2019/11/7	2600	250	D2600V2-1078	ES3DV3 - SN3124	DAE4 Sn316	13.60	57.60	54.4	-5.56
2019/11/15	2600	250	D2600V2-1078	ES3DV3 - SN3124	DAE4 Sn316	14.70	57.60	58.8	2.08
2019/11/16	2600	250	D2600V2-1078	ES3DV3 - SN3124	DAE4 Sn316	13.70	57.60	54.8	-4.86
2019/12/9	2600	250	D2600V2-1078	ES3DV3 - SN3170	DAE4 Sn1399	13.40	57.60	53.6	-6.94
2019/11/17	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	7.82	80.70	78.2	-3.10
2019/11/18	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	8.04	80.70	80.4	-0.37
2019/11/19	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	7.69	80.70	76.9	-4.71
2019/11/17	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	8.49	83.30	84.9	1.92
2019/11/18	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	8.10	83.30	81	-2.76
2019/11/19	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	8.34	83.30	83.4	0.12
2019/11/17	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7346	DAE4 Sn853	8.46	80.40	84.6	5.22
2019/11/18	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7346	DAE4 Sn853	7.71	80.40	77.1	-4.10

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/11/19	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	2.13	23.20	21.3	-8.19
2019/11/19	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	2.37	23.80	23.7	-0.42

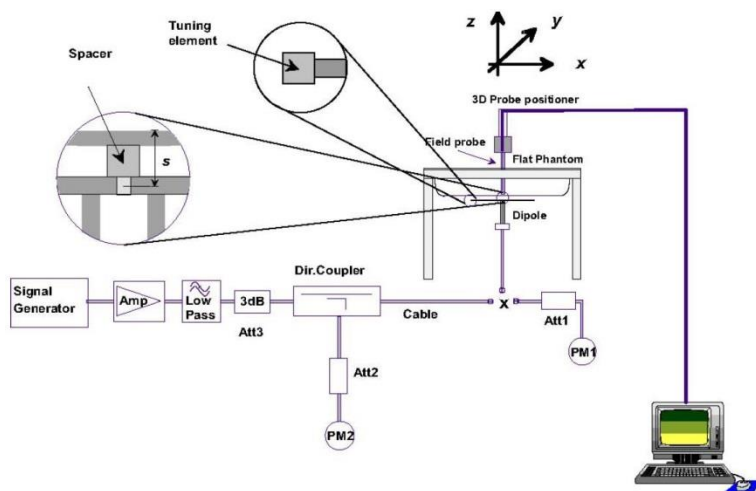

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

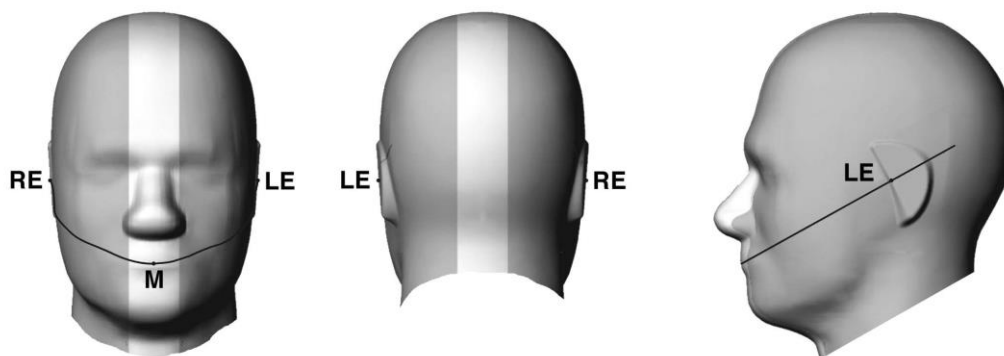


Fig 9.1.1 Front, back, and side views of SAM twin phantom

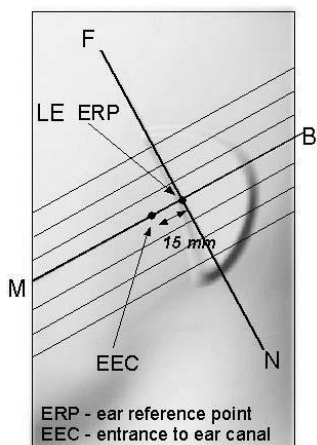


Fig 9.1.2 Close-up side view of phantom showing the ear region.

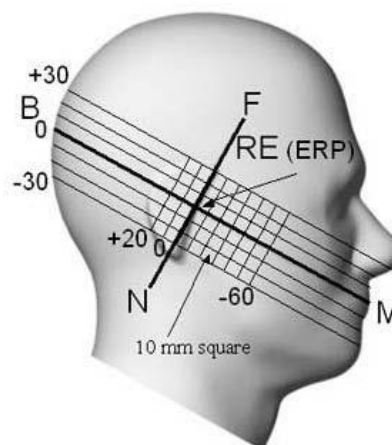


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

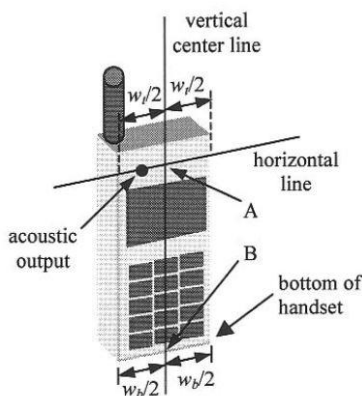


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

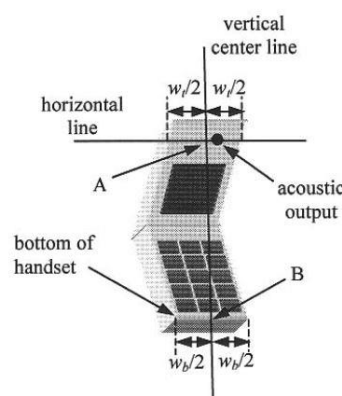


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

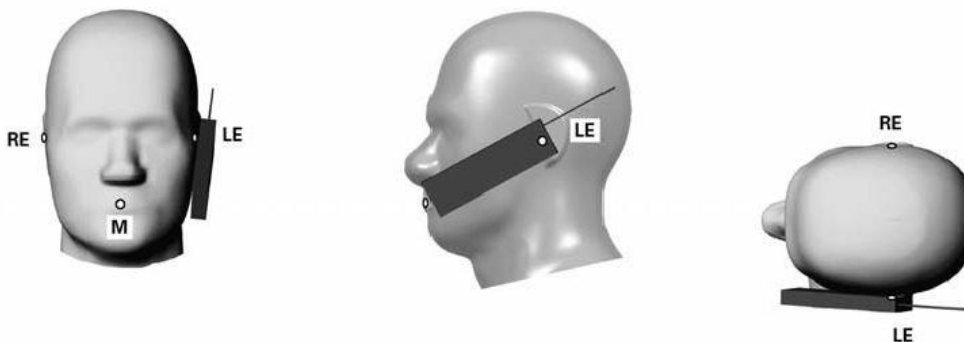


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

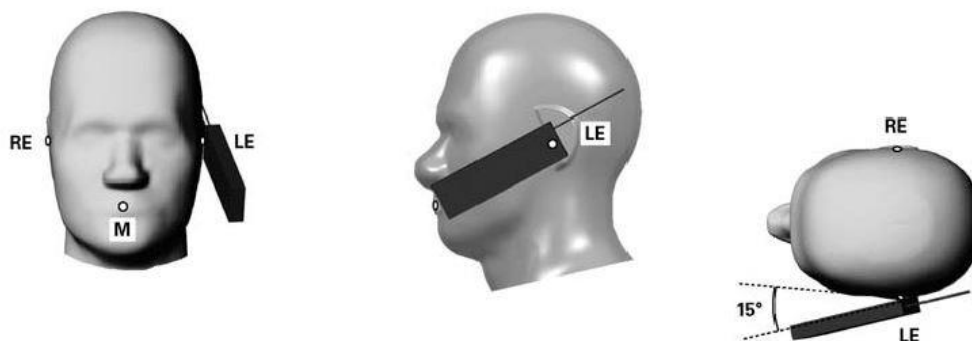


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

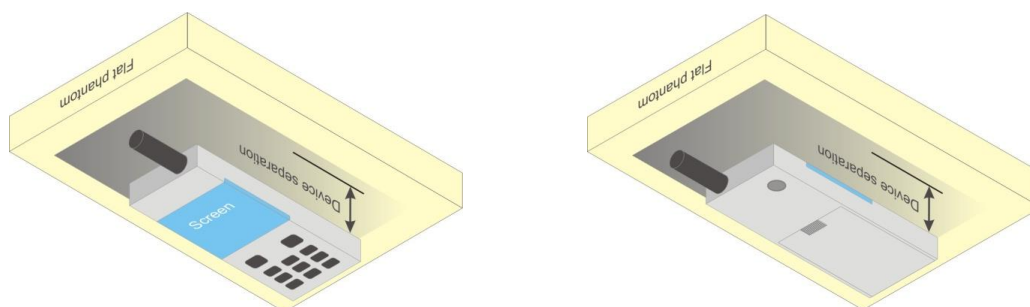


Fig 9.4 Body Worn Position



10.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

10.6 Product Specific Exposure

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.

11. WWAN Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

<WiFi off>

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		128	189	251		128	189	251	
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
Head / Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		32.71	32.73	32.61	34.00	23.71	23.73	23.61	25.00
		GPRS 1 Tx slot		32.77	32.73	32.68	34.00	23.77	23.73	23.68	25.00
		GPRS 2 Tx slots		30.69	30.61	30.58	32.00	24.69	24.61	24.58	26.00
		GPRS 3 Tx slots		28.73	28.61	28.58	30.00	24.47	24.35	24.32	25.74
		GPRS 4 Tx slots		27.50	27.39	27.31	29.00	24.50	24.39	24.31	26.00
		EDGE 1 Tx slot		26.75	26.73	26.64	28.00	17.75	17.73	17.64	19.00
		EDGE 2 Tx slots		25.68	25.62	25.55	27.00	19.68	19.62	19.55	21.00
		EDGE 3 Tx slots		23.52	23.39	23.51	25.00	19.26	19.13	19.25	20.74
		EDGE 4 Tx slots		21.46	21.49	21.32	23.00	18.46	18.49	18.32	20.00
		DTM Multi-slot class 5	GSM 1 Tx slot	30.60	30.52	30.49	32.00	24.62	24.51	24.51	25.98
			GPRS 1 Tx slot	30.68	30.54	30.57	32.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.64	30.51	30.52	32.00	24.62	24.54	24.51	25.98
			GPRS 1 Tx slot	30.64	30.61	30.55	32.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.66	28.59	28.51	30.00	24.39	24.28	24.27	25.74
			GPRS 2 Tx slots	28.65	28.52	28.54	30.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	30.68	30.55	30.52	32.00	22.84	22.72	22.67	24.16
			EDGE 1 Tx slot	25.65	25.58	25.48	27.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.61	30.54	30.58	32.00	22.79	22.72	22.71	24.16
			EDGE 1 Tx slot	25.68	25.62	25.45	27.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.68	28.56	28.52	30.00	21.71	21.58	21.60	23.10
			EDGE 2 Tx slots	23.50	23.35	23.47	25.00				

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		128	189	251		128	189	251	
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
Hotspot / Body-worn / Product Specific	Ant 1	GSM 1 Tx slot		32.71	32.73	32.61	34.00	23.71	23.73	23.61	25.00
		GPRS 1 Tx slot		32.77	32.73	32.68	34.00	23.77	23.73	23.68	25.00
		GPRS 2 Tx slots		30.69	30.61	30.58	32.00	24.69	24.61	24.58	26.00
		GPRS 3 Tx slots		28.73	28.61	28.58	30.00	24.47	24.35	24.32	25.74
		GPRS 4 Tx slots		27.50	27.39	27.31	29.00	24.50	24.39	24.31	26.00
		EDGE 1 Tx slot		26.75	26.73	26.64	28.00	17.75	17.73	17.64	19.00
		EDGE 2 Tx slots		25.68	25.62	25.55	27.00	19.68	19.62	19.55	21.00
		EDGE 3 Tx slots		23.52	23.39	23.51	25.00	19.26	19.13	19.25	20.74
		EDGE 4 Tx slots		21.46	21.49	21.32	23.00	18.46	18.49	18.32	20.00
		DTM Multi-slot class 5	GSM 1 Tx slot	30.60	30.52	30.49	32.00	24.62	24.51	24.51	25.98
			GPRS 1 Tx slot	30.68	30.54	30.57	32.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.64	30.51	30.52	32.00	24.62	24.54	24.51	25.98
			GPRS 1 Tx slot	30.64	30.61	30.55	32.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.66	28.59	28.51	30.00	24.39	24.28	24.27	25.74
			GPRS 2 Tx slots	28.65	28.52	28.54	30.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	30.68	30.55	30.52	32.00	22.84	22.72	22.67	24.16
			EDGE 1 Tx slot	25.65	25.58	25.48	27.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.61	30.54	30.58	32.00	22.79	22.72	22.71	24.16
			EDGE 1 Tx slot	25.68	25.62	25.45	27.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.68	28.56	28.52	30.00	21.71	21.58	21.60	23.10
			EDGE 2 Tx slots	23.50	23.35	23.47	25.00				

<WiFi on>

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		128	189	251		128	189	251	
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
Head	Ant 0	GSM 1 Tx slot		32.71	32.73	32.61	34.00	23.71	23.73	23.61	25.00
		GPRS 1 Tx slot		32.77	32.73	32.68	34.00	23.77	23.73	23.68	25.00
		GPRS 2 Tx slots		30.69	30.61	30.58	32.00	24.69	24.61	24.58	26.00
		GPRS 3 Tx slots		28.73	28.61	28.58	30.00	24.47	24.35	24.32	25.74
		GPRS 4 Tx slots		27.50	27.39	27.31	29.00	24.50	24.39	24.31	26.00
		EDGE 1 Tx slot		26.75	26.73	26.64	28.00	17.75	17.73	17.64	19.00
		EDGE 2 Tx slots		25.68	25.62	25.55	27.00	19.68	19.62	19.55	21.00
		EDGE 3 Tx slots		23.52	23.39	23.51	25.00	19.26	19.13	19.25	20.74
		EDGE 4 Tx slots		21.46	21.49	21.32	23.00	18.46	18.49	18.32	20.00
		DTM Multi-slot class 5	GSM 1 Tx slot	30.60	30.52	30.49	32.00	24.62	24.51	24.51	25.98
			GPRS 1 Tx slot	30.68	30.54	30.57	32.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.64	30.51	30.52	32.00	24.62	24.54	24.51	25.98
			GPRS 1 Tx slot	30.64	30.61	30.55	32.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.66	28.59	28.51	30.00	24.39	24.28	24.27	25.74
			GPRS 2 Tx slots	28.65	28.52	28.54	30.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	30.68	30.55	30.52	32.00	22.84	22.72	22.67	24.16
			EDGE 1 Tx slot	25.65	25.58	25.48	27.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	30.61	30.54	30.58	32.00	22.79	22.72	22.71	24.16
			EDGE 1 Tx slot	25.68	25.62	25.45	27.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	28.68	28.56	28.52	30.00	21.71	21.58	21.60	23.10
			EDGE 2 Tx slots	23.50	23.35	23.47	25.00				

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		128	189	251		128	189	251	
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		29.95	29.94	29.92	31.00	20.95	20.94	20.92	22.00
		GPRS 1 Tx slot		29.98	29.96	29.95	31.00	20.98	20.96	20.95	22.00
		GPRS 2 Tx slots		27.92	27.86	27.82	29.00	21.92	21.86	21.82	23.00
		GPRS 3 Tx slots		25.95	25.88	25.88	27.00	21.69	21.62	21.62	22.74
		GPRS 4 Tx slots		24.70	24.68	24.71	26.00	21.70	21.68	21.71	23.00
		EDGE 1 Tx slot		24.07	23.89	23.82	25.00	15.07	14.89	14.82	16.00
		EDGE 2 Tx slots		23.00	22.82	22.73	24.00	17.00	16.82	16.73	18.00
		EDGE 3 Tx slots		20.05	20.03	20.00	22.00	15.79	15.77	15.74	17.74
		EDGE 4 Tx slots		18.87	18.96	18.83	20.00	15.87	15.96	15.83	17.00
		DTM Multi-slot class 5	GSM 1 Tx slot	27.85	27.79	27.82	29.00	21.85	21.78	21.75	22.98
			GPRS 1 Tx slot	27.90	27.81	27.72	29.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	27.86	27.81	27.81	29.00	21.82	21.78	21.76	22.98
			GPRS 1 Tx slot	27.83	27.79	27.75	29.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	25.91	25.86	25.84	27.00	21.61	21.59	21.56	22.74
			GPRS 2 Tx slots	25.85	25.85	25.81	27.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	27.91	27.83	27.74	29.00	20.09	19.98	19.90	21.16
			EDGE 1 Tx slot	22.99	22.78	22.72	24.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	27.88	27.80	27.76	29.00	20.07	19.95	19.90	21.16
			EDGE 1 Tx slot	23.00	22.75	22.65	24.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	25.95	25.82	25.87	27.00	18.72	18.63	18.65	20.10
			EDGE 2 Tx slots	20.04	20.03	20.00	22.00				

<WiFi off>

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		512	661	810		512	661	810	
Head / Hotspot / Body-worn / Product Specific	Ant 0	Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
		GSM 1 Tx slot		29.48	29.45	29.73		20.48	20.45	20.73	
		GPRS 1 Tx slot		29.55	29.52	29.75		20.55	20.52	20.75	
		GPRS 2 Tx slots		27.97	27.88	28.06		21.97	21.88	22.06	
		GPRS 3 Tx slots		25.66	25.64	25.74		21.40	21.38	21.48	
		GPRS 4 Tx slots		24.52	24.60	24.60		21.52	21.60	21.60	
		EDGE 1 Tx slot		25.70	25.80	25.82		16.70	16.80	16.82	
		EDGE 2 Tx slots		24.60	24.57	24.84		18.60	18.57	18.84	
		EDGE 3 Tx slots		23.56	23.27	23.46		19.30	19.01	19.20	
		EDGE 4 Tx slots		22.81	22.39	22.43		19.81	19.39	19.43	
		DTM Multi-slot class 5	GSM 1 Tx slot	27.90	27.84	28.04		21.87	21.81	22.00	23.48
			GPRS 1 Tx slot	27.88	27.83	28.01					
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.88	28.01		21.91	21.84	21.98	23.48
			GPRS 1 Tx slot	27.94	27.85	28.00					
		DTM Multi-slot class 11	GSM 1 Tx slot	25.58	25.59	25.69		21.31	21.34	21.40	23.24
			GPRS 2 Tx slots	25.56	25.60	25.65					
		DTM Multi-slot class 5	GSM 1 Tx slot	27.87	27.88	28.06		20.48	20.50	20.69	22.07
			EDGE 1 Tx slot	24.50	24.54	24.75					
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.83	28.01		20.52	20.47	20.69	22.07
			EDGE 1 Tx slot	24.51	24.54	24.84					
		DTM Multi-slot class 11	GSM 1 Tx slot	25.65	25.54	25.74		20.10	19.86	20.09	21.74
			EDGE 2 Tx slots	23.54	23.19	23.45					

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		512	661	810		512	661	810	
Hotspot / Body-worn / Product Specific	Ant 1	Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
		GSM 1 Tx slot		29.48	29.45	29.73		20.48	20.45	20.73	
		GPRS 1 Tx slot		29.55	29.52	29.75		20.55	20.52	20.75	
		GPRS 2 Tx slots		27.97	27.88	28.06		21.97	21.88	22.06	
		GPRS 3 Tx slots		25.66	25.64	25.74		21.40	21.38	21.48	
		GPRS 4 Tx slots		24.52	24.60	24.60		21.52	21.60	21.60	
		EDGE 1 Tx slot		25.70	25.80	25.82		16.70	16.80	16.82	
		EDGE 2 Tx slots		24.60	24.57	24.84		18.60	18.57	18.84	
		EDGE 3 Tx slots		23.56	23.27	23.46		19.30	19.01	19.20	
		EDGE 4 Tx slots		22.81	22.39	22.43		19.81	19.39	19.43	
		DTM Multi-slot class 5	GSM 1 Tx slot	27.90	27.84	28.04		21.87	21.81	22.00	23.48
			GPRS 1 Tx slot	27.88	27.83	28.01					
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.88	28.01		21.91	21.84	21.98	23.48
			GPRS 1 Tx slot	27.94	27.85	28.00					
		DTM Multi-slot class 11	GSM 1 Tx slot	25.58	25.59	25.69		21.31	21.34	21.40	23.24
			GPRS 2 Tx slots	25.56	25.60	25.65					
		DTM Multi-slot class 5	GSM 1 Tx slot	27.87	27.88	28.06		20.48	20.50	20.69	22.07
			EDGE 1 Tx slot	24.50	24.54	24.75					
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.83	28.01		20.52	20.47	20.69	22.07
			EDGE 1 Tx slot	24.51	24.54	24.84					
		DTM Multi-slot class 11	GSM 1 Tx slot	25.65	25.54	25.74		20.10	19.86	20.09	21.74
			EDGE 2 Tx slots	23.54	23.19	23.45					

<WiFi on>

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		512	661	810		512	661	810	
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
Head	Ant 0	GSM 1 Tx slot		29.48	29.45	29.73	31.00	20.48	20.45	20.73	22.00
		GPRS 1 Tx slot		29.55	29.52	29.75	31.00	20.55	20.52	20.75	22.00
		GPRS 2 Tx slots		27.97	27.88	28.06	29.50	21.97	21.88	22.06	23.50
		GPRS 3 Tx slots		25.66	25.64	25.74	27.50	21.40	21.38	21.48	23.24
		GPRS 4 Tx slots		24.52	24.60	24.60	26.50	21.52	21.60	21.60	23.50
		EDGE 1 Tx slot		25.70	25.80	25.82	27.00	16.70	16.80	16.82	18.00
		EDGE 2 Tx slots		24.60	24.57	24.84	26.00	18.60	18.57	18.84	20.00
		EDGE 3 Tx slots		23.56	23.27	23.46	25.00	19.30	19.01	19.20	20.74
		EDGE 4 Tx slots		22.81	22.39	22.43	24.00	19.81	19.39	19.43	21.00
		DTM Multi-slot class 5	GSM 1 Tx slot	27.90	27.84	28.04	29.50	21.87	21.81	22.00	23.48
			GPRS 1 Tx slot	27.88	27.83	28.01	29.50				
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.88	28.01	29.50	21.91	21.84	21.98	23.48
			GPRS 1 Tx slot	27.94	27.85	28.00	29.50				
		DTM Multi-slot class 11	GSM 1 Tx slot	25.58	25.59	25.69	27.50	21.31	21.34	21.40	23.24
			GPRS 2 Tx slots	25.56	25.60	25.65	27.50				
		DTM Multi-slot class 5	GSM 1 Tx slot	27.87	27.88	28.06	29.50	20.48	20.50	20.69	22.07
			EDGE 1 Tx slot	24.50	24.54	24.75	26.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	27.92	27.83	28.01	29.50	20.52	20.47	20.69	22.07
			EDGE 1 Tx slot	24.51	24.54	24.84	26.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	25.65	25.54	25.74	27.50	20.10	19.86	20.09	21.74
			EDGE 2 Tx slots	23.54	23.19	23.45	25.00				

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel		512	661	810		512	661	810	
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		24.50	24.51	24.52	26.50	15.50	15.51	15.52	17.50
		GPRS 1 Tx slot		24.50	24.52	24.53	26.50	15.50	15.52	15.53	17.50
		GPRS 2 Tx slots		23.00	23.02	23.05	25.00	17.00	17.02	17.05	19.00
		GPRS 3 Tx slots		21.00	21.01	21.02	23.00	16.74	16.75	16.76	18.74
		GPRS 4 Tx slots		20.00	20.00	20.02	22.00	17.00	17.00	17.02	19.00
		EDGE 1 Tx slot		21.18	21.26	21.41	22.50	12.18	12.26	12.41	13.50
		EDGE 2 Tx slots		20.11	20.08	20.01	21.50	14.11	14.08	14.01	15.50
		EDGE 3 Tx slots		19.09	18.91	18.85	20.50	14.83	14.65	14.59	16.24
		EDGE 4 Tx slots		18.17	17.80	17.84	19.80	15.17	14.80	14.84	16.80
		DTM Multi-slot class 5	GSM 1 Tx slot	23.03	23.07	23.12	25.00	17.04	17.06	17.11	18.98
			GPRS 1 Tx slot	23.10	23.10	23.14	25.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	23.08	23.05	23.12	25.00	17.05	17.06	17.11	18.98
			GPRS 1 Tx slot	23.07	23.11	23.15	25.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	21.05	21.08	21.06	23.00	16.80	16.81	16.81	18.74
			GPRS 2 Tx slots	21.07	21.06	21.07	23.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	23.03	23.10	23.13	25.00	15.81	15.83	15.83	17.57
			EDGE 1 Tx slot	20.16	20.10	20.03	21.50				
		DTM Multi-slot class 9	GSM 1 Tx slot	23.06	23.10	23.05	25.00	15.84	15.84	15.79	17.57
			EDGE 1 Tx slot	20.20	20.13	20.07	21.50				
		DTM Multi-slot class 11	GSM 1 Tx slot	21.03	21.01	21.04	23.00	15.62	15.49	15.50	17.24
			EDGE 2 Tx slots	19.17	18.95	18.94	20.50				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

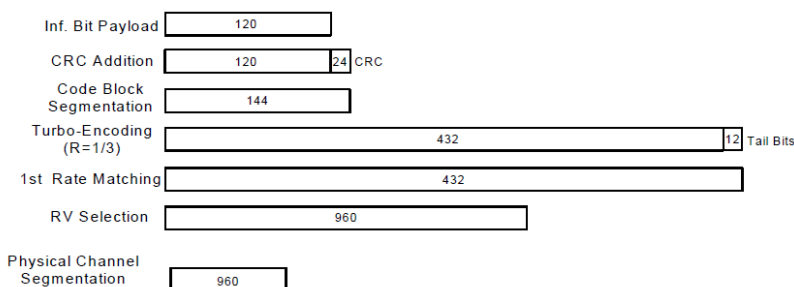
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<WiFi off>

Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV			WCDMA V		
		TX Channel		9262	9400	9538	1312	1413	1513	4132	4182	4233
		Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458
		Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
		Max. Power		25.1			24			24.5		
		3GPP Rel 99	AMR 12.2Kbps	24.21	24.35	24.25	22.92	22.91	22.90	23.55	23.55	23.39
		3GPP Rel 99	RMC 12.2Kbps	24.44	24.53	24.45	22.94	22.96	22.91	23.60	23.60	23.45
		Max. Power		24.1			23			23.5		
		3GPP Rel 6	HSDPA Subtest-1	24.08	24.10	24.05	21.96	21.98	21.94	22.57	22.56	22.43
		3GPP Rel 6	HSDPA Subtest-2	24.08	24.09	24.09	21.97	22.01	22.01	22.62	22.61	22.46
		3GPP Rel 6	HSDPA Subtest-3	23.56	23.59	23.58	21.49	21.53	21.50	22.14	22.12	22.01
		3GPP Rel 6	HSDPA Subtest-4	23.57	23.60	23.59	21.51	21.49	21.50	22.09	22.12	21.98
		Max. Power		24.1			23			23.5		
		3GPP Rel 8	DC-HSDPA Subtest-1	24.01	24.06	23.95	22.01	21.95	22.13	22.53	22.56	22.42
		3GPP Rel 8	DC-HSDPA Subtest-2	24.08	24.02	24.07	22.20	22.16	21.99	22.60	22.59	22.44
		3GPP Rel 8	DC-HSDPA Subtest-3	23.56	23.57	23.58	21.59	21.72	21.57	22.10	22.09	21.94
		3GPP Rel 8	DC-HSDPA Subtest-4	23.53	23.60	23.60	21.66	21.46	21.69	22.08	22.06	21.93
		Max. Power		24.1			23			23.5		
		3GPP Rel 6	HSUPA Subtest-1	24.09	24.07	24.10	21.92	22.00	21.97	22.59	22.56	22.43
		3GPP Rel 6	HSUPA Subtest-2	22.09	22.10	22.07	19.97	19.99	19.97	20.62	20.57	20.50
		3GPP Rel 6	HSUPA Subtest-3	23.09	23.08	23.07	20.99	21.01	20.95	21.58	21.60	21.47
		3GPP Rel 6	HSUPA Subtest-4	22.08	22.05	22.02	19.99	19.98	19.96	20.57	20.59	20.46
		3GPP Rel 6	HSUPA Subtest-5	24.10	24.09	24.10	22.00	22.00	22.00	22.60	22.60	22.40

Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA V		
		TX Channel		9262	9400	9538	4132	4182	4233
		Rx Channel		9662	9800	9938	4357	4407	4458
		Frequency (MHz)		1852.4	1880	1907.6	826.4	836.4	846.6
		Max. Power		25.1			24.5		
		3GPP Rel 99	AMR 12.2Kbps	24.21	24.35	24.25	23.55	23.55	23.39
		3GPP Rel 99	RMC 12.2Kbps	24.44	24.53	24.45	23.60	23.60	23.45
		Max. Power		24.1			23.5		
		3GPP Rel 6	HSDPA Subtest-1	24.08	24.10	24.05	22.57	22.56	22.43
		3GPP Rel 6	HSDPA Subtest-2	24.08	24.09	24.09	22.62	22.61	22.46
		3GPP Rel 6	HSDPA Subtest-3	23.56	23.59	23.58	22.14	22.12	22.01
		3GPP Rel 6	HSDPA Subtest-4	23.57	23.60	23.59	22.09	22.12	21.98
		Max. Power		24.1			23.5		
		3GPP Rel 8	DC-HSDPA Subtest-1	24.01	24.06	23.95	22.53	22.56	22.42
		3GPP Rel 8	DC-HSDPA Subtest-2	24.08	24.02	24.07	22.60	22.59	22.44
		3GPP Rel 8	DC-HSDPA Subtest-3	23.56	23.57	23.58	22.10	22.09	21.94
		3GPP Rel 8	DC-HSDPA Subtest-4	23.53	23.60	23.60	22.08	22.06	21.93
		Max. Power		24.1			23.5		
		3GPP Rel 6	HSUPA Subtest-1	24.09	24.07	24.10	22.59	22.56	22.43
		3GPP Rel 6	HSUPA Subtest-2	22.09	22.10	22.07	20.62	20.57	20.50
		3GPP Rel 6	HSUPA Subtest-3	23.09	23.08	23.07	21.58	21.60	21.47
		3GPP Rel 6	HSUPA Subtest-4	22.08	22.05	22.02	20.57	20.59	20.46
		3GPP Rel 6	HSUPA Subtest-5	24.10	24.09	24.10	22.60	22.60	22.40



Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV			WCDMA V		
		TX Channel		9262	9400	9538	1312	1413	1513	4132	4182	4233
		Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458
		Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
Hotspot / Body-worn / Product Specific	Ant 1	Max. Power		25.1			24			24.5		
		3GPP Rel 99	AMR 12.2Kbps	24.21	24.35	24.25	22.92	22.91	22.90	23.55	23.55	23.39
		3GPP Rel 99	RMC 12.2Kbps	24.44	24.53	24.45	22.94	22.96	22.91	23.60	23.60	23.45
		Max. Power		24.1			23			23.5		
		3GPP Rel 6	HSDPA Subtest-1	24.08	24.10	24.05	21.96	21.98	21.94	22.57	22.56	22.43
		3GPP Rel 6	HSDPA Subtest-2	24.08	24.09	24.09	21.97	22.01	22.01	22.62	22.61	22.46
		3GPP Rel 6	HSDPA Subtest-3	23.56	23.59	23.58	21.49	21.53	21.50	22.14	22.12	22.01
		3GPP Rel 6	HSDPA Subtest-4	23.57	23.60	23.59	21.51	21.49	21.50	22.09	22.12	21.98
		Max. Power		24.1			23			23.5		
		3GPP Rel 8	DC-HSDPA Subtest-1	24.01	24.06	23.95	22.01	21.95	22.13	22.53	22.56	22.42
		3GPP Rel 8	DC-HSDPA Subtest-2	24.08	24.02	24.07	22.20	22.16	21.99	22.60	22.59	22.44
		3GPP Rel 8	DC-HSDPA Subtest-3	23.56	23.57	23.58	21.59	21.72	21.57	22.10	22.09	21.94
		3GPP Rel 8	DC-HSDPA Subtest-4	23.53	23.60	23.60	21.66	21.46	21.69	22.08	22.06	21.93
		Max. Power		24.1			23			23.5		
		3GPP Rel 6	HSUPA Subtest-1	24.09	24.07	24.10	21.92	22.00	21.97	22.59	22.56	22.43
		3GPP Rel 6	HSUPA Subtest-2	22.09	22.10	22.07	19.97	19.99	19.97	20.62	20.57	20.50
		3GPP Rel 6	HSUPA Subtest-3	23.09	23.08	23.07	20.99	21.01	20.95	21.58	21.60	21.47
		3GPP Rel 6	HSUPA Subtest-4	22.08	22.05	22.02	19.99	19.98	19.96	20.57	20.59	20.46
		3GPP Rel 6	HSUPA Subtest-5	24.10	24.09	24.10	22.00	22.00	22.00	22.60	22.60	22.40



<WiFi on>


Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV			WCDMA V		
		TX Channel		9262	9400	9538	1312	1413	1513	4132	4182	4233
		Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458
		Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
Head	Ant 0	Max. Power		23.2			24			24.5		
		3GPP Rel 99	AMR 12.2Kbps	22.45	22.48	22.46	22.92	22.91	22.90	23.55	23.55	23.39
		3GPP Rel 99	RMC 12.2Kbps	22.51	22.57	22.47	22.94	22.96	22.91	23.60	23.60	23.45
		Max. Power		23.2			23			23.5		
		3GPP Rel 6	HSDPA Subtest-1	22.55	22.53	22.44	21.96	21.98	21.94	22.57	22.56	22.43
		3GPP Rel 6	HSDPA Subtest-2	22.55	22.55	22.47	21.97	22.01	22.01	22.62	22.61	22.46
		3GPP Rel 6	HSDPA Subtest-3	22.05	22.05	21.97	21.49	21.53	21.50	22.14	22.12	22.01
		3GPP Rel 6	HSDPA Subtest-4	22.06	22.07	21.99	21.51	21.49	21.50	22.09	22.12	21.98
		Max. Power		23.2			23			23.5		
		3GPP Rel 8	DC-HSDPA Subtest-1	22.53	22.54	22.49	22.01	21.95	22.13	22.53	22.56	22.42
		3GPP Rel 8	DC-HSDPA Subtest-2	22.56	22.51	22.51	22.20	22.16	21.99	22.60	22.59	22.44
		3GPP Rel 8	DC-HSDPA Subtest-3	22.12	22.33	22.05	21.59	21.72	21.57	22.10	22.09	21.94
		3GPP Rel 8	DC-HSDPA Subtest-4	22.16	22.03	22.26	21.66	21.46	21.69	22.08	22.06	21.93
		Max. Power		23.2			23			23.5		
		3GPP Rel 6	HSUPA Subtest-1	22.54	22.56	22.46	21.92	22.00	21.97	22.59	22.56	22.43
		3GPP Rel 6	HSUPA Subtest-2	20.55	20.57	20.49	19.97	19.99	19.97	20.62	20.57	20.50
		3GPP Rel 6	HSUPA Subtest-3	21.53	21.57	21.50	20.99	21.01	20.95	21.58	21.60	21.47
		3GPP Rel 6	HSUPA Subtest-4	20.53	20.59	20.44	19.99	19.98	19.96	20.57	20.59	20.46
		3GPP Rel 6	HSUPA Subtest-5	22.52	22.51	22.50	22.00	22.00	22.00	22.60	22.60	22.40

Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV			WCDMA V		
		TX Channel		9262	9400	9538	1312	1413	1513	4132	4182	4233
		Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458
		Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
Hotspot / Body-worn / Product Specific	Ant 0	Max. Power		20.2			19			22.5		
		3GPP Rel 99	AMR 12.2Kbps	19.58	19.57	19.50	17.42	17.48	17.38	20.89	20.91	20.78
		3GPP Rel 99	RMC 12.2Kbps	19.61	19.58	19.46	17.44	17.50	17.39	20.90	20.93	20.95
		Max. Power		20.2			18			21.5		
		3GPP Rel 6	HSDPA Subtest-1	19.55	19.53	19.43	17.42	17.43	17.42	20.80	20.83	20.69
		3GPP Rel 6	HSDPA Subtest-2	19.53	19.58	19.51	17.43	17.46	17.46	20.86	20.86	20.69
		3GPP Rel 6	HSDPA Subtest-3	19.04	19.12	19.01	16.99	17.01	16.96	20.33	20.33	20.22
		3GPP Rel 6	HSDPA Subtest-4	19.05	19.08	19.00	16.92	16.96	16.93	20.35	20.34	20.22
		Max. Power		20.2			18			21.5		
		3GPP Rel 8	DC-HSDPA Subtest-1	19.53	19.38	19.41	17.49	17.44	17.39	20.74	20.77	20.64
		3GPP Rel 8	DC-HSDPA Subtest-2	19.51	19.50	19.32	17.41	17.45	17.48	20.78	20.76	20.59
		3GPP Rel 8	DC-HSDPA Subtest-3	18.85	19.03	19.01	16.96	17.00	17.29	20.28	20.23	20.22
		3GPP Rel 8	DC-HSDPA Subtest-4	19.01	18.95	18.81	17.23	17.02	17.18	20.34	20.26	20.19
		Max. Power		20.2			18			21.5		
		3GPP Rel 6	HSUPA Subtest-1	19.60	19.60	19.45	17.43	17.46	17.41	20.83	20.81	20.71
		3GPP Rel 6	HSUPA Subtest-2	17.55	17.52	17.49	15.48	15.47	15.46	18.83	18.83	18.67
		3GPP Rel 6	HSUPA Subtest-3	18.57	18.59	18.49	16.46	16.48	16.43	19.82	19.76	19.67
		3GPP Rel 6	HSUPA Subtest-4	17.58	17.52	17.46	15.41	15.45	15.45	18.86	18.81	18.69
		3GPP Rel 6	HSUPA Subtest-5	19.60	19.60	19.50	17.43	17.44	17.43	20.90	20.90	20.70


<LTE Conducted Power>

General Note:

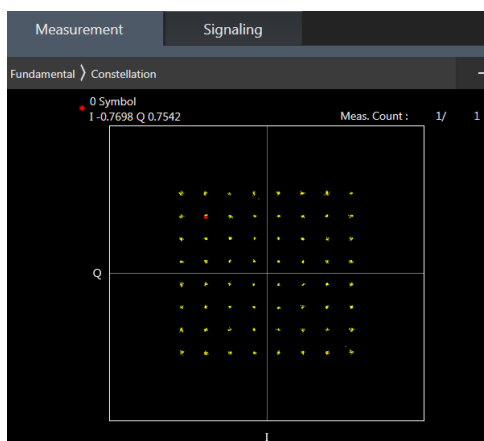1. Anritsu MT88201 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5/17 SAR test and the conducted measurement was covered by Band 26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

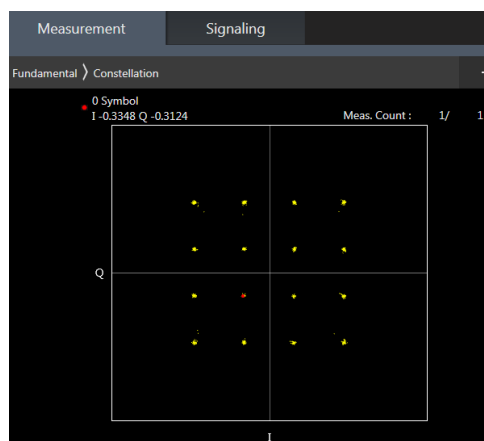

16QAM



<LTE Band 2>

<WiFi off>

Power Selection				Head / Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				25.1		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100
Frequency (MHz)				1860	1880	1900
20	QPSK	1	0	24.92	25.05	24.96
20	QPSK	1	49	24.82	25.04	24.92
20	QPSK	1	99	24.84	24.80	24.94
20	QPSK	50	0	23.97	24.05	24.05
20	QPSK	50	24	23.92	24.02	24.04
20	QPSK	50	50	23.96	23.98	23.98
20	QPSK	100	0	23.99	24.00	23.99
20	16QAM	1	0	23.98	23.92	23.90
20	16QAM	1	49	23.87	24.02	23.95
20	16QAM	1	99	23.90	23.85	24.04
20	16QAM	50	0	22.74	22.86	22.88
20	16QAM	50	24	22.73	22.89	22.87
20	16QAM	50	50	22.78	22.82	22.80
20	16QAM	100	0	22.81	22.82	22.81
20	64QAM	1	0	22.88	22.89	22.85
20	64QAM	1	49	22.79	22.96	22.91
20	64QAM	1	99	22.81	22.79	22.96
20	64QAM	50	0	21.77	21.86	21.87
20	64QAM	50	24	21.75	21.89	21.87
20	64QAM	50	50	21.81	21.82	21.82
20	64QAM	100	0	21.82	21.83	21.84
Channel				18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5
15	QPSK	1	0	24.87	24.76	24.97
15	QPSK	1	37	24.82	24.95	24.91
15	QPSK	1	74	24.75	24.79	24.98
15	QPSK	36	0	23.92	24.03	24.00
15	QPSK	36	20	23.91	24.02	24.01
15	QPSK	36	39	23.84	24.00	23.97
15	QPSK	75	0	23.88	24.00	23.98
15	16QAM	1	0	24.02	23.95	24.10
15	16QAM	1	37	23.92	24.08	24.01
15	16QAM	1	74	23.94	23.91	24.10
15	16QAM	36	0	22.83	22.90	22.90
15	16QAM	36	20	22.83	22.96	22.90
15	16QAM	36	39	22.77	22.92	22.89
15	16QAM	75	0	22.79	22.92	22.89
15	64QAM	1	0	22.95	22.90	23.01
15	64QAM	1	37	22.88	23.02	22.98
15	64QAM	1	74	22.83	22.83	23.02
15	64QAM	36	0	21.83	21.95	21.93
15	64QAM	36	20	21.86	21.97	21.96
15	64QAM	36	39	21.62	21.76	21.73
15	64QAM	75	0	21.79	21.92	21.87
Channel				18650	18900	19150
Frequency (MHz)				1855	1880	1905
10	QPSK	1	0	24.98	24.82	24.95
10	QPSK	1	25	24.86	24.96	24.94
10	QPSK	1	49	24.85	25.00	24.98
10	QPSK	25	0	23.92	24.10	24.01
10	QPSK	25	12	23.91	24.10	24.01
10	QPSK	25	25	23.87	23.97	23.98
10	QPSK	50	0	23.88	24.10	23.96
10	16QAM	1	0	24.10	23.96	24.01
10	16QAM	1	25	24.04	24.07	24.06
10	16QAM	1	49	23.97	24.10	24.09
10	16QAM	25	0	22.84	22.94	22.89
10	16QAM	25	12	22.83	22.93	22.91
10	16QAM	25	25	22.75	22.87	22.87
10	16QAM	50	0	22.79	22.91	22.89
10	64QAM	1	0	22.99	23.03	23.06
10	64QAM	1	25	22.88	22.99	23.03
10	64QAM	1	49	22.87	23.09	23.01



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	0	21.83	21.93	21.90
10	64QAM	25	12	21.83	21.95	21.89
10	64QAM	25	25	21.78	21.89	21.85
10	64QAM	50	0	21.81	21.94	21.90
Channel				18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5
5	QPSK	1	0	24.98	25.02	25.00
5	QPSK	1	12	25.00	25.01	25.02
5	QPSK	1	24	24.92	25.03	25.01
5	QPSK	12	0	24.01	24.09	23.98
5	QPSK	12	7	24.05	24.10	24.09
5	QPSK	12	13	24.01	24.07	24.06
5	QPSK	25	0	24.01	24.09	23.96
5	16QAM	1	0	24.02	24.10	24.05
5	16QAM	1	12	24.10	24.03	24.10
5	16QAM	1	24	24.01	24.06	24.08
5	16QAM	12	0	22.89	23.00	22.94
5	16QAM	12	7	22.92	23.01	22.86
5	16QAM	12	13	22.89	22.97	22.94
5	16QAM	25	0	22.89	22.95	22.95
5	64QAM	1	0	22.98	23.06	23.04
5	64QAM	1	12	22.99	23.10	23.06
5	64QAM	1	24	22.91	23.02	22.98
5	64QAM	12	0	21.93	22.03	21.89
5	64QAM	12	7	21.96	22.07	21.93
5	64QAM	12	13	21.91	22.01	21.86
5	64QAM	25	0	21.89	21.96	21.85
Channel				18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5
3	QPSK	1	0	24.89	24.95	25.03
3	QPSK	1	8	24.89	24.99	24.93
3	QPSK	1	14	24.82	24.94	24.99
3	QPSK	8	0	23.94	24.00	23.95
3	QPSK	8	4	23.97	24.04	24.00
3	QPSK	8	7	23.88	24.02	23.94
3	QPSK	15	0	23.88	23.98	23.93
3	16QAM	1	0	23.97	24.05	24.10
3	16QAM	1	8	24.03	24.10	24.08
3	16QAM	1	14	23.97	24.03	24.05
3	16QAM	8	0	22.88	22.96	22.89
3	16QAM	8	4	22.88	22.99	22.94
3	16QAM	8	7	22.87	22.96	22.90
3	16QAM	15	0	22.83	22.90	22.88
3	64QAM	1	0	22.88	22.99	23.03
3	64QAM	1	8	22.96	23.02	22.96
3	64QAM	1	14	22.89	22.97	23.05
3	64QAM	8	0	21.85	21.95	21.90
3	64QAM	8	4	21.91	21.98	21.93
3	64QAM	8	7	21.84	21.96	21.90
3	64QAM	15	0	21.84	21.91	21.86
Channel				18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3
1.4	QPSK	1	0	24.81	24.94	24.85
1.4	QPSK	1	3	24.89	24.98	25.02
1.4	QPSK	1	5	24.82	24.91	24.94
1.4	QPSK	3	0	24.85	24.96	24.88
1.4	QPSK	3	1	24.90	25.02	25.02
1.4	QPSK	3	3	24.87	24.96	25.00
1.4	QPSK	6	0	23.88	23.93	23.91
1.4	16QAM	1	0	23.87	23.94	23.93
1.4	16QAM	1	3	23.92	24.03	24.10
1.4	16QAM	1	5	23.84	23.95	24.01
1.4	16QAM	3	0	23.67	23.74	23.72
1.4	16QAM	3	1	23.71	23.83	23.86
1.4	16QAM	3	3	23.66	23.75	23.81
1.4	16QAM	6	0	22.74	22.85	22.80
1.4	64QAM	1	0	22.80	22.89	22.84
1.4	64QAM	1	3	22.83	22.93	23.01
1.4	64QAM	1	5	22.79	22.87	22.91
1.4	64QAM	3	0	22.81	22.90	22.85
1.4	64QAM	3	1	22.86	22.93	22.98
1.4	64QAM	3	3	22.83	22.91	22.94
1.4	64QAM	6	0	21.71	21.81	21.74



Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				25.1		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100
Frequency (MHz)				1860	1880	1900
20	QPSK	1	0	24.92	25.05	24.96
20	QPSK	1	49	24.82	25.04	24.92
20	QPSK	1	99	24.84	24.80	24.94
20	QPSK	50	0	23.97	24.05	24.05
20	QPSK	50	24	23.92	24.02	24.04
20	QPSK	50	50	23.96	23.98	23.98
20	QPSK	100	0	23.99	24.00	23.99
20	16QAM	1	0	23.98	23.92	23.90
20	16QAM	1	49	23.87	24.02	23.95
20	16QAM	1	99	23.90	23.85	24.04
20	16QAM	50	0	22.74	22.86	22.88
20	16QAM	50	24	22.73	22.89	22.87
20	16QAM	50	50	22.78	22.82	22.80
20	16QAM	100	0	22.81	22.82	22.81
20	64QAM	1	0	22.88	22.89	22.85
20	64QAM	1	49	22.79	22.96	22.91
20	64QAM	1	99	22.81	22.79	22.96
20	64QAM	50	0	21.77	21.86	21.87
20	64QAM	50	24	21.75	21.89	21.87
20	64QAM	50	50	21.81	21.82	21.82
20	64QAM	100	0	21.82	21.83	21.84
Channel				18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5
15	QPSK	1	0	24.87	24.76	24.97
15	QPSK	1	37	24.82	24.95	24.91
15	QPSK	1	74	24.75	24.79	24.98
15	QPSK	36	0	23.92	24.03	24.00
15	QPSK	36	20	23.91	24.02	24.01
15	QPSK	36	39	23.84	24.00	23.97
15	QPSK	75	0	23.88	24.00	23.98
15	16QAM	1	0	24.02	23.95	24.10
15	16QAM	1	37	23.92	24.08	24.01
15	16QAM	1	74	23.94	23.91	24.10
15	16QAM	36	0	22.83	22.90	22.90
15	16QAM	36	20	22.83	22.96	22.90
15	16QAM	36	39	22.77	22.92	22.89
15	16QAM	75	0	22.79	22.92	22.89
15	64QAM	1	0	22.95	22.90	23.01
15	64QAM	1	37	22.88	23.02	22.98
15	64QAM	1	74	22.83	22.83	23.02
15	64QAM	36	0	21.83	21.95	21.93
15	64QAM	36	20	21.86	21.97	21.96
15	64QAM	36	39	21.62	21.76	21.73
15	64QAM	75	0	21.79	21.92	21.87
Channel				18650	18900	19150
Frequency (MHz)				1855	1880	1905
10	QPSK	1	0	24.98	24.82	24.95
10	QPSK	1	25	24.86	24.96	24.94
10	QPSK	1	49	24.85	25.00	24.98
10	QPSK	25	0	23.92	24.10	24.01
10	QPSK	25	12	23.91	24.10	24.01
10	QPSK	25	25	23.87	23.97	23.98
10	QPSK	50	0	23.88	24.10	23.96
10	16QAM	1	0	24.10	23.96	24.01
10	16QAM	1	25	24.04	24.07	24.06
10	16QAM	1	49	23.97	24.10	24.09
10	16QAM	25	0	22.84	22.94	22.89
10	16QAM	25	12	22.83	22.93	22.91
10	16QAM	25	25	22.75	22.87	22.87
10	16QAM	50	0	22.79	22.91	22.89
10	64QAM	1	0	22.99	23.03	23.06
10	64QAM	1	25	22.88	22.99	23.03
10	64QAM	1	49	22.87	23.09	23.01
10	64QAM	25	0	21.83	21.93	21.90
10	64QAM	25	12	21.83	21.95	21.89



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	21.78	21.89	21.85
10	64QAM	50	0	21.81	21.94	21.90
Channel				18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5
5	QPSK	1	0	24.98	25.02	25.00
5	QPSK	1	12	25.00	25.01	25.02
5	QPSK	1	24	24.92	25.03	25.01
5	QPSK	12	0	24.01	24.09	23.98
5	QPSK	12	7	24.05	24.10	24.09
5	QPSK	12	13	24.01	24.07	24.06
5	QPSK	25	0	24.01	24.09	23.96
5	16QAM	1	0	24.02	24.10	24.05
5	16QAM	1	12	24.10	24.03	24.10
5	16QAM	1	24	24.01	24.06	21.09
5	16QAM	12	0	22.89	23.00	22.94
5	16QAM	12	7	22.92	23.01	22.86
5	16QAM	12	13	22.89	22.97	22.94
5	16QAM	25	0	22.89	22.95	22.95
5	64QAM	1	0	22.98	23.06	23.04
5	64QAM	1	12	22.99	23.10	23.06
5	64QAM	1	24	22.91	23.02	22.98
5	64QAM	12	0	21.93	22.03	21.89
5	64QAM	12	7	21.96	22.07	21.93
5	64QAM	12	13	21.91	22.01	21.86
5	64QAM	25	0	21.89	21.96	21.85
Channel				18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5
3	QPSK	1	0	24.89	24.95	25.03
3	QPSK	1	8	24.89	24.99	24.93
3	QPSK	1	14	24.82	24.94	24.99
3	QPSK	8	0	23.94	24.00	23.95
3	QPSK	8	4	23.97	24.04	24.00
3	QPSK	8	7	23.88	24.02	23.94
3	QPSK	15	0	23.88	23.98	23.93
3	16QAM	1	0	23.97	24.05	24.10
3	16QAM	1	8	24.03	24.10	24.08
3	16QAM	1	14	23.97	24.03	24.05
3	16QAM	8	0	22.88	22.96	22.89
3	16QAM	8	4	22.88	22.99	22.94
3	16QAM	8	7	22.87	22.96	22.90
3	16QAM	15	0	22.83	22.90	22.88
3	64QAM	1	0	22.88	22.99	23.03
3	64QAM	1	8	22.96	23.02	22.96
3	64QAM	1	14	22.89	22.97	23.05
3	64QAM	8	0	21.85	21.95	21.90
3	64QAM	8	4	21.91	21.98	21.93
3	64QAM	8	7	21.84	21.96	21.90
3	64QAM	15	0	21.84	21.91	21.86
Channel				18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3
1.4	QPSK	1	0	24.81	24.94	24.85
1.4	QPSK	1	3	24.89	24.98	25.02
1.4	QPSK	1	5	24.82	24.91	24.94
1.4	QPSK	3	0	24.85	24.96	24.88
1.4	QPSK	3	1	24.90	25.02	25.02
1.4	QPSK	3	3	24.87	24.96	25.00
1.4	QPSK	6	0	23.88	23.93	23.91
1.4	16QAM	1	0	23.87	23.94	23.93
1.4	16QAM	1	3	23.92	24.03	24.10
1.4	16QAM	1	5	23.84	23.95	24.01
1.4	16QAM	3	0	23.67	23.74	23.72
1.4	16QAM	3	1	23.71	23.83	23.86
1.4	16QAM	3	3	23.66	23.75	23.81
1.4	16QAM	6	0	22.74	22.85	22.80
1.4	64QAM	1	0	22.80	22.89	22.84
1.4	64QAM	1	3	22.83	22.93	23.01
1.4	64QAM	1	5	22.79	22.87	22.91
1.4	64QAM	3	0	22.81	22.90	22.85
1.4	64QAM	3	1	22.86	22.93	22.98
1.4	64QAM	3	3	22.83	22.91	22.94
1.4	64QAM	6	0	21.71	21.81	21.74

**<WiFi on>**

Power Selection				Head		
Transmit Antenna				Ant 0		
Max. Power				23.2		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100
Frequency (MHz)				1860	1880	1900
20	QPSK	1	0	22.75	22.71	22.71
20	QPSK	1	49	22.63	22.81	22.77
20	QPSK	1	99	22.66	22.62	22.80
20	QPSK	50	0	22.74	22.86	22.84
20	QPSK	50	24	22.70	22.87	22.85
20	QPSK	50	50	22.73	22.79	22.78
20	QPSK	100	0	22.78	22.83	22.80
20	16QAM	1	0	23.04	23.06	23.04
20	16QAM	1	49	23.01	23.09	23.07
20	16QAM	1	99	23.01	23.00	23.15
20	16QAM	50	0	22.82	22.95	22.93
20	16QAM	50	24	22.82	22.94	22.94
20	16QAM	50	50	22.88	22.88	22.88
20	16QAM	100	0	22.90	22.89	22.90
20	64QAM	1	0	22.98	22.92	22.90
20	64QAM	1	49	22.93	23.05	22.99
20	64QAM	1	99	22.91	22.87	23.02
20	64QAM	50	0	21.99	22.10	22.10
20	64QAM	50	24	22.00	22.10	22.07
20	64QAM	50	50	22.01	22.04	22.03
20	64QAM	100	0	22.04	22.05	22.06
Channel				18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5
15	QPSK	1	0	22.70	22.67	22.80
15	QPSK	1	37	22.62	22.78	22.75
15	QPSK	1	74	22.54	22.59	22.79
15	QPSK	36	0	22.72	22.83	22.81
15	QPSK	36	20	22.71	22.89	22.86
15	QPSK	36	39	22.62	22.81	22.77
15	QPSK	75	0	22.69	22.82	22.79
15	16QAM	1	0	22.98	23.03	23.10
15	16QAM	1	37	22.98	23.07	23.03
15	16QAM	1	74	22.90	22.96	23.14
15	16QAM	36	0	22.79	22.89	22.89
15	16QAM	36	20	22.80	22.92	22.90
15	16QAM	36	39	22.73	22.89	22.87
15	16QAM	75	0	22.77	22.90	22.87
15	64QAM	1	0	22.93	22.93	23.00
15	64QAM	1	37	22.86	23.01	22.97
15	64QAM	1	74	22.78	22.86	23.03
15	64QAM	36	0	22.03	22.08	22.05
15	64QAM	36	20	22.02	22.10	22.07
15	64QAM	36	39	21.98	22.09	22.09
15	64QAM	75	0	21.98	22.09	22.08
Channel				18650	18900	19150
Frequency (MHz)				1855	1880	1905
10	QPSK	1	0	22.82	22.93	22.79
10	QPSK	1	25	22.67	22.83	22.78
10	QPSK	1	49	22.66	22.82	22.82
10	QPSK	25	0	22.73	22.87	22.81
10	QPSK	25	12	22.73	22.88	22.82
10	QPSK	25	25	22.66	22.82	22.76
10	QPSK	50	0	22.71	22.86	22.81
10	16QAM	1	0	23.07	23.00	23.09
10	16QAM	1	25	23.01	23.08	23.07
10	16QAM	1	49	23.00	23.13	23.12
10	16QAM	25	0	22.86	22.93	22.93
10	16QAM	25	12	22.84	22.96	22.94
10	16QAM	25	25	22.76	22.91	22.86
10	16QAM	50	0	22.80	22.90	22.91
10	64QAM	1	0	23.06	23.09	23.04
10	64QAM	1	25	22.90	23.06	23.00
10	64QAM	1	49	22.91	23.01	23.03
10	64QAM	25	0	21.97	22.09	22.04
10	64QAM	25	12	22.00	22.10	22.09



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	21.92	22.04	22.00
10	64QAM	50	0	21.97	22.06	22.03
Channel				18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5
5	QPSK	1	0	22.70	22.83	22.75
5	QPSK	1	12	22.72	22.83	22.86
5	QPSK	1	24	22.61	22.76	22.82
5	QPSK	12	0	22.72	22.86	22.77
5	QPSK	12	7	22.73	22.86	22.82
5	QPSK	12	13	22.67	22.82	22.77
5	QPSK	25	0	22.71	22.82	22.78
5	16QAM	1	0	22.99	23.12	23.06
5	16QAM	1	12	23.03	23.12	23.10
5	16QAM	1	24	22.98	23.07	23.11
5	16QAM	12	0	22.83	22.93	22.92
5	16QAM	12	7	22.81	22.95	22.92
5	16QAM	12	13	22.81	22.89	22.87
5	16QAM	25	0	22.81	22.91	22.86
5	64QAM	1	0	22.95	23.03	22.99
5	64QAM	1	12	22.98	23.03	23.08
5	64QAM	1	24	22.86	22.99	23.05
5	64QAM	12	0	21.96	22.06	22.02
5	64QAM	12	7	21.96	22.10	22.04
5	64QAM	12	13	21.91	22.02	22.00
5	64QAM	25	0	21.90	22.02	21.97
Channel				18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5
3	QPSK	1	0	22.66	22.79	22.81
3	QPSK	1	8	22.70	22.83	22.74
3	QPSK	1	14	22.66	22.75	22.81
3	QPSK	8	0	22.74	22.86	22.77
3	QPSK	8	4	22.78	22.88	22.81
3	QPSK	8	7	22.73	22.85	22.78
3	QPSK	15	0	22.72	22.84	22.80
3	16QAM	1	0	22.98	23.02	23.10
3	16QAM	1	8	22.99	23.10	23.10
3	16QAM	1	14	22.93	23.05	23.13
3	16QAM	8	0	22.87	22.99	22.90
3	16QAM	8	4	22.89	23.02	22.94
3	16QAM	8	7	22.84	22.97	22.89
3	16QAM	15	0	22.83	22.92	22.91
3	64QAM	1	0	22.95	23.04	23.05
3	64QAM	1	8	22.96	23.03	22.98
3	64QAM	1	14	22.91	23.01	23.01
3	64QAM	8	0	21.97	22.06	21.98
3	64QAM	8	4	22.01	22.10	22.05
3	64QAM	8	7	21.94	22.07	22.00
3	64QAM	15	0	21.94	22.04	21.99
Channel				18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3
1.4	QPSK	1	0	22.65	22.76	22.66
1.4	QPSK	1	3	22.71	22.82	22.85
1.4	QPSK	1	5	22.64	22.71	22.77
1.4	QPSK	3	0	22.67	22.79	22.73
1.4	QPSK	3	1	22.71	22.83	22.84
1.4	QPSK	3	3	22.69	22.79	22.82
1.4	QPSK	6	0	22.67	22.80	22.72
1.4	16QAM	1	0	22.95	23.00	22.99
1.4	16QAM	1	3	23.00	23.09	23.00
1.4	16QAM	1	5	22.90	23.02	23.09
1.4	16QAM	3	0	22.76	22.81	22.82
1.4	16QAM	3	1	22.77	22.86	22.93
1.4	16QAM	3	3	22.71	22.82	22.88
1.4	16QAM	6	0	22.85	22.94	22.88
1.4	64QAM	1	0	22.93	22.94	22.89
1.4	64QAM	1	3	22.95	23.02	23.07
1.4	64QAM	1	5	22.87	22.95	22.99
1.4	64QAM	3	0	22.92	22.97	22.92
1.4	64QAM	3	1	22.96	23.01	23.05
1.4	64QAM	3	3	22.91	22.97	23.00
1.4	64QAM	6	0	21.98	22.07	22.01



FCC SAR TEST REPORT

Report No. : FA891147-05

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				20.2		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100
Frequency (MHz)				1860	1880	1900
20	QPSK	1	0	19.75	19.78	19.83
20	QPSK	1	49	19.62	19.75	19.81
20	QPSK	1	99	19.67	19.62	19.82
20	QPSK	50	0	19.73	19.83	19.88
20	QPSK	50	24	19.72	19.82	19.87
20	QPSK	50	50	19.74	19.78	19.82
20	QPSK	100	0	19.79	19.81	19.85
20	16QAM	1	0	20.06	20.08	20.02
20	16QAM	1	49	19.99	20.16	20.07
20	16QAM	1	99	20.04	19.96	20.10
20	16QAM	50	0	19.84	19.93	19.92
20	16QAM	50	24	19.82	19.95	19.91
20	16QAM	50	50	19.85	19.86	19.86
20	16QAM	100	0	19.89	19.86	19.86
20	64QAM	1	0	19.94	19.99	19.93
20	64QAM	1	49	19.88	20.03	20.02
20	64QAM	1	99	19.89	19.87	20.04
20	64QAM	50	0	19.83	19.96	19.94
20	64QAM	50	24	19.82	19.95	19.94
20	64QAM	50	50	19.85	19.89	19.89
20	64QAM	100	0	19.85	19.91	19.92
Channel				18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5
15	QPSK	1	0	19.69	19.68	19.86
15	QPSK	1	37	19.66	19.78	19.80
15	QPSK	1	74	19.59	19.62	19.86
15	QPSK	36	0	19.75	19.81	19.84
15	QPSK	36	20	19.72	19.83	19.91
15	QPSK	36	39	19.68	19.78	19.82
15	QPSK	75	0	19.70	19.79	19.86
15	16QAM	1	0	20.05	19.97	20.11
15	16QAM	1	37	20.01	20.09	20.08
15	16QAM	1	74	19.95	19.97	20.12
15	16QAM	36	0	19.83	19.94	19.87
15	16QAM	36	20	19.83	19.93	19.92
15	16QAM	36	39	19.76	19.88	19.83
15	16QAM	75	0	19.78	19.88	19.87
15	64QAM	1	0	19.91	19.94	20.03
15	64QAM	1	37	19.89	20.04	20.02
15	64QAM	1	74	19.79	19.86	20.02
15	64QAM	36	0	19.84	19.96	19.94
15	64QAM	36	20	19.84	20.00	19.97
15	64QAM	36	39	19.80	19.94	19.90
15	64QAM	75	0	19.77	19.90	19.87
Channel				18650	18900	19150
Frequency (MHz)				1855	1880	1905
10	QPSK	1	0	19.80	19.90	19.83
10	QPSK	1	25	19.70	19.81	19.84
10	QPSK	1	49	19.68	19.81	19.87
10	QPSK	25	0	19.77	19.84	19.88
10	QPSK	25	12	19.76	19.85	19.85
10	QPSK	25	25	19.69	19.81	19.85
10	QPSK	50	0	19.72	19.82	19.85
10	16QAM	1	0	20.14	20.13	20.12
10	16QAM	1	25	20.04	20.12	20.10
10	16QAM	1	49	20.02	20.13	20.13
10	16QAM	25	0	19.85	19.94	19.89
10	16QAM	25	12	19.85	19.93	19.89
10	16QAM	25	25	19.79	19.88	19.85
10	16QAM	50	0	19.81	19.93	19.90
10	64QAM	1	0	20.03	20.15	20.03
10	64QAM	1	25	19.91	20.05	20.02
10	64QAM	1	49	19.93	20.07	20.05
10	64QAM	25	0	19.84	19.93	19.93
10	64QAM	25	12	19.86	19.94	19.92
10	64QAM	25	25	19.79	19.90	19.88



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	50	0	19.82	19.93	19.90
Channel				18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5
5	QPSK	1	0	19.71	19.79	19.79
5	QPSK	1	12	19.71	19.80	19.90
5	QPSK	1	24	19.64	19.76	19.84
5	QPSK	12	0	19.76	19.82	19.85
5	QPSK	12	7	19.77	19.86	19.88
5	QPSK	12	13	19.73	19.79	19.84
5	QPSK	25	0	19.74	19.82	19.85
5	16QAM	1	0	20.04	20.12	20.08
5	16QAM	1	12	20.04	20.15	20.12
5	16QAM	1	24	19.98	20.09	20.12
5	16QAM	12	0	19.84	19.91	19.87
5	16QAM	12	7	19.86	19.93	19.91
5	16QAM	12	13	19.81	19.89	19.84
5	16QAM	25	0	19.82	19.89	19.86
5	64QAM	1	0	19.93	20.03	20.02
5	64QAM	1	12	19.92	20.06	20.11
5	64QAM	1	24	19.86	19.99	20.04
5	64QAM	12	0	19.85	19.97	19.92
5	64QAM	12	7	19.89	20.00	19.96
5	64QAM	12	13	19.82	19.96	19.91
5	64QAM	25	0	19.79	19.91	19.87
Channel				18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5
3	QPSK	1	0	19.69	19.81	19.87
3	QPSK	1	8	19.72	19.78	19.79
3	QPSK	1	14	19.67	19.76	19.86
3	QPSK	8	0	19.76	19.82	19.81
3	QPSK	8	4	19.80	19.85	19.86
3	QPSK	8	7	19.72	19.83	19.83
3	QPSK	15	0	19.73	19.83	19.82
3	16QAM	1	0	20.03	20.08	20.16
3	16QAM	1	8	20.06	20.10	20.10
3	16QAM	1	14	20.00	20.03	20.14
3	16QAM	8	0	19.84	19.94	19.90
3	16QAM	8	4	19.90	19.99	19.92
3	16QAM	8	7	19.86	19.95	19.87
3	16QAM	15	0	19.85	19.90	19.84
3	64QAM	1	0	19.89	20.04	20.03
3	64QAM	1	8	19.93	20.04	19.98
3	64QAM	1	14	19.87	19.98	20.02
3	64QAM	8	0	19.85	19.97	19.90
3	64QAM	8	4	19.88	19.98	19.91
3	64QAM	8	7	19.86	19.96	19.90
3	64QAM	15	0	19.83	19.93	19.87
Channel				18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3
1.4	QPSK	1	0	19.67	19.73	19.73
1.4	QPSK	1	3	19.72	19.81	19.89
1.4	QPSK	1	5	19.65	19.72	19.82
1.4	QPSK	3	0	19.69	19.76	19.74
1.4	QPSK	3	1	19.73	19.80	19.90
1.4	QPSK	3	3	19.71	19.77	19.85
1.4	QPSK	6	0	19.70	19.78	19.78
1.4	16QAM	1	0	20.00	20.04	20.01
1.4	16QAM	1	3	20.06	20.14	20.12
1.4	16QAM	1	5	19.97	20.04	20.10
1.4	16QAM	3	0	19.78	19.85	19.82
1.4	16QAM	3	1	19.82	19.91	19.96
1.4	16QAM	3	3	19.75	19.84	19.90
1.4	16QAM	6	0	19.85	19.94	19.90
1.4	64QAM	1	0	19.83	19.99	19.95
1.4	64QAM	1	3	19.93	20.04	20.10
1.4	64QAM	1	5	19.86	19.95	20.02
1.4	64QAM	3	0	19.87	19.99	19.95
1.4	64QAM	3	1	19.92	20.06	20.08
1.4	64QAM	3	3	19.89	19.98	19.99
1.4	64QAM	6	0	19.80	19.87	19.83



<LTE Band 4>

<WiFi off>

Power Selection				Head / Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				24.5		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300
Frequency (MHz)				1720	1732.5	1745
20	QPSK	1	0	23.48	23.47	23.51
20	QPSK	1	49	23.44	23.41	23.46
20	QPSK	1	99	23.37	23.33	23.39
20	QPSK	50	0	22.46	22.46	22.53
20	QPSK	50	24	22.49	22.45	22.52
20	QPSK	50	50	22.42	22.36	22.47
20	QPSK	100	0	22.44	22.41	22.47
20	16QAM	1	0	22.83	22.80	22.89
20	16QAM	1	49	22.76	22.75	22.81
20	16QAM	1	99	22.69	22.64	22.70
20	16QAM	50	0	21.61	21.54	21.61
20	16QAM	50	24	21.54	21.55	21.63
20	16QAM	50	50	21.51	21.48	21.52
20	16QAM	100	0	21.53	21.51	21.57
20	64QAM	1	0	21.75	21.70	21.75
20	64QAM	1	49	21.70	21.65	21.72
20	64QAM	1	99	21.60	21.54	21.63
20	64QAM	50	0	20.59	20.56	20.63
20	64QAM	50	24	20.58	20.54	20.61
20	64QAM	50	50	20.50	20.47	20.57
20	64QAM	100	0	20.53	20.50	20.58
Channel				20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	23.49	23.48	23.50
15	QPSK	1	37	23.46	23.39	23.48
15	QPSK	1	74	23.39	23.35	23.40
15	QPSK	36	0	22.51	22.42	22.50
15	QPSK	36	20	22.50	22.44	22.51
15	QPSK	36	39	22.46	22.36	22.45
15	QPSK	75	0	22.47	22.41	22.48
15	16QAM	1	0	22.84	22.81	22.88
15	16QAM	1	37	22.79	22.74	22.82
15	16QAM	1	74	22.70	22.66	22.73
15	16QAM	36	0	21.56	21.53	21.58
15	16QAM	36	20	21.58	21.51	21.62
15	16QAM	36	39	21.51	21.47	21.53
15	16QAM	75	0	21.53	21.49	21.59
15	64QAM	1	0	21.75	21.70	21.80
15	64QAM	1	37	21.72	21.67	21.75
15	64QAM	1	74	21.63	21.58	21.62
15	64QAM	36	0	20.62	20.56	20.61
15	64QAM	36	20	20.61	20.55	20.65
15	64QAM	36	39	20.57	20.47	20.55
15	64QAM	75	0	20.55	20.48	20.54
Channel				20000	20175	20350
Frequency (MHz)				1715	1732.5	1750
10	QPSK	1	0	23.50	23.47	23.50
10	QPSK	1	25	23.47	23.45	23.47
10	QPSK	1	49	23.41	23.35	23.43
10	QPSK	25	0	22.52	22.43	22.52
10	QPSK	25	12	22.52	22.48	22.52
10	QPSK	25	25	22.47	22.38	22.47
10	QPSK	50	0	22.47	22.42	22.51
10	16QAM	1	0	22.87	22.83	22.86
10	16QAM	1	25	22.86	22.80	22.83
10	16QAM	1	49	22.79	22.71	22.75
10	16QAM	25	0	21.60	21.53	21.64
10	16QAM	25	12	21.59	21.55	21.59
10	16QAM	25	25	21.56	21.49	21.56
10	16QAM	50	0	21.55	21.51	21.60
10	64QAM	1	0	21.75	21.69	21.79
10	64QAM	1	25	21.74	21.68	21.75
10	64QAM	1	49	21.67	21.60	21.67



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	0	20.57	20.56	20.60
10	64QAM	25	12	20.59	20.54	20.63
10	64QAM	25	25	20.58	20.48	20.58
10	64QAM	50	0	20.55	20.51	20.60
Channel				19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	23.49	23.46	23.45
5	QPSK	1	12	23.50	23.43	23.48
5	QPSK	1	24	23.41	23.38	23.41
5	QPSK	12	0	22.49	22.45	22.49
5	QPSK	12	7	22.53	22.50	22.52
5	QPSK	12	13	22.49	22.44	22.48
5	QPSK	25	0	22.48	22.42	22.50
5	16QAM	1	0	22.82	22.80	22.84
5	16QAM	1	12	22.86	22.79	22.83
5	16QAM	1	24	22.81	22.70	22.74
5	16QAM	12	0	21.58	21.56	21.58
5	16QAM	12	7	21.61	21.53	21.61
5	16QAM	12	13	21.55	21.48	21.58
5	16QAM	25	0	21.55	21.53	21.57
5	64QAM	1	0	21.74	21.67	21.73
5	64QAM	1	12	21.73	21.71	21.75
5	64QAM	1	24	21.69	21.61	21.68
5	64QAM	12	0	20.61	20.59	20.63
5	64QAM	12	7	20.66	20.60	20.64
5	64QAM	12	13	20.60	20.53	20.58
5	64QAM	25	0	20.59	20.51	20.54
Channel				19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	23.49	23.43	23.47
3	QPSK	1	8	23.50	23.45	23.46
3	QPSK	1	14	23.49	23.39	23.44
3	QPSK	8	0	22.50	22.45	22.48
3	QPSK	8	4	22.57	22.48	22.52
3	QPSK	8	7	22.49	22.43	22.48
3	QPSK	15	0	22.47	22.43	22.49
3	16QAM	1	0	22.80	22.75	22.78
3	16QAM	1	8	22.89	22.78	22.81
3	16QAM	1	14	22.79	22.75	22.77
3	16QAM	8	0	21.65	21.56	21.61
3	16QAM	8	4	21.66	21.62	21.65
3	16QAM	8	7	21.66	21.58	21.60
3	16QAM	15	0	21.59	21.56	21.60
3	64QAM	1	0	21.76	21.69	21.72
3	64QAM	1	8	21.78	21.70	21.74
3	64QAM	1	14	21.74	21.66	21.69
3	64QAM	8	0	20.64	20.57	20.61
3	64QAM	8	4	20.65	20.60	20.63
3	64QAM	8	7	20.62	20.55	20.61
3	64QAM	15	0	20.61	20.52	20.60
Channel				19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.41	23.38	23.40
1.4	QPSK	1	3	23.49	23.43	23.47
1.4	QPSK	1	5	23.42	23.34	23.40
1.4	QPSK	3	0	23.47	23.40	23.42
1.4	QPSK	3	1	23.49	23.43	23.49
1.4	QPSK	3	3	23.48	23.42	23.44
1.4	QPSK	6	0	22.43	22.35	22.41
1.4	16QAM	1	0	22.79	22.66	22.75
1.4	16QAM	1	3	22.83	22.75	22.81
1.4	16QAM	1	5	22.71	22.70	22.73
1.4	16QAM	3	0	22.58	22.49	22.55
1.4	16QAM	3	1	22.60	22.56	22.58
1.4	16QAM	3	3	22.57	22.47	22.51
1.4	16QAM	6	0	21.59	21.54	21.58
1.4	64QAM	1	0	21.69	21.60	21.67
1.4	64QAM	1	3	21.76	21.69	21.72
1.4	64QAM	1	5	21.69	21.61	21.63
1.4	64QAM	3	0	21.66	21.64	21.65
1.4	64QAM	3	1	21.71	21.68	21.69
1.4	64QAM	3	3	21.67	21.61	21.61
1.4	64QAM	6	0	20.52	20.46	20.52



FCC SAR TEST REPORT

Report No. : FA891147-05

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				24.5		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300
Frequency (MHz)				1720	1732.5	1745
20	QPSK	1	0	23.48	23.47	23.51
20	QPSK	1	49	23.44	23.41	23.46
20	QPSK	1	99	23.37	23.33	23.39
20	QPSK	50	0	22.46	22.46	22.53
20	QPSK	50	24	22.49	22.45	22.52
20	QPSK	50	50	22.42	22.36	22.47
20	QPSK	100	0	22.44	22.41	22.47
20	16QAM	1	0	22.83	22.80	22.89
20	16QAM	1	49	22.76	22.75	22.81
20	16QAM	1	99	22.69	22.64	22.70
20	16QAM	50	0	21.61	21.54	21.61
20	16QAM	50	24	21.54	21.55	21.63
20	16QAM	50	50	21.51	21.48	21.52
20	16QAM	100	0	21.53	21.51	21.57
20	64QAM	1	0	21.75	21.70	21.75
20	64QAM	1	49	21.70	21.65	21.72
20	64QAM	1	99	21.60	21.54	21.63
20	64QAM	50	0	20.59	20.56	20.63
20	64QAM	50	24	20.58	20.54	20.61
20	64QAM	50	50	20.50	20.47	20.57
20	64QAM	100	0	20.53	20.50	20.58
Channel				20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	23.49	23.48	23.50
15	QPSK	1	37	23.46	23.39	23.48
15	QPSK	1	74	23.39	23.35	23.40
15	QPSK	36	0	22.51	22.42	22.50
15	QPSK	36	20	22.50	22.44	22.51
15	QPSK	36	39	22.46	22.36	22.45
15	QPSK	75	0	22.47	22.41	22.48
15	16QAM	1	0	22.84	22.81	22.88
15	16QAM	1	37	22.79	22.74	22.82
15	16QAM	1	74	22.70	22.66	22.73
15	16QAM	36	0	21.56	21.53	21.58
15	16QAM	36	20	21.58	21.51	21.62
15	16QAM	36	39	21.51	21.47	21.53
15	16QAM	75	0	21.53	21.49	21.59
15	64QAM	1	0	21.75	21.70	21.80
15	64QAM	1	37	21.72	21.67	21.75
15	64QAM	1	74	21.63	21.58	21.62
15	64QAM	36	0	20.62	20.56	20.61
15	64QAM	36	20	20.61	20.55	20.65
15	64QAM	36	39	20.57	20.47	20.55
15	64QAM	75	0	20.55	20.48	20.54
Channel				20000	20175	20350
Frequency (MHz)				1715	1732.5	1750
10	QPSK	1	0	23.50	23.47	23.50
10	QPSK	1	25	23.47	23.45	23.47
10	QPSK	1	49	23.41	23.35	23.43
10	QPSK	25	0	22.52	22.43	22.52
10	QPSK	25	12	22.52	22.48	22.52
10	QPSK	25	25	22.47	22.38	22.47
10	QPSK	50	0	22.47	22.42	22.51
10	16QAM	1	0	22.87	22.83	22.86
10	16QAM	1	25	22.86	22.80	22.83
10	16QAM	1	49	22.79	22.71	22.75
10	16QAM	25	0	21.60	21.53	21.64
10	16QAM	25	12	21.59	21.55	21.59
10	16QAM	25	25	21.56	21.49	21.56
10	16QAM	50	0	21.55	21.51	21.60
10	64QAM	1	0	21.75	21.69	21.79
10	64QAM	1	25	21.74	21.68	21.75
10	64QAM	1	49	21.67	21.60	21.67
10	64QAM	25	0	20.57	20.56	20.60
10	64QAM	25	12	20.59	20.54	20.63
10	64QAM	25	25	20.58	20.48	20.58



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	50	0	20.55	20.51	20.60
Channel				19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	23.49	23.46	23.45
5	QPSK	1	12	23.50	23.43	23.48
5	QPSK	1	24	23.41	23.38	23.41
5	QPSK	12	0	22.49	22.45	22.49
5	QPSK	12	7	22.53	22.50	22.52
5	QPSK	12	13	22.49	22.44	22.48
5	QPSK	25	0	22.48	22.42	22.50
5	16QAM	1	0	22.82	22.80	22.84
5	16QAM	1	12	22.86	22.79	22.83
5	16QAM	1	24	22.81	22.70	22.74
5	16QAM	12	0	21.58	21.56	21.58
5	16QAM	12	7	21.61	21.53	21.61
5	16QAM	12	13	21.55	21.48	21.58
5	16QAM	25	0	21.55	21.53	21.57
5	64QAM	1	0	21.74	21.67	21.73
5	64QAM	1	12	21.73	21.71	21.75
5	64QAM	1	24	21.69	21.61	21.68
5	64QAM	12	0	20.61	20.59	20.63
5	64QAM	12	7	20.66	20.60	20.64
5	64QAM	12	13	20.60	20.53	20.58
5	64QAM	25	0	20.59	20.51	20.54
Channel				19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	23.49	23.43	23.47
3	QPSK	1	8	23.50	23.45	23.46
3	QPSK	1	14	23.49	23.39	23.44
3	QPSK	8	0	22.50	22.45	22.48
3	QPSK	8	4	22.57	22.48	22.52
3	QPSK	8	7	22.49	22.43	22.48
3	QPSK	15	0	22.47	22.43	22.49
3	16QAM	1	0	22.80	22.75	22.78
3	16QAM	1	8	22.89	22.78	22.81
3	16QAM	1	14	22.79	22.75	22.77
3	16QAM	8	0	21.65	21.56	21.61
3	16QAM	8	4	21.66	21.62	21.65
3	16QAM	8	7	21.66	21.58	21.60
3	16QAM	15	0	21.59	21.56	21.60
3	64QAM	1	0	21.76	21.69	21.72
3	64QAM	1	8	21.78	21.70	21.74
3	64QAM	1	14	21.74	21.66	21.69
3	64QAM	8	0	20.64	20.57	20.61
3	64QAM	8	4	20.65	20.60	20.63
3	64QAM	8	7	20.62	20.55	20.61
3	64QAM	15	0	20.61	20.52	20.60
Channel				19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.41	23.38	23.40
1.4	QPSK	1	3	23.49	23.43	23.47
1.4	QPSK	1	5	23.42	23.34	23.40
1.4	QPSK	3	0	23.47	23.40	23.42
1.4	QPSK	3	1	23.49	23.43	23.49
1.4	QPSK	3	3	23.48	23.42	23.44
1.4	QPSK	6	0	22.43	22.35	22.41
1.4	16QAM	1	0	22.79	22.66	22.75
1.4	16QAM	1	3	22.83	22.75	22.81
1.4	16QAM	1	5	22.71	22.70	22.73
1.4	16QAM	3	0	22.58	22.49	22.55
1.4	16QAM	3	1	22.60	22.56	22.58
1.4	16QAM	3	3	22.57	22.47	22.51
1.4	16QAM	6	0	21.59	21.54	21.58
1.4	64QAM	1	0	21.69	21.60	21.67
1.4	64QAM	1	3	21.76	21.69	21.72
1.4	64QAM	1	5	21.69	21.61	21.63
1.4	64QAM	3	0	21.66	21.64	21.65
1.4	64QAM	3	1	21.71	21.68	21.69
1.4	64QAM	3	3	21.67	21.61	21.61
1.4	64QAM	6	0	20.52	20.46	20.52



<WiFi on>

Power Selection				Head		
Transmit Antenna				Ant 0		
Max. Power				24.5		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300
Frequency (MHz)				1720	1732.5	1745
20	QPSK	1	0	23.48	23.47	23.51
20	QPSK	1	49	23.44	23.41	23.46
20	QPSK	1	99	23.37	23.33	23.39
20	QPSK	50	0	22.46	22.46	22.53
20	QPSK	50	24	22.49	22.45	22.52
20	QPSK	50	50	22.42	22.36	22.47
20	QPSK	100	0	22.44	22.41	22.47
20	16QAM	1	0	22.83	22.80	22.89
20	16QAM	1	49	22.76	22.75	22.81
20	16QAM	1	99	22.69	22.64	22.70
20	16QAM	50	0	21.61	21.54	21.61
20	16QAM	50	24	21.54	21.55	21.63
20	16QAM	50	50	21.51	21.48	21.52
20	16QAM	100	0	21.53	21.51	21.57
20	64QAM	1	0	21.75	21.70	21.75
20	64QAM	1	49	21.70	21.65	21.72
20	64QAM	1	99	21.60	21.54	21.63
20	64QAM	50	0	20.59	20.56	20.63
20	64QAM	50	24	20.58	20.54	20.61
20	64QAM	50	50	20.50	20.47	20.57
20	64QAM	100	0	20.53	20.50	20.58
Channel				20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	23.49	23.48	23.50
15	QPSK	1	37	23.46	23.39	23.48
15	QPSK	1	74	23.39	23.35	23.40
15	QPSK	36	0	22.51	22.42	22.50
15	QPSK	36	20	22.50	22.44	22.51
15	QPSK	36	39	22.46	22.36	22.45
15	QPSK	75	0	22.47	22.41	22.48
15	16QAM	1	0	22.84	22.81	22.88
15	16QAM	1	37	22.79	22.74	22.82
15	16QAM	1	74	22.70	22.66	22.73
15	16QAM	36	0	21.56	21.53	21.58
15	16QAM	36	20	21.58	21.51	21.62
15	16QAM	36	39	21.51	21.47	21.53
15	16QAM	75	0	21.53	21.49	21.59
15	64QAM	1	0	21.75	21.70	21.80
15	64QAM	1	37	21.72	21.67	21.75
15	64QAM	1	74	21.63	21.58	21.62
15	64QAM	36	0	20.62	20.56	20.61
15	64QAM	36	20	20.61	20.55	20.65
15	64QAM	36	39	20.57	20.47	20.55
15	64QAM	75	0	20.55	20.48	20.54
Channel				20000	20175	20350
Frequency (MHz)				1715	1732.5	1750
10	QPSK	1	0	23.50	23.47	23.50
10	QPSK	1	25	23.47	23.45	23.47
10	QPSK	1	49	23.41	23.35	23.43
10	QPSK	25	0	22.52	22.43	22.52
10	QPSK	25	12	22.52	22.48	22.52
10	QPSK	25	25	22.47	22.38	22.47
10	QPSK	50	0	22.47	22.42	22.51
10	16QAM	1	0	22.87	22.83	22.86
10	16QAM	1	25	22.86	22.80	22.83
10	16QAM	1	49	22.79	22.71	22.75
10	16QAM	25	0	21.60	21.53	21.64
10	16QAM	25	12	21.59	21.55	21.59
10	16QAM	25	25	21.56	21.49	21.56
10	16QAM	50	0	21.55	21.51	21.60
10	64QAM	1	0	21.75	21.69	21.79
10	64QAM	1	25	21.74	21.68	21.75
10	64QAM	1	49	21.67	21.60	21.67
10	64QAM	25	0	20.57	20.56	20.60
10	64QAM	25	12	20.59	20.54	20.63



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	20.58	20.48	20.58
10	64QAM	50	0	20.55	20.51	20.60
Channel				19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	23.49	23.46	23.45
5	QPSK	1	12	23.50	23.43	23.48
5	QPSK	1	24	23.41	23.38	23.41
5	QPSK	12	0	22.49	22.45	22.49
5	QPSK	12	7	22.53	22.50	22.52
5	QPSK	12	13	22.49	22.44	22.48
5	QPSK	25	0	22.48	22.42	22.50
5	16QAM	1	0	22.82	22.80	22.84
5	16QAM	1	12	22.86	22.79	22.83
5	16QAM	1	24	22.81	22.70	22.74
5	16QAM	12	0	21.58	21.56	21.58
5	16QAM	12	7	21.61	21.53	21.61
5	16QAM	12	13	21.55	21.48	21.58
5	16QAM	25	0	21.55	21.53	21.57
5	64QAM	1	0	21.74	21.67	21.73
5	64QAM	1	12	21.73	21.71	21.75
5	64QAM	1	24	21.69	21.61	21.68
5	64QAM	12	0	20.61	20.59	20.63
5	64QAM	12	7	20.66	20.60	20.64
5	64QAM	12	13	20.60	20.53	20.58
5	64QAM	25	0	20.59	20.51	20.54
Channel				19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	23.49	23.43	23.47
3	QPSK	1	8	23.50	23.45	23.46
3	QPSK	1	14	23.49	23.39	23.44
3	QPSK	8	0	22.50	22.45	22.48
3	QPSK	8	4	22.57	22.48	22.52
3	QPSK	8	7	22.49	22.43	22.48
3	QPSK	15	0	22.47	22.43	22.49
3	16QAM	1	0	22.80	22.75	22.78
3	16QAM	1	8	22.89	22.78	22.81
3	16QAM	1	14	22.79	22.75	22.77
3	16QAM	8	0	21.65	21.56	21.61
3	16QAM	8	4	21.66	21.62	21.65
3	16QAM	8	7	21.66	21.58	21.60
3	16QAM	15	0	21.59	21.56	21.60
3	64QAM	1	0	21.76	21.69	21.72
3	64QAM	1	8	21.78	21.70	21.74
3	64QAM	1	14	21.74	21.66	21.69
3	64QAM	8	0	20.64	20.57	20.61
3	64QAM	8	4	20.65	20.60	20.63
3	64QAM	8	7	20.62	20.55	20.61
3	64QAM	15	0	20.61	20.52	20.60
Channel				19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.41	23.38	23.40
1.4	QPSK	1	3	23.49	23.43	23.47
1.4	QPSK	1	5	23.42	23.34	23.40
1.4	QPSK	3	0	23.47	23.40	23.42
1.4	QPSK	3	1	23.49	23.43	23.49
1.4	QPSK	3	3	23.48	23.42	23.44
1.4	QPSK	6	0	22.43	22.35	22.41
1.4	16QAM	1	0	22.79	22.66	22.75
1.4	16QAM	1	3	22.83	22.75	22.81
1.4	16QAM	1	5	22.71	22.70	22.73
1.4	16QAM	3	0	22.58	22.49	22.55
1.4	16QAM	3	1	22.60	22.56	22.58
1.4	16QAM	3	3	22.57	22.47	22.51
1.4	16QAM	6	0	21.59	21.54	21.58
1.4	64QAM	1	0	21.69	21.60	21.67
1.4	64QAM	1	3	21.76	21.69	21.72
1.4	64QAM	1	5	21.69	21.61	21.63
1.4	64QAM	3	0	21.66	21.64	21.65
1.4	64QAM	3	1	21.71	21.68	21.69
1.4	64QAM	3	3	21.67	21.61	21.61
1.4	64QAM	6	0	20.52	20.46	20.52



FCC SAR TEST REPORT

Report No. : FA891147-05

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				21		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300
Frequency (MHz)				1720	1732.5	1745
20	QPSK	1	0	19.97	19.94	19.91
20	QPSK	1	49	19.91	19.87	19.85
20	QPSK	1	99	19.82	19.78	19.75
20	QPSK	50	0	19.98	19.96	19.91
20	QPSK	50	24	19.87	19.95	19.93
20	QPSK	50	50	19.91	19.88	19.85
20	QPSK	100	0	19.94	19.92	19.90
20	16QAM	1	0	20.32	20.24	20.23
20	16QAM	1	49	20.19	20.16	20.20
20	16QAM	1	99	20.12	20.10	20.08
20	16QAM	50	0	20.09	20.05	20.04
20	16QAM	50	24	20.08	20.03	20.04
20	16QAM	50	50	20.01	19.99	19.96
20	16QAM	100	0	20.06	20.03	19.96
20	64QAM	1	0	20.24	20.20	20.13
20	64QAM	1	49	20.21	20.13	20.12
20	64QAM	1	99	20.08	19.99	20.01
20	64QAM	50	0	20.10	20.08	20.03
20	64QAM	50	24	20.13	20.05	20.04
20	64QAM	50	50	20.05	20.03	19.98
20	64QAM	100	0	20.06	20.04	19.99
Channel				20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	19.96	19.92	19.88
15	QPSK	1	37	19.93	19.86	19.86
15	QPSK	1	74	19.86	19.79	19.78
15	QPSK	36	0	19.99	19.96	19.93
15	QPSK	36	20	20.01	19.95	19.94
15	QPSK	36	39	19.94	19.89	19.85
15	QPSK	75	0	19.94	19.90	19.89
15	16QAM	1	0	20.31	20.26	20.23
15	16QAM	1	37	20.27	20.18	20.21
15	16QAM	1	74	20.18	20.16	20.02
15	16QAM	36	0	20.09	20.03	19.98
15	16QAM	36	20	20.09	20.02	20.00
15	16QAM	36	39	20.01	19.97	19.94
15	16QAM	75	0	20.08	20.03	19.96
15	64QAM	1	0	20.23	20.22	20.14
15	64QAM	1	37	20.21	20.13	20.10
15	64QAM	1	74	20.11	20.04	20.02
15	64QAM	36	0	20.11	20.07	20.01
15	64QAM	36	20	20.13	20.07	20.04
15	64QAM	36	39	20.09	20.03	19.99
15	64QAM	75	0	20.06	20.02	19.97
Channel				20000	20175	20350
Frequency (MHz)				1715	1732.5	1750
10	QPSK	1	0	20.00	19.97	19.90
10	QPSK	1	25	19.95	19.92	19.86
10	QPSK	1	49	19.89	19.85	19.78
10	QPSK	25	0	19.99	19.96	19.92
10	QPSK	25	12	20.02	19.95	19.92
10	QPSK	25	25	19.98	19.89	19.88
10	QPSK	50	0	19.97	19.94	19.88
10	16QAM	1	0	19.98	20.26	20.27
10	16QAM	1	25	20.30	20.28	20.22
10	16QAM	1	49	20.17	20.19	20.09
10	16QAM	25	0	20.14	20.07	20.01
10	16QAM	25	12	20.10	20.07	20.05
10	16QAM	25	25	20.05	20.02	20.00
10	16QAM	50	0	20.08	20.05	20.01
10	64QAM	1	0	20.30	20.23	20.15
10	64QAM	1	25	20.21	20.16	20.14
10	64QAM	1	49	20.18	20.09	20.07
10	64QAM	25	0	20.14	20.10	20.04
10	64QAM	25	12	20.12	20.08	20.03
10	64QAM	25	25	20.06	20.00	20.00



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	50	0	20.11	20.06	20.01
Channel				19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	19.96	19.93	19.86
5	QPSK	1	12	19.98	19.94	19.87
5	QPSK	1	24	19.92	19.86	19.78
5	QPSK	12	0	19.98	19.96	19.88
5	QPSK	12	7	20.02	19.96	19.92
5	QPSK	12	13	19.99	19.93	19.88
5	QPSK	25	0	20.02	19.93	19.90
5	16QAM	1	0	20.30	20.18	20.20
5	16QAM	1	12	20.30	20.28	20.23
5	16QAM	1	24	20.26	20.21	20.08
5	16QAM	12	0	20.12	20.05	20.03
5	16QAM	12	7	20.15	20.08	20.03
5	16QAM	12	13	20.08	20.03	19.95
5	16QAM	25	0	20.09	20.06	19.99
5	64QAM	1	0	20.27	20.14	20.10
5	64QAM	1	12	20.28	20.18	20.14
5	64QAM	1	24	20.15	20.10	20.05
5	64QAM	12	0	20.19	20.12	20.04
5	64QAM	12	7	20.19	20.14	20.06
5	64QAM	12	13	20.17	20.08	20.01
5	64QAM	25	0	20.12	20.06	19.97
Channel				19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	19.94	19.87	19.95
3	QPSK	1	8	19.93	19.87	19.94
3	QPSK	1	14	19.92	19.84	19.88
3	QPSK	8	0	20.01	19.91	19.97
3	QPSK	8	4	20.00	19.95	20.03
3	QPSK	8	7	19.99	19.90	19.96
3	QPSK	15	0	19.98	19.88	19.97
3	16QAM	1	0	20.23	20.14	20.24
3	16QAM	1	8	20.27	20.24	20.27
3	16QAM	1	14	20.27	20.17	20.12
3	16QAM	8	0	20.10	20.05	20.09
3	16QAM	8	4	20.19	20.10	20.13
3	16QAM	8	7	20.08	20.07	20.08
3	16QAM	15	0	20.07	20.03	20.05
3	64QAM	1	0	20.22	20.15	20.17
3	64QAM	1	8	20.21	20.14	20.20
3	64QAM	1	14	20.17	20.09	20.19
3	64QAM	8	0	20.14	20.06	20.12
3	64QAM	8	4	20.16	20.10	20.15
3	64QAM	8	7	20.12	20.03	20.09
3	64QAM	15	0	20.11	20.04	20.08
Channel				19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	19.88	19.80	19.85
1.4	QPSK	1	3	19.95	19.88	19.93
1.4	QPSK	1	5	19.86	19.78	19.86
1.4	QPSK	3	0	19.90	19.84	19.92
1.4	QPSK	3	1	19.96	19.89	19.97
1.4	QPSK	3	3	19.91	19.82	19.88
1.4	QPSK	6	0	19.90	19.84	19.92
1.4	16QAM	1	0	20.20	20.16	20.19
1.4	16QAM	1	3	20.30	20.24	20.24
1.4	16QAM	1	5	20.22	20.20	20.16
1.4	16QAM	3	0	19.98	19.96	20.00
1.4	16QAM	3	1	20.03	19.99	20.05
1.4	16QAM	3	3	20.00	19.93	19.94
1.4	16QAM	6	0	20.09	20.03	20.04
1.4	64QAM	1	0	20.16	20.03	20.16
1.4	64QAM	1	3	20.22	20.14	20.19
1.4	64QAM	1	5	20.12	20.05	20.11
1.4	64QAM	3	0	20.15	20.09	20.13
1.4	64QAM	3	1	20.21	20.11	20.19
1.4	64QAM	3	3	20.13	20.08	20.12
1.4	64QAM	6	0	20.03	19.95	20.01



<LTE Band 5>

SAR for LTE B5 is covered by LTE B26 due to overlapping frequency range, less or same maximum tune-up limit and the same channel bandwidth

<LTE Band 12>

<WiFi off>

Power Selection				Head / Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130
Frequency (MHz)				704	707.5	711
10	QPSK	1	0	24.69	24.76	24.86
10	QPSK	1	25	24.83	24.91	24.86
10	QPSK	1	49	24.90	24.86	24.87
10	QPSK	25	0	23.82	23.93	23.88
10	QPSK	25	12	23.95	23.95	23.89
10	QPSK	25	25	23.91	23.90	23.86
10	QPSK	50	0	23.92	23.89	23.86
10	16QAM	1	0	23.98	24.10	24.19
10	16QAM	1	25	24.12	24.23	24.19
10	16QAM	1	49	24.24	24.17	24.15
10	16QAM	25	0	22.91	23.00	22.97
10	16QAM	25	12	23.04	23.02	22.99
10	16QAM	25	25	23.02	23.00	22.92
10	16QAM	50	0	23.05	23.00	22.96
10	64QAM	1	0	22.91	22.99	23.08
10	64QAM	1	25	23.03	23.14	23.10
10	64QAM	1	49	23.16	23.07	23.11
10	64QAM	25	0	21.93	21.99	21.97
10	64QAM	25	12	22.05	22.03	21.99
10	64QAM	25	25	22.04	22.00	21.93
10	64QAM	50	0	22.05	22.03	21.98
Channel				23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5
5	QPSK	1	0	24.68	24.77	24.81
5	QPSK	1	12	24.82	24.86	24.89
5	QPSK	1	24	24.82	24.85	24.85
5	QPSK	12	0	23.86	23.91	23.84
5	QPSK	12	7	23.87	23.90	23.96
5	QPSK	12	13	23.86	23.91	23.93
5	QPSK	25	0	23.86	23.90	23.81
5	16QAM	1	0	24.00	24.08	24.12
5	16QAM	1	12	24.12	24.22	24.23
5	16QAM	1	24	24.12	24.21	24.14
5	16QAM	12	0	22.91	22.95	22.89
5	16QAM	12	7	22.94	23.02	23.03
5	16QAM	12	13	22.91	22.96	23.00
5	16QAM	25	0	22.94	22.97	22.89
5	64QAM	1	0	22.90	22.99	23.03
5	64QAM	1	12	23.04	23.10	23.11
5	64QAM	1	24	23.04	23.09	23.07
5	64QAM	12	0	21.97	22.02	21.94
5	64QAM	12	7	22.01	22.06	22.07
5	64QAM	12	13	21.96	22.03	22.05
5	64QAM	25	0	21.93	21.98	21.92
Channel				23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5
3	QPSK	1	0	24.71	24.86	24.90
3	QPSK	1	8	24.71	24.86	24.86
3	QPSK	1	14	24.81	24.87	24.85
3	QPSK	8	0	23.76	23.87	23.90
3	QPSK	8	4	23.79	23.93	23.95
3	QPSK	8	7	23.84	23.89	23.90
3	QPSK	15	0	23.86	23.88	23.92
3	16QAM	1	0	23.99	24.20	24.21
3	16QAM	1	8	24.03	24.23	24.18
3	16QAM	1	14	24.12	24.20	24.12



FCC SAR TEST REPORT

Report No. : FA891147-05

3	16QAM	8	0	22.87	22.99	23.00
3	16QAM	8	4	22.88	23.02	23.03
3	16QAM	8	7	22.95	23.01	23.02
3	16QAM	15	0	22.94	22.99	22.99
3	64QAM	1	0	22.91	23.10	23.11
3	64QAM	1	8	22.93	23.12	23.10
3	64QAM	1	14	23.05	23.10	23.09
3	64QAM	8	0	21.85	21.99	22.01
3	64QAM	8	4	21.90	22.02	22.05
3	64QAM	8	7	21.95	21.99	22.01
3	64QAM	15	0	21.95	21.98	21.99
Channel				23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3
1.4	QPSK	1	0	24.60	24.79	24.75
1.4	QPSK	1	3	24.66	24.86	24.80
1.4	QPSK	1	5	24.61	24.78	24.51
1.4	QPSK	3	0	24.64	24.83	24.77
1.4	QPSK	3	1	24.68	24.85	24.81
1.4	QPSK	3	3	24.64	24.82	24.62
1.4	QPSK	6	0	23.67	23.80	23.80
1.4	16QAM	1	0	23.92	24.09	24.04
1.4	16QAM	1	3	24.03	24.18	24.02
1.4	16QAM	1	5	23.91	24.11	23.80
1.4	16QAM	3	0	23.72	23.88	23.83
1.4	16QAM	3	1	23.77	23.93	23.86
1.4	16QAM	3	3	23.71	23.88	23.70
1.4	16QAM	6	0	22.81	22.94	22.93
1.4	64QAM	1	0	22.83	23.01	22.99
1.4	64QAM	1	3	22.92	23.06	22.89
1.4	64QAM	1	5	22.84	23.00	22.78
1.4	64QAM	3	0	22.85	23.01	22.97
1.4	64QAM	3	1	22.89	23.06	23.04
1.4	64QAM	3	3	22.84	23.03	22.86
1.4	64QAM	6	0	21.76	21.89	21.89

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130
Frequency (MHz)				704	707.5	711
10	QPSK	1	0	24.69	24.76	24.86
10	QPSK	1	25	24.83	24.91	24.86
10	QPSK	1	49	24.90	24.86	24.87
10	QPSK	25	0	23.82	23.93	23.88
10	QPSK	25	12	23.95	23.95	23.89
10	QPSK	25	25	23.91	23.90	23.86
10	QPSK	50	0	23.92	23.89	23.86
10	16QAM	1	0	23.98	24.10	24.19
10	16QAM	1	25	24.12	24.23	24.19
10	16QAM	1	49	24.24	24.17	24.15
10	16QAM	25	0	22.91	23.00	22.97
10	16QAM	25	12	23.04	23.02	22.99
10	16QAM	25	25	23.02	23.00	22.92
10	16QAM	50	0	23.05	23.00	22.96
10	64QAM	1	0	22.91	22.99	23.08
10	64QAM	1	25	23.03	23.14	23.10
10	64QAM	1	49	23.16	23.07	23.11
10	64QAM	25	0	21.93	21.99	21.97
10	64QAM	25	12	22.05	22.03	21.99
10	64QAM	25	25	22.04	22.00	21.93
10	64QAM	50	0	22.05	22.03	21.98
Channel				23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5
5	QPSK	1	0	24.68	24.77	24.81
5	QPSK	1	12	24.82	24.86	24.89
5	QPSK	1	24	24.82	24.85	24.85
5	QPSK	12	0	23.86	23.91	23.84
5	QPSK	12	7	23.87	23.90	23.96
5	QPSK	12	13	23.86	23.91	23.93
5	QPSK	25	0	23.86	23.90	23.81
5	16QAM	1	0	24.00	24.08	24.12



FCC SAR TEST REPORT

Report No. : FA891147-05

5	16QAM	1	12	24.12	24.22	24.23
5	16QAM	1	24	24.12	24.21	24.14
5	16QAM	12	0	22.91	22.95	22.89
5	16QAM	12	7	22.94	23.02	23.03
5	16QAM	12	13	22.91	22.96	23.00
5	16QAM	25	0	22.94	22.97	22.89
5	64QAM	1	0	22.90	22.99	23.03
5	64QAM	1	12	23.04	23.10	23.11
5	64QAM	1	24	23.04	23.09	23.07
5	64QAM	12	0	21.97	22.02	21.94
5	64QAM	12	7	22.01	22.06	22.07
5	64QAM	12	13	21.96	22.03	22.05
5	64QAM	25	0	21.93	21.98	21.92
Channel				23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5
3	QPSK	1	0	24.71	24.86	24.90
3	QPSK	1	8	24.71	24.86	24.86
3	QPSK	1	14	24.81	24.87	24.85
3	QPSK	8	0	23.76	23.87	23.90
3	QPSK	8	4	23.79	23.93	23.95
3	QPSK	8	7	23.84	23.89	23.90
3	QPSK	15	0	23.86	23.88	23.92
3	16QAM	1	0	23.99	24.20	24.21
3	16QAM	1	8	24.03	24.23	24.18
3	16QAM	1	14	24.12	24.20	24.12
3	16QAM	8	0	22.87	22.99	23.00
3	16QAM	8	4	22.88	23.02	23.03
3	16QAM	8	7	22.95	23.01	23.02
3	16QAM	15	0	22.94	22.99	22.99
3	64QAM	1	0	22.91	23.10	23.11
3	64QAM	1	8	22.93	23.12	23.10
3	64QAM	1	14	23.05	23.10	23.09
3	64QAM	8	0	21.85	21.99	22.01
3	64QAM	8	4	21.90	22.02	22.05
3	64QAM	8	7	21.95	21.99	22.01
3	64QAM	15	0	21.95	21.98	21.99
Channel				23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3
1.4	QPSK	1	0	24.60	24.79	24.75
1.4	QPSK	1	3	24.66	24.86	24.80
1.4	QPSK	1	5	24.61	24.78	24.51
1.4	QPSK	3	0	24.64	24.83	24.77
1.4	QPSK	3	1	24.68	24.85	24.81
1.4	QPSK	3	3	24.64	24.82	24.62
1.4	QPSK	6	0	23.67	23.80	23.80
1.4	16QAM	1	0	23.92	24.09	24.04
1.4	16QAM	1	3	24.03	24.18	24.02
1.4	16QAM	1	5	23.91	24.11	23.80
1.4	16QAM	3	0	23.72	23.88	23.83
1.4	16QAM	3	1	23.77	23.93	23.86
1.4	16QAM	3	3	23.71	23.88	23.70
1.4	16QAM	6	0	22.81	22.94	22.93
1.4	64QAM	1	0	22.83	23.01	22.99
1.4	64QAM	1	3	22.92	23.06	22.89
1.4	64QAM	1	5	22.84	23.00	22.78
1.4	64QAM	3	0	22.85	23.01	22.97
1.4	64QAM	3	1	22.89	23.06	23.04
1.4	64QAM	3	3	22.84	23.03	22.86
1.4	64QAM	6	0	21.76	21.89	21.89



<WiFi on>

Power Selection				Head		
Transmit Antenna				Ant 0		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130
Frequency (MHz)				704	707.5	711
10	QPSK	1	0	24.69	24.76	24.86
10	QPSK	1	25	24.83	24.91	24.86
10	QPSK	1	49	24.90	24.86	24.87
10	QPSK	25	0	23.82	23.93	23.88
10	QPSK	25	12	23.95	23.95	23.89
10	QPSK	25	25	23.91	23.90	23.86
10	QPSK	50	0	23.92	23.89	23.86
10	16QAM	1	0	23.98	24.10	24.19
10	16QAM	1	25	24.12	24.23	24.19
10	16QAM	1	49	24.24	24.17	24.15
10	16QAM	25	0	22.91	23.00	22.97
10	16QAM	25	12	23.04	23.02	22.99
10	16QAM	25	25	23.02	23.00	22.92
10	16QAM	50	0	23.05	23.00	22.96
10	64QAM	1	0	22.91	22.99	23.08
10	64QAM	1	25	23.03	23.14	23.10
10	64QAM	1	49	23.16	23.07	23.11
10	64QAM	25	0	21.93	21.99	21.97
10	64QAM	25	12	22.05	22.03	21.99
10	64QAM	25	25	22.04	22.00	21.93
10	64QAM	50	0	22.05	22.03	21.98
Channel				23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5
5	QPSK	1	0	24.68	24.77	24.81
5	QPSK	1	12	24.82	24.86	24.89
5	QPSK	1	24	24.82	24.85	24.85
5	QPSK	12	0	23.86	23.91	23.84
5	QPSK	12	7	23.87	23.90	23.96
5	QPSK	12	13	23.86	23.91	23.93
5	QPSK	25	0	23.86	23.90	23.81
5	16QAM	1	0	24.00	24.08	24.12
5	16QAM	1	12	24.12	24.22	24.23
5	16QAM	1	24	24.12	24.21	24.14
5	16QAM	12	0	22.91	22.95	22.89
5	16QAM	12	7	22.94	23.02	23.03
5	16QAM	12	13	22.91	22.96	23.00
5	16QAM	25	0	22.94	22.97	22.89
5	64QAM	1	0	22.90	22.99	23.03
5	64QAM	1	12	23.04	23.10	23.11
5	64QAM	1	24	23.04	23.09	23.07
5	64QAM	12	0	21.97	22.02	21.94
5	64QAM	12	7	22.01	22.06	22.07
5	64QAM	12	13	21.96	22.03	22.05
5	64QAM	25	0	21.93	21.98	21.92
Channel				23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5
3	QPSK	1	0	24.71	24.86	24.90
3	QPSK	1	8	24.71	24.86	24.86
3	QPSK	1	14	24.81	24.87	24.85
3	QPSK	8	0	23.76	23.87	23.90
3	QPSK	8	4	23.79	23.93	23.95
3	QPSK	8	7	23.84	23.89	23.90
3	QPSK	15	0	23.86	23.88	23.92
3	16QAM	1	0	23.99	24.20	24.21
3	16QAM	1	8	24.03	24.23	24.18
3	16QAM	1	14	24.12	24.20	24.12
3	16QAM	8	0	22.87	22.99	23.00
3	16QAM	8	4	22.88	23.02	23.03
3	16QAM	8	7	22.95	23.01	23.02
3	16QAM	15	0	22.94	22.99	22.99
3	64QAM	1	0	22.91	23.10	23.11
3	64QAM	1	8	22.93	23.12	23.10
3	64QAM	1	14	23.05	23.10	23.09
3	64QAM	8	0	21.85	21.99	22.01
3	64QAM	8	4	21.90	22.02	22.05



FCC SAR TEST REPORT

Report No. : FA891147-05

3	64QAM	8	7	21.95	21.99	22.01
3	64QAM	15	0	21.95	21.98	21.99
Channel				23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3
1.4	QPSK	1	0	24.60	24.79	24.75
1.4	QPSK	1	3	24.66	24.86	24.80
1.4	QPSK	1	5	24.61	24.78	24.51
1.4	QPSK	3	0	24.64	24.83	24.77
1.4	QPSK	3	1	24.68	24.85	24.81
1.4	QPSK	3	3	24.64	24.82	24.62
1.4	QPSK	6	0	23.67	23.80	23.80
1.4	16QAM	1	0	23.92	24.09	24.04
1.4	16QAM	1	3	24.03	24.18	24.02
1.4	16QAM	1	5	23.91	24.11	23.80
1.4	16QAM	3	0	23.72	23.88	23.83
1.4	16QAM	3	1	23.77	23.93	23.86
1.4	16QAM	3	3	23.71	23.88	23.70
1.4	16QAM	6	0	22.81	22.94	22.93
1.4	64QAM	1	0	22.83	23.01	22.99
1.4	64QAM	1	3	22.92	23.06	22.89
1.4	64QAM	1	5	22.84	23.00	22.78
1.4	64QAM	3	0	22.85	23.01	22.97
1.4	64QAM	3	1	22.89	23.06	23.04
1.4	64QAM	3	3	22.84	23.03	22.86
1.4	64QAM	6	0	21.76	21.89	21.89



Power Selection				Hotspot / Body-worn/ Product Specific		
Transmit Antenna				Ant 0		
Max. Power				24.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130
Frequency (MHz)				704	707.5	711
10	QPSK	1	0	23.72	23.79	23.83
10	QPSK	1	25	23.88	23.91	23.89
10	QPSK	1	49	23.90	23.90	23.88
10	QPSK	25	0	23.81	23.89	23.84
10	QPSK	25	12	23.94	23.95	23.88
10	QPSK	25	25	23.91	23.89	23.84
10	QPSK	50	0	23.95	23.90	23.88
10	16QAM	1	0	23.99	24.12	24.23
10	16QAM	1	25	24.14	24.26	24.20
10	16QAM	1	49	24.23	24.22	24.20
10	16QAM	25	0	22.95	23.00	22.95
10	16QAM	25	12	23.07	23.03	22.99
10	16QAM	25	25	23.03	22.99	22.93
10	16QAM	50	0	23.01	22.99	22.99
10	64QAM	1	0	22.90	22.98	23.07
10	64QAM	1	25	23.05	23.19	23.07
10	64QAM	1	49	23.15	23.07	23.09
10	64QAM	25	0	21.92	22.00	21.97
10	64QAM	25	12	22.07	22.04	22.00
10	64QAM	25	25	22.02	22.02	21.95
10	64QAM	50	0	22.04	22.03	21.97
Channel				23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5
5	QPSK	1	0	23.70	23.73	23.76
5	QPSK	1	12	23.80	23.83	23.89
5	QPSK	1	24	23.80	23.84	23.86
5	QPSK	12	0	23.84	23.90	23.82
5	QPSK	12	7	23.88	23.89	23.94
5	QPSK	12	13	23.86	23.90	23.89
5	QPSK	25	0	23.84	23.87	23.79
5	16QAM	1	0	24.00	24.06	24.13
5	16QAM	1	12	24.13	24.19	24.20
5	16QAM	1	24	24.11	24.15	24.07
5	16QAM	12	0	22.92	22.95	22.90
5	16QAM	12	7	22.94	22.97	23.00
5	16QAM	12	13	22.92	22.96	22.98
5	16QAM	25	0	22.95	22.97	22.87
5	64QAM	1	0	22.90	22.99	23.01
5	64QAM	1	12	23.05	23.10	23.09
5	64QAM	1	24	23.01	23.08	23.03
5	64QAM	12	0	21.97	22.01	21.96
5	64QAM	12	7	22.00	22.02	22.04
5	64QAM	12	13	21.98	21.99	22.00
5	64QAM	25	0	21.93	21.95	21.88
Channel				23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5
3	QPSK	1	0	23.69	23.82	23.84
3	QPSK	1	8	23.70	23.83	23.85
3	QPSK	1	14	23.78	23.83	23.84
3	QPSK	8	0	23.71	23.87	23.89
3	QPSK	8	4	23.73	23.91	23.91
3	QPSK	8	7	23.84	23.86	23.87
3	QPSK	15	0	23.84	23.85	23.88
3	16QAM	1	0	24.00	24.16	24.18
3	16QAM	1	8	23.99	24.17	24.15
3	16QAM	1	14	24.09	24.16	23.88
3	16QAM	8	0	22.84	22.95	22.96
3	16QAM	8	4	22.85	23.01	23.01
3	16QAM	8	7	22.93	22.97	22.99
3	16QAM	15	0	22.92	22.94	22.96
3	64QAM	1	0	22.91	23.07	23.07
3	64QAM	1	8	22.90	23.05	23.04
3	64QAM	1	14	23.05	23.06	22.90
3	64QAM	8	0	21.83	21.95	21.96
3	64QAM	8	4	21.87	22.02	21.99



FCC SAR TEST REPORT

Report No. : FA891147-05

3	64QAM	8	7	21.94	21.96	21.98
3	64QAM	15	0	21.92	21.94	21.96
Channel				23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3
1.4	QPSK	1	0	23.64	23.74	23.82
1.4	QPSK	1	3	23.70	23.82	23.91
1.4	QPSK	1	5	23.62	23.76	23.86
1.4	QPSK	3	0	23.65	23.79	23.86
1.4	QPSK	3	1	23.68	23.82	23.91
1.4	QPSK	3	3	23.66	23.79	23.90
1.4	QPSK	6	0	23.66	23.78	23.74
1.4	16QAM	1	0	23.91	24.03	24.07
1.4	16QAM	1	3	24.00	24.16	23.90
1.4	16QAM	1	5	23.90	24.09	23.68
1.4	16QAM	3	0	23.73	23.87	23.87
1.4	16QAM	3	1	23.76	23.92	23.82
1.4	16QAM	3	3	23.71	23.86	23.56
1.4	16QAM	6	0	22.84	22.93	22.92
1.4	64QAM	1	0	22.85	23.00	23.07
1.4	64QAM	1	3	22.92	23.06	22.84
1.4	64QAM	1	5	22.82	22.99	22.68
1.4	64QAM	3	0	22.84	23.01	23.07
1.4	64QAM	3	1	22.87	23.06	23.05
1.4	64QAM	3	3	22.84	23.02	22.76
1.4	64QAM	6	0	21.77	21.89	21.98



<LTE Band 13>

<WiFi off>

Power Selection				Head / Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				25.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230		
Frequency (MHz)				782		
10	QPSK	1	0	24.33		
10	QPSK	1	25	24.34		
10	QPSK	1	49	24.20		
10	QPSK	25	0	23.36		
10	QPSK	25	12	23.39		
10	QPSK	25	25	23.34		
10	QPSK	50	0	23.35		
10	16QAM	1	0	23.58		
10	16QAM	1	25	23.61		
10	16QAM	1	49	23.51		
10	16QAM	25	0	22.45		
10	16QAM	25	12	22.47		
10	16QAM	25	25	22.45		
10	16QAM	50	0	22.47		
10	64QAM	1	0	22.54		
10	64QAM	1	25	22.54		
10	64QAM	1	49	22.43		
10	64QAM	25	0	21.46		
10	64QAM	25	12	21.47		
10	64QAM	25	25	21.42		
10	64QAM	50	0	21.47		
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	24.33	24.33	24.31
5	QPSK	1	12	24.33	24.32	24.25
5	QPSK	1	24	24.32	24.32	24.22
5	QPSK	12	0	23.40	23.32	23.34
5	QPSK	12	7	23.41	23.38	23.39
5	QPSK	12	13	23.36	23.32	23.24
5	QPSK	25	0	23.38	23.37	23.35
5	16QAM	1	0	23.62	23.65	23.62
5	16QAM	1	12	23.67	23.64	23.51
5	16QAM	1	24	23.62	23.63	23.49
5	16QAM	12	0	22.48	22.41	22.39
5	16QAM	12	7	22.48	22.45	22.44
5	16QAM	12	13	22.42	22.39	22.31
5	16QAM	25	0	22.47	22.42	22.43
5	64QAM	1	0	22.57	22.55	22.55
5	64QAM	1	12	22.54	22.57	22.49
5	64QAM	1	24	22.53	22.53	22.42
5	64QAM	12	0	21.52	21.47	21.44
5	64QAM	12	7	21.52	21.51	21.51
5	64QAM	12	13	21.49	21.45	21.35
5	64QAM	25	0	21.46	21.43	21.44

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				25.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230		
Frequency (MHz)				782		
10	QPSK	1	0	24.33		
10	QPSK	1	25	24.34		
10	QPSK	1	49	24.20		
10	QPSK	25	0	23.36		
10	QPSK	25	12	23.39		
10	QPSK	25	25	23.34		
10	QPSK	50	0	23.35		
10	16QAM	1	0	23.58		
10	16QAM	1	25	23.61		
10	16QAM	1	49	23.51		



FCC SAR TEST REPORT

Report No. : FA891147-05

10	16QAM	25	0	22.45		
10	16QAM	25	12	22.47		
10	16QAM	25	25	22.45		
10	16QAM	50	0	22.47		
10	64QAM	1	0	22.54		
10	64QAM	1	25	22.54		
10	64QAM	1	49	22.43		
10	64QAM	25	0	21.46		
10	64QAM	25	12	21.47		
10	64QAM	25	25	21.42		
10	64QAM	50	0	21.47		
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	24.33	24.33	24.31
5	QPSK	1	12	24.33	24.32	24.25
5	QPSK	1	24	24.32	24.32	24.22
5	QPSK	12	0	23.40	23.32	23.34
5	QPSK	12	7	23.41	23.38	23.39
5	QPSK	12	13	23.36	23.32	23.24
5	QPSK	25	0	23.38	23.37	23.35
5	16QAM	1	0	23.62	23.65	23.62
5	16QAM	1	12	23.67	23.64	23.51
5	16QAM	1	24	23.62	23.63	23.49
5	16QAM	12	0	22.48	22.41	22.39
5	16QAM	12	7	22.48	22.45	22.44
5	16QAM	12	13	22.42	22.39	22.31
5	16QAM	25	0	22.47	22.42	22.43
5	64QAM	1	0	22.57	22.55	22.55
5	64QAM	1	12	22.54	22.57	22.49
5	64QAM	1	24	22.53	22.53	22.42
5	64QAM	12	0	21.52	21.47	21.44
5	64QAM	12	7	21.52	21.51	21.51
5	64QAM	12	13	21.49	21.45	21.35
5	64QAM	25	0	21.46	21.43	21.44



FCC SAR TEST REPORT

Report No. : FA891147-05

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				25.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230		
Frequency (MHz)				782		
10	QPSK	1	0	24.33		
10	QPSK	1	25	24.34		
10	QPSK	1	49	24.20		
10	QPSK	25	0	23.36		
10	QPSK	25	12	23.39		
10	QPSK	25	25	23.34		
10	QPSK	50	0	23.35		
10	16QAM	1	0	23.58		
10	16QAM	1	25	23.61		
10	16QAM	1	49	23.51		
10	16QAM	25	0	22.45		
10	16QAM	25	12	22.47		
10	16QAM	25	25	22.45		
10	16QAM	50	0	22.47		
10	64QAM	1	0	22.54		
10	64QAM	1	25	22.54		
10	64QAM	1	49	22.43		
10	64QAM	25	0	21.46		
10	64QAM	25	12	21.47		
10	64QAM	25	25	21.42		
10	64QAM	50	0	21.47		
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	24.33	24.33	24.31
5	QPSK	1	12	24.33	24.32	24.25
5	QPSK	1	24	24.32	24.32	24.22
5	QPSK	12	0	23.40	23.32	23.34
5	QPSK	12	7	23.41	23.38	23.39
5	QPSK	12	13	23.36	23.32	23.24
5	QPSK	25	0	23.38	23.37	23.35
5	16QAM	1	0	23.62	23.65	23.62
5	16QAM	1	12	23.67	23.64	23.51
5	16QAM	1	24	23.62	23.63	23.49
5	16QAM	12	0	22.48	22.41	22.39
5	16QAM	12	7	22.48	22.45	22.44
5	16QAM	12	13	22.42	22.39	22.31
5	16QAM	25	0	22.47	22.42	22.43
5	64QAM	1	0	22.57	22.55	22.55
5	64QAM	1	12	22.54	22.57	22.49
5	64QAM	1	24	22.53	22.53	22.42
5	64QAM	12	0	21.52	21.47	21.44
5	64QAM	12	7	21.52	21.51	21.51
5	64QAM	12	13	21.49	21.45	21.35
5	64QAM	25	0	21.46	21.43	21.44



<Wifi on>

Power Selection				Head		
Transmit Antenna				Ant 0		
Max. Power				25.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230		
Frequency (MHz)				782		
10	QPSK	1	0	24.33		
10	QPSK	1	25	24.34		
10	QPSK	1	49	24.20		
10	QPSK	25	0	23.36		
10	QPSK	25	12	23.39		
10	QPSK	25	25	23.34		
10	QPSK	50	0	23.35		
10	16QAM	1	0	23.58		
10	16QAM	1	25	23.61		
10	16QAM	1	49	23.51		
10	16QAM	25	0	22.45		
10	16QAM	25	12	22.47		
10	16QAM	25	25	22.45		
10	16QAM	50	0	22.47		
10	64QAM	1	0	22.54		
10	64QAM	1	25	22.54		
10	64QAM	1	49	22.43		
10	64QAM	25	0	21.46		
10	64QAM	25	12	21.47		
10	64QAM	25	25	21.42		
10	64QAM	50	0	21.47		
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	24.33	24.33	24.31
5	QPSK	1	12	24.33	24.32	24.25
5	QPSK	1	24	24.32	24.32	24.22
5	QPSK	12	0	23.40	23.32	23.34
5	QPSK	12	7	23.41	23.38	23.39
5	QPSK	12	13	23.36	23.32	23.24
5	QPSK	25	0	23.38	23.37	23.35
5	16QAM	1	0	23.62	23.65	23.62
5	16QAM	1	12	23.67	23.64	23.51
5	16QAM	1	24	23.62	23.63	23.49
5	16QAM	12	0	22.48	22.41	22.39
5	16QAM	12	7	22.48	22.45	22.44
5	16QAM	12	13	22.42	22.39	22.31
5	16QAM	25	0	22.47	22.42	22.43
5	64QAM	1	0	22.57	22.55	22.55
5	64QAM	1	12	22.54	22.57	22.49
5	64QAM	1	24	22.53	22.53	22.42
5	64QAM	12	0	21.52	21.47	21.44
5	64QAM	12	7	21.52	21.51	21.51
5	64QAM	12	13	21.49	21.45	21.35
5	64QAM	25	0	21.46	21.43	21.44



Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				23.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230		
Frequency (MHz)				782		
10	QPSK	1	0	22.35		
10	QPSK	1	25	22.36		
10	QPSK	1	49	22.22		
10	QPSK	25	0	22.43		
10	QPSK	25	12	22.44		
10	QPSK	25	25	22.39		
10	QPSK	50	0	22.41		
10	16QAM	1	0	22.70		
10	16QAM	1	25	22.65		
10	16QAM	1	49	22.57		
10	16QAM	25	0	22.51		
10	16QAM	25	12	22.51		
10	16QAM	25	25	22.48		
10	16QAM	50	0	22.50		
10	64QAM	1	0	22.61		
10	64QAM	1	25	22.58		
10	64QAM	1	49	22.48		
10	64QAM	25	0	21.52		
10	64QAM	25	12	21.51		
10	64QAM	25	25	21.50		
10	64QAM	50	0	21.51		
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	22.36	22.34	22.29
5	QPSK	1	12	22.34	22.32	22.19
5	QPSK	1	24	22.31	22.29	22.16
5	QPSK	12	0	22.42	22.34	22.33
5	QPSK	12	7	22.40	22.39	22.37
5	QPSK	12	13	22.36	22.36	22.22
5	QPSK	25	0	22.40	22.35	22.34
5	16QAM	1	0	22.67	22.61	22.63
5	16QAM	1	12	22.65	22.64	22.52
5	16QAM	1	24	22.62	22.61	22.52
5	16QAM	12	0	22.50	22.44	22.38
5	16QAM	12	7	22.49	22.43	22.44
5	16QAM	12	13	22.41	22.40	22.31
5	16QAM	25	0	22.47	22.44	22.42
5	64QAM	1	0	22.46	22.56	22.54
5	64QAM	1	12	22.57	22.56	22.48
5	64QAM	1	24	22.52	22.52	22.40
5	64QAM	12	0	21.52	21.47	21.43
5	64QAM	12	7	21.52	21.51	21.49
5	64QAM	12	13	21.48	21.49	21.36
5	64QAM	25	0	21.48	21.45	21.43

**<LTE Band 17>**

SAR for LTE B17 is covered by LTE B12 due to overlapping frequency range, the same maximum tune-up limit and the same channel bandwidth

<LTE Band 26>**<WiFi off>**

Power Selection				Head / Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5
15	QPSK	1	0	24.69	24.77	24.86
15	QPSK	1	37	24.69	24.83	24.81
15	QPSK	1	74	24.74	24.77	24.73
15	QPSK	36	0	23.79	23.86	23.76
15	QPSK	36	20	23.77	23.87	23.73
15	QPSK	36	39	23.82	23.79	23.79
15	QPSK	75	0	23.71	23.83	23.70
15	16QAM	1	0	23.93	24.08	24.16
15	16QAM	1	37	24.00	24.14	24.10
15	16QAM	1	74	24.02	24.08	24.00
15	16QAM	36	0	22.83	22.94	22.83
15	16QAM	36	20	22.86	22.94	22.80
15	16QAM	36	39	22.92	22.86	22.85
15	16QAM	75	0	22.79	22.89	22.78
15	64QAM	1	0	22.90	23.04	23.11
15	64QAM	1	37	22.97	23.08	23.03
15	64QAM	1	74	22.98	23.01	22.93
15	64QAM	36	0	21.89	21.97	21.87
15	64QAM	36	20	21.86	21.97	21.84
15	64QAM	36	39	21.93	21.93	21.88
15	64QAM	75	0	21.81	21.90	21.81
Channel				26740	26865	26990
Frequency (MHz)				819	831.5	844
10	QPSK	1	0	24.70	24.76	24.85
10	QPSK	1	25	24.75	24.85	24.81
10	QPSK	1	49	24.68	24.81	24.70
10	QPSK	25	0	23.81	23.91	23.86
10	QPSK	25	12	23.84	23.89	23.87
10	QPSK	25	25	23.77	23.81	23.78
10	QPSK	50	0	23.79	23.89	23.82
10	16QAM	1	0	23.89	24.02	24.14
10	16QAM	1	25	24.03	24.15	24.07
10	16QAM	1	49	23.97	24.09	23.85
10	16QAM	25	0	22.88	22.96	22.90
10	16QAM	25	12	22.87	22.98	22.91
10	16QAM	25	25	22.82	22.90	22.87
10	16QAM	50	0	22.85	22.93	22.91
10	64QAM	1	0	22.89	23.00	23.11
10	64QAM	1	25	23.00	23.11	23.05
10	64QAM	1	49	22.95	23.05	22.94
10	64QAM	25	0	21.88	21.96	21.91
10	64QAM	25	12	21.92	22.00	21.94
10	64QAM	25	25	21.86	21.95	21.87
10	64QAM	50	0	21.87	21.96	21.89
Channel				26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5
5	QPSK	1	0	24.72	24.72	24.80
5	QPSK	1	12	24.68	24.71	24.80
5	QPSK	1	24	24.72	24.66	24.76
5	QPSK	12	0	23.77	23.78	23.80
5	QPSK	12	7	23.76	23.78	23.82
5	QPSK	12	13	23.80	23.75	23.78
5	QPSK	25	0	23.83	23.76	23.79
5	16QAM	1	0	23.90	24.02	24.13
5	16QAM	1	12	23.96	24.06	24.10
5	16QAM	1	24	24.02	24.03	24.03
5	16QAM	12	0	22.83	22.84	22.90
5	16QAM	12	7	22.82	22.88	22.87



FCC SAR TEST REPORT

Report No. : FA891147-05

5	16QAM	12	13	22.86	22.85	22.85
5	16QAM	25	0	22.89	22.84	22.86
5	64QAM	1	0	22.90	22.94	23.05
5	64QAM	1	12	22.91	22.97	23.01
5	64QAM	1	24	22.97	22.96	22.93
5	64QAM	12	0	21.86	21.94	21.93
5	64QAM	12	7	21.88	21.96	21.95
5	64QAM	12	13	21.92	21.92	21.89
5	64QAM	25	0	21.88	21.87	21.86
Channel				26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5
3	QPSK	1	0	24.70	24.71	24.78
3	QPSK	1	8	24.66	24.72	24.78
3	QPSK	1	14	24.64	24.69	24.74
3	QPSK	8	0	23.73	23.75	23.79
3	QPSK	8	4	23.74	23.80	23.79
3	QPSK	8	7	23.69	23.75	23.77
3	QPSK	15	0	23.73	23.76	23.78
3	16QAM	1	0	23.91	24.06	24.07
3	16QAM	1	8	23.95	24.06	24.05
3	16QAM	1	14	23.90	24.02	23.99
3	16QAM	8	0	22.83	22.92	22.89
3	16QAM	8	4	22.88	22.94	22.91
3	16QAM	8	7	22.86	22.92	22.86
3	16QAM	15	0	22.83	22.86	22.87
3	64QAM	1	0	22.89	23.01	23.04
3	64QAM	1	8	22.90	22.99	23.02
3	64QAM	1	14	22.89	22.96	22.94
3	64QAM	8	0	21.87	21.92	21.88
3	64QAM	8	4	21.89	21.94	21.92
3	64QAM	8	7	21.84	21.90	21.88
3	64QAM	15	0	21.82	21.87	21.87
Channel				26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3
1.4	QPSK	1	0	24.62	24.65	24.69
1.4	QPSK	1	3	24.69	24.73	24.76
1.4	QPSK	1	5	24.61	24.67	24.67
1.4	QPSK	3	0	24.68	24.70	24.72
1.4	QPSK	3	1	24.72	24.74	24.75
1.4	QPSK	3	3	24.66	24.69	24.71
1.4	QPSK	6	0	23.69	23.70	23.73
1.4	16QAM	1	0	23.86	23.94	23.97
1.4	16QAM	1	3	23.95	24.06	24.00
1.4	16QAM	1	5	23.87	23.95	23.92
1.4	16QAM	3	0	23.68	23.76	23.77
1.4	16QAM	3	1	23.72	23.82	23.82
1.4	16QAM	3	3	23.69	23.76	23.75
1.4	16QAM	6	0	22.82	22.85	22.86
1.4	64QAM	1	0	22.86	22.93	22.93
1.4	64QAM	1	3	22.91	22.99	22.96
1.4	64QAM	1	5	22.85	22.92	22.88
1.4	64QAM	3	0	22.86	22.91	22.90
1.4	64QAM	3	1	22.91	22.96	22.94
1.4	64QAM	3	3	22.83	22.90	22.88
1.4	64QAM	6	0	21.75	21.82	21.78



Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 1		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5
15	QPSK	1	0	24.69	24.77	24.86
15	QPSK	1	37	24.69	24.83	24.81
15	QPSK	1	74	24.74	24.77	24.73
15	QPSK	36	0	23.79	23.86	23.76
15	QPSK	36	20	23.77	23.87	23.73
15	QPSK	36	39	23.82	23.79	23.79
15	QPSK	75	0	23.71	23.83	23.70
15	16QAM	1	0	23.93	24.08	24.16
15	16QAM	1	37	24.00	24.14	24.10
15	16QAM	1	74	24.02	24.08	24.00
15	16QAM	36	0	22.83	22.94	22.83
15	16QAM	36	20	22.86	22.94	22.80
15	16QAM	36	39	22.92	22.86	22.85
15	16QAM	75	0	22.79	22.89	22.78
15	64QAM	1	0	22.90	23.04	23.11
15	64QAM	1	37	22.97	23.08	23.03
15	64QAM	1	74	22.98	23.01	22.93
15	64QAM	36	0	21.89	21.97	21.87
15	64QAM	36	20	21.86	21.97	21.84
15	64QAM	36	39	21.93	21.93	21.88
15	64QAM	75	0	21.81	21.90	21.81
Channel				26740	26865	26990
Frequency (MHz)				819	831.5	844
10	QPSK	1	0	24.70	24.76	24.85
10	QPSK	1	25	24.75	24.85	24.81
10	QPSK	1	49	24.68	24.81	24.70
10	QPSK	25	0	23.81	23.91	23.86
10	QPSK	25	12	23.84	23.89	23.87
10	QPSK	25	25	23.77	23.81	23.78
10	QPSK	50	0	23.79	23.89	23.82
10	16QAM	1	0	23.89	24.02	24.14
10	16QAM	1	25	24.03	24.15	24.07
10	16QAM	1	49	23.97	24.09	23.85
10	16QAM	25	0	22.88	22.96	22.90
10	16QAM	25	12	22.87	22.98	22.91
10	16QAM	25	25	22.82	22.90	22.87
10	16QAM	50	0	22.85	22.93	22.91
10	64QAM	1	0	22.89	23.00	23.11
10	64QAM	1	25	23.00	23.11	23.05
10	64QAM	1	49	22.95	23.05	22.94
10	64QAM	25	0	21.88	21.96	21.91
10	64QAM	25	12	21.92	22.00	21.94
10	64QAM	25	25	21.86	21.95	21.87
10	64QAM	50	0	21.87	21.96	21.89
Channel				26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5
5	QPSK	1	0	24.72	24.72	24.80
5	QPSK	1	12	24.68	24.71	24.80
5	QPSK	1	24	24.72	24.66	24.76
5	QPSK	12	0	23.77	23.78	23.80
5	QPSK	12	7	23.76	23.78	23.82
5	QPSK	12	13	23.80	23.75	23.78
5	QPSK	25	0	23.83	23.76	23.79
5	16QAM	1	0	23.90	24.02	24.13
5	16QAM	1	12	23.96	24.06	24.10
5	16QAM	1	24	24.02	24.03	24.03
5	16QAM	12	0	22.83	22.84	22.90
5	16QAM	12	7	22.82	22.88	22.87
5	16QAM	12	13	22.86	22.85	22.85
5	16QAM	25	0	22.89	22.84	22.86
5	64QAM	1	0	22.90	22.94	23.05
5	64QAM	1	12	22.91	22.97	23.01
5	64QAM	1	24	22.97	22.96	22.93
5	64QAM	12	0	21.86	21.94	21.93
5	64QAM	12	7	21.88	21.96	21.95



FCC SAR TEST REPORT

Report No. : FA891147-05

5	64QAM	12	13	21.92	21.92	21.89
5	64QAM	25	0	21.88	21.87	21.86
Channel				26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5
3	QPSK	1	0	24.70	24.71	24.78
3	QPSK	1	8	24.66	24.72	24.78
3	QPSK	1	14	24.64	24.69	24.74
3	QPSK	8	0	23.73	23.75	23.79
3	QPSK	8	4	23.74	23.80	23.79
3	QPSK	8	7	23.69	23.75	23.77
3	QPSK	15	0	23.73	23.76	23.78
3	16QAM	1	0	23.91	24.06	24.07
3	16QAM	1	8	23.95	24.06	24.05
3	16QAM	1	14	23.90	24.02	23.99
3	16QAM	8	0	22.83	22.92	22.89
3	16QAM	8	4	22.88	22.94	22.91
3	16QAM	8	7	22.86	22.92	22.86
3	16QAM	15	0	22.83	22.86	22.87
3	64QAM	1	0	22.89	23.01	23.04
3	64QAM	1	8	22.90	22.99	23.02
3	64QAM	1	14	22.89	22.96	22.94
3	64QAM	8	0	21.87	21.92	21.88
3	64QAM	8	4	21.89	21.94	21.92
3	64QAM	8	7	21.84	21.90	21.88
3	64QAM	15	0	21.82	21.87	21.87
Channel				26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3
1.4	QPSK	1	0	24.62	24.65	24.69
1.4	QPSK	1	3	24.69	24.73	24.76
1.4	QPSK	1	5	24.61	24.67	24.67
1.4	QPSK	3	0	24.68	24.70	24.72
1.4	QPSK	3	1	24.72	24.74	24.75
1.4	QPSK	3	3	24.66	24.69	24.71
1.4	QPSK	6	0	23.69	23.70	23.73
1.4	16QAM	1	0	23.86	23.94	23.97
1.4	16QAM	1	3	23.95	24.06	24.00
1.4	16QAM	1	5	23.87	23.95	23.92
1.4	16QAM	3	0	23.68	23.76	23.77
1.4	16QAM	3	1	23.72	23.82	23.82
1.4	16QAM	3	3	23.69	23.76	23.75
1.4	16QAM	6	0	22.82	22.85	22.86
1.4	64QAM	1	0	22.86	22.93	22.93
1.4	64QAM	1	3	22.91	22.99	22.96
1.4	64QAM	1	5	22.85	22.92	22.88
1.4	64QAM	3	0	22.86	22.91	22.90
1.4	64QAM	3	1	22.91	22.96	22.94
1.4	64QAM	3	3	22.83	22.90	22.88
1.4	64QAM	6	0	21.75	21.82	21.78



<WiFi on>

Power Selection				Head		
Transmit Antenna				Ant 0		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5
15	QPSK	1	0	24.69	24.77	24.86
15	QPSK	1	37	24.69	24.83	24.81
15	QPSK	1	74	24.74	24.77	24.73
15	QPSK	36	0	23.79	23.86	23.76
15	QPSK	36	20	23.77	23.87	23.73
15	QPSK	36	39	23.82	23.79	23.79
15	QPSK	75	0	23.71	23.83	23.70
15	16QAM	1	0	23.93	24.08	24.16
15	16QAM	1	37	24.00	24.14	24.10
15	16QAM	1	74	24.02	24.08	24.00
15	16QAM	36	0	22.83	22.94	22.83
15	16QAM	36	20	22.86	22.94	22.80
15	16QAM	36	39	22.92	22.86	22.85
15	16QAM	75	0	22.79	22.89	22.78
15	64QAM	1	0	22.90	23.04	23.11
15	64QAM	1	37	22.97	23.08	23.03
15	64QAM	1	74	22.98	23.01	22.93
15	64QAM	36	0	21.89	21.97	21.87
15	64QAM	36	20	21.86	21.97	21.84
15	64QAM	36	39	21.93	21.93	21.88
15	64QAM	75	0	21.81	21.90	21.81
Channel				26740	26865	26990
Frequency (MHz)				819	831.5	844
10	QPSK	1	0	24.70	24.76	24.85
10	QPSK	1	25	24.75	24.85	24.81
10	QPSK	1	49	24.68	24.81	24.70
10	QPSK	25	0	23.81	23.91	23.86
10	QPSK	25	12	23.84	23.89	23.87
10	QPSK	25	25	23.77	23.81	23.78
10	QPSK	50	0	23.79	23.89	23.82
10	16QAM	1	0	23.89	24.02	24.14
10	16QAM	1	25	24.03	24.15	24.07
10	16QAM	1	49	23.97	24.09	23.85
10	16QAM	25	0	22.88	22.96	22.90
10	16QAM	25	12	22.87	22.98	22.91
10	16QAM	25	25	22.82	22.90	22.87
10	16QAM	50	0	22.85	22.93	22.91
10	64QAM	1	0	22.89	23.00	23.11
10	64QAM	1	25	23.00	23.11	23.05
10	64QAM	1	49	22.95	23.05	22.94
10	64QAM	25	0	21.88	21.96	21.91
10	64QAM	25	12	21.92	22.00	21.94
10	64QAM	25	25	21.86	21.95	21.87
10	64QAM	50	0	21.87	21.96	21.89
Channel				26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5
5	QPSK	1	0	24.72	24.72	24.80
5	QPSK	1	12	24.68	24.71	24.80
5	QPSK	1	24	24.72	24.66	24.76
5	QPSK	12	0	23.77	23.78	23.80
5	QPSK	12	7	23.76	23.78	23.82
5	QPSK	12	13	23.80	23.75	23.78
5	QPSK	25	0	23.83	23.76	23.79
5	16QAM	1	0	23.90	24.02	24.13
5	16QAM	1	12	23.96	24.06	24.10
5	16QAM	1	24	24.02	24.03	24.03
5	16QAM	12	0	22.83	22.84	22.90
5	16QAM	12	7	22.82	22.88	22.87
5	16QAM	12	13	22.86	22.85	22.85
5	16QAM	25	0	22.89	22.84	22.86
5	64QAM	1	0	22.90	22.94	23.05
5	64QAM	1	12	22.91	22.97	23.01
5	64QAM	1	24	22.97	22.96	22.93
5	64QAM	12	0	21.86	21.94	21.93
5	64QAM	12	7	21.88	21.96	21.95



FCC SAR TEST REPORT

Report No. : FA891147-05

5	64QAM	12	13	21.92	21.92	21.89
5	64QAM	25	0	21.88	21.87	21.86
Channel				26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5
3	QPSK	1	0	24.70	24.71	24.78
3	QPSK	1	8	24.66	24.72	24.78
3	QPSK	1	14	24.64	24.69	24.74
3	QPSK	8	0	23.73	23.75	23.79
3	QPSK	8	4	23.74	23.80	23.79
3	QPSK	8	7	23.69	23.75	23.77
3	QPSK	15	0	23.73	23.76	23.78
3	16QAM	1	0	23.91	24.06	24.07
3	16QAM	1	8	23.95	24.06	24.05
3	16QAM	1	14	23.90	24.02	23.99
3	16QAM	8	0	22.83	22.92	22.89
3	16QAM	8	4	22.88	22.94	22.91
3	16QAM	8	7	22.86	22.92	22.86
3	16QAM	15	0	22.83	22.86	22.87
3	64QAM	1	0	22.89	23.01	23.04
3	64QAM	1	8	22.90	22.99	23.02
3	64QAM	1	14	22.89	22.96	22.94
3	64QAM	8	0	21.87	21.92	21.88
3	64QAM	8	4	21.89	21.94	21.92
3	64QAM	8	7	21.84	21.90	21.88
3	64QAM	15	0	21.82	21.87	21.87
Channel				26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3
1.4	QPSK	1	0	24.62	24.65	24.69
1.4	QPSK	1	3	24.69	24.73	24.76
1.4	QPSK	1	5	24.61	24.67	24.67
1.4	QPSK	3	0	24.68	24.70	24.72
1.4	QPSK	3	1	24.72	24.74	24.75
1.4	QPSK	3	3	24.66	24.69	24.71
1.4	QPSK	6	0	23.69	23.70	23.73
1.4	16QAM	1	0	23.86	23.94	23.97
1.4	16QAM	1	3	23.95	24.06	24.00
1.4	16QAM	1	5	23.87	23.95	23.92
1.4	16QAM	3	0	23.68	23.76	23.77
1.4	16QAM	3	1	23.72	23.82	23.82
1.4	16QAM	3	3	23.69	23.76	23.75
1.4	16QAM	6	0	22.82	22.85	22.86
1.4	64QAM	1	0	22.86	22.93	22.93
1.4	64QAM	1	3	22.91	22.99	22.96
1.4	64QAM	1	5	22.85	22.92	22.88
1.4	64QAM	3	0	22.86	22.91	22.90
1.4	64QAM	3	1	22.91	22.96	22.94
1.4	64QAM	3	3	22.83	22.90	22.88
1.4	64QAM	6	0	21.75	21.82	21.78



Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0		
Max. Power				23.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5
15	QPSK	1	0	22.76	22.82	22.81
15	QPSK	1	37	22.70	22.81	22.80
15	QPSK	1	74	22.73	22.75	22.74
15	QPSK	36	0	22.77	22.88	22.79
15	QPSK	36	20	22.80	22.87	22.75
15	QPSK	36	39	22.83	22.84	22.79
15	QPSK	75	0	22.77	22.86	22.74
15	16QAM	1	0	23.01	23.14	23.16
15	16QAM	1	37	23.08	23.15	23.13
15	16QAM	1	74	23.11	23.08	23.05
15	16QAM	36	0	22.85	22.95	22.84
15	16QAM	36	20	22.86	22.96	22.81
15	16QAM	36	39	22.89	22.89	22.87
15	16QAM	75	0	22.80	22.95	22.80
15	64QAM	1	0	22.90	23.05	23.10
15	64QAM	1	37	22.97	23.11	23.05
15	64QAM	1	74	22.97	23.04	22.93
15	64QAM	36	0	21.89	22.01	21.91
15	64QAM	36	20	21.90	21.99	21.86
15	64QAM	36	39	21.97	21.92	21.89
15	64QAM	75	0	21.84	21.92	21.82
Channel				26740	26865	26990
Frequency (MHz)				819	831.5	844
10	QPSK	1	0	22.71	22.79	22.86
10	QPSK	1	25	22.79	22.84	22.79
10	QPSK	1	49	22.73	22.75	22.70
10	QPSK	25	0	22.83	22.88	22.87
10	QPSK	25	12	22.81	22.92	22.88
10	QPSK	25	25	22.79	22.82	22.82
10	QPSK	50	0	22.80	22.87	22.85
10	16QAM	1	0	23.01	23.11	23.15
10	16QAM	1	25	23.12	23.16	23.10
10	16QAM	1	49	23.09	23.12	22.99
10	16QAM	25	0	22.91	22.99	22.94
10	16QAM	25	12	22.90	22.97	22.92
10	16QAM	25	25	22.85	22.91	22.88
10	16QAM	50	0	22.88	22.95	22.90
10	64QAM	1	0	22.89	22.97	23.06
10	64QAM	1	25	22.99	23.10	23.01
10	64QAM	1	49	22.92	23.01	22.89
10	64QAM	25	0	21.90	21.98	21.96
10	64QAM	25	12	21.93	22.01	21.93
10	64QAM	25	25	21.89	21.91	21.86
10	64QAM	50	0	21.91	21.96	21.92
Channel				26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5
5	QPSK	1	0	22.67	22.84	22.76
5	QPSK	1	12	22.65	22.80	22.73
5	QPSK	1	24	22.75	22.76	22.70
5	QPSK	12	0	22.71	22.84	22.76
5	QPSK	12	7	22.73	22.88	22.79
5	QPSK	12	13	22.81	22.81	22.74
5	QPSK	25	0	22.80	22.85	22.76
5	16QAM	1	0	22.98	23.16	23.06
5	16QAM	1	12	22.99	23.13	23.02
5	16QAM	1	24	23.09	23.09	22.95
5	16QAM	12	0	22.77	22.92	22.83
5	16QAM	12	7	22.81	22.93	22.87
5	16QAM	12	13	22.84	22.91	22.82
5	16QAM	25	0	22.86	22.90	22.83
5	64QAM	1	0	22.85	23.08	23.00
5	64QAM	1	12	22.87	23.10	22.96
5	64QAM	1	24	22.97	23.04	22.87
5	64QAM	12	0	21.86	21.97	21.88
5	64QAM	12	7	21.85	22.02	21.90



FCC SAR TEST REPORT

Report No. : FA891147-05

5	64QAM	12	13	21.93	21.96	21.88
5	64QAM	25	0	21.85	21.91	21.85
Channel				26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5
3	QPSK	1	0	22.67	22.81	22.74
3	QPSK	1	8	22.64	22.81	22.72
3	QPSK	1	14	22.65	22.79	22.70
3	QPSK	8	0	22.70	22.86	22.77
3	QPSK	8	4	22.73	22.87	22.78
3	QPSK	8	7	22.69	22.81	22.75
3	QPSK	15	0	22.69	22.84	22.77
3	16QAM	1	0	22.96	23.14	23.04
3	16QAM	1	8	23.00	23.15	23.03
3	16QAM	1	14	22.97	23.13	22.98
3	16QAM	8	0	22.82	22.95	22.84
3	16QAM	8	4	22.83	22.97	22.87
3	16QAM	8	7	22.79	22.93	22.82
3	16QAM	15	0	22.77	22.92	22.85
3	64QAM	1	0	22.86	23.07	22.95
3	64QAM	1	8	22.87	23.11	22.94
3	64QAM	1	14	22.85	23.05	22.88
3	64QAM	8	0	21.85	21.99	21.86
3	64QAM	8	4	21.86	21.97	21.87
3	64QAM	8	7	21.82	21.96	21.83
3	64QAM	15	0	21.79	21.93	21.84
Channel				26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3
1.4	QPSK	1	0	22.60	22.72	22.69
1.4	QPSK	1	3	22.66	22.79	22.77
1.4	QPSK	1	5	22.58	22.73	22.67
1.4	QPSK	3	0	22.64	22.76	22.72
1.4	QPSK	3	1	22.66	22.81	22.76
1.4	QPSK	3	3	22.65	22.78	22.73
1.4	QPSK	6	0	22.64	22.75	22.74
1.4	16QAM	1	0	22.90	23.04	23.04
1.4	16QAM	1	3	22.97	23.16	23.10
1.4	16QAM	1	5	22.89	23.03	22.97
1.4	16QAM	3	0	22.71	22.82	22.78
1.4	16QAM	3	1	22.75	22.90	22.83
1.4	16QAM	3	3	22.72	22.85	22.75
1.4	16QAM	6	0	22.78	22.91	22.85
1.4	64QAM	1	0	22.79	23.03	22.95
1.4	64QAM	1	3	22.85	23.06	22.98
1.4	64QAM	1	5	22.79	22.97	22.88
1.4	64QAM	3	0	22.80	22.98	22.90
1.4	64QAM	3	1	22.83	23.04	22.95
1.4	64QAM	3	3	22.79	23.01	22.90
1.4	64QAM	6	0	21.73	21.85	21.80

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

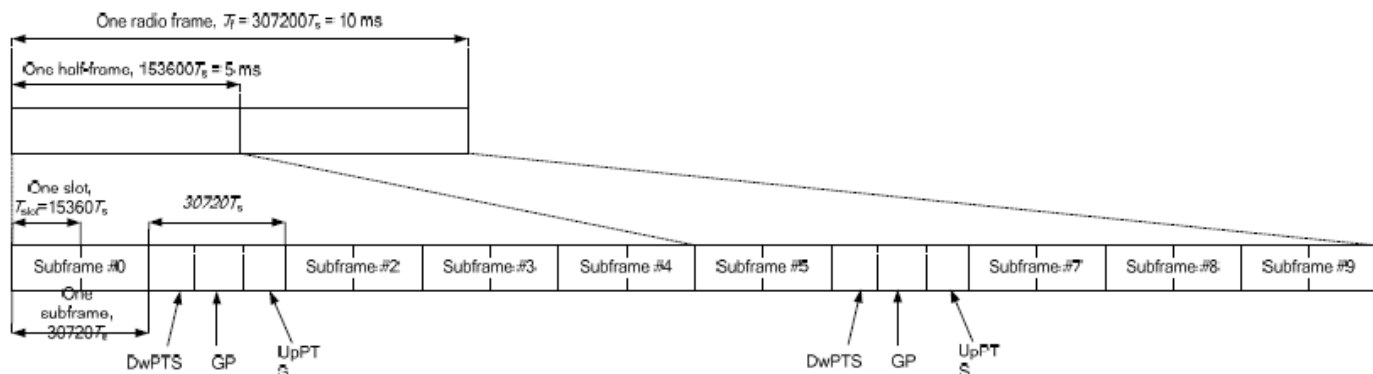


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

**<LTE Band 38>****<WiFi off>**

Power Selection				Head / Hotspot / Body-worn/ Product Specific		
Transmit Antenna				Ant 2		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	24.82	24.84	24.85
20	QPSK	1	49	24.84	24.87	24.78
20	QPSK	1	99	24.92	24.97	24.86
20	QPSK	50	0	23.92	23.94	23.96
20	QPSK	50	24	23.96	23.98	24.01
20	QPSK	50	50	23.97	24.01	23.92
20	QPSK	100	0	23.94	23.97	23.99
20	16QAM	1	0	23.92	23.97	23.97
20	16QAM	1	49	23.94	23.98	23.89
20	16QAM	1	99	24.03	24.07	23.96
20	16QAM	50	0	22.98	23.00	23.04
20	16QAM	50	24	23.01	23.05	23.07
20	16QAM	50	50	23.04	23.08	23.01
20	16QAM	100	0	23.01	23.05	23.07
20	64QAM	1	0	22.64	22.69	22.69
20	64QAM	1	49	22.68	22.70	22.61
20	64QAM	1	99	22.74	22.78	22.70
20	64QAM	50	0	21.97	22.01	22.01
20	64QAM	50	24	22.01	22.03	22.07
20	64QAM	50	50	22.00	22.06	21.98
20	64QAM	100	0	21.99	22.04	22.05
Channel				37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5
15	QPSK	1	0	24.85	24.89	24.91
15	QPSK	1	37	24.85	24.88	24.81
15	QPSK	1	74	24.96	24.95	24.93
15	QPSK	36	0	23.89	23.93	23.96
15	QPSK	36	20	23.94	23.96	23.91
15	QPSK	36	39	23.92	23.96	23.89
15	QPSK	75	0	23.95	23.95	24.00
15	16QAM	1	0	23.97	23.98	24.02
15	16QAM	1	37	23.95	23.95	23.91
15	16QAM	1	74	24.09	24.11	24.04
15	16QAM	36	0	22.93	22.95	22.98
15	16QAM	36	20	22.98	22.99	22.94
15	16QAM	36	39	22.97	23.00	22.94
15	16QAM	75	0	23.01	23.05	23.07
15	64QAM	1	0	22.69	22.72	22.75
15	64QAM	1	37	22.70	22.74	22.67
15	64QAM	1	74	22.78	22.84	22.77
15	64QAM	36	0	21.92	21.96	22.00
15	64QAM	36	20	21.99	22.01	21.95
15	64QAM	36	39	21.99	22.02	21.95
15	64QAM	75	0	22.00	22.03	22.05
Channel				37800	38000	38200
Frequency (MHz)				2575	2595	2615
10	QPSK	1	0	24.84	24.88	24.78
10	QPSK	1	25	24.86	24.89	24.80
10	QPSK	1	49	24.92	24.96	24.89
10	QPSK	25	0	23.88	23.90	23.86
10	QPSK	25	12	23.94	23.93	23.87
10	QPSK	25	25	23.93	23.94	23.91
10	QPSK	50	0	23.93	23.96	23.89
10	16QAM	1	0	23.97	24.01	23.94
10	16QAM	1	25	23.97	24.00	23.93
10	16QAM	1	49	24.00	24.06	24.00
10	16QAM	25	0	22.96	22.97	22.92
10	16QAM	25	12	22.98	23.04	23.00
10	16QAM	25	25	23.02	23.03	22.97
10	16QAM	50	0	22.99	23.01	22.98
10	64QAM	1	0	22.70	22.71	22.65
10	64QAM	1	25	22.71	22.75	22.67
10	64QAM	1	49	22.75	22.79	22.70

10	64QAM	25	0	21.98	22.03	21.97
10	64QAM	25	12	22.01	22.05	22.01
10	64QAM	25	25	22.04	22.07	22.00
10	64QAM	50	0	21.97	22.01	21.95
Channel				37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5
5	QPSK	1	0	24.81	24.86	24.81
5	QPSK	1	12	24.83	24.89	24.85
5	QPSK	1	24	24.82	24.88	24.82
5	QPSK	12	0	23.89	23.90	23.84
5	QPSK	12	7	23.90	23.95	23.89
5	QPSK	12	13	23.90	23.95	23.89
5	QPSK	25	0	23.88	23.93	23.85
5	16QAM	1	0	23.89	23.96	23.90
5	16QAM	1	12	23.94	24.01	23.96
5	16QAM	1	24	23.96	24.03	23.98
5	16QAM	12	0	22.88	22.93	22.89
5	16QAM	12	7	22.90	22.96	22.94
5	16QAM	12	13	22.91	22.97	22.94
5	16QAM	25	0	22.96	23.00	22.98
5	64QAM	1	0	22.67	22.72	22.64
5	64QAM	1	12	22.68	22.75	22.69
5	64QAM	1	24	22.71	22.77	22.70
5	64QAM	12	0	21.92	21.96	21.93
5	64QAM	12	7	21.97	22.01	21.99
5	64QAM	12	13	21.95	22.01	21.95
5	64QAM	25	0	21.98	22.04	21.99



<WiFi on>

Power Selection				Head		
Transmit Antenna				Ant 2		
Max. Power				25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	24.82	24.84	24.85
20	QPSK	1	49	24.84	24.87	24.78
20	QPSK	1	99	24.92	24.97	24.86
20	QPSK	50	0	23.92	23.94	23.96
20	QPSK	50	24	23.96	23.98	24.01
20	QPSK	50	50	23.97	24.01	23.92
20	QPSK	100	0	23.94	23.97	23.99
20	16QAM	1	0	23.92	23.97	23.97
20	16QAM	1	49	23.94	23.98	23.89
20	16QAM	1	99	24.03	24.07	23.96
20	16QAM	50	0	22.98	23.00	23.04
20	16QAM	50	24	23.01	23.05	23.07
20	16QAM	50	50	23.04	23.08	23.01
20	16QAM	100	0	23.01	23.05	23.07
20	64QAM	1	0	22.64	22.69	22.69
20	64QAM	1	49	22.68	22.70	22.61
20	64QAM	1	99	22.74	22.78	22.70
20	64QAM	50	0	21.97	22.01	22.01
20	64QAM	50	24	22.01	22.03	22.07
20	64QAM	50	50	22.00	22.06	21.98
20	64QAM	100	0	21.99	22.04	22.05
Channel				37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5
15	QPSK	1	0	24.85	24.89	24.91
15	QPSK	1	37	24.85	24.88	24.81
15	QPSK	1	74	24.96	24.95	24.93
15	QPSK	36	0	23.89	23.93	23.96
15	QPSK	36	20	23.94	23.96	23.91
15	QPSK	36	39	23.92	23.96	23.89
15	QPSK	75	0	23.95	23.95	24.00
15	16QAM	1	0	23.97	23.98	24.02
15	16QAM	1	37	23.95	23.95	23.91
15	16QAM	1	74	24.09	24.11	24.04
15	16QAM	36	0	22.93	22.95	22.98
15	16QAM	36	20	22.98	22.99	22.94
15	16QAM	36	39	22.97	23.00	22.94
15	16QAM	75	0	23.01	23.05	23.07
15	64QAM	1	0	22.69	22.72	22.75
15	64QAM	1	37	22.70	22.74	22.67
15	64QAM	1	74	22.78	22.84	22.77
15	64QAM	36	0	21.92	21.96	22.00
15	64QAM	36	20	21.99	22.01	21.95
15	64QAM	36	39	21.99	22.02	21.95
15	64QAM	75	0	22.00	22.03	22.05
Channel				37800	38000	38200
Frequency (MHz)				2575	2595	2615
10	QPSK	1	0	24.84	24.88	24.78
10	QPSK	1	25	24.86	24.89	24.80
10	QPSK	1	49	24.92	24.96	24.89
10	QPSK	25	0	23.88	23.90	23.86
10	QPSK	25	12	23.94	23.93	23.87
10	QPSK	25	25	23.93	23.94	23.91
10	QPSK	50	0	23.93	23.96	23.89
10	16QAM	1	0	23.97	24.01	23.94
10	16QAM	1	25	23.97	24.00	23.93
10	16QAM	1	49	24.00	24.06	24.00
10	16QAM	25	0	22.96	22.97	22.92
10	16QAM	25	12	22.98	23.04	23.00
10	16QAM	25	25	23.02	23.03	22.97
10	16QAM	50	0	22.99	23.01	22.98
10	64QAM	1	0	22.70	22.71	22.65
10	64QAM	1	25	22.71	22.75	22.67
10	64QAM	1	49	22.75	22.79	22.70
10	64QAM	25	0	21.98	22.03	21.97
10	64QAM	25	12	22.01	22.05	22.01



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	22.04	22.07	22.00
10	64QAM	50	0	21.97	22.01	21.95
Channel				37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5
5	QPSK	1	0	24.81	24.86	24.81
5	QPSK	1	12	24.83	24.89	24.85
5	QPSK	1	24	24.82	24.88	24.82
5	QPSK	12	0	23.89	23.90	23.84
5	QPSK	12	7	23.90	23.95	23.89
5	QPSK	12	13	23.90	23.95	23.89
5	QPSK	25	0	23.88	23.93	23.85
5	16QAM	1	0	23.89	23.96	23.90
5	16QAM	1	12	23.94	24.01	23.96
5	16QAM	1	24	23.96	24.03	23.98
5	16QAM	12	0	22.88	22.93	22.89
5	16QAM	12	7	22.90	22.96	22.94
5	16QAM	12	13	22.91	22.97	22.94
5	16QAM	25	0	22.96	23.00	22.98
5	64QAM	1	0	22.67	22.72	22.64
5	64QAM	1	12	22.68	22.75	22.69
5	64QAM	1	24	22.71	22.77	22.70
5	64QAM	12	0	21.92	21.96	21.93
5	64QAM	12	7	21.97	22.01	21.99
5	64QAM	12	13	21.95	22.01	21.95
5	64QAM	25	0	21.98	22.04	21.99



FCC SAR TEST REPORT

Report No. : FA891147-05

Power Selection				Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 2		
Max. Power				22.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	21.78	21.83	21.81
20	QPSK	1	49	21.81	21.82	21.76
20	QPSK	1	99	21.89	21.91	21.86
20	QPSK	50	0	21.91	21.90	21.93
20	QPSK	50	24	21.92	21.95	21.96
20	QPSK	50	50	21.95	21.97	21.90
20	QPSK	100	0	21.93	21.93	21.95
20	16QAM	1	0	21.86	21.89	21.90
20	16QAM	1	49	21.92	21.95	21.84
20	16QAM	1	99	21.96	22.03	21.92
20	16QAM	50	0	21.93	21.97	21.97
20	16QAM	50	24	21.98	22.01	22.01
20	16QAM	50	50	22.00	21.96	21.94
20	16QAM	100	0	21.97	22.00	22.01
20	64QAM	1	0	21.63	21.64	21.67
20	64QAM	1	49	21.65	21.66	21.58
20	64QAM	1	99	21.72	21.74	21.67
20	64QAM	50	0	21.92	21.95	21.97
20	64QAM	50	24	21.97	22.00	21.98
20	64QAM	50	50	22.00	21.97	21.94
20	64QAM	100	0	21.94	21.99	22.01
Channel				37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5
15	QPSK	1	0	21.81	21.85	21.87
15	QPSK	1	37	21.81	21.86	21.79
15	QPSK	1	74	21.95	21.95	21.89
15	QPSK	36	0	21.86	21.88	21.94
15	QPSK	36	20	21.90	21.92	21.87
15	QPSK	36	39	21.91	21.92	21.86
15	QPSK	75	0	21.90	21.94	21.97
15	16QAM	1	0	21.89	21.90	21.95
15	16QAM	1	37	21.91	21.93	21.89
15	16QAM	1	74	22.00	22.02	21.96
15	16QAM	36	0	21.86	21.89	21.93
15	16QAM	36	20	21.91	21.93	21.86
15	16QAM	36	39	21.88	21.92	21.88
15	16QAM	75	0	21.95	21.97	22.02
15	64QAM	1	0	21.64	21.65	21.69
15	64QAM	1	37	21.65	21.66	21.63
15	64QAM	1	74	21.76	21.78	21.72
15	64QAM	36	0	21.88	21.91	21.96
15	64QAM	36	20	21.93	21.97	21.90
15	64QAM	36	39	21.94	21.98	21.91
15	64QAM	75	0	21.95	21.98	22.01
Channel				37800	38000	38200
Frequency (MHz)				2575	2595	2615
10	QPSK	1	0	21.77	21.80	21.78
10	QPSK	1	25	21.82	21.86	21.80
10	QPSK	1	49	21.87	21.93	21.87
10	QPSK	25	0	21.87	21.86	21.83
10	QPSK	25	12	21.89	21.93	21.89
10	QPSK	25	25	21.89	21.91	21.86
10	QPSK	50	0	21.88	21.91	21.87
10	16QAM	1	0	21.89	21.89	21.88
10	16QAM	1	25	21.90	21.92	21.87
10	16QAM	1	49	21.94	21.97	21.94
10	16QAM	25	0	21.90	21.96	21.87
10	16QAM	25	12	21.95	21.97	21.92
10	16QAM	25	25	21.93	21.99	21.92
10	16QAM	50	0	21.93	21.96	21.89
10	64QAM	1	0	21.65	21.68	21.64
10	64QAM	1	25	21.67	21.70	21.64
10	64QAM	1	49	21.71	21.72	21.70
10	64QAM	25	0	21.94	21.97	21.92
10	64QAM	25	12	21.98	22.01	21.96
10	64QAM	25	25	22.00	22.02	21.96



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	50	0	21.93	21.97	21.93
Channel				37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5
5	QPSK	1	0	21.74	21.76	21.73
5	QPSK	1	12	21.77	21.81	21.77
5	QPSK	1	24	21.75	21.77	21.75
5	QPSK	12	0	21.78	21.86	21.78
5	QPSK	12	7	21.84	21.90	21.87
5	QPSK	12	13	21.82	21.86	21.84
5	QPSK	25	0	21.79	21.86	21.80
5	16QAM	1	0	21.80	21.86	21.80
5	16QAM	1	12	21.82	21.89	21.87
5	16QAM	1	24	21.86	21.89	21.87
5	16QAM	12	0	21.78	21.83	21.79
5	16QAM	12	7	21.82	21.86	21.84
5	16QAM	12	13	21.83	21.86	21.84
5	16QAM	25	0	21.87	21.90	21.89
5	64QAM	1	0	21.57	21.62	21.58
5	64QAM	1	12	21.58	21.64	21.63
5	64QAM	1	24	21.62	21.67	21.63
5	64QAM	12	0	21.86	21.88	21.84
5	64QAM	12	7	21.88	21.93	21.92
5	64QAM	12	13	21.88	21.93	21.91
5	64QAM	25	0	21.89	21.95	21.92



<LTE Band 41>

<WiFi off>

Power Selection				Head / Hotspot / Body-worn/ Product Specific				
Transmit Antenna				Ant 2				
Max. Power				25				
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.13	24.26	24.28	24.35	24.49
20	QPSK	1	49	24.06	24.16	24.19	24.27	24.42
20	QPSK	1	99	24.10	24.21	24.25	24.35	24.42
20	QPSK	50	0	23.15	23.28	23.32	23.37	23.50
20	QPSK	50	24	23.14	23.25	23.29	23.37	23.49
20	QPSK	50	50	23.15	23.24	23.29	23.34	23.47
20	QPSK	100	0	23.15	23.24	23.28	23.35	23.47
20	16QAM	1	0	23.24	23.39	23.39	23.45	23.63
20	16QAM	1	49	23.16	23.27	23.30	23.37	23.52
20	16QAM	1	99	23.17	23.28	23.33	23.42	23.52
20	16QAM	50	0	22.22	22.34	22.36	22.43	22.58
20	16QAM	50	24	22.21	22.32	22.35	22.44	22.56
20	16QAM	50	50	22.19	22.30	22.34	22.43	22.52
20	16QAM	100	0	22.19	22.30	22.34	22.43	22.55
20	64QAM	1	0	21.96	22.09	22.11	22.18	22.33
20	64QAM	1	49	21.87	21.99	22.03	22.10	22.26
20	64QAM	1	99	21.92	22.02	22.07	22.16	22.27
20	64QAM	50	0	21.18	21.32	21.36	21.44	21.57
20	64QAM	50	24	21.20	21.33	21.34	21.42	21.57
20	64QAM	50	50	21.19	21.29	21.33	21.41	21.54
20	64QAM	100	0	21.18	21.32	21.35	21.42	21.58
Channel				39725	40173	40620	41068	41515
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5
15	QPSK	1	0	24.13	24.25	24.29	24.36	24.48
15	QPSK	1	37	24.04	24.14	24.21	24.29	24.41
15	QPSK	1	74	24.10	24.24	24.26	24.35	24.42
15	QPSK	36	0	23.11	23.22	23.25	23.35	23.50
15	QPSK	36	20	23.13	23.23	23.26	23.34	23.47
15	QPSK	36	39	23.07	23.17	23.21	23.31	23.41
15	QPSK	75	0	23.11	23.22	23.27	23.33	23.43
15	16QAM	1	0	23.21	23.33	23.38	23.44	23.61
15	16QAM	1	37	23.13	23.26	23.29	23.38	23.49
15	16QAM	1	74	23.18	23.28	23.34	23.42	23.54
15	16QAM	36	0	22.10	22.23	22.26	22.35	22.50
15	16QAM	36	20	22.14	22.25	22.28	22.37	22.48
15	16QAM	36	39	22.12	22.22	22.25	22.34	22.46
15	16QAM	75	0	22.19	22.29	22.32	22.40	22.51
15	64QAM	1	0	21.93	22.06	22.08	22.18	22.32
15	64QAM	1	37	21.87	22.00	22.03	22.14	22.25
15	64QAM	1	74	21.93	22.03	22.07	22.18	22.28
15	64QAM	36	0	21.15	21.25	21.29	21.36	21.53
15	64QAM	36	20	21.17	21.27	21.30	21.40	21.51
15	64QAM	36	39	21.13	21.23	21.28	21.37	21.49
15	64QAM	75	0	21.16	21.28	21.33	21.40	21.57
Channel				39700	40160	40620	41080	41540
Frequency (MHz)				2501	2547	2593	2639	2685
10	QPSK	1	0	24.07	24.20	24.25	24.33	24.48
10	QPSK	1	25	24.04	24.17	24.21	24.32	24.45
10	QPSK	1	49	24.06	24.18	24.24	24.34	24.48
10	QPSK	25	0	23.04	23.18	23.25	23.35	23.47
10	QPSK	25	12	23.10	23.24	23.28	23.37	23.47
10	QPSK	25	25	23.07	23.18	23.26	23.35	23.48
10	QPSK	50	0	23.08	23.22	23.24	23.34	23.47
10	16QAM	1	0	23.19	23.33	23.35	23.45	23.62
10	16QAM	1	25	23.16	23.29	23.34	23.43	23.56
10	16QAM	1	49	23.13	23.26	23.33	23.42	23.55
10	16QAM	25	0	22.15	22.27	22.33	22.43	22.57
10	16QAM	25	12	22.18	22.30	22.34	22.42	22.58
10	16QAM	25	25	22.14	22.26	22.31	22.43	22.55
10	16QAM	50	0	22.14	22.30	22.33	22.43	22.56
10	64QAM	1	0	21.91	22.05	22.08	22.19	22.34
10	64QAM	1	25	21.88	22.02	22.05	22.16	22.27
10	64QAM	1	49	21.87	22.01	22.06	22.14	22.30



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	0	21.18	21.31	21.36	21.45	21.60
10	64QAM	25	12	21.20	21.32	21.37	21.47	21.60
10	64QAM	25	25	21.17	21.30	21.37	21.45	21.60
10	64QAM	50	0	21.15	21.25	21.30	21.44	21.56
Channel				39675	40148	40620	41093	41565
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5
5	QPSK	1	0	24.02	24.17	24.20	24.30	24.43
5	QPSK	1	12	24.02	24.16	24.23	24.31	24.45
5	QPSK	1	24	23.98	24.12	24.17	24.25	24.38
5	QPSK	12	0	23.03	23.19	23.24	23.32	23.48
5	QPSK	12	7	23.06	23.22	23.23	23.35	23.46
5	QPSK	12	13	23.07	23.18	23.22	23.34	23.47
5	QPSK	25	0	23.06	23.19	23.24	23.31	23.44
5	16QAM	1	0	23.11	23.25	23.29	23.37	23.51
5	16QAM	1	12	23.11	23.28	23.34	23.42	23.55
5	16QAM	1	24	23.10	23.24	23.30	23.40	23.52
5	16QAM	12	0	22.06	22.21	22.25	22.34	22.47
5	16QAM	12	7	22.11	22.23	22.27	22.38	22.50
5	16QAM	12	13	22.05	22.19	22.25	22.35	22.45
5	16QAM	25	0	22.11	22.27	22.30	22.40	22.56
5	64QAM	1	0	21.83	22.00	22.04	22.12	22.27
5	64QAM	1	12	21.84	22.01	22.07	22.15	22.30
5	64QAM	1	24	21.85	21.99	22.04	22.15	22.27
5	64QAM	12	0	21.10	21.25	21.30	21.38	21.52
5	64QAM	12	7	21.14	21.27	21.30	21.41	21.52
5	64QAM	12	13	21.12	21.25	21.28	21.39	21.49
5	64QAM	25	0	21.12	21.28	21.33	21.44	21.54



<WiFi on>

Power Selection				Head				
Transmit Antenna				Ant 2				
Max. Power				25				
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	24.13	24.26	24.28	24.35	24.49
20	QPSK	1	49	24.06	24.16	24.19	24.27	24.42
20	QPSK	1	99	24.10	24.21	24.25	24.35	24.42
20	QPSK	50	0	23.15	23.28	23.32	23.37	23.50
20	QPSK	50	24	23.14	23.25	23.29	23.37	23.49
20	QPSK	50	50	23.15	23.24	23.29	23.34	23.47
20	QPSK	100	0	23.15	23.24	23.28	23.35	23.47
20	16QAM	1	0	23.24	23.39	23.39	23.45	23.63
20	16QAM	1	49	23.16	23.27	23.30	23.37	23.52
20	16QAM	1	99	23.17	23.28	23.33	23.42	23.52
20	16QAM	50	0	22.22	22.34	22.36	22.43	22.58
20	16QAM	50	24	22.21	22.32	22.35	22.44	22.56
20	16QAM	50	50	22.19	22.30	22.34	22.43	22.52
20	16QAM	100	0	22.19	22.30	22.34	22.43	22.55
20	64QAM	1	0	21.96	22.09	22.11	22.18	22.33
20	64QAM	1	49	21.87	21.99	22.03	22.10	22.26
20	64QAM	1	99	21.92	22.02	22.07	22.16	22.27
20	64QAM	50	0	21.18	21.32	21.36	21.44	21.57
20	64QAM	50	24	21.20	21.33	21.34	21.42	21.57
20	64QAM	50	50	21.19	21.29	21.33	21.41	21.54
20	64QAM	100	0	21.18	21.32	21.35	21.42	21.58
Channel				39725	40173	40620	41068	41515
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5
15	QPSK	1	0	24.13	24.25	24.29	24.36	24.48
15	QPSK	1	37	24.04	24.14	24.21	24.29	24.41
15	QPSK	1	74	24.10	24.24	24.26	24.35	24.42
15	QPSK	36	0	23.11	23.22	23.25	23.35	23.50
15	QPSK	36	20	23.13	23.23	23.26	23.34	23.47
15	QPSK	36	39	23.07	23.17	23.21	23.31	23.41
15	QPSK	75	0	23.11	23.22	23.27	23.33	23.43
15	16QAM	1	0	23.21	23.33	23.38	23.44	23.61
15	16QAM	1	37	23.13	23.26	23.29	23.38	23.49
15	16QAM	1	74	23.18	23.28	23.34	23.42	23.54
15	16QAM	36	0	22.10	22.23	22.26	22.35	22.50
15	16QAM	36	20	22.14	22.25	22.28	22.37	22.48
15	16QAM	36	39	22.12	22.22	22.25	22.34	22.46
15	16QAM	75	0	22.19	22.29	22.32	22.40	22.51
15	64QAM	1	0	21.93	22.06	22.08	22.18	22.32
15	64QAM	1	37	21.87	22.00	22.03	22.14	22.25
15	64QAM	1	74	21.93	22.03	22.07	22.18	22.28
15	64QAM	36	0	21.15	21.25	21.29	21.36	21.53
15	64QAM	36	20	21.17	21.27	21.30	21.40	21.51
15	64QAM	36	39	21.13	21.23	21.28	21.37	21.49
15	64QAM	75	0	21.16	21.28	21.33	21.40	21.57
Channel				39700	40160	40620	41080	41540
Frequency (MHz)				2501	2547	2593	2639	2685
10	QPSK	1	0	24.07	24.20	24.25	24.33	24.48
10	QPSK	1	25	24.04	24.17	24.21	24.32	24.45
10	QPSK	1	49	24.06	24.18	24.24	24.34	24.48
10	QPSK	25	0	23.04	23.18	23.25	23.35	23.47
10	QPSK	25	12	23.10	23.24	23.28	23.37	23.47
10	QPSK	25	25	23.07	23.18	23.26	23.35	23.48
10	QPSK	50	0	23.08	23.22	23.24	23.34	23.47
10	16QAM	1	0	23.19	23.33	23.35	23.45	23.62
10	16QAM	1	25	23.16	23.29	23.34	23.43	23.56
10	16QAM	1	49	23.13	23.26	23.33	23.42	23.55
10	16QAM	25	0	22.15	22.27	22.33	22.43	22.57
10	16QAM	25	12	22.18	22.30	22.34	22.42	22.58
10	16QAM	25	25	22.14	22.26	22.31	22.43	22.55
10	16QAM	50	0	22.14	22.30	22.33	22.43	22.56
10	64QAM	1	0	21.91	22.05	22.08	22.19	22.34
10	64QAM	1	25	21.88	22.02	22.05	22.16	22.27
10	64QAM	1	49	21.87	22.01	22.06	22.14	22.30
10	64QAM	25	0	21.18	21.31	21.36	21.45	21.60
10	64QAM	25	12	21.20	21.32	21.37	21.47	21.60



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	21.17	21.30	21.37	21.45	21.60
10	64QAM	50	0	21.15	21.25	21.30	21.44	21.56
Channel				39675	40148	40620	41093	41565
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5
5	QPSK	1	0	24.02	24.17	24.20	24.30	24.43
5	QPSK	1	12	24.02	24.16	24.23	24.31	24.45
5	QPSK	1	24	23.98	24.12	24.17	24.25	24.38
5	QPSK	12	0	23.03	23.19	23.24	23.32	23.48
5	QPSK	12	7	23.06	23.22	23.23	23.35	23.46
5	QPSK	12	13	23.07	23.18	23.22	23.34	23.47
5	QPSK	25	0	23.06	23.19	23.24	23.31	23.44
5	16QAM	1	0	23.11	23.25	23.29	23.37	23.51
5	16QAM	1	12	23.11	23.28	23.34	23.42	23.55
5	16QAM	1	24	23.10	23.24	23.30	23.40	23.52
5	16QAM	12	0	22.06	22.21	22.25	22.34	22.47
5	16QAM	12	7	22.11	22.23	22.27	22.38	22.50
5	16QAM	12	13	22.05	22.19	22.25	22.35	22.45
5	16QAM	25	0	22.11	22.27	22.30	22.40	22.56
5	64QAM	1	0	21.83	22.00	22.04	22.12	22.27
5	64QAM	1	12	21.84	22.01	22.07	22.15	22.30
5	64QAM	1	24	21.85	21.99	22.04	22.15	22.27
5	64QAM	12	0	21.10	21.25	21.30	21.38	21.52
5	64QAM	12	7	21.14	21.27	21.30	21.41	21.52
5	64QAM	12	13	21.12	21.25	21.28	21.39	21.49
5	64QAM	25	0	21.12	21.28	21.33	21.44	21.54



Power Selection				Hotspot / Body-worn / Product Specific				
Transmit Antenna				Ant 2				
Max. Power				23				
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	22.07	22.17	22.22	22.32	22.47
20	QPSK	1	49	21.97	22.08	22.14	22.26	22.40
20	QPSK	1	99	21.99	22.14	22.21	22.32	22.41
20	QPSK	50	0	22.08	22.23	22.28	22.38	22.50
20	QPSK	50	24	22.11	22.21	22.28	22.38	22.49
20	QPSK	50	50	22.05	22.19	22.26	22.35	22.49
20	QPSK	100	0	22.07	22.19	22.30	22.38	22.48
20	16QAM	1	0	22.11	22.24	22.30	22.40	22.50
20	16QAM	1	49	22.04	22.14	22.23	22.34	22.46
20	16QAM	1	99	22.06	22.17	22.28	22.36	22.46
20	16QAM	50	0	22.11	22.24	22.30	22.42	22.49
20	16QAM	50	24	22.10	22.22	22.31	22.40	22.49
20	16QAM	50	50	22.09	22.22	22.31	22.41	22.48
20	16QAM	100	0	22.10	22.22	22.29	22.40	22.49
20	64QAM	1	0	21.87	21.99	22.05	22.16	22.30
20	64QAM	1	49	21.75	21.89	21.96	22.10	22.19
20	64QAM	1	99	21.80	21.92	22.02	22.13	22.20
20	64QAM	50	0	21.10	21.23	21.28	21.39	21.50
20	64QAM	50	24	21.09	21.22	21.27	21.38	21.50
20	64QAM	50	50	21.08	21.19	21.30	21.39	21.49
20	64QAM	100	0	21.10	21.23	21.28	21.39	21.53
Channel				39725	40173	40620	41068	41515
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5
15	QPSK	1	0	22.04	22.16	22.23	22.31	22.45
15	QPSK	1	37	21.95	22.08	22.17	22.27	22.37
15	QPSK	1	74	22.02	22.11	22.19	22.29	22.40
15	QPSK	36	0	22.02	22.14	22.20	22.34	22.44
15	QPSK	36	20	22.04	22.16	22.27	22.34	22.45
15	QPSK	36	39	22.00	22.10	22.21	22.30	22.40
15	QPSK	75	0	22.04	22.15	22.23	22.34	22.47
15	16QAM	1	0	22.09	22.23	22.26	22.39	22.48
15	16QAM	1	37	22.01	22.14	22.21	22.34	22.41
15	16QAM	1	74	22.07	22.19	22.26	22.39	22.45
15	16QAM	36	0	22.00	22.14	22.21	22.31	22.44
15	16QAM	36	20	22.03	22.15	22.24	22.32	22.43
15	16QAM	36	39	22.00	22.10	22.20	22.29	22.41
15	16QAM	75	0	22.05	22.19	22.27	22.38	22.48
15	64QAM	1	0	21.83	21.96	22.01	22.12	22.28
15	64QAM	1	37	21.76	21.89	21.96	22.11	22.17
15	64QAM	1	74	21.82	21.94	22.03	22.13	22.22
15	64QAM	36	0	21.05	21.17	21.23	21.35	21.49
15	64QAM	36	20	21.06	21.18	21.27	21.36	21.49
15	64QAM	36	39	21.03	21.13	21.23	21.34	21.45
15	64QAM	75	0	21.07	21.18	21.25	21.37	21.50
Channel				39700	40160	40620	41080	41540
Frequency (MHz)				2501	2547	2593	2639	2685
10	QPSK	1	0	21.97	22.11	22.18	22.30	22.44
10	QPSK	1	25	21.97	22.09	22.17	22.28	22.39
10	QPSK	1	49	21.99	22.09	22.21	22.31	22.45
10	QPSK	25	0	22.01	22.14	22.25	22.34	22.48
10	QPSK	25	12	22.03	22.17	22.23	22.37	22.48
10	QPSK	25	25	22.04	22.15	22.22	22.35	22.46
10	QPSK	50	0	22.01	22.16	22.23	22.36	22.47
10	16QAM	1	0	22.06	22.19	22.28	22.37	22.48
10	16QAM	1	25	22.04	22.17	22.23	22.39	22.48
10	16QAM	1	49	22.00	22.14	22.24	22.36	22.48
10	16QAM	25	0	22.06	22.18	22.27	22.39	22.48
10	16QAM	25	12	22.07	22.21	22.27	22.38	22.49
10	16QAM	25	25	22.03	22.16	22.26	22.38	22.49
10	16QAM	50	0	22.06	22.20	22.26	22.38	22.47
10	64QAM	1	0	21.82	21.94	22.03	22.15	22.28
10	64QAM	1	25	21.79	21.92	21.99	22.12	22.21
10	64QAM	1	49	21.76	21.91	22.00	22.12	22.25
10	64QAM	25	0	21.07	21.21	21.29	21.41	21.54
10	64QAM	25	12	21.10	21.24	21.32	21.43	21.55



FCC SAR TEST REPORT

Report No. : FA891147-05

10	64QAM	25	25	21.07	21.20	21.30	21.42	21.53
10	64QAM	50	0	21.04	21.19	21.26	21.37	21.52
Channel				39675	40148	40620	41093	41565
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5
5	QPSK	1	0	21.90	22.04	22.13	22.23	22.38
5	QPSK	1	12	21.90	22.06	22.16	22.25	22.40
5	QPSK	1	24	21.87	21.99	22.09	22.22	22.31
5	QPSK	12	0	21.97	22.12	22.17	22.28	22.43
5	QPSK	12	7	21.99	22.16	22.23	22.34	22.41
5	QPSK	12	13	21.98	22.10	22.18	22.34	22.40
5	QPSK	25	0	21.96	22.11	22.18	22.30	22.44
5	16QAM	1	0	21.97	22.10	22.16	22.31	22.41
5	16QAM	1	12	21.96	22.11	22.23	22.35	22.48
5	16QAM	1	24	21.97	22.10	22.20	22.31	22.42
5	16QAM	12	0	21.95	22.09	22.18	22.29	22.41
5	16QAM	12	7	21.97	22.12	22.19	22.33	22.42
5	16QAM	12	13	21.96	22.09	22.17	22.29	22.40
5	16QAM	25	0	22.02	22.13	22.23	22.37	22.47
5	64QAM	1	0	21.73	21.87	21.95	22.07	22.20
5	64QAM	1	12	21.73	21.89	21.99	22.10	22.21
5	64QAM	1	24	21.73	21.86	21.95	22.10	22.17
5	64QAM	12	0	20.98	21.13	21.20	21.34	21.47
5	64QAM	12	7	21.01	21.16	21.23	21.37	21.45
5	64QAM	12	13	20.99	21.12	21.20	21.32	21.44
5	64QAM	25	0	21.04	21.16	21.26	21.38	21.49

12. LTE Carrier Aggregation combinations

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC					3CC				
Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset
1	41A_41A				3	41A_41C			
2	41C								

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	41	20	2680	41490	QPSK	1	0	41	20	2660.20	41292	24.44	24.49

<Three Carrier power verification>

Configure		PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	41	20	2680	41490	QPSK	1	0	41	5	2498.5	39675	41	20	2510.2	39792	24.48	24.49

13. WLAN Conducted Power

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

<2.4GHz WLAN>

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	14.90	15.00	99.12	13.90	14.00	99.00	12.90	13.00	12.90	13.00	15.86	16.00	99.20
		6	2437	14.90	15.00		13.70	14.00		12.60	13.00	12.80	13.00	15.71	16.00	
		11	2462	14.90	15.00		13.80	14.00		13.00	13.00	12.70	13.00	15.86	16.00	
		12	2467	14.60	15.00		13.80	14.00		12.90	13.00	12.60	13.00	15.76	16.00	
		13	2472	12.90	13.00		12.90	13.00		12.60	13.00	12.80	13.00	15.71	16.00	
	802.11g 6Mbps	1	2412	14.90	15.00	98.33	13.90	14.00	98.33	13.00	13.00	12.60	13.00	15.81	16.00	98.33
		6	2437	14.80	15.00		13.90	14.00		13.00	13.00	12.90	13.00	15.96	16.00	
		11	2462	14.60	15.00		13.60	14.00		12.80	13.00	12.40	13.00	15.61	16.00	
		12	2467	10.00	10.00		10.00	10.00		10.00	10.00	9.40	10.00	12.72	13.00	
		13	2472	-1.20	-1.00		-2.60	-2.50		-1.90	-1.00	-3.30	-2.50	0.47	0.50	
	802.11n-HT20 MCS0	1	2412	14.70	15.00	98.21	13.80	14.00	98.21	12.90	13.00	12.50	13.00	15.71	16.00	98.21
		6	2437	14.60	15.00		13.80	14.00		12.90	13.00	12.60	13.00	15.76	16.00	
		11	2462	14.60	15.00		13.70	14.00		12.90	13.00	12.40	13.00	15.67	16.00	
		12	2467	9.60	10.00		9.90	10.00		10.00	10.00	9.10	10.00	12.57	13.00	
		13	2472	-5.70	-5.50		-7.90	-7.00		-6.30	-5.50	-7.80	-7.00	-3.98	-4.00	

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.80	18.00	99.12	17.60	18.00	99.00	17.80	18.00	17.60	18.00	20.71	21.00	99.20
		6	2437	17.90	18.00		17.90	18.00		17.70	18.00	17.90	18.00	20.81	21.00	
		11	2462	17.90	18.00		17.50	18.00		17.80	18.00	17.90	18.00	20.86	21.00	
		12	2467	17.50	17.50		17.20	17.50		17.30	17.50	17.10	17.50	20.21	20.50	
		13	2472	12.90	13.00		12.90	13.00		12.70	13.00	12.90	13.00	15.81	16.00	
	802.11g 6Mbps	1	2412	17.90	18.00	98.33	17.80	18.00	98.33	17.90	18.00	18.00	18.00	20.96	21.00	98.33
		6	2437	17.60	18.00		17.60	18.00		17.80	18.00	17.90	18.00	20.86	21.00	
		11	2462	16.90	17.00		16.90	17.00		17.00	17.00	16.80	17.00	19.91	20.00	
		12	2467	10.10	10.50		10.10	10.50		10.50	10.50	9.90	10.50	13.22	13.50	
		13	2472	-1.20	-1.00		-2.60	-2.50		-1.90	-1.00	-3.30	-2.50	0.47	0.50	
	802.11n-HT20 MCS0	1	2412	17.90	18.00	98.21	17.90	18.00	98.21	17.90	18.00	17.90	18.00	20.91	21.00	98.21
		6	2437	17.90	18.00		17.90	18.00		17.80	18.00	17.80	18.00	20.81	21.00	
		11	2462	15.90	16.00		15.80	16.00		15.80	16.00	15.60	16.00	18.71	19.00	
		12	2467	9.60	10.00		9.90	10.00		10.00	10.00	9.20	10.00	12.57	13.00	
		13	2472	-5.70	-5.50		-7.90	-7.00		-6.30	-5.50	-7.80	-7.00	-3.98	-4.00	



<5GHz WLAN>

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	11.90	12.00	98.33	11.90	12.00	98.33	12.00	12.00	10.70	12.00	14.47	15.00	98.10
		40	5200	11.70	12.00		11.70	12.00		11.80	12.00	10.50	12.00	14.21	15.00	
		44	5220	11.80	12.00		11.60	12.00		11.60	12.00	11.00	12.00	14.32	15.00	
		48	5240	11.60	12.00		11.90	12.00		11.90	12.00	10.80	12.00	14.40	15.00	
	802.11n-HT20 MCS0	36	5180	11.90	12.00	98.18	11.70	12.00	98.18	11.90	12.00	11.00	12.00	14.48	15.00	97.92
		40	5200	11.80	12.00		11.70	12.00		11.90	12.00	10.90	12.00	14.44	15.00	
		44	5220	11.80	12.00		11.80	12.00		11.60	12.00	10.80	12.00	14.23	15.00	
		48	5240	11.90	12.00		11.90	12.00		11.90	12.00	10.90	12.00	14.44	15.00	
	802.11n-HT40 MCS0	38	5190	11.70	12.00	96.45	11.60	12.00	96.46	11.90	12.00	11.10	12.00	14.53	15.00	96.46
		46	5230	11.80	12.00		11.90	12.00		11.90	12.00	11.10	12.00	14.53	15.00	
	802.11ac-VHT20 MCS0	36	5180	11.80	12.00	97.94	11.60	12.00	97.94	11.80	12.00	10.90	12.00	14.38	15.00	98.19
		40	5200	11.70	12.00		11.60	12.00		11.80	12.00	10.80	12.00	14.34	15.00	
		44	5220	11.70	12.00		11.70	12.00		11.50	12.00	10.70	12.00	14.13	15.00	
		48	5240	11.80	12.00		11.80	12.00		11.80	12.00	10.80	12.00	14.34	15.00	
	802.11ac-VHT40 MCS0	38	5190	11.90	12.00	96.30	11.90	12.00	96.30	11.80	12.00	10.80	12.00	14.34	15.00	96.00
		46	5230	11.70	12.00		11.70	12.00		11.60	12.00	10.70	12.00	14.18	15.00	
802.11ac-VHT80 MCS0	42	5210	11.30	11.50	92.00	11.30	11.50	92.80	11.50	11.50	11.10	11.50	14.31	14.50	92.80	

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.40	17.50	98.33	17.40	17.50	98.33	17.30	17.50	16.20	17.50	19.80	20.50	98.10
		40	5200	17.30	17.50		17.40	17.50		17.30	17.50	16.20	17.50	19.80	20.50	
		44	5220	17.10	17.50		17.10	17.50		17.30	17.50	16.30	17.50	19.84	20.50	
		48	5240	17.40	17.50		17.30	17.50		17.40	17.50	16.40	17.50	19.94	20.50	
	802.11n-HT20 MCS0	36	5180	17.30	17.50	98.18	17.30	17.50	98.18	17.20	17.50	16.20	17.50	19.74	20.50	97.92
		40	5200	17.30	17.50		17.30	17.50		16.20	17.50	19.80	20.50			
		44	5220	17.40	17.50		17.40	17.50		17.30	17.50	16.30	17.50	19.84	20.50	
		48	5240	17.20	17.50		17.20	17.50		17.40	17.50	16.50	17.50	19.98	20.50	
	802.11n-HT40 MCS0	38	5190	12.30	12.50	96.45	12.40	12.50	96.46	12.50	12.50	12.20	12.50	15.36	15.50	96.46
		46	5230	17.40	17.50		17.20	17.50		17.30	17.50	16.40	17.50	19.88	20.50	
	802.11ac-VHT20 MCS0	36	5180	17.20	17.50	97.94	17.20	17.50	97.94	17.10	17.50	16.10	17.50	19.64	20.50	98.19
		40	5200	17.20	17.50		17.20	17.50		17.10	17.50	16.10	17.50	19.64	20.50	
		44	5220	17.30	17.50		17.30	17.50		17.20	17.50	16.20	17.50	19.74	20.50	
		48	5240	17.10	17.50		17.10	17.50		17.30	17.50	16.40	17.50	19.88	20.50	
	802.11ac-VHT40 MCS0	38	5190	12.30	12.50	96.30	12.40	12.50	96.30	12.40	12.50	12.10	12.50	15.26	15.50	96.00
		46	5230	17.40	17.50		17.30	17.50		17.10	17.50	16.30	17.50	19.73	20.50	
	802.11ac-VHT80 MCS0	42	5210	11.30	11.50	92.00	11.30	11.50	92.80	11.50	11.50	11.10	11.50	14.31	14.50	92.80



Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	11.60	12.00	98.33	11.60	12.00	98.33	11.90	12.00	10.90	12.00	14.44	15.00	98.10
		56	5280	11.60	12.00		11.70	12.00		12.00	12.00	11.50	12.00	14.77	15.00	
		60	5300	11.70	12.00		11.80	12.00		12.00	12.00	11.50	12.00	14.77	15.00	
		64	5320	11.80	12.00		11.80	12.00		11.60	12.00	11.00	12.00	14.32	15.00	
	802.11n-HT20 MCS0	52	5260	11.60	12.00	98.18	11.90	12.00	98.18	12.00	12.00	11.30	12.00	14.67	15.00	97.92
		56	5280	11.70	12.00		11.80	12.00		12.00	12.00	11.50	12.00	14.77	15.00	
		60	5300	11.90	12.00		11.90	12.00		11.70	12.00	11.20	12.00	14.47	15.00	
		64	5320	11.80	12.00		11.70	12.00		11.70	12.00	11.50	12.00	14.61	15.00	
	802.11n-HT40 MCS0	54	5270	11.60	12.00	96.45	11.60	12.00	96.46	11.90	12.00	11.30	12.00	14.62	15.00	96.46
		62	5310	11.60	12.00		11.90	12.00		12.00	12.00	11.50	12.00	14.77	15.00	
	802.11ac-VHT20 MCS0	52	5260	11.50	12.00	97.94	11.80	12.00	97.94	11.90	12.00	11.20	12.00	14.57	15.00	98.19
		56	5280	11.60	12.00		11.70	12.00		12.00	12.00	11.30	12.00	14.67	15.00	
		60	5300	11.80	12.00		11.80	12.00		12.00	12.00	11.60	12.00	14.87	15.00	
		64	5320	11.70	12.00		11.60	12.00		11.60	12.00	11.40	12.00	14.51	15.00	
	802.11ac-VHT40 MCS0	54	5270	11.90	12.00	96.30	11.80	12.00	96.30	11.80	12.00	11.10	12.00	14.47	15.00	96.00
		62	5310	11.70	12.00		11.90	12.00		11.60	12.00	11.10	12.00	14.37	15.00	
	802.11ac-VHT80 MCS0	58	5290	11.90	12.00	92.00	11.70	12.00	92.80	11.90	12.00	11.70	12.00	14.81	15.00	92.80

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	17.40	17.50	98.33	17.20	17.50	98.33	17.20	17.50	16.50	17.50	19.87	20.50	98.10
		56	5280	17.30	17.50		17.30	17.50		17.50	17.50	17.10	17.50	20.31	20.50	
		60	5300	17.30	17.50		17.40	17.50		17.50	17.50	17.10	17.50	20.31	20.50	
		64	5320	17.20	17.50		17.40	17.50		17.40	17.50	17.30	17.50	20.36	20.50	
	802.11n-HT20 MCS0	52	5260	17.40	17.50	98.18	17.30	17.50	98.18	17.50	17.50	17.00	17.50	20.27	20.50	97.92
		56	5280	17.30	17.50		17.20	17.50		17.50	17.50	17.00	17.50	20.27	20.50	
		60	5300	17.20	17.50		17.30	17.50		17.50	17.50	17.00	17.50	20.27	20.50	
		64	5320	17.20	17.50		17.40	17.50		17.40	17.50	17.20	17.50	20.31	20.50	
	802.11n-HT40 MCS0	54	5270	17.30	17.50	96.45	17.30	17.50	96.46	17.50	17.50	16.70	17.50	20.13	20.50	96.46
		62	5310	13.50	13.50		13.30	13.50		13.30	13.50	13.20	13.50	16.26	16.50	
	802.11ac-VHT20 MCS0	52	5260	17.30	17.50	97.94	17.20	17.50	97.94	17.40	17.50	16.90	17.50	20.17	20.50	98.19
		56	5280	17.20	17.50		17.10	17.50		17.40	17.50	16.90	17.50	20.17	20.50	
		60	5300	17.10	17.50		17.20	17.50		17.40	17.50	16.90	17.50	20.17	20.50	
64		5320	17.10	17.50	17.30		17.50	17.30		17.50	17.10	17.50	20.21	20.50		
802.11ac-VHT40 MCS0	54	5270	17.30	17.50	96.30	17.40	17.50	96.30	17.20	17.50	16.70	17.50	19.97	20.50	96.00	
	62	5310	13.40	13.50		13.20	13.50		13.20	13.50	13.10	13.50	16.16	16.50		
802.11ac-VHT80 MCS0	58	5290	11.90	12.00	92.00	11.70	12.00	92.80	11.90	12.00	11.70	12.00	14.81	15.00	92.80	

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	11.30	11.50	98.33	13.30	13.50	98.33	11.30	12.00	11.60	12.00	14.46	15.00	98.10
		116	5580	11.40	11.50		13.40	13.50		10.60	12.00	11.80	12.00	14.25	15.00	
		124	5620	11.20	11.50		13.30	13.50		10.80	12.00	11.90	12.00	14.40	15.00	
		132	5660	11.30	11.50		13.20	13.50		10.50	12.00	12.00	12.00	14.32	15.00	
		144	5720	11.30	11.50		13.40	13.50		10.60	12.00	11.80	12.00	14.25	15.00	
	802.11n-HT20 MCS0	100	5500	11.20	11.50	98.18	13.30	13.50	98.18	11.60	12.00	11.60	12.00	14.61	15.00	97.92
		116	5580	11.20	11.50		13.40	13.50		10.90	12.00	11.80	12.00	14.38	15.00	
		124	5620	11.20	11.50		13.30	13.50		10.70	12.00	11.90	12.00	14.35	15.00	
		132	5660	11.20	11.50		13.30	13.50		10.70	12.00	11.90	12.00	14.35	15.00	
		144	5720	11.30	11.50		13.40	13.50		10.90	12.00	11.70	12.00	14.33	15.00	
	802.11n-HT40 MCS0	102	5510	11.20	11.50	96.45	12.80	13.00	96.46	11.50	12.00	11.60	12.00	14.56	15.00	96.46
		110	5550	11.40	11.50		13.10	13.50		11.70	12.00	11.90	12.00	14.81	15.00	
		126	5630	11.10	11.50		13.40	13.50		10.30	12.00	12.00	12.00	14.24	15.00	
		134	5670	11.40	11.50		13.10	13.50		11.70	12.00	11.90	12.00	14.81	15.00	
		142	5710	11.40	11.50		13.40	13.50		12.00	12.00	11.60	12.00	14.81	15.00	
	802.11ac-VHT20 MCS0	100	5500	11.10	11.50	97.94	13.20	13.50	97.94	11.50	12.00	11.50	12.00	14.51	15.00	98.19
		116	5580	11.10	11.50		13.30	13.50		10.80	12.00	11.70	12.00	14.28	15.00	
		124	5620	11.10	11.50		13.20	13.50		10.20	12.00	11.70	12.00	14.02	15.00	
		132	5660	11.10	11.50		13.20	13.50		10.50	12.00	11.90	12.00	14.27	15.00	
		144	5720	11.20	11.50		13.30	13.50		10.80	12.00	11.60	12.00	14.23	15.00	
	802.11ac-VHT40 MCS0	102	5510	11.40	11.50	96.30	12.70	13.00	96.30	11.90	12.00	11.90	12.00	14.91	15.00	96.00
		110	5550	11.40	11.50		13.40	13.50		10.60	12.00	11.80	12.00	14.25	15.00	
		126	5630	11.30	11.50		13.30	13.50		10.50	12.00	11.80	12.00	14.21	15.00	
		134	5670	11.30	11.50		13.40	13.50		10.50	12.00	11.80	12.00	14.21	15.00	
		142	5710	11.20	11.50		13.40	13.50		11.10	12.00	12.00	12.00	14.58	15.00	
	802.11ac-VHT80 MCS0	106	5530	11.10	11.50	92.00	11.70	12.00	92.80	11.90	12.00	11.20	12.00	14.57	15.00	92.80
		122	5610	11.10	11.50		13.10	13.50		11.80	12.00	11.80	12.00	14.81	15.00	
		138	5690	11.40	11.50		13.40	13.50		11.90	12.00	12.00	12.00	14.96	15.00	



Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.40	17.50	98.33	17.20	17.50	98.33	17.20	17.50	17.30	17.50	20.26	20.50	98.10
		116	5580	17.40	17.50		17.30	17.50		16.60	17.50	17.30	17.50	19.97	20.50	
		124	5620	17.30	17.50		17.30	17.50		16.60	17.50	17.20	17.50	19.92	20.50	
		132	5660	17.30	17.50		17.30	17.50		16.60	17.50	17.20	17.50	19.92	20.50	
		144	5720	17.30	17.50		17.20	17.50		17.30	17.50	17.50	17.50	20.41	20.50	
	802.11n-HT20 MCS0	100	5500	17.40	17.50	98.18	17.40	17.50	98.18	17.10	17.50	17.30	17.50	20.21	20.50	97.92
		116	5580	17.40	17.50		17.40	17.50		16.60	17.50	17.20	17.50	19.92	20.50	
		124	5620	17.30	17.50		17.30	17.50		16.50	17.50	17.20	17.50	19.87	20.50	
		132	5660	17.30	17.50		17.30	17.50		16.50	17.50	17.20	17.50	19.87	20.50	
		144	5720	17.20	17.50		17.20	17.50		16.80	17.50	17.10	17.50	19.96	20.50	
	802.11n-HT40 MCS0	102	5510	12.80	13.00	96.45	12.80	13.00	96.46	12.80	13.00	12.90	13.00	15.86	16.00	96.46
		110	5550	17.30	17.50		17.50	17.50		16.00	17.50	17.30	17.50	19.71	20.50	
		126	5630	17.10	17.50		17.10	17.50		16.10	17.50	17.30	17.50	19.75	20.50	
		134	5670	17.20	17.50		17.30	17.50		16.80	17.50	17.50	17.50	20.17	20.50	
		142	5710	17.50	17.50		17.10	17.50		17.10	17.50	17.40	17.50	20.26	20.50	
	802.11ac-VHT20 MCS0	100	5500	17.30	17.50	97.94	17.30	17.50	97.94	17.00	17.50	17.20	17.50	20.11	20.50	98.19
		116	5580	17.30	17.50		17.30	17.50		16.50	17.50	17.10	17.50	19.82	20.50	
		124	5620	17.20	17.50		17.20	17.50		17.00	17.50	17.50	17.50	20.27	20.50	
		132	5660	17.20	17.50		17.20	17.50		17.00	17.50	17.50	17.50	20.27	20.50	
		144	5720	17.10	17.50		17.10	17.50		17.20	17.50	17.50	17.50	20.36	20.50	
	802.11ac-VHT40 MCS0	102	5510	12.80	13.00	96.30	12.70	13.00	96.30	12.70	13.00	12.80	13.00	15.76	16.00	96.00
		110	5550	17.40	17.50		17.30	17.50		16.20	17.50	17.40	17.50	19.85	20.50	
		126	5630	17.20	17.50		17.10	17.50		16.20	17.50	17.30	17.50	19.80	20.50	
		134	5670	17.10	17.50		17.20	17.50		16.20	17.50	17.30	17.50	19.80	20.50	
		142	5710	17.30	17.50		17.40	17.50		16.50	17.50	17.10	17.50	19.82	20.50	
	802.11ac-VHT80 MCS0	106	5530	11.80	12.00	92.00	11.70	12.00	92.80	11.60	12.00	11.40	12.00	14.51	15.00	92.80
		122	5610	17.30	17.50		17.30	17.50		17.40	17.50	17.20	17.50	20.31	20.50	
		138	5690	17.40	17.50		17.00	17.50		17.30	17.50	17.00	17.50	20.16	20.50	

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	11.90	12.00	98.33	11.90	12.00	98.33	11.20	12.00	11.70	12.00	14.47	15.00	98.10
		157	5785	11.90	12.00		11.60	12.00		11.70	12.00	11.90	12.00	14.81	15.00	
		165	5825	11.70	12.00		11.90	12.00		11.10	12.00	11.70	12.00	14.42	15.00	
	802.11n-HT20 MCS0	149	5745	11.70	12.00	98.18	11.90	12.00	98.18	11.13	12.00	11.60	12.00	14.37	15.00	97.92
		157	5785	11.80	12.00		11.90	12.00		11.60	12.00	11.80	12.00	14.71	15.00	
		165	5825	11.60	12.00		11.90	12.00		11.00	12.00	11.70	12.00	14.37	15.00	
	802.11n-HT40 MCS0	151	5755	11.80	12.00	96.45	11.90	12.00	96.46	11.60	12.00	12.00	12.00	14.81	15.00	96.46
		159	5795	11.90	12.00		11.80	12.00		11.80	12.00	11.90	12.00	14.86	15.00	
	802.11ac-VHT20 MCS0	149	5745	11.60	12.00	97.94	11.80	12.00	97.94	11.50	12.00	12.00	12.00	14.77	15.00	98.19
		157	5785	11.70	12.00		11.80	12.00		11.50	12.00	11.70	12.00	14.61	15.00	
		165	5825	11.50	12.00		11.80	12.00		10.90	12.00	11.60	12.00	14.27	15.00	
	802.11ac-VHT40 MCS0	151	5755	11.80	12.00	96.30	11.70	12.00	96.30	11.50	12.00	12.00	12.00	14.77	15.00	96.00
		159	5795	11.90	12.00		11.80	12.00		11.30	12.00	11.60	12.00	14.46	15.00	
	802.11ac-VHT80 MCS0	155	5775	11.90	12.00	92.00	11.80	12.00	92.80	11.20	12.00	12.00	12.00	14.63	15.00	92.80

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	17.20	17.50	98.33	17.40	17.50	98.33	16.80	17.50	17.10	17.50	19.96	20.50	98.10
		157	5785	17.40	17.50		17.40	17.50		17.40	17.50	17.30	17.50	20.36	20.50	
		165	5825	17.40	17.50		17.40	17.50		16.70	17.50	17.20	17.50	19.97	20.50	
	802.11n-HT20 MCS0	149	5745	17.30	17.50	98.18	17.40	17.50	98.18	16.80	17.50	17.10	17.50	19.96	20.50	97.92
		157	5785	17.40	17.50		17.40	17.50		17.40	17.50	17.40	17.50	20.41	20.50	
		165	5825	17.40	17.50		17.40	17.50		16.60	17.50	17.30	17.50	19.97	20.50	
	802.11n-HT40 MCS0	151	5755	17.20	17.50	96.45	17.30	17.50	96.46	17.10	17.50	17.30	17.50	20.21	20.50	96.46
		159	5795	17.30	17.50		17.10	17.50		17.30	17.50	17.00	17.50	20.16	20.50	
	802.11ac-VHT20 MCS0	149	5745	17.20	17.50	97.94	17.30	17.50	97.94	17.20	17.50	17.50	17.50	20.36	20.50	98.19
		157	5785	17.30	17.50		17.30	17.50		17.30	17.50	17.30	17.50	20.31	20.50	
		165	5825	17.30	17.50		17.30	17.50		16.50	17.50	17.20	17.50	19.87	20.50	
	802.11ac-VHT40 MCS0	151	5755	17.40	17.50	96.30	17.40	17.50	96.30	16.70	17.50	17.20	17.50	19.97	20.50	96.00
		159	5795	17.40	17.50		17.30	17.50		17.20	17.50	17.20	17.50	20.21	20.50	
	802.11ac-VHT80 MCS0	155	5775	17.10	17.50	92.00	17.10	17.50	92.80	17.10	17.50	17.00	17.50	20.06	20.50	92.80

14. Bluetooth Conducted Power

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	17.57	11.96	11.95
	CH 39	2441	17.43	11.73	11.77
	CH 78	2480	16.46	11.13	11.16
Tune-up Limit			18	13	13

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	9.87	9.83
	CH 19	2440	9.46	9.42
	CH 39	2480	8.51	8.53
Tune-up Limit			10	10

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and the duty cycle is 77.22% considered in SAR testing.

15. Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN UAT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WWAN LAT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&2.4GHz WLAN Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
2.4GHz WLAN Ant 5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 4+5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN UAT	Yes	Yes	Yes	No	Yes	Yes
WWAN LAT	Yes	Yes	No	Yes	Yes	Yes
BT&2.4GHz WLAN Ant 4	Yes	Yes	Yes	No	Yes	No
2.4GHz WLAN Ant 5	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 4	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 5	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 4+5	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Detail antenna locations refer to operation description.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for WWAN / 2.4GHz, 5.2GHz and 5.8GHz WLAN and Bluetooth hotspot SAR was < 1.2 W/kg, therefore, the extremity SAR was not necessary even the overall diagonal dimension is > 16 cm. only 5.3GHz and 5.5GHz WLAN extremity is required.
6. In section 17 WWAN SAR testing, "WiFi on / WiFi off" means the same power limits apply to WiFi on or WiFi off in all mode, in section 17 WiFi/BT SAR testing, "WWAN on / WWAN off" means the same power limit apply to WWAN on or WWAN off in all mode.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5/17 SAR test and the conducted measurement was covered by Band 26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 Head SAR testing is required when the U-NII-2A band highest reported SAR for a test configuration is > 1.2 W/kg, SAR is required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. When in MIMO SAR testing, if the hot spots are separated the scaling factor would scale each hot spot based on the difference between the power for that transmit antenna and the maximum rated power, if the hot spot were not separable or too much overlap which the scaling factor is the worst case rated power/measured power across the two chains in SAR calculation.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

16.1 Head SAR

<GSM SAR>

WiFi on / WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_Ant 0	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	27.50	29.00	1.413	-0.16	0.261	0.369
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	27.50	29.00	1.413	-0.1	0.132	0.186
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	27.50	29.00	1.413	-0.1	0.229	0.323
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	27.50	29.00	1.413	-0.09	0.141	0.199

WiFi on / WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.60	26.50	1.549	-0.17	0.089	0.138
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.60	26.50	1.549	-0.09	0.067	0.104
02	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.60	26.50	1.549	0.13	0.182	0.282
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.60	26.50	1.549	-0.1	0.069	0.107

<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	24.53	25.10	1.140	0.12	0.294	0.335
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	24.53	25.10	1.140	-0.11	0.328	0.374
03	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	24.53	25.10	1.140	0.04	0.603	0.688
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	24.53	25.10	1.140	-0.16	0.339	0.387

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	22.57	23.20	1.156	-0.01	0.169	0.195
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	22.57	23.20	1.156	0.13	0.217	0.251
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	22.57	23.20	1.156	-0.18	0.356	0.412
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	22.57	23.20	1.156	-0.1	0.203	0.235

WiFi on / WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	22.96	24.00	1.271	-0.03	0.158	0.201
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	22.96	24.00	1.271	0.05	0.161	0.205
04	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	22.96	24.00	1.271	0.06	0.205	0.260
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	22.96	24.00	1.271	-0.1	0.134	0.170

WiFi on / WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	WCDMA V_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.60	24.50	1.230	-0.18	0.263	0.324
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	4182	836.4	23.60	24.50	1.230	-0.12	0.127	0.156
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	23.60	24.50	1.230	-0.09	0.230	0.283
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	4182	836.4	23.60	24.50	1.230	-0.05	0.136	0.167

<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	25.05	25.10	1.012	0.07	0.282	0.285
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	24.05	24.10	1.012	-0.13	0.229	0.232
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	18900	1880	25.05	25.10	1.012	-0.04	0.298	0.301
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	24.05	24.10	1.012	-0.18	0.244	0.247
06	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	25.05	25.10	1.012	-0.04	0.577	0.584
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	24.05	24.10	1.012	-0.02	0.459	0.464
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	18900	1880	25.05	25.10	1.012	-0.14	0.332	0.336
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	24.05	24.10	1.012	-0.19	0.261	0.264

WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	49	Right Cheek	0mm	18900	1880	22.81	23.20	1.094	0.13	0.153	0.167
	LTE Band 2_Ant 0	20M	QPSK	50	24	Right Cheek	0mm	18900	1880	22.87	23.20	1.079	-0.14	0.157	0.169
	LTE Band 2_Ant 0	20M	QPSK	1	49	Right Tilted	0mm	18900	1880	22.81	23.20	1.094	0.07	0.195	0.213
	LTE Band 2_Ant 0	20M	QPSK	50	24	Right Tilted	0mm	18900	1880	22.87	23.20	1.079	-0.17	0.199	0.215
	LTE Band 2_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	18900	1880	22.81	23.20	1.094	0.03	0.322	0.352
	LTE Band 2_Ant 0	20M	QPSK	50	24	Left Cheek	0mm	18900	1880	22.87	23.20	1.079	-0.01	0.327	0.353
	LTE Band 2_Ant 0	20M	QPSK	1	49	Left Tilted	0mm	18900	1880	22.81	23.20	1.094	-0.1	0.183	0.200
	LTE Band 2_Ant 0	20M	QPSK	50	24	Left Tilted	0mm	18900	1880	22.87	23.20	1.079	-0.18	0.187	0.202

WiFi on / WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	23.47	24.50	1.268	-0.03	0.183	0.232
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	22.46	23.50	1.271	-0.05	0.145	0.184
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	23.47	24.50	1.268	0.06	0.181	0.229
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	22.46	23.50	1.271	-0.01	0.144	0.183
07	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	23.47	24.50	1.268	0.06	0.265	0.336
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	22.46	23.50	1.271	-0.14	0.211	0.268
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	23.47	24.50	1.268	-0.11	0.152	0.193
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	22.46	23.50	1.271	-0.03	0.123	0.156

WiFi on / WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	25	Right Cheek	0mm	23095	707.5	24.91	25.70	1.199	-0.03	0.149	0.179
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Cheek	0mm	23095	707.5	23.95	24.70	1.189	-0.19	0.122	0.145
	LTE Band 12_Ant 0	10M	QPSK	1	25	Right Tilted	0mm	23095	707.5	24.91	25.70	1.199	-0.17	0.079	0.095
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Tilted	0mm	23095	707.5	23.95	24.70	1.189	-0.11	0.065	0.077
08	LTE Band 12_Ant 0	10M	QPSK	1	25	Left Cheek	0mm	23095	707.5	24.91	25.70	1.199	-0.02	0.166	0.199
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Cheek	0mm	23095	707.5	23.95	24.70	1.189	0.01	0.135	0.160
	LTE Band 12_Ant 0	10M	QPSK	1	25	Left Tilted	0mm	23095	707.5	24.91	25.70	1.199	0.07	0.109	0.131
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Tilted	0mm	23095	707.5	23.95	24.70	1.189	0.01	0.089	0.106

WiFi on / WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 13_Ant 0	10M	QPSK	1	25	Right Cheek	0mm	23230	782	24.34	25.30	1.247	0.12	0.247	0.308
	LTE Band 13_Ant 0	10M	QPSK	25	12	Right Cheek	0mm	23230	782	23.39	24.30	1.233	-0.1	0.197	0.243
	LTE Band 13_Ant 0	10M	QPSK	1	25	Right Tilted	0mm	23230	782	24.34	25.30	1.247	-0.07	0.137	0.171
	LTE Band 13_Ant 0	10M	QPSK	25	12	Right Tilted	0mm	23230	782	23.39	24.30	1.233	-0.09	0.110	0.136
	LTE Band 13_Ant 0	10M	QPSK	1	25	Left Cheek	0mm	23230	782	24.34	25.30	1.247	-0.08	0.219	0.273
	LTE Band 13_Ant 0	10M	QPSK	25	12	Left Cheek	0mm	23230	782	23.39	24.30	1.233	-0.12	0.176	0.217
	LTE Band 13_Ant 0	10M	QPSK	1	25	Left Tilted	0mm	23230	782	24.34	25.30	1.247	-0.12	0.147	0.183
	LTE Band 13_Ant 0	10M	QPSK	25	12	Left Tilted	0mm	23230	782	23.39	24.30	1.233	-0.14	0.119	0.147

WiFi on / WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	37	Right Cheek	0mm	26865	831.5	24.83	25.70	1.222	-0.1	0.288	0.352
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Cheek	0mm	26865	831.5	23.87	24.70	1.211	-0.1	0.233	0.282
	LTE Band 26_Ant 0	15M	QPSK	1	37	Right Tilted	0mm	26865	831.5	24.83	25.70	1.222	-0.13	0.170	0.208
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Tilted	0mm	26865	831.5	23.87	24.70	1.211	-0.11	0.137	0.166
10	LTE Band 26_Ant 0	15M	QPSK	1	37	Left Cheek	0mm	26865	831.5	24.83	25.70	1.222	-0.09	0.290	0.354
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Cheek	0mm	26865	831.5	23.87	24.70	1.211	-0.17	0.238	0.288
	LTE Band 26_Ant 0	15M	QPSK	1	37	Left Tilted	0mm	26865	831.5	24.83	25.70	1.222	-0.11	0.177	0.216
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Tilted	0mm	26865	831.5	23.87	24.70	1.211	-0.05	0.145	0.176

<TDD LTE SAR>

WiFi on / WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	38000	2595	24.97	25.70	1.183	62.9	1.006	-0.04	0.306	0.364
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.08	0.252	0.297
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Tilted	0mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.17	0.068	0.081
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.17	0.054	0.064
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Cheek	0mm	38000	2595	24.97	25.70	1.183	62.9	1.006	-0.07	0.162	0.193
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	38000	2595	24.01	24.70	1.172	62.9	1.006	-0.01	0.127	0.150
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Tilted	0mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.11	0.117	0.139
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	38000	2595	24.01	24.70	1.172	62.9	1.006	-0.03	0.093	0.110

WiFi on / WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.18	0.199	0.225
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Cheek	0mm	41490	2680	23.50	24.00	1.122	62.9	1.006	0	0.155	0.175
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	41490	2680	24.49	25.00	1.125	62.9	1.006	0.01	0.061	0.069
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Tilted	0mm	41490	2680	23.50	24.00	1.122	62.9	1.006	0.19	0.049	0.055
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.19	0.090	0.102
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Cheek	0mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.1	0.071	0.080
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	41490	2680	24.49	25.00	1.125	62.9	1.006	0.17	0.099	0.112
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Tilted	0mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.1	0.090	0.102

**<WLAN SAR>**

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4	1	2412	14.90	15.00	1.023	99.12	1.009	-0.01	0.164	0.169
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4	1	2412	14.90	15.00	1.023	99.12	1.009	-0.1	0.172	0.178
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	1	2412	14.90	15.00	1.023	99.12	1.009	-0.01	0.417	0.431
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4	1	2412	14.90	15.00	1.023	99.12	1.009	-0.06	0.230	0.237
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 5	1	2412	13.90	14.00	1.023	99.00	1.010	0.03	0.050	0.052
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 5	1	2412	13.90	14.00	1.023	99.00	1.010	0.15	0.037	0.038
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	1	2412	13.90	14.00	1.023	99.00	1.010	-0.08	0.172	0.178
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 5	1	2412	13.90	14.00	1.023	99.00	1.010	-0.12	0.073	0.075
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+5	1	2412	12.90	13.00	1.023	99.20	1.008	-0.11	0.142	0.146
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+5	1	2412	12.90	13.00	1.023	99.20	1.008	-0.17	0.121	0.125
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4+5	1	2412	12.90	13.00	1.023	99.20	1.008	-0.1	0.353	0.364
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4+5	1	2412	12.90	13.00	1.023	99.20	1.008	-0.07	0.227	0.234

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	58	5290	11.90	12.00	1.023	92.00	1.087	-0.16	0.192	0.214
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	58	5290	11.90	12.00	1.023	92.00	1.087	0.14	0.197	0.219
14	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	58	5290	11.90	12.00	1.023	92.00	1.087	-0.04	0.356	0.396
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	58	5290	11.90	12.00	1.023	92.00	1.087	-0.17	0.322	0.358
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	58	5290	11.70	12.00	1.072	92.80	1.078	0.17	0.026	0.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	58	5290	11.70	12.00	1.072	92.80	1.078	0.17	0.012	0.014
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	58	5290	11.70	12.00	1.072	92.80	1.078	0.11	0.136	0.157
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	58	5290	11.70	12.00	1.072	92.80	1.078	-0.09	0.040	0.046
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	58	5290	11.70	12.00	1.072	92.80	1.078	-0.17	0.185	0.214
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	58	5290	11.70	12.00	1.072	92.80	1.078	-0.11	0.240	0.277
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	58	5290	11.70	12.00	1.072	92.80	1.078	-0.02	0.341	0.394
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	58	5290	11.70	12.00	1.072	92.80	1.078	0.11	0.328	0.379
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	138	5690	11.40	11.50	1.023	92.00	1.087	0.12	0.177	0.197
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	138	5690	11.40	11.50	1.023	92.00	1.087	-0.09	0.187	0.208
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	138	5690	11.40	11.50	1.023	92.00	1.087	0.01	0.222	0.247
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	11.40	11.50	1.023	92.00	1.087	0.05	0.213	0.237
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	138	5690	13.40	13.50	1.023	92.80	1.078	-0.1	0.041	0.045
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	138	5690	13.40	13.50	1.023	92.80	1.078	-0.1	0.027	0.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	138	5690	13.40	13.50	1.023	92.80	1.078	-0.04	0.154	0.170
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	138	5690	13.40	13.50	1.023	92.80	1.078	-0.14	0.066	0.073
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	138	5690	11.90	12.00	1.023	92.80	1.078	-0.11	0.227	0.250
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	138	5690	11.90	12.00	1.023	92.80	1.078	0.03	0.244	0.269
15	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	138	5690	11.90	12.00	1.023	92.80	1.078	-0.12	0.325	0.359
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	138	5690	11.90	12.00	1.023	92.80	1.078	0.05	0.262	0.289
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	155	5775	11.90	12.00	1.023	92.00	1.087	-0.04	0.190	0.211
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	155	5775	11.90	12.00	1.023	92.00	1.087	0.03	0.210	0.234
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	155	5775	11.90	12.00	1.023	92.00	1.087	0.11	0.282	0.314
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	155	5775	11.90	12.00	1.023	92.00	1.087	0.04	0.228	0.254
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	155	5775	11.80	12.00	1.047	92.80	1.078	-0.09	0.028	0.032
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	155	5775	11.80	12.00	1.047	92.80	1.078	-0.07	0.018	0.020
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	155	5775	11.80	12.00	1.047	92.80	1.078	-0.11	0.103	0.116
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	155	5775	11.80	12.00	1.047	92.80	1.078	0.17	0.037	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	155	5775	11.20	12.00	1.202	92.80	1.078	-0.02	0.193	0.250
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	155	5775	11.20	12.00	1.202	92.80	1.078	0.09	0.205	0.266
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	155	5775	11.20	12.00	1.202	92.80	1.078	-0.07	0.250	0.324
16	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	155	5775	11.20	12.00	1.202	92.80	1.078	0.09	0.252	0.327

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.01	0.198	0.236
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.09	0.189	0.225
17	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.14	0.514	0.612
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.05	0.280	0.333

16.2 Hotspot SAR

<GSM SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
18	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.50	29.00	1.413	-0.16	0.222	0.314
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.50	29.00	1.413	-0.18	0.357	0.504
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	27.50	29.00	1.413	-0.15	0.167	0.236
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	27.50	29.00	1.413	-0.06	0.239	0.338
	GSM850_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	27.50	29.00	1.413	-0.16	0.096	0.136
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.5	29	1.413	-0.01	0.274	0.387
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.5	29	1.413	-0.02	0.356	0.503
	GSM850_Ant 1	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	27.5	29	1.413	-0.16	0.244	0.345
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	27.5	29	1.413	-0.12	0.232	0.328
	GSM850_Ant 1	GPRS (4 Tx slots)	Top Side	10mm	128	824.2	27.5	29	1.413	-0.05	0.227	0.321
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	251	848.8	24.71	26.00	1.346	-0.11	0.135	0.182
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	251	848.8	24.71	26.00	1.346	-0.13	0.211	0.284
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	251	848.8	24.71	26.00	1.346	0.05	0.078	0.105
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	251	848.8	24.71	26.00	1.346	-0.14	0.133	0.179
	GSM850_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	251	848.8	24.71	26.00	1.346	-0.13	0.070	0.094

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
19	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	661	1880	24.60	26.50	1.549	-0.17	0.374	0.579
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	661	1880	24.60	26.50	1.549	-0.03	0.411	0.637
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	661	1880	24.60	26.50	1.549	-0.03	0.215	0.333
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	661	1880	24.60	26.50	1.549	-0.09	0.083	0.129
	GSM1900_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	661	1880	24.60	26.50	1.549	-0.14	0.498	0.771
	GSM1900_Ant 1	GPRS (4 Tx slots)	Front	10mm	661	1880	24.6	26.5	1.549	-0.02	0.143	0.221
	GSM1900_Ant 1	GPRS (4 Tx slots)	Back	10mm	661	1880	24.6	26.5	1.549	0.01	0.186	0.288
	GSM1900_Ant 1	GPRS (4 Tx slots)	Left Side	10mm	661	1880	24.6	26.5	1.549	-0.12	0.052	0.081
	GSM1900_Ant 1	GPRS (4 Tx slots)	Right Side	10mm	661	1880	24.6	26.5	1.549	0.03	0.022	0.034
	GSM1900_Ant 1	GPRS (4 Tx slots)	Top Side	10mm	661	1880	24.6	26.5	1.549	0.1	0.186	0.288
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	810	1909.8	20.02	22.00	1.578	-0.07	0.162	0.256
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	810	1909.8	20.02	22.00	1.578	-0.17	0.168	0.265
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	810	1909.8	20.02	22.00	1.578	-0.02	0.089	0.140
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	810	1909.8	20.02	22.00	1.578	-0.18	0.035	0.055
	GSM1900_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	810	1909.8	20.02	22.00	1.578	0.01	0.202	0.319

<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	24.53	25.10	1.140	-0.05	0.961	1.096
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	24.44	25.10	1.164	-0.14	0.914	1.064
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9538	1907.6	24.45	25.10	1.161	0.03	0.973	1.130
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9400	1880	24.53	25.10	1.140	-0.16	0.833	0.950
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	24.44	25.10	1.164	-0.07	0.780	0.908
20	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9538	1907.6	24.45	25.10	1.161	-0.08	1.020	1.185
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Side	10mm	9400	1880	24.53	25.10	1.140	-0.14	0.625	0.713
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Side	10mm	9400	1880	24.53	25.10	1.140	-0.16	0.194	0.221
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	24.53	25.10	1.140	-0.16	0.945	1.078
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	24.44	25.10	1.164	-0.07	0.927	1.079
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	24.45	25.10	1.161	0.04	1.010	1.173
	WCDMA II_Ant 1	RMC 12.2Kbps	Front	10mm	9400	1880	24.53	25.1	1.140	-0.04	0.220	0.251
	WCDMA II_Ant 1	RMC 12.2Kbps	Back	10mm	9400	1880	24.53	25.1	1.140	0.02	0.300	0.342
	WCDMA II_Ant 1	RMC 12.2Kbps	Left Side	10mm	9400	1880	24.53	25.1	1.140	0.03	0.096	0.109
	WCDMA II_Ant 1	RMC 12.2Kbps	Right Side	10mm	9400	1880	24.53	25.1	1.140	0.03	0.025	0.029
	WCDMA II_Ant 1	RMC 12.2Kbps	Top Side	10mm	9400	1880	24.53	25.1	1.140	0.03	0.287	0.327
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	19.61	20.20	1.146	-0.08	0.280	0.321
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	19.61	20.20	1.146	-0.14	0.226	0.259
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Side	10mm	9262	1852.4	19.61	20.20	1.146	-0.12	0.191	0.219
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Side	10mm	9262	1852.4	19.61	20.20	1.146	-0.15	0.060	0.069
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	19.61	20.20	1.146	-0.1	0.269	0.308

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 1	RMC 12.2Kbps	Front	10mm	1413	1732.6	22.96	24	1.271	-0.02	0.301	0.382
21	WCDMA IV_Ant 1	RMC 12.2Kbps	Back	10mm	1413	1732.6	22.96	24	1.271	-0.06	0.390	0.496
	WCDMA IV_Ant 1	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	22.96	24	1.271	0.04	0.121	0.154
	WCDMA IV_Ant 1	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	22.96	24	1.271	-0.04	0.006	0.008
	WCDMA IV_Ant 1	RMC 12.2Kbps	Top Side	10mm	1413	1732.6	22.96	24	1.271	0.05	0.310	0.394
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1413	1732.6	17.50	19.00	1.413	-0.1	0.218	0.308
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1413	1732.6	17.50	19.00	1.413	-0.03	0.220	0.311
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	17.50	19.00	1.413	-0.15	0.065	0.092
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	17.50	19.00	1.413	0.02	0.035	0.049
	WCDMA IV_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	1413	1732.6	17.50	19.00	1.413	-0.06	0.266	0.376

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	4182	836.4	23.60	24.50	1.230	-0.17	0.236	0.290
22	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4182	836.4	23.60	24.50	1.230	-0.18	0.386	0.475
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	4182	836.4	23.60	24.50	1.230	-0.11	0.157	0.193
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Side	10mm	4182	836.4	23.60	24.50	1.230	-0.11	0.238	0.293
	WCDMA V_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	4182	836.4	23.60	24.50	1.230	-0.13	0.120	0.148
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	10mm	4182	836.4	23.6	24.5	1.230	-0.08	0.220	0.271
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	4182	836.4	23.6	24.5	1.230	-0.01	0.298	0.367
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Side	10mm	4182	836.4	23.6	24.5	1.230	-0.14	0.139	0.171
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Side	10mm	4182	836.4	23.6	24.5	1.230	-0.11	0.131	0.161
	WCDMA V_Ant 1	RMC 12.2Kbps	Top Side	10mm	4182	836.4	23.6	24.5	1.230	-0.18	0.185	0.228
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	4233	846.6	20.95	22.50	1.429	-0.13	0.162	0.231
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4233	846.6	20.95	22.50	1.429	-0.16	0.258	0.369
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	4233	846.6	20.95	22.50	1.429	-0.15	0.098	0.140
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Side	10mm	4233	846.6	20.95	22.50	1.429	-0.11	0.160	0.229
	WCDMA V_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	4233	846.6	20.95	22.50	1.429	-0.18	0.083	0.119

<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	25.05	25.10	1.012	-0.11	0.951	0.962
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18700	1860	24.92	25.10	1.042	-0.1	0.904	0.942
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	24.96	25.10	1.033	-0.05	0.943	0.974
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	24.05	24.10	1.012	-0.09	0.767	0.776
	LTE Band 2_Ant 0	20M	QPSK	100	0	Front	10mm	18900	1880	24.00	24.10	1.023	-0.02	0.765	0.783
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	25.05	25.10	1.012	-0.03	0.854	0.864
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18700	1860	24.92	25.10	1.042	-0.07	0.804	0.838
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	19100	1900	24.96	25.10	1.033	-0.04	0.930	0.960
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	24.05	24.10	1.012	-0.03	0.687	0.695
	LTE Band 2_Ant 0	20M	QPSK	100	0	Back	10mm	18900	1880	24.00	24.10	1.023	-0.15	0.689	0.705
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Side	10mm	18900	1880	25.05	25.10	1.012	-0.18	0.592	0.599
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Side	10mm	18900	1880	24.05	24.10	1.012	-0.09	0.473	0.478
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Side	10mm	18900	1880	25.05	25.10	1.012	-0.09	0.168	0.170
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Side	10mm	18900	1880	24.05	24.10	1.012	-0.06	0.134	0.136
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	25.05	25.10	1.012	-0.1	0.884	0.894
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	24.92	25.10	1.042	-0.16	0.873	0.910
23	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	24.96	25.10	1.033	0.1	0.945	0.976
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	24.05	24.10	1.012	-0.15	0.714	0.722
	LTE Band 2_Ant 0	20M	QPSK	100	0	Bottom Side	10mm	18900	1880	24.00	24.10	1.023	-0.14	0.716	0.733
	LTE Band 2_Ant 1	20M	QPSK	1	0	Front	10mm	18900	1880	25.05	25.1	1.012	-0.01	0.224	0.227
	LTE Band 2_Ant 1	20M	QPSK	50	0	Front	10mm	18900	1880	24.05	24.1	1.012	-0.05	0.230	0.233
	LTE Band 2_Ant 1	20M	QPSK	1	0	Back	10mm	18900	1880	25.05	25.1	1.012	0.08	0.265	0.268
	LTE Band 2_Ant 1	20M	QPSK	50	0	Back	10mm	18900	1880	24.05	24.1	1.012	0.04	0.273	0.276
	LTE Band 2_Ant 1	20M	QPSK	1	0	Left Side	10mm	18900	1880	25.05	25.1	1.012	0.16	0.081	0.082
	LTE Band 2_Ant 1	20M	QPSK	50	0	Left Side	10mm	18900	1880	24.05	24.1	1.012	0.17	0.083	0.084
	LTE Band 2_Ant 1	20M	QPSK	1	0	Right Side	10mm	18900	1880	25.05	25.1	1.012	0.18	0.024	0.024
	LTE Band 2_Ant 1	20M	QPSK	50	0	Right Side	10mm	18900	1880	24.05	24.1	1.012	0.19	0.024	0.024
	LTE Band 2_Ant 1	20M	QPSK	1	0	Top Side	10mm	18900	1880	25.05	25.1	1.012	0.18	0.257	0.260
	LTE Band 2_Ant 1	20M	QPSK	50	0	Top Side	10mm	18900	1880	24.05	24.1	1.012	0.13	0.252	0.255
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	19.83	20.20	1.089	-0.04	0.287	0.313
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	19100	1900	19.88	20.20	1.076	-0.04	0.292	0.314
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	19100	1900	19.83	20.20	1.089	-0.12	0.243	0.265
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	19100	1900	19.88	20.20	1.076	-0.18	0.249	0.268
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Side	10mm	19100	1900	19.83	20.20	1.089	-0.18	0.176	0.192
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Side	10mm	19100	1900	19.88	20.20	1.076	-0.17	0.179	0.193
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Side	10mm	19100	1900	19.83	20.20	1.089	-0.07	0.051	0.056
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Side	10mm	19100	1900	19.88	20.20	1.076	-0.09	0.051	0.055
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	19.83	20.20	1.089	-0.07	0.268	0.292
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	19100	1900	19.88	20.20	1.076	-0.16	0.273	0.294



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.47	24.50	1.268	-0.02	0.535	0.678
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.46	23.50	1.271	-0.16	0.430	0.546
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.47	24.50	1.268	-0.19	0.486	0.616
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.46	23.50	1.271	-0.02	0.386	0.490
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	23.47	24.50	1.268	-0.08	0.250	0.317
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	22.46	23.50	1.271	-0.08	0.206	0.262
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	23.47	24.50	1.268	0.14	0.104	0.132
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	22.46	23.50	1.271	-0.03	0.084	0.107
24	LTE Band 4_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	23.47	24.50	1.268	0.09	0.658	0.834
	LTE Band 4_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	22.46	23.50	1.271	-0.09	0.484	0.615
	LTE Band 4_Ant 0	20M	QPSK	100	0	Bottom Side	10mm	20175	1732.5	22.41	23.50	1.285	-0.14	0.487	0.626
	LTE Band 4_Ant 1	20M	QPSK	1	0	Front	10mm	21750	1732.5	23.47	24.5	1.268	-0.08	0.466	0.591
	LTE Band 4_Ant 1	20M	QPSK	50	0	Front	10mm	21750	1732.5	22.46	23.5	1.271	-0.05	0.380	0.483
	LTE Band 4_Ant 1	20M	QPSK	1	0	Back	10mm	21750	1732.5	23.47	24.5	1.268	-0.07	0.498	0.631
	LTE Band 4_Ant 1	20M	QPSK	50	0	Back	10mm	21750	1732.5	22.46	23.5	1.271	-0.06	0.410	0.521
	LTE Band 4_Ant 1	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	23.47	24.5	1.268	0.15	0.159	0.202
	LTE Band 4_Ant 1	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	22.46	23.5	1.271	0.08	0.128	0.163
	LTE Band 4_Ant 1	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	23.47	24.5	1.268	0	0.009	0.011
	LTE Band 4_Ant 1	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	22.46	23.5	1.271	0.03	0.009	0.011
	LTE Band 4_Ant 1	20M	QPSK	1	0	Top Side	10mm	20175	1732.5	23.47	24.5	1.268	0.14	0.437	0.554
	LTE Band 4_Ant 1	20M	QPSK	50	0	Top Side	10mm	20175	1732.5	22.46	23.5	1.271	0.14	0.359	0.456
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	19.94	21.00	1.276	-0.08	0.238	0.304
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	19.96	21.00	1.271	-0.09	0.244	0.310
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	19.94	21.00	1.276	-0.17	0.218	0.278
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	19.96	21.00	1.271	-0.15	0.220	0.280
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	19.94	21.00	1.276	-0.1	0.102	0.130
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	19.96	21.00	1.271	-0.15	0.105	0.133
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	19.94	21.00	1.276	-0.07	0.042	0.054
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	19.96	21.00	1.271	-0.09	0.043	0.055
	LTE Band 4_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	19.94	21.00	1.276	-0.1	0.286	0.365
	LTE Band 4_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	19.96	21.00	1.271	-0.1	0.289	0.367

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	25	Front	10mm	23095	707.5	24.91	25.70	1.199	-0.13	0.224	0.269
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.03	0.183	0.217
	LTE Band 12_Ant 0	10M	QPSK	1	25	Back	10mm	23095	707.5	24.91	25.70	1.199	-0.04	0.309	0.371
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.08	0.251	0.298
	LTE Band 12_Ant 0	10M	QPSK	1	25	Left Side	10mm	23095	707.5	24.91	25.70	1.199	-0.1	0.216	0.259
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Side	10mm	23095	707.5	23.95	24.70	1.189	-0.02	0.175	0.208
	LTE Band 12_Ant 0	10M	QPSK	1	25	Right Side	10mm	23095	707.5	24.91	25.70	1.199	-0.17	0.207	0.248
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Side	10mm	23095	707.5	23.95	24.70	1.189	-0.02	0.168	0.200
	LTE Band 12_Ant 0	10M	QPSK	1	25	Bottom Side	10mm	23095	707.5	24.91	25.70	1.199	-0.17	0.046	0.055
	LTE Band 12_Ant 0	10M	QPSK	25	12	Bottom Side	10mm	23095	707.5	23.95	24.70	1.189	-0.1	0.038	0.045
	LTE Band 12_Ant 1	10M	QPSK	1	25	Front	10mm	23095	707.5	24.91	25.70	1.199	-0.18	0.274	0.329
	LTE Band 12_Ant 1	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.19	0.224	0.266
	LTE Band 12_Ant 1	10M	QPSK	1	25	Back	10mm	23095	707.5	24.91	25.70	1.199	-0.16	0.328	0.393
	LTE Band 12_Ant 1	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.02	0.268	0.319
25	LTE Band 12_Ant 1	10M	QPSK	1	25	Left Side	10mm	23095	707.5	24.91	25.70	1.199	-0.14	0.366	0.439
	LTE Band 12_Ant 1	10M	QPSK	25	12	Left Side	10mm	23095	707.5	23.95	24.70	1.189	-0.03	0.299	0.355
	LTE Band 12_Ant 1	10M	QPSK	1	25	Right Side	10mm	23095	707.5	24.91	25.70	1.199	-0.07	0.195	0.234
	LTE Band 12_Ant 1	10M	QPSK	25	12	Right Side	10mm	23095	707.5	23.95	24.70	1.189	-0.16	0.160	0.190
	LTE Band 12_Ant 1	10M	QPSK	1	25	Top Side	10mm	23095	707.5	24.91	25.70	1.199	-0.18	0.150	0.180
	LTE Band 12_Ant 1	10M	QPSK	25	12	Top Side	10mm	23095	707.5	23.95	24.70	1.189	-0.03	0.124	0.147
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	25	Front	10mm	23095	707.5	23.91	24.70	1.199	-0.1	0.170	0.204
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.07	0.173	0.206
	LTE Band 12_Ant 0	10M	QPSK	1	25	Back	10mm	23095	707.5	23.91	24.70	1.199	-0.07	0.237	0.284
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.1	0.241	0.286
	LTE Band 12_Ant 0	10M	QPSK	1	25	Left Side	10mm	23095	707.5	23.91	24.70	1.199	-0.14	0.171	0.205
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Side	10mm	23095	707.5	23.95	24.70	1.189	-0.17	0.174	0.207
	LTE Band 12_Ant 0	10M	QPSK	1	25	Right Side	10mm	23095	707.5	23.91	24.70	1.199	-0.15	0.172	0.206
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Side	10mm	23095	707.5	23.95	24.70	1.189	-0.19	0.174	0.207
	LTE Band 12_Ant 0	10M	QPSK	1	25	Bottom Side	10mm	23095	707.5	23.91	24.70	1.199	-0.19	0.038	0.046
	LTE Band 12_Ant 0	10M	QPSK	25	12	Bottom Side	10mm	23095	707.5	23.95	24.70	1.189	-0.09	0.038	0.045



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	25	Front	10mm	23230	782	24.34	25.30	1.247	-0.1	0.313	0.390
	LTE Band 13_Ant 0	10M	QPSK	25	12	Front	10mm	23230	782	23.39	24.30	1.233	-0.14	0.253	0.312
26	LTE Band 13_Ant 0	10M	QPSK	1	25	Back	10mm	23230	782	24.34	25.30	1.247	-0.1	0.382	0.477
	LTE Band 13_Ant 0	10M	QPSK	25	12	Back	10mm	23230	782	23.39	24.30	1.233	-0.14	0.309	0.381
	LTE Band 13_Ant 0	10M	QPSK	1	25	Left Side	10mm	23230	782	24.34	25.30	1.247	-0.14	0.265	0.331
	LTE Band 13_Ant 0	10M	QPSK	25	12	Left Side	10mm	23230	782	23.39	24.30	1.233	-0.12	0.215	0.265
	LTE Band 13_Ant 0	10M	QPSK	1	25	Right Side	10mm	23230	782	24.34	25.30	1.247	-0.12	0.316	0.394
	LTE Band 13_Ant 0	10M	QPSK	25	12	Right Side	10mm	23230	782	23.39	24.30	1.233	-0.16	0.255	0.314
	LTE Band 13_Ant 0	10M	QPSK	1	25	Bottom Side	10mm	23230	782	24.34	25.30	1.247	-0.12	0.071	0.089
	LTE Band 13_Ant 0	10M	QPSK	25	12	Bottom Side	10mm	23230	782	23.39	24.30	1.233	-0.18	0.057	0.070
	LTE Band 13_Ant 1	10M	QPSK	1	25	Front	10mm	23230	782	24.34	25.3	1.247	-0.11	0.211	0.263
	LTE Band 13_Ant 1	10M	QPSK	25	12	Front	10mm	23230	782	23.39	24.3	1.233	-0.08	0.172	0.212
	LTE Band 13_Ant 1	10M	QPSK	1	25	Back	10mm	23230	782	24.34	25.3	1.247	-0.14	0.253	0.316
	LTE Band 13_Ant 1	10M	QPSK	25	12	Back	10mm	23230	782	23.39	24.3	1.233	-0.01	0.206	0.254
	LTE Band 13_Ant 1	10M	QPSK	1	25	Left Side	10mm	23230	782	24.34	25.3	1.247	-0.16	0.176	0.220
	LTE Band 13_Ant 1	10M	QPSK	25	12	Left Side	10mm	23230	782	23.39	24.3	1.233	-0.07	0.146	0.180
	LTE Band 13_Ant 1	10M	QPSK	1	25	Right Side	10mm	23230	782	24.34	25.3	1.247	-0.1	0.126	0.157
	LTE Band 13_Ant 1	10M	QPSK	25	12	Right Side	10mm	23230	782	23.39	24.3	1.233	-0.16	0.103	0.127
	LTE Band 13_Ant 1	10M	QPSK	1	25	Top Side	10mm	23230	782	24.34	25.3	1.247	-0.19	0.138	0.172
	LTE Band 13_Ant 1	10M	QPSK	25	12	Top Side	10mm	23230	782	23.39	24.3	1.233	-0.06	0.114	0.141
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	25	Front	10mm	23230	782	22.36	23.30	1.242	-0.09	0.195	0.242
	LTE Band 13_Ant 0	10M	QPSK	25	12	Front	10mm	23230	782	22.44	23.30	1.219	-0.14	0.198	0.241
	LTE Band 13_Ant 0	10M	QPSK	1	25	Back	10mm	23230	782	22.36	23.30	1.242	-0.09	0.240	0.298
	LTE Band 13_Ant 0	10M	QPSK	25	12	Back	10mm	23230	782	22.44	23.30	1.219	-0.12	0.245	0.299
	LTE Band 13_Ant 0	10M	QPSK	1	25	Left Side	10mm	23230	782	22.36	23.30	1.242	-0.14	0.160	0.199
	LTE Band 13_Ant 0	10M	QPSK	25	12	Left Side	10mm	23230	782	22.44	23.30	1.219	-0.16	0.169	0.206
	LTE Band 13_Ant 0	10M	QPSK	1	25	Right Side	10mm	23230	782	22.36	23.30	1.242	-0.13	0.198	0.246
	LTE Band 13_Ant 0	10M	QPSK	25	12	Right Side	10mm	23230	782	22.44	23.30	1.219	-0.1	0.202	0.246
	LTE Band 13_Ant 0	10M	QPSK	1	25	Bottom Side	10mm	23230	782	22.36	23.30	1.242	-0.18	0.046	0.057
	LTE Band 13_Ant 0	10M	QPSK	25	12	Bottom Side	10mm	23230	782	22.44	23.30	1.219	-0.16	0.047	0.057



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	37	Front	10mm	26865	831.5	24.83	25.70	1.222	-0.16	0.281	0.343
	LTE Band 26_Ant 0	15M	QPSK	36	20	Front	10mm	26865	831.5	23.87	24.70	1.211	-0.12	0.232	0.281
27	LTE Band 26_Ant 0	15M	QPSK	1	37	Back	10mm	26865	831.5	24.83	25.70	1.222	-0.16	0.439	0.536
	LTE Band 26_Ant 0	15M	QPSK	36	20	Back	10mm	26865	831.5	23.87	24.70	1.211	-0.13	0.354	0.429
	LTE Band 26_Ant 0	15M	QPSK	1	37	Left Side	10mm	26865	831.5	24.83	25.70	1.222	-0.1	0.195	0.238
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Side	10mm	26865	831.5	23.87	24.70	1.211	-0.12	0.159	0.192
	LTE Band 26_Ant 0	15M	QPSK	1	37	Right Side	10mm	26865	831.5	24.83	25.70	1.222	-0.16	0.286	0.349
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Side	10mm	26865	831.5	23.87	24.70	1.211	-0.18	0.235	0.284
	LTE Band 26_Ant 0	15M	QPSK	1	37	Bottom Side	10mm	26865	831.5	24.83	25.70	1.222	-0.15	0.113	0.138
	LTE Band 26_Ant 0	15M	QPSK	36	20	Bottom Side	10mm	26865	831.5	23.87	24.70	1.211	-0.06	0.098	0.119
	LTE Band 26_Ant 1	15M	QPSK	1	37	Front	10mm	26865	831.5	24.83	25.7	1.222	-0.02	0.283	0.346
	LTE Band 26_Ant 1	15M	QPSK	36	20	Front	10mm	26865	831.5	23.87	24.7	1.211	-0.07	0.235	0.284
	LTE Band 26_Ant 1	15M	QPSK	1	37	Back	10mm	26865	831.5	24.83	25.7	1.222	-0.17	0.397	0.485
	LTE Band 26_Ant 1	15M	QPSK	36	20	Back	10mm	26865	831.5	23.87	24.7	1.211	-0.02	0.328	0.397
	LTE Band 26_Ant 1	15M	QPSK	1	37	Left Side	10mm	26865	831.5	24.83	25.7	1.222	-0.15	0.133	0.162
	LTE Band 26_Ant 1	15M	QPSK	36	20	Left Side	10mm	26865	831.5	23.87	24.7	1.211	-0.14	0.108	0.131
	LTE Band 26_Ant 1	15M	QPSK	1	37	Right Side	10mm	26865	831.5	24.83	25.7	1.222	0.04	0.117	0.143
	LTE Band 26_Ant 1	15M	QPSK	36	20	Right Side	10mm	26865	831.5	23.87	24.7	1.211	-0.01	0.095	0.115
	LTE Band 26_Ant 1	15M	QPSK	1	37	Top Side	10mm	26865	831.5	24.83	25.7	1.222	-0.16	0.221	0.270
	LTE Band 26_Ant 1	15M	QPSK	36	20	Top Side	10mm	26865	831.5	23.87	24.7	1.211	-0.01	0.181	0.219
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	22.82	23.70	1.225	-0.15	0.191	0.234
	LTE Band 26_Ant 0	15M	QPSK	36	0	Front	10mm	26865	831.5	22.88	23.70	1.208	-0.08	0.192	0.232
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	22.82	23.70	1.225	-0.19	0.254	0.311
	LTE Band 26_Ant 0	15M	QPSK	36	0	Back	10mm	26865	831.5	22.88	23.70	1.208	-0.16	0.272	0.329
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Side	10mm	26865	831.5	22.82	23.70	1.225	0.05	0.132	0.162
	LTE Band 26_Ant 0	15M	QPSK	36	0	Left Side	10mm	26865	831.5	22.88	23.70	1.208	0	0.136	0.164
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Side	10mm	26865	831.5	22.82	23.70	1.225	-0.16	0.171	0.209
	LTE Band 26_Ant 0	15M	QPSK	36	0	Right Side	10mm	26865	831.5	22.88	23.70	1.208	-0.16	0.180	0.217
	LTE Band 26_Ant 0	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	22.82	23.70	1.225	-0.08	0.072	0.088
	LTE Band 26_Ant 0	15M	QPSK	36	0	Bottom Side	10mm	26865	831.5	22.88	23.70	1.208	-0.07	0.078	0.094



<TDD LTE SAR>

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
28	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	-0.01	0.510	0.607
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.03	0.412	0.486
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.04	0.489	0.582
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.05	0.396	0.467
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Side	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.03	0.058	0.069
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Side	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.08	0.046	0.054
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Side	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.11	0.343	0.408
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Side	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.12	0.279	0.329
	LTE Band 38_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.1	0.255	0.303
	LTE Band 38_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.09	0.203	0.239
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.03	0.244	0.294
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.17	0.249	0.296
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.13	0.249	0.300
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.16	0.254	0.302
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Side	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.12	0.025	0.030
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Side	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.06	0.026	0.031
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Side	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.02	0.169	0.204
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Side	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.12	0.163	0.194
	LTE Band 38_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.02	0.130	0.157
	LTE Band 38_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.07	0.131	0.156

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
29	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.14	0.438	0.496
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.19	0.348	0.393
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	0.05	0.399	0.451
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.02	0.311	0.351
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Side	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.17	0.042	0.048
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Side	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.11	0.034	0.038
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.15	0.314	0.355
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Side	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.13	0.249	0.281
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.06	0.246	0.278
	LTE Band 41_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.09	0.192	0.217
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.16	0.281	0.319
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.12	0.281	0.317
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.12	0.267	0.303
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.01	0.265	0.299
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Side	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.12	0.028	0.032
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Side	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	0.15	0.029	0.033
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.05	0.187	0.213
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Side	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.09	0.186	0.210
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.1	0.149	0.169



FCC SAR TEST REPORT

Report No. : FA891147-05

	LTE Band 41_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.19	0.149	0.168
--	-------------------	-----	------	----	---	-------------	------	-------	------	-------	-------	-------	------	-------	-------	-------	-------

<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.08	0.164	0.169
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.04	0.211	0.218
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.09	0.110	0.114
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.04	0.114	0.118
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	-0.05	0.175	0.181
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	-0.08	0.492	0.508
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	0	0.363	0.375
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	-0.04	0.047	0.049
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.08	0.289	0.305
30	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.19	0.543	0.573
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.05	0.348	0.367
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.06	0.164	0.173
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.45	1.037	-0.03	0.314	0.333
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.45	1.037	-0.03	0.268	0.284
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.45	1.037	0.06	0.203	0.215
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.45	1.037	0.07	0.301	0.319
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 5	46	5230	17.20	17.50	1.072	96.46	1.037	-0.13	0.196	0.218
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 5	46	5230	17.20	17.50	1.072	96.46	1.037	-0.17	0.714	0.793
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 5	46	5230	17.20	17.50	1.072	96.46	1.037	0.15	0.723	0.803
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 5	36	5180	17.40	17.50	1.023	98.33	1.017	0.12	0.760	0.791
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 5	46	5230	17.20	17.50	1.072	96.46	1.037	-0.11	0.065	0.072
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+5	46	5230	16.40	17.50	1.288	96.46	1.037	-0.13	0.359	0.480
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+5	46	5230	16.40	17.50	1.288	96.46	1.037	-0.05	0.550	0.735
31	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4+5	46	5230	16.40	17.50	1.288	96.46	1.037	-0.11	0.605	0.808
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 4+5	48	5240	16.40	17.50	1.288	98.10	1.019	-0.14	0.599	0.786
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4+5	46	5230	16.40	17.50	1.288	96.46	1.037	-0.15	0.331	0.442
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	-0.12	0.236	0.281
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	0.12	0.181	0.216
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	-0.15	0.224	0.267
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	-0.07	0.231	0.275
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.07	0.133	0.157
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.08	0.496	0.586
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.05	0.501	0.592
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.03	0.037	0.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	-0.01	0.205	0.248
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	-0.16	0.515	0.623
32	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	0	0.601	0.727
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	-0.14	0.230	0.278

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	-0.15	0.093	0.111
33	Bluetooth	1Mbps	Back	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.13	0.156	0.186
	Bluetooth	1Mbps	Right Side	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.04	0.063	0.075
	Bluetooth	1Mbps	Top Side	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.06	0.058	0.069

16.3 Body Worn Accessory SAR
<GSM SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.50	29.00	1.413	-0.16	0.222	0.314
34	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.50	29.00	1.413	-0.18	0.357	0.504
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.5	29	1.413	-0.01	0.274	0.387
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.5	29	1.413	-0.02	0.356	0.503
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	251	848.8	24.71	26.00	1.346	-0.11	0.135	0.182
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	251	848.8	24.71	26.00	1.346	-0.13	0.211	0.284

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	661	1880	24.60	26.50	1.549	-0.17	0.374	0.579
35	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	661	1880	24.60	26.50	1.549	-0.03	0.411	0.637
	GSM1900_Ant 1	GPRS (4 Tx slots)	Front	10mm	661	1880	24.6	26.5	1.549	-0.02	0.143	0.221
	GSM1900_Ant 1	GPRS (4 Tx slots)	Back	10mm	661	1880	24.6	26.5	1.549	0.01	0.186	0.288
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	810	1909.8	20.02	22.00	1.578	-0.07	0.162	0.256
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	810	1909.8	20.02	22.00	1.578	-0.17	0.168	0.265

<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	24.53	25.10	1.140	-0.05	0.961	1.096
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	24.44	25.10	1.164	-0.14	0.914	1.064
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9538	1907.6	24.45	25.10	1.161	0.03	0.973	1.130
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9400	1880	24.53	25.10	1.140	-0.16	0.833	0.950
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	24.44	25.10	1.164	-0.07	0.780	0.908
36	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9538	1907.6	24.45	25.10	1.161	-0.08	1.020	1.185
	WCDMA II_Ant 1	RMC 12.2Kbps	Front	10mm	9400	1880	24.53	25.1	1.140	-0.04	0.220	0.251
	WCDMA II_Ant 1	RMC 12.2Kbps	Back	10mm	9400	1880	24.53	25.1	1.140	0.02	0.300	0.342
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	19.61	20.20	1.146	-0.08	0.280	0.321
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	19.61	20.20	1.146	-0.14	0.226	0.259

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 1	RMC 12.2Kbps	Front	10mm	1413	1732.6	22.96	24	1.271	-0.02	0.301	0.382
37	WCDMA IV_Ant 1	RMC 12.2Kbps	Back	10mm	1413	1732.6	22.96	24	1.271	-0.06	0.390	0.496
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1413	1732.6	17.50	19.00	1.413	-0.1	0.218	0.308
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1413	1732.6	17.50	19.00	1.413	-0.03	0.220	0.311

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	4182	836.4	23.60	24.50	1.230	-0.17	0.236	0.290
38	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4182	836.4	23.60	24.50	1.230	-0.18	0.386	0.475
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	10mm	4182	836.4	23.6	24.5	1.230	-0.08	0.220	0.271
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	4182	836.4	23.6	24.5	1.230	-0.01	0.298	0.367
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	4233	846.6	20.95	22.50	1.429	-0.13	0.162	0.231
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4233	846.6	20.95	22.50	1.429	-0.16	0.258	0.369

<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	25.05	25.10	1.012	-0.11	0.951	0.962
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18700	1860	24.92	25.10	1.042	-0.1	0.904	0.942
39	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	24.96	25.10	1.033	-0.05	0.943	0.974
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	24.05	24.10	1.012	-0.09	0.767	0.776
	LTE Band 2_Ant 0	20M	QPSK	100	0	Front	10mm	18900	1880	24.00	24.10	1.023	-0.02	0.765	0.783
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	25.05	25.10	1.012	-0.03	0.854	0.864
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18700	1860	24.92	25.10	1.042	-0.07	0.804	0.838
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	19100	1900	24.96	25.10	1.033	-0.04	0.930	0.960
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	24.05	24.10	1.012	-0.03	0.687	0.695
	LTE Band 2_Ant 0	20M	QPSK	100	0	Back	10mm	18900	1880	24.00	24.10	1.023	-0.15	0.689	0.705
	LTE Band 2_Ant 1	20M	QPSK	1	0	Front	10mm	18900	1880	25.05	25.1	1.012	-0.01	0.224	0.227
	LTE Band 2_Ant 1	20M	QPSK	50	0	Front	10mm	18900	1880	24.05	24.1	1.012	-0.05	0.230	0.233
	LTE Band 2_Ant 1	20M	QPSK	1	0	Back	10mm	18900	1880	25.05	25.1	1.012	0.08	0.265	0.268
	LTE Band 2_Ant 1	20M	QPSK	50	0	Back	10mm	18900	1880	24.05	24.1	1.012	0.04	0.273	0.276
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	19.83	20.20	1.089	-0.04	0.287	0.313
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	19100	1900	19.88	20.20	1.076	-0.04	0.292	0.314
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	19100	1900	19.83	20.20	1.089	-0.12	0.243	0.265
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	19100	1900	19.88	20.20	1.076	-0.18	0.249	0.268

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
40	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.47	24.50	1.268	-0.02	0.535	0.678
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.46	23.50	1.271	-0.16	0.430	0.546
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.47	24.50	1.268	-0.19	0.486	0.616
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.46	23.50	1.271	-0.02	0.386	0.490
	LTE Band 4_Ant 1	20M	QPSK	1	0	Front	10mm	21750	1732.5	23.47	24.5	1.268	-0.08	0.466	0.591
	LTE Band 4_Ant 1	20M	QPSK	50	0	Front	10mm	21750	1732.5	22.46	23.5	1.271	-0.05	0.380	0.483
	LTE Band 4_Ant 1	20M	QPSK	1	0	Back	10mm	21750	1732.5	23.47	24.5	1.268	-0.07	0.498	0.631
	LTE Band 4_Ant 1	20M	QPSK	50	0	Back	10mm	21750	1732.5	22.46	23.5	1.271	-0.06	0.410	0.521
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	19.94	21.00	1.276	-0.08	0.238	0.304
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	19.96	21.00	1.271	-0.09	0.244	0.310
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	19.94	21.00	1.276	-0.17	0.218	0.278
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	19.96	21.00	1.271	-0.15	0.220	0.280

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	25	Front	10mm	23095	707.5	24.91	25.70	1.199	-0.13	0.224	0.269
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.03	0.183	0.217
	LTE Band 12_Ant 0	10M	QPSK	1	25	Back	10mm	23095	707.5	24.91	25.70	1.199	-0.04	0.309	0.371
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.08	0.251	0.298
	LTE Band 12_Ant 1	10M	QPSK	1	25	Front	10mm	23095	707.5	24.91	25.70	1.199	-0.18	0.274	0.329
	LTE Band 12_Ant 1	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.19	0.224	0.266
41	LTE Band 12_Ant 1	10M	QPSK	1	25	Back	10mm	23095	707.5	24.91	25.70	1.199	-0.16	0.328	0.393
	LTE Band 12_Ant 1	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.02	0.268	0.319
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	25	Front	10mm	23095	707.5	23.91	24.70	1.199	-0.1	0.170	0.204
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	10mm	23095	707.5	23.95	24.70	1.189	-0.07	0.173	0.206
	LTE Band 12_Ant 0	10M	QPSK	1	25	Back	10mm	23095	707.5	23.91	24.70	1.199	-0.07	0.237	0.284
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	10mm	23095	707.5	23.95	24.70	1.189	-0.1	0.241	0.286
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	25	Front	10mm	23230	782	24.34	25.30	1.247	-0.1	0.313	0.390
	LTE Band 13_Ant 0	10M	QPSK	25	12	Front	10mm	23230	782	23.39	24.30	1.233	-0.14	0.253	0.312
42	LTE Band 13_Ant 0	10M	QPSK	1	25	Back	10mm	23230	782	24.34	25.30	1.247	-0.1	0.382	0.477
	LTE Band 13_Ant 0	10M	QPSK	25	12	Back	10mm	23230	782	23.39	24.30	1.233	-0.14	0.309	0.381
	LTE Band 13_Ant 1	10M	QPSK	1	25	Front	10mm	23230	782	24.34	25.3	1.247	-0.11	0.211	0.263
	LTE Band 13_Ant 1	10M	QPSK	25	12	Front	10mm	23230	782	23.39	24.3	1.233	-0.08	0.172	0.212
	LTE Band 13_Ant 1	10M	QPSK	1	25	Back	10mm	23230	782	24.34	25.3	1.247	-0.14	0.253	0.316
	LTE Band 13_Ant 1	10M	QPSK	25	12	Back	10mm	23230	782	23.39	24.3	1.233	-0.01	0.206	0.254
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	25	Front	10mm	23230	782	22.36	23.30	1.242	-0.09	0.195	0.242
	LTE Band 13_Ant 0	10M	QPSK	25	12	Front	10mm	23230	782	22.44	23.30	1.219	-0.14	0.198	0.241
	LTE Band 13_Ant 0	10M	QPSK	1	25	Back	10mm	23230	782	22.36	23.30	1.242	-0.09	0.240	0.298
	LTE Band 13_Ant 0	10M	QPSK	25	12	Back	10mm	23230	782	22.44	23.30	1.219	-0.12	0.245	0.299

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0-	15M	QPSK	1	37	Front	10mm	26865	831.5	24.83	25.70	1.222	-0.16	0.281	0.343
	LTE Band 26_Ant 0-	15M	QPSK	36	20	Front	10mm	26865	831.5	23.87	24.70	1.211	-0.12	0.232	0.281
43	LTE Band 26_Ant 0-	15M	QPSK	1	37	Back	10mm	26865	831.5	24.83	25.70	1.222	-0.16	0.439	0.536
	LTE Band 26_Ant 0-	15M	QPSK	36	20	Back	10mm	26865	831.5	23.87	24.70	1.211	-0.13	0.354	0.429
	LTE Band 26_Ant 1	15M	QPSK	1	37	Front	10mm	26865	831.5	24.83	25.7	1.222	-0.02	0.283	0.346
	LTE Band 26_Ant 1	15M	QPSK	36	20	Front	10mm	26865	831.5	23.87	24.7	1.211	-0.07	0.235	0.284
	LTE Band 26_Ant 1	15M	QPSK	1	37	Back	10mm	26865	831.5	24.83	25.7	1.222	-0.17	0.397	0.485
	LTE Band 26_Ant 1	15M	QPSK	36	20	Back	10mm	26865	831.5	23.87	24.7	1.211	-0.02	0.328	0.397
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	22.82	23.70	1.225	-0.15	0.191	0.234
	LTE Band 26_Ant 0	15M	QPSK	36	0	Front	10mm	26865	831.5	22.88	23.70	1.208	-0.08	0.192	0.232
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	22.82	23.70	1.225	-0.19	0.254	0.311
	LTE Band 26_Ant 0	15M	QPSK	36	0	Back	10mm	26865	831.5	22.88	23.70	1.208	-0.16	0.272	0.329

<TDD LTE SAR>

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
44	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	-0.01	0.510	0.607
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.03	0.412	0.486
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	24.97	25.70	1.183	62.9	1.006	0.04	0.489	0.582
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	24.01	24.70	1.172	62.9	1.006	0.05	0.396	0.467
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.03	0.244	0.294
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.17	0.249	0.296
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	21.91	22.70	1.199	62.9	1.006	-0.13	0.249	0.300
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	21.97	22.70	1.183	62.9	1.006	-0.16	0.254	0.302

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
45	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	-0.14	0.438	0.496
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.19	0.348	0.393
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	24.49	25.00	1.125	62.9	1.006	0.05	0.399	0.451
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	23.50	24.00	1.122	62.9	1.006	-0.02	0.311	0.351
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.16	0.281	0.319
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.12	0.281	0.317
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	22.47	23.00	1.130	62.9	1.006	-0.12	0.267	0.303
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	22.50	23.00	1.122	62.9	1.006	-0.01	0.265	0.299

<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.08	0.164	0.169
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	11	2462	17.90	18.00	1.023	99.12	1.009	-0.04	0.211	0.218
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	-0.05	0.175	0.181
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 5	6	2437	17.90	18.00	1.023	99.00	1.010	-0.08	0.492	0.508
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.08	0.289	0.305
46	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+5	11	2462	17.80	18.00	1.047	99.20	1.008	-0.19	0.543	0.573
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	-0.17	0.295	0.320
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	-0.04	0.244	0.265
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.02	0.173	0.188
47	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.14	0.653	0.709
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	-0.09	0.390	0.486
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	-0.18	0.537	0.670
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.15	0.285	0.317
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.09	0.160	0.178
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	0.01	0.090	0.102
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	-0.05	0.437	0.493
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	0.03	0.348	0.402
48	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	-0.12	0.535	0.618
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	-0.12	0.236	0.281
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	155	5775	17.10	17.50	1.096	92.00	1.087	0.12	0.181	0.216
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.07	0.133	0.157
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	155	5775	17.10	17.50	1.096	92.80	1.078	-0.08	0.496	0.586
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	-0.01	0.205	0.248
49	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	155	5775	17.00	17.50	1.122	92.80	1.078	-0.16	0.515	0.623

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	-0.15	0.093	0.111
50	Bluetooth	1Mbps	Back	10mm	Ant 4	0	2402	17.57	18	1.104	77.22	1.079	0.13	0.156	0.186

16.4 Product Specific SAR

<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	-0.05	0.932	1.012
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	-0.16	0.534	0.580
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	0.11	0.557	0.605
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4	54	5270	17.30	17.50	1.047	96.45	1.037	-0.04	0.772	0.838
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.06	0.556	0.604
51	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.01	1.830	1.987
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.11	1.410	1.531
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.46	1.037	-0.06	0.102	0.111
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	-0.09	0.789	0.984
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	-0.1	1.400	1.745
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	0.11	1.370	1.708
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4+5	54	5270	16.70	17.50	1.202	96.46	1.037	-0.03	0.765	0.954
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.06	1.010	1.123
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.09	0.399	0.444
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.18	0.404	0.449
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4	138	5690	17.40	17.50	1.023	92.00	1.087	-0.11	0.528	0.587
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	-0.16	0.330	0.373
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	-0.12	1.090	1.230
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	-0.16	0.866	0.978
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5	122	5610	17.30	17.50	1.047	92.80	1.078	-0.13	0.045	0.051
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	-0.13	1.110	1.282
52	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	-0.15	1.350	1.559
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	-0.18	1.300	1.502
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+5	122	5610	17.20	17.50	1.072	92.80	1.078	-0.18	0.747	0.863

16.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9538	1907.6	24.45	25.10	1.161	-0.08	1.020	-	1.185
2nd	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9538	1907.6	24.45	25.10	1.161	-0.02	0.994	1.03	1.154

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

17. Simultaneous Transmission Analysis

RF Exposure Conditions	Item	Simultaneous Transmission Configurations		Remark
Head / Body-worn / Hotspot	1	WWAN off (Cellular off)	(Ant 4)WIFI 5G SISO +(Ant 4) Bluetooth	
	2		(Ant 5)WIFI 5G SISO+(Ant 4) Bluetooth	
	3		WIFI 5G MIMO+(Ant 4) Bluetooth	
	4		(Ant 4)WIFI 5G SISO	
	5		(Ant 5)WIFI 5G SISO	
	6		WIFI 5G MIMO	
	7		(Ant 4) WIFI 2.4G SISO	
	8		(Ant 5) WIFI 2.4G SISO	
	9		(Ant 5) WIFI 2.4G SISO +(Ant 4) Bluetooth	
	10		WIFI 2.4G MIMO	
	11		(Ant 4) Bluetooth	
	12		(Ant 5) WIFI 5G SISO+(Ant 4) WIFI 2.4G SISO	
	13	WWAN on (Cellular on)	(Ant 4) WIFI 5G SISO +(Ant 4) Bluetooth	
	14		(Ant 5) WIFI 5G SISO+(Ant 4) Bluetooth	
	15		WIFI 5G MIMO+(Ant 4) Bluetooth	
	16		(Ant 4) WIFI 5G SISO	
	17		(Ant 5) WIFI 5G SISO	
	18		WIFI 5G MIMO	
	19		(Ant 4) WIFI 2.4G SISO	
	20		(Ant 5) WIFI 2.4G SISO	
	21		(Ant 5) WIFI 2.4G SISO +(Ant 4) Bluetooth	
	22		WIFI 2.4G MIMO	
	23		(Ant 5) WIFI 5G SISO+ (Ant 4) WIFI 2.4G SISO	
	24		(Ant 4) Bluetooth	

General Note:

- All licensed modes share the same antenna part and cannot transmit simultaneously.
- The worst case WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WiFi Direct and Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- When the device operates in head/hotspot/body-worn, cellular TX power has 2 power table associated with WiFi-ON (power table 1) and WiFi-OFF (power table 2). Cellular SAR associated with power table 1 was used for analysis of simultaneous transmission with WLAN and BT, associated with power table 2 was used for analysis of simultaneous transmission with BTonly.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR, if $SPLSR < 0.1$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

**17.1 Head Exposure Conditions****<WWAN OFF>**

Exposure Position	2 2.4GHz WLAN Ant 4 1g SAR (W/kg)	3 2.4GHz WLAN Ant 5 1g SAR (W/kg)	4 5GHz WLAN Ant 4 1g SAR (W/kg)	5 5GHz WLAN Ant 5 1g SAR (W/kg)	6 Bluetooth Ant 4 1g SAR (W/kg)	7 2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	8 5GHz WLAN Ant 4+5 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	3+6 Summed 1g SAR (W/kg)	4+6 Summed 1g SAR (W/kg)	5+6 Summed 1g SAR (W/kg)	6+8 Summed 1g SAR (W/kg)
Right Cheek	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.214	0.288	0.450	0.281	0.486
Right Tilted	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.208	0.263	0.459	0.255	0.502
Left Cheek	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.601	0.790	1.008	0.782	1.006
Left Tilted	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.310	0.408	0.691	0.406	0.712

<WiFi ON>

WWAN Band		Exposure Position	1	2	3	4	5	6	7	8	1+2+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	
			WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 5	5GHz WLAN Ant 4	5GHz WLAN Ant 5	Bluetooth Ant 4	2.4GHz WLAN Ant 4+5	5GHz WLAN Ant 4+5							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850_Ant 0	Right Cheek	0.369	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.583	0.657	0.515	0.819	0.650	0.855	
		Right Tilted	0.186	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.394	0.449	0.311	0.645	0.441	0.688	
		Left Cheek	0.323	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.924	1.113	0.687	1.331	1.105	1.329	
		Left Tilted	0.199	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.509	0.607	0.433	0.890	0.605	0.911	
	GSM1900_Ant 0	Right Cheek	0.138	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.352	0.426	0.284	0.588	0.419	0.624	
		Right Tilted	0.104	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.312	0.367	0.229	0.563	0.359	0.606	
		Left Cheek	0.282	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.883	1.072	0.646	1.290	1.064	1.288	
		Left Tilted	0.107	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.417	0.515	0.341	0.798	0.513	0.819	
WCDMA	WCDMA II_Ant 0	Right Cheek	0.195	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.409	0.483	0.341	0.645	0.476	0.681	
		Right Tilted	0.251	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.459	0.514	0.376	0.710	0.506	0.753	
		Left Cheek	0.412	0.431	0.178	0.396	0.170	0.612	0.364	0.394	1.013	1.202	0.776	1.420	1.194	1.418	
		Left Tilted	0.235	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.545	0.643	0.469	0.926	0.641	0.947	
	WCDMA IV_Ant 0	Right Cheek	0.201	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.415	0.489	0.347	0.651	0.482	0.687	
		Right Tilted	0.205	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.413	0.468	0.330	0.664	0.460	0.707	
		Left Cheek	0.260	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.861	1.050	0.624	1.268	1.042	1.266	
		Left Tilted	0.170	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.480	0.578	0.404	0.861	0.576	0.882	
	WCDMA V_Ant 0-	Right Cheek	0.324	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.538	0.612	0.470	0.774	0.605	0.810	
		Right Tilted	0.156	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.364	0.419	0.281	0.615	0.411	0.658	
		Left Cheek	0.283	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.884	1.073	0.647	1.291	1.065	1.289	
		Left Tilted	0.167	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.477	0.575	0.401	0.858	0.573	0.879	
	LTE	LTE Band 2_Ant 0	Right Cheek	0.169	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.383	0.457	0.315	0.619	0.450	0.655
			Right Tilted	0.215	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.423	0.478	0.340	0.674	0.470	0.717
			Left Cheek	0.353	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.954	1.143	0.717	1.361	1.135	1.359
			Left Tilted	0.202	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.512	0.610	0.436	0.893	0.608	0.914
LTE Band 4_Ant 0-		Right Cheek	0.232	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.446	0.520	0.378	0.682	0.513	0.718	
		Right Tilted	0.229	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.437	0.492	0.354	0.688	0.484	0.731	
		Left Cheek	0.336	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.937	1.126	0.700	1.344	1.118	1.342	
		Left Tilted	0.193	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.503	0.601	0.427	0.884	0.599	0.905	
LTE Band 12_Ant 0		Right Cheek	0.179	0.169	0.052	0.214	0.045	0.162	0.146	0.250	0.393	0.393	0.325	0.555	0.386	0.591	
		Right Tilted	0.095	0.178	0.038	0.234	0.030	0.120	0.125	0.277	0.303	0.253	0.220	0.449	0.245	0.492	
		Left Cheek	0.199	0.431	0.178	0.396	0.170	0.596	0.364	0.394	0.800	0.973	0.563	1.191	0.965	1.189	
		Left Tilted	0.131	0.237	0.075	0.358	0.073	0.258	0.234	0.379	0.441	0.464	0.365	0.747	0.462	0.768	
LTE Band 13_Ant 0		Right Cheek	0.308	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.522	0.596	0.454	0.758	0.589	0.794	
		Right Tilted	0.171	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.379	0.434	0.296	0.630	0.426	0.673	
		Left Cheek	0.273	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.874	1.063	0.637	1.281	1.055	1.279	
		Left Tilted	0.183	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.493	0.591	0.417	0.874	0.589	0.895	
LTE Band 26_Ant 0		Right Cheek	0.352	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.566	0.640	0.498	0.802	0.633	0.838	
		Right Tilted	0.208	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.416	0.471	0.333	0.667	0.463	0.710	
		Left Cheek	0.354	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.955	1.144	0.718	1.362	1.136	1.360	
		Left Tilted	0.216	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.526	0.624	0.450	0.907	0.622	0.928	
LTE Band 38_Ant 2		Right Cheek	0.364	0.169	0.052	0.214	0.045	0.162	0.146	0.250	0.578	0.578	0.510	0.740	0.571	0.776	
		Right Tilted	0.081	0.178	0.038	0.234	0.030	0.120	0.125	0.277	0.289	0.239	0.206	0.435	0.231	0.478	
		Left Cheek	0.193	0.431	0.178	0.396	0.170	0.596	0.364	0.394	0.794	0.967	0.557	1.185	0.959	1.183	
		Left Tilted	0.139	0.237	0.075	0.358	0.073	0.258	0.234	0.379	0.449	0.472	0.373	0.755	0.470	0.776	
LTE Band 41_Ant 2	Right Cheek	0.225	0.169	0.052	0.214	0.045	0.236	0.146	0.250	0.439	0.513	0.371	0.675	0.506	0.711		
	Right Tilted	0.069	0.178	0.038	0.234	0.030	0.225	0.125	0.277	0.277	0.332	0.194	0.528	0.324	0.571		
	Left Cheek	0.102	0.431	0.178	0.396	0.170	0.612	0.364	0.394	0.703	0.892	0.466	1.110	0.884	1.108		
	Left Tilted	0.112	0.237	0.075	0.358	0.073	0.333	0.234	0.379	0.422	0.520	0.346	0.803	0.518	0.824		

<WiFi OFF>

WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)
			WWAN	Bluetooth Ant 4	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850_Ant 0	Right Cheek	0.369	0.236	0.605
		Right Tilted	0.186	0.225	0.411
		Left Cheek	0.323	0.612	0.935
		Left Tilted	0.199	0.333	0.532
	GSM1900_Ant 0	Right Cheek	0.138	0.236	0.374
		Right Tilted	0.104	0.225	0.329
		Left Cheek	0.282	0.612	0.894
		Left Tilted	0.107	0.333	0.440
WCDMA	WCDMA II_Ant 0	Right Cheek	0.335	0.236	0.571
		Right Tilted	0.374	0.225	0.599
		Left Cheek	0.688	0.612	1.300
		Left Tilted	0.387	0.333	0.720
	WCDMA IV_Ant 0	Right Cheek	0.201	0.236	0.437
		Right Tilted	0.205	0.225	0.430
		Left Cheek	0.260	0.612	0.872
		Left Tilted	0.170	0.333	0.503
	WCDMA V_Ant 0	Right Cheek	0.324	0.236	0.560
		Right Tilted	0.156	0.225	0.381
		Left Cheek	0.283	0.612	0.895
		Left Tilted	0.167	0.333	0.500
LTE	LTE Band 2_Ant 0	Right Cheek	0.285	0.236	0.521
		Right Tilted	0.301	0.225	0.526
		Left Cheek	0.584	0.612	1.196
		Left Tilted	0.336	0.333	0.669
	LTE Band 4_Ant 0	Right Cheek	0.232	0.236	0.468
		Right Tilted	0.229	0.225	0.454
		Left Cheek	0.336	0.612	0.948
		Left Tilted	0.193	0.333	0.526
	LTE Band 12_Ant 0	Right Cheek	0.179	0.236	0.415
		Right Tilted	0.095	0.225	0.320
		Left Cheek	0.199	0.612	0.811
		Left Tilted	0.131	0.333	0.464
	LTE Band 13_Ant 0	Right Cheek	0.308	0.236	0.544
		Right Tilted	0.171	0.225	0.396
		Left Cheek	0.273	0.612	0.885
		Left Tilted	0.183	0.333	0.516
	LTE Band 26_Ant 0	Right Cheek	0.352	0.236	0.588
		Right Tilted	0.208	0.225	0.433
		Left Cheek	0.354	0.612	0.966
		Left Tilted	0.216	0.333	0.549
	LTE Band 38_Ant 2	Right Cheek	0.364	0.236	0.600
		Right Tilted	0.081	0.225	0.306
		Left Cheek	0.193	0.612	0.805
		Left Tilted	0.139	0.333	0.472
	LTE Band 41_Ant 2	Right Cheek	0.225	0.236	0.461
		Right Tilted	0.069	0.225	0.294
		Left Cheek	0.102	0.612	0.714
		Left Tilted	0.112	0.333	0.445

**17.2 Hotspot Exposure Conditions****<WiFi ON>**

WWAN Band		Exposure Position	1	2	3	4	5	6	7	8	1+2+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 5	5GHz WLAN Ant 4	5GHz WLAN Ant 5	Bluetooth Ant 4	2.4GHz WLAN Ant 4+5	5GHz WLAN Ant 4+5						
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850_Ant 0	Front	0.182	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.569	0.474	0.487	0.626	0.511	0.773
		Back	0.284	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.295	0.978	0.857	0.754	1.263	1.205
		Left side	0.105								0.105	0.105	0.105	0.105	0.105	0.105
		Right side	0.179	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.096	0.629	0.546	0.521	1.057	1.062
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
	Bottom side	0.094								0.094	0.094	0.094	0.094	0.094	0.094	
	GSM1900_Ant 0	Front	0.256	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.643	0.548	0.561	0.700	0.585	0.847
		Back	0.265	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.276	0.959	0.838	0.735	1.244	1.186
		Left side	0.140								0.140	0.140	0.140	0.140	0.140	0.140
		Right side	0.055	0.114	0.375	0.267	0.803	0.075	0.367	0.808	0.972	0.505	0.422	0.397	0.933	0.938
Top side			0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511	
Bottom side	0.319								0.319	0.319	0.319	0.319	0.319	0.319		
WCDMA	WCDMA II_Ant 0	Front	0.321	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.708	0.613	0.626	0.765	0.650	0.912
		Back	0.259	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.270	0.953	0.832	0.729	1.238	1.180
		Left side	0.219								0.219	0.219	0.219	0.219	0.219	0.219
		Right side	0.069	0.114	0.375	0.267	0.803	0.075	0.367	0.808	0.986	0.519	0.436	0.411	0.947	0.952
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.308								0.308	0.308	0.308	0.308	0.308	0.308
	WCDMA IV_Ant 0	Front	0.308	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.695	0.600	0.613	0.752	0.637	0.899
		Back	0.311	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.322	1.005	0.884	0.781	1.290	1.232
		Left side	0.092								0.092	0.092	0.092	0.092	0.092	0.092
		Right side	0.049	0.114	0.375	0.267	0.803	0.075	0.367	0.808	0.966	0.499	0.416	0.391	0.927	0.932
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.376								0.376	0.376	0.376	0.376	0.376	0.376
	WCDMA V_Ant 0	Front	0.231	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.618	0.523	0.536	0.675	0.560	0.822
		Back	0.369	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.380	1.063	0.942	0.839	1.348	1.290
		Left side	0.140								0.140	0.140	0.140	0.140	0.140	0.140
		Right side	0.229	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.146	0.679	0.596	0.571	1.107	1.112
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.119								0.119	0.119	0.119	0.119	0.119	0.119
LTE	LTE Band 2_Ant 0	Front	0.314	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.701	0.606	0.619	0.758	0.643	0.905
		Back	0.268	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.279	0.962	0.841	0.738	1.247	1.189
		Left side	0.193								0.193	0.193	0.193	0.193	0.193	0.193
		Right side	0.056	0.114	0.375	0.267	0.803	0.075	0.367	0.808	0.973	0.506	0.423	0.398	0.934	0.939
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.294								0.294	0.294	0.294	0.294	0.294	0.294
	LTE Band 4_Ant 0	Front	0.310	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.697	0.602	0.615	0.754	0.639	0.901
		Back	0.280	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.291	0.974	0.853	0.750	1.259	1.201
		Left side	0.133								0.133	0.133	0.133	0.133	0.133	0.133
		Right side	0.055	0.114	0.375	0.267	0.803	0.075	0.367	0.808	0.972	0.505	0.422	0.397	0.933	0.938
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.367								0.367	0.367	0.367	0.367	0.367	0.367
	LTE Band 12_Ant 0	Front	0.206	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.593	0.498	0.511	0.650	0.535	0.797
		Back	0.286	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.297	0.980	0.859	0.756	1.265	1.207
		Left side	0.207								0.207	0.207	0.207	0.207	0.207	0.207
		Right side	0.207	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.124	0.657	0.574	0.549	1.085	1.090
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.046								0.046	0.046	0.046	0.046	0.046	0.046
	LTE Band 13_Ant 0	Front	0.242	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.629	0.534	0.547	0.686	0.571	0.833
		Back	0.299	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.310	0.993	0.872	0.769	1.278	1.220
		Left side	0.206								0.206	0.206	0.206	0.206	0.206	0.206
		Right side	0.246	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.163	0.696	0.613	0.588	1.124	1.129
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.057								0.057	0.057	0.057	0.057	0.057	0.057
LTE Band 26_Ant 0	Front	0.234	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.621	0.526	0.539	0.678	0.563	0.825	
	Back	0.329	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.340	1.023	0.902	0.799	1.308	1.250	
	Left side	0.164								0.164	0.164	0.164	0.164	0.164	0.164	
	Right side	0.217	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.134	0.667	0.584	0.559	1.095	1.100	
	Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511	
	Bottom side	0.094								0.094	0.094	0.094	0.094	0.094	0.094	
LTE Band 38_Ant 2	Front	0.296	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.683	0.588	0.601	0.740	0.625	0.887	
	Back	0.302	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.313	0.996	0.875	0.772	1.281	1.223	
	Left side	0.031								0.031	0.031	0.031	0.031	0.031	0.031	



FCC SAR TEST REPORT

Report No. : FA891147-05

		Right side	0.204	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.121	0.654	0.571	0.546	1.082	1.087
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.157								0.157	0.157	0.157	0.157	0.157	0.157
	LTE Band 41_Ant 2	Front	0.319	0.169	0.181	0.333	0.218	0.111	0.305	0.480	0.706	0.611	0.624	0.763	0.648	0.910
		Back	0.303	0.218	0.508	0.284	0.793	0.186	0.573	0.735	1.314	0.997	0.876	0.773	1.282	1.224
		Left side	0.033								0.033	0.033	0.033	0.033	0.033	0.033
		Right side	0.213	0.114	0.375	0.267	0.803	0.075	0.367	0.808	1.130	0.663	0.580	0.555	1.091	1.096
		Top side		0.118	0.049	0.319	0.072	0.069	0.173	0.442	0.190	0.118	0.173	0.388	0.141	0.511
		Bottom side	0.169								0.169	0.169	0.169	0.169	0.169	0.169



<WiFi OFF>

WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)
			WWAN	Bluetooth Ant 4	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850_Ant 0	Front	0.314	0.111	0.425
		Back	0.504	0.186	0.690
		Left side	0.236		0.236
		Right side	0.338	0.075	0.413
		Top side		0.069	0.069
		Bottom side	0.136		0.136
	GSM850_Ant 1	Front	0.387	0.111	0.498
		Back	0.503	0.186	0.689
		Left side	0.345		0.345
		Right side	0.328	0.075	0.403
	GSM1900_Ant 0	Top side	0.321	0.069	0.390
		Front	0.579	0.111	0.690
		Back	0.637	0.186	0.823
		Left side	0.333		0.333
		Right side	0.129	0.075	0.204
	GSM1900_Ant 1	Top side		0.069	0.069
		Bottom side	0.771		0.771
		Front	0.221	0.111	0.332
		Back	0.288	0.186	0.474
		Left side	0.081		0.081
WCDMA	WCDMA II_Ant 0	Right side	0.034	0.075	0.109
		Top side	0.288	0.069	0.357
		Front	1.130	0.111	1.241
		Back	1.185	0.186	1.371
		Left side	0.713		0.713
	WCDMA II_Ant 1	Right side	0.221	0.075	0.296
		Top side		0.069	0.069
		Bottom side	1.173		1.173
		Front	0.251	0.111	0.362
		Back	0.342	0.186	0.528
	WCDMA IV_Ant 1	Left side	0.109		0.109
		Right side	0.029	0.075	0.104
		Top side	0.327	0.069	0.396
		Front	0.382	0.111	0.493
		Back	0.496	0.186	0.682
	WCDMA V_Ant 0	Left side	0.154		0.154
		Right side	0.008	0.075	0.083
		Top side	0.394	0.069	0.463
		Front	0.290	0.111	0.401
		Back	0.475	0.186	0.661
	WCDMA V_Ant 1	Left side	0.193		0.193
		Right side	0.293	0.075	0.368
		Top side		0.069	0.069
		Bottom side	0.148		0.148
		Front	0.271	0.111	0.382
		Back	0.367	0.186	0.553
		Left side	0.171		0.171
		Right side	0.161	0.075	0.236
		Top side	0.228	0.069	0.297

WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)
			WWAN	Bluetooth Ant 4	
			1g SAR (W/kg)	1g SAR (W/kg)	
LTE	LTE Band 2_Ant 0	Front	0.974	0.111	1.085
		Back	0.960	0.186	1.146
		Left side	0.599		0.599
		Right side	0.170	0.075	0.245
		Top side		0.069	0.069
		Bottom side	0.976		0.976
	LTE Band 2_Ant 1	Front	0.233	0.111	0.344
		Back	0.276	0.186	0.462
		Left side	0.084		0.084
		Right side	0.024	0.075	0.099
		Top side	0.260	0.069	0.329
	LTE Band 4_Ant 0	Front	0.678	0.111	0.789
		Back	0.616	0.186	0.802
		Left side	0.317		0.317
		Right side	0.132	0.075	0.207
		Top side		0.069	0.069
	LTE Band 4_Ant 1	Bottom side	0.834		0.834
		Front	0.591	0.111	0.702
		Back	0.631	0.186	0.817
		Left side	0.202		0.202
		Right side	0.011	0.075	0.086
	LTE Band 12_Ant 0	Top side	0.554	0.069	0.623
		Front	0.269	0.111	0.380
		Back	0.371	0.186	0.557
		Left side	0.259		0.259
		Right side	0.248	0.075	0.323
	LTE Band 12_Ant 1	Bottom side	0.055		0.055
		Front	0.329	0.111	0.440
		Back	0.393	0.186	0.579
		Left side	0.439		0.439
		Right side	0.234	0.075	0.309
	LTE Band 13_Ant 0	Top side	0.180	0.069	0.249
		Front	0.390	0.111	0.501
		Back	0.477	0.186	0.663
		Left side	0.331		0.331
		Right side	0.394	0.075	0.469
	LTE Band 13_Ant 1	Top side		0.069	0.069
		Bottom side	0.089		0.089
		Front	0.263	0.111	0.374
		Back	0.316	0.186	0.502
		Left side	0.220		0.220
	LTE Band 26_Ant 0	Right side	0.157	0.075	0.232
		Top side	0.172	0.069	0.241
		Front	0.343	0.111	0.454
		Back	0.536	0.186	0.722
		Left side	0.238		0.238
	LTE Band 26_Ant 1	Right side	0.349	0.075	0.424
		Top side		0.069	0.069
		Bottom side	0.138		0.138
		Front	0.346	0.111	0.457
		Back	0.485	0.186	0.671
	LTE Band 38_Ant 2	Left side	0.162		0.162
		Right side	0.143	0.075	0.218
		Top side	0.270	0.069	0.339
		Front	0.607	0.111	0.718
		Back	0.582	0.186	0.768
	LTE Band 41_Ant 2	Left side	0.069		0.069
		Right side	0.408	0.075	0.483
		Bottom side	0.303		0.303
		Front	0.496	0.111	0.607
		Back	0.451	0.186	0.637
		Left side	0.048		0.048
		Right side	0.355	0.075	0.430
		Top side		0.069	0.069
		Bottom side	0.278		0.278



17.3 Body-Worn Accessory Exposure Conditions

<WWAN OFF>

Exposure Position	2	3	4	5	6	7	8	2+5 Summed 1g SAR (W/kg)	3+6 Summed 1g SAR (W/kg)	4+6 Summed 1g SAR (W/kg)	5+6 Summed 1g SAR (W/kg)	6+8 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)					
Front	0.169	0.181	0.32	0.188	0.111	0.305	0.486	0.357	0.292	0.431	0.299	0.597
Back	0.218	0.508	0.265	0.709	0.186	0.573	0.67	0.927	0.694	0.451	0.895	0.856

<WiFi ON>

WWAN Band		Exposure Position	1	2	3	4	5	6	7	8	1+2+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)						
GSM	GSM850_Ant 0	Front	0.182	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.539	0.474	0.487	0.613	0.481	0.779
		Back	0.284	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.211	0.978	0.857	0.735	1.179	1.140
	GSM1900_Ant 0	Front	0.256	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.613	0.548	0.561	0.687	0.555	0.853
		Back	0.265	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.192	0.959	0.838	0.716	1.160	1.121
WCDMA	WCDMA II_Ant 0	Front	0.321	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.678	0.613	0.626	0.752	0.620	0.918
		Back	0.259	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.186	0.953	0.832	0.710	1.154	1.115
	WCDMA IV_Ant 0	Front	0.308	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.665	0.600	0.613	0.739	0.607	0.905
		Back	0.311	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.238	1.005	0.884	0.762	1.206	1.167
	WCDMA V_Ant 0	Front	0.231	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.588	0.523	0.536	0.662	0.530	0.828
		Back	0.369	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.296	1.063	0.942	0.820	1.264	1.225
LTE	LTE Band 2_Ant 0	Front	0.314	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.671	0.606	0.619	0.745	0.613	0.911
		Back	0.268	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.195	0.962	0.841	0.719	1.163	1.124
	LTE Band 4_Ant 0	Front	0.310	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.667	0.602	0.615	0.741	0.609	0.907
		Back	0.280	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.207	0.974	0.853	0.731	1.175	1.136
	LTE Band 12_Ant 0	Front	0.206	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.563	0.498	0.511	0.637	0.505	0.803
		Back	0.286	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.213	0.980	0.859	0.737	1.181	1.142
	LTE Band 13_Ant 0	Front	0.242	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.599	0.534	0.547	0.673	0.541	0.839
		Back	0.299	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.226	0.993	0.872	0.750	1.194	1.155
	LTE Band 26_Ant 0	Front	0.234	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.591	0.526	0.539	0.665	0.533	0.831
		Back	0.329	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.256	1.023	0.902	0.780	1.224	1.185
	LTE Band 38_Ant 2	Front	0.296	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.653	0.588	0.601	0.727	0.595	0.893
		Back	0.302	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.229	0.996	0.875	0.753	1.197	1.158
	LTE Band 41_Ant 2	Front	0.319	0.169	0.181	0.320	0.188	0.111	0.305	0.486	0.676	0.611	0.624	0.750	0.618	0.916
		Back	0.303	0.218	0.508	0.265	0.709	0.186	0.573	0.670	1.230	0.997	0.876	0.754	1.198	1.159

<WiFi OFF>

WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)
			WWAN	Bluetooth Ant 4	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850_Ant 0	Front	0.314	0.111	0.425
		Back	0.504	0.186	0.690
	GSM850_Ant 1	Front	0.387	0.111	0.498
		Back	0.503	0.186	0.689
	GSM1900_Ant 0	Front	0.579	0.111	0.690
		Back	0.637	0.186	0.823
	GSM1900_Ant 1	Front	0.221	0.111	0.332
		Back	0.288	0.186	0.474
WCDMA	WCDMA II_Ant 0	Front	1.130	0.111	1.241
		Back	1.185	0.186	1.371
	WCDMA II_Ant 1	Front	0.251	0.111	0.362
		Back	0.342	0.186	0.528
	WCDMA IV_Ant 1	Front	0.382	0.111	0.493
		Back	0.496	0.186	0.682
	WCDMA V_Ant 0	Front	0.290	0.111	0.401
		Back	0.475	0.186	0.661
	WCDMA V_Ant 1	Front	0.271	0.111	0.382
		Back	0.367	0.186	0.553
LTE	LTE Band 2_Ant 0	Front	0.974	0.111	1.085
		Back	0.960	0.186	1.146
	LTE Band 2_Ant 1	Front	0.233	0.111	0.344
		Back	0.276	0.186	0.462
	LTE Band 4_Ant 0	Front	0.678	0.111	0.789
		Back	0.616	0.186	0.802
	LTE Band 4_Ant 1	Front	0.591	0.111	0.702
		Back	0.631	0.186	0.817
	LTE Band 12_Ant 0	Front	0.269	0.111	0.380
		Back	0.371	0.186	0.557
	LTE Band 12_Ant 1	Front	0.329	0.111	0.440
		Back	0.393	0.186	0.579
	LTE Band 13_Ant 0	Front	0.390	0.111	0.501
		Back	0.477	0.186	0.663
	LTE Band 13_Ant 1	Front	0.263	0.111	0.374
		Back	0.316	0.186	0.502
	LTE Band 26_Ant 0	Front	0.343	0.111	0.454
		Back	0.536	0.186	0.722
	LTE Band 26_Ant 1	Front	0.346	0.111	0.457
		Back	0.485	0.186	0.671
	LTE Band 38_Ant 2	Front	0.607	0.111	0.718
		Back	0.582	0.186	0.768
	LTE Band 41_Ant 2	Front	0.496	0.111	0.607
		Back	0.451	0.186	0.637

17.4 Product Specific Exposure Conditions

Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 10g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+4+7 Summed 10g SAR (W/kg)	1+5+7 Summed 10g SAR (W/kg)	1+6+7 Summed 10g SAR (W/kg)
	WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 5	5GHz WLAN Ant 4	5GHz WLAN Ant 5	Bluetooth Ant 4	2.4GHz WLAN Ant 4+5					
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)					
Front				1.123	0.604	1.282		0.000	0.604	1.123	0.604	1.282
Back				0.580	1.987	1.745		0.000	1.987	0.580	1.987	1.745
Right side				0.605	1.531	1.708		0.000	1.531	0.605	1.531	1.708
Top side				0.838	0.111	0.954		0.000	0.111	0.838	0.111	0.954

Test Engineer: Iran Wang Kurt Liu Mood Huang Wilson Lin White Huang Jay Jian Willy Yu Andy Jiang
Randy Lin Neil Hsiang and Carter Chuang

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.