

## FCC Part 15, Subpart C (Intentional Radiator)


**Product Name: ThinkPad X23**  
**(2662-Exx / Dxx)**

**FCC ID: ANOSY4W2662DFJ**

**October 9, 2001**

EMC Staff Engineer

Toshiya Murota

Signature: 

IBM Japan, Ltd.  
EMC Engineering  
LAB-S59

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242-8502, Japan  
Phone: +81-46-215-6574  
Fax: +81-46-273-7420  
E-Mail: murota@jp.ibm.com

EMC Engineering manager / NVLAP signatory

Akihisa Sakurai

Signature: 

IBM Japan, Ltd.  
EMC Engineering  
LAB-S59

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242-8502, Japan  
Phone: +81-46-215-2613  
Fax: +81-46-273-7420  
E-Mail: akihisa@jp.ibm.com

Ultra Portable Product Manager

Yehichiro Kanda

Signature: 

IBM Japan, Ltd.  
Ultra Portable Product  
LAB-R19

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242-8502, Japan  
Phone: +81-46-215-3700

Portable Systems Director

Arimasa Naitoh

Signature: 

IBM Japan, Ltd.  
Portable Systems  
LAB-R11

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242-8502, Japan  
Phone: +81-46-215-6110

**MEASUREMENT/TECHNICAL REPORT – Part 15 Subpart C  
(Intentional Radiator)****ThinkPad X23  
(2662-Dxx / Exx)****FCC ID : ANOSY4W2662DFJ****October 9, 2001**

This report concerns: (check one)	
Original Grant	<input checked="" type="checkbox"/>
Class I change	<input type="checkbox"/>
Class II change	<input type="checkbox"/>
Equipment type: <u>Wireless LAN and Bluetooth devices in Computer</u> (computer, printer, modem, etc.)	
This report shall not be reproduced except in full, without the written permission of this test lab.	
The measurement results contained in this report relate only to the item which was tested.	
Measurement procedure used is ANSI C63.4-1992 unless otherwise specified.	
Other test procedure: _____	
The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated June 30, 2000.	
<b>APPLICANT ANTI-DRUG ABUSE CERTIFICATION:</b> By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b). <div style="text-align: center;"><input checked="" type="radio"/> Yes or <input type="radio"/> No</div>	
"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"	
Prepared by: Toshiya Murota IBM Japan Corporation, Yamato EMC Engineering LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan Tel: +81-46-215-6574 Fax: +81-46-273-7420	

# Operational Description

## 1. Objective

This is a Certification Compliance Report for FCC Part 15, Subpart C (Intentional Radiator).

- The applying equipment : ThinkPad X23
- FCC ID : ANOSY4W2662DFJ

The hardware structure of PC unit, IEEE 802.11b Wireless LAN card and antennas are the same as the existing model ThinkPad X22 (FCC ID : ANOSY3W26629DX) except CPU clock speed and addition of the Bluetooth feature.

## 2. Product Description

The applying equipment is a compact size laptop computer integrating IEEE 802.11b Wireless LAN or Bluetooth functions inside.

- The Wireless LAN feature consists of an OEM card (Actiontec Electronics Inc., IEEE802.11b Wireless LAN Mini-PCI card) and IBM original integrated antennas (Inverted F-figure type antenna × 2).
- The Bluetooth feature consists of an OEM card (TDK Systems Europe Ltd., Bluetooth standard card) and IBM original integrated antenna (Inverted F-figure type antenna × 1).

The specification of the applying equipment is as follows :

**Table 1 : Specification of PC main body**

Model Identification		<b>ThinkPad X23</b>	
Product number (Order code)		<b>2662-Exx</b>	<b>2662-Dxx</b>
<b>PC Functions</b>	Max. size	279mm(11.0")(W) : 226mm(8.9")(D) : 30.2mm(1.19")(H)	
	Max.Weight	3.7 lbs	
	Hard disk	2.5" 20 GB	
	Memory	128MB	
	Bay Device (DVD, CD etc.)	None	
	Power	AC adapter, Battery (Li-Ion)	
	Ports & Slots	CRT, Headphone, Microphone, Line In, USB×2, 4M IR, Port Replicator, Slicer, Ethernet, Modem, PCMCIA slot (type-2 × 1), CF Slot(type-2 × 1)	
	CPU	Intel® Mobile Geyserville® 866MHz LV	
	LCD	12.1" TFT XGA	
	Keyboard	US English, UK English, French, Spanish, Chinese, Korean, Thailand	Japanese
	Pre installed Software	Windows XP-Pro, Windows 2000, Windows XP-Home	Windows XP-Home

**Table 2 : Specification of IEEE802.11b Wireless-LAN feature**

Carrier Frequencies	2412MHz – 2462MHz			
Occupied BW at 20dB below (Band-edge)	2403.55MHz – 2470.51MHz			
Channels	Total 11 channels (default setting ch. # : 1, 6, 11)			
Channel BW at 20dB below	Max. 17.14MHz / ch			
Channel spacing	5 MHz			
Conducted emission Power	15.5 dBm (0.0355W)			
Antenna gain	- 0.38 dBi			
Antenna type	Inverted F-figure type antenna Tx/Rx switching antenna : IBM P/N: 26P9340 Rx antenna : IBM P/N: 26P9866			
Antenna cable type and length	Tx/Rx switching antenna : coax 355mm Rx antenna : coax 498mm			
Bit rate	1 Mbit/sec	2 Mbit/sec	5.5 Mbit/sec	11 Mbit/sec
Chip/symbol rate	11	11	8	8
Bit/symbol rate	1 (DBPSK)	2 (DQPSK)	4 (CCK)	8 (CCK)
Chip/bit rate	11	5.5	2	1

**Table 3 : Specification of Bluetooth feature**


Carrier Frequencies	2402MHz – 2480MHz			
Occupied BW at 20dB below (Band-edge)	2401.61MHz – 2480.39MHz			
Channels	Total 79 channels (Inquiry / Paging mode : 32 channels)			
Channel BW at 20dB below	Max. 0.782 MHz / ch			
Channel spacing	1 MHz			
Conducted emission Power	3.8 dBm (0.0024W)			
Antenna gain	- 0.63 dBi			
Antenna type	Inverted F-figure type antenna (Tx / Rx) IBM P/N: 26P9866 (common with WLAN)			
Antenna cable type and length	coax 498mm			

### 3. Mounting structure of Wireless features

The left antenna in LCD is used for both RF transmission and receiving with half duplex switching mode. The right antenna is used for RF receiver only. When the Wireless LAN card is in RF receiving state, one of the antennas is selected automatically to have a good quality of radiocommunication.

**Antenna position for Bluetooth (Tx/Rx)**  
The right antenna is used for WLAN or Bluetooth card.

**Antenna positions for Wireless LAN**

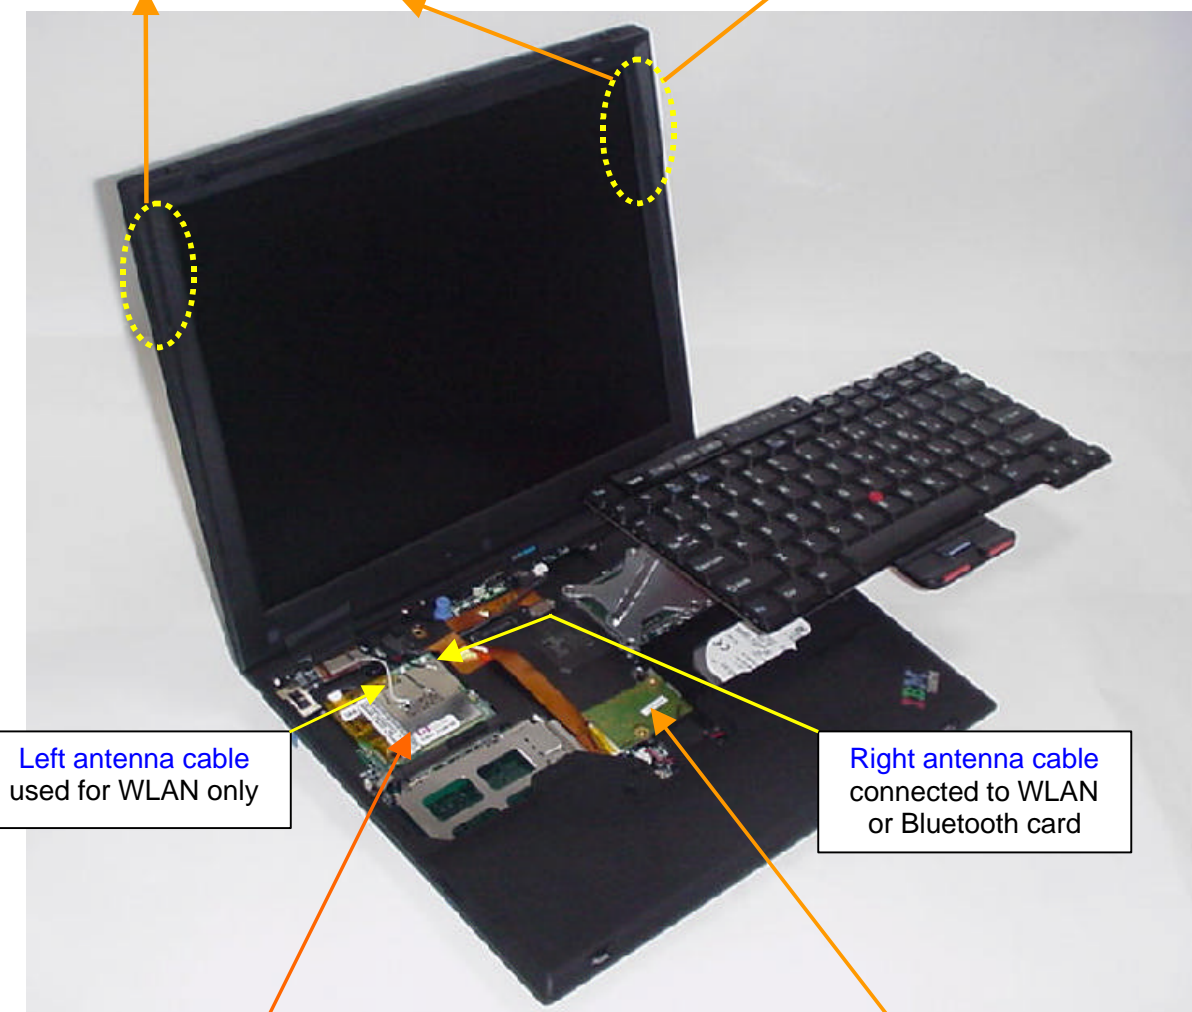

**Left antenna cable**  
used for WLAN only

**Right antenna cable**  
connected to WLAN  
or Bluetooth card

**OEM IEEE802.11b Wireless LAN Mini-PCI card**  
supplied by Actiontec Electronics Inc.

**OEM Bluetooth standard card**  
supplied by TDK Systems Europe Ltd.

The wireless LAN and Bluetooth cards are selective features of user's choice.

## 4. Related Submittal(s)/Grant(s)/Notes

- The device without wireless features is classified as a digital device under Part 15 Subpart B and subject to DoC.

## 5. Circuitry description of the Wireless LAN PC card

### **Reference: Basic Operation Principle of 802MIP**

by Actiontec Electronics, Inc. 4/2001

The Wireless LAN portion of 802MIP combo card is a 2.4GHz ISM Band DSSS Radio. It is designed to operate using IEEE 802.11b WLAN Standard for use in wireless networking systems. The Radio consists of 4 major ICs, which are ISL3685, HFA3783, ISL3984, ISL3874, and few support ICs. It operates at maximum transmit rate 11Mb/s, back off rates 5.5, 2 and 1 Mb/s. The modulation schemes include CCK (Complementary Code Keying), DQPSK and DBPSK depending on what transmit bit rate it operates at. The radio card interfaces to PC through a MiniPCI bus.

### **Transmitter path**

The Ethernet data comes through the MiniPCI interface, the Host I/O interface to the MAC section of ISL3874. The signal then flows into the data router where it is converted from Ethernet to 802.11b protocol. After the signal is converted, a radio preamble and header is added to it and passed to the I/O of BBP (Base Band Processor) section of ISL3874 via PHY I/O, RADIO I/O. There is also support circuitry, such as outboard SRAM and flash ROM, which contains the firmware controlling the radio.

In TX modulator of BBP section, differential phase shift keying modulation schemes DBPSK, DQPSK and CCK, with data scrambling capability, are fulfilled to provide a variety of data rates--DBPSK for 1 Mb/s, DQPSK for 2 Mb/s and CCK for 5.5 and 11Mb/s. The signal, which now is two separate quadrature components I and Q, then flows to the quad IF chip HFA3783 through D/A converters.

At TX side of BBP, there is also TX ALC (Automatic Level Control) circuitry, which is part of the TX ALC loop. The loop keeps TX output power to be consistent so that prevent the power spectrum from regrowth.

HFA3783 is now the dual up conversion mixers (dual down conversion mixers for RX). The signal upconverts to an IF frequency of 374 MHz and passes into a variable gain amplifier, which is also a part of the ALC loop. Next, it passes through the switched TX/RX shared SAW filter into ISL3685 and then upconverts again to a RF frequency from 2.412~2.462 GHz, depending on the channel selection. The signal flows through a pre-amplifier, two band pass filters, which block all the unwanted emissions such as image components, harmonics and spurious stuff, into ISL3984 power amplifier. The output of the power amplifier is then fed through another band pass filter that is about 85 MHz bandwidth to one of the antennas.

**Receiver path**

The receive signal traveling through the air is received by the dual diversity antennas. The circuits will switch to the antenna which provides better RSSI (Received Signal Strength Indication). The RF signal then feeds into an 85 MHz band pass filter, which blocks all the unwanted components such as image frequency. The signal again is amplified using the LNA within ISL3685 and mixed down to the IF frequency of 374 MHz. The PLL and synthesizer select the channel frequency using Low Side Injection. The mixer outputs are then fed through the IF SAW filter that provides image rejection into HFA3783, which is now a quad down converter. HFA3783 also provides RSSI to BBP of ISL3874. There is a two stage analog AGC (Automatic Gain Control) circuit which adjusts the gain to compensate the signal strength differences. The output of the twin AGC's provides a constant level signal to the I and Q down converters, which convert the IF to both I and Q signals to BBP. A second frequency synthesizer, which uses ISL3183 as its VCO, feeds the I and Q mixers with a same frequency signal that is phase shifted by 90°.

The I and Q signals that are fed into BBP of ISL3874 are converted into digital signals via a dual A/D converters then flow through the digital AGC control circuit followed by the digital demodulator. The correlation codes that BBP generates properly detect the transmitted complimentary codes. In here the automatic antenna selection is also done by taking RSSI as the reference. The output of the digital demodulator is sent into an I/O interface of MAC section. The digital codes then flow into the PHY I/O interface and into the MAC protocol engine. The MAC of ISL3874 converts the signal protocol from 802.11b to Ethernet and finally passes that data through the HOST I/O interface to the PC.

## **6. Circuitry description of the Bluetooth card**

### **Reference: Bluetooth Daughter Board hardware specifications**

by TDK Systems Europe Ltd. 3/2001

Refer to circuit drawings in “Schematic Diagrams of IBM Bluetooth Daughter Card”.

The first page shows the main assembly layout of the card.

Sheet 1 of 3 refers to the bluetooth core ( control circuit ).

Sheet 2 of 3 refers to the RF section.

Sheet 3 of 3 contains no actual circuit information, only the interconnection between vias on the PCB.

Most of the functionality of the circuitry is contained within the CSR Bluecore chip. The PCB contains, in addition to the Bluecore chip, a flash memory (U2), a low noise RF amplifier,(U6) antenna switching (U5), and a linear power supply regulator (U3).

The antenna socket is routed by U5 RF changeover switch to either the input of the low noise RF amplifier U6, or the output of the PA stage, U4. Bluetooth IC U1 delivers the RF send signal via a Multilayer Balun, B1, to U4. Antenna switching is controlled from the Bluecore chip U1.

U4 provides extra power gain to compensate for the fall off in RF output from the U1 at elevated temperatures.

The Bluecore chip contains RF receiver and transmitter circuitry, 10K of 16 bit words of RAM, organized into circular buffers for temporary storage of incoming and outgoing data, a memory manager, DSP as part of the radio block, and internal 16 bit microcontroller. The flash memory U2 serves to hold settings and program code for the Bluecore chip U1.

The Bluecore chip can interface to a USB port, and optionally to an RS232 interface. In this design the USB port only is used.

A separate power supply regulator is used (U3), because it can provide a higher current capability than the regulator within the Bluecore chip, which would need an external pass transistor and extra components. This is a low-dropout regulator providing a nominal 3.0V internal supply.

The Bluecore-01 contains a USB controller and is directly connected via a 40 way Hirose DF12-40DS-0.5V to a mating 40W compatible connector on the motherboard. All functions of the Bluecore IC are controlled via the USB bus from the motherboard. The Bluecore control is also via the USB bus, including firmware upgrades.

An alternative control / programming interface for the Bluecore IC is via it's SPI interface, accessible by fitting the optional connector JP1. This is a contingency measure which will also allow the flash device to be programmed before the USB port is configured.