



TEST REPORT

Report No. : CHTEW21110022 Report verification: 

Project No. : SHT2110034901EW

FCC ID : 2AYD5-I21M01

Applicant's name : Imin Technology Pte Ltd

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test item description : Mobile POS

Trade Mark : iMin

Model/Type reference : I21M01

Listed Model(s) : -

Standard : FCC 47 CFR Part2.1093
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Oct. 15, 2021

Date of testing : Oct. 16, 2021- Nov. 01, 2021

Date of issue : Nov. 02, 2021

Result : PASS

Compiled by
(position+printedname+signature).... : File administrators: Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Test Engineer: Patrick Qiu

Patrick Qiu

Approved by
(position+printedname+signature).... : Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao,
Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Statement of Compliance</u>	<u>3</u>
<u>2.</u>	<u>Test Standards and Report version</u>	<u>4</u>
2.1.	Test Standards	4
2.2.	Report version	4
<u>3.</u>	<u>Summary</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	RF Specification Description	5
3.4.	Testing Laboratory Information	7
3.5.	Environmental conditions	7
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>8</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>9</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>10</u>
6.1.	SAR Measurement Set-up	10
6.2.	DASY5 E-field Probe System	11
6.3.	Phantoms	12
6.4.	Device Holder	12
<u>7.</u>	<u>SAR Test Procedure</u>	<u>13</u>
7.1.	Scanning Procedure	13
7.2.	Data Storage and Evaluation	15
<u>8.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>17</u>
8.1.	Tissue Dielectric Parameters	17
8.2.	System Check	19
<u>9.</u>	<u>SAR Exposure Limits</u>	<u>28</u>
<u>10.</u>	<u>Conducted Power Measurement Results and Tune-up</u>	<u>29</u>
10.1.	GSM	29
10.2.	WCDMA	30
10.3.	LTE	32
10.4.	Wi-Fi	34
10.5.	Bluetooth	34
<u>11.</u>	<u>RF Exposure Conditions (Test Configurations)</u>	<u>35</u>
11.1.	Antenna Location	35
<u>12.</u>	<u>Measured and Reported SAR Results</u>	<u>36</u>
<u>13.</u>	<u>SAR Measurement Variability</u>	<u>38</u>
<u>14.</u>	<u>Simultaneous Transmission analysis</u>	<u>39</u>
14.1.	Simultaneous Transmission	39
<u>15.</u>	<u>TestSetup Photos</u>	<u>40</u>
<u>16.</u>	<u>External Photos of the EUT</u>	<u>42</u>

1. Statement of Compliance

Maximum Reported SAR (W/kg @1g)				
RF Exposure Conditions	WWAN	DTS	NII	Simultaneous TX
Extremity(Dist.= 0mm)	1.244	1.337	1.451	2.103

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Test Standards and Report version

2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[616217 D04 SAR for laptop and tablets v01r02](#): SAR Evaluation Requirements for Laptop, Notebook, Netbook and Tablet Computers

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

2.2. Report version

Revision No.	Date of issue	Description
N/A	2021-11-02	Original

3. Summary

3.1. Client Information

Applicant:	Imin Technology Pte Ltd
Address:	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943
Manufacturer:	Imin Technology Pte Ltd
Address:	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

3.2. Product Description

Main unit	
Name of EUT:	Mobile POS
Trade Mark:	iMin
Model No.:	I21M01
Listed Model(s):	-
Power supply:	DC 7.4V
Device Category:	Portable
Product stage:	Production unit
RF Exposure Environment:	General Population/Uncontrolled
HTW test sample No.:	YPHT21100349001
Hardware version:	Neostra_Z2Pro_testinage_003_20210714
Software version:	Z2PRO_MB_UM512_V2.0
Device Dimension:	Overall (Length x Width x Thickness):205 x 82 x 65mm

3.3. RF Specification Description

GSM	
Operation Band:	GSM850 PCS1900
Support Network:	GSM GPRS EGPRS
Operating Mode:	GSM:GMSK GPRS:GMSK EGPRS:8PSK
Device Class:	B
GPRS Multi-Slot Class:	12
GPRS Multi-Slot Class:	12
Antenna Type:	FPC Antenna
Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No	

WCDMA	
Operation Band:	FDD Band II FDD Band V
Power Class:	Class 3
Operating Mode:	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA
Antenna Type:	FPC Antenna

LTE	
Operation Band:	FDD Band 5 FDD Band 7 TDD Band 41
Power Class:	Class 3
Operating Mode:	QPSK 16QAM
Antenna Type:	FPC Antenna
Does this device support Carrier Aggregation (CA)? ☐ Yes ☒ No	
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No	
Wi-Fi 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Antenna Type:	FPC Antenna
Wi-Fi 5G	
Operation Band:	U-NII-1 U-NII-2A U-NII-2C U-NII-3
Operating Mode:	802.11a 802.11n(HT20) 802.11n(HT40) 802.11ac(VHT20) 802.11ac(VHT40) 802.11ac(VHT80)
Antenna Type:	FPC Antenna
Bluetooth	
Bluetooth version:	V5.0
Support function:	EDR
Operating Mode:	GFSK $\pi/4$ DQPSK 8DPSK
Antenna Type:	FPC Antenna
Bluetooth	
Bluetooth version:	V5.0
Support function:	BLE
Operating Mode:	GFSK
Antenna Type:	FPC Antenna
Remark: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2021/05/27	2022/05/26
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2021/9/17	2022/9/16
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
●	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2021/08/05	2022/08/04
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2021/08/05	2022/08/04
●	Power sensor	R&S	NRP18A	101386	2021/05/27	2022/05/26
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2021/11/11	2022/11/10
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2021/11/11	2022/11/10

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix E and F.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

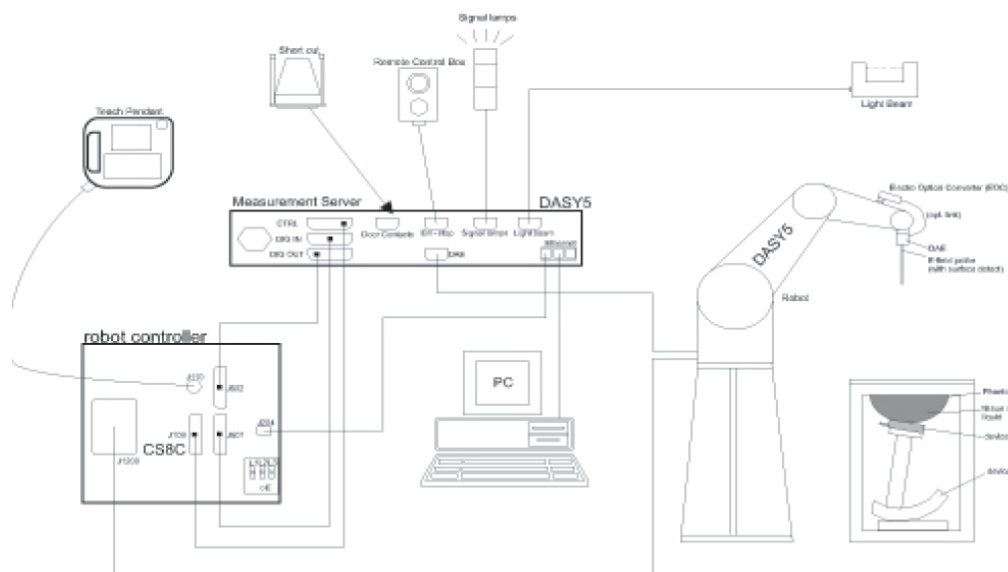

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

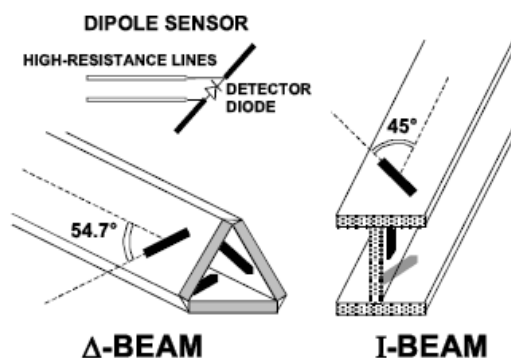

6.3. Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with standard and all known tissue-simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.



ELI Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Resolutions per FCC KDB Publication 865664 D01v04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within $\pm 5 \%$.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Dielectric Property Measurements & System Check

8.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Tissue dielectric parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:


Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (S/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
835	41.50	42.26	0.900	0.940	1.83%	4.44%	±5%	22.0	2021/11/16
1900	40.00	40.74	1.400	1.464	1.85%	4.57%	±5%	22.0	2021/11/16
2450	39.20	39.60	1.800	1.871	1.02%	3.94%	±5%	22.0	2021/11/17
2600	39.00	39.34	1.960	1.984	0.87%	1.22%	±5%	22.0	2021/11/17
5250	35.93	34.93	4.706	4.526	-2.78%	-3.82%	±5%	22.0	2021/11/18
5600	35.53	34.60	5.065	4.854	-2.62%	-4.17%	±5%	22.0	2021/11/18
5750	35.36	34.04	5.219	4.988	-3.73%	-4.43%	±5%	22.0	2021/11/18

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- The results are normalized to 1 W input power.

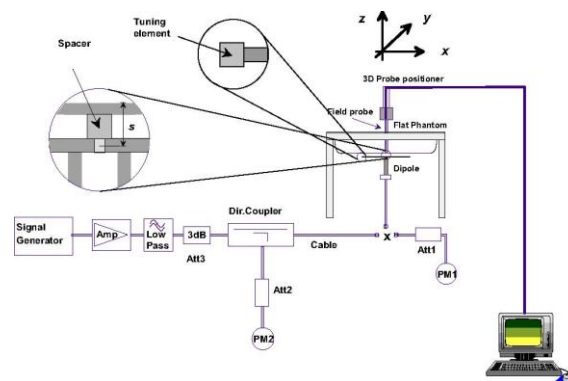

System Performance Check Setup



Photo of Dipole Setup

System Check Result:

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target.

Body											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
835	9.39	9.76	2.44	6.14	6.40	1.60	3.94%	4.23%	$\pm 10\%$	22.4	2021/11/16
1900	39.80	40.00	10.00	20.30	21.04	5.26	0.50%	3.65%	$\pm 10\%$	22.4	2021/11/16
2450	52.00	56.80	14.20	23.90	26.16	6.54	9.23%	9.46%	$\pm 10\%$	22.4	2021/11/17
2600	56.50	60.00	15.00	25.00	26.80	6.70	6.19%	7.20%	$\pm 10\%$	22.4	2021/11/17

Body											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 100mW	Target 1W	Normalize to 1W	Measured 100mW					
5250	78.20	80.20	8.02	22.30	23.00	2.30	2.56%	3.14%	$\pm 10\%$	22.4	2021/11/18
5600	81.60	84.10	8.41	23.30	24.20	2.42	3.06%	3.86%	$\pm 10\%$	22.4	2021/11/18
5750	79.30	85.50	8.55	22.50	24.50	2.45	7.82%	8.89%	$\pm 10\%$	22.4	2021/11/18

Plots of System Performance Check

System Performance Check-Body 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2021-11-16

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 42.456$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.84 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.22 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

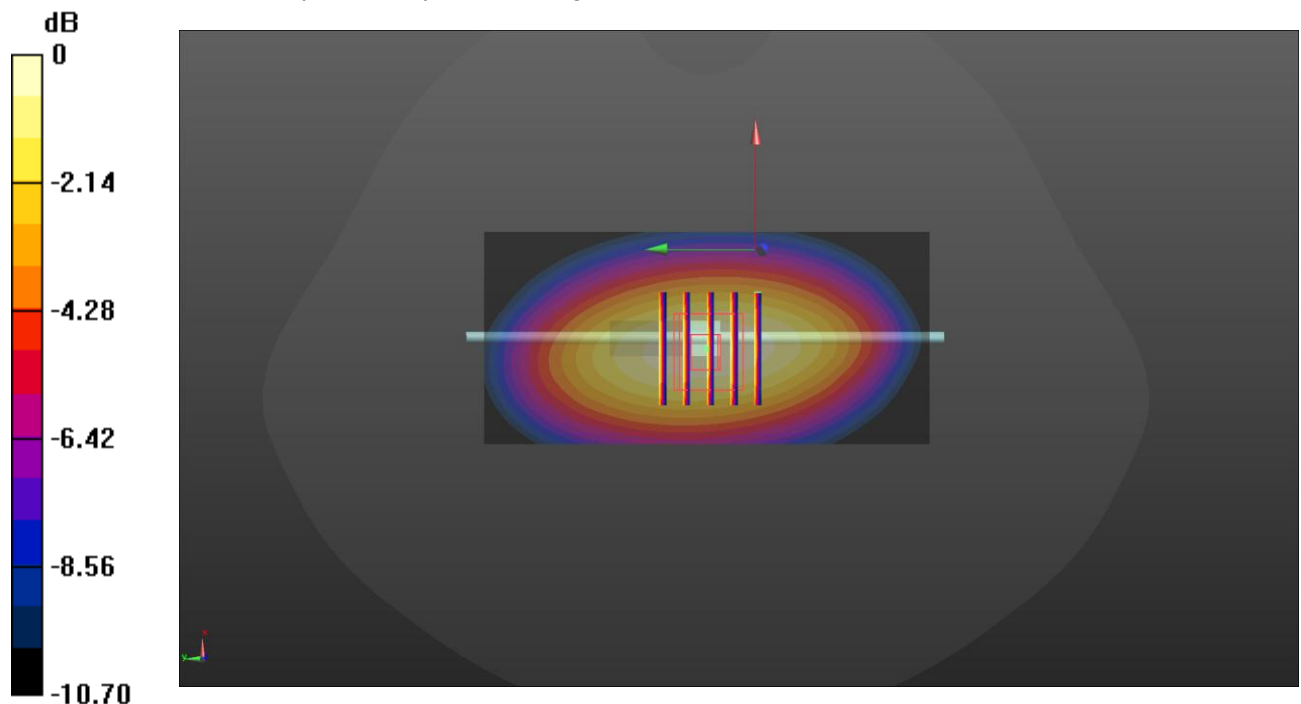

0 dB = 2.85 W/kg = 4.55 dBW/kg

System Performance Check- Body 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date: 2021-11-16

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 40.735$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.2 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.40V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.26 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

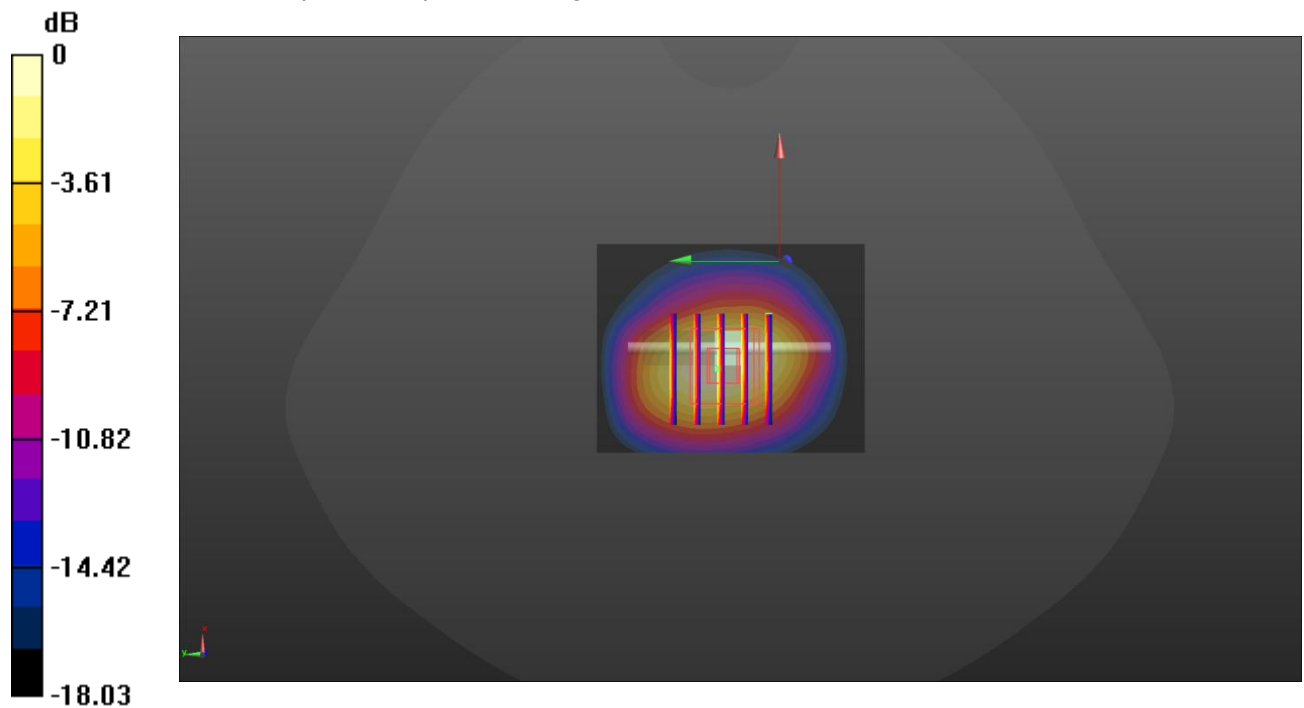

SystemPerformanceCheck- Body 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-11-17

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 39.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.8 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.01 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.54 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

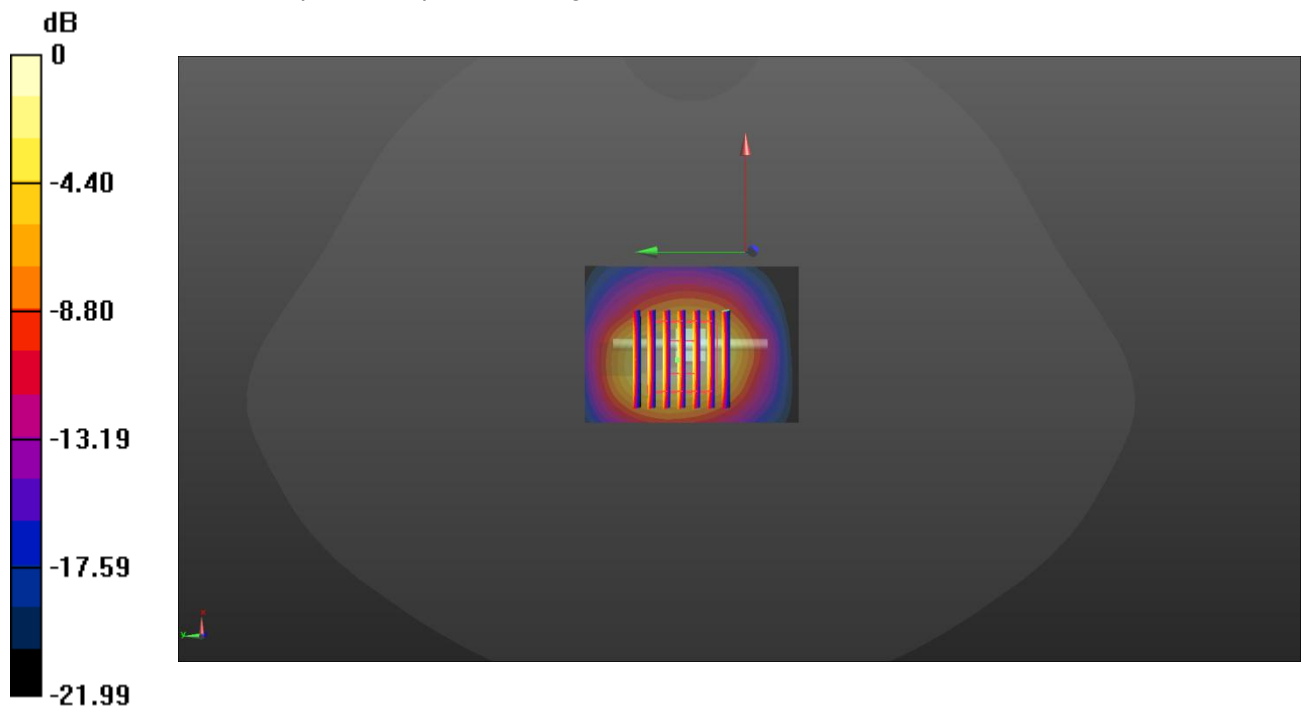

SystemPerformanceCheck- Body 2600MHz

DUT: D2600V2; Type: D2600V2; Serial: 1150

Date: 2021-11-17

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 39.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 27.1 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.7 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 15 W/kg; SAR(10 g) = 6.77 W/kg

Maximum value of SAR (measured) = 25.5 W/kg

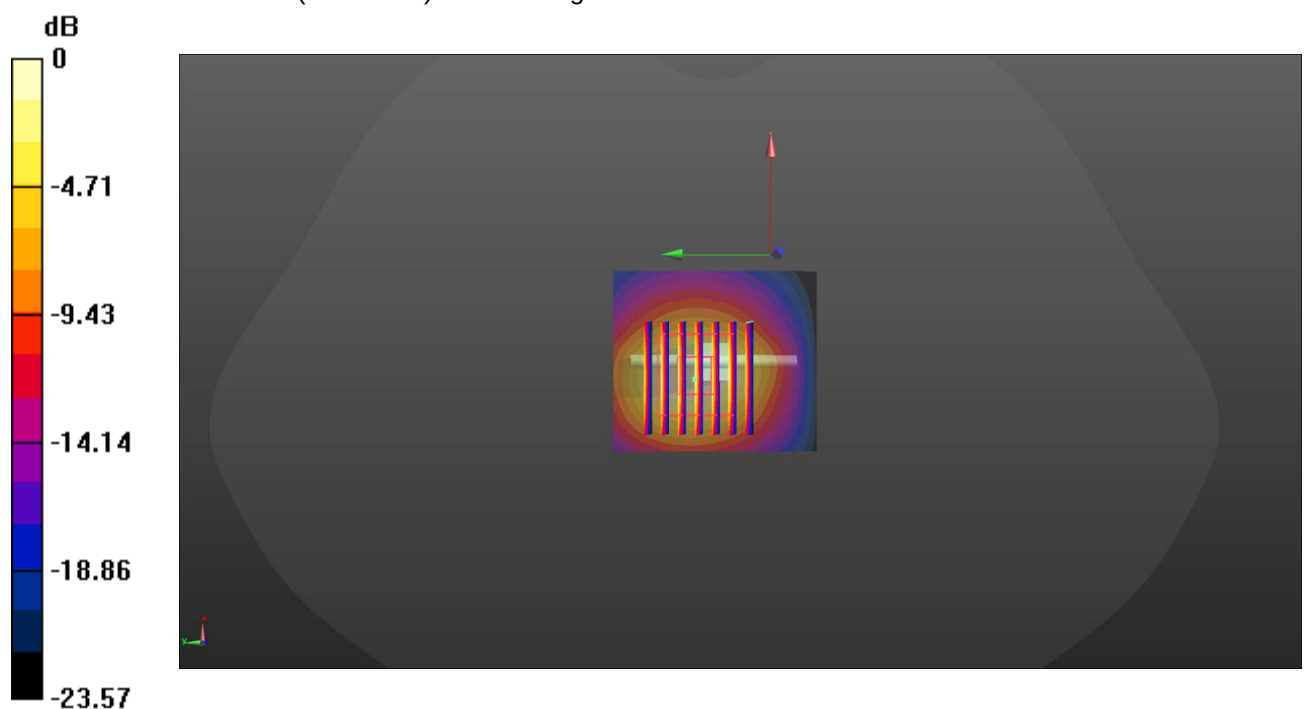

0 dB = 25.5 W/kg = 14.07 dBW/kg

SystemPerformanceCheck- Body 5250MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-11-18

Communication System: UID 0, Generic WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.526$ S/m; $\epsilon_r = 34.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(5.65, 5.65, 5.65) @ 5250 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, pin=100mW/Area Scan (31x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.2 W/kg


Head/d=10mm, pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

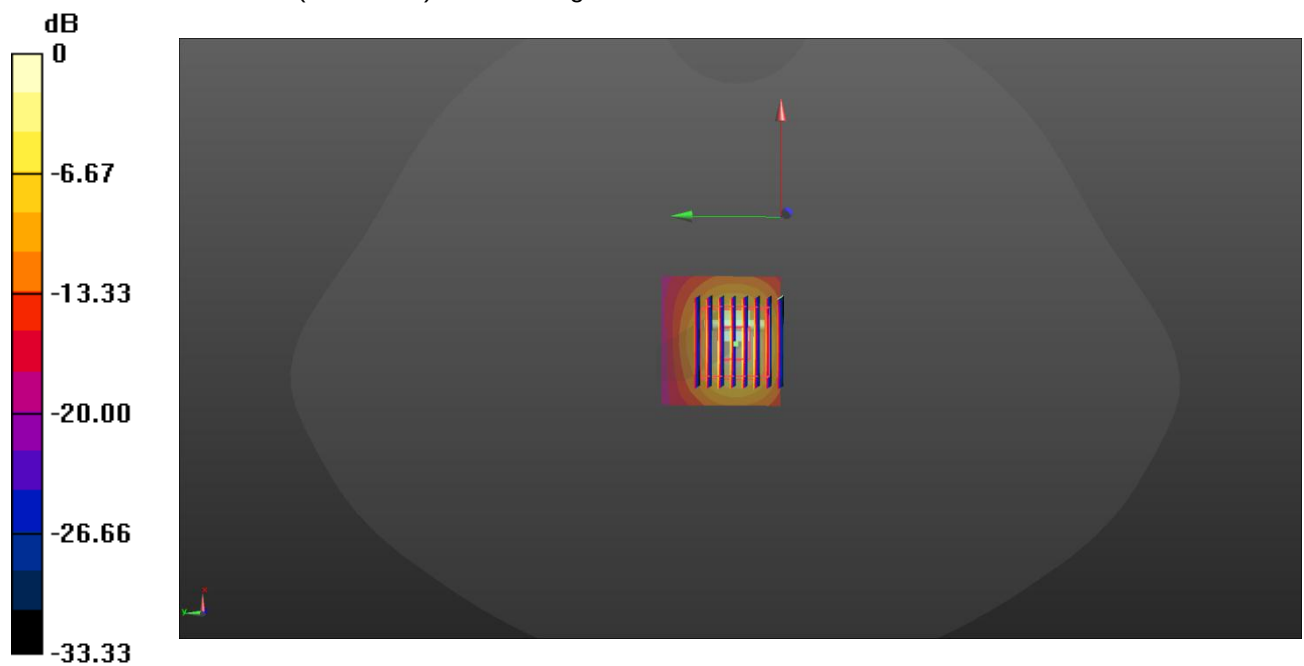

0 dB = 18.6 W/kg = 12.70 dBW/kg

SystemPerformanceCheck- Body 5600MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-11-18

Communication System: UID 0, Generic WIFI (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.854$ S/m; $\epsilon_r = 34.546$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 22.1 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.57 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 35.4 W/kg

SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

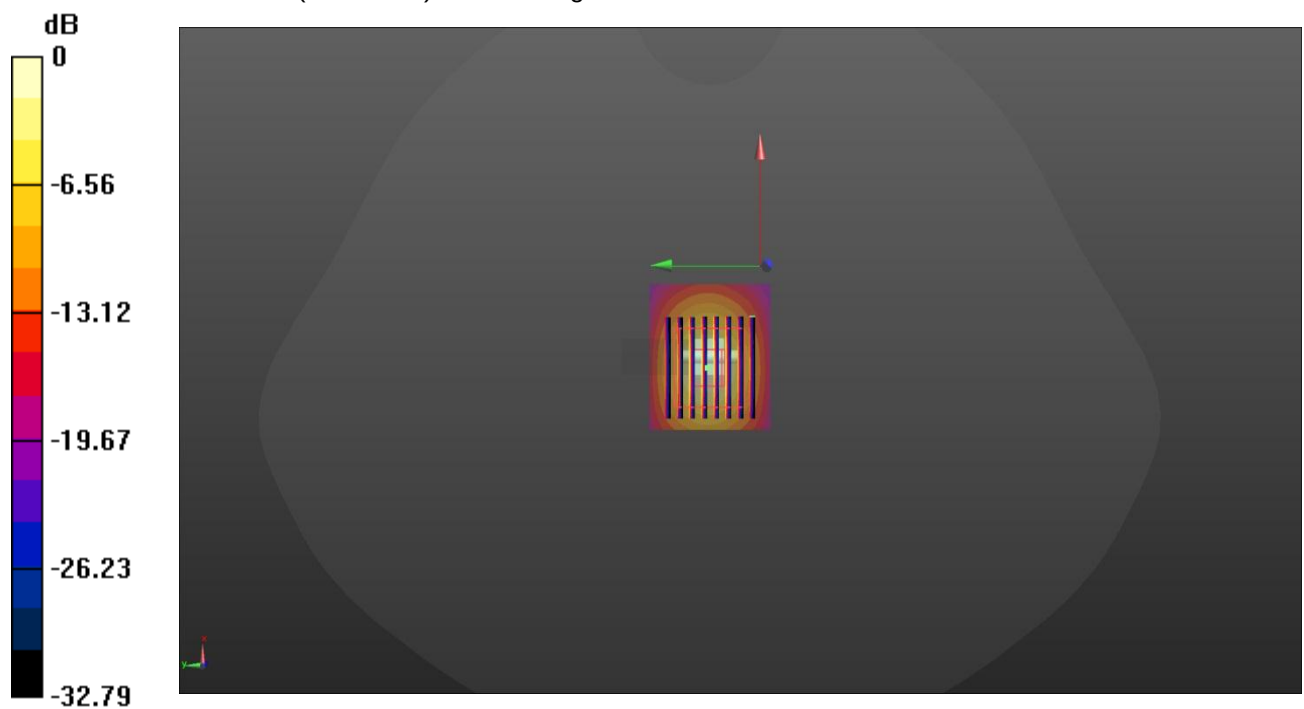

0 dB = 20.1 W/kg = 13.03 dBW/kg

SystemPerformanceCheck- Body 5750MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-11-18

Communication System: UID 0, Generic WIFI (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 4.988 \text{ S/m}$; $\epsilon_r = 34.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 22.6 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 61.72 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 36.9 W/kg

SAR(1 g) = 8.55 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 21.1 W/kg

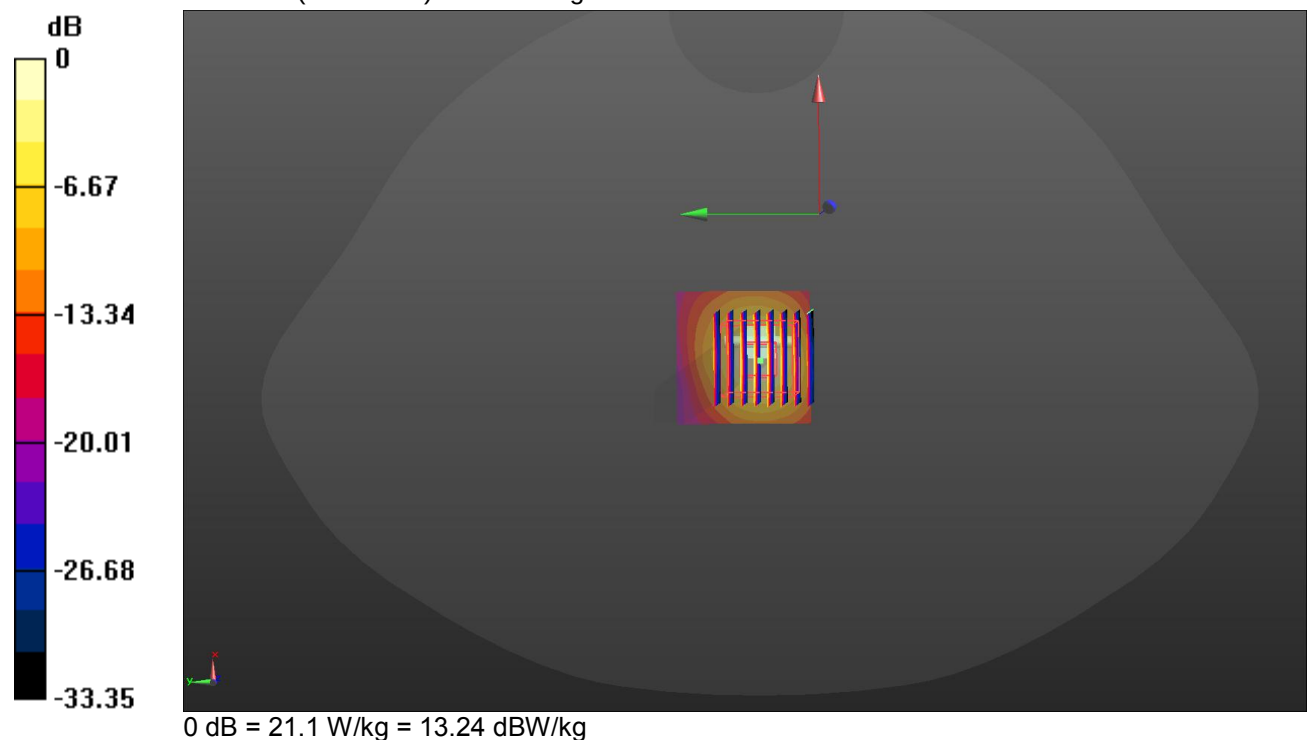

9. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

10. Conducted Power Measurement Results and Tune-up

10.1. GSM

1. *Per KDB 447498 D01, the maximum output power channel is used for SAR testing and further SAR test reduction.*
2. *Per KDB 941225 D01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.*
3. *Per KDB941225 D01, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.*

Please refer to appendix A

Note:

1) Division Factors

To Frame-Average Power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> Burst Average Power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/4) => -3.01dB

10.2. WCDMA

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ED} (Note 5) (Note 6)	β_{ED} (SF)	β_{ED} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ED1} : 47/15 β_{ED2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:	$\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
Note 2:	CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3:	For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4:	For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
Note 5:	In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
Note 6:	β_{ED} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Please refer to appendix A

10.3. LTE

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

Please refer to appendix A

LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplinkdownlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS		UpPTS	DwPTS		UpPTS
		Normal cyclic prefix in uplink			Normal cyclic prefix in uplink	
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used-configuration 0 at 63.3% duty cycle.

Please refer to appendix A

10.4. Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Please refer to appendix A

10.5. Bluetooth

Please refer to appendix A

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$



Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.450	Extremity	0	1.1	0.059

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

11. RF Exposure Conditions (Test Configurations)

11.1. Antenna Location

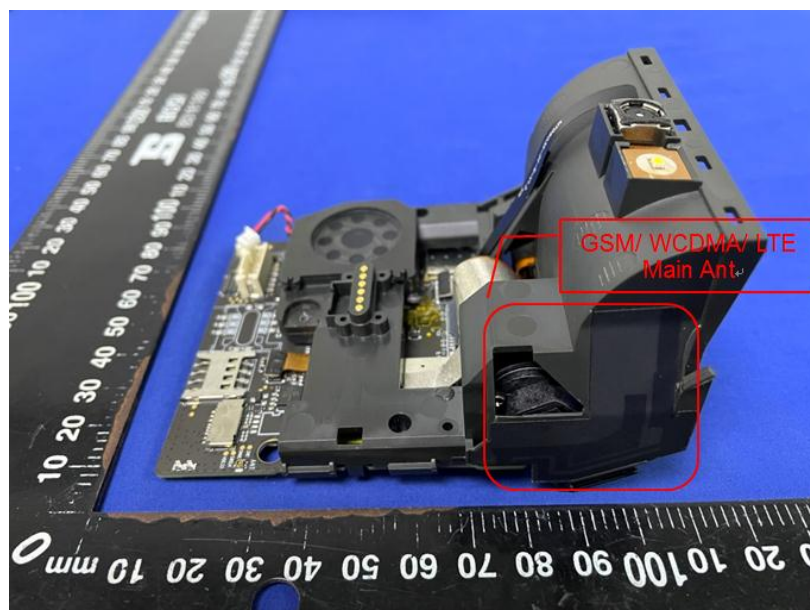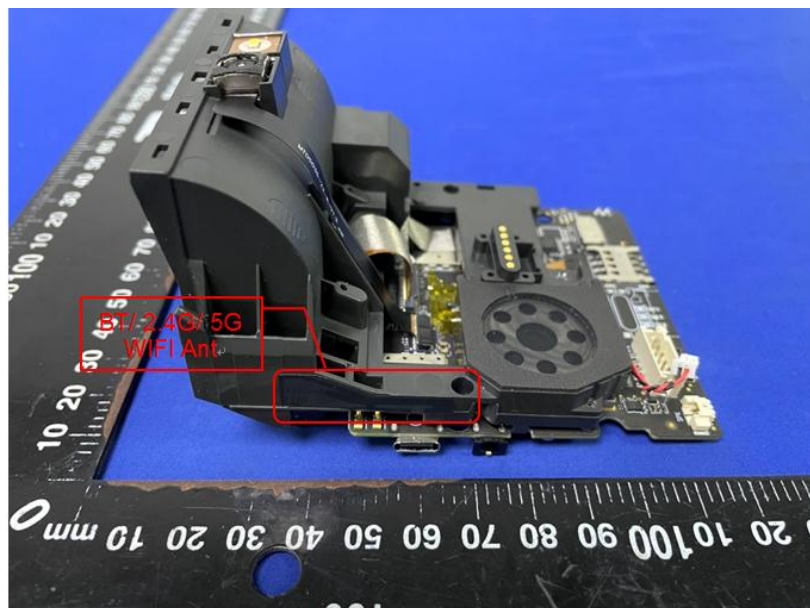

Distance of the Antenna to the EUT surface/edge(mm)						
Antenna	Rear	Front	Top side	Bottom side	Right side	Left side
WWAN	15	15	26	132	80	2
WiFi/BT	5	15	50	123	2	80

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

12. Measured and Reported SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G SAR Test Reduction Procedure:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

GSM Guidance

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Please refer to section 9. for GSM power verification.

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

W-CDMA Guidance

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC (Head) and other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC (Body-Worn Accessory) as the primary mode.

SAR measurement is not required for the HSDPA, HSUPA, DC-HSDPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

Please refer to appendix B

13. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Frequency		Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
		CH	MHz		Measured SAR(W/kg)	Largest to Smallest SAR Ratio	Measured SAR(W/kg)	Largest to Smallest SAR Ratio
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

14. Simultaneous Transmission analysis

14.1. Simultaneous Transmission

No.	Simultaneous Transmission Configurations	Body-worn	Note
1	GPRS (data) + Bluetooth (data)	Yes	
2	GPRS (data) + WLAN (data)	Yes	
3	WCDMA (data) + Bluetooth (data)	Yes	
4	WCDMA (data) + WLAN (data)	Yes	
5	LTE + Bluetooth (data)	Yes	
6	LTE + WLAN (data)	Yes	


General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position

Please refer to appendix C

SAR Test Data Plots to the Appendix D.

15. TestSetup Photos

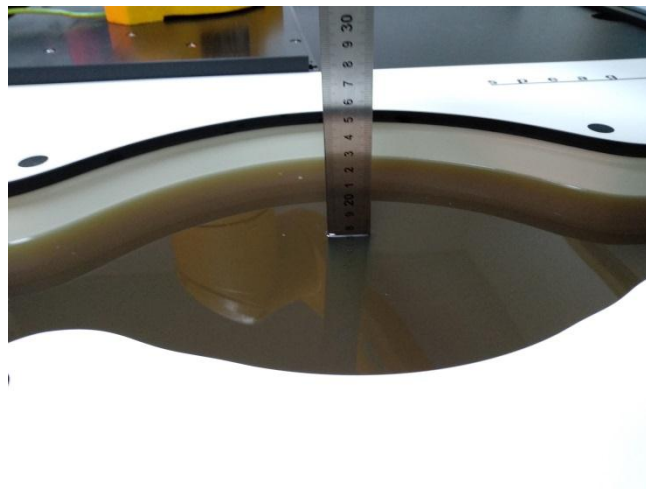

Liquid depth in the Body phantom



Rear (0mm)



Front 0mm




Left 0mm



Right 0mm

16. External Photos of the EUT



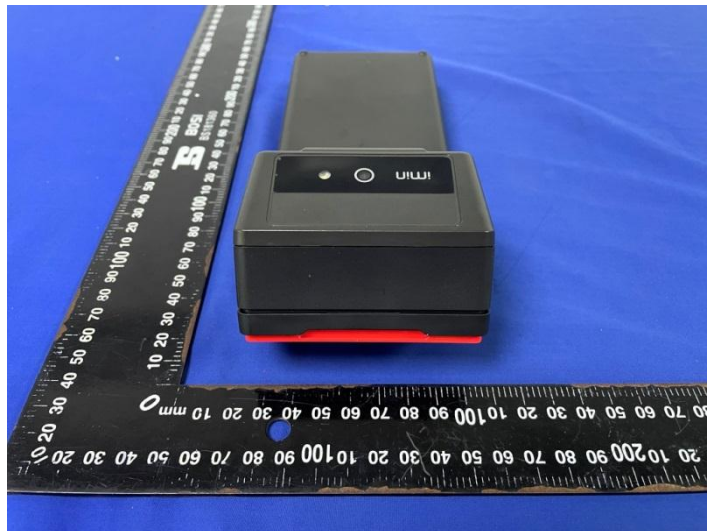



-----End of Report-----

Appendix A:Conducted Power Measurement Results-GSM

GSM850		Burst Average Power (dBm)			Tune-up limit (dBm)	Division Factors	Frame-Average Power (dBm)			Tune-up limit (dBm)
		CH128	CH190	CH251			CH128	CH190	CH251	
		824.2MHz	836.6MHz	848.8MHz			824.2MHz	836.6MHz	848.8MHz	
GSM		34.63	34.52	34.69	35.00	-9.03	25.60	25.49	25.66	25.97
GPRS (GMSK)	1Tx slot	34.65	34.50	34.68	35.00	-9.03	25.62	25.47	25.65	25.97
	2Tx slots	32.65	32.52	32.45	33.00	-6.02	26.63	26.50	26.43	26.98
	3Tx slots	30.73	30.62	30.56	31.00	-4.26	26.47	26.36	26.30	26.74
	4Tx slots	28.53	28.44	28.41	29.00	-3.01	25.52	25.43	25.40	25.99
EGPRS (8PSK)	1Tx slot	28.42	28.46	28.04	28.50	-9.03	19.39	19.43	19.01	19.47
	2Tx slots	28.29	28.41	27.97	28.50	-6.02	22.27	22.39	21.95	22.48
	3Tx slots	27.05	27.28	26.78	27.50	-4.26	22.79	23.02	22.52	23.24
	4Tx slots	24.24	24.58	24.04	25.00	-3.01	21.23	21.57	21.03	21.99

GSM1900		Burst Average Power (dBm)			Tune-up limit (dBm)	Division Factors	Frame-Average Power (dBm)			Tune-up limit (dBm)
		CH512	CH661	CH810			CH512	CH661	CH810	
		1850.2MHz	1880MHz	1909.8MHz			1850.2MHz	1880.0MHz	1909.8MHz	
GSM		31.63	31.47	31.32	32.00	-9.03	22.60	22.44	22.29	22.97
GPRS (GMSK)	1Tx slot	31.63	31.41	31.24	32.00	-9.03	22.60	22.38	22.21	22.97
	2Tx slots	29.49	29.20	28.99	29.50	-6.02	23.47	23.18	22.97	23.48
	3Tx slots	27.94	27.62	27.39	28.00	-4.26	23.68	23.36	23.13	23.74
	4Tx slots	25.90	25.56	25.30	26.00	-3.01	22.89	22.55	22.29	22.99
EGPRS (8PSK)	1Tx slot	27.85	28.13	27.57	28.50	-9.03	18.82	19.10	18.54	19.47
	2Tx slots	27.69	28.10	27.55	28.50	-6.02	21.67	22.08	21.53	22.48
	3Tx slots	26.38	26.89	26.35	27.00	-4.26	22.12	22.63	22.09	22.74
	4Tx slots	23.93	24.69	24.07	25.00	-3.01	20.92	21.68	21.06	21.99

Appendix A:Conducted Power Measurement Results-WCDMA

WCDMA Band II		Conducted Power (dBm)			Tune-up limit (dBm)
		CH9262	CH9400	CH9538	
		1852.4MHz	1880MHz	1907.6MHz	
AMR 12.2K		23.88	24.11	24.09	24.50
RMC 12.2K		23.84	24.12	24.05	24.50
HSDPA	Subtest-1	24.01	24.24	24.22	24.50
	Subtest-2	24.02	24.23	24.23	24.50
	Subtest-3	23.70	23.81	23.78	24.00
	Subtest-4	24.05	24.26	24.25	24.50
HSUPA	Subtest-1	19.93	21.79	21.13	22.00
	Subtest-2	22.13	22.13	22.39	22.50
	Subtest-3	22.16	22.28	22.43	22.50
	Subtest-4	22.20	21.31	22.49	22.50
	Subtest-5	24.25	24.02	24.12	24.50

WCDMA Band V		Conducted Power (dBm)			Tune-up limit (dBm)
		CH4132	CH4183	CH4233	
		826.4MHz	836.6MHz	846.6MHz	
AMR 12.2K		24.73	24.72	24.69	25.00
RMC 12.2K		24.62	24.80	24.59	25.00
HSDPA	Subtest-1	24.01	23.95	24.06	24.50
	Subtest-2	24.75	24.77	24.75	25.00
	Subtest-3	24.75	24.77	24.72	25.00
	Subtest-4	24.74	24.77	24.73	25.00
HSUPA	Subtest-1	21.92	22.29	22.34	22.50
	Subtest-2	22.50	22.47	22.61	23.00
	Subtest-3	22.06	22.51	22.72	23.00
	Subtest-4	22.21	21.96	21.15	22.50
	Subtest-5	24.24	24.25	24.26	24.50

Appendix A:Conducted Power Measurement Results-LTE

LTE-FDD Band 5				Conducted Power (dBm)			Tune-up Limit(dBm)
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High	
1.4	QPSK	1	0	25.39	25.38	25.78	26.00
			2	25.45	25.40	25.78	
			5	25.44	25.40	25.69	
		3	0	25.54	25.47	25.60	26.00
			1	25.50	25.42	25.58	
			3	25.47	25.47	25.58	
		6	0	24.45	24.27	24.53	25.00
	16QAM	1	0	25.49	25.46	24.95	25.50
			2	25.02	25.33	24.97	
			5	25.05	25.40	24.35	
		3	0	25.52	25.44	25.58	26.00
			1	25.49	25.56	25.59	
			3	25.48	25.46	25.59	
		6	0	23.49	23.66	23.51	24.00
3	QPSK	1	0	25.59	25.51	25.57	26.00
			8	25.57	25.50	25.63	
			14	25.49	25.42	25.63	
		8	0	24.02	24.99	24.52	25.50
			4	23.85	25.04	24.53	
			7	24.19	24.94	24.48	
		15	0	24.43	24.46	24.69	25.00
	16QAM	1	0	24.30	25.12	24.56	25.50
			8	24.27	24.97	24.56	
			14	23.86	24.99	24.48	
		8	0	24.00	25.03	24.54	25.50
			4	23.91	25.06	24.60	
			7	24.20	24.94	24.47	
		15	0	23.44	23.61	23.69	24.00
5	QPSK	1	0	25.61	25.64	25.67	26.00
			12	25.52	25.64	25.77	
			24	25.64	25.71	25.78	
		12	0	24.55	24.55	24.67	25.00
			6	24.52	24.49	24.56	
			13	24.36	24.47	24.69	
		25	0	24.41	24.42	24.74	25.00
	16QAM	1	0	24.23	24.37	24.05	24.50
			12	24.24	24.29	24.18	
			24	24.27	24.44	23.99	
		12	0	24.52	24.49	24.55	25.00
			6	24.51	24.54	24.69	
			13	24.40	24.51	24.69	
		25	0	23.48	23.66	23.89	24.00
10	QPSK	1	0	25.59	25.78	25.53	26.00
			24	25.56	25.66	25.65	
			49	25.65	25.72	25.64	
		25	0	24.41	24.48	24.57	25.00
			12	24.42	24.51	24.54	
			25	24.60	24.69	24.71	
		50	0	24.53	24.47	24.64	25.00
	16QAM	1	0	23.90	24.43	24.26	24.50
			24	23.86	24.33	24.39	
			49	24.01	24.32	24.43	
		25	0	24.42	24.51	24.54	25.00
			12	24.42	24.51	24.54	
			25	24.62	24.60	24.69	
		50	0	23.69	23.58	23.82	24.00

Appendix A:Conducted Power Measurement Results-LTE

LTE-FDD Band 7				Conducted Power (dBm)			Tune-up Limit(dBm)
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High	
5	QPSK	1	0	24.66	24.68	24.84	25.00
			12	24.67	24.83	24.81	
			24	24.57	24.68	24.78	
		12	0	23.58	23.71	23.61	24.00
			6	23.73	23.69	23.60	
			13	23.68	23.67	23.53	
		25	0	23.74	23.71	23.69	24.00
	16QAM	1	0	23.44	23.42	23.06	23.50
			12	23.43	23.31	23.04	
			24	23.41	23.26	23.06	
		12	0	23.74	23.71	23.60	24.00
			6	23.72	23.57	23.59	
			13	23.65	23.67	23.54	
		25	0	22.61	22.98	22.80	23.00
10	QPSK	1	0	24.86	24.67	24.64	25.00
			24	24.80	24.89	24.59	
			49	24.80	24.72	24.50	
		25	0	23.93	23.63	23.67	24.00
			12	23.91	23.79	23.65	
			25	23.75	23.74	23.69	
		50	0	23.81	23.88	23.56	24.00
	16QAM	1	0	23.25	23.86	23.92	24.50
			24	23.27	24.00	23.84	
			49	23.33	23.82	23.91	
		25	0	23.91	23.80	23.67	24.00
			12	23.90	23.79	23.65	
			25	23.75	23.81	23.68	
		50	0	23.01	23.10	22.70	23.50
15	QPSK	1	0	24.46	24.71	24.64	25.00
			38	24.38	24.84	24.58	
			74	24.39	24.69	24.49	
		38	0	24.03	24.00	23.80	24.50
			18	24.03	24.13	23.50	
			37	23.66	23.98	23.48	
		75	0	23.76	23.75	23.61	24.00
	16QAM	1	0	23.64	23.99	23.56	24.50
			38	23.64	24.14	23.52	
			74	23.61	24.00	23.78	
		38	0	23.98	24.01	23.51	24.50
			18	24.00	24.17	23.52	
			37	23.58	23.96	23.66	
		75	0	22.91	22.95	22.73	23.00
20	QPSK	1	0	25.02	24.79	24.90	25.50
			49	24.98	24.89	24.97	
			99	24.90	24.92	24.87	
		50	0	23.67	23.79	23.84	24.00
			25	23.78	23.70	23.83	
			50	23.68	23.83	23.78	
		100	0	23.76	23.92	23.77	24.00
	16QAM	1	0	24.29	23.86	23.58	24.50
			49	24.28	23.99	23.60	
			99	24.30	23.63	23.53	
		50	0	23.81	23.74	23.83	24.00
			25	23.80	23.72	23.83	
			50	23.80	23.82	23.77	
		100	0	22.93	22.99	22.88	23.00

Appendix A:Conducted Power Measurement Results-LTE

LTE-TDD Band 41				Conducted Power (dBm)			Tune-up Limit(dBm)
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High	
5	QPSK	1	0	24.34	23.94	23.70	24.50
			12	24.30	23.94	23.70	
			24	24.29	23.85	23.79	
		12	0	23.74	23.56	22.70	24.00
			6	23.72	23.53	22.75	
			13	23.74	23.43	22.62	
		25	0	23.43	23.03	22.73	23.50
	16QAM	1	0	23.69	23.57	22.85	24.00
			12	23.71	23.51	22.89	
			24	23.68	23.43	22.77	
		12	0	23.74	23.57	22.69	24.00
			6	23.72	23.53	22.75	
			13	23.72	23.42	22.78	
		25	0	22.44	22.15	21.99	22.50
10	QPSK	1	0	24.44	24.10	23.53	24.50
			24	24.37	23.94	23.67	
			49	24.38	23.89	23.77	
		25	0	23.46	23.08	22.70	23.50
			12	23.39	23.08	22.69	
			25	23.40	22.99	22.75	
		50	0	23.04	22.59	22.22	23.50
	16QAM	1	0	23.34	23.47	22.53	23.50
			24	23.40	23.18	22.62	
			49	23.41	23.14	22.51	
		25	0	23.47	23.08	22.69	23.50
			12	23.36	23.11	22.67	
			25	23.40	22.86	22.76	
		50	0	22.17	21.75	21.56	22.50
15	QPSK	1	0	24.14	24.13	23.72	24.50
			38	24.23	24.04	23.68	
			74	24.24	23.90	23.75	
		38	0	23.53	23.70	22.48	24.00
			18	23.54	23.48	22.66	
			37	23.52	22.97	22.71	
		75	0	22.96	22.64	22.38	23.00
	16QAM	1	0	23.52	23.34	22.46	24.00
			38	23.47	23.15	22.62	
			74	23.50	22.97	22.72	
		38	0	23.51	23.71	22.45	24.00
			18	23.56	23.31	22.68	
			37	23.57	22.95	22.87	
		75	0	22.14	21.56	21.51	22.50
20	QPSK	1	0	24.51	24.27	23.53	25.00
			49	24.55	24.01	23.60	
			99	24.48	23.91	23.62	
		50	0	23.42	23.13	22.78	23.50
			25	23.44	23.21	22.78	
			50	23.31	22.96	22.76	
		100	0	23.09	22.71	22.40	23.50
	16QAM	1	0	24.05	23.11	22.96	24.50
			49	24.14	23.09	22.91	
			99	24.12	22.90	23.03	
		50	0	22.62	22.20	22.03	23.00
			25	22.62	22.21	22.03	
			50	22.56	22.07	22.06	
		100	0	22.17	21.65	21.55	22.50

Appendix A:Conducted Power Measurement Results-WiF/Bluetooth

WIFI 2.4G				
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
802.11b 1Mbps	1	2412	20.02	20.50
	6	2437	23.22	23.50
	11	2462	21.05	21.50
802.11g 6Mbps	1	2412	23.08	23.50
	6	2437	23.77	24.00
	11	2462	22.94	23.00
802.11n (HT20) MCS0	1	2412	20.49	20.50
	6	2437	23.74	24.00
	11	2462	23.30	23.50
802.11n (HT40) MCS0	3	2422	20.22	20.50
	6	2437	22.13	22.50
	9	2452	19.14	19.50

WIFI 5G U-NII-1					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11ac	36	5180	12.70	13.00
		44	5220	12.03	12.50
		48	5240	11.68	12.00
	802.11n	36	5180	12.73	13.00
		44	5220	12.13	12.50
		48	5240	11.47	11.50
	802.11a	36	5180	12.57	13.00
		44	5220	11.89	12.00
		48	5240	11.52	12.00
40	802.11ac	38	5190	11.82	12.00
		46	5230	11.12	11.50
	802.11n	38	5190	11.39	11.50
		46	5230	11.00	11.00
80	802.11ac	42	5210	13.25	13.50

WIFI 5G U-NII-2A					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11ac	52	5260	11.25	11.50
		56	5280	11.39	11.50
		64	5320	11.74	12.00
	802.11n	52	5260	11.32	11.50
		56	5280	11.40	11.50
		64	5320	11.67	12.00
	802.11a	52	5260	11.24	11.50
		56	5280	11.26	11.50
		64	5320	11.57	12.00
40	802.11ac	54	5270	12.75	13.00
		62	5310	13.00	13.00
	802.11n	54	5270	10.26	10.50
		62	5310	12.36	12.50
80	802.11ac	58	5290	12.49	12.50

WIFI 5G U-NII-2C					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11ac	100	5500	11.84	12.00
		120	5600	12.15	12.50
		140	5700	11.43	11.50
	802.11n	100	5500	10.02	10.50
		120	5600	10.29	10.50
		140	5700	11.41	11.50
	802.11a	100	5500	11.67	12.00
		120	5600	12.01	12.50
		140	5700	13.19	13.50
40	802.11ac	102	5510	12.51	13.00
		118	5590	12.66	13.00
		134	5670	12.69	13.00
	802.11n	102	5510	12.54	13.00
		118	5590	12.72	13.00
		134	5670	12.55	13.00
80	802.11ac	106	5530	10.38	10.50
		122	5610	11.83	12.00

WIFI 5G U-NII-3					
Bandwidth	Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
20	802.11ac	149	5745	12.11	12.50
		157	5785	11.40	11.50
		165	5825	10.78	11.00
	802.11n	149	5745	12.06	12.50
		157	5785	11.47	11.50
		165	5825	10.75	11.00
	802.11a	149	5745	11.30	11.50
		157	5785	10.70	11.00
		165	5825	10.12	10.50
40	802.11ac	151	5755	12.77	13.00
		159	5795	12.10	12.50
	802.11n	151	5755	12.67	13.00
		159	5795	12.23	12.50
80	802.11ac	155	5775	11.99	12.00

Bluetooth					
Mode		Channel	Frequency (MHz)	Average Power (dBm)	Tune-up limit (dBm)
EDR	GFSK	0	2402	3.65	4.00
		39	2441	2.71	3.00
		78	2480	1.86	2.00
	$\pi/4$ QPSK	0	2402	5.19	5.50
		39	2441	4.16	4.50
		78	2480	2.97	3.00
	8DPSK	0	2402	5.41	5.50
		39	2441	4.66	5.00
		78	2480	2.49	2.50
BLE 1Mbps	GFSK	0	2402	3.15	3.50
		19	2440	1.67	2.00
		39	2480	1.36	1.50
BLE 2Mbps	GFSK	0	2402	3.25	3.50
		19	2440	2.45	2.50
		39	2480	0.75	1.00

Appendix B:SAR Measurement Results-Extremity

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 2Tx slots	Front	128	824.2	32.65	33.00	1.084	-0.06	0.256	0.277	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-
	Rear	128	824.2	32.65	33.00	1.084	0.03	0.310	0.336	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-
	Left	128	824.2	32.65	33.00	1.084	0.05	0.363	0.393	1
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-
	Right	128	824.2	32.65	33.00	1.084	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-
	Top	128	824.2	32.65	33.00	1.084	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-
	Bottom	128	824.2	32.65	33.00	1.084	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.45	33.00	1.135	-	-	-	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	512	1850.2	27.94	28.00	1.014	0.06	0.628	0.637	-
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-
	Rear	512	1850.2	27.94	28.00	1.014	-0.10	0.654	0.663	-
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-
	Left	512	1850.2	27.94	28.00	1.014	0.01	0.750	0.760	2
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-
	Right	512	1850.2	27.94	28.00	1.014	-	-	-	-
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-
	Top	512	1850.2	27.94	28.00	1.014	-	-	-	-
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-
	Bottom	512	1850.2	27.94	28.00	1.014	-	-	-	-
		661	1880.0	27.62	28.00	1.091	-	-	-	-
		810	1909.8	27.39	28.00	1.151	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	0.05	0.892	0.974	-
		9538	1907.6	24.05	24.50	1.109	-	-	-	-
	Rear	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	0.09	0.905	0.988	-
		9538	1907.6	24.05	24.50	1.109	-	-	-	-
	Left	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	0.13	1.140	1.244	3
		9538	1907.6	24.05	24.50	1.109	-	-	-	-
	Right	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	-	-	-	-
		9538	1907.6	24.05	24.50	1.109	-	-	-	-
	Top	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	-	-	-	-
		9538	1907.6	24.05	24.50	1.109	-	-	-	-
	Bottom	9262	1852.4	23.84	24.50	1.164	-	-	-	-
		9400	1880.0	24.12	24.50	1.091	-	-	-	-
		9538	1907.6	24.05	24.50	1.109	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	0.08	0.274	0.287	-
		4233	846.6	24.59	25.00	1.099	-	-	-	-
	Rear	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	0.06	0.286	0.299	-
		4233	846.6	24.59	25.00	1.099	-	-	-	-
	Left	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	-0.16	0.326	0.341	4
		4233	846.6	24.59	25.00	1.099	-	-	-	-
	Right	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	-	-	-	-
		4233	846.6	24.59	25.00	1.099	-	-	-	-
	Top	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	-	-	-	-
		4233	846.6	24.59	25.00	1.099	-	-	-	-
	Bottom	4132	826.4	24.62	25.00	1.091	-	-	-	-
		4183	836.6	24.80	25.00	1.047	-	-	-	-
		4233	846.6	24.59	25.00	1.099	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	0.03	0.335	0.352	-
		20600	844.0	25.53	26.00	1.114	-	-	-	-
	Rear	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	0.09	0.386	0.406	-
		20600	844.0	25.53	26.00	1.114	-	-	-	-
	Left	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	0.15	0.416	0.438	5
		20600	844.0	25.53	26.00	1.114	-	-	-	-
	Right	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	-	-	-	-
		20600	844.0	25.53	26.00	1.114	-	-	-	-
	Top	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	-	-	-	-
		20600	844.0	25.53	26.00	1.114	-	-	-	-
	Bottom	20450	829.0	25.59	26.00	1.099	-	-	-	-
		20525	836.5	25.78	26.00	1.052	-	-	-	-
		20600	844.0	25.53	26.00	1.114	-	-	-	-
10M QPSK 25RB	Front	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-0.06	0.332	0.355	-
	Rear	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-0.08	0.364	0.389	-
	Left	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-0.02	0.398	0.425	-
	Right	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-	-	-	-
	Top	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-	-	-	-
	Bottom	20450	829.0	24.60	25.00	1.096	-	-	-	-
		20525	836.5	24.69	25.00	1.074	-	-	-	-
		20600	844.0	24.71	25.00	1.069	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20850	2510.0	25.02	25.50	1.117	0.06	0.147	0.164	-
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
	Rear	20850	2510.0	25.02	25.50	1.117	-0.11	0.154	0.172	-
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
	Left	20850	2510.0	25.02	25.50	1.117	-0.14	0.181	0.202	6
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
	Right	20850	2510.0	25.02	25.50	1.117	-	-	-	-
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
	Top	20850	2510.0	25.02	25.50	1.117	-	-	-	-
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
	Bottom	20850	2510.0	25.02	25.50	1.117	-	-	-	-
		21100	2535.0	24.79	25.50	1.178	-	-	-	-
		21350	2560.0	24.90	25.50	1.148	-	-	-	-
20M QPSK 50RB	Front	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	-0.07	0.122	0.127	-
	Rear	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	0.02	0.138	0.143	-
	Left	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	-0.06	0.175	0.182	-
	Right	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	-	-	-	-
	Top	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	-	-	-	-
	Bottom	20850	2510.0	23.67	24.00	1.079	-	-	-	-
		21100	2535.0	23.79	24.00	1.050	-	-	-	-
		21350	2560.0	23.84	24.00	1.038	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

LTE Band 41											
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	40340	2565.0	24.55	25.00	1.109	1.006	0.04	0.142	0.158	-
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
	Rear	40340	2565.0	24.55	25.00	1.109	1.006	0.09	0.155	0.173	-
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
	Left	40340	2565.0	24.55	25.00	1.109	1.006	-0.04	0.186	0.208	7
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
	Right	40340	2565.0	24.55	25.00	1.109	1.006	-	-	-	-
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
	Top	40340	2565.0	24.55	25.00	1.109	1.006	-	-	-	-
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
	Bottom	40340	2565.0	24.55	25.00	1.109	1.006	-	-	-	-
		40740	2605.0	24.01	25.00	1.256	1.006	-	-	-	-
		41140	2645.0	23.60	25.00	1.380	1.006	-	-	-	-
20M QPSK 50RB	Front	40340	2565.0	23.44	23.50	1.014	1.006	-0.13	0.113	0.115	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-
	Rear	40340	2565.0	23.44	23.50	1.014	1.006	0.04	0.128	0.131	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-
	Left	40340	2565.0	23.44	23.50	1.014	1.006	-0.06	0.176	0.180	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-
	Right	40340	2565.0	23.44	23.50	1.014	1.006	-	-	-	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-
	Top	40340	2565.0	23.44	23.50	1.014	1.006	-	-	-	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-
	Bottom	40340	2565.0	23.44	23.50	1.014	1.006	-	-	-	-
		40740	2605.0	23.21	23.50	1.069	1.006	-	-	-	-
		41140	2645.0	22.78	23.50	1.180	1.006	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

WIFI 2.4G												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11b 1Mbps	Front	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	-0.04	0.911	1.078	-
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-
	Rear	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	0.06	0.942	1.115	-
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-
	Left	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	-	-	-	-
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-
	Right	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	-0.13	1.130	1.337	8
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-
	Top	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	-	-	-	-
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-
	Bottom	1	2412	20.02	20.50	1.117	90.12%	1.110	-	-	-	-
		6	2437	23.22	23.50	1.067	90.12%	1.110	-	-	-	-
		11	2462	21.05	21.50	1.109	90.09%	1.110	-	-	-	-

WIFI 5G U-NII-1												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11ac (VHT80)	Front	42	5210	13.25	13.50	1.059	44.76%	2.234	0.05	0.304	0.719	-
	Rear	42	5210	13.25	13.50	1.059	44.76%	2.234	-0.11	0.312	0.738	-
	Left	42	5210	13.25	13.50	1.059	44.76%	2.234	-	-	-	-
	Right	42	5210	13.25	13.50	1.059	44.76%	2.234	0.09	0.359	0.850	9
	Top	42	5210	13.25	13.50	1.059	44.76%	2.234	-	-	-	-
	Bottom	42	5210	13.25	13.50	1.059	44.76%	2.234	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

WIFI 5G U-NII-2A												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11ac (VHT40)	Front	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	0.03	0.274	0.531	-
	Rear	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	-0.09	0.288	0.558	-
	Left	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	-	-	-	-
	Right	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	0.16	0.305	0.591	10
	Top	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	-	-	-	-
	Bottom	54	5270	12.75	13.00	1.059	51.61%	1.938	-	-	-	-
		62	5310	13.00	13.00	1.000	51.61%	1.938	-	-	-	-

WIFI 5G U-NII-2C												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	0.04	0.712	1.266	-
	Rear	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	0.08	0.743	1.321	-
	Left	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	-	-	-	-
	Right	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	0.15	0.816	1.451	11
	Top	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	-	-	-	-
	Bottom	100	5500	11.67	12.00	1.079	60.40%	1.656	-	-	-	-
		120	5600	12.01	12.50	1.119	60.00%	1.667	-	-	-	-
		140	5700	13.19	13.50	1.074	60.40%	1.656	-	-	-	-

Appendix B:SAR Measurement Results-Extremity

WIFI 5G U-NII-3												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11n (HT40)	Front	151	5755	12.77	13.00	1.054	52.03%	1.922	0.11	0.347	0.703	-
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-
	Rear	151	5755	12.77	13.00	1.054	52.03%	1.922	0.05	0.388	0.786	-
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-
	Left	151	5755	12.77	13.00	1.054	52.03%	1.922	-	-	-	-
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-
	Right	151	5755	12.77	13.00	1.054	52.03%	1.922	-0.10	0.462	0.936	12
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-
	Top	151	5755	12.77	13.00	1.054	52.03%	1.922	-	-	-	-
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-
	Bottom	151	5755	12.77	13.00	1.054	52.03%	1.922	-	-	-	-
		159	5795	12.10	12.50	1.096	52.03%	1.922	-	-	-	-

Appendix C: Simultaneous Transmission analysis

PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			PCE	WLAN DTS	
GSM	GSM850	Front	0.277	1.078	1.355
		Rear	0.336	1.115	1.451
		Left side	0.393	-	0.393
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	PCS1900	Front	0.637	1.078	1.715
		Rear	0.663	1.115	1.778
		Left side	0.760	-	0.760
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
WCDMA	Band II	Front	0.974	1.078	2.052
		Rear	0.988	1.115	2.103
		Left side	1.244	-	1.244
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	Band V	Front	0.287	1.078	1.365
		Rear	0.299	1.115	1.414
		Left side	0.341	-	0.341
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
LTE	B5 1RB	Front	0.352	1.078	1.430
		Rear	0.406	1.115	1.521
		Left side	0.438	-	0.438
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	B5 25RB	Front	0.355	1.078	1.433
		Rear	0.389	1.115	1.504
		Left side	0.425	-	0.425
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	B7 1RB	Front	0.164	1.078	1.242
		Rear	0.172	1.115	1.287
		Left side	0.202	-	0.202
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	B7 50RB	Front	0.127	1.078	1.205
		Rear	0.143	1.115	1.258
		Left side	0.182	-	0.182
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	B41 1RB	Front	0.158	1.078	1.236
		Rear	0.173	1.115	1.288
		Left side	0.208	-	0.208
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-
	B41 50RB	Front	0.115	1.078	1.193
		Rear	0.131	1.115	1.246
		Left side	0.180	-	0.180
		Right side	-	1.337	1.337
		Top side	-	-	-
		Bottom side	-	-	-

Appendix C: Simultaneous Transmission analysis

PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			PCE	WLAN U-NII	
GSM	GSM850	Front	0.277	1.266	1.543
		Rear	0.336	1.321	1.657
		Left side	0.393	-	0.393
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	PCS1900	Front	0.637	1.266	1.903
		Rear	0.663	1.321	1.984
		Left side	0.760	-	0.760
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
WCDMA	Band II	Front	0.974	1.266	2.240
		Rear	0.988	1.321	2.309
		Left side	1.244	-	1.244
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	Band V	Front	0.287	1.266	1.553
		Rear	0.299	1.321	1.620
		Left side	0.341	-	0.341
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
LTE	B5 1RB	Front	0.352	1.266	1.618
		Rear	0.406	1.321	1.727
		Left side	0.438	-	0.438
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	B5 25RB	Front	0.355	1.266	1.621
		Rear	0.389	1.321	1.710
		Left side	0.425	-	0.425
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	B7 1RB	Front	0.164	1.266	1.430
		Rear	0.172	1.321	1.493
		Left side	0.202	-	0.202
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	B7 50RB	Front	0.127	1.266	1.393
		Rear	0.143	1.321	1.464
		Left side	0.182	-	0.182
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	B41 1RB	Front	0.158	1.266	1.424
		Rear	0.173	1.321	1.494
		Left side	0.208	-	0.208
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-
	B41 50RB	Front	0.115	1.266	1.381
		Rear	0.131	1.321	1.452
		Left side	0.180	-	0.180
		Right side	-	1.451	1.451
		Top side	-	-	-
		Bottom side	-	-	-

Appendix C: Simultaneous Transmission analysis

PCE + BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	BT	(W/kg)
GSM	GSM850	Front	0.277	0.059	0.336
		Rear	0.336	0.059	0.395
		Left side	0.393	-	0.393
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	PCS1900	Front	0.637	0.059	0.696
		Rear	0.663	0.059	0.722
		Left side	0.760	-	0.760
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
WCDMA	Band II	Front	0.974	0.059	1.033
		Rear	0.988	0.059	1.047
		Left side	1.244	-	1.244
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	Band V	Front	0.287	0.059	0.346
		Rear	0.299	0.059	0.358
		Left side	0.341	-	0.341
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
LTE	B5 1RB	Front	0.352	0.059	0.411
		Rear	0.406	0.059	0.465
		Left side	0.438	-	0.438
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	B5 25RB	Front	0.355	0.059	0.414
		Rear	0.389	0.059	0.448
		Left side	0.425	-	0.425
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	B7 1RB	Front	0.164	0.059	0.223
		Rear	0.172	0.059	0.231
		Left side	0.202	-	0.202
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	B7 50RB	Front	0.127	0.059	0.186
		Rear	0.143	0.059	0.202
		Left side	0.182	-	0.182
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	B41 1RB	Front	0.158	0.059	0.217
		Rear	0.173	0.059	0.232
		Left side	0.208	-	0.208
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-
	B41 50RB	Front	0.115	0.059	0.174
		Rear	0.131	0.059	0.190
		Left side	0.180	-	0.180
		Right side	-	0.059	0.059
		Top side	-	-	-
		Bottom side	-	-	-

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/16/2021

GSM 850-L-Body worn

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1) (0); Frequency: 824.2 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 825$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 42.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C;Liquid Temperature:22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 824.2 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 128/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.981 W/kg


Left/CH 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.363 W/kg.

Maximum value of SAR (measured) = 0.953 W/kg

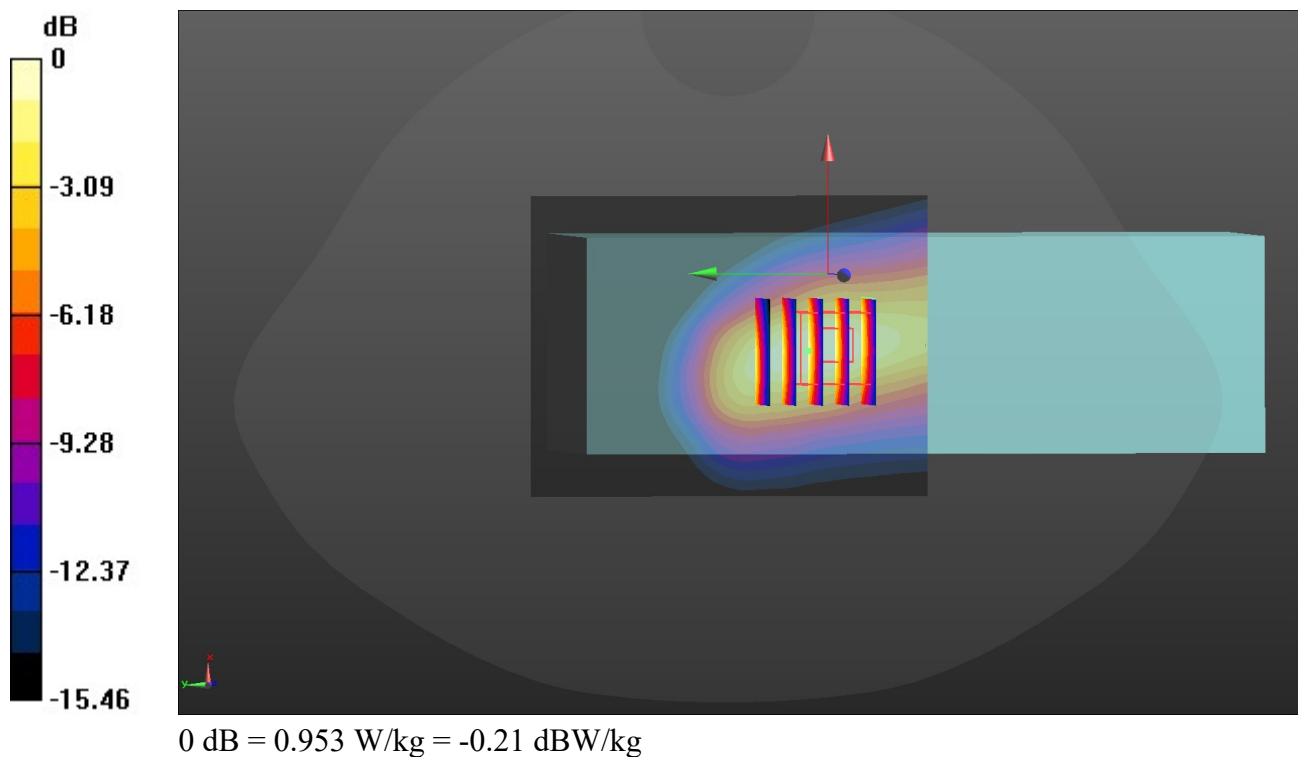

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/16/2021

GSM 1900-L-Body worn

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1-2) (0); Frequency: 1850.2 MHz;Duty Cycle: 1:2.66993

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 40.855$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C;Liquid Temperature:22.1°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1850.2 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 512/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm.

Maximum value of SAR (interpolated) = 2.22 W/kg


Left/CH 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.78 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.51 W/kg; SAR(10 g) = 0.750 W/kg

Maximum value of SAR (measured) = 2.34 W/kg

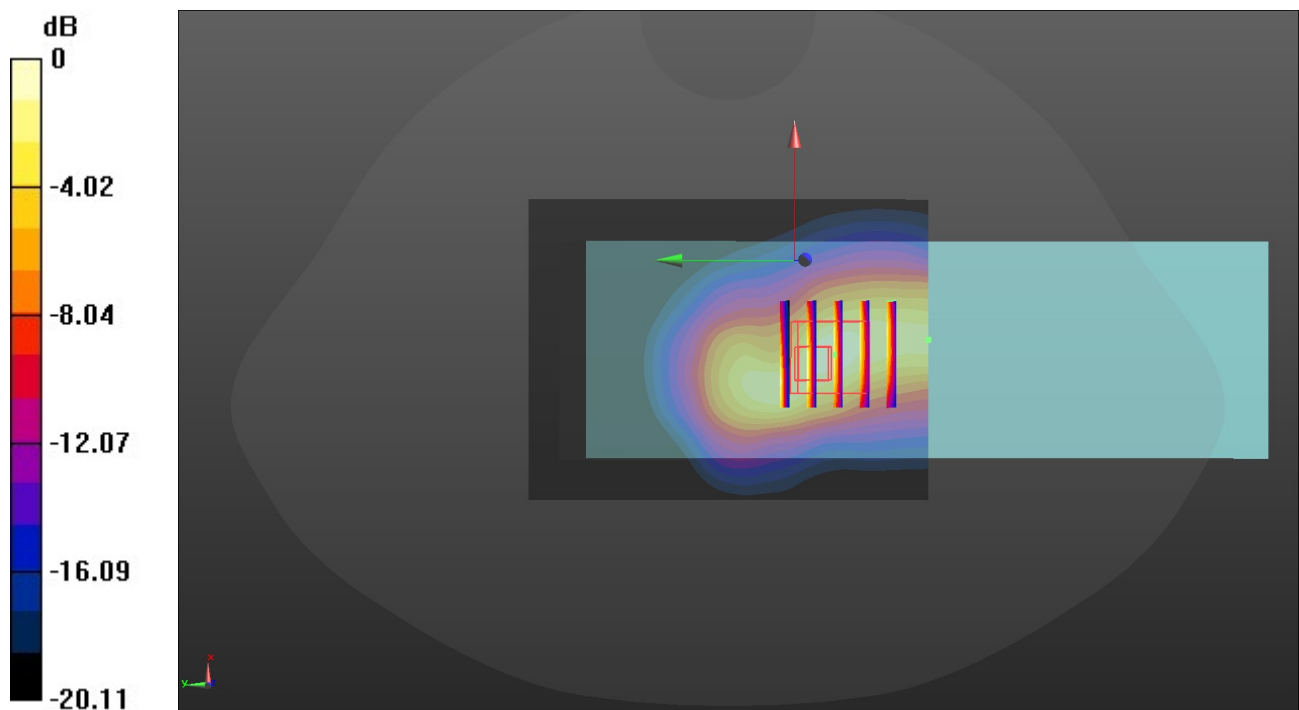

0 dB = 2.34 W/kg = 3.69 dBW/kg

WCDMA Band II-M-Body worn

Communication System: UID 0, Generic UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 40.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C;Liquid Temperature:22.1°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 9400/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.52 W/kg


Left/CH 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.42 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.38 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.14 W/kg.

Maximum value of SAR (measured) = 3.62 W/kg

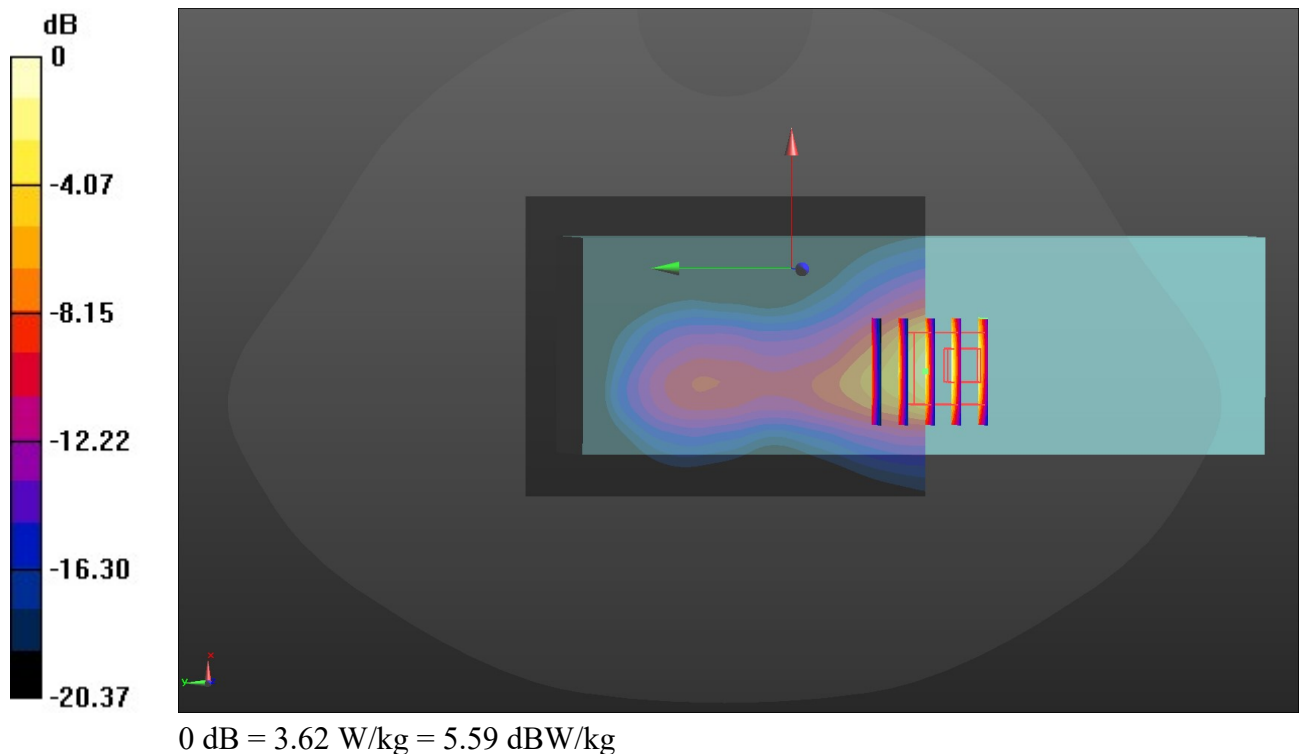

WCDMA Band V-M-Body worn

Communication System: UID 0, Generic UMTS (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 42.45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C;Liquid Temperature:22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 836.6 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 4183/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.719 W/kg


Left/CH 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.00 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

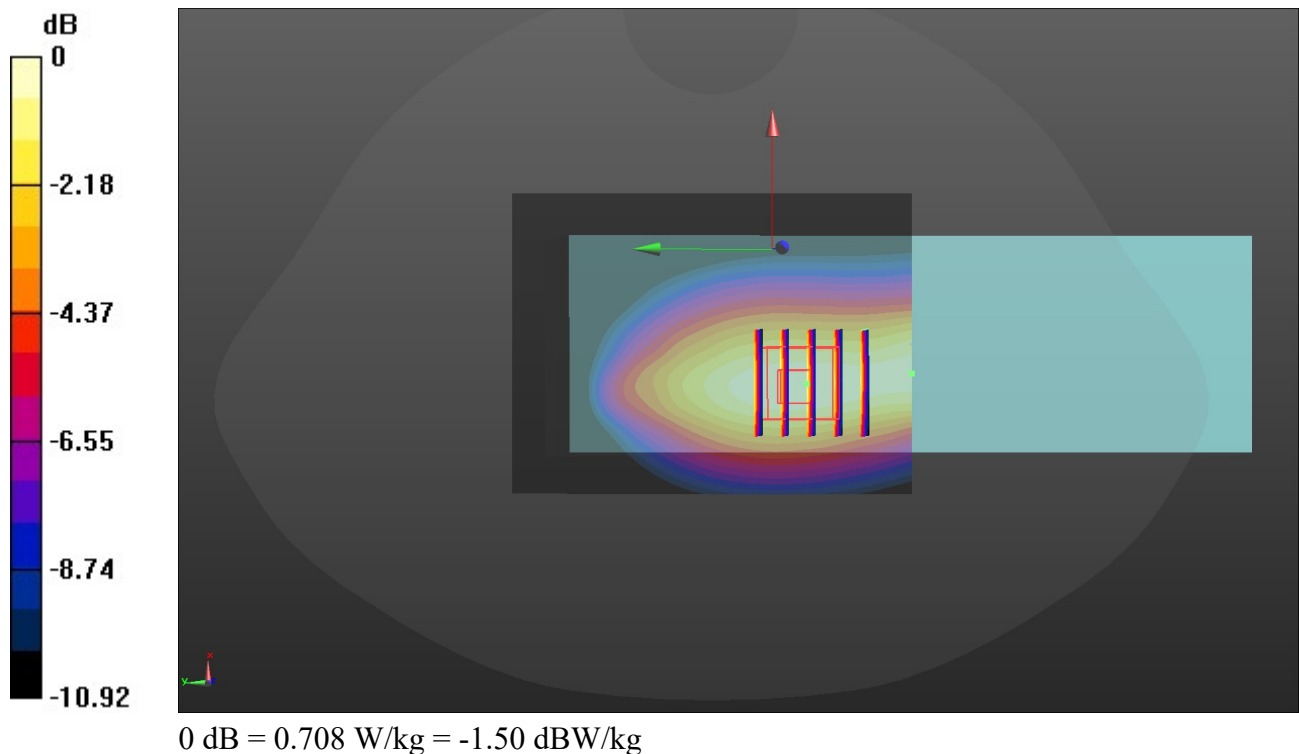

LTE Band 5-M-Body worn

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 836.5 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 20525/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.899 W/kg


Left/CH 20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.85 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

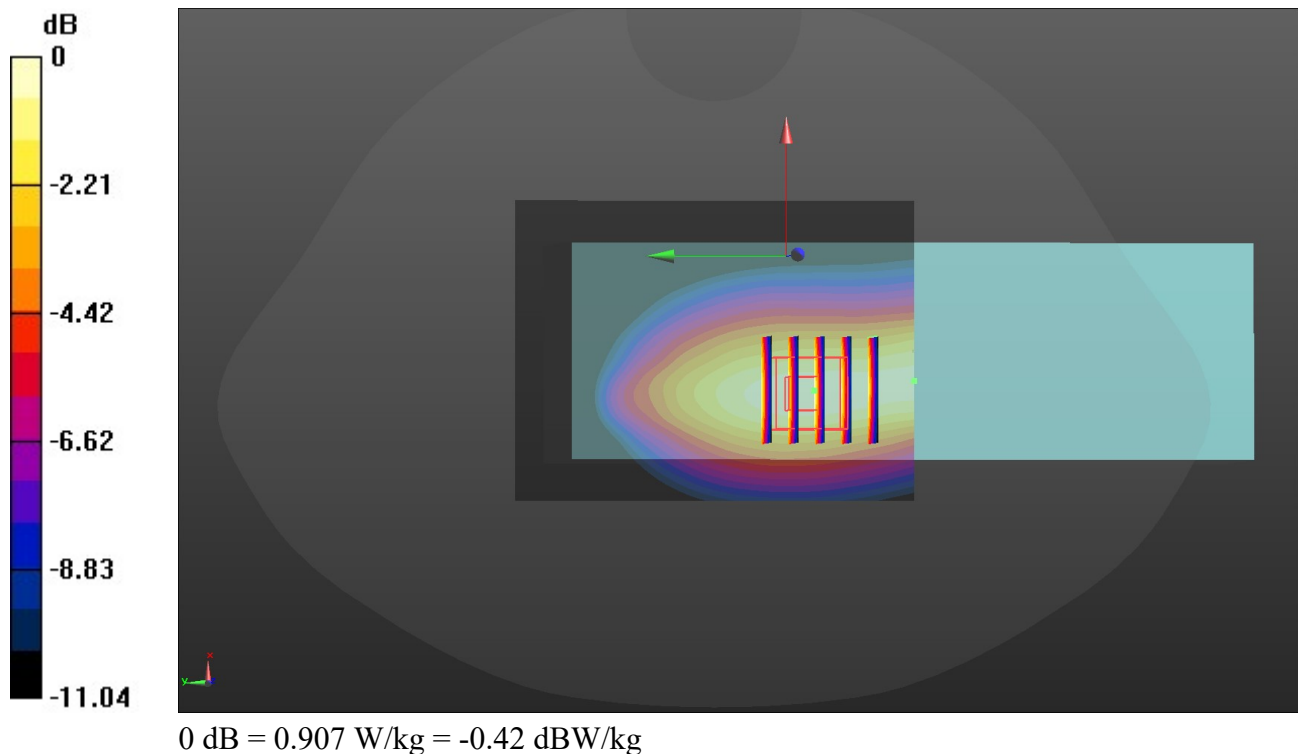

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/17/2021

LTE Band 7-L-Body worn

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 39.474$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2510 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 20850/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.389 W/kg


Left/CH 20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.240 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.835 W/kg

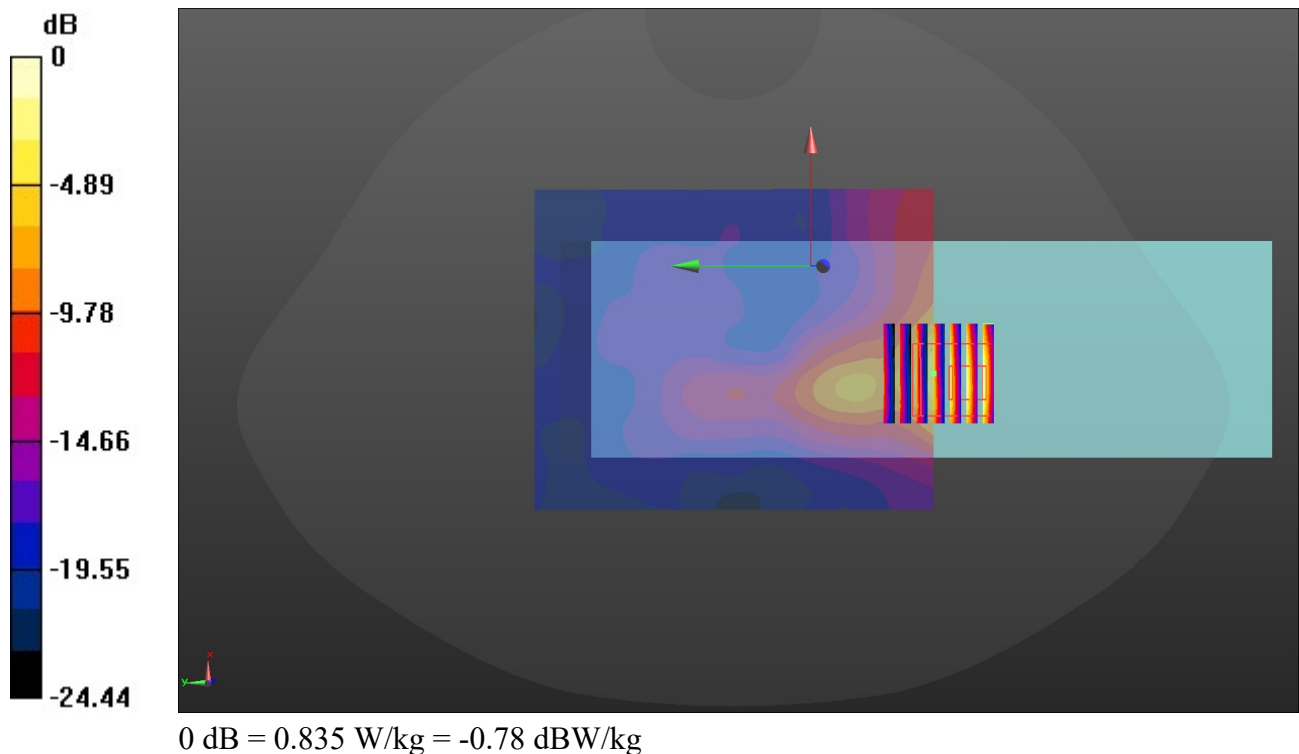

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/17/2021

LTE Band 41-L-Body worn

Communication System: UID 0, Generic LTE-TDD (0); Frequency: 2565 MHz;Duty Cycle: 1:1.57979

Medium parameters used (interpolated): $f = 2565$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C;Liquid Temperature:22.1°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2565 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left/CH 40340/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.400 W/kg


Left/CH 40340/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.246 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.858 W/kg

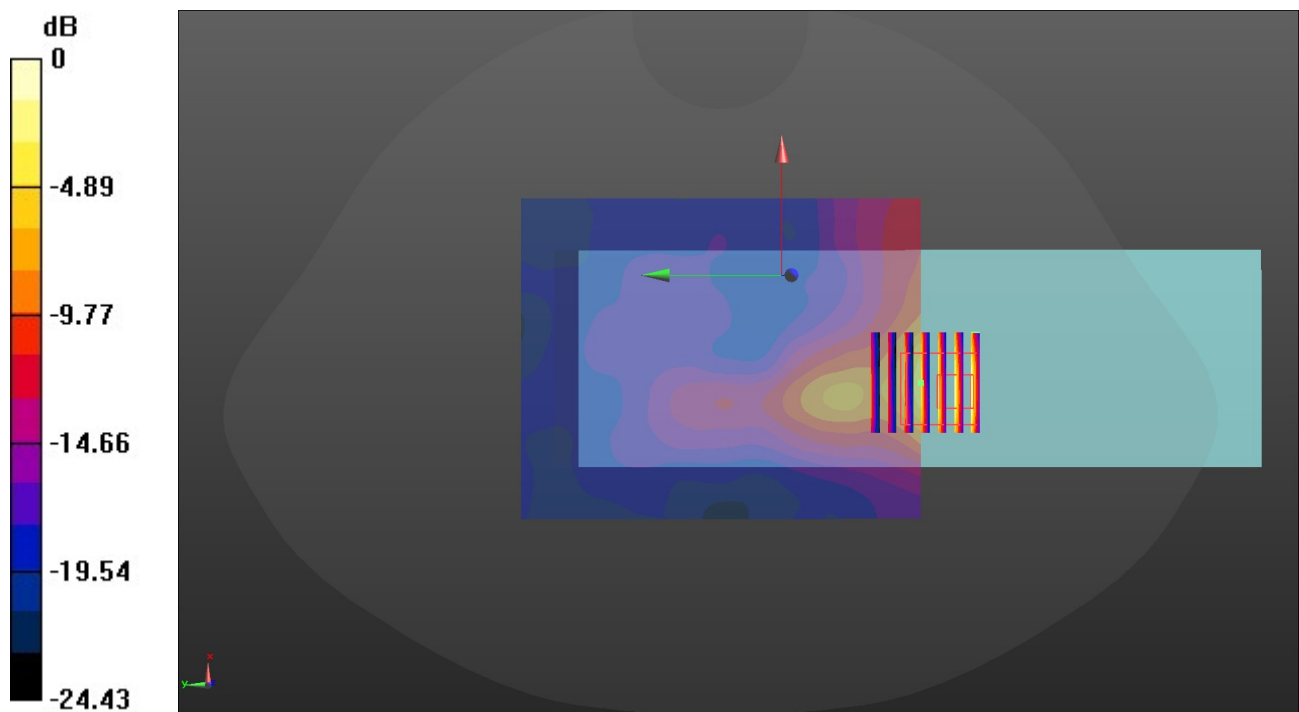

0 dB = 0.858 W/kg = -0.67 dBW/kg

Wifi 2.4G-M -Body worn

Communication System: UID 0, Generic WIFI (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 39.606$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2437 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right/CH 6/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.55 W/kg

Right/CH 6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.532 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 8.06 W/kg

SAR(1 g) = 3.11 W/kg; SAR(10 g) = 1.13 W/kg

Maximum value of SAR (measured) = 6.17 W/kg

