

FCC Test Report

FCC ID	:	I88WAC6552D-S
Equipment	:	802.11 ac Unified Pro Outdoor Access Point with Sector Smart Antenna
Model No.	:	WAC6552D-S
Brand Name	:	ZYXEL
Applicant	:	Zyxel Communications Corporation
Address	:	No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan, R.O.C
Standard	:	47 CFR FCC Part 15.247
Received Date	:	Nov. 17, 2017
Tested Date	:	Jun. 22 ~ Jul. 10, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

ong Chen

Along Cher Assistant Manager

Approved by:

AC-MRA



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions	13
3.2	6dB and Occupied Bandwidth	16
3.3	RF Output Power	22
3.4	Power Spectral Density	24
3.5	Unwanted Emissions into Restricted Frequency Bands	
3.6	Emissions in Non-Restricted Frequency Bands	58
4	TEST LABORATORY INFORMATION	71



Release Record

Report No.	Version	Description	Issued Date
FR7N1701AC	Rev. 01	Initial issue	Aug. 06, 2018



FCC Rules	Test Items	Measured	Result	
15.207	Conducted Emissions	[dBuV]: 18.920MHz 40.34 (Margin -9.66dB) - AV	Pass	
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 73.86 (Margin -0.14dB) - PK [dBuV/m at 3m]: 2483.50MHz	Pass	
13.203		53.86 (Margin -0.14dB) - AV		
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 28.35	Pass	
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass	
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass	
15.203	Antenna Requirement	Meet the requirement of limit	Pass	

Summary of Test Results



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)							
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps		
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps		
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15		
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15		

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant.	Model	Type Connector	Operating Freq	uencies (MHz) / Ant	enna Gain (dBi)	
No.	Model		Connector	2400~2483.5	5150~5250	5725~5850
1	SECTX-DB r2.0	Direction	I-PEX	0.8	4.22	5.34

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	55Vdc from POE (for support unit only)
-------------------	--




1.1.4 Channel List

Frequency	band (MHz)	2400~	2483.5	
802.11 b /	g / n HT20	802.11n HT40		
Channel	Frequency(MHz)	Channel	Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			



1.1.5 Test Tool and Duty Cycle

Test Tool	cart						
	Mode	Mode Duty cycle (%)					
	11b 100.00%		0.00				
Duty Cycle and Duty Factor	11g	98.60%	0.06				
	HT20	98.50%	0.07				
	HT40	97.02%	0.13				

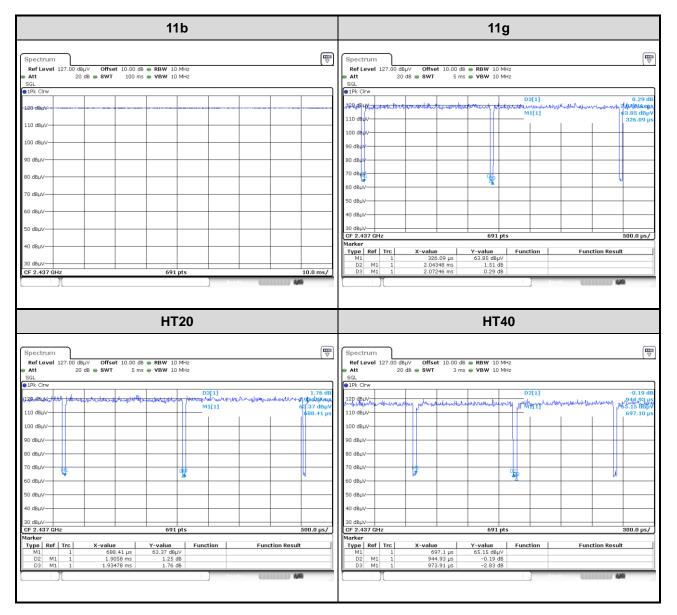



1.1.6 Power Setting


Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	25
11b	2437	25
11b	2462	25
11g	2412	20
11g	2437	25
11g	2462	20
HT20	2412	19.5
HT20	2437	25
HT20	2462	20
HT40	2422	15
HT40	2437	20
HT40	2452	17



1.2 Local Support Equipment List

	Support Equipment List							
No.	No. Equipment Brand Model FCC ID Remarks							
1	Notebook	DELL	Latitude E6440	DoC				
2	2 POE Microsemi PD9001GR/AC Provided b							

1.3 Test Setup Chart

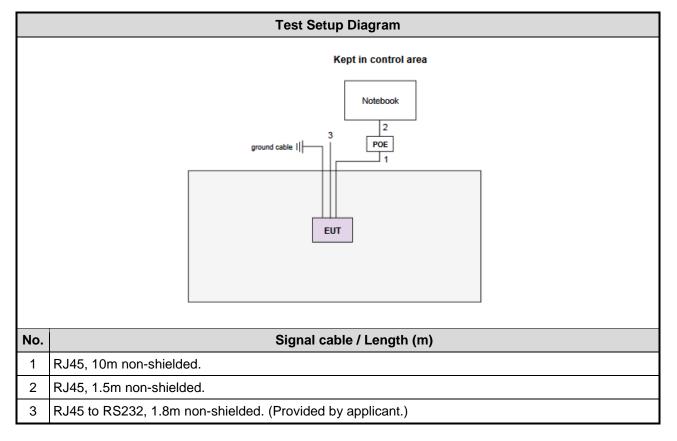



The Equipment List 1.4

Test Item	Conducted Emission								
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Receiver	Agilent	N9038A	MY53290044	Sep. 26, 2017	Sep. 25, 2018				
LISN	R&S	ENV216	101579	Feb. 13, 2018	Feb. 12, 2019				
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 18, 2017	Dec. 17, 2018				
Measurement Software AUDIX e3 6.120210k NA NA									
Note: Calibration Inte	rval of instruments liste	d above is one year.		·					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (030	H03-WS)			
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 03, 2018	Jan. 02, 2019
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 19, 2018	Apr. 18, 2019
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 18, 2018	Jan. 17, 2019
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170 BBHA 9170517		Nov. 23, 2017	Nov. 22, 2018
Loop Antenna	R&S	HFH2-Z2 100330		Nov. 13, 2017	Nov. 12, 2018
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Nov. 27, 2017	Nov. 26, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY32487/4	Nov. 27, 2017	Nov. 26, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Nov. 27, 2017	Nov. 26, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Nov. 27, 2017	Nov. 26, 2018
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Nov. 27, 2017	Nov. 26, 2018
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Nov. 27, 2017	Nov. 26, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 16, 2018	Apr. 15, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 16, 2017	Oct. 15, 2018
Power Sensor	Anritsu	MA2411B	1207366	Oct. 16, 2017	Oct. 15, 2018
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 01, 2017	Nov. 30, 2018
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v04 FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.134 Hz			
Conducted power	±0.808 dB			
Power density	±0.463 dB			
Conducted emission	±2.670 dB			
AC conducted emission	±2.90 dB			
Radiated emission ≤ 1GHz	±3.66 dB			
Radiated emission > 1GHz	±5.37 dB			



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 55%	Alex Tsai
Radiated Emissions	03CH03-WS	25°C / 60-63%	Aska Huang Akun Chang
RF Conducted	TH01-WS	21°C / 64%	Brad Wu

➢ FCC Designation No.: TW0009

➢ FCC site registration No.: 207696

➢ IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz Maximum Output Power 6dB bandwidth Power spectral density	11b 11g HT20 HT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 Mbps 6 Mbps MCS 0 MCS 0	



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5	66 - 56 *	56 - 46 *				
0.5-5	56	46				
5-30	60	50				
Note 1: * Decreases with the logarith	Note 1: * Decreases with the logarithm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup

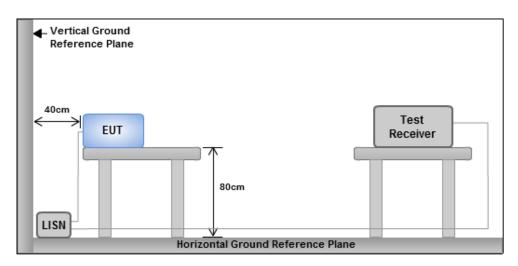

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



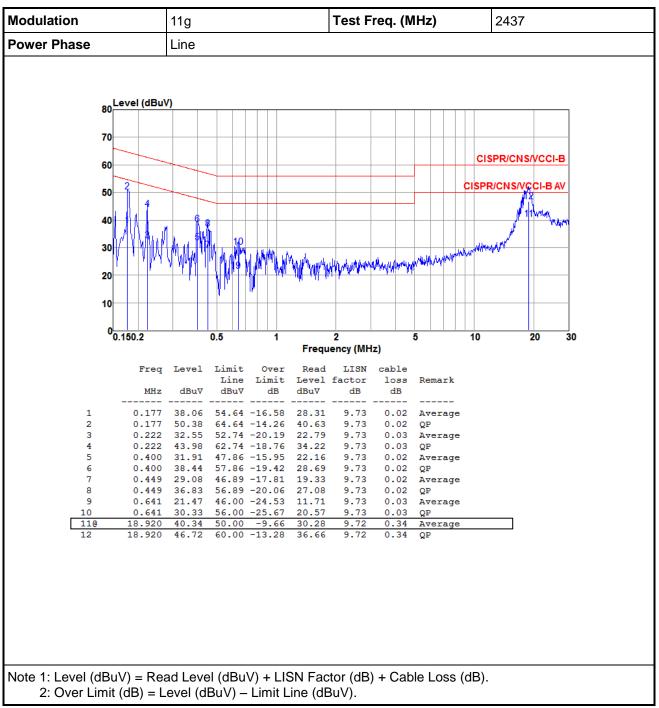

3.1.4 Test Result of Conducted Emissions



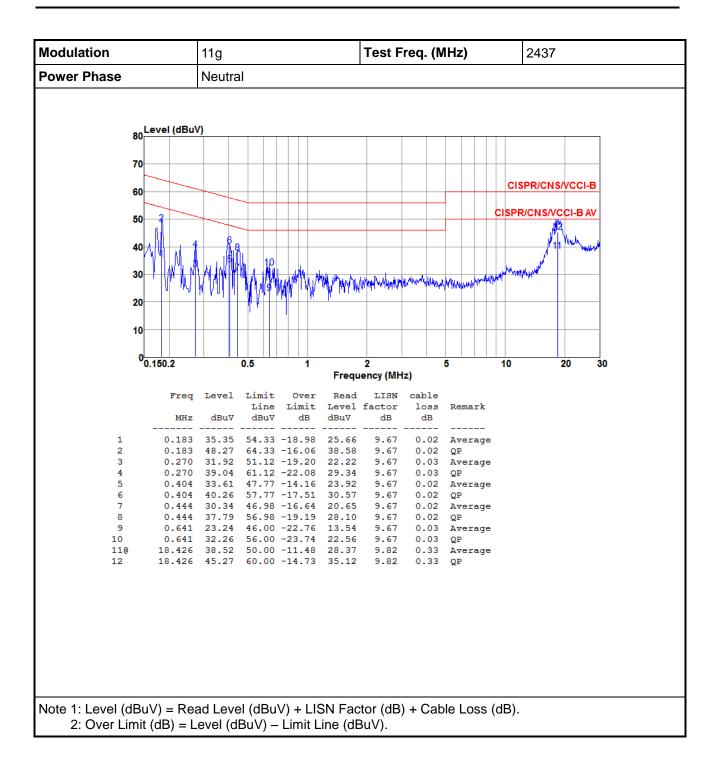



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup





3.2.4 Test Result of 6dB and Occupied Bandwidth

Summary


Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	7.536M	12.012M	12M0G1D	6.087M	11.867M
802.11g_Nss1,(6Mbps)_2TX	16.377M	16.932M	16M9D1D	16.377M	16.643M
802.11n HT20_Nss1,(MCS0)_2TX	17.609M	18.017M	18M0D1D	17.536M	17.8M
802.11n HT40_Nss1,(MCS0)_2TX	36.377M	36.614M	36M6D1D	35.362M	36.469M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth;


Mode	Result	Limit	Port 1-N dB	Port 1-OBW	Port 2-N dB	Port 2-OBW
		(Hz)	(Hz)	(Hz)	(Hz)	(Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	7.101M	12.012M	6.594M	11.867M
2437MHz	Pass	500k	7.101M	11.939M	6.594M	11.939M
2462MHz	Pass	500k	7.536M	11.939M	6.087M	11.939M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.377M	16.643M	16.377M	16.787M
2437MHz	Pass	500k	16.377M	16.787M	16.377M	16.932M
2462MHz	Pass	500k	16.377M	16.643M	16.377M	16.715M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.536M	17.873M	17.536M	17.873M
2437MHz	Pass	500k	17.536M	17.945M	17.536M	18.017M
2462MHz	Pass	500k	17.536M	17.8M	17.609M	17.873M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	36.232M	36.469M	35.797M	36.614M
2437MHz	Pass	500k	35.362M	36.469M	35.942M	36.469M
2452MHz	Pass	500k	35.797M	36.469M	36.377M	36.614M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;




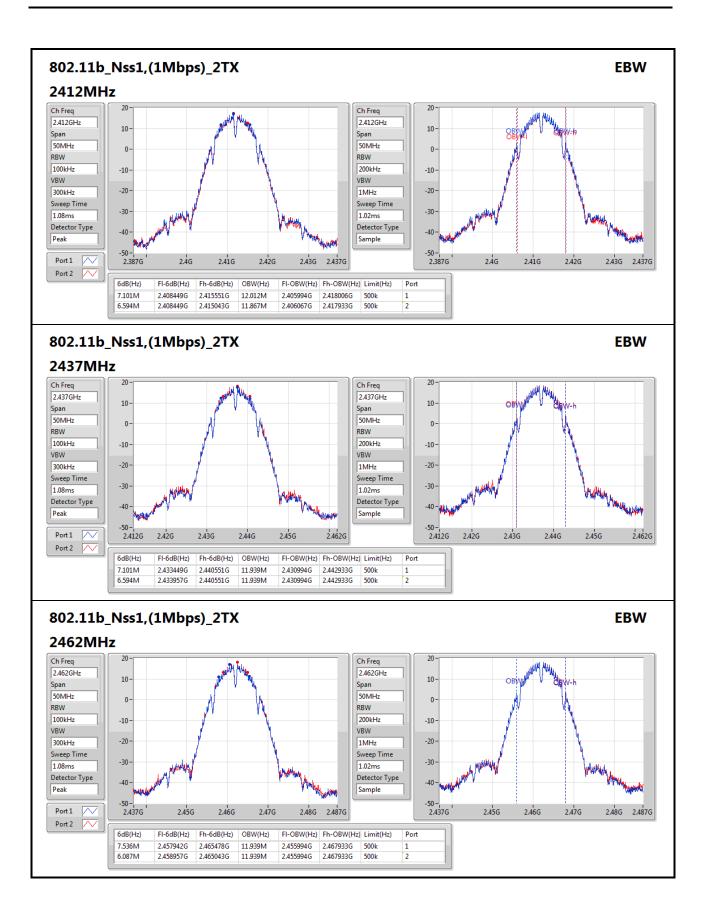




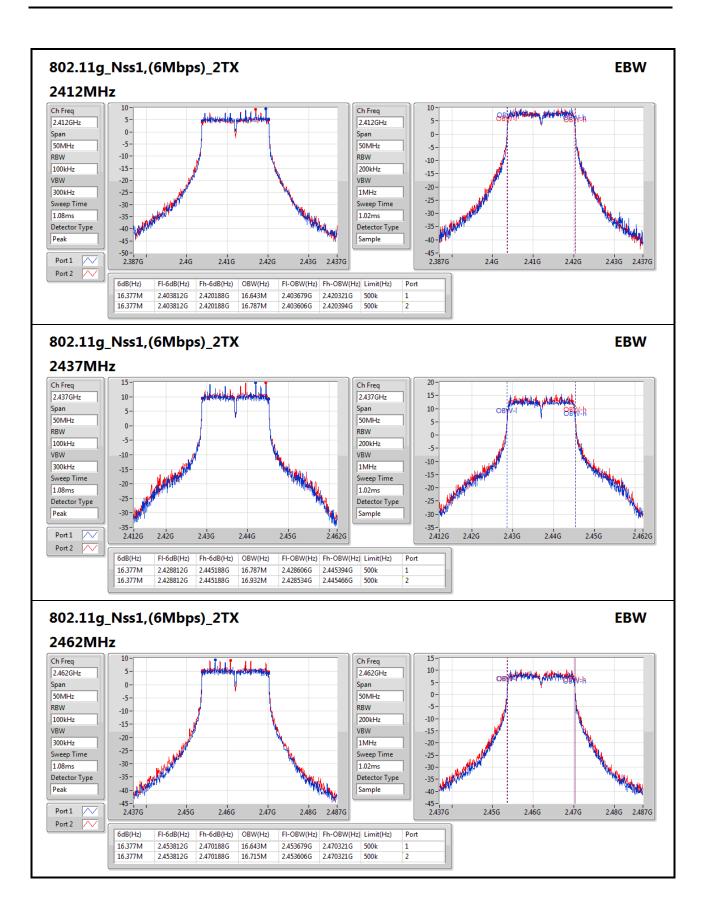



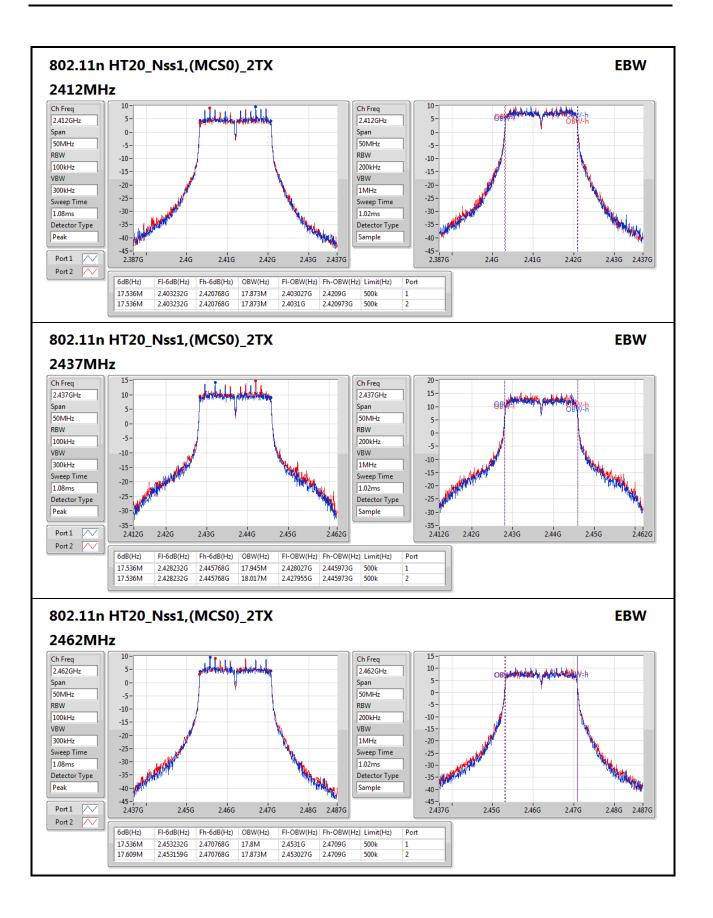



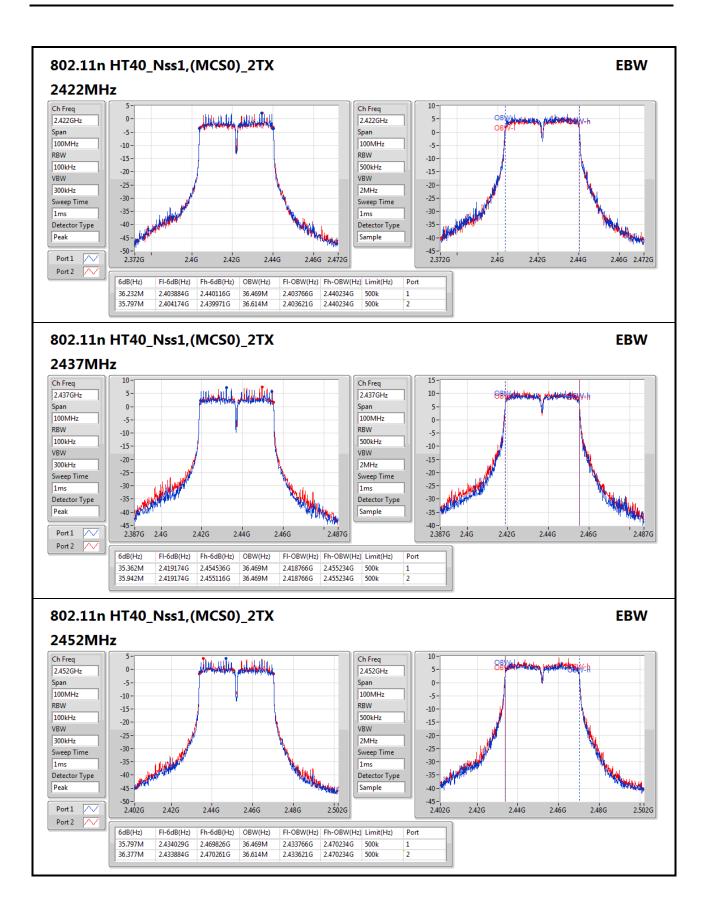



3.3 **RF Output Power**

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup





3.3.4 Test Result of Maximum Output Power

Summary of Conducted (Average) Output Power

Mode	Total Power	Total Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	28.27	0.67143
802.11g_Nss1,(6Mbps)_2TX	28.35	0.68391
802.11n HT20_Nss1,(MCS0)_2TX	28.30	0.67608
802.11n HT40_Nss1,(MCS0)_2TX	24.58	0.28708

Result

Mode	Result	DG	Port 1	Port 2	Total Power	Power Limit	EIRP	EIRP Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.80	24.97	25.23	28.11	30.00	28.91	36.00
2437MHz	Pass	0.80	25.28	25.24	28.27	30.00	29.07	36.00
2462MHz	Pass	0.80	25.26	25.22	28.25	30.00	29.05	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.80	20.56	20.37	23.48	30.00	24.28	36.00
2437MHz	Pass	0.80	25.42	25.26	28.35	30.00	29.15	36.00
2462MHz	Pass	0.80	20.63	20.31	23.48	30.00	24.28	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.80	20.28	20.02	23.16	30.00	23.96	36.00
2437MHz	Pass	0.80	25.41	25.16	28.30	30.00	29.10	36.00
2462MHz	Pass	0.80	20.68	20.44	23.57	30.00	24.37	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	0.80	15.86	15.24	18.57	30.00	19.37	36.00
2437MHz	Pass	0.80	21.61	21.52	24.58	30.00	25.38	36.00
2452MHz	Pass	0.80	17.54	17.42	20.49	30.00	21.29	36.00

DG = Directional Gain; **Port X** = Port X output power



3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

Peak PSD

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle ≥ 98%

- 1. Set the RBW = 30 kHz, VBW = 100 kHz.
- 2. Detector = RMS, Sweep time = auto couple.
- 3. Sweep time = auto couple.
- 4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle < 98%

- 1 Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
- 2 Set the sweep time to: ≥ 10 (number of measurement points in sweep) x (total on/off period of the transmitted signal).
- 3 Perform the measurement over a single sweep.
- 4 Use the peak marker function to determine the maximum amplitude level.
- 5 Add 10 log (1/x), where x is the duty cycle.

3.4.3 Test Setup





3.4.4 Test Result of Power Spectral Density

Summary

Mode	PD
	(dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	7.69
802.11g_Nss1,(6Mbps)_2TX	3.68
802.11n HT20_Nss1,(MCS0)_2TX	3.40
802.11n HT40_Nss1,(MCS0)_2TX	-4.05

RBW=30kHz.

Result

Mode	Result	DG	Port 1	Port 2	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.81	4.55	4.50	7.53	8.00
2437MHz	Pass	3.81	4.97	5.31	7.68	8.00
2462MHz	Pass	3.81	4.84	4.98	7.69	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.81	-3.43	-3.92	-0.67	8.00
2437MHz	Pass	3.81	0.56	1.23	3.68	8.00
2462MHz	Pass	3.81	-3.14	-3.19	-0.75	8.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.81	-4.28	-3.83	-1.40	8.00
2437MHz	Pass	3.81	0.70	0.94	3.40	8.00
2462MHz	Pass	3.81	-4.10	-4.05	-1.35	8.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	3.81	-11.51	-11.96	-8.78	8.00
2437MHz	Pass	3.81	-6.17	-6.69	-4.05	8.00
2452MHz	Pass	3.81	-10.15	-9.53	-6.94	8.00


DG = Directional Gain; RBW=30kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;


Directional gain = $0.8+10^* \log(2/1) = 3.81 \text{ dBi}.$

Test results of each port are measured value with duty factor




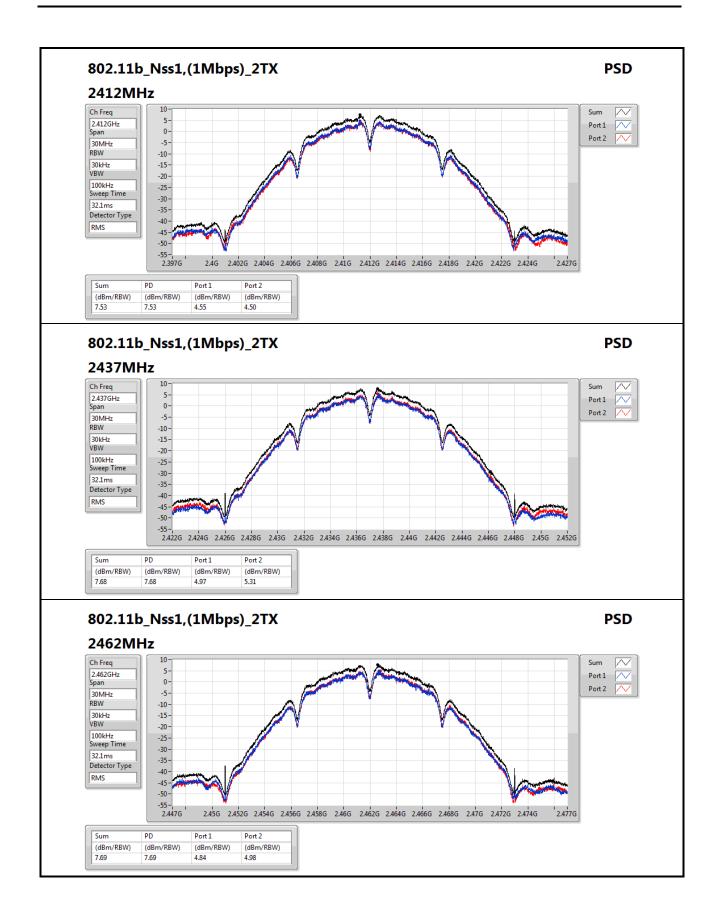




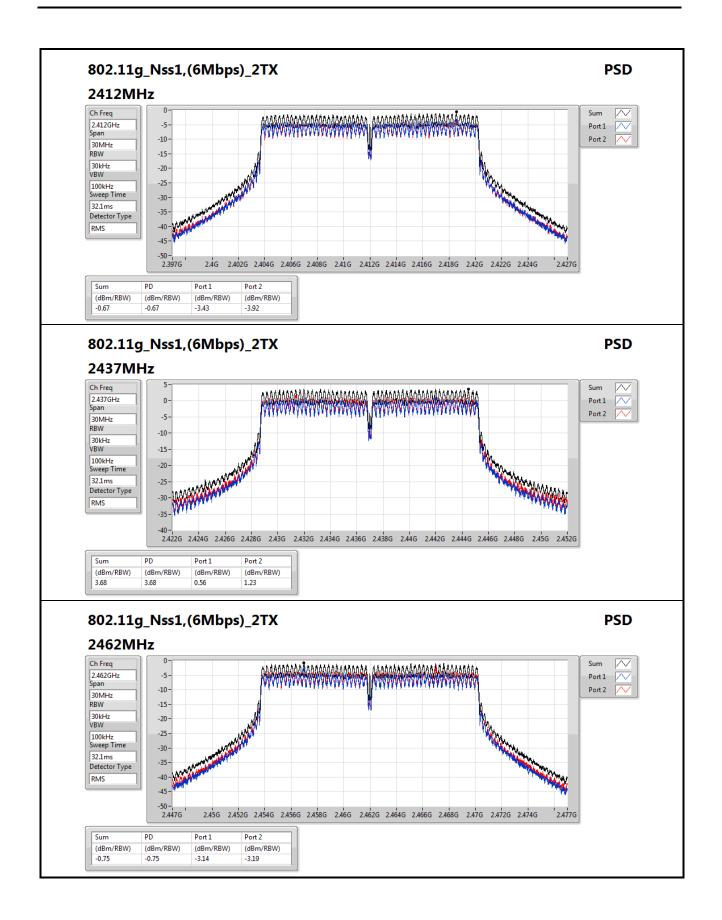



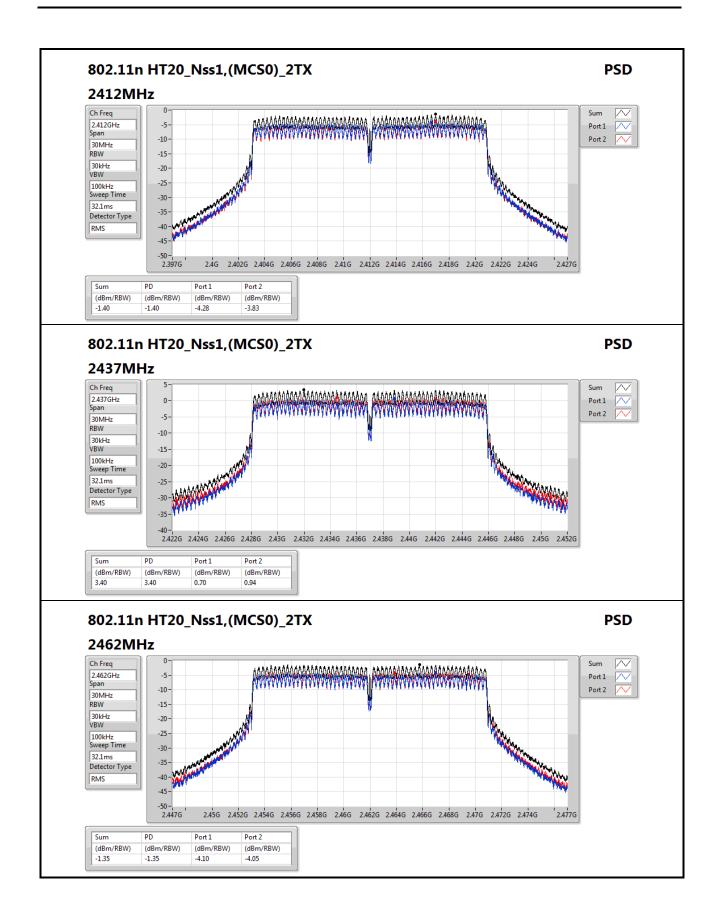



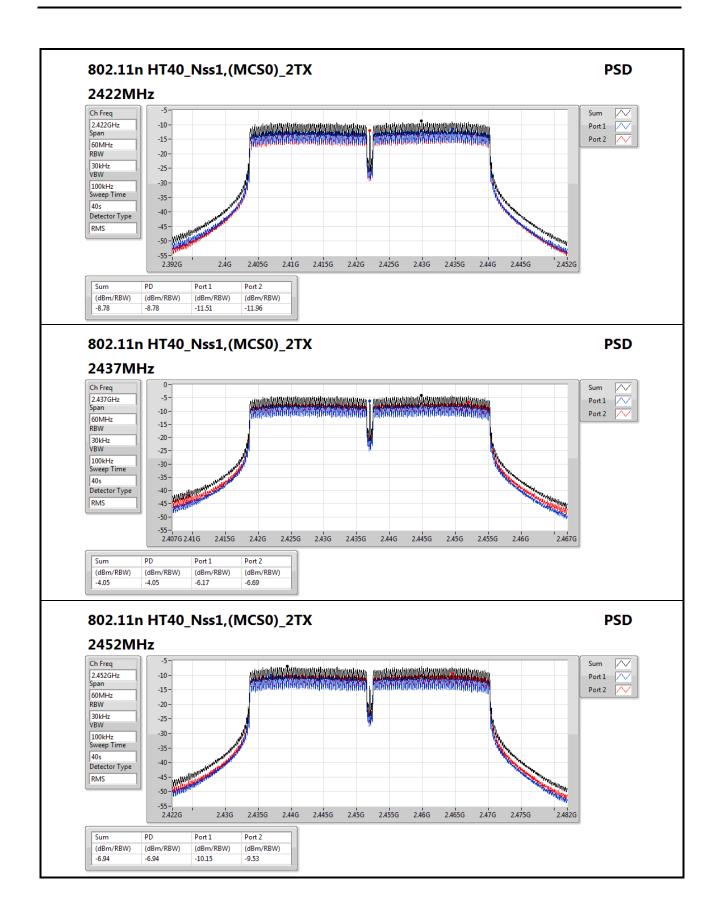



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.5.3 Test Setup

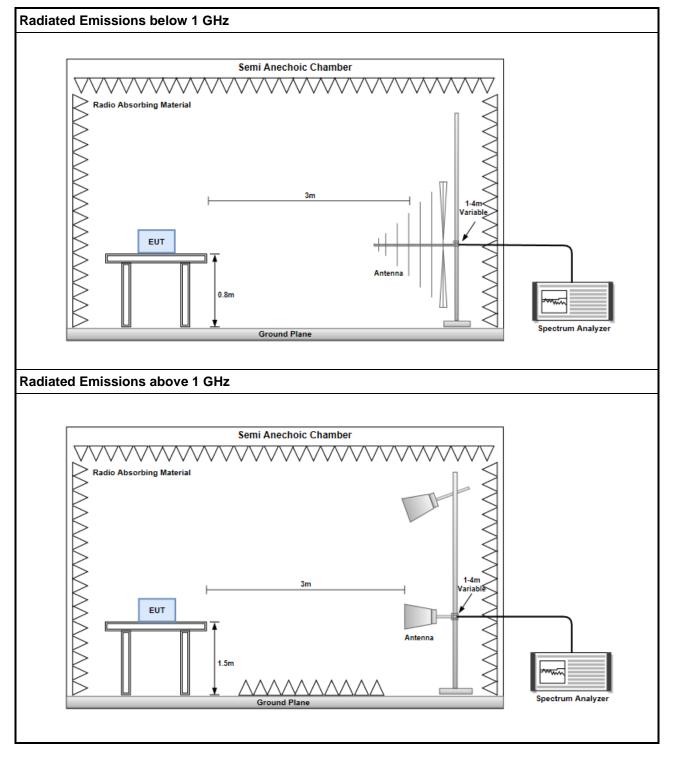




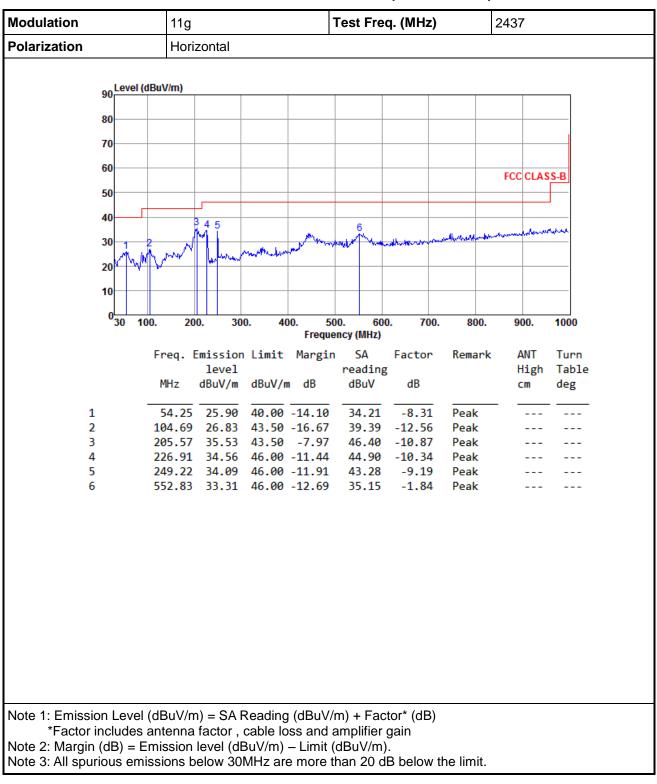


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



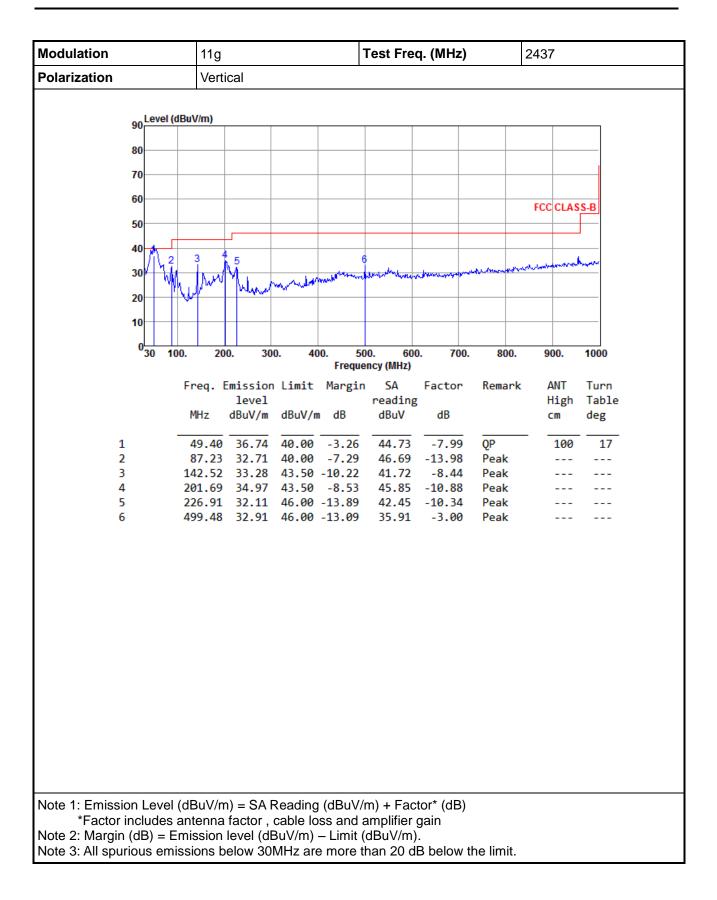




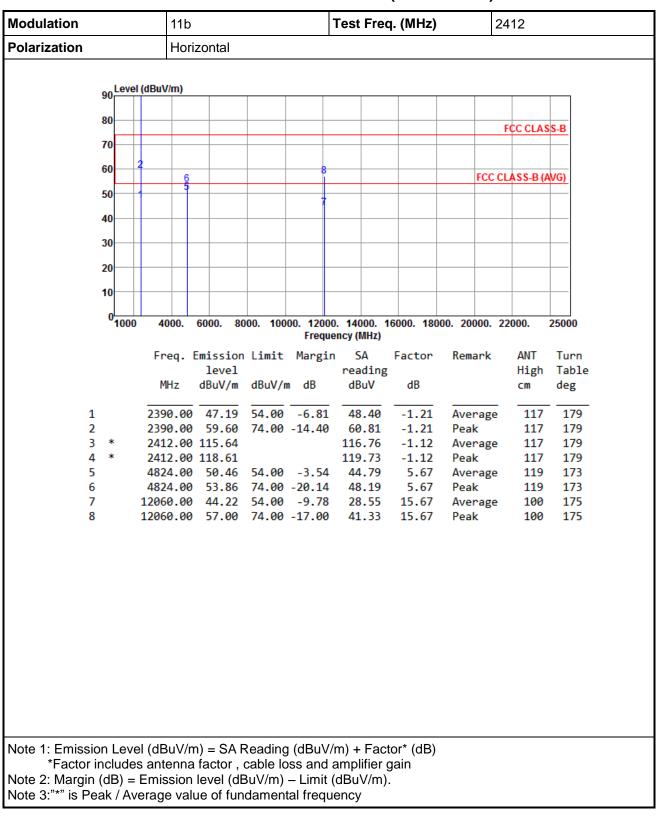


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b




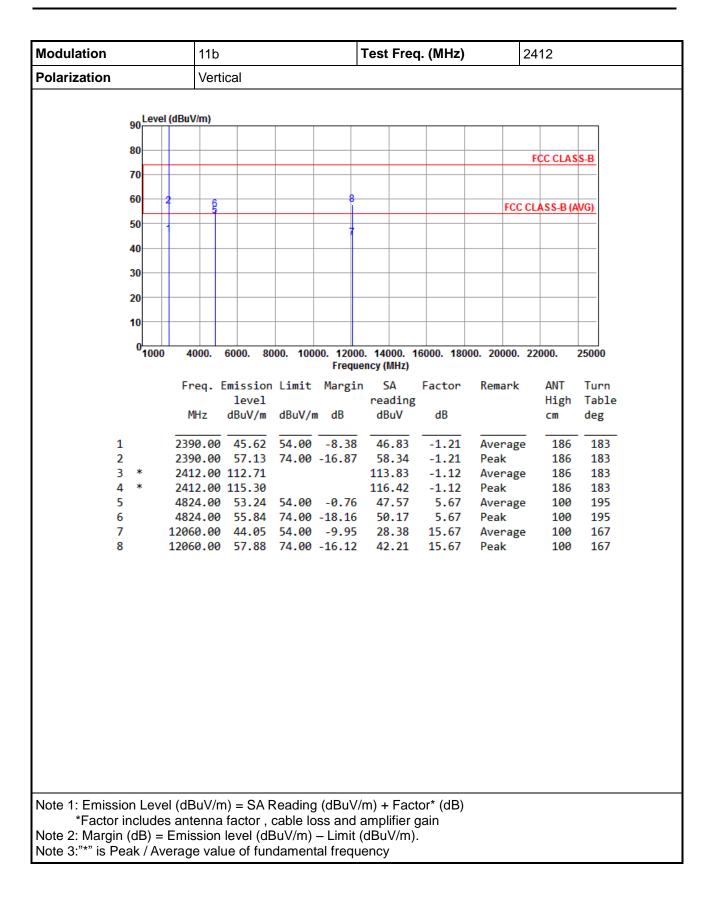




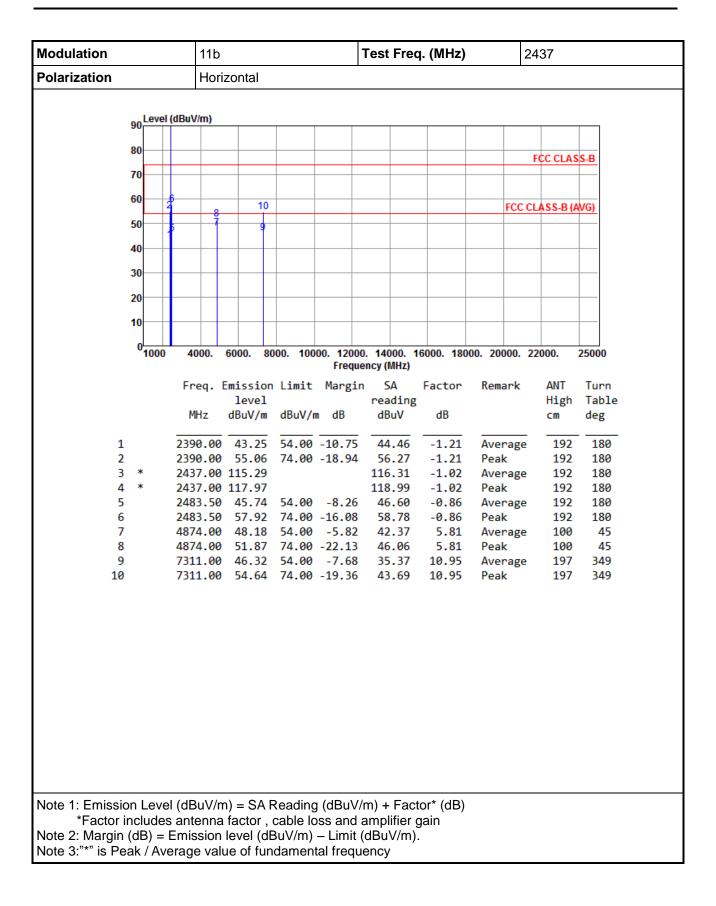




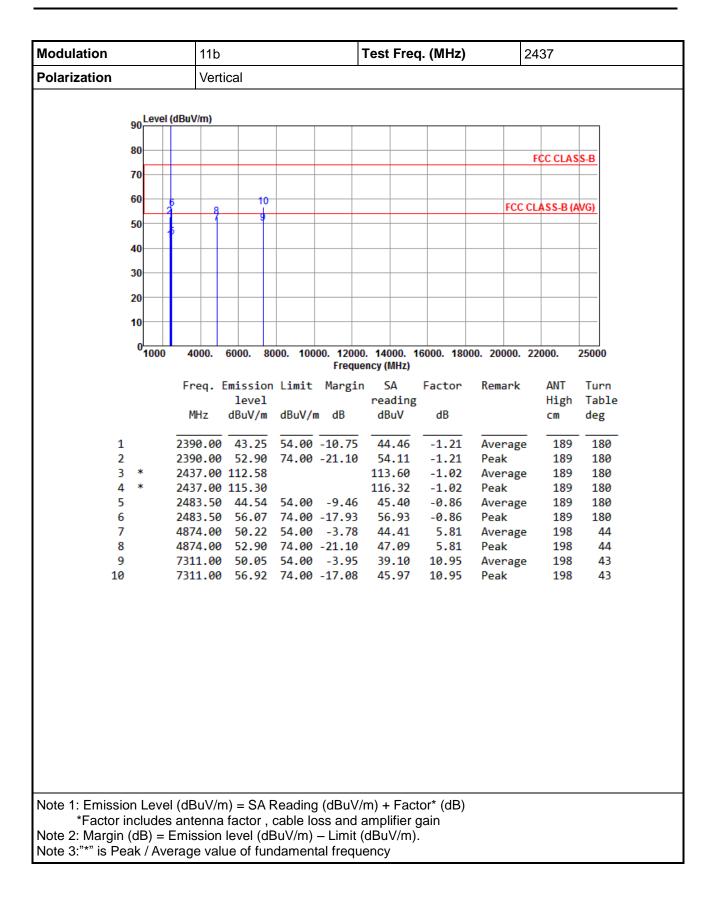




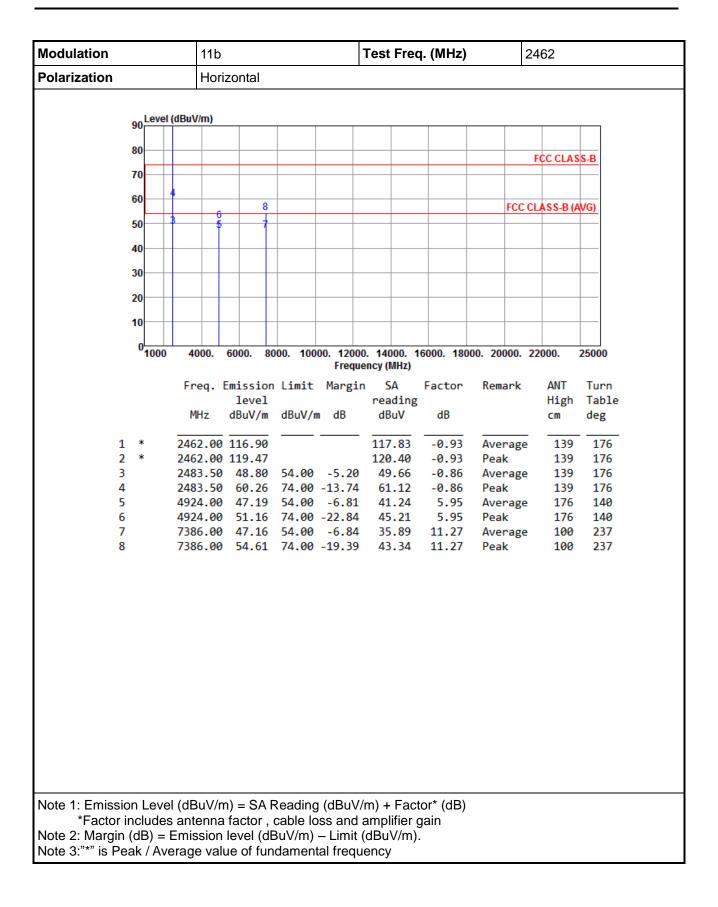



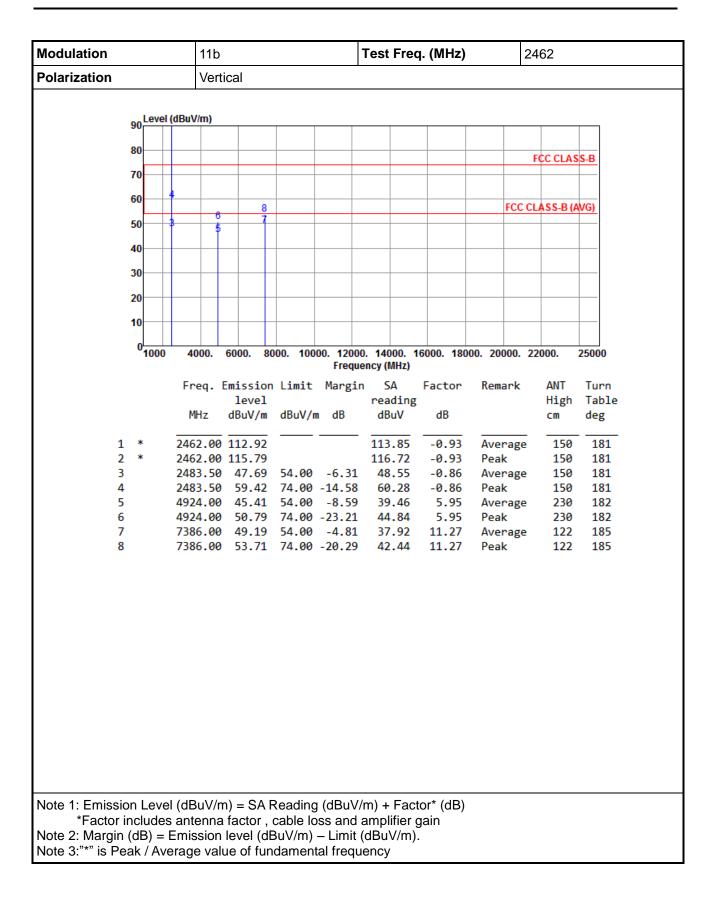




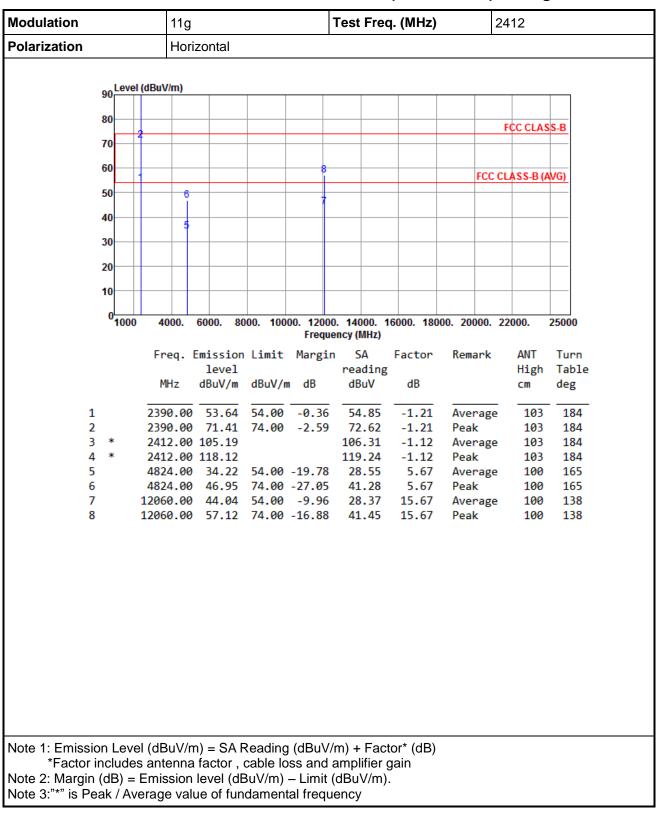


3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g




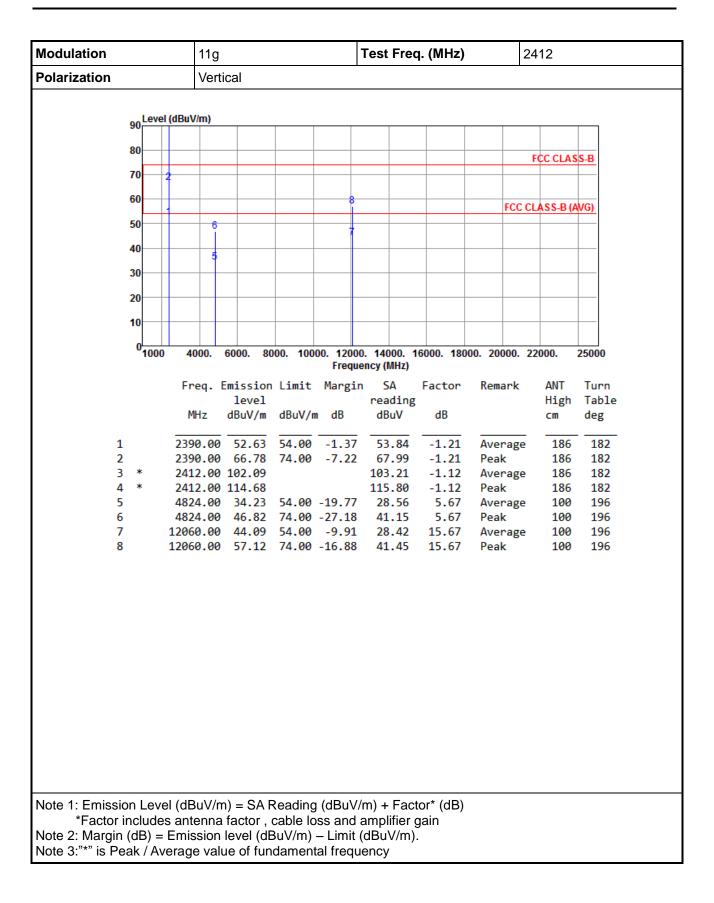




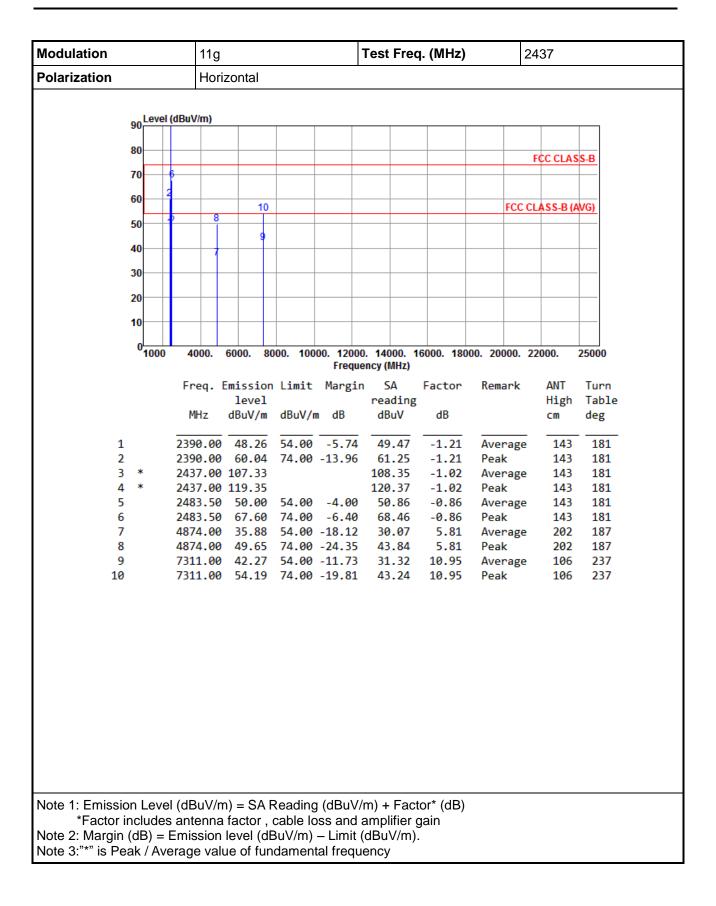




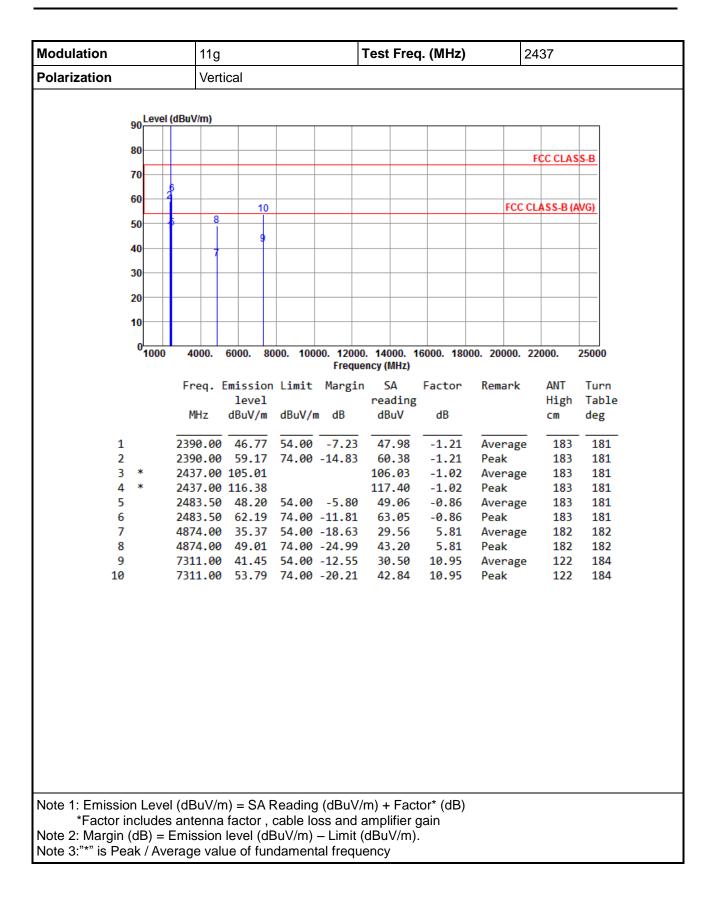




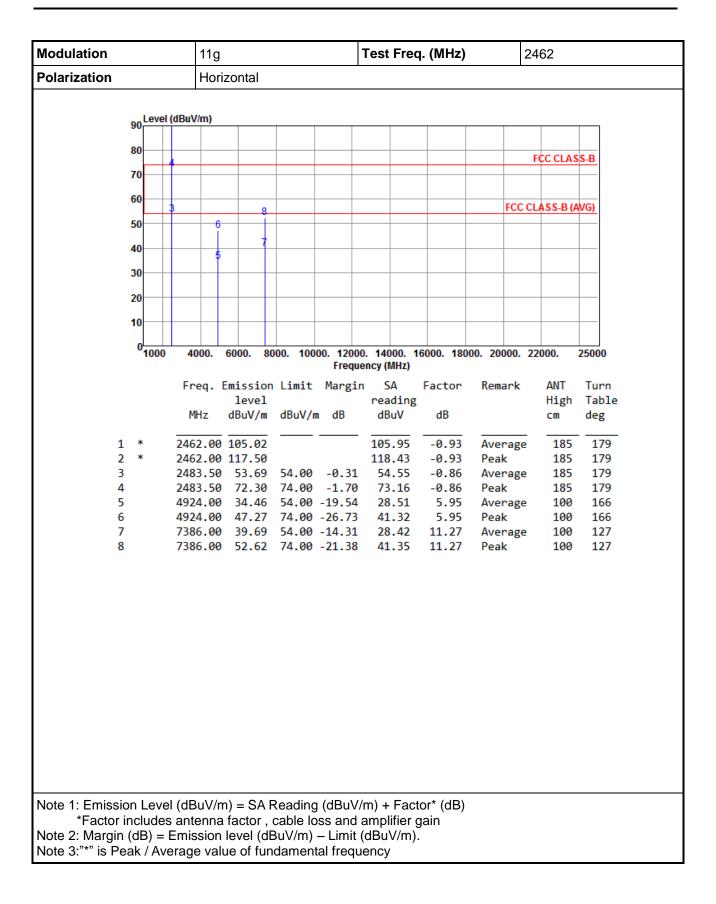



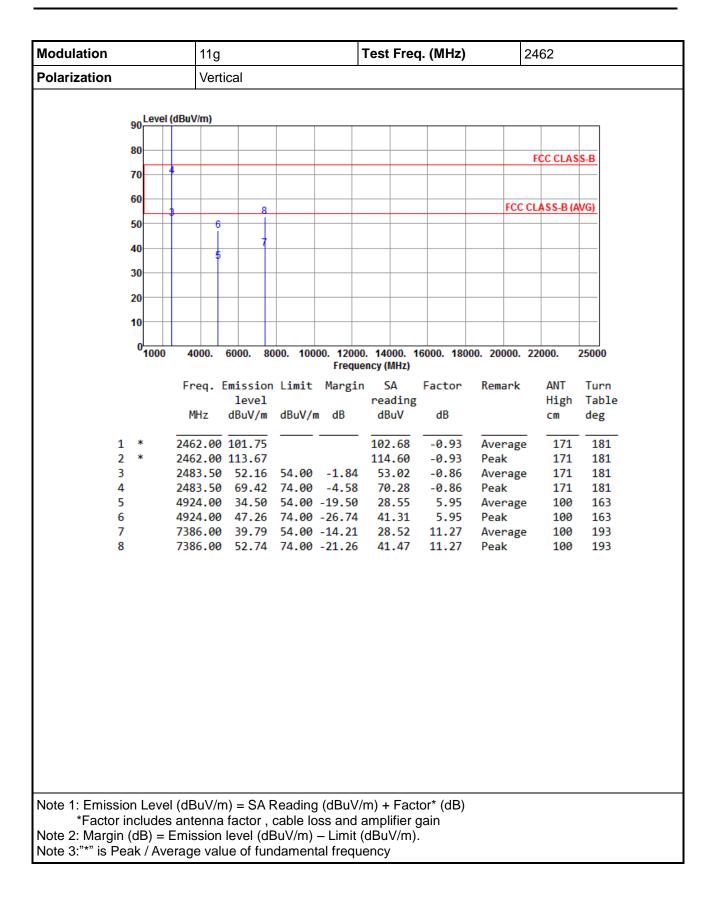




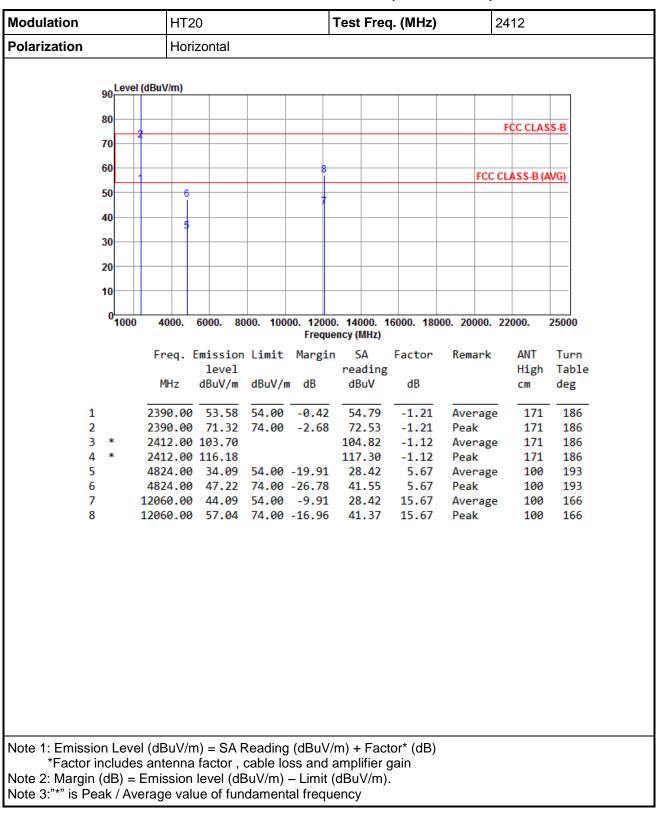


3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20




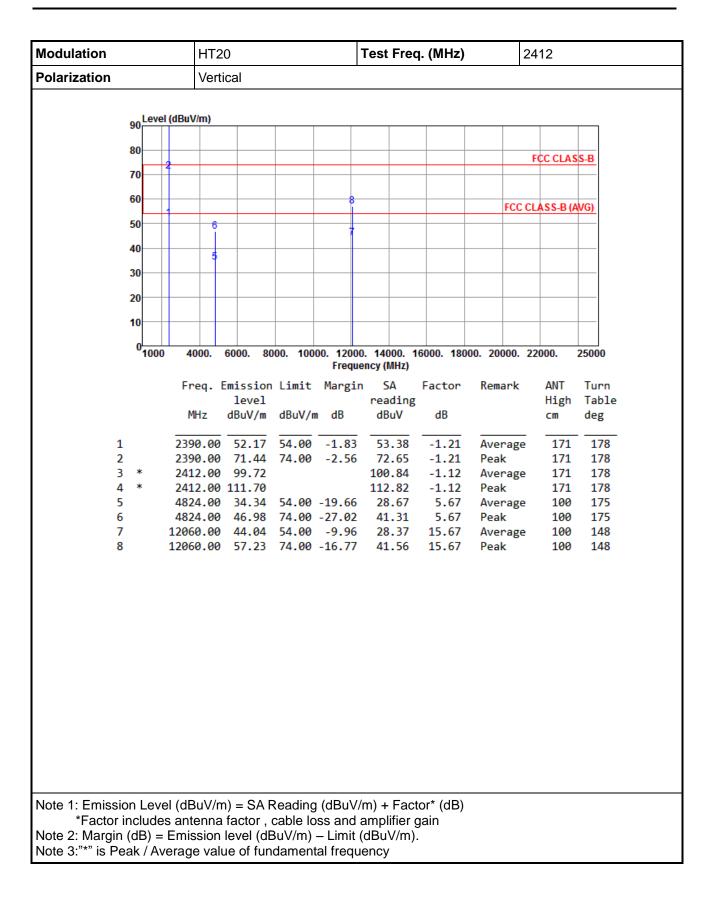




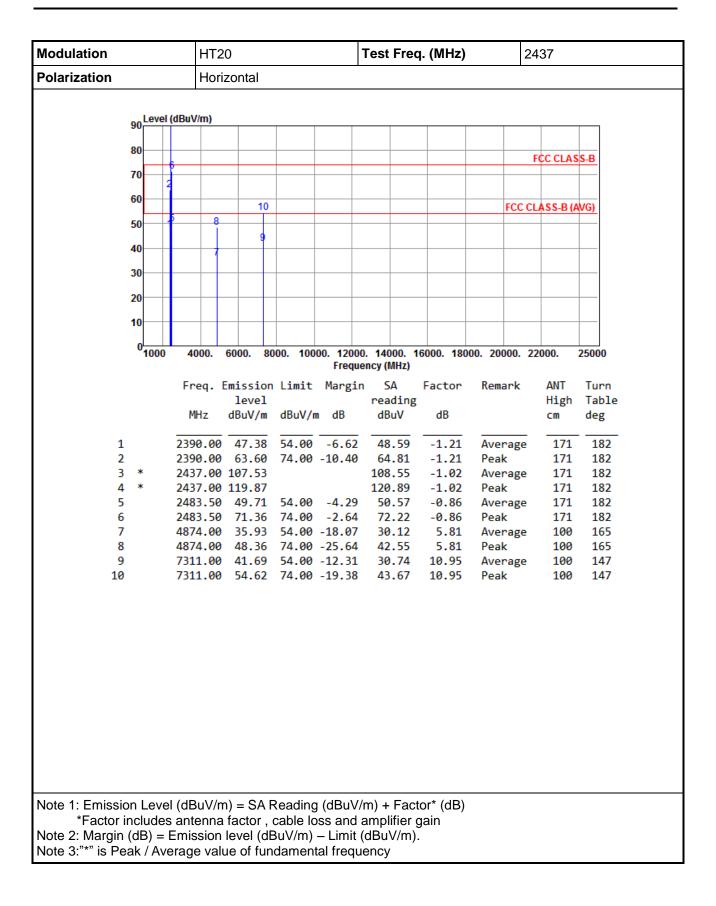




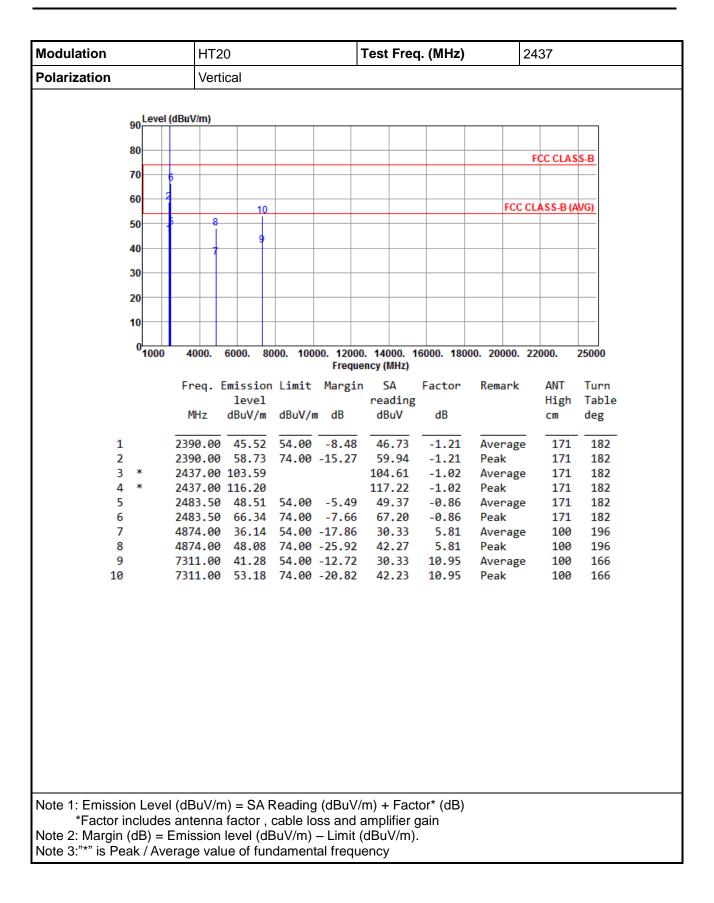




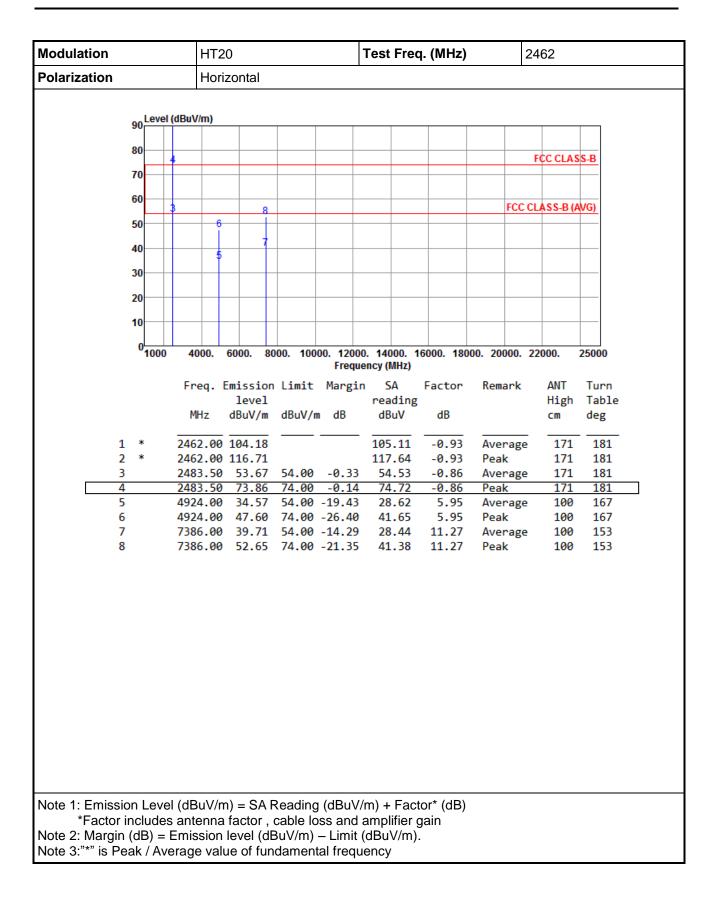



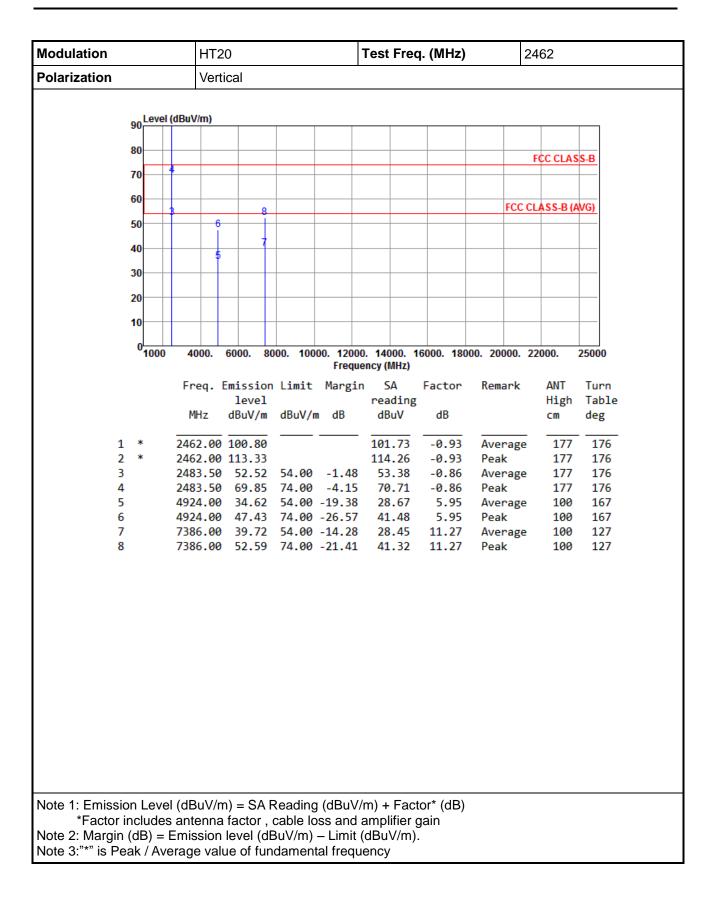




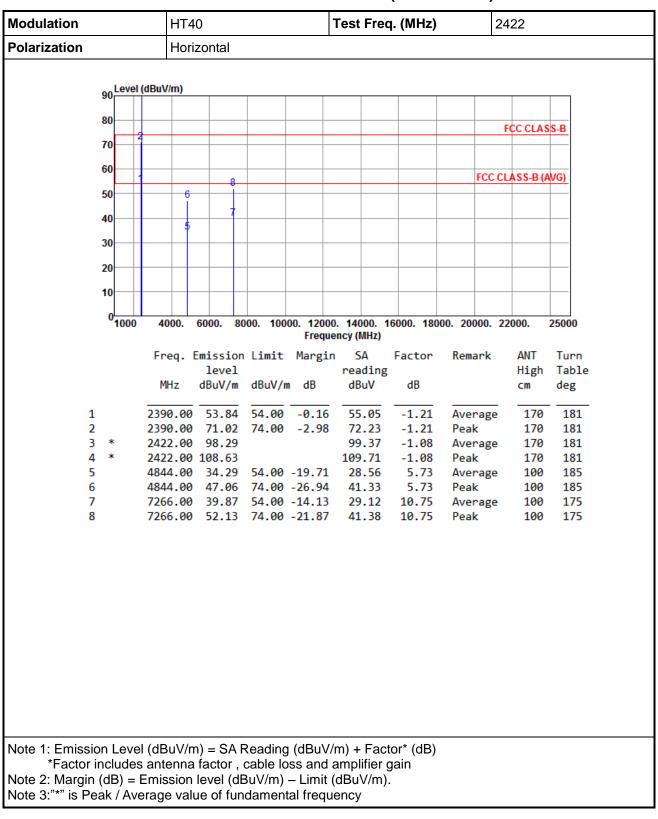


3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40




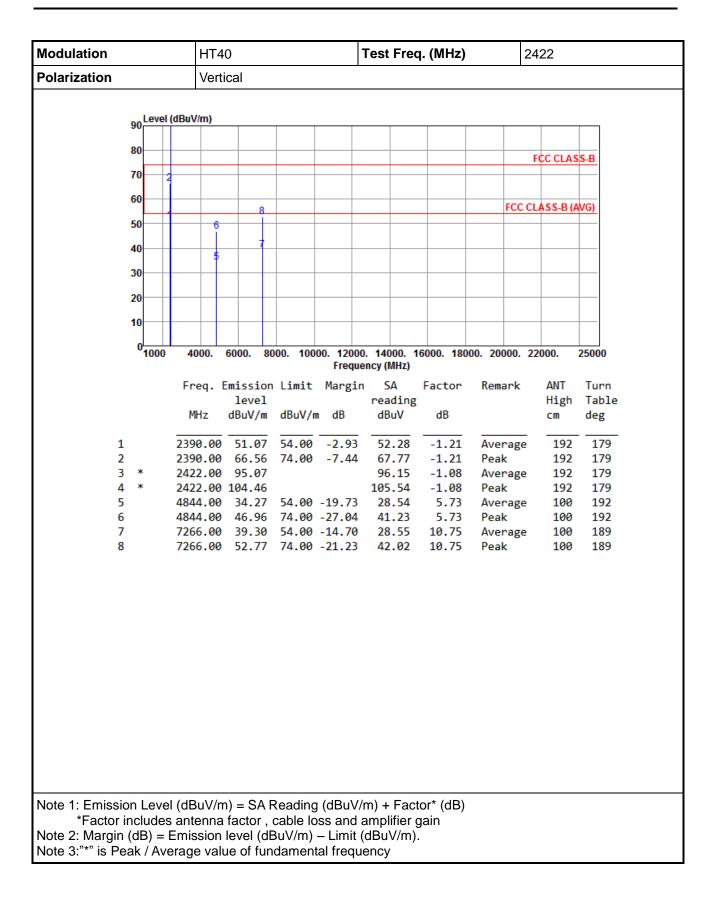




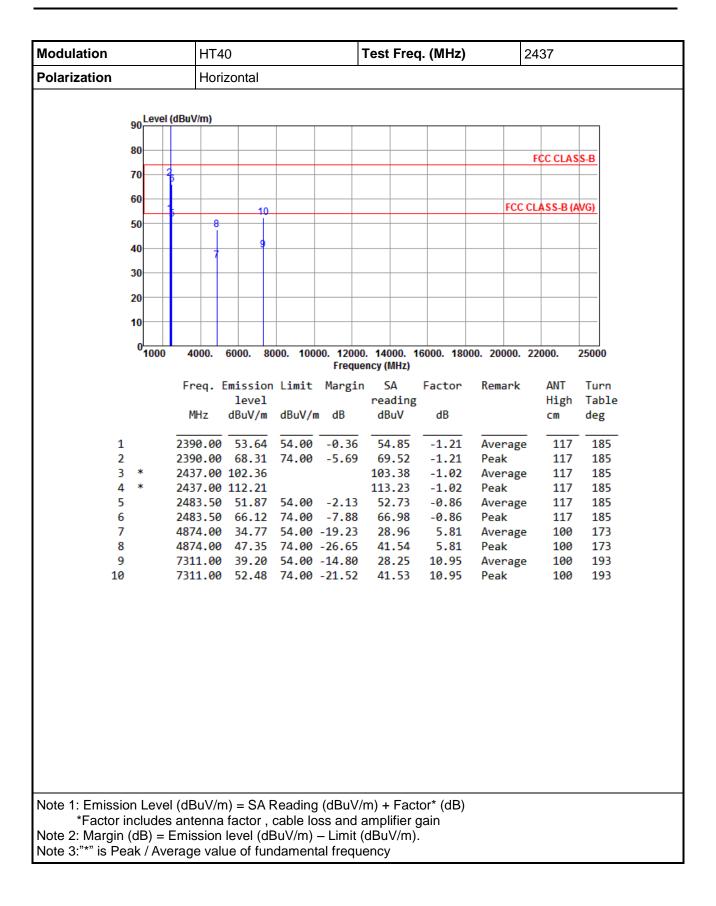




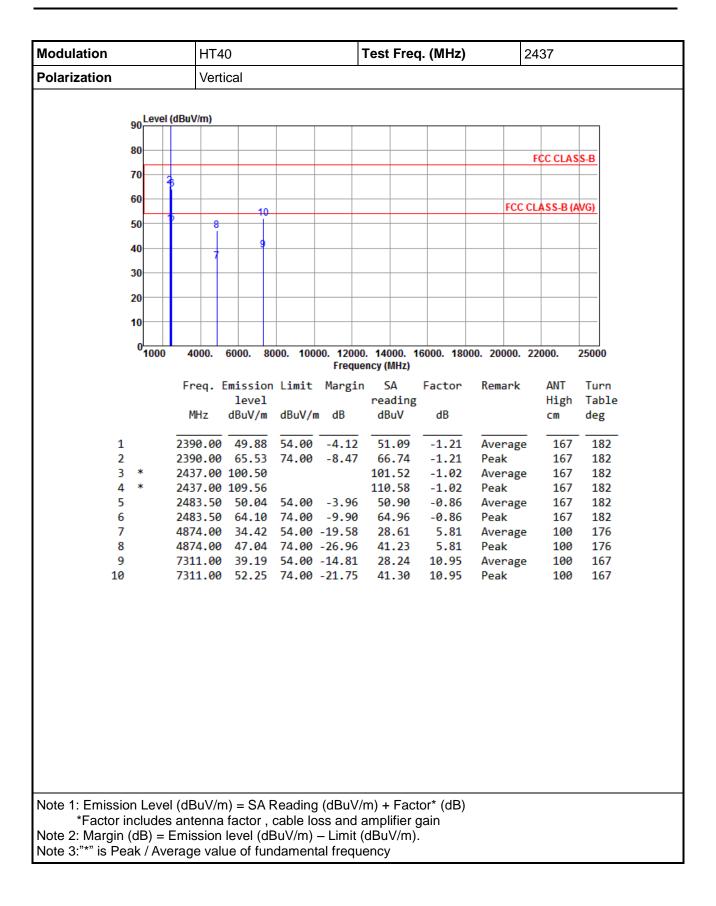



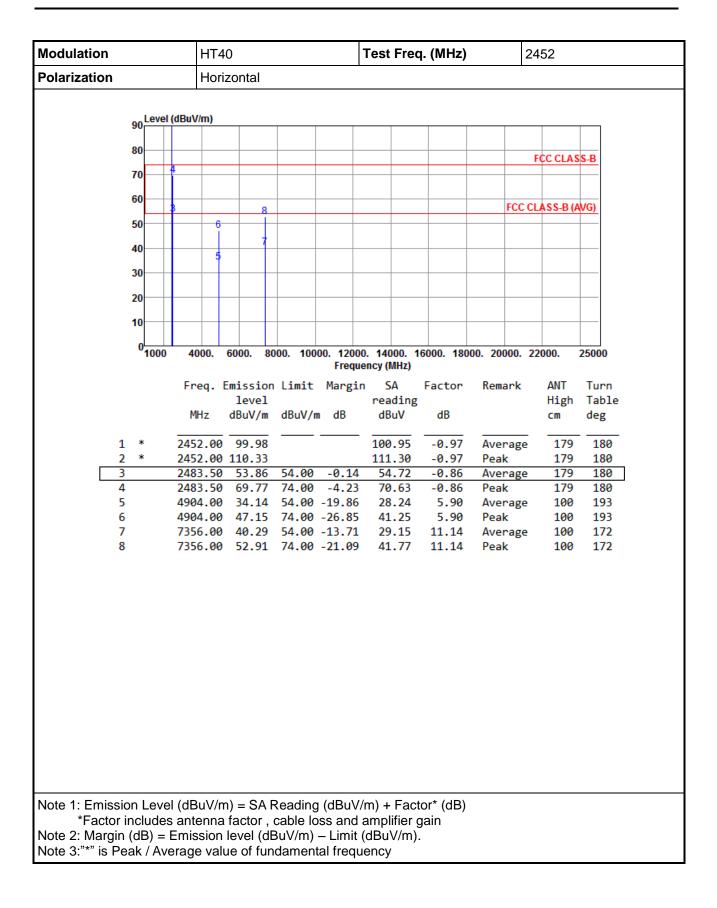



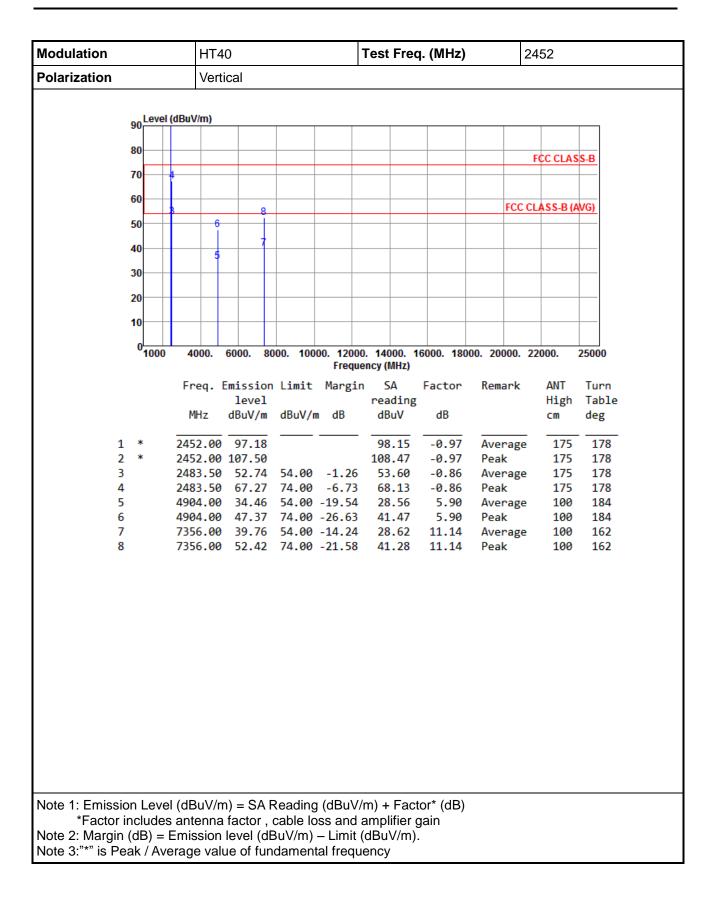



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level


3.6.3 Test Setup

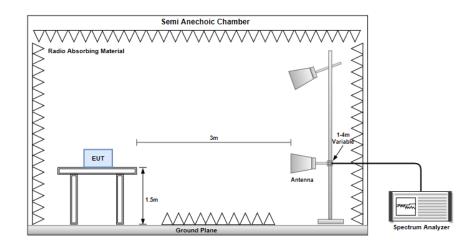




3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

802.11b

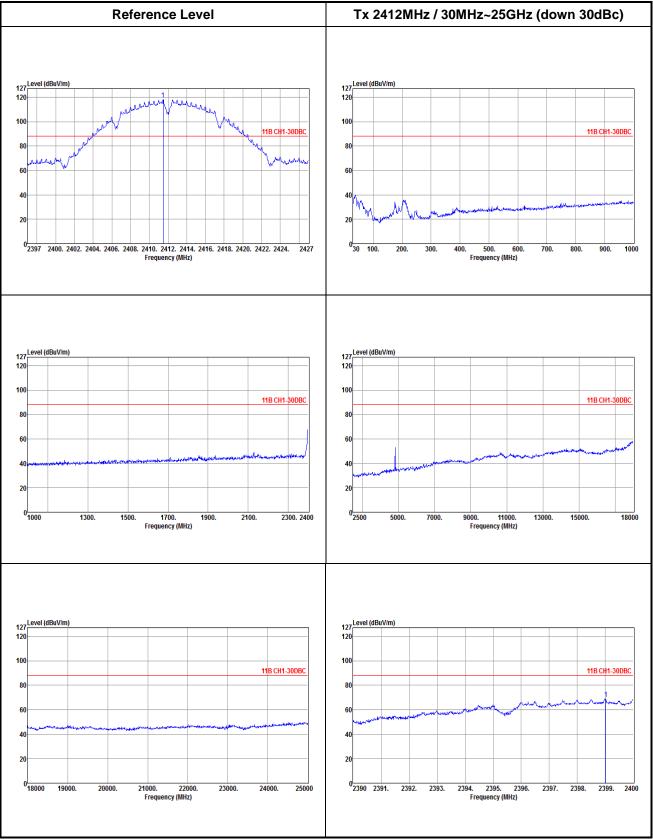


Report No.: FR7N1701AC Report Version: Rev. 01



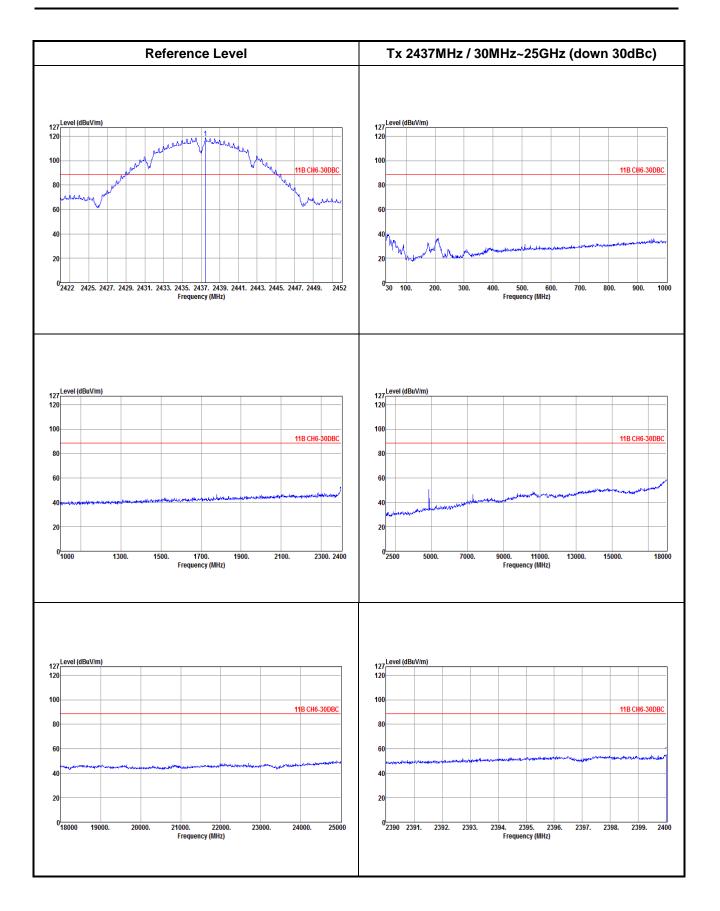




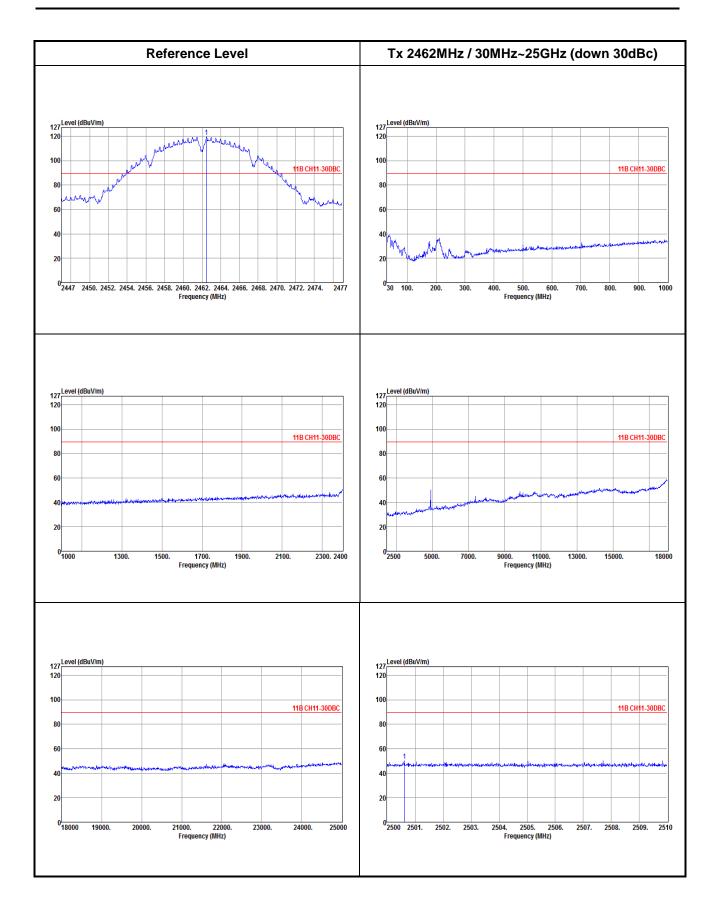





802.11g

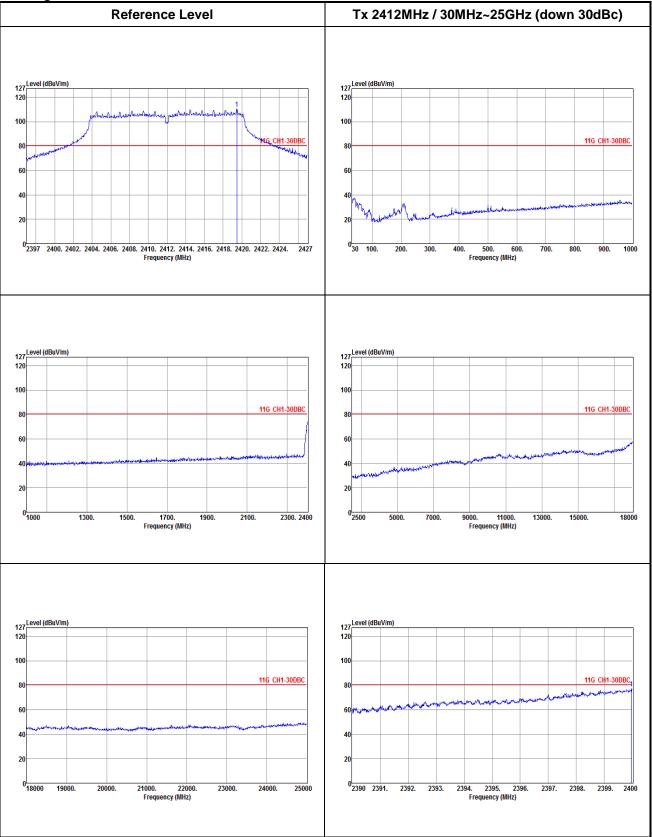



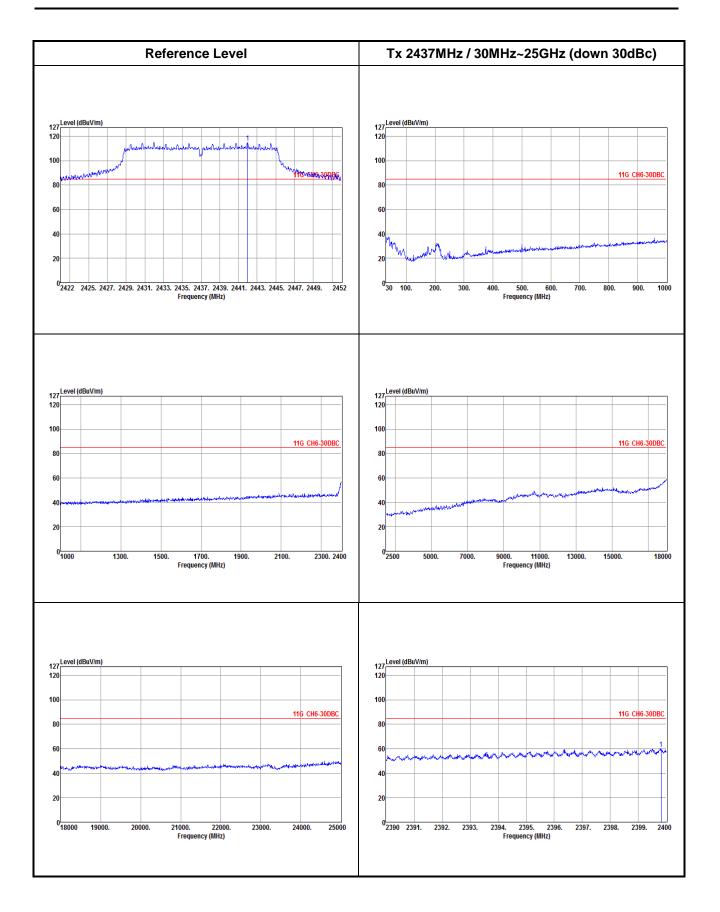




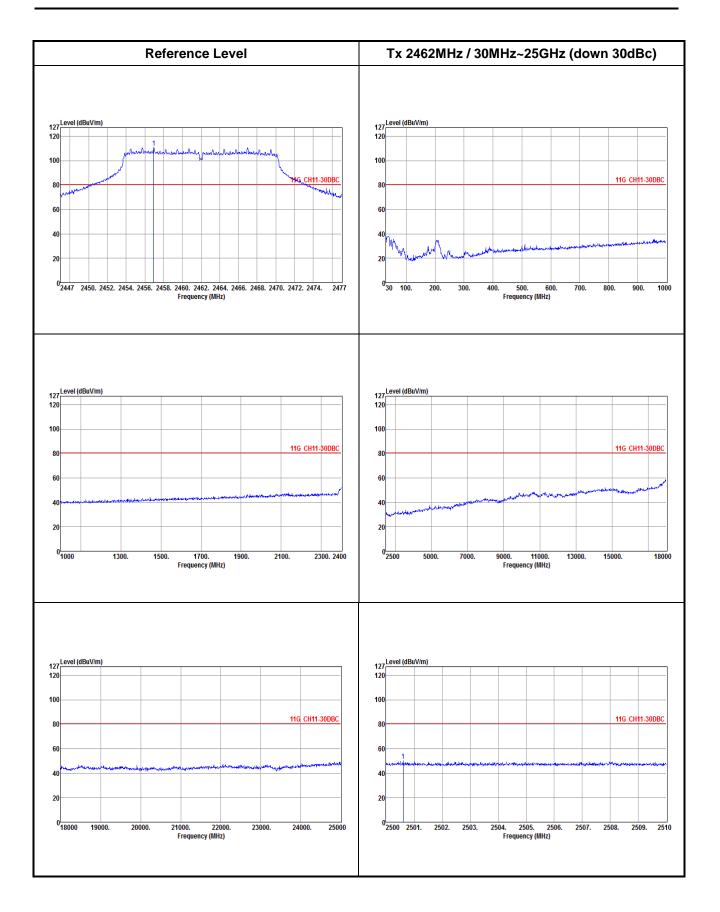





HT20

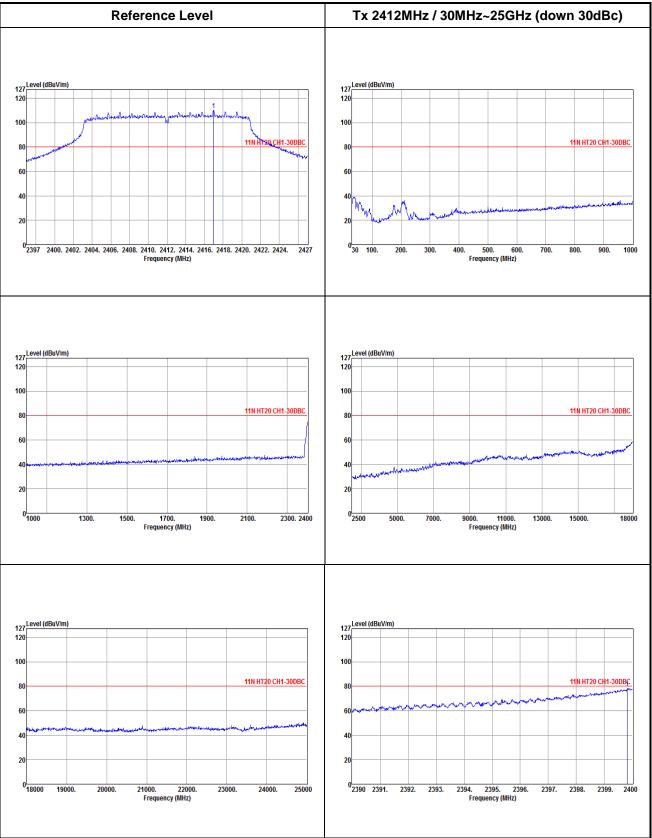



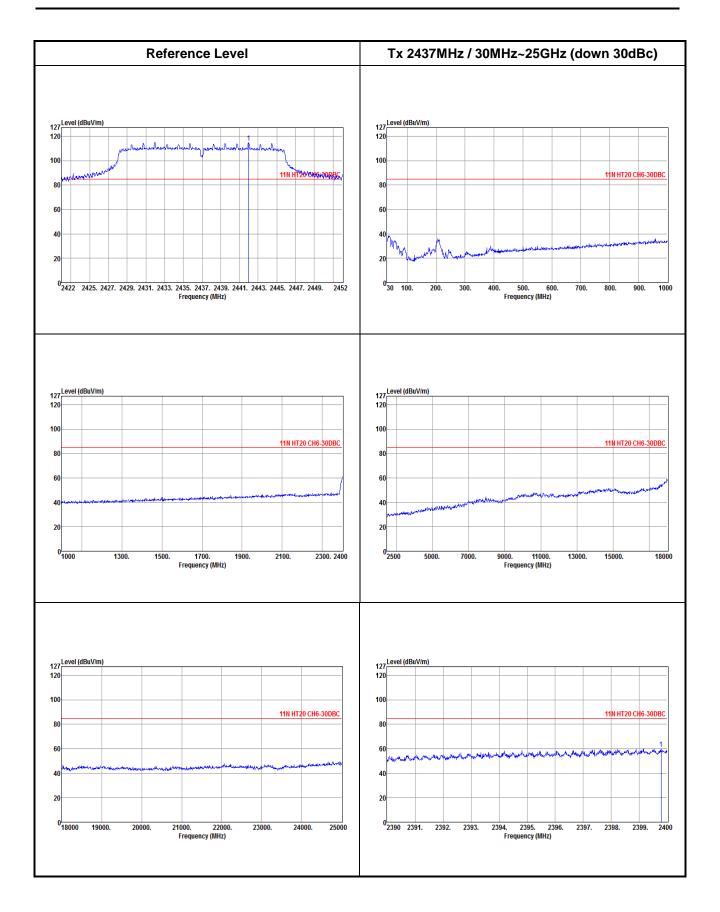




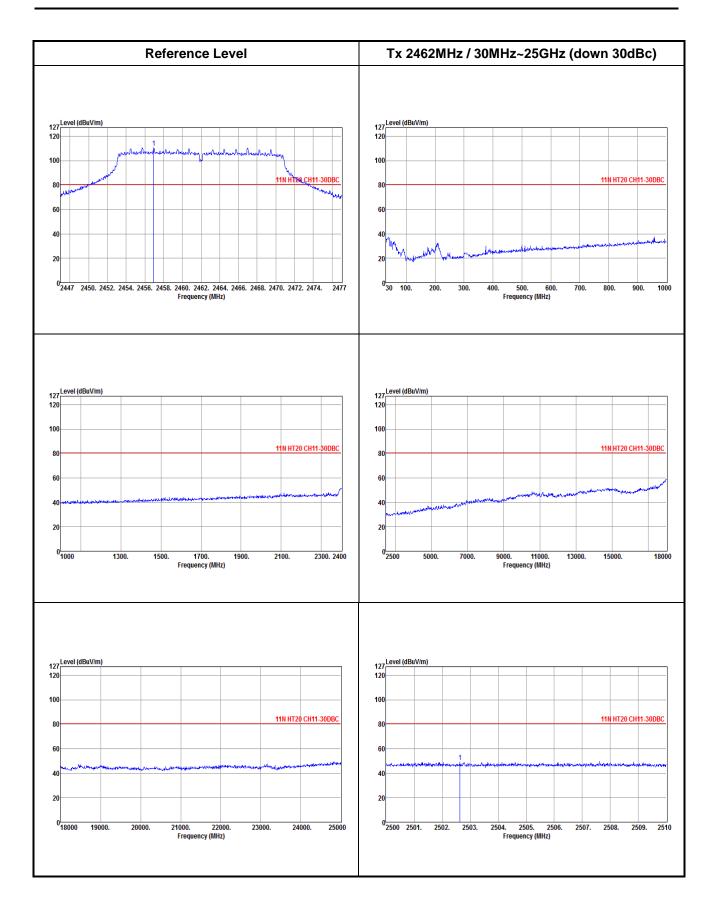





HT40

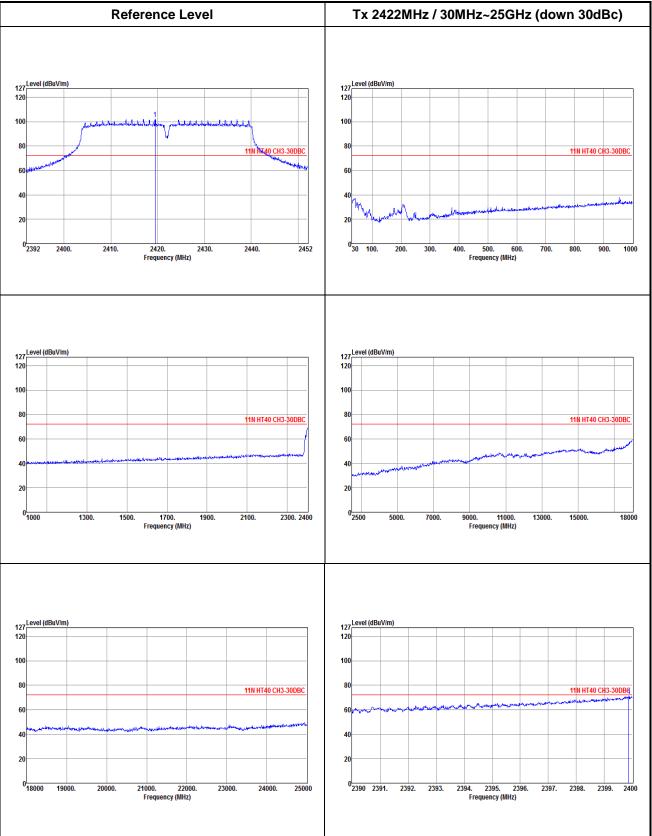



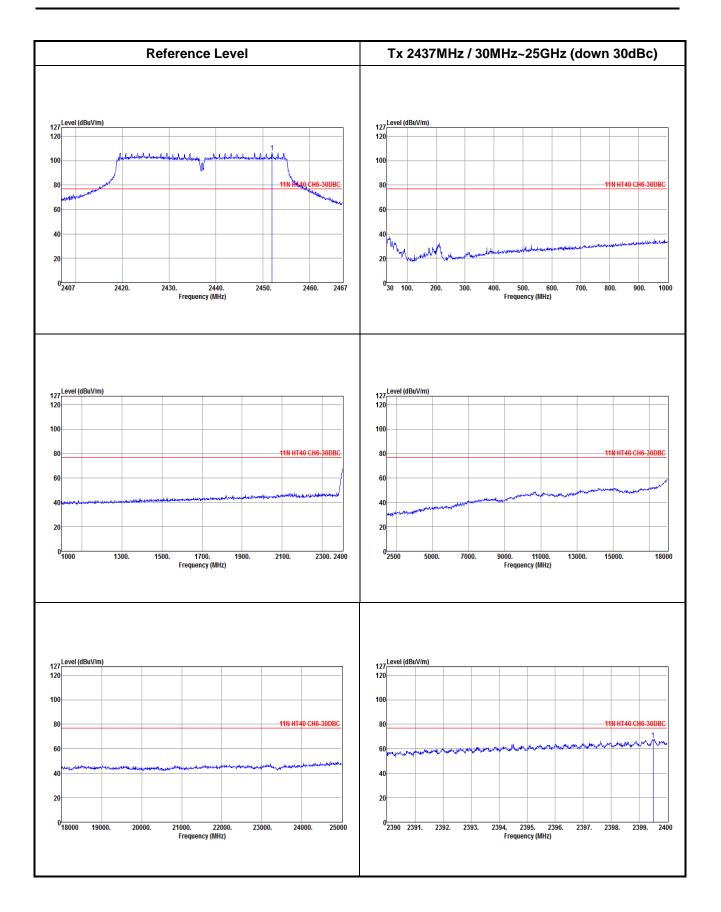



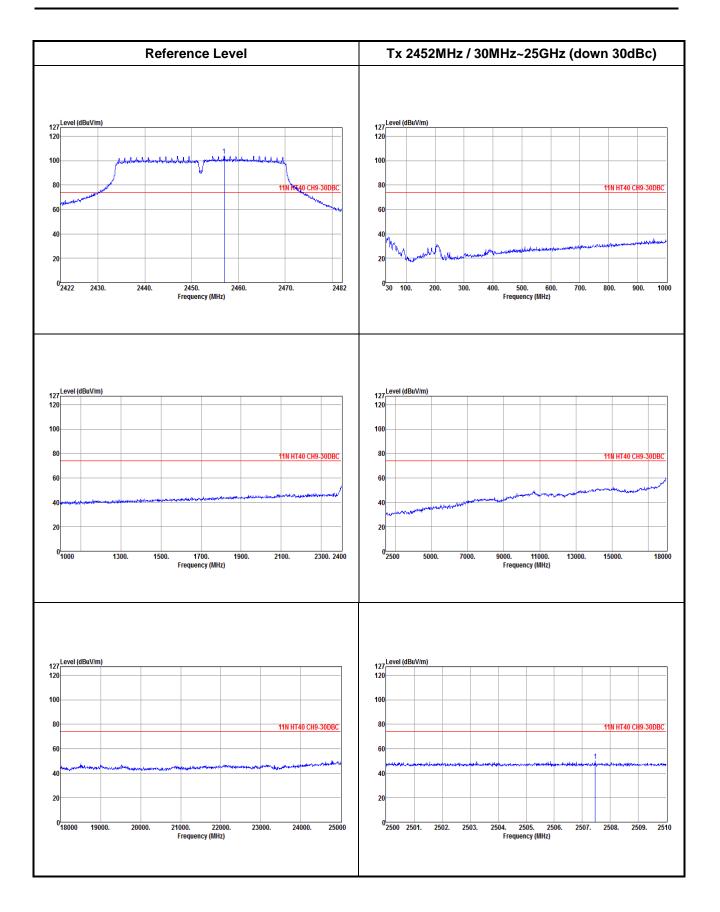



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C. Kwei Shan Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C. Kwei Shan Site II Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—