


FCC Test Report


APPLICANT : ZTE CORPORATION
EQUIPMENT : Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z5157V
FCC ID : SRQ-Z5157V
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jan. 06, 2020 and testing was completed on Mar. 05, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Jason Jia / Supervisor



Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location	7
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system	10
2.4. EUT Operation Test Setup	11
3. TEST RESULT	12
3.1. Test of AC Conducted Emission Measurement	12
3.2. Test of Radiated Emission Measurement	16
4. LIST OF MEASURING EQUIPMENT	21
5. UNCERTAINTY OF EVALUATION	22
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC010604	Rev. 01	Initial issue of report	Mar. 27, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 5.16 dB at 0.637 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.25 dB at 47.460 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	ZTE
Model Name	Z5157V
FCC ID	SRQ-Z5157V
EUT supports Radios application	LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conduction/ Radiation: 861583040005939
HW Version	Z5157VHW1.0
SW Version	Z5157VV1.0.0B04
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM: 88MHz~108MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna FM : External Earphone Antenna
Type of Modulation	LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM/256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM

Note:

1. GNSS Rx = GLONASS + GPS
2. WLAN operation in 5600 MHz ~ 5650 MHz is notched.

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 5 Rx(Middle) + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter 1)
	Mode 2: LTE Band 2 Rx + Earphone + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable(Charging from Adapter 2)
	Mode 3: LTE Band 4 Rx + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4 + USB Cable(Charging from Adapter 2)
	Mode 4: LTE Band 13 Rx(High) + Earphone + Bluetooth Idle + WLAN (5G) Idle + FM(98MHZ) + USB Cable(Charging from Adapter 2)
	Mode 5: LTE Band 12 Rx(Low) + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + USB Cable(Data Link with Notebook)
Radiated Emissions	Mode 1: LTE Band 5 Rx(Middle) + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter 1)
	Mode 2: LTE Band 2 Rx + Earphone + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable(Charging from Adapter 2)
	Mode 3: LTE Band 4 Rx + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4 + USB Cable(Charging from Adapter 1)
	Mode 4: LTE Band 13 Rx(High) + Earphone + Bluetooth Idle + WLAN (5G) Idle + FM(88MHZ) + USB Cable(Charging from Adapter 1)
	Mode 5: LTE Band 12 Rx(Low) + Earphone + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + USB Cable(Data Link with Notebook)
Remark: 1. The worst case of AC is mode 4; only the test data of this mode is reported. 2. The worst case of RE is mode 4; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook 4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.	

2.2.Connection Diagram of Test System

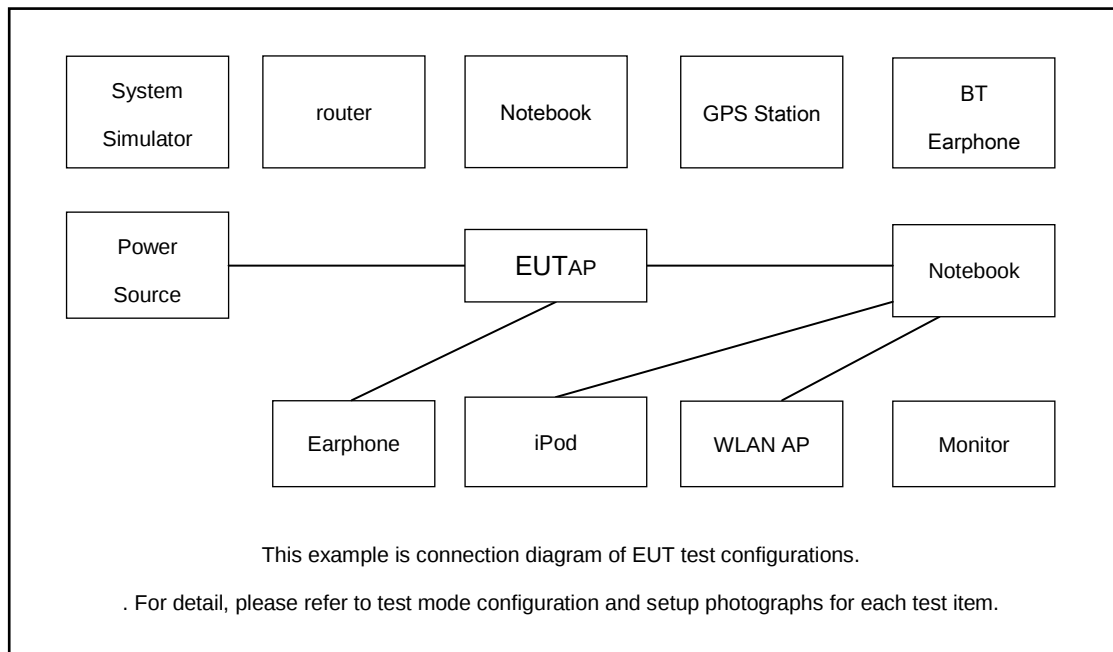

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	A1199	Fcc DoC	Shielded, 1.2m	N/A
2.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
3.	SD Card	Kingston	SDC4/4GB	N/A	N/A	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Earphone	moto	N/A	N/A	Unshielded, 1.2m	N/A
7.	Earphone	Lenovo	P121	N/A	Unshielded,1.2m	N/A
8.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
9.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
10.	Notebook	Lenovo	QDS-BRCM1050I	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
11.	Notebook	Dell	Latitude3440	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
12.	Hard disk	Lenovo	FH310	Fcc DoC	Shielded, 1.2m	N/A
13.	Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
14.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
15.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on NFC Function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

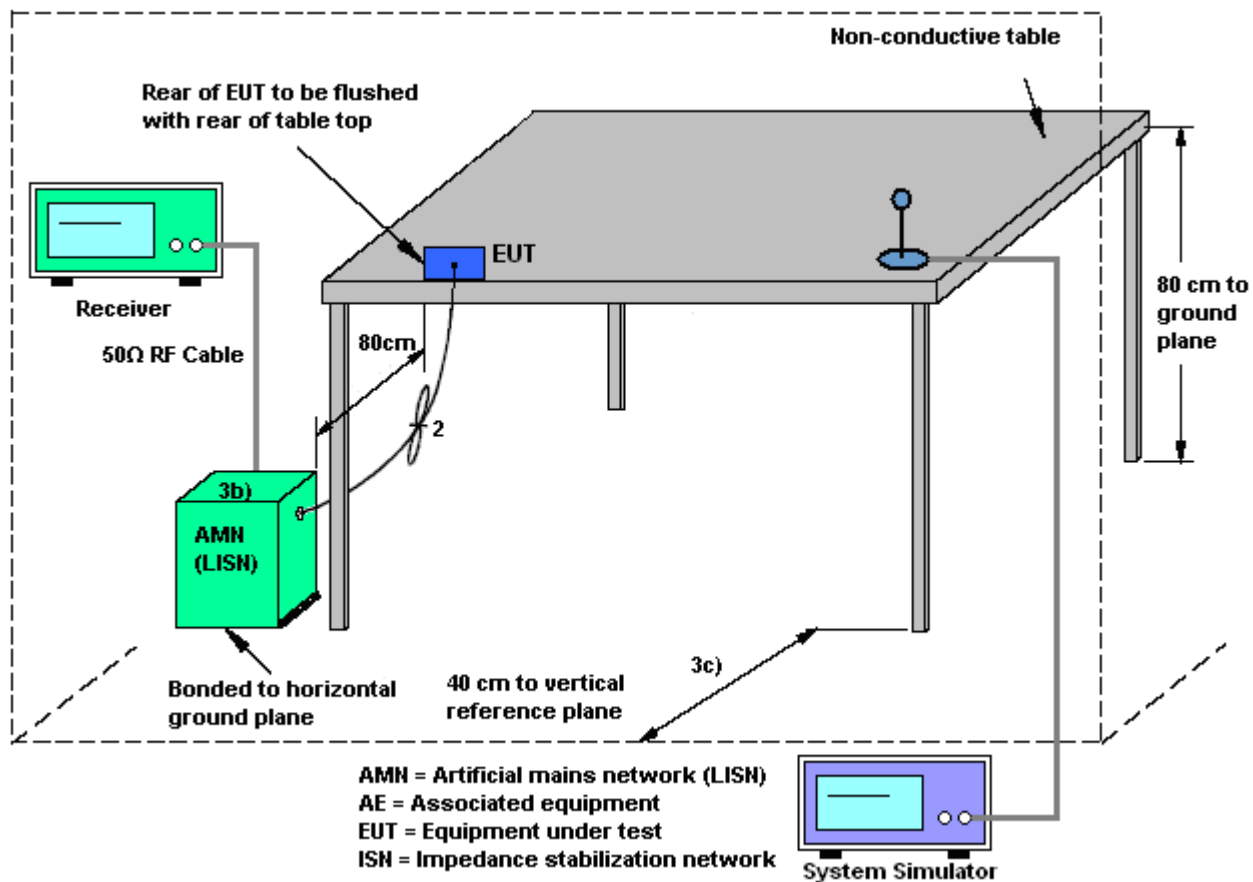




3.1.5 Test Result of AC Conducted Emission

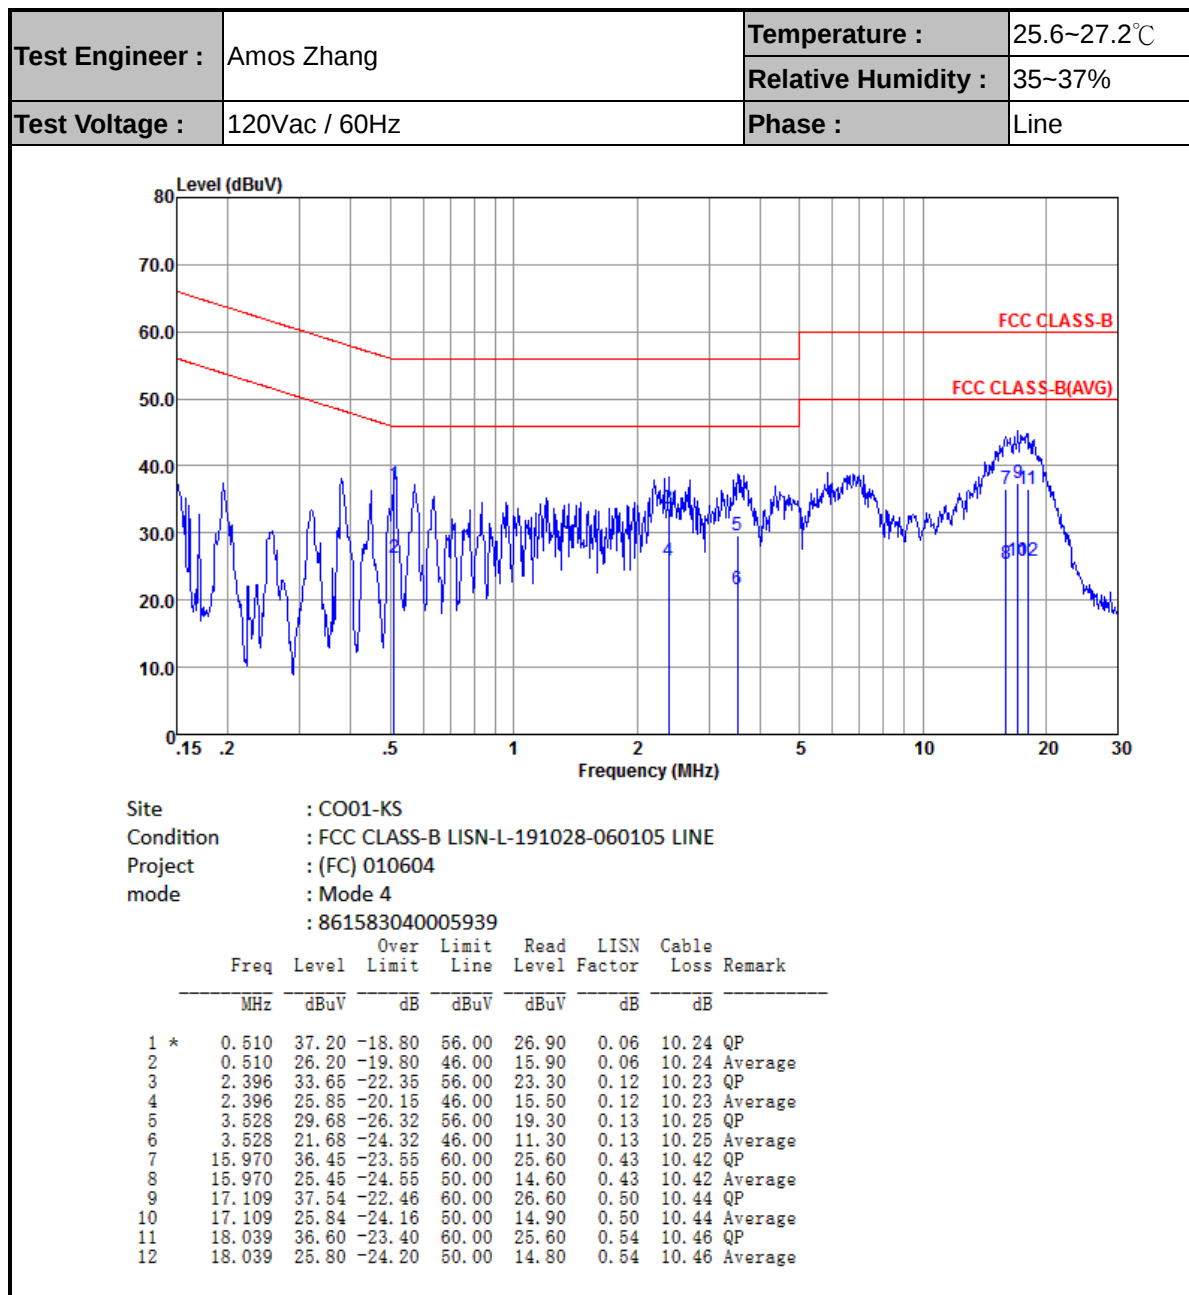



Test Engineer :	Amos Zhang	Temperature :	25.6~27.2℃
		Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

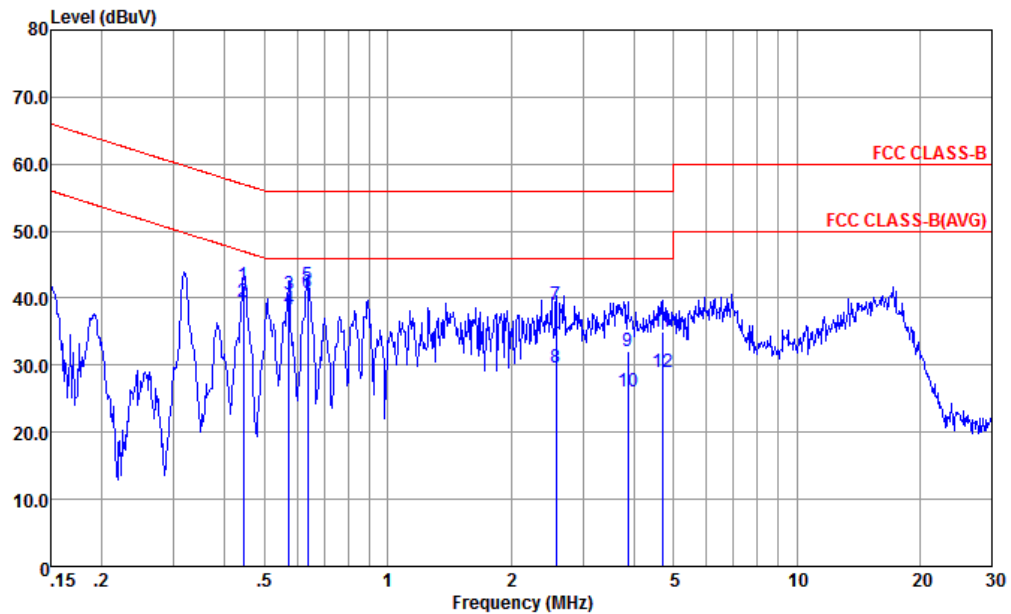

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-191028-060105 NEUTRAL
 Project : (FC) 010604
 mode : Mode 4
 : 861583040005939

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.444	41.95	-15.03	56.98	31.60	0.10	10.25	QP
2	0.444	39.55	-7.43	46.98	29.20	0.10	10.25	Average
3	0.573	40.64	-15.36	56.00	30.30	0.10	10.24	QP
4	0.573	38.44	-7.56	46.00	28.10	0.10	10.24	Average
5	0.637	41.94	-14.06	56.00	31.60	0.10	10.24	QP
6 *	0.637	40.84	-5.16	46.00	30.50	0.10	10.24	Average
7	2.581	38.97	-17.03	56.00	28.59	0.14	10.24	QP
8	2.581	29.57	-16.43	46.00	19.19	0.14	10.24	Average
9	3.860	32.00	-24.00	56.00	21.60	0.15	10.25	QP
10	3.860	26.00	-20.00	46.00	15.60	0.15	10.25	Average
11	4.696	34.92	-21.08	56.00	24.49	0.16	10.27	QP
12	4.696	29.02	-16.98	46.00	18.59	0.16	10.27	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

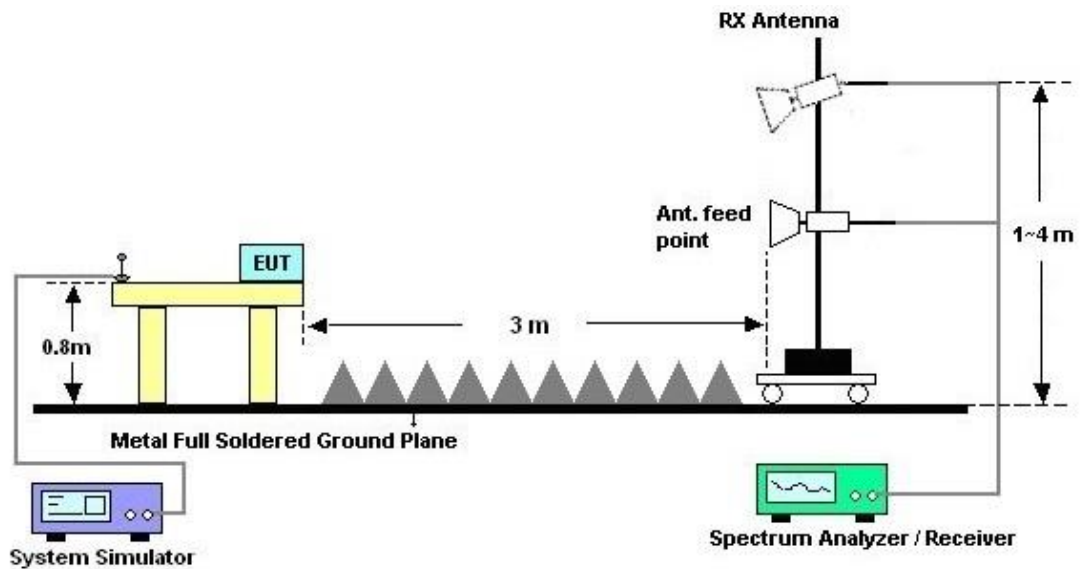




3.2.5. Test Result of Radiated Emission

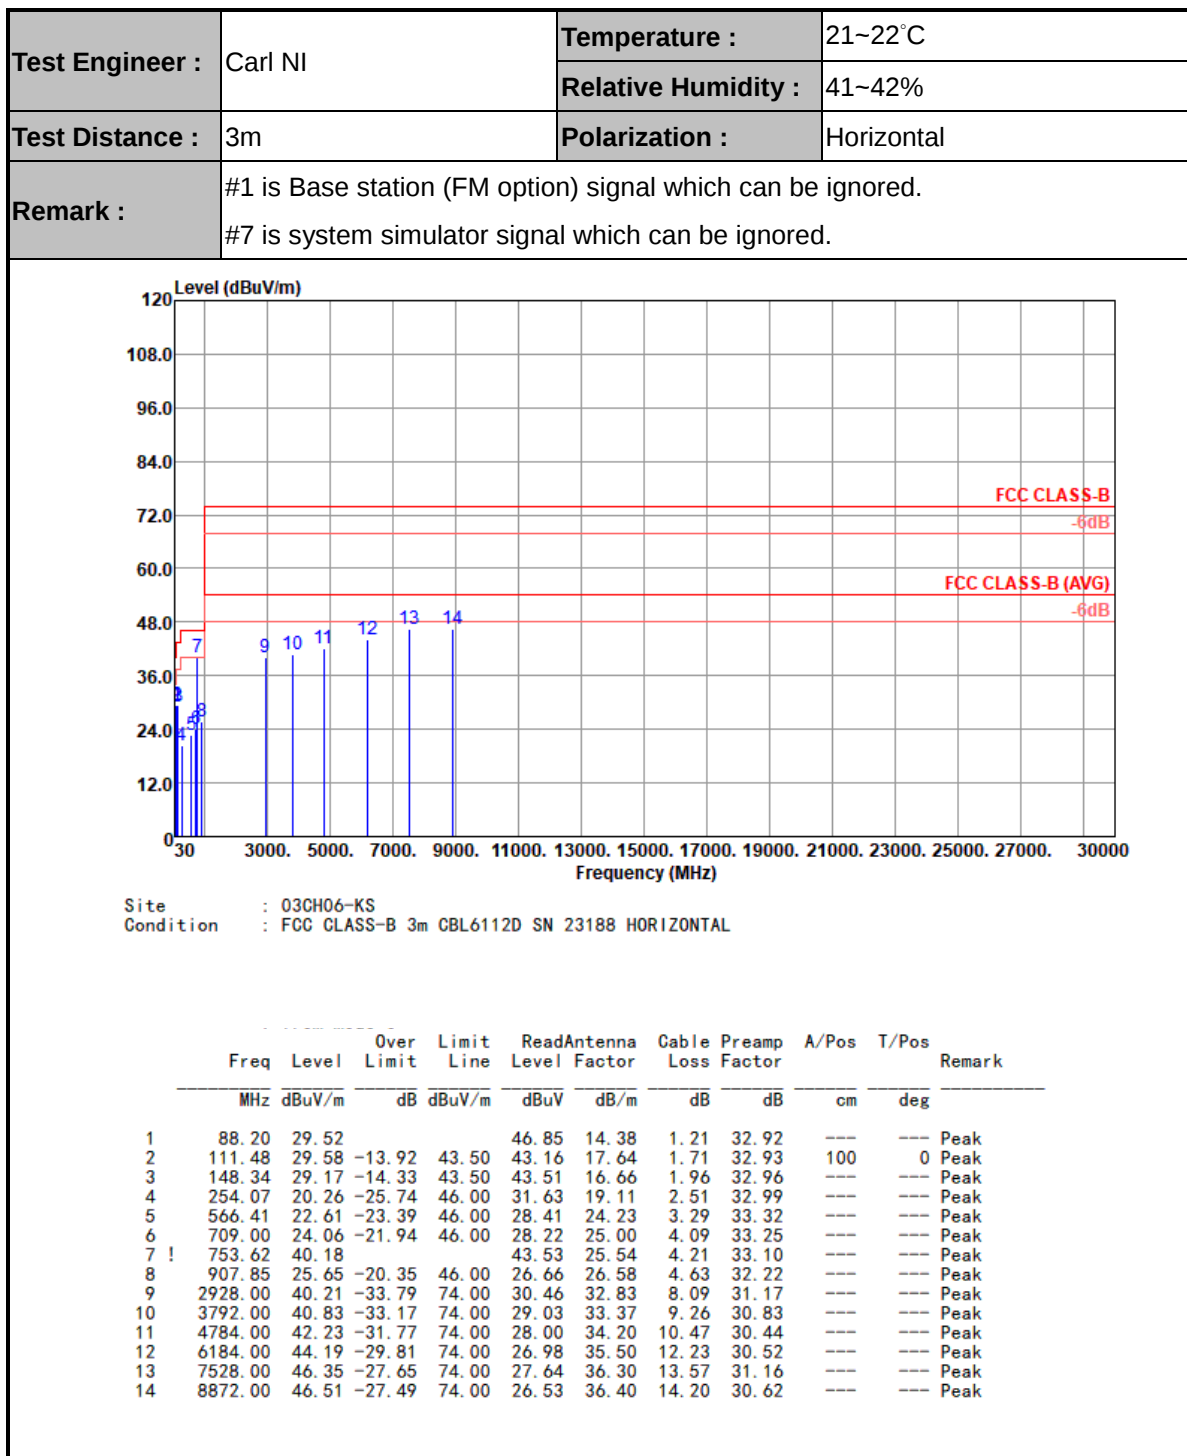



Test Engineer :	Carl NI	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#3 is Base station (FM option) signal which can be ignored. #7 is system simulator signal which can be ignored.		

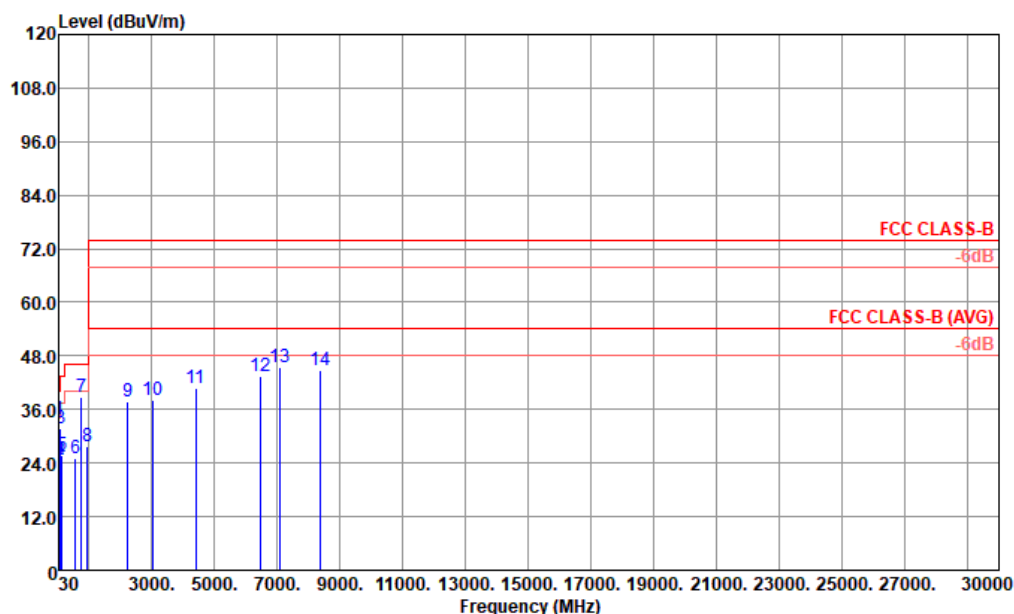

Site : 03CH06-KS
Condition : FCC CLASS-B 3m CBL6112D SN 23188 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor			
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	47.46	33.75	-6.25	40.00	50.41	15.10	1.20	32.96	100	0 Peak
2	62.98	24.90	-15.10	40.00	43.68	12.56	1.60	32.94	---	---
3	88.20	31.61			48.94	14.38	1.21	32.92	---	---
4	107.60	24.62	-18.88	43.50	38.47	17.40	1.68	32.93	---	---
5	131.85	25.73	-17.77	43.50	39.17	17.66	1.85	32.95	---	---
6	576.11	25.17	-20.83	46.00	30.75	24.33	3.42	33.33	---	---
7	753.62	38.77			42.12	25.54	4.21	33.10	---	---
8	946.65	27.59	-18.41	46.00	27.67	26.97	4.70	31.75	---	---
9	2224.00	37.62	-36.38	74.00	30.36	31.70	7.05	31.49	---	---
10	3008.00	38.27	-35.73	74.00	28.12	33.10	8.18	31.13	---	---
11	4408.00	40.64	-33.36	74.00	27.35	33.70	9.98	30.39	---	---
12	6456.00	43.49	-30.51	74.00	25.67	35.60	12.91	30.69	---	---
13	7104.00	45.41	-28.59	74.00	26.47	36.20	13.66	30.92	---	---
14	8368.00	44.88	-29.12	74.00	25.89	36.00	14.00	31.01	---	---

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) - Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2019	Feb. 28, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2019	Feb. 28, 2020	Oct. 10, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 18, 2019	Feb. 28, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2019	Feb. 28, 2020	Oct. 10, 2020	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Jul. 18, 2019	Mar. 05, 2020	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 16, 2019	Mar. 05, 2020	Apr. 15, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 30, 2019	Mar. 05, 2020	May 29, 2020	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2019	Mar. 05, 2020	Apr. 26, 2020	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Mar. 05, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Mar. 05, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2019	Mar. 05, 2020	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2019	Mar. 05, 2020	Apr. 14, 2020	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 05, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 05, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 05, 2020	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------