



**FCC CFR47 CERTIFICATION
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

**BROADCOM 802.11ag /DRAFT 802.11n
WIRELESS LAN PCI-E MINI CARD**

MODEL NUMBER: BCM94321MC

FCC ID: QDS-BRCM1022

REPORT NUMBER: 06U10579-2B

ISSUE DATE: OCTOBER 24, 2006

Prepared for
**BROADCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	10/18/2006	Initial Issue	Thu
B	10/24/2006	Updated Output Powers	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST.....	7
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>7</i>
5.2. <i>TEST RESULT CONCLUSIONS.....</i>	<i>7</i>
5.3. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>9</i>
5.5. <i>CLASS II PERMISSIVE CHANGE DESCRIPTION.....</i>	<i>9</i>
5.6. <i>SOFTWARE AND FIRMWARE.....</i>	<i>9</i>
5.7. <i>CONFIGURATION AND MODE.....</i>	<i>9</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
6. TEST AND MEASUREMENT EQUIPMENT.....	12
7. LIMITS AND RESULT.....	13
7.1. <i>CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND.....</i>	<i>13</i>
LEGACY MODE.....	13
7.1.1. <i>EMISSION BANDWIDTH.....</i>	<i>13</i>
7.1.2. <i>PEAK POWER.....</i>	<i>14</i>
7.1.3. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>25</i>
7.1.4. <i>AVERAGE POWER.....</i>	<i>28</i>
7.1.5. <i>PEAK POWER SPECTRAL DENSITY.....</i>	<i>29</i>
7.1.6. <i>PEAK EXCURSION.....</i>	<i>34</i>
7.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>35</i>
MIMO MODE.....	40
7.1.8. <i>EMISSION BANDWIDTH.....</i>	<i>40</i>
7.1.9. <i>PEAK POWER.....</i>	<i>41</i>
7.1.10. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>56</i>
7.1.11. <i>AVERAGE POWER.....</i>	<i>59</i>

7.1.12. PEAK POWER SPECTRAL DENSITY 60

7.1.13. PEAK EXCURSION..... 61

7.1.14. CONDUCTED SPURIOUS EMISSIONS..... 62

7.2. *RADIATED EMISSIONS* 70

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS..... 70

LEGACY MODE..... 73

7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND 73

MIMO MODE..... 82

7.2.3. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND 82

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz..... 100

7.3. *POWERLINE CONDUCTED EMISSIONS* 102

8. SETUP PHOTOS.....106

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORP.
 190 MATHILDA PLACE
 SUNNYVALE, CA 94086, USA

EUT DESCRIPTION: BROADCOM 802.11 AG /DRAFT 802.11n WIRELESS LAN PCI-E MINI CARD

MODEL: BCM94321MC

SERIAL NUMBER: 944 & 976

DATE TESTED: SEPTEMBER 13 - 29, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:




THU CHAN
 EMC SUPERVISOR
 COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN
 EMC ENGINEER
 COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11n MIMO transceiver chipset and manufactured by Broadcom Corp. The chipset is installed on a Mini PCI-E card, model number BCM94321MC.

5.2. TEST RESULT CONCLUSIONS

The worst-case data rates in each mode is based on the investigations by measuring the PSD, peak power, average power on conducted emissions, bandedge and 2nd harmonic (5GHz only) on radiated emissions across all the data rates, bandwidths, modulations and spatial stream modes.

For the Legacy Mode, the worst case is 1Mb/s @ 11b mode & 6Mb/s @ 11g mode.

For MCS Index and MIMO operation modes covered under this evaluation it was determined that MCS Index 0 is worst case for all testing performed at 20MHz (including Band-edge, Emissions testing, PSD). MCS Index 32 is worst case for 40MHz mode.

Both MCS 0 and MCS 32 were set to CDD mode.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

LEGACY MODE

5150 to 5250 MHz Authorized Band

Frequency Range (MHz)	Mode	Peak Chain 0 (dBm)	Peak Chain 1 (dBm)	Total Peak Power (dBm)	Output (mW)
5150 - 5250	a-mode	7.16	7.17	10.18	10.41

5250 to 5350 MHz Authorized Band

Frequency Range (MHz)	Mode	Peak Chain 0 (dBm)	Peak Chain 1 (dBm)	Total Peak Power (dBm)	Output (mW)
5250 - 5350	a-mode	15.98	16.12	19.06	80.55

MIMO MODE

5150 to 5250 MHz Authorized Band

Frequency Range (MHz)	Mode	Peak Chain 0 (dBm)	Peak Chain 1 (dBm)	Total Peak Power (dBm)	Output (mW)
5150 - 5250	20 MHz BANDWIDTH	10.19	10.09	13.15	20.66
5150 - 5250	40 MHz BANDWIDTH	12.53	12.24	15.40	34.66

5250 to 5350 MHz Authorized Band

Frequency Range (MHz)	Mode	Peak Chain 0 (dBm)	Peak Chain 1 (dBm)	Total Peak Power (dBm)	Output (mW)
5250 - 5350	20 MHz BANDWIDTH	15.97	16.00	19.00	79.35
5250 - 5350	40 MHz BANDWIDTH	17.2	17.13	20.18	104.12

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT has 2 Tx/Rx antennas that are automatically selected for use as per the MCS index and STF mode selections.

The radio utilizes an integral antenna for diversity, with a maximum gain as below:

Hitachi Antenna:

Main Antenna: 1.7 dBi @2.4 GHz; Aux antenna: 3.9 dBi @2.4 GHz

Main Antenna: 3.5 dBi @5.3 GHz; Aux antenna: 5.6 dBi @ 5.3 GHz.

Main Antenna: 4.2 dBi @5.8 GHz; Aux antenna: 6.2 dBi @5.8 GHz.

5.5. CLASS II PERMISSIVE CHANGE DESCRIPTION

The major change filed under this application is:

1. The 5GHz power amp has been modified from a SIGE to a Skyworks model and the associated layout and filter circuitry is slightly different. The power levels of the BCM94321MC with new PA will be identical to those in the original filing, as detailed in the operational description.
2. The top metal shield is modified to offer improved EMC suppression.

5.6. SOFTWARE AND FIRMWARE

The EUT was tested in the following manner:

- “epi_tcp.exe” was used to transmit UDP packets to a broadcast IP address (192.168.66.255) – i.e. no ACK required. This test mode sends a continuous packetized data stream with duty cycles that vary dependant upon data rate/MCS Index selected.
- “wl ampd” and “frameburst” were enabled to ensure worst case data packet transfer and duty cycle.
- Worst case packet length have also been used to ensure max duty cycle

5.7. CONFIGURATION AND MODE

Operating modes were changed directly in software with no other changes to the set up. Power levels were verified across all the MCS Index at the start of test and as required throughout testing.

Prior to each test a power meter was used to tune the gated average power within a Tx packet. The channel gates on the meter were set to ensure that, at the time of recording, only packet power was captured without including duty cycle off time.

Power was tuned for different modes, channels and antennas based on the power tuning table contained in the Operational Description submitted under the same filing.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Dell	Inspiron 0000	CN-901014-70166-57K-01JT	DOC
AC Adapter	Dell	PA-1600-06D1	F9710	DOC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.2 m	N/A
2	DC	1	DC	Unshielded	1.2 m	N/A

TEST SETUP

The EUT is installed in a host laptop computer via Expresscard to MiniPCI-E adapter boards during the tests. Test software exercised the radio card.

SETUP DIAGRAM

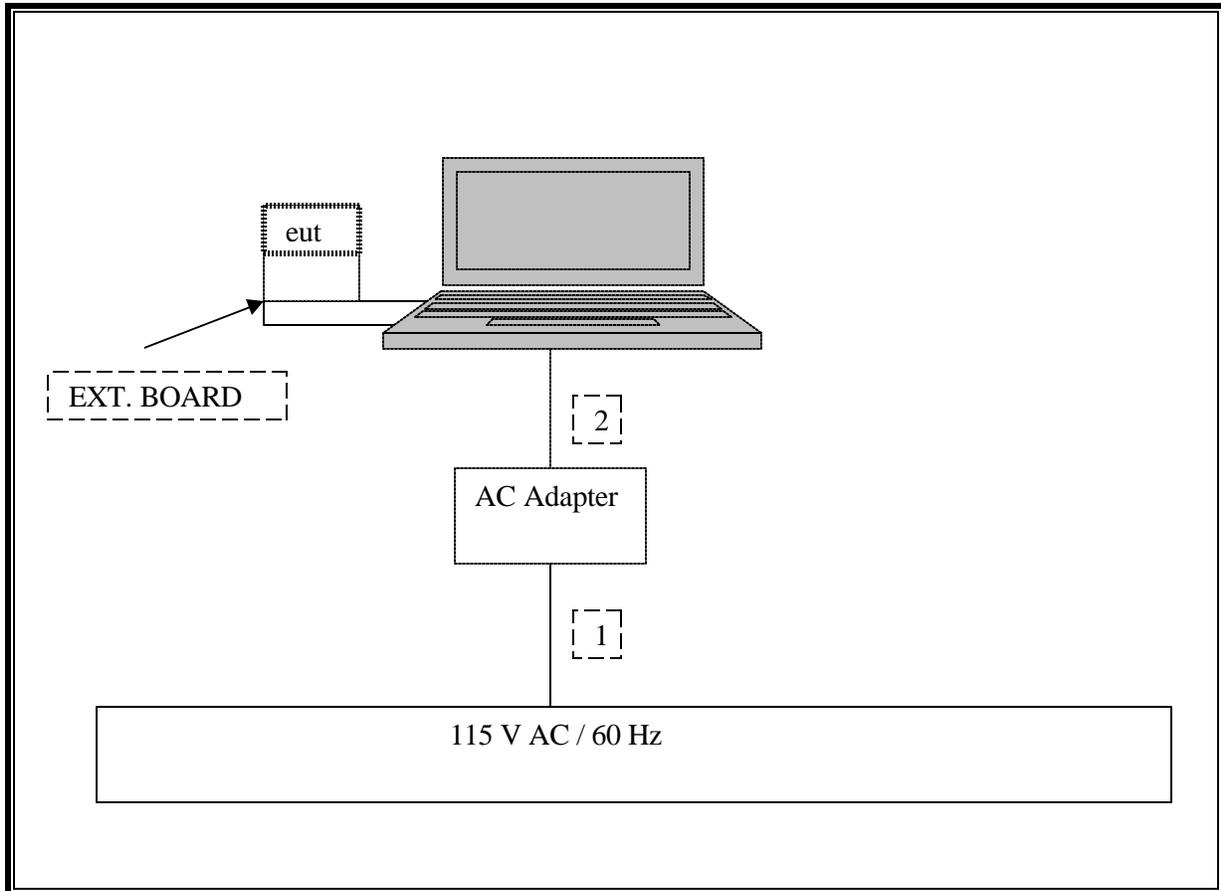

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/19/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/22/2007
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00561	10/3/2007
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	8/18/2007
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2007
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	8/30/2007
EMI Test Receiver	R & S	ESHS 20	827129/006	11/3/2006
AC Power Source, 10 kVA	ACS	AFC-10K-AFC-2	J1568	CNR
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	3/3/2007
4.6 - 5.8 GHz Combiner	Mini-Circuits	ZB4PD1-5.8	SN649900514	N/A
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	4/13/2007
7.6 GHz High Pass Filter	Micro Tronics	HPM13350	1	N/A
5.75 - 5.8 Reject Filter	Micro Tronics	BRC13192	2	N/A

7. LIMITS AND RESULT

7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND

LEGACY MODE

7.1.1. EMISSION BANDWIDTH

LIMIT

§15.403 (i) Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Same as previous CCS report # 06U10233-2C.

7.1.2. PEAK POWER

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

Following formula to calculate the array gain:

$$\text{Array gain} = 10 \cdot \log (10^{\text{main gain}/10} + 10^{\text{aux gain}/10})$$

5.15 – 5.25GHz band: 8.039 dBi

5.25 – 5.35GHz band: 7.686 dBi

LIMITS AND RESULTS

No non-compliance noted:

11a_CHAIN 0 & CHAIN 1

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	19.616	16.926	8.039	14.89

Limit in 5250 to 5350 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5260	24	33.59	26.262	7.686	22.31
High	5320	24	19.814	23.970	7.686	22.28


Results


Channel	Frequency (MHz)	Power Chain 0 (dBm)	Power Chain 1 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	7.16	7.17	10.18	14.89	-4.71
Mid	5260	14.00	14.07	17.05	22.31	-5.27
High	5320	15.98	16.12	19.06	22.28	-3.22


Results

Channel	Frequency (MHz)	Combiner Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	10.56	14.89	-4.33
Mid	5260	17.19	22.31	-5.12
High	5320	18.00	22.28	-4.28


PEAK POWER (NORMAL MODE) (Chain 0)

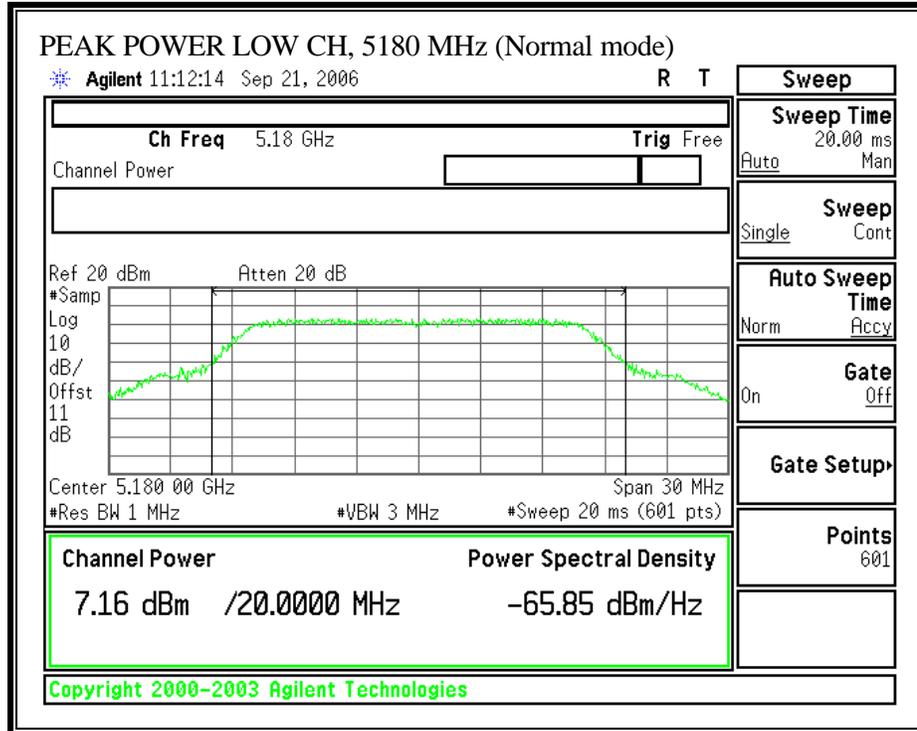


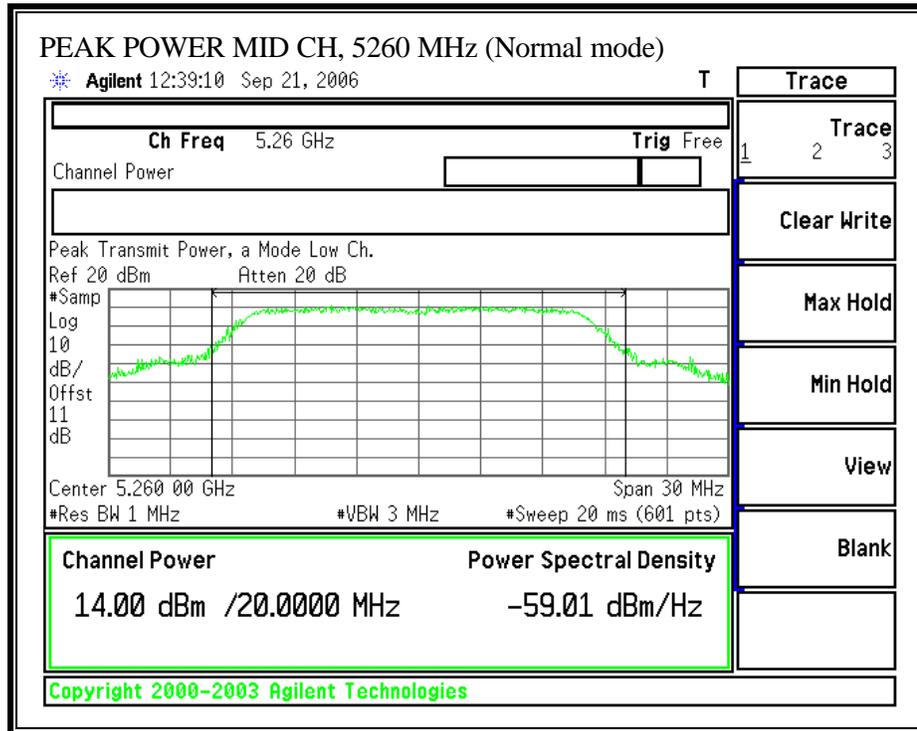


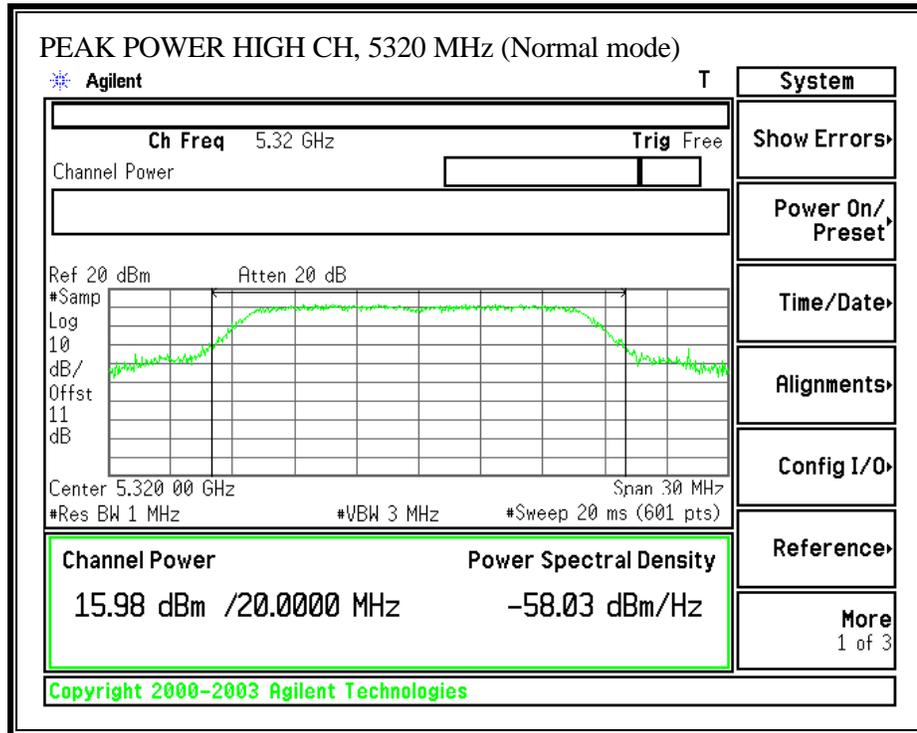


PEAK POWER (NORMAL MODE) (Chain 1)

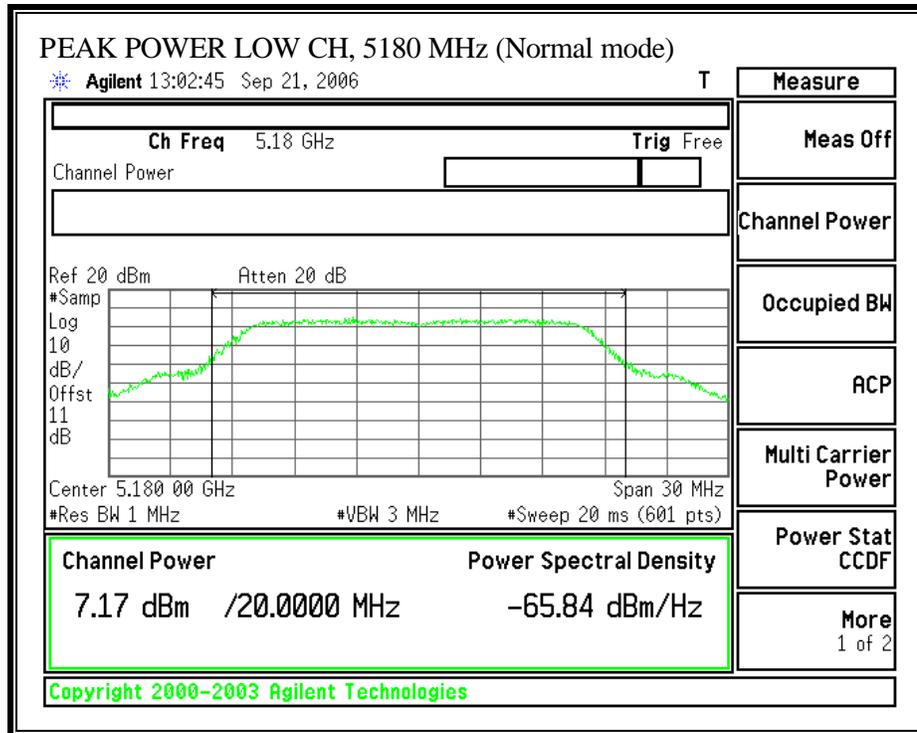


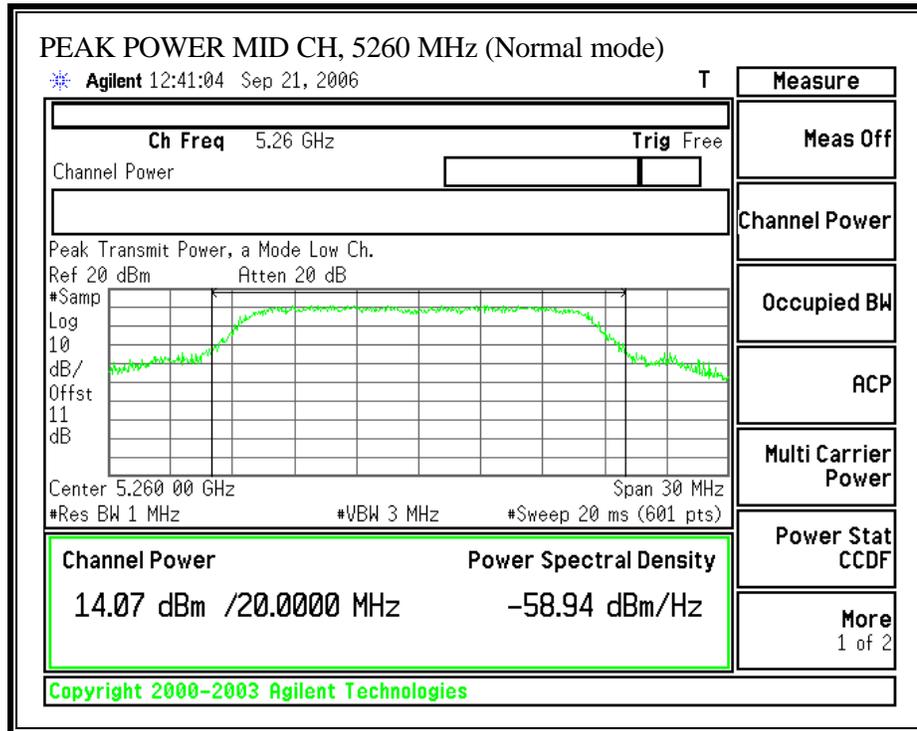


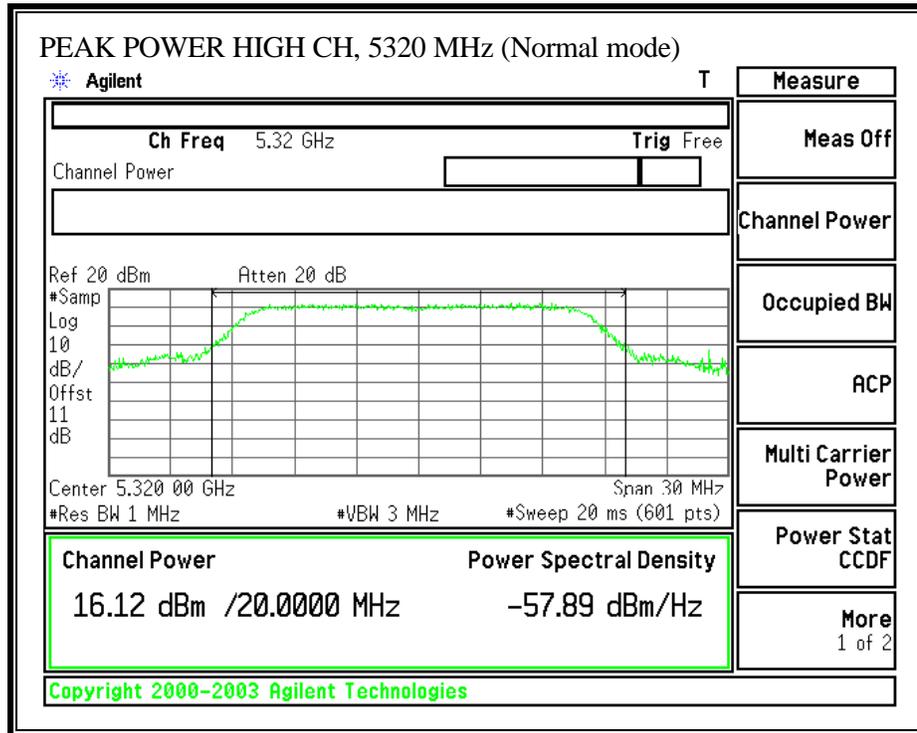

PEAK POWER (NORMAL MODE) - COMBINER

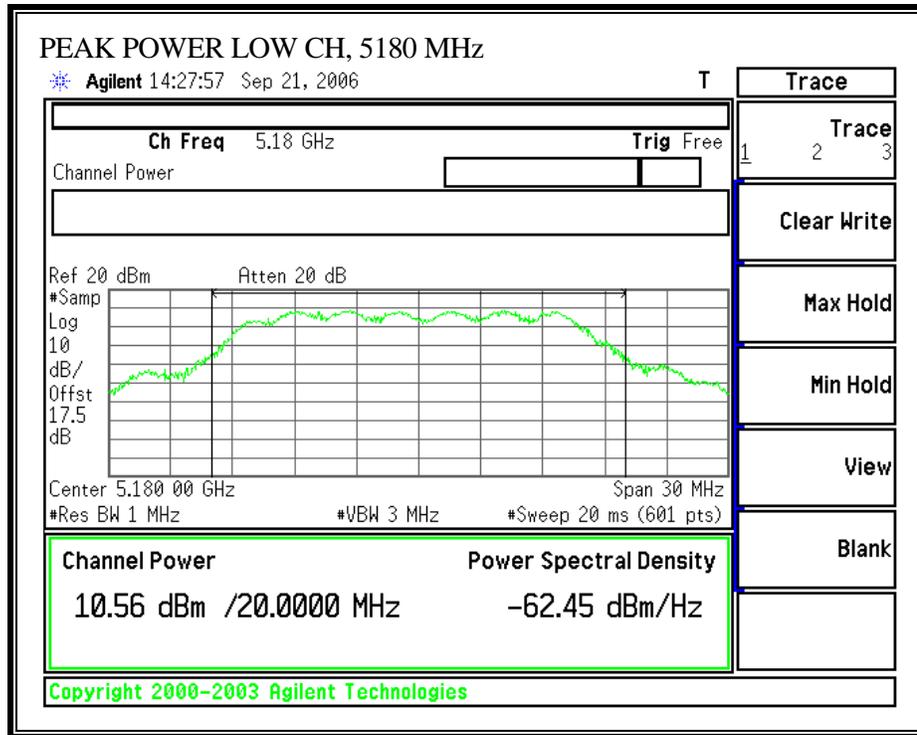

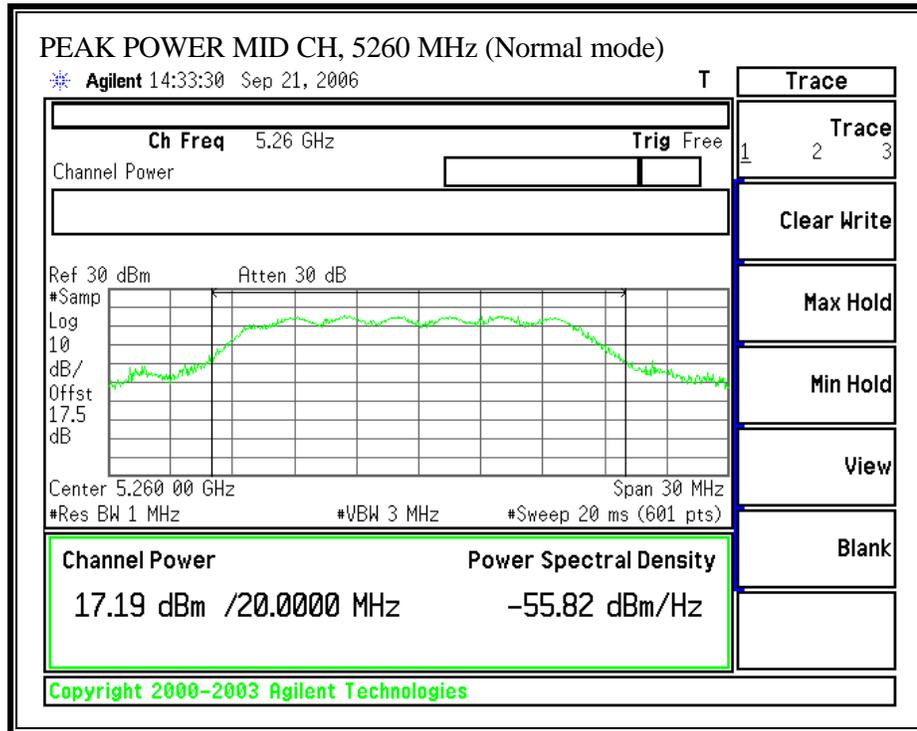

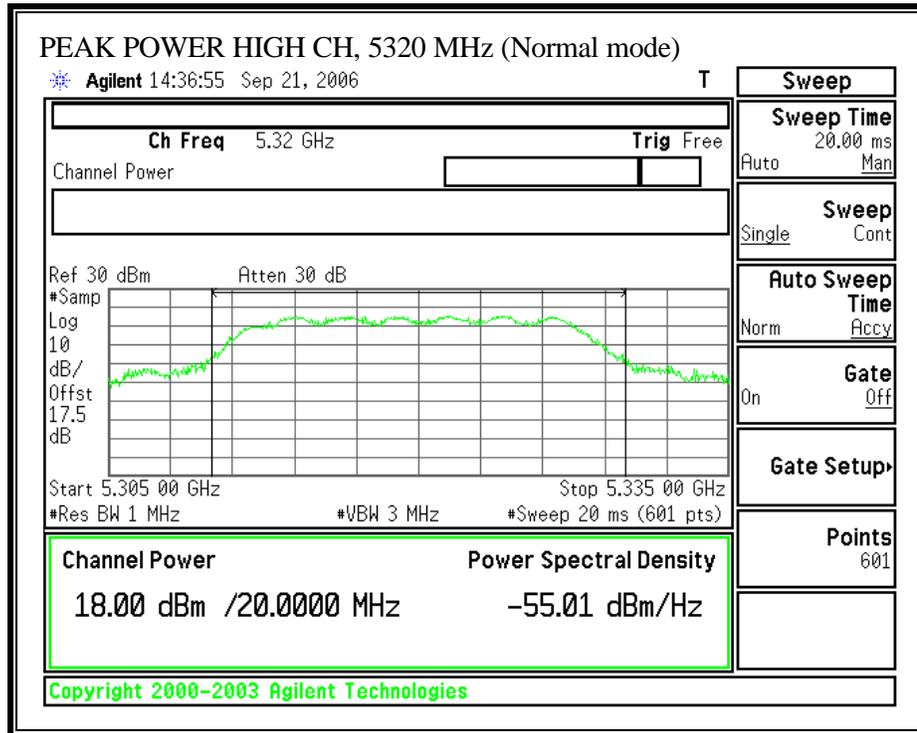

7.1.3. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted

Mode	MPE Distance (cm)	Output Power (dBm)	Output Power (dBm)	Total Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm^2)
802.11a	20.0	15.98	16.12	19.06	8.039	0.05

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.9 dB (including 10 dB pad and 1.9 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5180	7.15
Middle	5260	14.21
High	5320	15.05

7.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain = 6.2 dBi, therefore there is a reduction due to antenna gain.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

Following formula to calculate the array gain:

$$\text{Array gain} = 10 \cdot \log (10^{\text{main gain}/10} + 10^{\text{aux gain}/10})$$

5.15 – 5.25GHz band: 8.039 dBi

5.25 – 5.35GHz band: 7.686 dBi


RESULTS


No non-compliance noted:


802.11a Mode with Combiner

Channel	Frequency (MHz)	PPSD With Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	5180	1.63	1.96	-0.33
Middle	5260	8.94	9.31	-0.37
High	5320	8.61	9.31	-0.70

PEAK POWER SPECTRAL DENSITY (802.11a MODE) - COMBINER

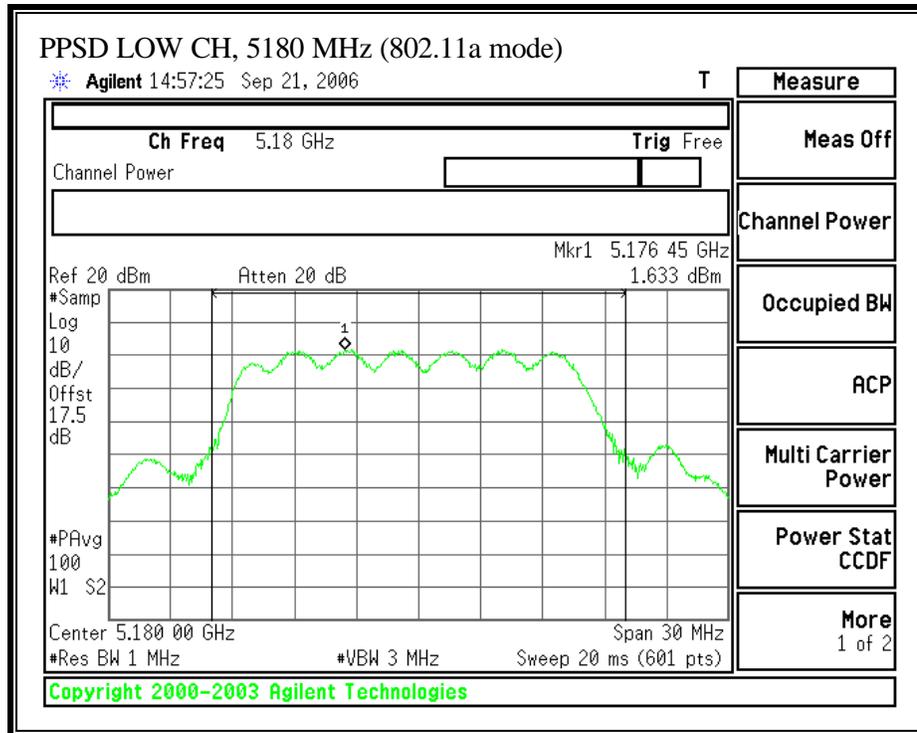

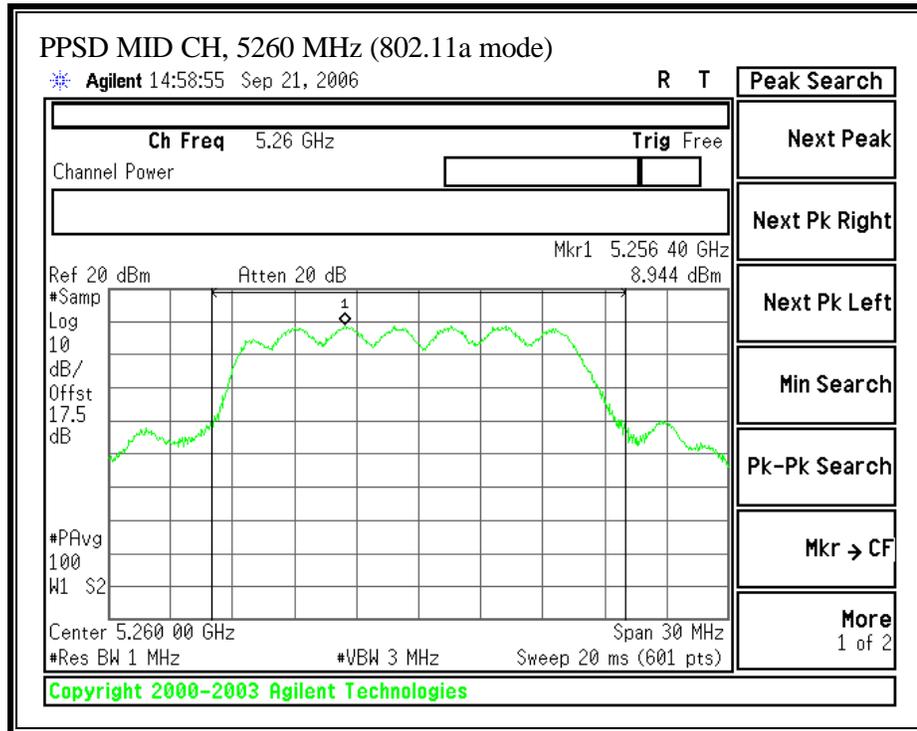

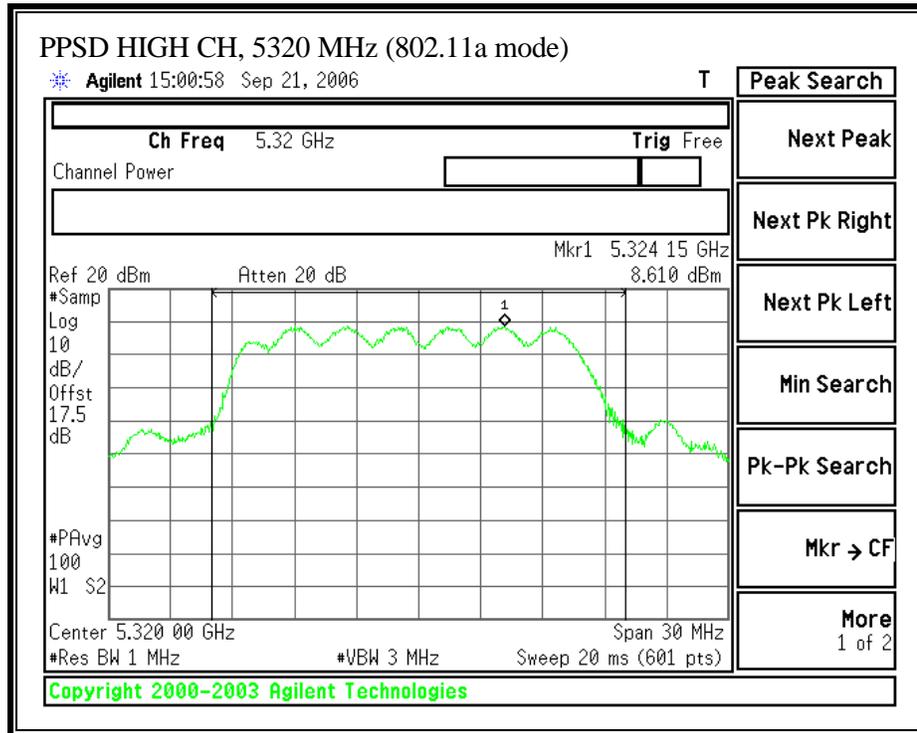

7.1.6. PEAK EXCURSION

LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Same as previous CCS report # 06U10233-2.

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULTS


No non-compliance noted:

SPURIOUS EMISSIONS (802.11a MODE)

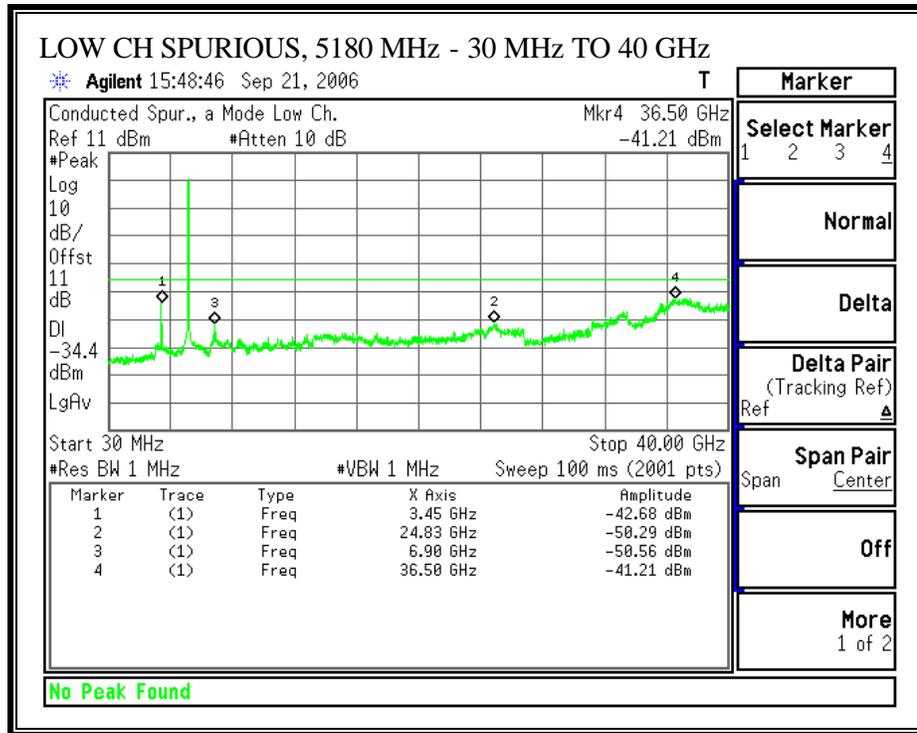

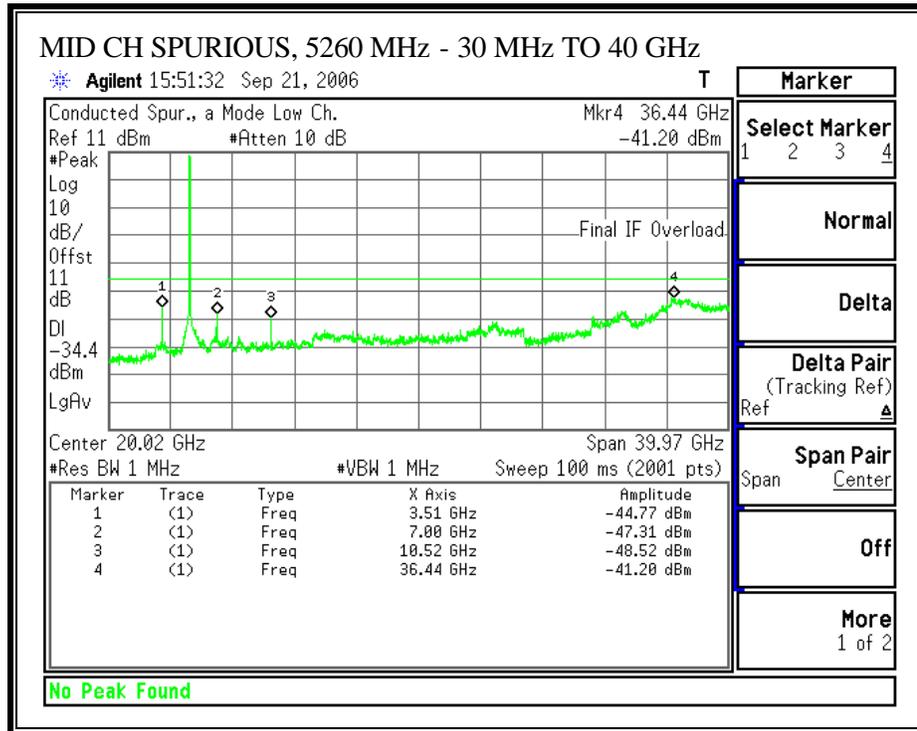

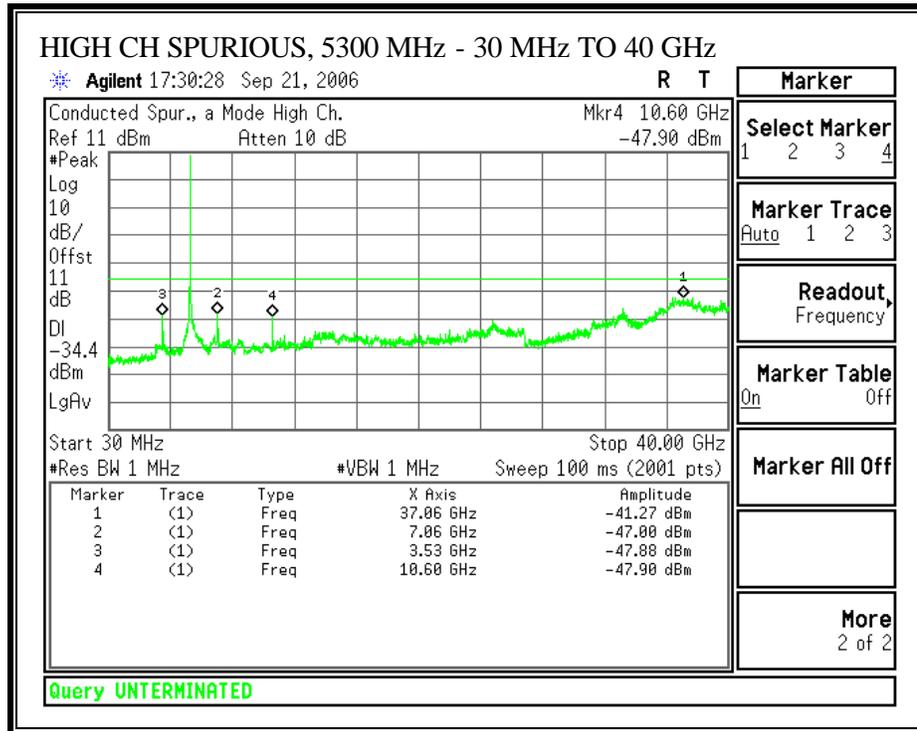

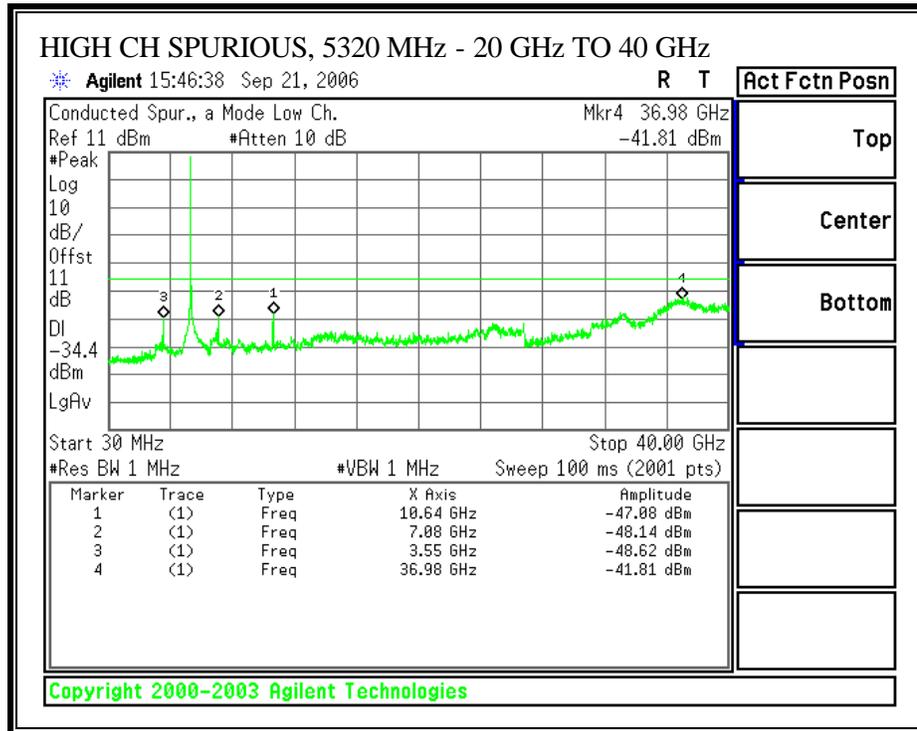

MIMO MODE

7.1.8. EMISSION BANDWIDTH

LIMIT

§15.403 (i) Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Same as previous CCS report # 06U10233-2.

7.1.9. PEAK POWER

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS.

Total peak power calculation formula: $10 \log (10^{\text{Pchain0}} / 10) + 10^{\text{Pchain1}} / 10$

Note: Pchain 0 and Pchain1 are in dBm

LIMITS AND RESULTS

No non-compliance noted:

20 MHz TX BANDWIDTH - CHAIN 0 & CHAIN 1

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B Chain 0 (MHz)	B Chain 1 (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	19.255	22.998	16.845	6.20	16.65

Limit in 5250 to 5350 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5260	24	35.328	31.637	26.002	6.20	23.80
High	5320	24	37.726	34.464	26.374	6.20	23.80

Results

Channel	Frequency (MHz)	Power Chain 0 (dBm)	Power Chain 0 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	10.19	10.09	13.15	16.65	-3.49
Mid	5260	15.97	16.00	19.00	23.80	-4.80
High	5320	14.02	14.06	17.05	23.80	-6.75

40 MHz TX BANDWIDTH - CHAIN 0 & CHAIN 1

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B Chain 0 (MHz)	B Chain 1 (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5190	17	44.836	39.829	20.002	6.20	16.80


Limit in 5250 to 5350 MHz Band


Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5270	24	76.184	74.998	29.750	6.20	23.80
High	5310	24	65.430	61.061	28.858	6.20	23.80


Results

Channel	Frequency (MHz)	Power Chain 0 (dBm)	Power Chain 0 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5190	12.53	12.24	15.40	16.80	-2.87
Mid	5270	17.20	17.13	20.18	23.80	-2.98
High	5310	12.14	12.05	15.11	23.80	-2.97


PEAK POWER (802.11 – 20MHz TX BANDWIDTH – CHAIN 0)

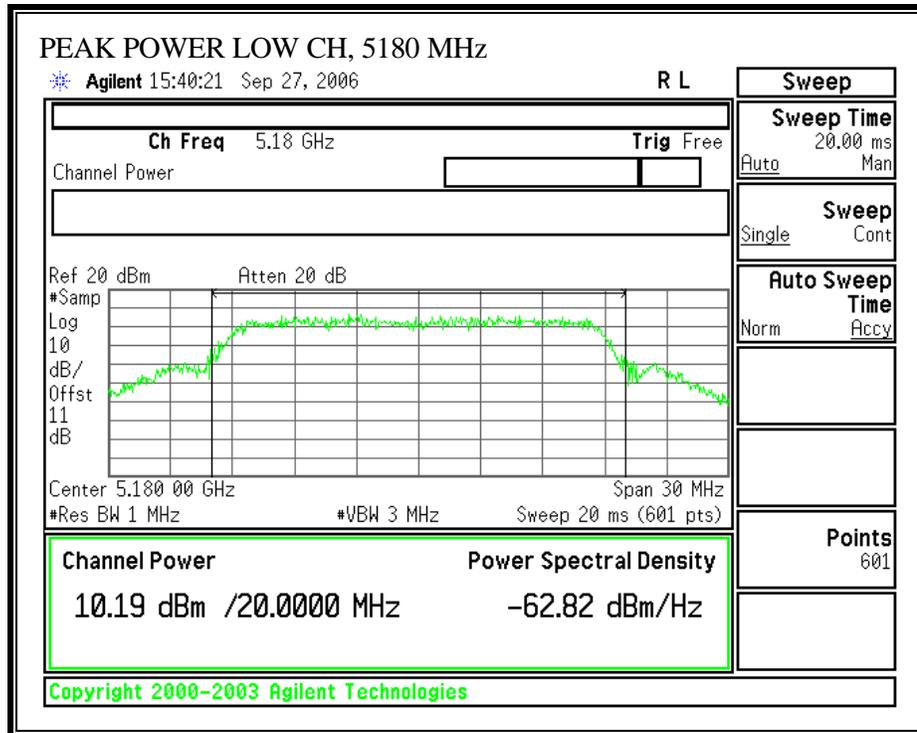


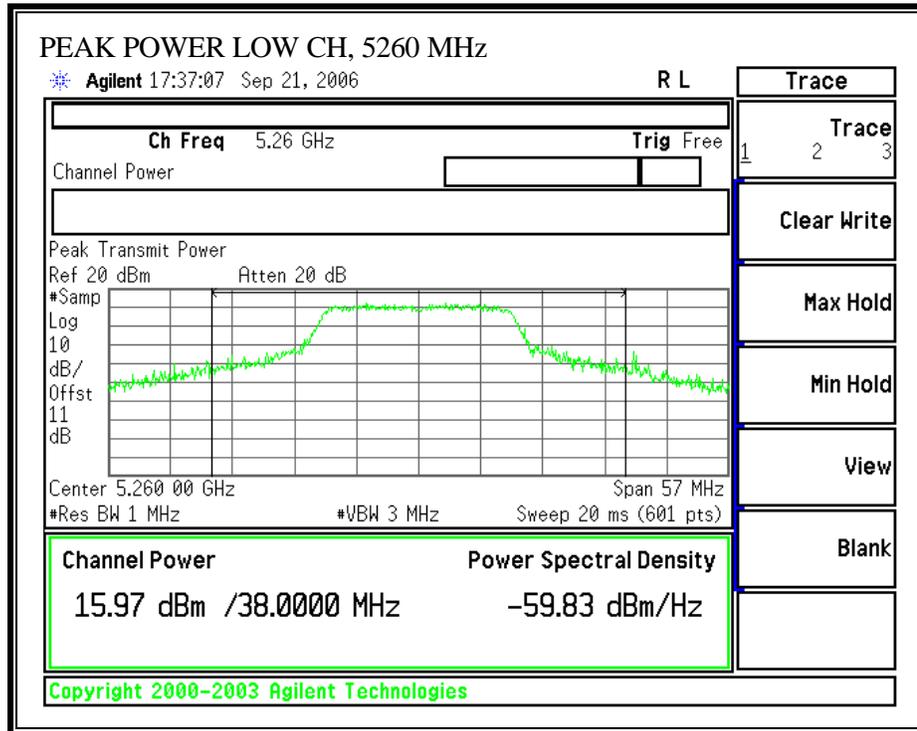


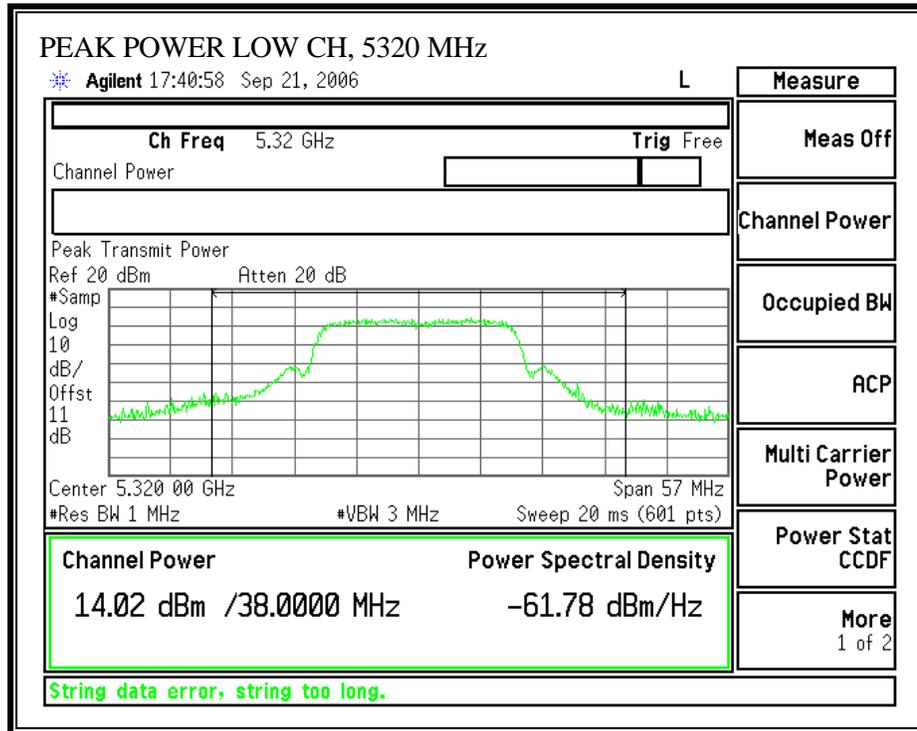


PEAK POWER (802.11 – 20MHz TX BANDWIDTH – CHAIN 1)

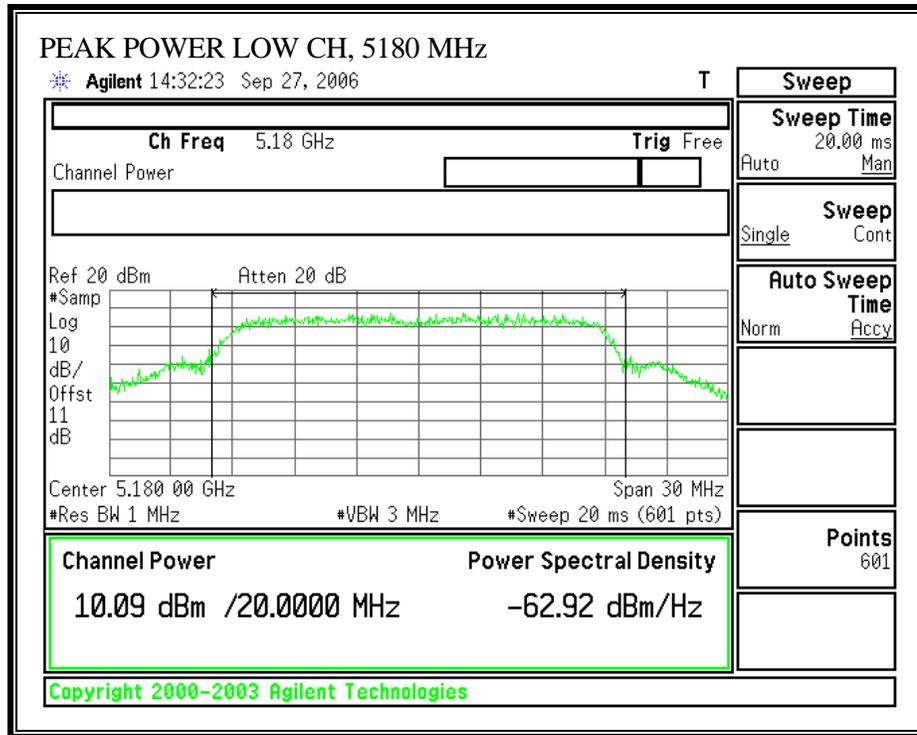


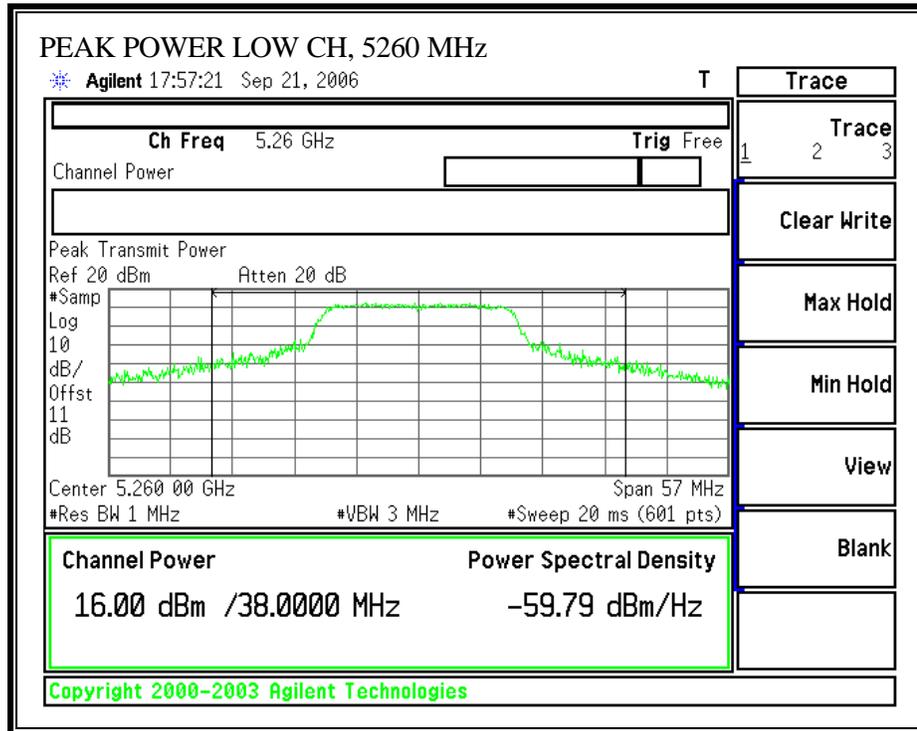


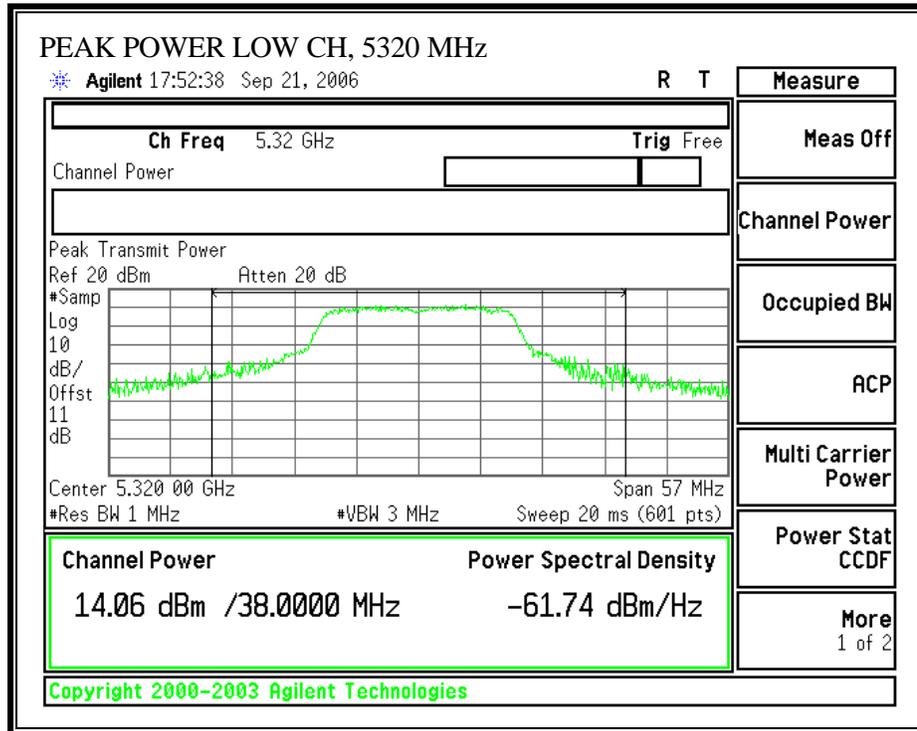


PEAK POWER (802.11 – 40MHz TX BANDWIDTH – CHAIN 0)

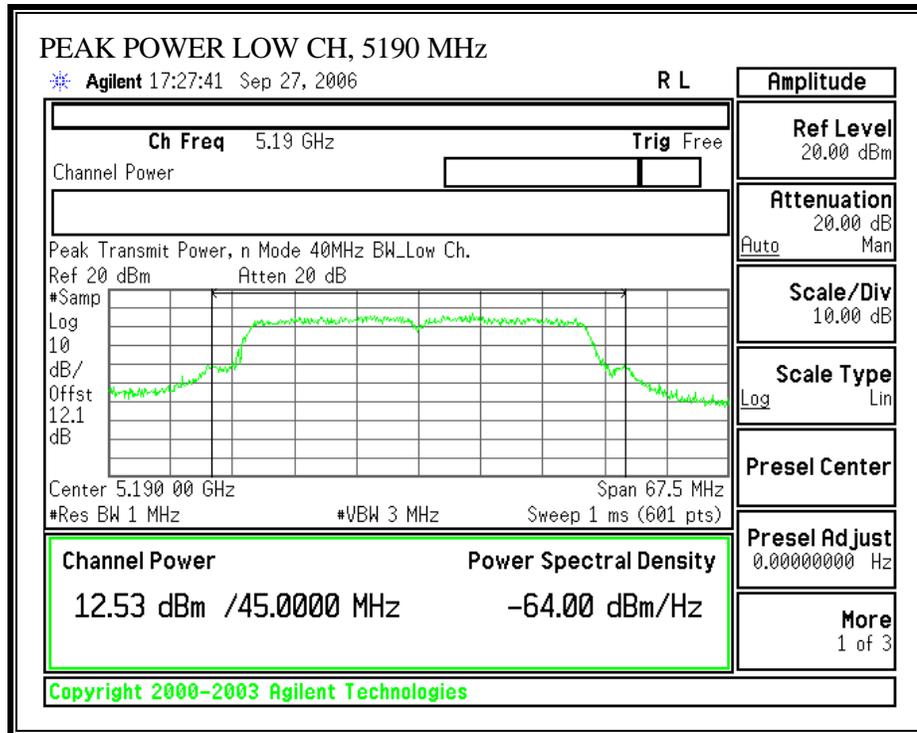


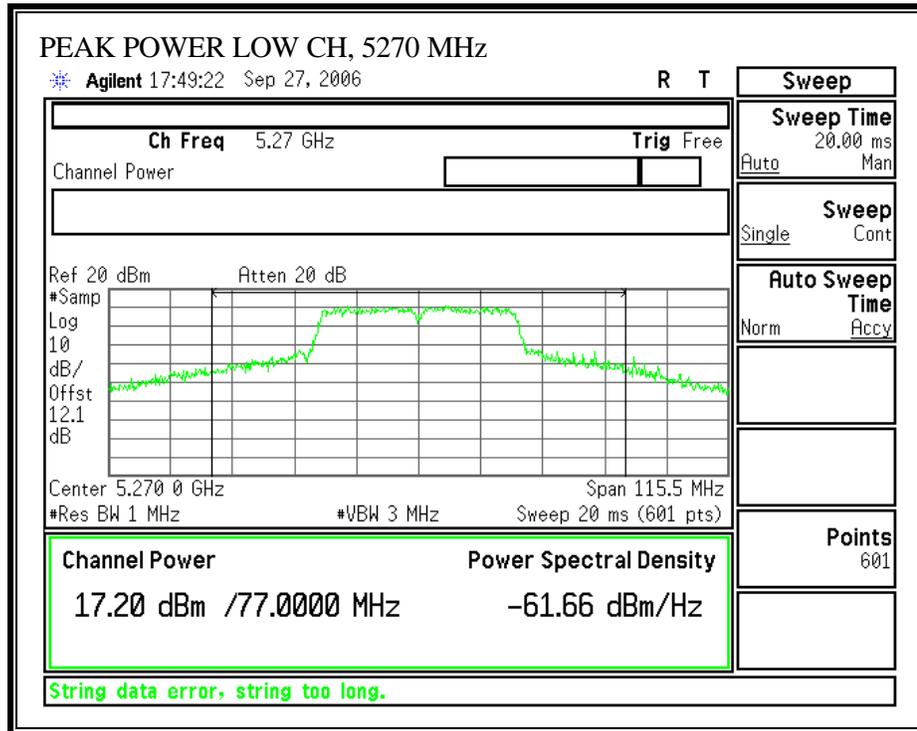


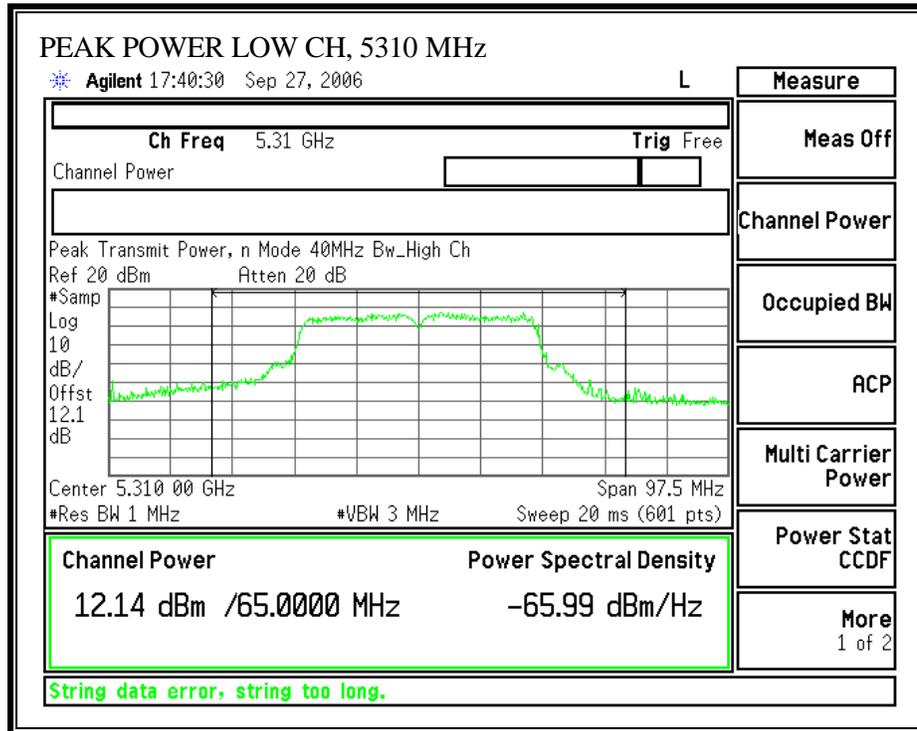

PEAK POWER (802.11 – 40MHz TX BANDWIDTH – CHAIN 1)

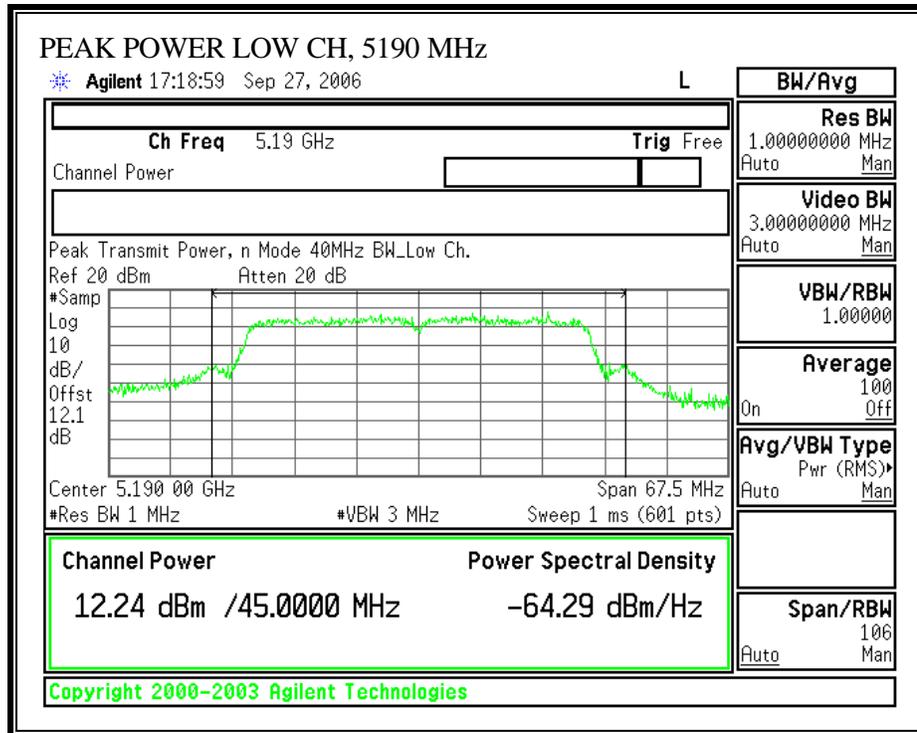

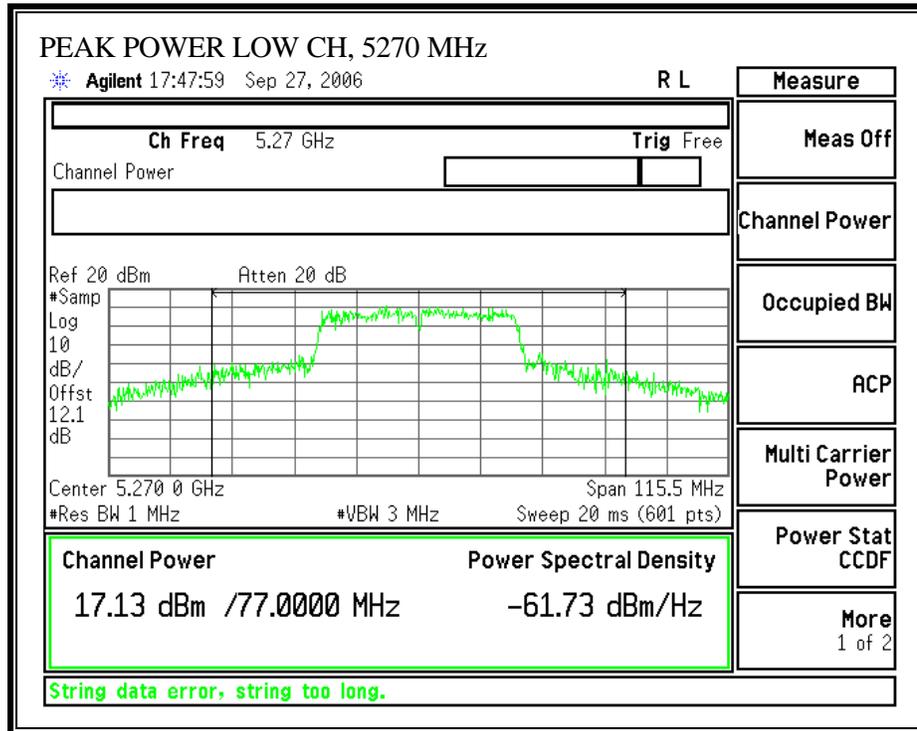

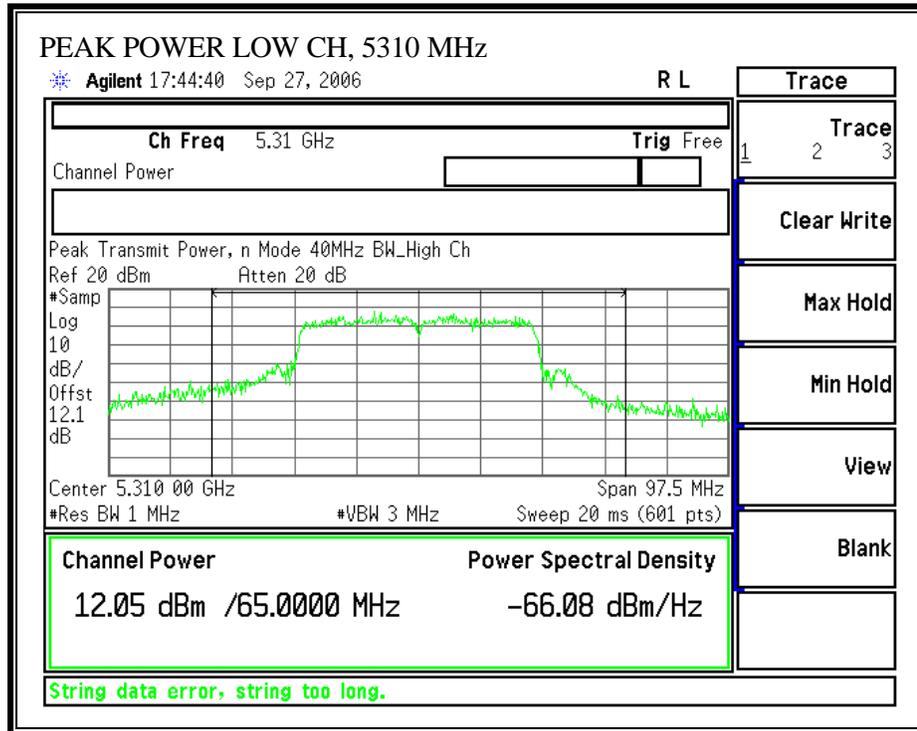

7.1.10. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted

Mode	MPE Distance (cm)	Power Chain 0 (dBm)	Power Chain 1 (dBm)	Total Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm^2)
20 MHz TX BANDWIDTH	20.0	15.97	16.00	19.00	5.60	0.03
40 MHz TX BANDWIDTH	20.0	17.20	17.13	20.18	5.60	0.04

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.11. AVERAGE POWER**AVERAGE POWER LIMIT**

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.9 dB (including 10 dB pad and 1.9 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

20 MHz TX BANDWIDTH

Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	5180	10.22	10.29
Middle	5260	16.19	16.23
High	5320	14.33	14.12

40 MHz TX BANDWIDTH

Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	5190	12.32	12.11
Middle	5270	17.35	17.33
High	5310	12.28	12.27

7.1.12. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain < 6dBi, therefore there is no reduction due to antenna gain.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

Same as previous CCS report # 06U10233-2C.

7.1.13. PEAK EXCURSION

LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Same as previous CCS report # 06U10233-2C.

7.1.14. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULTS


No non-compliance noted:

SPURIOUS EMISSIONS - 802.11a -20 MHz TX BANDWIDTH - CHAIN 0

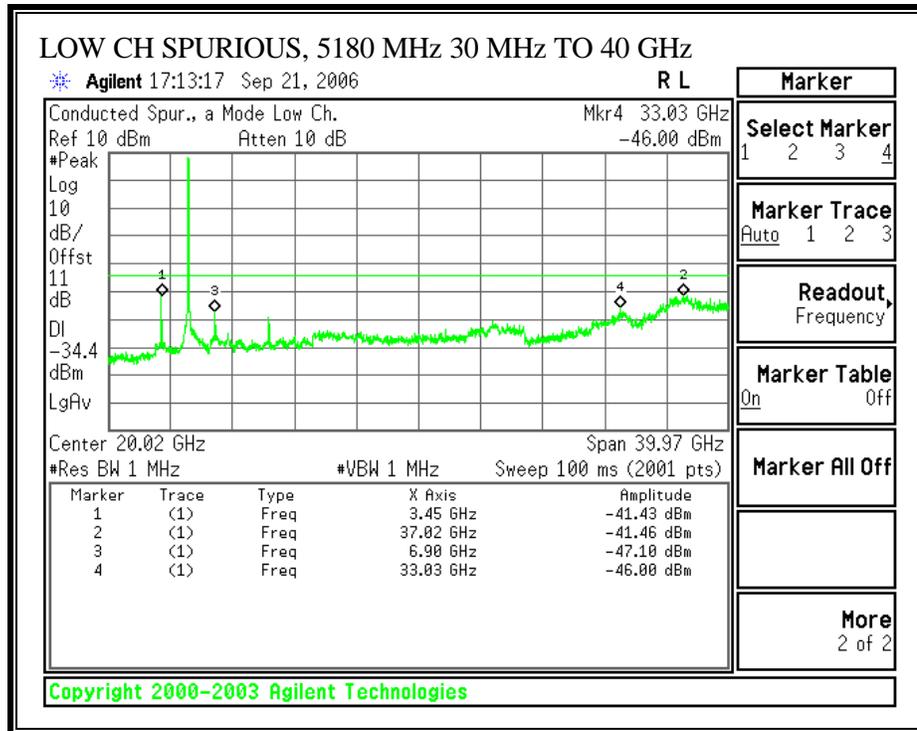


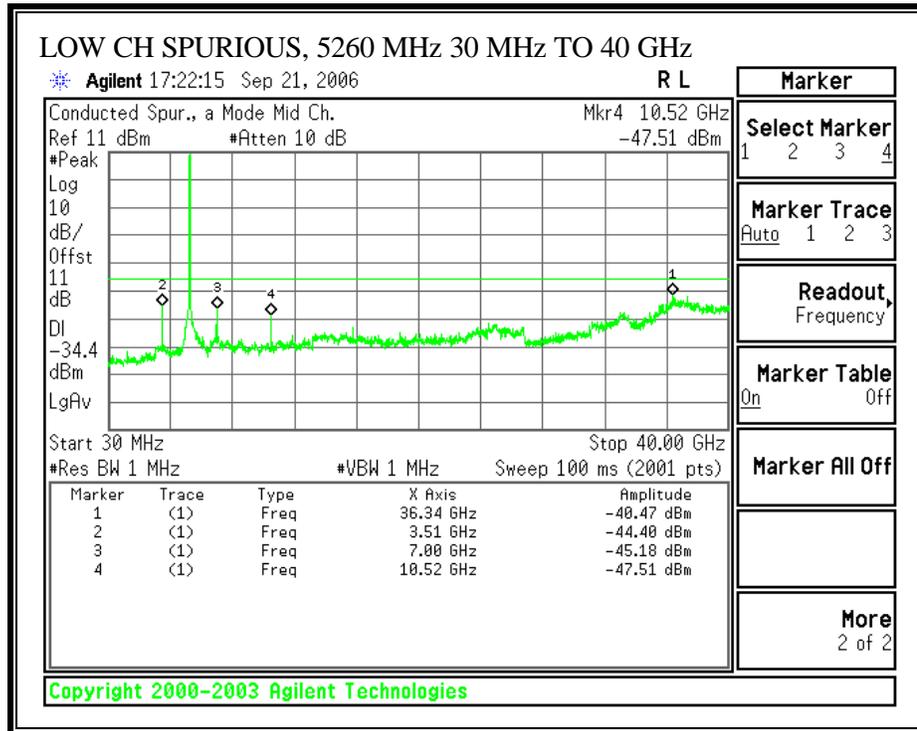


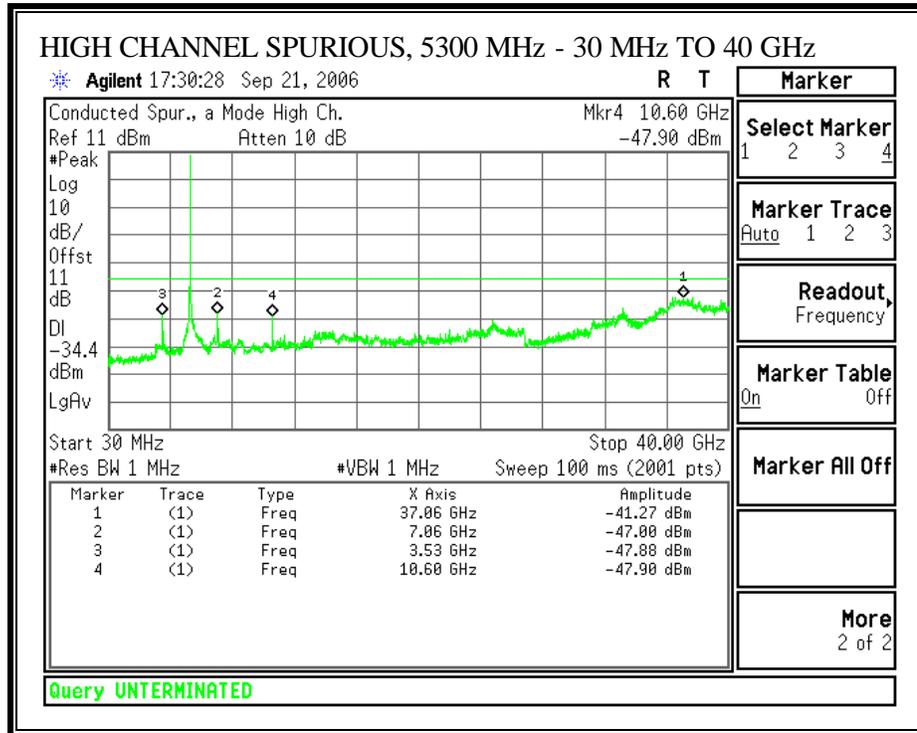


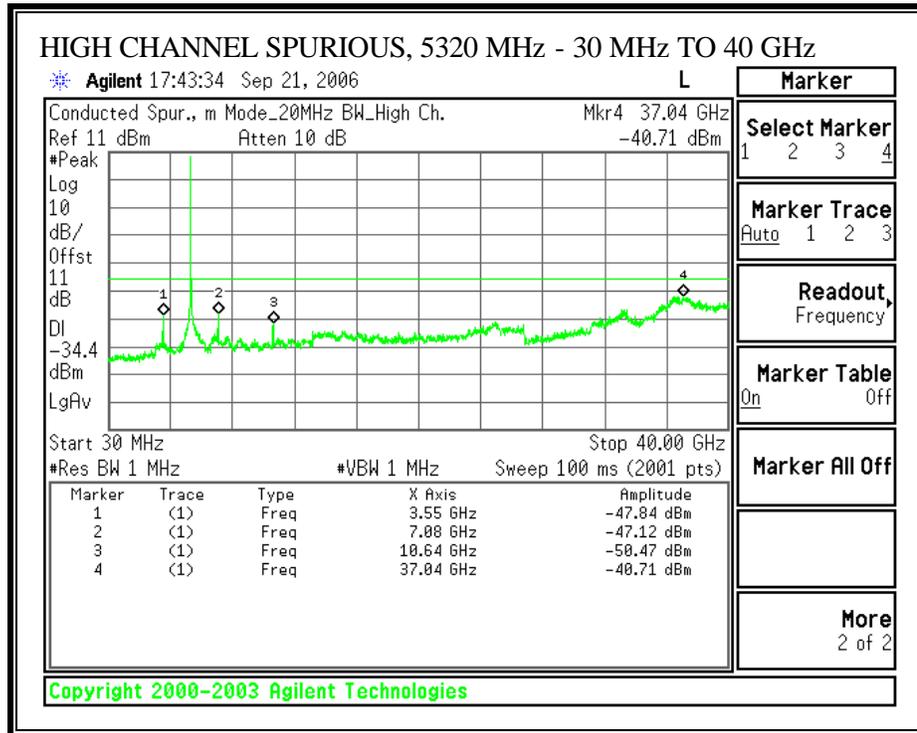

SPURIOUS EMISSIONS - 802.11a -40 MHz TX BANDWIDTH - CHAIN 0

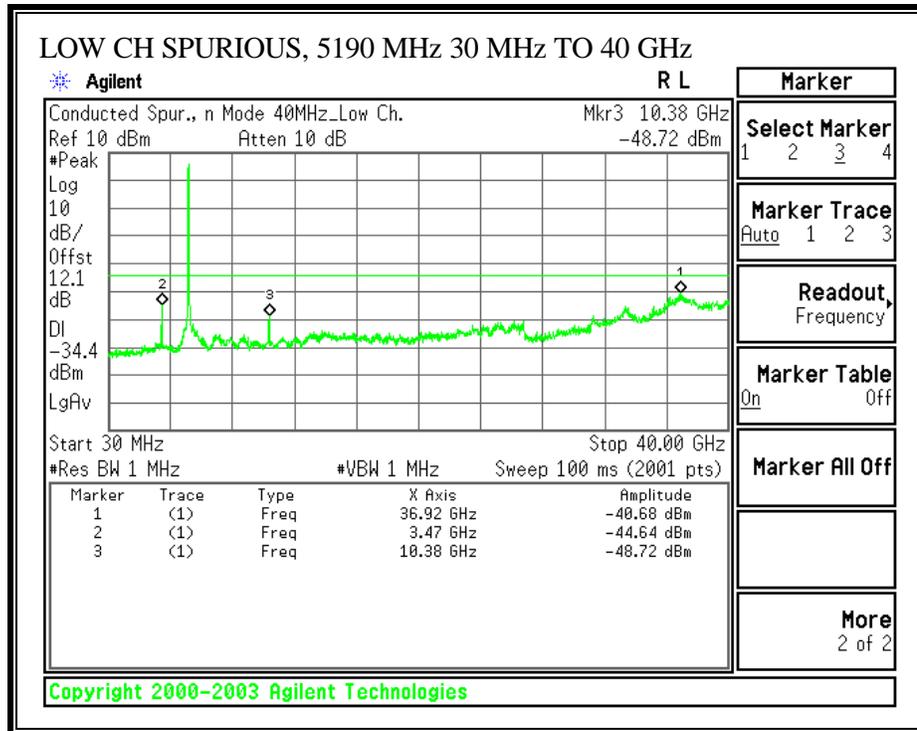

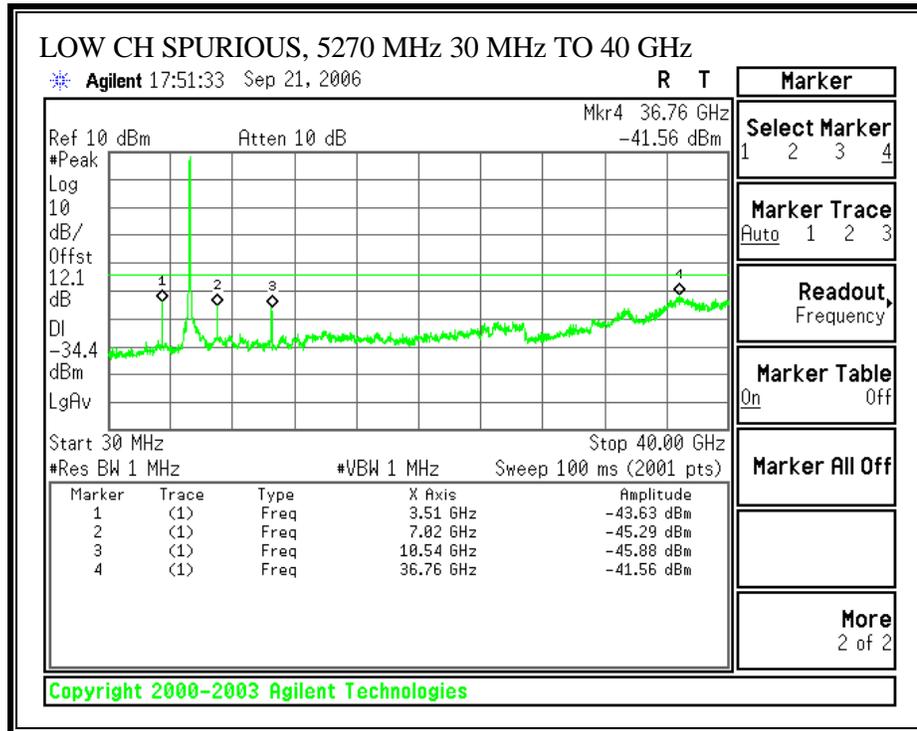

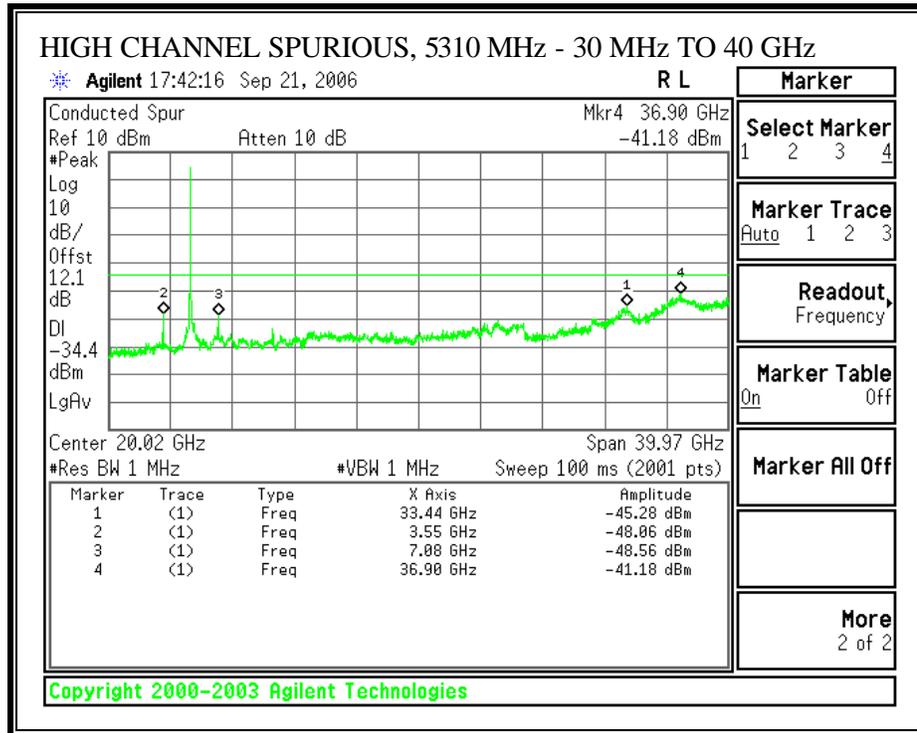

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

LEGACY MODE


7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, 5180 MHz - HORIZONTAL)

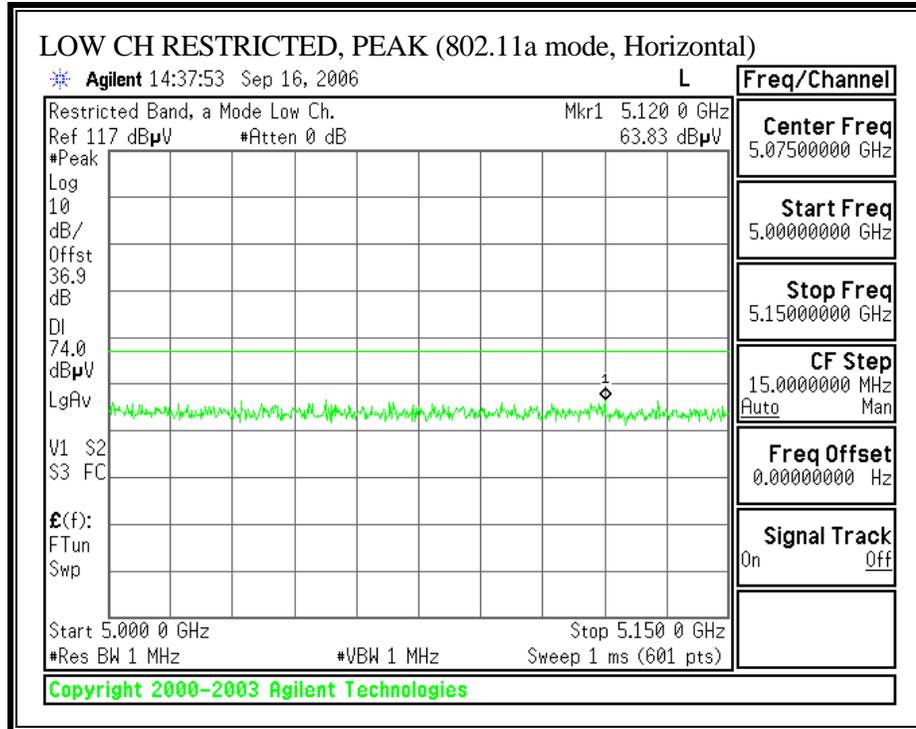

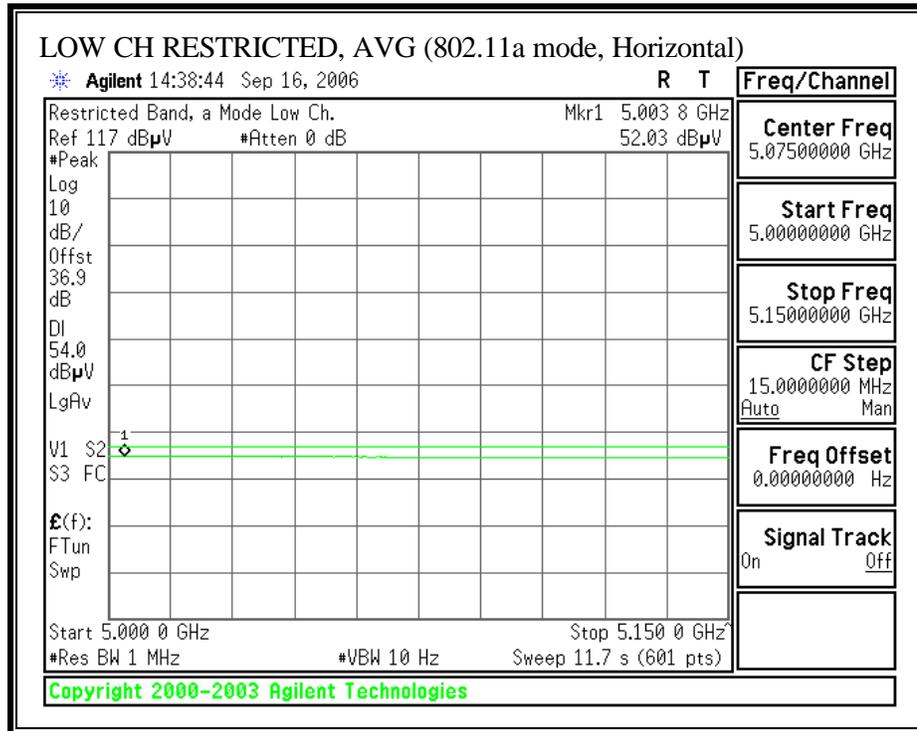



RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, 5180 MHz - VERTICAL)

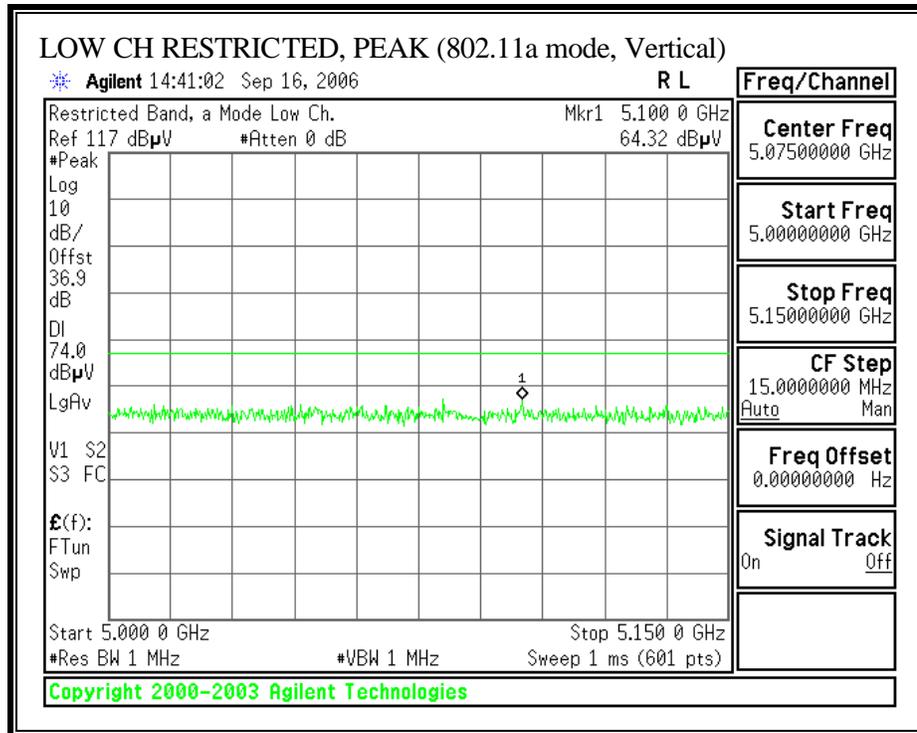

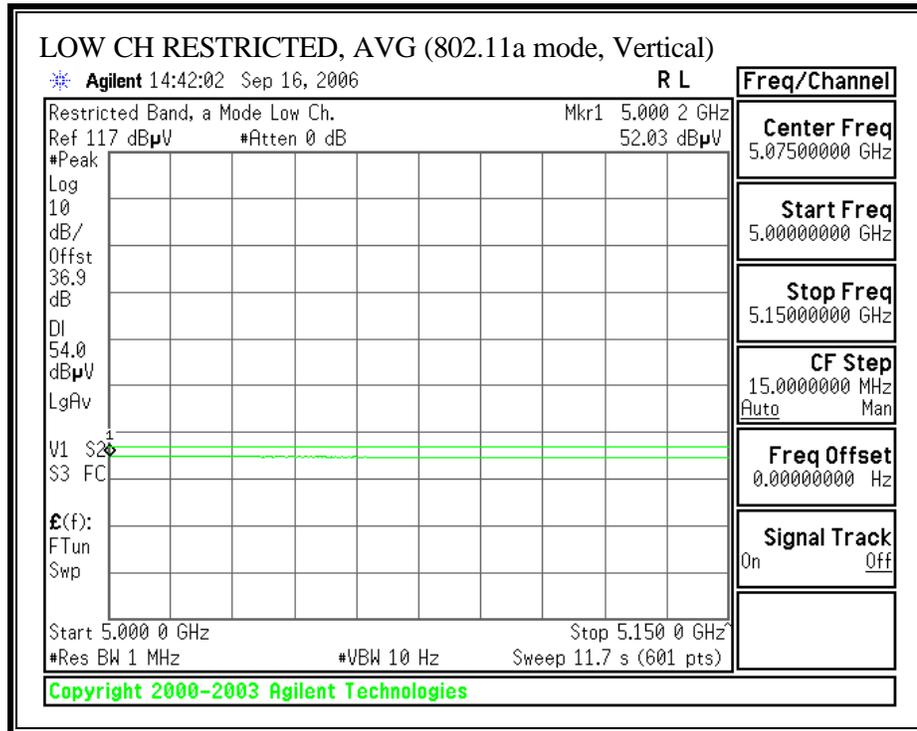



RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, 5320 MHz - HORIZONTAL)

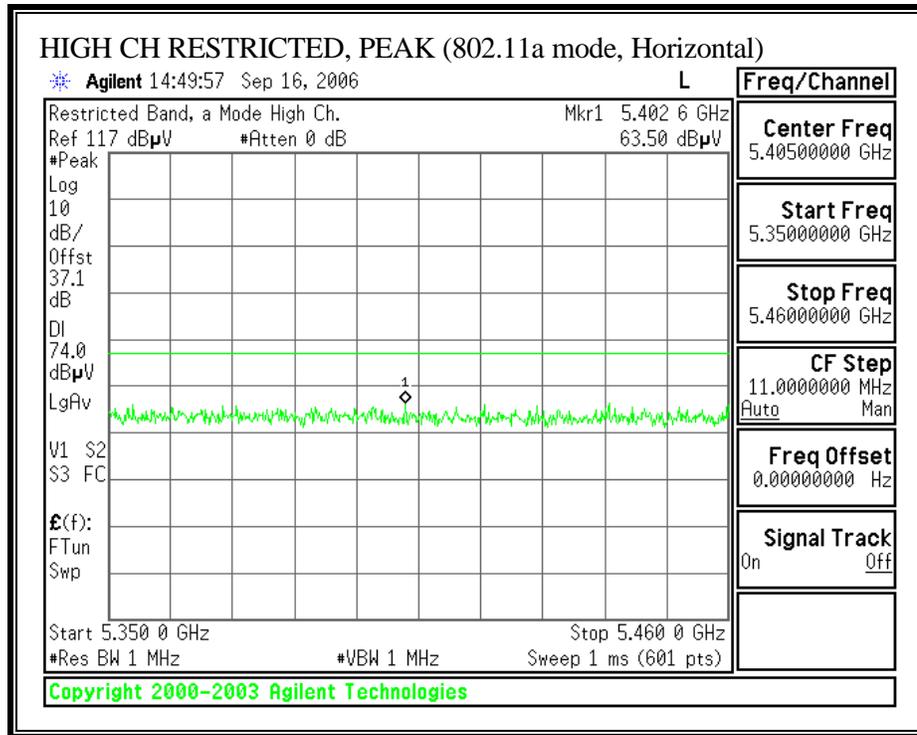

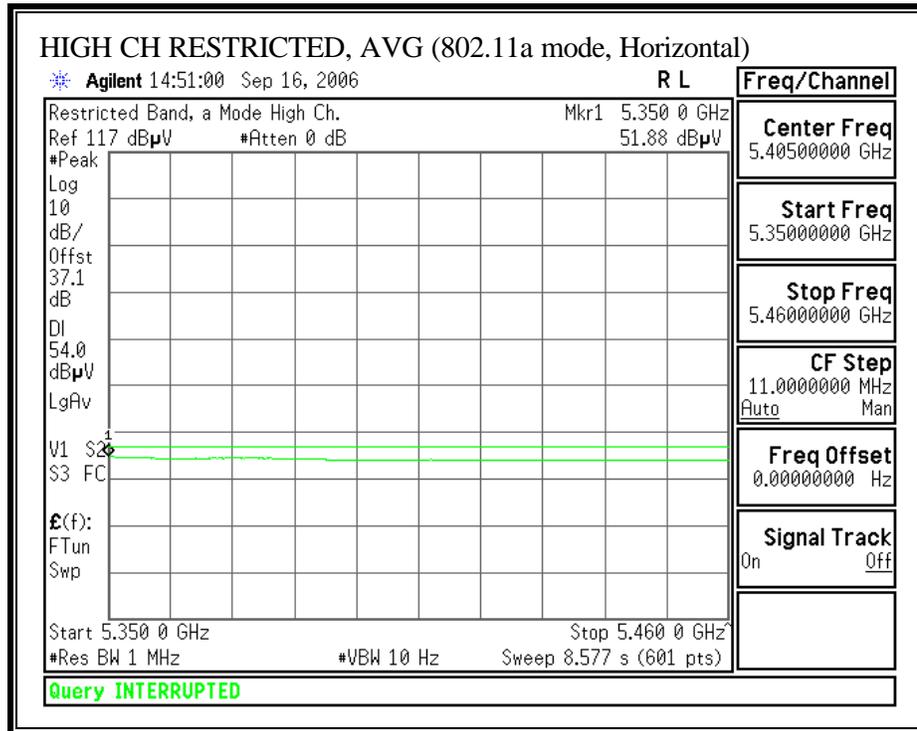

RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, 5320 MHz - VERTICAL)

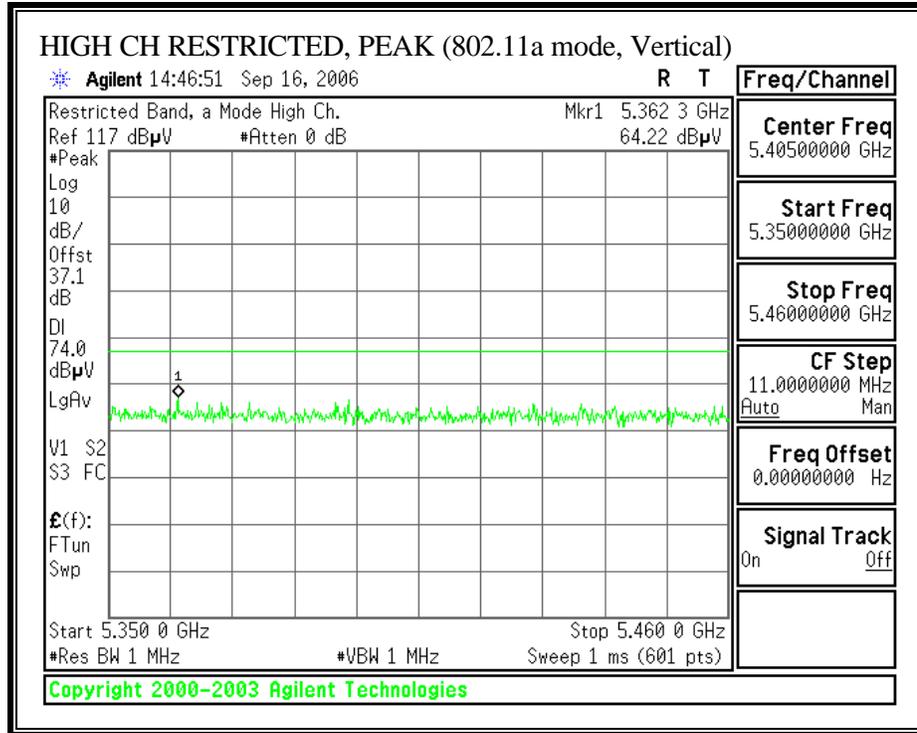

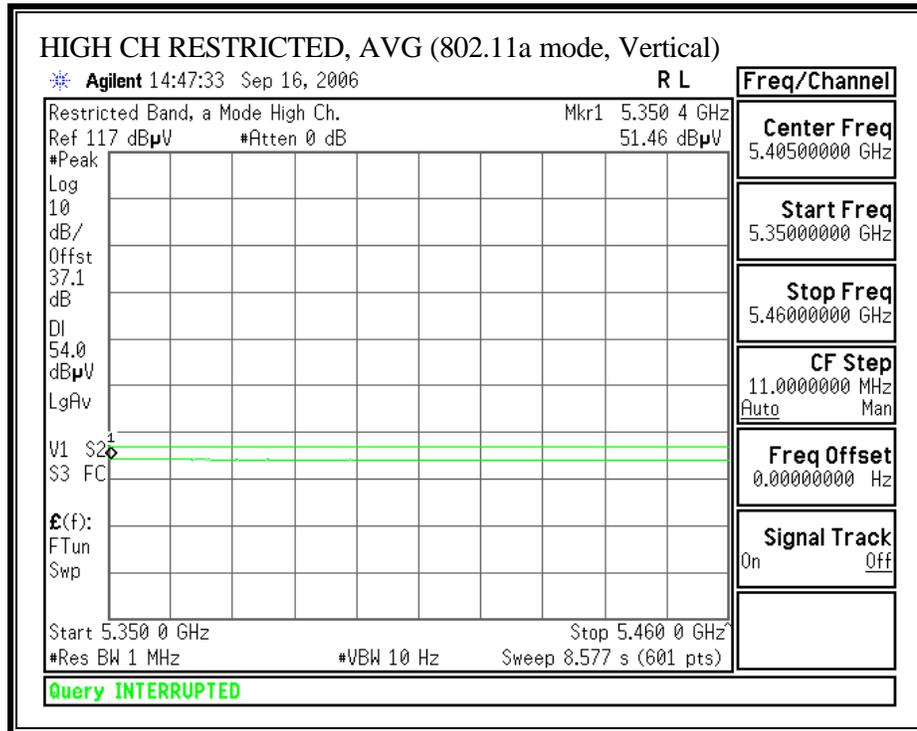

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Broadcom
Project #: 06U10579
Date: 09/18/06
Test Engineer: Vien Tran
Configuration: EUT & Antenna
Mode: Tx 11a 5.2 GHz Band_Legacy

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	
	Vien 187215002	Vien 197209005	HPF_7.6GHz		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
CH 36, 5180 MHz															
10.360	3.0	46.3	34.1	37.0	4.7	-32.6	0.0	0.8	56.2	44.0	74	54	-17.8	-10.0	H
15.540	3.0	44.2	33.0	38.1	5.8	-32.2	0.0	0.7	56.6	45.4	74	54	-17.4	-8.6	H
10.360	3.0	45.1	33.2	37.0	4.7	-32.6	0.0	0.8	55.0	43.1	74	54	-19.0	-10.9	V
15.540	3.0	43.6	32.7	38.1	5.8	-32.2	0.0	0.7	56.0	45.1	74	54	-18.0	-8.9	V
CH 52, 5260 MHz															
10.520	3.0	45.2	33.3	37.1	4.7	-32.6	0.0	0.8	55.2	43.3	74	54	-18.8	-10.7	H
15.780	3.0	43.3	32.5	37.5	5.8	-32.2	0.0	0.7	55.2	44.4	74	54	-18.8	-9.6	H
10.520	3.0	44.1	32.9	37.1	4.7	-32.6	0.0	0.8	54.1	42.9	74	54	-19.9	-11.1	V
15.780	3.0	43.0	32.2	37.5	5.8	-32.2	0.0	0.7	54.9	44.1	74	54	-19.1	-9.9	V
CH 64, 5320 MHz															
10.640	3.0	44.9	33.5	37.1	4.8	-32.6	0.0	0.8	54.9	43.5	74	54	-19.1	-10.5	H
15.960	3.0	43.5	33.0	37.1	5.9	-32.1	0.0	0.7	55.0	44.5	74	54	-19.0	-9.5	H
10.640	3.0	44.1	32.8	37.1	4.8	-32.6	0.0	0.8	54.1	42.8	74	54	-19.9	-11.2	V
15.960	3.0	43.1	32.6	37.1	5.9	-32.1	0.0	0.7	54.6	44.1	74	54	-19.4	-9.9	V
No other emissions were detected above system noise floor															


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


MIMO MODE

7.2.3. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


20 MHz TX BANDWIDTH


RESTRICTED BANDEGE (LOW CHANNEL, 5180 MHz - HORIZONTAL)

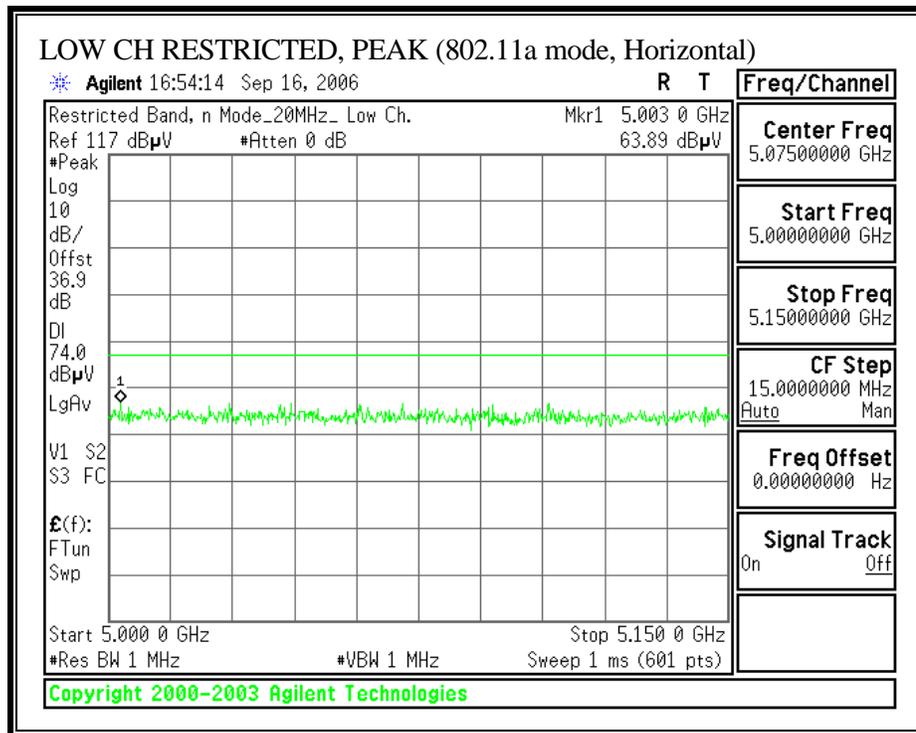

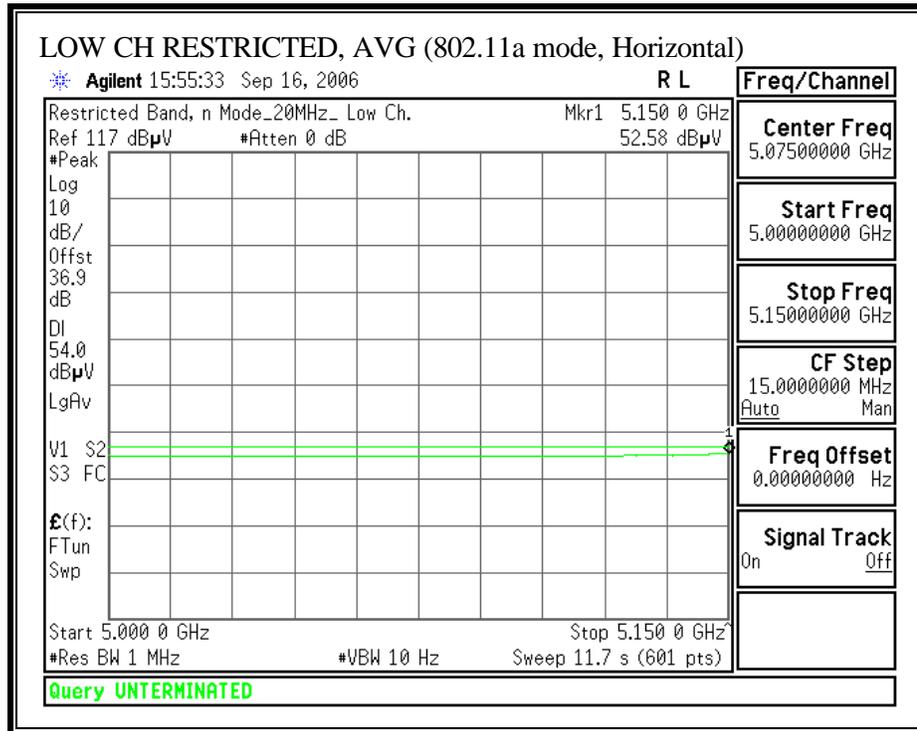



RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, 5180 MHz - VERTICAL)

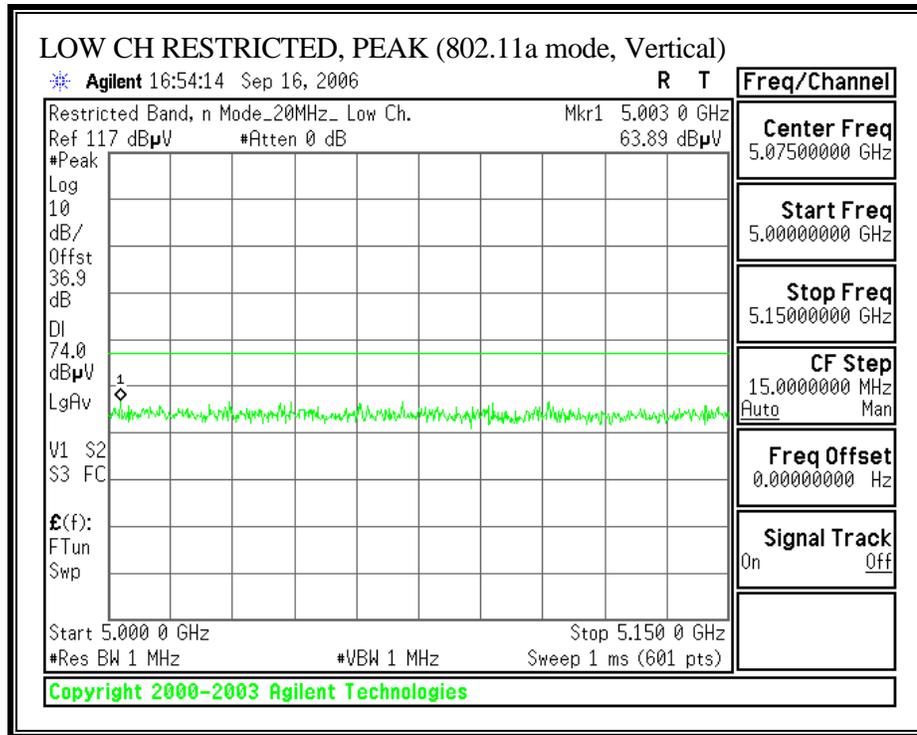

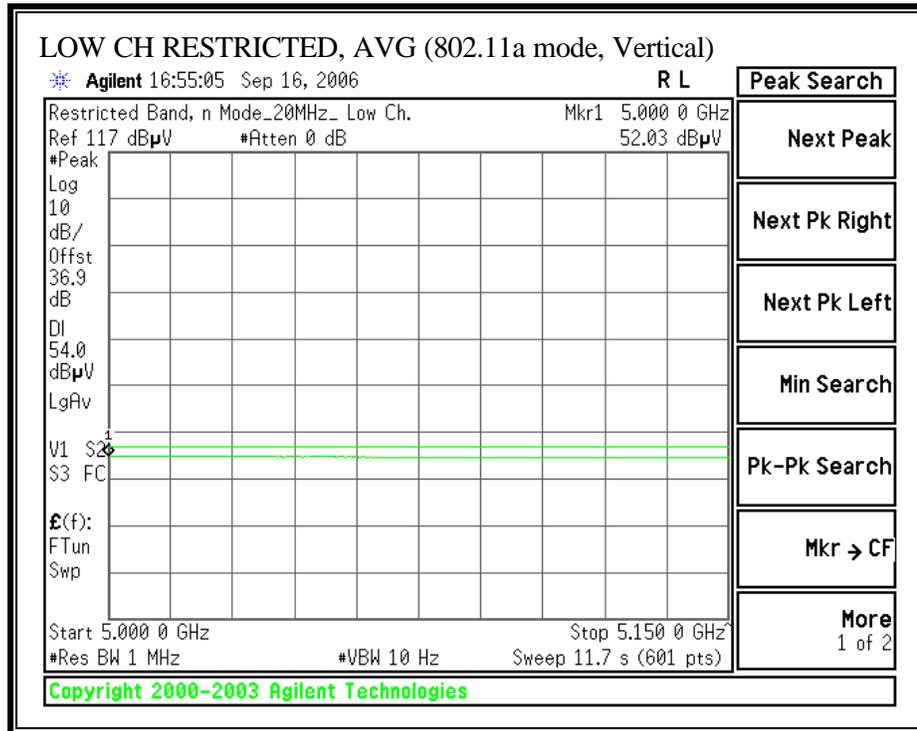



RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, 5320 MHz - HORIZONTAL)

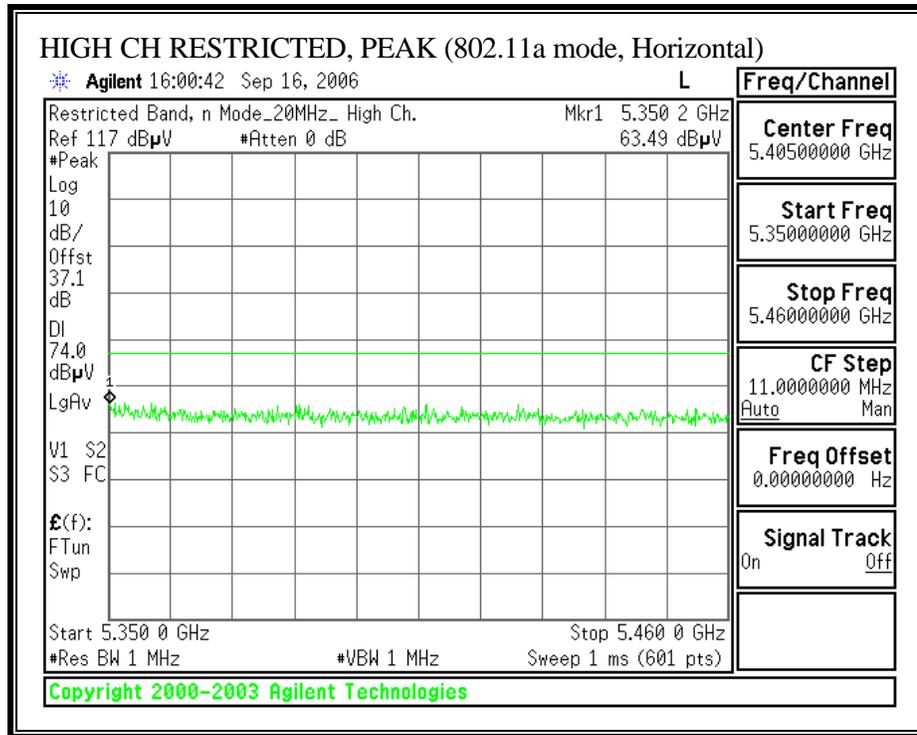

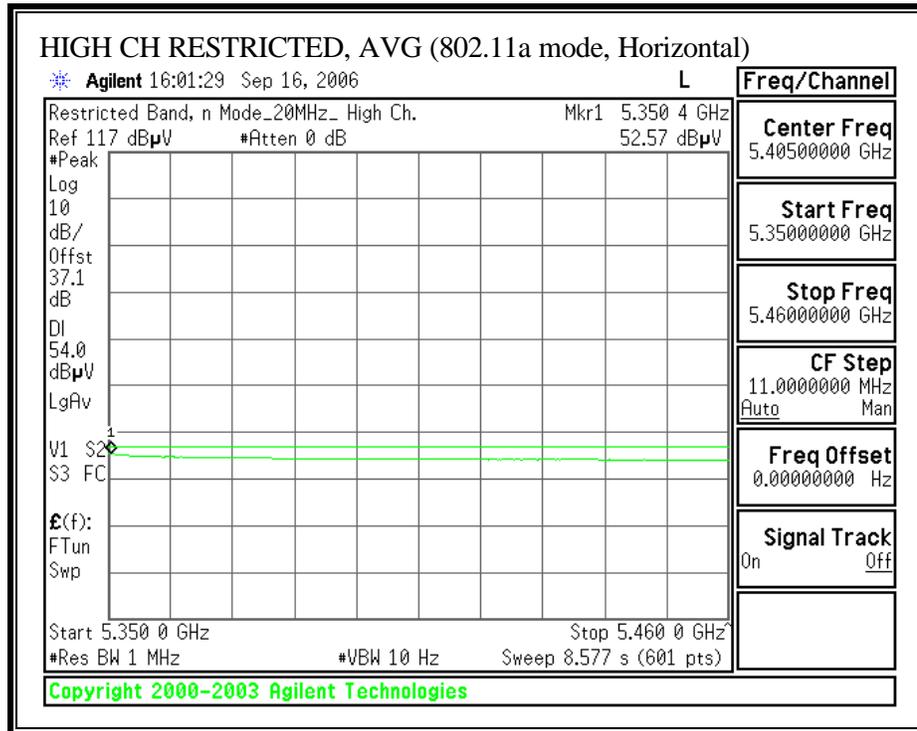

RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, 5320 MHz - VERTICAL)

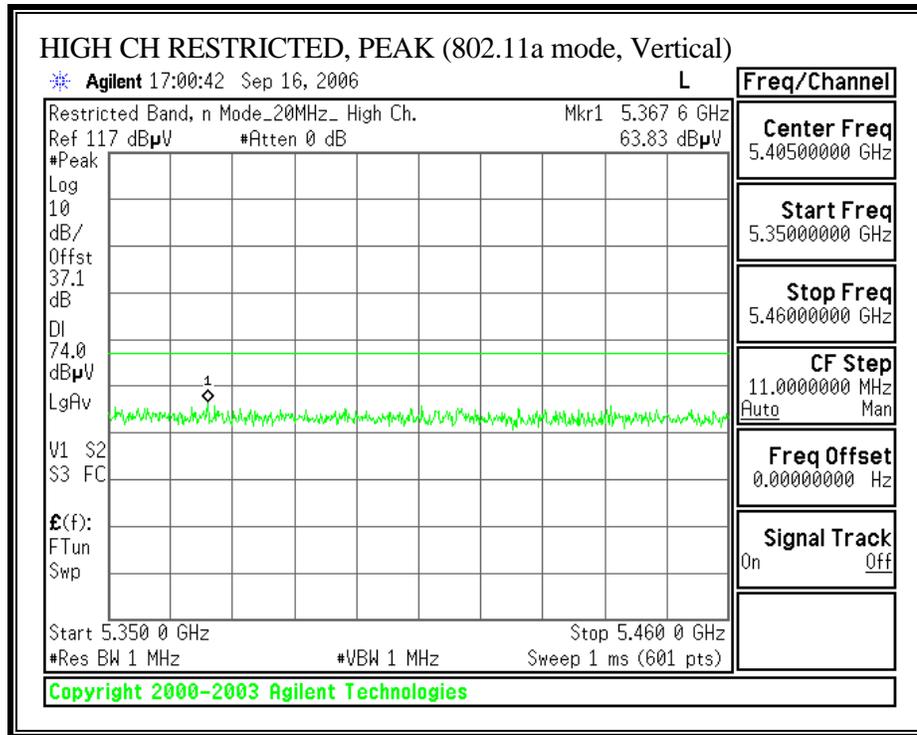

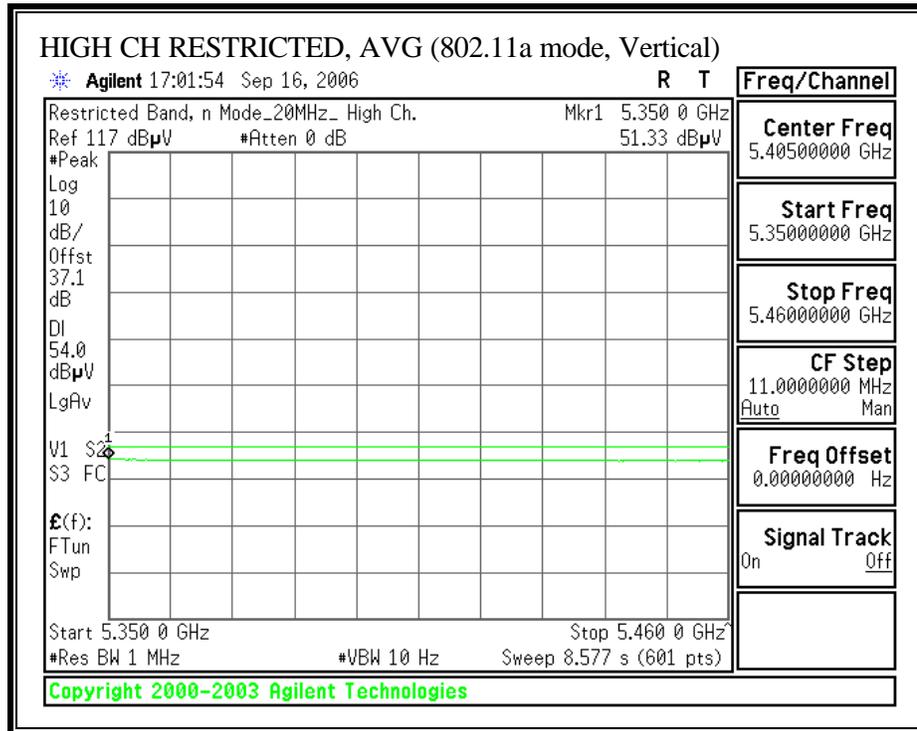

HARMONICS AND SPURIOUS EMISSIONS (802.11a – 20 MHz TX BANDWIDTH)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Broadcom
Project #: 06U10579
Date: 09/18/06
Test Engineer: Vien Tran
Configuration: EUT & Antenna
Mode: Tx_5.2GHz Band_ 11n 20 MHz Bandwidth

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T34 HP 8449B			FCC 15.205

Hi Frequency Cables


2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
	Vien 187215002	Vien 197209005	HPF_7.6GHz		


f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fltr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)
CH 36, 5180 MHz															
15.540	3.0	45.9	33.3	38.1	5.8	-32.2	0.0	0.7	58.3	45.7	74	54	-15.7	-8.3	H
15.540	3.0	44.6	32.6	38.1	5.8	-32.2	0.0	0.7	57.0	45.0	74	54	-17.0	-9.0	V
CH 52, 5260 MHz															
15.780	3.0	44.6	33.6	37.5	5.8	-32.2	0.0	0.7	56.5	45.5	74	54	-17.5	-8.5	H
15.780	3.0	43.7	32.5	37.5	5.8	-32.2	0.0	0.7	55.6	44.4	74	54	-18.4	-9.6	V
CH 64, 5320 MHz															
10.640	3.0	50.5	38.2	37.1	4.8	-32.6	0.0	0.8	60.5	48.2	74	54	-13.5	-5.8	H
15.960	3.0	45.7	34.1	37.1	5.9	-32.1	0.0	0.7	57.2	45.6	74	54	-16.8	-8.4	H
10.640	3.0	48.1	37.1	37.1	4.8	-32.6	0.0	0.8	58.1	47.1	74	54	-15.9	-6.9	V
15.960	3.0	46.2	33.5	37.1	5.9	-32.1	0.0	0.7	57.7	45.0	74	54	-16.3	-9.0	V
No other emissions were detected above system noise floor															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


40 MHz TX BANDWIDTH


RESTRICTED BANDEDGE (LOW CHANNEL, 5190 MHz - HORIZONTAL)

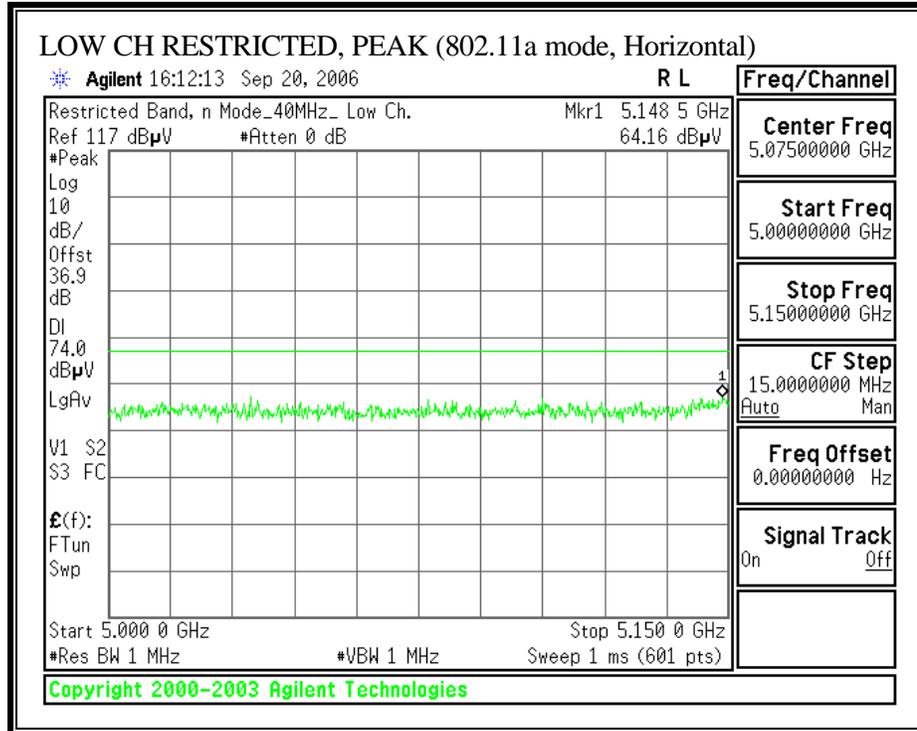

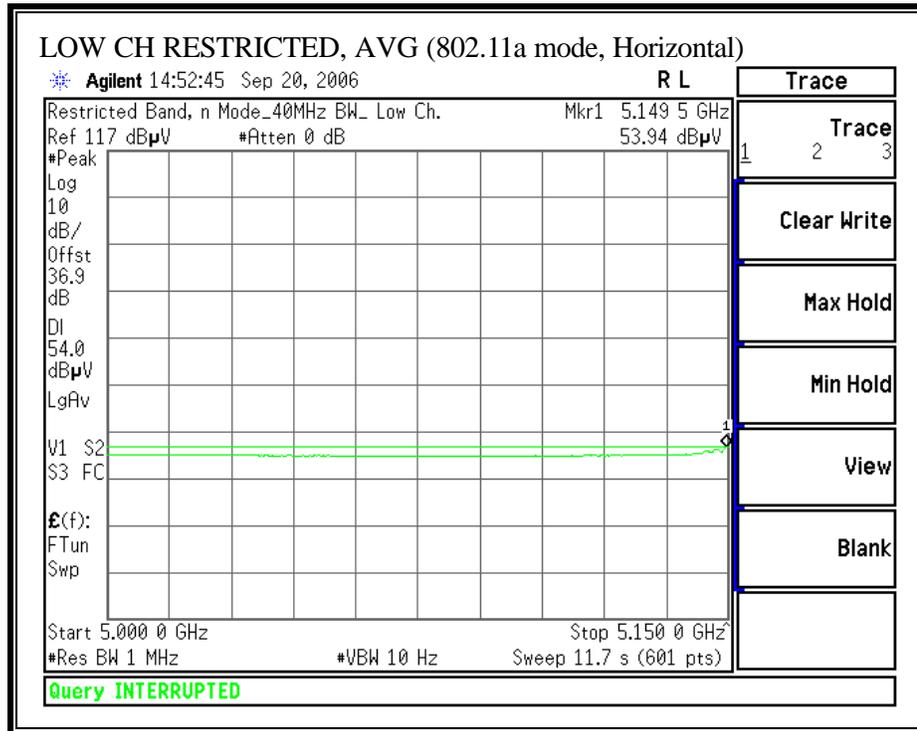



RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, 5190 MHz - VERTICAL)

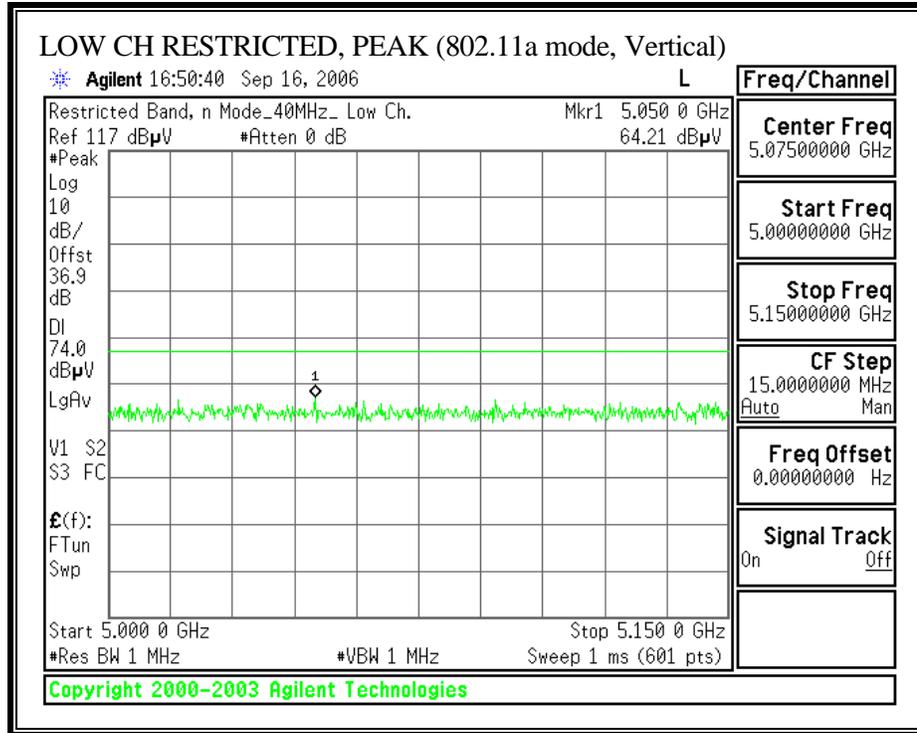


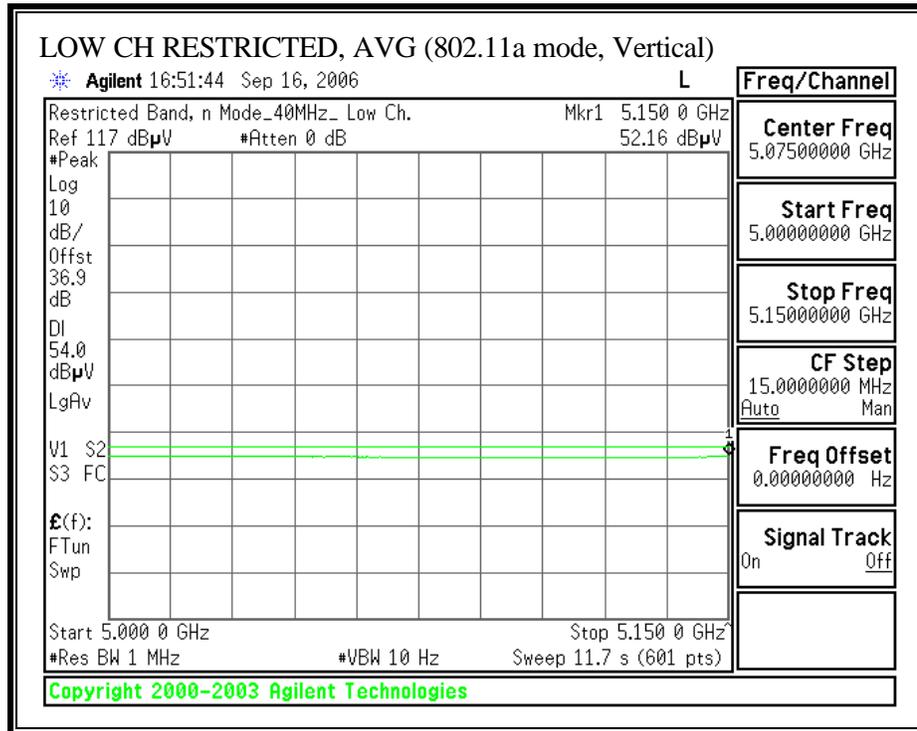

RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, 5310 MHz - HORIZONTAL)

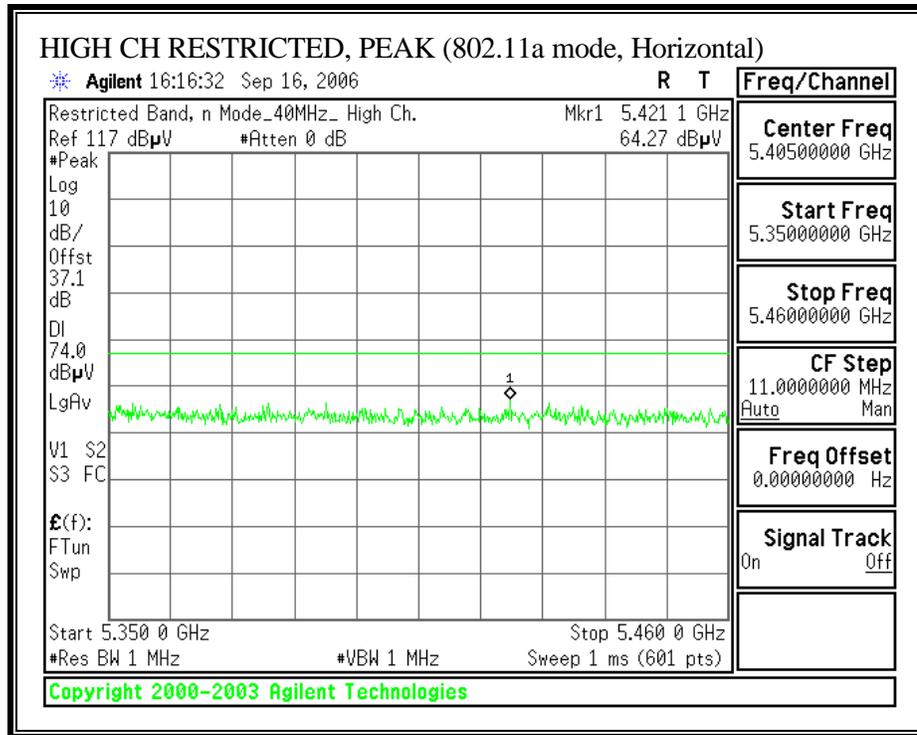

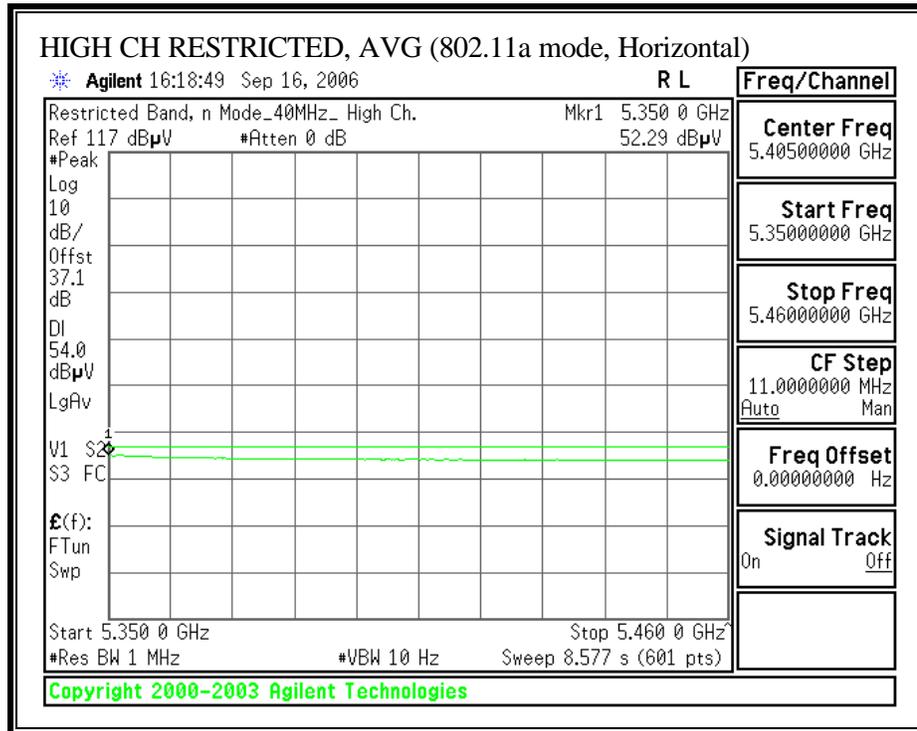

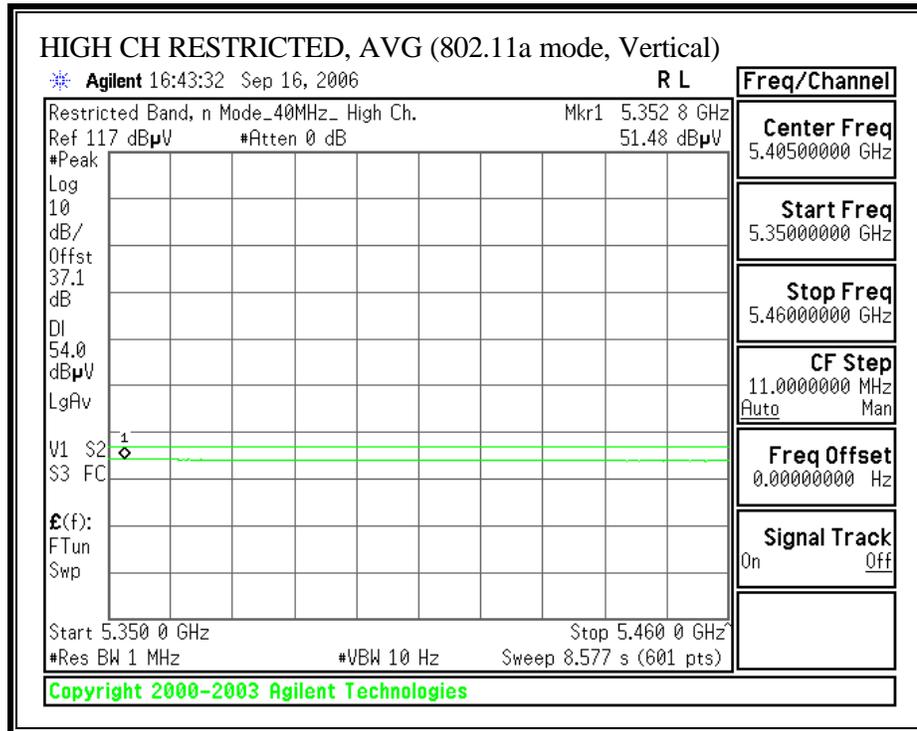

HARMONICS AND SPURIOUS EMISSIONS (802.11a – 40 MHz TX BANDWIDTH)

High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Company: Broadcom
 Project #: 06U10579
 Date: 09/18/06
 Test Engineer: Vien Tran
 Configuration: EUT & Antenna
 Mode: Tx 11a 5.8 GHz Band_11n 40 MHz Bandwidth

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T34 HP 8449B			FCC 15.205

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	
	Vien 187215002	Vien 197209005	HPF_7.6GHz		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
CH 151,5755 MHz															
11.510	3.0	50.0	39.6	37.5	4.8	-32.5	0.0	0.7	60.4	50.0	74	54	-13.6	-4.0	H
11.510	3.0	47.9	35.8	37.5	4.8	-32.5	0.0	0.7	58.3	46.2	74	54	-15.7	-7.8	V
CH 159,5795 MHz															
11.650	3.0	49.4	39.2	37.5	4.8	-32.5	0.0	0.7	59.9	49.7	74	54	-14.1	-4.3	H
11.650	3.0	46.6	35.6	37.5	4.8	-32.5	0.0	0.7	57.1	46.1	74	54	-16.9	-7.9	V
No other emissions were detected above system noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

5 GHz BAND

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL							
				561F Monterey Road Morgan Hill, CA 95037 Tel: (408) 463-0888 Fax: (408) 463-0885			
<hr/> Data#: 10 File#: 06u10579.EMI Date: 09-29-2006 Time: 14:27:42 Audix ATC							
Condition: FCC CLASS-B HORIZONTAL Test Operator:: Vien Tran Company: : Broadcom Project #: : 06U10579 Configuration:: EUT, Laptop, Antenna Mode of Oper.: Tx on_5 GHz Band Target: : FCC Class B EUT S/N: : 944 Notes: :							
							Page: 1
	Freq	Read			Limit	Over	
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	101.780	30.86	11.77	42.63	43.50	-0.87	Peak
2	164.830	28.66	13.61	42.27	43.50	-1.23	Peak
3	213.330	26.09	12.71	38.80	43.50	-4.70	Peak
4	286.080	22.63	15.16	37.79	46.00	-8.21	Peak
5	434.490	21.27	18.84	40.11	46.00	-5.89	Peak
6	567.380	20.71	21.12	41.83	46.00	-4.17	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL				561F Monterey Road Morgan Hill, CA 95037 Tel: (408) 463-0888 Fax: (408) 463-0885			
Data#:	12	File#:	06u10579.EMI	Date:	09-29-2006	Time:	14:41:21
Audix ATC							
Condition: FCC CLASS-B VERTICAL							
Test Operator:: Vien Tran							
Company: : Broadcom							
Project #: : 06U10579							
Configuration:: EUT, Laptop, Antenna							
Mode of Oper.: : Tx on_5 GHz Band							
Target: : FCC Class B							
EUT S/N: : 944							
Notes: :							
							Page: 1
	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	101.780	28.68	11.77	40.45	43.50	-3.05	Peak
2	164.830	25.61	13.61	39.22	43.50	-4.28	Peak
3	201.690	22.74	14.32	37.06	43.50	-6.44	Peak
4	242.430	20.89	13.63	34.52	46.00	-11.48	Peak
5	397.630	19.15	17.99	37.14	46.00	-8.86	Peak
6	473.290	22.32	19.71	42.03	46.00	-3.97	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


No non-compliance noted:

5 GHz Band


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	FCC B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.17	55.96	--	41.40	0.00	65.21	55.21	-9.25	-13.81	L1
0.22	48.16	--	30.96	0.00	62.82	52.82	-14.66	-21.86	L1
0.34	38.90	--	27.89	0.00	59.20	49.20	-20.30	-21.31	L1
0.17	53.80	--	39.86	0.00	65.21	55.21	-11.41	-15.35	L2
0.22	45.50	--	30.20	0.00	62.82	52.82	-17.32	-22.62	L2
0.34	38.28	--	36.32	0.00	59.20	49.20	-20.92	-12.88	L2
6 Worst Data									

LINE 2 RESULTS

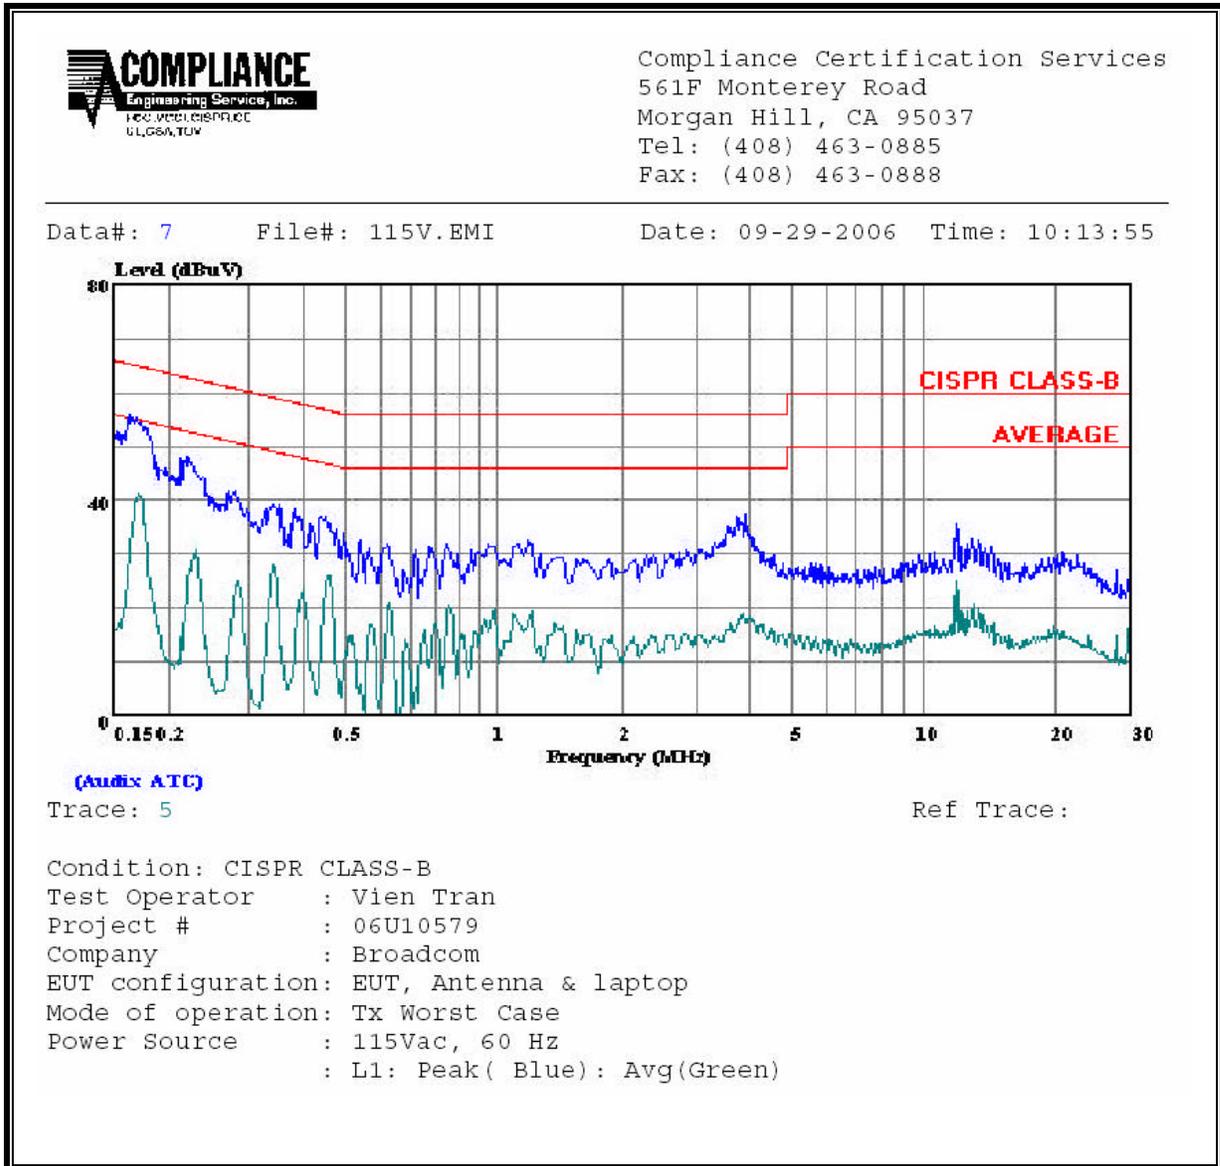


LINE 2 RESULTS

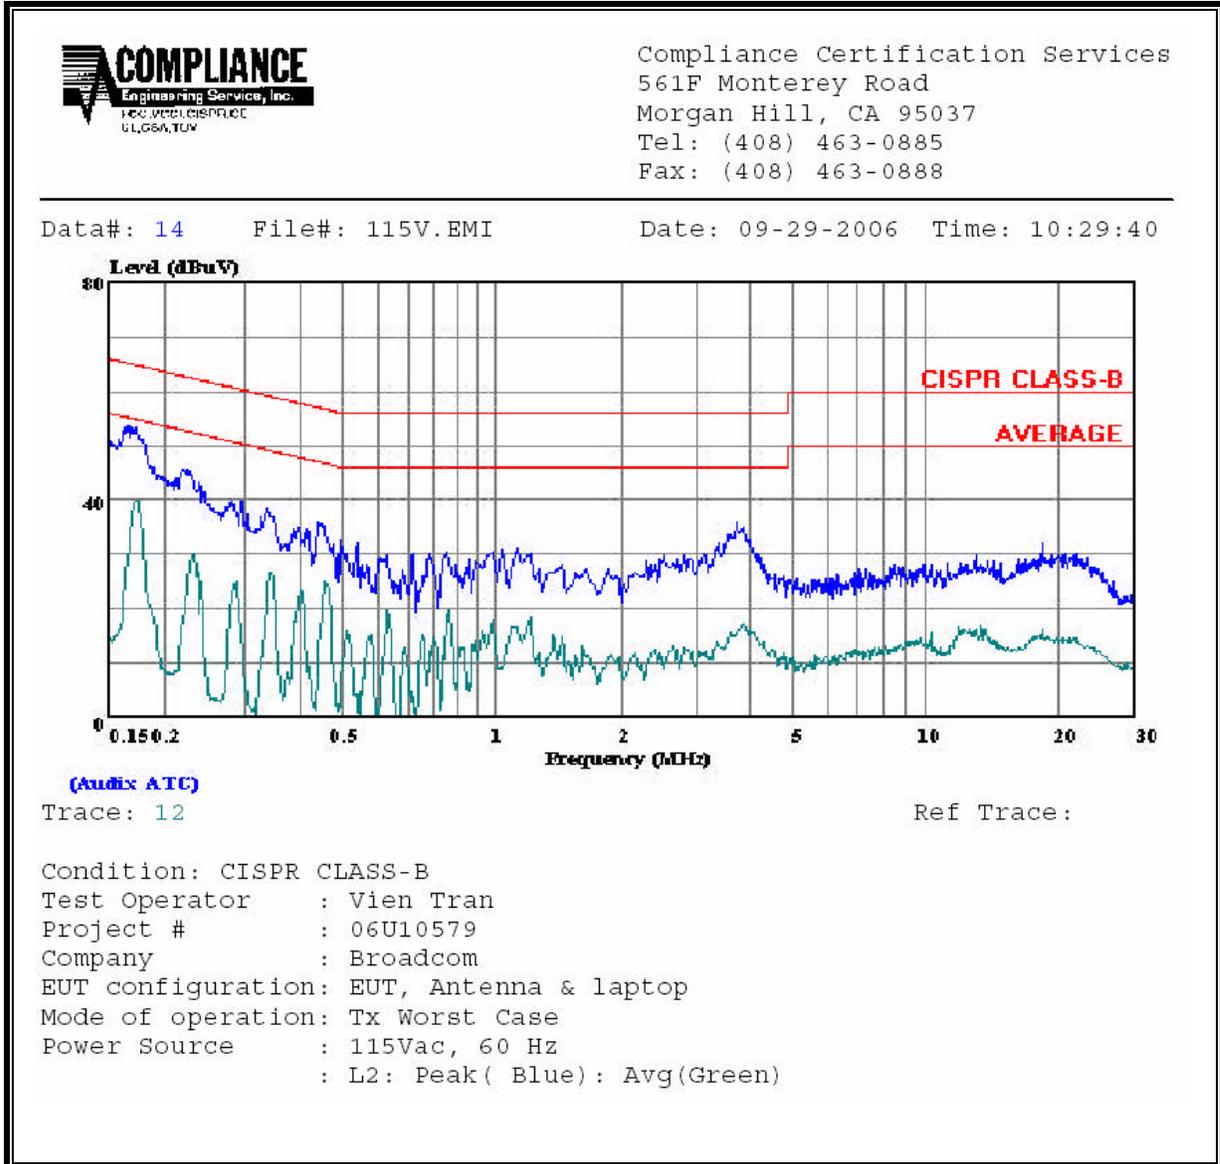


8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

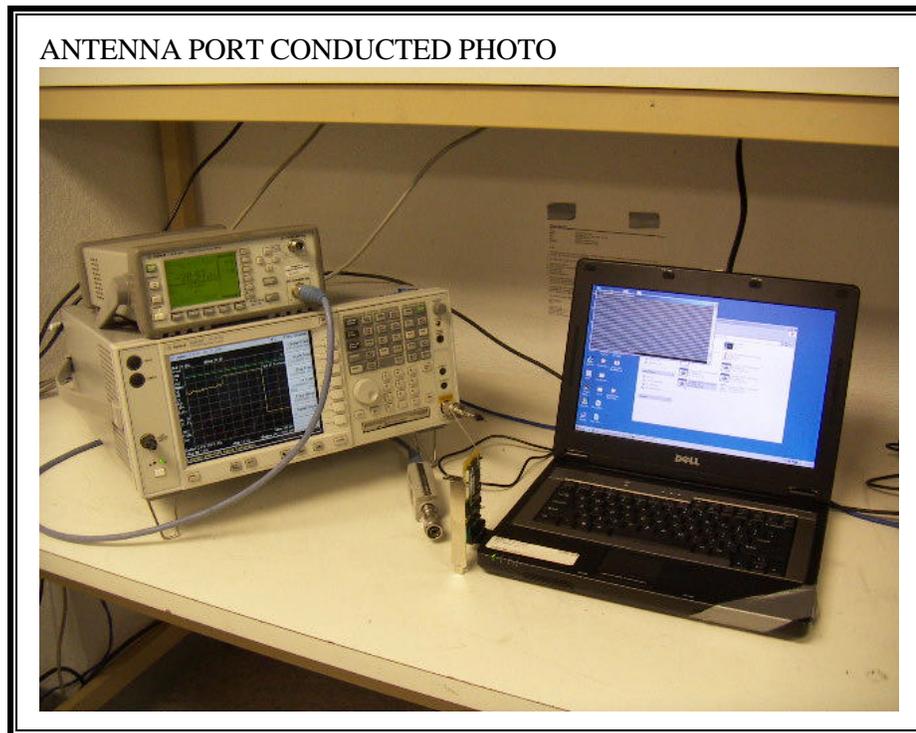

RADIATED RF MEASUREMENT SETUP

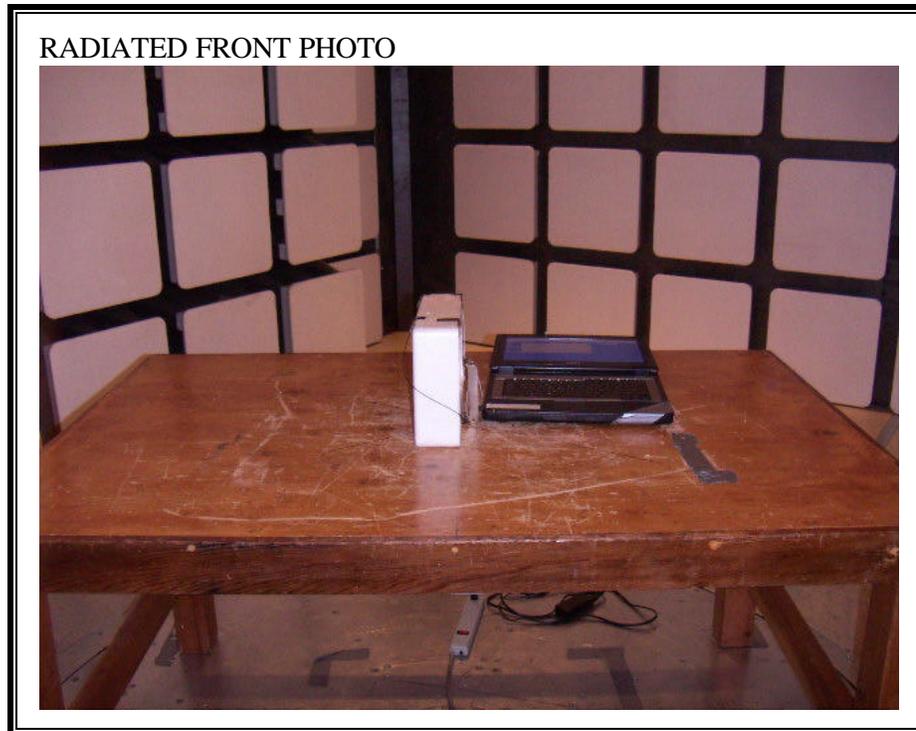


RADIATED BACK PHOTO




RADIATED SIDE PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

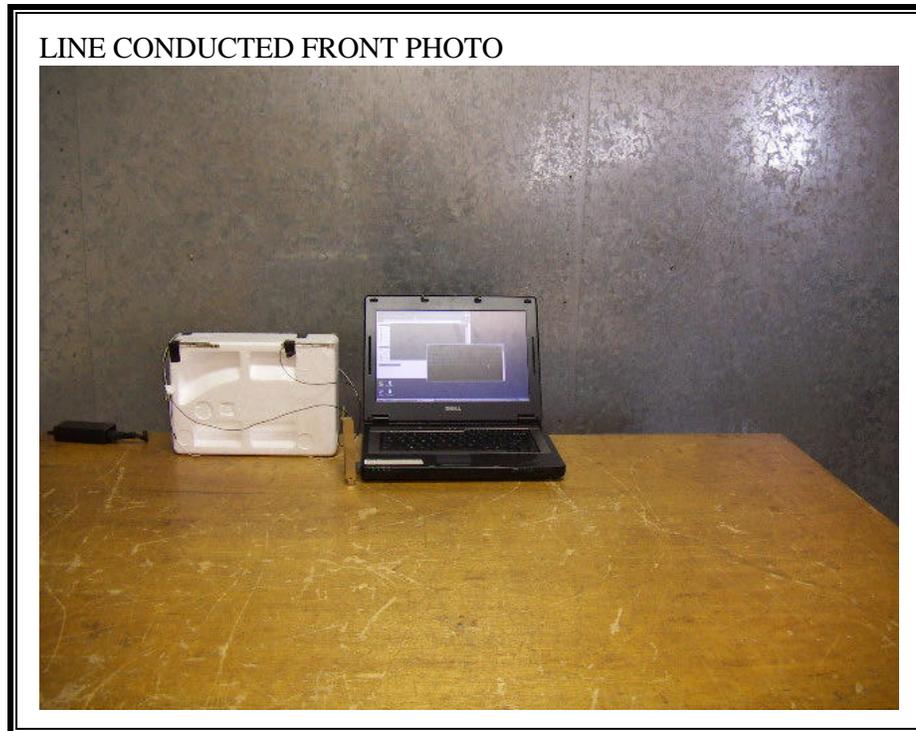

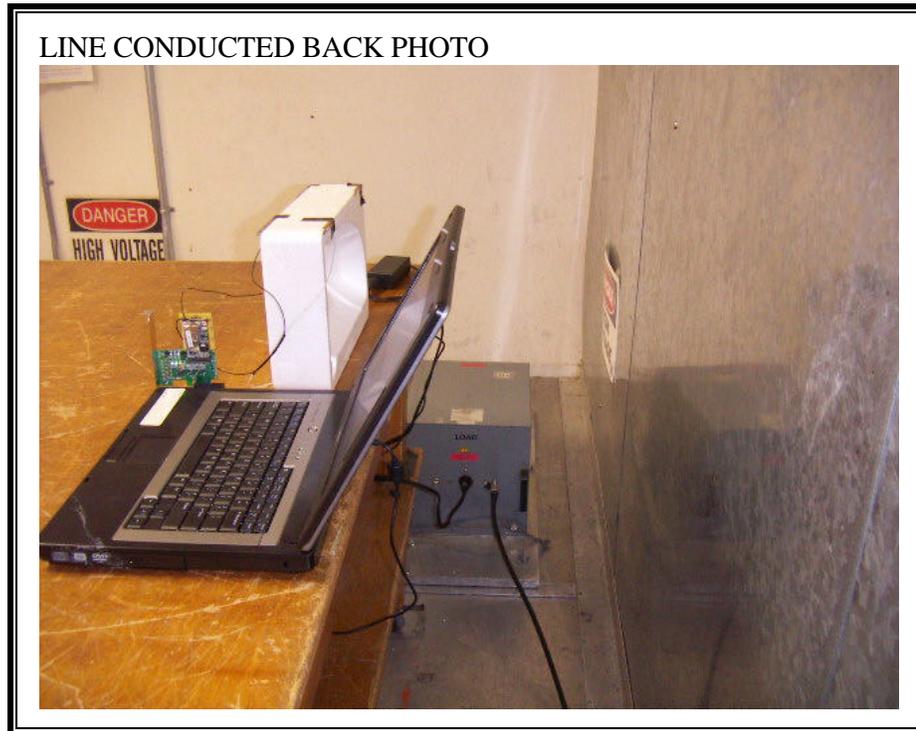

END OF REPORT