



FCC RADIO TEST REPORT

FCC ID : QXO-AP302W
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP302W
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Standard : 47 CFR FCC Part 15.247

The product was received on Sep. 09, 2020, and testing was started from Sep. 10, 2020 and completed on Oct. 30, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	10
2.3 EUT Operation during Test	12
2.4 Accessories	13
2.5 Support Equipment.....	13
2.6 Test Setup Diagram	15
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 DTS Bandwidth	20
3.3 Maximum Conducted Output Power	21
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	26
3.6 Emissions in Restricted Frequency Bands.....	27
4 Test Equipment and Calibration Data	31
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.2



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen**Report Producer: Viola Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2400-2483.5	BT-LE Coded S=8(125Kbps)	1	1
2400-2483.5	BT-LE Coded S=2(500Kbps)	1	1
2400-2483.5	BT-LE(1Mbps)	1	1
2400-2483.5	BT-LE(2Mbps)	2	1

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Set.	Ant.	2.4G Port	5G Port	Bluetooth & IEEE802.15.4 (Zigbee/Thread) Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	1	1	-	WNC	XKAN-N04	Printed Antenna	I-PEX	Note1
	2	2	2	-	WNC	XKAN-N04	Printed Antenna	I-PEX	
	3	-	2	1	WNC	XKAN-N04	Printed Antenna	I-PEX	
	4	-	1	-	WNC	XKAN-N04	Printed Antenna	I-PEX	

Note1:

Set.	Ant.	2.4G Port	5G Port	Bluetooth & IEEE802.15.4 (Zigbee/Thread) Port	Gain (dBi)		
					2.4GHz	5GHz	Bluetooth & IEEE802.15.4 (Zigbee/Thread)
1	1	1	1	-	4.5	6.0	-
	2	2	2	-	4.5	6.0	-
	3	-	2	1	-	6.6	4.8
	4	-	1	-	-	6.6	-

Note2: The above information was declared by manufacturer.

Dual Band Radio

<For 2.4GHz Band>

For IEEE 802.11b/g/n/VHT/ax mode (1TX/2RX):

The EUT supports 1TX/2RX function, and it supports TX diversity function.

Both Port 1 and Port 2 could be used as transmitting antenna, but only one of them will be used at one time. Port 1 and Port 2 could receive simultaneously.

For TX function: Port 1 generated the worst case than Port 2, so it is tested and recorded in the report.

For IEEE 802.11b/g/n/VHT/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a/n/ac/ax mode (1TX/2RX):

The EUT supports 1TX/2RX function, and it supports TX diversity function.

Both Port 1 and Port 2 could be used as transmitting antenna, but only one of them will be used at one time. Port 1 and Port 2 could receive simultaneously.

For TX function: Port 1 generated the worst case than Port 2, so it is tested and recorded in the report.

**For IEEE 802.11a/n/ac/ax mode (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

5G Radio**<For 5GHz Band>****For IEEE 802.11a/n/ac/ax mode (1TX/2RX):**

The EUT supports 1TX/2RX function, and it supports TX diversity function.

Both Port 1 and Port 2 could be used as transmitting antenna, but only one of them will be used at one time. Port 1 and Port 2 could receive simultaneously.

For TX function: Port 2 generated the worst case than Port 1, so it is tested and recorded in the report.

For IEEE 802.11a/n/ac/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

BLE/IEEE802.15.4 (Zigbee/Thread) Radio**For Bluetooth & IEEE802.15.4 (Zigbee/Thread) mode (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.64	1.94	400u	3k
BT-LE(2Mbps)	0.342	4.66	213.75u	10k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

EUT Power Type	From Power Adapter or PoE		
Function	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point	
Test Software Version	Telnet		
Support Mode	<input checked="" type="checkbox"/>	LE 1M PHY: 1 Mb/s	
	<input checked="" type="checkbox"/>	LE Coded PHY (S=2): 500 Kb/s	
	<input checked="" type="checkbox"/>	LE Coded PHY (S=8): 125 Kb/s	
	<input checked="" type="checkbox"/>	LE 2M PHY: 2 Mb/s	

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT Support Function

Radio	Function		
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth & IEEE802.15.4 (Zigbee/Thread)
Dual Band Radio	V	V	-
5G Radio	-	V	-
BLE/IEEE802.15.4 (Zigbee/Thread) Radio	-	-	V

Function	Support Type	Support Band
AP	Master	WLAN 2.4GHz/Bluetooth/IEEE802.15.4(Zigbee/Thread)/WLAN 5GHz Band 1~4
Bridge	Master	WLAN 2.4GHz/Bluetooth/IEEE802.15.4(Zigbee/Thread)/WLAN 5GHz Band 1+4
Mesh	Master	WLAN 2.4GHz/Bluetooth/IEEE802.15.4(Zigbee/Thread)/WLAN 5GHz Band 1+4

Note:

1. The above information was declared by manufacturer.
2. The EUT has three functions which are AP, Bridge, and Mesh mode, only the AP mode was tested and recorded in this test report.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location				
<input type="checkbox"/>	HWA YA	ADD	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL	886-3-327-3456	FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD	No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	
		TEL	886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH02-CB	Owen Hsu	23.2~23.8°C / 54~58%	Oct. 05, 2020 ~ Oct. 19, 2020
Radiated below 1GHz	03CH05-CB	Brian Sun	23.1~23.6°C / 54~58%	Sep. 25, 2020
Radiated above 1GHz	03CH02-CB	Paul Chen	23.4~25.6°C / 54~57%	Sep. 25, 2020 ~ Oct. 15, 2020
	03CH06-CB		23.5~25.5°C / 53~55%	
Radiated above 1GHz (For co-location)	03CH05-CB	Brian Sun	23.1~23.6°C / 54~58%	Sep. 25, 2020
	03CH06-CB		23.4~24.1°C / 54~57%	Oct. 30, 2020
AC Conduction	CO02-CB	Wei Li	24~25°C / 56~59%	Sep. 10, 2020 ~ Sep. 28, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.6 dB	Confidence levels of 95%
Conducted Emission	2.8 dB	Confidence levels of 95%
Output Power Measurement	1.4 dB	Confidence levels of 95%
Power Density Measurement	2.8 dB	Confidence levels of 95%
Bandwidth Measurement	0.39%	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	0E
2440MHz	0E
2480MHz	0E
BT-LE(2Mbps)	-
2402MHz	0E
2440MHz	0E
2480MHz	0E

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + Adapter
2	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + PoE Out + PoE
3	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + Adapter
4	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + PoE Out + PoE
5	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + Adapter
6	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + PoE Out + PoE
7	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + Adapter
8	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + PoE Out + PoE
For operating mode 5 is the worst case and it was record in this test report.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Densit Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + Adapter
2	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + PoE Out + PoE
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.	
3	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth + Adapter
4	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + Adapter
5	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4 + Adapter
For operating mode 5 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
1	BLE/IEEE802.15.4 Radio with Bluetooth

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	5G Radio with 5GHz function + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth
2	5G Radio with 5GHz function + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4
For operating mode 1 is the worst case and it was record in this test report.	
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth
2	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with Bluetooth
3	Dual Band Radio with 2.4GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4
4	Dual Band Radio with 5GHz function + 5G Radio + BLE/IEEE802.15.4 (Zigbee/Thread) Radio with IEEE802.15.4
Refer to Sporton Test Report No.: FA091507 for Co-location RF Exposure Evaluation.	

Note1: The EUT only used at Y axis position.

Note2: The PoE is for measurement only, would not be marketed.

The detail information as below:

Power	Brand	Model
Adapter	powertron electronics corp.	PA1024-120IB200
PoE	Microsemi	PD-9001GR/AT/AC

Note3: The USB port was performed at the load as applicant requirement.

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

Others
RJ-45 cable*1, non-shielded, 0.1m
Bracket*1

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	ETH1/PoE Out NB	DELL	E6430	N/A
B	PASS THRU NB	DELL	E6430	N/A
C	2.4G/5G-R1 NB	DELL	E6430	N/A
D	5G-R2 NB	DELL	E6430	N/A
E	ETH2 NB	DELL	E6430	N/A
F	Flash disk	Kingston	DTSE9H	N/A
G	Adapter	powertron electronics corp.	PA1024-120IB200	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A
D	Notebook	DELL	E4300	N/A
E	Notebook	DELL	E4300	N/A
F	Flash disk	Kingston	DTSE9H	N/A
G	PoE	Microsemi	PD-9001GR/AT/AC	N/A
H	PoE LOAD	WNC	RLLL-M1	N/A
I	Adapter	powertron electronics corp.	PA1024-120IB200	N/A


**For Radiated (above 1GHz):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Adapter	powertron electronics corp.	PA1024-120IB200	N/A


For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Adapter	powertron electronics corp.	PA1024-120IB200	N/A

2.6 Test Setup Diagram

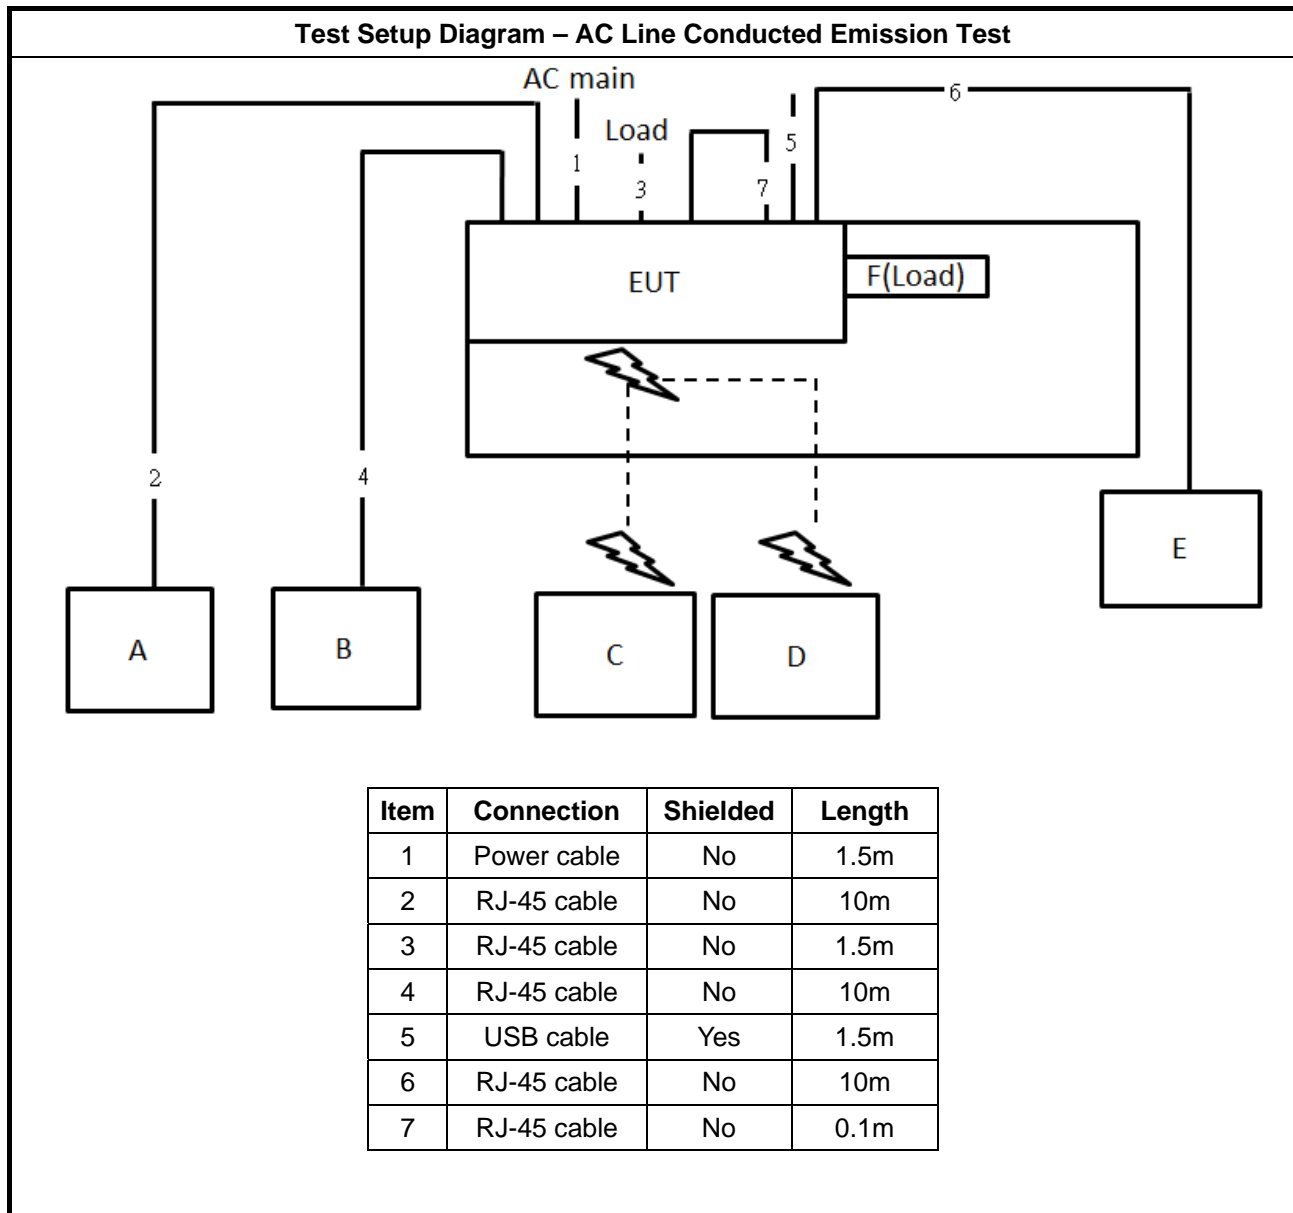

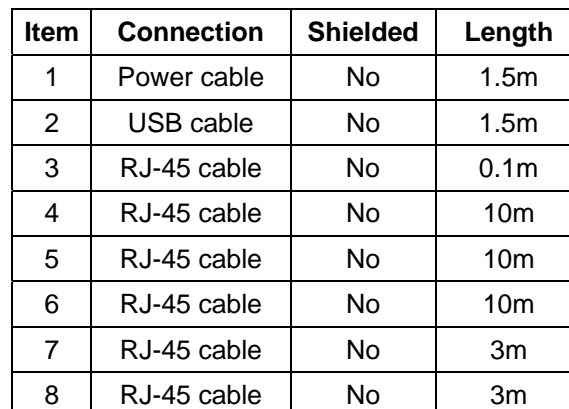

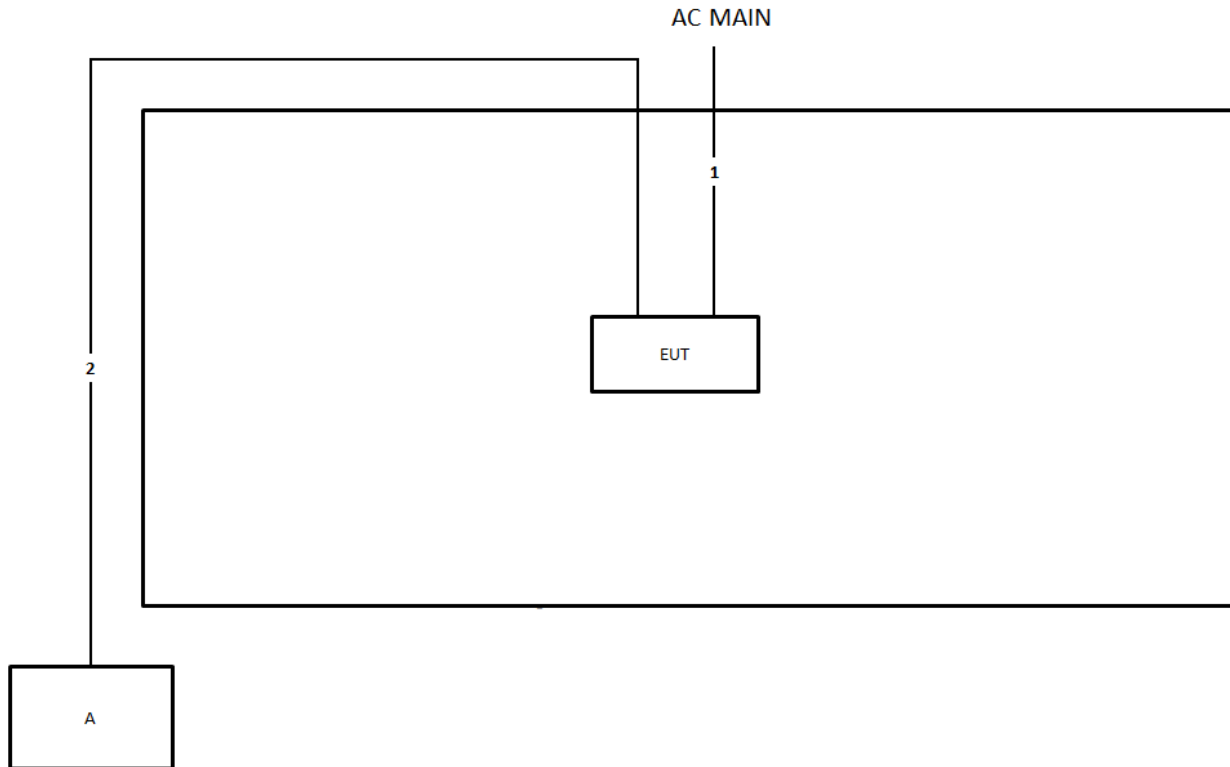Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

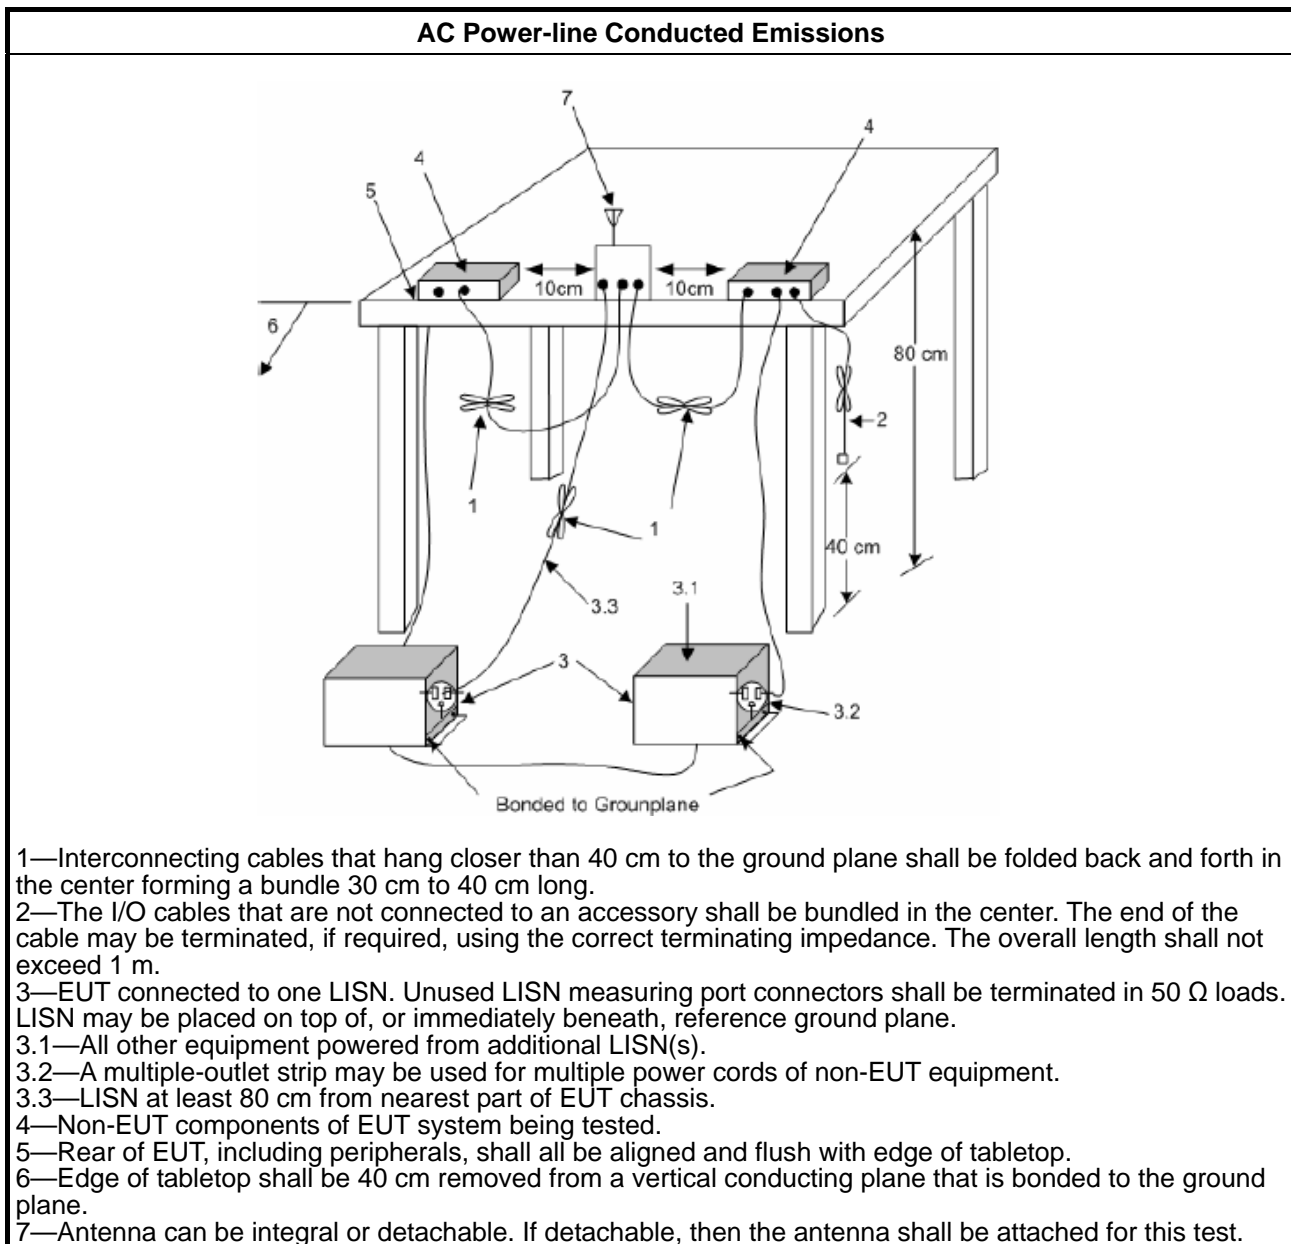

1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

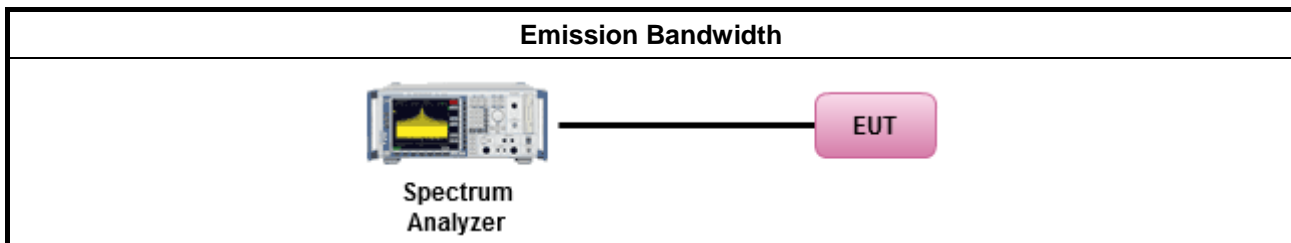

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> Maximum Conducted Output Power 	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> For conducted measurement. 	
<ul style="list-style-type: none"> If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

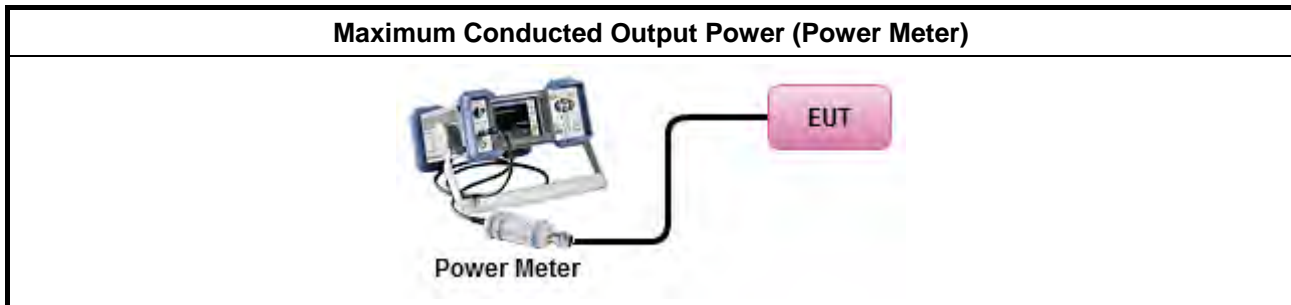

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

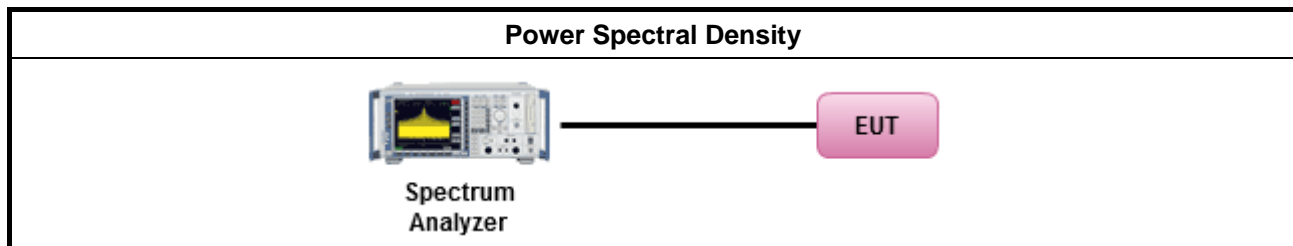

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

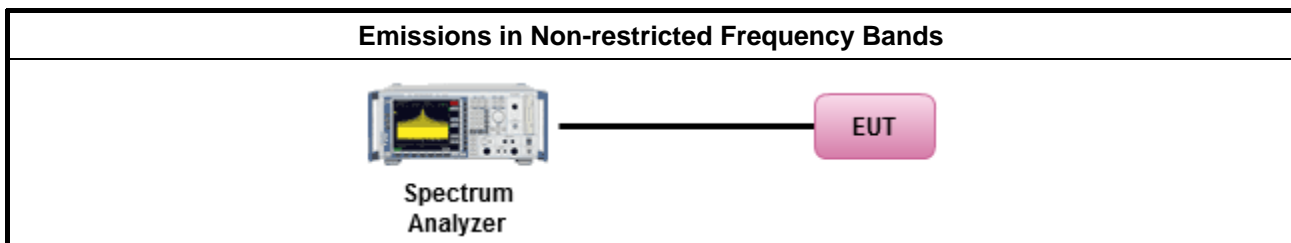

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 	
<ul style="list-style-type: none"> Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. 	
<ul style="list-style-type: none"> For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> For the transmitter band-edge emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	<ul style="list-style-type: none"> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	<ul style="list-style-type: none"> For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

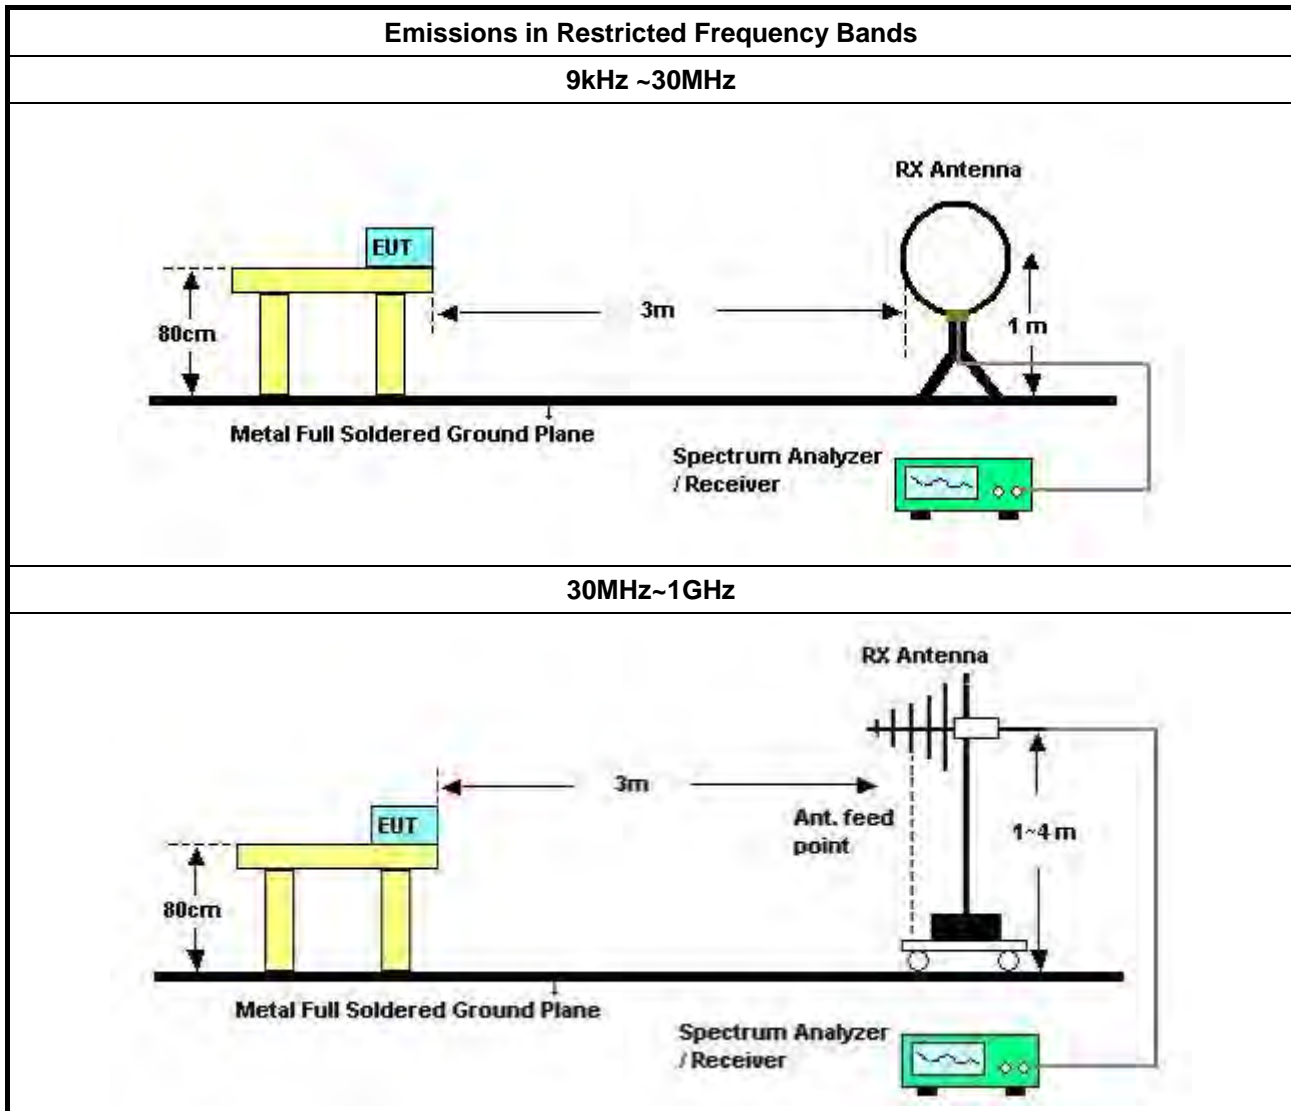

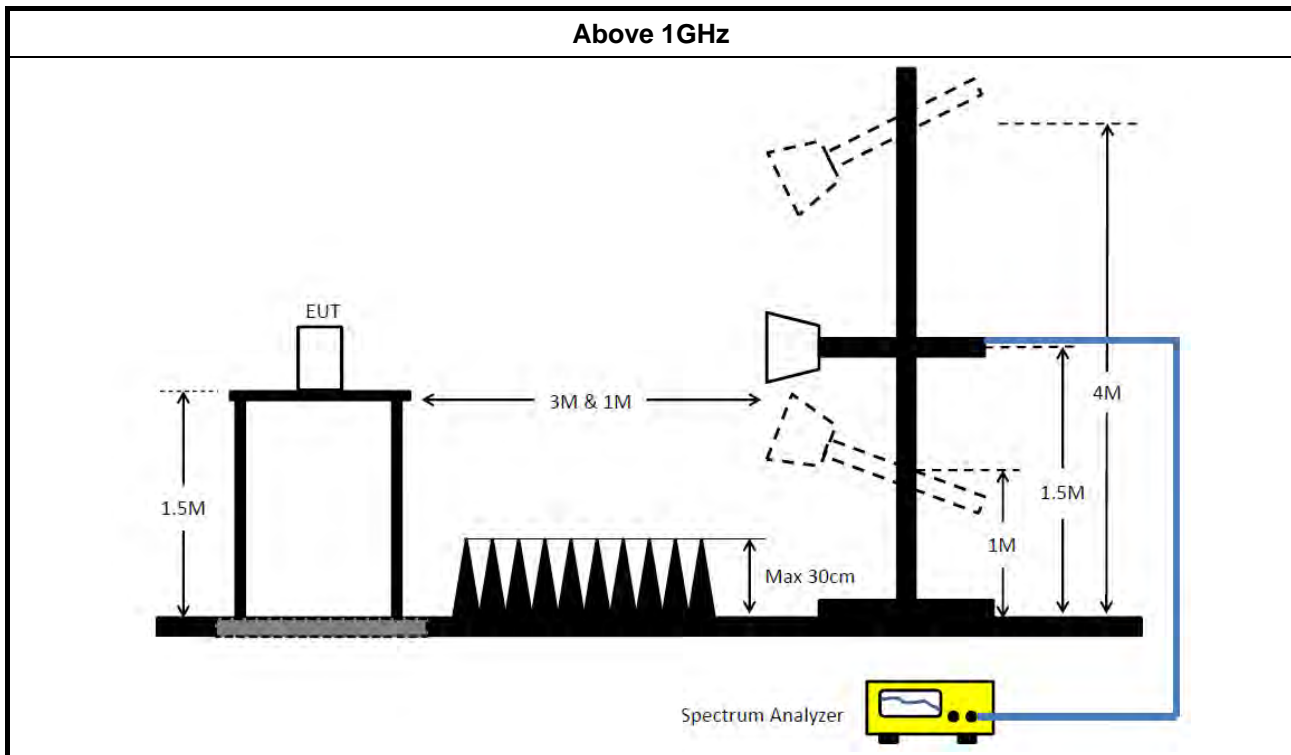

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2019	Nov. 20, 2020	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Oct. 30, 2019	Oct. 29, 2020	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Mar. 10, 2020	Mar. 09, 2021	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 21, 2019	Oct. 20, 2020	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Mar. 19, 2020	Mar. 18, 2021	Conduction (CO02-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH05-CB)
3m Semi Anechoic Chamber(NSA)	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 10, 2020	Aug. 09, 2021	Radiation (03CH05-CB)
Site V.S.W.R	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Nov. 09, 2019	Nov. 08, 2020	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCi	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 27, 2020	Mar. 26, 2021	Radiation (03CH05-CB)
Horn Antenna	COM-POWER	AH-118	071028	1GHz~18GHz	Jun. 09, 2020	Jun. 08, 2021	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 28, 2020	Apr. 27, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jul. 03, 2020	Jul. 02, 2021	Radiation (03CH05-CB)
Amplifier	-	-	TF-130N-R1	18GHz ~ 40GHz	Jun. 19, 2020	Jun. 18, 2021	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	LOW Cable-04+23	30MHz~1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Feb. 01, 2020	Jan. 31, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Site V.S.W.R	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz 3m	Mar. 28, 2020	Mar. 27, 2021	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 21, 2020	Apr. 20, 2021	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 13, 2020	Jul. 12, 2021	Radiation (03CH02-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH02-CB)
High Cable	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
High Cable	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Site V.S.W.R	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 03, 2019	Oct. 02, 2020	Radiation (03CH06-CB)
Site V.S.W.R	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 02, 2020	Oct. 01, 2021	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Jul. 22, 2020	Jul. 21, 2021	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 07, 2020	May 06, 2021	Radiation (03CH06-CB)
Amplifier	-	-	TF-130N-R1	18GHz ~ 40GHz	Jun. 19, 2020	Jun. 18, 2021	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 21, 2019	Oct. 20, 2020	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH06-CB)
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-05	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	HUBER+SUHNER	RG402	High Cable-05+24	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+24	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1531343	300MHz~40GHz	Aug. 04, 2020	Aug. 03, 2021	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1728001	300MHz~40GHz	Aug. 04, 2020	Aug. 03, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-3	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



Conducted Emissions at Powerline


Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 5	Pass	AV	366k	44.20	48.60	-4.40	Line

Test Mode 5


28/09/2020

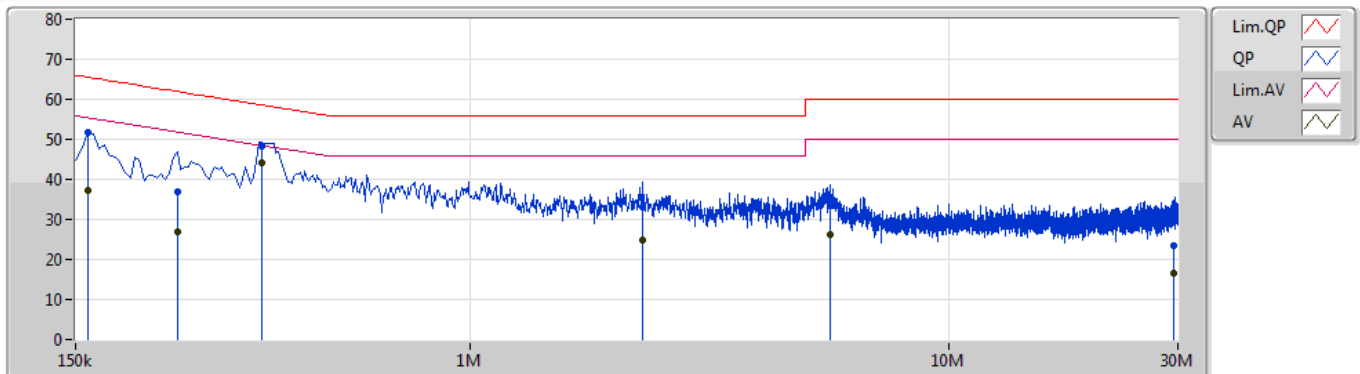

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	159k	51.65	65.52	-13.87	10.26	Line	-	41.39	0.05	0.06	10.15			
AV	159k	37.28	55.52	-18.24	10.26	Line	-	27.02	0.05	0.06	10.15			
QP	244.5k	37.05	61.95	-24.90	10.27	Line	-	26.78	0.05	0.07	10.15			
AV	244.5k	26.74	51.95	-25.21	10.27	Line	-	16.47	0.05	0.07	10.15			
QP	366k	48.28	58.60	-10.32	10.24	Line	-	38.04	0.05	0.08	10.11			
AV	366k	44.20	48.60	-4.40	10.24	Line	"Worst"	33.96	0.05	0.08	10.11			
QP	2.292M	33.13	56.00	-22.87	10.39	Line	-	22.74	0.10	0.16	10.13			
AV	2.292M	24.94	46.00	-21.06	10.39	Line	-	14.55	0.10	0.16	10.13			
QP	5.645M	33.58	60.00	-26.42	10.47	Line	-	23.11	0.16	0.15	10.16			
AV	5.645M	26.07	50.00	-23.93	10.47	Line	-	15.60	0.16	0.15	10.16			
QP	29.382M	23.43	60.00	-36.57	11.07	Line	-	12.36	0.62	0.24	10.21			
AV	29.382M	16.53	50.00	-33.47	11.07	Line	-	5.46	0.62	0.24	10.21			

Test Mode 5

28/09/2020

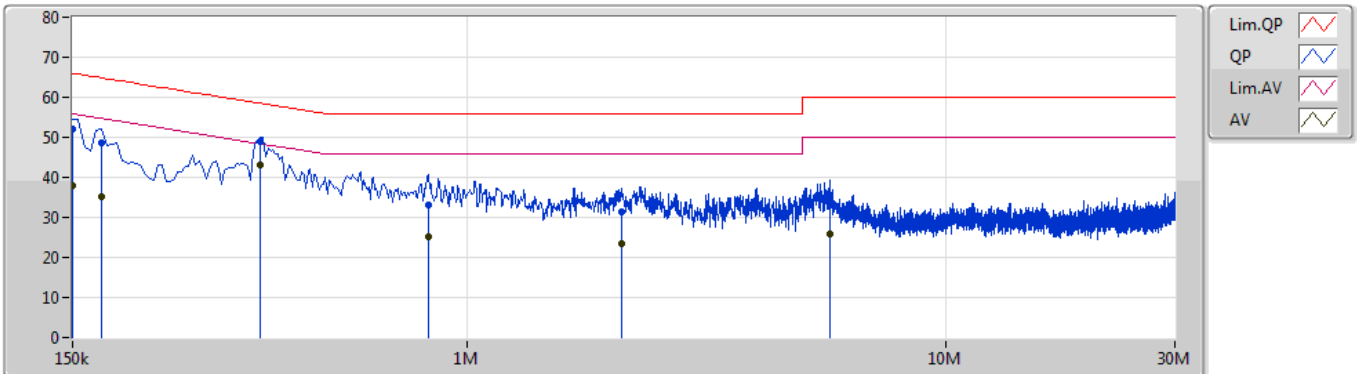

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	52.18	66.00	-13.82	10.25	Neutral	-	41.93	0.05	0.05	10.15			
AV	150k	37.83	56.00	-18.17	10.25	Neutral	-	27.58	0.05	0.05	10.15			
QP	172.5k	48.70	64.83	-16.13	10.27	Neutral	-	38.43	0.05	0.06	10.16			
AV	172.5k	35.10	54.83	-19.73	10.27	Neutral	-	24.83	0.05	0.06	10.16			
QP	370.5k	48.85	58.49	-9.64	10.24	Neutral	-	38.61	0.05	0.08	10.11			
AV	370.5k	43.25	48.49	-5.24	10.24	Neutral	"Worst"	33.01	0.05	0.08	10.11			
QP	829.5k	33.24	56.00	-22.76	10.28	Neutral	-	22.96	0.06	0.11	10.11			
AV	829.5k	25.15	46.00	-20.85	10.28	Neutral	-	14.87	0.06	0.11	10.11			
QP	2.094M	31.45	56.00	-24.55	10.37	Neutral	-	21.08	0.08	0.16	10.13			
AV	2.094M	23.31	46.00	-22.69	10.37	Neutral	-	12.94	0.08	0.16	10.13			
QP	5.703M	33.07	60.00	-26.93	10.45	Neutral	-	22.62	0.14	0.15	10.16			
AV	5.703M	25.71	50.00	-24.29	10.45	Neutral	-	15.26	0.14	0.15	10.16			



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	706.25k	1.052M	1M05F1D	667.5k	1.046M
BT-LE(2Mbps)	1.223M	2.086M	2M09F1D	1.158M	2.064M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	682.5k	1.047M
2440MHz	Pass	500k	706.25k	1.052M
2480MHz	Pass	500k	667.5k	1.046M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.223M	2.086M
2440MHz	Pass	500k	1.158M	2.064M
2480MHz	Pass	500k	1.17M	2.066M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz
EBW

07/10/2020

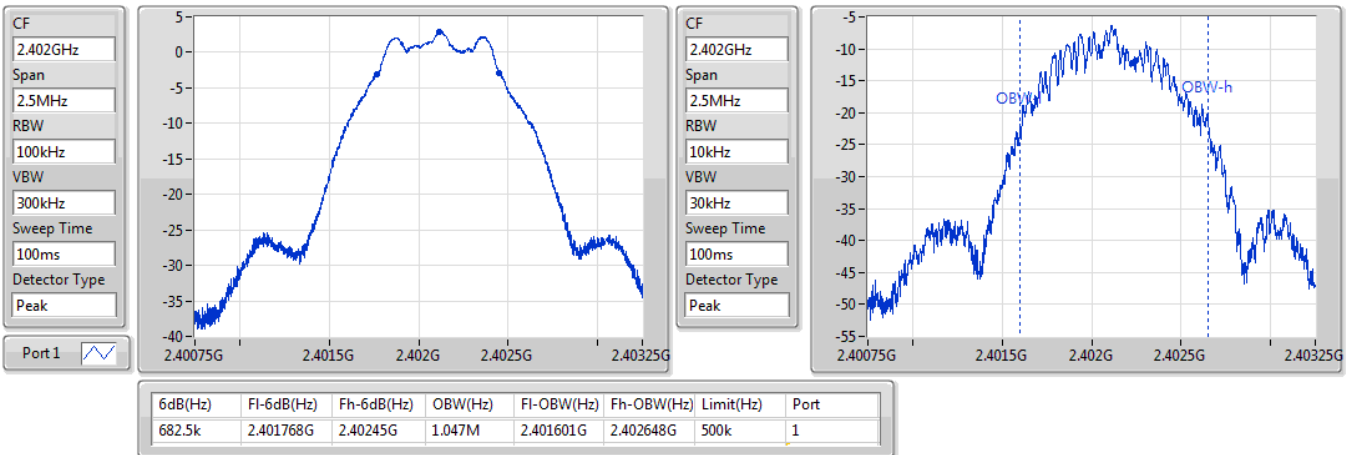
BT-LE(1Mbps)
2440MHz
EBW


07/10/2020

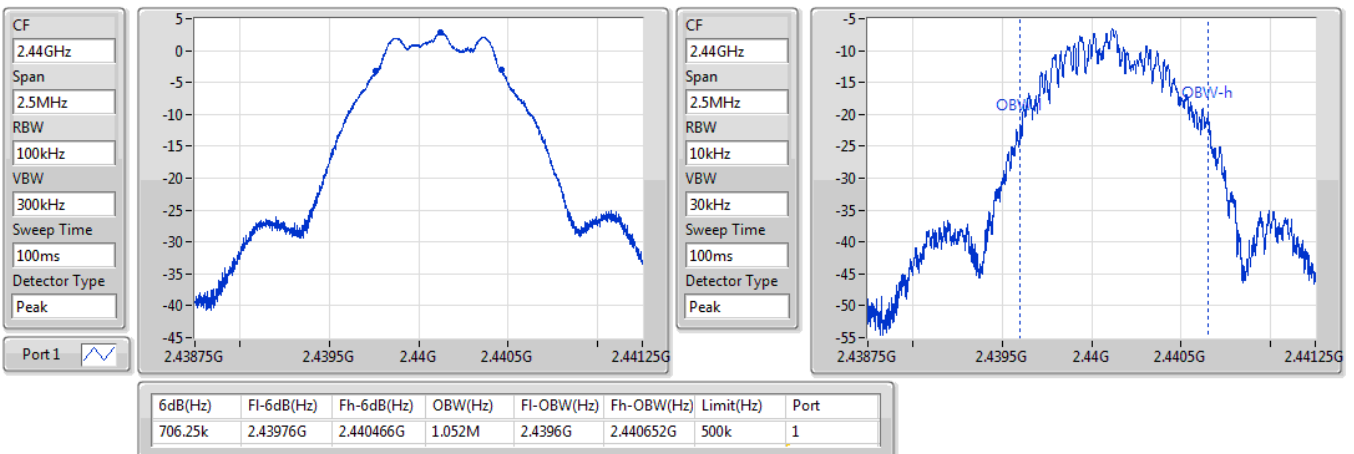


BT-LE(1Mbps)
2480MHz

07/10/2020

CF
2.48GHz
Span
2.5MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak
Port 1

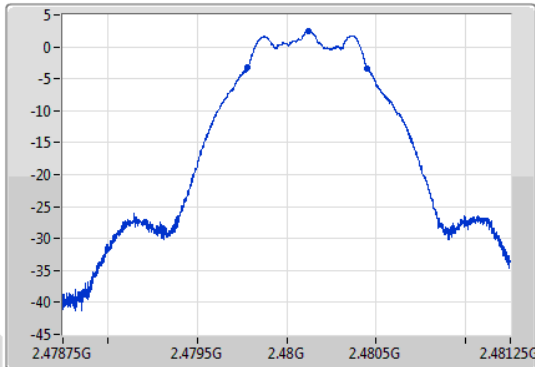

CF
2.48GHz
Span
2.5MHz
RBW
10kHz
VBW
30kHz
Sweep Time
100ms
Detector Type
Peak

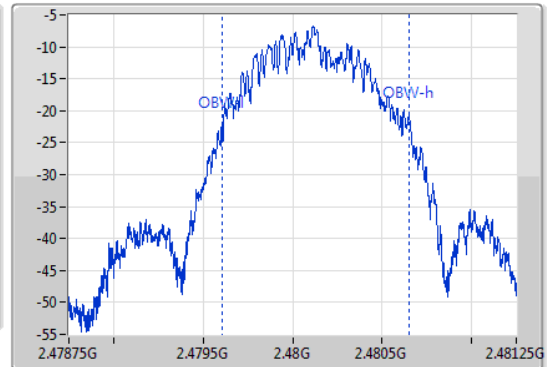


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
667.5k	2.479783G	2.48045G	1.046M	2.479606G	2.480652G	500k	1


BT-LE(2Mbps)
2402MHz

07/10/2020

CF
2.402GHz
Span
5MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak
Port 1

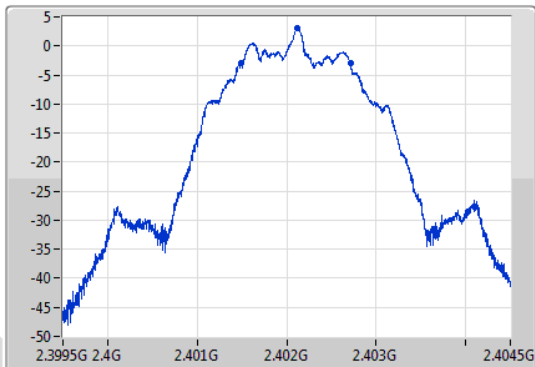


CF
2.402GHz
Span
5MHz
RBW
10kHz
VBW
30kHz
Sweep Time
100ms
Detector Type
Peak

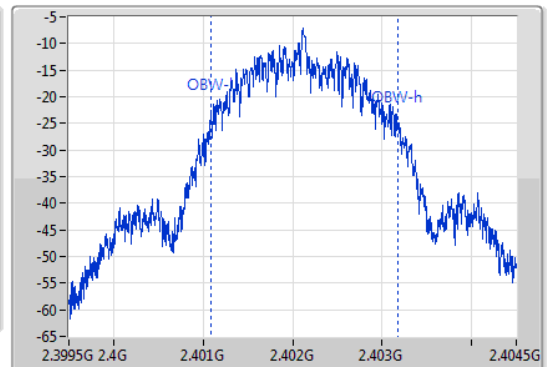


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.223M	2.40149G	2.402713G	2.086M	2.40109G	2.403177G	500k	1

BT-LE(2Mbps)
EBW
2440MHz

07/10/2020

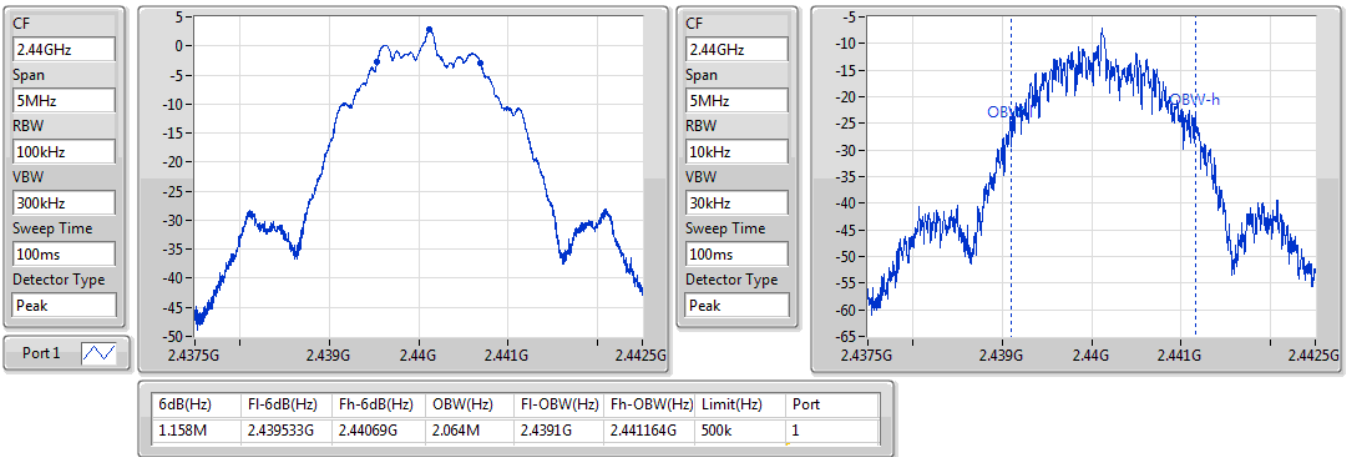
BT-LE(2Mbps)
EBW
2480MHz

07/10/2020

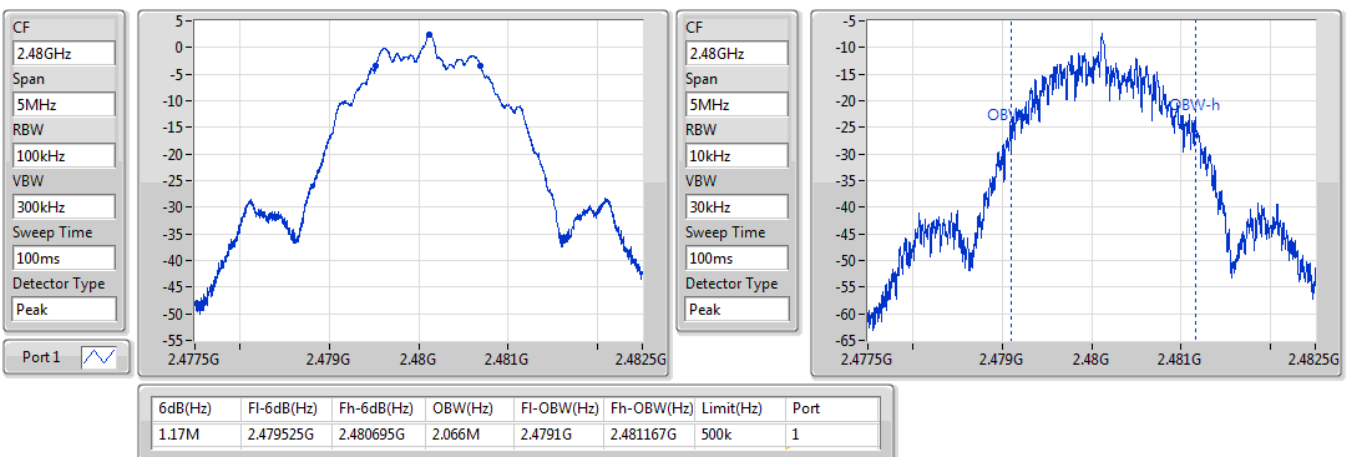



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.98	0.00199
BT-LE(2Mbps)	2.83	0.00192



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.80	2.98	30.00
2440MHz	Pass	4.80	2.74	30.00
2480MHz	Pass	4.80	2.48	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.80	2.83	30.00
2440MHz	Pass	4.80	2.58	30.00
2480MHz	Pass	4.80	2.31	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-12.57
BT-LE(2Mbps)	-15.05

RBW=3 kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.80	-12.57	8.00
2440MHz	Pass	4.80	-12.97	8.00
2480MHz	Pass	4.80	-13.15	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.80	-15.06	8.00
2440MHz	Pass	4.80	-15.08	8.00
2480MHz	Pass	4.80	-15.05	8.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

PSD

2402MHz

07/10/2020

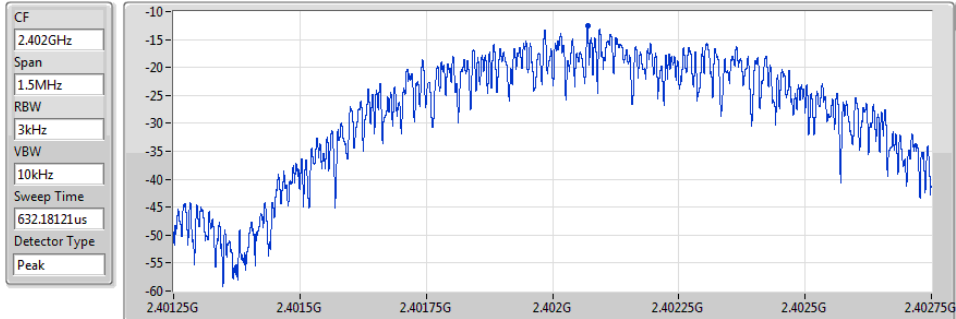


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.57	-12.57	-12.57

BT-LE(1Mbps)

PSD

2440MHz

07/10/2020

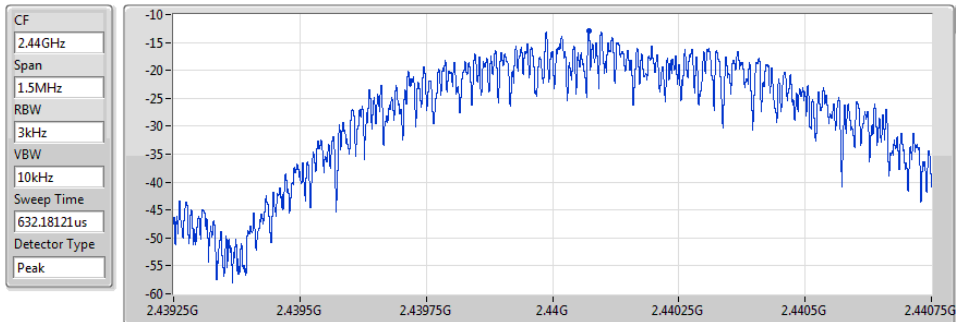


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.97	-12.97	-12.97

BT-LE(1Mbps)

PSD

2480MHz

07/10/2020

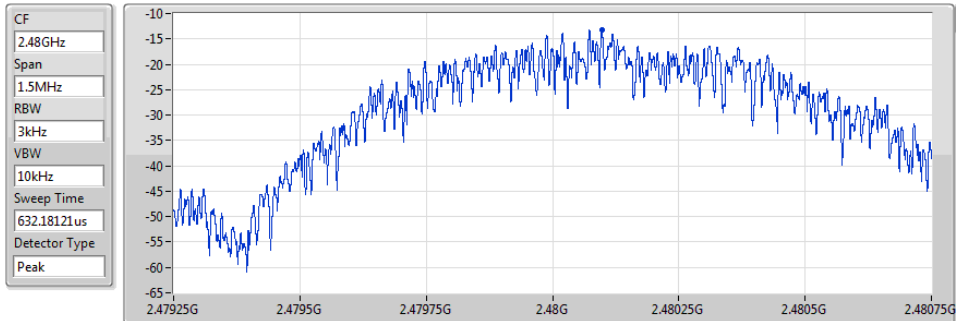


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.15	-13.15	-13.15

BT-LE(2Mbps)

PSD

2402MHz

07/10/2020

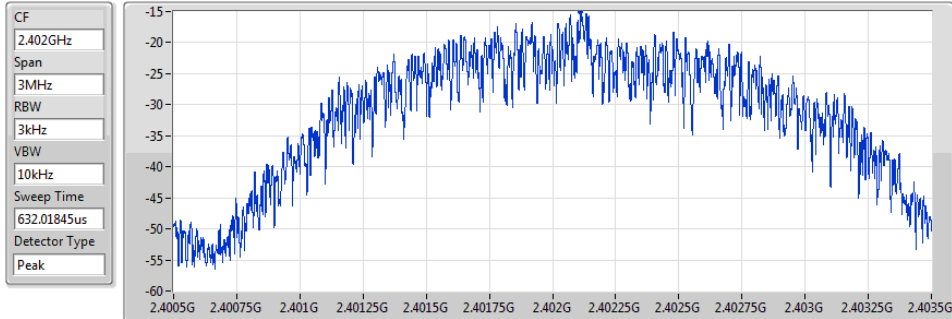


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.06	-15.06	-15.06

BT-LE(2Mbps)

PSD

2440MHz

07/10/2020

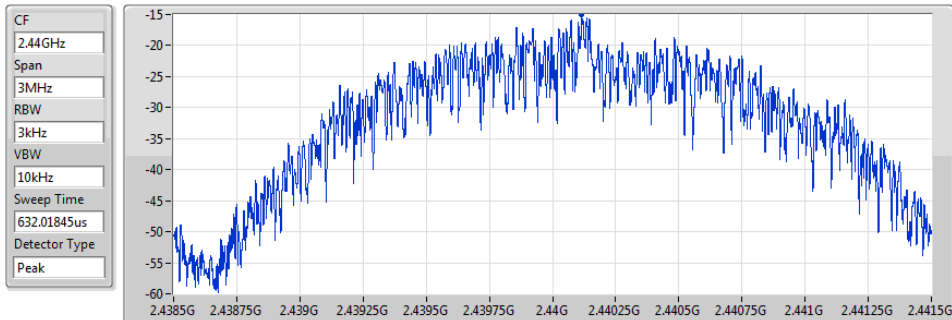


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.08	-15.08	-15.08

BT-LE(2Mbps)

PSD

2480MHz

07/10/2020

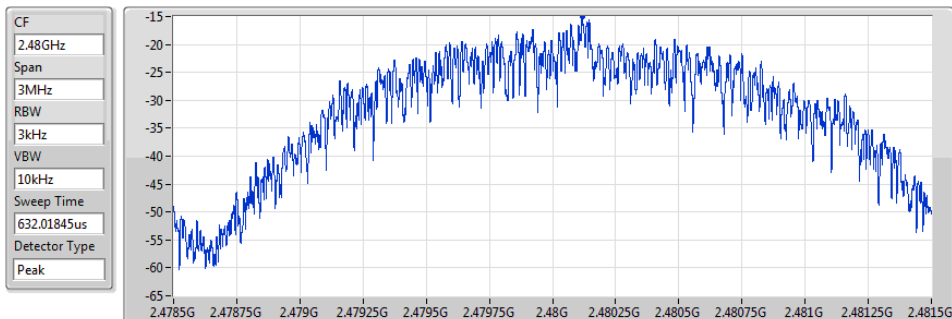

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.05	-15.05	-15.05



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40209G	2.88	-27.12	699.75M	-52.11	2.39963G	-44.28	2.4G	-46.04	2.5003G	-50.76	16.47101G	-43.84	1
BT-LE(2Mbps)	Pass	2.40209G	2.97	-27.03	1.96904G	-52.19	2.4G	-34.41	2.4G	-31.64	2.49834G	-51.67	16.21512G	-43.08	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40209G	2.88	-27.12	699.75M	-52.11	2.39963G	-44.28	2.4G	-46.04	2.5003G	-50.76	16.47101G	-43.84	1
2440MHz	Pass	2.40209G	2.88	-27.12	795.22M	-51.72	2.39403G	-51.69	2.4835G	-54.39	2.49752G	-50.16	24.87065G	-43.68	1
2480MHz	Pass	2.40209G	2.88	-27.12	2.16644G	-52.31	2.39119G	-52.17	2.4835G	-52.72	2.49561G	-50.57	16.41759G	-43.71	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40209G	2.97	-27.03	1.96904G	-52.19	2.4G	-34.41	2.4G	-31.64	2.49834G	-51.67	16.21512G	-43.08	1
2440MHz	Pass	2.40209G	2.97	-27.03	745.28M	-52.11	2.3957G	-52.18	2.4G	-53.67	2.50312G	-50.51	16.45414G	-43.74	1
2480MHz	Pass	2.40209G	2.97	-27.03	801.39M	-51.02	2.39427G	-52.10	2.4835G	-53.11	2.48409G	-49.69	16.2348G	-43.05	1



BT-LE(1Mbps)

2402MHz

CSE NdB

07/10/2020

Port1

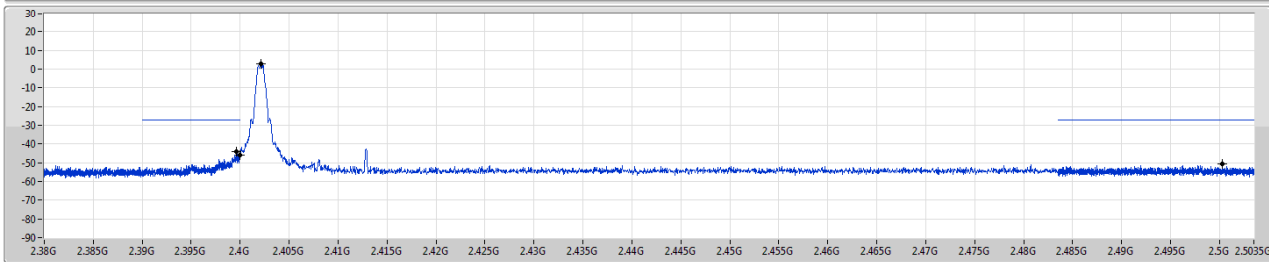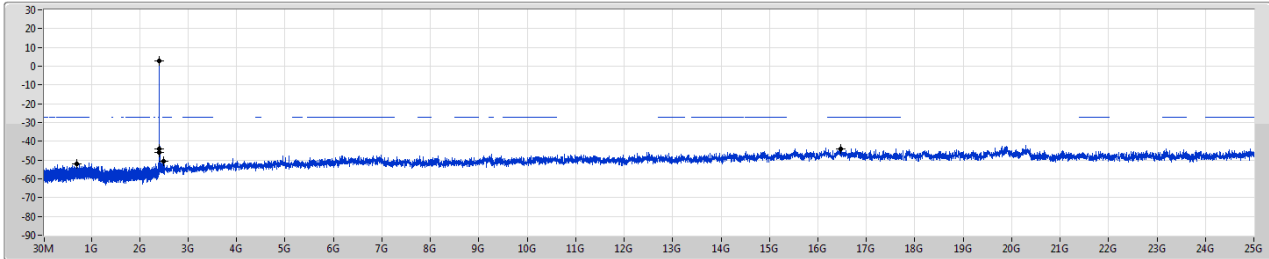

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40209G	2.88	-27.12	699.75M	-52.11	2.39963G	-44.28	2.4G	-46.04	2.5003G	-50.76	16.47101G	-43.84	1



BT-LE(1Mbps)

2440MHz

CSE NdB

07/10/2020

Port1

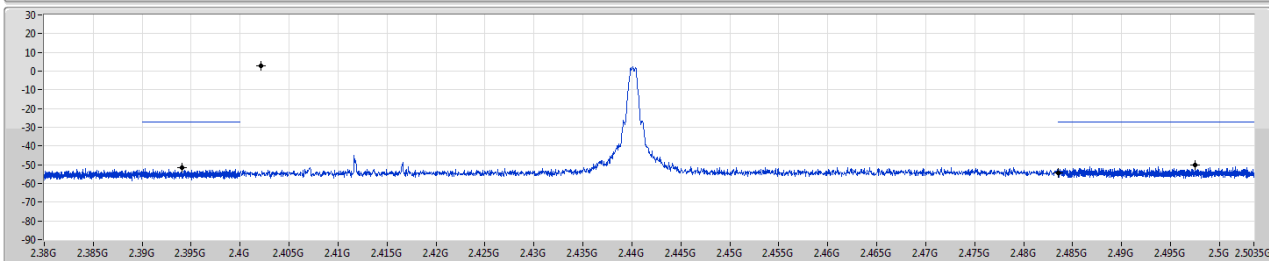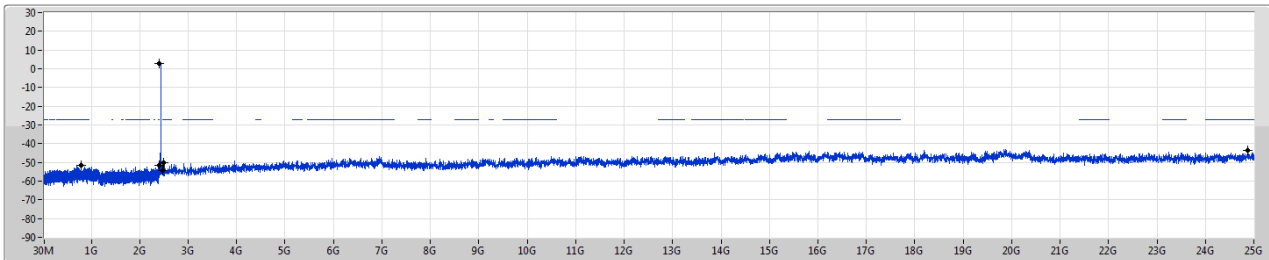

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40209G	2.88	-27.12	795.22M	-51.72	2.39403G	-51.69	2.4835G	-54.39	2.49752G	-50.16	24.87065G	-43.68	1


BT-LE(1Mbps)

2480MHz

CSE NdB

07/10/2020

Port 1

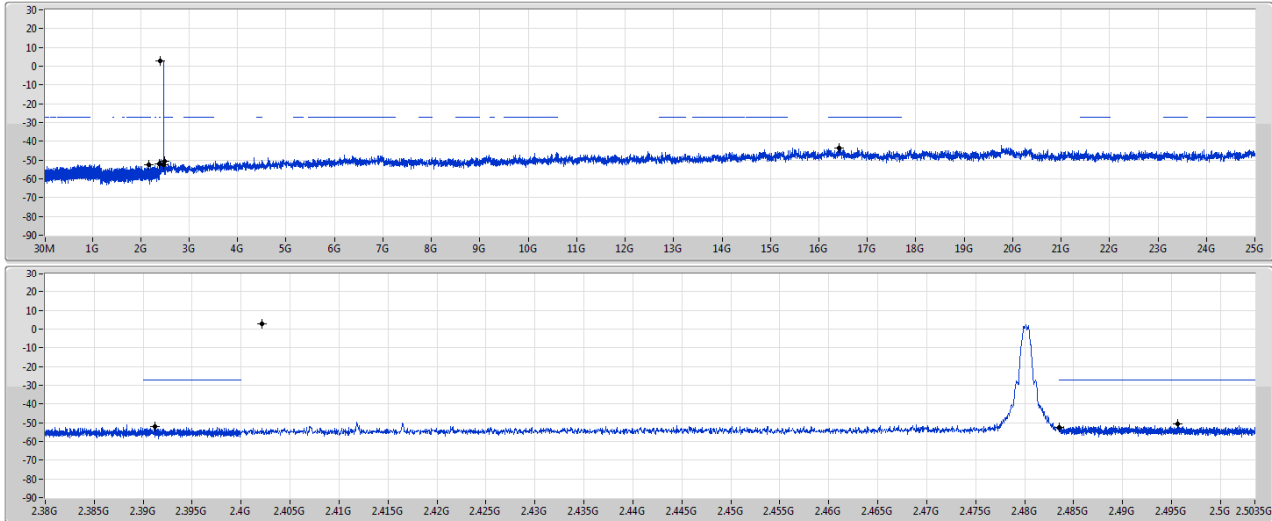


BT-LE(2Mbps)

2402MHz

CSE NdB

07/10/2020

Port 1

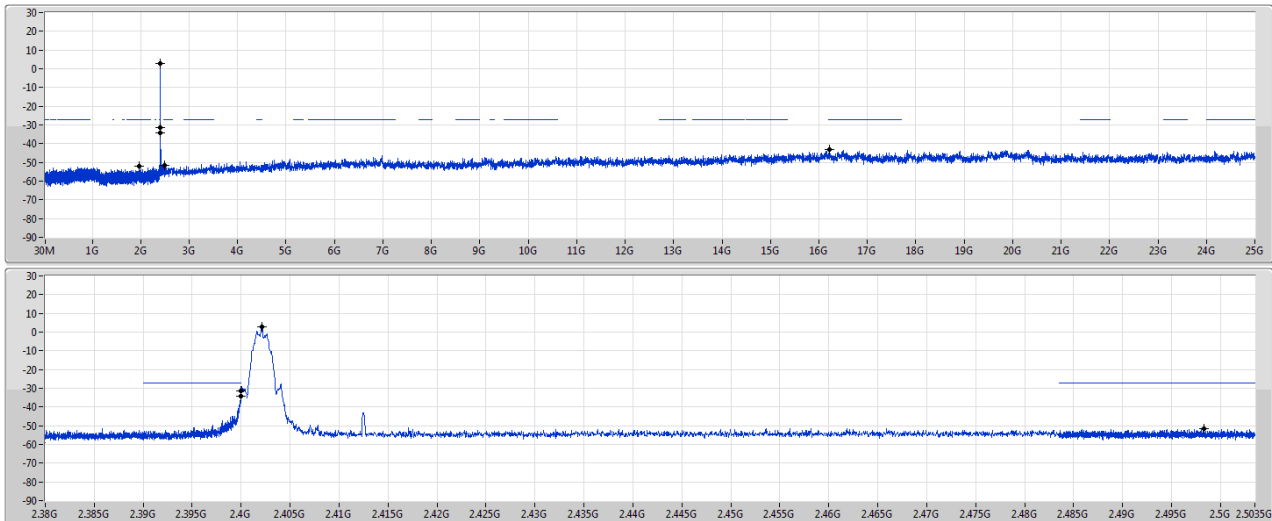


BT-LE(2Mbps)

2440MHz

CSE NdB

07/10/2020

Port 1

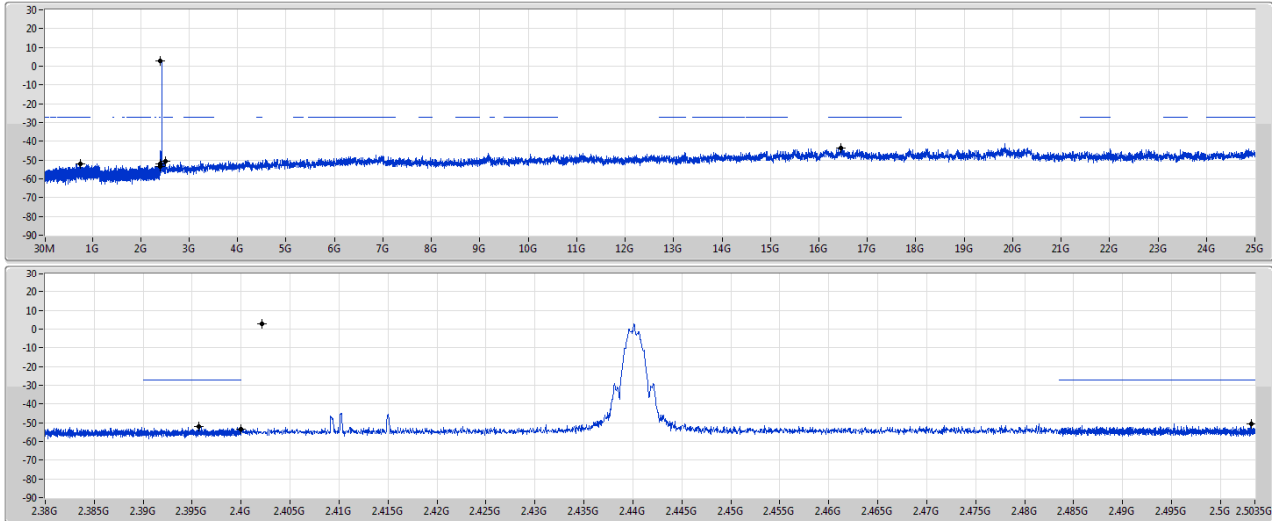


BT-LE(2Mbps)

2480MHz

CSE NdB

07/10/2020

Port 1

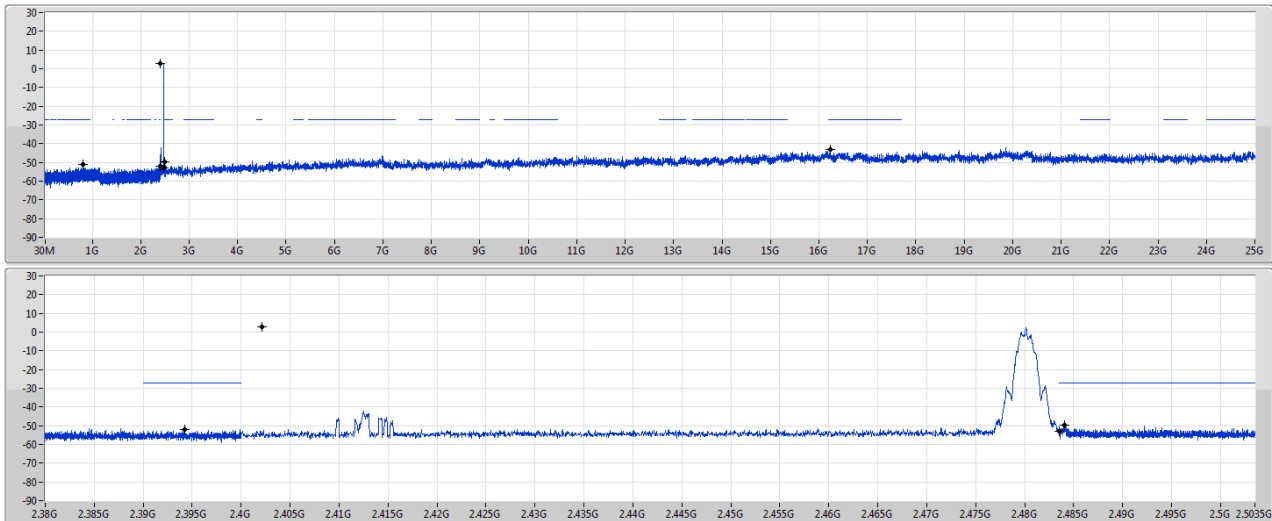



Radiated Emissions below 1GHz

Appendix F.1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 5	Pass	PK	81.41M	36.97	40.00	-3.03	Vertical

Test Mode 5


25/09/2020



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	38.73M	36.09	40.00	-3.91	-10.42	3	Vertical	194	1.00	-	46.51	19.65	1.37	31.44
QP	51.34M	35.58	40.00	-4.42	-16.35	3	Vertical	3	1.25	-	51.93	14.13	1.17	31.65
PK	81.41M	36.97	40.00	-3.03	-17.32	3	Vertical	278	2.00	"Worst"	54.29	13.04	1.40	31.76
PK	161.92M	37.49	43.50	-6.01	-13.93	3	Vertical	140	1.25	-	51.42	15.97	1.81	31.71
QP	495.6M	39.78	46.00	-6.22	-6.38	3	Vertical	103	1.00	-	46.16	22.90	3.08	32.36
QP	511.12M	40.55	46.00	-5.45	-6.22	3	Vertical	111	1.00	-	46.77	22.99	3.14	32.35

Test Mode 5

25/09/2020

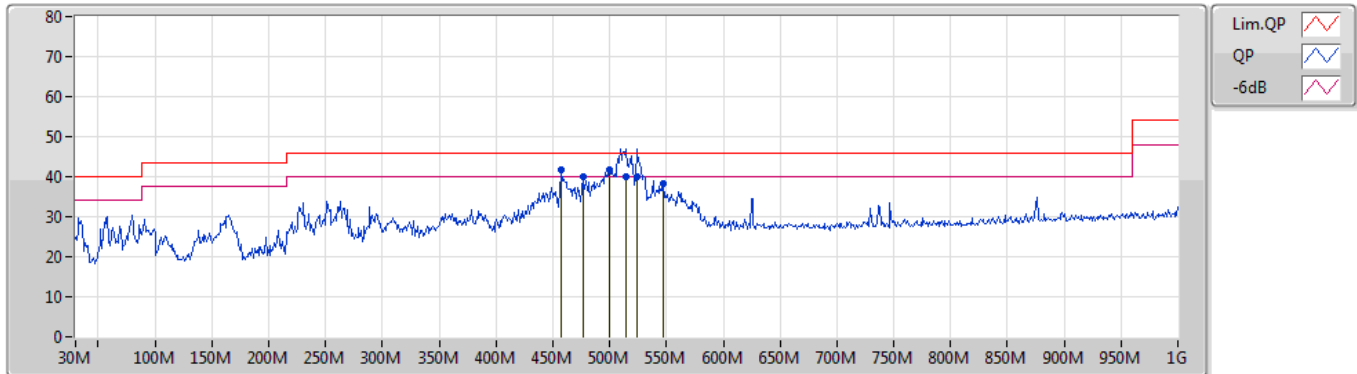

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	457.77M	41.59	46.00	-4.41	-6.89	3	Horizontal	208	1.50	-	48.48	22.43	2.93	32.25
PK	476.2M	39.91	46.00	-6.09	-6.51	3	Horizontal	129	1.00	-	46.42	22.79	3.00	32.30
PK	499.48M	41.84	46.00	-4.16	-6.33	3	Horizontal	300	1.25	"Worst"	48.17	22.94	3.10	32.37
QP	514.03M	39.85	46.00	-6.15	-6.20	3	Horizontal	196	1.25	-	46.05	22.98	3.16	32.34
QP	523.73M	39.92	46.00	-6.08	-6.15	3	Horizontal	187	1.25	-	46.07	22.98	3.19	32.32
PK	547.01M	38.26	46.00	-7.74	-4.79	3	Horizontal	172	1.00	-	43.05	24.20	3.29	32.28




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(2Mbps)	Pass	AV	2.4835G	53.97	54.00	-0.03	3	Vertical	332	1.90	-

BT-LE(1Mbps)

2402MHz_TX

05/10/2020

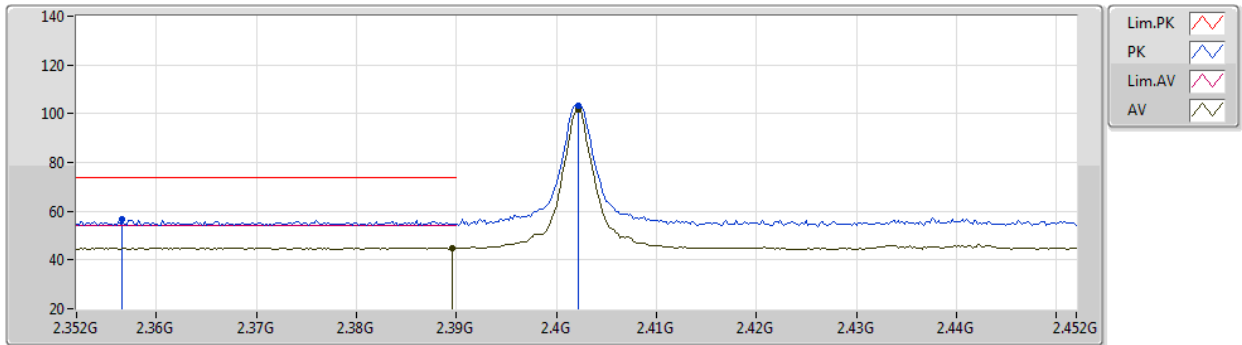


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3566G	56.55	74.00	-17.45	24.97	3	Vertical	308	2.12	-	27.60	3.98	-
AV	2.3896G	45.04	54.00	-8.96	13.45	3	Vertical	308	2.12	-	27.60	3.99	-
PK	2.4022G	103.26	Inf	-Inf	71.67	3	Vertical	308	2.12	-	27.59	4.00	-
AV	2.4022G	101.91	Inf	-Inf	70.32	3	Vertical	308	2.12	-	27.59	4.00	-

BT-LE(1Mbps)

2402MHz_TX

05/10/2020

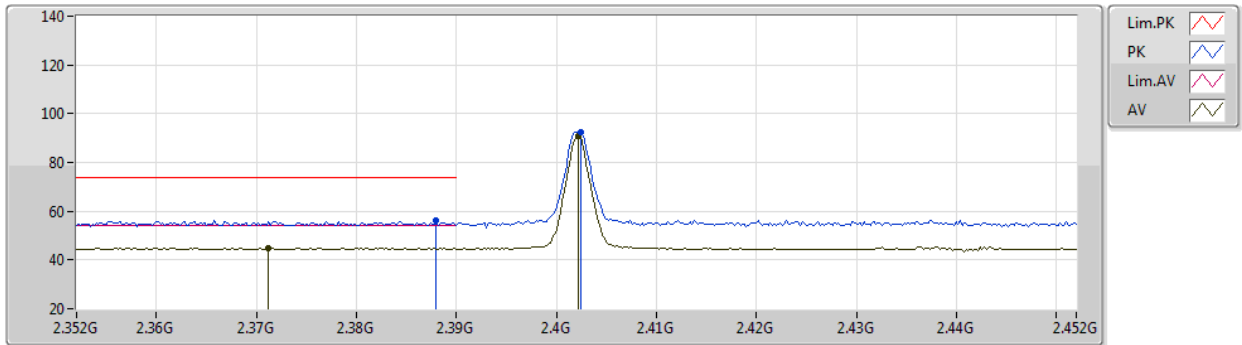


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.388G	56.31	74.00	-17.69	24.72	3	Horizontal	0	1.51	-	27.60	3.99	-
AV	2.3712G	44.80	54.00	-9.20	13.21	3	Horizontal	0	1.51	-	27.60	3.99	-
PK	2.4024G	92.38	Inf	-Inf	60.79	3	Horizontal	0	1.51	-	27.59	4.00	-
AV	2.4022G	91.05	Inf	-Inf	59.46	3	Horizontal	0	1.51	-	27.59	4.00	-

BT-LE(1Mbps)

2402MHz_TX

05/10/2020

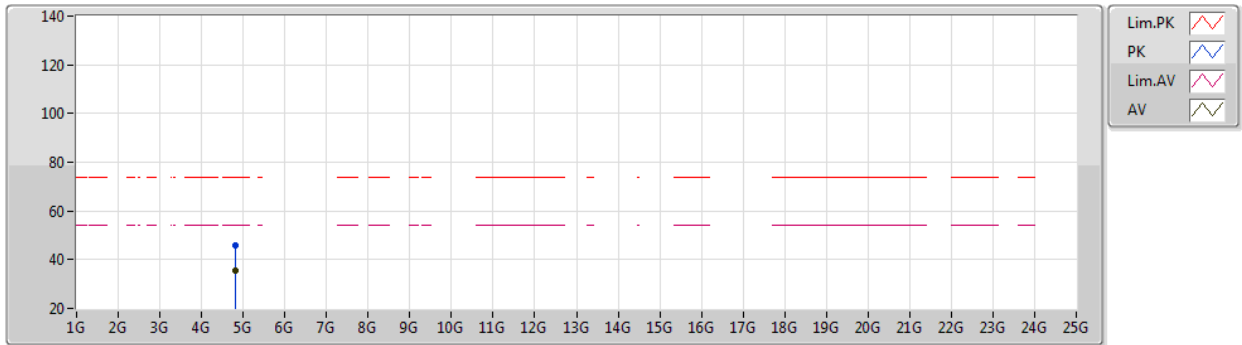


EUT V_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80612G	45.68	74.00	-28.32	41.12	3	Vertical	188	2.22	-	31.02	5.31	31.77
AV	4.80374G	35.60	54.00	-18.40	31.05	3	Vertical	188	2.22	-	31.01	5.31	31.77

BT-LE(1Mbps)

2402MHz_TX

05/10/2020

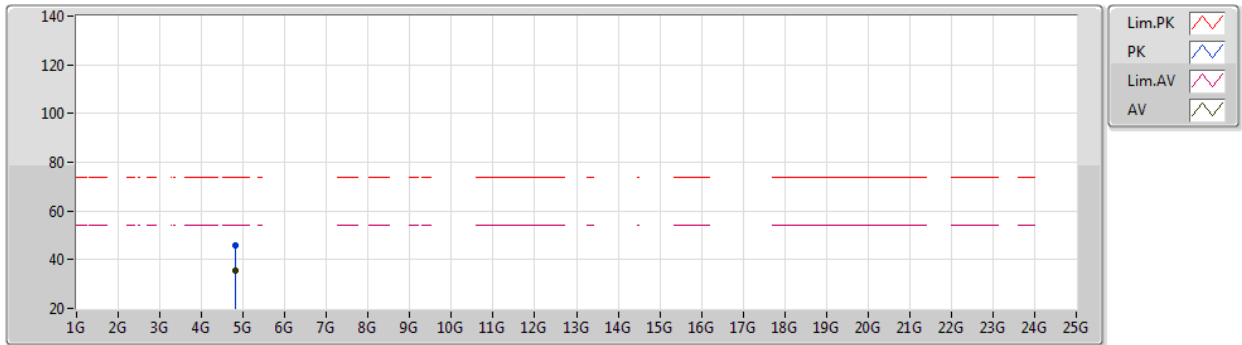


EUT V_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80271G	45.92	74.00	-28.08	41.38	3	Horizontal	65	2.70	-	31.01	5.30	31.77
AV	4.80294G	35.47	54.00	-18.53	30.93	3	Horizontal	65	2.70	-	31.01	5.30	31.77

BT-LE(1Mbps)

2440MHz_TX

05/10/2020

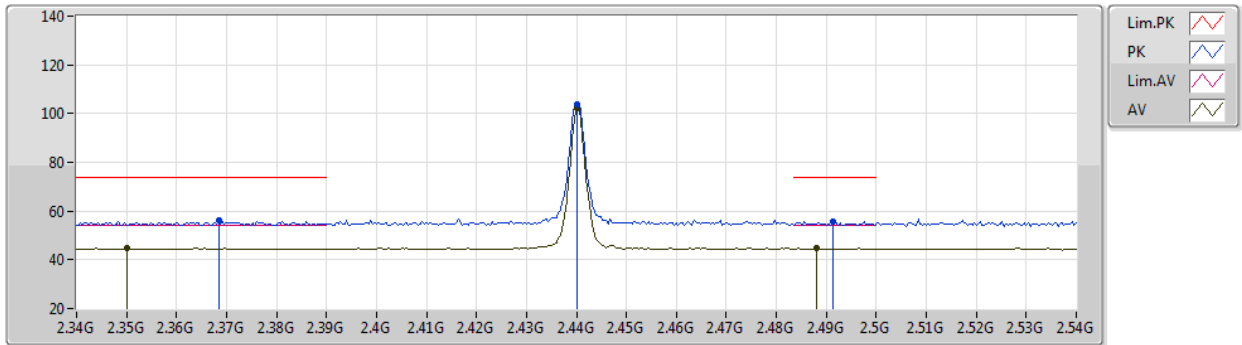


EUT_V1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3684G	56.05	74.00	-17.95	24.47	3	Vertical	330	1.74	-	27.60	3.98	-
AV	2.35G	44.81	54.00	-9.19	13.23	3	Vertical	330	1.74	-	27.60	3.98	-
PK	2.44G	103.57	Inf	-Inf	72.11	3	Vertical	330	1.74	-	27.44	4.02	-
AV	2.44G	102.14	Inf	-Inf	70.68	3	Vertical	330	1.74	-	27.44	4.02	-
PK	2.4912G	55.81	74.00	-18.19	24.36	3	Vertical	330	1.74	-	27.40	4.05	-
AV	2.488G	44.69	54.00	-9.31	13.25	3	Vertical	330	1.74	-	27.40	4.04	-

BT-LE(1Mbps)

2440MHz_TX

05/10/2020

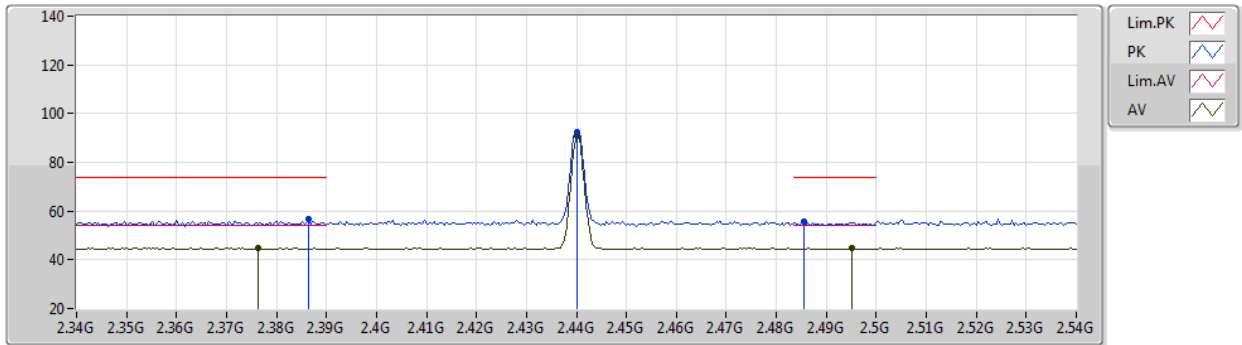


EUT_V1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3864G	56.65	74.00	-17.35	25.06	3	Horizontal	4	1.40	-	27.60	3.99	-
AV	2.3764G	44.78	54.00	-9.22	13.19	3	Horizontal	4	1.40	-	27.60	3.99	-
PK	2.44G	92.59	Inf	-Inf	61.13	3	Horizontal	4	1.40	-	27.44	4.02	-
AV	2.44G	91.11	Inf	-Inf	59.65	3	Horizontal	4	1.40	-	27.44	4.02	-
PK	2.4856G	55.54	74.00	-18.46	24.10	3	Horizontal	4	1.40	-	27.40	4.04	-
AV	2.4952G	44.63	54.00	-9.37	13.18	3	Horizontal	4	1.40	-	27.40	4.05	-

BT-LE(1Mbps)

2440MHz_TX

05/10/2020

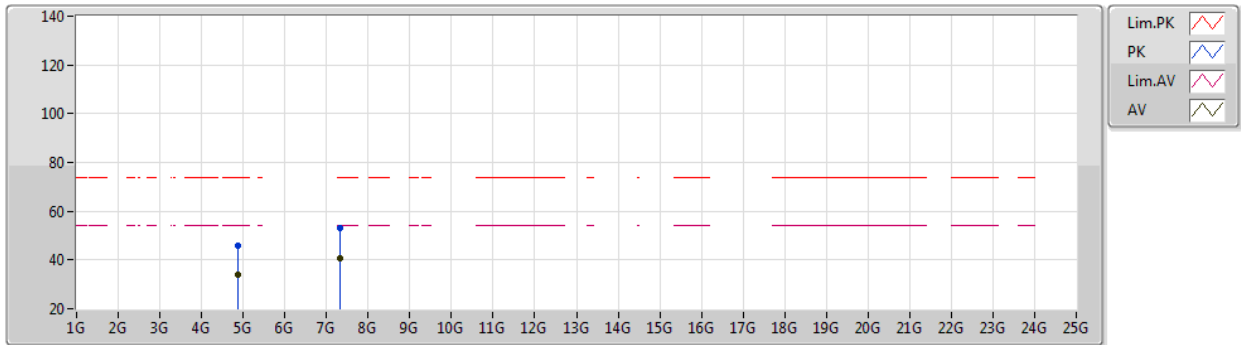


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88197G	45.86	74.00	-28.14	40.97	3	Vertical	197	1.07	-	31.14	5.42	31.67
AV	4.8804G	34.10	54.00	-19.90	29.22	3	Vertical	197	1.07	-	31.14	5.42	31.68
PK	7.32159G	52.85	74.00	-21.15	42.74	3	Vertical	280	2.00	-	36.31	6.96	33.16
AV	7.32117G	40.88	54.00	-13.12	30.76	3	Vertical	280	2.00	-	36.32	6.96	33.16

BT-LE(1Mbps)

2440MHz_TX

05/10/2020

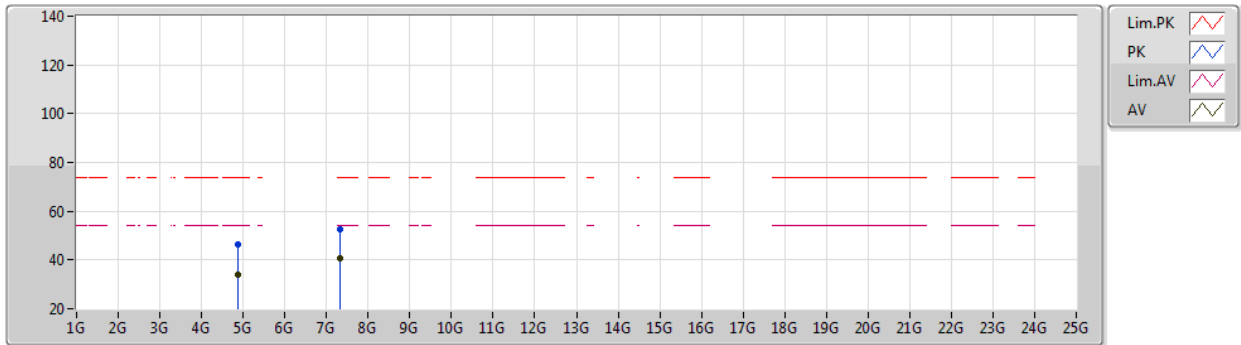


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88084G	46.61	74.00	-27.39	41.73	3	Horizontal	294	1.76	-	31.14	5.42	31.68
AV	4.8817G	34.19	54.00	-19.81	29.30	3	Horizontal	294	1.76	-	31.14	5.42	31.67
PK	7.31974G	52.82	74.00	-21.18	42.70	3	Horizontal	86	2.01	-	36.32	6.96	33.16
AV	7.32142G	40.92	54.00	-13.08	30.81	3	Horizontal	86	2.01	-	36.31	6.96	33.16

BT-LE(1Mbps)

2480MHz_TX

05/10/2020

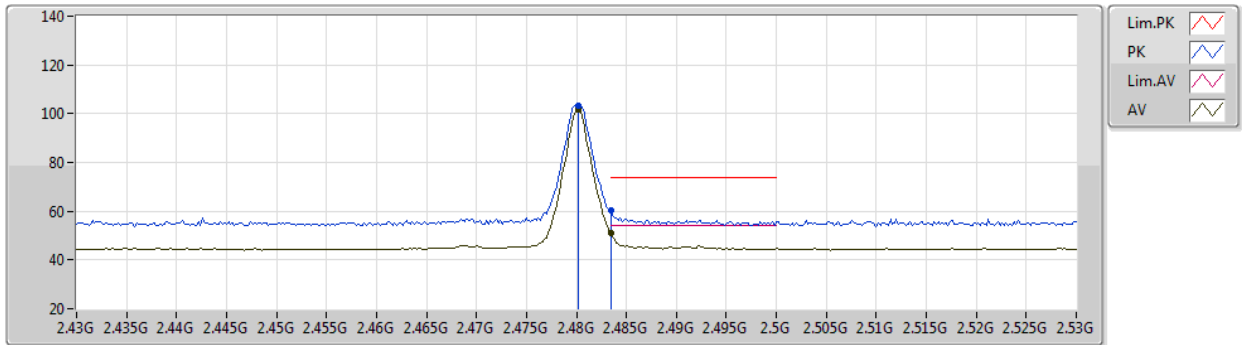


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4802G	103.16	Inf	-Inf	71.72	3	Vertical	329	2.11	-	27.40	4.04	-
AV	2.4802G	101.75	Inf	-Inf	70.31	3	Vertical	329	2.11	-	27.40	4.04	-
PK	2.4835G	60.11	74.00	-13.89	28.67	3	Vertical	329	2.11	-	27.40	4.04	-
AV	2.4835G	50.90	54.00	-3.10	19.46	3	Vertical	329	2.11	-	27.40	4.04	-

BT-LE(1Mbps)

2480MHz_TX

05/10/2020

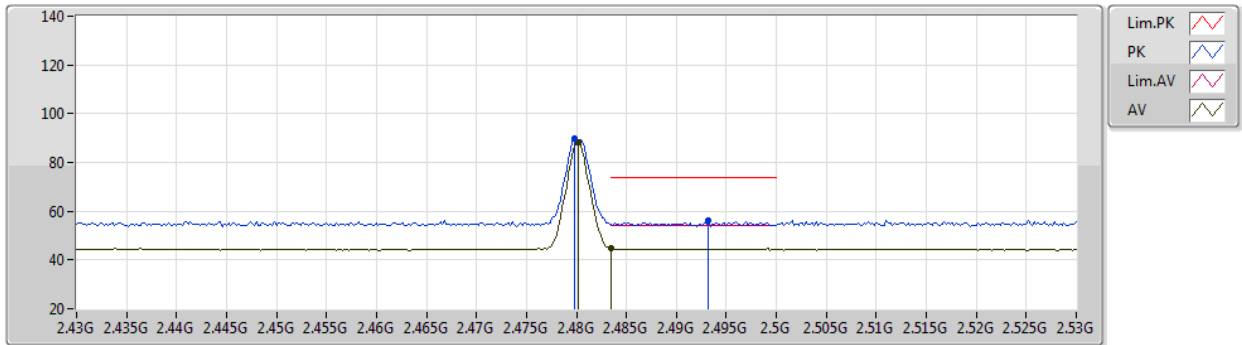


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4798G	89.60	Inf	-Inf	58.16	3	Horizontal	12	1.33	-	27.40	4.04	-
AV	2.4802G	88.18	Inf	-Inf	56.74	3	Horizontal	12	1.33	-	27.40	4.04	-
PK	2.4932G	55.95	74.00	-18.05	24.50	3	Horizontal	12	1.33	-	27.40	4.05	-
AV	2.4835G	44.78	54.00	-9.22	13.34	3	Horizontal	12	1.33	-	27.40	4.04	-

BT-LE(1Mbps)

2480MHz_TX

05/10/2020

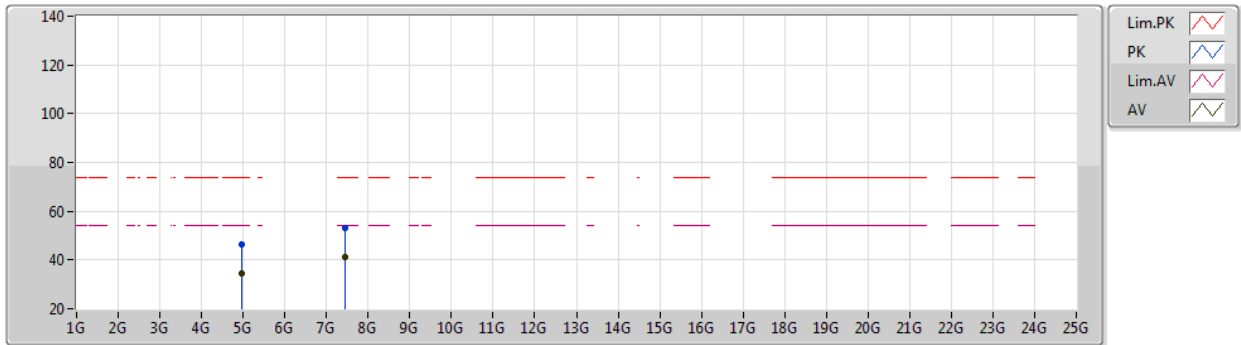


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95873G	46.40	74.00	-27.60	41.11	3	Vertical	354	1.86	-	31.33	5.54	31.58
AV	4.96114G	34.55	54.00	-19.45	29.25	3	Vertical	354	1.86	-	31.34	5.54	31.58
PK	7.43956G	52.95	74.00	-21.05	42.81	3	Vertical	88	2.54	-	36.36	7.00	33.22
AV	7.44215G	40.99	54.00	-13.01	30.84	3	Vertical	88	2.54	-	36.37	7.00	33.22

BT-LE(1Mbps)

2480MHz_TX

05/10/2020

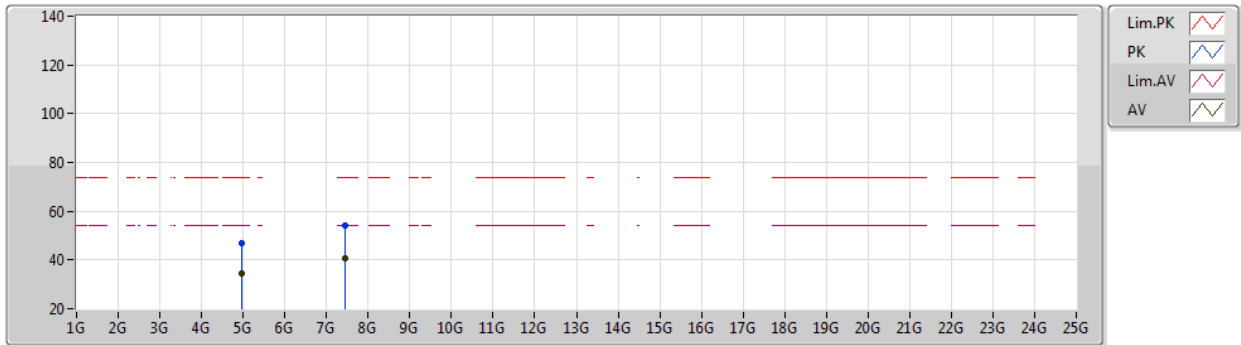


EUT Y_1TX
Setting 0E
06-F-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95928G	46.71	74.00	-27.29	41.41	3	Horizontal	326	1.02	-	31.34	5.54	31.58
AV	4.96076G	34.34	54.00	-19.66	29.04	3	Horizontal	326	1.02	-	31.34	5.54	31.58
PK	7.43957G	53.98	74.00	-20.02	43.84	3	Horizontal	233	1.57	-	36.36	7.00	33.22
AV	7.44123G	40.72	54.00	-13.28	30.58	3	Horizontal	233	1.57	-	36.36	7.00	33.22

BT-LE(2Mbps)

2402MHz_TX

05/10/2020

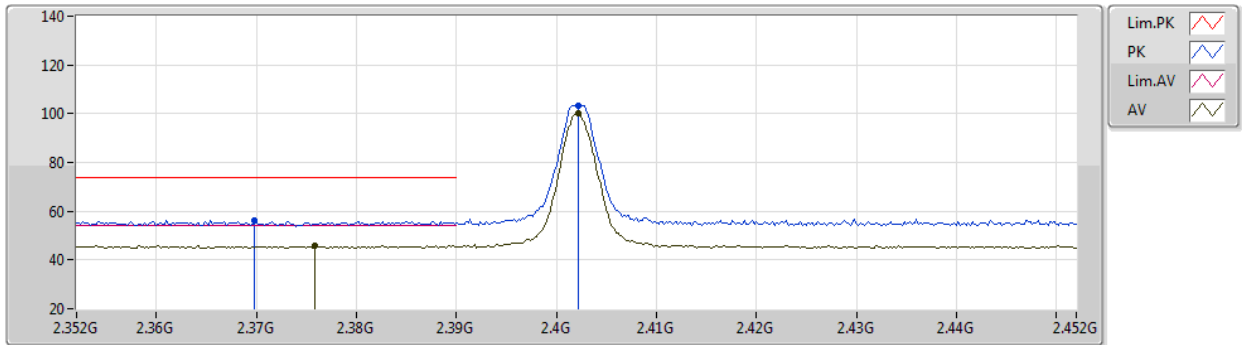


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3698G	56.41	74.00	-17.59	24.83	3	Vertical	308	1.78	-	27.60	3.98	-
AV	2.3758G	45.85	54.00	-8.15	14.26	3	Vertical	308	1.78	-	27.60	3.99	-
PK	2.4022G	103.32	Inf	-Inf	71.73	3	Vertical	308	1.78	-	27.59	4.00	-
AV	2.4022G	100.33	Inf	-Inf	68.74	3	Vertical	308	1.78	-	27.59	4.00	-

BT-LE(2Mbps)

2402MHz_TX

05/10/2020

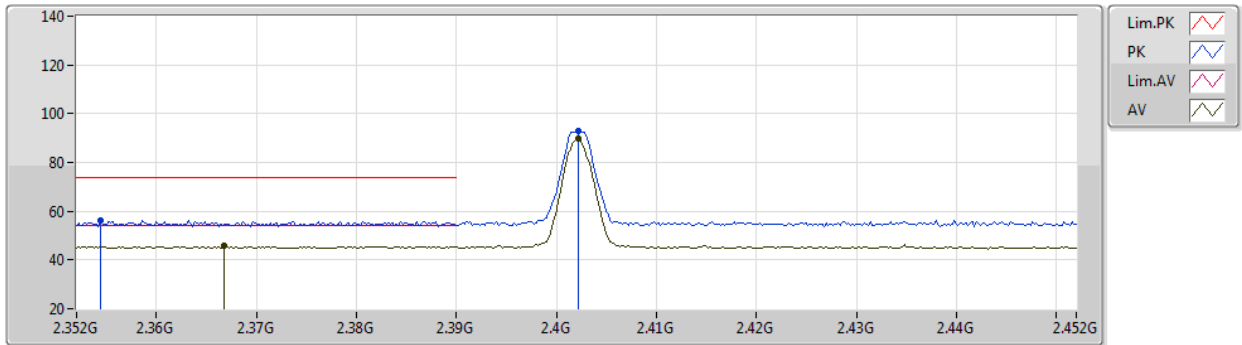


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3544G	56.12	74.00	-17.88	24.54	3	Horizontal	5	1.01	-	27.60	3.98	-
AV	2.3668G	45.74	54.00	-8.26	14.16	3	Horizontal	5	1.01	-	27.60	3.98	-
PK	2.4022G	92.69	Inf	-Inf	61.10	3	Horizontal	5	1.01	-	27.59	4.00	-
AV	2.4022G	89.68	Inf	-Inf	58.09	3	Horizontal	5	1.01	-	27.59	4.00	-

BT-LE(2Mbps)

2402MHz_TX

05/10/2020

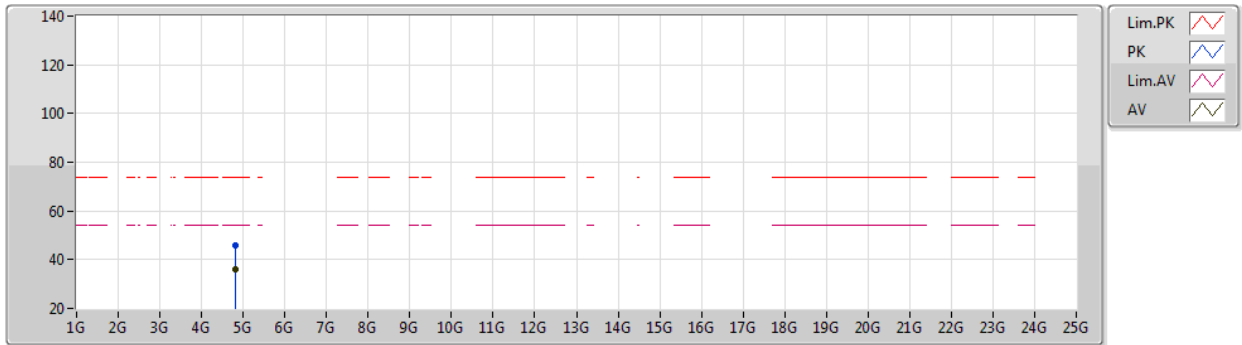


EUT V_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80192G	45.99	74.00	-28.01	41.45	3	Vertical	336	1.58	-	31.01	5.30	31.77
AV	4.80792G	35.81	54.00	-18.19	31.23	3	Vertical	336	1.58	-	31.03	5.31	31.76

BT-LE(2Mbps)

2402MHz_TX

05/10/2020

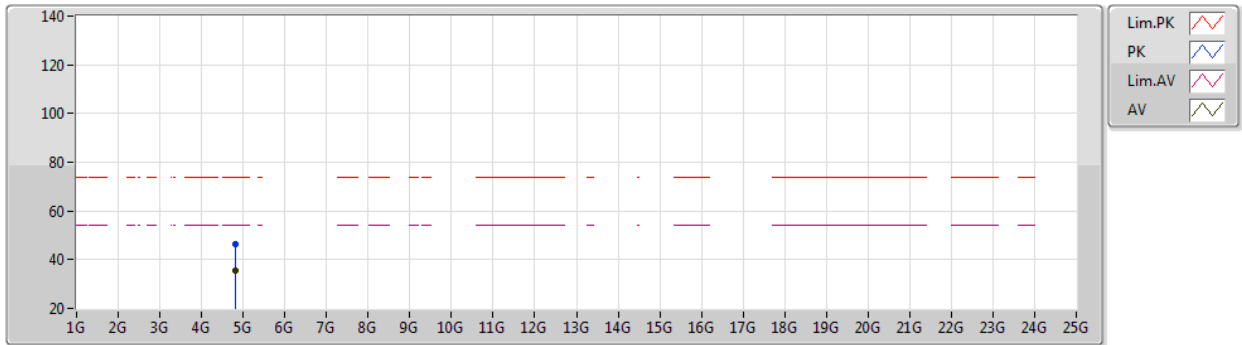


EUT V_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80132G	46.38	74.00	-27.62	41.84	3	Horizontal	214	1.26	-	31.01	5.30	31.77
AV	4.80498G	35.33	54.00	-18.67	30.77	3	Horizontal	214	1.26	-	31.02	5.31	31.77

BT-LE(2Mbps)

2440MHz_TX

05/10/2020

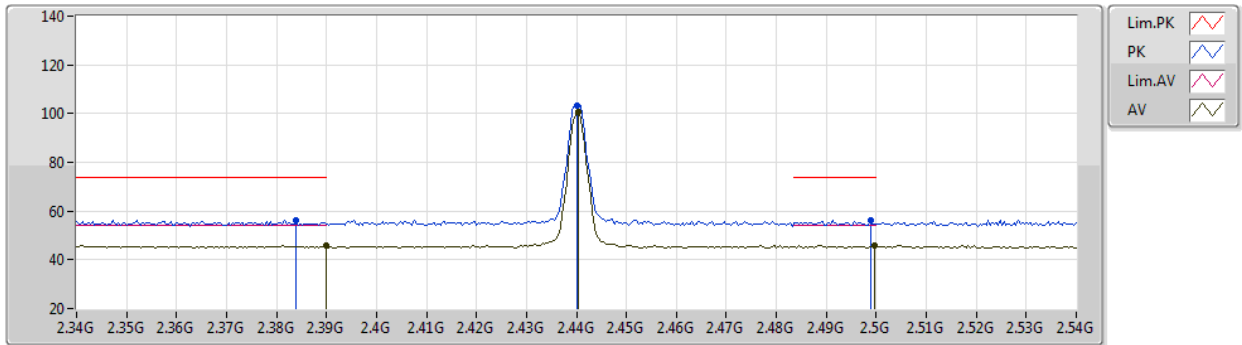


EUT_V1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.384G	56.44	74.00	-17.56	24.85	3	Vertical	333	1.80	-	27.60	3.99	-
AV	2.39G	45.88	54.00	-8.12	14.28	3	Vertical	333	1.80	-	27.60	4.00	-
PK	2.44G	103.37	Inf	-Inf	71.91	3	Vertical	333	1.80	-	27.44	4.02	-
AV	2.4404G	100.46	Inf	-Inf	69.00	3	Vertical	333	1.80	-	27.44	4.02	-
PK	2.4988G	56.28	74.00	-17.72	24.83	3	Vertical	333	1.80	-	27.40	4.05	-
AV	2.4996G	45.93	54.00	-8.07	14.48	3	Vertical	333	1.80	-	27.40	4.05	-

BT-LE(2Mbps)

2440MHz_TX

05/10/2020

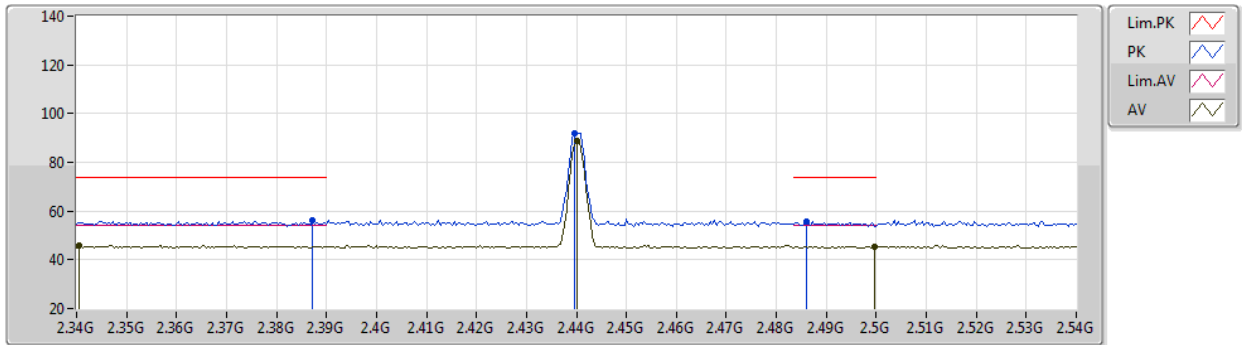


EUT_V1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3872G	56.01	74.00	-17.99	24.42	3	Horizontal	15	1.38	-	27.60	3.99	-
AV	2.3404G	45.69	54.00	-8.31	14.10	3	Horizontal	15	1.38	-	27.62	3.97	-
PK	2.4396G	91.94	Inf	-Inf	60.48	3	Horizontal	15	1.38	-	27.44	4.02	-
AV	2.44G	88.97	Inf	-Inf	57.51	3	Horizontal	15	1.38	-	27.44	4.02	-
PK	2.486G	55.77	74.00	-18.23	24.33	3	Horizontal	15	1.38	-	27.40	4.04	-
AV	2.4996G	45.50	54.00	-8.50	14.05	3	Horizontal	15	1.38	-	27.40	4.05	-

BT-LE(2Mbps)

2440MHz_TX

05/10/2020

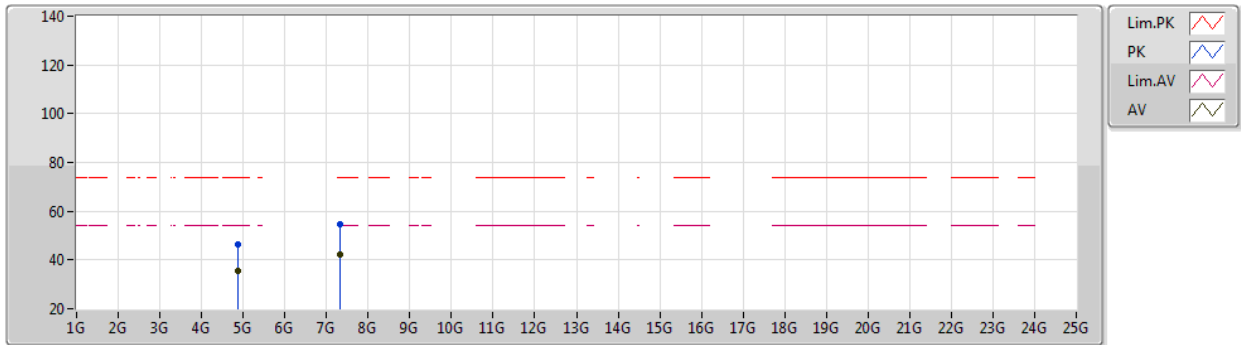


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87788G	46.13	74.00	-27.87	41.25	3	Vertical	72	2.09	-	31.14	5.42	31.68
AV	4.8818G	35.33	54.00	-18.67	30.44	3	Vertical	72	2.09	-	31.14	5.42	31.67
PK	7.31752G	54.46	74.00	-19.54	44.33	3	Vertical	119	1.80	-	36.33	6.96	33.16
AV	7.31632G	42.23	54.00	-11.77	32.10	3	Vertical	119	1.80	-	36.33	6.96	33.16

BT-LE(2Mbps)

2440MHz_TX

05/10/2020

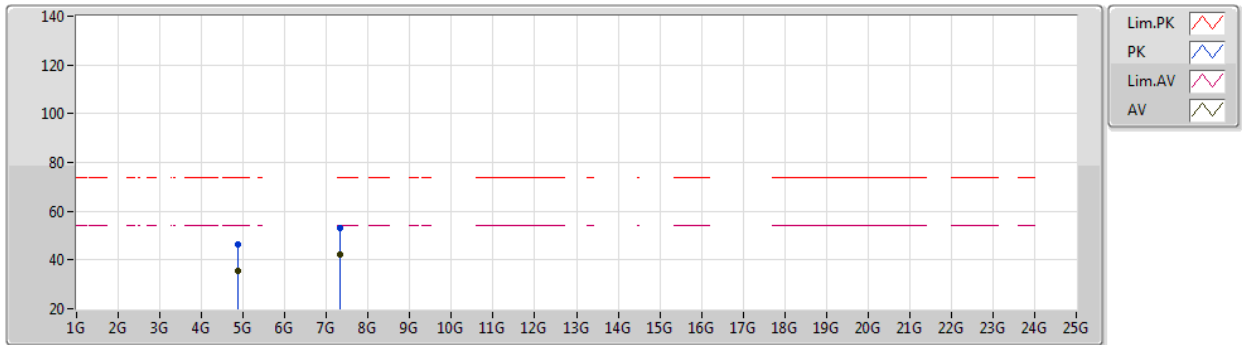


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88156G	46.33	74.00	-27.67	41.44	3	Horizontal	36	2.13	-	31.14	5.42	31.67
AV	4.87942G	35.44	54.00	-18.56	30.56	3	Horizontal	36	2.13	-	31.14	5.42	31.68
PK	7.32344G	53.04	74.00	-20.96	42.94	3	Horizontal	5	1.80	-	36.31	6.96	33.17
AV	7.31708G	42.28	54.00	-11.72	32.15	3	Horizontal	5	1.80	-	36.33	6.96	33.16

BT-LE(2Mbps)

2480MHz_TX

05/10/2020

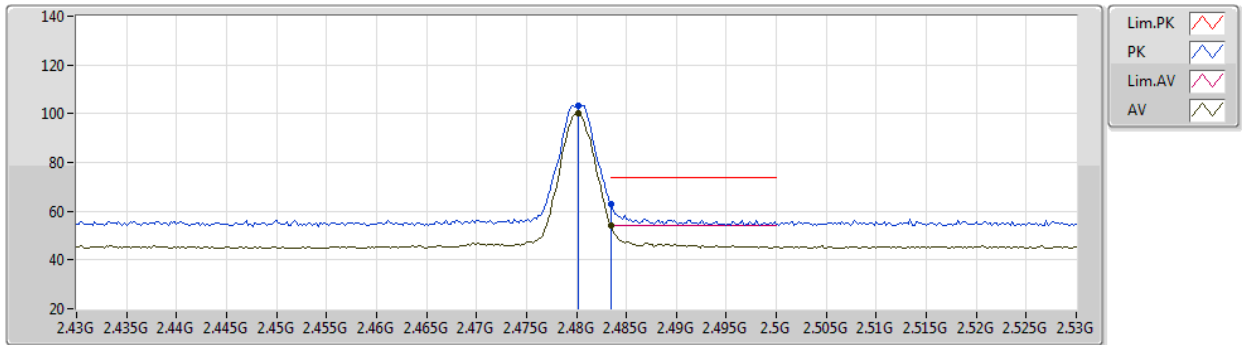


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4802G	103.30	Inf	-Inf	71.86	3	Vertical	332	1.90	-	27.40	4.04	-
AV	2.4802G	100.39	Inf	-Inf	68.95	3	Vertical	332	1.90	-	27.40	4.04	-
PK	2.4835G	63.10	74.00	-10.90	31.66	3	Vertical	332	1.90	-	27.40	4.04	-
AV	2.4835G	53.97	54.00	-0.03	22.53	3	Vertical	332	1.90	-	27.40	4.04	-

BT-LE(2Mbps)

2480MHz_TX

05/10/2020

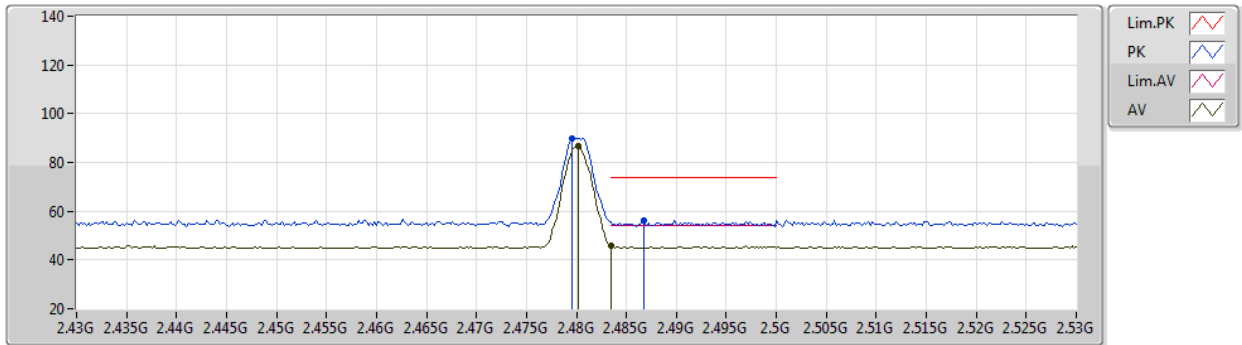


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4796G	89.73	Inf	-Inf	58.29	3	Horizontal	14	1.54	-	27.40	4.04	-
AV	2.4802G	86.81	Inf	-Inf	55.37	3	Horizontal	14	1.54	-	27.40	4.04	-
PK	2.4868G	56.30	74.00	-17.70	24.86	3	Horizontal	14	1.54	-	27.40	4.04	-
AV	2.4835G	45.88	54.00	-8.12	14.44	3	Horizontal	14	1.54	-	27.40	4.04	-

BT-LE(2Mbps)

2480MHz_TX

05/10/2020

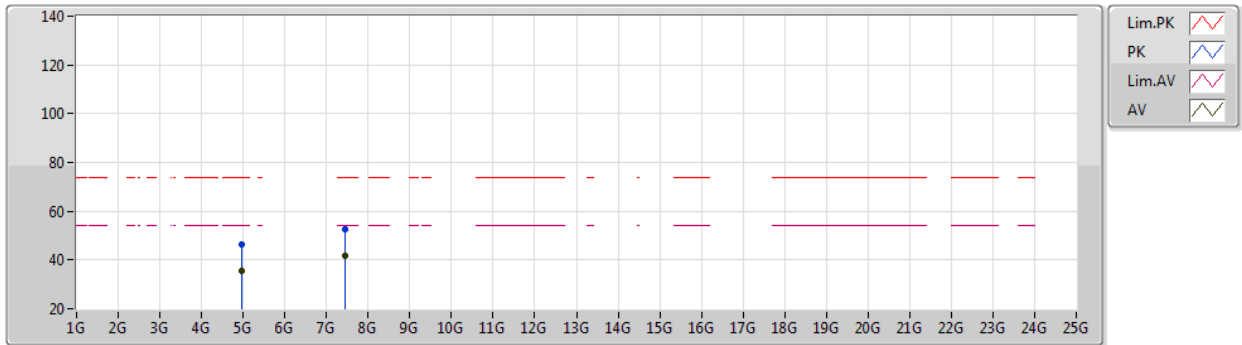


EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.96108G	46.50	74.00	-27.50	41.20	3	Vertical	195	1.39	-	31.34	5.54	31.58
AV	4.96104G	35.34	54.00	-18.66	30.04	3	Vertical	195	1.39	-	31.34	5.54	31.58
PK	7.43974G	52.53	74.00	-21.47	42.39	3	Vertical	223	1.34	-	36.36	7.00	33.22
AV	7.4399G	41.93	54.00	-12.07	31.79	3	Vertical	223	1.34	-	36.36	7.00	33.22

BT-LE(2Mbps)

2480MHz_TX

05/10/2020

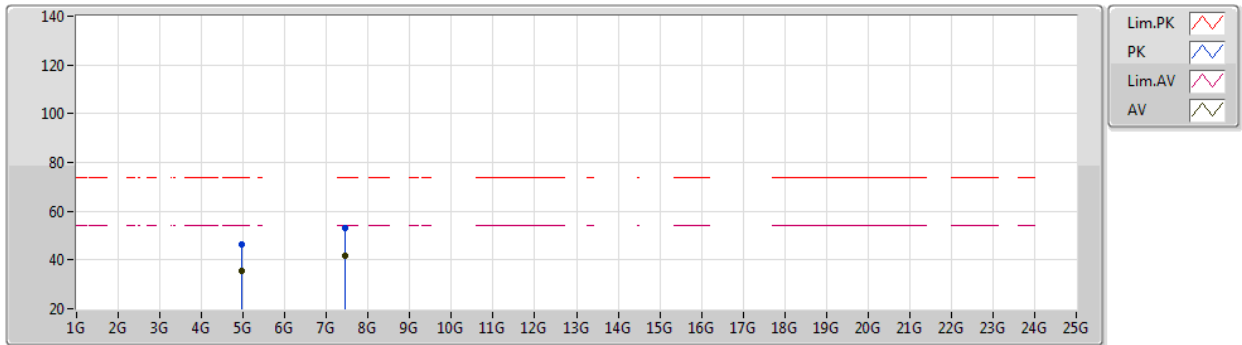

EUT Y_1TX
Setting 0E
06-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95884G	46.43	74.00	-27.57	41.13	3	Horizontal	86	1.84	-	31.34	5.54	31.58
AV	4.96166G	35.65	54.00	-18.35	30.34	3	Horizontal	86	1.84	-	31.35	5.54	31.58
PK	7.4449G	52.85	74.00	-21.15	42.69	3	Horizontal	187	1.71	-	36.38	7.00	33.22
AV	7.4443G	41.94	54.00	-12.06	31.78	3	Horizontal	187	1.71	-	36.38	7.00	33.22




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.64204G	36.79	54.00	-17.21	Vertical

Mode 1


30/10/2020

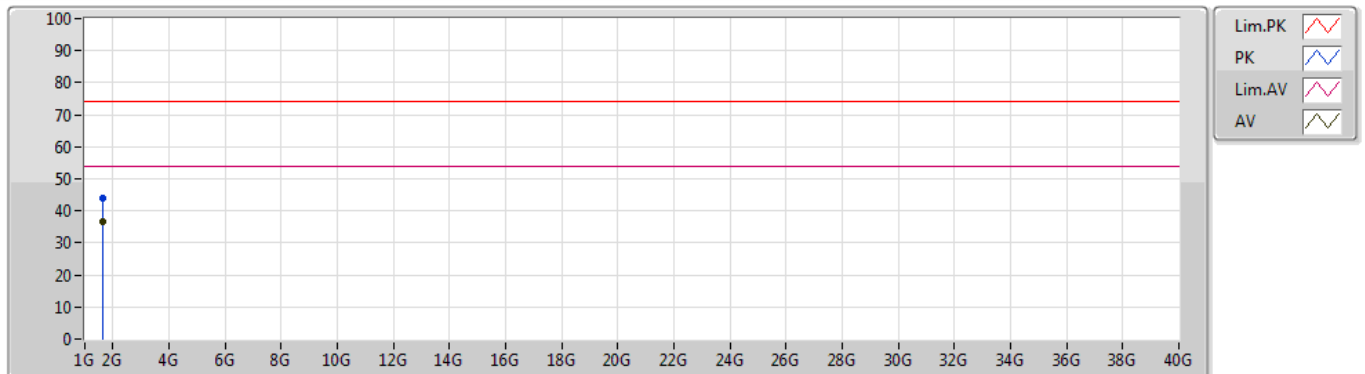

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	1.6598G	43.96	74.00	-30.04	-6.68	3	Vertical	155	1.03	-	50.64	25.06	2.50	34.24
AV	1.64204G	36.79	54.00	-17.21	-6.67	3	Vertical	155	1.03	"Worst"	43.46	25.10	2.50	34.27

Mode 1

30/10/2020

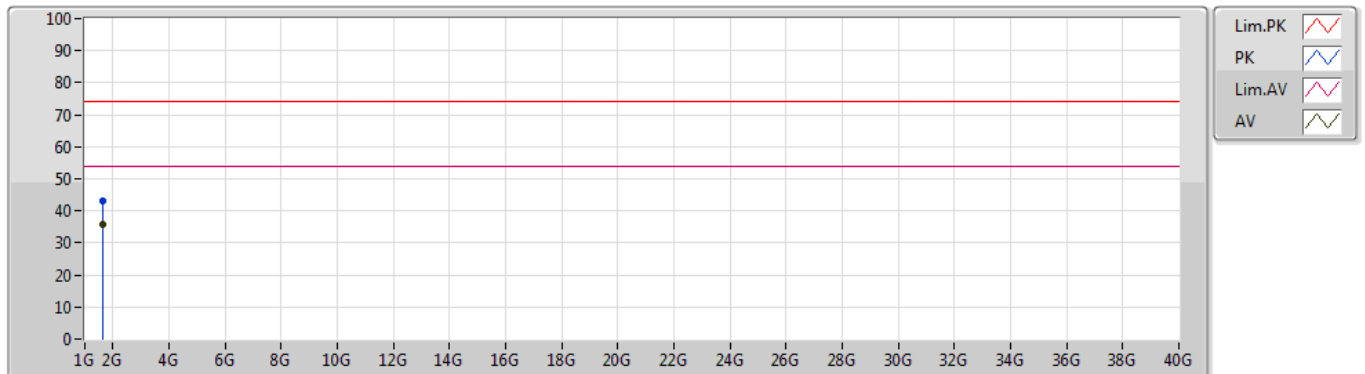

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	1.6533G	42.95	74.00	-31.05	-6.66	3	Horizontal	97	1.00	-	49.61	25.09	2.50	34.25
AV	1.658G	35.69	54.00	-18.31	-6.67	3	Horizontal	97	1.00	"Worst"	42.36	25.07	2.50	34.24