



Report No.: TW2009393-01E File reference No.: 2020-10-27

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Laptop

Model No.: NP141AQ-T, N14550

Trademark: PACKARD BELL

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: October 27, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2020-10-27



Page 2 of 101

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	23
8.0	Maximum Output Power	43
9.0	Power Spectral Density Measurement	46
10.0	Out of Band Measurement.	65
11.0	Antenna Requirement.	83
12.0	FCC ID Label	84
13.0	Photo of Test Setup and EUT View.	85

Date: 2020-10-27



Page 4 of 101

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Telephone: 0755-84688843

Fax: --

1.3 Description of EUT

Product: Laptop

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Brand Name: PACKARD BELL

Model Number: NP141AQ-T Additional Model Number: N14550

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20,HT40

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-10-27



Page 5 of 101

Two FPC antennas used. The gain of the antennas is 1.79dBi for each one. (get from Antenna:

the antenna specification provided the applicant)

Input Voltage: DC12V, 2A

Power Adapter Model: FJ-SW1202000U;

Input: 100-240V~50/60Hz 0.6A Max; Output: DC12V, 2000mA

Submitted Sample: 2 Samples

Test Duration 1.5

2020-09-29 to 2020-10-27

Test Uncertainty 1.6

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry lang The sample tested by

Print Name: Terry Tang

Remark:

RF Test Software Name: DRTU.Ink

Power Setting Level: 8

Page 6 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2020-10-27



Page 7 of 101

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Page 8 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 9 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

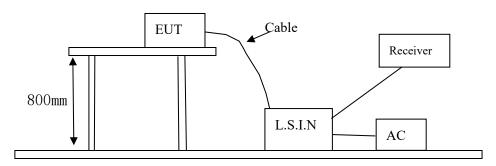

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Lauton	Shenzhen Jingwah Information	NP141AQ-T,	RBD-NP141AT
Laptop	Technology Co., Ltd.	N14550	KDD-NY141AI

B. Internal Device

Device	Device Manufacturer		FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2009393-01E Page 10 of 101

Date: 2020-10-27



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Limits (dB \(\mu \) V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5 00$	56.0	46.0	
$5.00 \sim 30.00$	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2020-10-27



Conducted Emission on Live Terminal (150kHz to 30MHz) A:

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

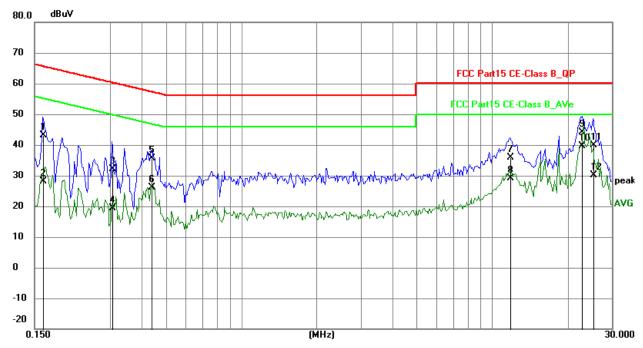

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	33.33	9.78	43.11	65.38	-22.27	QP	Р
2	0.1617	18.31	9.78	28.09	55.38	-27.29	AVG	Р
3	0.3060	22.41	9.76	32.17	60.08	-27.91	QP	Р
4	0.3060	9.68	9.76	19.44	50.08	-30.64	AVG	Р
5	0.4397	25.91	9.77	35.68	57.07	-21.39	QP	Р
6	0.4397	16.26	9.77	26.03	47.07	-21.04	AVG	Р
7	11.7633	25.56	10.24	35.80	60.00	-24.20	QP	Р
8	11.7633	18.91	10.24	29.15	50.00	-20.85	AVG	Р
9	22.8822	33.28	10.86	44.14	60.00	-15.86	QP	Р
10	22.8822	28.75	10.86	39.61	50.00	-10.39	AVG	Р
11	25.2885	28.98	11.01	39.99	60.00	-20.01	QP	Р
12	25.2885	19.11	11.01	30.12	50.00	-19.88	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2020-10-27



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

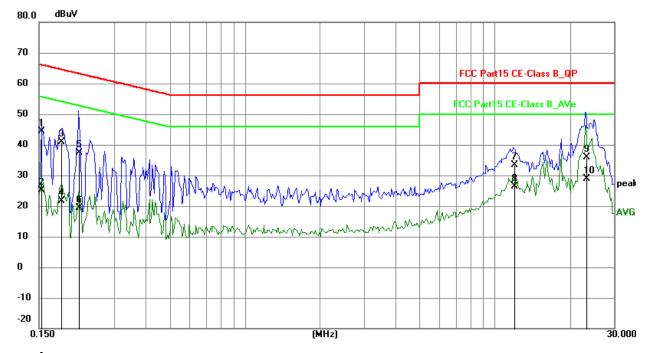

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	34.72	9.78	44.50	65.79	-21.29	QP	Р
2	0.1539	15.35	9.78	25.13	55.79	-30.66	AVG	Р
3	0.1835	31.00	9.76	40.76	64.33	-23.57	QP	Р
4	0.1835	11.76	9.76	21.52	54.33	-32.81	AVG	Р
5	0.2163	27.53	9.75	37.28	62.96	-25.68	QP	Р
6	0.2163	9.59	9.75	19.34	52.96	-33.62	AVG	Р
7	11.9328	23.10	10.25	33.35	60.00	-26.65	QP	Р
8	11.9328	16.24	10.25	26.49	50.00	-23.51	AVG	Р
9	23.1404	25.02	10.87	35.89	60.00	-24.11	QP	Р
10	23.1404	17.93	10.87	28.80	50.00	-21.20	AVG	Р

Date: 2020-10-27



Page 13 of 101

6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2009393-01E Page 14 of 101

Date: 2020-10-27



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

	•	9 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Page 15 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

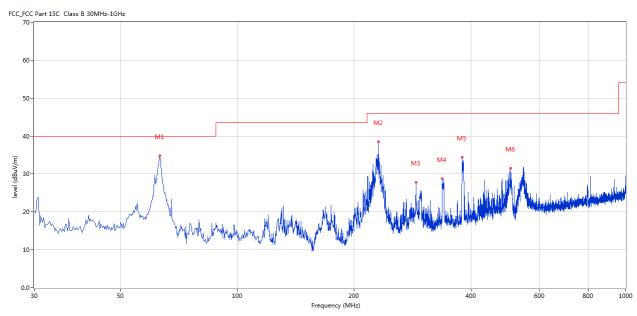

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	63.214	34.76	-13.32	40.0	-5.24	Peak	360.00	200	Horizontal	Pass
2	230.982	38.51	-12.65	46.0	-7.49	Peak	214.00	200	Horizontal	Pass
3	288.440	27.80	-11.25	46.0	-18.20	Peak	272.00	100	Horizontal	Pass
4	336.928	28.72	-9.86	46.0	-17.28	Peak	272.00	100	Horizontal	Pass
5	379.113	34.41	-9.26	46.0	-11.59	Peak	272.00	100	Horizontal	Pass
6	506.151	31.45	-6.89	46.0	-14.55	Peak	360.00	200	Horizontal	Pass

Page 16 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

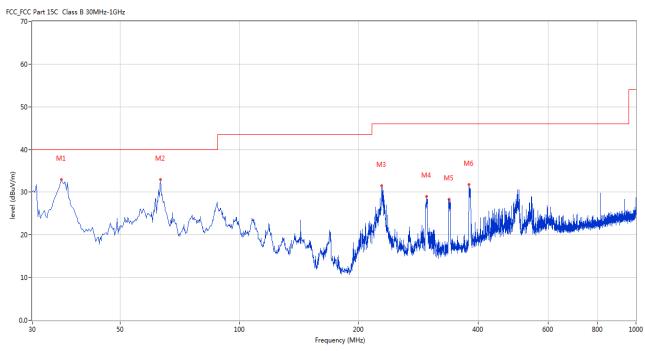

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	35.576	32.91	-13.84	40.0	-7.09	Peak	360.00	200	Vertical	Pass
2	63.214	32.99	-13.32	40.0	-7.01	Peak	360.00	200	Vertical	Pass
3	228.315	31.49	-12.75	46.0	-14.51	Peak	360.00	200	Vertical	Pass
4	295.956	29.06	-11.09	46.0	-16.94	Peak	1.00	100	Vertical	Pass
5	337.413	28.33	-9.83	46.0	-17.67	Peak	15.00	100	Vertical	Pass
6	379.113	31.77	-9.26	46.0	-14.23	Peak	360.00	200	Vertical	Pass

Page 17 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

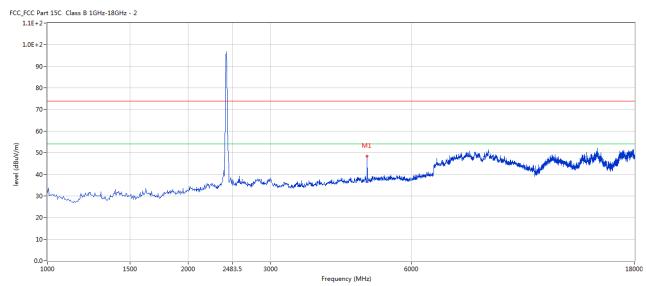

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4824.044	48.41	3.15	54.0	-5.59	Peak	150.00	100	Н	N/A

Page 18 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



CH01 for 11g at 6Mbps: Vertical

FCC_FCC Part 15C Class B 1GHz-18GHz - 2

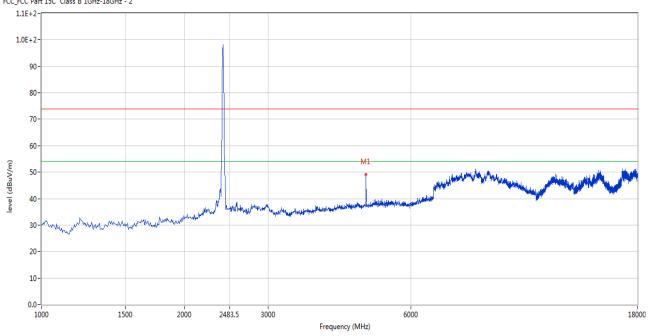


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4824.044	49.21	3.15	54.0	-4.79	Peak	105.00	100	V	N/A

Report No.: TW2009393-01E Page 19 of 101

Date: 2020-10-27



CH06 for 11g at 6Mbps: Vertical

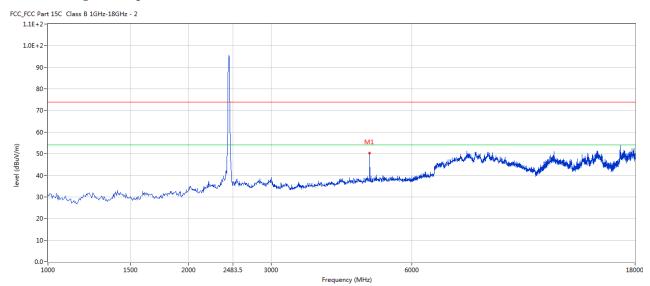


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4875.031	50.21	3.19	54.0	-3.79	Peak	165.00	100	٧	N/A

Report No.: TW2009393-01E Page 20 of 101

Date: 2020-10-27



CH06 for 11g at 6Mbps: Horizontal

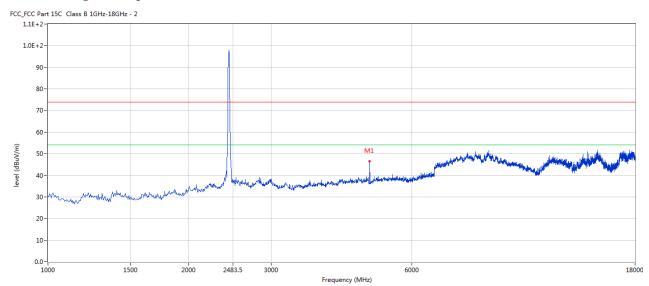


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4875.031	47.56	3.19	54.0	-6.44	Peak	178.00	100	Н	N/A

Report No.: TW2009393-01E Page 21 of 101

Date: 2020-10-27



CH11 for 11g at 6Mbps: Vertical

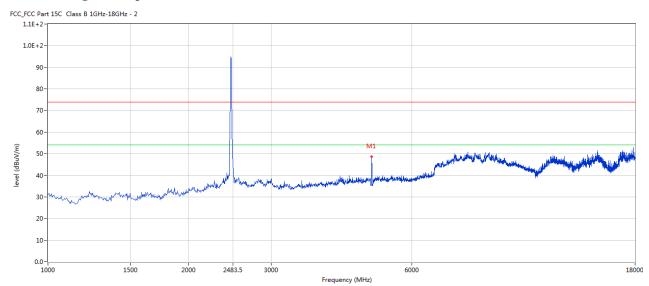


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4921.770	49.53	3.27	54.0	-4.47	Peak	151.00	100	٧	Pass

Page 22 of 101 Report No.: TW2009393-01E

Date: 2020-10-27



CH11 for 11g at 6Mbps: Horizontal

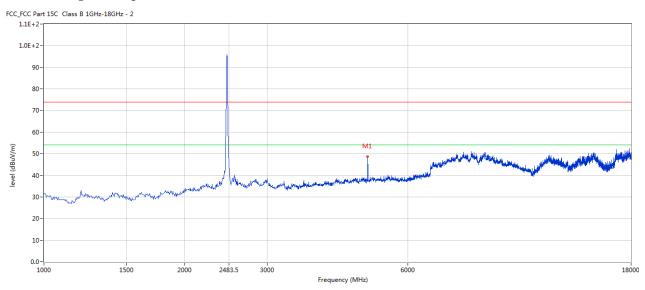

No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4921.770	49.60	3.27	54.0	-4.4	Peak	149.00	100	Н	N/A

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz, it is only the floor noise.

Page 23 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth $(VBW) \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2009393-01E Page 24 of 101

Date: 2020-10-27



6dB Occupied Bandwidth

EUT		-	Laptop		Model		NP14	1AQ-T
Mode		8	302.11b		Test Volta	age	DC	7.6V
Temperat	ure	24	deg. C,		Humidity	,	56%	6 RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	1	10	.02		0.5	Pass
6		2437	1	9.	62		0.5	Pass
11		2462	1	9.	63		0.5	Pass
1		2412	11	10	.02		0.5	Pass
6		2437	11	10	.02)2		Pass
11	2462 11		11	10.03		0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Page 25 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



1. 802.11b at 1Mbps of CH01

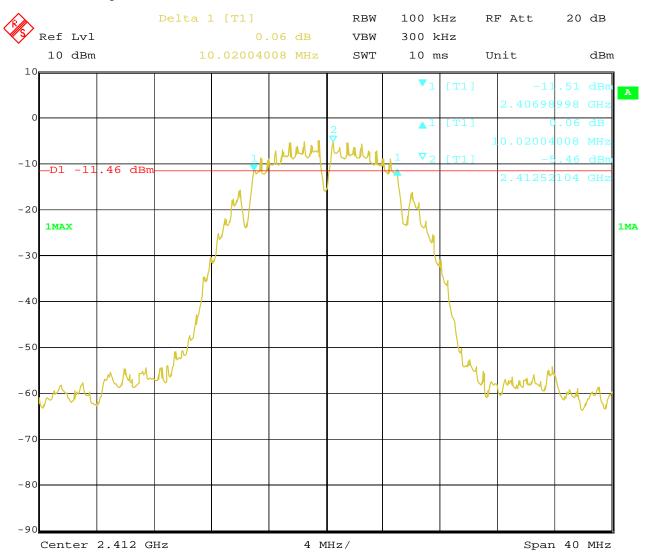

14.OCT.2020 13:30:41 Date:


Page 26 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2. 802.11b at 1Mbps of CH06

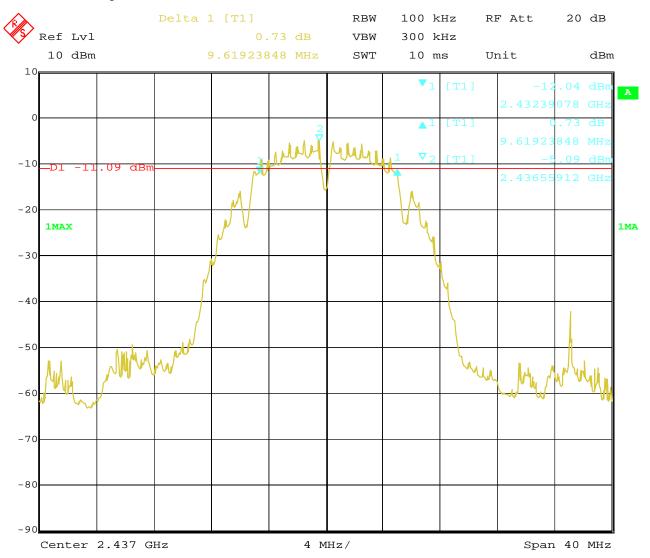

14.OCT.2020 13:44:44 Date:


Page 27 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3. 802.11b at 1Mbps of CH11

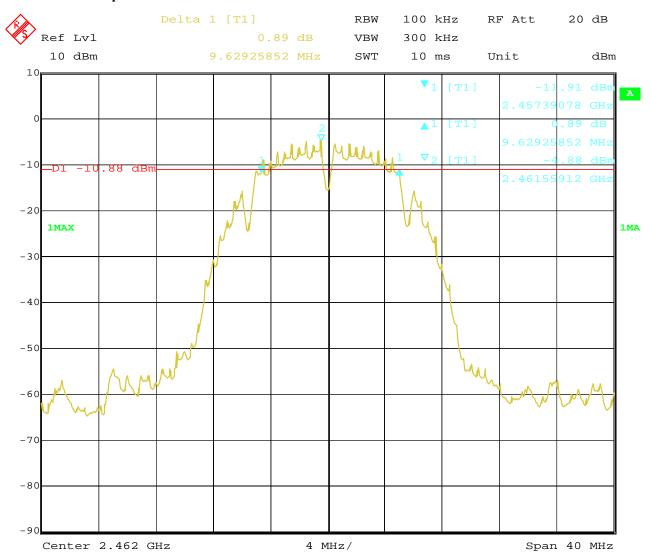

14.OCT.2020 13:55:41 Date:


Page 28 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



4. 802.11b at 11Mbps of CH01

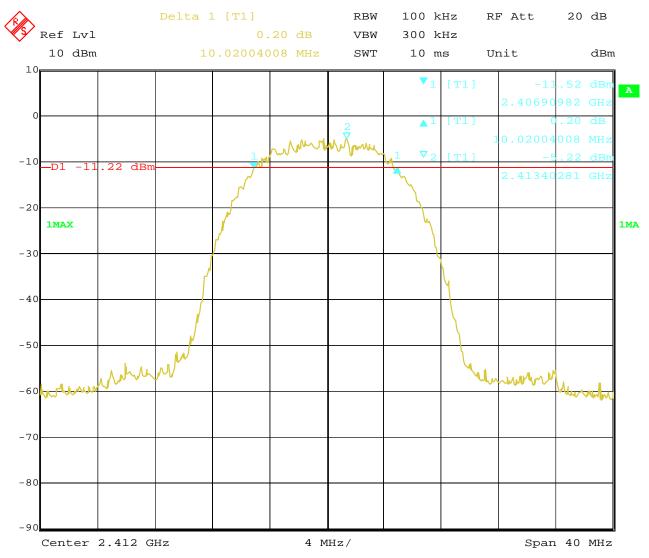

14.OCT.2020 13:33:48 Date:


Page 29 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



5. 802.11b at 11Mbps of CH06

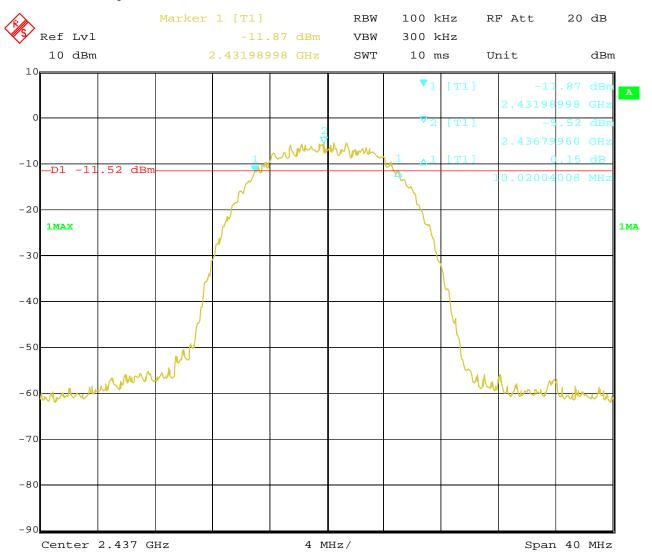

14.OCT.2020 13:46:18 Date:


Page 30 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



6. 802.11b at 11Mbps of CH11

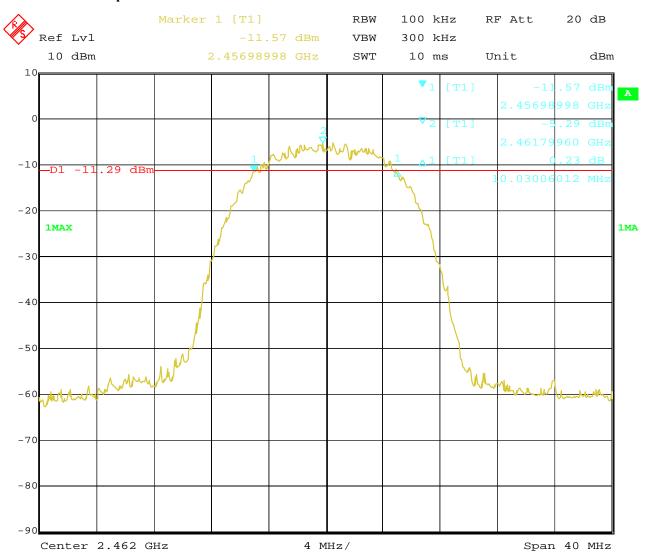

14.OCT.2020 13:57:31 Date:

Report No.: TW2009393-01E Page 31 of 101

Date: 2020-10-27



6dB Occupied Bandwidth

EUT			Laptop		Model		NP	141AQ-T
Mode		8	302.11g		Test Volta	nge	Ι	OC7.6V
Temperat	ure	24	4 deg. C,		Humidity	,	5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)	Minimum Limit (MHz)		Pass/ Fail
1		2412	6	15	.31		0.5	Pass
6		2437	6	15	.47	0.5		Pass
11		2462	6	15	.48	0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Page 32 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Test Plots:

1. 802.11g at 6Mbps of CH01

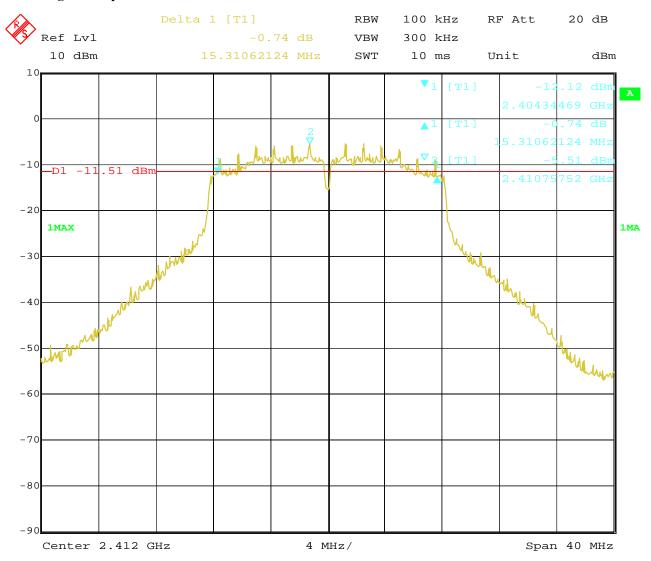

Date: 14.OCT.2020 13:36:51


Page 33 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2. 802.11g at 6Mbps of CH06

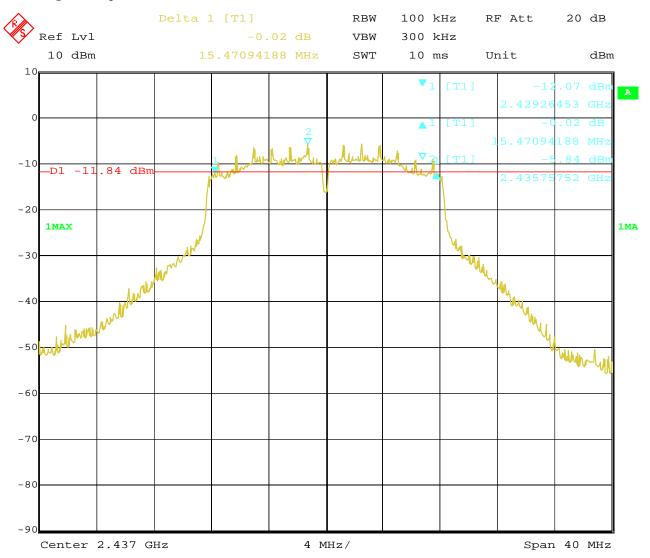

14.OCT.2020 Date: 13:48:59


Page 34 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3. 802.11g at 6Mbps of CH11

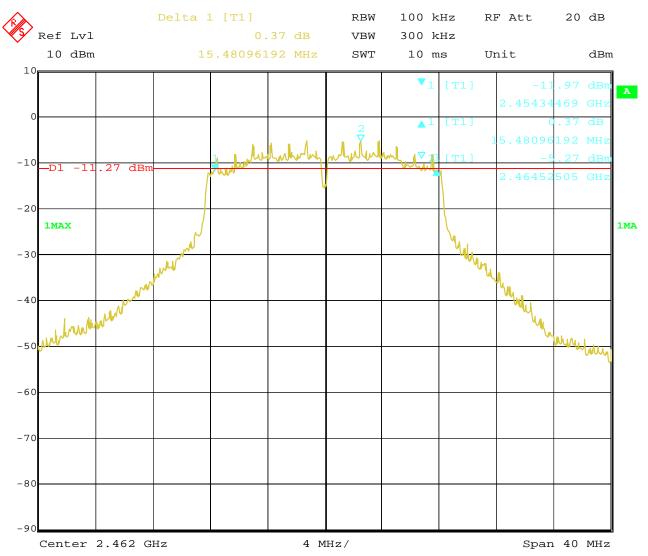

14.OCT.2020 14:00:26 Date:

Page 35 of 101 Report No.: TW2009393-01E

Date: 2020-10-27



6dB Occupied Bandwidth

EUT		Laptop			Model		NP141AQ-T	
Mode		802.11n HT20			Test Voltage		DC7.6V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1	2412		mcs0	16.03		0.5		Pass
6		2437	mcs0	mcs0 16.4			0.5	Pass
11		2462	mcs0	16	.12		0.5	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Page 36 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Test Plots:

1. 802.11n at HT20 of CH01

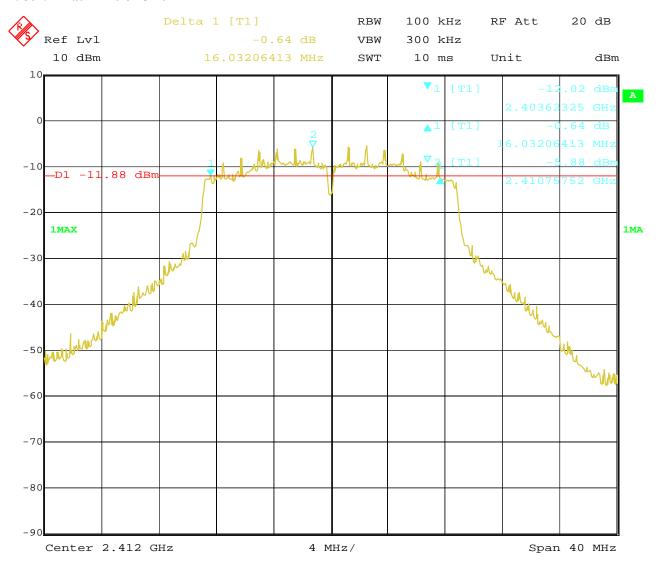

Date: 14.OCT.2020 13:39:39


Page 37 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2. 802.11n at HT20 of CH06

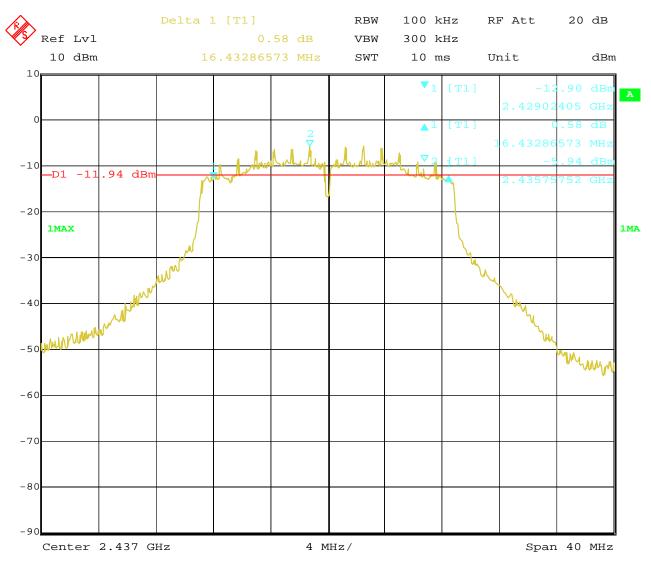

14.OCT.2020 Date: 13:53:14


Page 38 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3. 802.11n at HT20 of CH11

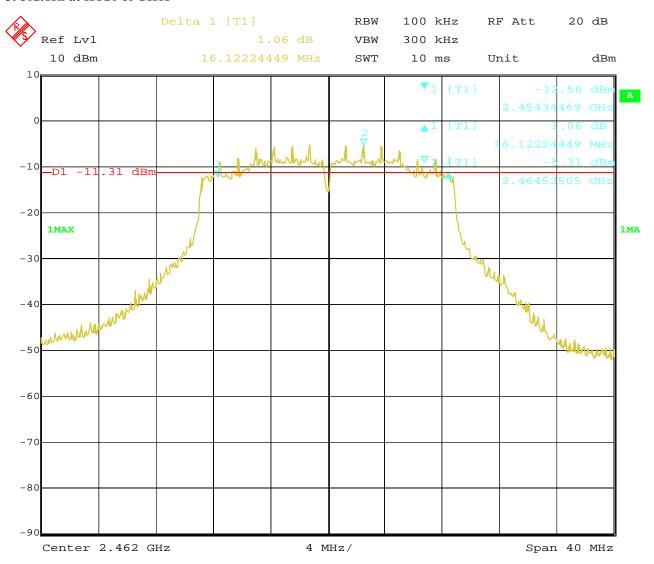

14.OCT.2020 14:02:58 Date:

Report No.: TW2009393-01E Page 39 of 101

Date: 2020-10-27



6dB Occupied Bandwidth

EUT			Laptop		Model		NP14	1AQ-T
Mode		802	.11n HT40		Test Volta	ige	DC	7.6V
Temperat	ure	24		Humidity		56%	6 RH	
Channel	nel Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
3		2422	mcs0	mcs0 35			0.5	Pass
6		2437	mcs0	35	.48		0.5	Pass
9	2452		mcs0	35	.39	0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Page 40 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Test Plots:

1. 802.11n at HT40 of CH03

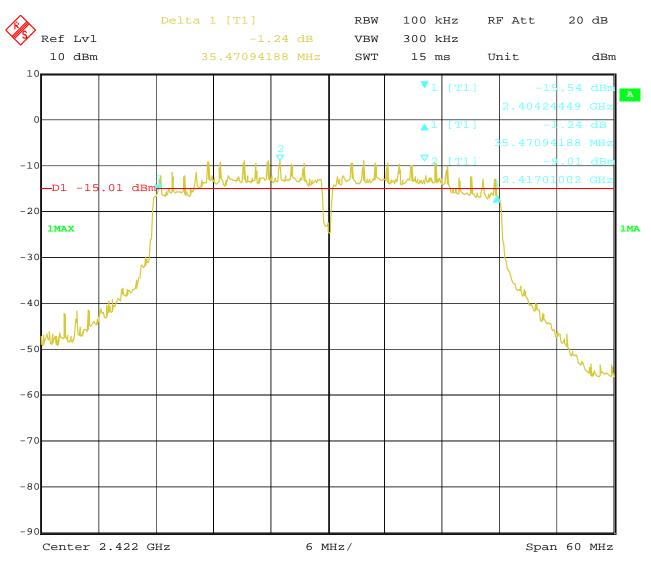

Date: 14.OCT.2020 14:05:47


Page 41 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2. 802.11n at HT40 of CH06

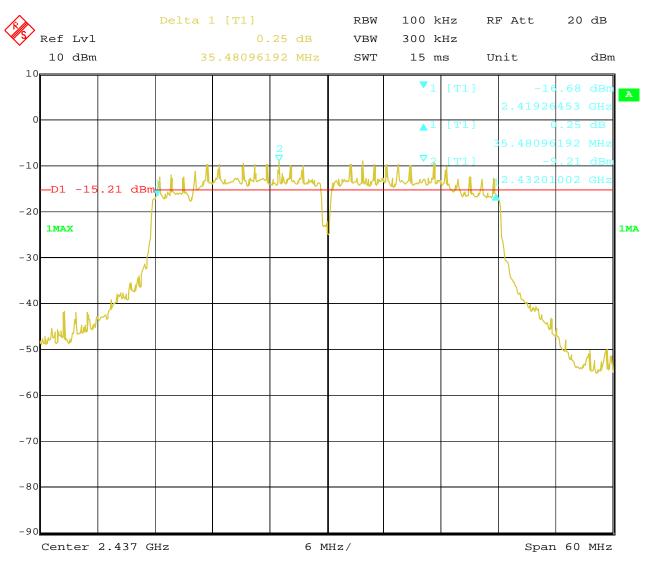

14.OCT.2020 14:08:19 Date:


Page 42 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3. 802.11n at HT40 of CH09

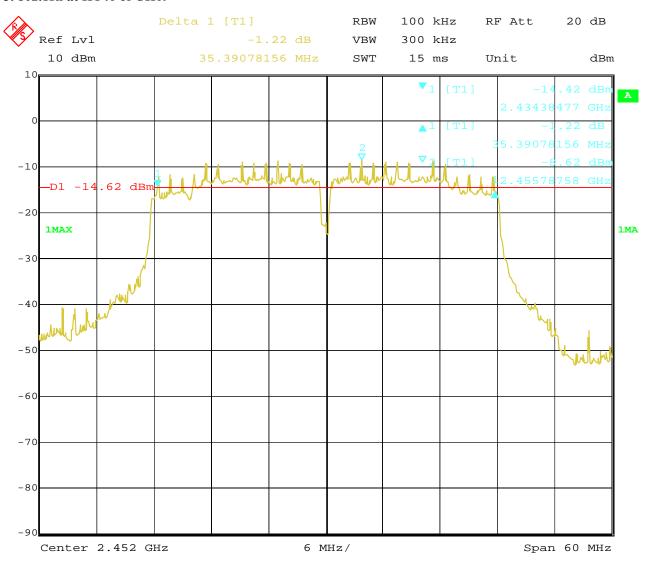

14.OCT.2020 Date: 14:10:38 Report No.: TW2009393-01E


Date: 2020-10-27



Page 43 of 101

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Average power was measured

Page 44 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



8.4Test Results

EUT			Lap	top			Mo	del	NP141AQ-T	
Mode	Mode 802.11b				Test Voltage			DC7.6V		
Temperat	erature 24 deg. C, Humidity				idity	56% RH				
Channel	Frequ (MH	uency z)	An1 Po	ower mW	Ant 2		rer mW	Total Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412		2.61	1.82	2.46		1.86	5.55	30	Pass
6	2437		2.18	1.65	2.09	2.09 1.6		5.15	30	Pass
11	2462		2.95	1.97	2.87		1.94	5.92	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			Lap	top		Mo	del	NP141AQ-T		
Mode	Mode 802.11g				Test V	oltage	DC7.6V			
Temperat	ure		24 de	g. C,	g. C, Humidity			56% RH		
Channel	Frequ (MH	uency z)	An1 Po	ower mW	Ant 2 l	Power	Total Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail	
1	2412		2.96	1.98	2.75	1.88	5.87	30	Pass	
6	2437		2.93	1.96	2.68	1.85	5.82	30	Pass	
11	2462	•	2.79	1.90	2.62	1.83	5.72	30	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



EUT			Lap	top		Mo	del	NP141AQ-T	
Mode	Mode 802.11n (HT20) Test Voltage			oltage	DC7.6V				
Temperat	ure		24 de	eg. C,		Hum	idity	56%	RH
Channel	Frequence (MH	uency z)	An1 Po	ower mW	Ant 2 l	Power	Total Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412		2.71	1.87	2.55	1.80	5.64	30	Pass
6	2437		2.74	1.88	2.60	1.82	5.68	30	Pass
11	2462		2.93	1.96	2.85	1.93	5.90	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			Lap	top		Mo	del	NP141AQ-T		
Mode	Mode 802.11n (HT40)				Test V	oltage	DC7.6V			
Temperat	ure		24 de	deg. C, Humidity			idity	56% RH		
Channel	Frequence (MH	uency z)	An1 Po	ower mW	Ant 2 I	Power	Total Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail	
3	2422		2.39	1.73	2.32	1.71	5.37	30	Pass	
6	2437		2.85	1.93	2.69	1.86	5.78	30	Pass	
9	2452		2.39	1.73	2.28	1.69	5.35	30	Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 46 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2009393-01E Page 47 of 101

Date: 2020-10-27



9.4Test Result

EUT		Laptop			Model			NP141AQ-T		
Mode	ode 802.11b 11Mbps		Test Voltage		DC7.6V					
Temperat	ure		24 deg. C,		Humidity		56% RH			
Channel	Freq	uency	Ant1 Power	F	actor	Total Power Spectral		Limit	Pass/ Fail	
	(M	IHz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)		
1	24	412	-14.78		3.01	-11.77		8	Pass	
6	24	137	-15.13	3.01		-12.12		8	Pass	
1	24	162	-15.11		3.01	-12.10		8	Pass	

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

EUT			Laptop		N	Model	NP141AQ-T		
Mode	e 802.11b 1Mbps		Test Voltage			DC7.6V			
Temperat	ure		24 deg. C,		Humidity		56% RH		
Channel	-	Frequency Antl Power Factor Total Power S			Limit	Pass/ Fail			
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
1	24	412 -13.88			3.01	-10.87		8	Pass
6	24	137	-15.18		3.01	-12.17		8	Pass
1	24	162	-14.83		3.01	-11	.82	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 48 of 101

Date: 2020-10-27

Report No.: TW2009393-01E

STING LAD	
	١

EUT		Laptop			N	Model	NP141AQ-T		
Mode			802.11g 6Mbps	6Mbps T		Test Voltage		DC7.6V	
Temperat	ure		24 deg. C,		Humidity		56% RH		
Channel	Freq	uency	Ant1 Power	Factor		Total Power Spectral		Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
1	24	412	-14.28		3.01	-11.27		8	Pass
6	24	137	-16.14	3.01		-13.13		8	Pass
1	24	162	-15.17		3.01	-12	2.16	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

EUT		Laptop			Model		NP141AQ-T		
Mode	Mode 802.11n HT20 mcs0		Test Voltage		DC7.6V				
Temperat	ure		24 deg. C,	Humidity		ımidity	56% RH		
Channel	Freq	uency Ant1 Power		F	actor	Total Power Spectral		Limit	Pass/ Fail
	(M	IHz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
1	24	412	-14.47		3.01	-11.46		8	Pass
6	24	137	-15.60		3.01	-12	2.59	8	Pass
1	24	462	-15.43		3.01	-12.42		8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

Report No.: TW2009393-01E Page 49 of 101

Date: 2020-10-27



EUT		Laptop			Model		NP141AQ-T		
Mode		802.11n HT40 mcs0		Test	Test Voltage		DC7.6V		
Temperat	ure		24 deg. C,		Humidity		56% RH		
Channel	Freq	uency	y Antl Power Fa		actor	Total Power Spectral		Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
3	24	122	-19.25	-19.25 3.0		-16.24		8	Pass
6	24	437	7 -19.14		3.01	-16.13		8	Pass
9	24	452	52 -19.40		3.01	-16	5.39	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 50 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

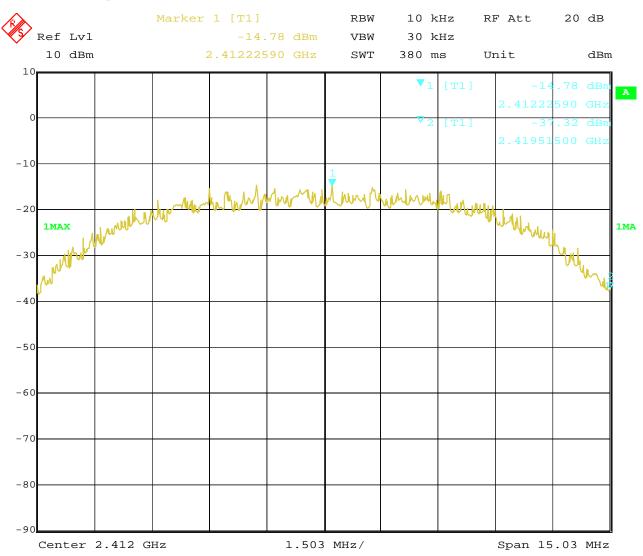

Date: 14.OCT.2020 15:11:14


Page 51 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



2. 802.11b at 11Mbps at CH06

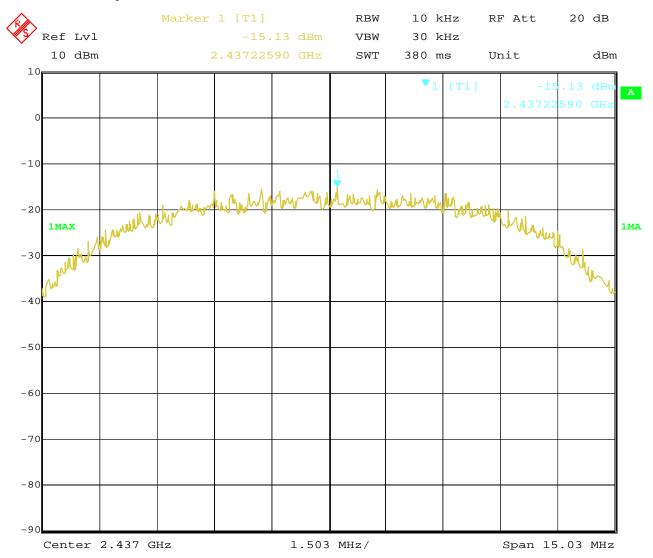

14.OCT.2020 Date: 15:18:58


Page 52 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



3. 802.11b at 11Mbps of CH11

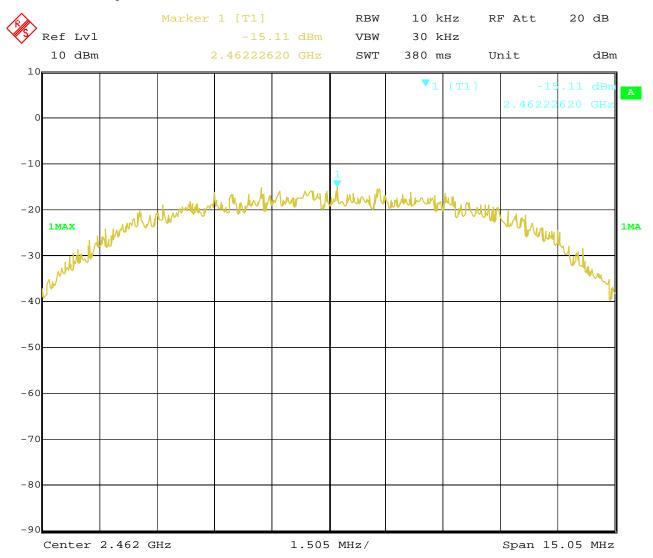

14.OCT.2020 Date: 15:26:05


Page 53 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



4. 802.11b at 1Mbps of CH1

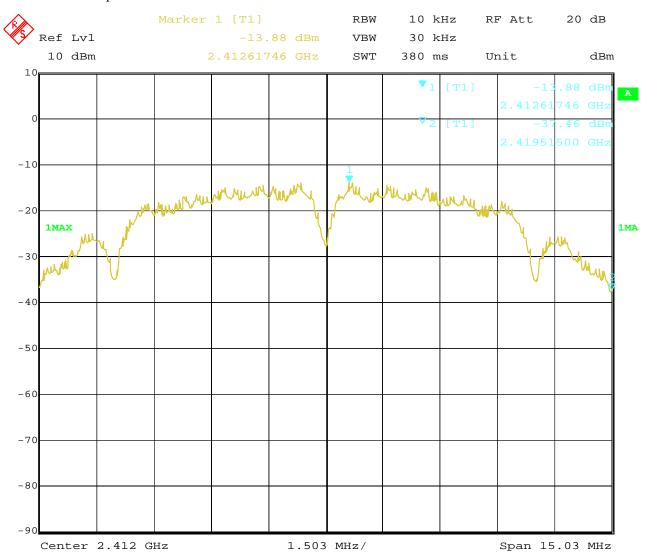

14.OCT.2020 15:10:06 Date:


Page 54 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



5. 802.11b at 1Mbps of CH6

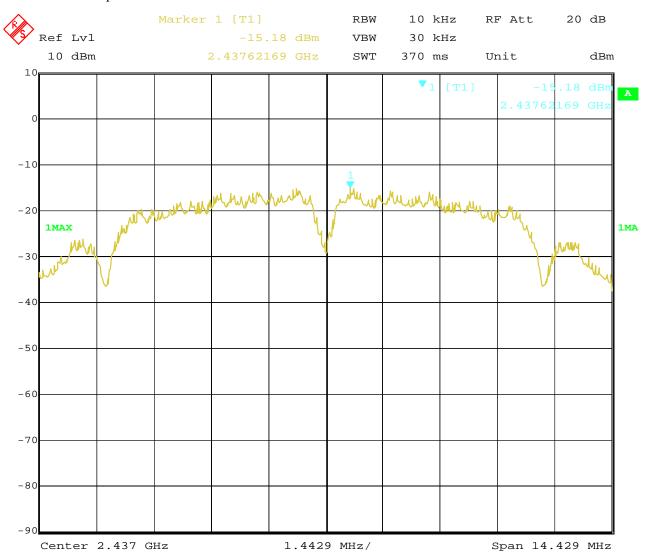

14.OCT.2020 15:17:02 Date:


Page 55 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



6. 802.11b at 1Mbps of CH11

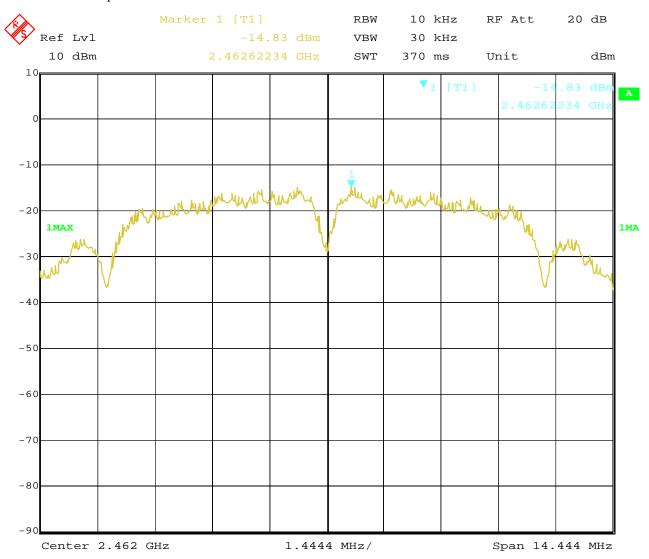

14.OCT.2020 Date: 15:23:33


Page 56 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



7. 802.11g at 6Mbps of CH1

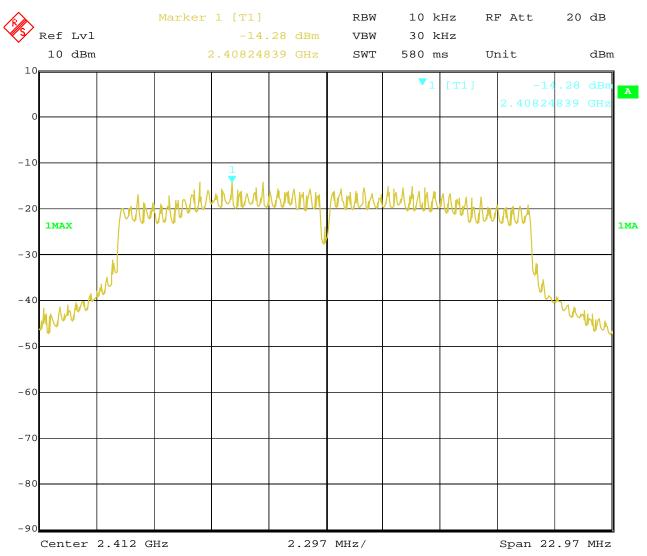

14.OCT.2020 Date: 15:12:59


Page 57 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



8. 802.11g at 6Mbps of CH6

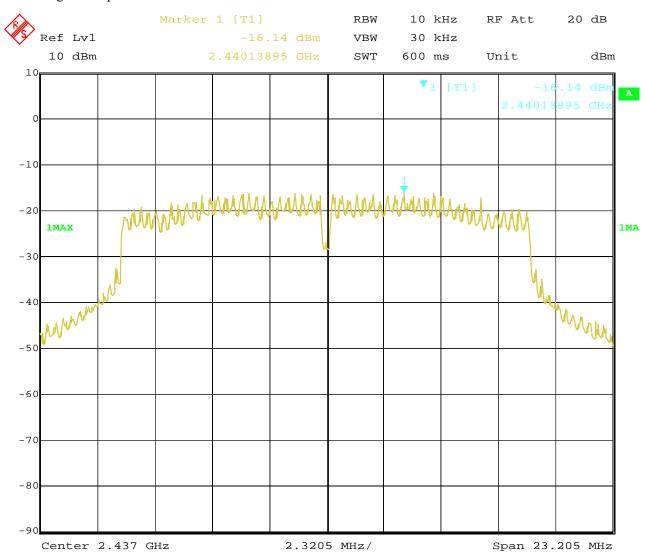

14.OCT.2020 15:17:58 Date:


Page 58 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



9. 802.11g at 6Mbps of CH11

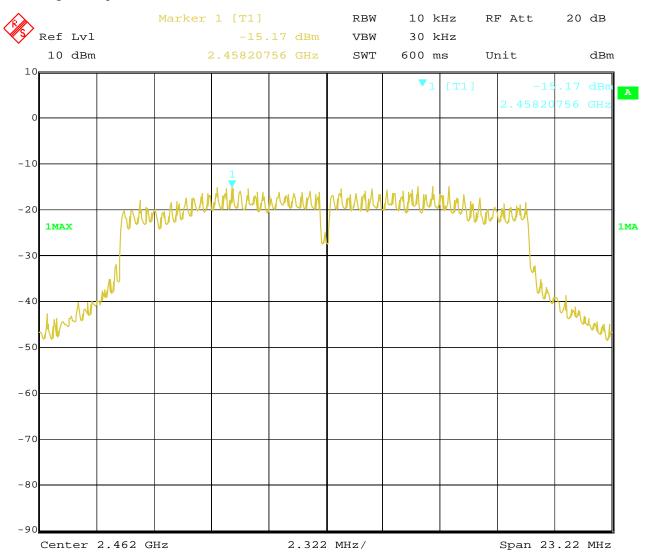

14.OCT.2020 Date: 15:24:52


Page 59 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



10. 802.11n at HT20 of CH01

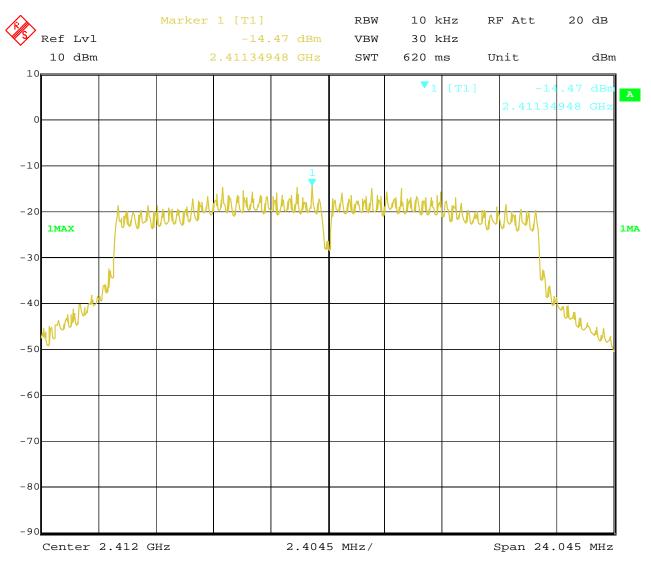

14.OCT.2020 15:14:20 Date:


Page 60 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



11. 802.11n at HT20 of CH06

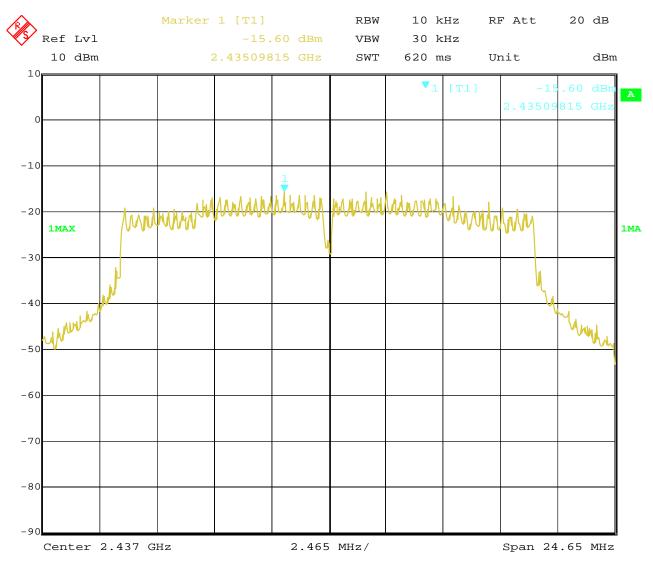

14.OCT.2020 Date: 15:20:17


Page 61 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



12. 802.11n at HT20 of CH11

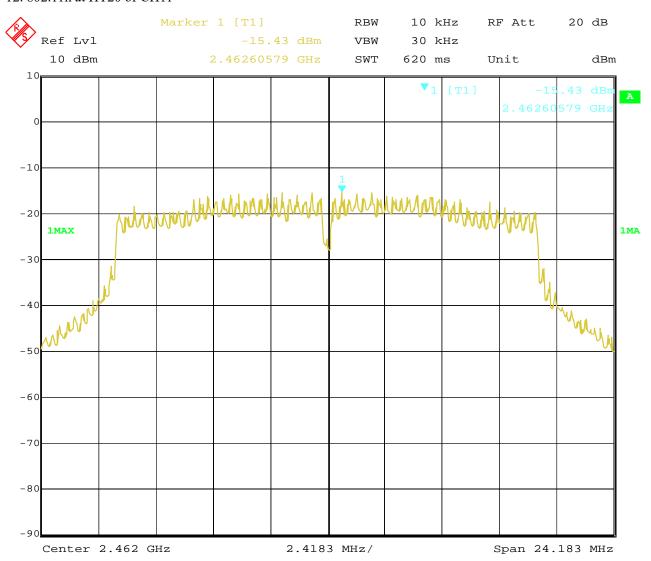

14.OCT.2020 15:27:32 Date:


Page 62 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



13. 802.11n at HT40 of CH01

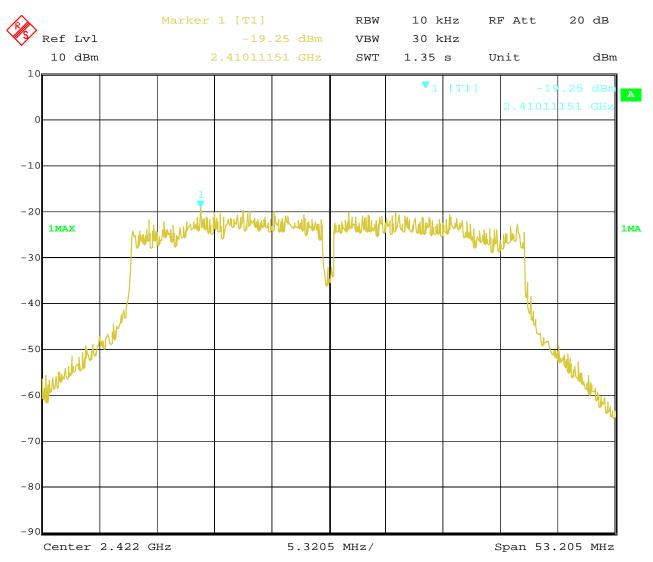

14.OCT.2020 15:15:51 Date:


Page 63 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



14. 802.11n at HT40 of CH04

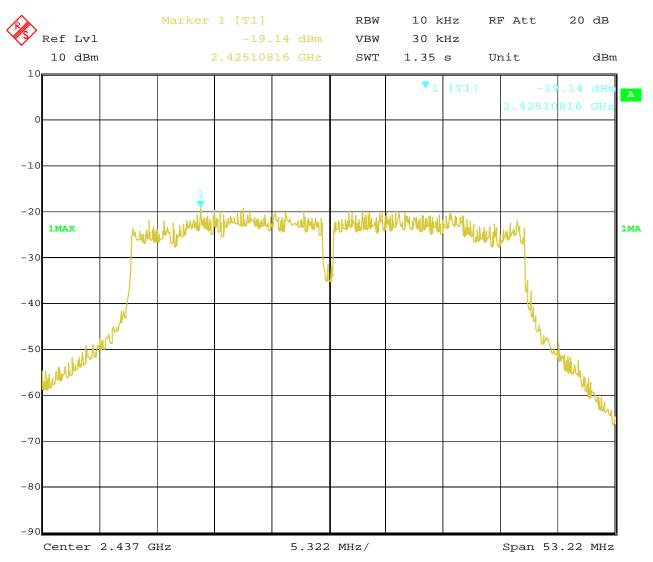

14.OCT.2020 Date: 15:21:38


Page 64 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



15. 802.11n at HT40 of CH07

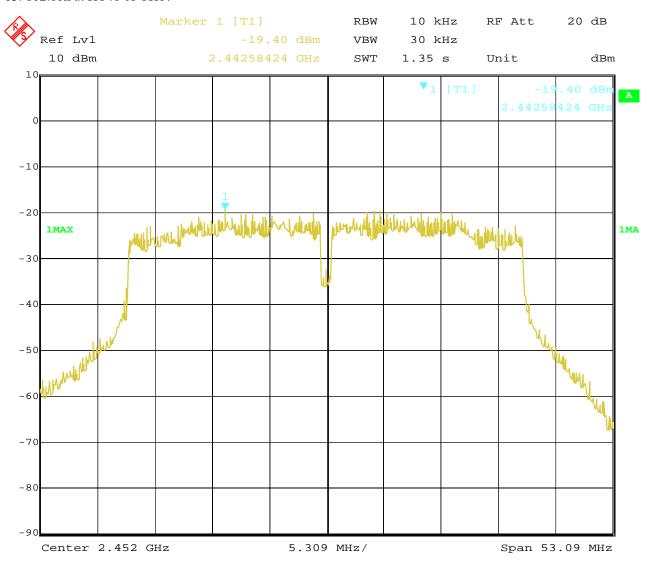

14.OCT.2020 15:22:34 Date:

Report No.: TW2009393-01E


Date: 2020-10-27



Page 65 of 101

10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Page 66 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

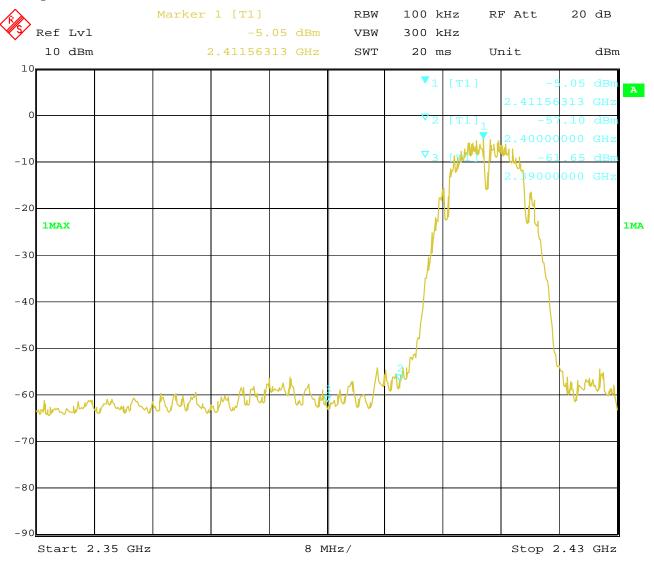

14.OCT.2020 14:36:50 Date:

Page 67 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

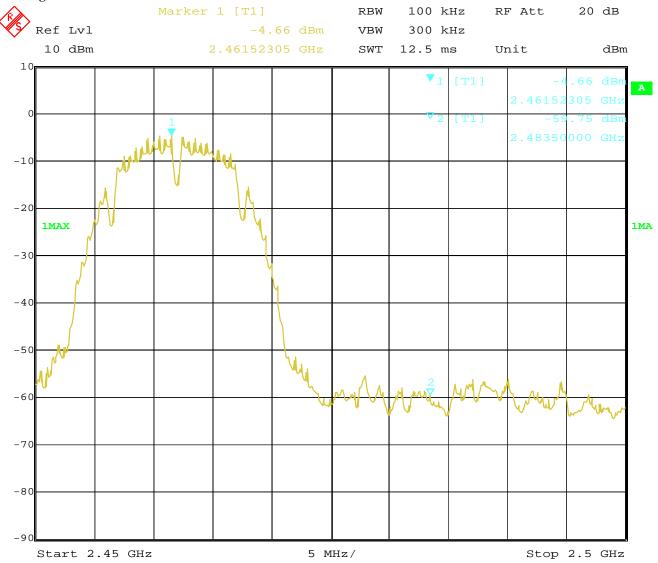

14.OCT.2020 14:43:33 Date:

Page 68 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

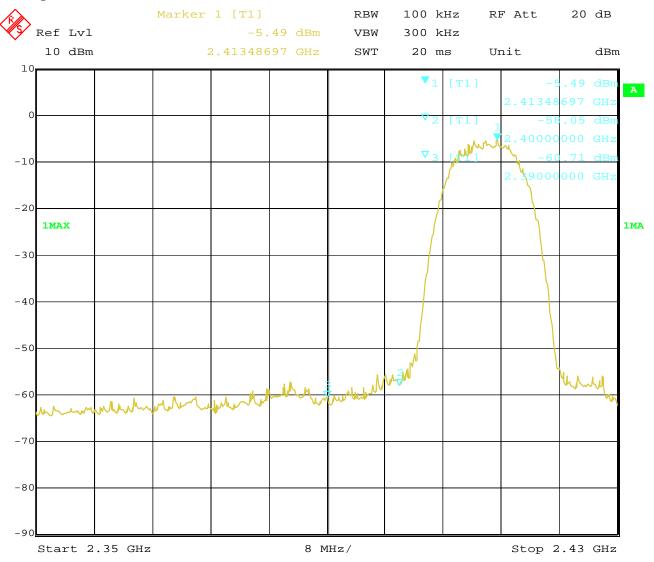

14.OCT.2020 14:37:37 Date:

Page 69 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

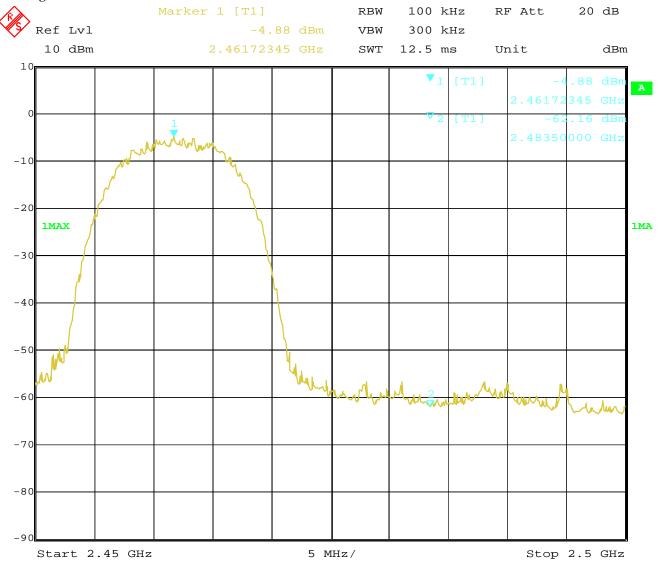

14.OCT.2020 14:44:36 Date:

Page 70 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

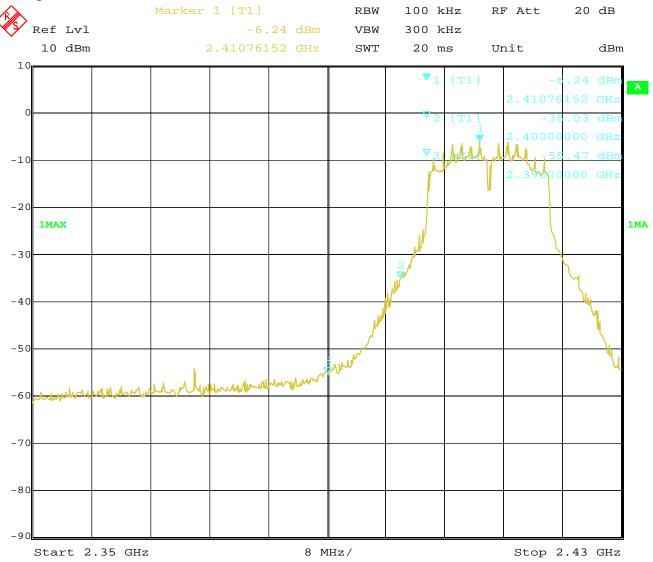

14.OCT.2020 Date: 14:38:35

Page 71 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




CH11 at 6Mbps

Band-edge Measurement 10.4

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

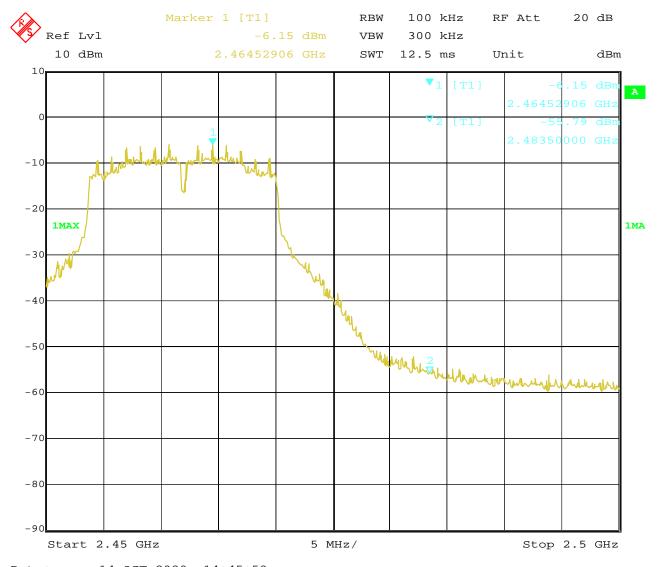

14.OCT.2020 Date: 14:45:59

Page 72 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

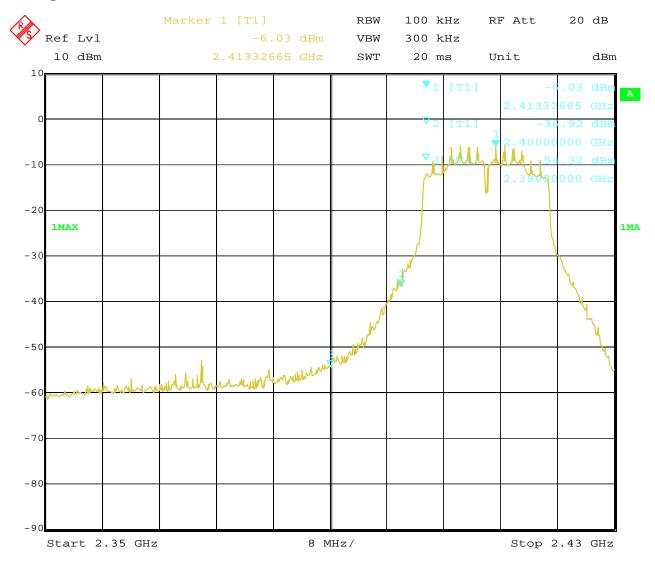

14.OCT.2020 14:39:53 Date:

Page 73 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




CH11 at mcs0

10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

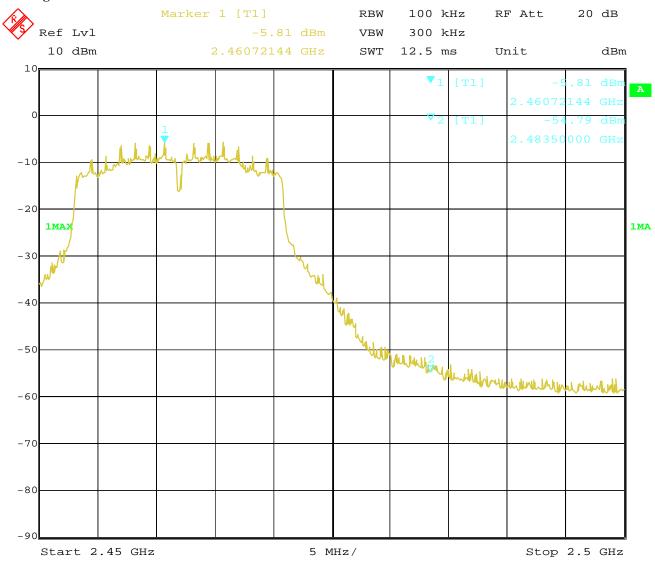

14.OCT.2020 Date: 14:47:14

Page 74 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




For 802.11n (HT40) mode

CH03 at msc0

Band-edge and Restricted band Measurement 10.4

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

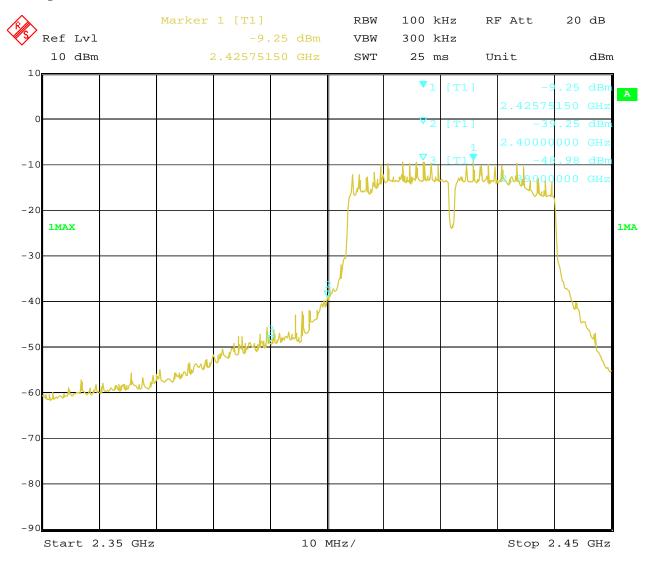

14.OCT.2020 14:40:57 Date:

Page 75 of 101

Report No.: TW2009393-01E

Date: 2020-10-27




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

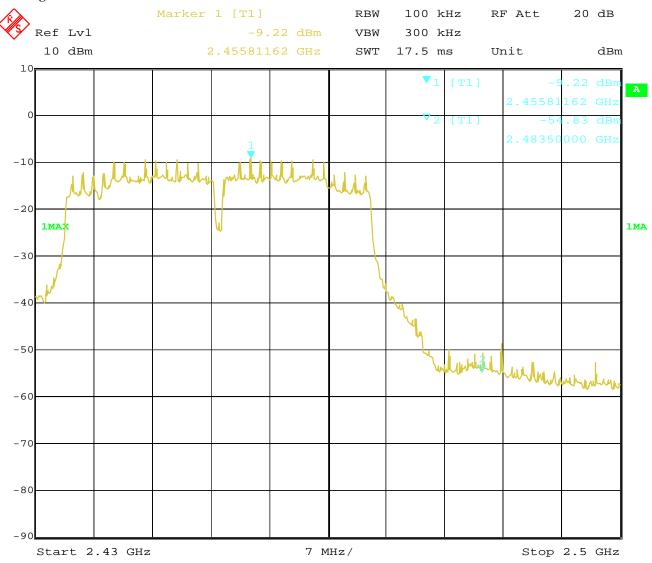

14.OCT.2020 Date: 14:41:56 Report No.: TW2009393-01E Page 76 of 101

Date: 2020-10-27



Restricted band Measurement 10.5

EUT	I	Laptop	Model	NP141AQ-T			
Mode	Keeping	Transmitting	Test Voltage	DC7.6V			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
	802.11b mode, Low Channel, Horizontal						
2390	PK (dBμV/m)	44.29	T : 'A	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$			
		802.11b mod	e, Vertical				
2390	PK (dBµV/m)	42.55	Limit	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$			

Total Resulted Sand Medistrement									
EUT	I	Laptop	Model	NP141AQ-T					
Mode	Keeping	g Transmitting	Test Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11b mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	44.83	T 114	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					
802.11b mode, High Channel, Vertical									
2483.5	PK (dBµV/m)	42.79	T ::4	74(dBμV/m)					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

Page 77 of 101 Report No.: TW2009393-01E

Date: 2020-10-27



10.5 Restricted band Measurement

EUT]	Laptop	Model	NP141AQ-T					
Mode	Keeping	g Transmitting	Test Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11g mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	45.03	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	54(dBμV/m)					
	802.11g mode, Vertical								
2390	PK (dBµV/m)	43.72	Limit	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

Total Restricted band Medsurement									
EUT	I	Laptop	Model	NP141AQ-T					
Mode	Keeping	g Transmitting	Test Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11g mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	46.19	T ' '/	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					
802.11g mode, High Channel, Vertical									
2483.5	PK (dBµV/m)	43.69	T ' '/	74(dBμV/m)					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

Report No.: TW2009393-01E Page 78 of 101

Date: 2020-10-27



10.5 Restricted band Measurement

EUT	I	Laptop	Model	NP141AQ-T			
Mode	Keeping	Transmitting	Test Voltage	DC7.6V			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
	802.11n HT20 mode, Low Channel, Horizontal						
2390	PK (dBµV/m)	45.51	T ::4	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBµV/m)			
	8	302.11n HT20 mode, Lo	ow Channel, Vertic	cal			
2390	PK (dBμV/m)	44.26	Limit	74(dBμV/m)			
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$			

EUT	I	aptop	Model	NP141AQ-T
Mode	Keeping	Transmitting	Test Voltage	DC7.6V
Temperature	24	deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
	80	2.11n HT20 mode, Hi	gh Channel, Horiz	ontal
2483.5	PK (dBμV/m)	47.35	T * *,	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
	8	02.11n HT20 mode, H	igh Channel, Vertic	cal
2483.5	PK (dBμV/m)	45.83	Limit	74(dBμV/m)
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Page 79 of 101

Report No.: TW2009393-01E


Date: 2020-10-27



10.5 Restricted band Measurement

EUT	I	Laptop	Model	NP141AQ-T		
Mode	Keeping	Transmitting	Test Voltage	DC7.6V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
802.11n HT40 mode, Low Channel, Horizontal						
2390	PK (dBµV/m)	47.58		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBµV/m)		
		802.11n HT40 mode, L	ow Channel Vertic	al		
2390	PK (dBμV/m)	46.23	Limit	74(dBμV/m)		
	AV (dBμV/m)		Limit	54(dBμV/m)		

Test Plots

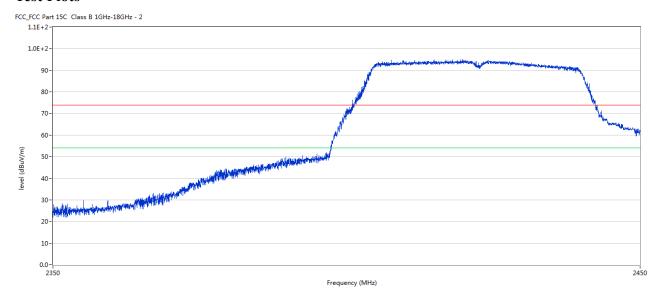


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2389.690	46.23	-3.53	54.0	-7.77	Peak	105.00	100	V	N/A

Page 80 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



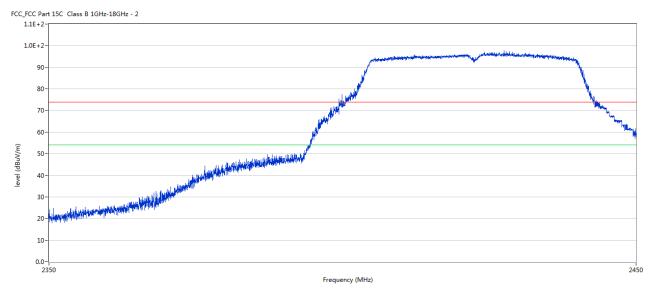

	No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
Ī	1	2390.165	47.58	-3.53	54.0	-6.42	Peak	189.00	100	Н	Pass


Page 81 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



EUT]	Laptop	Model	NP141AQ-T				
Mode	Keeping	g Transmitting	Test Voltage	DC7.6V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11n HT40 mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	48.25	T :!4	$74(dB\mu V/m)$				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				
802.11n HT40 mode, High Channel, Vertical								
2483.5	PK (dBμV/m)	47.61	T :14	74(dBμV/m)				
	AV (dBμV/m)		Limit	54(dBµV/m)				

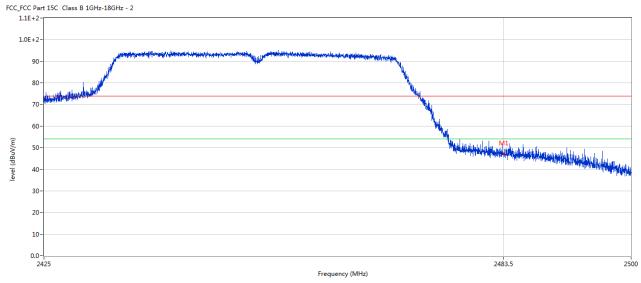


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.579	48.25	-3.57	54.0	-5.75	Peak	203.00	100	Н	Pass

Page 82 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



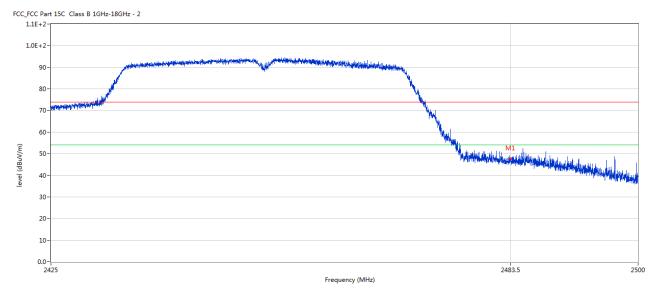

	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
Ī	1	2483.542	47.61	-3.57	54.0	-6.39	Peak	117.00	100	V	Pass

Report No.: TW2009393-01E

Date: 2020-10-27



Page 83 of 101

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Two FPC antennas used. The gain of the antennas is 1.79dBi Maximum for each one.

Report No.: TW2009393-01E Page 84 of 101

Date: 2020-10-27



12.0 FCC ID Label

FCC ID: RBD-NP141AT

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 85 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



13.0 **Photo of testing**

Conducted Emission Test Setup:

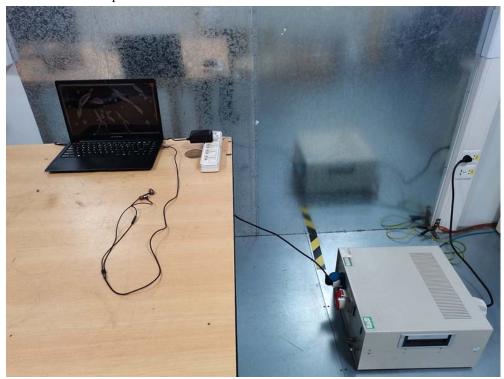


Page 86 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Radiated Emission Test Setup:

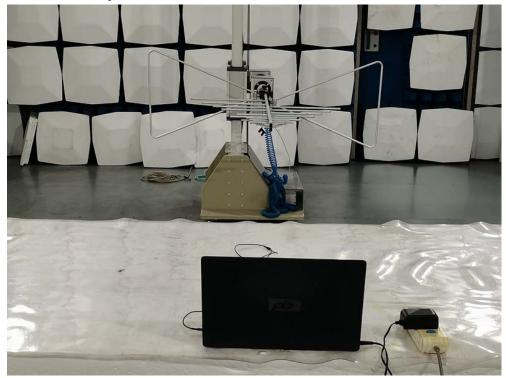



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2009393-01E

Date: 2020-10-27



Photographs - EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 89 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 90 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 91 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 92 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 93 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Inside view



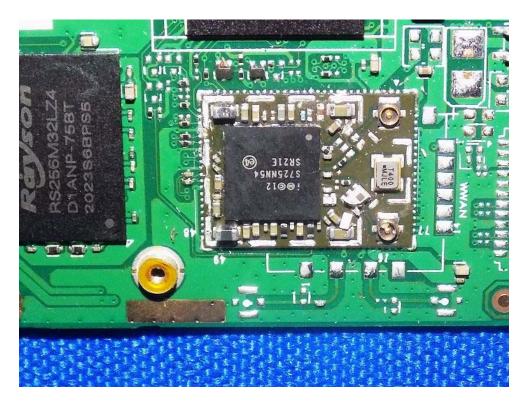

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 94 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 95 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 96 of 101


Report No.: TW2009393-01E

Date: 2020-10-27



Inside view

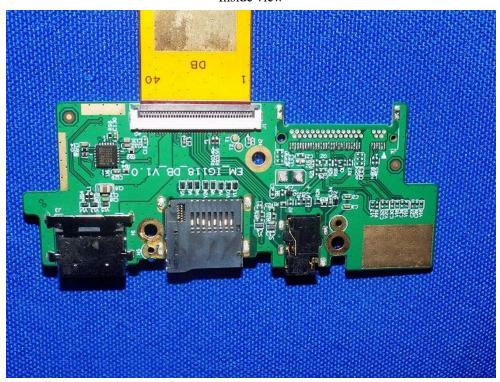

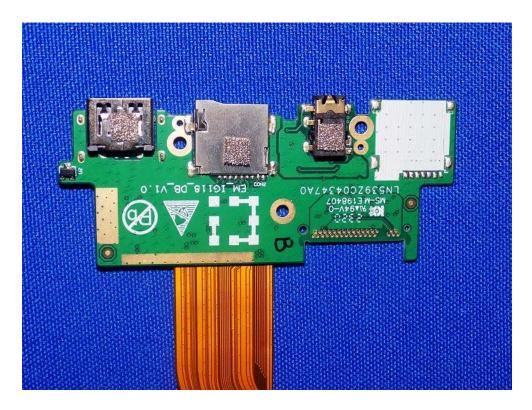

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 97 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 98 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 99 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Inside view

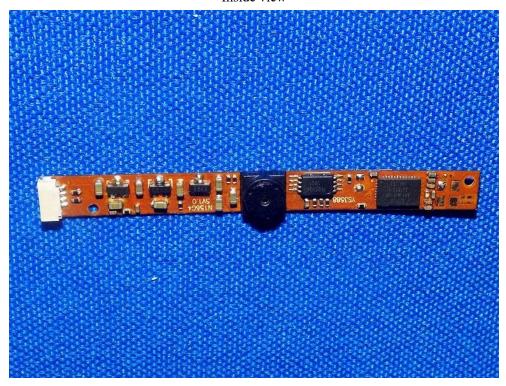



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 100 of 101

Report No.: TW2009393-01E

Date: 2020-10-27



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 101 of 101 Report No.: TW2009393-01E

Date: 2020-10-27



Power Supply



End of the report