



FCC PART 15.247

TEST REPORT

For

SDI Technologies Inc.

1299 Main St. Rahway NJ 07065, United States

FCC ID: EMO553N

Report Type: Class II Permissive Change	Product Type: BLUETOOTH MP3 KARAOKE WITH LIGHT SHOW
Report Number: <u>RSZ200323K52-00BA1</u>	
Report Date: <u>2020-04-14</u>	
Reviewed By: <u>RF Engineer</u>	<u>Jimmy Xiao</u>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	10
APPLICABLE STANDARD	10
EUT SETUP.....	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	11
TEST DATA	12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	BLUETOOTH MP3 KARAOKE WITH LIGHT SHOW
Tested Model	FR-553.EXv0MR
Multiple Model	M ₁ -553M ₂ M ₃ M ₄ M ₅ M ₆ M ₇ M ₈ M ₉ M ₁₀ (M ₁ -M ₁₀ , please refer to model no. table)
Model Different	Refer to the DOS
Frequency Range	Bluetooth LE: 2402~2480MHz
Conducted Peak Output Power	Bluetooth LE: -3.91dBm
Modulation Technique	Bluetooth LE: GFSK
Antenna Specification	Bluetooth: 0dBi
Voltage Range	DC 3.7 V from battery or DC 5V from USB port
Date of Test	2020-03-31 to 2020-04-08
Sample serial number	RSZ200323K52-RFA1-S1 (Assigned by BACL, Shenzhen)
Received date	2020-03-23
Sample/EUT Status	Good Condition

Objective

This report is prepared on behalf of *SDI Technologies Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

This is a CIIPC application of the device; the differences between the original device and the current one are as follows:

- Add the models: FR-553.EXv0MR, M₁-553M₂M₃M₄M₅M₆M₇M₈M₉M₁₀ (M₁-M₁₀, please refer to model No. table).
- Changing the appearance of EUT.
- Add the circuit of the recording function, the Bluetooth module is not changed.

Based on the above differences list, the radiated spurious emission was retested.

Model Table as follow:

Model No. Table										
Part of model #	M ₁	M ₂	M ₃	M ₄	M ₅	M ₆	M ₇	M ₈	M ₉	M ₁₀
Number of digit(s)	2	2	1	1	1 to 2	1	1 to 2	1 to 2	2	1 to 2
Description	2 digits alphabets by "a" – "Z" for brand	2 digits alphabets combination by "a" – "Z" special character version Or blank	"," Or blank	"U" for Europe version Or blank	"E" for English content Or "F" for English & French Or "3" for 3 language version Or "11" for Europe version with 11 languages	"X" for no sound chip * (Remark: * = configurati on same as EUT)	"0"-"9" for year version Or "V0" – "V9" for year version	"M" for Movie version brand Or "R" for 553 series "Record version" Or "MR" for Movie version brand + 553 series "Record version" Or Blank (Remark : internal construction and electrically identical with EUT)	"AK" for Walmart exclusive Or "AP" for Apple exclusive Or "KS" for Kohl's exclusive Or "TG" for Target exclusive Or blank	"i" for inner carton required Or "z" for direct to consumer on-line packaging Or "OL" for Amazon packaging Or blank

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: EMO553N.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“BT FCC TOOL V2.21” exercise software was used, and the power level is 3.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TP-LINK	Adapter	A8-501000	Unknown
SDI Technologies Inc.	MIC	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.5	EUT	Adapter

Block Diagram of Test Setup

For radiation emission

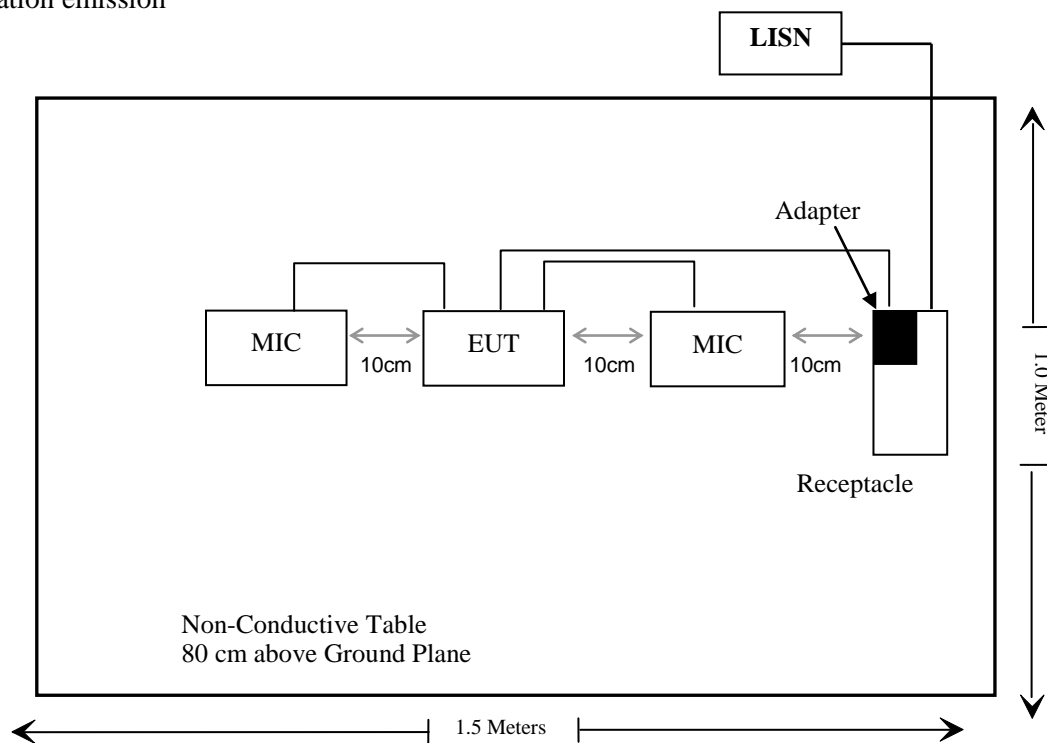

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliance*
§15.203	Antenna Requirement	Compliance*
§15.207 (a)	AC Line Conducted Emissions	Compliance*
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance*
§15.247(b)(3)	Maximum Conducted Output Power	Compliance*
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance*
§15.247(e)	Power Spectral Density	Compliance*

Compliance*: The CIIPC application will not effected the result, test data please refer to the FCC ID: EMO553N, which was granted on 10/30/2019, Report No.: RSZ190909K52-00B, which was tested by Bay Area Compliance Laboratories Corp. (Shenzhen).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2019/4/20	2020/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019/7/22	2020/07/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2019/4/20	2020/4/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2017/12/6	2020/12/5


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

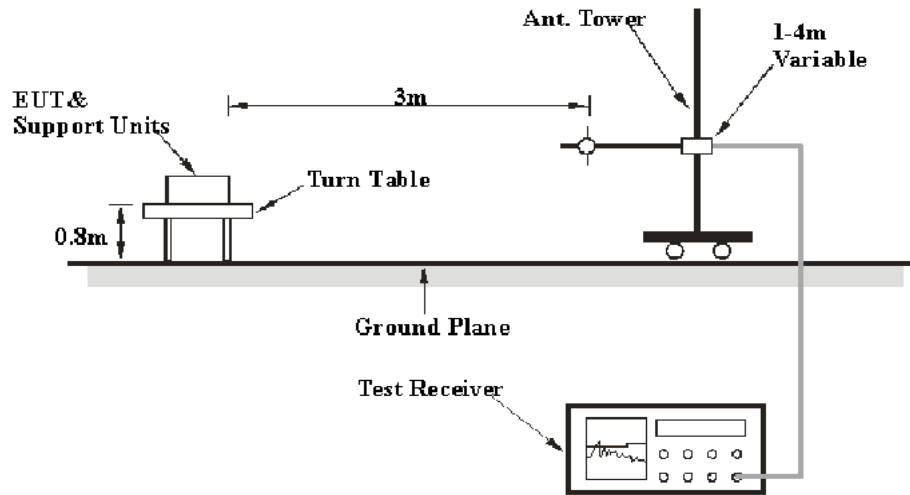

Above 1GHz:

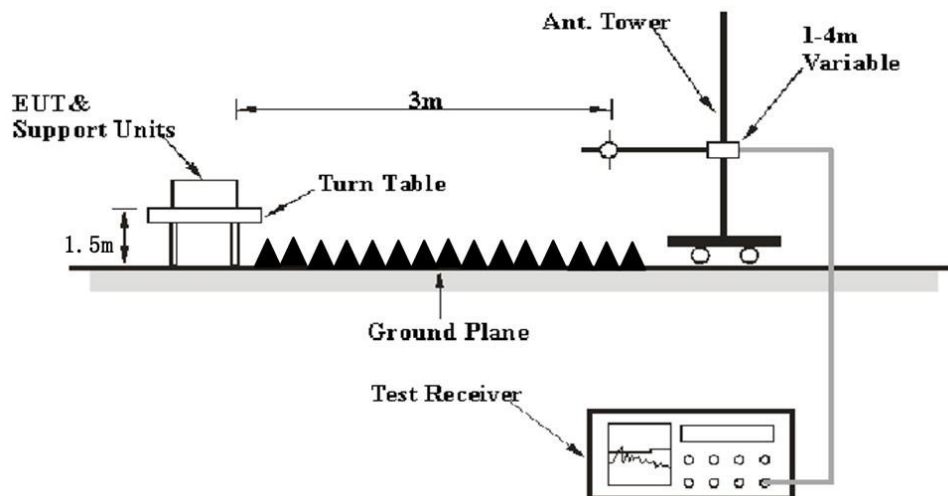

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.


Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Zero Yan on 2020-03-31 for below 1GHz and Charlie Cha on 2020-04-08 for Above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz: (worst case is high channel)

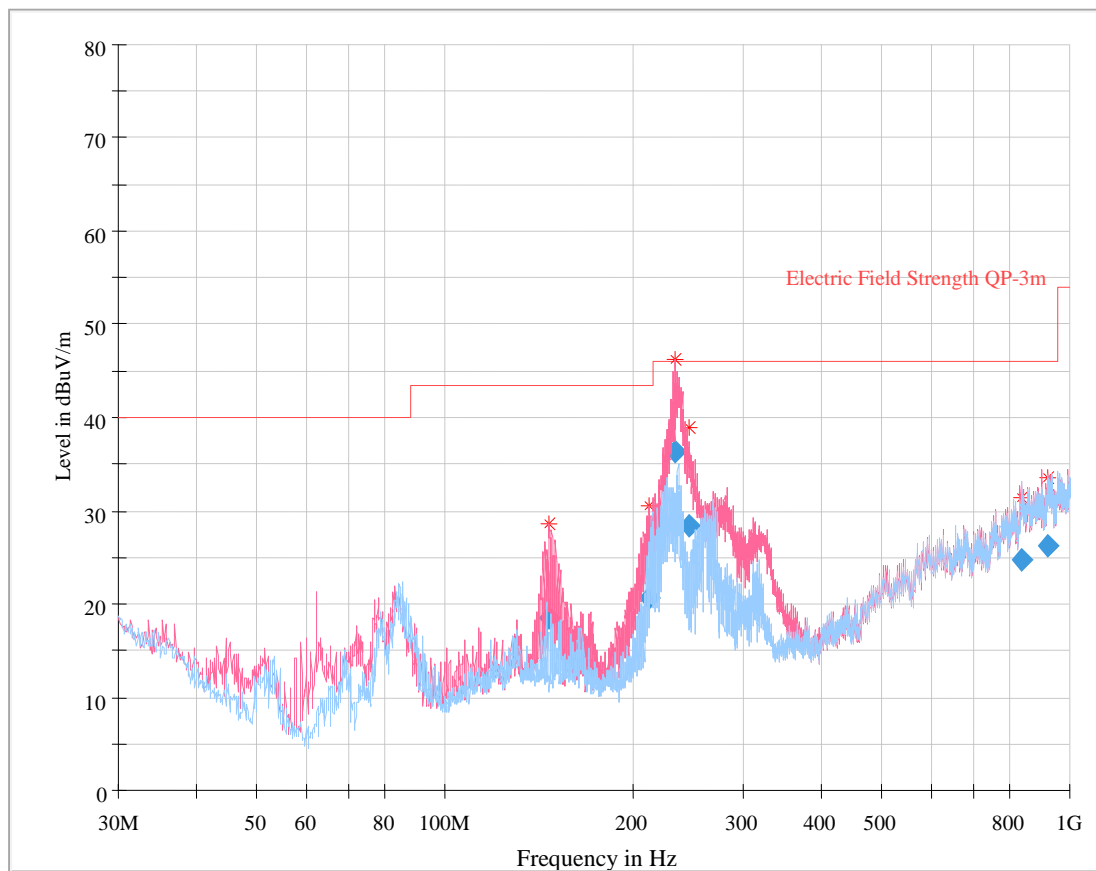

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
146.583500	18.56	111.0	V	355.0	-14.2	43.50	24.94
212.251250	20.62	215.0	V	153.0	-13.9	43.50	22.88
233.999000	36.43	191.0	V	100.0	-14.0	46.00	9.57
246.309000	28.31	191.0	V	44.0	-14.1	46.00	17.69
838.775500	24.73	248.0	V	156.0	2.8	46.00	21.27
924.630250	26.26	180.0	V	177.0	4.6	46.00	19.74

1 GHz-25 GHz (BLE):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2333.36	28.87	PK	208	2.3	H	31.64	60.51	74	13.49
2333.36	13.71	Ave.	208	2.3	H	31.64	45.35	54	8.65
2491.81	28.69	PK	155	2.0	V	32.13	60.82	74	13.18
2491.81	13.61	Ave.	155	2.0	V	32.13	45.74	54	8.26
4804.00	43.88	PK	61	1.9	H	5.40	49.28	74	24.72
4804.00	28.78	Ave.	61	1.9	H	5.40	34.18	54	19.82
Middle Channel (2440 MHz)									
4880.00	43.92	PK	49	1.3	H	6.43	50.35	74	23.65
4880.00	28.88	Ave.	49	1.3	H	6.43	35.31	54	18.69
High Channel (2480 MHz)									
2341.67	28.81	PK	296	1.8	H	31.64	60.45	74	13.55
2341.67	13.62	Ave.	296	1.8	H	31.64	45.26	54	8.74
2494.21	28.89	PK	26	1.4	V	32.13	61.02	74	12.98
2494.21	13.78	Ave.	26	1.4	V	32.13	45.91	54	8.09
4960.00	44.09	PK	111	1.9	H	6.95	51.04	74	22.96
4960.00	29.12	Ave.	111	1.9	H	6.95	36.07	54	17.93

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the harmonic test, it is performed with the 2400-2483.5MHz band filter.

Pre-scan with High channel Horizontal

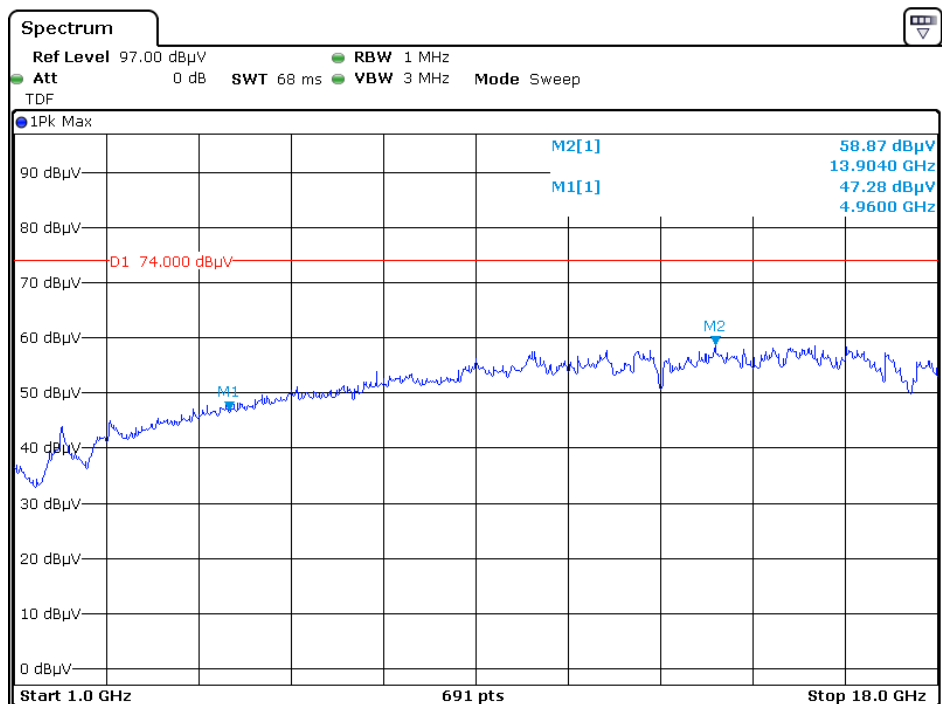


Date: 8.APR.2020 21:05:33

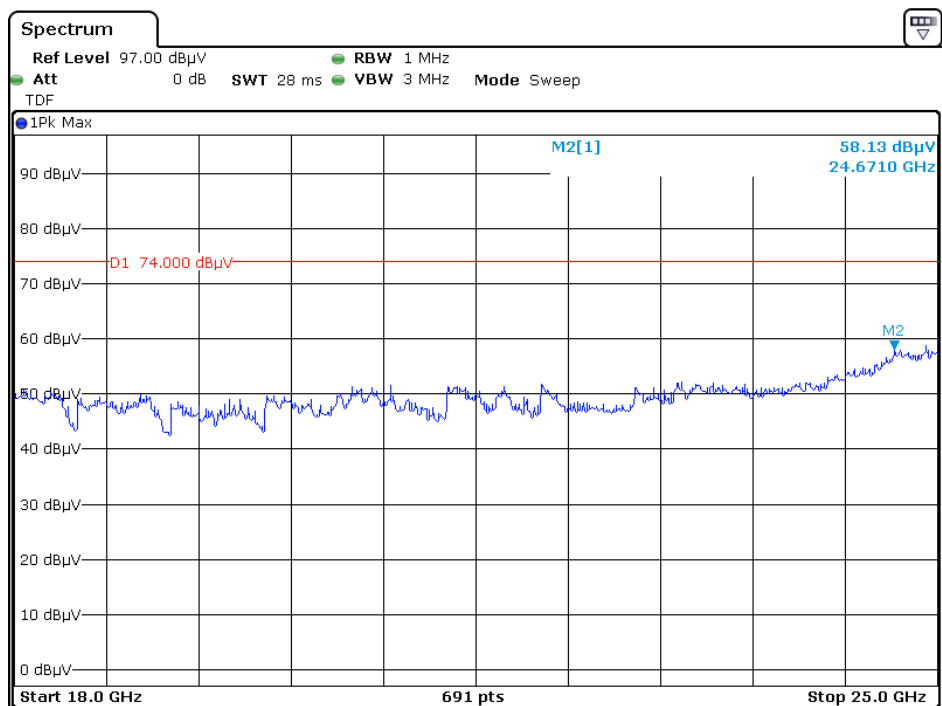


Date: 8.APR.2020 21:49:39

Vertical

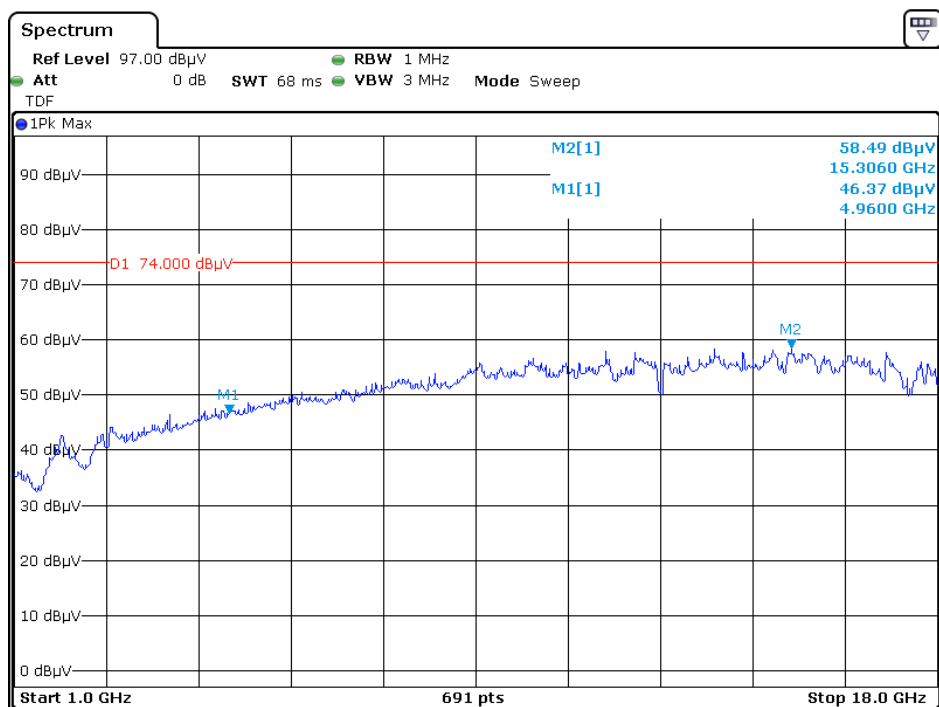


Date: 8.APR.2020 21:13:55

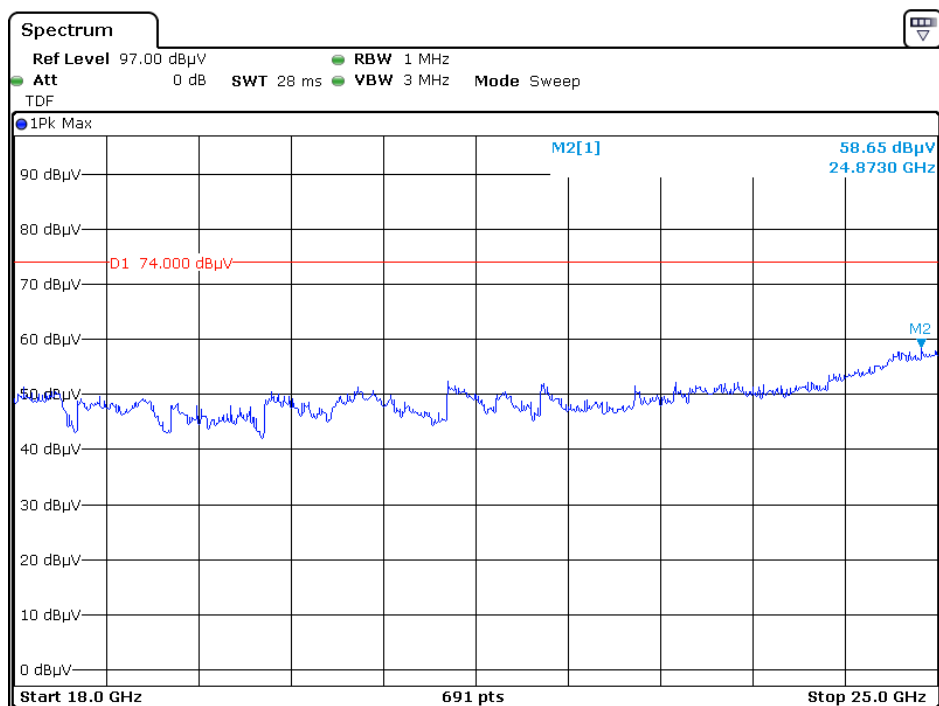


Date: 8.APR.2020 21:56:25

Pre-scan for Average Horizontal

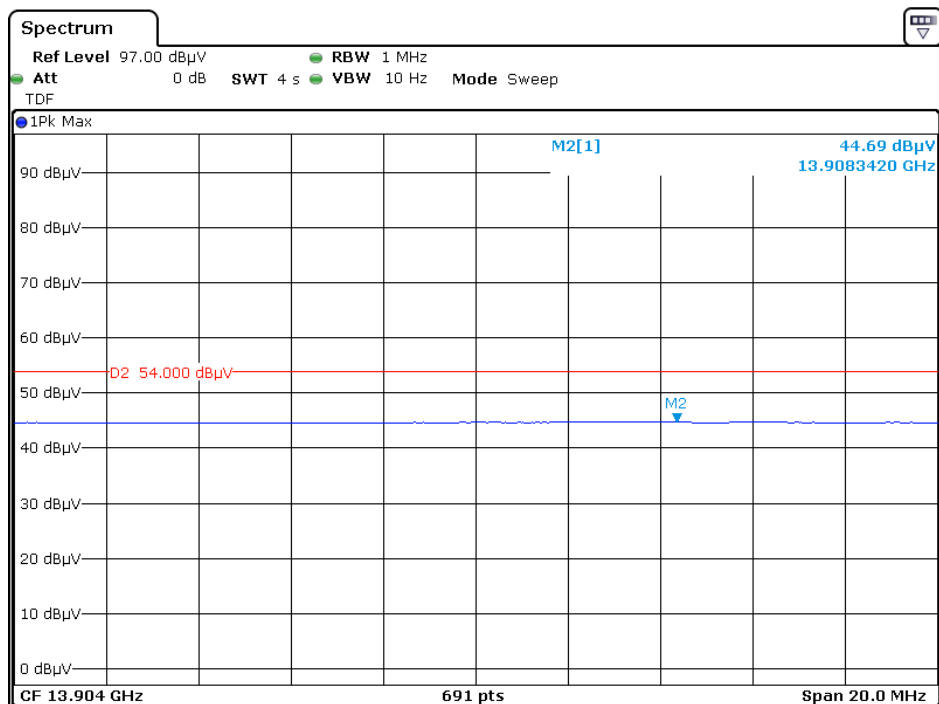


Date: 8.APR.2020 21:08:37

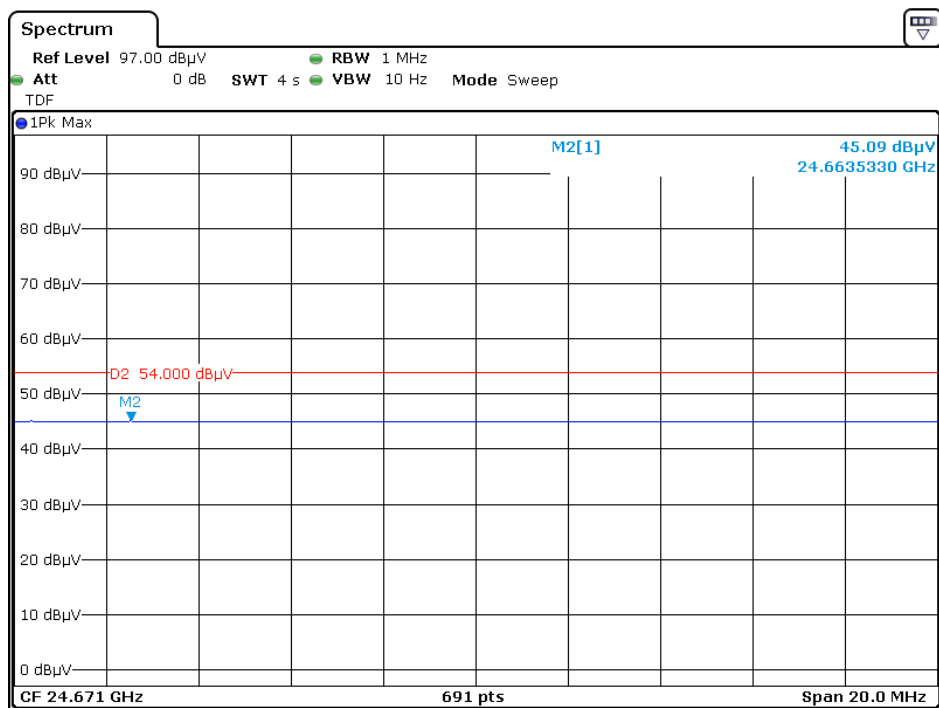


Date: 8.APR.2020 21:56:00

Vertical

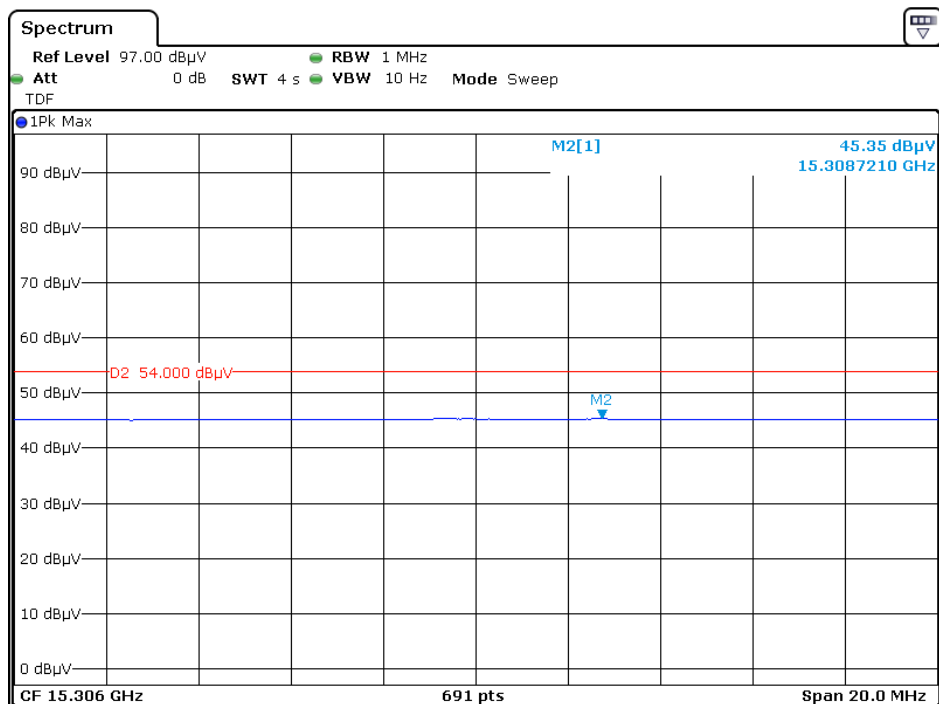

Date: 8.APR.2020 21:16:07

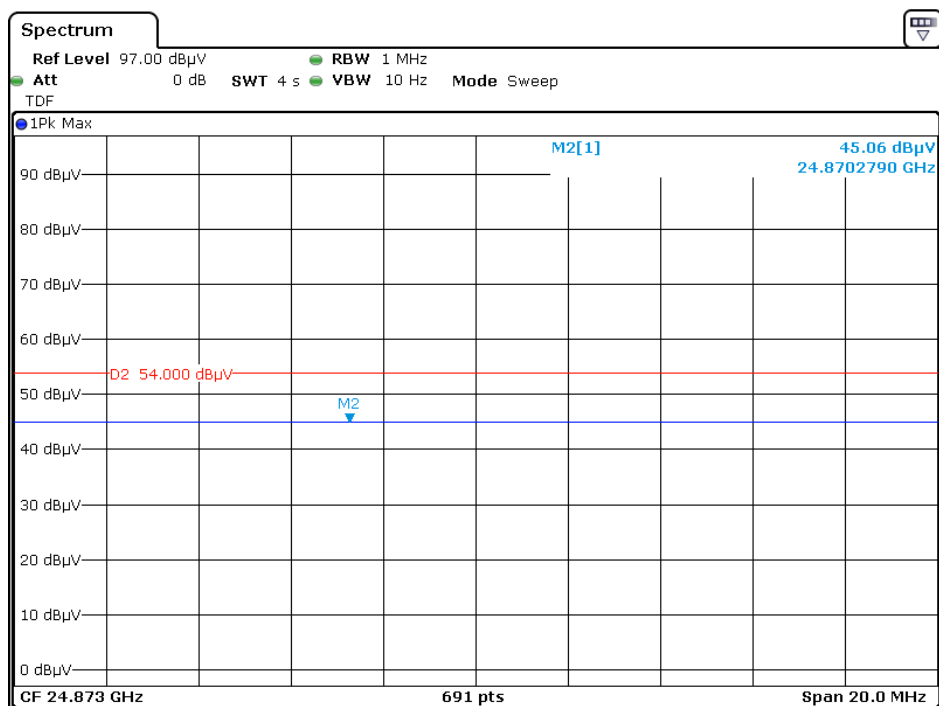

Date: 8.APR.2020 21:59:21

**** END OF REPORT ****