

12. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

1) Scalar SAR summation < 1.6W/kg.

2) $SPLSR = \frac{(SAR_1 + SAR_2)^{1.5}}{r}$ / (min. separation distance, mm), and the peak separation distance is

determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where

(x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.

If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

No.	Simultaneous Tx	Head	Body-worn	Hotspot
1	WWAN+WLAN	Yes	Yes	Yes
2	WWAN+Bluetooth	Yes	Yes	Yes

Note : WiFi and Bluetooth use the same antenna and cannot be transmitted at the same time.

Exposure Position		WWAN Band	DTS/DSS Band	Simultaneous Tx SAR(W/Kg)
		SAR(W/Kg)	SAR(W/Kg)	
Head	Left Cheek	0.778	0.565	1.343
	Left Tilt 15 Degree	0.393	0.300	0.693
	Right Cheek	0.678	0.494	1.172
	Right Tilt 15 Degree	0.360	0.251	0.611
Body&Hotspot	Front Side	0.451	0.343	0.794
	Back Side	0.740	0.528	1.268
	Left Side	0.222	0.165	0.387
	Right Side	0.232	/	0.232
	Top Side	/	0.159	0.159
	Bottom Side	0.377	/	0.377

Note : The Simultaneous Tx is calculated based on the same configuration and test position.

Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 850MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz
MEASUREMENT 7 System Performance Check - 5200MHz
MEASUREMENT 8 System Performance Check - 5800MHz

MEASUREMENT 1

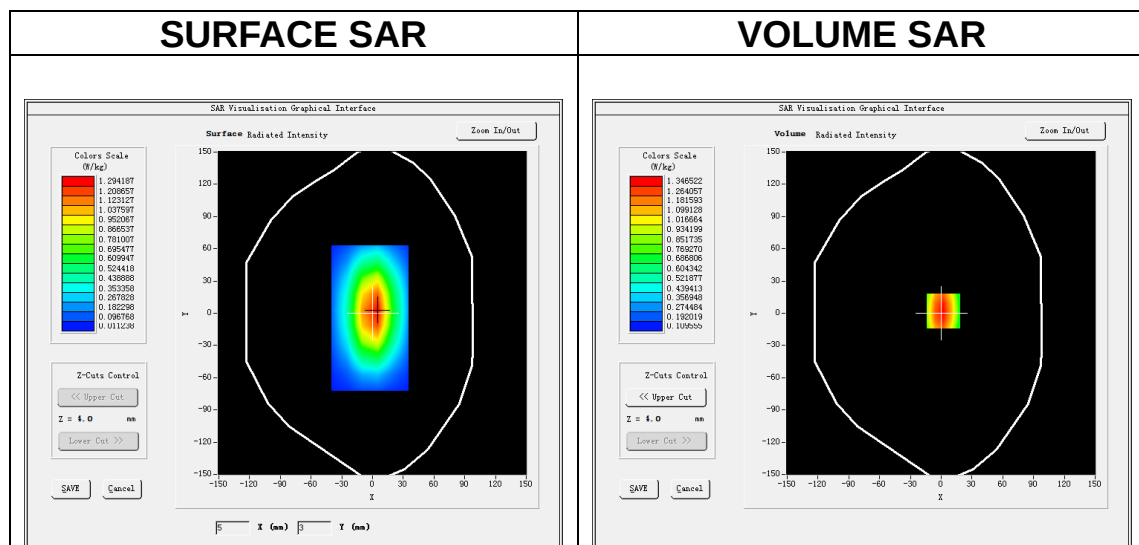
Date of measurement: 9/12/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW750</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.65</u>

B. SAR Measurement Results


Frequency (MHz)	750.000000
Relative permittivity (real part)	42.562010
Relative permittivity (imaginary part)	19.132740
Conductivity (S/m)	0.912054
Variation (%)	0.210000



Maximum location: X=2.00, Y=2.00

SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.621031
SAR 1g (W/Kg)	0.930125

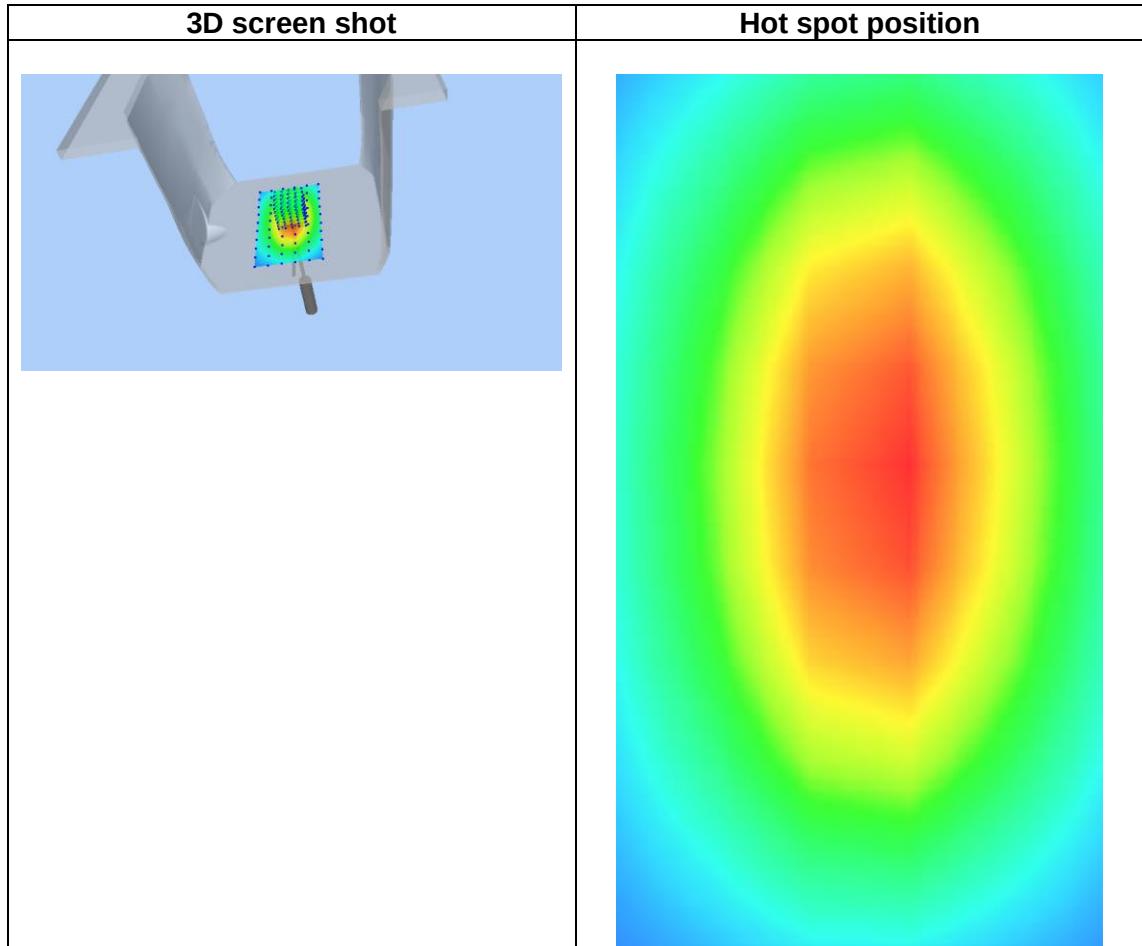

MEASUREMENT 2


Date of measurement: 3/12/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.66</u>

B. SAR Measurement Results


Frequency (MHz)	835.000000
Relative permittivity (real part)	42.012031
Relative permittivity (imaginary part)	19.131021
Conductivity (S/m)	0.941030
Variation (%)	0.310000

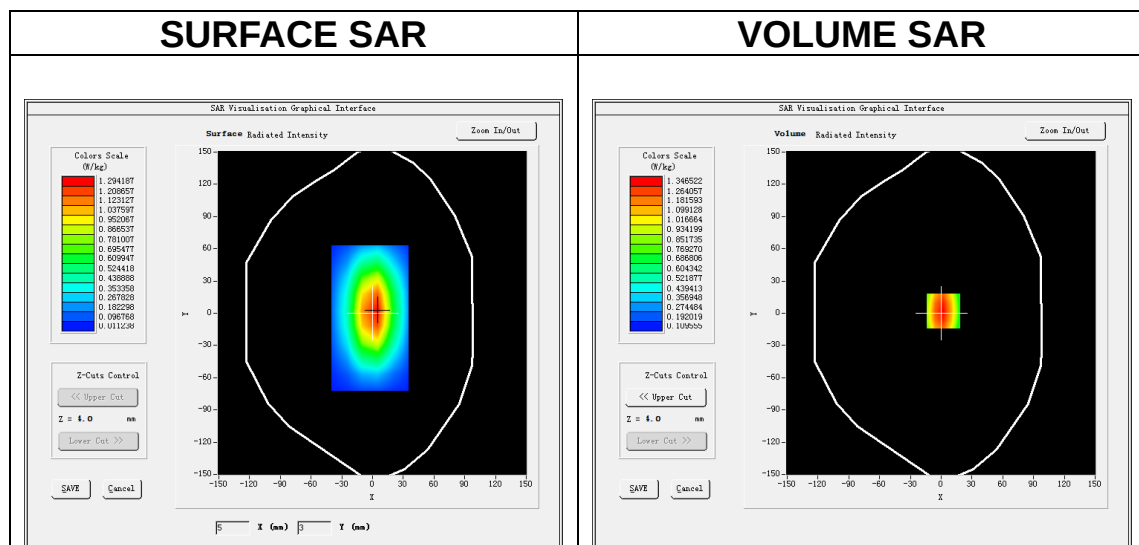

Maximum location: X=2.00, Y=2.00

SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.612031
SAR 1g (W/Kg)	1.011231

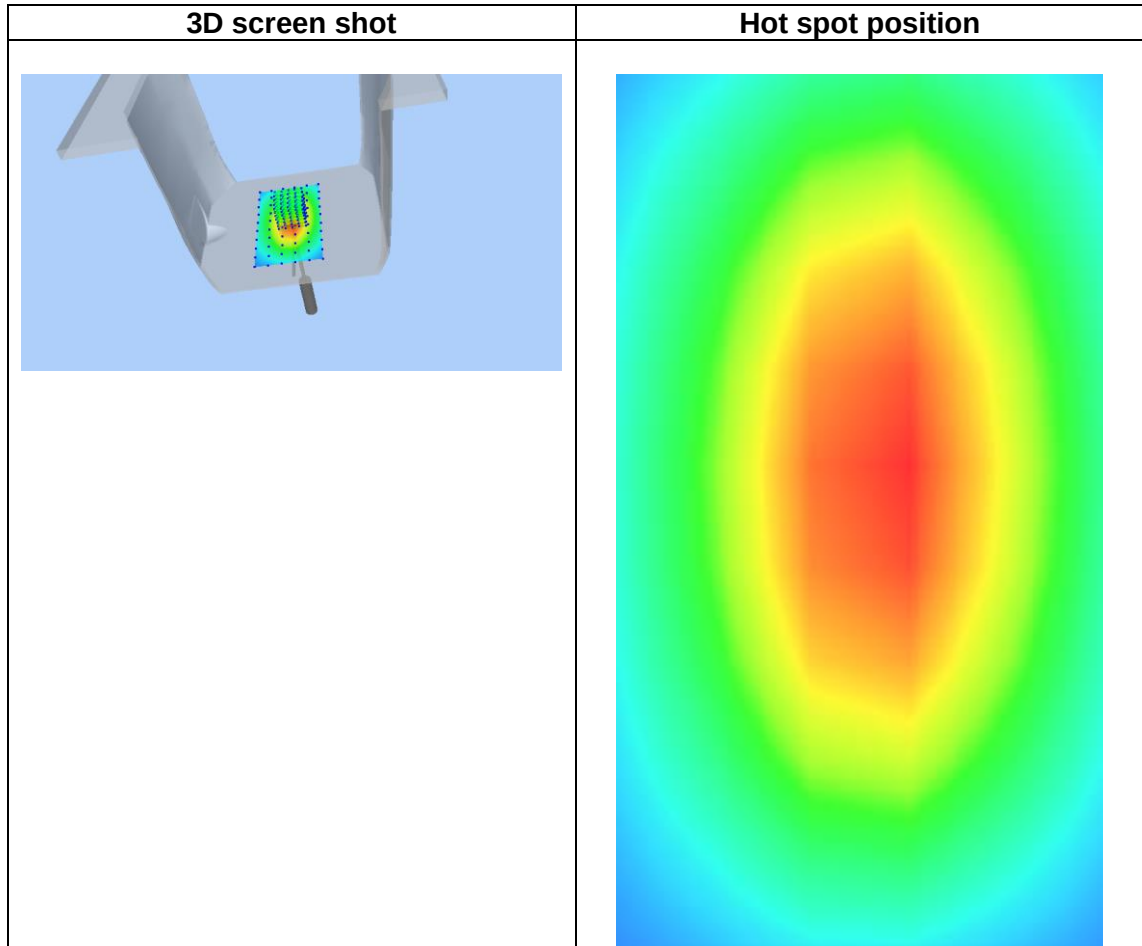

MEASUREMENT 3


Date of measurement: 21/11/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.606403
Relative permittivity (imaginary part)	14.067180
Conductivity (S/m)	1.406718
Variation (%)	-0.140000

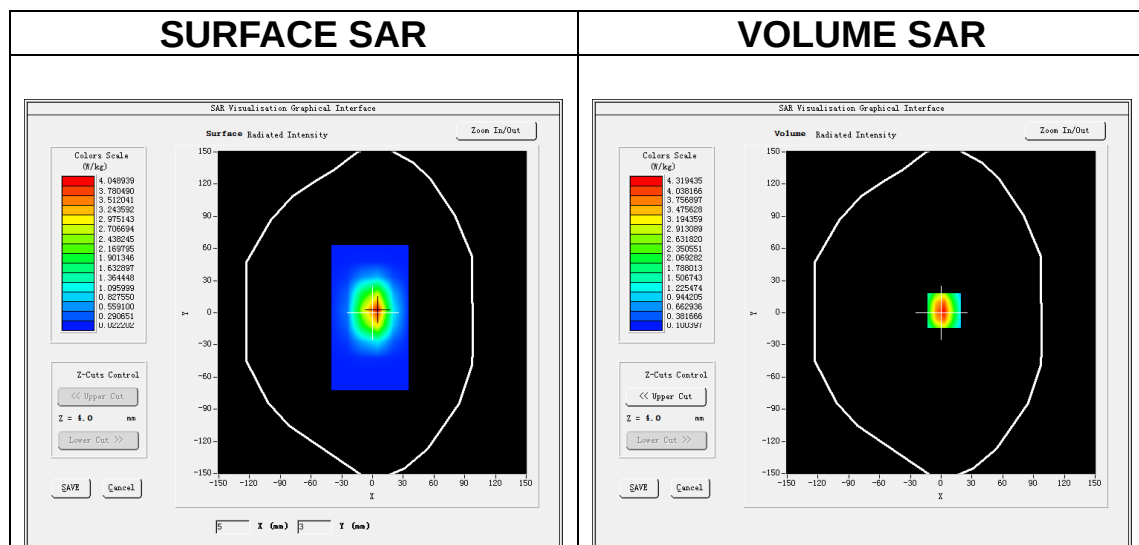

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.024557
SAR 1g (W/Kg)	3.832112

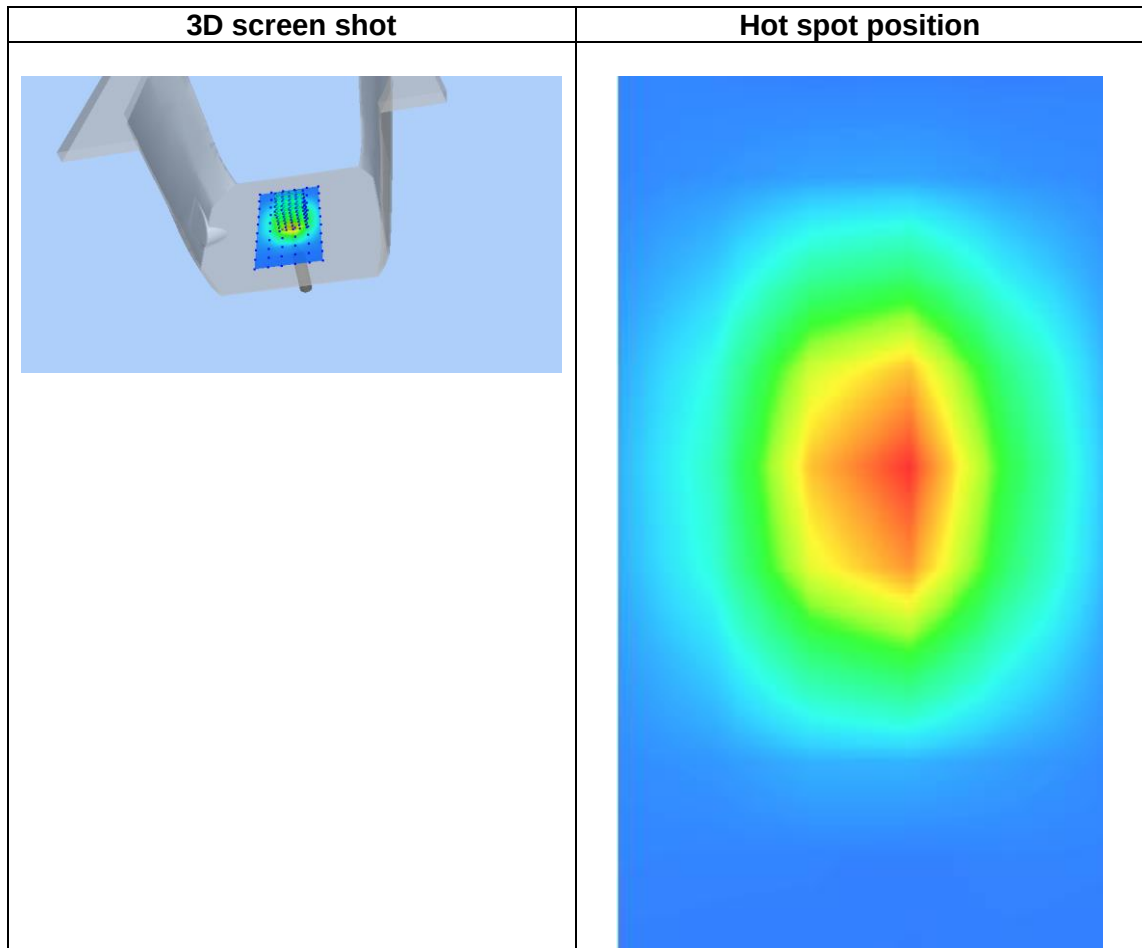

MEASUREMENT 4


Date of measurement: 25/11/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1900.000000
Relative permittivity (real part)	41.420140
Relative permittivity (imaginary part)	12.570123
Conductivity (S/m)	1.390503
Variation (%)	-0.440000

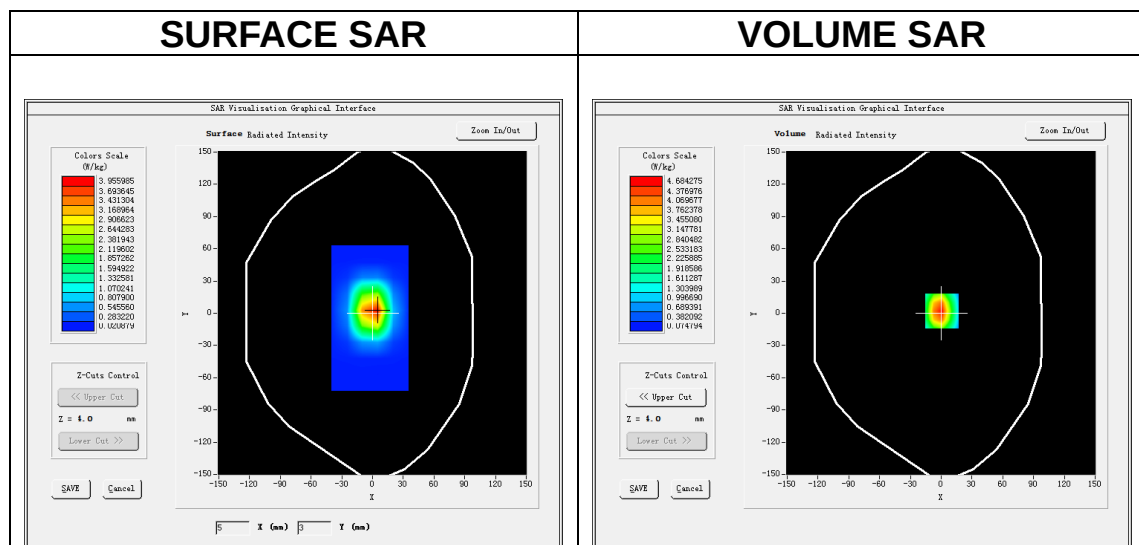

Maximum location: X=1.00, Y=2.00

SAR Peak: 7.65 W/kg

SAR 10g (W/Kg)	2.153165
SAR 1g (W/Kg)	4.153568

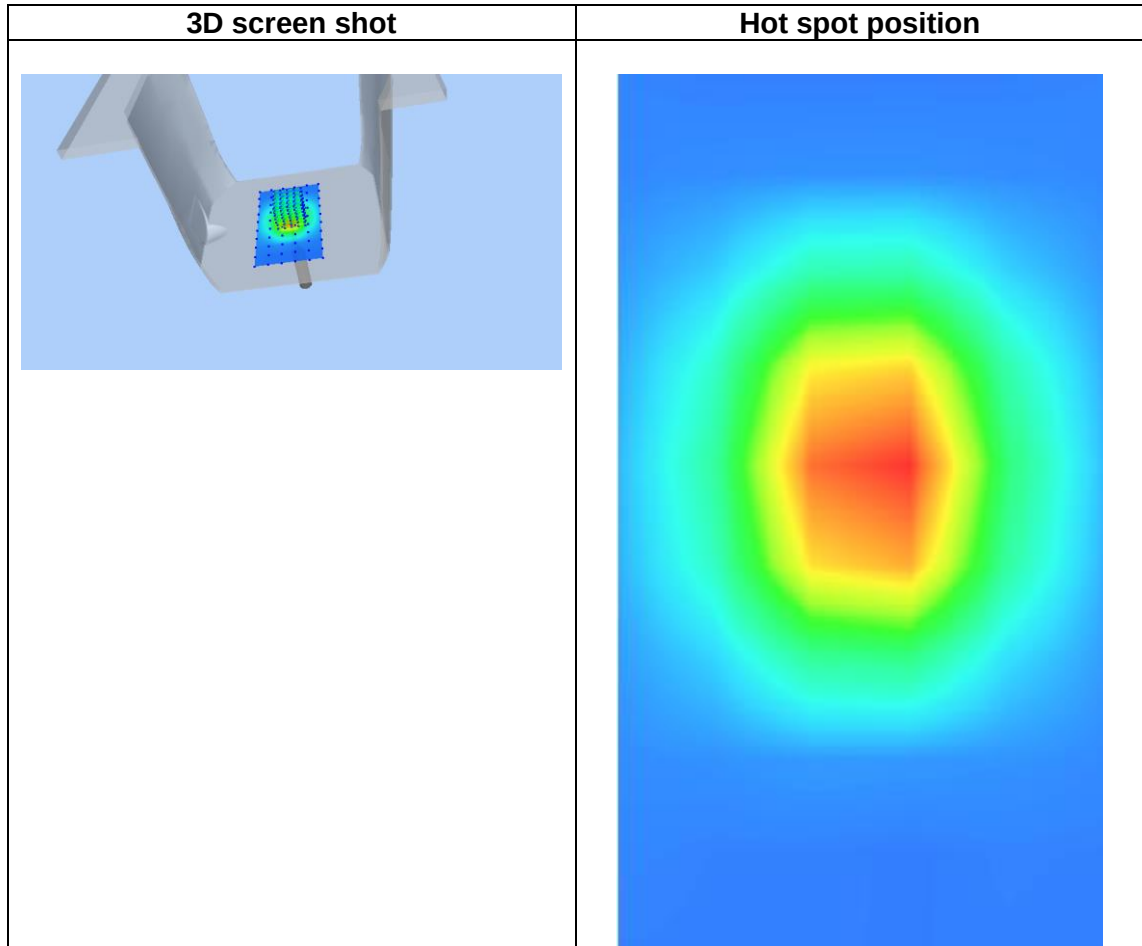

MEASUREMENT 5


Date of measurement: 28/11/2024

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2450</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.38</u>

B. SAR Measurement Results



Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.408511
Relative permittivity (imaginary part)	13.399264
Conductivity (S/m)	1.823789
Variation (%)	-1.250000

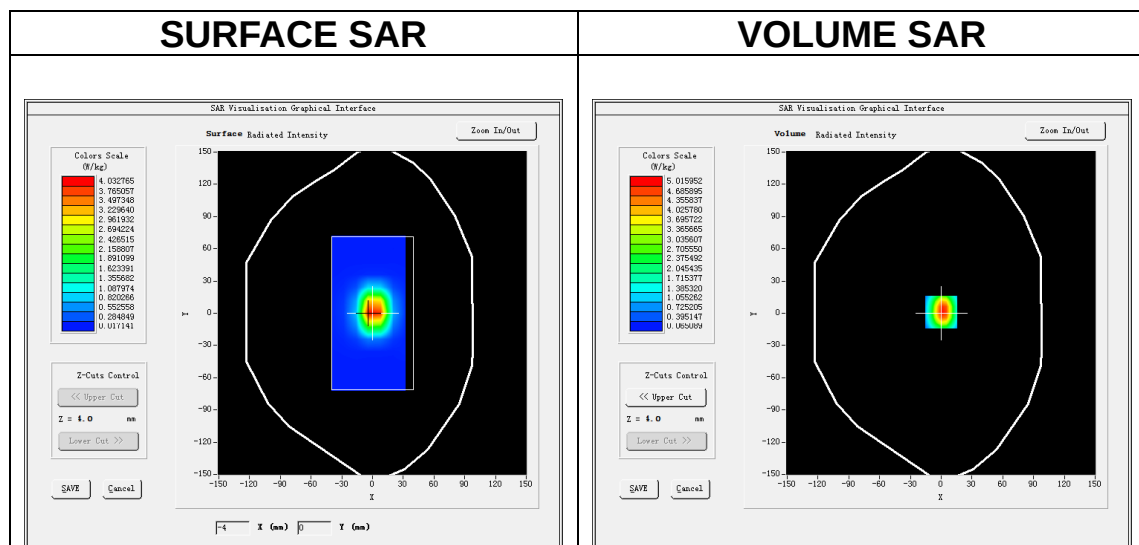

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.359425
SAR 1g (W/Kg)	5.183642

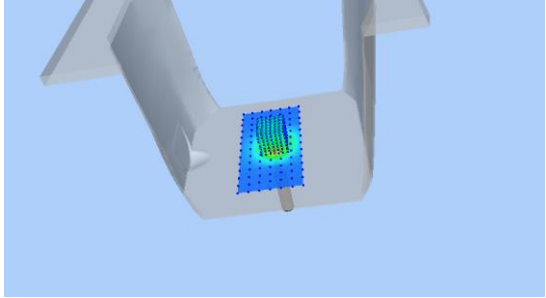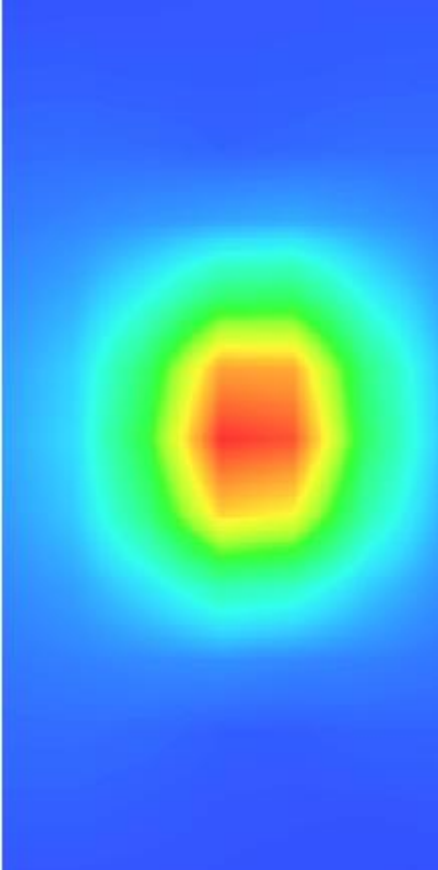3D screen shot	Hot spot position
	

MEASUREMENT 6


Date of measurement: 11/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results



Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.432362
Relative permittivity (imaginary part)	13.768602
Conductivity (S/m)	1.988798
Variation (%)	-3.980000

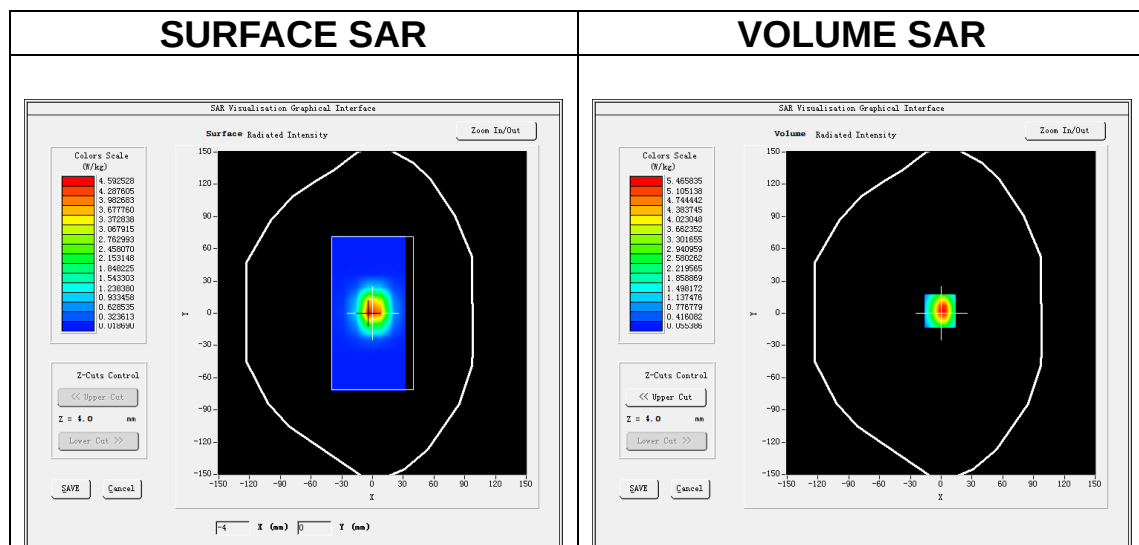

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.523157
SAR 1g (W/Kg)	5.432595

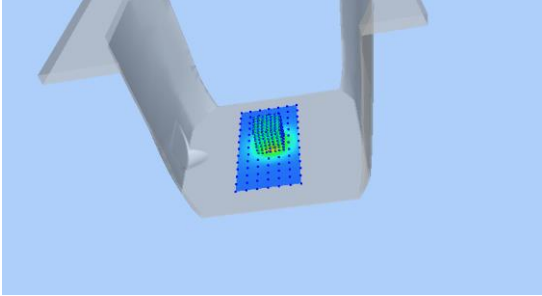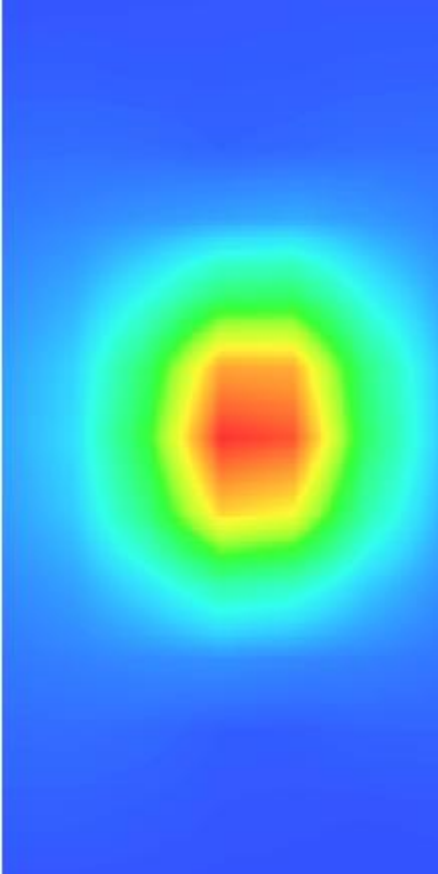3D screen shot	Hot spot position
	

MEASUREMENT 7


Date of measurement: 4/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.30</u>

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.400000
Relative permittivity (imaginary part)	16.129999
Conductivity (S/m)	4.510778
Variation (%)	-4.570000

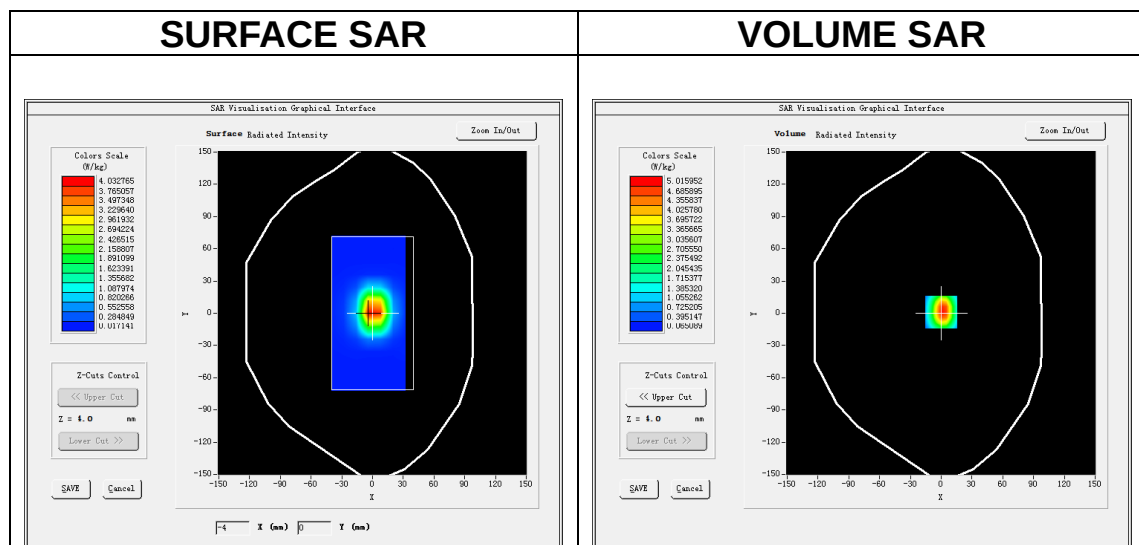

Maximum location: X=0.00, Y=1.00

SAR Peak: 15.14 W/kg

SAR 10g (W/Kg)	5.212361
SAR 1g (W/Kg)	14.712032

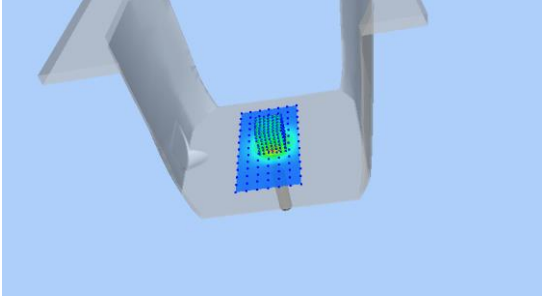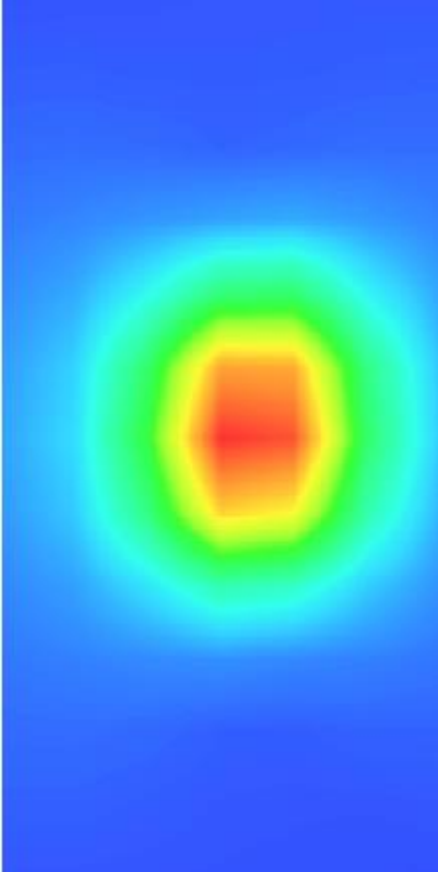3D screen shot	Hot spot position
	

MEASUREMENT 8


Date of measurement: 5/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.27</u>

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative permittivity (real part)	35.299999
Relative permittivity (imaginary part)	16.360001
Conductivity (S/m)	5.271556
Variation (%)	-2.480000

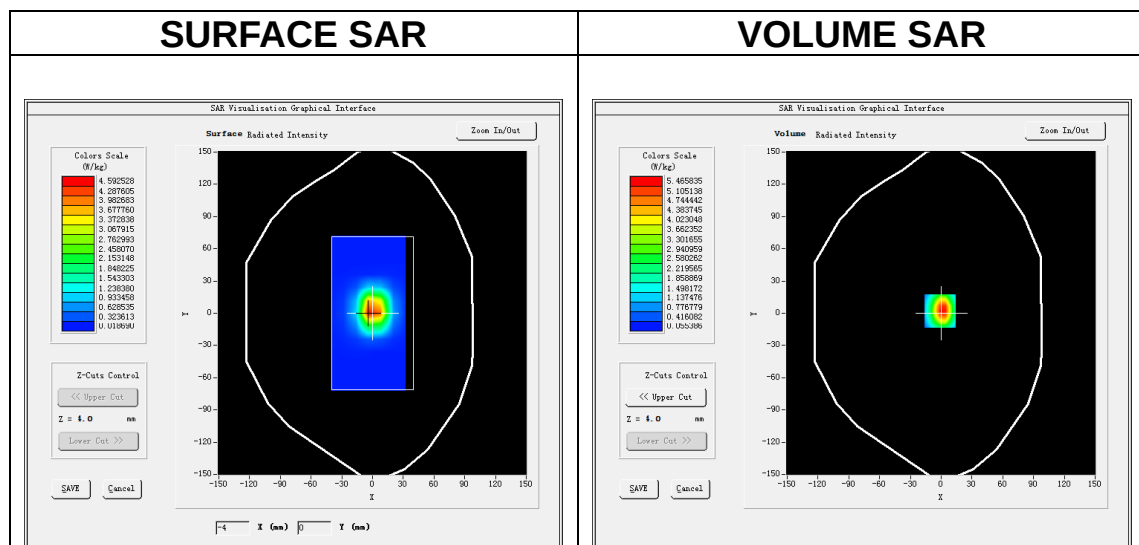

Maximum location: X=-1.00, Y=2.00

SAR Peak: 17.07 W/kg

SAR 10g (W/Kg)	5.623106
SAR 1g (W/Kg)	16.421035

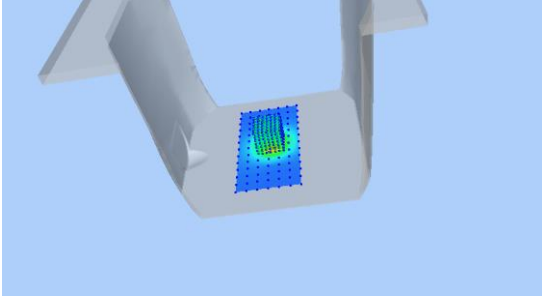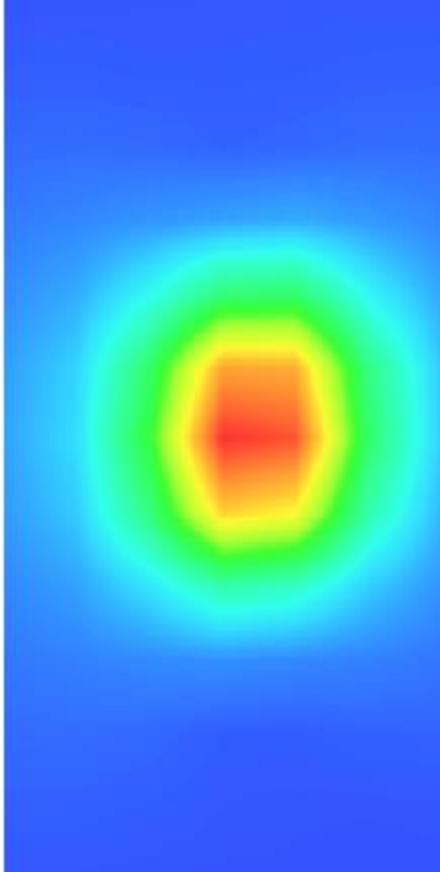3D screen shot	Hot spot position
	

Appendix C. SAR Test Plots

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 5 Head
MEASUREMENT 8 WCDMA Band 5 Body
MEASUREMENT 9 WALN 5.2G Head
MEASUREMENT 10 WALN 5.8G Head
MEASUREMENT 11 WALN 5.2G Body
MEASUREMENT 12 WALN 5.8G Body
MEASUREMENT 13 WALN 2.4G Head
MEASUREMENT 14 WALN 2.4G Body
MEASUREMENT 15 LTE Band 2 Head
MEASUREMENT 16 LTE Band 2 Body
MEASUREMENT 17 LTE Band 4 Head
MEASUREMENT 18 LTE Band 4 Body
MEASUREMENT 19 LTE Band 5 Head
MEASUREMENT 20 LTE Band 5 Body
MEASUREMENT 21 LTE Band 7 Head
MEASUREMENT 22 LTE Band 7 Body
MEASUREMENT 23 LTE Band 12 Head
MEASUREMENT 24 LTE Band 12 Body
MEASUREMENT 25 LTE Band 17 Head
MEASUREMENT 26 LTE Band 17 Body
MEASUREMENT 27 LTE Band 41 Head
MEASUREMENT 28 LTE Band 41 Body
MEASUREMENT 29 LTE Band 66 Head
MEASUREMENT 30 LTE Band 66 Body
MEASUREMENT 31 LTE Band 26a Head
MEASUREMENT 32 LTE Band 26a Body
MEASUREMENT 33 LTE Band 26b Head
MEASUREMENT 34 LTE Band 26b Body

MEASUREMENT 1


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.400024
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901453
Variation (%)	4.410000

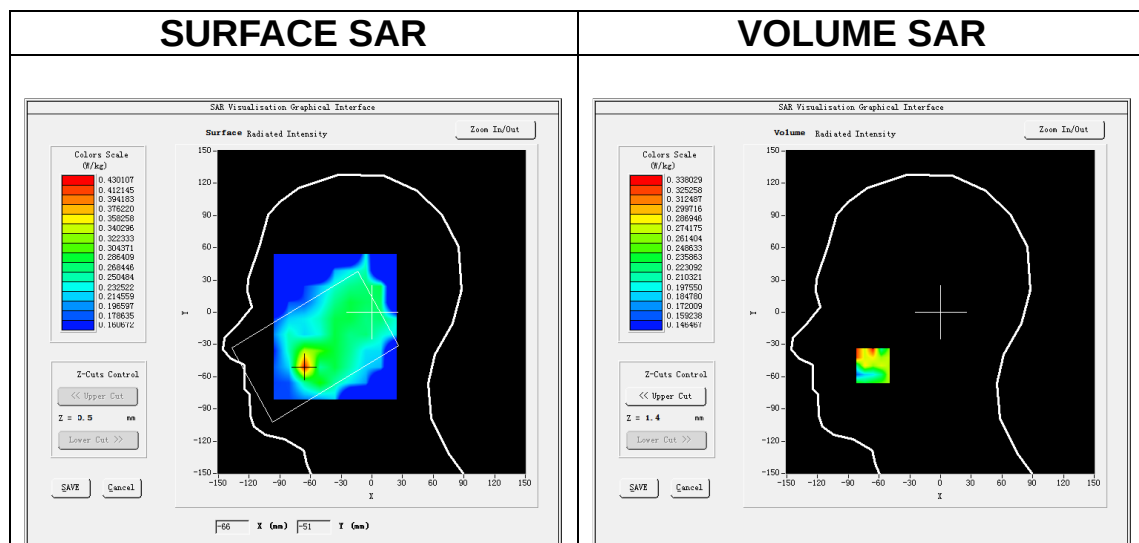

Maximum location: X=-66.00, Y=-50.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.239675
SAR 1g (W/Kg)	0.324748

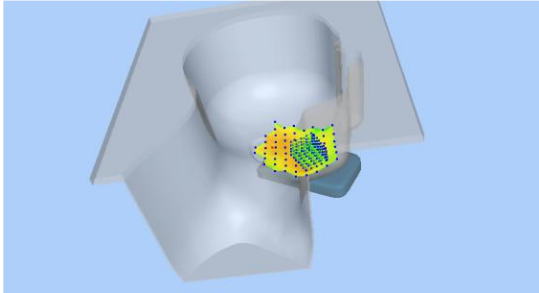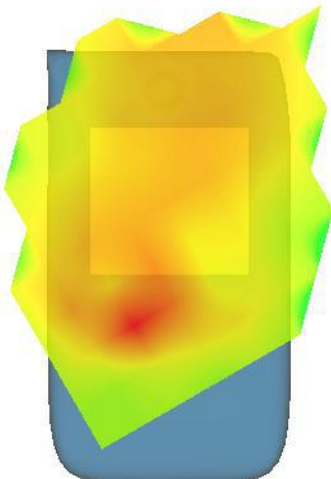3D screen shot	Hot spot position
 A 3D perspective view of a grey, bowl-shaped structure. A small, rectangular area on the right side of the bowl is highlighted with a grid of yellow and green dots, indicating the hot spot position.	 A 3D visualization of the hot spot position. It shows a yellow, irregularly shaped volume with a red core, indicating the area of highest intensity. The volume is positioned within the same grey structure as shown in the 3D screen shot.

MEASUREMENT 2


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results


Frequency (MHz)	836.400024
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901453
Variation (%)	-1.150000

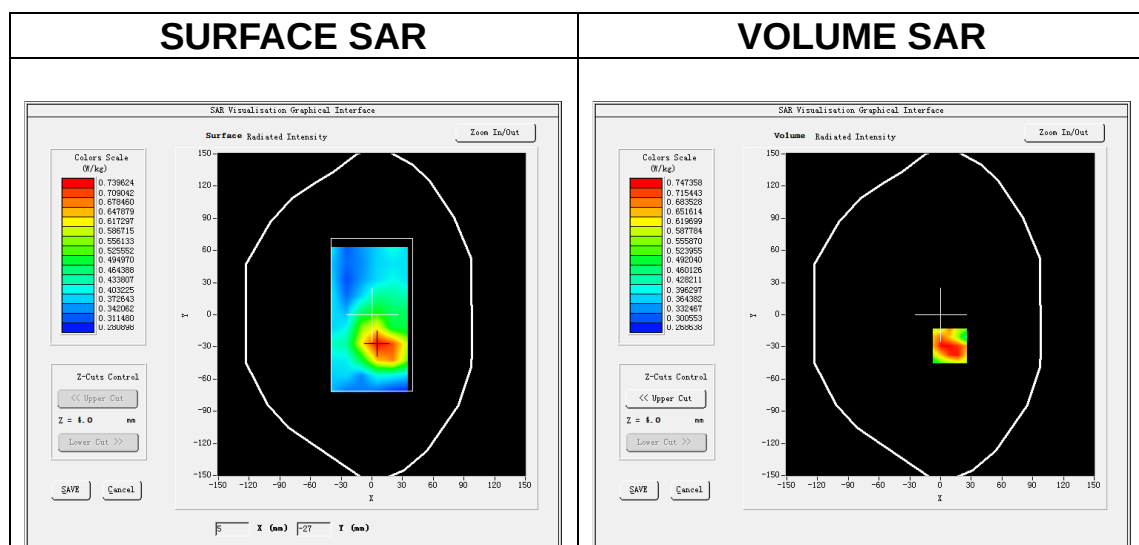

Maximum location: X=9.00, Y=-29.00

SAR Peak: 0.95 W/kg

SAR 10g (W/Kg)	0.558923
SAR 1g (W/Kg)	0.689185

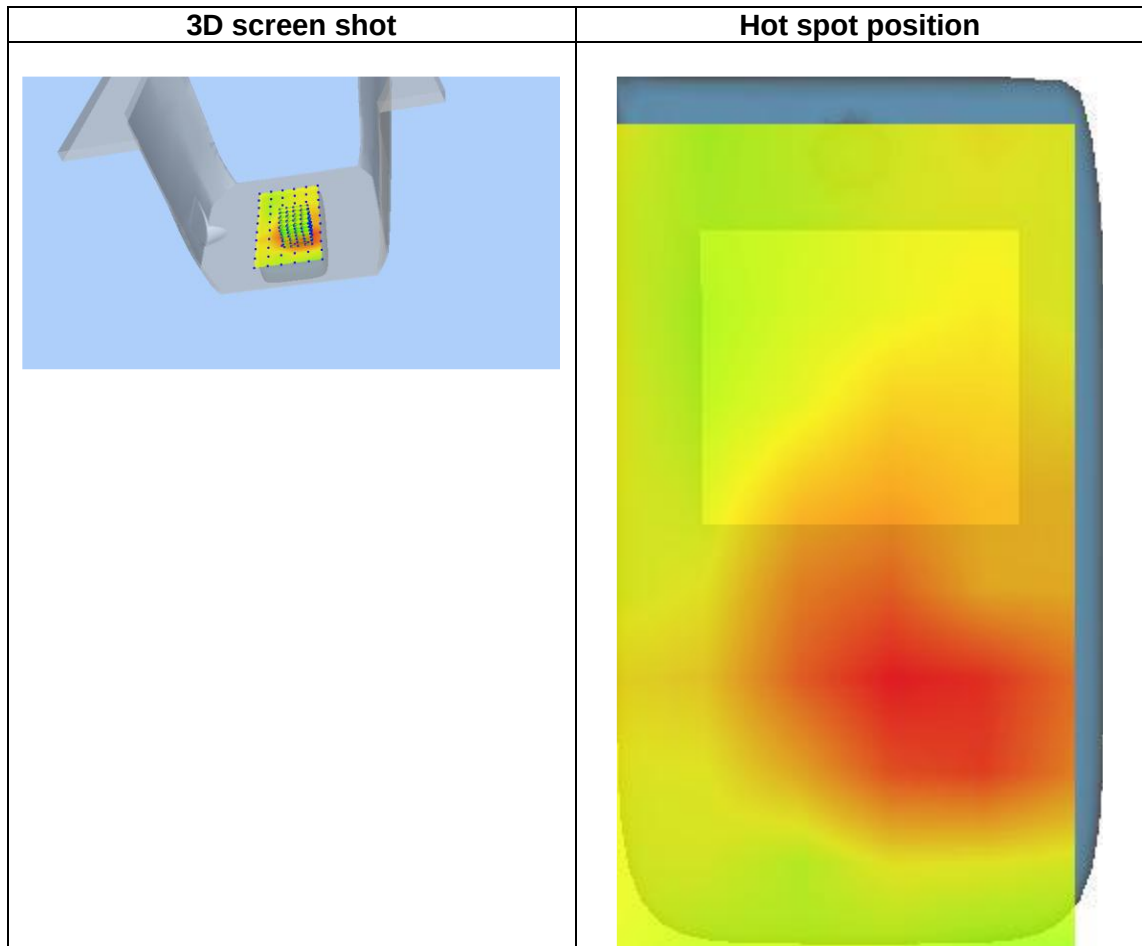

MEASUREMENT 3


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.408000
Conductivity (S/m)	1.400391
Variation (%)	0.940000

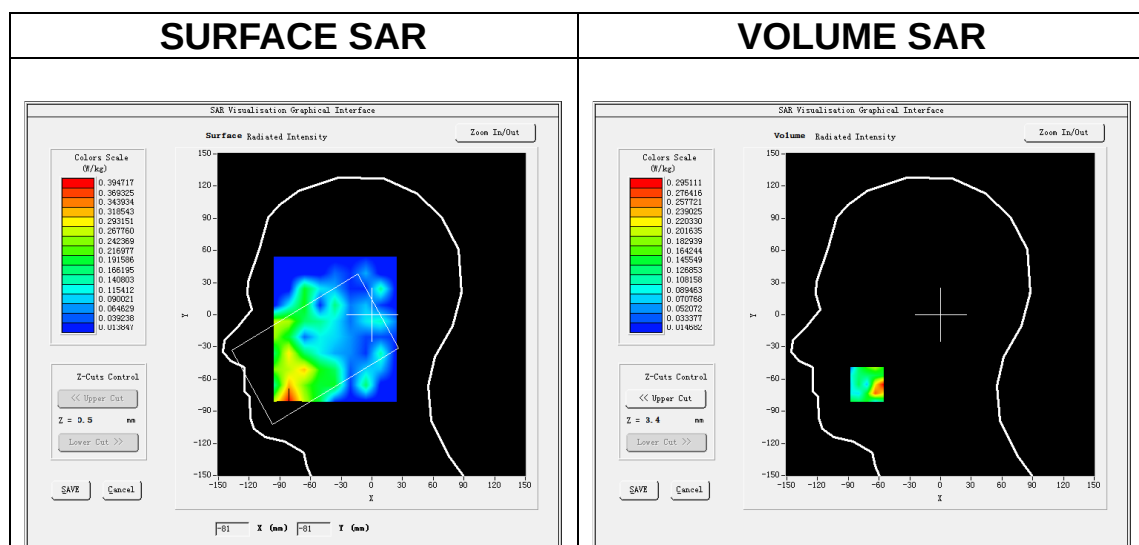

Maximum location: X=-72.00, Y=-65.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.118777
SAR 1g (W/Kg)	0.281267

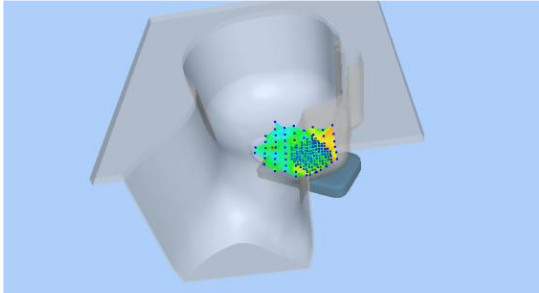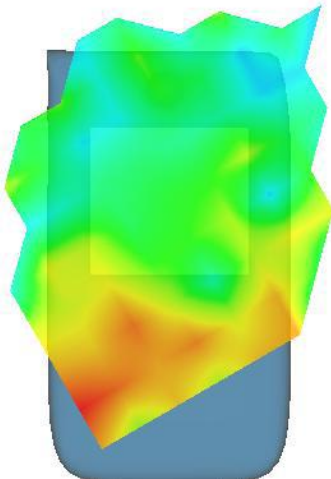3D screen shot	Hot spot position
 A 3D perspective view of a grey, bowl-shaped object on a light blue surface. A cluster of small, multi-colored dots (green, yellow, red) is located on the right side of the bowl, representing a hot spot.	 A 3D visualization of the hot spot position. It shows a color-coded surface map on a grey object, with colors ranging from blue (low intensity) to red (high intensity). A white rectangular box highlights a specific area on the surface.

MEASUREMENT 4


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.408000
Conductivity (S/m)	1.400391
Variation (%)	-0.959999

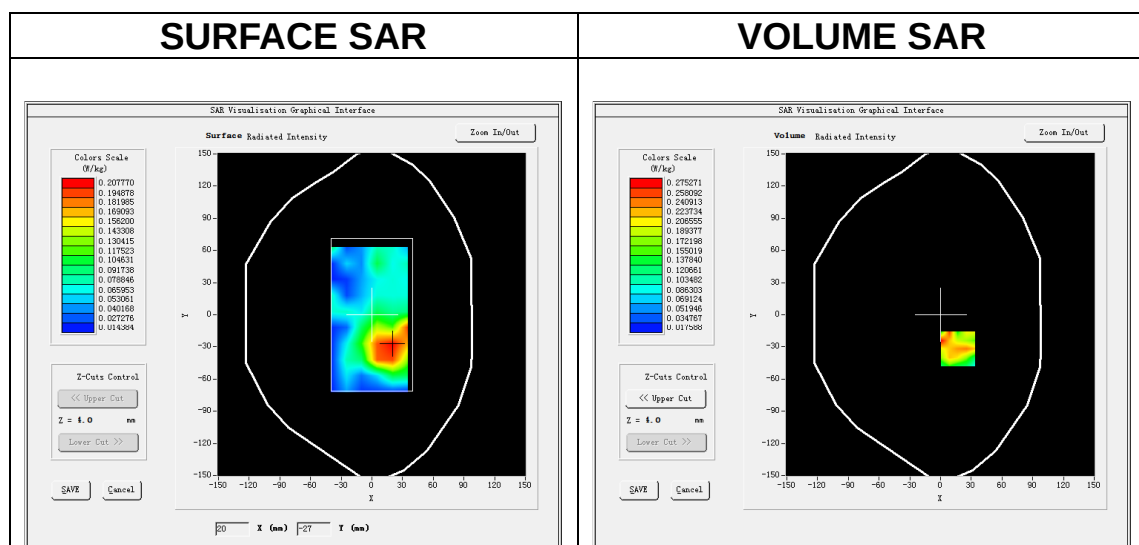

Maximum location: X=17.00, Y=-32.00

SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.144543
SAR 1g (W/Kg)	0.236040

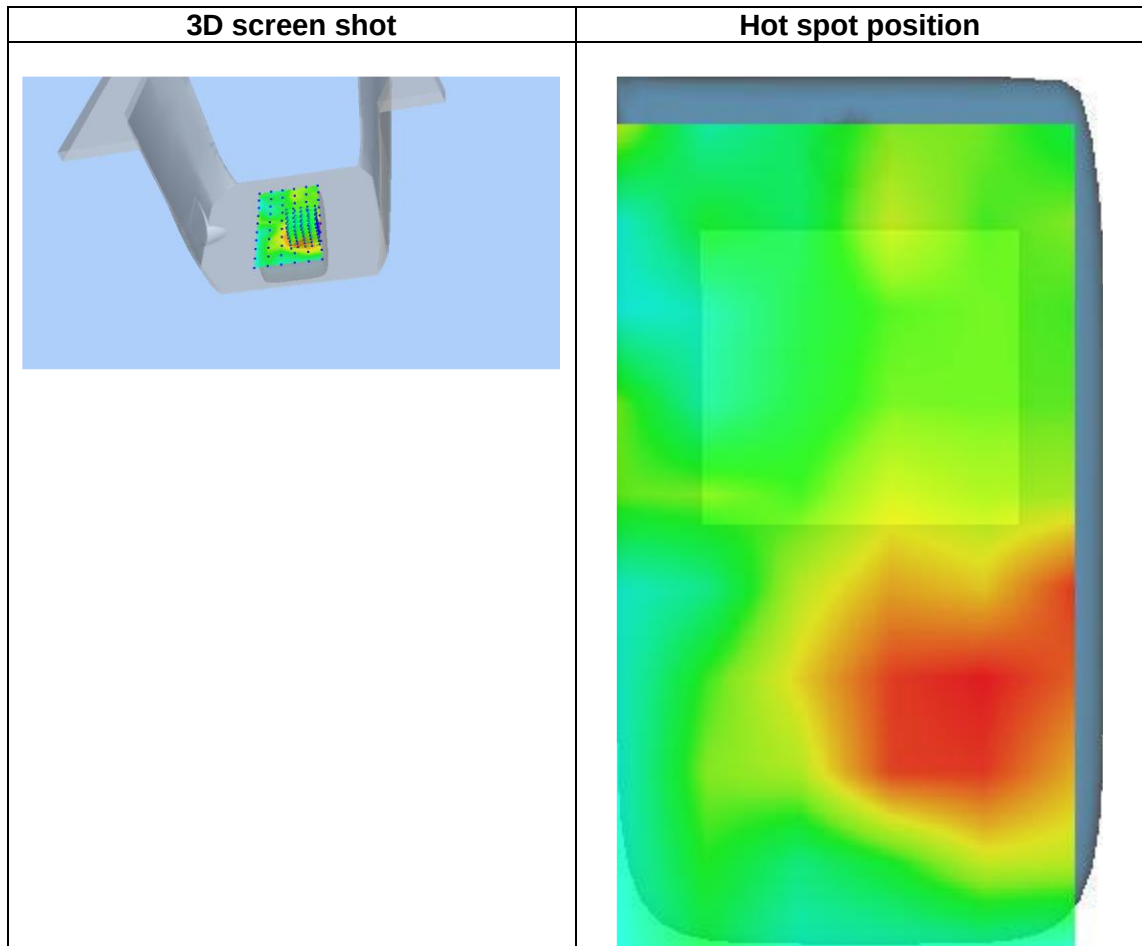

MEASUREMENT 5


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.408000
Conductivity (S/m)	1.400391
Variation (%)	-2.820000

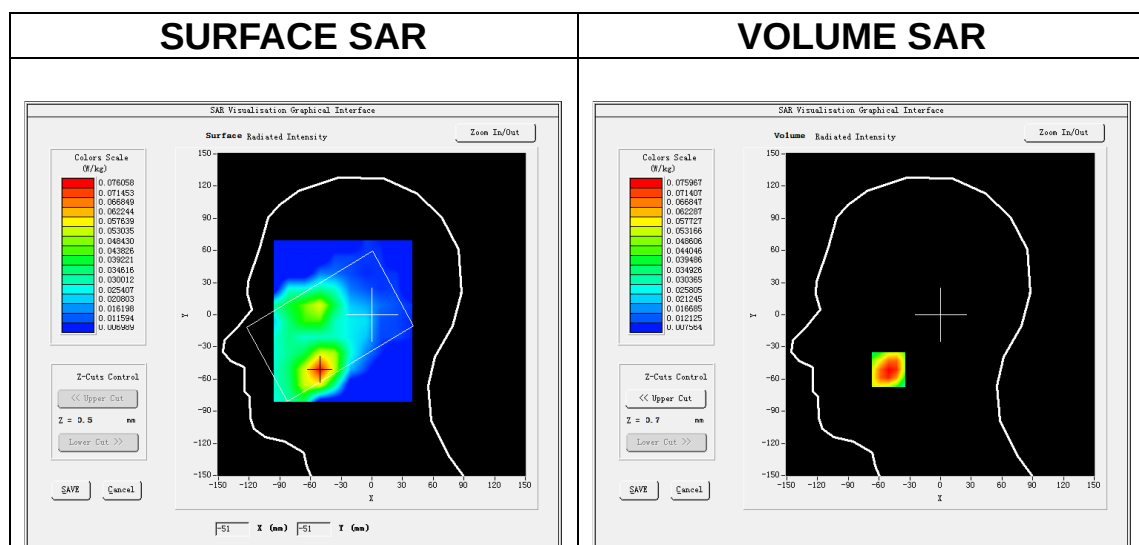

Maximum location: X=-51.00, Y=-51.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.047270
SAR 1g (W/Kg)	0.076228

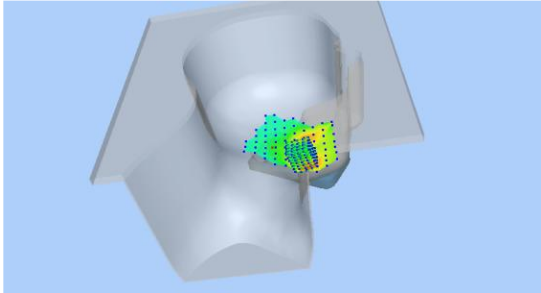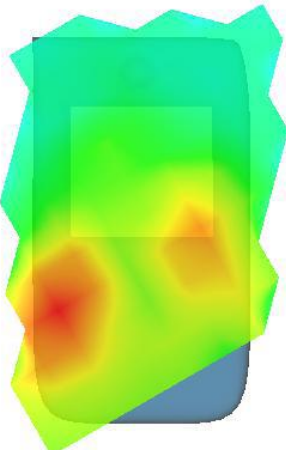3D screen shot	Hot spot position
	

MEASUREMENT 6


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.408000
Conductivity (S/m)	1.400391
Variation (%)	1.450000

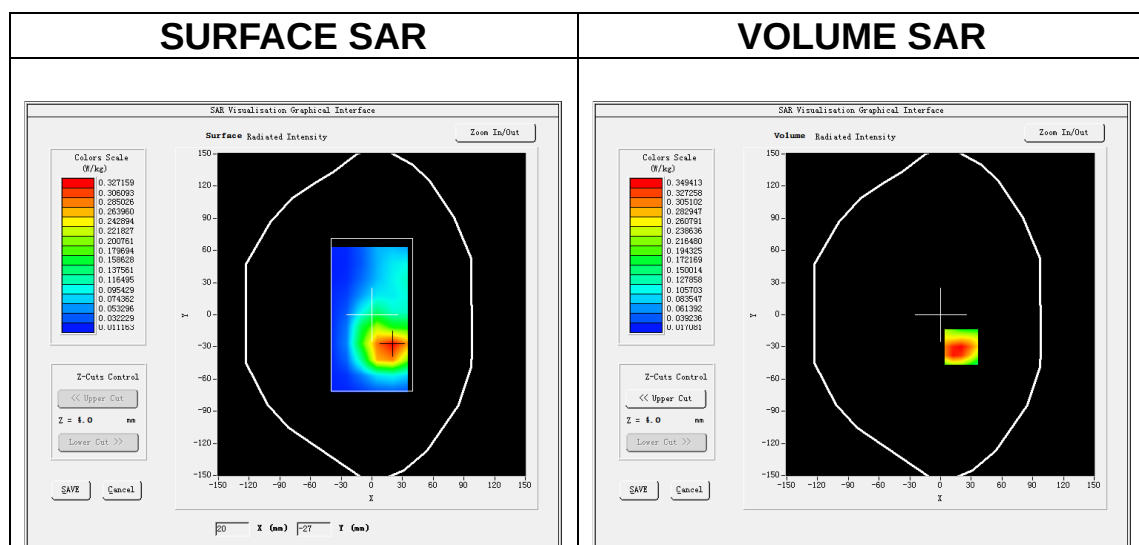

Maximum location: X=20.00, Y=-30.00

SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.199237
SAR 1g (W/Kg)	0.350144

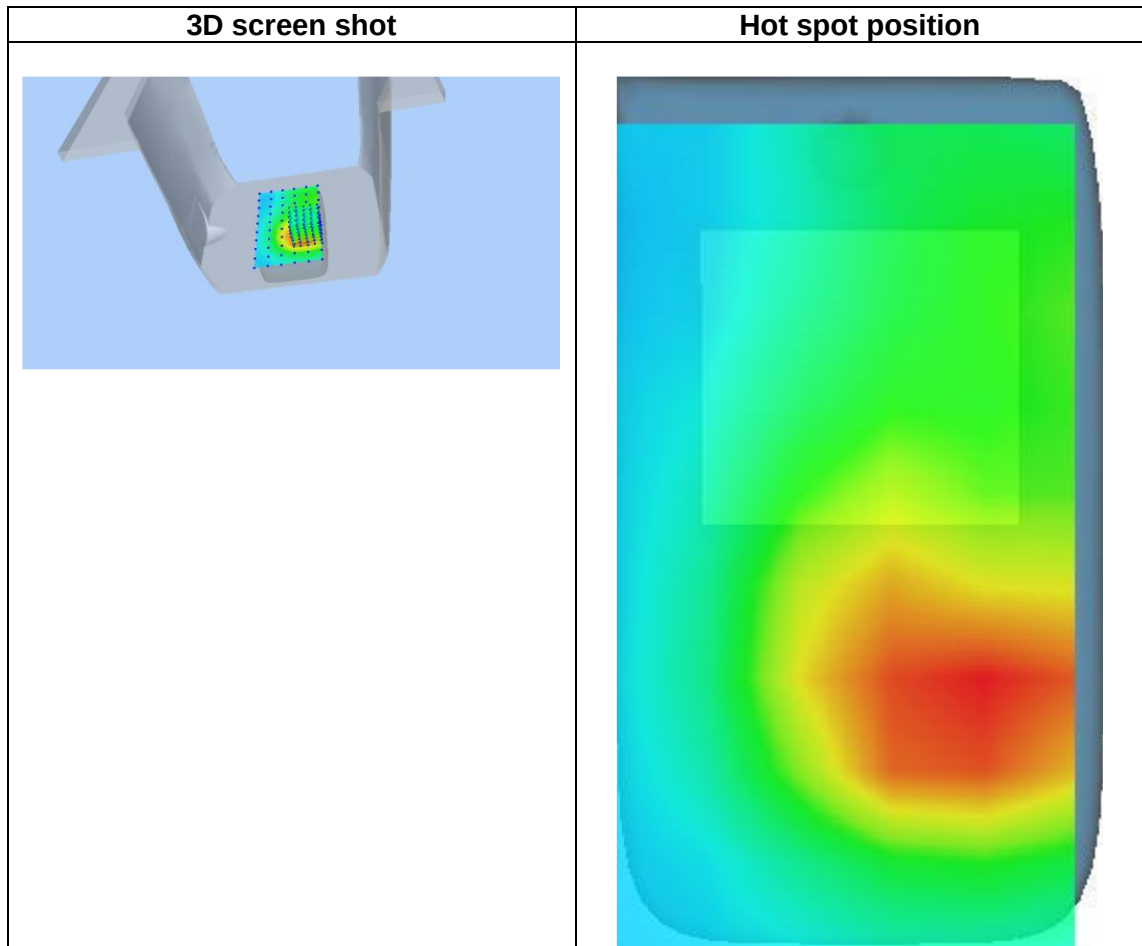

MEASUREMENT 7


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.400024
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901453
Variation (%)	3.500000

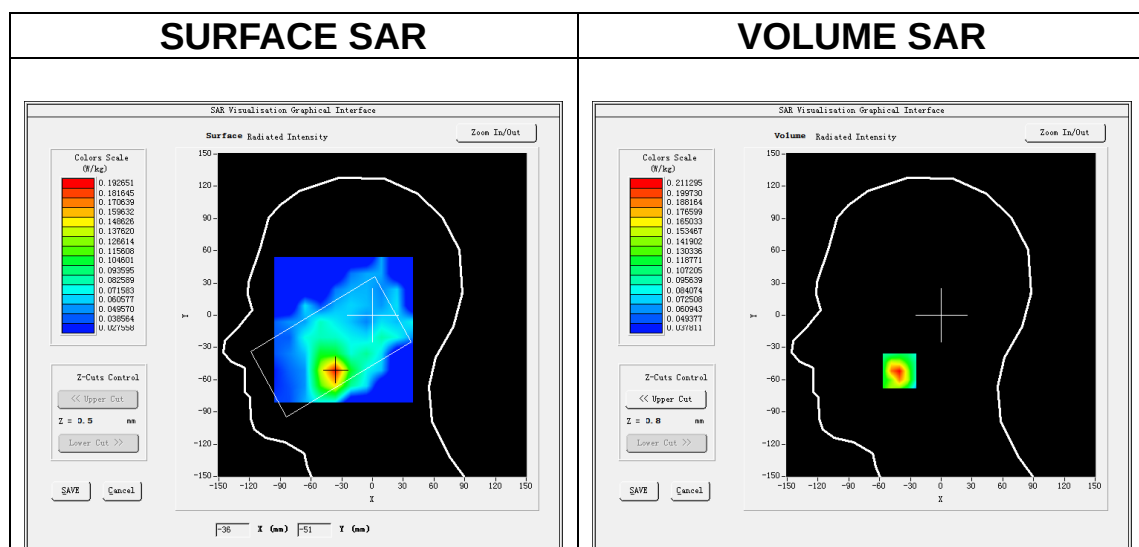

Maximum location: X=-37.00, Y=-52.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.124686
SAR 1g (W/Kg)	0.201074

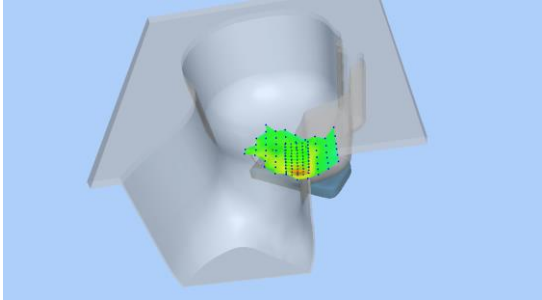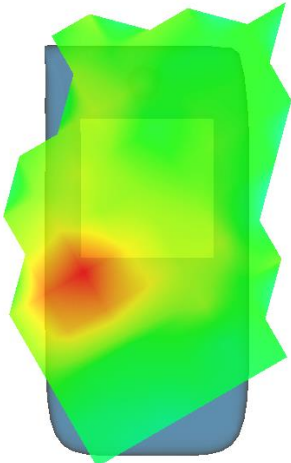3D screen shot	Hot spot position
 A 3D perspective view of a grey, bowl-shaped structure on a light blue background. A small cluster of green and yellow dots is visible on the right side of the bowl, indicating the hot spot position.	 A 3D visualization of the hot spot position. It shows a green, irregularly shaped volume with a red and yellow core, indicating the area of highest intensity or heat. The volume is positioned within the bowl structure.

MEASUREMENT 8


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.400024
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901453
Variation (%)	2.370000

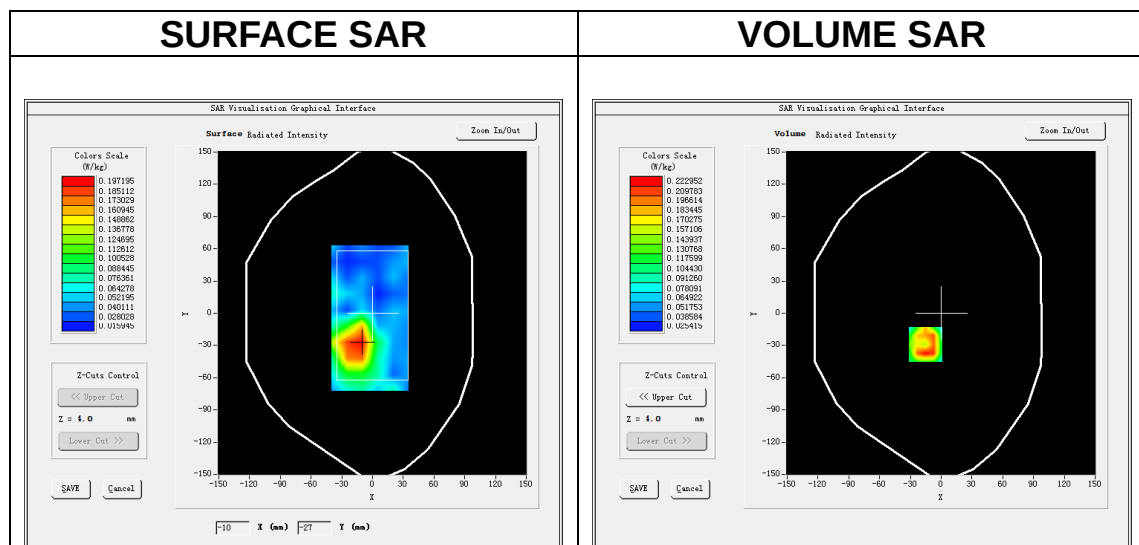

Maximum location: X=-15.00, Y=-29.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.126669
SAR 1g (W/Kg)	0.206836

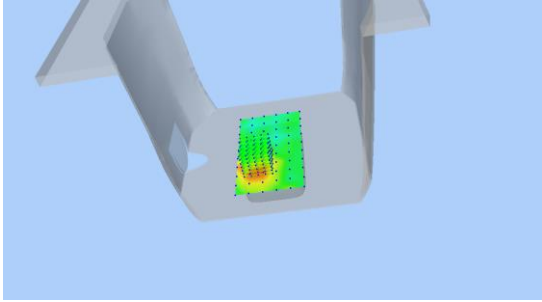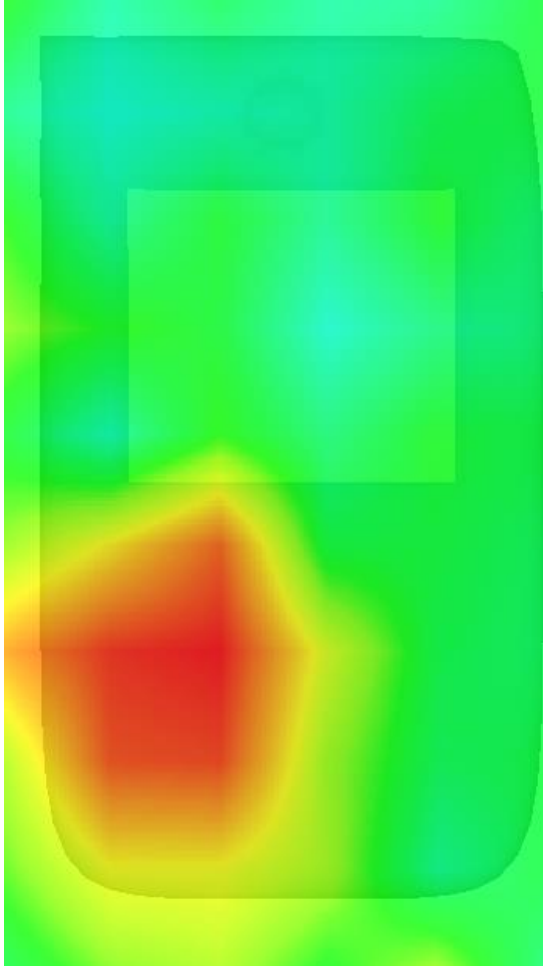3D screen shot	Hot spot position
	

MEASUREMENT 9


Date of measurement: 4/12/2024

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>IEEE 802.11n U-NII</u>
Channels	<u>Low</u>
Signal	<u>IEEE802.n (Crest factor: 1.0)</u>
ConvF	<u>2.30</u>

B. SAR Measurement Results



Frequency (MHz)	5190.000000
Relative permittivity (real part)	36.010000
Relative permittivity (imaginary part)	16.129974
Conductivity (S/m)	4.650809
Variation (%)	4.050000

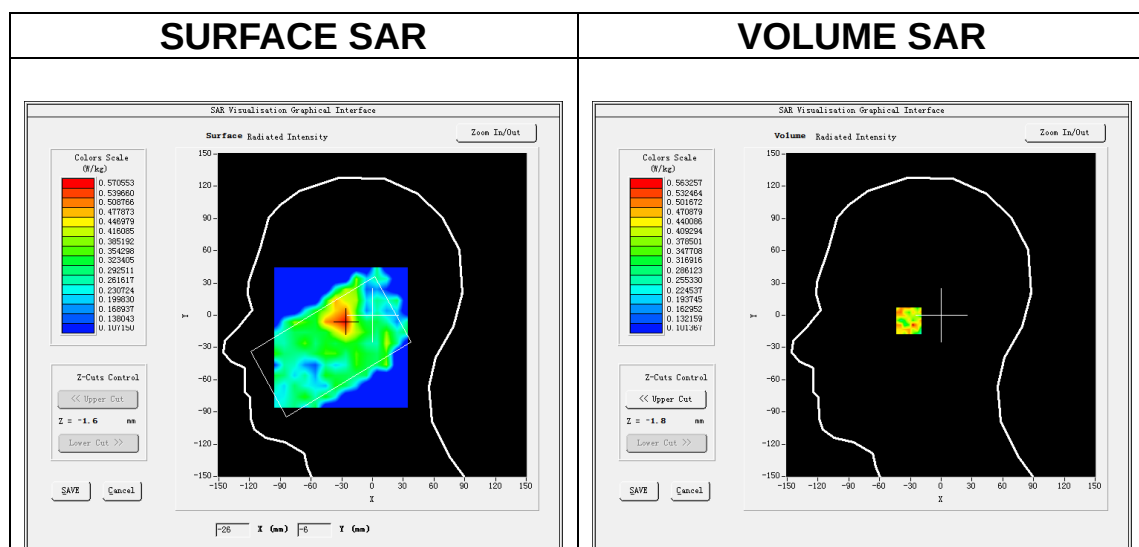

Maximum location: X=-28.00, Y=-5.00

SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.366782
SAR 1g (W/Kg)	0.427280

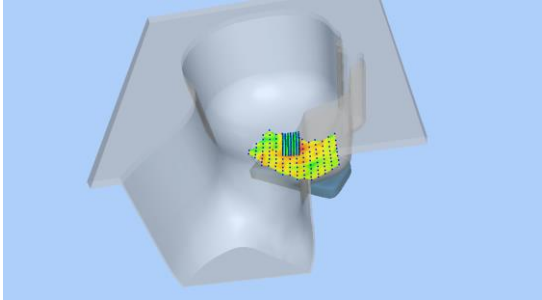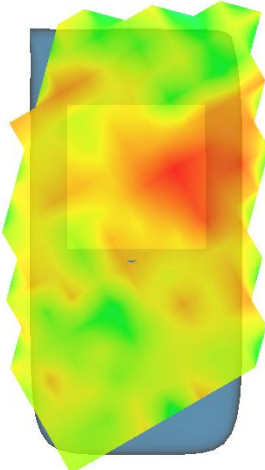3D screen shot	Hot spot position
	

MEASUREMENT 10


Date of measurement: 5/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.a (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.27</u>

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative permittivity (real part)	35.314987
Relative permittivity (imaginary part)	16.355486
Conductivity (S/m)	5.220126
Variation (%)	-4.790000

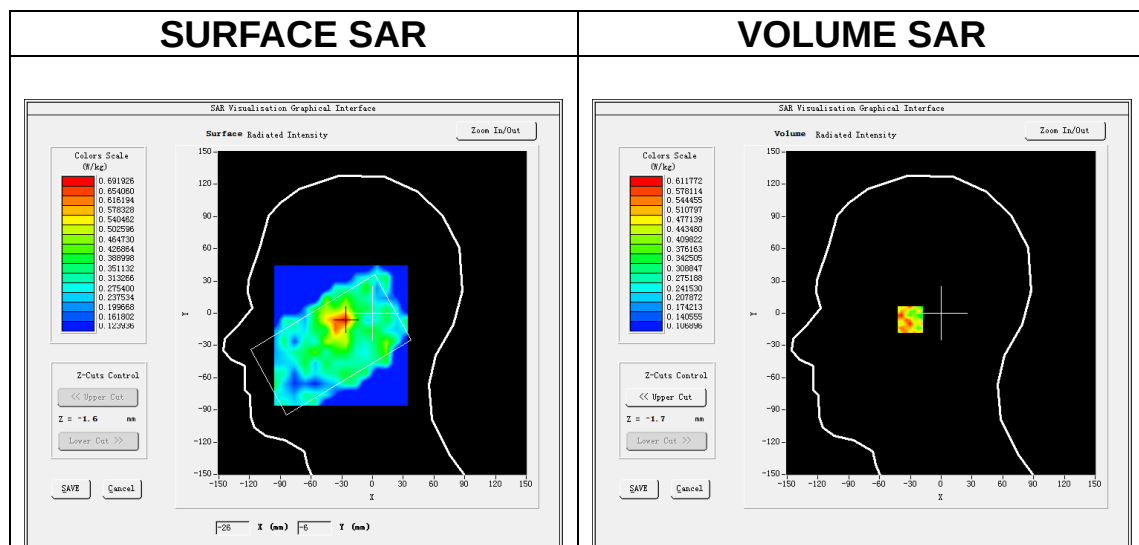

Maximum location: X=-27.00, Y=-6.00

SAR Peak: 1.47 W/kg

SAR 10g (W/Kg)	0.400473
SAR 1g (W/Kg)	0.533381

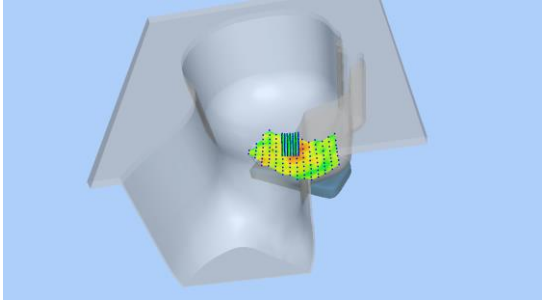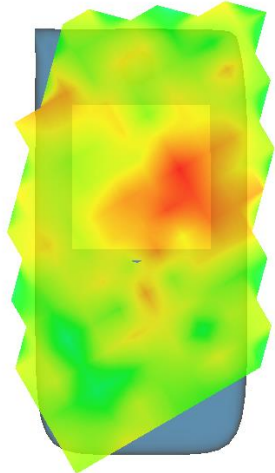3D screen shot	Hot spot position
	

MEASUREMENT 11


Date of measurement: 4/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.30</u>

B. SAR Measurement Results



Frequency (MHz)	5190.000000
Relative permittivity (real part)	36.010000
Relative permittivity (imaginary part)	16.129974
Conductivity (S/m)	4.650809
Variation (%)	-0.030000

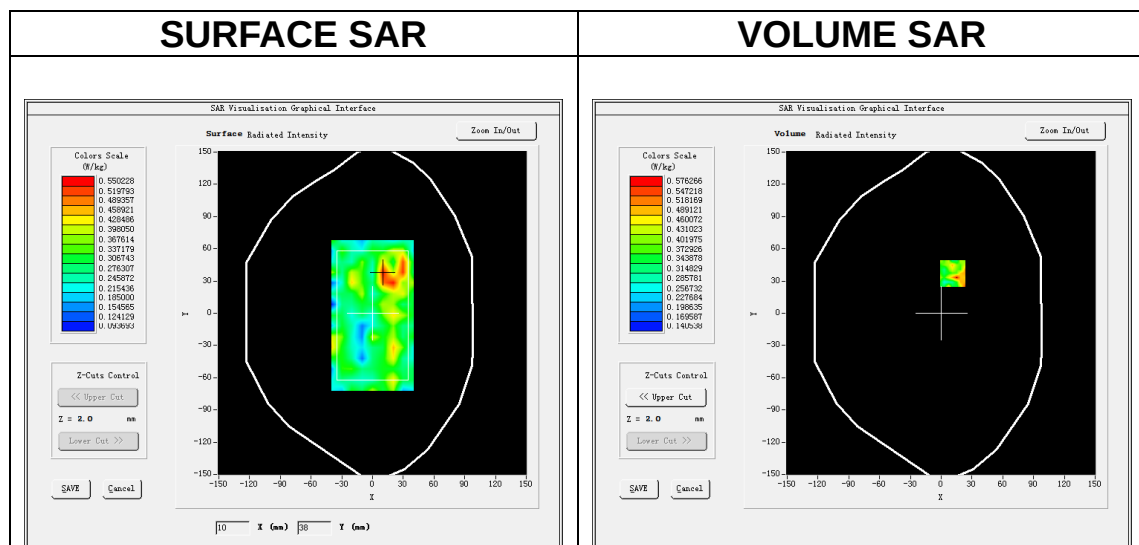

Maximum location: X=11.00, Y=37.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.330679
SAR 1g (W/Kg)	0.407355

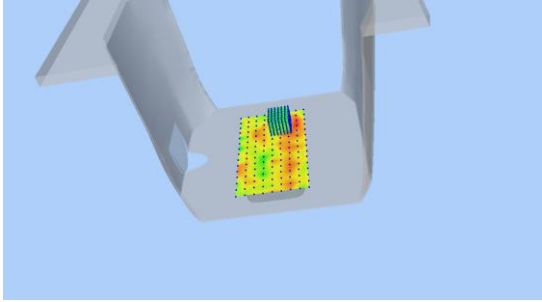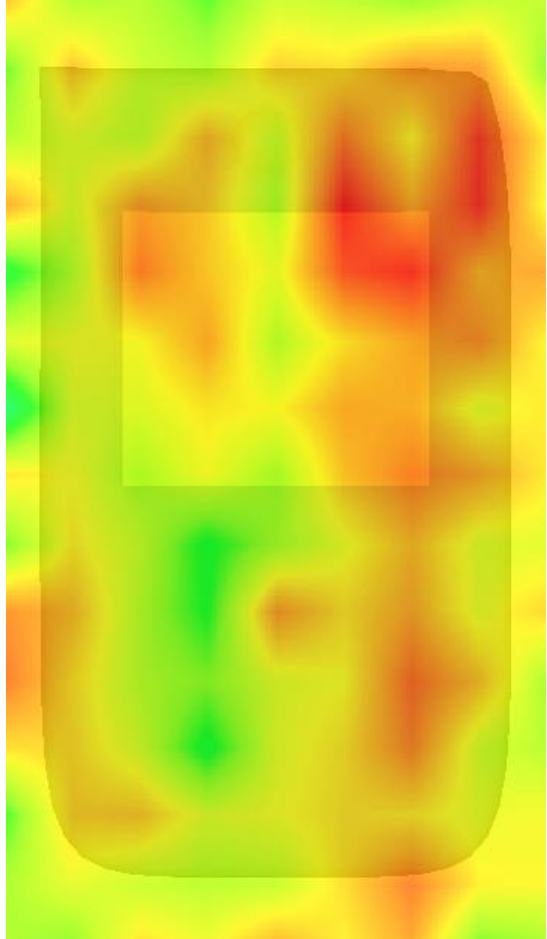3D screen shot	Hot spot position
	

MEASUREMENT 12


Date of measurement: 5/12/2024

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Low</u>
Signal	<u>IEEE802.a (Crest factor: 1.0)</u>
ConvF	<u>2.27</u>

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative permittivity (real part)	35.314987
Relative permittivity (imaginary part)	16.355486
Conductivity (S/m)	5.220126
Variation (%)	0.620000

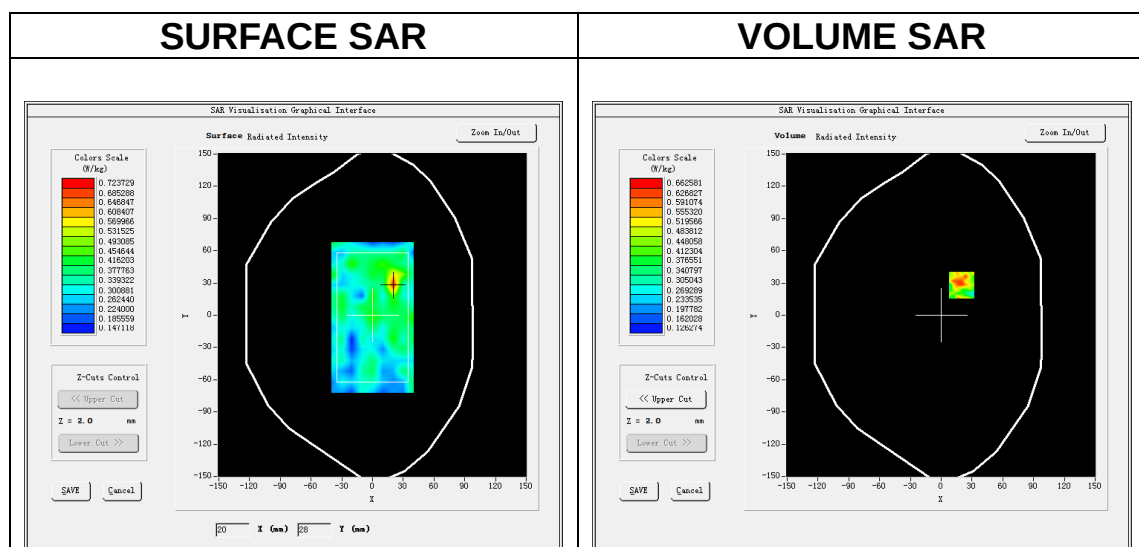

Maximum location: X=20.00, Y=28.00

SAR Peak: 1.06 W/kg

SAR 10g (W/Kg)	0.403917
SAR 1g (W/Kg)	0.497753

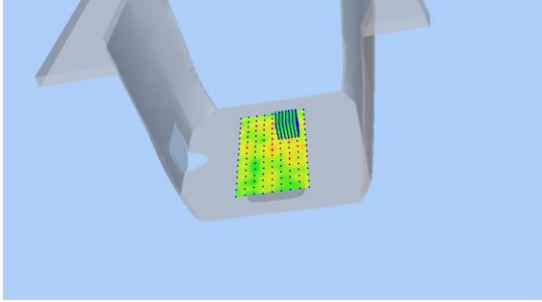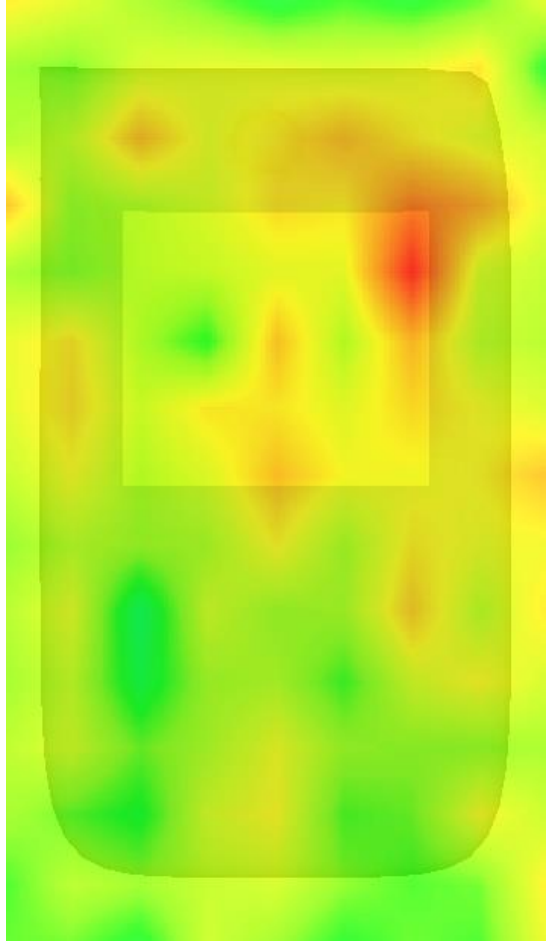3D screen shot	Hot spot position
	

MEASUREMENT 13


Date of measurement: 28/11/2024

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>IEEE 802.11b ISM</u>
Channels	<u>Low</u>
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
ConvF	<u>2.38</u>

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.224000
Relative permittivity (imaginary part)	13.203000
Conductivity (S/m)	1.769202
Variation (%)	4.980000

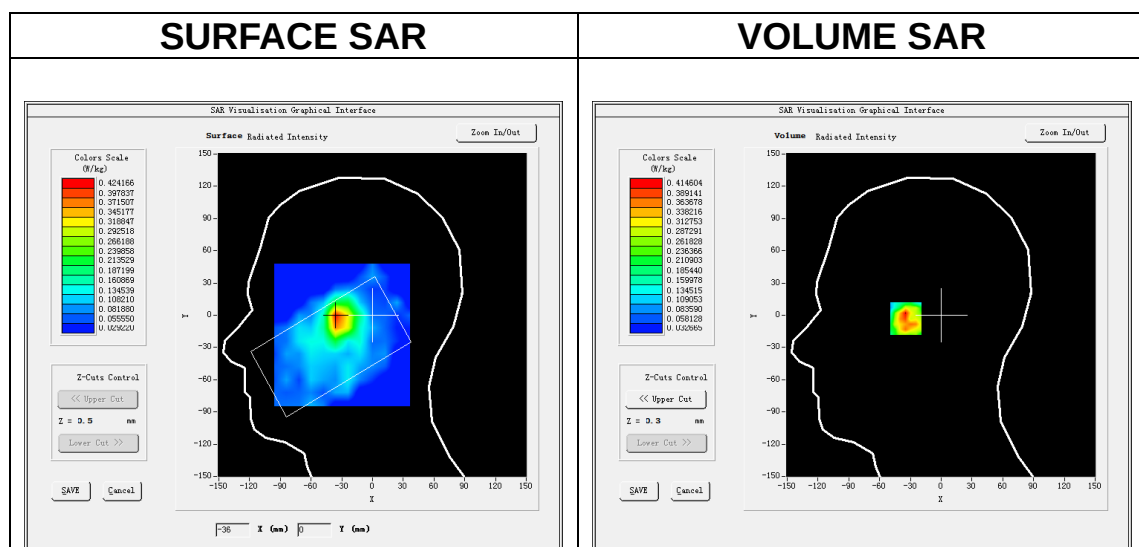

Maximum location: X=-34.00, Y=-2.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.223790
SAR 1g (W/Kg)	0.357064

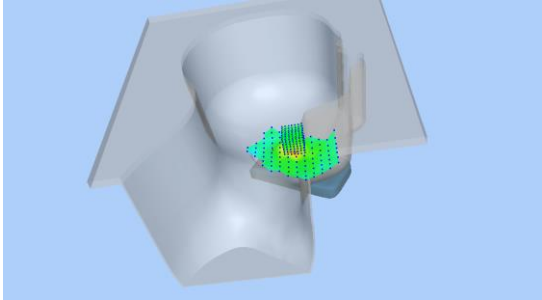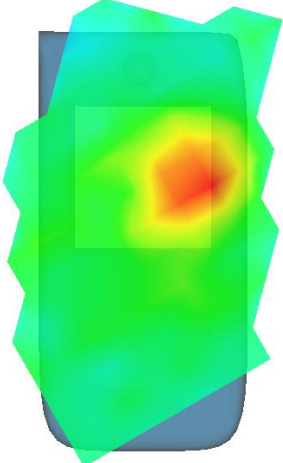3D screen shot	Hot spot position
	

MEASUREMENT 14


Date of measurement: 28/11/2024

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11b ISM</u>
Channels	<u>Low</u>
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
ConvF	<u>2.38</u>

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative permittivity (real part)	39.224000
Relative permittivity (imaginary part)	13.203000
Conductivity (S/m)	1.769202
Variation (%)	4.920000

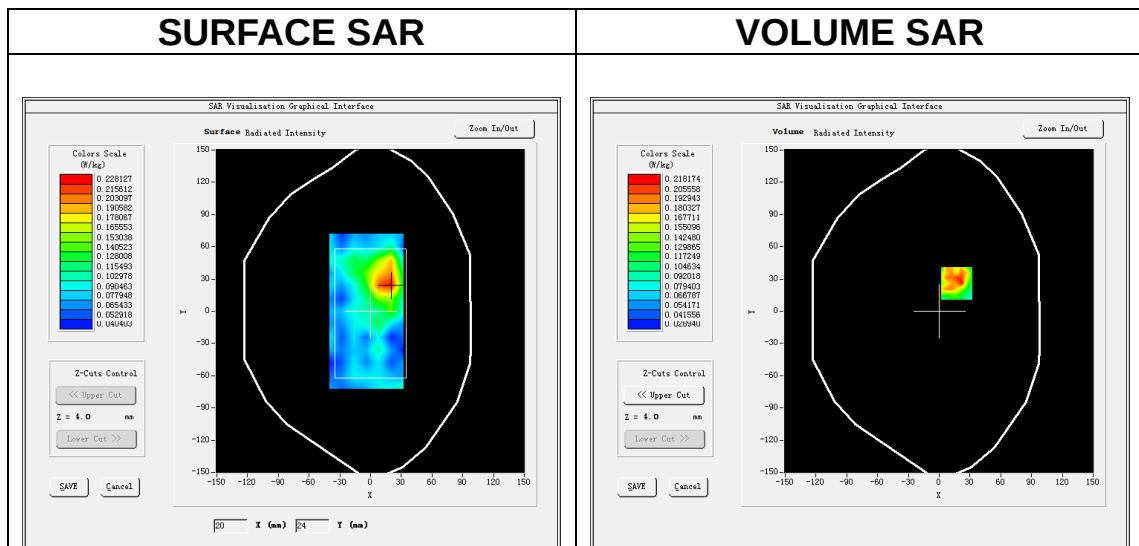

Maximum location: X=17.00, Y=26.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.135939
SAR 1g (W/Kg)	0.191317

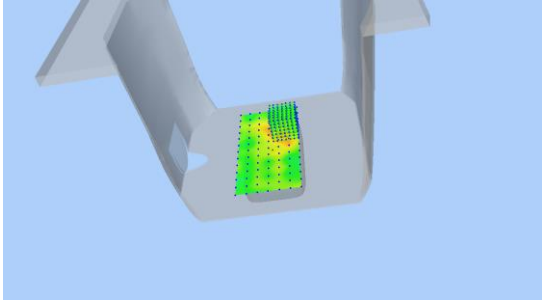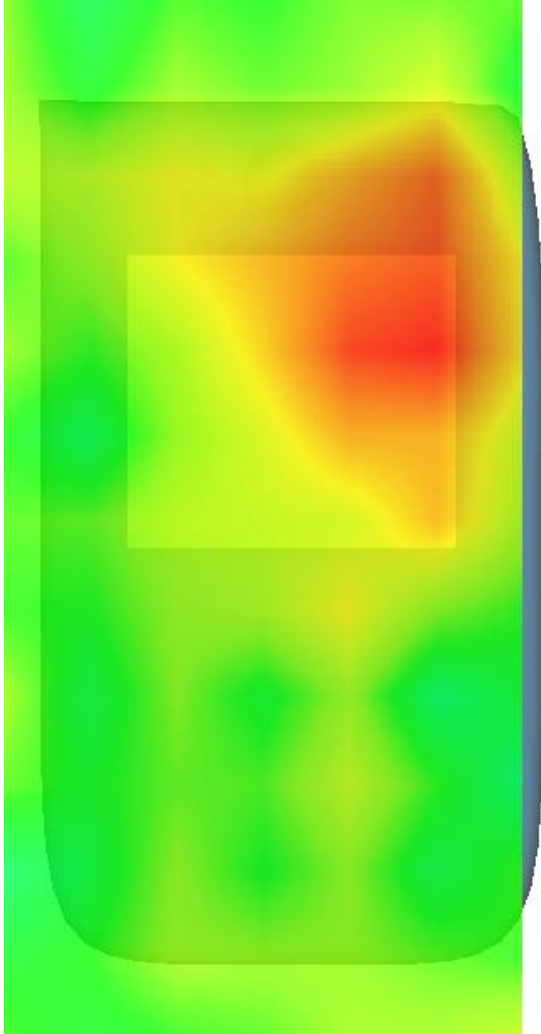3D screen shot	Hot spot position
	

MEASUREMENT 15


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1879.500000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.411700
Conductivity (S/m)	1.400405
Variation (%)	-3.860000

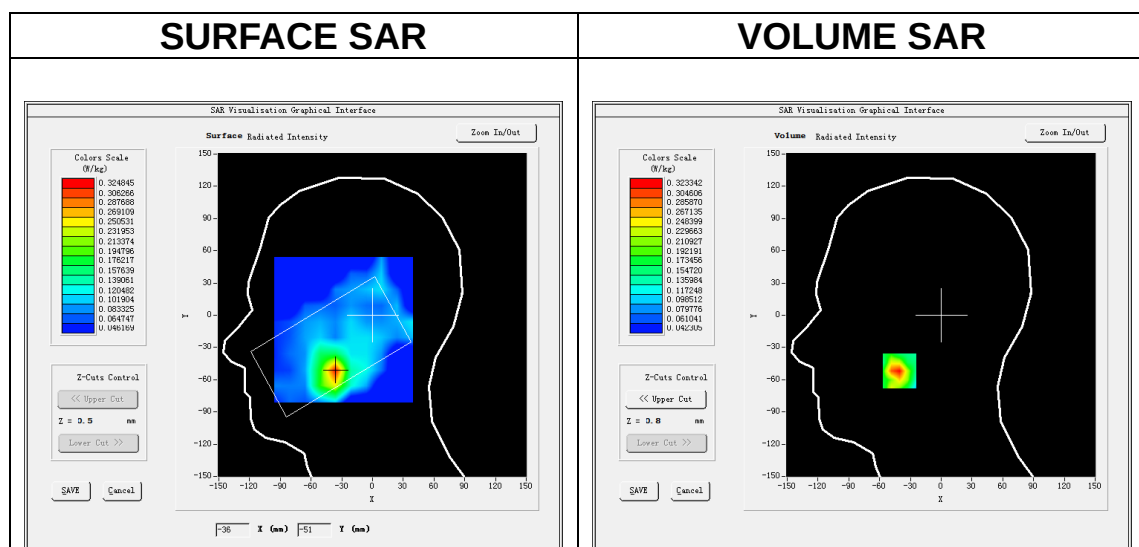

Maximum location: X=-37.00, Y=-52.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.185038
SAR 1g (W/Kg)	0.301520

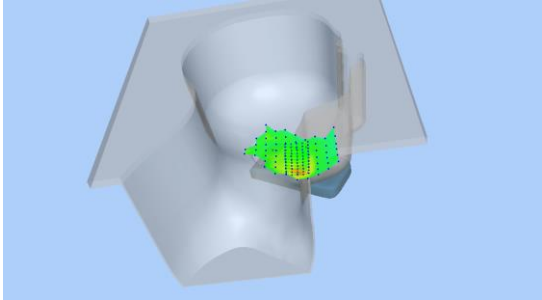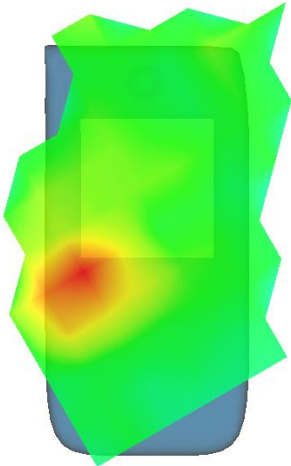3D screen shot	Hot spot position
	

MEASUREMENT 16


Date of measurement: 25/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1879.500000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.411700
Conductivity (S/m)	1.400405
Variation (%)	4.110000

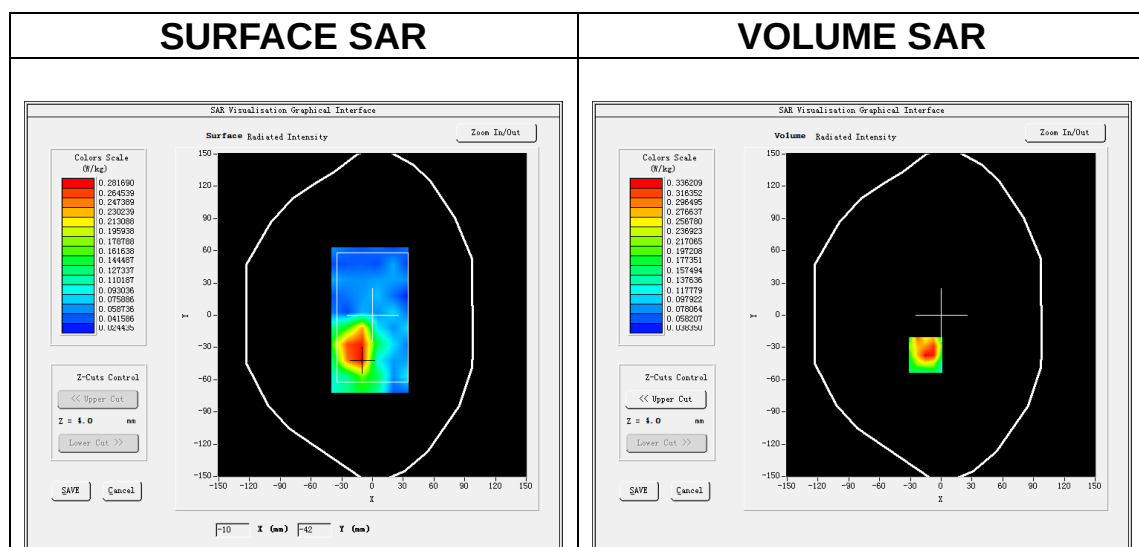

Maximum location: X=-15.00, Y=-37.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.202984
SAR 1g (W/Kg)	0.327523

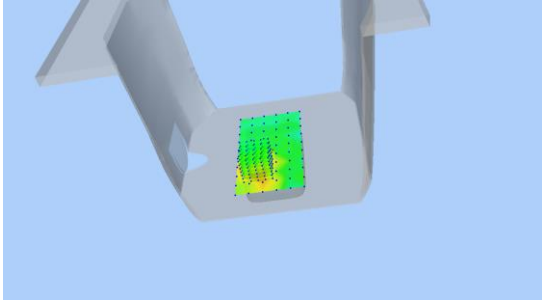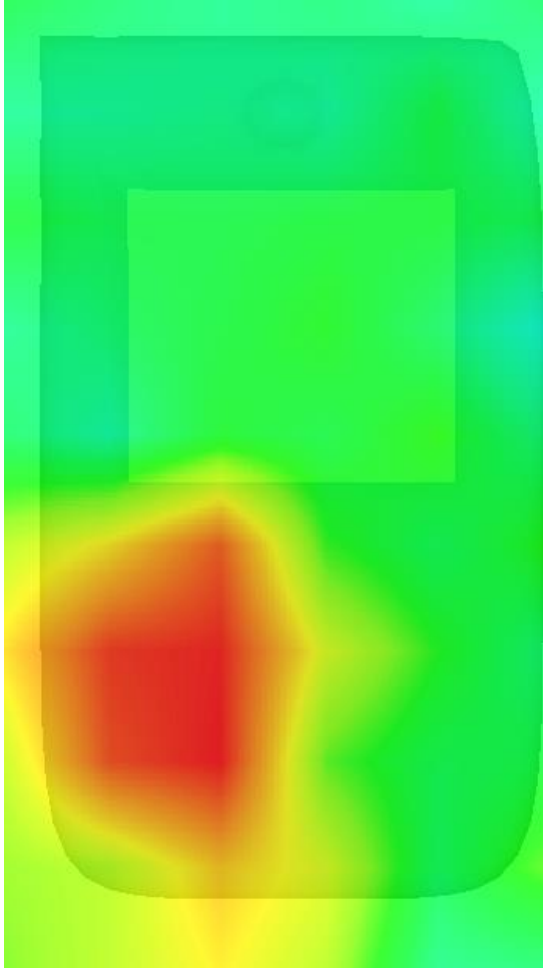3D screen shot	Hot spot position
	

MEASUREMENT 17


Date of measurement: 21/11/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 4</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>
ConvF	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.115910
Relative permittivity (imaginary part)	14.136136
Conductivity (S/m)	1.360603
Variation (%)	1.219999

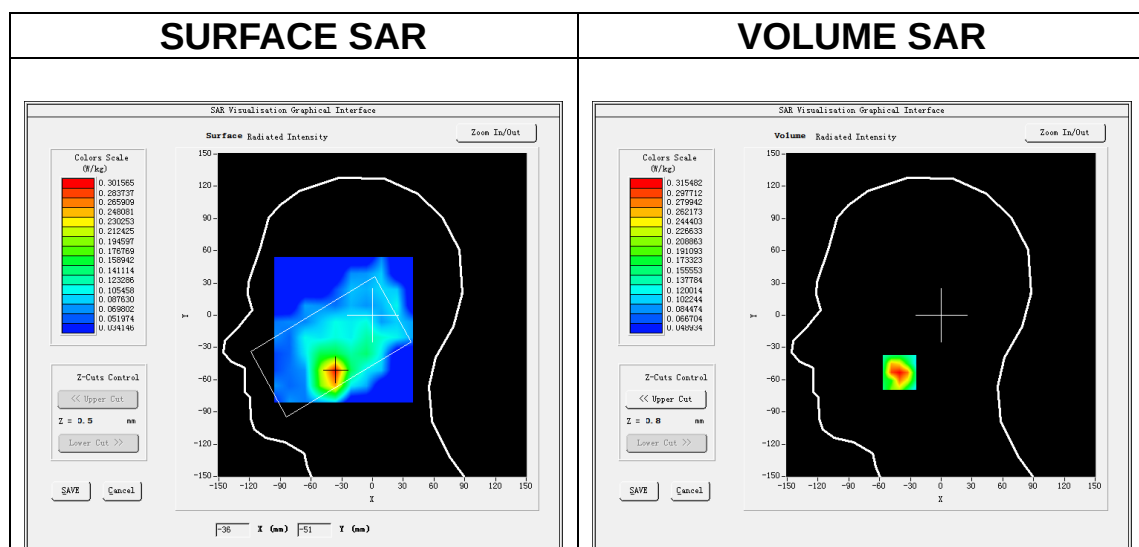

Maximum location: X=-37.00, Y=-53.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.188313
SAR 1g (W/Kg)	0.310243

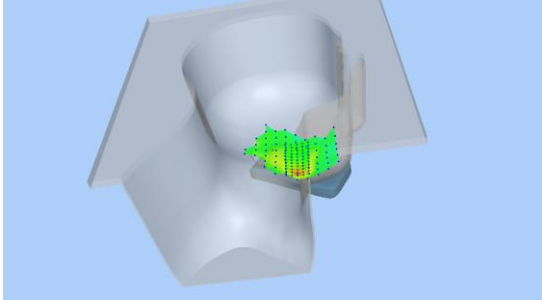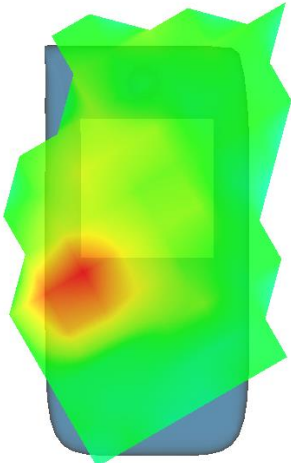3D screen shot	Hot spot position
	

MEASUREMENT 18


Date of measurement: 21/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.115910
Relative permittivity (imaginary part)	14.136136
Conductivity (S/m)	1.360603
Variation (%)	-2.360001

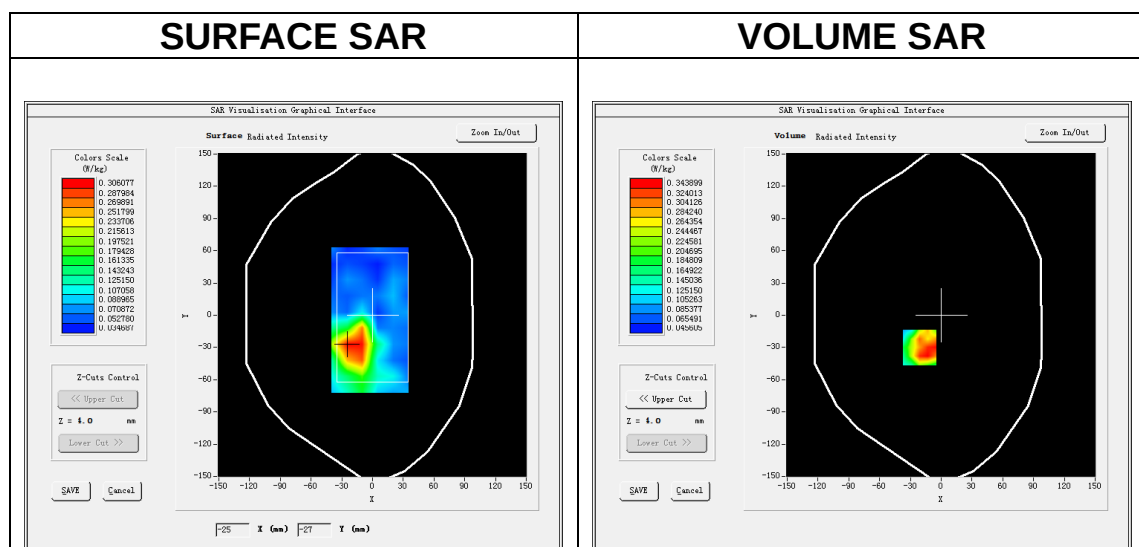

Maximum location: X=-21.00, Y=-30.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.209244
SAR 1g (W/Kg)	0.328905

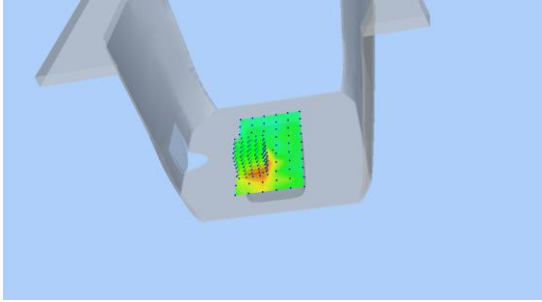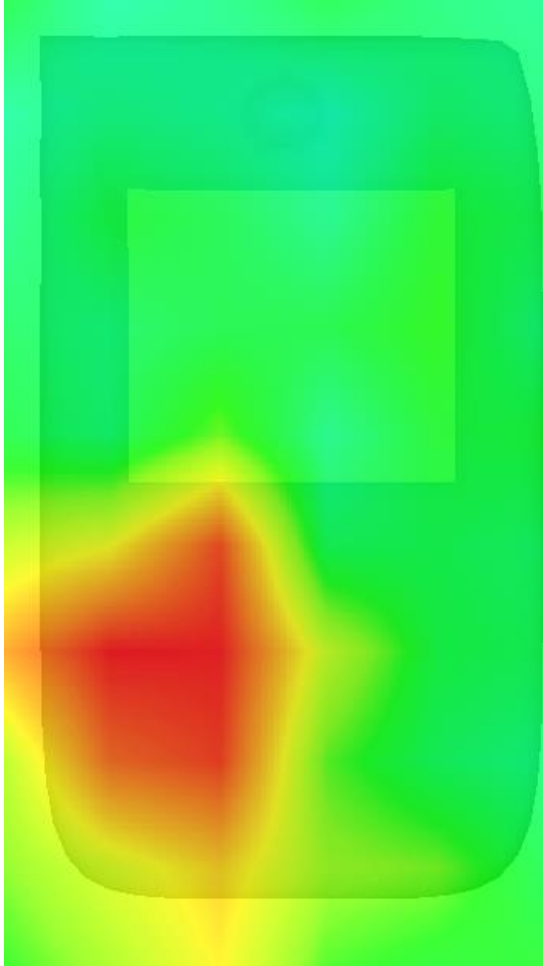3D screen shot	Hot spot position
	

MEASUREMENT 19


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901561
Variation (%)	-1.160000

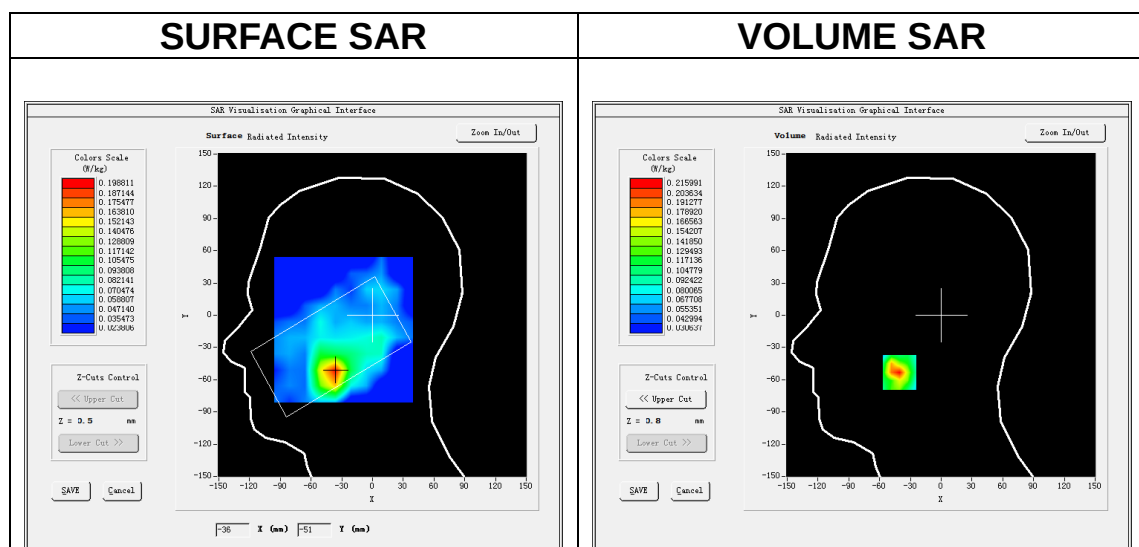

Maximum location: X=-37.00, Y=-53.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.119910
SAR 1g (W/Kg)	0.201810

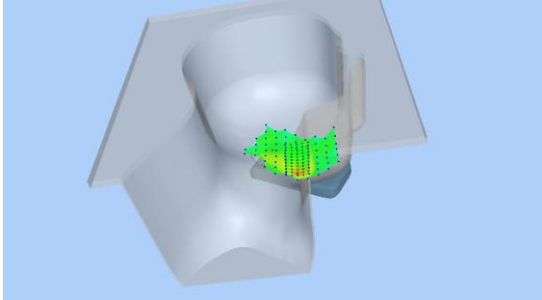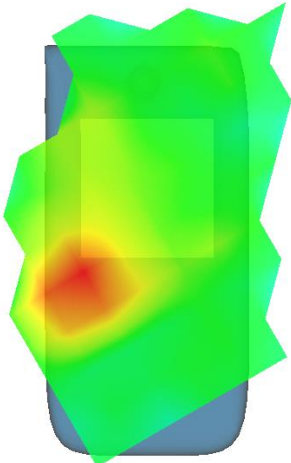3D screen shot	Hot spot position
	

MEASUREMENT 20


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901561
Variation (%)	1.629999

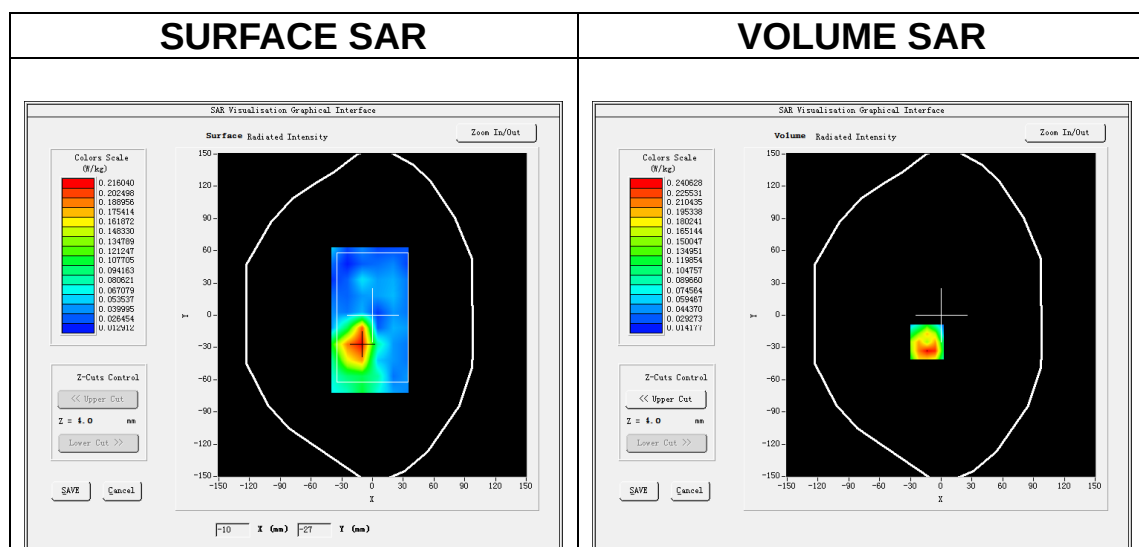

Maximum location: X=-14.00, Y=-25.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.127735
SAR 1g (W/Kg)	0.222049

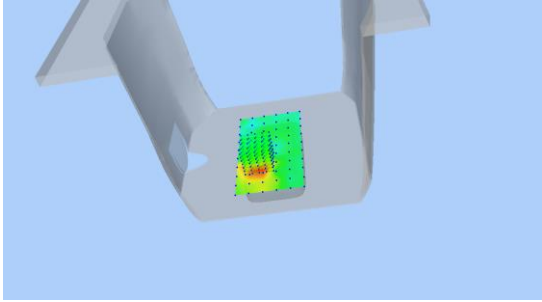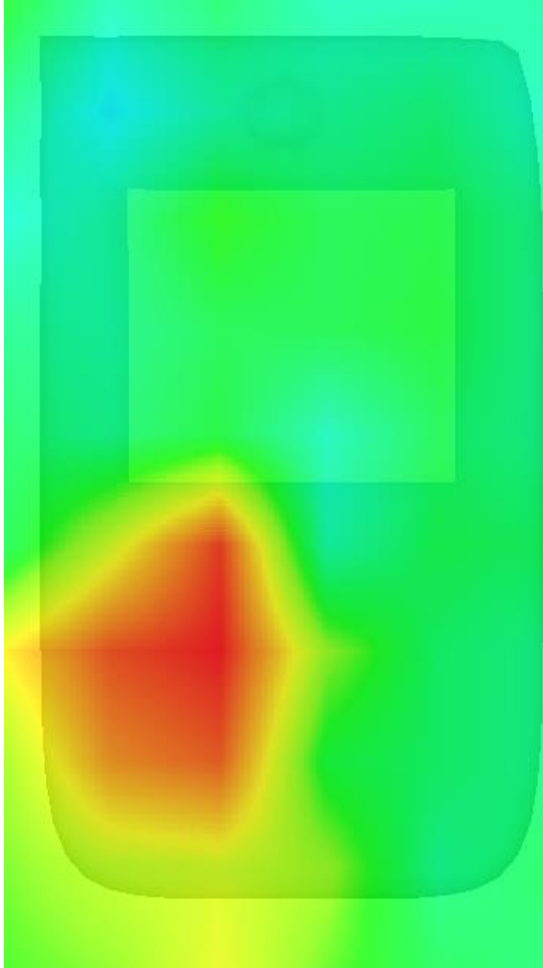3D screen shot	Hot spot position
	

MEASUREMENT 21


Date of measurement: 11/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.086666
Relative permittivity (imaginary part)	13.418333
Conductivity (S/m)	1.889749
Variation (%)	3.370000

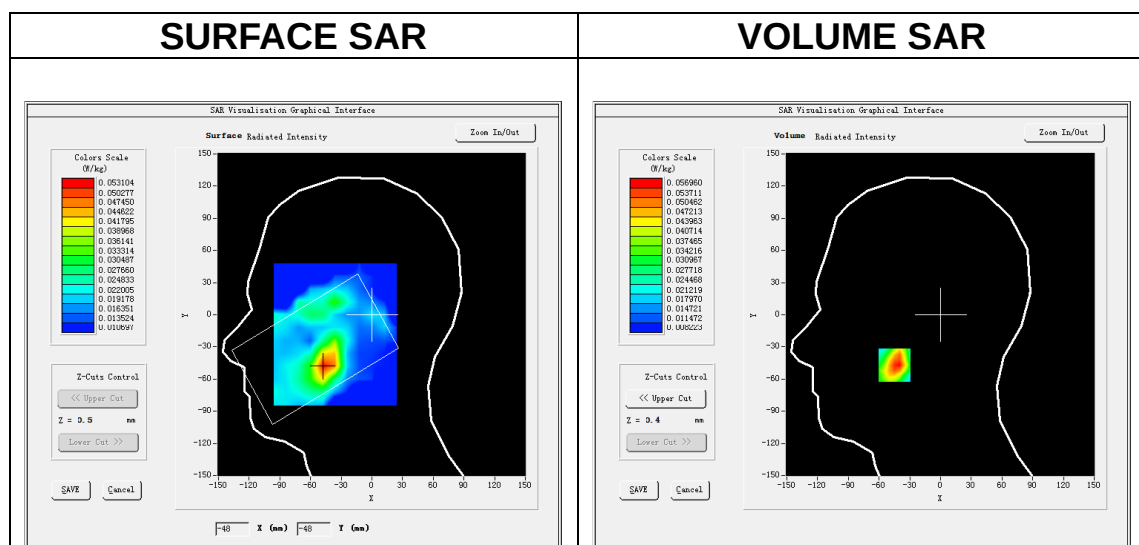

Maximum location: X=-45.00, Y=-47.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.032526
SAR 1g (W/Kg)	0.052329

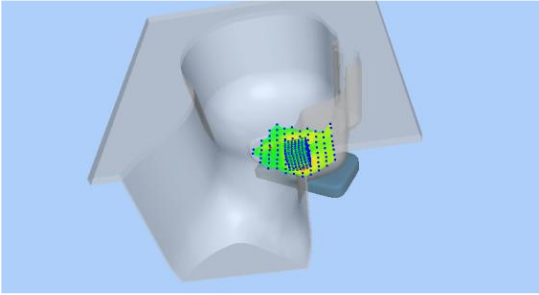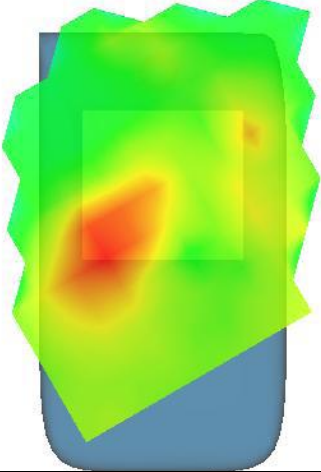3D screen shot	Hot spot position
	

MEASUREMENT 22


Date of measurement: 11/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results


Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.086666
Relative permittivity (imaginary part)	13.418333
Conductivity (S/m)	1.889749
Variation (%)	1.209999

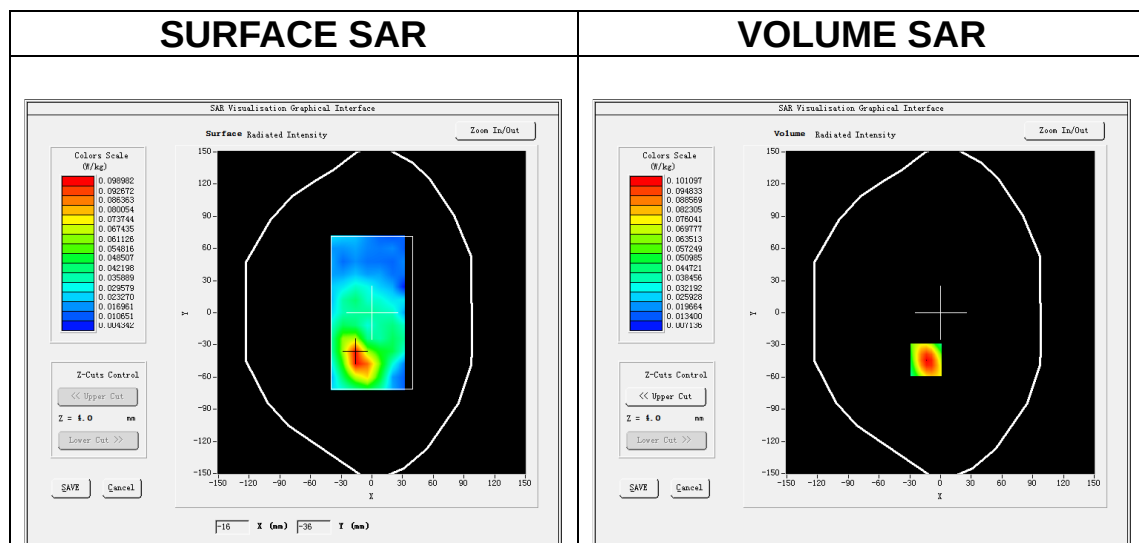

Maximum location: X=17.00, Y=-36.00

SAR Peak: 3.63 W/kg

SAR 10g (W/Kg)	0.054903
SAR 1g (W/Kg)	0.096460

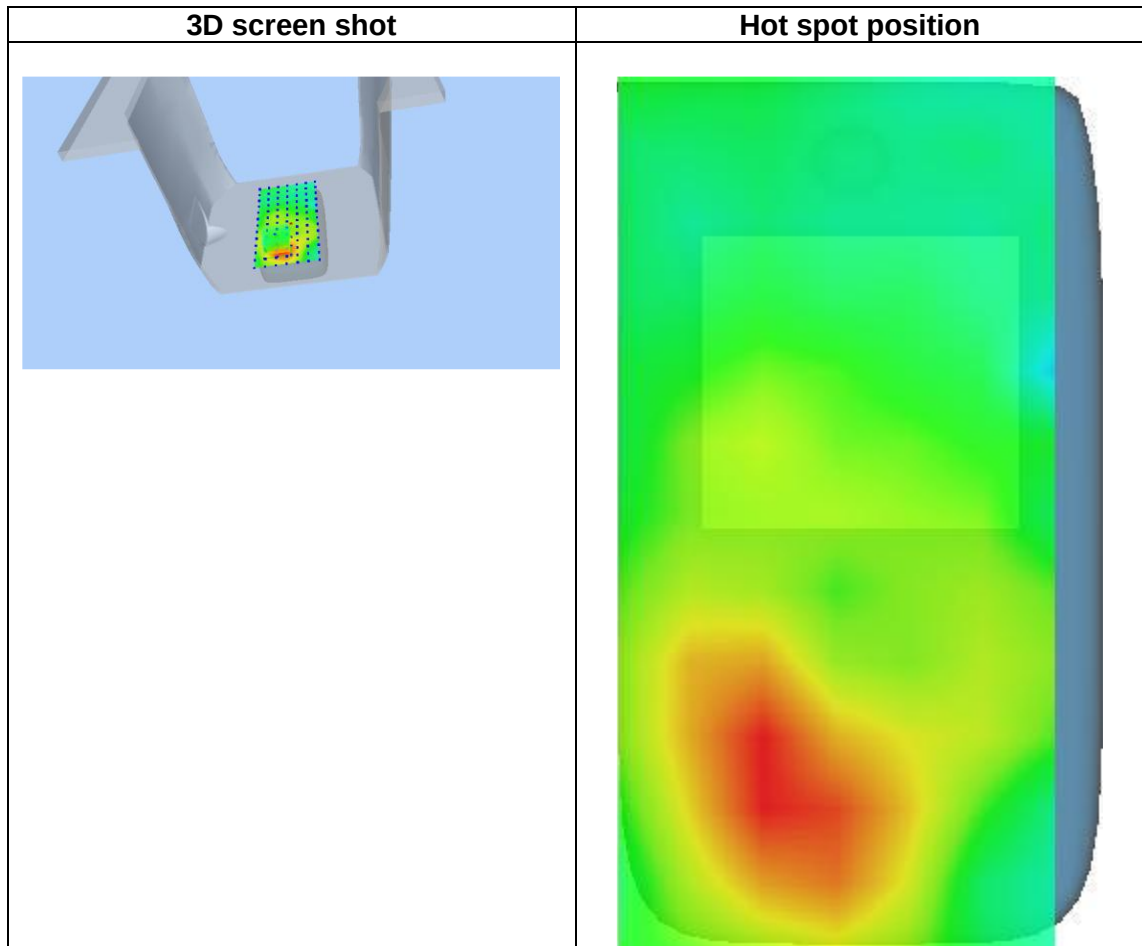

MEASUREMENT 23


Date of measurement: 9/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	41.427540
Relative permittivity (imaginary part)	21.802214
Conductivity (S/m)	0.856948
Variation (%)	0.930000

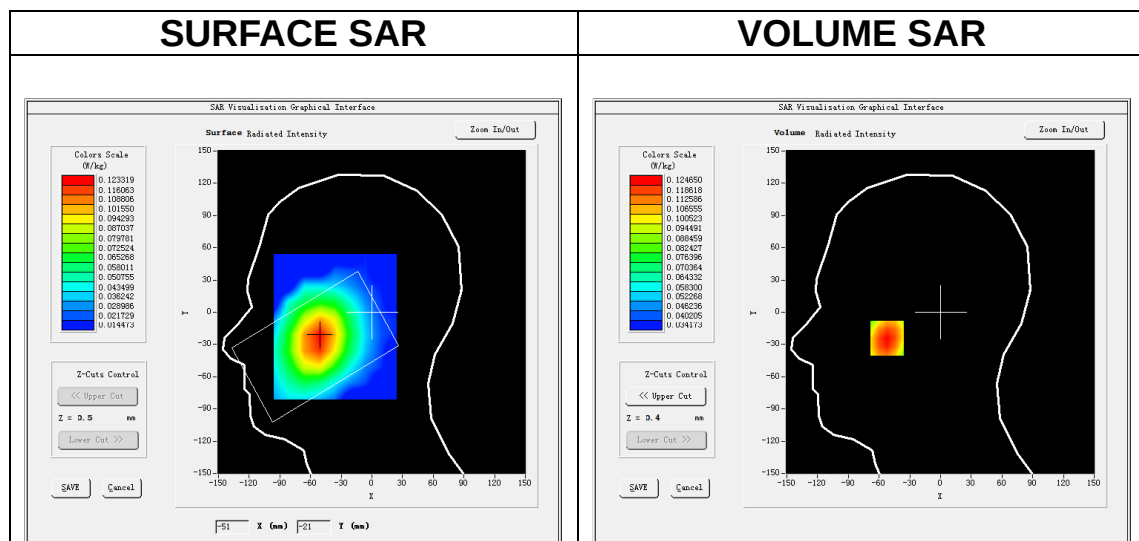

Maximum location: X=-52.00, Y=-24.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.097210
SAR 1g (W/Kg)	0.121421

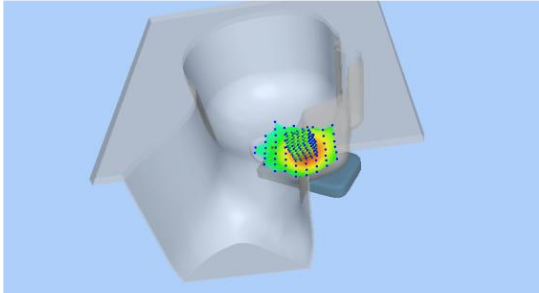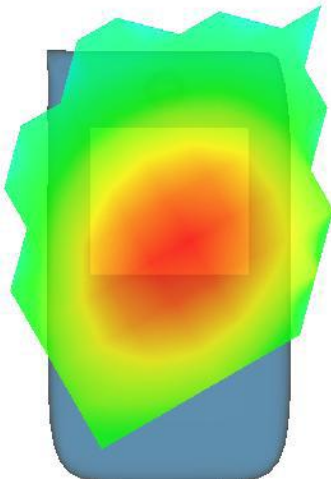3D screen shot	Hot spot position
 A 3D perspective view of a grey, bowl-shaped structure. A small, multi-colored, pixelated hot spot is visible on the right side of the structure, indicating a localized area of high intensity or temperature.	 A 3D visualization of the hot spot position. It shows a blue, bowl-shaped structure with a large, irregular, multi-colored region (red, orange, yellow, green) on its surface, representing the spatial distribution of the hot spot. The red and orange areas are concentrated in the center, while the green areas are on the periphery.

MEASUREMENT 24


Date of measurement: 9/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results


Frequency (MHz)	707.500000
Relative permittivity (real part)	41.427540
Relative permittivity (imaginary part)	21.802214
Conductivity (S/m)	0.856948
Variation (%)	-3.669998

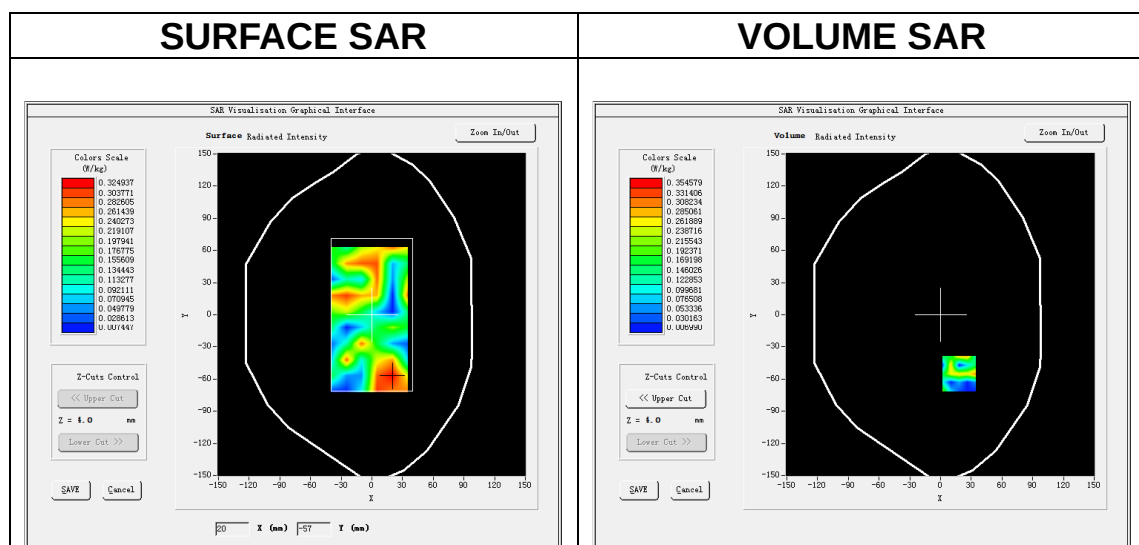

Maximum location: X=18.00, Y=-55.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.165149
SAR 1g (W/Kg)	0.327631

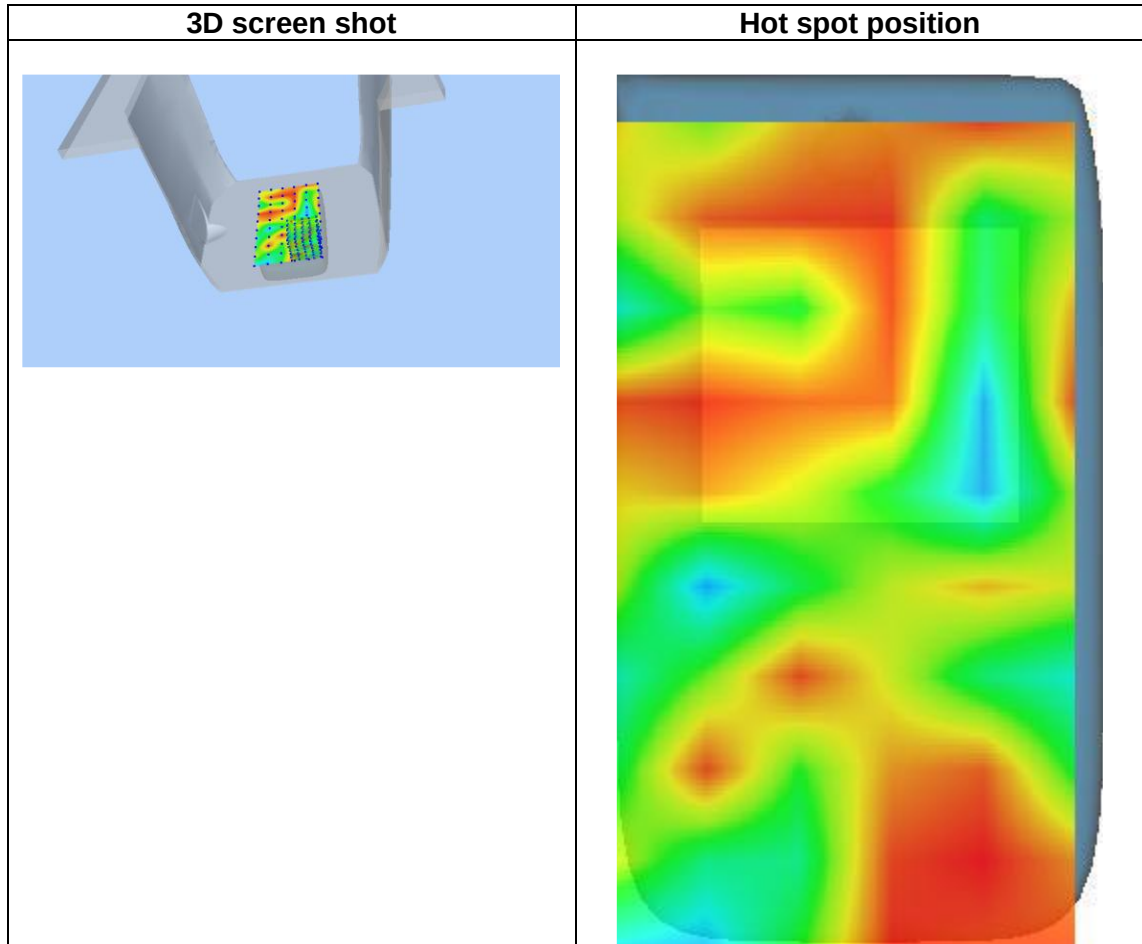

MEASUREMENT 25


Date of measurement: 9/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	41.412189
Relative permittivity (imaginary part)	21.742662
Conductivity (S/m)	0.857627
Variation (%)	-4.400000

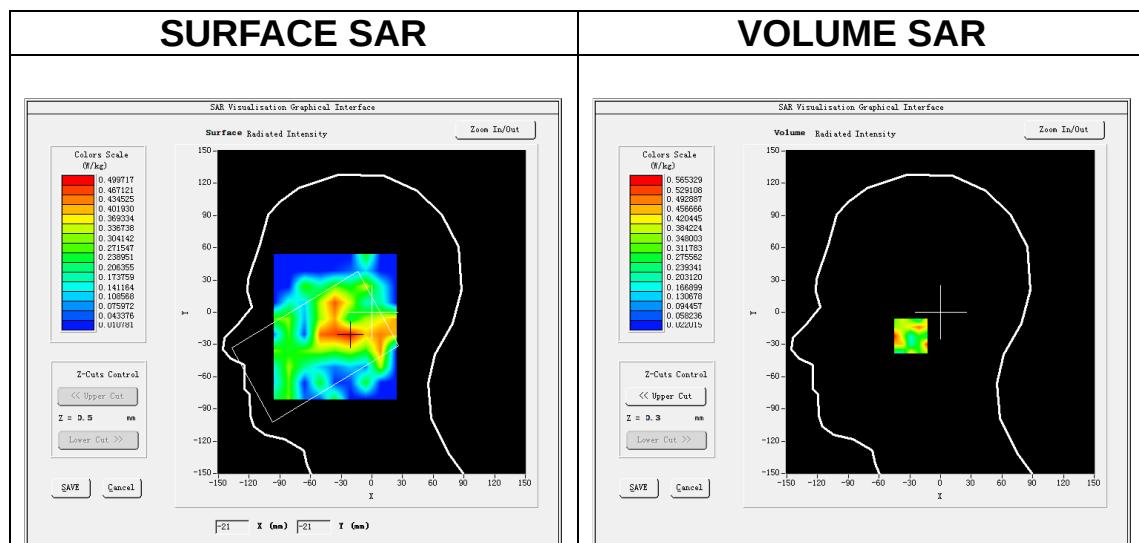

Maximum location: X=-22.00, Y=-22.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.303479
SAR 1g (W/Kg)	0.508229

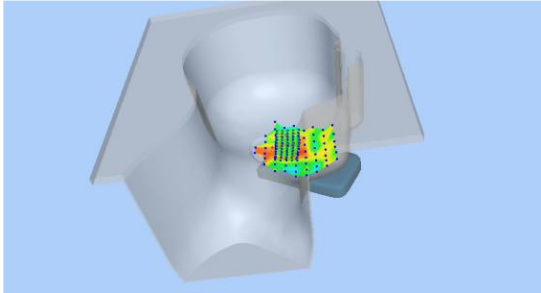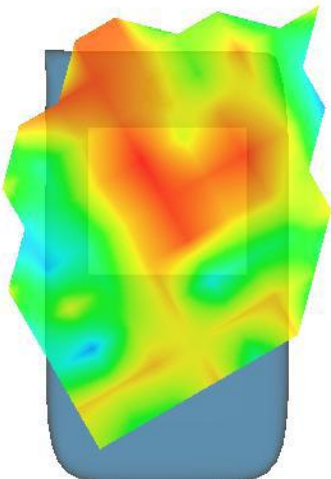3D screen shot	Hot spot position
	

MEASUREMENT 26


Date of measurement: 9/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	41.412189
Relative permittivity (imaginary part)	21.742662
Conductivity (S/m)	0.857627
Variation (%)	-1.270000

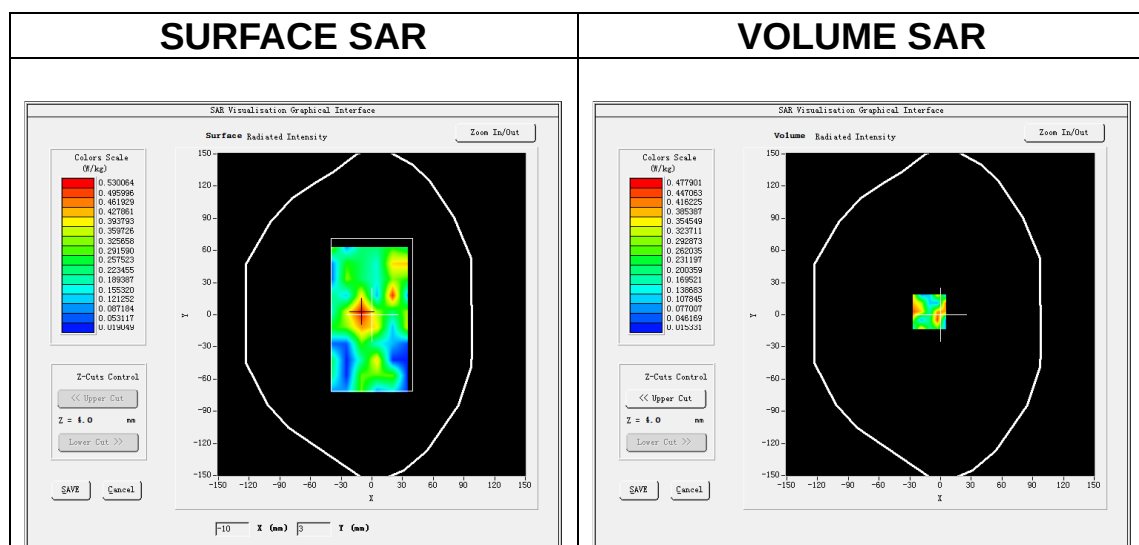

Maximum location: X=-11.00, Y=3.00

SAR Peak: 1.29 W/kg

SAR 10g (W/Kg)	0.259122
SAR 1g (W/Kg)	0.391823

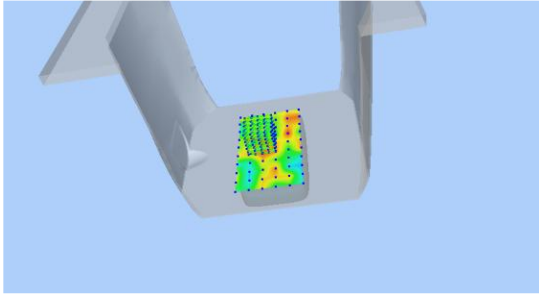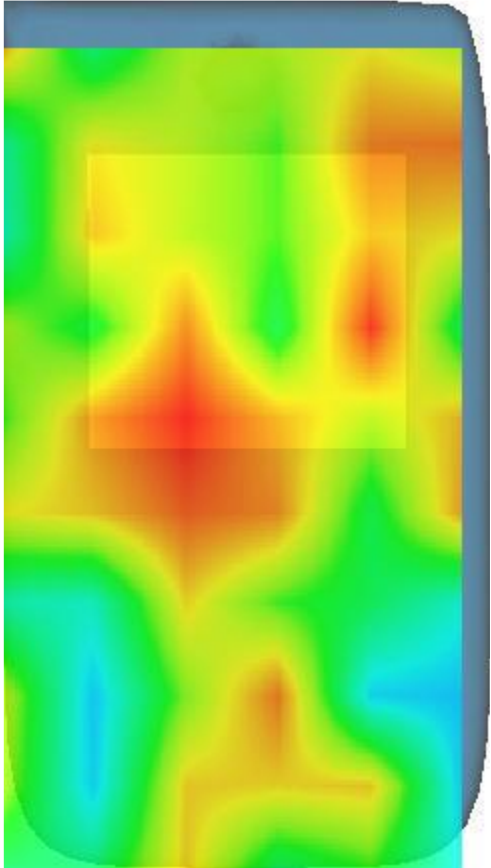3D screen shot	Hot spot position
	

MEASUREMENT 27


Date of measurement: 11/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results



Frequency (MHz)	2593.000000
Relative permittivity (real part)	39.140884
Relative permittivity (imaginary part)	14.048088
Conductivity (S/m)	2.023705
Variation (%)	1.110000

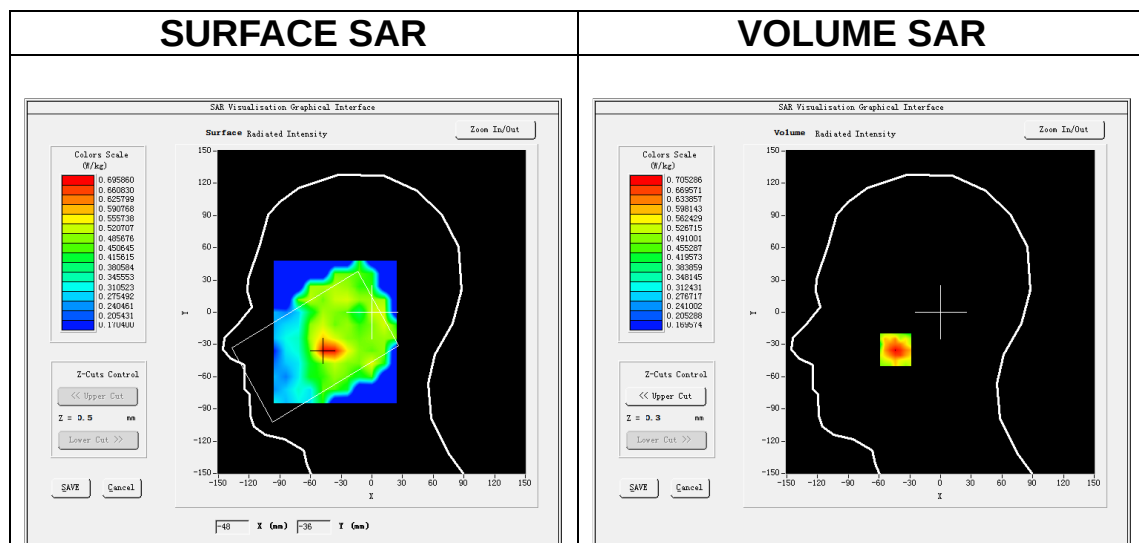

Maximum location: X=-44.00, Y=-35.00

SAR Peak: 1.10 W/kg

SAR 10g (W/Kg)	0.467849
SAR 1g (W/Kg)	0.671050

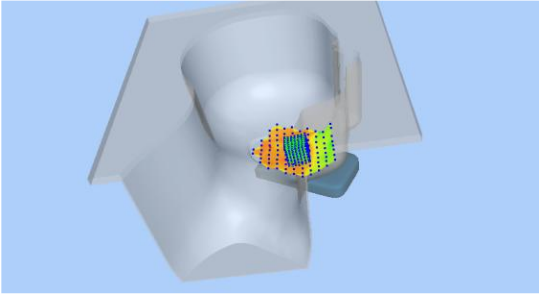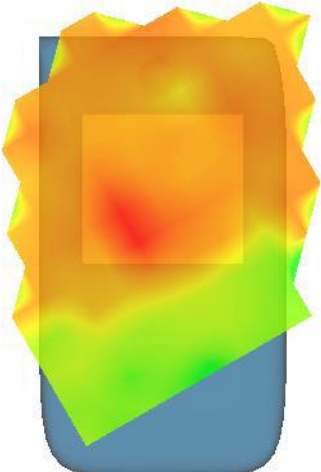3D screen shot	Hot spot position
	

MEASUREMENT 28


Date of measurement: 11/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results



Frequency (MHz)	2593.000000
Relative permittivity (real part)	39.140884
Relative permittivity (imaginary part)	14.048088
Conductivity (S/m)	2.023705
Variation (%)	-3.360000

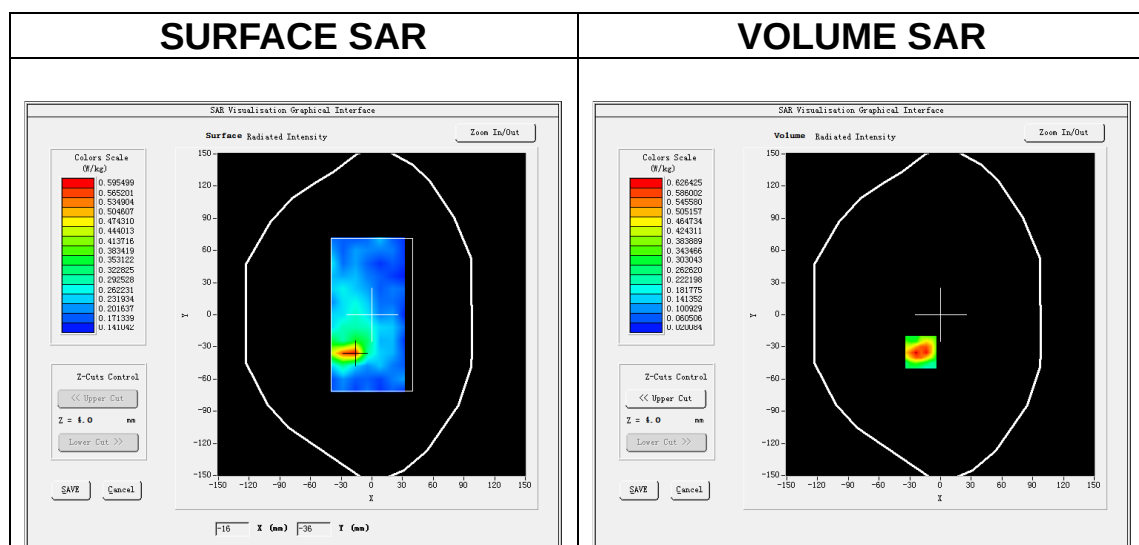

Maximum location: X=-19.00, Y=-35.00

SAR Peak: 1.27 W/kg

SAR 10g (W/Kg)	0.350998
SAR 1g (W/Kg)	0.604734

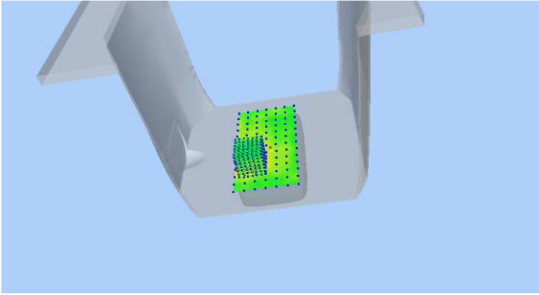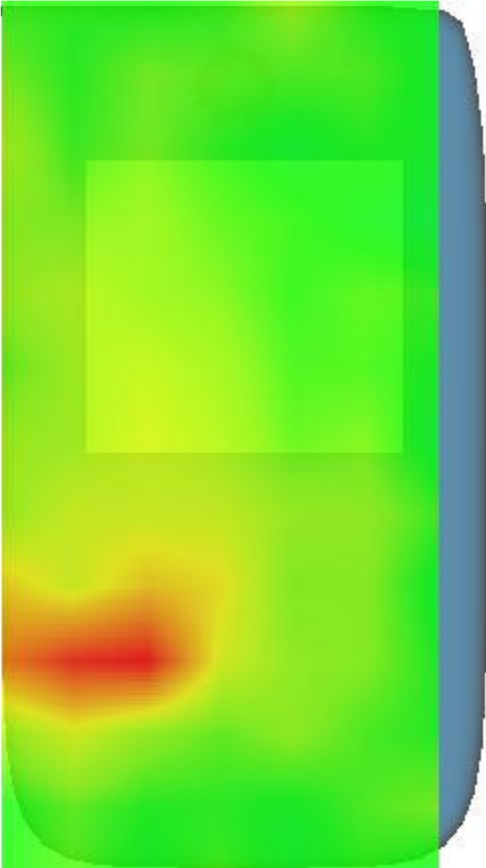3D screen shot	Hot spot position
	

MEASUREMENT 29


Date of measurement: 21/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results



Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.730927
Relative permittivity (imaginary part)	13.903665
Conductivity (S/m)	1.347883
Variation (%)	0.560000

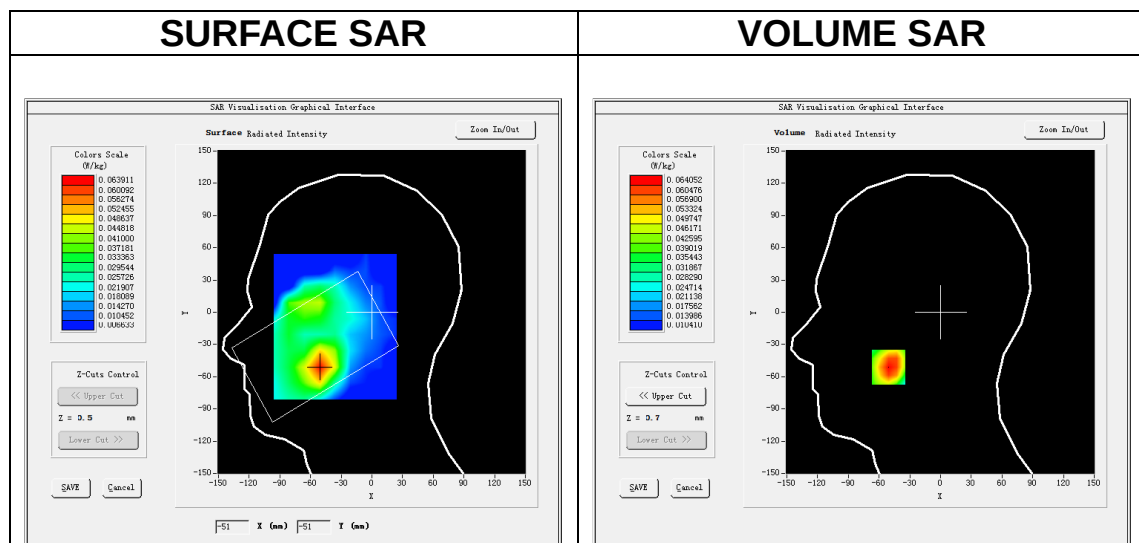

Maximum location: X=-51.00, Y=-51.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.043214
SAR 1g (W/Kg)	0.062060

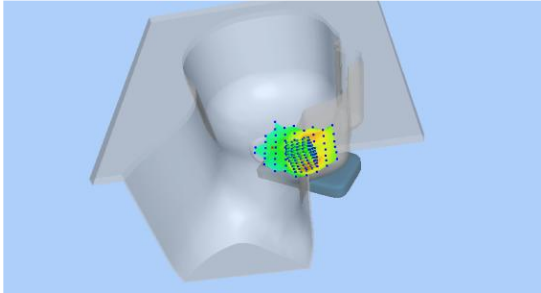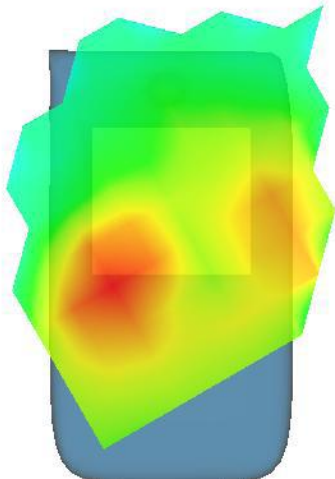3D screen shot	Hot spot position
	

MEASUREMENT 30


Date of measurement: 21/11/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.730927
Relative permittivity (imaginary part)	13.903665
Conductivity (S/m)	1.347883
Variation (%)	1.280000

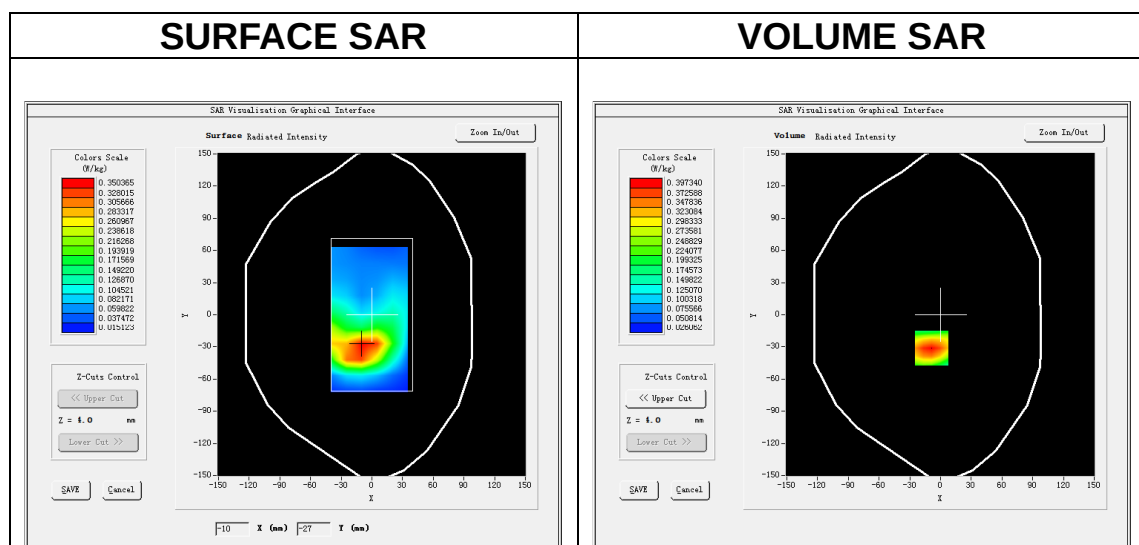

Maximum location: X=-9.00, Y=-31.00

SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.222364
SAR 1g (W/Kg)	0.374754

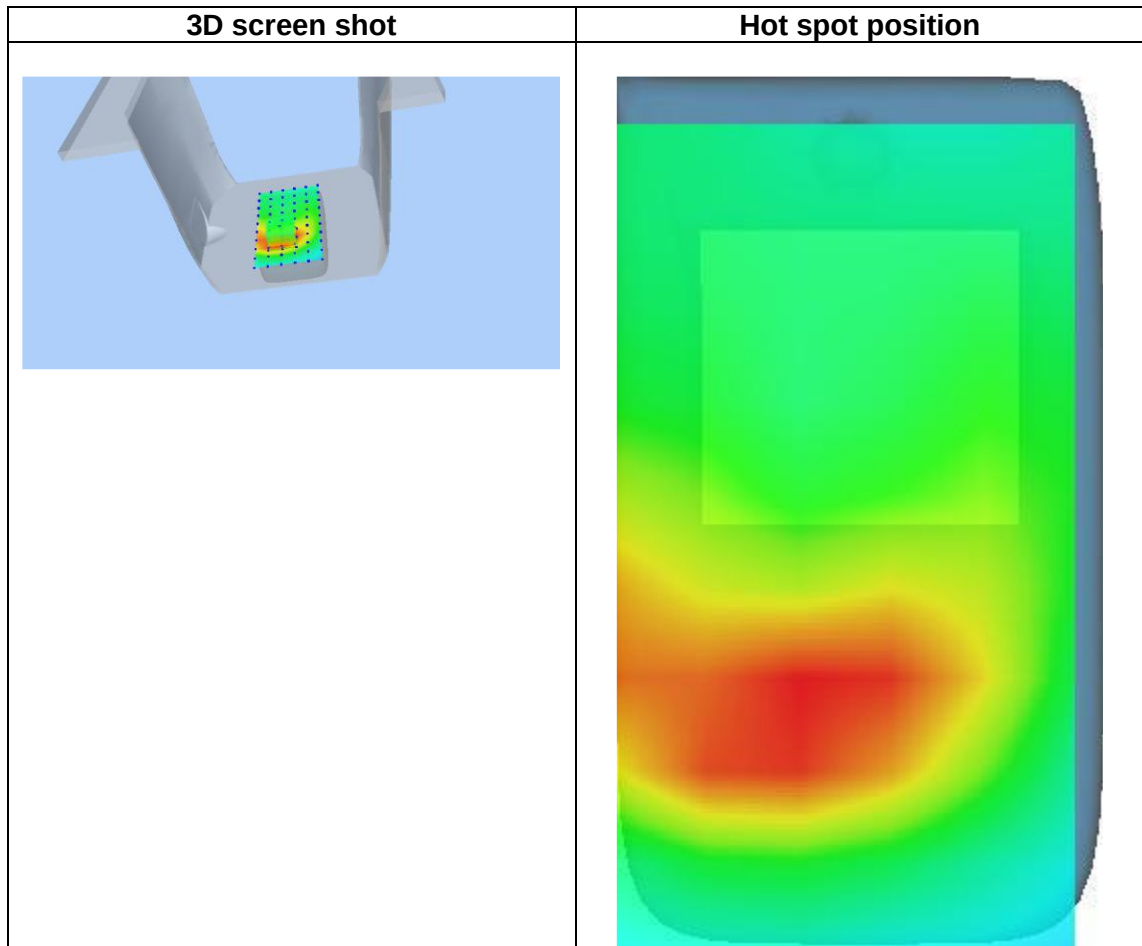

MEASUREMENT 31


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>CUSTOM (LTEBand26A)</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results


Frequency (MHz)	819.000000
Relative permittivity (real part)	41.575294
Relative permittivity (imaginary part)	19.768942
Conductivity (S/m)	0.899487
Variation (%)	-0.380000

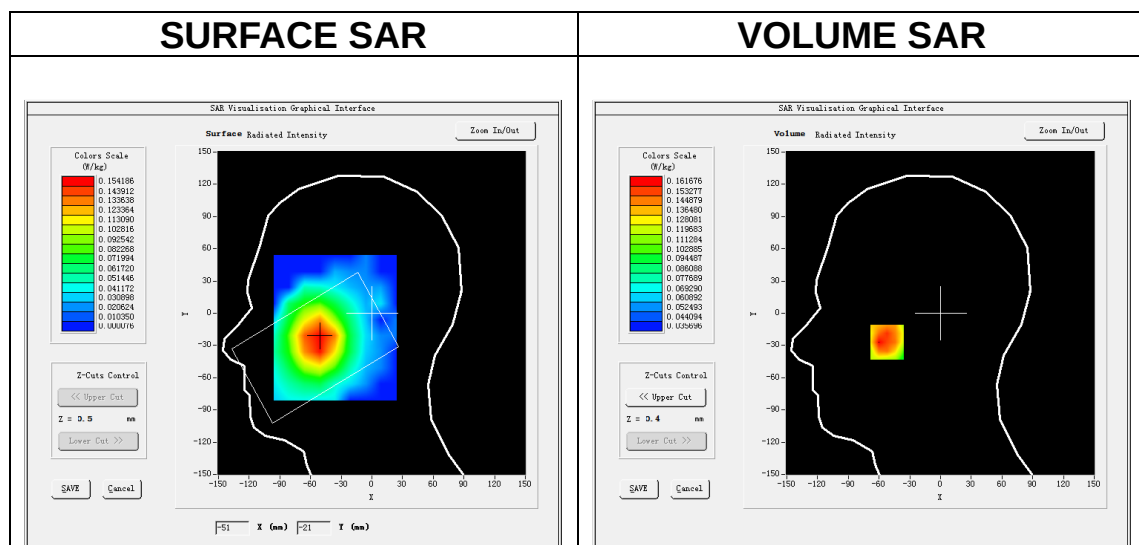

Maximum location: X=-52.00, Y=-27.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.118644
SAR 1g (W/Kg)	0.155657

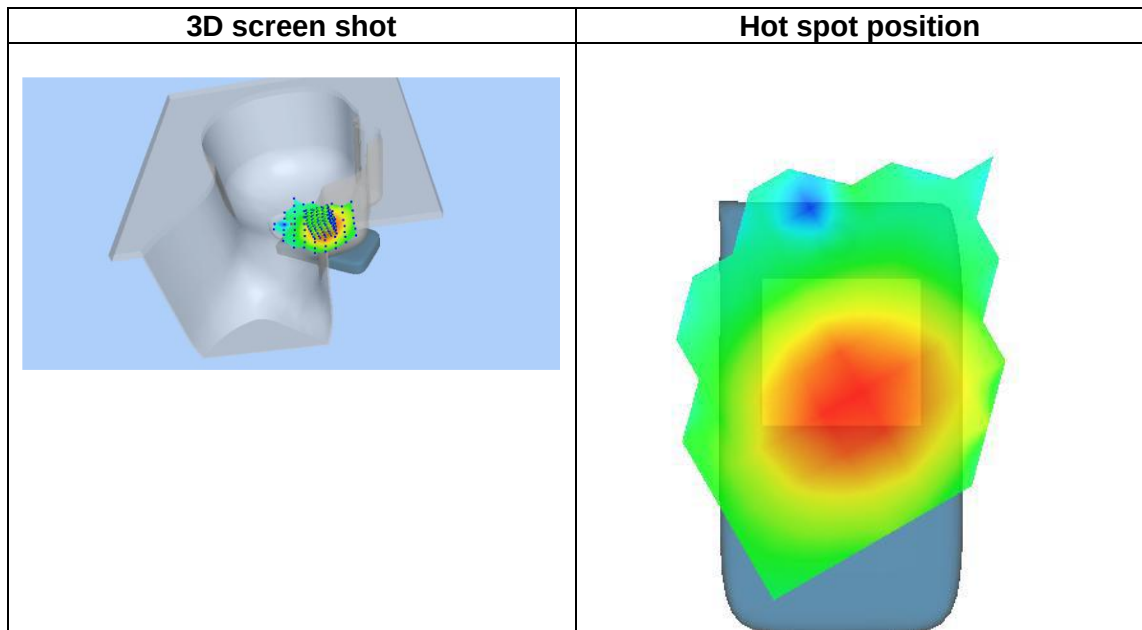

MEASUREMENT 32


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>CUSTOM (LTEBand26A)</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	819.000000
Relative permittivity (real part)	41.575294
Relative permittivity (imaginary part)	19.768942
Conductivity (S/m)	0.899487
Variation (%)	-0.200000

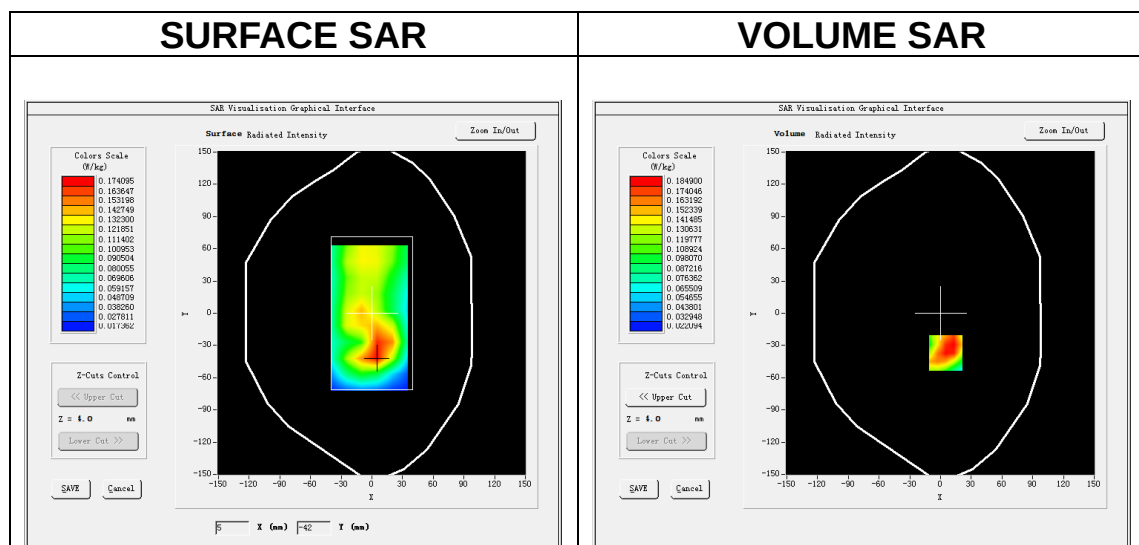

Maximum location: X=5.00, Y=-37.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.113221
SAR 1g (W/Kg)	0.181730

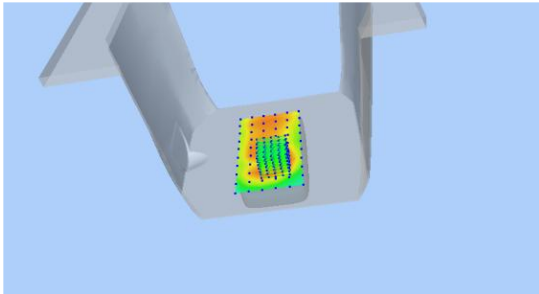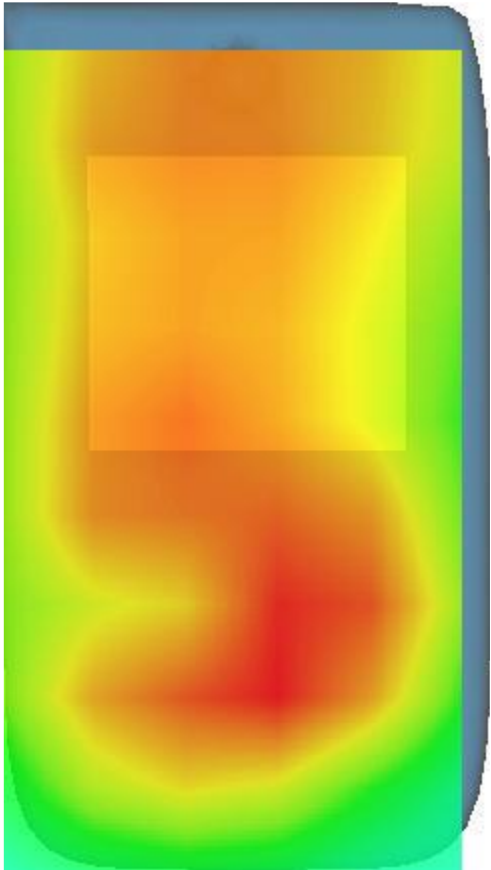3D screen shot	Hot spot position
	

MEASUREMENT 33


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>CUSTOM (LTEBand26B)</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results


Frequency (MHz)	831.500000
Relative permittivity (real part)	41.516472
Relative permittivity (imaginary part)	19.480705
Conductivity (S/m)	0.899900
Variation (%)	0.700000

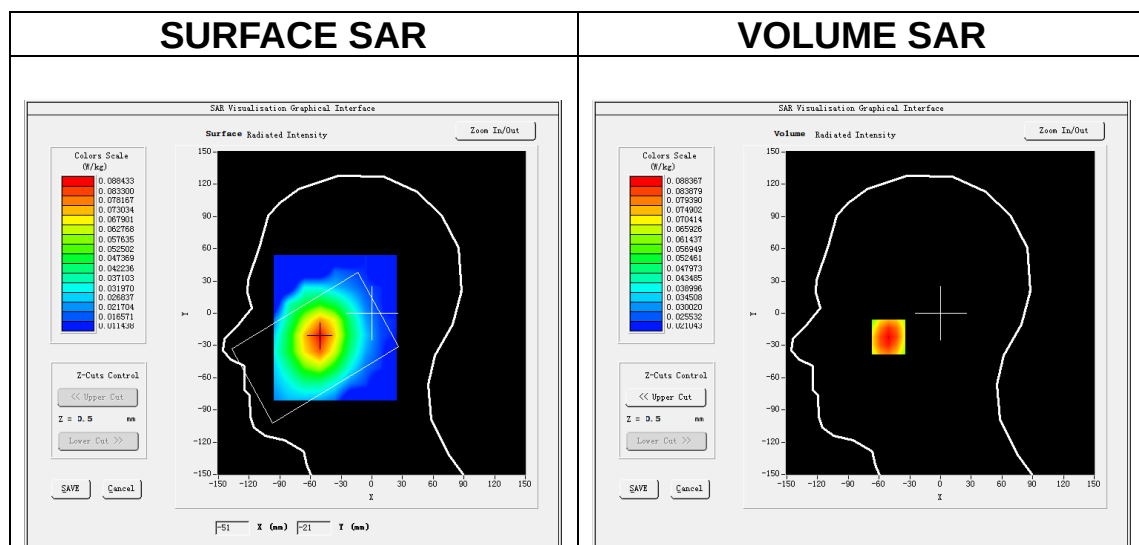

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.067311
SAR 1g (W/Kg)	0.085828

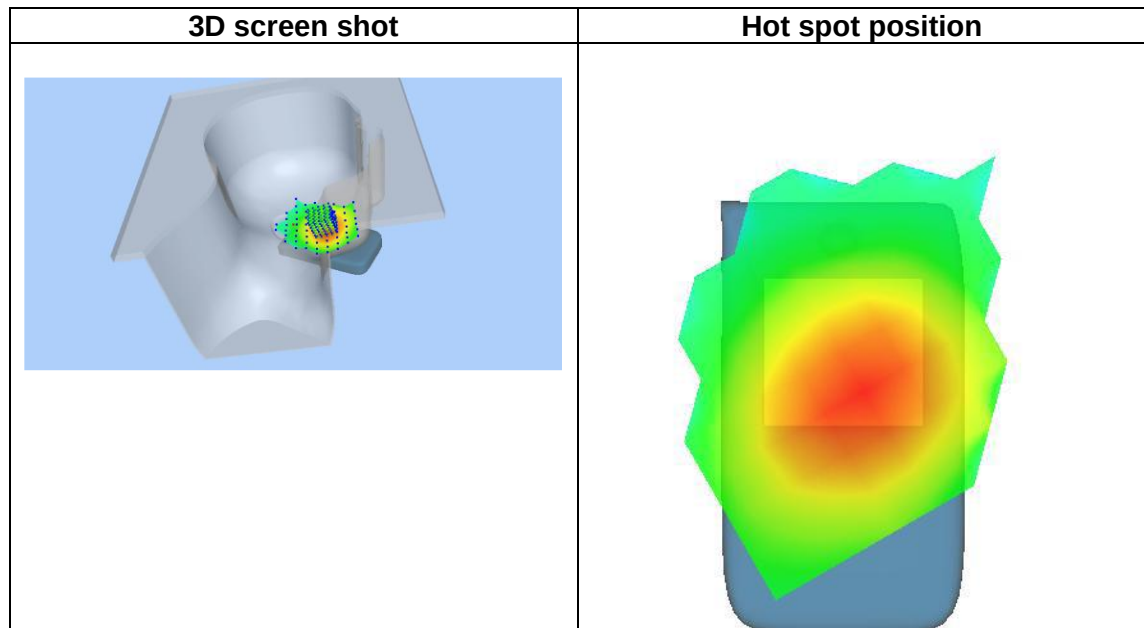

MEASUREMENT 34


Date of measurement: 3/12/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>CUSTOM (LTEBand26B)</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	831.500000
Relative permittivity (real part)	41.516472
Relative permittivity (imaginary part)	19.480705
Conductivity (S/m)	0.899900
Variation (%)	0.370000

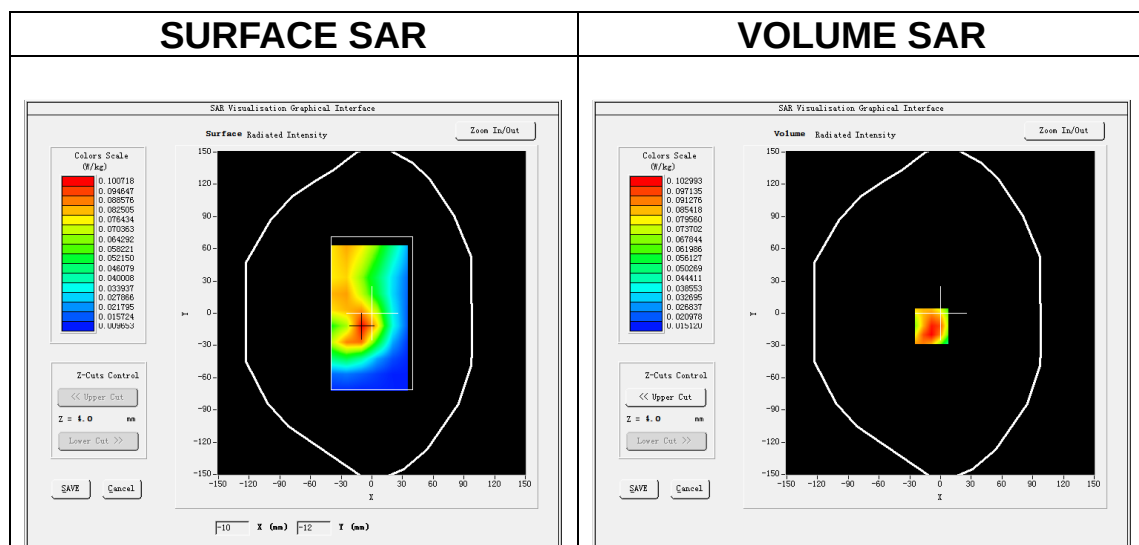

Maximum location: X=-9.00, Y=-12.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.063311
SAR 1g (W/Kg)	0.098446

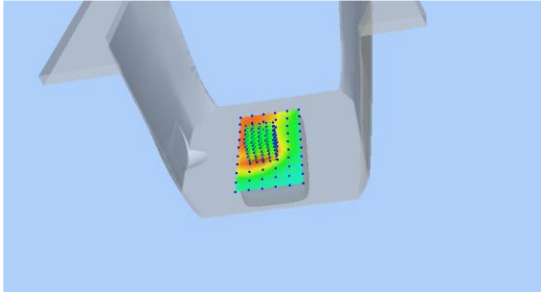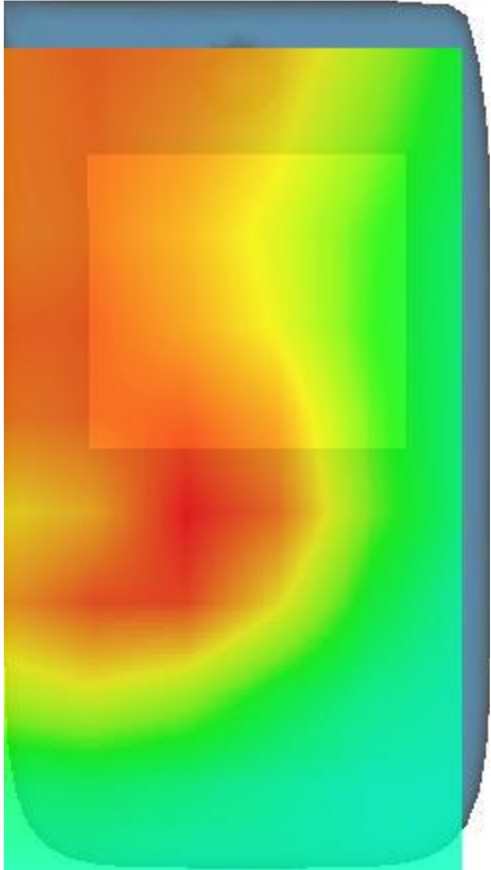3D screen shot	Hot spot position
	

Appendix D. Calibration Certificate

Table of contents
E Field Probe - EPGO0523-403
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 03/14 WGA33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.307.3.24.BES.A

**GUANGDONG ASIA HONGKE TEST
TECHNOLOGY CO., LTD**
NO.1/F,BUILDING B1, JUNFENG INDUSTRIAL PARK,
CHONGQING ROAD, HEPING COMMUNITY,
FUHAIHAI STREET, BAO'AN DISTRICT,SHENZHEN,
GUANGDONG 518055, P.R.CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 39/21 EPGO0523-403

Calibrated at MVG
Z.I. de la pointe du diable
Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 09/11/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.307.3.24.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme Le Gall	Measurement Responsible	09/10/2024	
<i>Checked by :</i>	Jérôme Luc	Technical Manager	09/10/2024	
<i>Approved by :</i>	Yann Toutain	Laboratory Director	09/11/2024	

	<i>Customer Name</i>
<i>Distribution :</i>	Shenzhen Asia Hongke

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Jérôme Luc	9/11/2024	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.307.3.24.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	4
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.307.3.24.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 39/21 EPG00523-403
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.199 M Ω Dipole 2: R2=0.218 M Ω Dipole 3: R3=0.210 M Ω

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

Page: 4/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.307.3.24.BES.A

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.307.3.24.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level $k = 2$					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
1.26	0.87	0.77

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
113	108	113

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain E-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$