

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Sky Phone LLC

1348 Washington Av. Suite 350, Miami Beach, Florida, United States

FCC ID: 2ABOSSKYPLATM5

Report Type: Original Report	Product Type: 3G Smart Phone
Report Number: RSZ171228008-00D	
Report Date: 2018-02-02	
Reviewed By: RF Engineer	Rocky Kang <i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk

“*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50 (D) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	18
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC § 22.917 (A); § 24.238 (A); §27.53 (H)(M) - BAND EDGES	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY49
 APPLICABLE STANDARD49
 TEST PROCEDURE49
 TEST DATA50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Sky Phone LLC*'s product, model number: Platinum A5 (FCC ID: 2ABOSSKYPLATM5) or the "EUT" in this report was a *3G Smart Phone*, which was measured approximately: 14.52cm (L) × 7.21 cm (W) × 0.95 cm (H), rated with input voltage: DC 3.7 V battery or DC 5.0V from adapter.

Adapter Information:

Model: D31-02051000

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1.0A

Notes: This series products model: Platinum M5 and Platinum A5 are electrically identical; the difference among them is only model number due to marketing purpose. Model Platinum A5 was selected for fully testing, the detailed information can be referred to the declaration letter which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1702891 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-28.*

Objective

This test report is prepared on behalf of *Sky Phone LLC* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Subpart 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2ABOSSKYPLATM5

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D and KDB 971168 D01 v03.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		uncertainty
Occupied Channel Bandwidth		$\pm 5\%$
RF output power, conducted		$\pm 1.5\text{dB}$
Unwanted Emission, conducted		$\pm 1.5\text{dB}$
Emissions, radiated	Below 1GHz	$\pm 4.70\text{dB}$
	Above 1GHz	$\pm 4.80\text{dB}$
Temperature		$\pm 1^\circ\text{C}$
Supply voltages		$\pm 0.4\%$

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.
The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

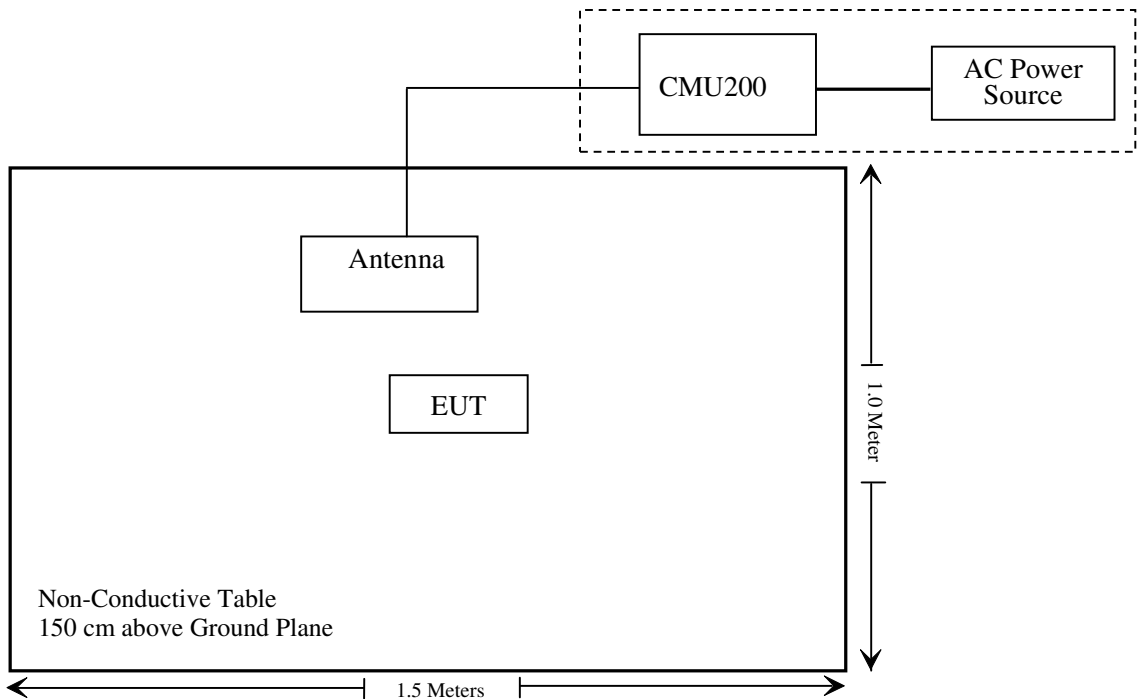

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ171228008-20A.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-05	2018-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
Rohde & Schwarz	Auto test Software	EMC32	V9.10	NCR	NCR
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-12-07	2018-12-07
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2018-12-28
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2018-12-28
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-10-18	2018-10-18
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHL	3dB Attenuator	N/A	N/A	2017-11-22	2018-05-23
N/A	Power Splitter	N/A	N/A	2017-05-21	2018-05-21

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ171228008-20A.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, 24E and 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50 (d) - RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.


The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-05.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.93	38.45
	190	836.6	32.97	38.45
	251	848.8	32.99	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.98	30.85	28.97	27.46	38.45
	190	836.6	33.05	30.91	29.04	27.56	38.45
	251	848.8	33.03	30.94	29.09	27.63	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	RMC		22.68	22.34	22.46
	HSDPA	1	21.45	21.84	21.49
		2	21.36	21.77	21.43
		3	21.52	21.89	21.57
		4	21.41	21.72	21.39
	HSUPA	1	21.62	21.74	21.57
		2	21.58	21.66	21.52
		3	21.73	21.79	21.62
		4	21.50	21.65	21.49
		5	21.68	21.82	21.66
	HSPA+	1	21.03	21.07	21.10

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.20	33
	661	1880.0	28.80	33
	810	1909.8	28.71	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.08	26.84	25.88	24.36	33
	661	1880.0	28.86	26.58	25.59	24.10	33
	810	1909.8	28.73	26.39	25.40	23.91	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	RMC		21.76	21.66	21.55
	HSDPA	1	21.17	20.83	20.87
		2	21.13	20.73	20.84
		3	21.20	20.91	20.95
		4	21.11	20.73	20.80
	HSUPA	1	20.59	21.05	21.13
		2	20.56	20.95	21.05
		3	20.72	21.15	21.25
		4	20.50	20.95	21.01
		5	20.70	21.12	21.19
	HSPA+	1	21.12	21.15	21.16

AWS Band (Part 27)

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	RMC		22.09	21.96	22.01
	HSDPA	1	20.77	21.50	21.02
		2	20.71	21.43	20.90
		3	20.81	21.57	21.12
		4	20.64	21.39	20.99
	HSUPA	1	21.29	21.02	21.43
		2	21.24	20.98	21.32
		3	21.33	21.05	21.54
		4	21.21	20.92	21.31
		5	21.37	21.09	21.50
	HSPA+	1	21.09	21.06	21.11

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.21	13
	Middle	0.13	13
	High	0.22	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.35	13
	Middle	3.13	13
	High	3.37	13
HSDPA (16QAM)	Low	3.37	13
	Middle	3.13	13
	High	3.31	13
HSUPA (BPSK)	Low	3.32	13
	Middle	3.13	13
	High	3.34	13
HSPA+	Low	3.44	13
	Middle	3.27	13
	High	3.16	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.22	13
	Middle	0.19	13
	High	0.17	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	4.12	13
	Middle	3.98	13
	High	4.15	13
HSDPA (16QAM)	Low	4.17	13
	Middle	3.92	13
	High	4.14	13
HSUPA (BPSK)	Low	4.15	13
	Middle	3.95	13
	High	4.16	13
HSPA+	Low	3.37	13
	Middle	3.51	13
	High	3.24	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.52	13
	Middle	3.32	13
	High	3.54	13
HSDPA (16QAM)	Low	3.57	13
	Middle	3.37	13
	High	3.56	13
HSUPA (BPSK)	Low	3.55	13
	Middle	3.52	13
	High	3.32	13
HSPA+	Low	3.04	13
	Middle	3.53	13
	High	3.77	13

Radiated Power**GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	81.05	333	1.2	H	19.1	0.7	0.0	18.40	38.45	20.05
836.6	91.85	275	2.1	V	31.9	0.7	0.0	31.20	38.45	7.25
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	89.12	273	1.2	H	19.1	1.30	8.50	26.30	33	6.7
1880.00	89.44	199	2.1	V	19.2	1.30	8.50	26.40	33	6.6

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	81.26	127	2.2	H	19.3	0.7	0.0	18.60	38.45	19.85
836.6	84.69	108	1.3	V	24.7	0.7	0.0	24.00	38.45	14.45
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	86.53	258	1.8	H	16.5	1.30	8.50	23.70	33	9.3
1880.00	84.05	304	1.5	V	13.8	1.30	8.50	21.00	33	12.0
EIRP for WCDMA Band IV (Part 27), Middle Channel										
1732.60	86.17	176	2.1	H	10.0	1.30	9.10	20.80	30	9.2
1732.60	83.31	105	1.2	V	10.7	1.30	9.10	18.50	30	11.5

Note:

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (GSM) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

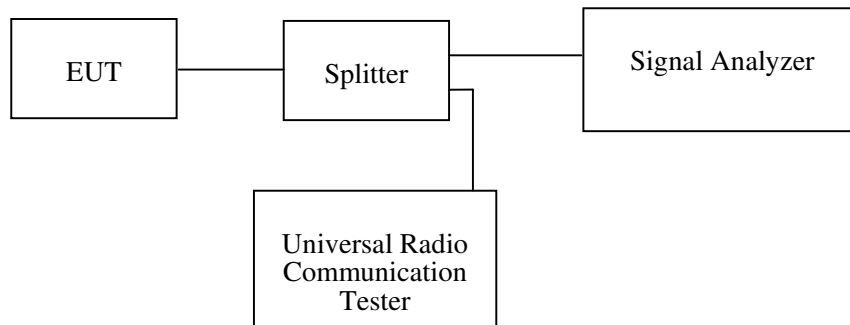

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	243.13	324.20

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.081	4.674
HSUPA (BPSK)	836.6	4.153	5.369
HSDPA (16QAM)	836.6	4.081	4.660


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880	246.02	321.30


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.096	4.660
HSUPA (BPSK)	1880.0	4.110	4.674
HSDPA (16QAM)	1880.0	4.096	4.732

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1732.6	4.110	4.689
HSUPA (BPSK)	1732.6	4.110	4.674
HSDPA (16QAM)	1732.6	4.096	4.732

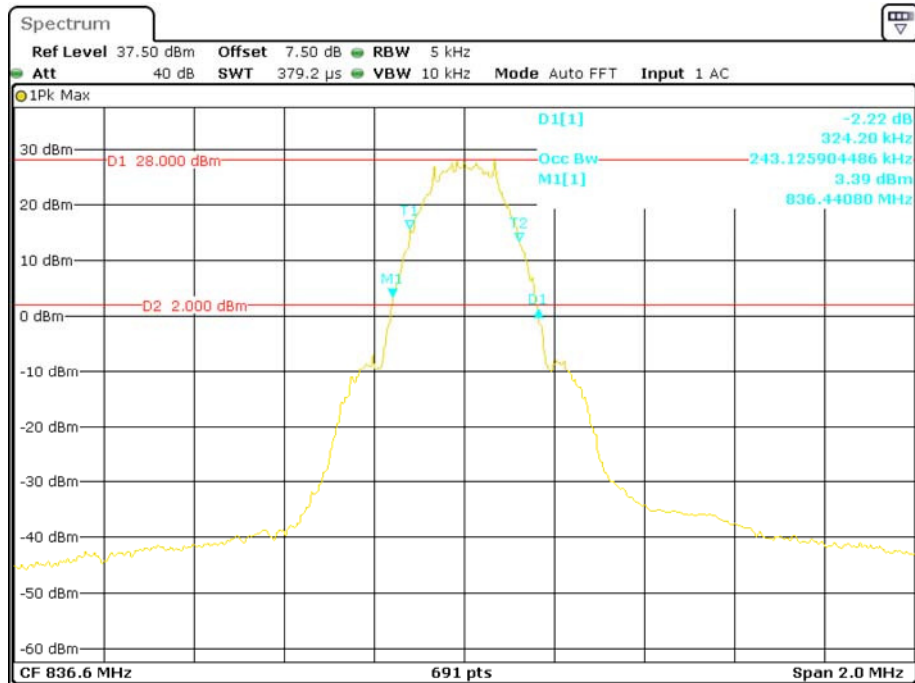Cellular Band (Part 22H)**26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode**


Date: 5.JAN.2018 13:50:32

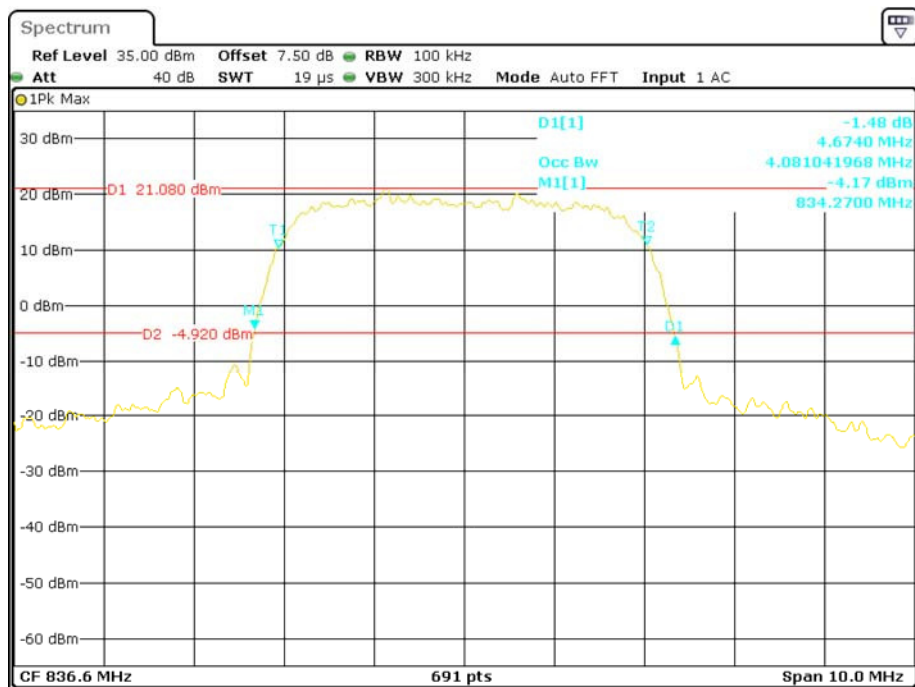26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode


Date: 5.JAN.2018 15:00:04

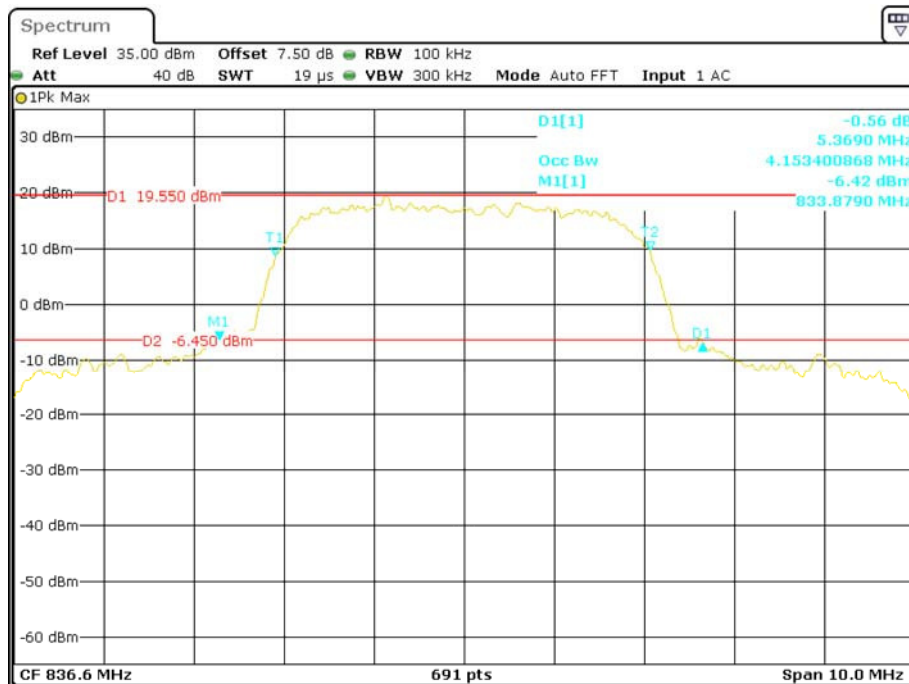26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode


Date: 5.JAN.2018 14:36:41

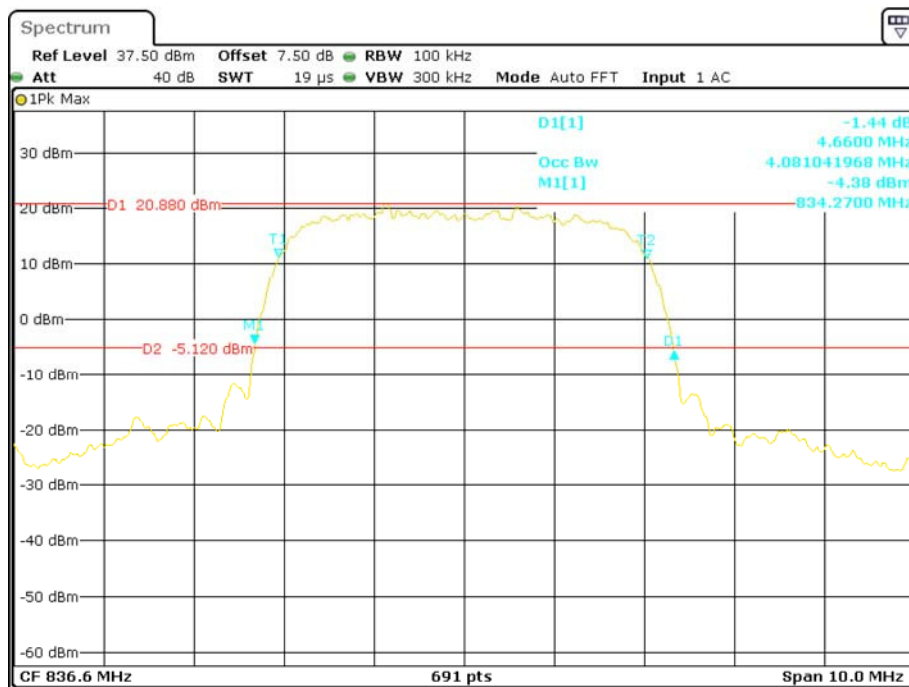26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode


Date: 5.JAN.2018 14:12:22

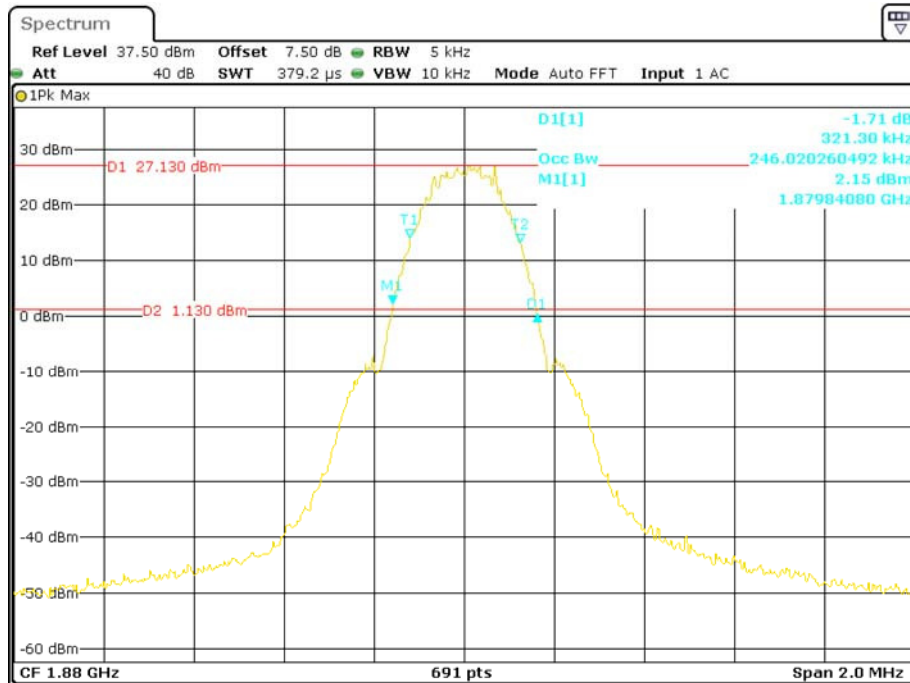PCS Band (Part 24E)**26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode**


Date: 5.JAN.2018 14:00:13

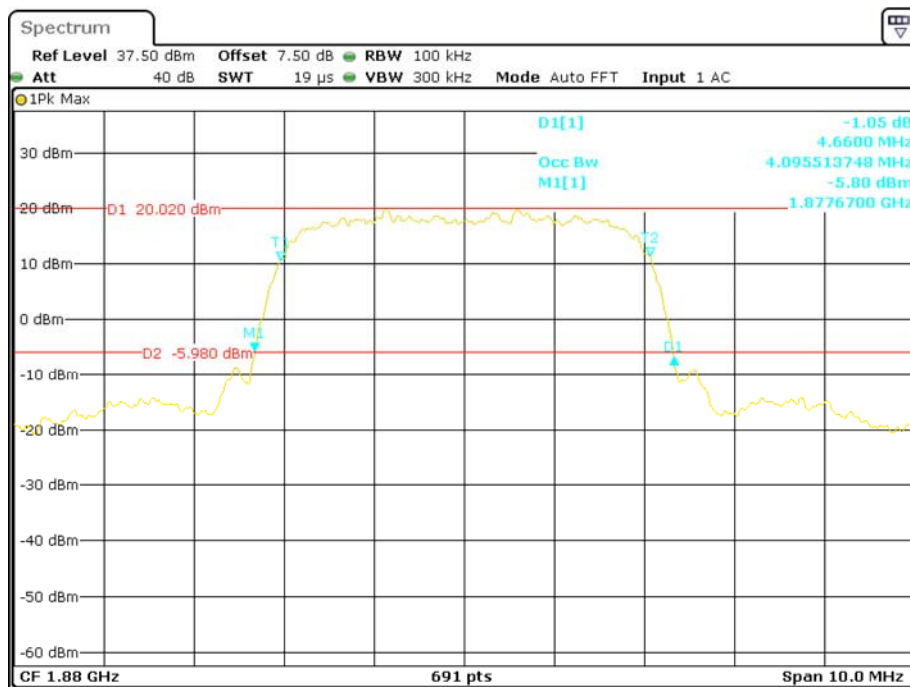26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

Date: 5.JAN.2018 14:14:48

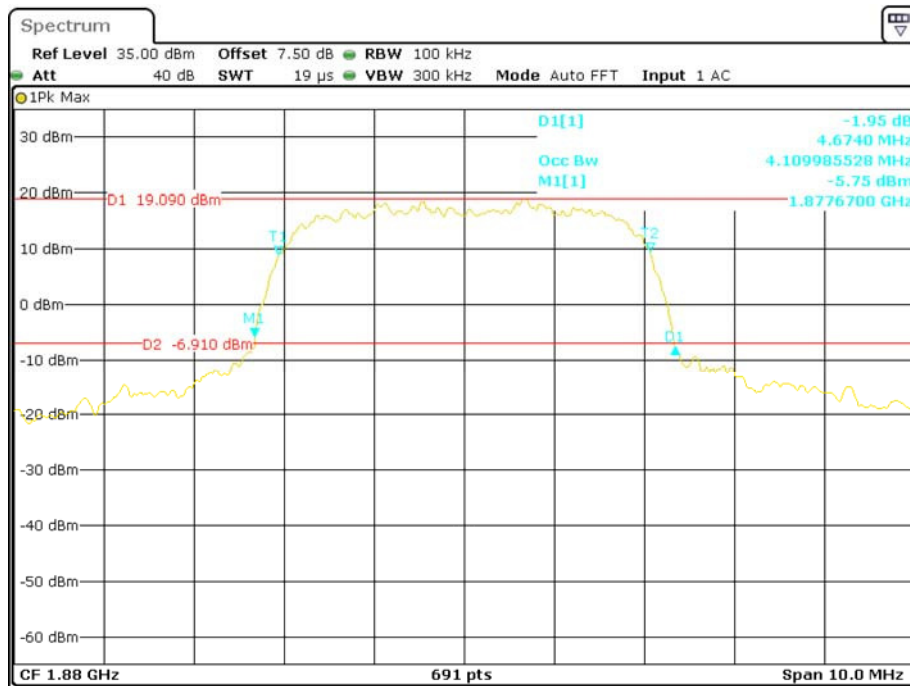26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode


Date: 5.JAN.2018 14:39:14

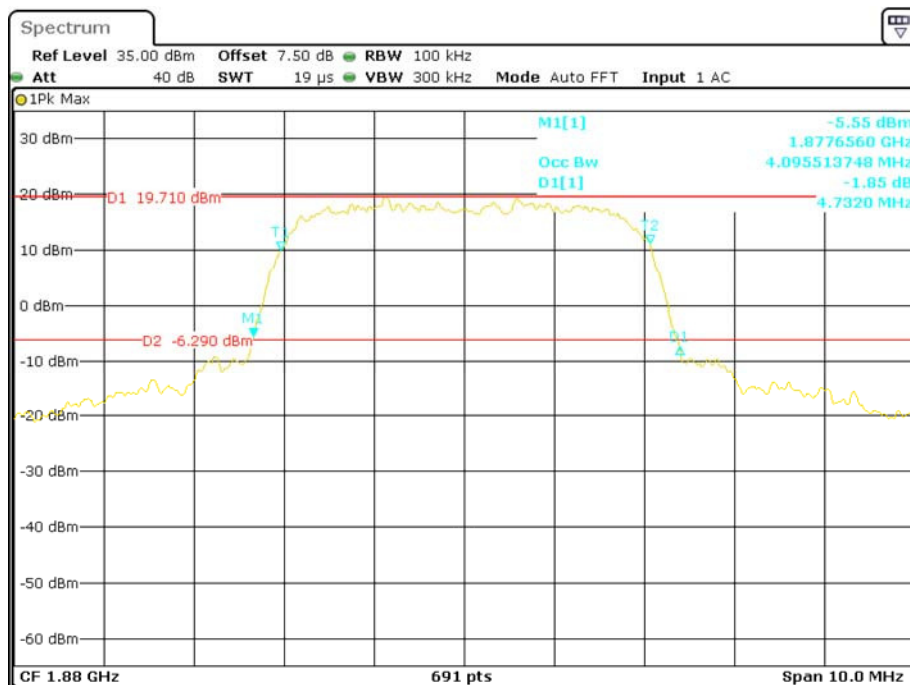26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

Date: 5.JAN.2018 15:01:33


AWS Band (Part 27)

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

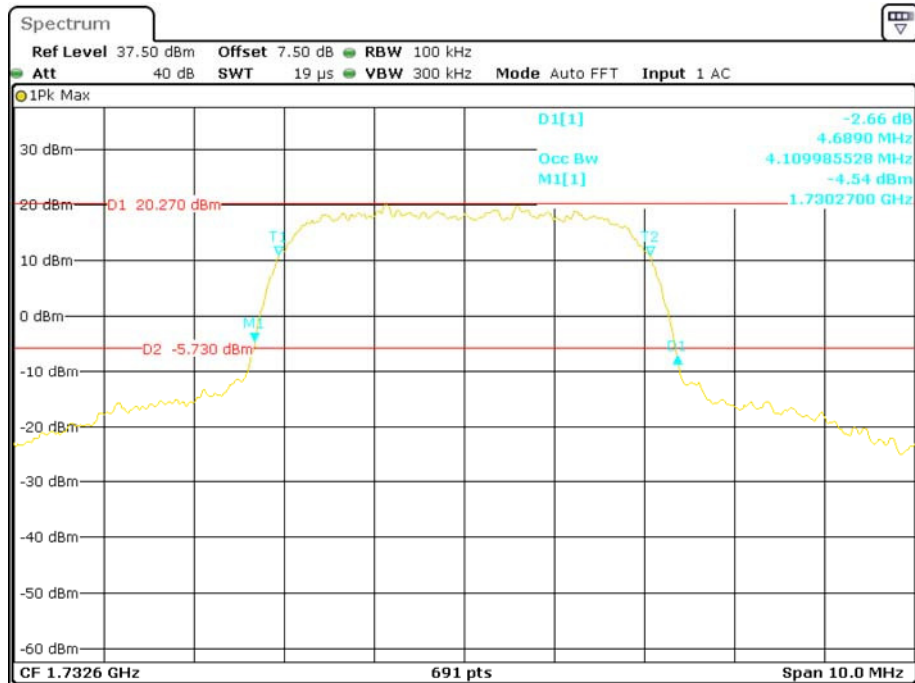


Date: 5.JAN.2018 14:16:06

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

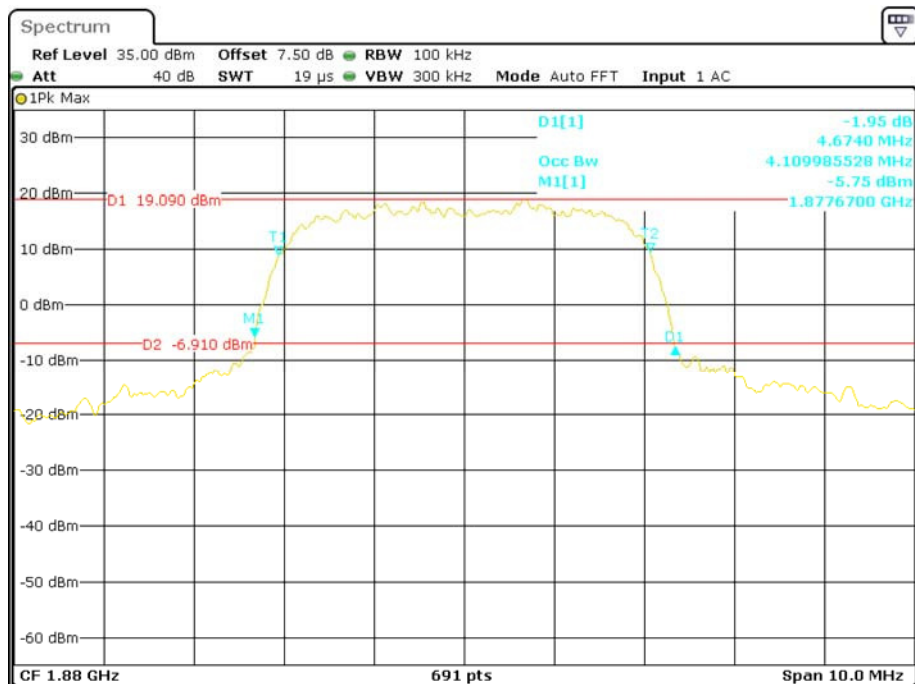

Date: 5.JAN.2018 14:39:14

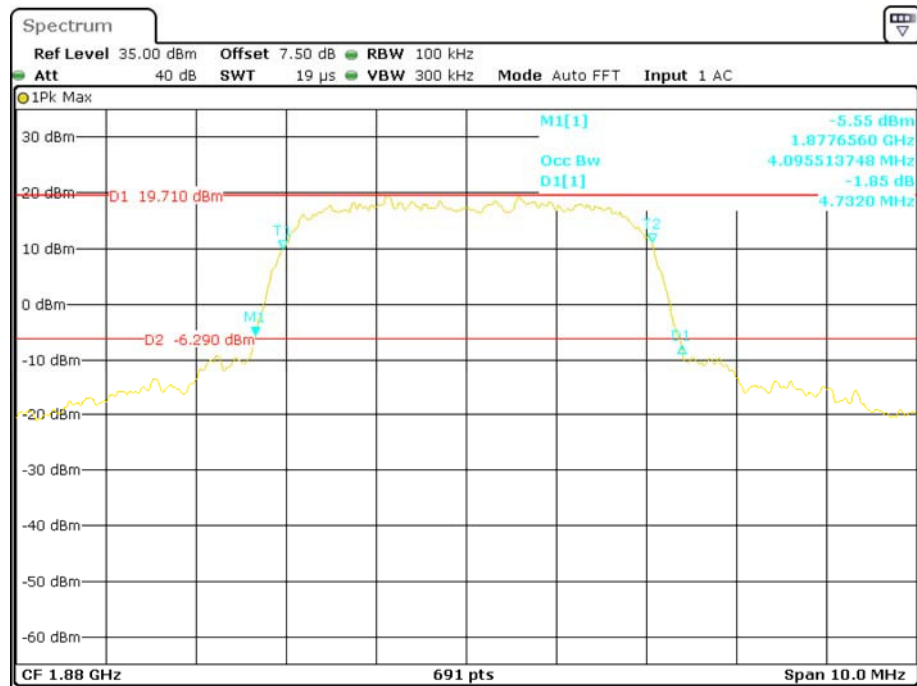26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

Date: 5.JAN.2018 15:01:33

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

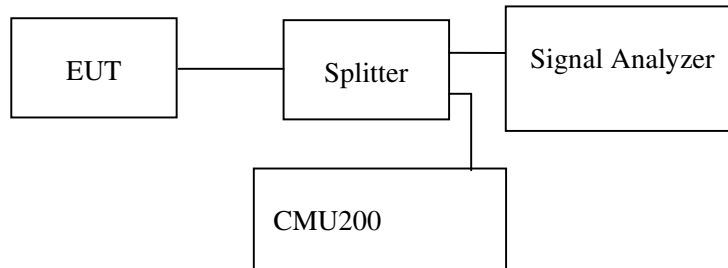

Test Data

Environmental Conditions

Temperature:	22~25 °C
Relative Humidity:	51~52 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by Dylan Li on 2018-01-05 and 2018-01-30.

EUT operation mode: Transmitting

Test result: Compliance, please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

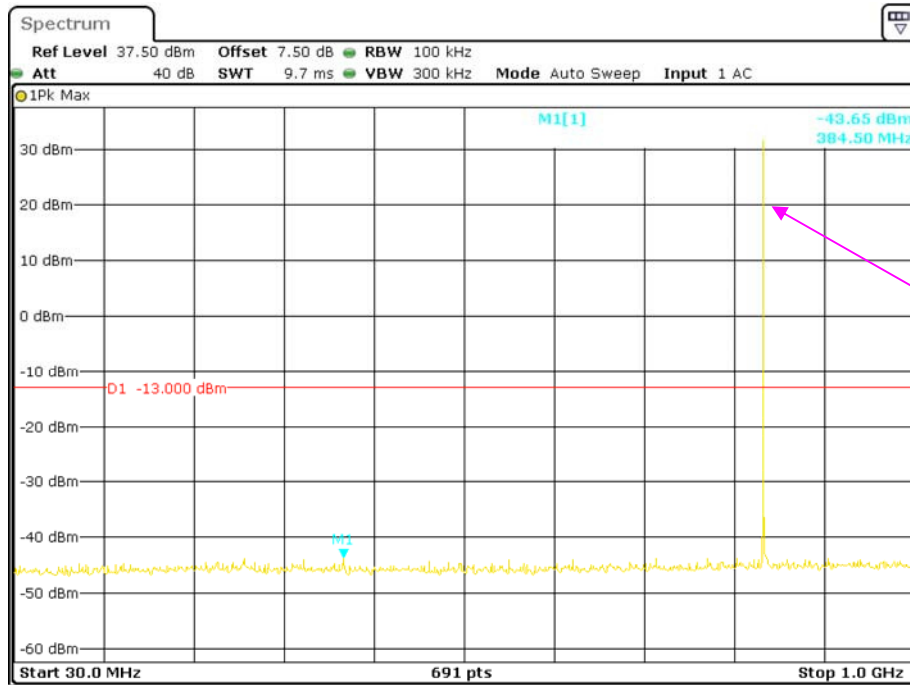

Date: 5.JAN.2018 13:56:11


Fundamental test

1 GHz – 10 GHz (GSM Mode)

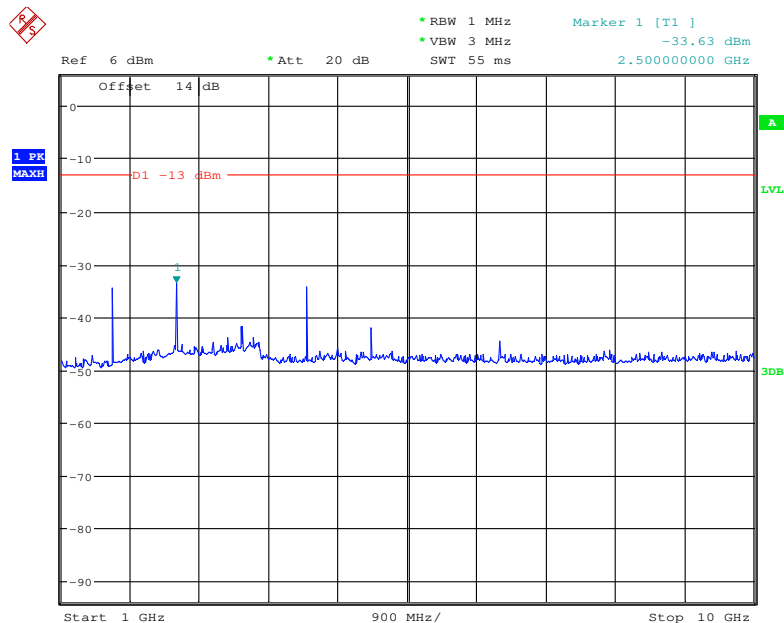

Date: 30.JAN.2018 21:49:49


30 MHz – 1 GHz (WCDMA Mode)

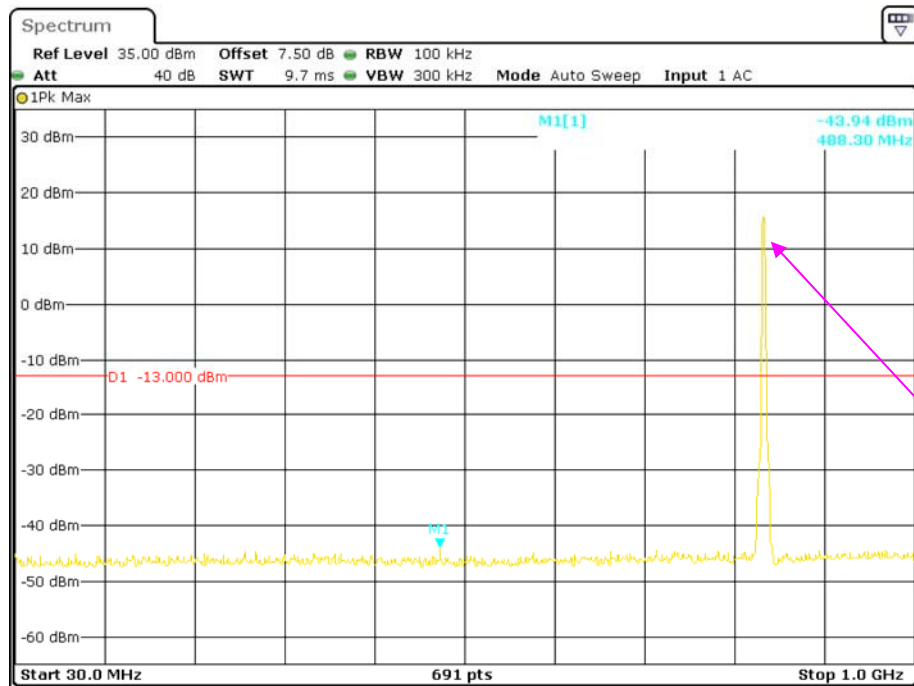


Date: 5.JAN.2018 14:33:02

Fundamental test


1 GHz – 10 GHz (WCDMA Mode)

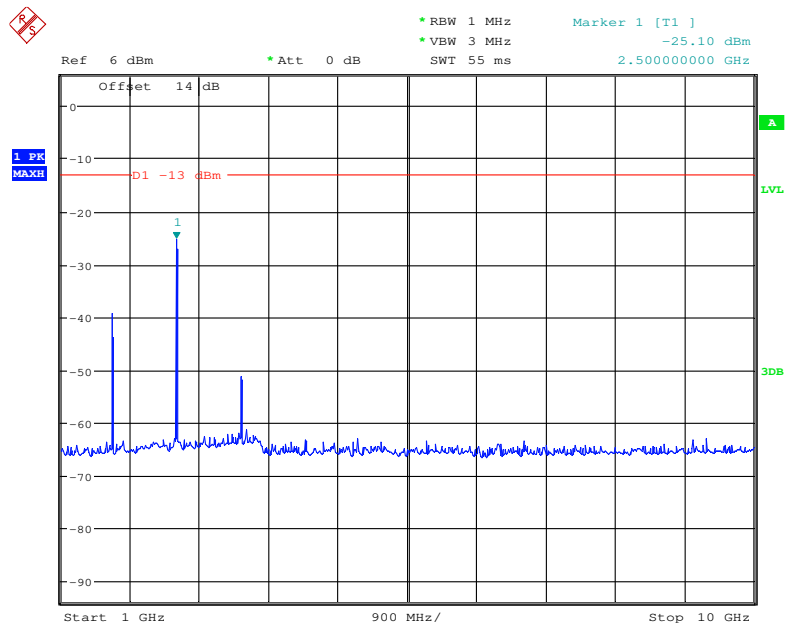

Date: 30.JAN.2018 21:55:04

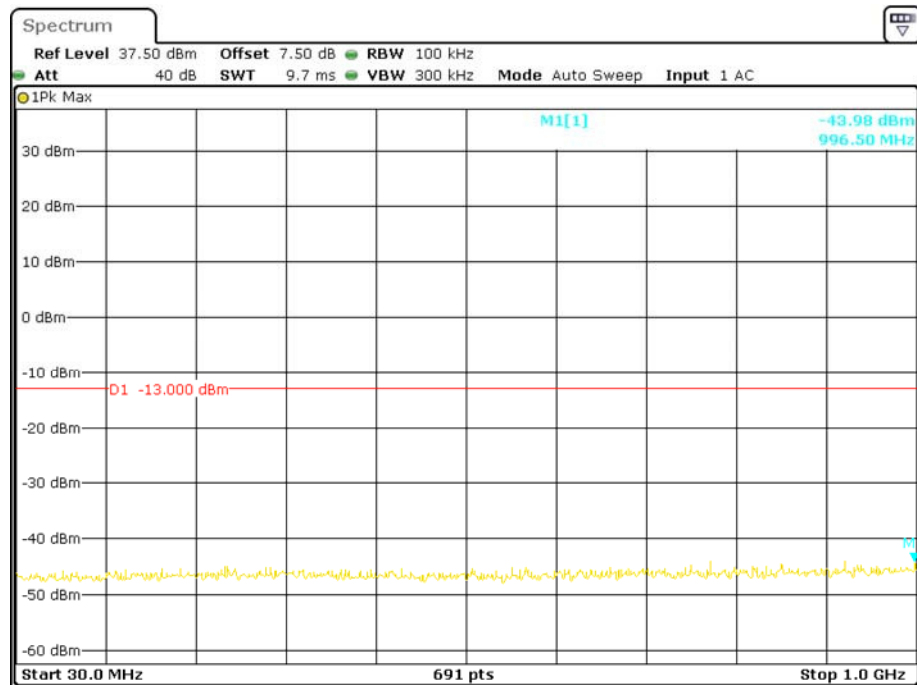
PCS Band (Part 24E)**30 MHz – 1 GHz (GSM Mode)**

Date: 5.JAN.2018 14:04:52

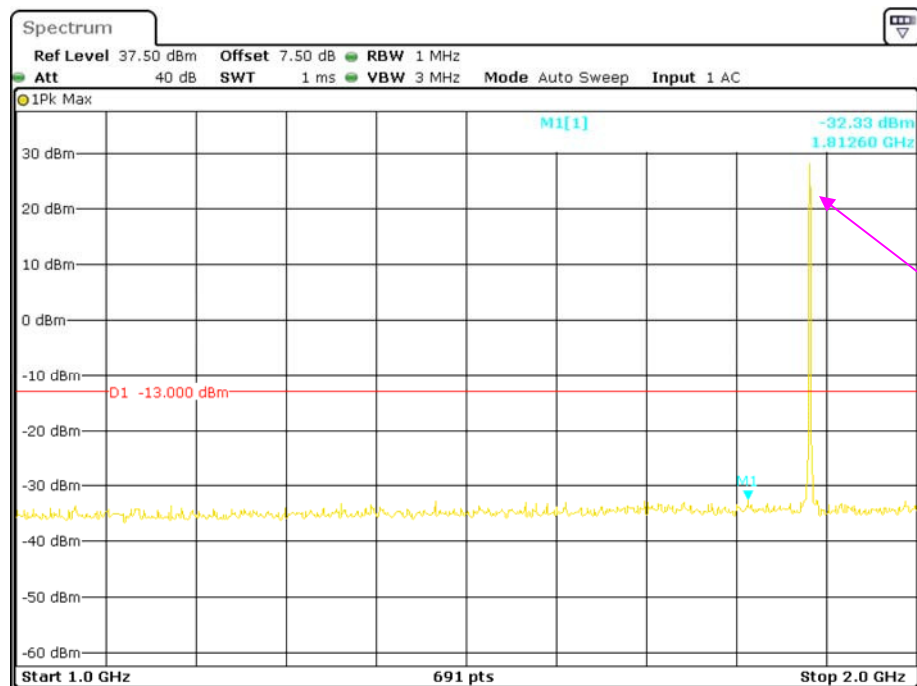1 GHz – 2 GHz (GSM Mode)


Date: 5.JAN.2018 14:05:36

2 GHz – 20 GHz (GSM Mode)

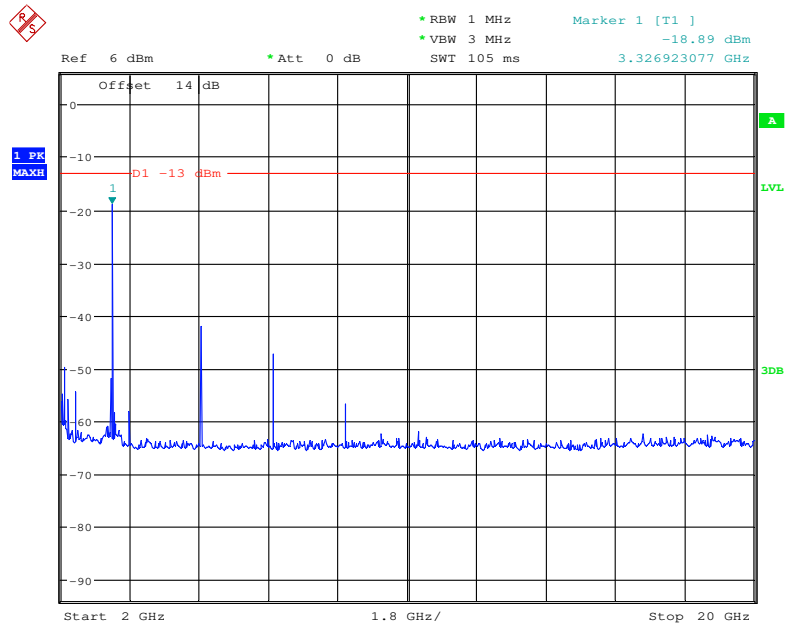


Date: 30.JAN.2018 21:51:53

30 MHz – 1 GHz (WCDMA Mode)

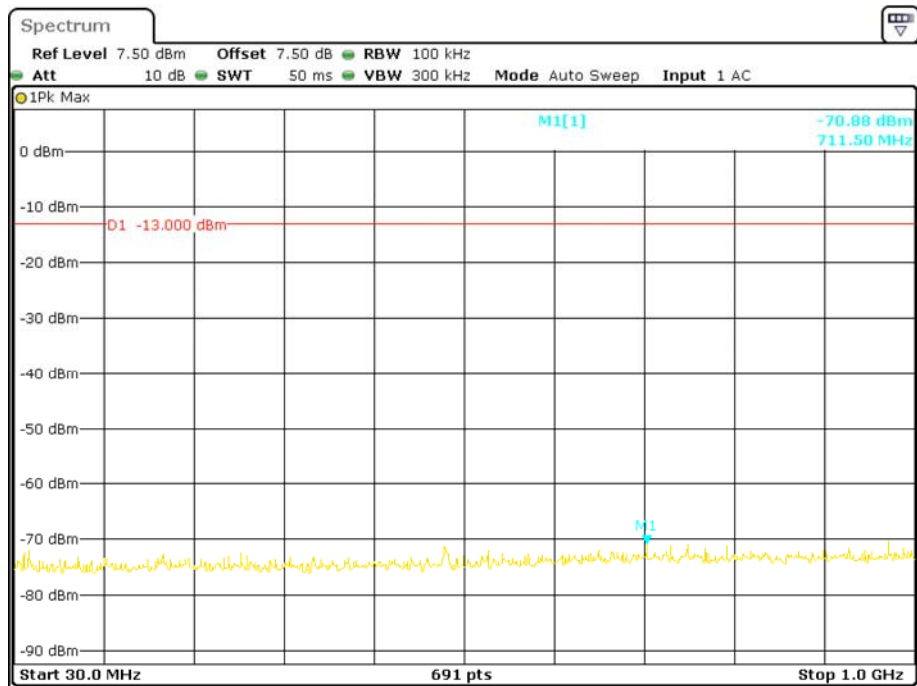

Date: 5.JAN.2018 14:23:32


1 GHz – 2 GHz (WCDMA Mode)

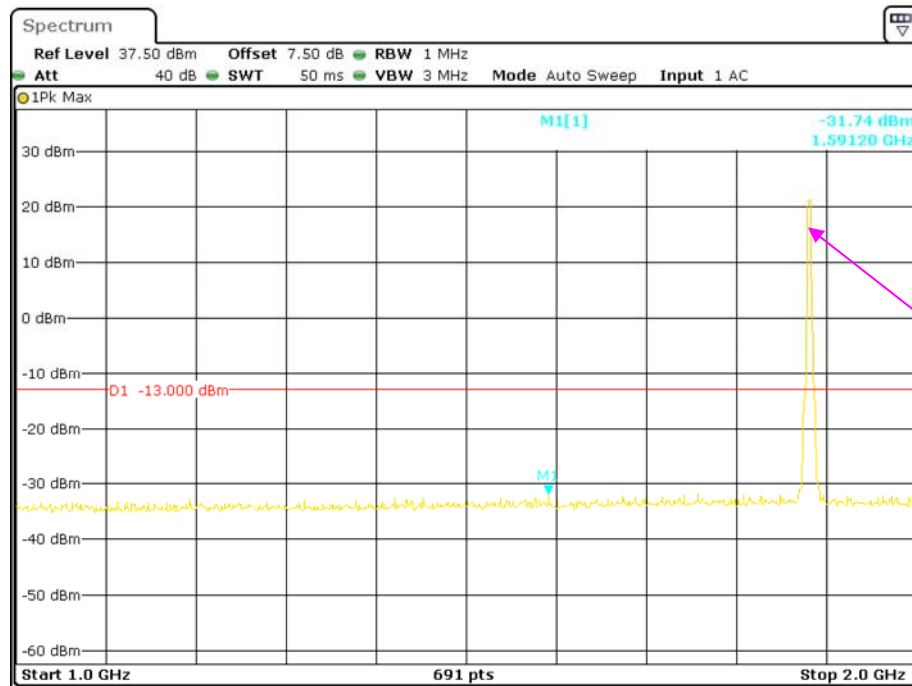

Date: 5.JAN.2018 14:22:31

Fundamental test


2 GHz – 20 GHz (WCDMA Mode)

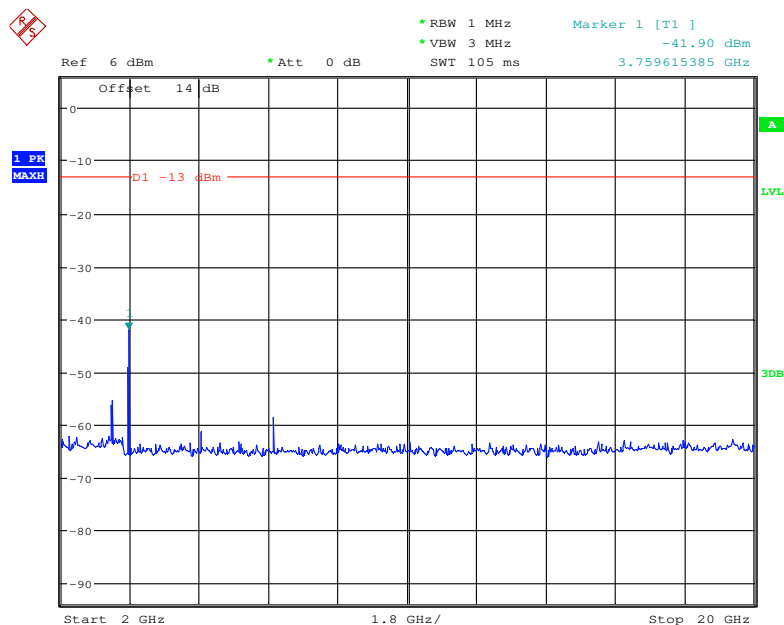

Date: 30.JAN.2018 21:53:13


AWS Band (Part 27)

30 MHz – 1 GHz (WCDMA Mode)

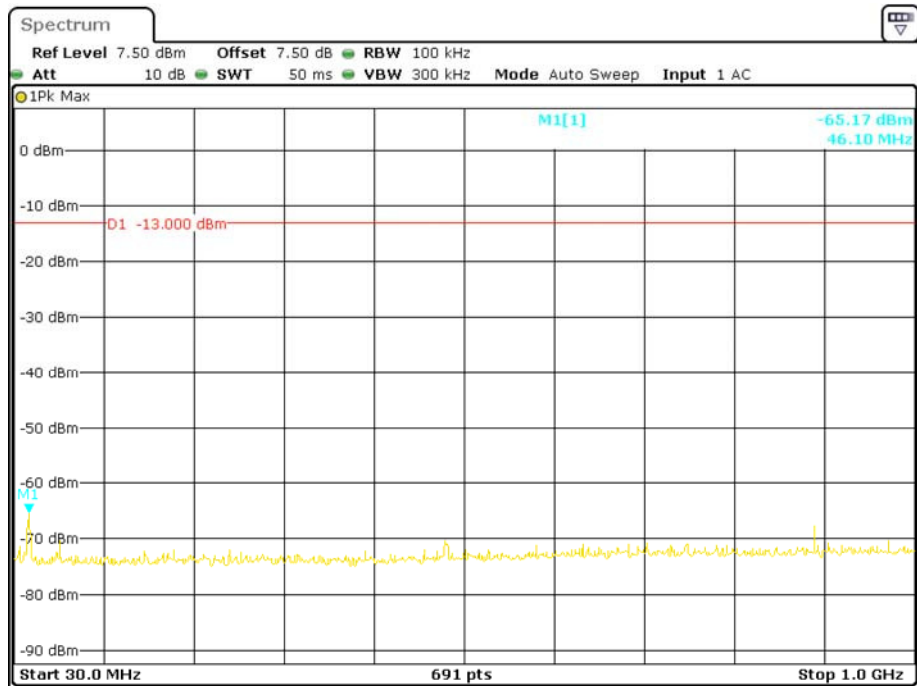


Date: 5.JAN.2018 14:24:32

1 GHz – 2 GHz (WCDMA Mode)

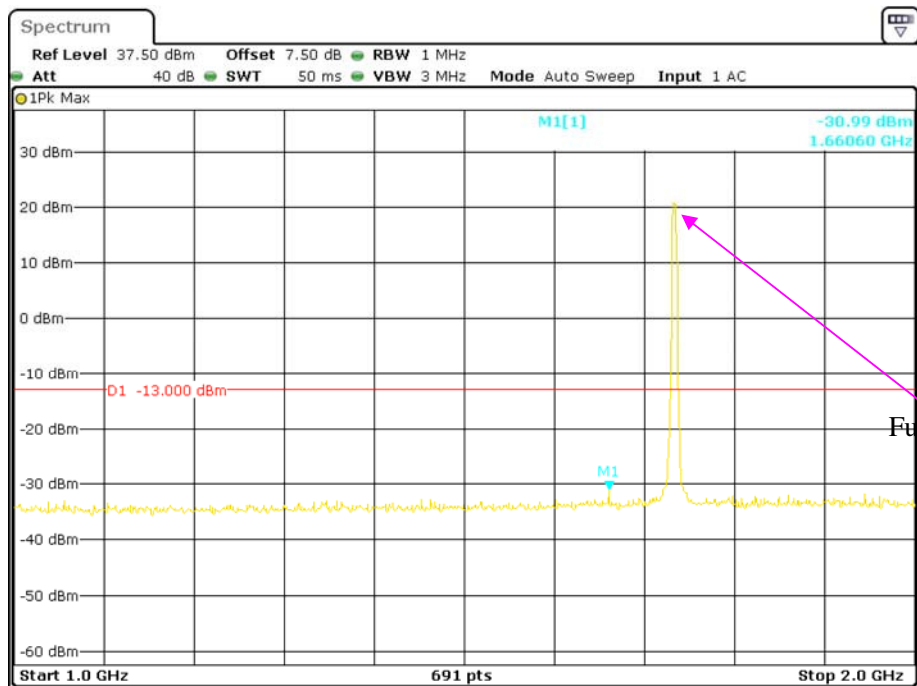

Date: 5.JAN.2018 14:21:34

2 GHz – 20 GHz (WCDMA Mode)

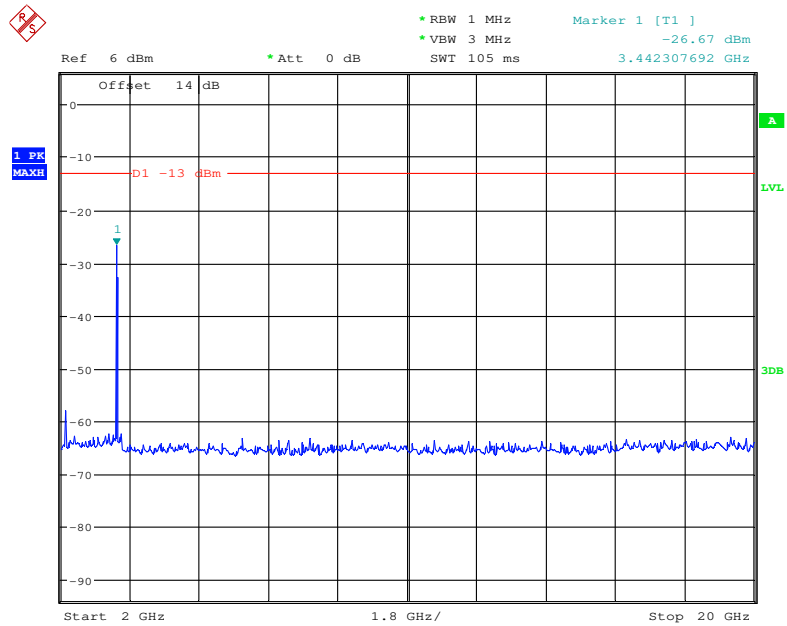

Date: 30.JAN.2018 21:54:32

FCC § 2.1053; § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, § 22.917(a) and § 24.238(a) and § 27.53(h)(m)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-30.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
215.32	35.14	175	2.1	V	-59.9	0.3	0.0	-60.20	-13	47.20
215.32	36.25	168	1.4	H	-58.8	0.3	0.0	-59.10	-13	46.10
1673.20	56.6	205	1.0	H	-50.5	1.30	9.10	-42.70	-13	29.70
1673.20	58.53	318	1.7	V	-47.9	1.30	9.10	-40.10	-13	27.10
2509.80	54.51	86	1.7	H	-49.0	2.60	9.30	-42.30	-13	29.30
2509.80	56.58	75	1.0	V	-46.3	2.60	9.30	-39.60	-13	26.60
WCDMA Mode, Middle channel										
208.35	35.69	33	2.4	V	-59.3	0.3	0.0	-59.60	-13	46.60
208.36	36.94	337	2.1	H	-58.1	0.3	0.0	-58.40	-13	45.40
1673.20	48.21	210	2.0	H	-58.9	1.30	9.10	-51.10	-13	38.10
1673.20	49.68	351	1.6	V	-56.8	1.30	9.10	-49.00	-13	36.00
2509.80	46.48	338	1.1	H	-57.0	2.60	9.30	-50.30	-13	37.30
2509.80	46.31	350	1.2	V	-56.6	2.60	9.30	-49.90	-13	36.90

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, middle channel										
215.32	35.26	158	1.3	V	-59.7	0.3	0.0	-60.00	-13	47.00
215.32	37.01	343	1.2	H	-58.0	0.3	0.0	-58.30	-13	45.30
3760.00	52.49	209	2.5	H	-48.7	1.50	9.70	-40.50	-13	27.50
3760.00	51.6	326	1.7	V	-49.2	1.50	9.70	-41.00	-13	28.00
9400.00	56.98	235	1.5	H	-38.3	2.20	12.50	-28.00	-13	15.00
9400.00	59.69	16	2.5	V	-35.8	2.20	12.50	-25.50	-13	12.50
WCDMA Mode, Middle channel										
208.35	36.01	287	2.3	V	-59.0	0.3	0.0	-59.30	-13	46.30
208.36	37.12	257	1.9	H	-57.9	0.3	0.0	-58.20	-13	45.20
3760.00	48.09	285	2.4	H	-53.1	1.50	9.70	-44.90	-13	31.90
3760.00	47.99	118	1.7	V	-52.8	1.50	9.70	-44.60	-13	31.60

AWS Band (Part 27)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
WCDMA Mode, Middle channel										
208.35	35.57	343	1.1	V	-59.4	0.3	0.0	-59.70	-13	46.70
208.36	36.59	37	1.8	H	-58.4	0.3	0.0	-58.70	-13	45.70
3465.20	42.24	250	1.1	H	-58.1	1.50	9.70	-49.90	-13	36.90
3465.20	42.51	323	2.4	V	-58.6	1.50	9.70	-50.40	-13	37.40

Note:

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); §27.53 (h)(m) - BAND EDGES**Applicable Standard**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

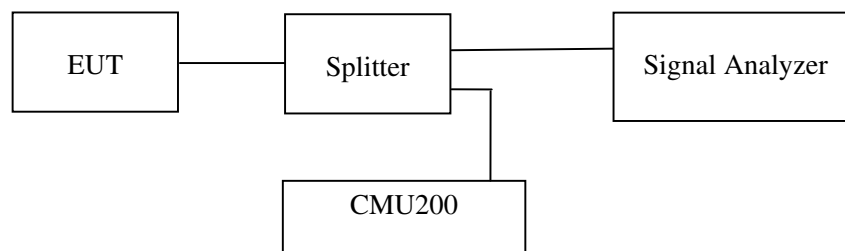**Test Data****Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-05.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

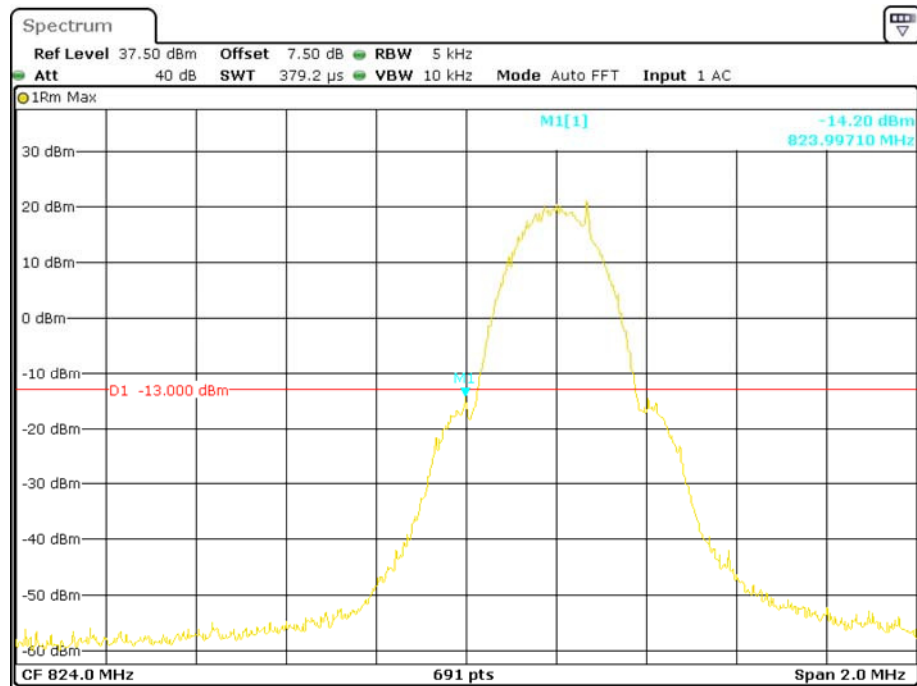


Date: 5.JAN.2018 13:53:11


Cellular Band, Right Band Edge for GSM (GMSK) Mode

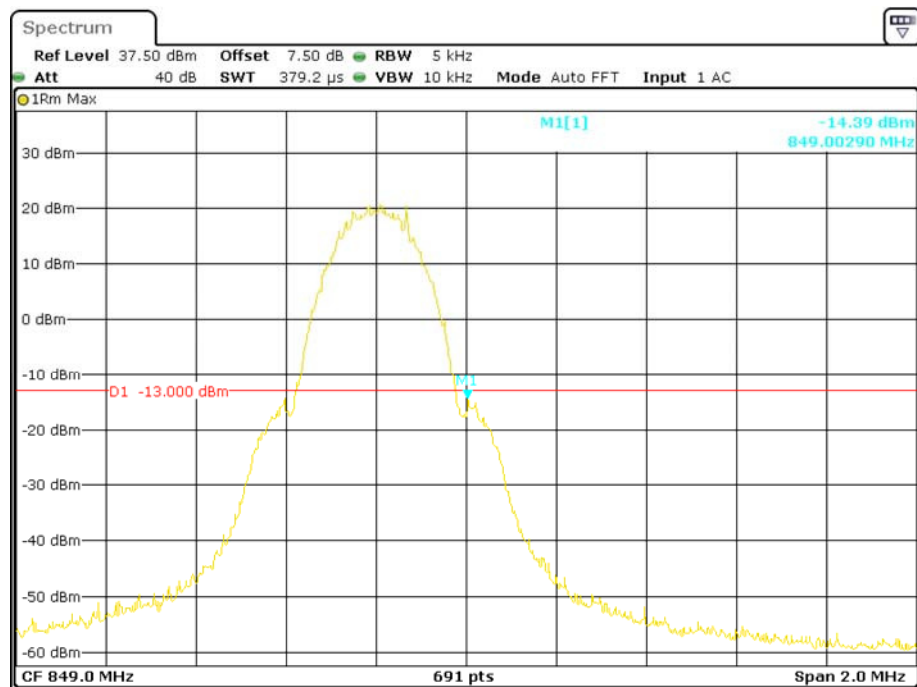


Date: 5.JAN.2018 13:53:48

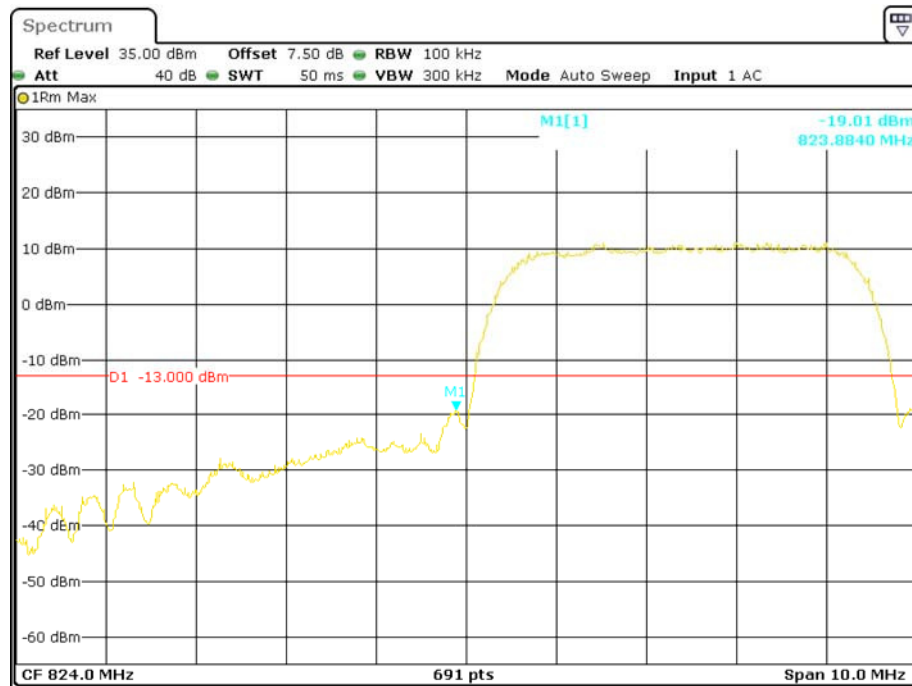Cellular Band, Left Band Edge for WCDMA (BPSK) Mode


Date: 5.JAN.2018 14:30:45

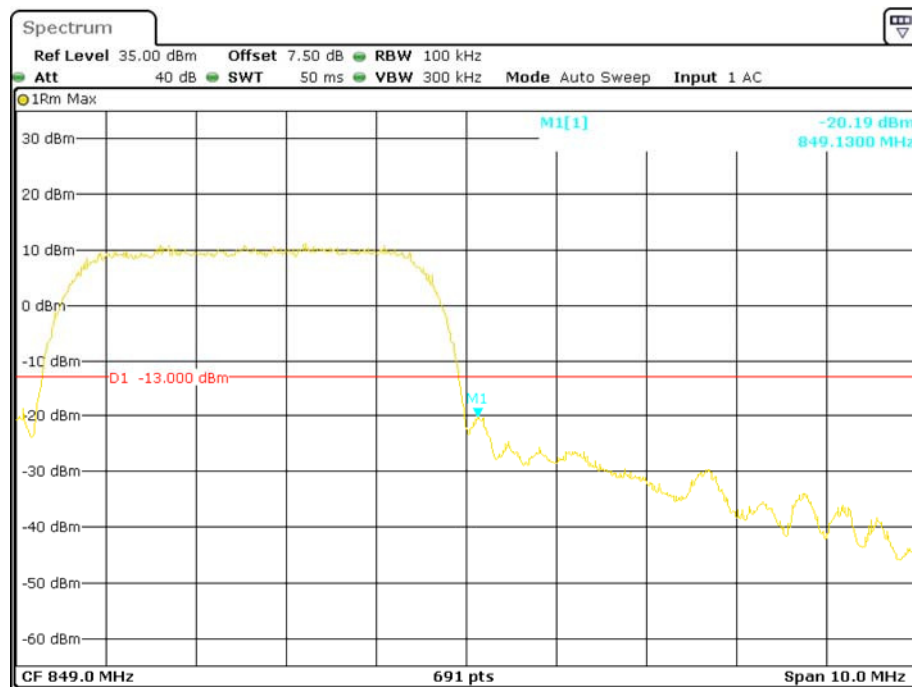Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

Date: 5.JAN.2018 14:29:30

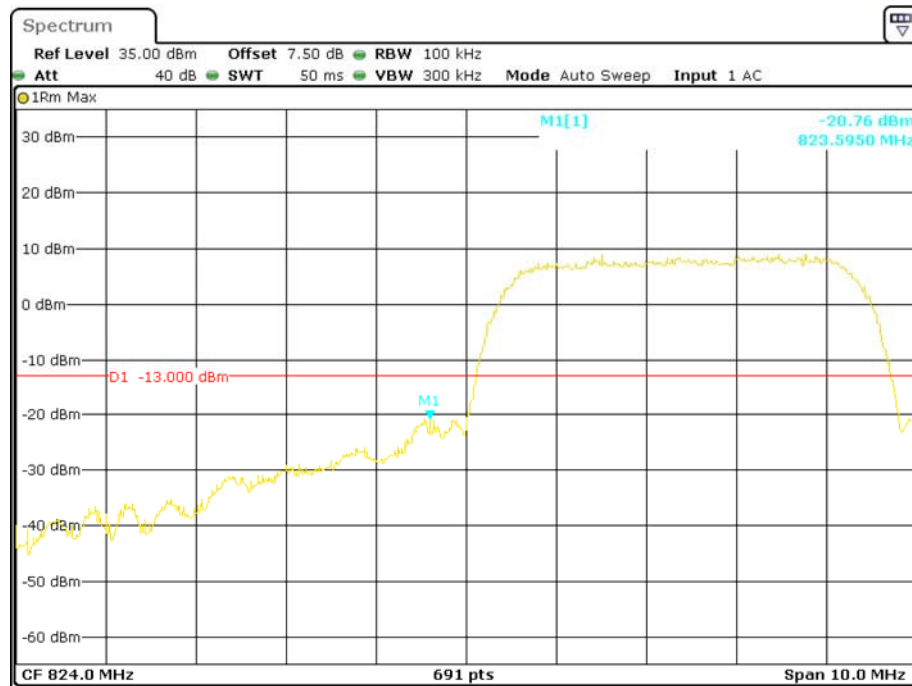
Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

Date: 5.JAN.2018 14:51:50

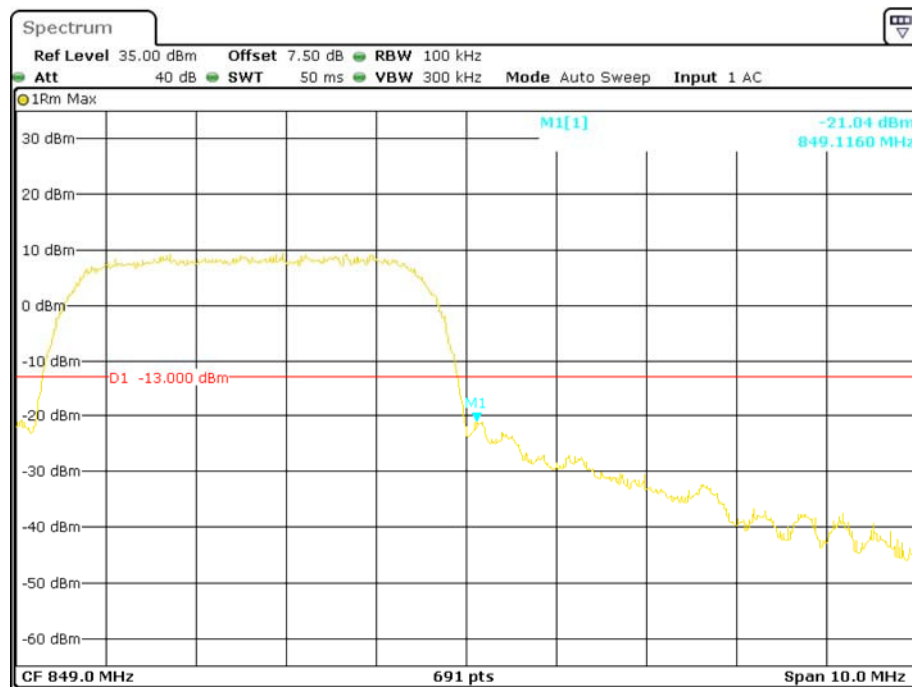Cellular Band, Right Band Edge for HSDPA (16QAM) Mode


Date: 5.JAN.2018 14:50:36

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

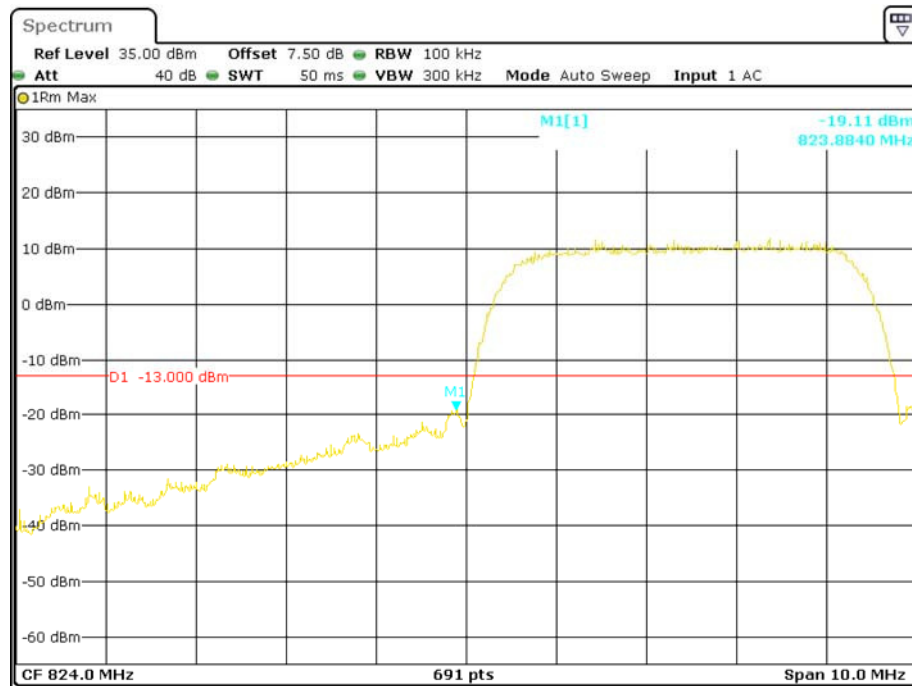


Date: 5.JAN.2018 14:47:55

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

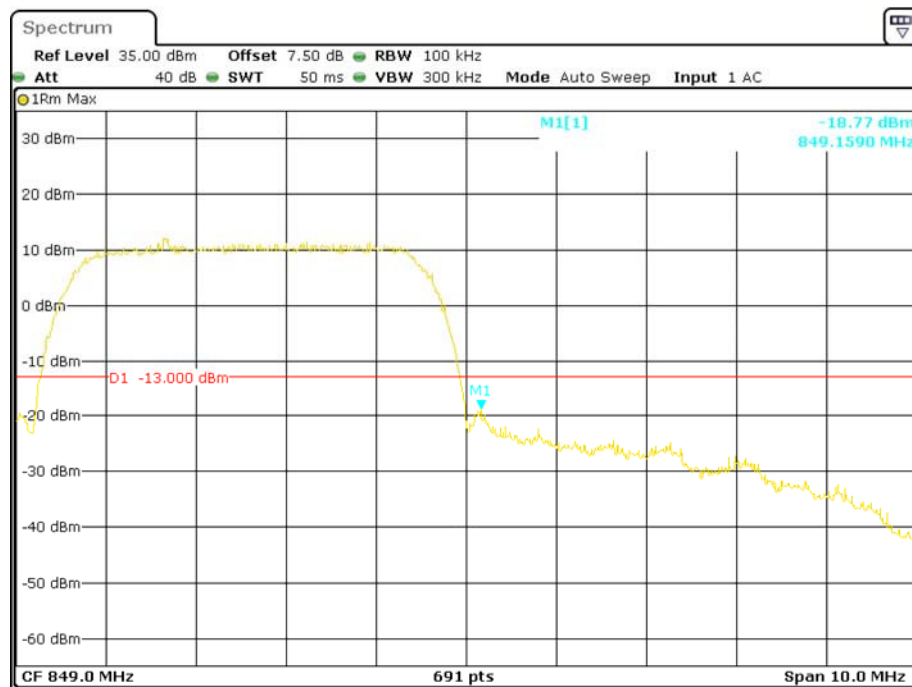


Date: 5.JAN.2018 14:48:35

PCS Band, Left Band Edge for GSM (GMSK) Mode

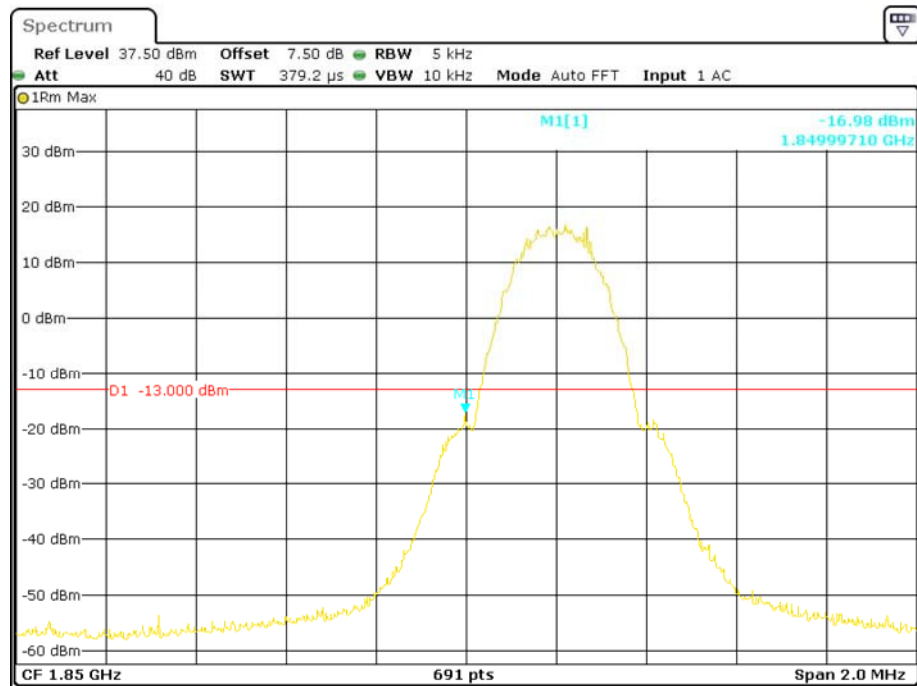


Date: 5.JAN.2018 14:02:05

PCS Band, Right Band Edge for GSM (GMSK) Mode

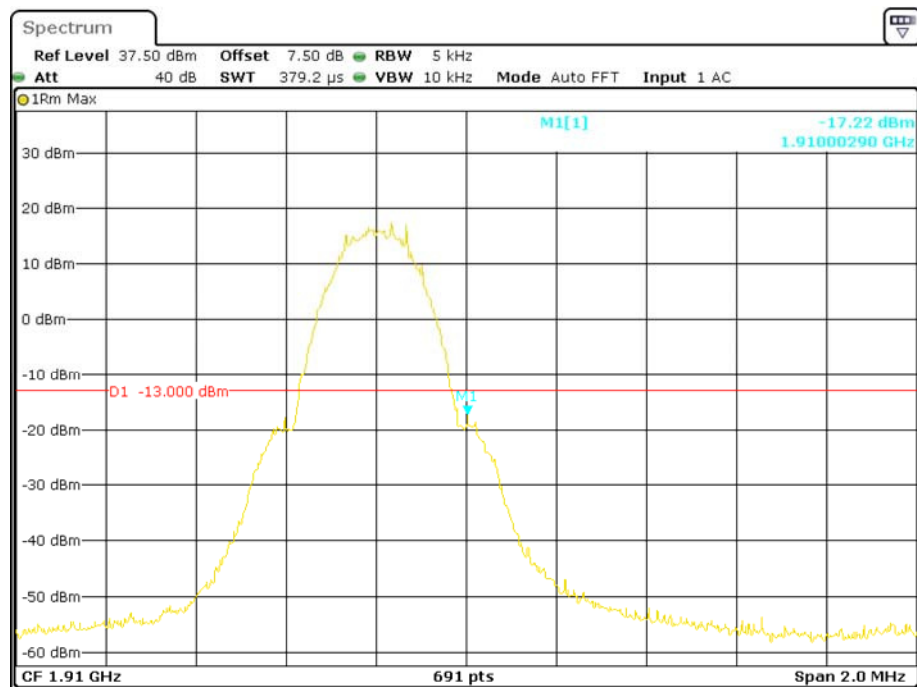


Date: 5.JAN.2018 14:03:00


PCS Band, Left Band Edge for WCDMA (BPSK) Mode

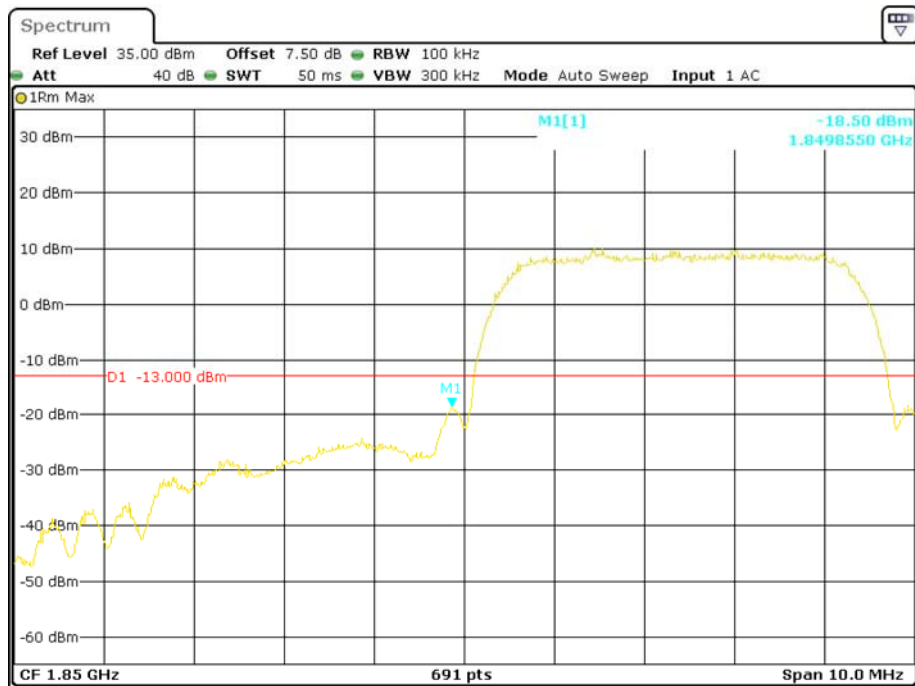

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

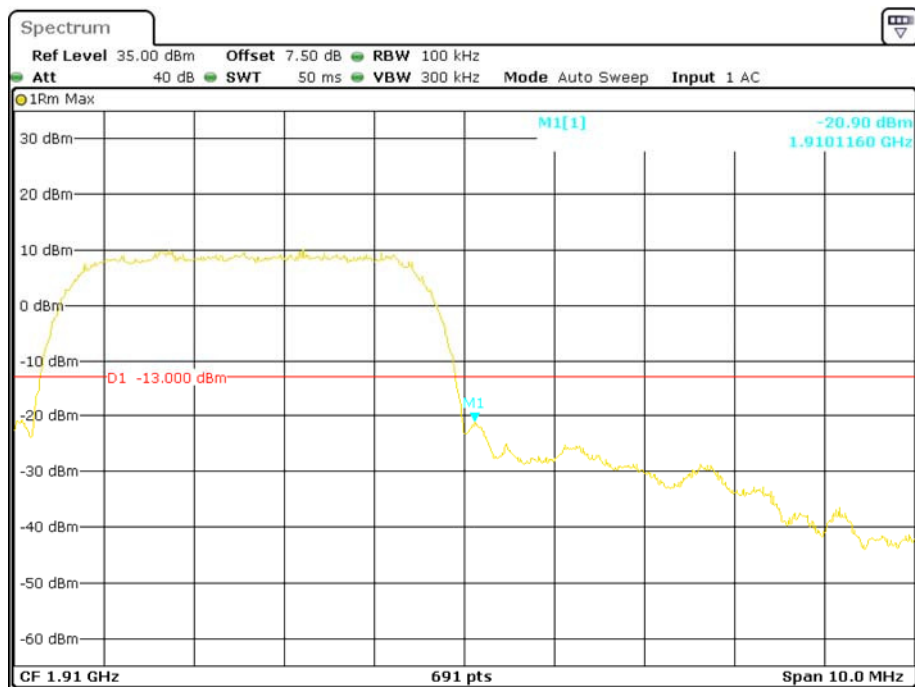


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

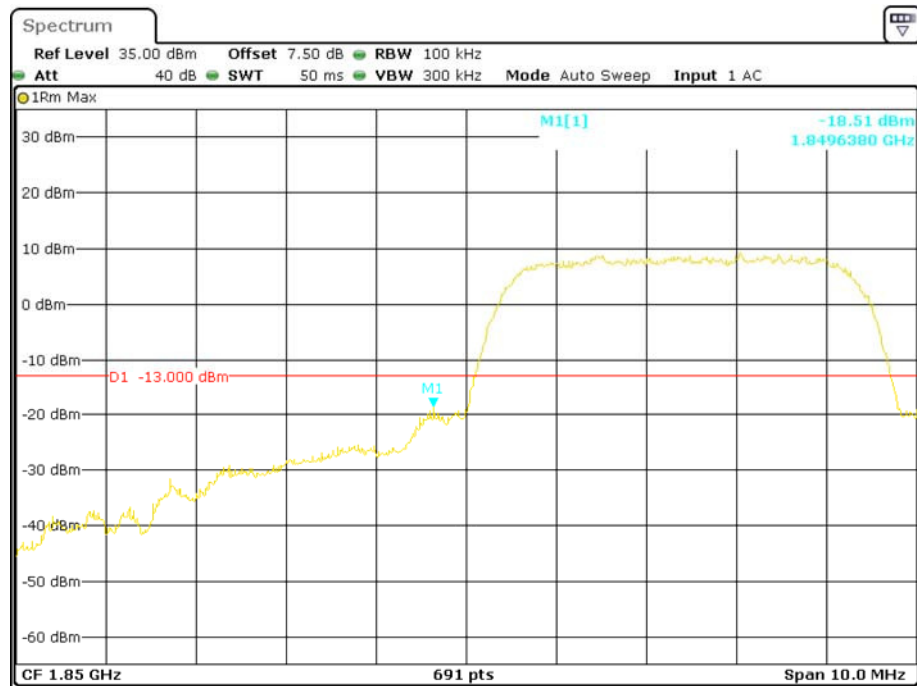


Date: 5.JAN.2018 14:53:51

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

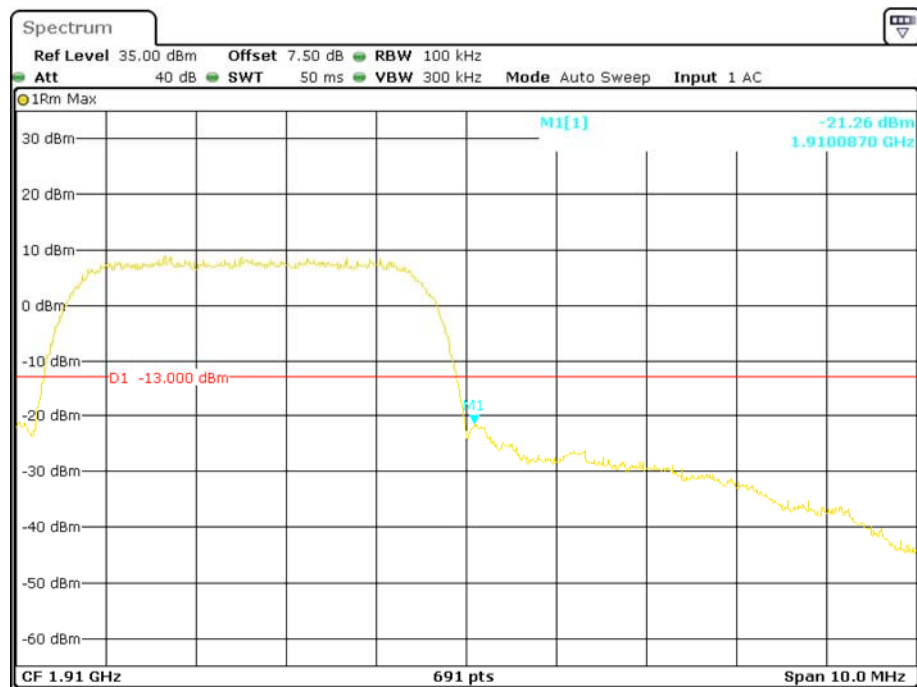


Date: 5.JAN.2018 14:54:57

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

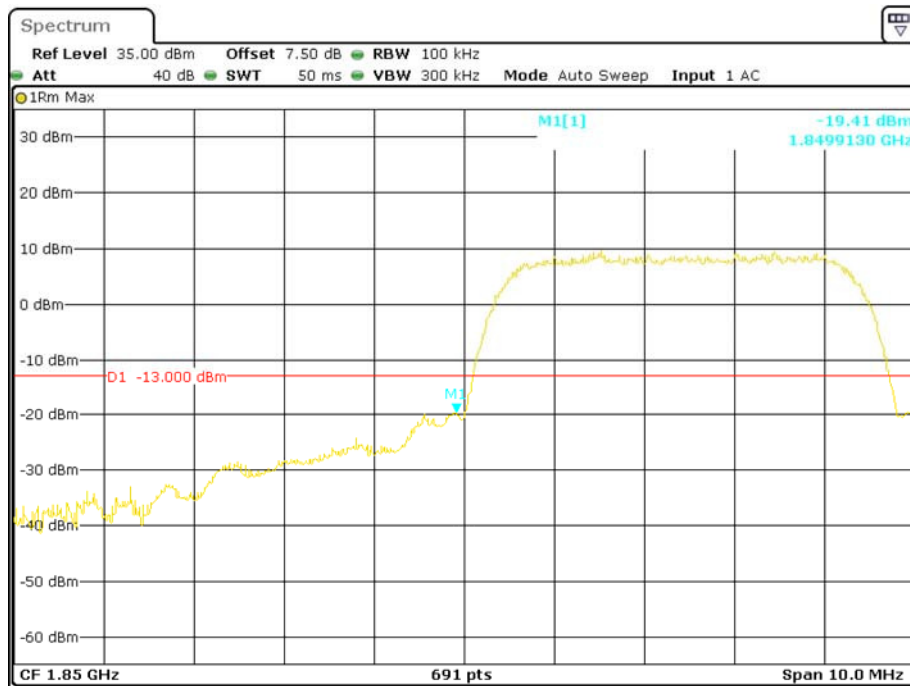


Date: 5.JAN.2018 14:46:55

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

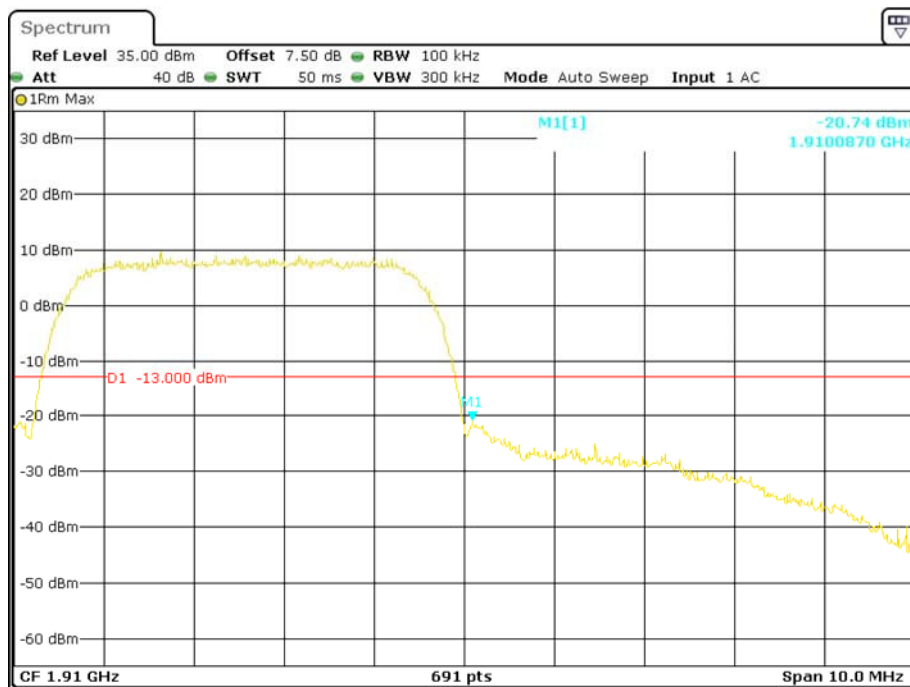


Date: 5.JAN.2018 14:45:58

AWS Band, Left Band Edge for WCDMA (BPSK) Mode

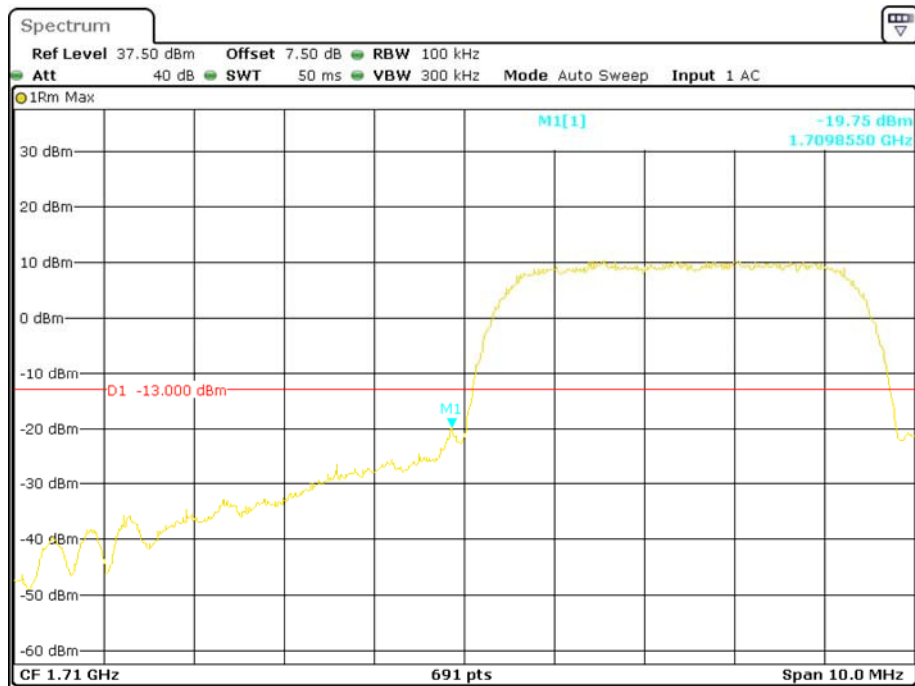


Date: 5.JAN.2018 14:18:00

AWS Band, Right Band Edge for WCDMA (BPSK) Mode

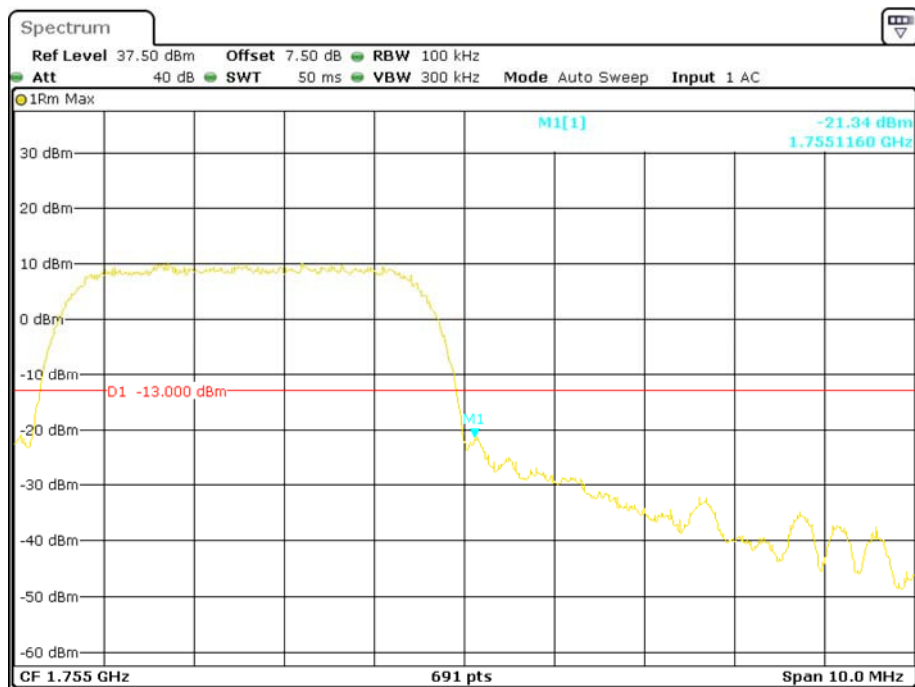


Date: 5.JAN.2018 14:19:10

AWS Band, Left Band Edge for HSDPA (16QAM) Mode

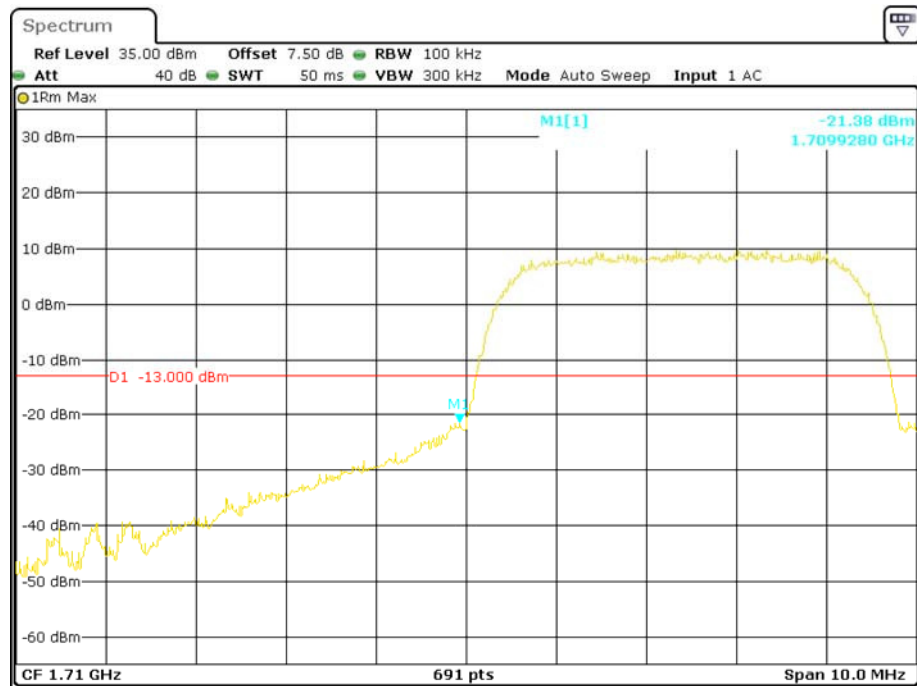


Date: 5.JAN.2018 14:56:38

AWS Band, Right Band Edge for HSDPA (16QAM) Mode

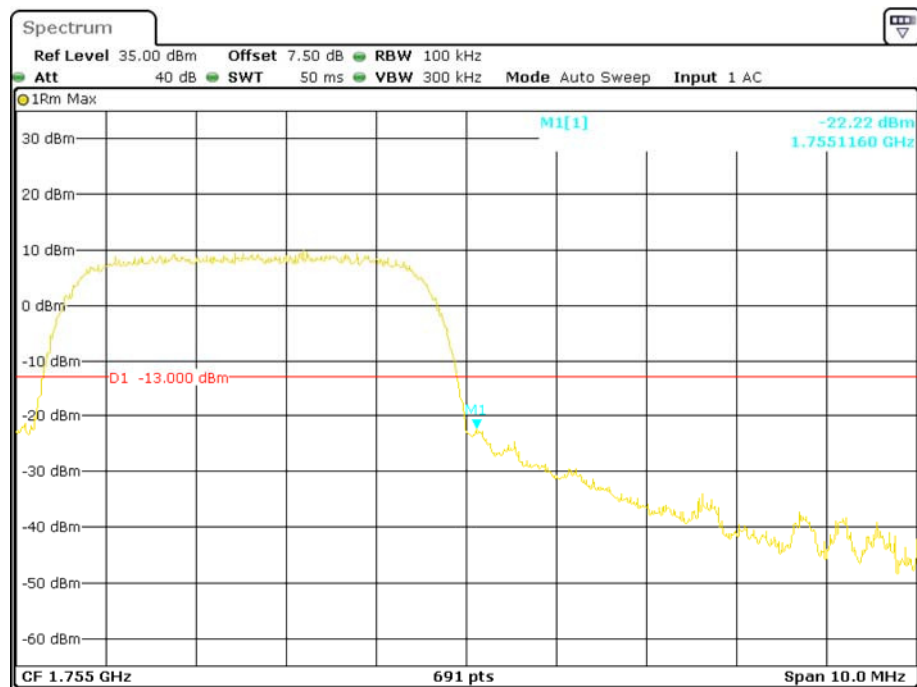


Date: 5.JAN.2018 14:55:56

AWSS Band, Left Band Edge for HSUPA (BPSK) Mode

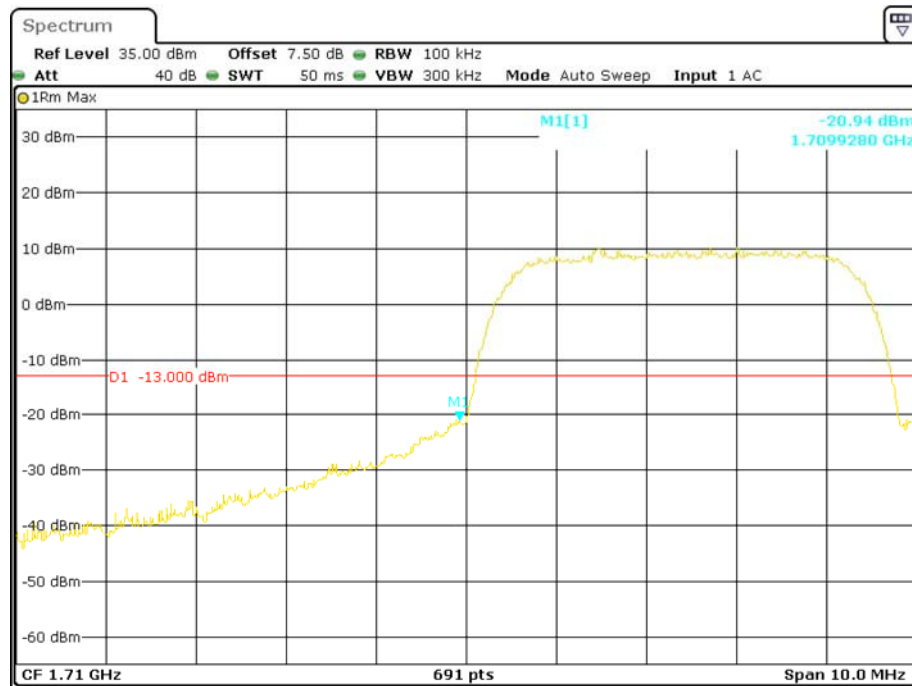

Date: 5.JAN.2018 14:42:43

AWS Band, Right Band Edge for HSUPA (BPSK) Mode

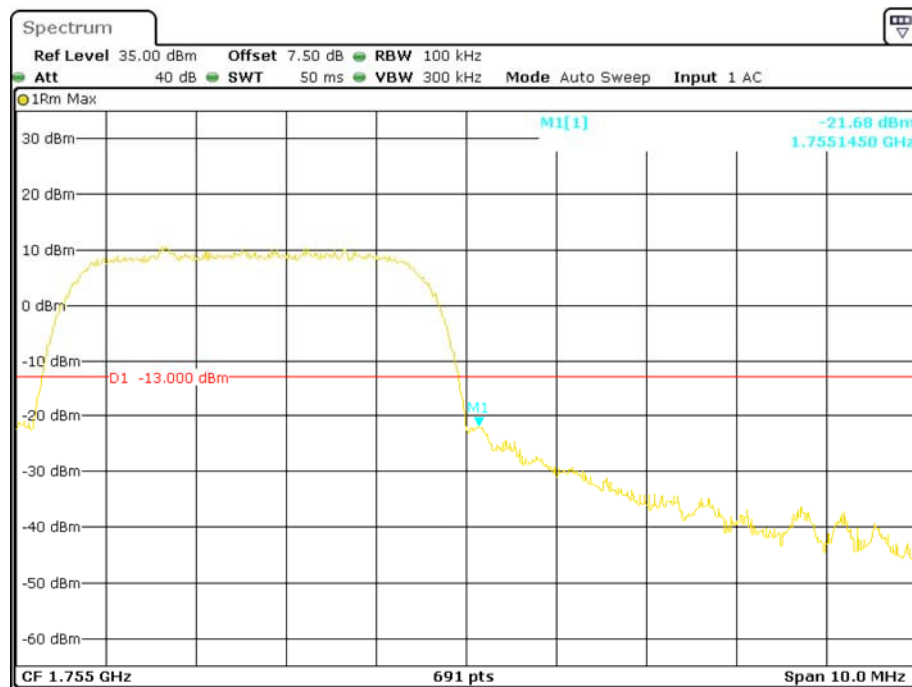

Date: 5.JAN.2018 14:44:42

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

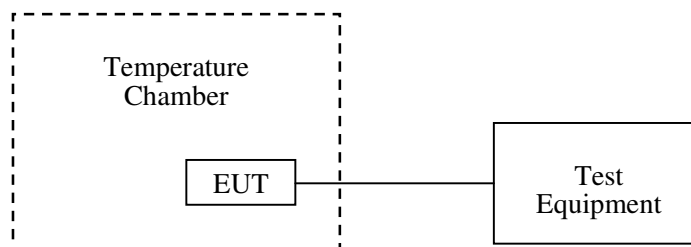

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-4	-0.0048	2.5
-20		-4	-0.0048	2.5
-10		-3	-0.0036	2.5
0		-3	-0.0036	2.5
10		-7	-0.0084	2.5
20		5	0.0060	2.5
30		-3	-0.0036	2.5
40		-4	-0.0048	2.5
50		4	0.0048	2.5
25	V min.= 3.5	-4	-0.0048	2.5
25	V max.= 4.2	-1	-0.0012	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	8	0.00956	2.5
-20		8	0.00956	2.5
-10		6	0.00717	2.5
0		6	0.00717	2.5
10		6	0.00717	2.5
20		3	0.00359	2.5
30		6	0.00717	2.5
40		8	0.00956	2.5
50		11	0.01315	2.5
25	V min.= 3.5	12	0.01434	2.5
25	V max.= 4.2	13	0.01554	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0\text{ MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	15	0.0080	pass
-20		8	0.0043	pass
-10		18	0.0096	pass
0		10	0.0053	pass
10		8	0.0043	pass
20		16	0.0085	pass
30		7	0.0037	pass
40		9	0.0048	pass
50		6	0.0032	pass
25	V min.= 3.5	4	0.0021	pass
25	V max.= 4.2	6	0.0032	pass

WCDMA Mode

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-4	-0.00213	pass
-20		-4	-0.00213	pass
-10		-2	-0.00106	pass
0		-2	-0.00106	pass
10		-2	-0.00106	pass
20		-1	-0.00053	pass
30		-4	-0.00213	pass
40		-8	-0.00426	pass
50		-10	-0.00532	pass
25	V min.= 3.5	-15	-0.00798	pass
25	V max.= 4.2	-20	-0.01064	pass

AWS Band (Part 27)

Middle Channel, f_0 =1732.6 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-4	-0.00213	pass
-20		-4	-0.00213	pass
-10		-2	-0.00106	pass
0		-2	-0.00106	pass
10		-2	-0.00106	pass
20		-1	-0.00053	pass
30		-4	-0.00213	pass
40		-8	-0.00426	pass
50		-10	-0.00532	pass
25	V min.= 3.5	-15	-0.00798	pass
25	V max.= 4.2	-20	-0.01064	pass

******* END OF REPORT *******