


LABEL.A 96x22mm

Unit requires 3 min. warm-up after battery is installed-Green LED flash once in every 10 seconds and continue for 3 minutes. Normal operation is indicated by the green LED flashing once 50 seconds.

Troubles. Low battery - Amber will flash once per 50 seconds, one chirp per 50 seconds.
Smoke Trouble - Amber will flash once per 50 seconds, three chirps per 50 seconds.
CO Trouble - Amber will flash twice per 50 seconds, one chirp per 50 seconds.
Smoke Low sensitivity - Amber will flash once per 50 seconds, two chirps per 50 seconds.
End of life - Amber will flash four times per 50 seconds, one beep per 50 seconds.

Smoke Alarm. Red will flash three times with three long beeps.
Co Alarm. Red will flash four times with four beeps.

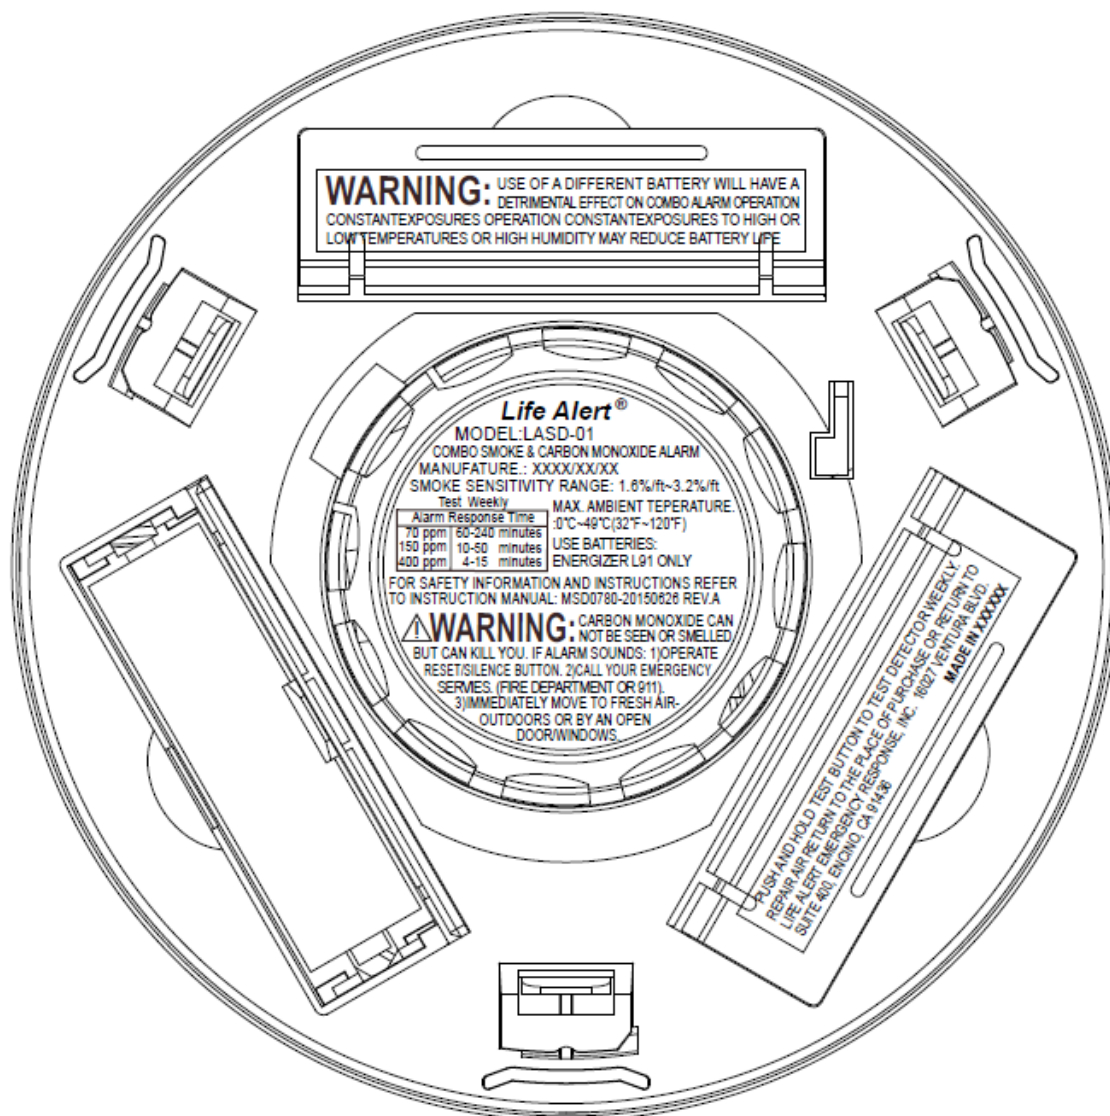

LABEL.B 53x9mm

WARNING: USE OF A DIFFERENT BATTERY WILL HAVE A
CONSTANT EXPOSURES OPERATION CONSTANT EXPOSURES TO HIGH OR
LOW TEMPERATURES OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE


LABEL.C Dia39.75mm



LABEL.D 47x8.5mm

PUSH AND HOLD TEST BUTTON TO TEST DETECTOR WEEKLY.
REPAIR AIR RETURN TO THE PLACE OF PURCHASE OR RETURN TO
LIFE ALERT EMERGENCY RESPONSE, INC. 18027 VENTURA BLVD.
SUITE 400, ENCINO, CA 91436
MADE IN XXXXXX

LABEL.E 33x12mm



LABEL.F 54x10mm X3pcs

WARNING: BATTERY HAS BEEN REMOVED



