

EMV TESTHAUS

test report

Customer:

Continental Automotive GmbH

Siemensstraße 12
93055 Regensburg
Germany
Tel.: +49 941 790-0

RF test report
180429-AU01+W01



Continental Automotive GmbH

RF Transmitter



The test result refers exclusively to the
model tested.

This test report may not be copied or published
in extracts without the written authorization of
the accreditation agency and/or
EMV TESTHAUS GmbH



EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Germany
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



Test Firm Type "accredited": Valid until 2019-05-06
MRA US-EU, FCC designation number: DE0010
BNetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site numbers with registration expiry date:
3472A-1, expiring 2018-11-09
3472A-2, expiring 2018-11-12

Test laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of
EMV **TESTHAUS** GmbH.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

Table of contents

1	Summary of test results	6
2	Referenced publications	7
3	Equipment under test (EUT)	8
4	Test configuration and mode of operation	9
4.1	Test configuration	9
4.2	Mode of operation	9
5	Measurement Procedures	10
5.1	20 dB bandwidth	10
5.2	Occupied bandwidth (99%)	10
5.3	Spurious radiated emissions 9 kHz to 10 th harmonic	11
5.4	Radiated emissions	11
6	Test results	15
6.1	Field strength of fundamental wave	15
6.2	Spurious radiated emissions 9 kHz to 10th harmonic	17
6.3	Correction for pulse operation (duty cycle)	26
6.4	20 dB bandwidth	31
6.5	Occupied bandwidth	34
6.6	Signal deactivation	37
7	Equipment calibration status	39
8	Measurement uncertainties	40
9	Revision history	41
10	Additional documents	41



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

List of figures

Figure 1: Setup for radiated emission test below 30 MHz	11
Figure 2: Setup for radiated emission test from 30 MHz to 1 GHz	12
Figure 3: Setup for radiated emission test above 1 GHz.....	13
Figure 4: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel 1 in position 1	19
Figure 5: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel 2 in position 2.....	20
Figure 6: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel 1 in position 3.....	21
Figure 7: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel 2 in position 3.....	22
Figure 8: Chart of spurious radiated emission final test 1 GHz to 10 th harmonic, channel 1 in position 1	24
Figure 9: Chart of spurious radiated emission final test 1 GHz to 10 th harmonic, channel 2 in position 2.....	25
Figure 10: Test protocol correction for pulse operation (duty cycle) on channel 1, first pulse	27
Figure 11: Test protocol correction for pulse operation (duty cycle) on channel 1, second pulse ..	28
Figure 12: Test protocol correction for pulse operation (duty cycle) on channel 2, first pulse	29
Figure 13: Test protocol correction for pulse operation (duty cycle) on channel 2, second pulse ..	30
Figure 14: Chart of 20 dB bandwidth test, channel 1	32
Figure 15: Chart of 20 dB bandwidth test, channel 2	33
Figure 16: Chart of occupied bandwidth test, channel 1	35
Figure 17: Chart of occupied bandwidth test, channel 2	36
Figure 18: Test protocol of signal deactivation.....	38



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

List of tables

Table 1: Devices used for testing.....	9
Table 2: Test results of field strength of fundamental wave	16
Table 3: Final result of spurious radiated emission test 30 MHz to 1 GHz, channel 1	21
Table 4: Final result of spurious radiated emission test 30 MHz to 1 GHz, channel 2	22
Table 5: Final result of spurious radiated emission test 1 GHz to 10 th harmonic, channel 1	24
Table 6: Final result of spurious radiated emission test 1 GHz to 10 th harmonic, channel 2	25
Table 7: Final results of 20 dB bandwidth test, channel 1	32
Table 8: Final results of 20 dB bandwidth test, channel 2	33
Table 9: Final results of occupied bandwidth test, channel 1	35
Table 10: Final results of occupied bandwidth test, channel 2	36
Table 11: Equipment calibration status.....	39
Table 12: Measurement uncertainty	40




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

1 Summary of test results

47 CFR part and section	Test	Equivalent to IC radio standard(s)	Page	Result	Note(s)
15.207(a)	AC power line conducted emissions 150 kHz to 30 MHz	RSS-Gen, 7.4	---	Not applicable	---
15.231(b)	Field strength of the fundamental wave	RSS-210, A1.2 a	15	Passed	---
15.231(b)	Spurious emissions (magnetic field) 9 kHz – 30 MHz	RSS-210, A1.2 b	17	Passed	---
15.231(b)	Spurious emissions radiated (electrical field) 30 MHz – 10 th harmonic	RSS-210, A1.2 b	17	Passed	---
15.231(b)2	Correction for pulse operation (duty cycle)	RSS-Gen 8.2	26	Passed	---
15.231(a)	Signal deactivation	RSS-210, A1.1(a)	37	Passed	---
15.231(c)	20 dB bandwidth	RSS-Gen, 6.7	31	Passed	---
	Occupied bandwidth (99 %)	RSS-Gen, 6.7	34	Passed	---

Straubing, August 17, 2018



Jennifer Ebner
Test engineer
EMV **TESTHAUS** GmbH



Konrad Graßl
Head of radio department
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

2 Referenced publications

The tests were performed according to following standards:

<i>FCC Rules and Regulations Part 15, Subpart A – General (November, 2017)</i>	
Part 15, Subpart A, Section 15.31	Measurement Standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths
<i>FCC Rules and Regulations Part 15, Subpart C – Intentional Radiators (November, 2017)</i>	
Part 15, Subpart C, Section 15.203	Antenna Requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.231	Periodic operation in the band 40.66 MHz - 40.7 MHz and above 70 MHz
<i>OET Bulletin 65, 65A, 65B, 65C 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields</i>	
ANSI C63.10: 2013	Procedures for Compliance Testing of Unlicensed Wireless Devices
<i>RSS-210 – Licence-Exempt Radio Apparatus: Category I Equipment (August, 2016)</i>	
Annex A 1.1	<i>Types of Momentarily Operated Devices</i>
Annex A 1.2	<i>Field Strengths</i>
<i>RSS-Gen Issue 5 – General Requirements for Compliance of Radio Apparatus</i>	
Section 6.7	Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

3 Equipment under test (EUT)

Product type:	RF Transmitter		
Model name:	A2C17105000		
Serial number(s):	Prototype		
Applicant:	Continental Automotive GmbH		
Manufacturer:	Continental Automotive GmbH		
Version:	Hardware:	n/a	
	Software:	n/a	
Additional modifications:	None		
Short description:	The EUT is a remote unit with Transponder, PASE and Remote Keyless Entry functionality. The transponder function is based on the Immo frontend inside the microcontroller and one of the external LF coils. The PASE function is part of the PEPS protocol (Passive Entry and Passive Start) that provides enhanced customer convenience and security via a customer carried, passively or actively enabled Passive Key (PK) communicating with the vehicle through an RF Receiver (RFM) to the BCM with an integrated PEPS microcontroller.		
FCC ID:	KR5A2C17105000		
IC registration number:	7812D-A2C17105000		
Frequency range:	Above 70 MHz		
Operating frequencies:	433.6 MHz and 434.24 MHz		
Channel spacing:	not specified		
Number of RF channels:	2		
System type:	Remote control		
Modulation type(s):	FSK		
Antenna type(s):	PCB antenna		
Antenna gain(s):	Approximately 0 dBi		
Power supply:	Leclanché or lithium battery supply		
	Nominal voltage:	3.0 V	
	Minimum voltage:	2.2 V	
	Maximum voltage:	3.3 V	
Temperature range:	-20 °C to +60 °C		
Device type:	<input checked="" type="checkbox"/> Portable	<input type="checkbox"/> Mobile	<input type="checkbox"/> Fixed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

4 Test configuration and mode of operation

4.1 Test configuration

Device	Type designation	Serial or inventory no.	Manufacturer
<i>EUT</i>			
RF Transmitter with test mode	A2C17105000	Prototype	Continental Automotive GmbH
RF Transmitter with application mode	A2C17105000	Prototype	Continental Automotive GmbH

Table 1: Devices used for testing

4.2 Mode of operation

EUT was tested in following mode(s) of operation:

Test mode/ EUT	Behavior
Prototype sample, A2C17105000 with test mode	Modulated carrier wave on channel 1 (433.6 MHz) and channel 2 (434.24 MHz)
Prototype sample, A2C17105000 with application mode	Modulated carrier wave on channel (433.6 MHz) and channel 2 (434.24 MHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

5 Measurement Procedures

5.1 20 dB bandwidth

The 20 dB bandwidth test method refers to section 6.9.2 of ANSI C63.10 and shall be as follows:

Spectrum analyzer settings:

Spectrum analyzer center frequency = nominal EUT channel center frequency

Span = between two times and five times the OBW

IF filter bandwidth (3 dB RBW) = between 1 % to 5 % of the OBW

VBW \geq 3 x RBW

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Measure the maximum width of the emission that is constrained by the frequencies associated with the two markers (upper and lower frequencies) that are at or slightly below the 20 dB down amplitude relative to the maximum level measured in the fundamental emission.

If possible, use the automatic bandwidth measurement capability of the spectrum analyzer using the X dB bandwidth mode with X set to 20 dB. Submit this plot(s).

The 20 dB bandwidth is the frequency difference between the two markers.

For test setup see clause 5.4.

5.2 Occupied bandwidth (99%)

The occupied bandwidth test method refers to section 6.9.3 of ANSI C63.10 and shall be as follows.

Spectrum analyzer settings:

Span = between 1.5 times and 5.0 times of the OBW, centered on a channel

RBW \geq in the range of 1% to 5% of the OBW

VBW \geq approximately three times the RBW

Sweep time = auto coupled

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Use the 99% power bandwidth function of the spectrum analyzer and report the measured bandwidth.

For test setup see clause 5.4.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

5.3 Spurious radiated emissions 9 kHz to 10th harmonic

For test setup and test method see clause 5.4.

5.4 Radiated emissions

5.4.1 Radiated emissions below 30 MHz

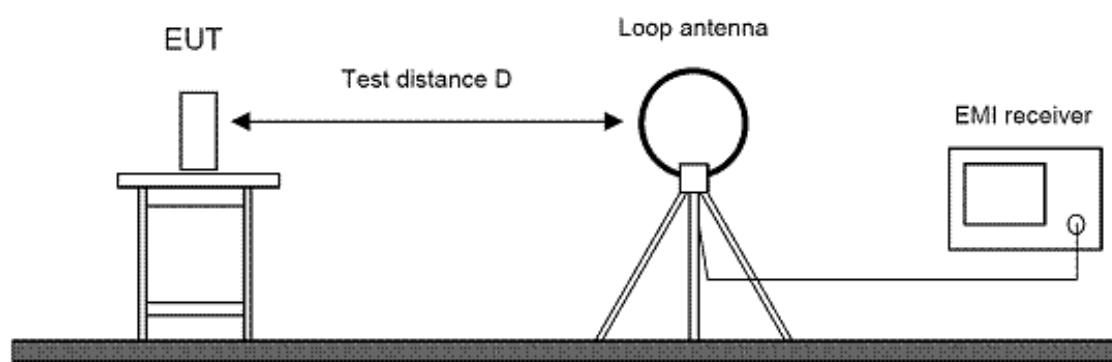


Figure 1: Setup for radiated emission test below 30 MHz

The test method for radiated emissions below 30 MHz refers to section 6.4 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 0.8 meter above ground. The receiving antenna is located 3 meters from the EUT. The test setup is placed inside a compact diagnostic chamber.
2. EUT and all peripherals are powered on.
3. The loop antenna is set in parallel with the antenna of the EUT.
4. The EMI receiver performs a scan from 9 kHz to 30 MHz with peak detector and measurement bandwidth set to 200 Hz for frequencies up to 150 kHz and 9 or 10 kHz for frequencies above.
5. The turn table is rotated to 8 different positions (360° / 8).
6. The antenna is set in line with the antenna of the EUT and steps 4 and 5 are repeated.
7. Then the test setup is placed in an OATS with 3 m distance and all peak values over the limit or with less margin than 10 dB are marked and re-measured with a quasi-peak detector except for the frequency bands 9 to 90 kHz and 110 to 490 kHz, where average detector applies.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The highest value for each frequency is recorded.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

5.4.2 Radiated emissions from 30 MHz to 1 GHz

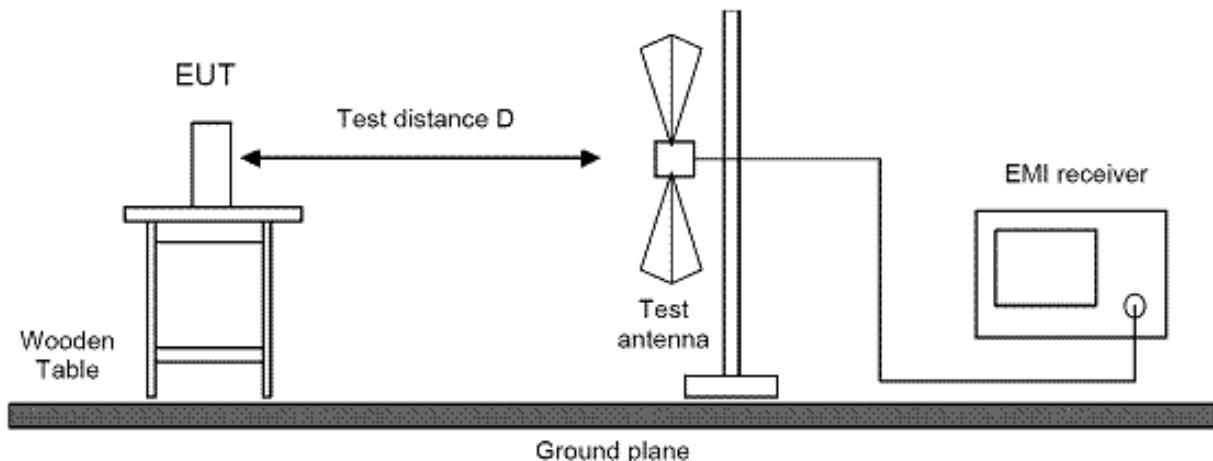


Figure 2: Setup for radiated emission test from 30 MHz to 1 GHz

The test method for radiated emissions from 30 MHz to 1 GHz refers to section 6.5 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 0.8 meter above ground. The receiving antenna is located 3 meters from the EUT. The test setup is placed inside a compact diagnostic chamber.
2. EUT and all peripherals are powered on.
3. The broadband antenna is set to vertical polarization.
4. The EMI receiver performs a scan from 30 MHz to 1000 MHz with peak detector and measurement bandwidth set to 120 kHz.
5. The turn table is rotated to 6 different positions ($360^\circ / 6$).
6. The antenna polarization is changed to horizontal and steps 4 and 5 are repeated.
7. Then the test setup is placed in an OATS at 3 m distance and all peak values over the limit or with less margin than 10 dB are marked and re-measured with a quasi-peak detector.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna is varied between 1 meter and 4 meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
10. The highest value for each frequency is recorded.

5.4.3 Radiated emissions above 1 GHz

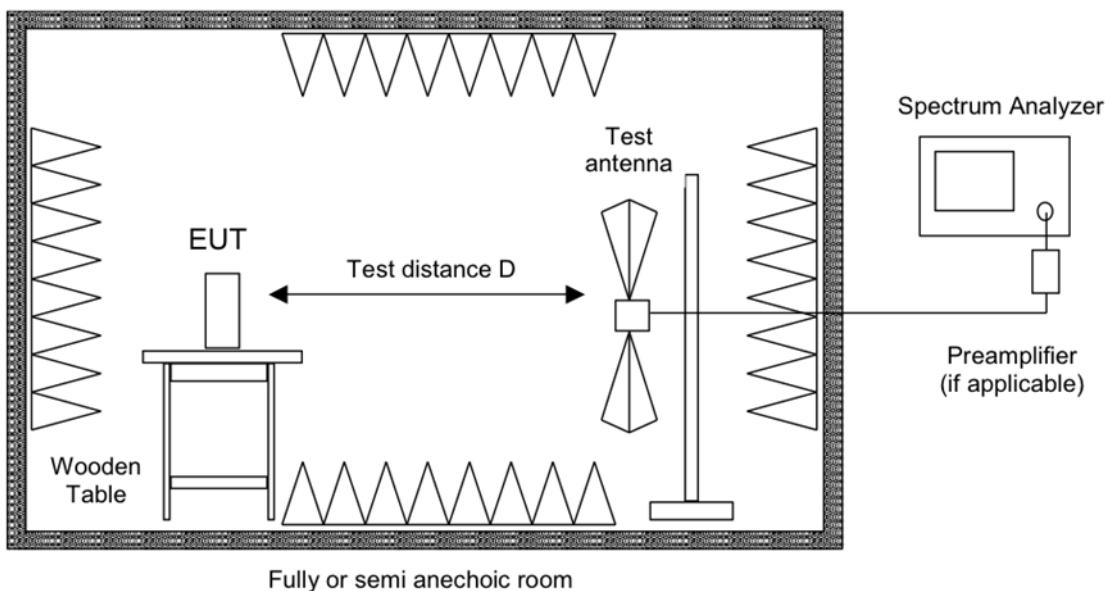


Figure 3: Setup for radiated emission test above 1 GHz

The test method for radiated emissions above 1 GHz refers to section 6.6 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 1.5 meter above ground. The test setup is placed inside a semi-anechoic chamber with RF absorbers on the floor.
2. EUT and all peripherals are powered on.
3. To identify the critical frequencies, extrapolatory radiated emission tests are performed at a closer distance than 3 meters (e.g. 1 meter). The critical frequencies found are noted.
4. For pre-scan the receiving antenna is located 3 meters from the EUT.
5. The broadband horn antenna is set to vertical polarization.
6. The EMI receiver performs a scan from 1 GHz to the 10th harmonic of the fundamental frequency with peak and average detector activated simultaneously and measurement bandwidth set to 1 MHz. The trace data is recorded using the max hold function.
7. The turntable is rotated in steps of 15°.
8. After a full turn by 360° the antenna polarization is changed to horizontal and steps 4 and 5 are repeated.
9. After the scan all peak values over the limit or with less margin than 10 dB are marked. If critical frequencies recorded during extrapolatory radiated emission tests are not contained, they are added to this list.
10. Emission levels at listed frequencies are maximized by moving the turntable and varying the antenna height until maximum of emission is found.
11. The turntable is rotated by 360 degrees to determine the position of the highest radiation.

12. The height of the broadband receiving antenna is varied between 1 meter and the upper height above ground to find the maximum emission field strength of both horizontal and vertical polarization. For equipment that is tested in multiple orientations, the upper height is limited to 2.5 meters or 0.5 meters above the top of the EUT, whichever is higher. For all other equipment the upper height is 4 meters.
13. The highest value for each frequency is recorded.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 6.

6.1 Field strength of fundamental wave

47 CFR part and section: 15.231(b)
Equivalent to IC radio standard(s) RSS-210, A1.2 a
Measurement procedure: See 5.3

Performed by:	Jennifer Ebner	Date of test:	August 9, 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input type="checkbox"/> Open Area Test Site (OATS)	---	EMV TESTHAUS	E00354
<input checked="" type="checkbox"/> Semi Anechoic Chamber (SAC)	---	Albatross Projects	E00716
<input type="checkbox"/> Anechoic Chamber (AC)	---	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver (SAC)	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier	AMF-5D-00501800	Miteq	W00089
<input type="checkbox"/> Preamplifier	AMF-6F-16002650	Miteq	W00090
<input type="checkbox"/> Preamplifier	ALS05749	MIWEKO	W01007
<input type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/> TRILOG broadband antenna (CDC)	VULB 9163	Schwarzbeck	E00012
<input type="checkbox"/> TRILOG broadband antenna (OATS)	VULB 9163	Schwarzbeck	E00013
<input checked="" type="checkbox"/> TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
<input type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00053
<input type="checkbox"/> Horn antenna	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/> Measurement software	E10	ib comPLAN	E00443
<input checked="" type="checkbox"/> Measurement software	EMC 32	Rohde & Schwarz	E00777



EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.1.2 Limit according to 15.231(b)

Frequency [MHz]	Field strength Fs [μ V/m]	Field strength [dB μ V/m]	Measurement distance d [m]
40.66 – 40.70	2250	67	3
70 – 130	1250	62	3
130 – 174	1250 to 3750*	62 to 71.4*	3
174 – 260	3750	71.4	3
260 – 470	3750 to 12500*	71.4 to 81.9*	3
Above 470	12500	81.9	3

*Linear interpolation

6.1.3 Test Result

f [MHz]	Level PK [dB μ V/m]	Limit PK [dB μ V/m]	Margin PK [dB]	Duty cycle factor [dB]	Level AV [dB μ V/m]	Limit AV [dB μ V/m]	Margin AV [dB]
433.568900	83.04	100.8	17.76	-6.0	77.04	80.8	3.76
434.247500	83.96	100.8	16.84	-6.0	77.69	80.8	3.11

Table 2: Test results of field strength of fundamental wave



6.2 Spurious radiated emissions 9 kHz to 10th harmonic

47 CFR part and section: 15.231(b)
Equivalent to IC radio standard(s) RSS-210, A1.2 b
Measurement procedure: See 5.3

Performed by:	Jennifer Ebner	Date of test:	August, 9 to August, 10 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input type="checkbox"/> Open Area Test Site (OATS)	---	EMV TESTHAUS	E00354
<input checked="" type="checkbox"/> Semi Anechoic Chamber (SAC)	---	Albatross Projects	E00716
<input type="checkbox"/> Anechoic Chamber (AC)	---	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver (SAC)	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier	AMF-5D-00501800	Miteq	W00089
<input type="checkbox"/> Preamplifier	AMF-6F-16002650	Miteq	W00090
<input checked="" type="checkbox"/> Preamplifier	ALS05749	MIWEKO	W01007
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/> TRILOG broadband antenna (CDC)	VULB 9163	Schwarzbeck	E00012
<input type="checkbox"/> TRILOG broadband antenna (OATS)	VULB 9163	Schwarzbeck	E00013
<input checked="" type="checkbox"/> TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00053
<input type="checkbox"/> Horn antenna	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/> Measurement software	E10	ib comPLAN	E00443
<input checked="" type="checkbox"/> Measurement software	EMC 32	Rohde & Schwarz	E00777



EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.2.2 Limits < 1 GHz

Frequency [MHz]	Field strength F_s [μ V/m]	Field strength [dB μ V/m]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Recalculation factor is determined according to ANSI C63.10, section 6.4.4.2 “Extrapolation from the measurement of a single point”:

$$d_{\text{near field}} = 47.77 / f_{\text{MHz}}, \text{ or}$$

$$f_{\text{MHz}} = 47.77 / d_{\text{near field}}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula for determining the recalculation factor:

$$f_{\text{MHz}}(300 \text{ m}) \approx 0.159 \text{ MHz}$$

$$f_{\text{MHz}}(30 \text{ m}) \approx 1.592 \text{ MHz}$$

$$f_{\text{MHz}}(3 \text{ m}) \approx 15.923 \text{ MHz}$$

For $9 \text{ kHz} \leq f \leq 159 \text{ kHz}$ and $490 \text{ kHz} < f \leq 1.592 \text{ MHz}$:

$$\text{Recalculation factor} = -40 \log(d_{\text{limit}} / d_{\text{measure}})$$

For $159 \text{ kHz} < f \leq 490 \text{ kHz}$ and $1.592 \text{ MHz} < f \leq 15.923 \text{ MHz}$:

$$\text{Recalculation factor} = -40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$$

For $f > 15.923 \text{ MHz}$:

$$\text{Recalculation factor} = -20 \log(d_{\text{limit}} / d_{\text{measure}})$$

The limits in the graphics and value lists are derived from the general radiated emission limits as specified in 15.209 using the recalculation factor as described above.

6.2.3 Limits > 1 GHz

< 54 dB μ V/m (average detector) inside restricted bands

< 74 dB μ V/m (peak detector) inside restricted bands



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.2.4 Test results from 9 kHz to 30 MHz

Test distance: Prescan: 3 m
 Final scan: 3 m 10 m m
 Polarisation: parallel in line angle:°
 EUT Position: Position 1 Position 2 Position 3

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
9 kHz – 90 kHz	100 Hz	200 Hz	PK	AV	100 ms	2 s	20 dB
90 kHz – 110 kHz	100 Hz	200 Hz	PK	QPK	100 ms	2 s	20 dB
110 kHz – 150 kHz	100 Hz	200 Hz	PK	AV	100 ms	2 s	20 dB
150 kHz – 490 kHz	4.5 kHz	9 kHz	PK	AV	100 ms	2 s	20 dB
490 kHz – 30 MHz	4.5 kHz	9 kHz	PK	QPK	100 ms	2 s	20 dB

Note: In this test report only the charts of the worst case positions are shown. These are found through premeasurements.

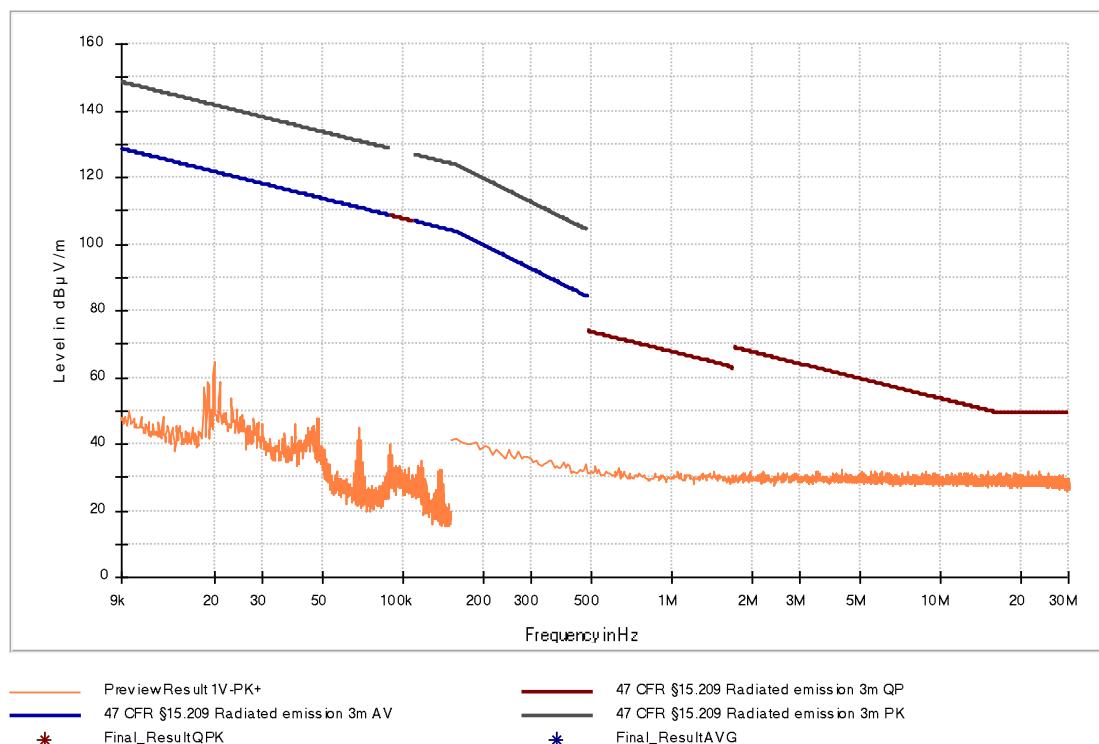


Figure 4: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel 1 in position 1

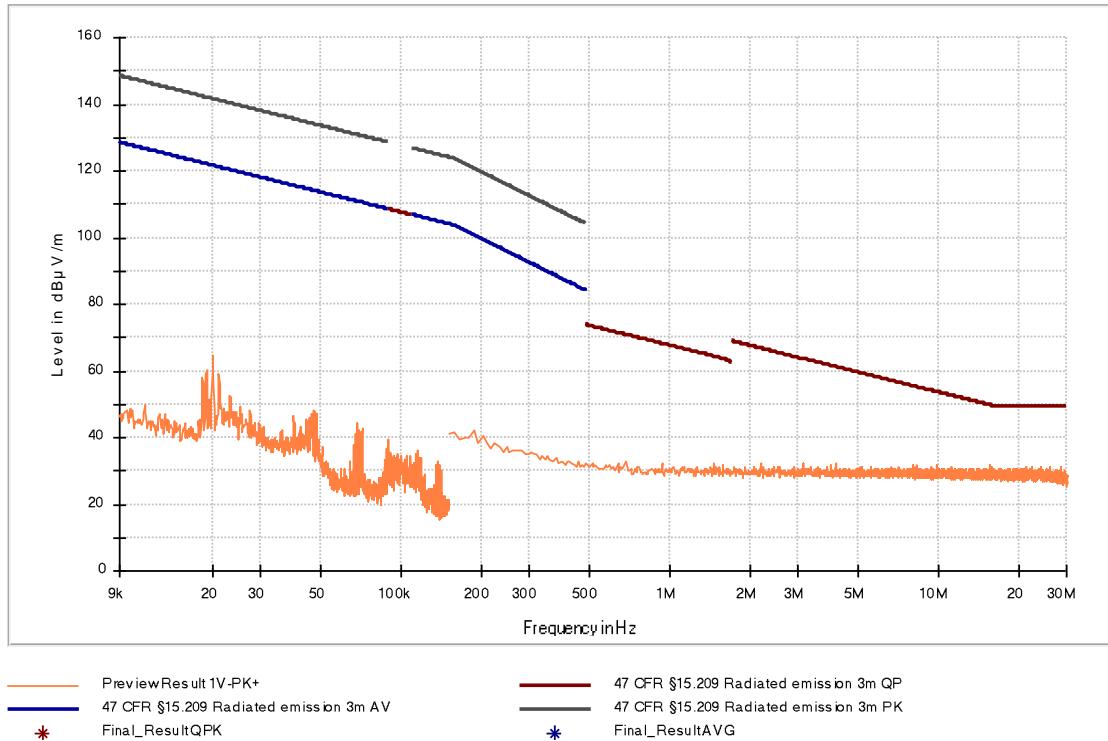


Figure 5: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel 2 in position 2



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.2.5 Test results from 30 MHz to 1 GHz

Test distance: Prescan: 3 m
 Final scan: 3 m 10 m m
 Polarisation: horizontal vertical
 EUT Position: Position 1 Position 2 Position 3

Frequency range	Step size	IF Band-width	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
30 MHz – 1 GHz	50 kHz	120 kHz	PK	PK	Coupled	1 s	20 dB

Note: In this test report only the charts of the worst case positions are shown. These are found through premeasurements

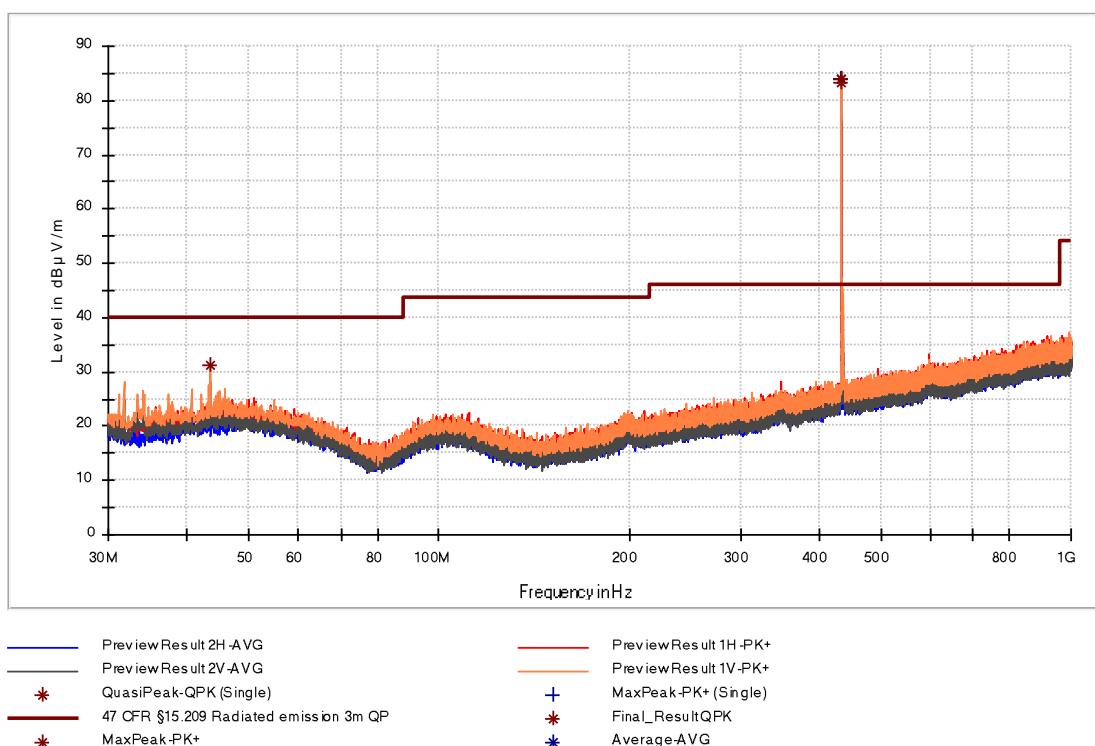


Figure 6: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel 1 in position 3

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
43.434500	31.34	40.00	8.66	1000.0	120.000	100.0	V	260.0

Table 3: Final result of spurious radiated emission test 30 MHz to 1 GHz, channel 1



EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

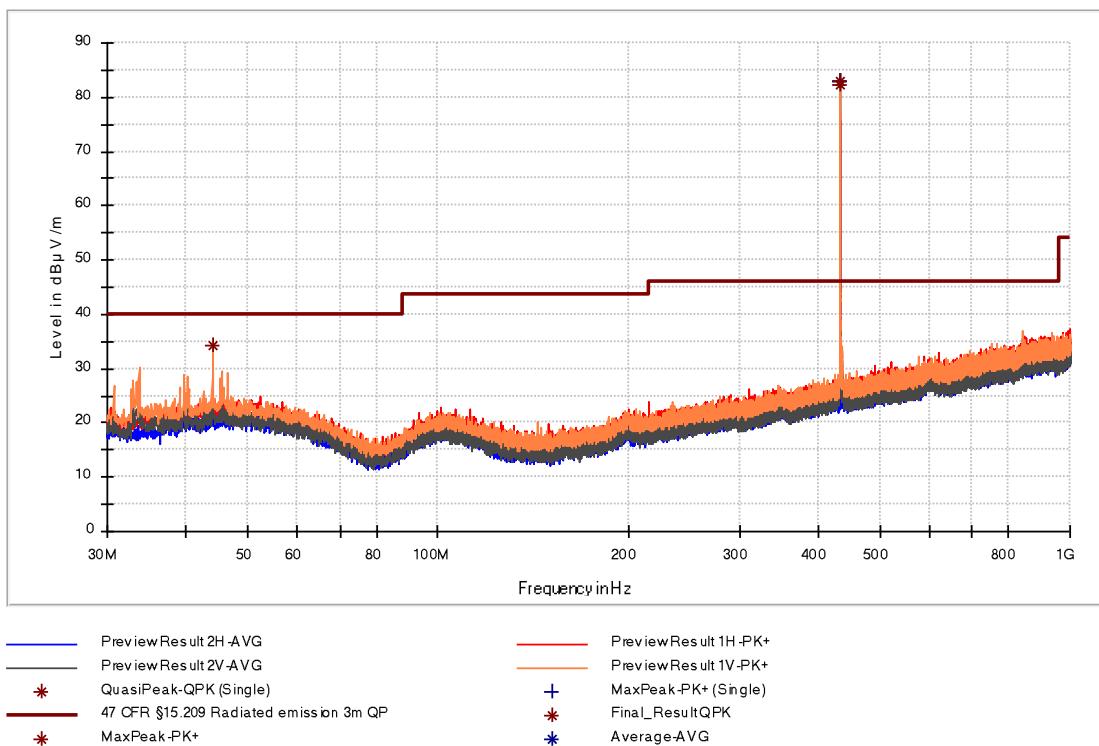


Figure 7: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel 2 in position 3

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
44.113500	34.21	40.00	5.79	1000.0	120.000	212.0	V	105.0

Table 4: Final result of spurious radiated emission test 30 MHz to 1 GHz, channel 2



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.2.7 Test results from 1 GHz to 10th harmonic

Test distance: Prescan: 1 m 3 m m
Final scan: 3 m 10 m m
Polarisation: horizontal vertical
EUT Position: Position 1 Position 2 Position 3

Frequency range	Step size	IF Band-width	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
1 GHz – 5 GHz	250 kHz	1 MHz	PK	PK	50 ms	1000 ms	30 dB
1 GHz – 5 GHz	250 kHz	1 MHz	AV	AV	50 ms	1000 ms	30 dB

Note: In this test report only the charts of the worst case positions are shown. These are found through premeasurements.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

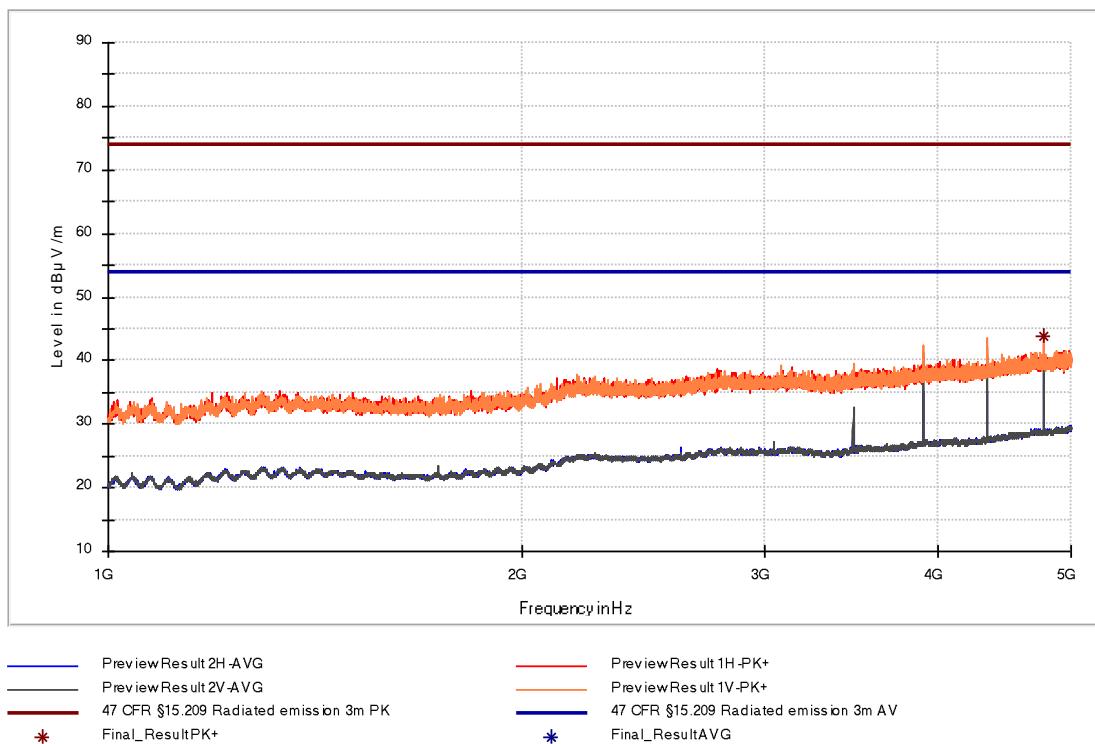


Figure 8: Chart of spurious radiated emission final test 1 GHz to 10th harmonic, channel 1 in position 1

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4776.6590	43.79	---	74.00	30.21	100.0	1000.000	136.0	V	30.0

Table 5: Final result of spurious radiated emission test 1 GHz to 10th harmonic, channel 1



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

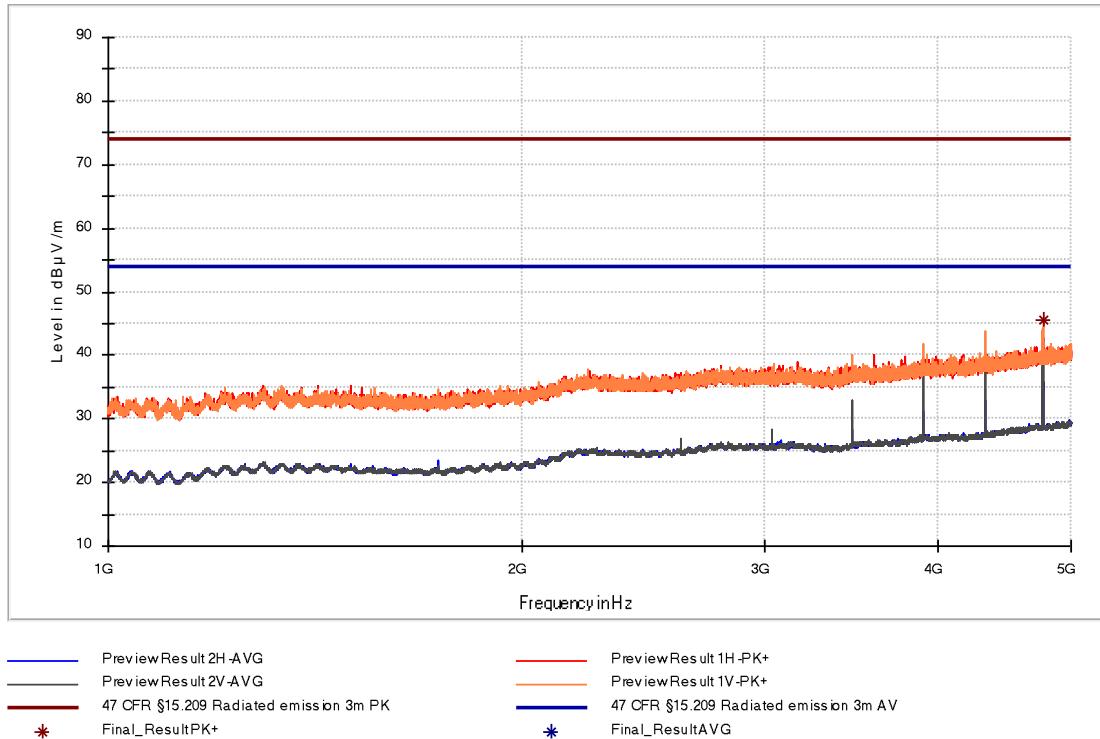


Figure 9: Chart of spurious radiated emission final test 1 GHz to 10th harmonic, channel 2 in position 2

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4769.377667	45.43	---	74.00	28.57	100.0	1000.000	236.0	V	7.0

Table 6: Final result of spurious radiated emission test 1 GHz to 10th harmonic, channel 2

6.3 Correction for pulse operation (duty cycle)

47 CFR part and section: 15.231(b)2
Equivalent to IC radio standard(s) RSS-Gen 8.2
Measurement procedure: See 5.2

Performed by:	Jennifer Ebner	Date of test:	August 14, 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Laboratory environment	---	---	---
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input checked="" type="checkbox"/> EMI test receiver	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> Measuring antenna set	---	---	A00088

6.3.2 Applicable standard

According to FCC Part 15C, Section 15.35(c):
The emissions from intentional radiators shall not exceed the effective field strength limits.

6.3.3 Description of measurement

The duty cycle is measured using stimulus signal from a car key as used in real application.
The duty cycle factor (dB) is calculated applying the following formula:

$$KE = 20 \lg \frac{t_{iB} * p}{T_w}$$

K_E	pulse operation correction factor	(dB)
t_{iw}	pulse duration for one complete pulse track	(ms)
t_{ib}	pulse duration for one pulse	(ms)
T_w	a period of the pulse track	(ms)
P	number of pulses in one train	(ms)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.3.4 Test results

$$KE = 20 \lg \frac{49.95 \text{ ms}}{100 \text{ ms}} = -6.03 \text{ dB} \rightarrow 6 \text{ dB max.}$$

Duty cycle	t_{iw} [ms]	T_w [ms]	t_{IB} [ms]	p	K_E [dB]
Within 100 ms	-	100.00	49.95	1	-6


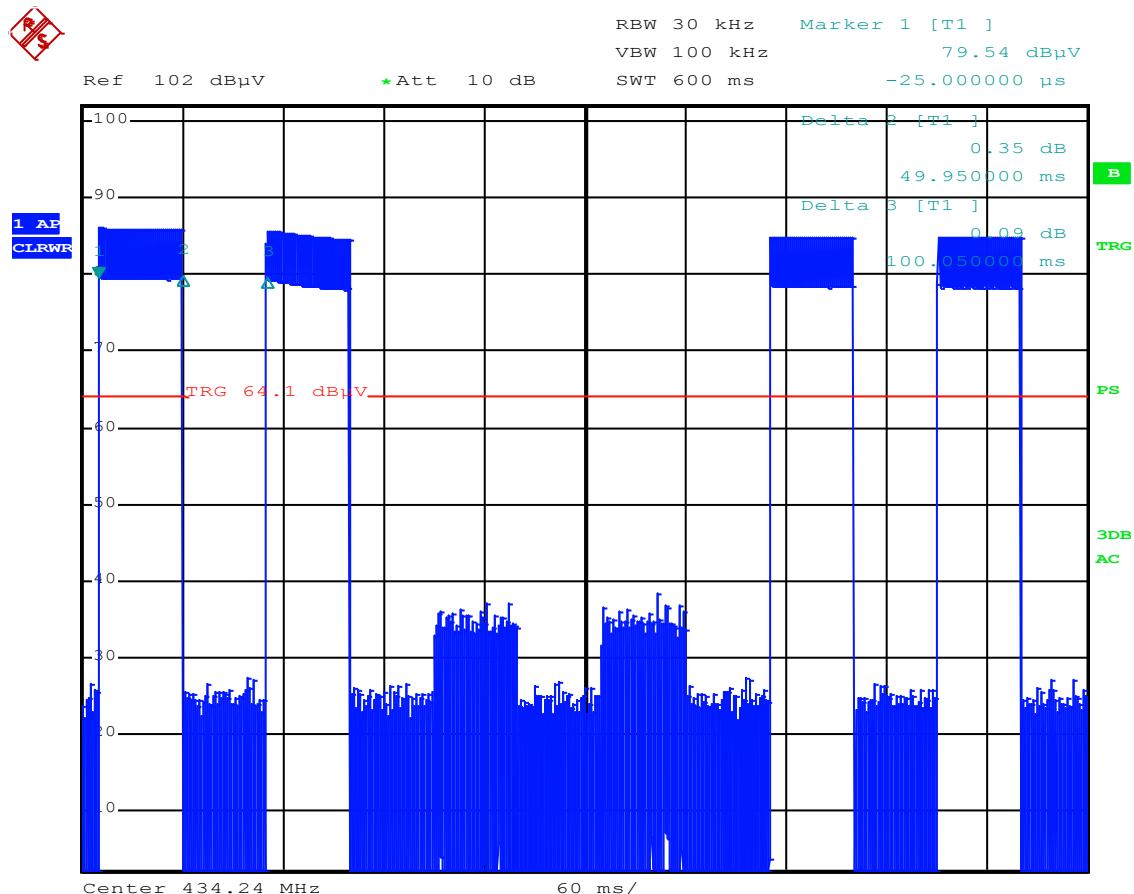


Figure 10: Test protocol correction for pulse operation (duty cycle) on channel 1, first pulse



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

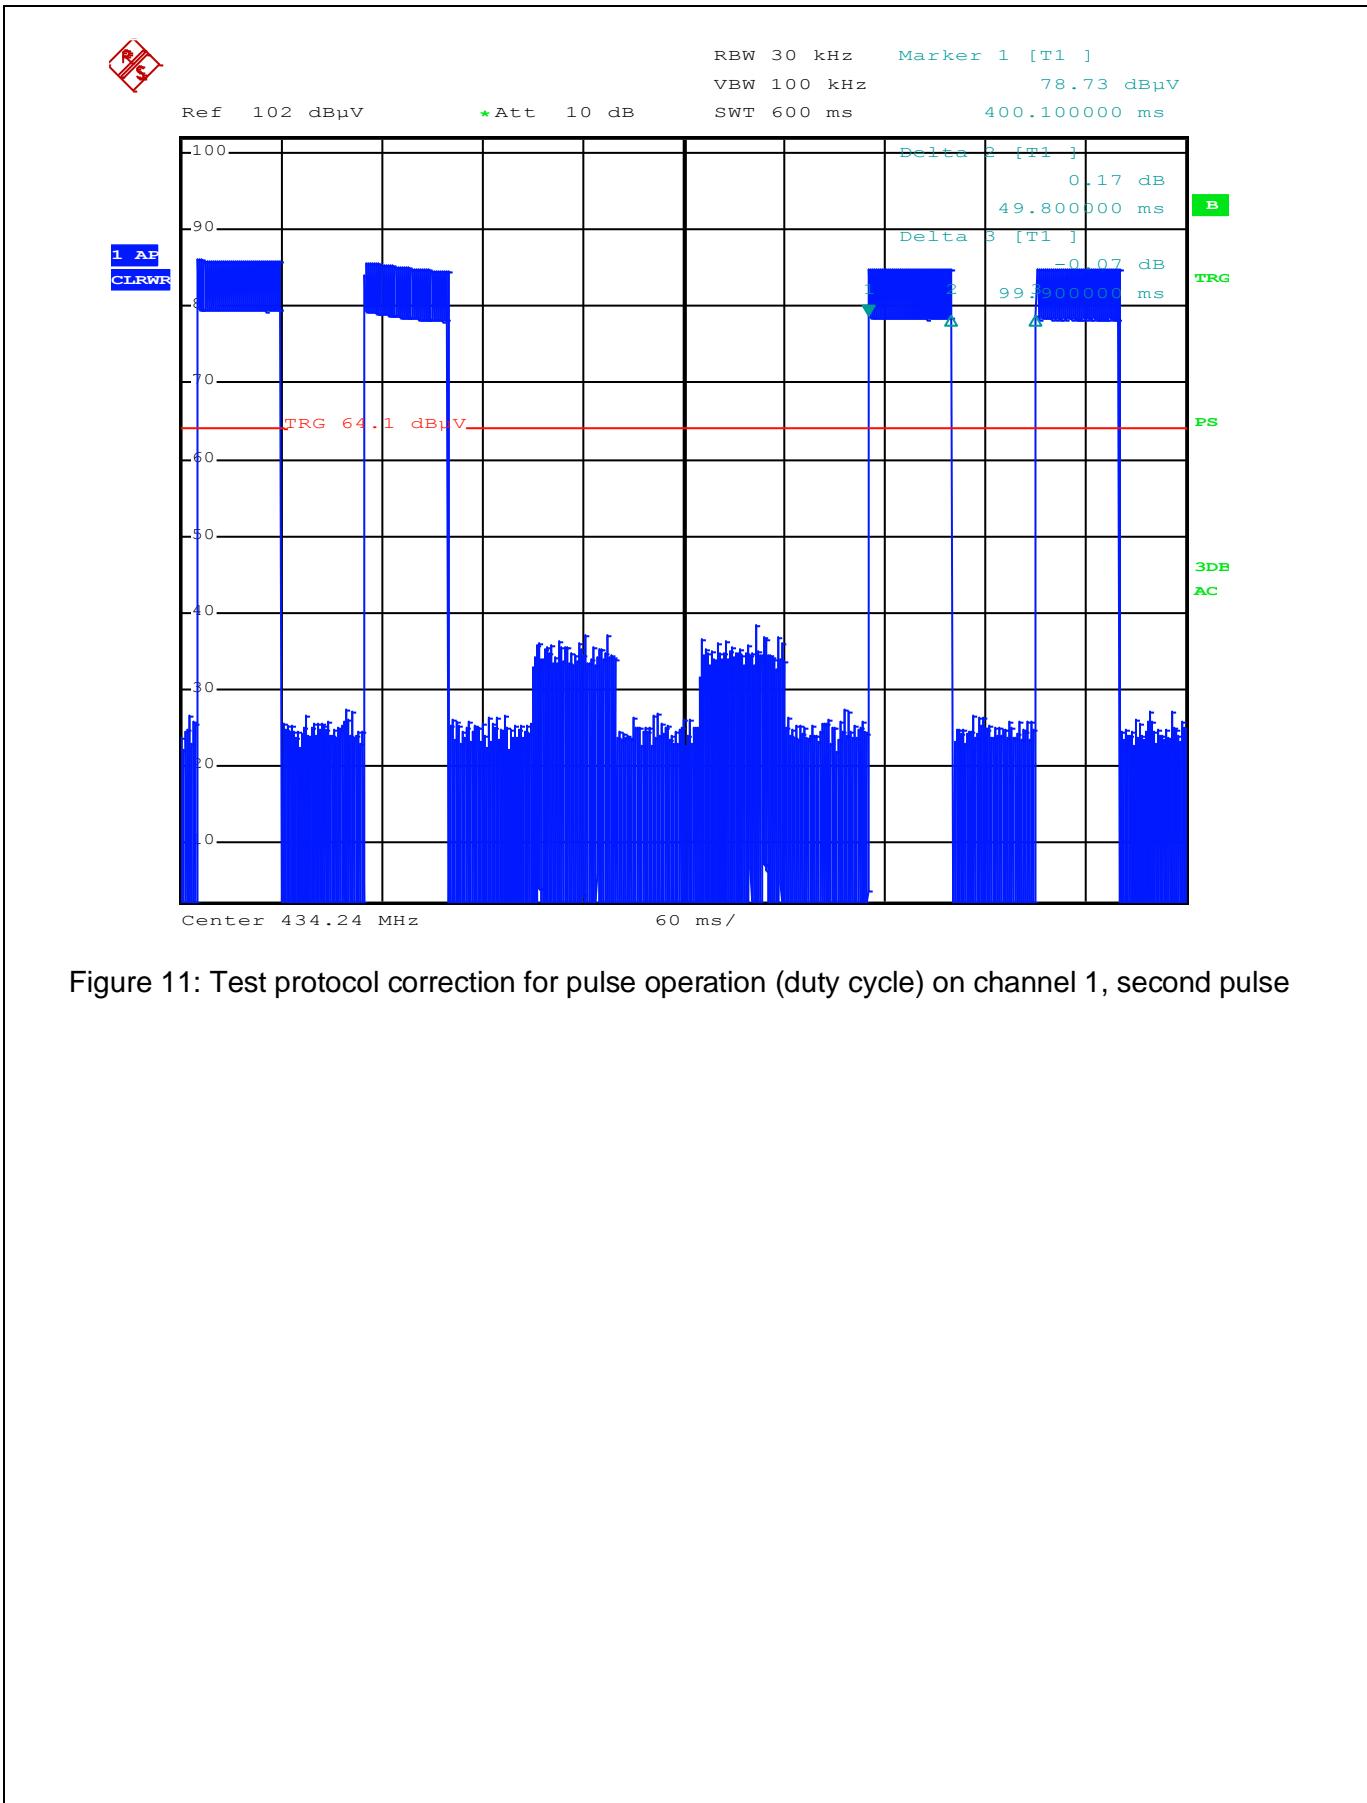

EMV TESTHAUS	EMV TESTHAUS GmbH Gustav-Hertz-Straße 35 94315 Straubing Germany	Continental Automotive GmbH RF Transmitter A2C17105000
180429-AU01+W01		Page 28 of 41

$$KE = 20 \lg \frac{49.925 \text{ ms}}{100 \text{ ms}} = -6.03 \text{ dB} \rightarrow 6 \text{ dB max.}$$

Duty cycle	t_{iw} [ms]	T_w [ms]	t_{iB} [ms]	p	K_E [dB]
Within 100 ms	-	100.00	49.925	1	-6

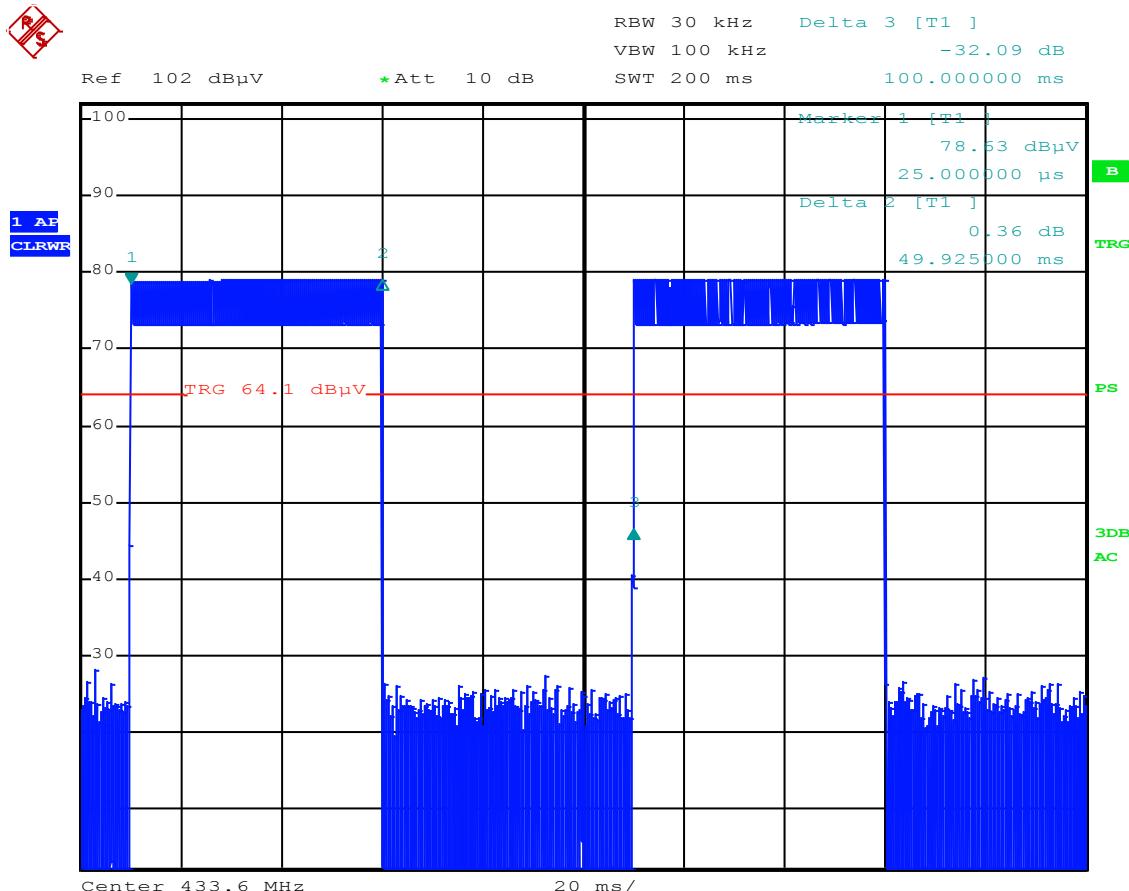


Figure 12: Test protocol correction for pulse operation (duty cycle) on channel 2, first pulse



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

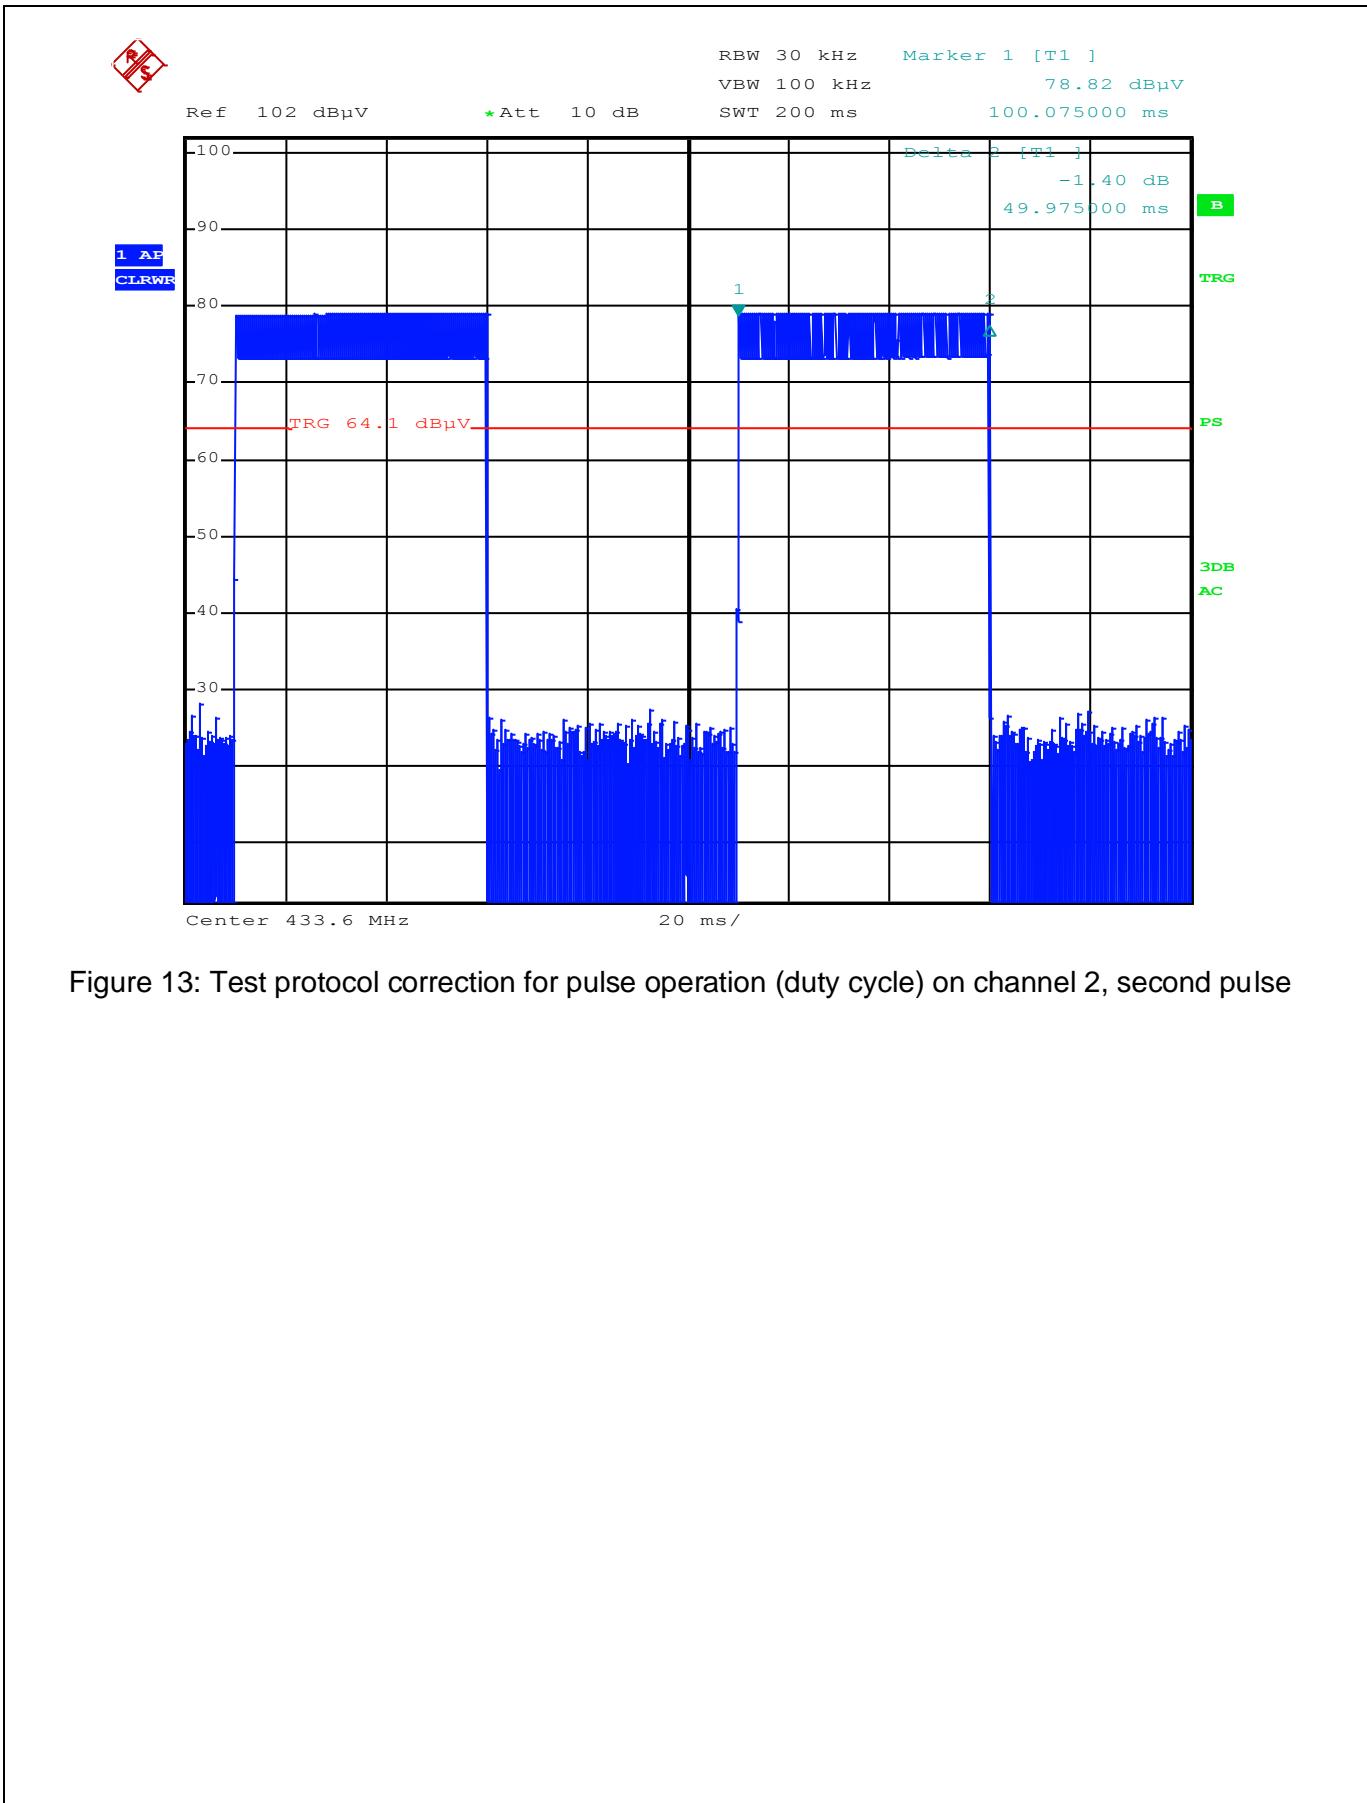


Figure 13: Test protocol correction for pulse operation (duty cycle) on channel 2, second pulse

6.4 20 dB bandwidth

47 CFR part and section: 15.231(c)
Equivalent to IC radio standard(s) RSS-Gen, 6.7
Measurement procedure (DTS): See 5.1

Performed by:	Jennifer Ebner	Date of test:	August 10, 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Laboratory environment	---	---	---
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input checked="" type="checkbox"/> EMI test receiver	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> Measuring antenna set	---	---	A00088

6.4.2 Limits according to FCC Part 15C Section 15.231(c):

Frequency [MHz]	20 dB BW limit dependent of the carrier [%]
70 – 900	0.25
Above 900	0.50



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.4.3 Test results

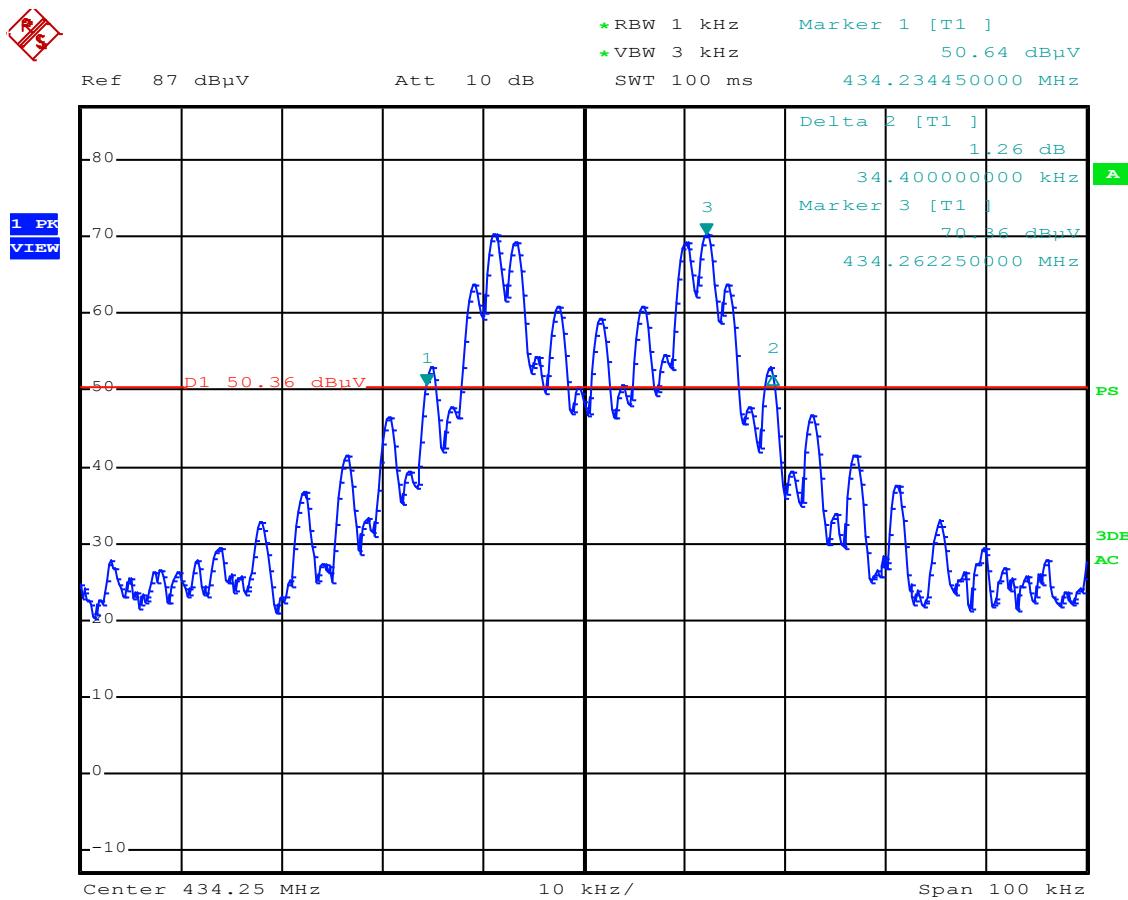


Figure 14: Chart of 20 dB bandwidth test, channel 1

f [MHz]	20dB-BW [kHz]	f _{lower} [MHz]	f _{upper} [MHz]	Limit [MHz]	Result
434.250	34.40	434.234	434.268	1.086	Passed

Table 7: Final results of 20 dB bandwidth test, channel 1

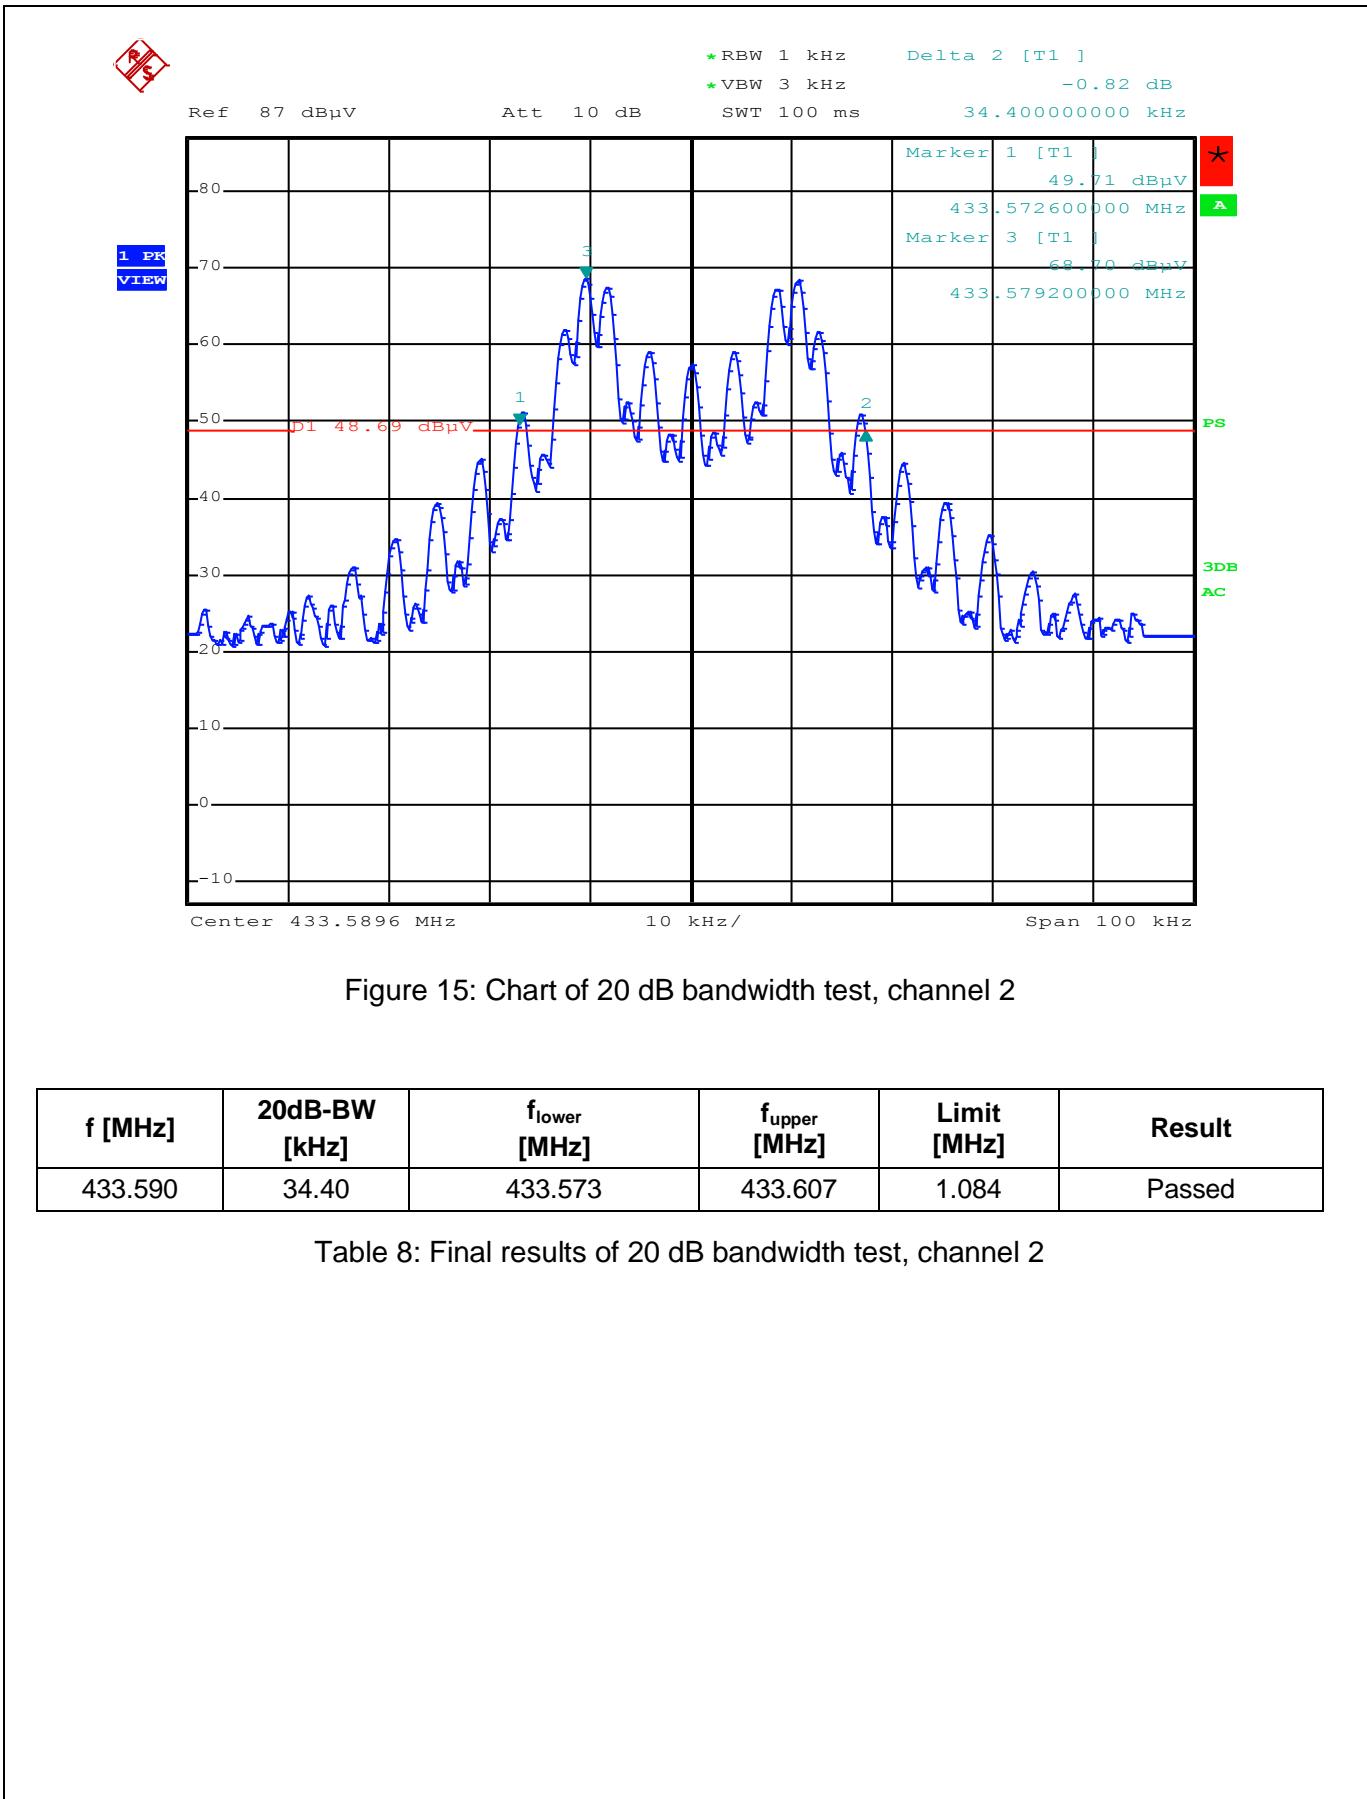


Figure 15: Chart of 20 dB bandwidth test, channel 2

f [MHz]	20dB-BW [kHz]	f_{lower} [MHz]	f_{upper} [MHz]	Limit [MHz]	Result
433.590	34.40	433.573	433.607	1.084	Passed

Table 8: Final results of 20 dB bandwidth test, channel 2

6.5 Occupied bandwidth

47 CFR part and section: ---
Equivalent to IC radio standard(s) RSS-Gen, 6.7
Measurement procedure: See 5.2

Performed by:	Jennifer Ebner	Date of test:	August 10, 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Laboratory environment	---	---	---
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input checked="" type="checkbox"/> EMI test receiver	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> Measuring antenna set	---	---	A00088

6.5.2 Limits

None -> results recorded for setting the proper reference level.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.5.3 Test results


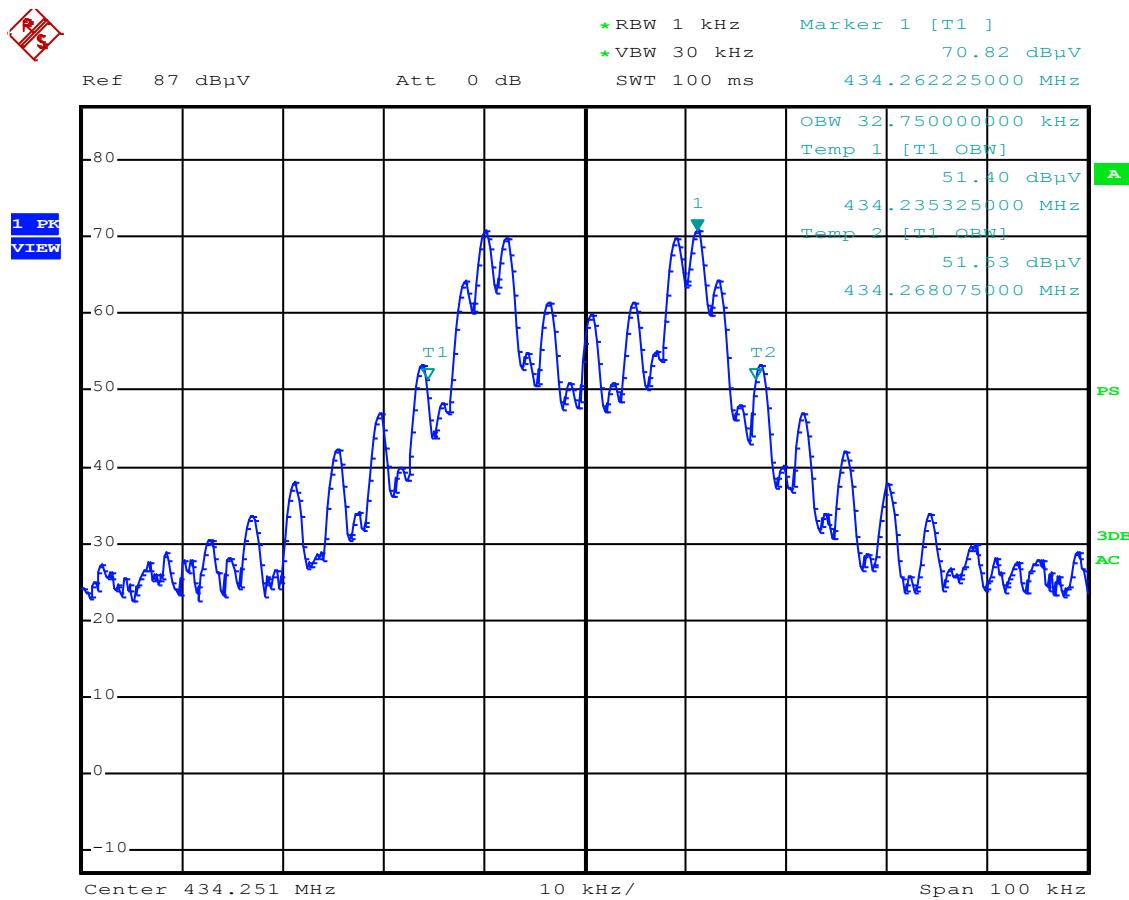


Figure 16: Chart of occupied bandwidth test, channel 1

f [MHz]	Occ. BW [kHz]	f _{lower} [MHz]	f _{upper} [MHz]	Result
434.251	32.75	434.235	434.268	No limit

Table 9: Final results of occupied bandwidth test, channel 1

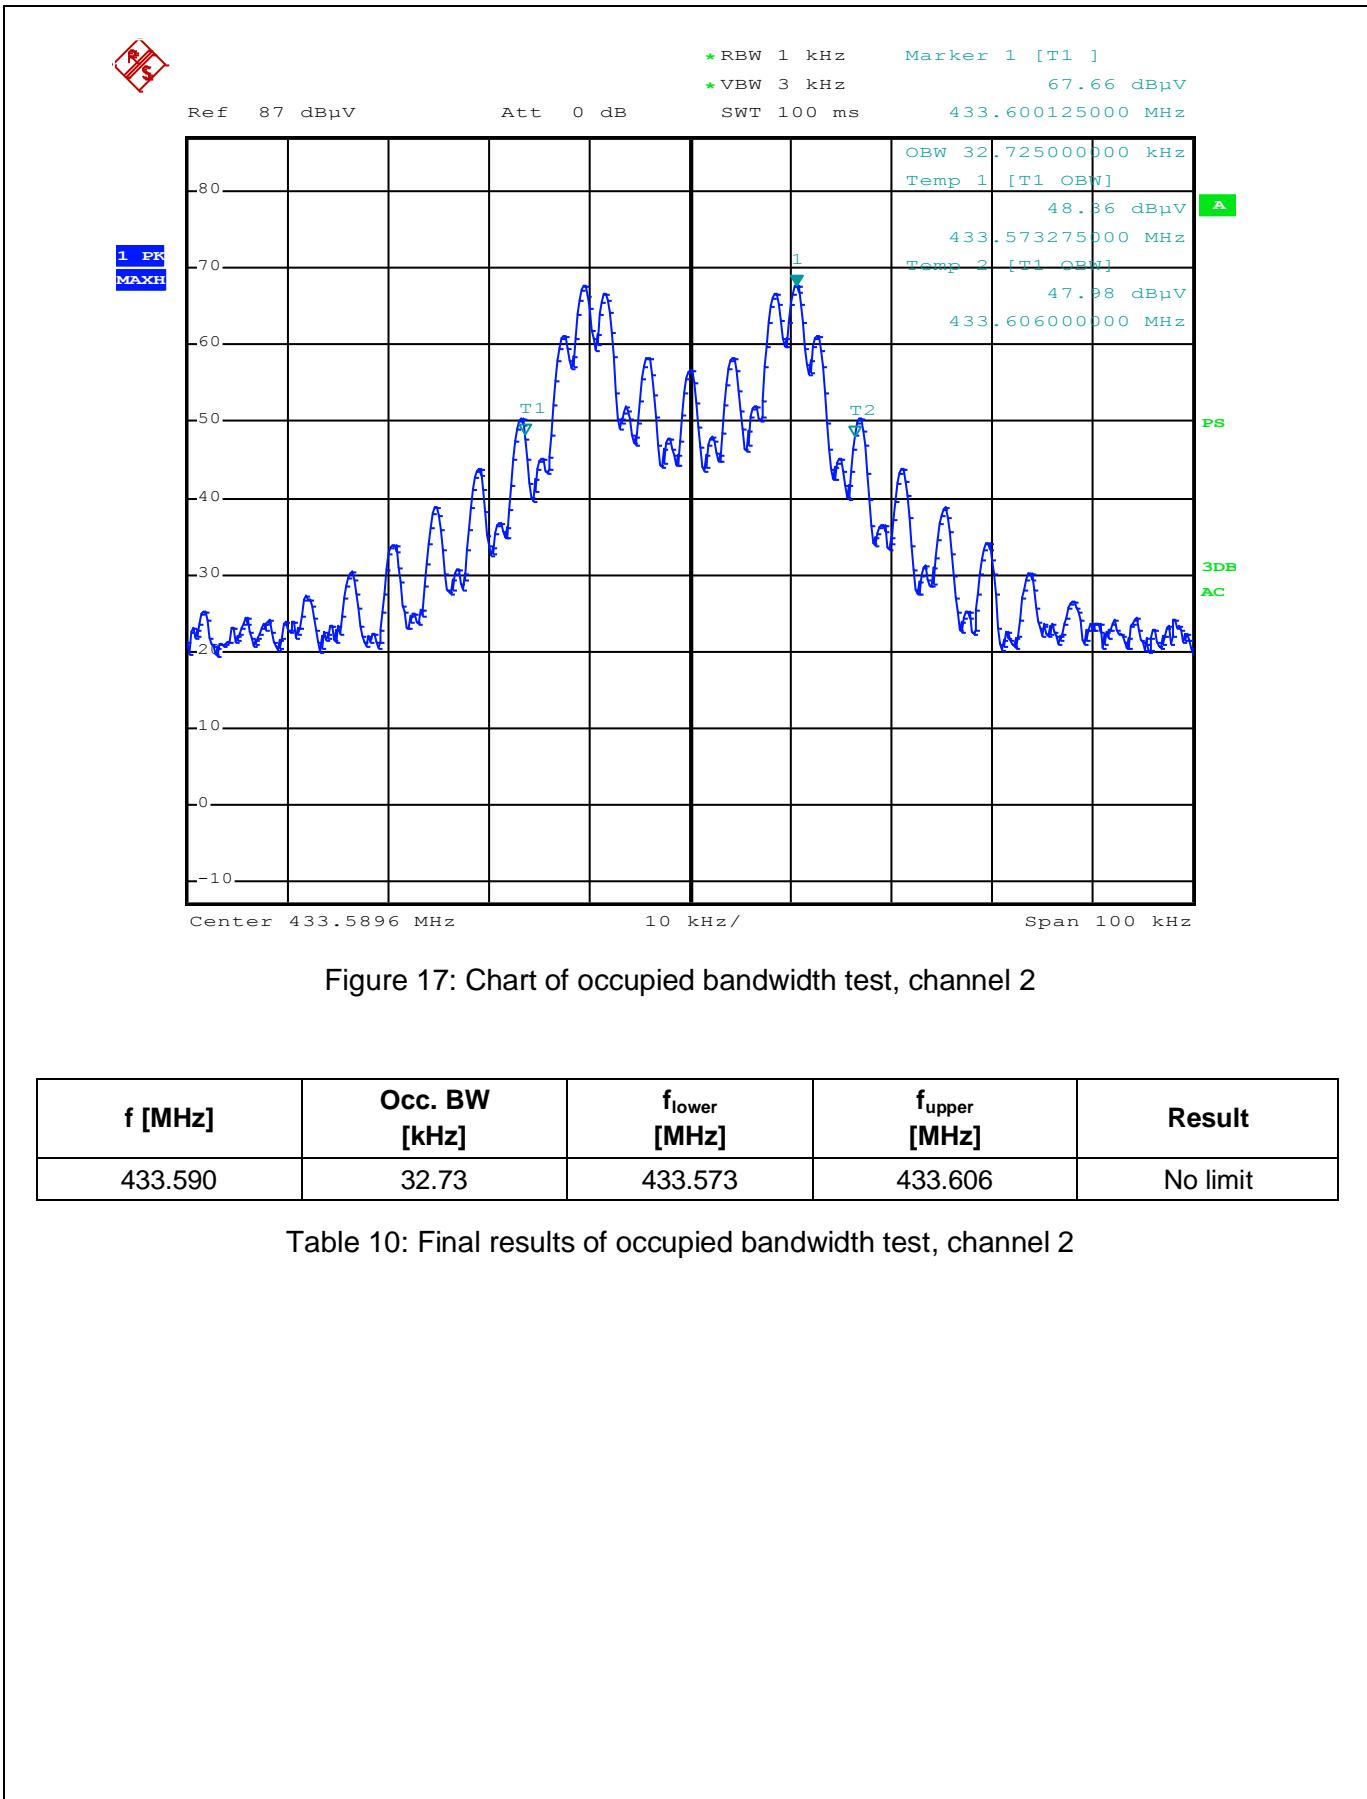

6.6 Signal deactivation

47 CFR part and section: 15.231(a)2
Equivalent to IC radio standard(s) RSS-210, A1.1.b
Measurement procedure: See 5.2

Performed by:	Jennifer Ebner	Date of test:	August 14, 2018
Result	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.6.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Laboratory environment	---	---	---
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input checked="" type="checkbox"/> EMI test receiver	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> Measuring antenna set	---	---	A00088

6.6.2 Applicable standard

According to FCC Part 15C, Section 15.231(a)(1):
A transmitter activated automatically shall cease transmission within 5 seconds after activation.

6.6.3 Description of measurement

The duration of transmission is measured with the spectrum analyzer. The sweep points were set to maximum for higher time resolution. The signal is modulated; the marker of the analyzer is set to maximum amplitude at normal temperature and zero span. The analyzer is set to single sweep and video triggered, the marker is set to the edges in order to measure the duration time and then recorded.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

6.6.4 Test results

Limit according to FCC Part 15C, Section 15.231(a)(1):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

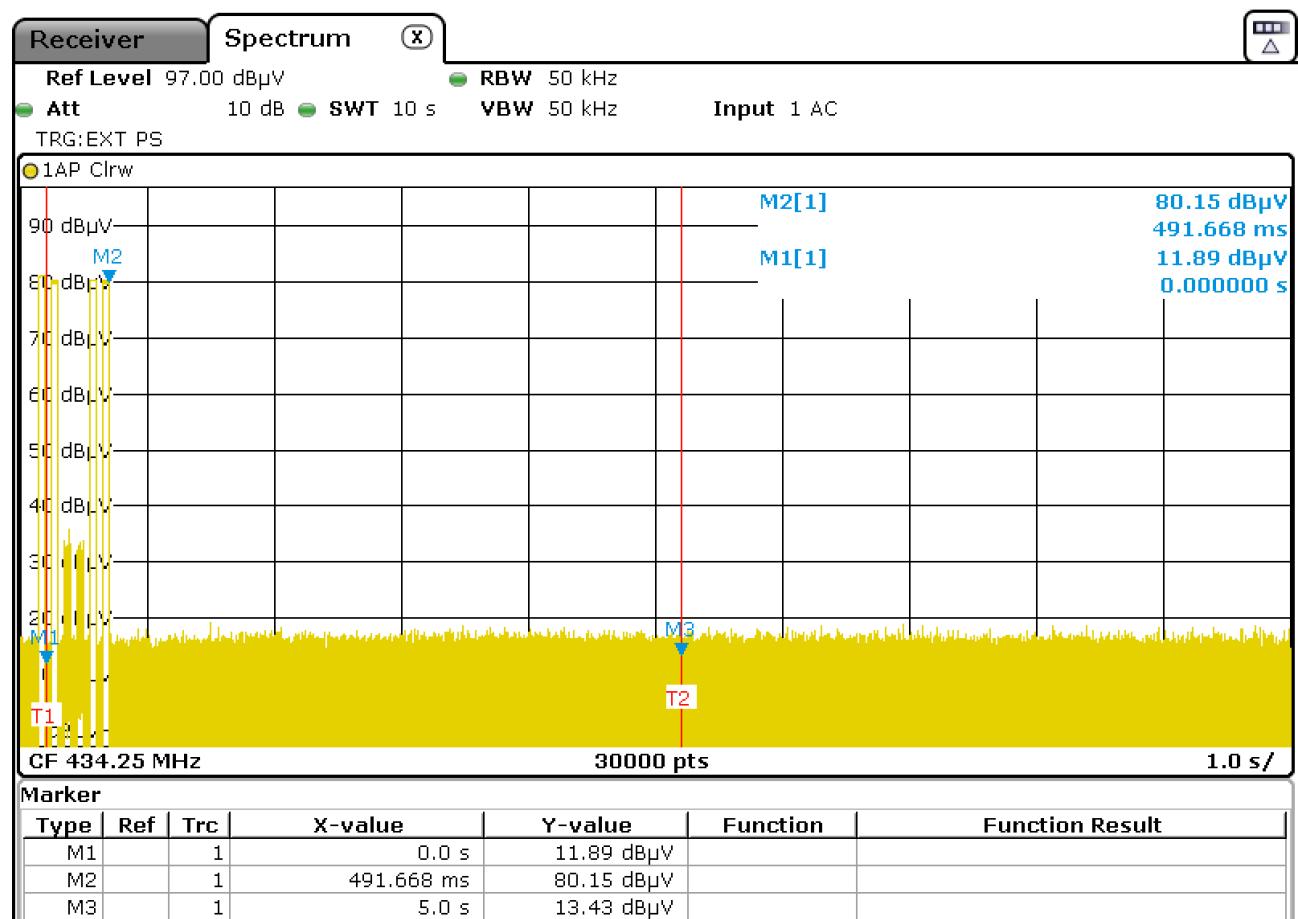


Figure 18: Test protocol of signal deactivation

Note: The analyzer was triggered external by releasing the button.

Explanation:

- M1: Release of button (0 seconds)
- M2: End of transmission (491.668 ms)
- M3: Limit line (5 seconds)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2018-04	2019-04
EMI test receiver	ESR7	101059	E00739	2018-05	2019-05
EMI test receiver	ESCI 3	100013	E00001	2018-05	2019-05
Preamplifier (1 GHz - 18 GHz)	ALS05749	001	W01007	2018-01	2019-01
Loop antenna	HFH2-Z2	871398/0050	E00060	2016-10	2018-10
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2018-03	2021-03
Horn antenna	BBHA 9120D	9120D-592	W00052	2017-04	2020-04
Horn antenna	BBHA 9170	9170-332	W00054	2017-04	2020-04
Measuring antenna set	---	---	A00088	N/A ³	
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC) with floor absorbers	FS-SAC	---	E00100	2018-03	2021-03
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2018-03	2021-03
Cable set CDC	RG214/U	---	E00446	2018-04	2019-04
	LCF12-50J	---	E01215	2018-04	2019-04
	LMR400	1718020006	E00920	2018-01	2019-01
	RG214 Hiflex	171802007	E00921	2018-01	2019-01
Cable set anechoic chamber	262-0942-1500	005	E00435	2018-10	2019-10
	SF104EA/2x11PC 35-42/5m	11144/4EA	E00307	2017-12	2018-12
	262-0942-1500	003	E00433	2018-10	2019-10
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35 /11PC35/10000MM	501347/4EA	E00755	2017-12	2018-12
	SF104E/11PC35/1 1PC35/2000MM	507410/4E	E01033	2017-12	2018-12
	SF104E/11PC35/1 1PC35/2000MM	507411/4E	E01034	2018-09	2019-09

Table 11: Equipment calibration status

- Note 1: Industry Canada (test sites number 3472A-1 and 3472A-2): 2018-11
 Note 2: Expiration date of test firm accreditation for SAC:
 FCC test firm type “accredited”: 2019-05
 Note 3: Only used for relative measurements.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Continental Automotive GmbH
 RF Transmitter
 A2C17105000

8 Measurement uncertainties

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	± 4.1 dB	2
Carrier frequency separation Number of hopping frequencies Time of occupancy (dwell time)	± 5.0 %	2
Bandwidth tests	± 2.0 %	2
Maximum conducted output power	± 1.5 dB	2
Power spectral density	± 3.0 dB	2
Spurious RF conducted emissions	± 3.0 dB	2
Radiated emission open field or semi-anechoic chamber 9 kHz to 30 MHz 30 MHz to 300 MHz 300MHz to 1 GHz	± 4.8 dB ± 5.4 dB ± 5.9 dB	2
Radiated emission anechoic chamber <td>± 4.5 dB</td> <td>2</td>	± 4.5 dB	2

Table 12: Measurement uncertainty

The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000

9 Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2018-08-17	Jennifer Ebner	First edition

10 Additional documents

- Annex A: Pictures of test setup and EUT-positions
- Annex B: Pictures of EUT (external)
- Annex C: Pictures of EUT (internal)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Continental Automotive GmbH
RF Transmitter
A2C17105000