



FCC 47 CFR PART 15 Subpart C

TEST REPORT

For

Navigator 805

Model Number: GM-050024 / R

Trade Name: Genius

Issued to

**KYE SYSTEMS CORP.
No.492, Sec.5, Chung Hsin Rd., San Chung,
Taipei Hsien, 241, Taiwan, R.O.C.**

Issued by



**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION.....	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
4.1 MEASURING INSTRUMENT CALIBRATION.....	7
4.2 MEASUREMENT EQUIPMENT USED.....	7
4.3 FACILITIES	8
4.4 EQUIPMENT.....	8
4.5 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
5. SETUP OF EQUIPMENT UNDER TEST.....	10
5.1 SETUP CONFIGURATION OF EUT.....	10
5.2 SUPPORT EQUIPMENT	10
6. FCC PART 15.249 REQUIREMENTS.....	11
6.1 BAND EDGES MEASUREMENT.....	11
6.2 RADIATED EMISSION	16
6.3 POWERLINE CONDUCTED EMISSIONS.....	23
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....	26



1. TEST RESULT CERTIFICATION

Applicant: KYE SYSTEMS CORP.
No.492, Sec.5, Chung Hsin Rd., San Chung,
Taipei Hsien, 241, Taiwan, R.O.C.

Equipment Under Test: Navigator 805

Trade Name: Genius

Model Number: GM-050024 / R

Date of Test: May 18, 2006 ~ November 3, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.107, 15.109, 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Navigator 805																																			
Trade Name	Genius																																			
Model Number	GM-050024 / R																																			
Model Discrepancy	N/A																																			
Power Supply	Vdc from USB Port of Host PC																																			
Modulation Technique	GFSK																																			
Number of Channels	16 Channels																																			
		<table><tr><th>Channel</th><th>Frequency (MHz)</th></tr><tr><td>0</td><td>2402</td></tr><tr><td>1</td><td>2425</td></tr><tr><td>2</td><td>2448</td></tr><tr><td>3</td><td>2471</td></tr><tr><td>4</td><td>2405</td></tr><tr><td>5</td><td>2428</td></tr><tr><td>6</td><td>2451</td></tr><tr><td>7</td><td>2474</td></tr><tr><td>8</td><td>2408</td></tr><tr><td>9</td><td>2431</td></tr><tr><td>10</td><td>2454</td></tr><tr><td>11</td><td>2477</td></tr><tr><td>12</td><td>2411</td></tr><tr><td>13</td><td>2434</td></tr><tr><td>14</td><td>2457</td></tr><tr><td>15</td><td>2480</td></tr></table>	Channel	Frequency (MHz)	0	2402	1	2425	2	2448	3	2471	4	2405	5	2428	6	2451	7	2474	8	2408	9	2431	10	2454	11	2477	12	2411	13	2434	14	2457	15	2480
	Channel	Frequency (MHz)																																		
	0	2402																																		
	1	2425																																		
	2	2448																																		
	3	2471																																		
	4	2405																																		
	5	2428																																		
	6	2451																																		
	7	2474																																		
	8	2408																																		
	9	2431																																		
	10	2454																																		
	11	2477																																		
	12	2411																																		
13	2434																																			
14	2457																																			
15	2480																																			
Antenna Gain	-3dBi																																			
Antenna Designation	Printed Antenna																																			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: FSUGMZHKK filing to comply with Section 15.10, 15.109, 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: GM-050024 / R) has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Channel Mid (2448MHz) and Channel High (2480MHz) were chosen for the final testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/02/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/05/2006
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/02/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/10/2007
Horn-Antenna	TRC	HA-1301A	01	07/18/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 4.5248dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/26/2007
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/20/2007
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



4.3 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4.4 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.5 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	Sony	PCG-6GFP	00045-578-554-578	WLAN: ETC094LPD0155 Bluetooth: ETC094LPD0156	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Mouse	Genius	N/A	FSUGMZHJ	N/A	N/A	N/A

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

6. FCC PART 15.249 REQUIREMENTS

6.1 BAND EDGES MEASUREMENT


LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Configuration

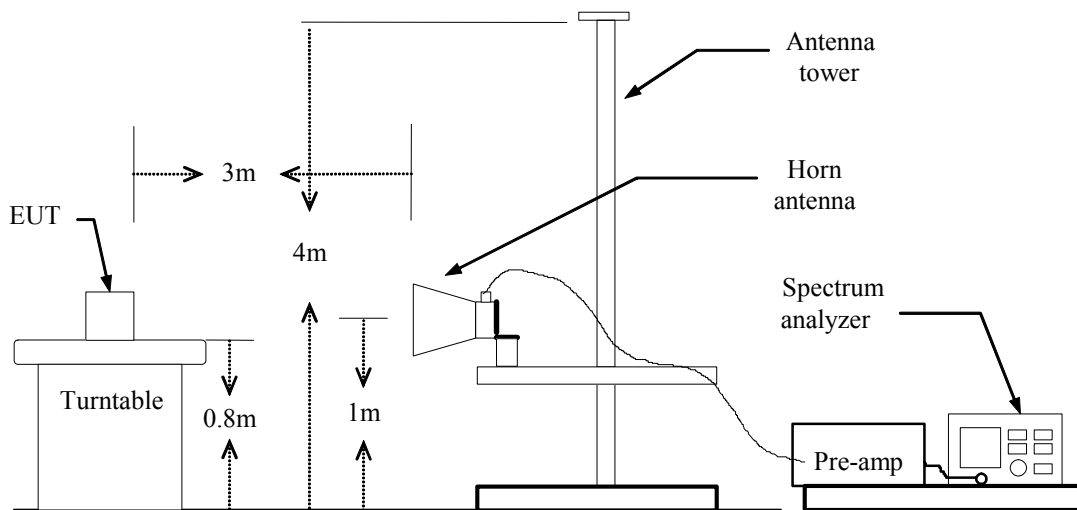

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 07:40:39 Nov 3, 2006

T

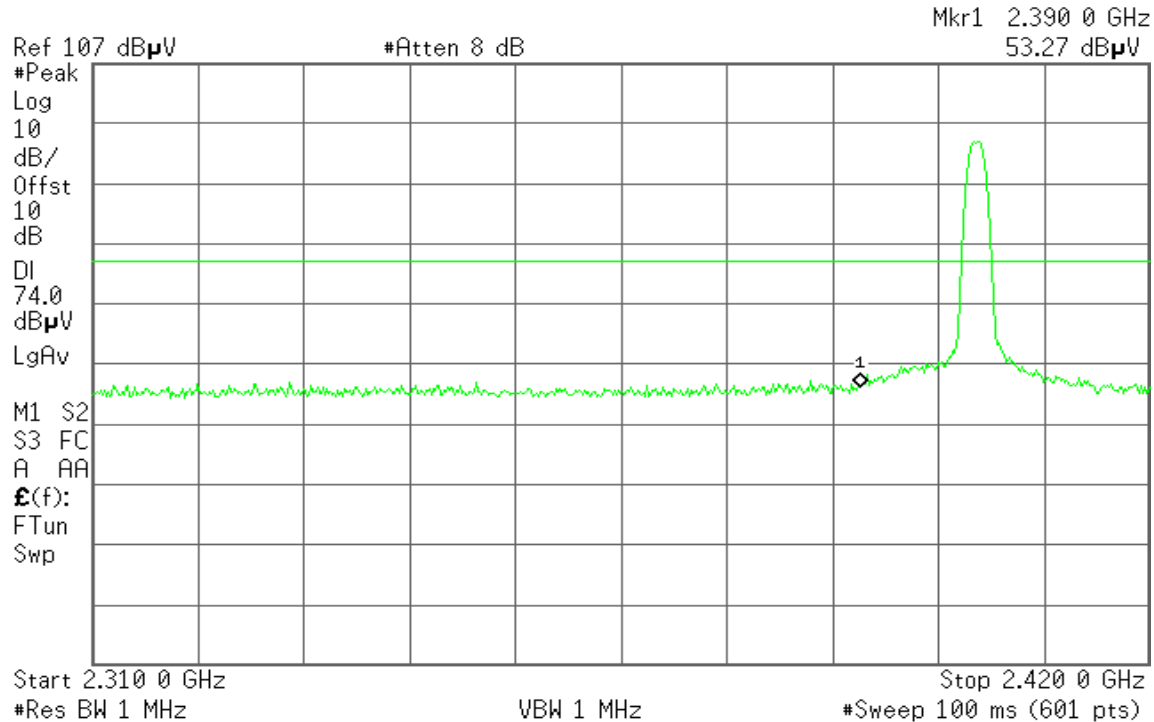


Detector mode: Average

Polarity: Vertical

Agilent 07:40:16 Nov 3, 2006

T

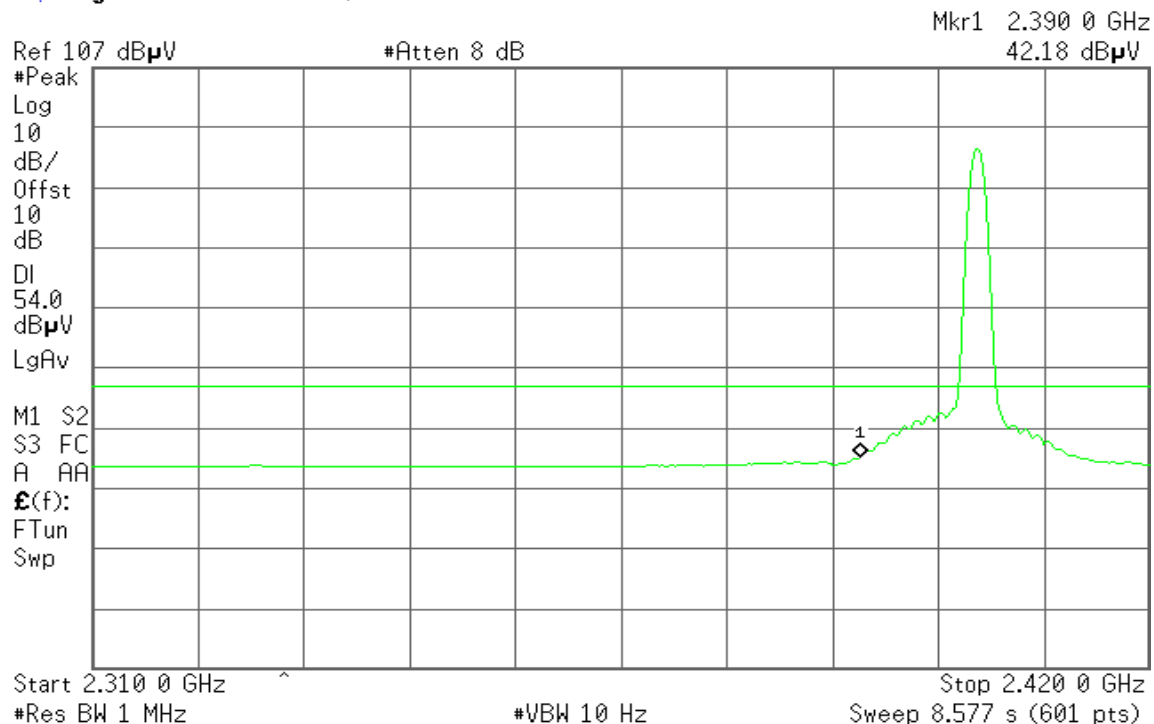




Detector mode: Peak

Polarity: Horizontal

Agilent 07:34:03 Nov 3, 2006

T

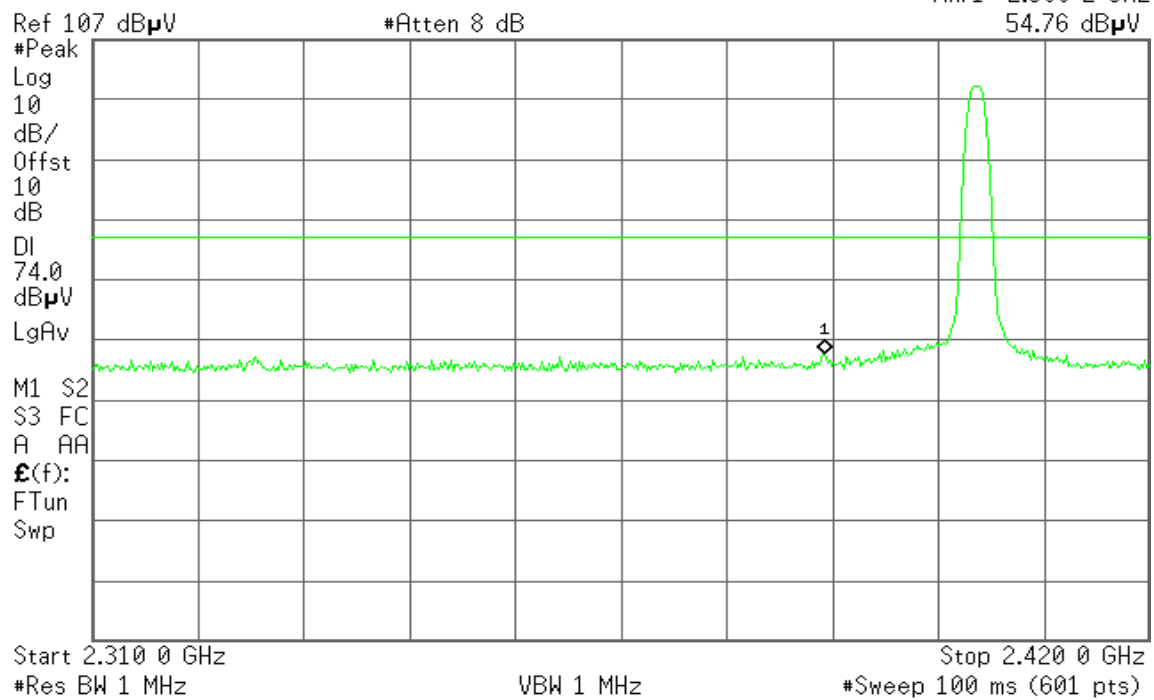


Detector mode: Average

Polarity: Horizontal

Agilent 07:33:36 Nov 3, 2006


T

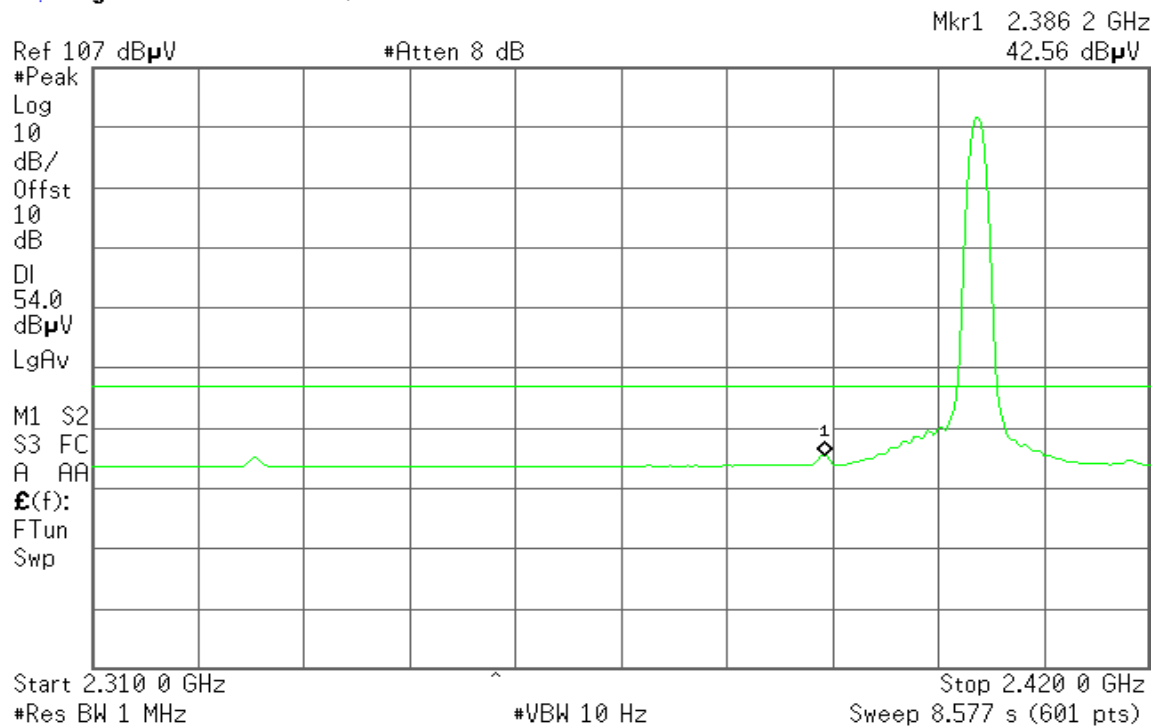

**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 07:06:34 Nov 3, 2006

T

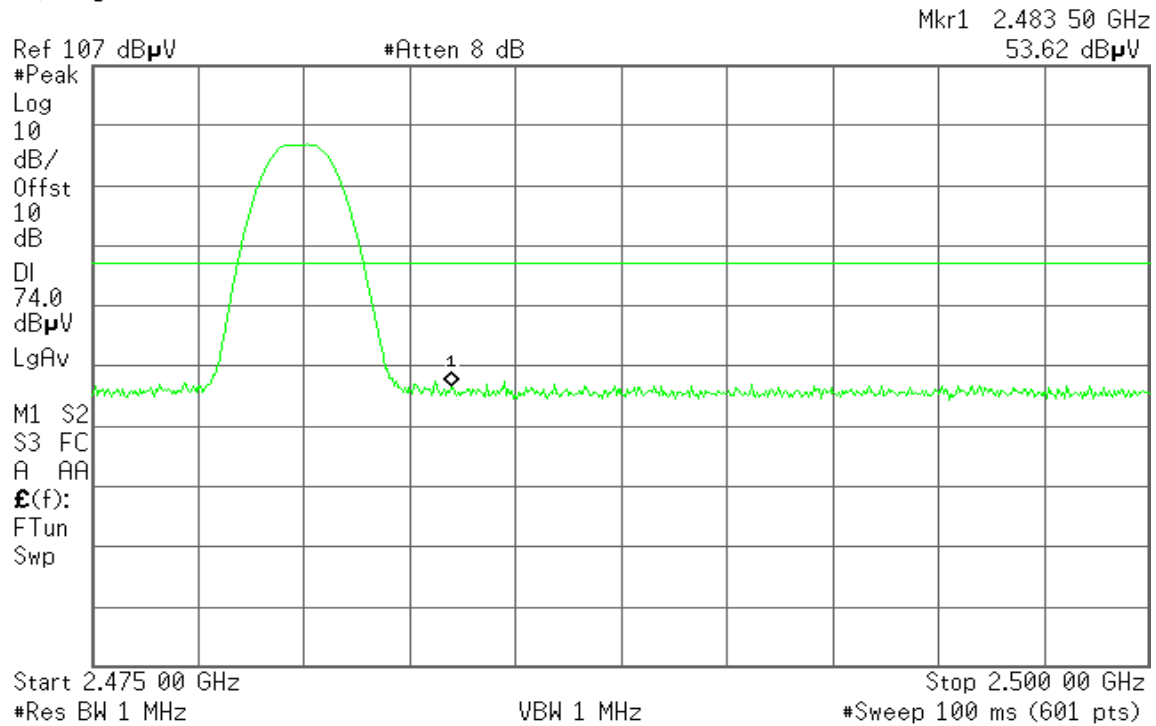**Detector mode: Average****Polarity: Vertical**

* Agilent 07:05:50 Nov 3, 2006

T

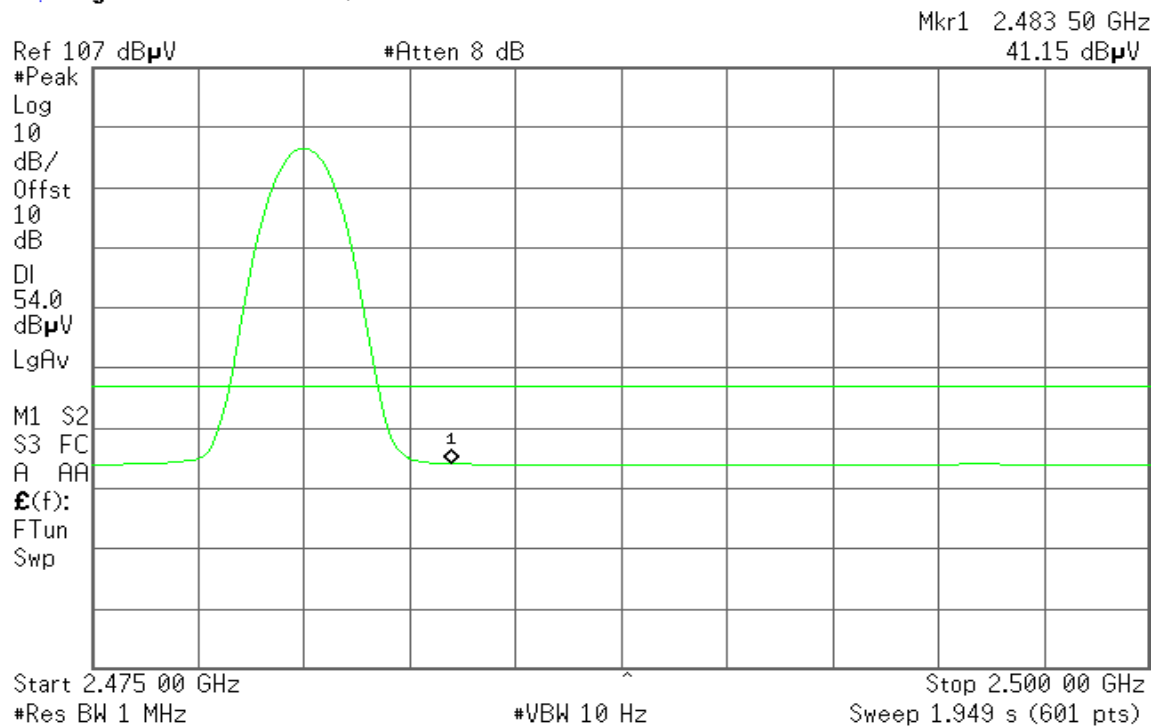



Detector mode: Peak

Polarity: Horizontal

Agilent 07:18:53 Nov 3, 2006

T

Mkr1 2.483 50 GHz
53.49 dB μ V

Ref 107 dB μ V

#Atten 8 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

$\mathcal{E}(f)$:

FTun

Swp

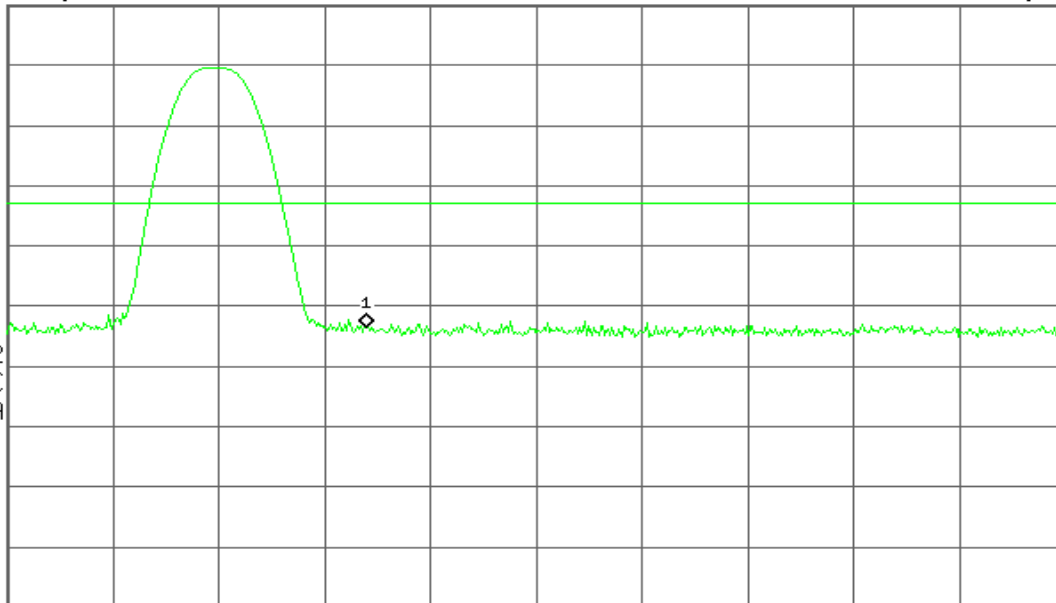

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent 07:18:25 Nov 3, 2006

T

Mkr1 2.483 50 GHz
41.54 dB μ V

Ref 107 dB μ V

#Atten 8 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

$\mathcal{E}(f)$:

FTun

Swp

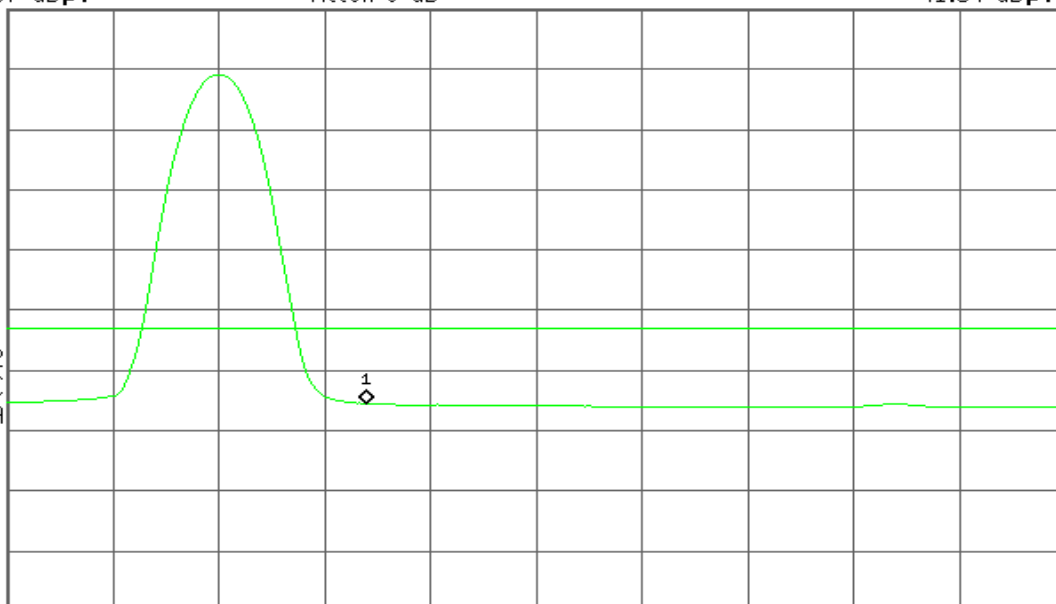

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.949 s (601 pts)



6.2 RADIATED EMISSION

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

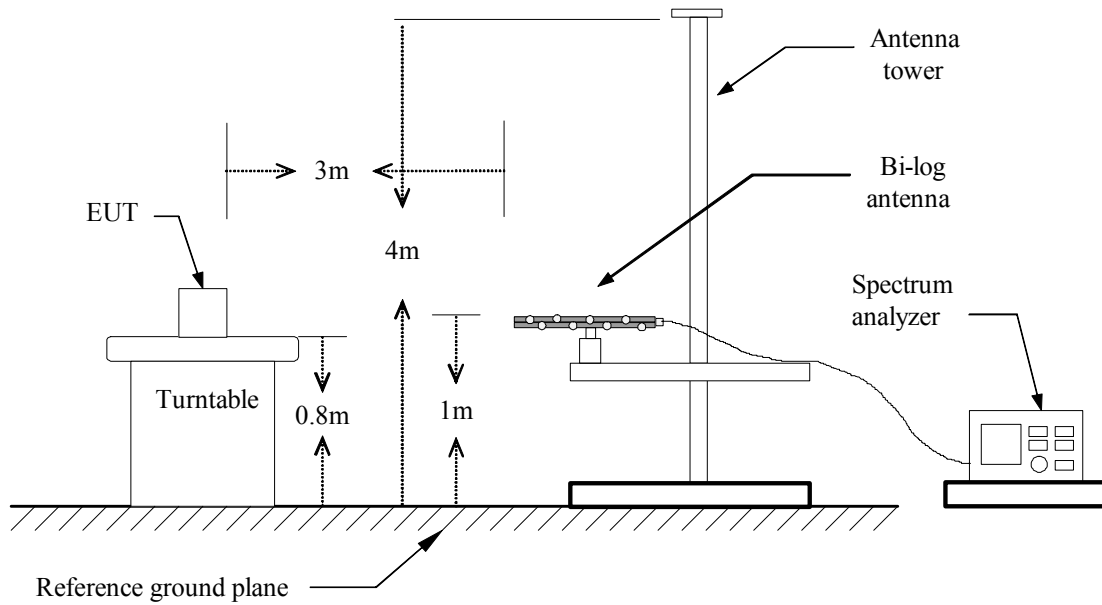

Above 1 GHz

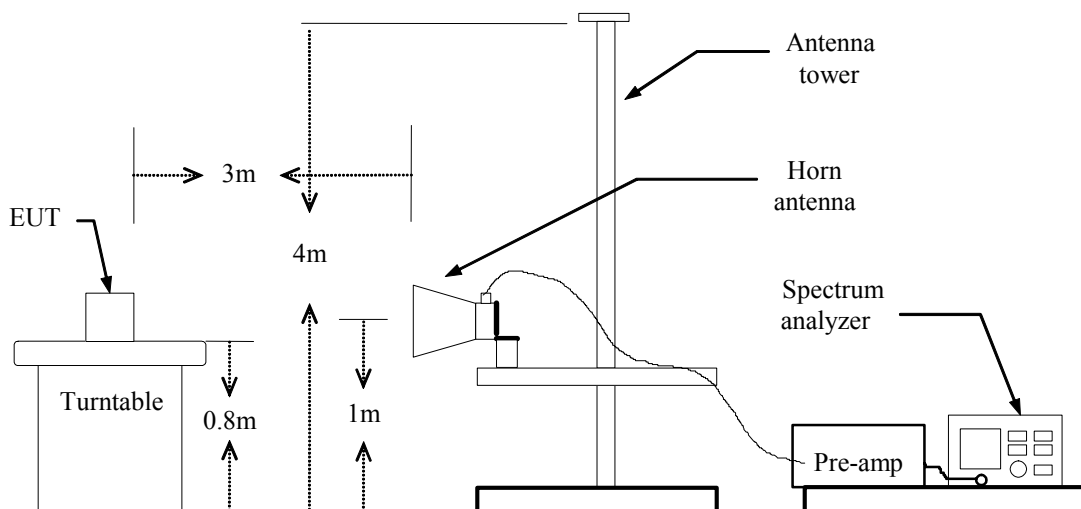



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** May 26, 2006**Temperature:** 23°C**Tested by:** Ivan Tsai**Humidity:** 54% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. (H/V)	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	3m Limit (dBuV/m)	Margin (dB)
259.57	V	Peak	61.08	-30.37	30.71	46.00	-15.29
266.03	V	Peak	61.96	-29.63	32.32	46.00	-13.68
455.18	V	QP	66.56	-25.72	40.84	46.00	-5.16
597.45	V	Peak	54.47	-22.95	31.52	46.00	-14.48
666.97	V	Peak	60.28	-22.11	38.17	46.00	-7.83
935.33	V	Peak	51.29	-19.11	32.17	46.00	-13.83
259.57	H	Peak	58.32	-30.37	27.95	46.00	-18.05
288.67	H	Peak	61.44	-29.25	32.19	46.00	-13.81
455.18	H	QP	59.71	-25.72	33.99	46.00	-12.01
600.68	H	Peak	51.89	-22.93	28.96	46.00	-17.04
666.97	H	Peak	56.71	-22.11	34.60	46.00	-11.40
933.72	H	Peak	48.88	-19.14	29.75	46.00	-16.25

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.*
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.*
- 4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
- 6. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).*

**Above 1 GHz****Operation Mode:** CH Low / 2402 MHz**Test Date:** November 3, 2006**Temperature:** 25°C**Tested by:** James Yu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2402.00	V	96.22	95.78	-4.10	92.12	91.68	114.00	94.00	-2.32	AVG
1290.00	V	53.81	---	-10.25	43.56	---	74.00	54.00	-10.44	Peak
4808.33	V	54.38	48.23	0.39	54.77	48.62	74.00	54.00	-5.38	AVG
7208.33	V	53.02	44.34	4.61	57.63	48.95	74.00	54.00	-5.05	AVG
N/A										
2402.00	H	99.05	97.11	-4.10	94.95	93.01	114.00	94.00	-0.99	AVG
1200.00	H	54.88	---	-10.38	44.50	---	74.00	54.00	-9.50	Peak
4800.00	H	55.10	49.75	0.39	55.49	50.14	74.00	54.00	-3.86	AVG
7208.33	H	46.13	---	4.61	50.75	---	74.00	54.00	-3.25	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** CH Mid / 2448 MHz**Test Date:** November 3, 2006**Temperature:** 25°C**Tested by:** James Yu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2448.00	V	97.86	95.75	-4.00	93.86	91.75	114.00	94.00	-2.25	AVG
1316.67	V	53.73	---	-10.22	43.52	---	74.00	54.00	-10.48	Peak
4900.00	V	54.63	48.63	0.38	55.01	49.01	74.00	54.00	-4.99	AVG
7341.67	V	54.07	46.72	4.45	58.52	51.17	74.00	54.00	-2.83	AVG
N/A										
2448.00	H	99.02	96.64	-4.00	95.02	92.64	114.00	94.00	-1.36	AVG
1316.67	H	53.01	---	-10.22	42.79	---	74.00	54.00	-11.21	Peak
3675.00	H	44.40	---	-1.25	43.16	---	74.00	54.00	-10.84	Peak
3758.33	H	44.30	---	-1.14	43.16	---	74.00	54.00	-10.84	Peak
4900.00	H	50.30	---	0.38	50.68	---	74.00	54.00	-3.32	Peak
7341.67	H	53.46	46.14	4.45	57.91	50.59	74.00	54.00	-3.41	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** CH High / 2480 MHz**Test Date:** November 3, 2006**Temperature:** 25°C**Tested by:** James Yu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2480.00	V	96.52	96.15	-3.92	92.60	92.23	114.00	94.00	-1.77	AVG
1066.67	V	55.66	---	-10.57	45.09	---	74.00	54.00	-8.91	Peak
1240.00	V	54.84	---	-10.32	44.51	---	74.00	54.00	-9.49	Peak
4958.33	V	51.09	---	0.37	51.47	---	74.00	54.00	-2.53	Peak
7441.67	V	55.60	49.32	4.32	59.92	53.64	74.00	54.00	-0.36	AVG
N/A										
2480.00	H	99.16	97.25	-3.92	95.24	93.33	114.00	94.00	-0.64	AVG
1376.67	H	53.75	---	-10.13	43.62	---	74.00	54.00	-10.38	Peak
4958.33	H	48.82	---	0.37	49.20	---	74.00	54.00	-4.80	Peak
7441.67	H	55.31	49.14	4.32	59.63	53.46	74.00	54.00	-0.54	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



6.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**Operation Mode:** Mode 1**Test Date:** May 18, 2006**Temperature:** 25°C**Tested by:** Ivan Tsai**Humidity:** 55% RH

Frequency (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.216	39.660	39.190	0.100	39.760	39.290	62.971	52.971	-23.211	-13.681	L1
0.317	34.320	32.840	0.100	34.420	32.940	59.785	49.785	-25.365	-16.845	L1
0.338	35.120	34.380	0.100	35.220	34.480	59.252	49.252	-24.032	-14.772	L1
0.550	34.920	34.210	0.100	35.020	34.310	56.000	46.000	-20.980	-11.690	L1
0.894	34.700	34.570	0.100	34.800	34.670	56.000	46.000	-21.200	-11.330	L1
5.768	33.200	31.390	0.277	33.477	31.667	60.000	50.000	-26.523	-18.333	L1
0.219	36.640	32.030	0.100	36.740	32.130	62.875	52.875	-26.135	-20.745	L2
0.244	37.740	28.560	0.100	37.840	28.660	61.945	51.945	-24.105	-23.285	L2
0.605	29.350	27.500	0.100	29.450	27.600	56.000	46.000	-26.550	-18.400	L2
3.328	29.880	27.990	0.100	29.980	28.090	56.000	46.000	-26.020	-17.910	L2
11.264	33.030	32.500	0.725	33.755	33.225	60.000	50.000	-26.245	-16.775	L2
20.971	31.050	28.720	1.200	32.250	29.920	60.000	50.000	-27.750	-20.080	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

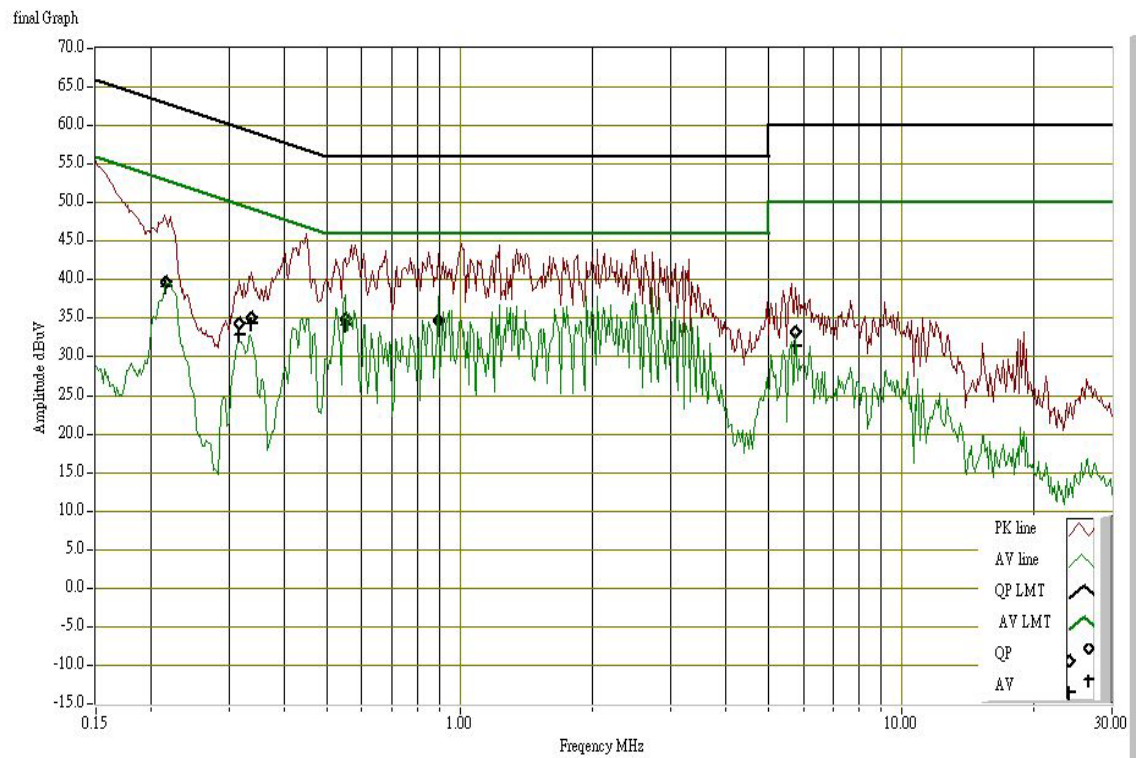

Conducted emissions (Line 2)

