

Test report for

47 CFR Part 15 Subpart B

ICES-Gen, ICES-003

Test report No. : P000393271 001 Ver 1.0



The RvA is signatory to ILAC - MRA

Product name : Simcenter SCADAS XS

Applicant : Siemens Industry Software Netherlands BV

FCC ID : 2AF88-SC-XS1

IC : 28364-SCXS1

Laboratory information

Accreditation

Kiwa Nederland B.V. complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2017. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L248 and is granted by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Kiwa Nederland B.V. is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001.

Kiwa Nederland B.V. is a Wireless Device Testing laboratory recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

The Industry Canada company number for Kiwa Nederland B.V. is: 4173A. The CABID is NL0001.

Kiwa Nederland B.V. is a registered Conformity Assessment body (CAB) under the Japan-EC MRA (Agreement on Mutual Recognition between Japan and the European Community). The registration number is: 201.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Kiwa Nederland B.V.

Testing Location

Test Site	Kiwa Nederland B.V.
Test Site location	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands Tel. +31 88998 3393
Test Site FCC	NL0001
CABID	NL0001

Revision History

Version	Date	Remarks	By
v0.50	25-04-2024	First draft	PvW
v1.00	26-04-2024	Final release	PvW

Table of Contents

Revision History	2
Summary of Test results	5
1 General Description	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Tested Equipment Under Test (EUT)	6
1.3.1 Auxiliary items	7
1.4 Product specifications of Equipment under test.....	9
1.5 Environmental conditions	9
1.6 Measurement standards.....	9
1.7 Applicable standards.....	9
1.8 Observation and remarks.....	9
1.9 Conclusions	10
2 Test configuration of the Equipment Under Test.....	11
2.1 Test mode	11
2.2 Test setups	11
2.2.1 Radiated emissions test setup 30 MHz - 1 GHz	11
2.2.2 Radiated emissions test setup above 1 GHz	11
2.2.3 AC Power line conducted emissions test setup	12
2.3 Test methodology	13
2.4 Equipment modifications.....	13
2.5 Equipment used in the test configuration	14
2.6 Sample calculations.....	14
3 Test results.....	15
3.1 Radiated spurious emissions.....	15
3.1.1 Limit	15
3.1.2 Measurement instruments	15
3.1.3 Test setup	15
3.1.4 Test procedure.....	16
3.1.5 Measurement Uncertainty	16
3.1.6 Test results.....	17
3.1.7 Plots of the Radiated Spurious Emissions Measurement	18
3.2 AC Power-line conducted emissions	21
3.2.1 Limit	21
3.2.2 Measurement instruments	21
3.2.3 Test setup	21
3.2.4 Test procedure.....	21
3.2.5 Measurement uncertainty	21

3.2.6	AC Power Line Conducted emission data of the EUT, results.....	22
3.2.7	Plots of the AC mains conducted spurious measurement.....	23
4	Sample calculations.....	24
5	Photograph test setup.....	27
5.1	Photograph test setup Radiated Emissions.....	27
5.2	Photograph test setup, AC Power Line Conducted emissions	29

Summary of Test results

FCC	ISED	Description	Section in report	Verdict
15.109 (b)	ICES-003 Table 2	Radiated spurious emissions < 1GHz	3.1	Pass
15.109 (b)	ICES-003 Table 4	Radiated spurious emissions > 1GHz	3.1	Pass
15.107 (b)	ICES-003 Table 1	AC power-line conducted emissions	3.2	Pass

Decision rule: Pass/Fail decisions are based on measurement results without taking into account measurement uncertainty.

1 General Description

1.1 Applicant

Client name: Siemens Industry Software Netherlands BV
Address: Weidehek 53, Breda, the Netherlands
Zip code: 4824 AT
Telephone: 076 5736363
E-mail: Tom.schrijer@siemens.com
Contact name: Mr. Tom Schrijer

1.2 Manufacturer

Manufacturer name: Siemens Industry Software Netherlands BV
Address: Weidehek 53, Breda, the Netherlands
Zip code: 4824 AT
Telephone: 076 5736363
E-mail: Tom.schrijer@siemens.com
Contact name: Mr. Tom Schrijer

1.3 Tested Equipment Under Test (EUT)

Product name: Simcenter SCADAS XS
Brand name: Siemens
FCC ID: 2AF88-SC-XS1
IC: 28364-SCXS1
Product description: Data Acquisition System
Variant model(s): SC-XS12-AC
SC-XS12-A
SC-XS12-NC
SC-XS6-E
SC-XS6-EC
Batch and/or serial No. 12241101
Software version: --
Hardware version: --
Date of receipt: 10-04-2024
Tests started: 15-04-2024
Testing ended: 16-04-2024

1.3.1 Auxiliary items

AUX1

Product name:	GEM12I05-USB
Brand name:	MeanWell
Product type:	AC/DC Medical Adaptor
Model(s):	GEM12I05-USB
Batch and/or serial No.	EJ4390138
Remarks:	Used for charging battery of EUT

AUX2

Product name:	--
Brand name:	--
Product type:	GNSS antenna
Model(s):	--
Batch and/or serial No.	--
Remarks:	Connects to EUT GNSS antenna port

AUX3

Product name:	HS sensor cable
Brand name:	--
Product type:	Cable
Model(s):	--
Batch and/or serial No.	--
Remarks:	Connects to EUT HS port

AUX4

Product name:	ABC Sensor cable
Brand name:	--
Product type:	Cable
Model(s):	--
Batch and/or serial No.	--
Remarks:	Connects to EUT ABC port

AUX5

Product name:	SPDIF Sensor cable
Brand name:	--
Product type:	Cable
Model(s):	--
Batch and/or serial No.	--
Remarks:	Connects to EUT SPDIF port

AUX6

Product name: CAN Sensor cable
Brand name: --
Product type: Cable
Model(s): --
Batch and/or serial No. --
Remarks: Connects to EUT CAN port

AUX7

Product name: TACHO Sensor cable
Brand name: --
Product type: Cable
Model(s): --
Batch and/or serial No. --
Remarks: Connects to EUT TACHO port

AUX8

Product name: LAN cable
Brand name: --
Product type: Cable
Model(s): --
Batch and/or serial No. --
Remarks: Connects to EUT LAN port

1.4 Product specifications of Equipment under test

Tx Frequency:	WLAN: 2400 – 2483.5 MHz
Rx frequency:	WLAN: 2400 – 2483.5 MHz
Occupied channel width:	20 MHz
Antenna type:	Ceramic chip antenna
Antenna gain:	+2.0 dBi
Type of modulation:	CCK/OFDM/DBPSK/DQPSK/DSSS/64-QAM
Emission designator	802.11b: 14M1F1D 802.11n: 17M8F1D

Disclaimer: The operating frequency bands are declared by the applicant

Disclaimer: The emission designator bandwidth is based on bandwidth measurements in the module test report no. 311258 by LS Research LCC.

The EUT is considered as a Class B device.

1.5 Environmental conditions

Test date	15-04-2024	16-04-2024
Ambient temperature	20.5°C	19.8°C
Humidity	37.2%	35.6%

1.6 Measurement standards

- ANSI C63.4:2014

1.7 Applicable standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart B, 15.107 and 15.109
- ICES-003 Issue 7
- ICES-Gen Issue 2

1.8 Observation and remarks

The worst case configuration for position of the EUT is when it is laying flat on a horizontal surface with the buttons facing up.

1.9 Conclusions

The sample of the product showed **NO NON-COMPLIANCES** to the specifications stated in paragraph 1.8 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Kiwa Nederland B.V. accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.8 "Applicable standards".

All tests are performed by:

Name : L.F. Diaz under supervision of P. van Wanrooij

Review of test methods and report by:

Name : ing. R. van Barneveld

The above conclusions have been verified by the following signatory:

Date : 26-04-2024

Name : ing. R. van Barneveld

Function : Test Engineer

Signature :




2 Test configuration of the Equipment Under Test

2.1 Test mode


The EUT is recording data with the WLAN turned off during emission testing.

2.2 Test setups

2.2.1 Radiated emissions test setup 30 MHz - 1 GHz

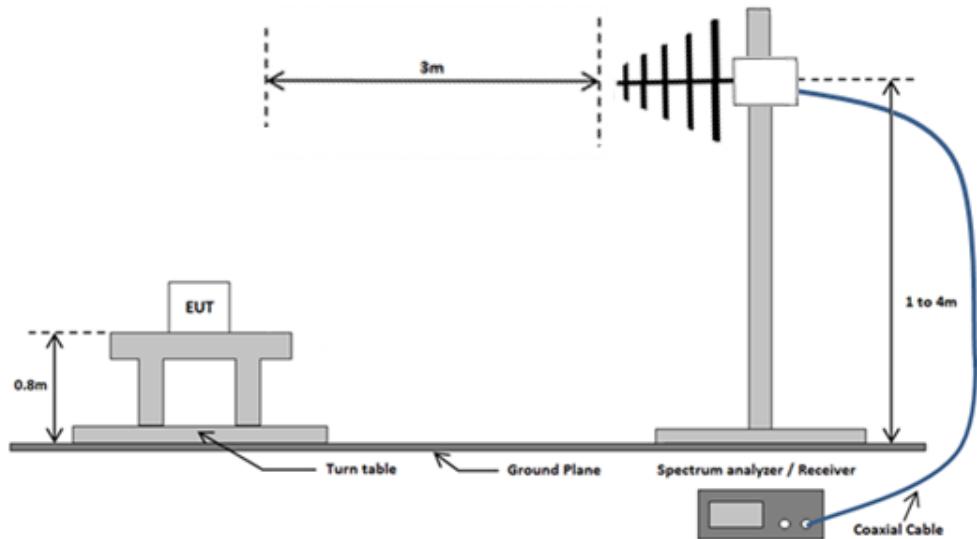

2.2.2 Radiated emissions test setup above 1 GHz

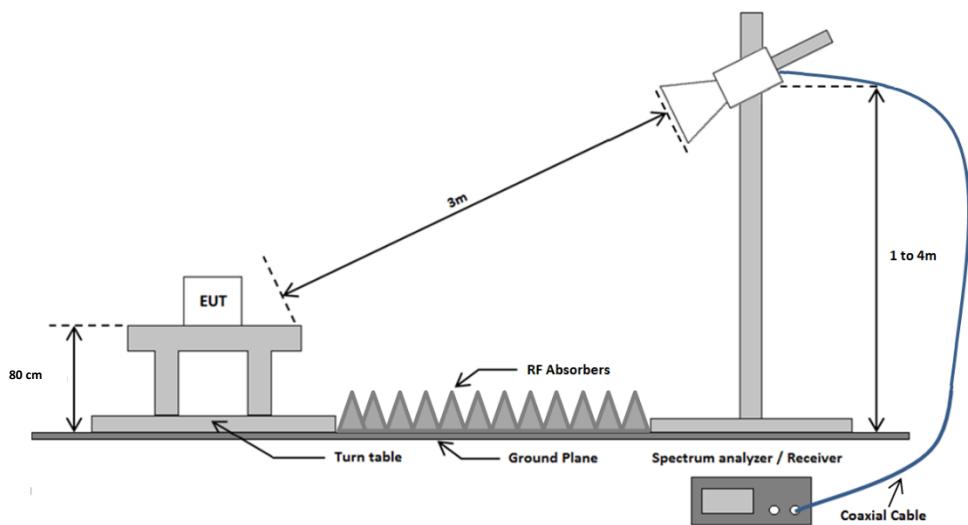

2.2.3 AC Power line conducted emissions test setup

Emissions test at AC mains

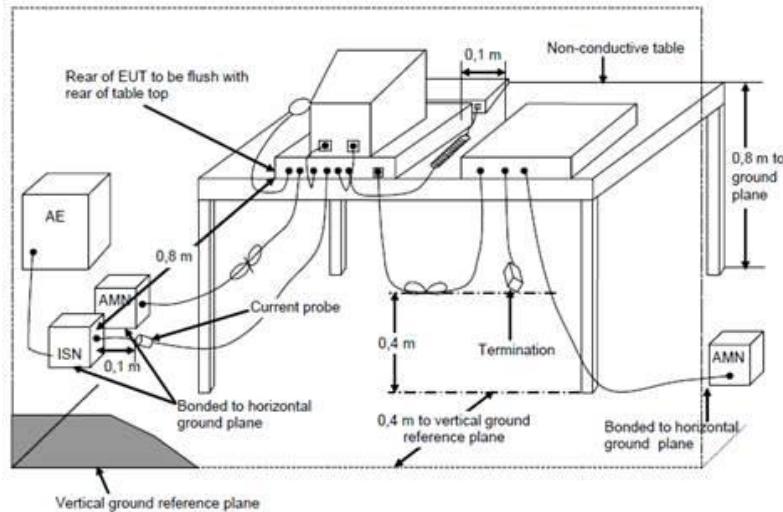


Figure 1. EUT and auxiliary setup

List of used cables					
Number	Function	From	To	Length	Remarks
1	DC Power USB cable	AUX1	EUT	< 3m	--
2	GNSS antenna input	GNSS antenna	EUT	<3m	--
3	HS sensor cable	EUT	Sensor	<3m	--
4	ABC sensor cable (4x)	EUT	Sensors	<3m	--
5	SPDIF sensor cable	EUT	Sensor	<3m	--
6	CAN sensor cable	EUT	Sensor	<3m	--
7	TACHO Sensor cable	EUT	Sensor	<3m	--
8	LAN cable	EUT	Network device	<100m	--

2.3 Test methodology

The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.107 and 15.109, ICES-003 and ICES-Gen. The test methods, which have been used, are based on ANSI C63.4-2014.

2.4 Equipment modifications.

No modifications have been made to the equipment.

2.5 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Cal. Done date	Cal. due date	Used at Par.
EMI Receiver	Rohde & Schwarz	ESR7	114534	04-2023	30-04-2024	3.1; 3.2
Spectrum Analyzer	Rohde & Schwarz	FSV3044	114923	10-2023	10-2024	3.1
Biconical antenna + 6dB attenuator	EMCO	3109	107818	06-2022	06-2025	3.1
Logperiodic antenna	EMCO	3147	114385	03-2021	09-2024	3.1
Horn antenna	EMCO	3115	114607	01-2021	06-2024	3.1
Preamplifier 1-18 GHz	µComp Nordic	MCNA-40-0010800-25-10P	114690	05-2022	05-2024	3.1
Test software	Raditeq	Radimation Version 2023.2.3	--	--	--	3.1; 3.2
LISN /Two line V-network	Rohde & Schwarz	ENV 216	114379	12-2023	12-2024	3.2

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2017 has been confirmed before testing.

NA= Not Applicable

2.6 Sample calculations

All formulas for data conversions and conversion factors are reported in chapter 4 of this test report.

3 Test results

3.1 Radiated spurious emissions

3.1.1 Limit

Except for Class A digital devices, the field strength of radiated emissions from an unintentional radiator shall not exceed the field strength levels specified in the following tables.

On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified.

Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function.

When average radiated emission measurements are specified in this part, there is also a limit on the peak level of the emissions. Unless otherwise specified, the limit on peak emissions is 20 dB above the average limit.

The product under test shall comply with both the average and the peak limits.

ICES-003 Issue 7 section 3.2.2

The quasi-peak limits for the electric component of the radiated field strength emitted from ITE or digital apparatus, within 30 MHz to 1 GHz, for a measurement distance of 3m are presented in table below.

At and above 1 GHz, except for outdoor units of home satellite receiving systems, the ITE or digital apparatus shall comply with the limits specified in table below up to the frequency F_M , which shall be determined. The product under test shall comply with both the average and the peak limits.

FCC 15.109(a)

Frequency (MHz)	Field strength (μ V/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

ICES-003 tables 2, 4

Frequency (MHz)	Field strength (μ V/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-230	200	46.0	3
230 -960	224	47.0	3
Above 960	500	54.0	3

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.5 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.2.1 and 2.2.2 of this report.

3.1.4 Test procedure

30 MHz to 26.5 GHz: According to ANSI C63.4-2014, section 8.3

30 MHz to 1 GHz: IRN 441 – Method 1

1 GHz to 18 GHz: IRN 441 – Method 2

In case of handheld and/or body-worn equipment, the EUT's orientation (X, Y, Z) was varied in order to ensure that maximum emission amplitudes were attained. In all other cases the associated cabling and the EUT orientation was varied for maximum emissions.

The spectrum was examined from 30MHz to the highest measurement frequency according to the table below. Final radiated emission measurements were made at 3m distance.

Highest internal frequency (F_X) ⁱ	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_X \leq 1 \text{ GHz}$	5 GHz
$F_X > 1 \text{ GHz}$	$5 \times F_X$ up to a maximum of 40 GHz

i. F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

3.1.5 Measurement Uncertainty


Frequency range	Polarization	Uncertainty
30 – 200 MHz	Horizontal	±4.5 dB
	Vertical	±5.4 dB
200 -1000 MHz	Horizontal	±3.6 dB
	Vertical	±4.6 dB
1 – 18 GHz	Horizontal	±5.7 dB
	Vertical	±5.7 dB
18 – 26.5 GHz	Horizontal	±4.9 dB
	Vertical	±4.9 dB

3.1.6 Test results


Frequency	Quasi-Peak	Quasi-Peak Limit	Polarization	Height	Status
69,816 MHz	9,3 dB μ V/m	40 dB μ V/m	Horizontal	2 m	Pass
80,959 MHz	7,6 dB μ V/m	40 dB μ V/m	Horizontal	2,8 m	Pass
48,183 MHz	11,5 dB μ V/m	40 dB μ V/m	Vertical	1 m	Pass
32,961 MHz	25,7 dB μ V/m	40 dB μ V/m	Vertical	1 m	Pass
299,999 MHz	25,4 dB μ V/m	46 dB μ V/m	Horizontal	2,8 m	Pass
756,481 MHz	27,7 dB μ V/m	46 dB μ V/m	Horizontal	2,7 m	Pass

The results of the radiated emission tests are depicted in the table above. A selection of plots is provided on the next pages



3.1.7 Plots of the Radiated Spurious Emissions Measurement


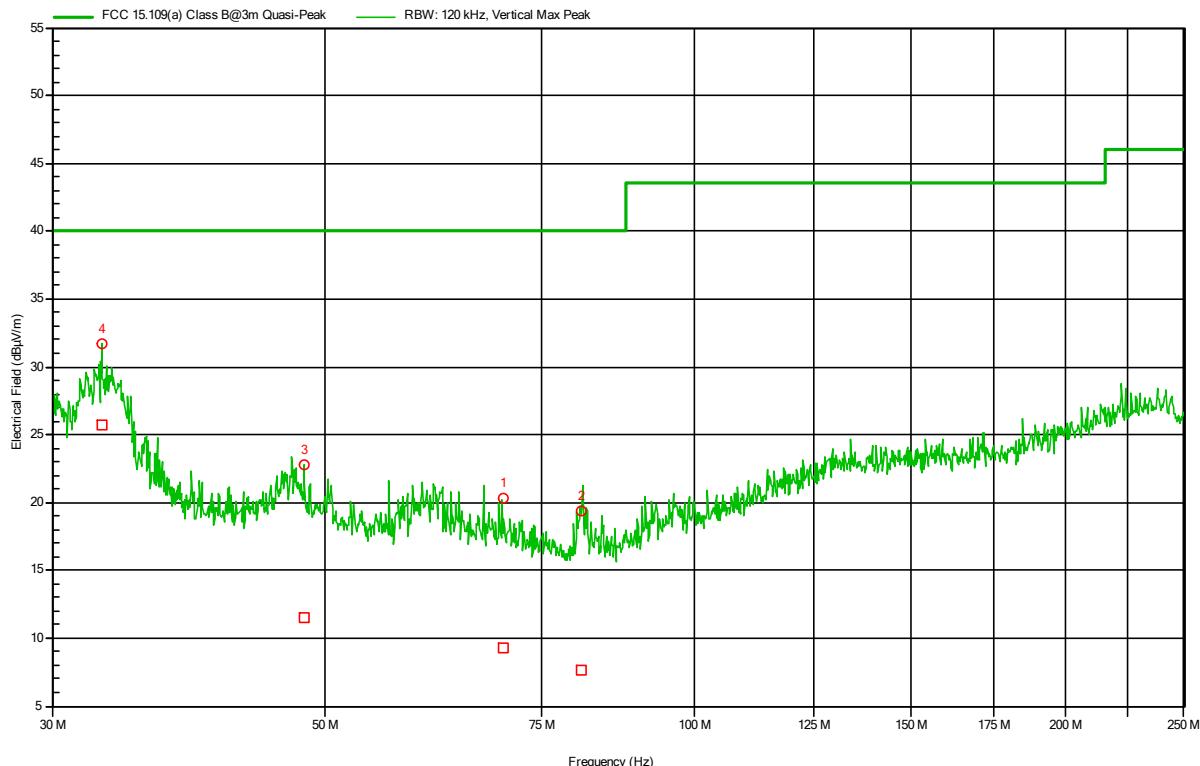


Plot 1a: radiated emissions of the EUT, Antenna vertical, in the range 30 – 250 MHz
(pre-scan @3m peak values shown)

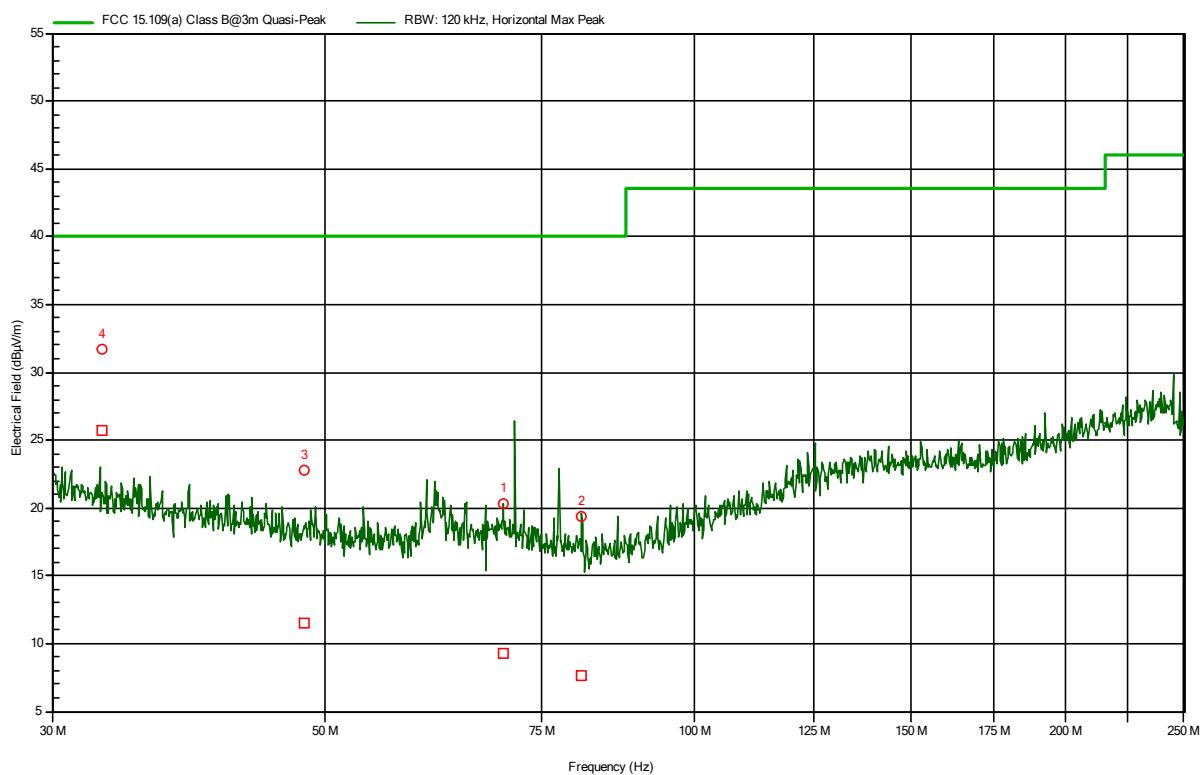

Plot 1b: radiated emissions of the EUT, Antenna horizontal, in the range 30 – 250 MHz
(pre-scan @3m peak values shown)

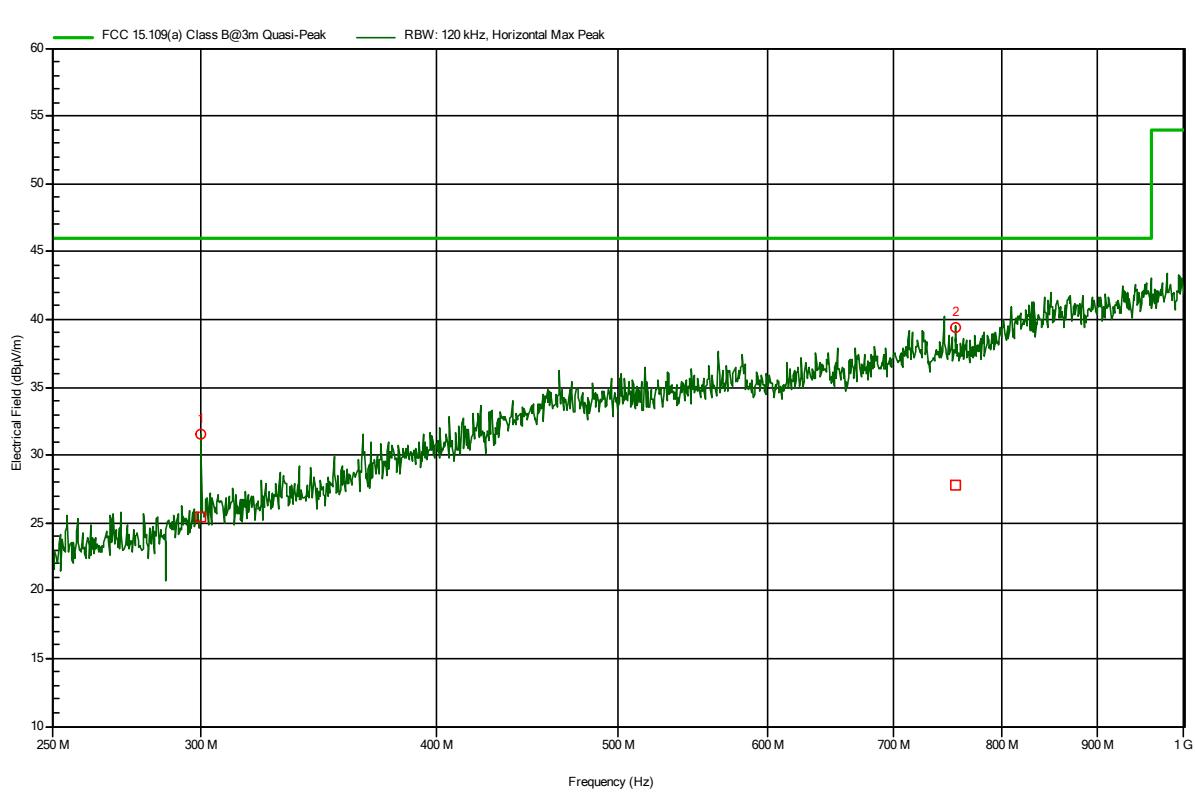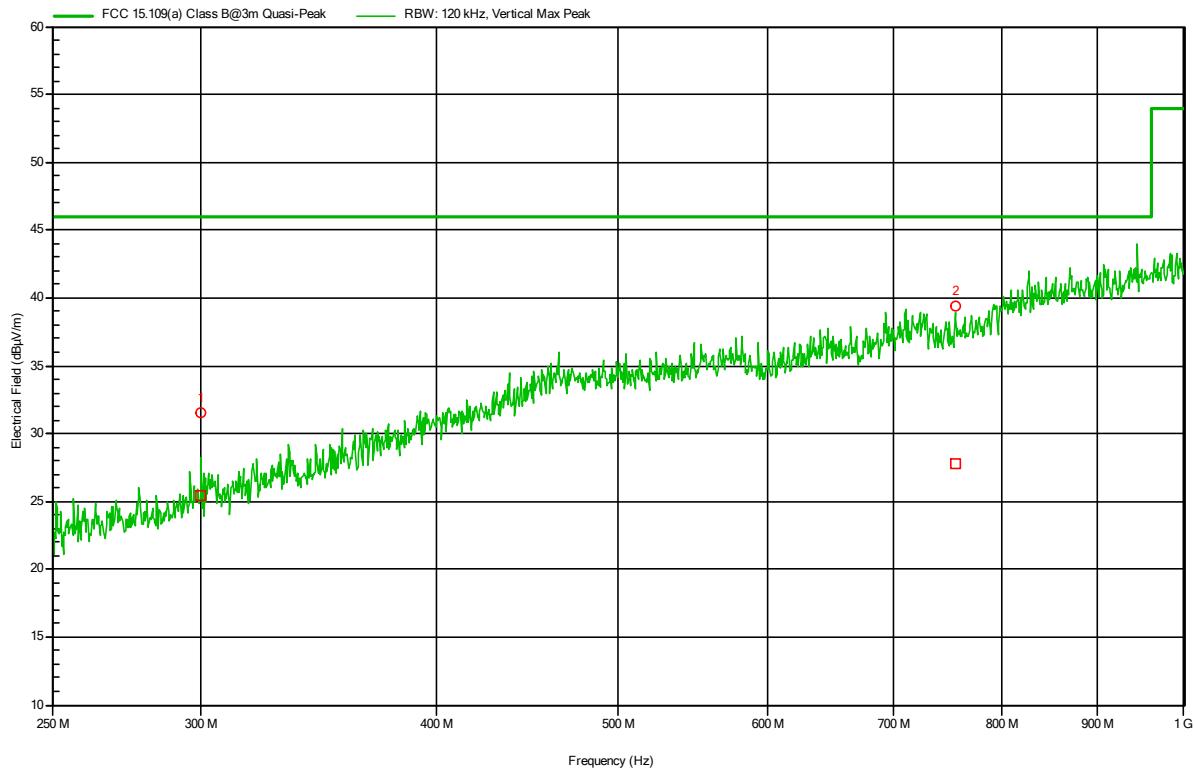

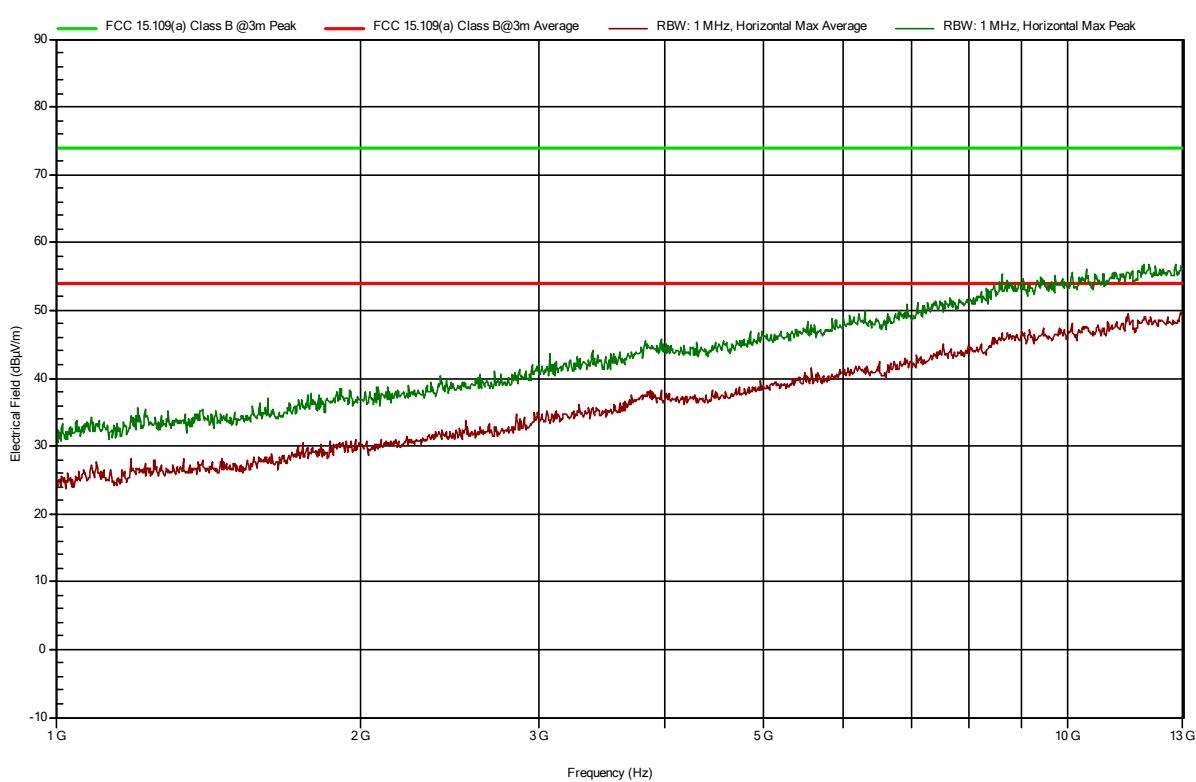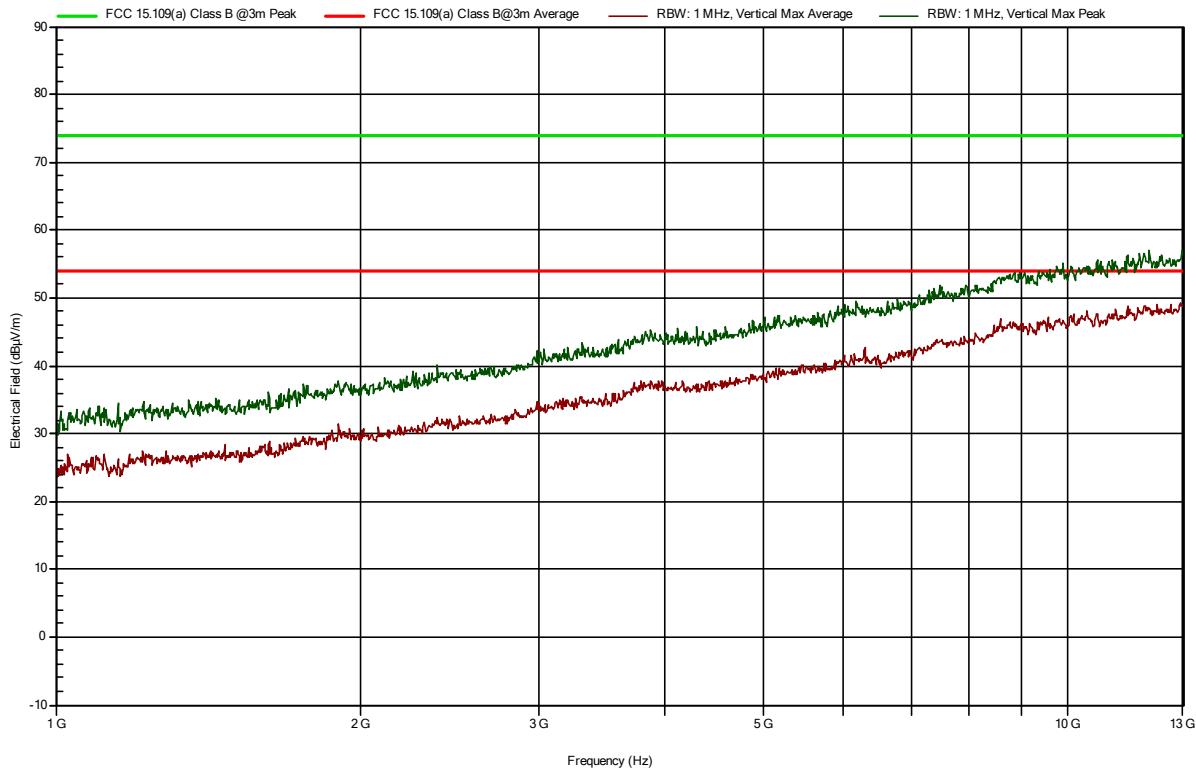

3.2 AC Power-line conducted emissions

3.2.1 Limit

§ 15.107 (a)

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

ICES-003 Issue 7 section 3.2.1

The ITE or digital apparatus shall comply with the conducted emission limits specified in table below at its AC mains power terminals. The product under test shall comply with both the quasi-peak and the average limits.

Where the product under test is powered through an external device (for example, through an external power supply, or by means of a device providing power over Ethernet to the product under test), the conducted emission limits apply at the AC mains power terminals of the external device, while this is powering the product under test: see ICES-Gen.

Frequency of Emission (MHz)	Conducted Limit (dB μ V) Quasi-Peak	Conducted Limit (dB μ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

*Decreases with the logarithm of the frequency.

3.2.2 Measurement instruments

The measurement instruments are listed in chapter 2.5 of this report.

3.2.3 Test setup

The test setup is as shown in chapter 2.2.3 of this report.

3.2.4 Test procedure

According to ANSI C63.4: 2014, section 13.3

IRN 439 – Method 1


3.2.5 Measurement uncertainty

+/- 3.6 dB


3.2.6 AC Power Line Conducted emission data of the EUT, results

Frequency	Average	Average Limit	Peak	Peak Limit	LISN	Status
474 kHz	32,3 dBµV	46,4 dBµV	42,5 dBµV	79 dBµV	Neutral	Pass
964,5 kHz	18,8 dBµV	46 dBµV	34,7 dBµV	73 dBµV	Neutral	Pass
20,238 MHz	27,4 dBµV	50 dBµV	48,7 dBµV	73 dBµV	Neutral	Pass
460,5 kHz	24,1 dBµV	46,7 dBµV	37,9 dBµV	79 dBµV	Line 1	Pass
21,156 MHz	29,9 dBµV	50 dBµV	48,2 dBµV	73 dBµV	Line 1	Pass
13,907 MHz	28,2 dBµV	50 dBµV	47,6 dBµV	73 dBµV	Line 1	Pass

3.2.7 Plots of the AC mains conducted spurious measurement

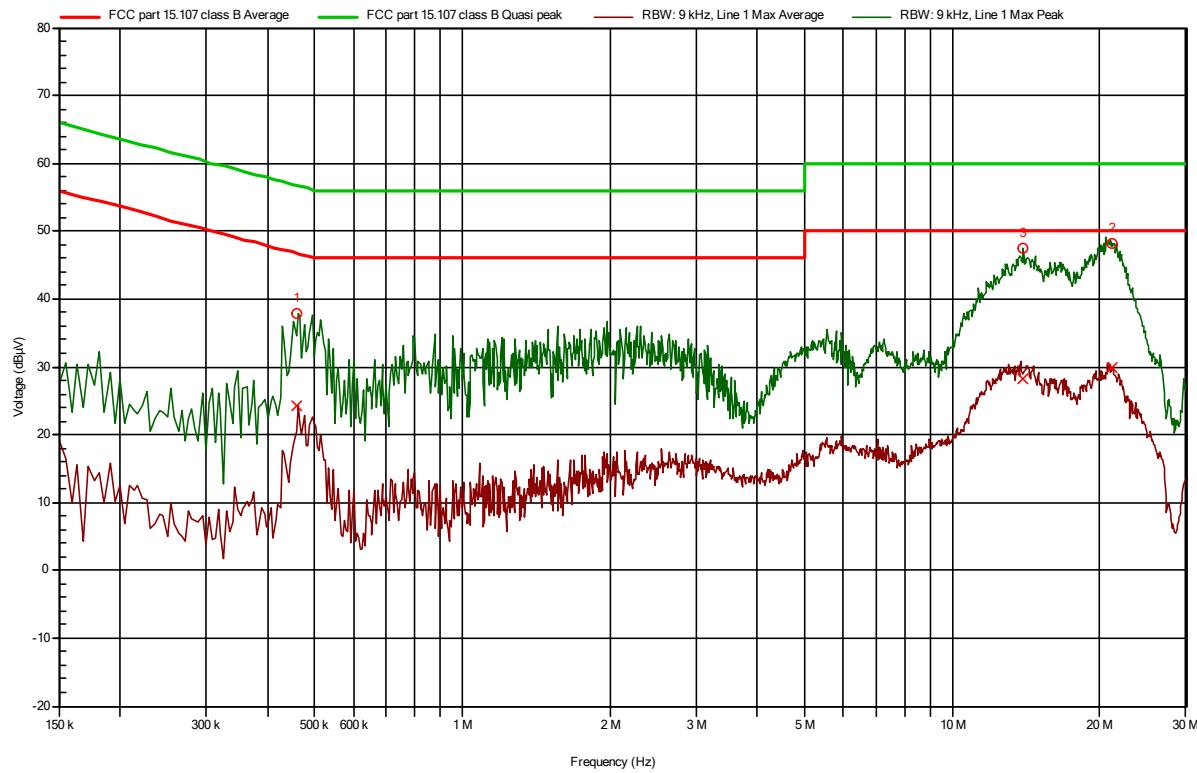

Pre-scan plot with peak detector of the AC Power-line Conducted emissions on **Phase**

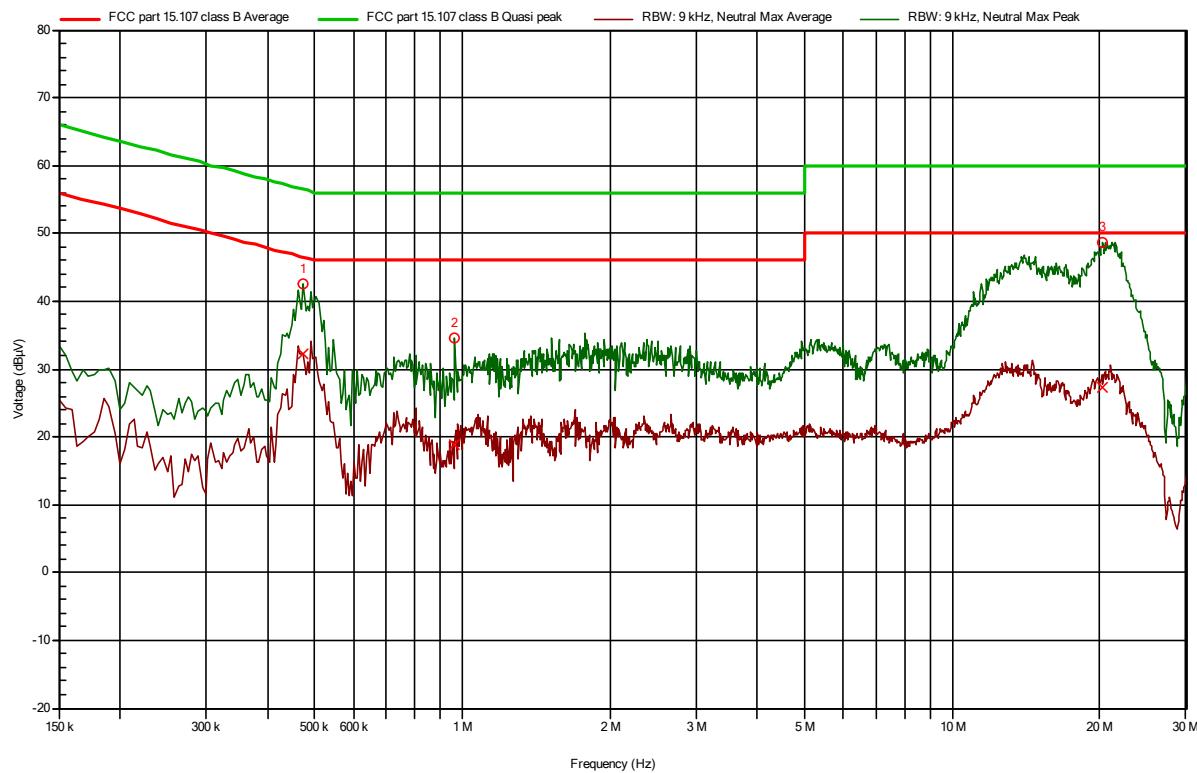

Pre-scan plot with peak detector of the AC Power-line Conducted emissions on **Neutral**

4 Sample calculations

All formulas for data conversions and conversion factors are reported in this chapter.

Conducted emission Measurement:

$$U_{lisn} (\text{dB}\mu\text{V}) = U (\text{dB}\mu\text{V}) + \text{Corr. (dB)}$$

Where:

U = Measuring receiver voltage

LISN insertion loss = Voltage division factor of LISN

Corr. = sum of single correction factors of used LISN, cables and pulse limiter.

Linear interpolation will be used for frequencies in between the values in the table.

Frequency (MHz)	Voltage division LISN (db)	Cable loss (dB)	Corr. (dB)
		TE 11134	
0,15	9.7	0.02	9.72
0,2	9.68	0.03	9.71
0,3	9.68	0.03	9.71
0,5	9.69	0.08	9.77
0,7	9.69	0.25	9.94
0,8	9.69	0.25	9.94
1	9.68	0.11	9.79
2	9.7	0.15	9.85
3	9.71	0.21	9.92
5	9.72	0.21	9.93
7	9.76	0.25	10.01
8	9.77	0.25	10.02
10	9.77	0.29	10.06
15	9.84	0.34	10.18
20	9.88	0.37	10.25
25	9.97	0.43	10.4
30	10.08	0.45	10.53

Field Strength Measurement:

$$E (\text{dB}\mu\text{V}/\text{m}) = U(\text{dB}\mu\text{V}) + AF (\text{dB}/\text{m}) + \text{Corr.} (\text{dB})$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

Corr. = sum of single correction factors of used cable and amplifier (if applicable).

Linear interpolation will be used for frequencies in between the values in the table.

Tables shows an extract of the values.

Frequency (MHz)	AF (dB/m)	Cable loss (dB)	Corr. (dB)
		ID: SAR cable	
30	18.6	0.68	19.28
100	10.4	1.15	11.55
150	14.8	1.41	16.21
200	16.0	1.63	17.63
250	16.9	1.93	18.83

Frequency (MHz)	Gain (dBi)	Cable loss (dB)	Corr. (dB)
		ID: SAR cable	
250	11.8	1.93	13.73
300	13	2.12	15.12
350	15.6	2.2	17.8
400	17.1	2.29	19.39
450	17.3	2.53	19.83
500	17.7	2.67	20.37
550	18.4	2.9	21.3
600	19.2	3.02	22.22
650	19.7	3.09	22.79
700	20.3	3.22	23.52
750	21.4	3.56	24.96
800	22	3.69	25.69
900	22.1	3.81	25.91
950	22.6	3.91	26.51
1000	22.5	4.3	26.8

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr.
				(dB)
TE 00531	TE 11132	TE 01315		
Emco 3115	Miteq			
SN: 9412-4377	JS4-18004000-30-8P-A1			
1000	23,6	40,4	2,0	66
1500	25,1	40,5	2,4	68
2000	27,1	40,5	2,7	70,3
2500	28,6	40,7	3,2	72,5
3000	30,5	40,7	3,2	74,4
3500	31,2	40,7	3,4	75,3
4000	32,7	40,9	4,9	78,5
4500	32,4	40,9	4,4	77,7
5000	33,2	40,7	4,6	78,5
5500	34,0	40,5	4,5	79
6000	34,6	40,0	5,2	79,8
6500	34,3	39,4	5,9	79,6
7000	35,2	38,6	5,7	79,5
7500	36,4	39,2	5,9	81,5
8000	37,0	38,9	6,3	82,2
8500	37,5	38,4	6,4	82,3
9000	38,1	37,4	6,5	82
9500	37,8	37,0	7,1	81,9
10000	38,2	36,5	7,3	82
10500	38,1	36,7	7,6	82,4
11000	38,3	36,9	8,3	83,5
11500	38,5	37,6	8,1	84,2
12000	39,1	38,3	8,4	85,8
12500	38,7	38,5	8,3	85,5
13000	39,2	38,9	9,2	87,3
13500	40,5	40,2	8,3	89
14000	41,1	40,0	8,2	89,3
14500	41,4	40,1	8,2	89,7
15000	40,2	41,4	8,3	89,9
15500	37,9	41,4	8,6	87,9
16000	37,5	42,8	9,2	89,5
16500	38,6	42,3	8,8	89,7
17000	41,1	43,1	9,4	93,6
17500	42,7	43,2	9,4	95,3
18000	44,0	44,2	9,8	98

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr.
				(dB)
TE 00818	TE 11131	TE 01315		
Flann 20240-25	Miteq			
SN: 163703	JS4-18004000-30-8P-A1			
18000	31,3	26,2	9,8	67,3
19000	31,5	26,1	9,6	67,2
20000	31,7	25,9	11	68,6
21000	31,9	24,3	10,7	66,9
22000	32,1	18,3	10,5	60,9
23000	32,2	18,9	10,8	61,9
24000	32,3	23,6	11,4	67,3
25000	32,4	24,5	11,6	68,5
26000	32,5	25,3	11,7	69,5

5 Photograph test setup

5.1 Photograph test setup Radiated Emissions



Photo 1 Photograph test setup radiated emissions 30-250 MHz, report section 3.1



Photo 2 Photograph test setup radiated emissions 250-1000 MHz, report section 3.1

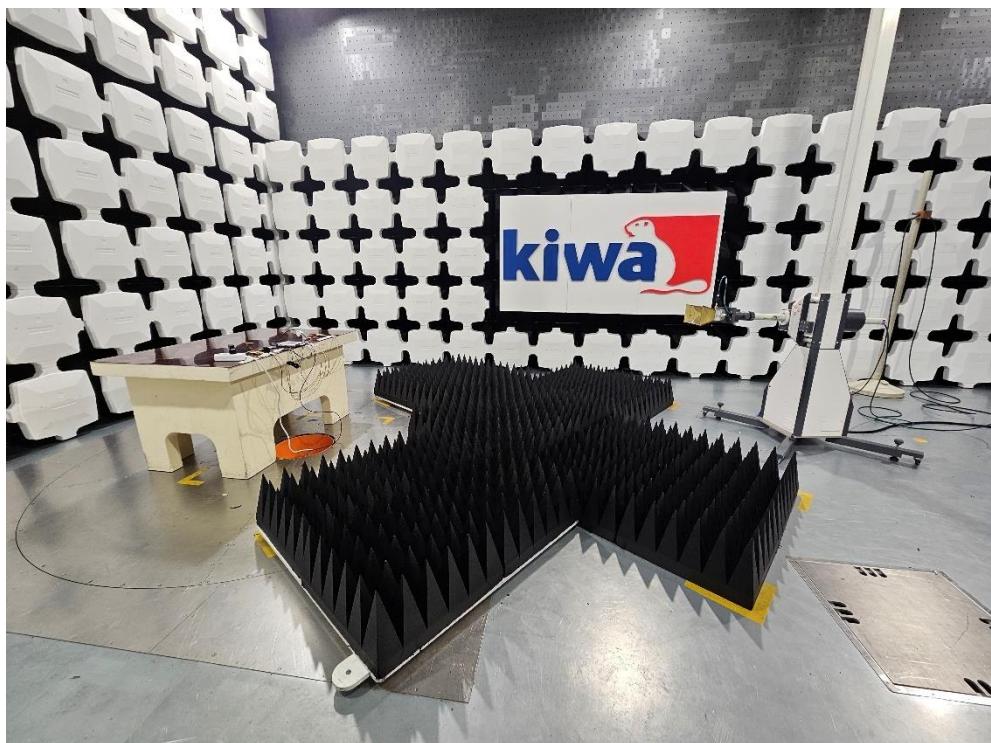


Photo 3 Photograph test setup radiated emissions 1-18 GHz, report section 3.1

5.2 Photograph test setup, AC Power Line Conducted emissions

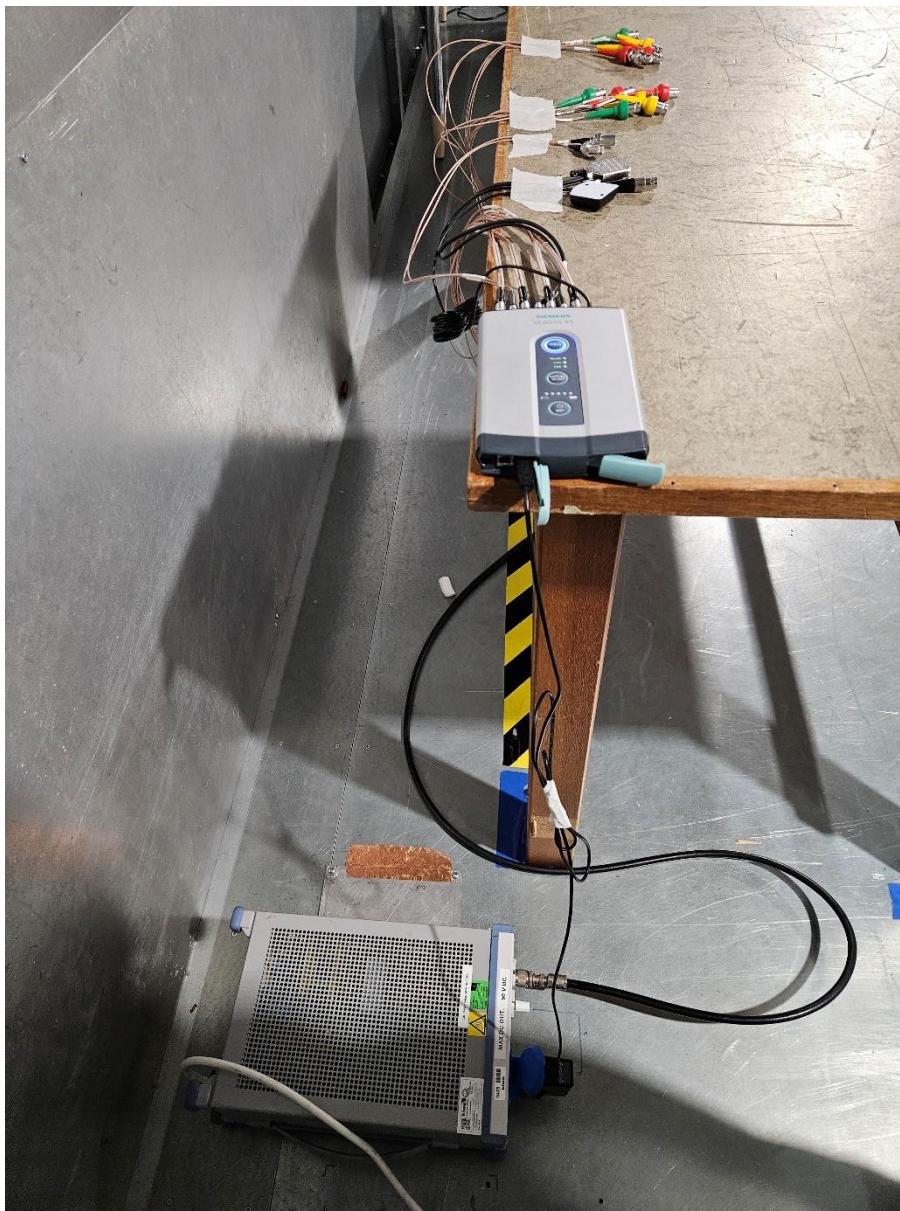


Photo 4: Photographs AC Power Line conducted emission, report section 3.3

<<END OF REPORT>>