



Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH105

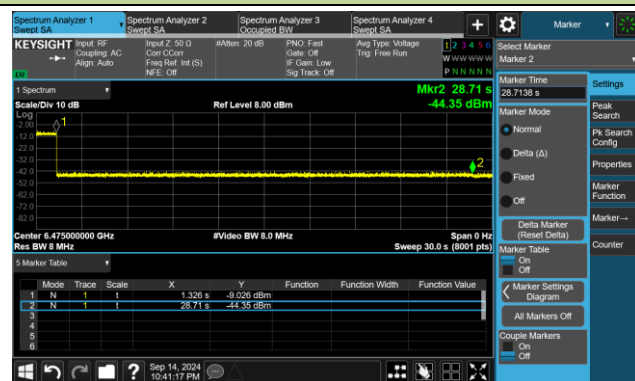


802.11be-EHT320 / CH97 (Low Edge)

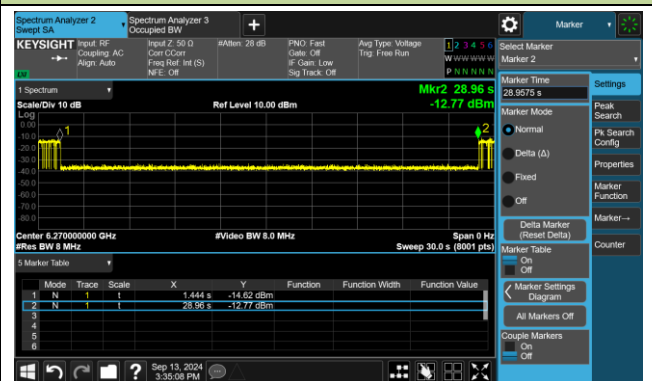

802.11be-EHT320 / CH97 (Middle)

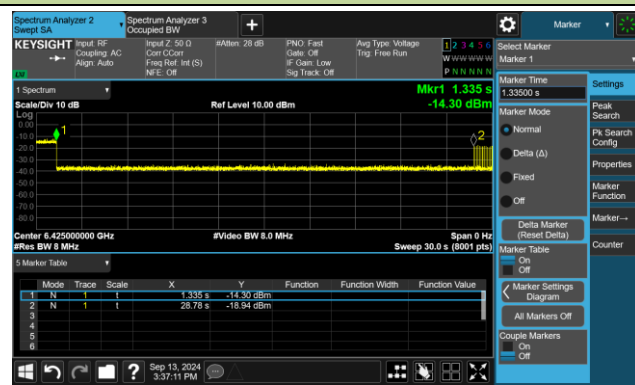


802.11be-EHT320 / CH97 (High Edge)

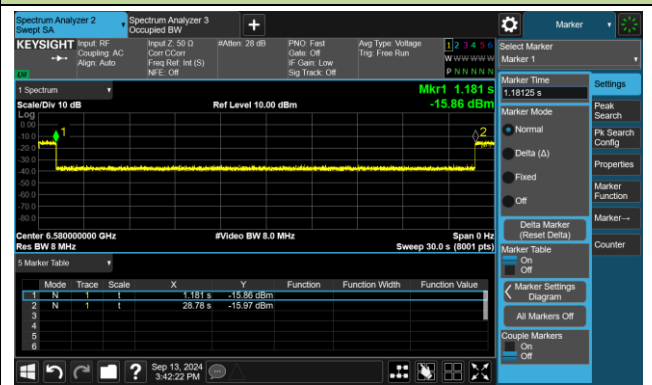


Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH165

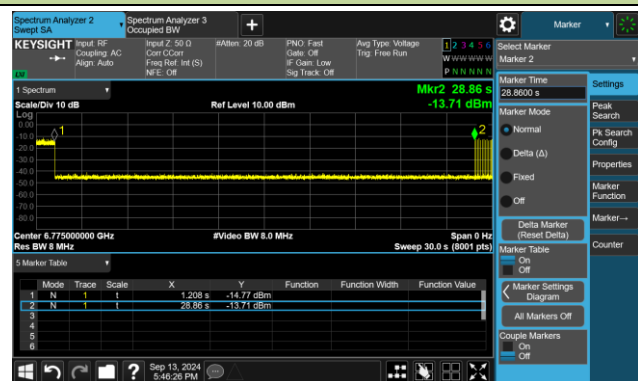


802.11be-EHT320 / CH127 (Low Edge)

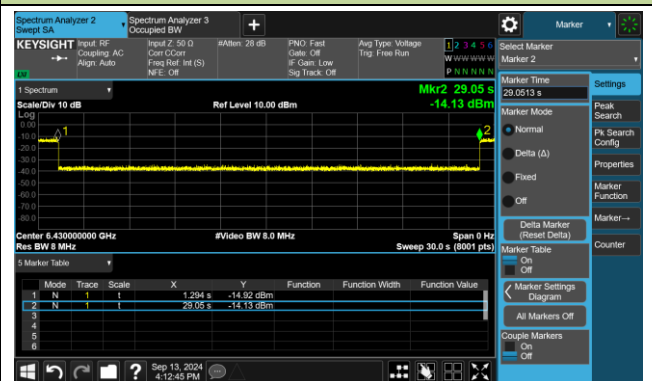

802.11be-EHT320 / CH127 (Middle)

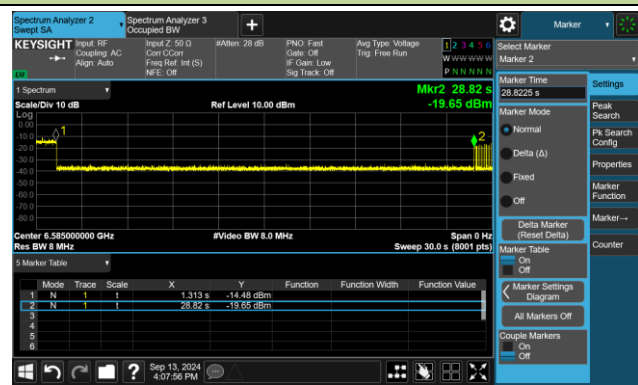


802.11be-EHT320 / CH127 (High Edge)

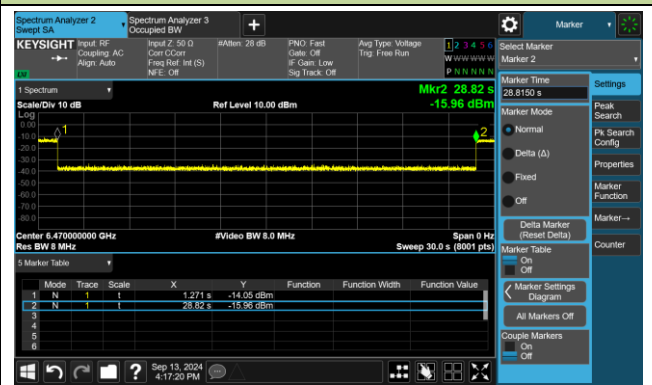


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH213

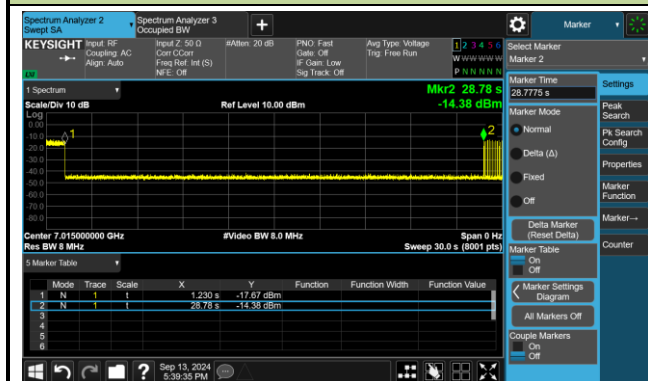


802.11be-EHT320 / CH191 (Low Edge)

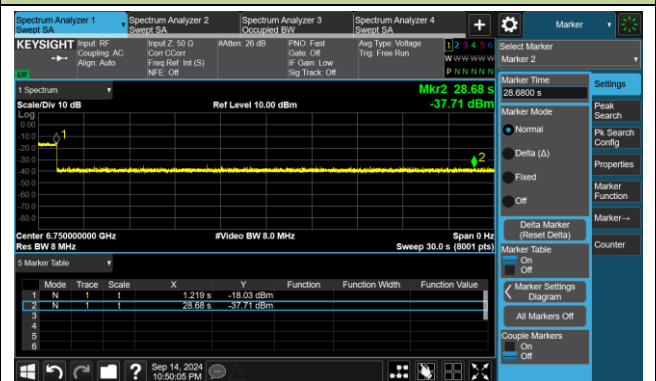

802.11be-EHT320 / CH191 (Middle)

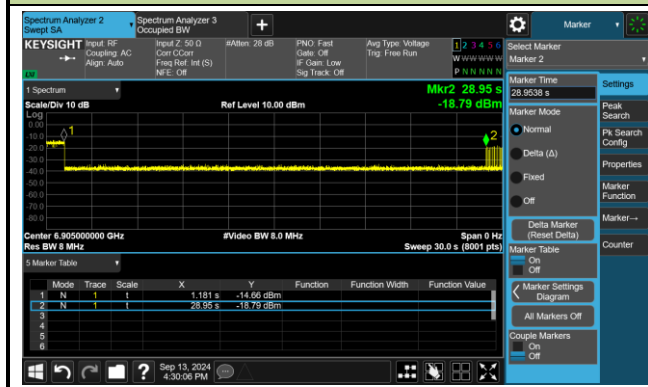

802.11be-EHT320 / CH191 (High Edge)

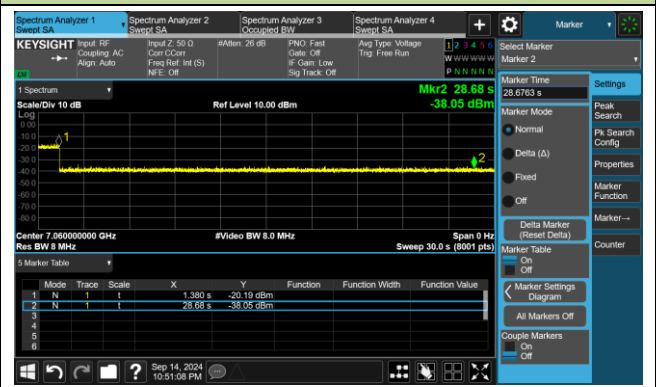

A.8 Radiated Spurious Emission Test Result

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	1
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11533.200	40.0	6.5	46.5	74.0	-27.5	Peak	Horizontal
*	14555.800	37.8	10.2	48.0	88.2	-40.2	Peak	Horizontal
*	17469.600	37.4	11.8	49.2	88.2	-39.0	Peak	Horizontal
	17996.600	36.6	17.7	54.3	74.0	-19.7	Peak	Horizontal
	17996.600	24.8	17.7	42.5	54.0	-11.5	Average	Horizontal
	11337.700	39.9	6.6	46.5	74.0	-27.5	Peak	Vertical
*	14557.500	38.0	10.2	48.2	88.2	-40.0	Peak	Vertical
*	17518.900	36.6	12.6	49.2	88.2	-39.0	Peak	Vertical
	17998.300	35.5	17.9	53.4	74.0	-20.6	Peak	Vertical
	17998.300	24.9	17.9	42.8	54.0	-11.2	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	49
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9425.200	41.2	3.9	45.1	74.0	-28.9	Peak	Horizontal
	11154.100	40.8	6.1	46.9	74.0	-27.1	Peak	Horizontal
*	14523.500	37.8	10.9	48.7	88.2	-39.5	Peak	Horizontal
*	17575.000	37.7	12.3	50.0	88.2	-38.2	Peak	Horizontal
	9437.100	40.7	3.9	44.6	74.0	-29.4	Peak	Vertical
	11655.600	40.0	6.4	46.4	74.0	-27.6	Peak	Vertical
*	14518.400	37.1	11.3	48.4	88.2	-39.8	Peak	Vertical
*	17568.200	37.4	12.5	49.9	88.2	-38.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	93
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9392.900	41.2	4.0	45.2	74.0	-28.8	Peak	Horizontal
	11948.000	41.7	5.7	47.4	74.0	-26.6	Peak	Horizontal
*	14343.300	38.9	10.1	49.0	88.2	-39.2	Peak	Horizontal
*	17575.000	38.1	12.3	50.4	88.2	-37.8	Peak	Horizontal
	9421.800	41.0	3.8	44.8	74.0	-29.2	Peak	Vertical
	11533.200	40.3	6.5	46.8	74.0	-27.2	Peak	Vertical
*	14753.000	38.7	10.2	48.9	88.2	-39.3	Peak	Vertical
*	17665.100	37.4	13.5	50.9	88.2	-37.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	97
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9321.500	41.3	4.1	45.4	74.0	-28.6	Peak	Horizontal
	11332.600	39.6	6.6	46.2	74.0	-27.8	Peak	Horizontal
*	14350.100	38.5	10.2	48.7	88.2	-39.5	Peak	Horizontal
*	17677.000	36.9	13.7	50.6	88.2	-37.6	Peak	Horizontal
	9442.200	40.5	3.7	44.2	74.0	-29.8	Peak	Vertical
	11074.200	40.6	6.0	46.6	74.0	-27.4	Peak	Vertical
*	14637.400	38.0	10.5	48.5	88.2	-39.7	Peak	Vertical
*	17661.700	37.8	13.5	51.3	88.2	-36.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	105
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.000	40.1	4.1	44.2	74.0	-29.8	Peak	Horizontal
	10877.000	41.5	5.9	47.4	74.0	-26.6	Peak	Horizontal
*	14345.000	38.0	10.2	48.2	88.2	-40.0	Peak	Horizontal
*	17641.300	37.1	12.9	50.0	88.2	-38.2	Peak	Horizontal
	9481.300	40.6	3.6	44.2	74.0	-29.8	Peak	Vertical
	11164.300	40.5	6.1	46.6	74.0	-27.4	Peak	Vertical
*	14428.300	38.5	10.3	48.8	88.2	-39.4	Peak	Vertical
*	17573.300	37.7	12.3	50.0	88.2	-38.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	113
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9432.000	41.1	4.1	45.2	74.0	-28.8	Peak	Horizontal
	10977.300	40.6	6.0	46.6	74.0	-27.4	Peak	Horizontal
*	14577.900	37.8	10.4	48.2	88.2	-40.0	Peak	Horizontal
*	17660.000	37.4	13.4	50.8	88.2	-37.4	Peak	Horizontal
	9323.200	40.7	4.1	44.8	74.0	-29.2	Peak	Vertical
	11040.200	40.8	6.1	46.9	74.0	-27.1	Peak	Vertical
*	14749.600	38.5	10.2	48.7	88.2	-39.5	Peak	Vertical
*	17673.600	36.9	13.6	50.5	88.2	-37.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	117
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9418.400	40.9	3.7	44.6	74.0	-29.4	Peak	Horizontal
	10803.900	41.5	5.4	46.9	74.0	-27.1	Peak	Horizontal
*	14583.000	37.4	10.5	47.9	88.2	-40.3	Peak	Horizontal
*	17624.300	37.5	12.8	50.3	88.2	-37.9	Peak	Horizontal
	9421.800	40.8	3.8	44.6	74.0	-29.4	Peak	Vertical
	11026.600	40.7	6.0	46.7	74.0	-27.3	Peak	Vertical
*	14747.900	38.8	10.3	49.1	88.2	-39.1	Peak	Vertical
*	17522.300	36.9	12.7	49.6	88.2	-38.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	153
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9477.900	41.5	3.6	45.1	74.0	-28.9	Peak	Horizontal
	11414.200	40.0	6.8	46.8	74.0	-27.2	Peak	Horizontal
*	14307.600	39.5	10.0	49.5	88.2	-38.7	Peak	Horizontal
*	17532.500	36.8	12.3	49.1	88.2	-39.1	Peak	Horizontal
	9433.700	41.1	4.0	45.1	74.0	-28.9	Peak	Vertical
	11424.400	40.0	6.9	46.9	74.0	-27.1	Peak	Vertical
*	14533.700	39.6	10.2	49.8	88.2	-38.4	Peak	Vertical
*	17585.200	39.7	12.2	51.9	88.2	-36.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	181
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	10310.900	49.1	2.1	51.2	88.2	-37.0	Peak	Horizontal
	11489.000	49.2	0.9	50.1	74.0	-23.9	Peak	Horizontal
*	14005.000	47.2	4.3	51.5	88.2	-36.7	Peak	Horizontal
	17777.300	45.9	9.2	55.1	74.0	-18.9	Peak	Horizontal
	17777.300	33.3	9.2	42.5	54.0	-11.5	Average	Horizontal
*	10331.300	47.8	2.0	49.8	88.2	-38.4	Peak	Vertical
	11087.800	48.1	1.5	49.6	74.0	-24.4	Peak	Vertical
*	13155.000	49.6	-0.2	49.4	88.2	-38.8	Peak	Vertical
	17845.300	45.6	10.0	55.6	74.0	-18.4	Peak	Vertical
	17845.300	33.3	10.0	43.3	54.0	-10.7	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	185
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9809.400	47.9	0.6	48.5	88.2	-39.7	Peak	Horizontal
	11574.000	48.0	0.7	48.7	74.0	-25.3	Peak	Horizontal
*	13064.900	48.0	-0.4	47.6	88.2	-40.6	Peak	Horizontal
	15621.700	44.3	6.8	51.1	74.0	-22.9	Peak	Horizontal
	15621.700	32.3	6.8	39.1	54.0	-14.9	Average	Horizontal
*	10331.300	47.0	2.0	49.0	88.2	-39.2	Peak	Vertical
	11077.600	47.0	1.5	48.5	74.0	-25.5	Peak	Vertical
*	14008.400	46.3	4.3	50.6	88.2	-37.6	Peak	Vertical
	15626.800	44.0	6.7	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	189
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10338.100	47.3	1.8	49.1	88.2	-39.1	Peak	Horizontal
	11517.900	47.2	0.5	47.7	74.0	-26.3	Peak	Horizontal
*	14222.600	46.3	3.7	50.0	88.2	-38.2	Peak	Horizontal
	15623.400	44.4	6.7	51.1	74.0	-22.9	Peak	Horizontal
	15623.400	32.5	6.7	39.2	54.0	-14.8	Average	Horizontal
*	10314.300	46.5	2.1	48.6	88.2	-39.6	Peak	Vertical
	11502.600	48.4	0.7	49.1	74.0	-24.9	Peak	Vertical
*	14010.100	45.4	4.3	49.7	88.2	-38.5	Peak	Vertical
	15716.900	45.2	6.5	51.7	74.0	-22.3	Peak	Vertical
	15716.900	32.4	6.5	38.9	54.0	-15.1	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	213
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10324.500	46.9	2.0	48.9	88.2	-39.3	Peak	Horizontal
	10885.500	47.4	1.3	48.7	74.0	-25.3	Peak	Horizontal
*	14124.000	45.9	4.0	49.9	88.2	-38.3	Peak	Horizontal
	15711.800	44.8	6.4	51.2	74.0	-22.8	Peak	Horizontal
	15711.800	32.5	6.4	38.9	54.0	-15.1	Average	Horizontal
*	10327.900	46.1	2.0	48.1	88.2	-40.1	Peak	Vertical
	10820.900	47.1	1.3	48.4	74.0	-25.6	Peak	Vertical
*	14232.800	46.3	3.7	50.0	88.2	-38.2	Peak	Vertical
	15628.500	44.2	6.7	50.9	74.0	-23.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE20 (Nss=4)	Test Channel	229
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10249.700	47.8	0.8	48.6	88.2	-39.6	Peak	Horizontal
	11014.700	47.6	0.7	48.3	74.0	-25.7	Peak	Horizontal
*	14181.800	46.5	3.4	49.9	88.2	-38.3	Peak	Horizontal
	15626.800	44.8	6.7	51.5	74.0	-22.5	Peak	Horizontal
	15626.800	32.5	6.7	39.2	54.0	-14.8	Average	Horizontal
*	10319.400	46.4	2.1	48.5	88.2	-39.7	Peak	Vertical
	11089.500	47.0	1.5	48.5	74.0	-25.5	Peak	Vertical
*	15028.400	46.3	4.6	50.9	88.2	-37.3	Peak	Vertical
	15631.900	44.1	6.7	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	3
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9384.400	40.2	4.2	44.4	74.0	-29.6	Peak	Horizontal
	11687.900	40.9	5.9	46.8	74.0	-27.2	Peak	Horizontal
*	14800.600	39.3	10.6	49.9	88.2	-38.3	Peak	Horizontal
*	17658.300	38.0	13.4	51.4	88.2	-36.8	Peak	Horizontal
	9430.300	42.1	4.0	46.1	74.0	-27.9	Peak	Vertical
	11094.600	41.1	6.3	47.4	74.0	-26.6	Peak	Vertical
*	14732.600	39.1	10.3	49.4	88.2	-38.8	Peak	Vertical
*	17656.600	38.5	13.3	51.8	88.2	-36.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	51
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9370.800	41.0	3.9	44.9	74.0	-29.1	Peak	Horizontal
	11526.400	40.9	6.7	47.6	74.0	-26.4	Peak	Horizontal
*	14263.400	39.4	9.6	49.0	88.2	-39.2	Peak	Horizontal
*	17660.000	39.0	13.4	52.4	88.2	-35.8	Peak	Horizontal
	9438.800	41.6	3.8	45.4	74.0	-28.6	Peak	Vertical
	11516.200	41.6	6.7	48.3	74.0	-25.7	Peak	Vertical
*	14758.100	39.9	10.0	49.9	88.2	-38.3	Peak	Vertical
*	17583.500	38.7	12.2	50.9	88.2	-37.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	91
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9449.000	41.2	3.4	44.6	74.0	-29.4	Peak	Horizontal
	11555.300	40.5	6.8	47.3	74.0	-26.7	Peak	Horizontal
*	14073.000	40.3	8.9	49.2	88.2	-39.0	Peak	Horizontal
*	17527.400	38.1	12.6	50.7	88.2	-37.5	Peak	Horizontal
	9454.100	41.3	3.4	44.7	74.0	-29.3	Peak	Vertical
	11419.300	41.1	6.8	47.9	74.0	-26.1	Peak	Vertical
*	14635.700	38.2	10.6	48.8	88.2	-39.4	Peak	Vertical
*	17627.700	40.9	12.8	53.7	88.2	-34.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	99
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9404.800	40.5	3.8	44.3	74.0	-29.7	Peak	Horizontal
	11526.400	40.3	6.7	47.0	74.0	-27.0	Peak	Horizontal
*	14243.000	40.5	9.5	50.0	88.2	-38.2	Peak	Horizontal
*	17520.600	39.0	12.7	51.7	88.2	-36.5	Peak	Horizontal
	9423.500	40.6	3.9	44.5	74.0	-29.5	Peak	Vertical
	11557.000	40.4	6.8	47.2	74.0	-26.8	Peak	Vertical
*	14545.600	39.6	10.3	49.9	88.2	-38.3	Peak	Vertical
*	17677.000	38.1	13.7	51.8	88.2	-36.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	107
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9432.000	40.9	4.1	45.0	74.0	-29.0	Peak	Horizontal
	11562.100	39.9	6.7	46.6	74.0	-27.4	Peak	Horizontal
*	14516.700	38.6	11.4	50.0	88.2	-38.2	Peak	Horizontal
*	17551.200	38.6	12.4	51.0	88.2	-37.2	Peak	Horizontal
	9314.700	41.0	4.0	45.0	74.0	-29.0	Peak	Vertical
	11409.100	40.4	6.7	47.1	74.0	-26.9	Peak	Vertical
*	14683.300	39.9	10.0	49.9	88.2	-38.3	Peak	Vertical
*	17457.700	39.2	11.9	51.1	88.2	-37.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	115
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9426.900	41.3	4.0	45.3	74.0	-28.7	Peak	Horizontal
	11388.700	40.0	7.2	47.2	74.0	-26.8	Peak	Horizontal
*	14515.000	37.8	11.6	49.4	88.2	-38.8	Peak	Horizontal
*	17586.900	38.1	12.2	50.3	88.2	-37.9	Peak	Horizontal
	9377.600	41.2	4.1	45.3	74.0	-28.7	Peak	Vertical
	11023.200	41.7	5.9	47.6	74.0	-26.4	Peak	Vertical
*	14630.600	39.3	10.5	49.8	88.2	-38.4	Peak	Vertical
*	17556.300	37.7	12.6	50.3	88.2	-37.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	123
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9430.300	41.2	4.0	45.2	74.0	-28.8	Peak	Horizontal
	11521.300	41.1	6.8	47.9	74.0	-26.1	Peak	Horizontal
*	14528.600	39.2	10.4	49.6	88.2	-38.6	Peak	Horizontal
*	17529.100	38.3	12.5	50.8	88.2	-37.4	Peak	Horizontal
	9433.700	41.2	4.0	45.2	74.0	-28.8	Peak	Vertical
	11465.200	40.7	6.6	47.3	74.0	-26.7	Peak	Vertical
*	14804.000	38.7	10.8	49.5	88.2	-38.7	Peak	Vertical
*	17564.800	39.2	12.5	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	147
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10171.500	48.1	0.5	48.6	88.2	-39.6	Peak	Horizontal
	11082.700	47.4	1.5	48.9	74.0	-25.1	Peak	Horizontal
*	15033.500	45.9	4.6	50.5	88.2	-37.7	Peak	Horizontal
	15939.600	44.8	6.7	51.5	74.0	-22.5	Peak	Horizontal
	15939.600	32.6	6.7	39.3	54.0	-14.7	Average	Horizontal
*	10302.400	46.0	2.1	48.1	88.2	-40.1	Peak	Vertical
	11351.300	47.2	0.6	47.8	74.0	-26.2	Peak	Vertical
*	14054.300	46.2	3.5	49.7	88.2	-38.5	Peak	Vertical
	15793.400	45.3	5.8	51.1	74.0	-22.9	Peak	Vertical
	15793.400	32.7	5.8	38.5	54.0	-15.5	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	179
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10312.600	47.0	2.1	49.1	88.2	-39.1	Peak	Horizontal
	10814.100	47.2	1.3	48.5	74.0	-25.5	Peak	Horizontal
*	14632.300	45.7	4.2	49.9	88.2	-38.3	Peak	Horizontal
	15485.700	45.6	5.6	51.2	74.0	-22.8	Peak	Horizontal
	15485.700	32.6	5.6	38.2	54.0	-15.8	Average	Horizontal
*	10336.400	46.4	1.8	48.2	88.2	-40.0	Peak	Vertical
	10837.900	47.6	1.4	49.0	74.0	-25.0	Peak	Vertical
*	14105.300	46.0	3.6	49.6	88.2	-38.6	Peak	Vertical
	15875.000	45.3	5.9	51.2	74.0	-22.8	Peak	Vertical
	15875.000	32.4	5.9	38.3	54.0	-15.7	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	187
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10215.700	47.4	1.0	48.4	88.2	-39.8	Peak	Horizontal
	11086.100	47.3	1.5	48.8	74.0	-25.2	Peak	Horizontal
*	14069.600	46.3	3.6	49.9	88.2	-38.3	Peak	Horizontal
	15633.600	44.2	6.7	50.9	74.0	-23.1	Peak	Horizontal
*	10326.200	46.6	2.0	48.6	88.2	-39.6	Peak	Vertical
	11089.500	46.6	1.5	48.1	74.0	-25.9	Peak	Vertical
*	14547.300	45.7	4.7	50.4	88.2	-37.8	Peak	Vertical
	15623.400	44.6	6.7	51.3	74.0	-22.7	Peak	Vertical
	15623.400	32.4	6.7	39.1	54.0	-14.9	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	195
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	10312.600	46.7	2.1	48.8	88.2	-39.4	Peak	Horizontal
	11064.000	47.7	1.2	48.9	74.0	-25.1	Peak	Horizontal
*	14129.100	44.9	4.0	48.9	88.2	-39.3	Peak	Horizontal
	15638.700	44.7	6.6	51.3	74.0	-22.7	Peak	Horizontal
	15638.700	32.6	6.6	39.2	54.0	-14.8	Average	Horizontal
*	10326.200	46.3	2.0	48.3	88.2	-39.9	Peak	Vertical
	10890.600	47.4	1.2	48.6	74.0	-25.4	Peak	Vertical
*	14127.400	45.9	4.0	49.9	88.2	-38.3	Peak	Vertical
	15696.500	44.4	6.1	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	211
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10310.900	46.2	2.1	48.3	88.2	-39.9	Peak	Horizontal
	11084.400	47.3	1.5	48.8	74.0	-25.2	Peak	Horizontal
*	14025.400	45.9	4.2	50.1	88.2	-38.1	Peak	Horizontal
	15616.600	44.6	6.6	51.2	74.0	-22.8	Peak	Horizontal
	15616.600	32.5	6.6	39.1	54.0	-14.9	Average	Horizontal
*	10314.300	46.0	2.1	48.1	88.2	-40.1	Peak	Vertical
	11075.900	47.6	1.5	49.1	74.0	-24.9	Peak	Vertical
*	14022.000	45.4	4.4	49.8	88.2	-38.4	Peak	Vertical
	15606.400	45.4	6.3	51.7	74.0	-22.3	Peak	Vertical
	15606.400	33.5	6.3	39.8	54.0	-14.2	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE40 (Nss=4)	Test Channel	227
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10317.700	46.9	2.1	49.0	88.2	-39.2	Peak	Horizontal
	11084.400	47.5	1.5	49.0	74.0	-25.0	Peak	Horizontal
*	14142.700	45.9	4.0	49.9	88.2	-38.3	Peak	Horizontal
	15640.400	44.9	6.5	51.4	74.0	-22.6	Peak	Horizontal
	15640.400	32.2	6.5	38.7	54.0	-15.3	Average	Horizontal
*	10322.800	45.8	2.1	47.9	88.2	-40.3	Peak	Vertical
	11096.300	46.8	1.5	48.3	74.0	-25.7	Peak	Vertical
*	14249.800	46.4	3.7	50.1	88.2	-38.1	Peak	Vertical
	15633.600	43.9	6.7	50.6	74.0	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	7
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9379.300	40.7	4.2	44.9	74.0	-29.1	Peak	Horizontal
	11035.100	40.9	6.1	47.0	74.0	-27.0	Peak	Horizontal
*	14433.400	38.7	10.3	49.0	88.2	-39.2	Peak	Horizontal
*	17573.300	38.4	12.3	50.7	88.2	-37.5	Peak	Horizontal
	9423.500	40.7	3.9	44.6	74.0	-29.4	Peak	Vertical
	11524.700	40.7	6.7	47.4	74.0	-26.6	Peak	Vertical
*	14526.900	38.7	10.6	49.3	88.2	-38.9	Peak	Vertical
*	17658.300	38.0	13.4	51.4	88.2	-36.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	55
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.000	40.8	4.1	44.9	74.0	-29.1	Peak	Horizontal
	11417.600	40.3	6.8	47.1	74.0	-26.9	Peak	Horizontal
*	14515.000	38.1	11.6	49.7	88.2	-38.5	Peak	Horizontal
*	17627.700	37.7	12.8	50.5	88.2	-37.7	Peak	Horizontal
	9433.700	40.8	4.0	44.8	74.0	-29.2	Peak	Vertical
	11497.500	40.6	6.7	47.3	74.0	-26.7	Peak	Vertical
*	14515.000	37.8	11.6	49.4	88.2	-38.8	Peak	Vertical
*	17660.000	38.9	13.4	52.3	88.2	-35.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	87
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9452.400	41.5	3.4	44.9	74.0	-29.1	Peak	Horizontal
	11628.400	40.6	6.3	46.9	74.0	-27.1	Peak	Horizontal
*	14520.100	38.2	11.1	49.3	88.2	-38.9	Peak	Horizontal
*	17467.900	39.1	11.8	50.9	88.2	-37.3	Peak	Horizontal
	9469.400	41.3	3.5	44.8	74.0	-29.2	Peak	Vertical
	11648.800	40.7	6.2	46.9	74.0	-27.1	Peak	Vertical
*	14515.000	37.6	11.6	49.2	88.2	-39.0	Peak	Vertical
*	17466.200	37.8	11.9	49.7	88.2	-38.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	103
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9435.400	41.2	4.0	45.2	74.0	-28.8	Peak	Horizontal
	10973.900	40.9	5.9	46.8	74.0	-27.2	Peak	Horizontal
*	14518.400	38.8	11.3	50.1	88.2	-38.1	Peak	Horizontal
*	17561.400	38.2	12.6	50.8	88.2	-37.4	Peak	Horizontal
	9462.600	41.5	3.5	45.0	74.0	-29.0	Peak	Vertical
	11557.000	40.6	6.8	47.4	74.0	-26.6	Peak	Vertical
*	14817.600	39.6	10.3	49.9	88.2	-38.3	Peak	Vertical
*	17658.300	37.2	13.4	50.6	88.2	-37.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	119
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9377.600	42.1	4.1	46.2	74.0	-27.8	Peak	Horizontal
	11307.100	41.5	6.1	47.6	74.0	-26.4	Peak	Horizontal
*	14338.200	39.3	9.9	49.2	88.2	-39.0	Peak	Horizontal
*	17561.400	38.1	12.6	50.7	88.2	-37.5	Peak	Horizontal
	9484.700	41.6	3.7	45.3	74.0	-28.7	Peak	Vertical
	11055.500	40.8	6.1	46.9	74.0	-27.1	Peak	Vertical
*	14345.000	39.1	10.2	49.3	88.2	-38.9	Peak	Vertical
*	17649.800	38.2	13.1	51.3	88.2	-36.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	151
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10319.400	46.9	2.1	49.0	88.2	-39.2	Peak	Horizontal
	11118.400	47.7	1.1	48.8	74.0	-25.2	Peak	Horizontal
*	14253.200	46.8	3.7	50.5	88.2	-37.7	Peak	Horizontal
	15620.000	45.1	6.8	51.9	74.0	-22.1	Peak	Horizontal
	15620.000	32.6	6.8	39.4	54.0	-14.6	Average	Horizontal
*	10324.500	46.7	2.0	48.7	88.2	-39.5	Peak	Vertical
	10649.200	46.9	1.4	48.3	74.0	-25.7	Peak	Vertical
*	14441.900	45.6	3.9	49.5	88.2	-38.7	Peak	Vertical
	15970.200	43.7	7.0	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	183
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10319.400	47.0	2.1	49.1	88.2	-39.1	Peak	Horizontal
	10938.200	47.2	1.1	48.3	74.0	-25.7	Peak	Horizontal
*	14543.900	45.8	4.6	50.4	88.2	-37.8	Peak	Horizontal
	15621.700	44.3	6.8	51.1	74.0	-22.9	Peak	Horizontal
	15621.700	32.5	6.8	39.3	54.0	-14.7	Average	Horizontal
*	10324.500	46.1	2.0	48.1	88.2	-40.1	Peak	Vertical
	11104.800	47.7	1.4	49.1	74.0	-24.9	Peak	Vertical
*	14350.100	46.1	3.6	49.7	88.2	-38.5	Peak	Vertical
	15958.300	44.4	7.5	51.9	74.0	-22.1	Peak	Vertical
	15958.300	32.4	7.5	39.9	54.0	-14.1	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	199
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10333.000	47.5	2.0	49.5	88.2	-38.7	Peak	Horizontal
	11101.400	46.7	1.4	48.1	74.0	-25.9	Peak	Horizontal
*	14530.300	46.4	4.2	50.6	88.2	-37.6	Peak	Horizontal
	15718.600	45.1	6.5	51.6	74.0	-22.4	Peak	Horizontal
	15718.600	32.4	6.5	38.9	54.0	-15.1	Average	Horizontal
*	10324.500	46.2	2.0	48.2	88.2	-40.0	Peak	Vertical
	10819.200	47.3	1.3	48.6	74.0	-25.4	Peak	Vertical
*	14617.000	46.3	4.3	50.6	88.2	-37.6	Peak	Vertical
	15835.900	44.4	6.3	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE80 (Nss=4)	Test Channel	215
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10324.500	46.4	2.0	48.4	88.2	-39.8	Peak	Horizontal
	10820.900	47.4	1.3	48.7	74.0	-25.3	Peak	Horizontal
*	14333.100	46.8	3.9	50.7	88.2	-37.5	Peak	Horizontal
	15953.200	44.0	7.3	51.3	74.0	-22.7	Peak	Horizontal
	15953.200	32.7	7.3	40.0	54.0	-14.0	Average	Horizontal
*	10304.100	46.5	2.1	48.6	88.2	-39.6	Peak	Vertical
	11084.400	47.3	1.5	48.8	74.0	-25.2	Peak	Vertical
*	14020.300	45.6	4.4	50.0	88.2	-38.2	Peak	Vertical
	15723.700	44.6	6.5	51.1	74.0	-22.9	Peak	Vertical
	15723.700	32.7	6.5	39.2	54.0	-14.8	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	15
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9462.600	41.2	3.5	44.7	74.0	-29.3	Peak	Horizontal
	11540.000	40.7	6.4	47.1	74.0	-26.9	Peak	Horizontal
*	14751.300	38.7	10.2	48.9	88.2	-39.3	Peak	Horizontal
*	17675.300	37.3	13.7	51.0	88.2	-37.2	Peak	Horizontal
	9425.200	40.8	3.9	44.7	74.0	-29.3	Peak	Vertical
	11524.700	40.9	6.7	47.6	74.0	-26.4	Peak	Vertical
*	14634.000	39.1	10.7	49.8	88.2	-38.4	Peak	Vertical
*	17663.400	37.9	13.5	51.4	88.2	-36.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	47
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9316.400	41.5	4.0	45.5	74.0	-28.5	Peak	Horizontal
	11364.900	40.7	6.5	47.2	74.0	-26.8	Peak	Horizontal
*	14739.400	38.8	10.3	49.1	88.2	-39.1	Peak	Horizontal
*	17518.900	38.1	12.6	50.7	88.2	-37.5	Peak	Horizontal
	9416.700	40.9	3.7	44.6	74.0	-29.4	Peak	Vertical
	11422.700	40.2	6.9	47.1	74.0	-26.9	Peak	Vertical
*	14639.100	38.4	10.3	48.7	88.2	-39.5	Peak	Vertical
*	17445.800	38.5	11.8	50.3	88.2	-37.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	79
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9474.500	41.7	3.6	45.3	74.0	-28.7	Peak	Horizontal
	11636.900	40.7	6.2	46.9	74.0	-27.1	Peak	Horizontal
*	14351.800	39.3	10.2	49.5	88.2	-38.7	Peak	Horizontal
*	17563.100	37.3	12.6	49.9	88.2	-38.3	Peak	Horizontal
	9467.700	41.5	3.5	45.0	74.0	-29.0	Peak	Vertical
	11625.000	40.7	6.4	47.1	74.0	-26.9	Peak	Vertical
*	14345.000	39.6	10.2	49.8	88.2	-38.4	Peak	Vertical
*	17549.500	38.5	12.3	50.8	88.2	-37.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	111
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9437.100	41.4	3.9	45.3	74.0	-28.7	Peak	Horizontal
	11402.300	39.9	6.7	46.6	74.0	-27.4	Peak	Horizontal
*	14465.700	39.3	9.8	49.1	88.2	-39.1	Peak	Horizontal
*	17563.100	37.6	12.6	50.2	88.2	-38.0	Peak	Horizontal
	9443.900	42.0	3.6	45.6	74.0	-28.4	Peak	Vertical
	10812.400	41.4	5.5	46.9	74.0	-27.1	Peak	Vertical
*	14815.900	38.9	10.4	49.3	88.2	-38.9	Peak	Vertical
*	17556.300	38.4	12.6	51.0	88.2	-37.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	143
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10341.500	47.1	1.6	48.7	88.2	-39.5	Peak	Horizontal
	10809.000	47.7	1.2	48.9	74.0	-25.1	Peak	Horizontal
*	14566.000	46.2	3.7	49.9	88.2	-38.3	Peak	Horizontal
	15829.100	45.4	6.2	51.6	74.0	-22.4	Peak	Horizontal
	15829.100	32.3	6.2	38.5	54.0	-15.5	Average	Horizontal
*	10205.500	48.0	0.9	48.9	88.2	-39.3	Peak	Vertical
	11094.600	46.9	1.5	48.4	74.0	-25.6	Peak	Vertical
*	14523.500	47.1	3.9	51.0	88.2	-37.2	Peak	Vertical
	15711.800	44.2	6.4	50.6	74.0	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	175
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10305.800	46.5	2.1	48.6	88.2	-39.6	Peak	Horizontal
	10751.200	47.3	1.5	48.8	74.0	-25.2	Peak	Horizontal
*	14957.000	46.9	4.3	51.2	88.2	-37.0	Peak	Horizontal
	15781.500	44.9	5.6	50.5	74.0	-23.5	Peak	Horizontal
*	10343.200	46.9	1.5	48.4	88.2	-39.8	Peak	Vertical
	10752.900	48.4	1.5	49.9	74.0	-24.1	Peak	Vertical
*	15087.900	45.6	5.7	51.3	88.2	-36.9	Peak	Vertical
	15691.400	44.6	6.0	50.6	74.0	-23.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11ax-HE160 (Nss=4)	Test Channel	207
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10321.100	46.1	2.1	48.2	88.2	-40.0	Peak	Horizontal
	10856.600	47.2	1.5	48.7	74.0	-25.3	Peak	Horizontal
*	14030.500	46.0	3.9	49.9	88.2	-38.3	Peak	Horizontal
	15965.100	44.0	7.3	51.3	74.0	-22.7	Peak	Horizontal
	15965.100	32.5	7.3	39.8	54.0	-14.2	Average	Horizontal
*	9829.800	48.2	0.8	49.0	88.2	-39.2	Peak	Vertical
	10741.000	46.5	1.3	47.8	74.0	-26.2	Peak	Vertical
*	14547.300	45.8	4.7	50.5	88.2	-37.7	Peak	Vertical
	15713.500	44.4	6.4	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	1
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9452.400	41.3	3.4	44.7	74.0	-29.3	Peak	Horizontal
	11030.000	41.9	6.0	47.9	74.0	-26.1	Peak	Horizontal
*	14525.200	39.5	10.7	50.2	88.2	-38.0	Peak	Horizontal
*	17551.200	38.8	12.4	51.2	88.2	-37.0	Peak	Horizontal
	9418.400	43.4	3.7	47.1	74.0	-26.9	Peak	Vertical
	11531.500	40.9	6.6	47.5	74.0	-26.5	Peak	Vertical
*	13931.900	40.8	8.5	49.3	88.2	-38.9	Peak	Vertical
*	17440.700	38.3	11.8	50.1	88.2	-38.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	49
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9384.400	41.2	4.2	45.4	74.0	-28.6	Peak	Horizontal
	11426.100	40.9	6.9	47.8	74.0	-26.2	Peak	Horizontal
*	14805.700	39.1	10.8	49.9	88.2	-38.3	Peak	Horizontal
*	17552.900	38.1	12.4	50.5	88.2	-37.7	Peak	Horizontal
	9381.000	41.7	4.3	46.0	74.0	-28.0	Peak	Vertical
	11543.400	41.6	6.5	48.1	74.0	-25.9	Peak	Vertical
*	14719.000	38.8	10.1	48.9	88.2	-39.3	Peak	Vertical
*	17551.200	38.4	12.4	50.8	88.2	-37.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	93
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9430.300	40.4	4.0	44.4	74.0	-29.6	Peak	Horizontal
	11208.500	40.6	6.5	47.1	74.0	-26.9	Peak	Horizontal
*	14557.500	39.5	10.2	49.7	88.2	-38.5	Peak	Horizontal
*	17517.200	38.4	12.5	50.9	88.2	-37.3	Peak	Horizontal
	9415.000	41.3	3.6	44.9	74.0	-29.1	Peak	Vertical
	11436.300	39.9	7.0	46.9	74.0	-27.1	Peak	Vertical
*	14717.300	39.7	10.0	49.7	88.2	-38.5	Peak	Vertical
*	17556.300	38.8	12.6	51.4	88.2	-36.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	97
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9379.300	40.5	4.2	44.7	74.0	-29.3	Peak	Horizontal
	11648.800	41.5	6.2	47.7	74.0	-26.3	Peak	Horizontal
*	14807.400	38.9	10.7	49.6	88.2	-38.6	Peak	Horizontal
*	17576.700	39.1	12.3	51.4	88.2	-36.8	Peak	Horizontal
	9379.300	40.9	4.2	45.1	74.0	-28.9	Peak	Vertical
	11543.400	40.6	6.5	47.1	74.0	-26.9	Peak	Vertical
*	14341.600	39.9	10.0	49.9	88.2	-38.3	Peak	Vertical
*	17585.200	38.1	12.2	50.3	88.2	-37.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	105
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9399.700	40.9	3.8	44.7	74.0	-29.3	Peak	Horizontal
	11509.400	40.5	6.7	47.2	74.0	-26.8	Peak	Horizontal
*	14377.300	39.1	10.2	49.3	88.2	-38.9	Peak	Horizontal
*	17515.500	38.7	12.4	51.1	88.2	-37.1	Peak	Horizontal
	9396.300	40.7	3.9	44.6	74.0	-29.4	Peak	Vertical
	11529.800	40.9	6.6	47.5	74.0	-26.5	Peak	Vertical
*	14627.200	40.3	10.2	50.5	88.2	-37.7	Peak	Vertical
*	17658.300	37.6	13.4	51.0	88.2	-37.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	113
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9382.700	40.5	4.2	44.7	74.0	-29.3	Peak	Horizontal
	11798.400	41.1	6.1	47.2	74.0	-26.8	Peak	Horizontal
*	14640.800	39.6	10.2	49.8	88.2	-38.4	Peak	Horizontal
*	17559.700	38.5	12.7	51.2	88.2	-37.0	Peak	Horizontal
	9420.100	41.1	3.8	44.9	74.0	-29.1	Peak	Vertical
	11528.100	41.2	6.7	47.9	74.0	-26.1	Peak	Vertical
*	14515.000	38.5	11.6	50.1	88.2	-38.1	Peak	Vertical
*	17469.600	38.6	11.8	50.4	88.2	-37.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	117
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9423.500	40.9	3.9	44.8	74.0	-29.2	Peak	Horizontal
	11519.600	40.4	6.8	47.2	74.0	-26.8	Peak	Horizontal
*	14632.300	39.0	10.6	49.6	88.2	-38.6	Peak	Horizontal
*	17459.400	38.3	11.9	50.2	88.2	-38.0	Peak	Horizontal
	9469.400	41.4	3.5	44.9	74.0	-29.1	Peak	Vertical
	11524.700	40.4	6.7	47.1	74.0	-26.9	Peak	Vertical
*	14634.000	39.4	10.7	50.1	88.2	-38.1	Peak	Vertical
*	17561.400	38.4	12.6	51.0	88.2	-37.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	153
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10310.900	46.3	2.1	48.4	88.2	-39.8	Peak	Horizontal
	11494.100	47.3	0.9	48.2	74.0	-25.8	Peak	Horizontal
*	14628.900	46.7	4.2	50.9	88.2	-37.3	Peak	Horizontal
	15614.900	45.2	6.6	51.8	74.0	-22.2	Peak	Horizontal
	15614.900	32.4	6.6	39.0	54.0	-15.0	Average	Horizontal
*	10333.000	46.2	2.0	48.2	88.2	-40.0	Peak	Vertical
	10632.200	47.0	1.5	48.5	74.0	-25.5	Peak	Vertical
*	14011.800	45.6	4.3	49.9	88.2	-38.3	Peak	Vertical
	15631.900	44.8	6.7	51.5	74.0	-22.5	Peak	Vertical
	15631.900	32.6	6.7	39.3	54.0	-14.7	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	181
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10305.800	46.3	2.1	48.4	88.2	-39.8	Peak	Horizontal
	10752.900	47.3	1.5	48.8	74.0	-25.2	Peak	Horizontal
*	14338.200	45.9	3.8	49.7	88.2	-38.5	Peak	Horizontal
	15715.200	44.4	6.4	50.8	74.0	-23.2	Peak	Horizontal
*	10321.100	46.4	2.1	48.5	88.2	-39.7	Peak	Vertical
	10761.400	47.9	1.5	49.4	74.0	-24.6	Peak	Vertical
*	14547.300	45.0	4.7	49.7	88.2	-38.5	Peak	Vertical
	15953.200	43.7	7.3	51.0	74.0	-23.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	185
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10329.600	46.2	2.0	48.2	88.2	-40.0	Peak	Horizontal
	10822.600	46.9	1.4	48.3	74.0	-25.7	Peak	Horizontal
*	14465.700	46.1	4.1	50.2	88.2	-38.0	Peak	Horizontal
	15625.100	45.4	6.7	52.1	74.0	-21.9	Peak	Horizontal
	15625.100	32.5	6.7	39.2	54.0	-14.8	Average	Horizontal
*	10346.600	47.6	1.4	49.0	88.2	-39.2	Peak	Vertical
	11098.000	48.0	1.4	49.4	74.0	-24.6	Peak	Vertical
*	13960.800	46.7	2.6	49.3	88.2	-38.9	Peak	Vertical
	15720.300	45.3	6.5	51.8	74.0	-22.2	Peak	Vertical
	15720.300	32.4	6.5	38.9	54.0	-15.1	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	189
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10324.500	47.1	2.0	49.1	88.2	-39.1	Peak	Horizontal
	10820.900	47.3	1.3	48.6	74.0	-25.4	Peak	Horizontal
*	15086.200	44.9	5.6	50.5	88.2	-37.7	Peak	Horizontal
	15728.800	44.9	6.2	51.1	74.0	-22.9	Peak	Horizontal
	15728.800	32.3	6.2	38.5	54.0	-15.5	Average	Horizontal
*	10236.100	47.6	0.9	48.5	88.2	-39.7	Peak	Vertical
	11081.000	47.3	1.6	48.9	74.0	-25.1	Peak	Vertical
*	13996.500	45.9	3.8	49.7	88.2	-38.5	Peak	Vertical
	15621.700	44.5	6.8	51.3	74.0	-22.7	Peak	Vertical
	15621.700	32.5	6.8	39.3	54.0	-14.7	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	213
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10312.600	47.2	2.1	49.3	88.2	-38.9	Peak	Horizontal
	10730.800	47.6	1.1	48.7	74.0	-25.3	Peak	Horizontal
*	14239.600	46.6	3.7	50.3	88.2	-37.9	Peak	Horizontal
	15943.000	44.7	6.9	51.6	74.0	-22.4	Peak	Horizontal
	15943.000	32.8	6.9	39.7	54.0	-14.3	Average	Horizontal
*	10518.300	48.1	1.2	49.3	88.2	-38.9	Peak	Vertical
	10873.600	47.1	1.5	48.6	74.0	-25.4	Peak	Vertical
*	14537.100	45.8	4.4	50.2	88.2	-38.0	Peak	Vertical
	15626.800	45.5	6.7	52.2	74.0	-21.8	Peak	Vertical
	15626.800	32.5	6.7	39.2	54.0	-14.8	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT20 (Nss=4)	Test Channel	229
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10326.200	46.6	2.0	48.6	88.2	-39.6	Peak	Horizontal
	10752.900	46.8	1.5	48.3	74.0	-25.7	Peak	Horizontal
*	14248.100	46.3	3.7	50.0	88.2	-38.2	Peak	Horizontal
	15954.900	43.9	7.3	51.2	74.0	-22.8	Peak	Horizontal
	15954.900	32.4	7.3	39.7	54.0	-14.3	Average	Horizontal
*	10302.400	45.8	2.1	47.9	88.2	-40.3	Peak	Vertical
	11359.800	47.7	0.7	48.4	74.0	-25.6	Peak	Vertical
*	15082.800	45.4	5.6	51.0	88.2	-37.2	Peak	Vertical
	15623.400	44.2	6.7	50.9	74.0	-23.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	3
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9355.500	41.7	3.6	45.3	74.0	-28.7	Peak	Horizontal
	11264.600	41.3	6.3	47.6	74.0	-26.4	Peak	Horizontal
*	14343.300	40.6	10.1	50.7	88.2	-37.5	Peak	Horizontal
*	17573.300	39.1	12.3	51.4	88.2	-36.8	Peak	Horizontal
	9375.900	41.6	4.1	45.7	74.0	-28.3	Peak	Vertical
	10955.200	41.6	5.8	47.4	74.0	-26.6	Peak	Vertical
*	14351.800	40.1	10.2	50.3	88.2	-37.9	Peak	Vertical
*	17634.500	40.0	12.9	52.9	88.2	-35.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	51
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9438.800	41.0	3.8	44.8	74.0	-29.2	Peak	Horizontal
	11099.700	40.7	6.3	47.0	74.0	-27.0	Peak	Horizontal
*	14343.300	39.4	10.1	49.5	88.2	-38.7	Peak	Horizontal
*	17660.000	39.2	13.4	52.6	88.2	-35.6	Peak	Horizontal
	9423.500	39.2	3.9	43.1	74.0	-30.9	Peak	Vertical
	11540.000	41.5	6.4	47.9	74.0	-26.1	Peak	Vertical
*	14810.800	39.0	10.6	49.6	88.2	-38.6	Peak	Vertical
*	17552.900	38.5	12.4	50.9	88.2	-37.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	91
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9433.700	41.7	4.0	45.7	74.0	-28.3	Peak	Horizontal
	11405.700	40.6	6.7	47.3	74.0	-26.7	Peak	Horizontal
*	14428.300	39.3	10.3	49.6	88.2	-38.6	Peak	Horizontal
*	17670.200	38.3	13.6	51.9	88.2	-36.3	Peak	Horizontal
	9430.300	40.9	4.0	44.9	74.0	-29.1	Peak	Vertical
	11691.300	40.8	6.0	46.8	74.0	-27.2	Peak	Vertical
*	14270.200	39.4	9.7	49.1	88.2	-39.1	Peak	Vertical
*	17675.300	37.7	13.7	51.4	88.2	-36.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	99
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9437.100	40.8	3.9	44.7	74.0	-29.3	Peak	Horizontal
	11254.400	41.0	5.9	46.9	74.0	-27.1	Peak	Horizontal
*	14515.000	37.8	11.6	49.4	88.2	-38.8	Peak	Horizontal
*	17561.400	38.8	12.6	51.4	88.2	-36.8	Peak	Horizontal
	9399.700	41.1	3.8	44.9	74.0	-29.1	Peak	Vertical
	11087.800	41.0	6.2	47.2	74.0	-26.8	Peak	Vertical
*	14588.100	39.7	10.3	50.0	88.2	-38.2	Peak	Vertical
*	17558.000	38.2	12.7	50.9	88.2	-37.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	107
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9384.400	40.3	4.2	44.5	74.0	-29.5	Peak	Horizontal
	11536.600	41.0	6.5	47.5	74.0	-26.5	Peak	Horizontal
*	14576.200	38.9	10.3	49.2	88.2	-39.0	Peak	Horizontal
*	17551.200	38.4	12.4	50.8	88.2	-37.4	Peak	Horizontal
	9483.000	41.5	3.7	45.2	74.0	-28.8	Peak	Vertical
	11373.400	41.0	6.8	47.8	74.0	-26.2	Peak	Vertical
*	14814.200	39.4	10.4	49.8	88.2	-38.4	Peak	Vertical
*	17575.000	38.2	12.3	50.5	88.2	-37.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	115
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9445.600	41.9	3.6	45.5	74.0	-28.5	Peak	Horizontal
	12271.000	42.0	5.9	47.9	74.0	-26.1	Peak	Horizontal
*	14749.600	39.4	10.2	49.6	88.2	-38.6	Peak	Horizontal
*	17654.900	37.6	13.3	50.9	88.2	-37.3	Peak	Horizontal
	9389.500	40.3	4.1	44.4	74.0	-29.6	Peak	Vertical
	11138.800	40.9	5.9	46.8	74.0	-27.2	Peak	Vertical
*	14635.700	38.9	10.6	49.5	88.2	-38.7	Peak	Vertical
*	17668.500	38.1	13.6	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Justin Guo
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	123
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9433.700	41.1	4.0	45.1	74.0	-28.9	Peak	Horizontal
	11108.200	40.7	6.3	47.0	74.0	-27.0	Peak	Horizontal
*	14309.300	39.6	10.0	49.6	88.2	-38.6	Peak	Horizontal
*	17654.900	39.2	13.3	52.5	88.2	-35.7	Peak	Horizontal
	9438.800	40.8	3.8	44.6	74.0	-29.4	Peak	Vertical
	11410.800	40.9	6.8	47.7	74.0	-26.3	Peak	Vertical
*	14518.400	38.6	11.3	49.9	88.2	-38.3	Peak	Vertical
*	17651.500	37.7	13.2	50.9	88.2	-37.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	147
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10450.300	47.1	1.2	48.3	88.2	-39.9	Peak	Horizontal
	10871.900	47.0	1.5	48.5	74.0	-25.5	Peak	Horizontal
*	14530.300	45.9	4.2	50.1	88.2	-38.1	Peak	Horizontal
	15569.000	45.5	6.4	51.9	74.0	-22.1	Peak	Horizontal
	15569.000	32.7	6.4	39.1	54.0	-14.9	Average	Horizontal
*	10329.600	46.4	2.0	48.4	88.2	-39.8	Peak	Vertical
	10817.500	47.3	1.3	48.6	74.0	-25.4	Peak	Vertical
*	14538.800	45.5	4.4	49.9	88.2	-38.3	Peak	Vertical
	15973.600	44.4	6.8	51.2	74.0	-22.8	Peak	Vertical
	15973.600	32.5	6.8	39.3	54.0	-14.7	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	179
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10282.000	47.5	0.8	48.3	88.2	-39.9	Peak	Horizontal
	10994.300	47.7	1.0	48.7	74.0	-25.3	Peak	Horizontal
*	13998.200	45.5	3.9	49.4	88.2	-38.8	Peak	Horizontal
	15540.100	45.0	6.3	51.3	74.0	-22.7	Peak	Horizontal
	15540.100	32.6	6.3	38.9	54.0	-15.1	Average	Horizontal
*	10523.400	48.5	1.3	49.8	88.2	-38.4	Peak	Vertical
	11081.000	47.4	1.6	49.0	74.0	-25.0	Peak	Vertical
*	14945.100	47.0	4.0	51.0	88.2	-37.2	Peak	Vertical
	15728.800	45.3	6.2	51.5	74.0	-22.5	Peak	Vertical
	15728.800	32.7	6.2	38.9	54.0	-15.1	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	187
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10344.900	46.7	1.5	48.2	88.2	-40.0	Peak	Horizontal
	10810.700	47.8	1.2	49.0	74.0	-25.0	Peak	Horizontal
*	15048.800	45.9	4.9	50.8	88.2	-37.4	Peak	Horizontal
	15626.800	44.6	6.7	51.3	74.0	-22.7	Peak	Horizontal
	15626.800	32.7	6.7	39.4	54.0	-14.6	Average	Horizontal
*	10339.800	46.9	1.7	48.6	88.2	-39.6	Peak	Vertical
	10759.700	46.6	1.5	48.1	74.0	-25.9	Peak	Vertical
*	14234.500	46.2	3.7	49.9	88.2	-38.3	Peak	Vertical
	15705.000	44.4	6.2	50.6	74.0	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	195
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10322.800	46.3	2.1	48.4	88.2	-39.8	Peak	Horizontal
	10858.300	47.3	1.5	48.8	74.0	-25.2	Peak	Horizontal
*	15099.800	46.3	5.3	51.6	88.2	-36.6	Peak	Horizontal
	15545.200	44.5	6.4	50.9	74.0	-23.1	Peak	Horizontal
*	10282.000	47.7	0.8	48.5	88.2	-39.7	Peak	Vertical
	11082.700	47.2	1.5	48.7	74.0	-25.3	Peak	Vertical
*	14426.600	46.2	4.1	50.3	88.2	-37.9	Peak	Vertical
	15625.100	44.1	6.7	50.8	74.0	-23.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	211
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	9821.300	48.2	0.7	48.9	88.2	-39.3	Peak	Horizontal
	10739.300	48.2	1.3	49.5	74.0	-24.5	Peak	Horizontal
*	14010.100	45.9	4.3	50.2	88.2	-38.0	Peak	Horizontal
	15635.300	44.6	6.7	51.3	74.0	-22.7	Peak	Horizontal
	15635.300	32.7	6.7	39.4	54.0	-14.6	Average	Horizontal
*	10305.800	46.0	2.1	48.1	88.2	-40.1	Peak	Vertical
	10897.400	48.0	1.1	49.1	74.0	-24.9	Peak	Vertical
*	14006.700	46.5	4.3	50.8	88.2	-37.4	Peak	Vertical
	15514.600	44.9	6.3	51.2	74.0	-22.8	Peak	Vertical
	15514.600	32.3	6.3	38.6	54.0	-15.4	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT40 (Nss=4)	Test Channel	227
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10309.200	46.6	2.1	48.7	88.2	-39.5	Peak	Horizontal
	11094.600	47.0	1.5	48.5	74.0	-25.5	Peak	Horizontal
*	14542.200	46.3	4.5	50.8	88.2	-37.4	Peak	Horizontal
	15499.300	45.6	6.1	51.7	74.0	-22.3	Peak	Horizontal
	15499.300	32.6	6.1	38.7	54.0	-15.3	Average	Horizontal
*	10331.300	46.4	2.0	48.4	88.2	-39.8	Peak	Vertical
	10856.600	47.4	1.5	48.9	74.0	-25.1	Peak	Vertical
*	14056.000	46.4	3.5	49.9	88.2	-38.3	Peak	Vertical
	15698.200	44.7	6.1	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	7
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11553.600	40.9	6.8	47.7	74.0	-26.3	Peak	Horizontal
*	14249.800	40.8	9.6	50.4	88.2	-37.8	Peak	Horizontal
	15589.400	38.4	8.0	46.4	74.0	-27.6	Peak	Horizontal
*	17190.800	39.0	9.4	48.4	88.2	-39.8	Peak	Horizontal
	11472.000	40.3	6.7	47.0	74.0	-27.0	Peak	Vertical
*	14586.400	39.5	10.4	49.9	88.2	-38.3	Peak	Vertical
	15579.200	38.4	7.6	46.0	74.0	-28.0	Peak	Vertical
*	16913.700	38.5	10.0	48.5	88.2	-39.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	55
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9367.400	41.2	3.8	45.0	74.0	-29.0	Peak	Horizontal
	11504.300	40.7	6.7	47.4	74.0	-26.6	Peak	Horizontal
*	14586.400	39.1	10.4	49.5	88.2	-38.7	Peak	Horizontal
*	17371.000	38.3	10.7	49.0	88.2	-39.2	Peak	Horizontal
	9330.000	41.8	4.1	45.9	74.0	-28.1	Peak	Vertical
	11443.100	40.8	6.9	47.7	74.0	-26.3	Peak	Vertical
*	14634.000	39.6	10.7	50.3	88.2	-37.9	Peak	Vertical
*	17530.800	39.5	12.4	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	87
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11653.900	41.7	6.3	48.0	74.0	-26.0	Peak	Horizontal
*	14579.600	38.8	10.4	49.2	88.2	-39.0	Peak	Horizontal
	15832.500	39.2	7.3	46.5	74.0	-27.5	Peak	Horizontal
*	17677.000	37.5	13.7	51.2	88.2	-37.0	Peak	Horizontal
	11494.100	41.3	6.7	48.0	74.0	-26.0	Peak	Vertical
*	14345.000	39.0	10.2	49.2	88.2	-39.0	Peak	Vertical
	15470.400	38.9	7.7	46.6	74.0	-27.4	Peak	Vertical
*	17617.500	38.6	12.5	51.1	88.2	-37.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	103
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	10752.900	42.1	5.7	47.8	74.0	-26.2	Peak	Horizontal
*	14341.600	39.7	10.0	49.7	88.2	-38.5	Peak	Horizontal
	15433.000	38.3	8.1	46.4	74.0	-27.6	Peak	Horizontal
*	17440.700	38.9	11.8	50.7	88.2	-37.5	Peak	Horizontal
	10871.900	42.1	5.7	47.8	74.0	-26.2	Peak	Vertical
*	14254.900	40.3	9.6	49.9	88.2	-38.3	Peak	Vertical
	15694.800	39.8	7.0	46.8	74.0	-27.2	Peak	Vertical
*	17556.300	38.7	12.6	51.3	88.2	-36.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	119
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11461.800	40.6	6.6	47.2	74.0	-26.8	Peak	Horizontal
*	14625.500	40.0	10.0	50.0	88.2	-38.2	Peak	Horizontal
	15812.100	40.0	7.2	47.2	74.0	-26.8	Peak	Horizontal
*	17578.400	38.8	12.3	51.1	88.2	-37.1	Peak	Horizontal
	11623.300	41.9	6.4	48.3	74.0	-25.7	Peak	Vertical
*	14511.600	38.9	11.0	49.9	88.2	-38.3	Peak	Vertical
	16062.000	38.2	8.1	46.3	74.0	-27.7	Peak	Vertical
*	17112.600	39.6	9.6	49.2	88.2	-39.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	151
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10299.000	46.6	2.1	48.7	88.2	-39.5	Peak	Horizontal
	10735.900	47.4	1.2	48.6	74.0	-25.4	Peak	Horizontal
*	14948.500	46.4	4.1	50.5	88.2	-37.7	Peak	Horizontal
	15631.900	44.9	6.7	51.6	74.0	-22.4	Peak	Horizontal
	15631.900	32.9	6.7	39.6	54.0	-14.4	Average	Horizontal
*	9775.400	48.1	0.8	48.9	88.2	-39.3	Peak	Vertical
	10652.600	48.9	1.3	50.2	74.0	-23.8	Peak	Vertical
*	13920.000	46.3	2.6	48.9	88.2	-39.3	Peak	Vertical
	15963.400	44.0	7.3	51.3	74.0	-22.7	Peak	Vertical
	15963.400	32.5	7.3	39.8	54.0	-14.2	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	183
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10290.500	46.9	1.5	48.4	88.2	-39.8	Peak	Horizontal
	10831.100	47.1	1.4	48.5	74.0	-25.5	Peak	Horizontal
*	14266.800	46.2	3.4	49.6	88.2	-38.6	Peak	Horizontal
	15715.200	45.7	6.4	52.1	74.0	-21.9	Peak	Horizontal
	15715.200	32.7	6.4	39.1	54.0	-14.9	Average	Horizontal
*	10310.900	46.3	2.1	48.4	88.2	-39.8	Peak	Vertical
	11563.800	47.8	0.5	48.3	74.0	-25.7	Peak	Vertical
*	14334.800	46.3	3.9	50.2	88.2	-38.0	Peak	Vertical
	15851.200	44.7	6.0	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	199
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10234.400	48.2	0.9	49.1	88.2	-39.1	Peak	Horizontal
	10856.600	47.2	1.5	48.7	74.0	-25.3	Peak	Horizontal
*	14023.700	46.1	4.3	50.4	88.2	-37.8	Peak	Horizontal
	15723.700	44.3	6.5	50.8	74.0	-23.2	Peak	Horizontal
*	10309.200	47.6	2.1	49.7	88.2	-38.5	Peak	Vertical
	10960.300	47.8	1.1	48.9	74.0	-25.1	Peak	Vertical
*	15094.700	45.1	5.6	50.7	88.2	-37.5	Peak	Vertical
	15620.000	44.7	6.8	51.5	74.0	-22.5	Peak	Vertical
	15620.000	32.6	6.8	39.4	54.0	-14.6	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT80 (Nss=4)	Test Channel	215
Test Date	202		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10319.400	46.7	2.1	48.8	88.2	-39.4	Peak	Horizontal
	10773.300	47.9	1.1	49.0	74.0	-25.0	Peak	Horizontal
*	14535.400	46.0	4.3	50.3	88.2	-37.9	Peak	Horizontal
	15832.500	44.8	6.2	51.0	74.0	-23.0	Peak	Horizontal
	15832.500	32.5	6.2	38.7	54.0	-15.3	Average	Horizontal
*	10338.100	47.0	1.8	48.8	88.2	-39.4	Peak	Vertical
	10749.500	47.1	1.4	48.5	74.0	-25.5	Peak	Vertical
*	14042.400	46.6	3.4	50.0	88.2	-38.2	Peak	Vertical
	15626.800	44.0	6.7	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	15
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11626.700	41.3	6.4	47.7	74.0	-26.3	Peak	Horizontal
*	14634.000	39.2	10.7	49.9	88.2	-38.3	Peak	Horizontal
	15550.300	39.3	7.6	46.9	74.0	-27.1	Peak	Horizontal
*	17252.000	39.4	10.6	50.0	88.2	-38.2	Peak	Horizontal
	11458.400	40.6	6.6	47.2	74.0	-26.8	Peak	Vertical
*	14520.100	38.4	11.1	49.5	88.2	-38.7	Peak	Vertical
	15671.000	39.7	7.4	47.1	74.0	-26.9	Peak	Vertical
*	17578.400	40.2	12.3	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	47
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11519.600	40.5	6.8	47.3	74.0	-26.7	Peak	Horizontal
*	14632.300	39.1	10.6	49.7	88.2	-38.5	Peak	Horizontal
	15586.000	38.5	8.3	46.8	74.0	-27.2	Peak	Horizontal
*	17484.900	38.9	11.5	50.4	88.2	-37.8	Peak	Horizontal
	11529.800	41.1	6.6	47.7	74.0	-26.3	Peak	Vertical
*	14520.100	39.7	11.1	50.8	88.2	-37.4	Peak	Vertical
	15674.400	38.8	7.4	46.2	74.0	-27.8	Peak	Vertical
*	17552.900	39.2	12.4	51.6	88.2	-36.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	79
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11766.100	41.8	5.8	47.6	74.0	-26.4	Peak	Horizontal
*	14562.600	40.1	10.1	50.2	88.2	-38.0	Peak	Horizontal
	15672.700	38.9	7.4	46.3	74.0	-27.7	Peak	Horizontal
*	17581.800	38.2	12.2	50.4	88.2	-37.8	Peak	Horizontal
	11570.600	40.8	6.5	47.3	74.0	-26.7	Peak	Vertical
*	14515.000	38.4	11.6	50.0	88.2	-38.2	Peak	Vertical
	15856.300	39.1	7.0	46.1	74.0	-27.9	Peak	Vertical
*	17524.000	38.9	12.8	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	111
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11551.900	40.4	6.7	47.1	74.0	-26.9	Peak	Horizontal
*	14822.700	39.5	10.2	49.7	88.2	-38.5	Peak	Horizontal
	15416.000	40.5	7.7	48.2	74.0	-25.8	Peak	Horizontal
*	17522.300	37.9	12.7	50.6	88.2	-37.6	Peak	Horizontal
	11495.800	40.7	6.7	47.4	74.0	-26.6	Peak	Vertical
*	14628.900	39.4	10.3	49.7	88.2	-38.5	Peak	Vertical
	15433.000	38.5	8.1	46.6	74.0	-27.4	Peak	Vertical
*	17554.600	38.5	12.5	51.0	88.2	-37.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	143
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	10305.800	46.5	2.1	48.6	88.2	-39.6	Peak	Horizontal
	10868.500	46.7	1.5	48.2	74.0	-25.8	Peak	Horizontal
*	15307.200	45.9	5.6	51.5	88.2	-36.7	Peak	Horizontal
	15966.800	43.9	7.2	51.1	74.0	-22.9	Peak	Horizontal
	15966.800	32.6	7.2	39.8	54.0	-14.2	Average	Horizontal
*	10387.400	47.1	1.1	48.2	88.2	-40.0	Peak	Vertical
	10749.500	47.0	1.4	48.4	74.0	-25.6	Peak	Vertical
*	14018.600	46.2	4.4	50.6	88.2	-37.6	Peak	Vertical
	15985.500	44.8	6.3	51.1	74.0	-22.9	Peak	Vertical
	15985.500	32.3	6.3	38.6	54.0	-15.4	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	175
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9826.400	47.8	0.8	48.6	88.2	-39.6	Peak	Horizontal
	10781.800	47.7	0.9	48.6	74.0	-25.4	Peak	Horizontal
*	14141.000	45.8	4.1	49.9	88.2	-38.3	Peak	Horizontal
	15614.900	44.6	6.6	51.2	74.0	-22.8	Peak	Horizontal
	15614.900	32.8	6.6	39.4	54.0	-14.6	Average	Horizontal
*	10300.700	46.5	2.1	48.6	88.2	-39.6	Peak	Vertical
	10742.700	47.5	1.3	48.8	74.0	-25.2	Peak	Vertical
*	14015.200	45.9	4.3	50.2	88.2	-38.0	Peak	Vertical
	15562.200	44.5	6.5	51.0	74.0	-23.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT160 (Nss=4)	Test Channel	207
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10338.100	47.2	1.8	49.0	88.2	-39.2	Peak	Horizontal
	10851.500	47.9	1.4	49.3	74.0	-24.7	Peak	Horizontal
*	14020.300	45.9	4.4	50.3	88.2	-37.9	Peak	Horizontal
	15562.200	44.5	6.5	51.0	74.0	-23.0	Peak	Horizontal
*	10319.400	46.0	2.1	48.1	88.2	-40.1	Peak	Vertical
	11062.300	46.2	1.2	47.4	74.0	-26.6	Peak	Vertical
*	13991.400	46.6	3.5	50.1	88.2	-38.1	Peak	Vertical
	15965.100	43.6	7.3	50.9	74.0	-23.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Barry Wu
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	31
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11560.400	40.4	6.8	47.2	74.0	-26.8	Peak	Horizontal
*	14516.700	38.6	11.4	50.0	88.2	-38.2	Peak	Horizontal
	15553.700	38.9	7.5	46.4	74.0	-27.6	Peak	Horizontal
*	17292.800	40.2	9.8	50.0	88.2	-38.2	Peak	Horizontal
	11584.200	41.1	6.5	47.6	74.0	-26.4	Peak	Vertical
*	14370.500	39.6	10.2	49.8	88.2	-38.4	Peak	Vertical
	15458.500	38.9	7.6	46.5	74.0	-27.5	Peak	Vertical
*	16949.400	39.8	10.0	49.8	88.2	-38.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	63
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9780.500	47.0	0.8	47.8	88.2	-40.4	Peak	Horizontal
	10962.000	47.7	1.1	48.8	74.0	-25.2	Peak	Horizontal
*	15084.500	44.5	5.6	50.1	88.2	-38.1	Peak	Horizontal
	15722.000	44.3	6.6	50.9	74.0	-23.1	Peak	Horizontal
*	10319.400	46.6	2.1	48.7	88.2	-39.5	Peak	Vertical
	10834.500	46.8	1.4	48.2	74.0	-25.8	Peak	Vertical
*	14645.900	46.5	4.1	50.6	88.2	-37.6	Peak	Vertical
	15970.200	44.4	7.0	51.4	74.0	-22.6	Peak	Vertical
	15970.200	32.9	7.0	39.9	54.0	-14.1	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	95
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10293.900	46.6	1.7	48.3	88.2	-39.9	Peak	Horizontal
	11109.900	46.9	1.3	48.2	74.0	-25.8	Peak	Horizontal
*	15089.600	44.4	5.7	50.1	88.2	-38.1	Peak	Horizontal
	15949.800	44.8	7.1	51.9	74.0	-22.1	Peak	Horizontal
	15949.800	32.5	7.1	39.6	54.0	-14.4	Average	Horizontal
*	10327.900	46.0	2.0	48.0	88.2	-40.2	Peak	Vertical
	10900.800	46.3	1.0	47.3	74.0	-26.7	Peak	Vertical
*	14180.100	46.6	3.4	50.0	88.2	-38.2	Peak	Vertical
	15895.400	45.3	5.8	51.1	74.0	-22.9	Peak	Vertical
	15895.400	32.8	5.8	38.6	54.0	-15.4	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	127
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10322.800	45.6	2.1	47.7	88.2	-40.5	Peak	Horizontal
	10758.000	47.4	1.6	49.0	74.0	-25.0	Peak	Horizontal
*	14538.800	46.0	4.4	50.4	88.2	-37.8	Peak	Horizontal
	15625.100	44.0	6.7	50.7	74.0	-23.3	Peak	Horizontal
*	10231.000	47.1	1.0	48.1	88.2	-40.1	Peak	Vertical
	11089.500	46.6	1.5	48.1	74.0	-25.9	Peak	Vertical
*	15086.200	44.3	5.6	49.9	88.2	-38.3	Peak	Vertical
	15715.200	44.7	6.4	51.1	74.0	-22.9	Peak	Vertical
	15715.200	32.6	6.4	39.0	54.0	-15.0	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	159
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10331.300	46.1	2.0	48.1	88.2	-40.1	Peak	Horizontal
	10841.300	47.0	1.4	48.4	74.0	-25.6	Peak	Horizontal
*	14239.600	45.4	3.7	49.1	88.2	-39.1	Peak	Horizontal
	15807.000	44.8	5.9	50.7	74.0	-23.3	Peak	Horizontal
*	10316.000	45.6	2.1	47.7	88.2	-40.5	Peak	Vertical
	10848.100	46.3	1.4	47.7	74.0	-26.3	Peak	Vertical
*	14006.700	45.0	4.3	49.3	88.2	-38.9	Peak	Vertical
	15713.500	45.4	6.4	51.8	74.0	-22.2	Peak	Vertical
	15713.500	32.4	6.4	38.8	54.0	-15.2	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Mode	802.11be-EHT320 (Nss=4)	Test Channel	191
Test Date	2024-09-20		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10317.700	45.7	2.1	47.8	88.2	-40.4	Peak	Horizontal
	10807.300	46.9	1.1	48.0	74.0	-26.0	Peak	Horizontal
*	14251.500	46.7	3.7	50.4	88.2	-37.8	Peak	Horizontal
	15628.500	44.2	6.7	50.9	74.0	-23.1	Peak	Horizontal
	15628.500	32.6	6.7	39.3	54.0	-14.7	Average	Horizontal
*	10300.700	46.1	2.1	48.2	88.2	-40.0	Peak	Vertical
	10647.500	46.8	1.5	48.3	74.0	-25.7	Peak	Vertical
*	14028.800	45.3	4.0	49.3	88.2	-38.9	Peak	Vertical
	15965.100	43.8	7.3	51.1	74.0	-22.9	Peak	Vertical
	15965.100	33.6	7.3	40.9	54.0	-13.1	Average	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	SIP-AC2	Test Date	2024-09-18
Test Engineer	Barry Wu	Temp./Humidity	24.3°C /65.2%
Factor	VULB 9168_00999_25-2000MHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 NSS=4 at 6665MHz		

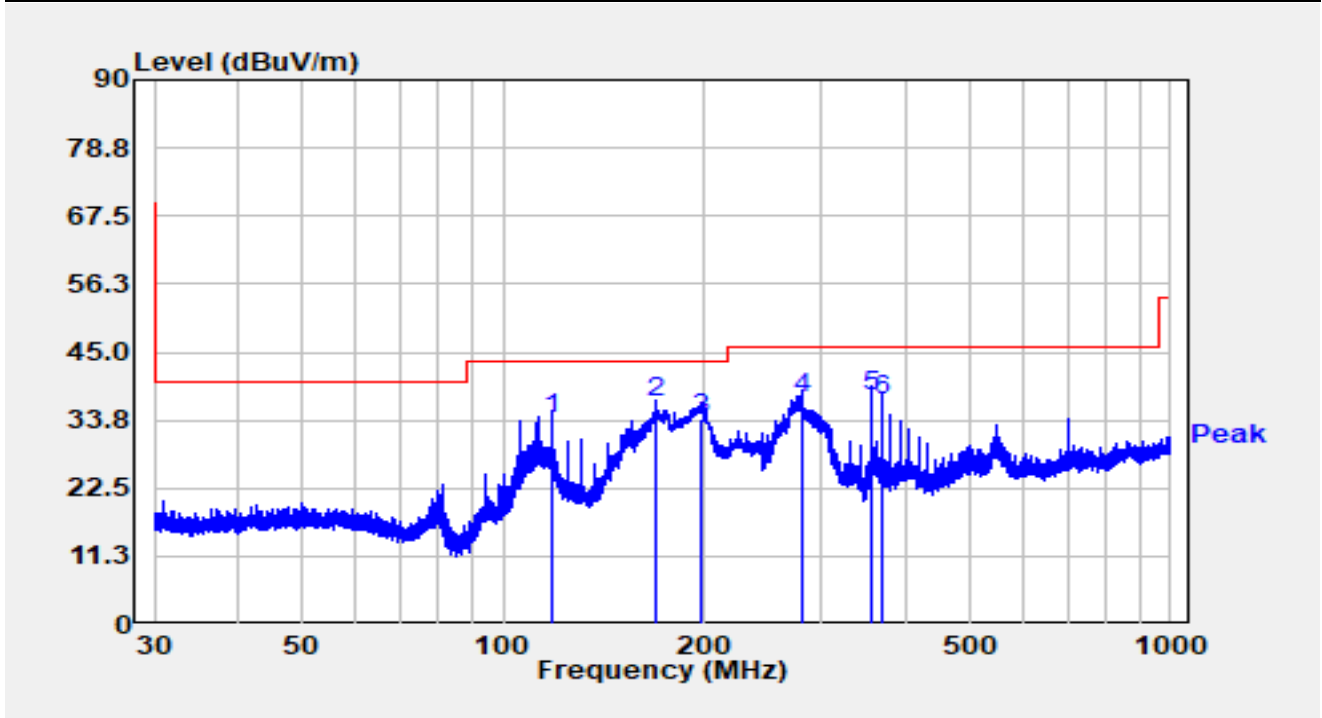


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		118.726	17.10	16.85	33.95	-9.55	43.50	QP
2	*	168.709	17.90	18.74	36.64	-6.86	43.50	QP
3		198.379	18.20	15.90	34.10	-9.40	43.50	QP
4		281.303	18.40	18.85	37.25	-8.75	46.00	QP
5		356.301	17.40	20.35	37.75	-8.25	46.00	QP
6		368.758	16.20	20.82	37.02	-8.98	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-09-18
Test Engineer	Barry Wu	Temp./Humidity	24.3°C /65.2%
Factor	VULB 9168_00999_25-2000MHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 NSS=4 at 6665MHz		

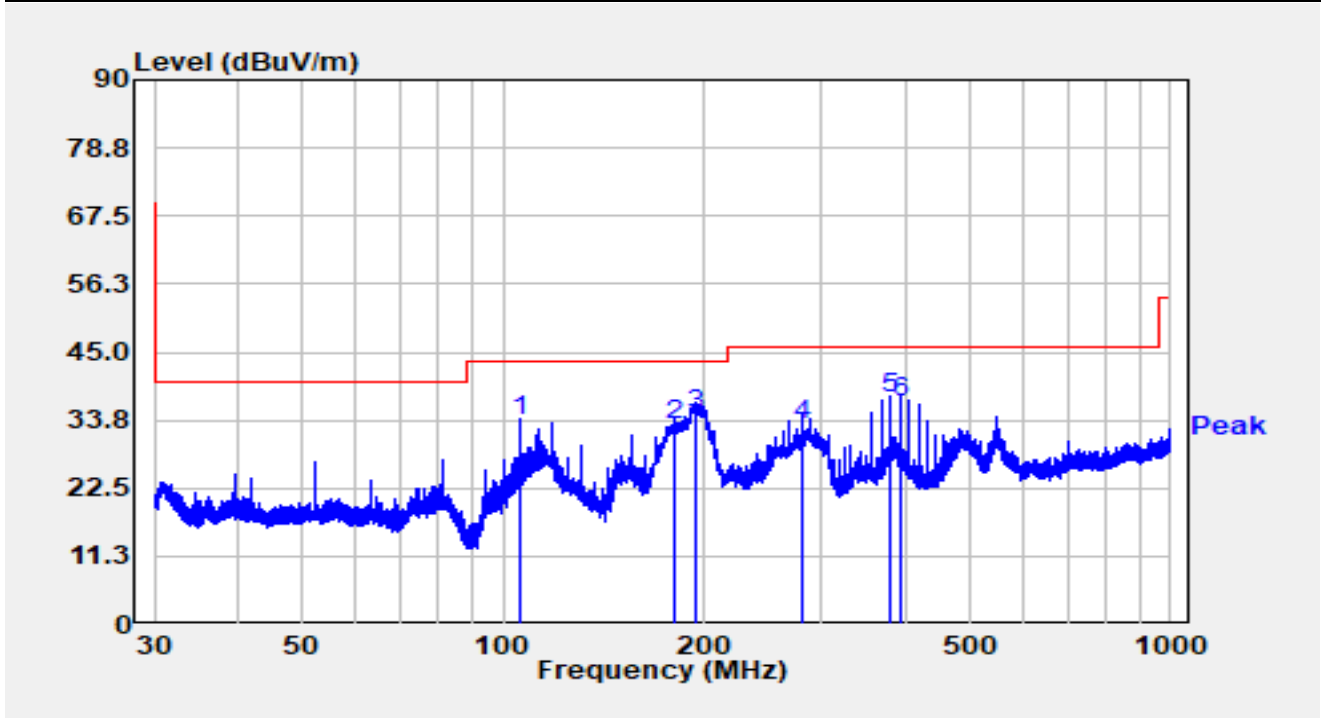


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		106.236	17.90	15.71	33.61	-9.89	43.50	QP
2		181.220	15.40	17.38	32.78	-10.72	43.50	QP
3		193.773	18.50	16.08	34.58	-8.92	43.50	QP
4		281.303	14.20	18.85	33.05	-12.95	46.00	QP
5	*	381.249	16.10	21.10	37.20	-8.80	46.00	QP
6		393.748	15.20	21.34	36.54	-9.46	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 Radiated Restricted Band Edge Test Result

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

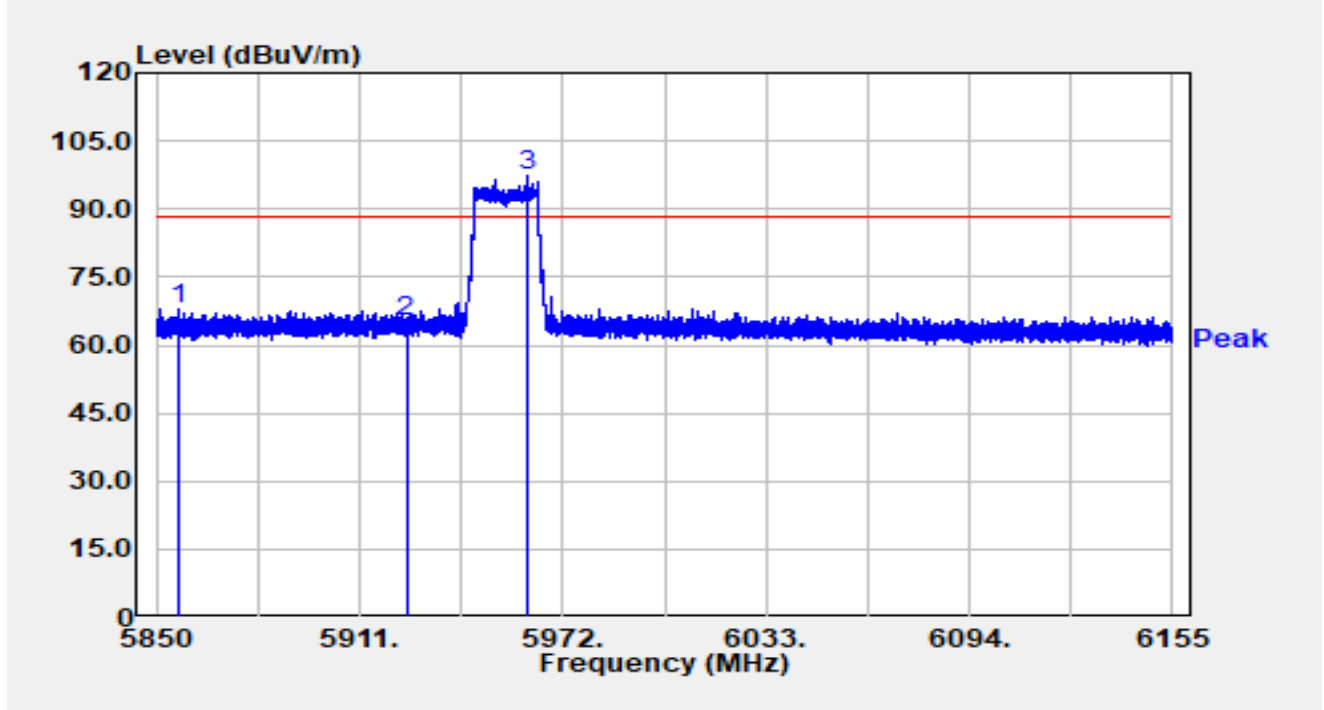


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5856.862	27.57	40.51	68.08	-20.12	88.20	Peak
2		5925.000	24.66	40.76	65.42	-22.78	88.20	Peak
3		5961.142	56.59	40.86	97.45	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

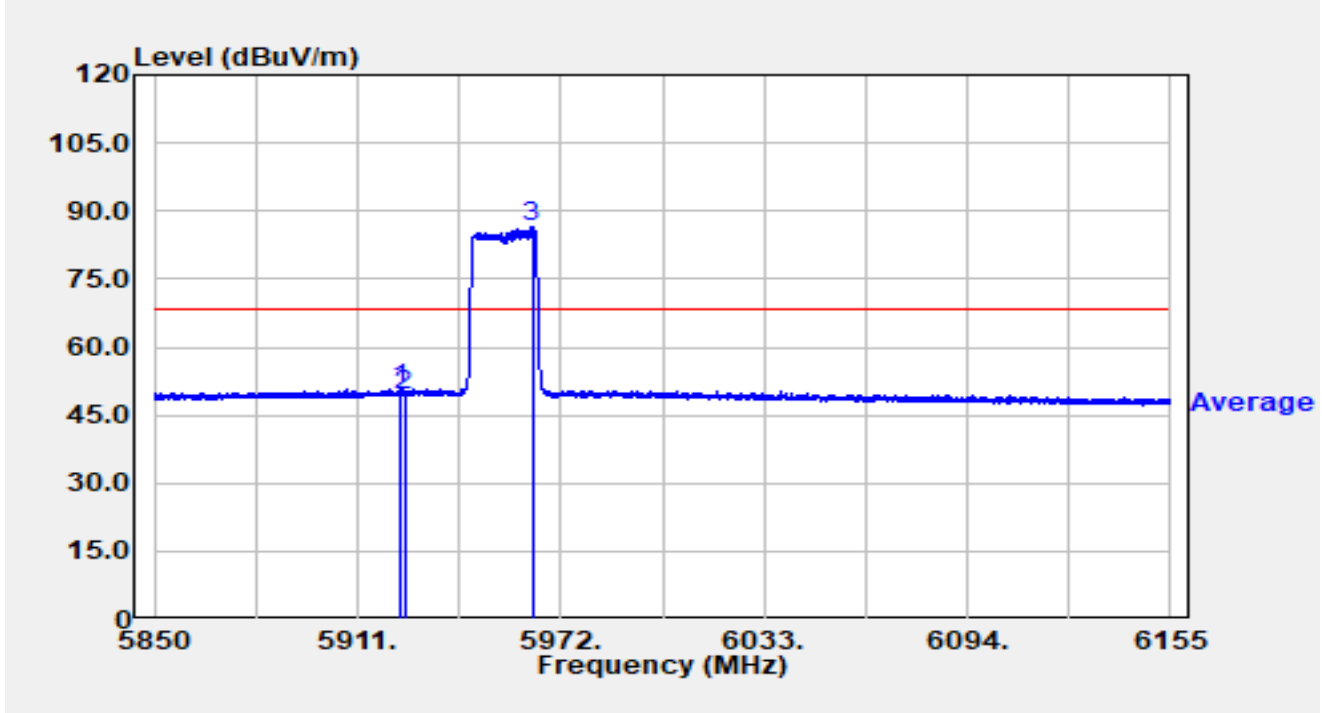


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.688	9.87	40.74	50.62	-17.58	68.20	Average
2		5925.000	8.81	40.76	49.57	-18.63	68.20	Average
3		5963.369	45.39	40.89	86.27	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

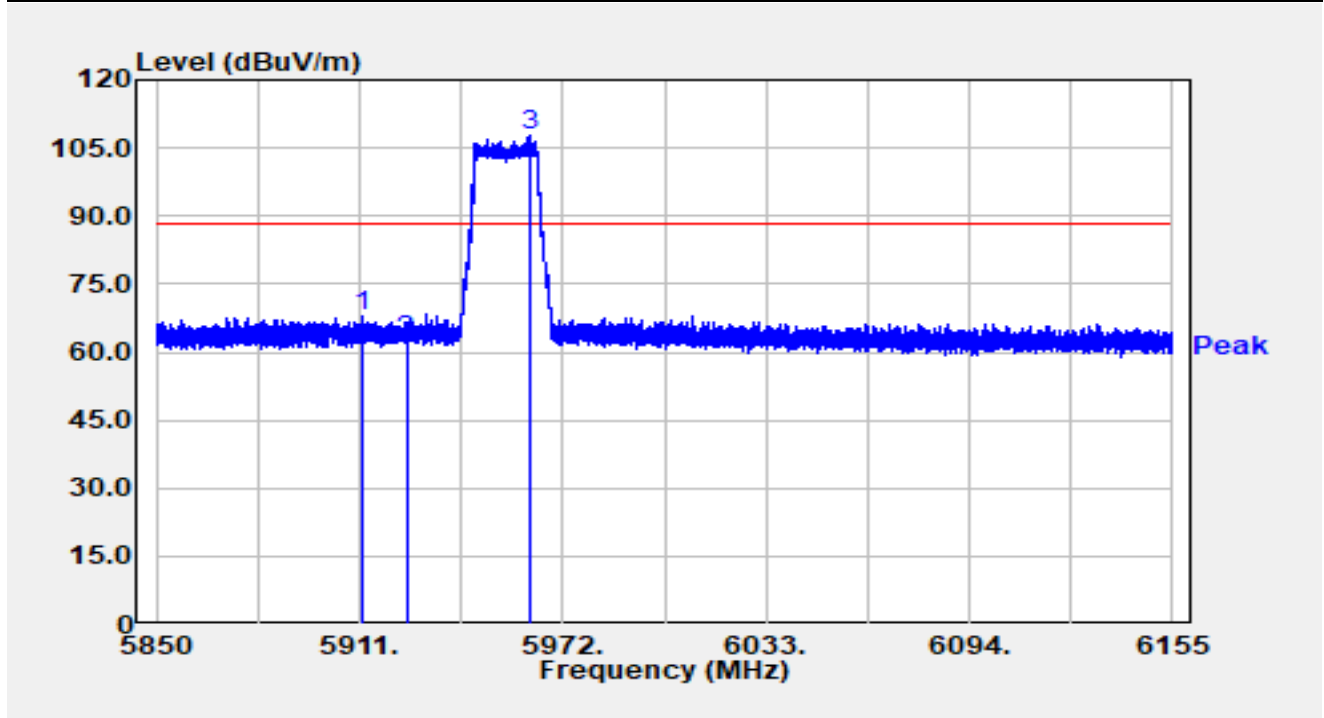


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.884	27.49	40.61	68.10	-20.10	88.20	Peak
2		5925.000	21.51	40.76	62.27	-25.93	88.20	Peak
3		5962.332	66.82	40.87	107.69	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

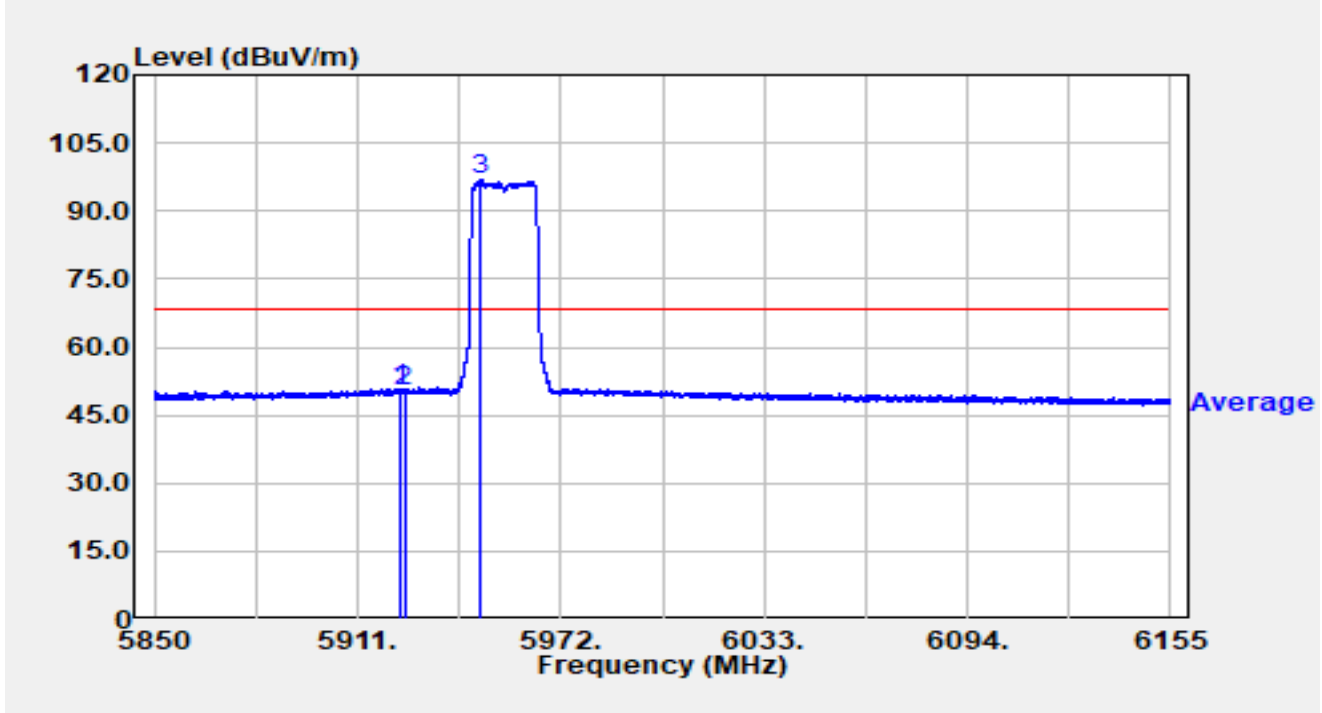


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.840	10.13	40.74	50.88	-17.32	68.20	Average
2		5925.000	9.53	40.76	50.28	-17.92	68.20	Average
3		5948.088	56.20	40.72	96.91	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

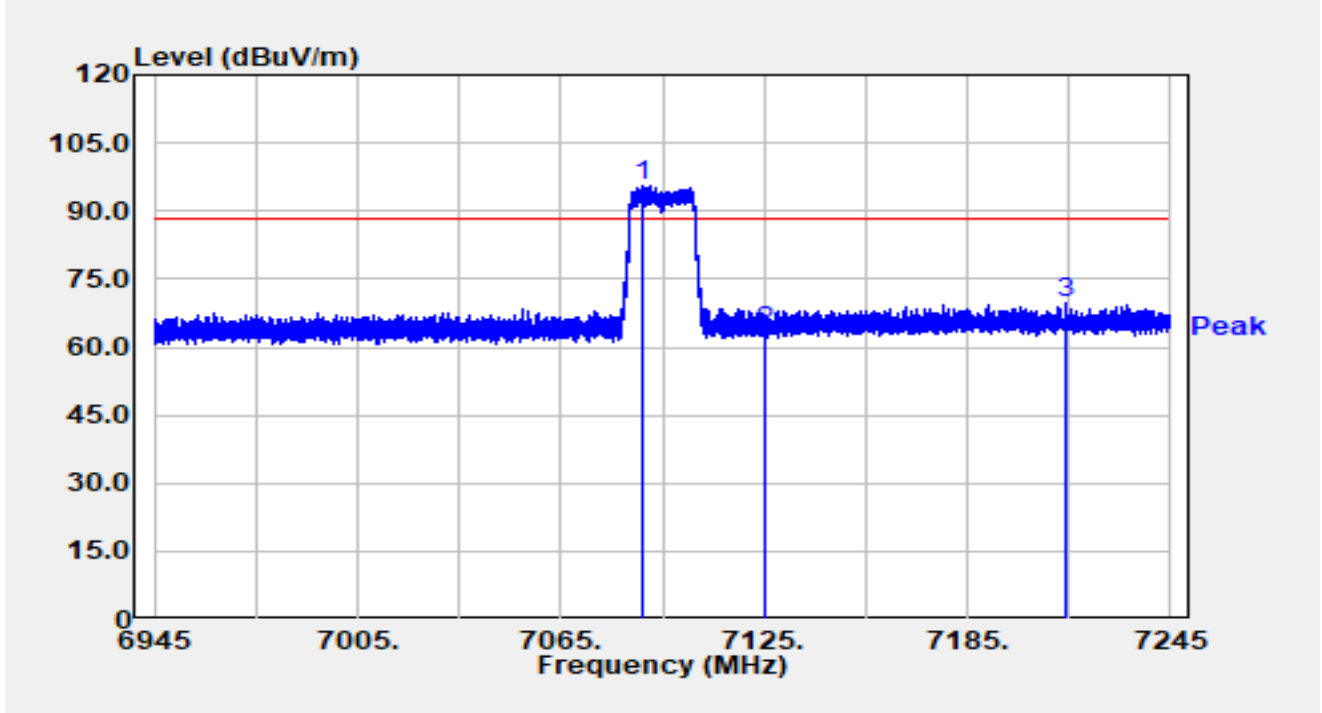


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.030	53.49	42.14	95.62	N/A	N/A	Peak
2		7125.000	21.41	42.13	63.54	-24.66	88.20	Peak
3	*	7213.800	27.37	42.20	69.58	-18.62	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

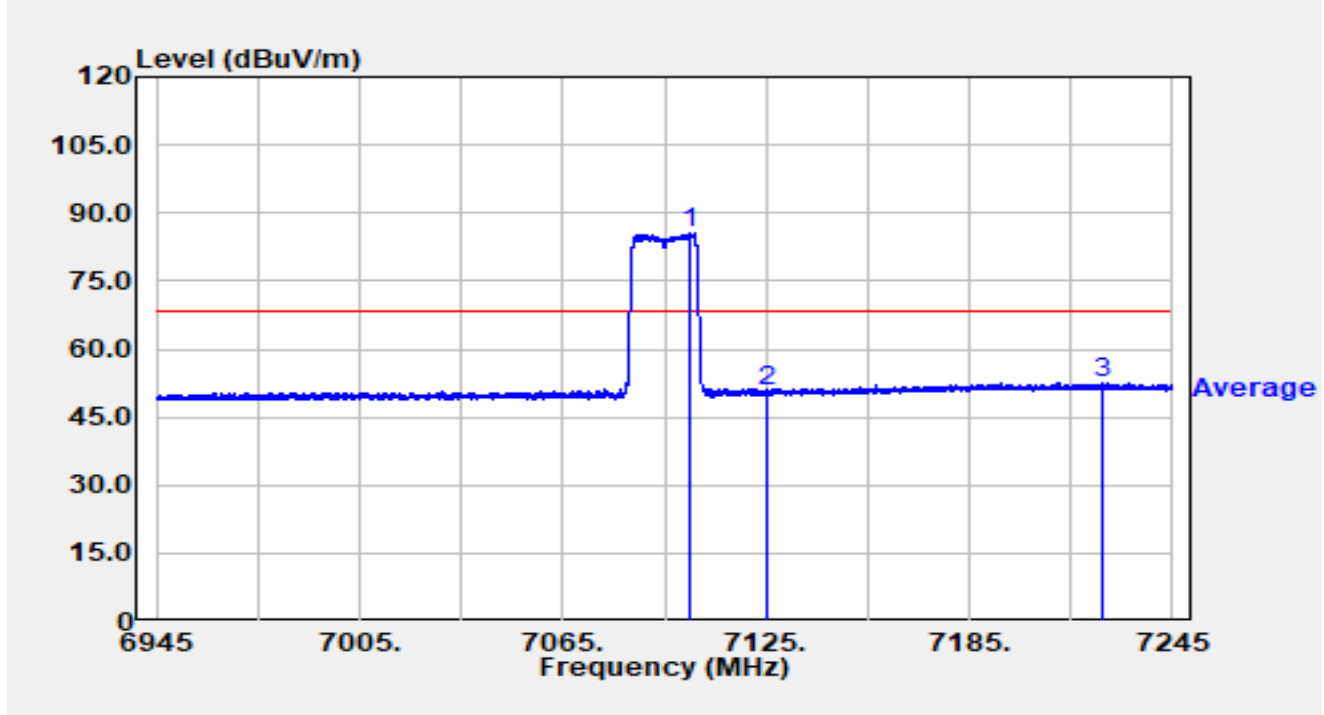


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7102.710	43.41	42.21	85.63	N/A	N/A	Average
2		7125.000	8.39	42.13	50.52	-17.68	68.20	Average
3	*	7224.120	10.16	42.24	52.40	-15.80	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

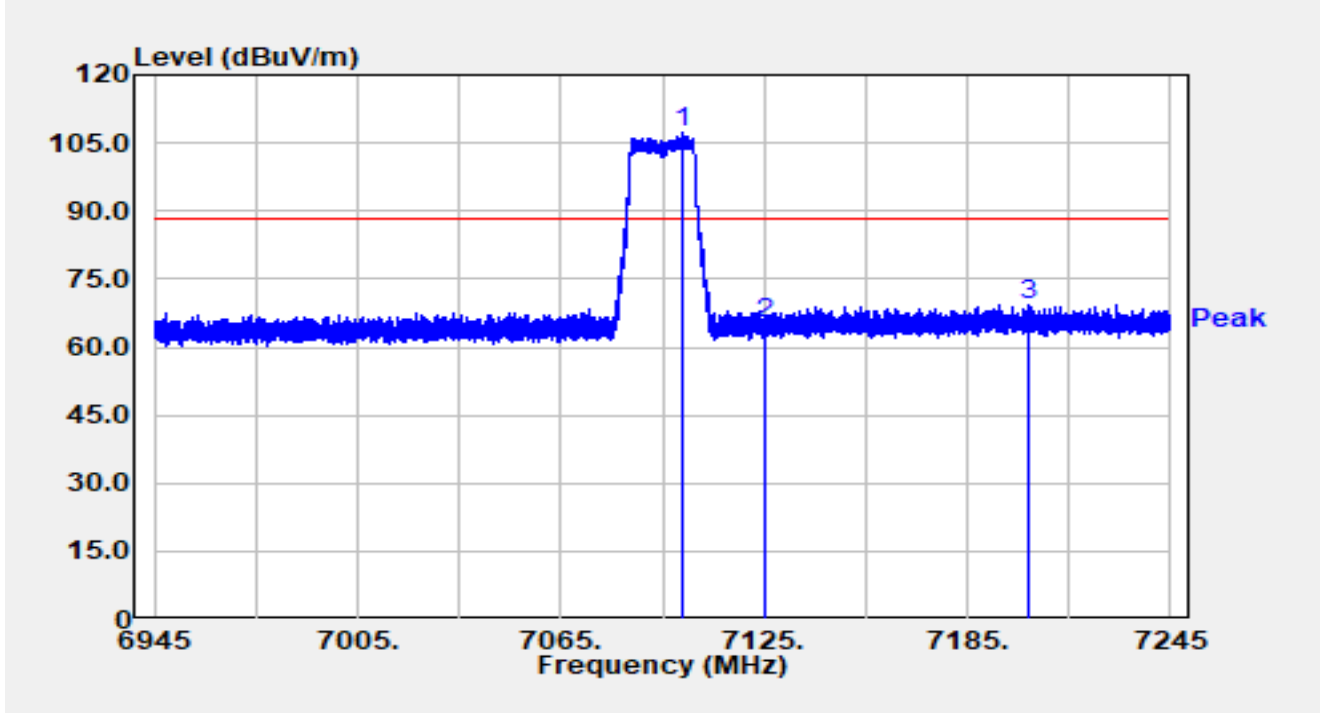


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.240	64.98	42.21	107.19	N/A	N/A	Peak
2		7125.000	23.23	42.13	65.36	-22.84	88.20	Peak
3	*	7203.420	27.32	42.17	69.48	-18.72	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

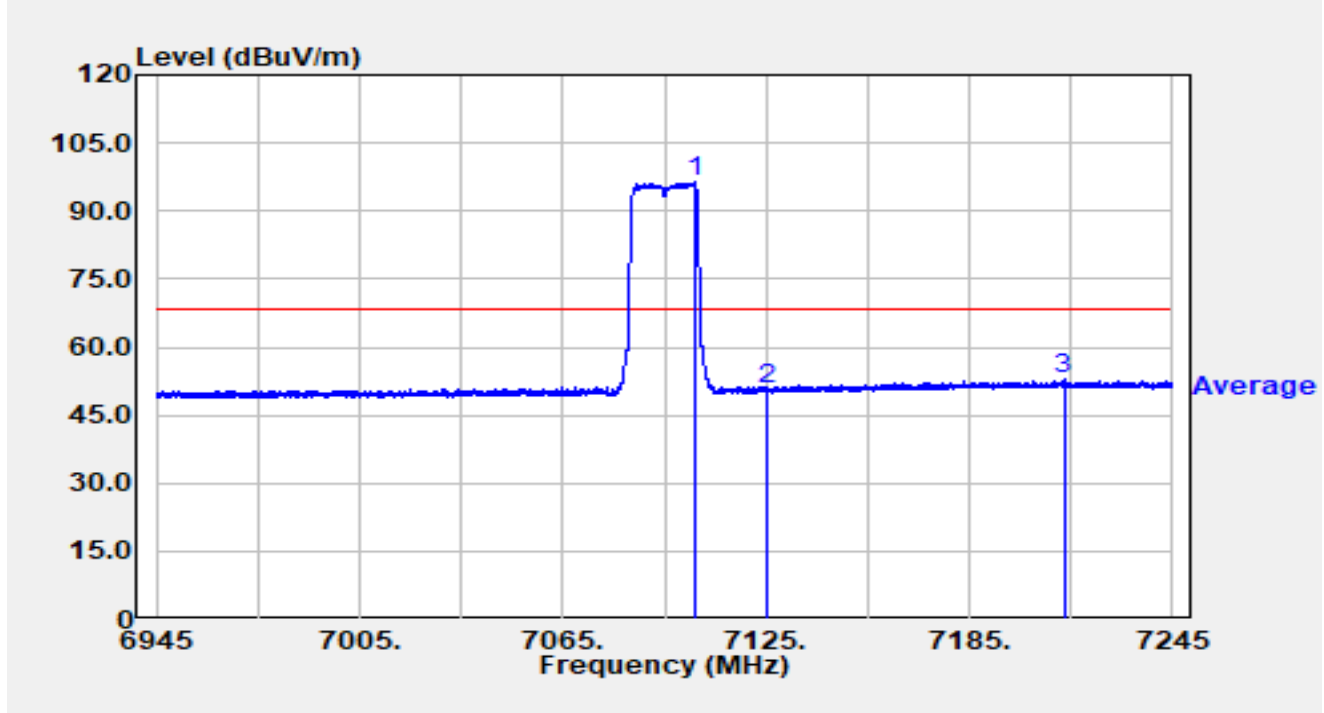


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.850	54.26	42.21	96.47	N/A	N/A	Average
2		7125.000	8.60	42.13	50.73	-17.47	68.20	Average
3	*	7212.900	10.60	42.20	52.80	-15.40	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

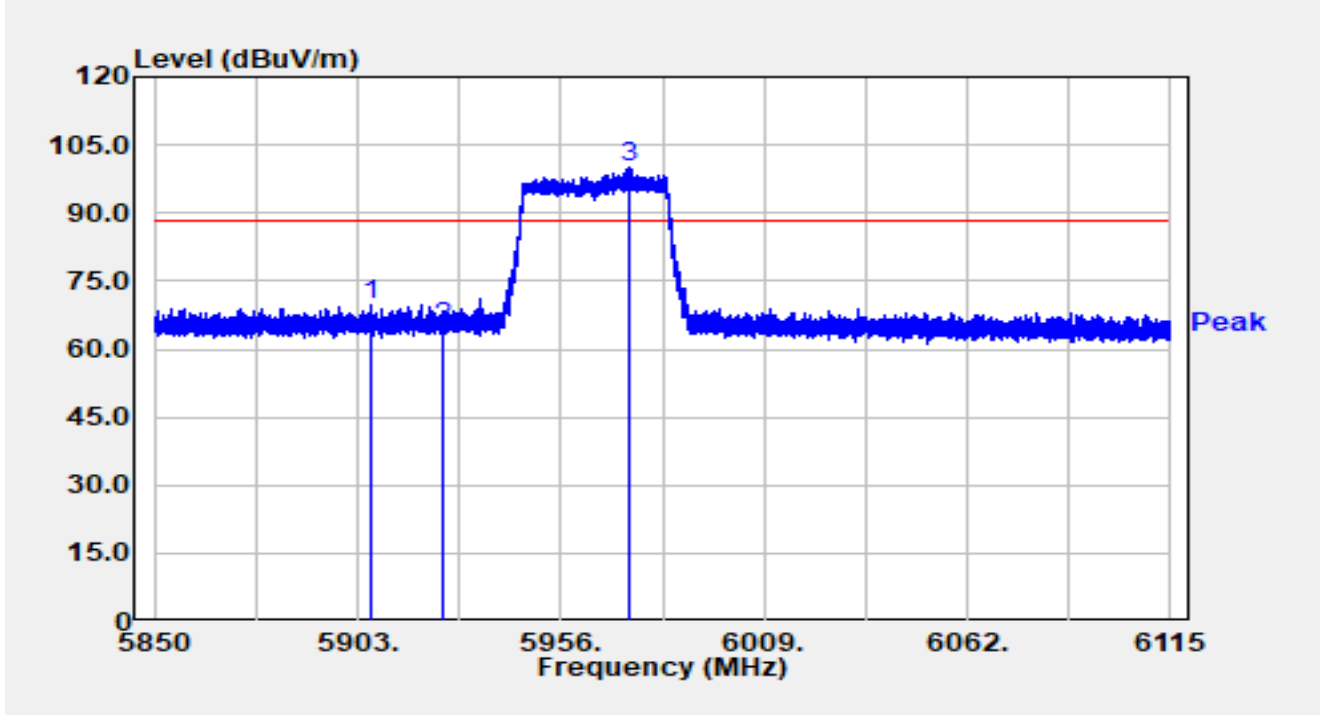


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.551	29.30	40.63	69.93	-18.27	88.20	Peak
2		5925.000	23.82	40.76	64.58	-23.62	88.20	Peak
3		5973.914	59.08	40.82	99.90	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

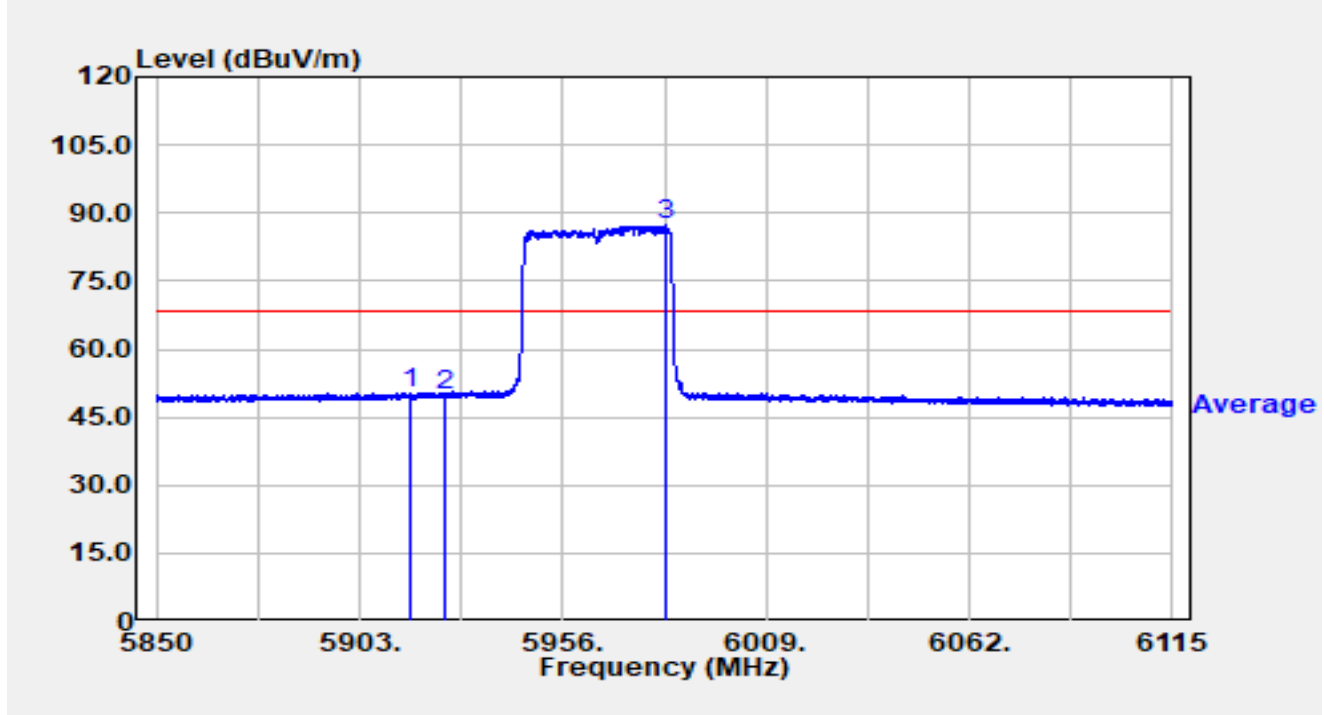


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.091	9.78	40.65	50.42	-17.78	68.20	Average
2		5925.000	9.02	40.76	49.77	-18.43	68.20	Average
3		5982.686	46.49	40.79	87.28	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

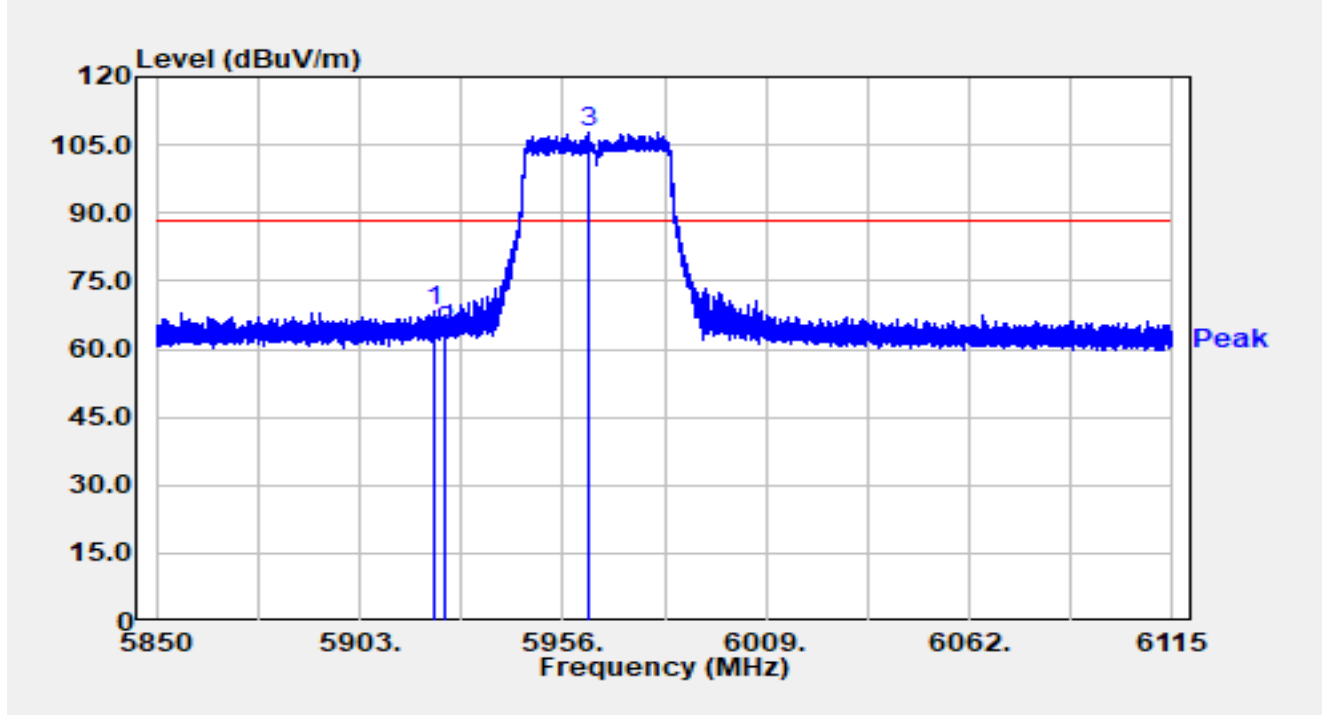


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.769	27.84	40.73	68.56	-19.64	88.20	Peak
2		5925.000	23.11	40.76	63.86	-24.34	88.20	Peak
3		5962.784	67.04	40.88	107.92	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

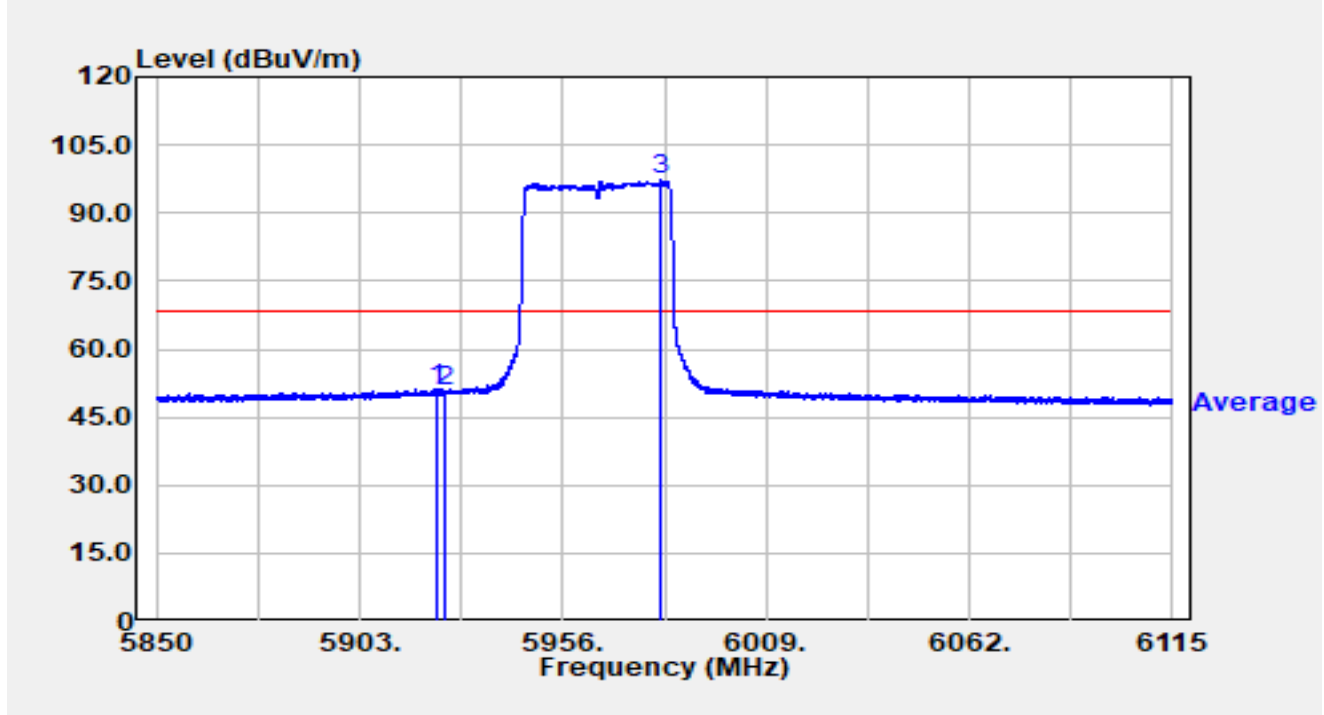


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5923.484	10.42	40.74	51.16	-17.04	68.20	Average
2		5925.000	9.87	40.76	50.62	-17.58	68.20	Average
3		5981.758	56.46	40.78	97.24	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBUV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

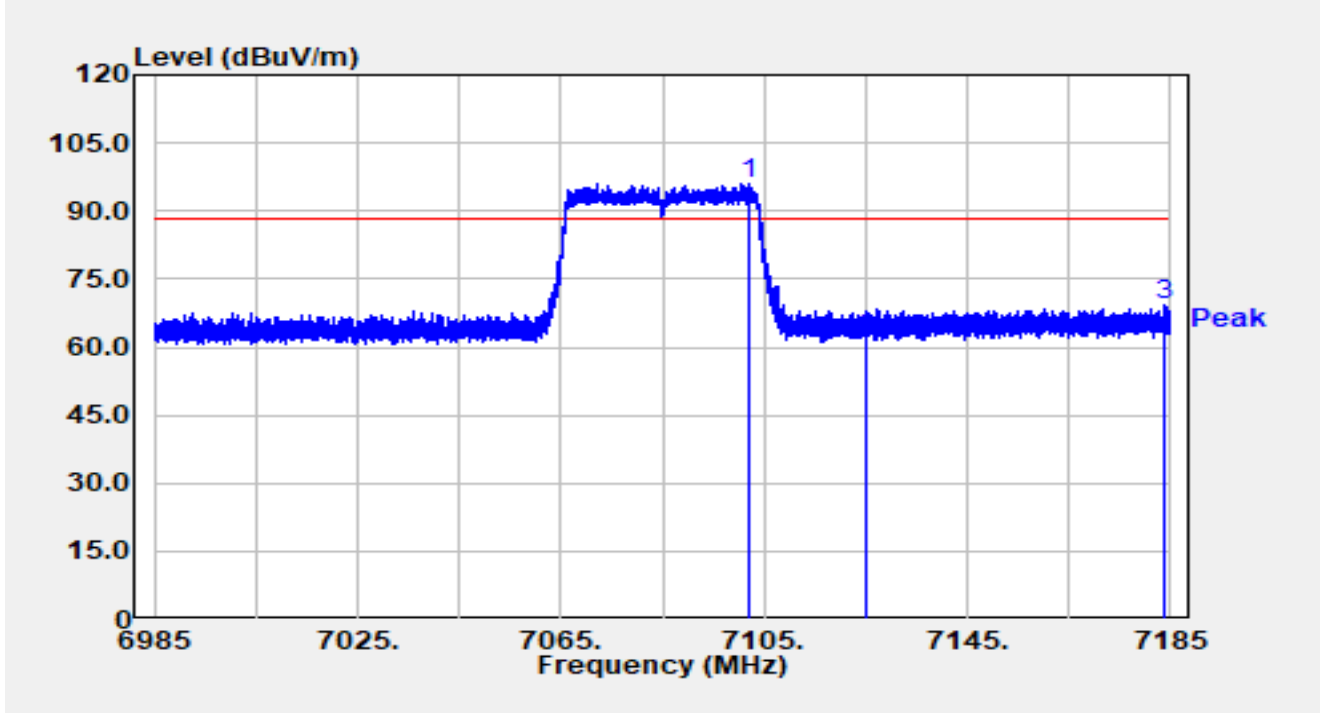


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.840	53.83	42.21	96.04	N/A	N/A	Peak
2		7125.000	19.35	42.13	61.48	-26.72	88.20	Peak
3	*	7183.980	27.05	42.22	69.27	-18.93	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

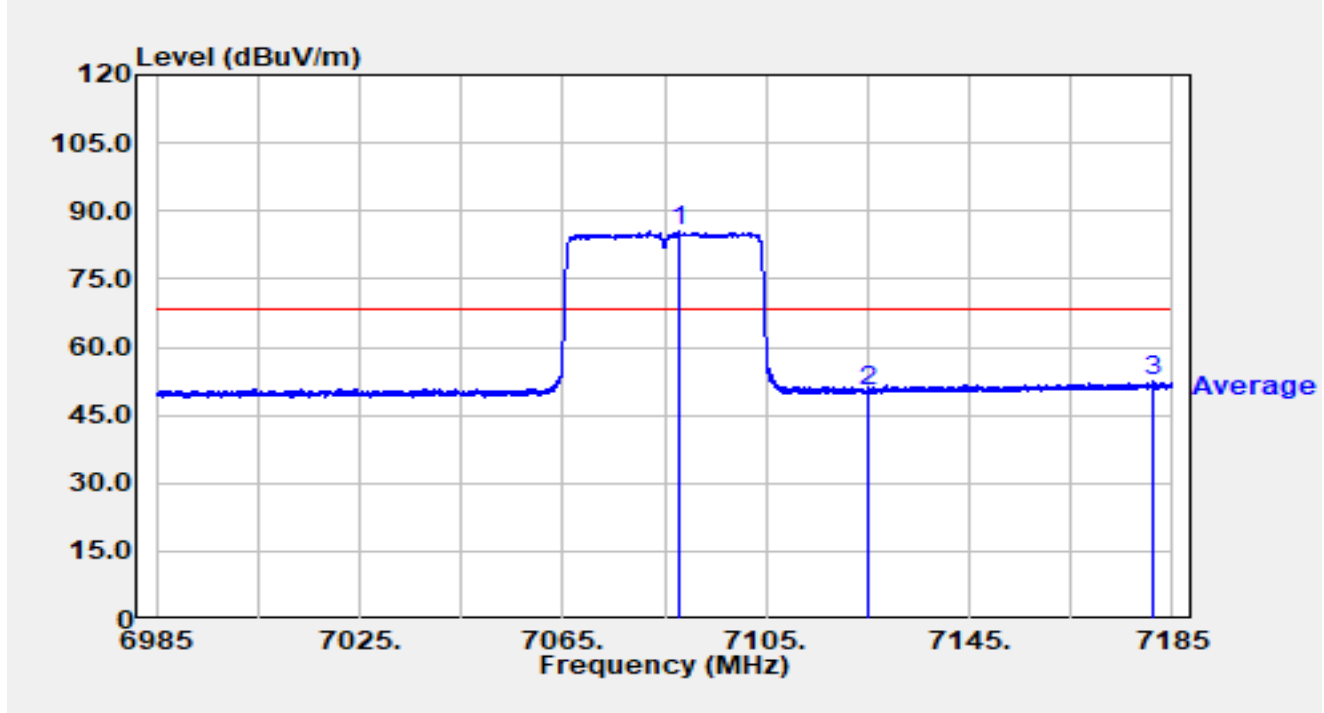


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.760	43.32	42.13	85.45	N/A	N/A	Average
2		7125.000	8.22	42.13	50.35	-17.85	68.20	Average
3	*	7181.240	10.29	42.21	52.50	-15.70	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

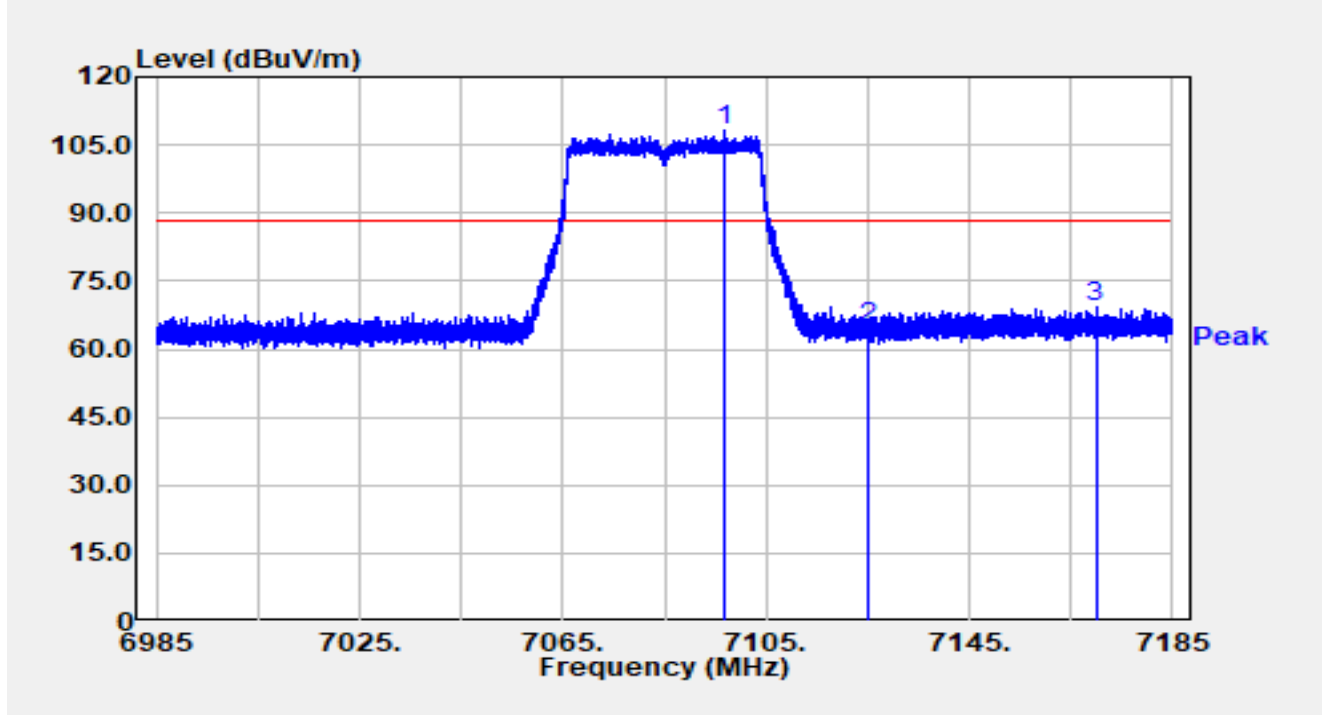


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.020	66.08	42.18	108.27	N/A	N/A	Peak
2		7125.000	22.63	42.13	64.76	-23.44	88.20	Peak
3	*	7169.880	27.30	42.19	69.49	-18.71	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

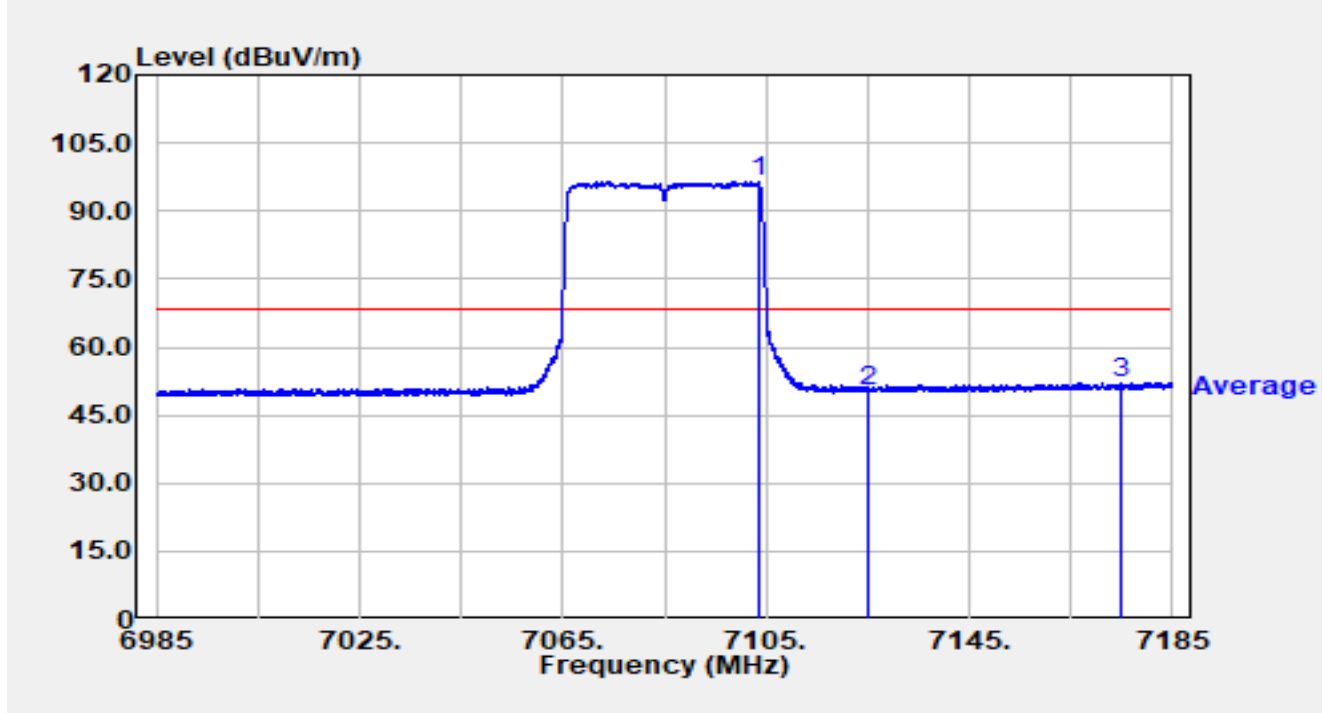


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.540	54.26	42.21	96.48	N/A	N/A	Average
2		7125.000	8.28	42.13	50.41	-17.79	68.20	Average
3	*	7174.680	10.00	42.20	52.20	-16.00	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

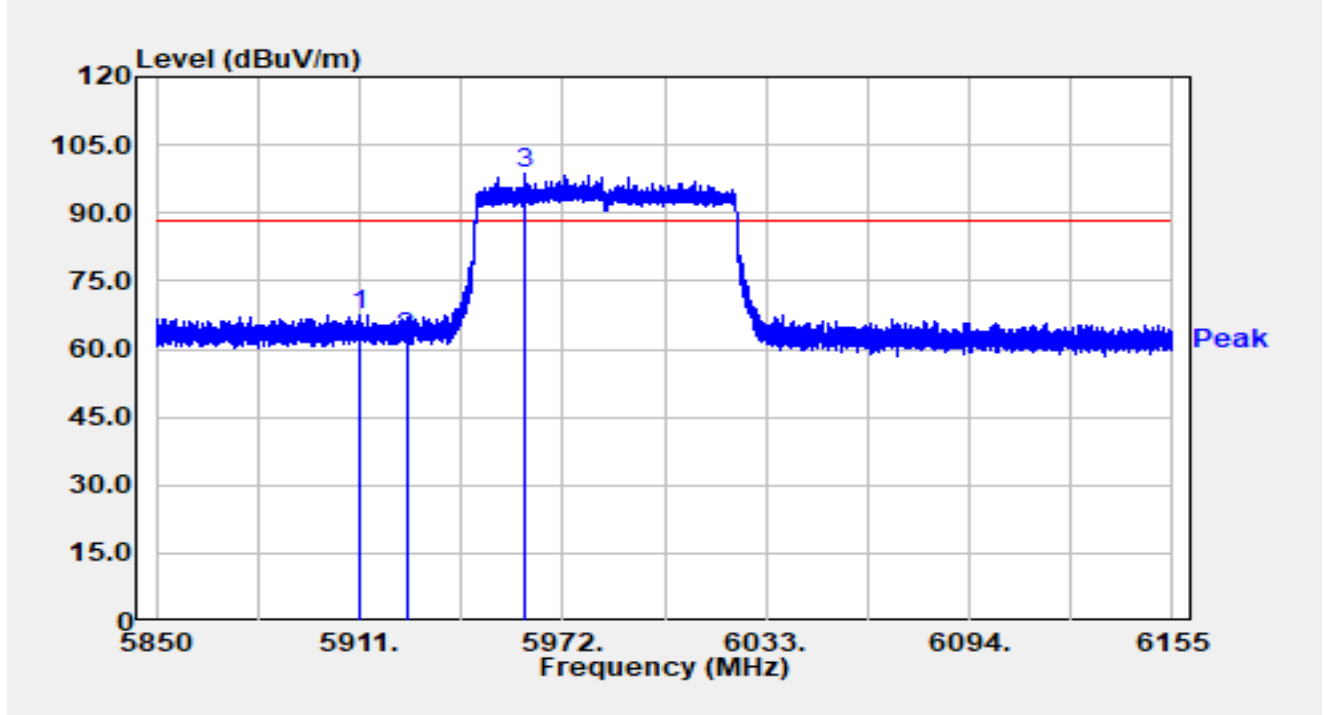


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.030	27.03	40.61	67.64	-20.56	88.20	Peak
2		5925.000	21.72	40.76	62.47	-25.73	88.20	Peak
3		5960.746	57.94	40.86	98.80	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

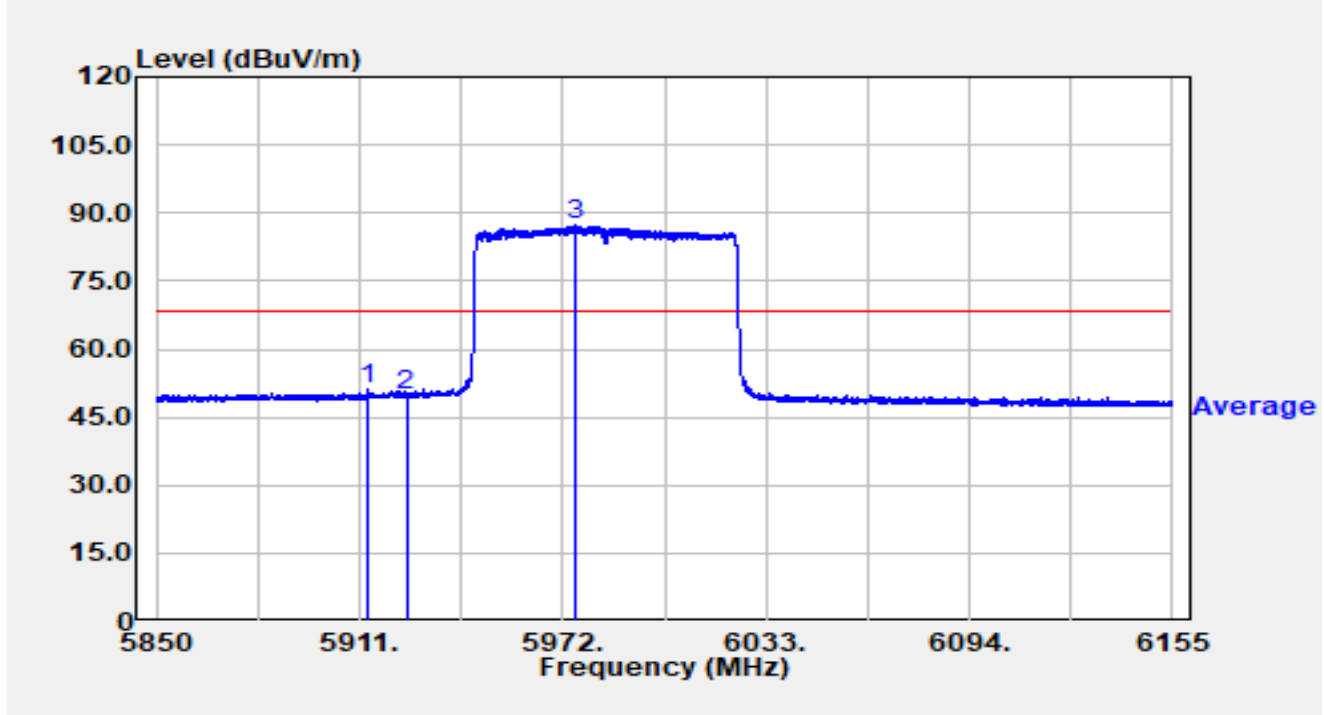


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.379	10.37	40.61	50.98	-17.22	68.20	Average
2		5925.000	9.20	40.76	49.96	-18.24	68.20	Average
3		5976.026	46.41	40.80	87.21	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

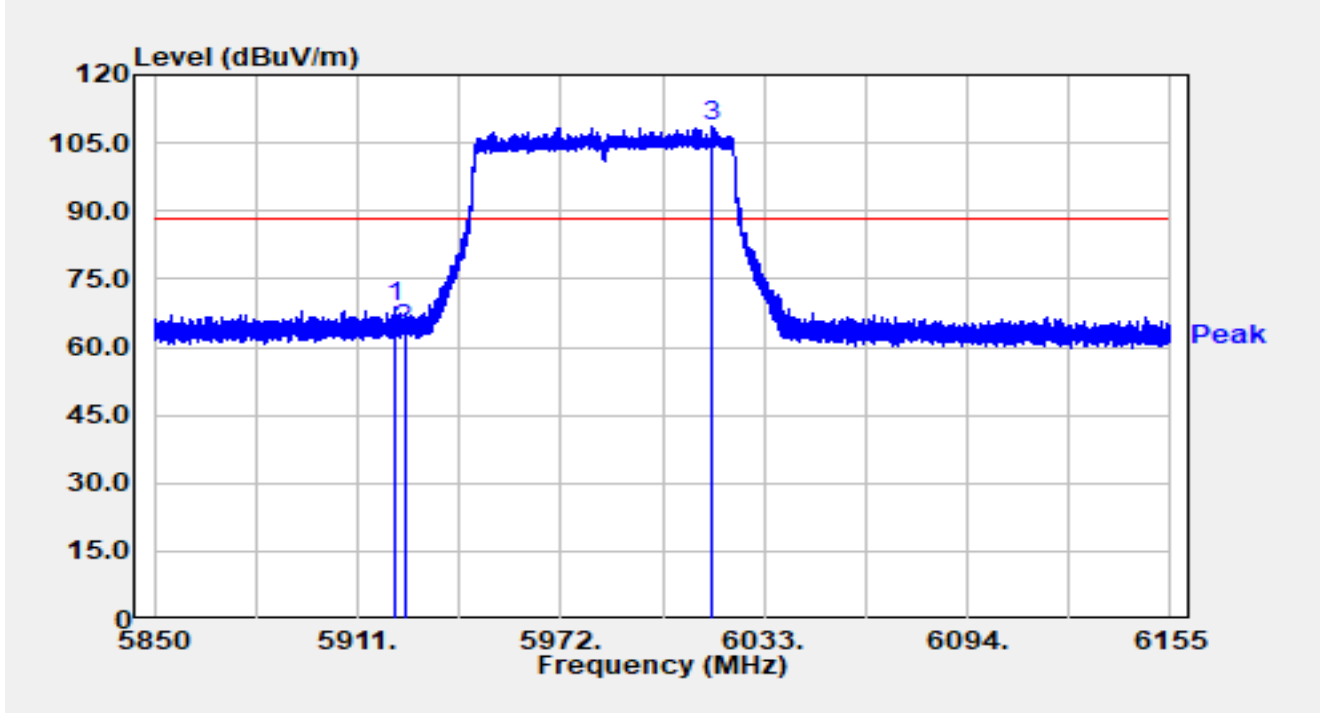


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.041	28.10	40.72	68.82	-19.38	88.20	Peak
2		5925.000	23.01	40.76	63.77	-24.43	88.20	Peak
3		6017.476	67.71	40.99	108.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

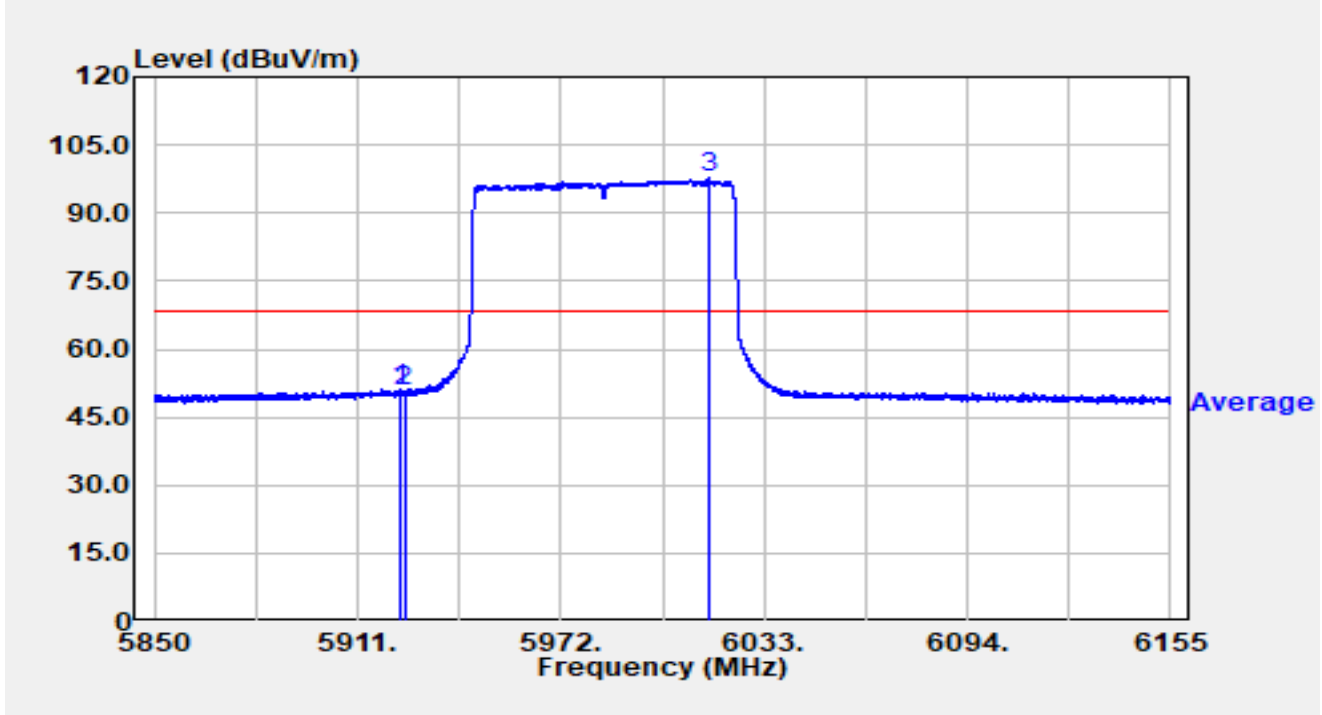


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.146	10.56	40.75	51.30	-16.90	68.20	Average
2		5925.000	9.89	40.76	50.64	-17.56	68.20	Average
3		6016.347	56.63	40.99	97.61	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

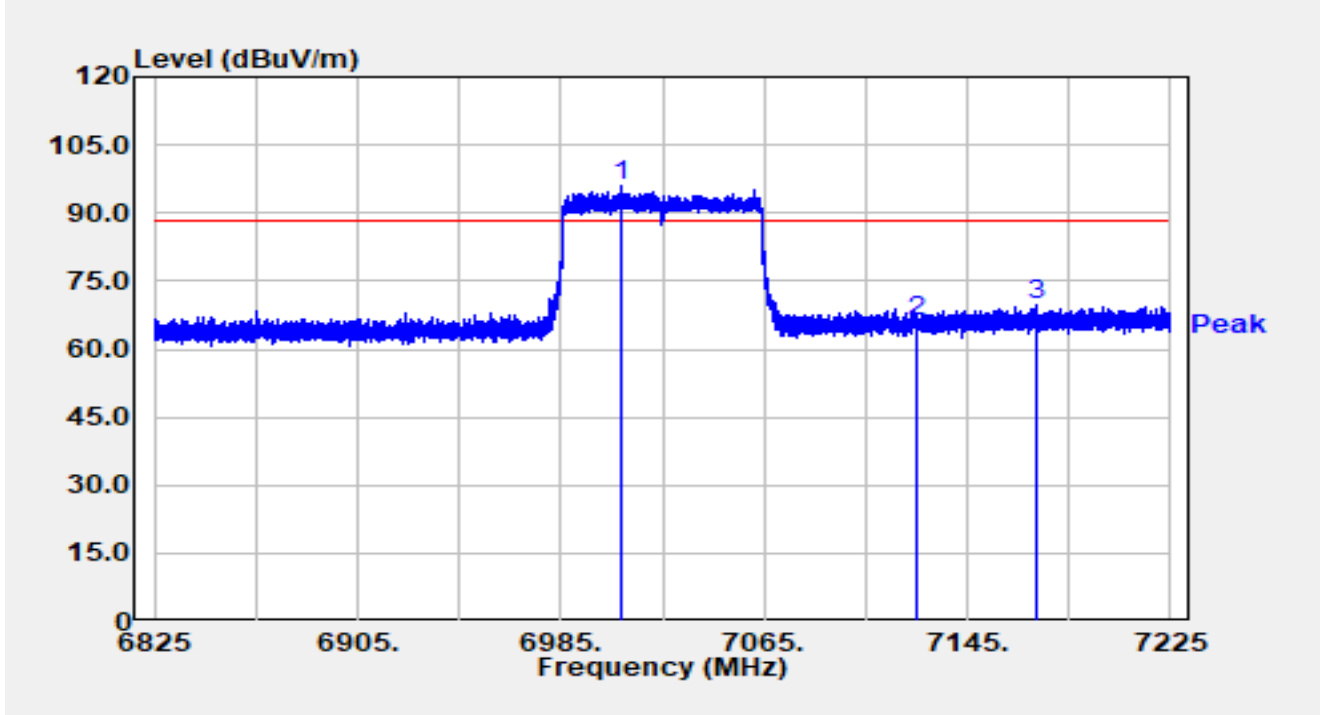


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7008.400	54.04	41.94	95.98	N/A	N/A	Peak
2		7125.000	23.86	42.13	65.99	-22.21	88.20	Peak
3	*	7172.480	27.64	42.19	69.84	-18.36	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

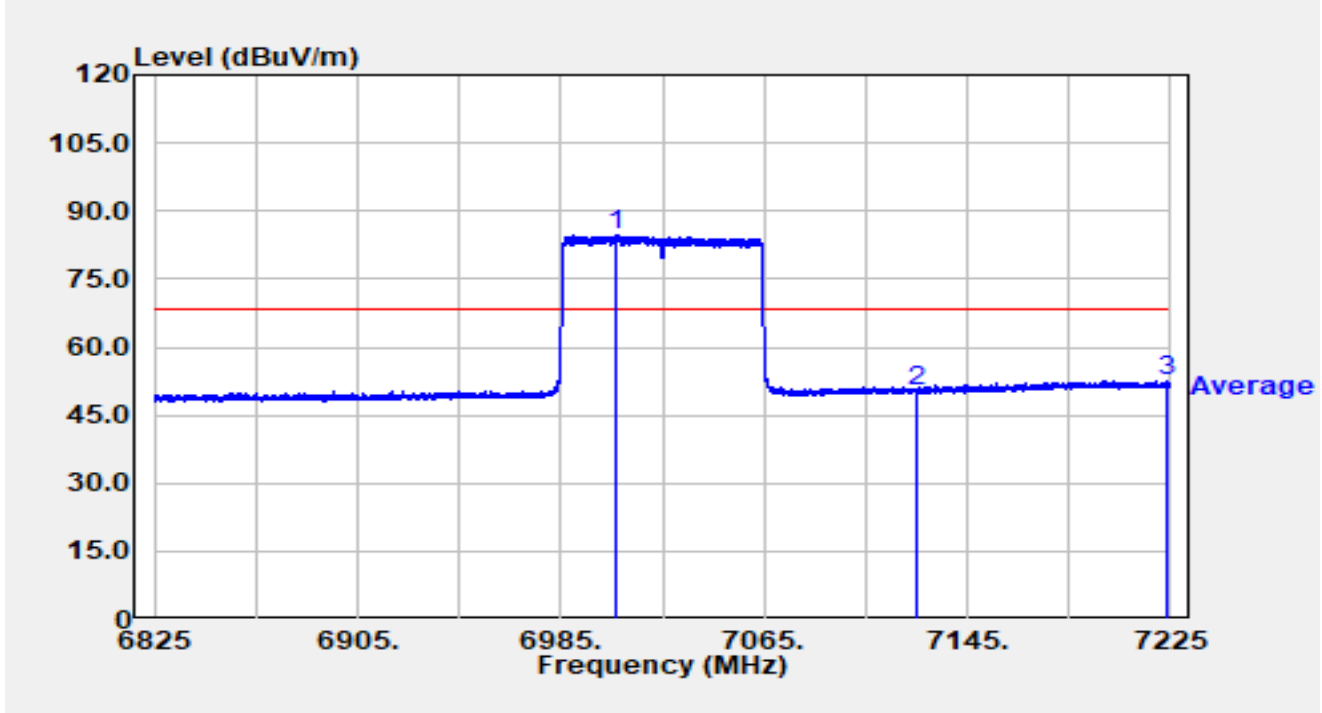


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7007.040	42.71	41.93	84.64	N/A	N/A	Average
2		7125.000	8.10	42.13	50.24	-17.96	68.20	Average
3	*	7223.120	10.16	42.24	52.40	-15.80	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

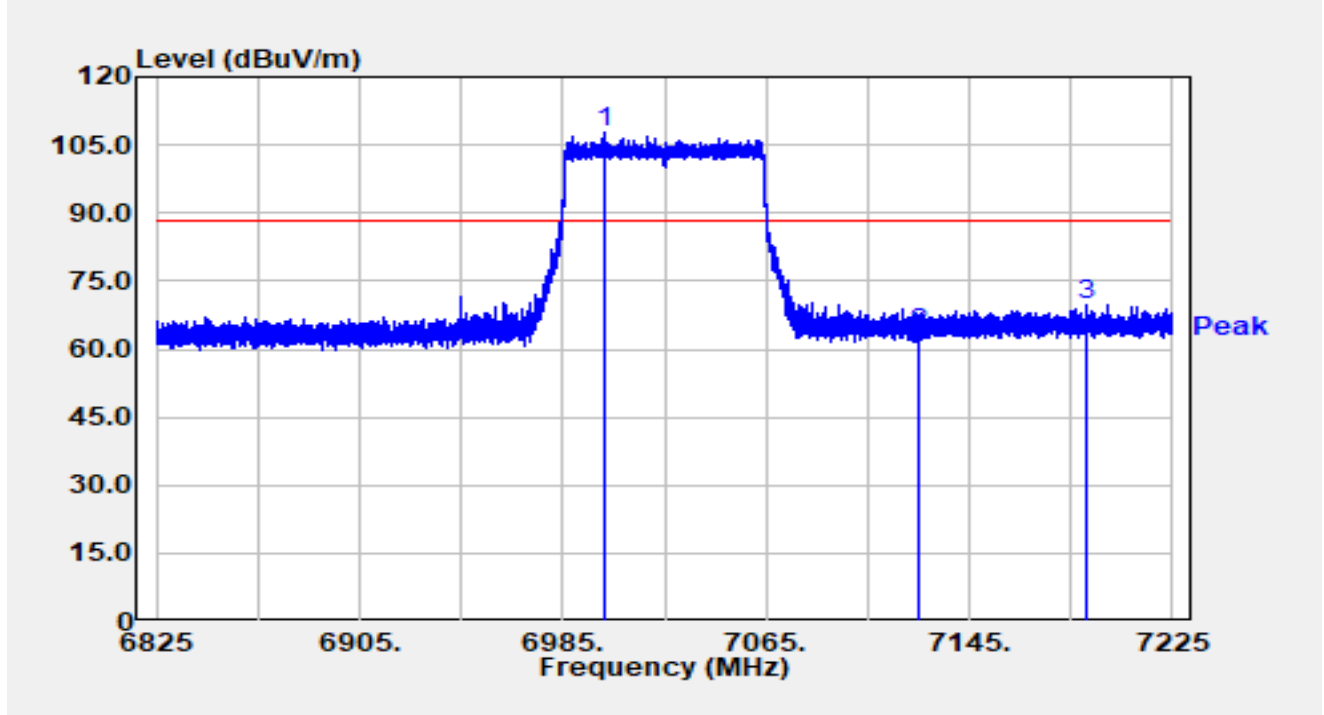


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7001.080	66.05	41.90	107.95	N/A	N/A	Peak
2		7125.000	21.47	42.13	63.61	-24.59	88.20	Peak
3	*	7191.240	27.58	42.21	69.79	-18.41	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

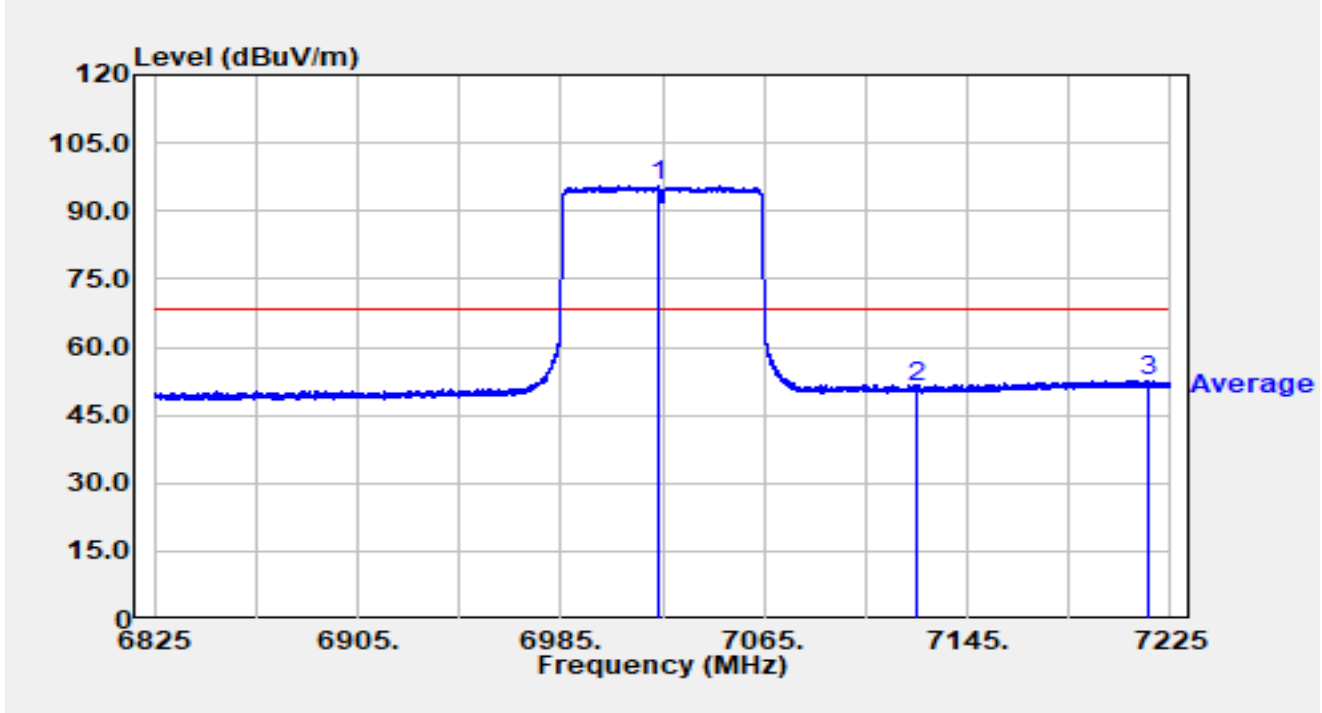


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7023.000	53.61	42.00	95.60	N/A	N/A	Average
2		7125.000	8.90	42.13	51.04	-17.16	68.20	Average
3	*	7216.160	10.48	42.22	52.69	-15.51	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

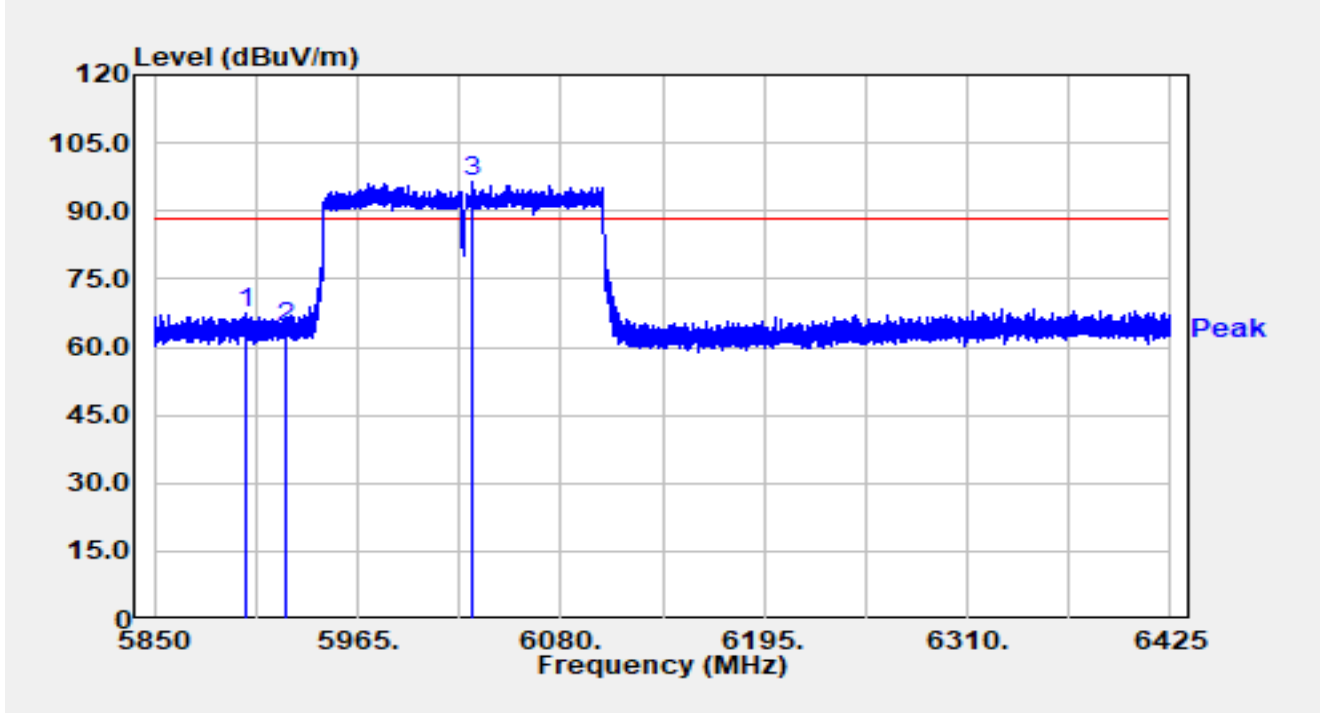


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.118	26.63	40.65	67.28	-20.92	88.20	Peak
2		5925.000	23.61	40.76	64.37	-23.83	88.20	Peak
3		6030.033	55.41	40.98	96.40	N/A	N/A	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

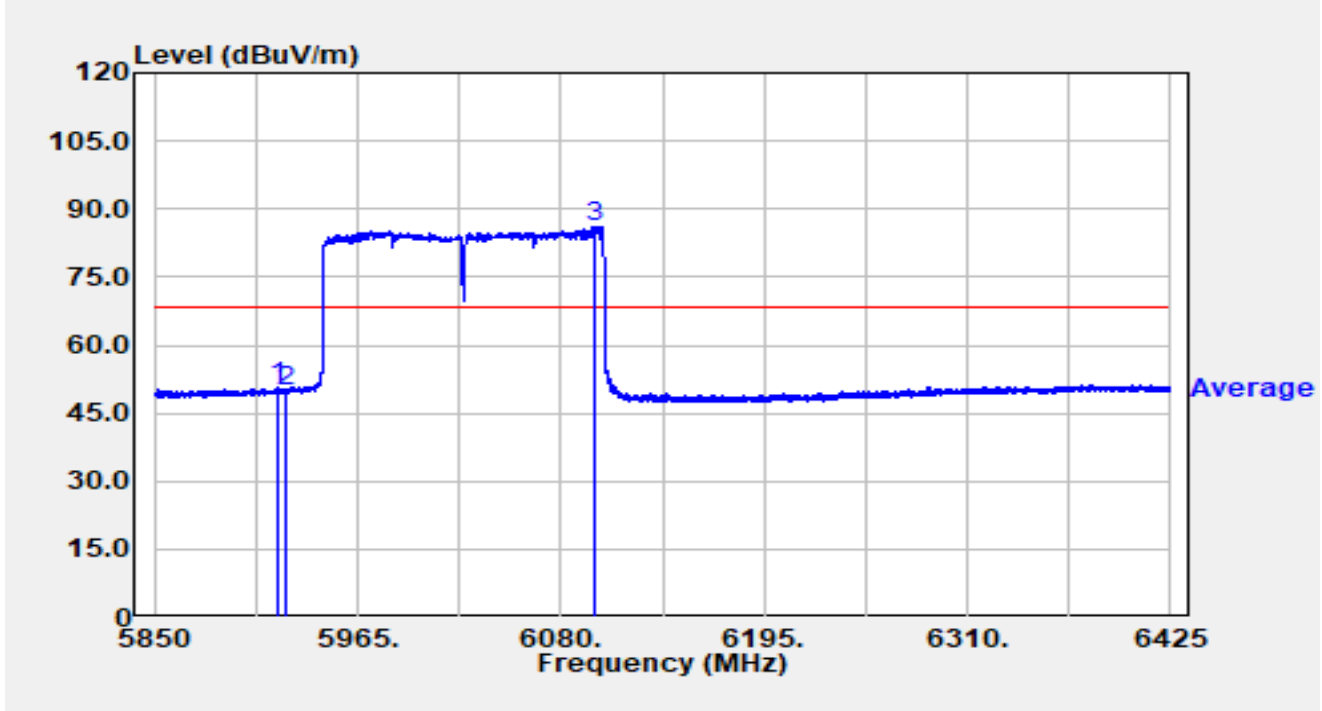


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.862	9.83	40.69	50.53	-17.67	68.20	Average
2		5925.000	9.00	40.76	49.76	-18.44	68.20	Average
3		6099.837	45.06	41.06	86.12	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

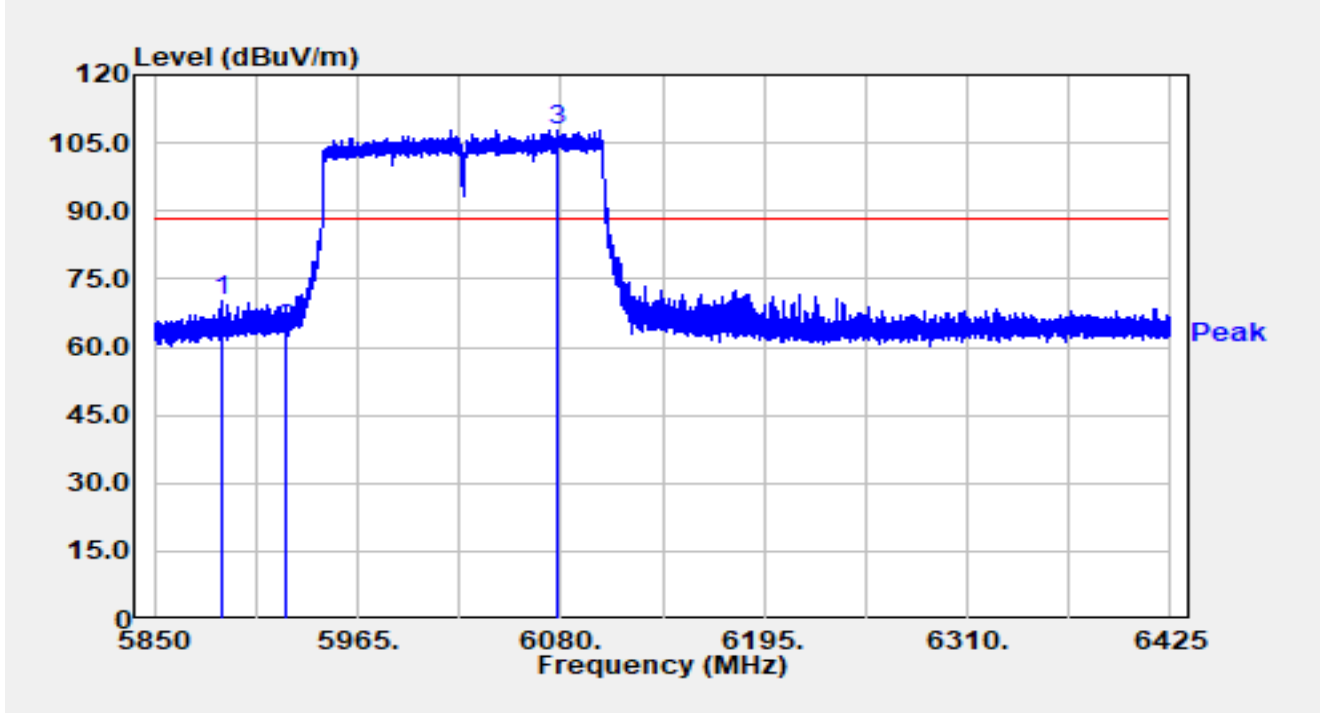


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5888.928	29.73	40.63	70.36	-17.84	88.20	Peak
2		5925.000	23.24	40.76	64.00	-24.20	88.20	Peak
3		6077.585	66.83	41.10	107.94	N/A	N/A	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

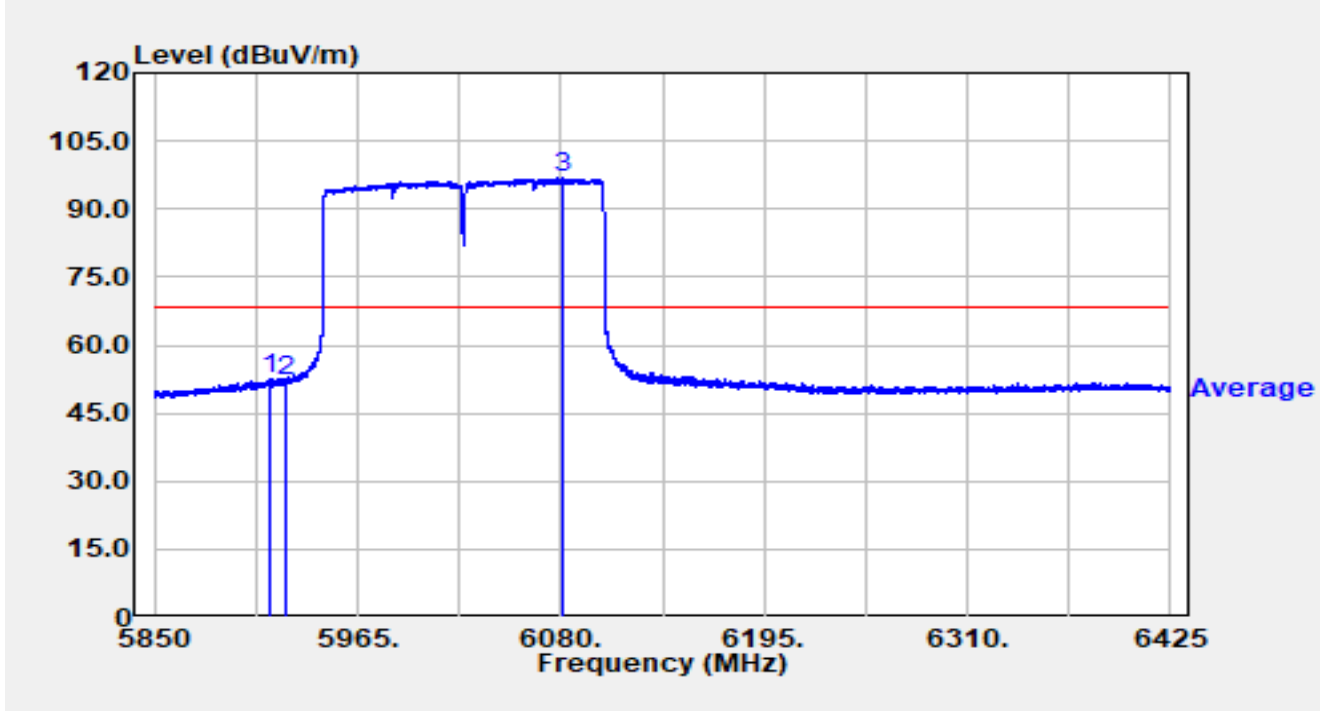


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.688	12.04	40.63	52.67	-15.53	68.20	Average
2		5925.000	11.37	40.76	52.13	-16.07	68.20	Average
3		6081.092	55.62	41.12	96.74	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

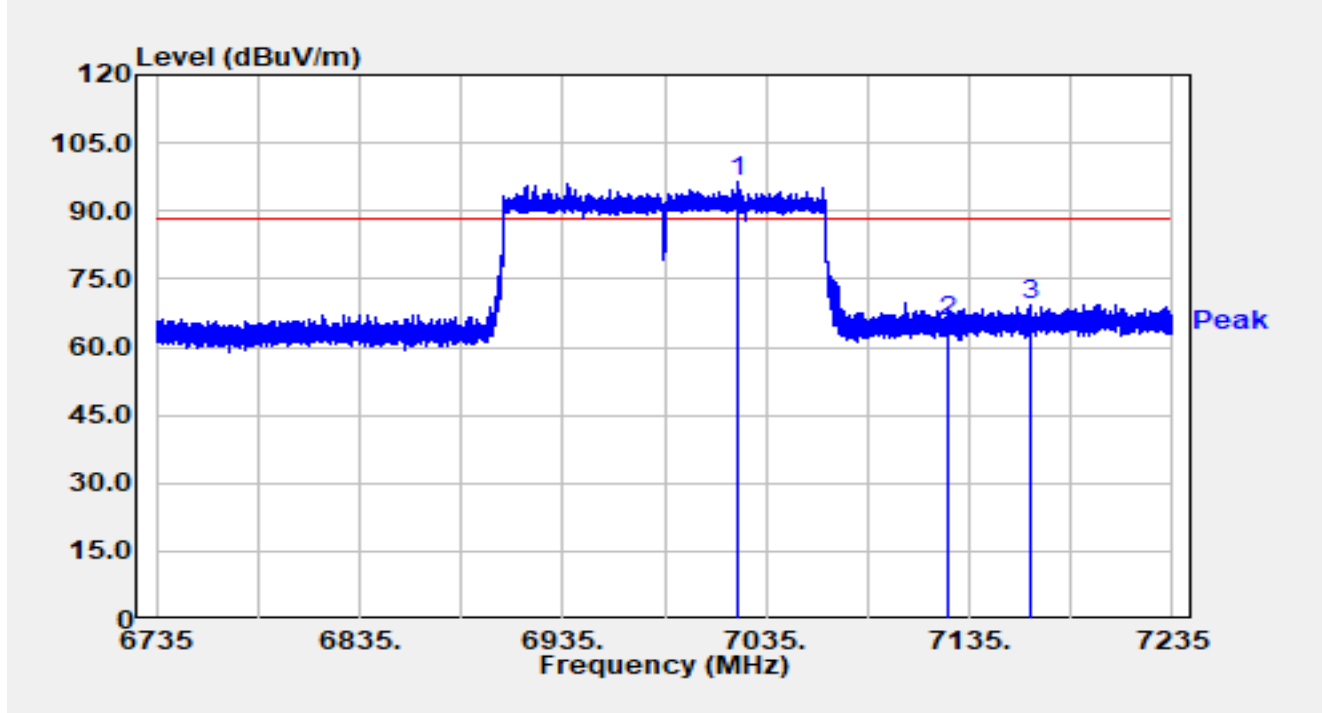


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7021.050	54.37	41.99	96.36	N/A	N/A	Peak
2		7125.000	23.38	42.13	65.52	-22.68	88.20	Peak
3	*	7165.600	27.17	42.21	69.38	-18.82	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

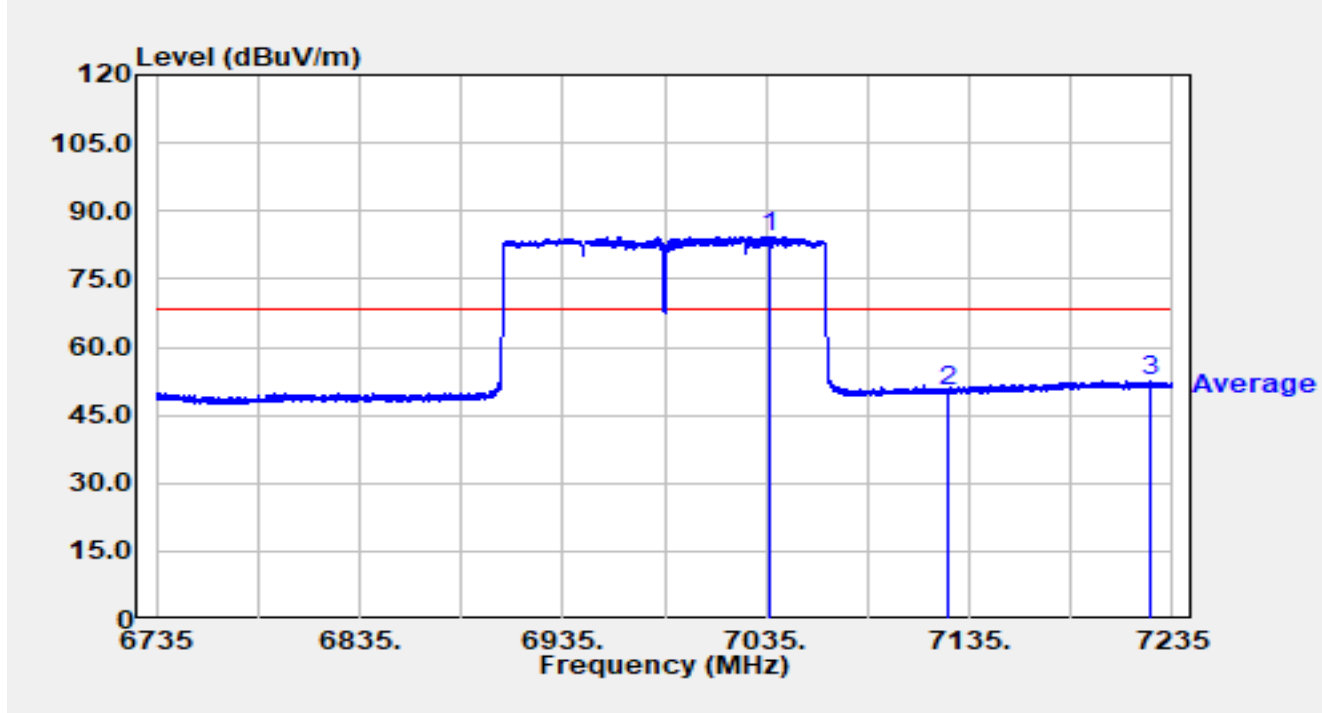


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7036.450	42.39	42.03	84.42	N/A	N/A	Average
2		7125.000	8.29	42.13	50.43	-17.77	68.20	Average
3	*	7224.400	10.12	42.24	52.36	-15.84	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

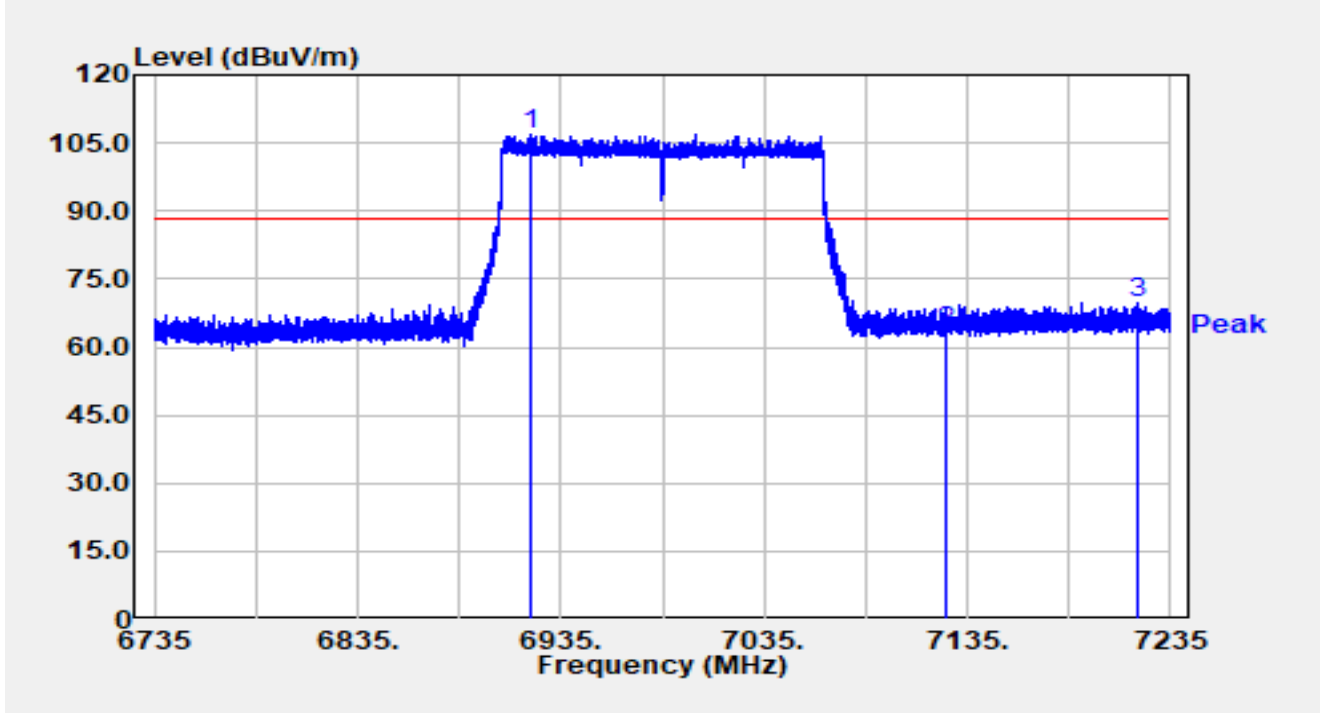


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6920.750	65.31	41.72	107.03	N/A	N/A	Peak
2		7125.000	21.36	42.13	63.49	-24.71	88.20	Peak
3	*	7218.850	27.57	42.23	69.80	-18.40	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

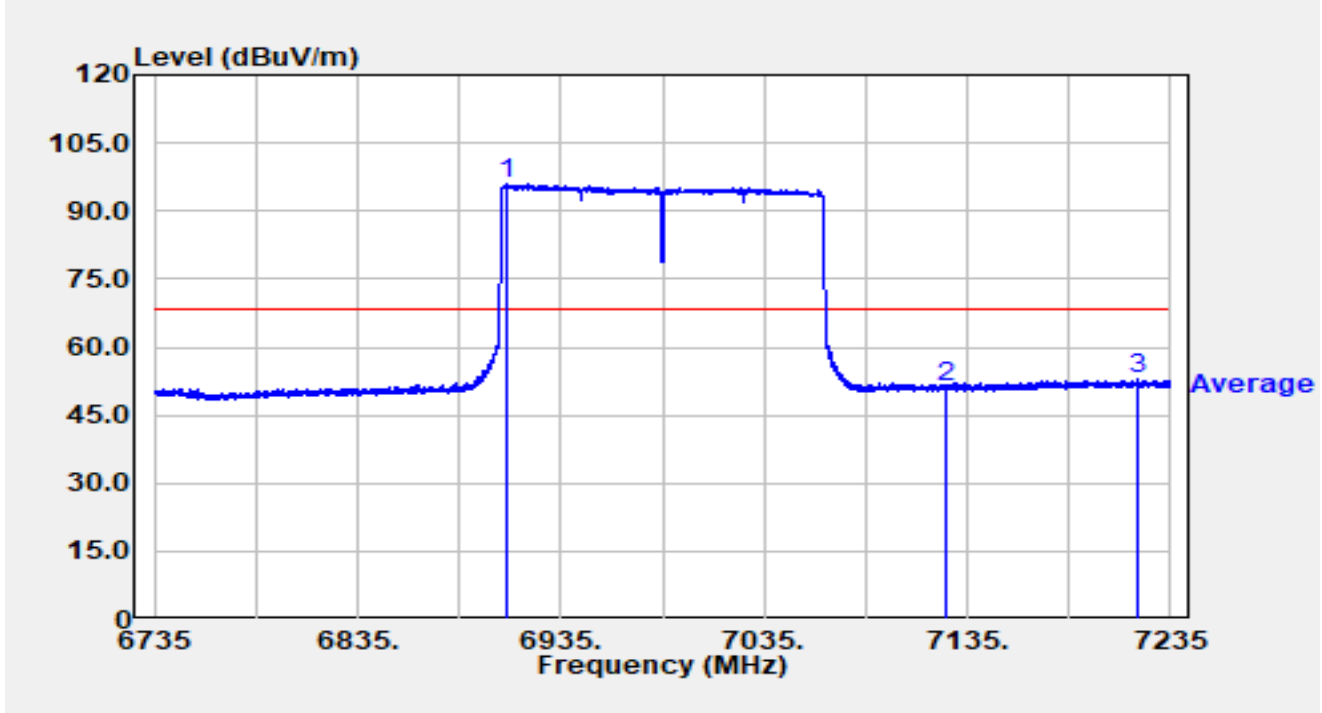


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6908.450	54.23	41.69	95.92	N/A	N/A	Average
2		7125.000	8.89	42.13	51.03	-17.17	68.20	Average
3	*	7219.200	10.63	42.23	52.86	-15.34	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

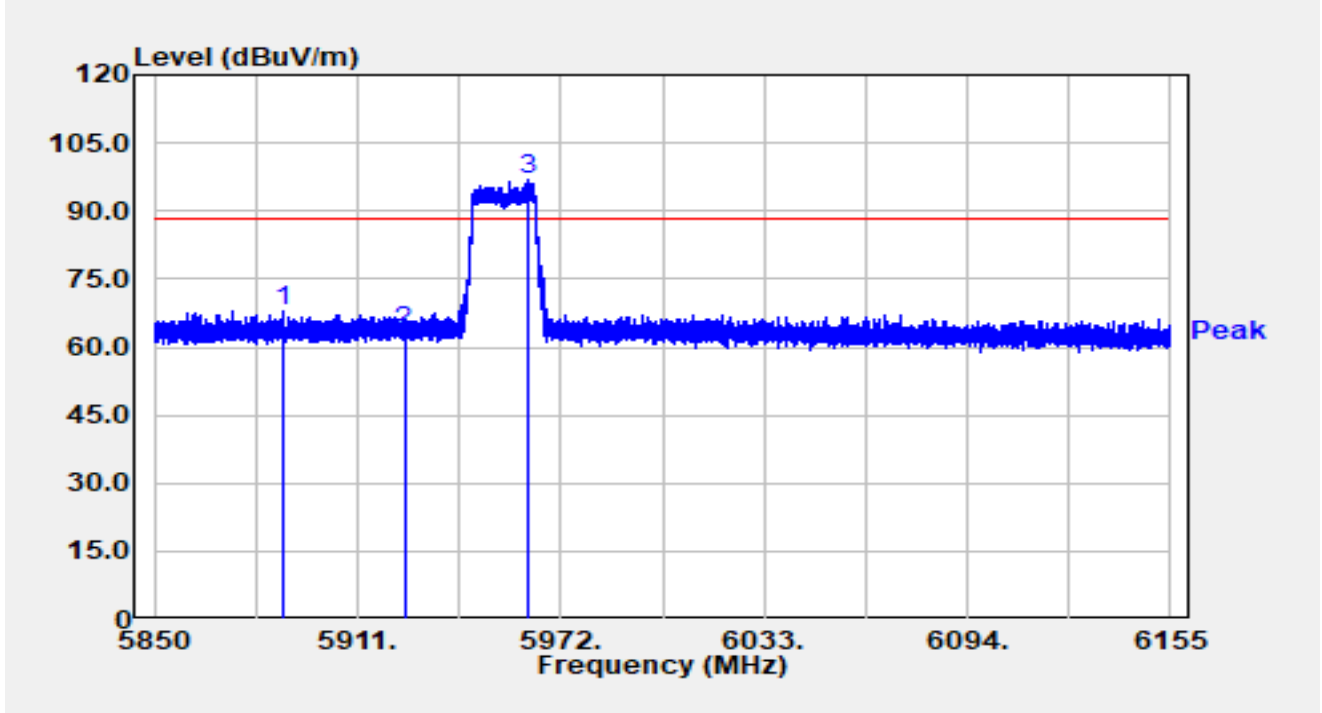


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5888.521	27.46	40.62	68.09	-20.11	88.20	Peak
2		5925.000	22.81	40.76	63.57	-24.63	88.20	Peak
3		5961.965	56.02	40.87	96.89	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

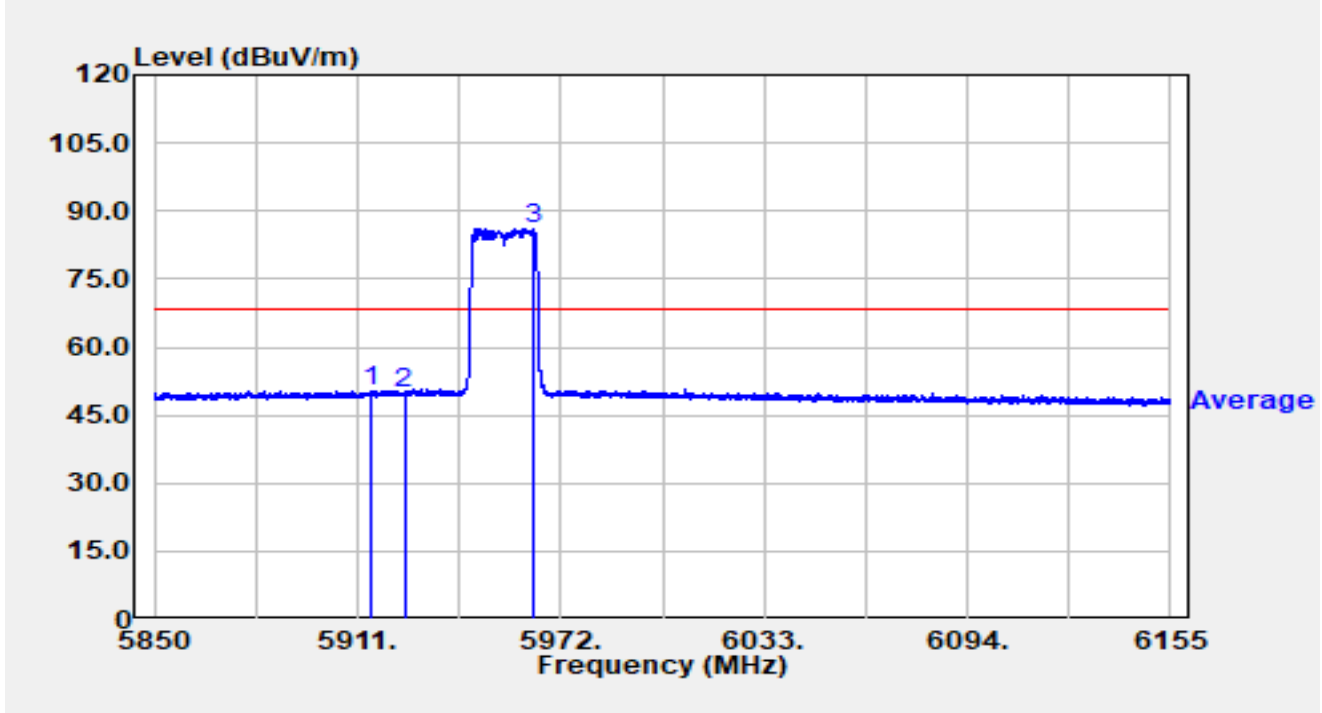


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.904	9.80	40.63	50.43	-17.77	68.20	Average
2		5925.000	9.04	40.76	49.79	-18.41	68.20	Average
3		5963.948	45.33	40.89	86.22	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

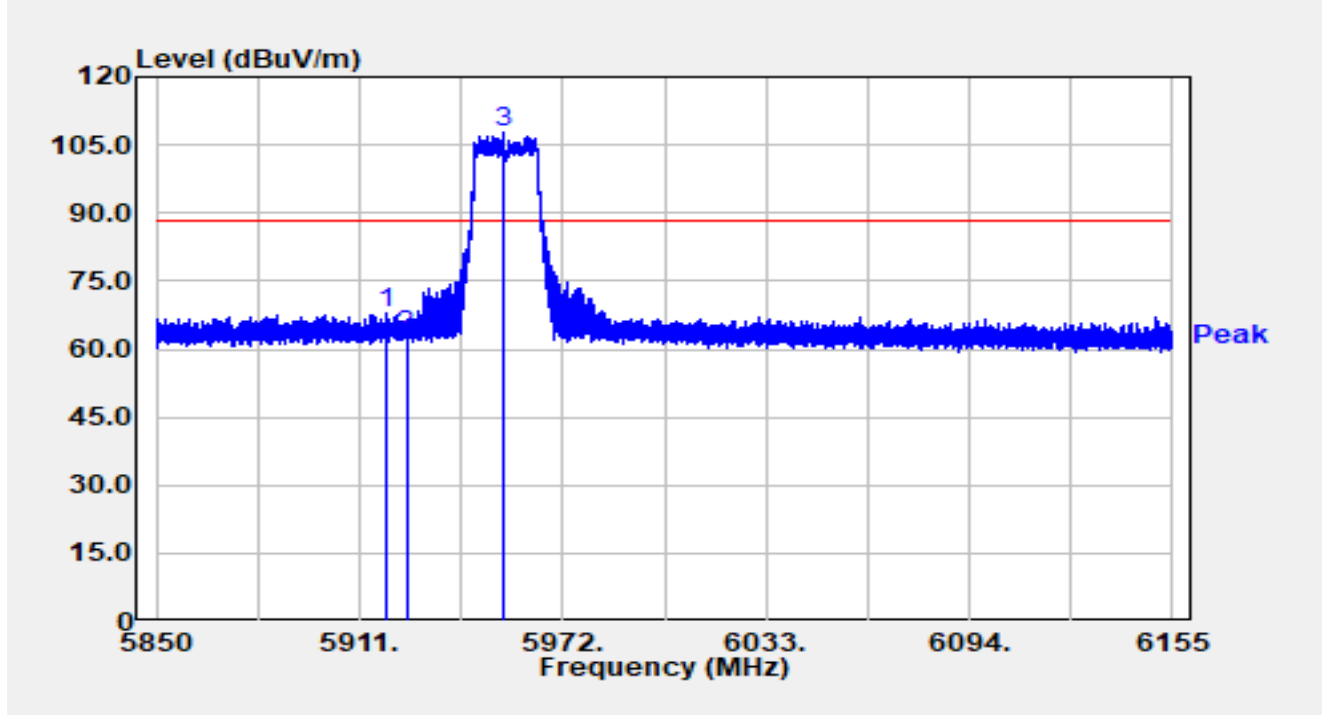


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.899	27.40	40.68	68.08	-20.12	88.20	Peak
2		5925.000	22.24	40.76	63.00	-25.20	88.20	Peak
3		5954.097	67.00	40.78	107.79	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

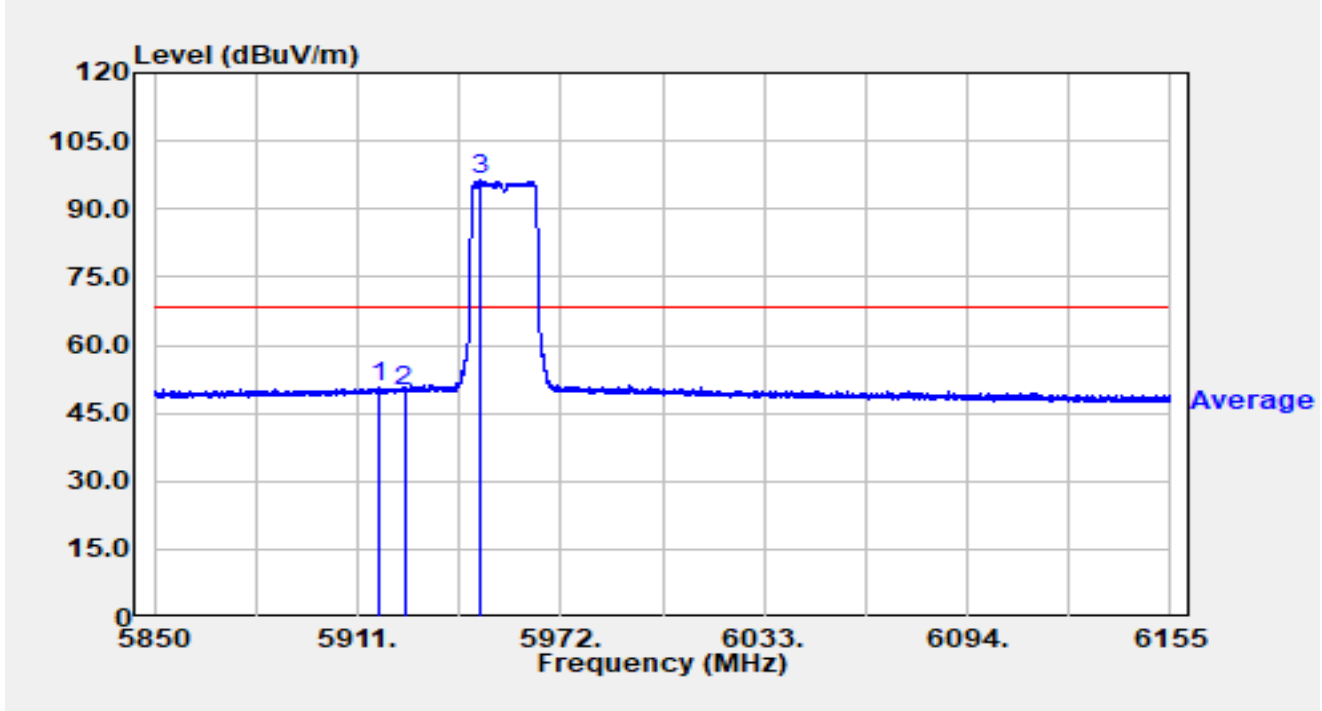


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.649	10.23	40.67	50.90	-17.30	68.20	Average
2		5925.000	9.14	40.76	49.90	-18.30	68.20	Average
3		5947.722	55.54	40.71	96.26	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

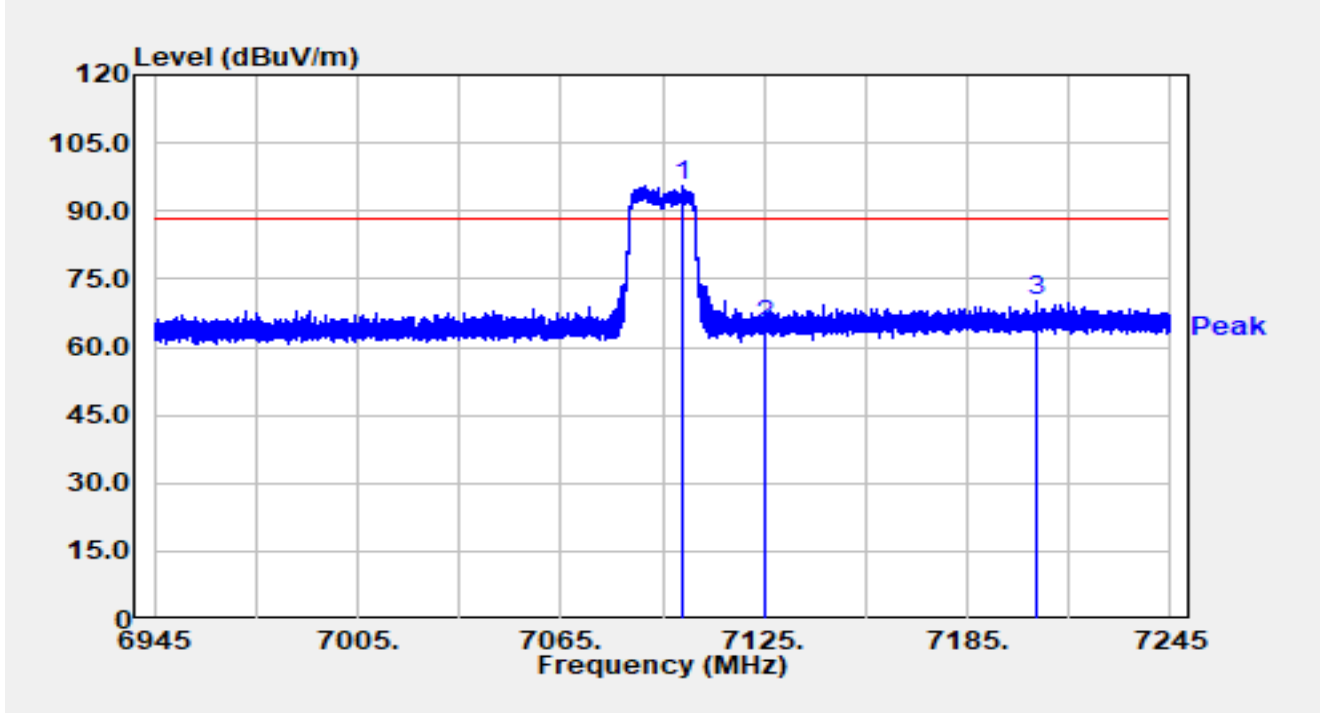


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.060	53.45	42.21	95.65	N/A	N/A	Peak
2		7125.000	22.69	42.13	64.83	-23.37	88.20	Peak
3	*	7205.730	27.91	42.16	70.08	-18.12	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

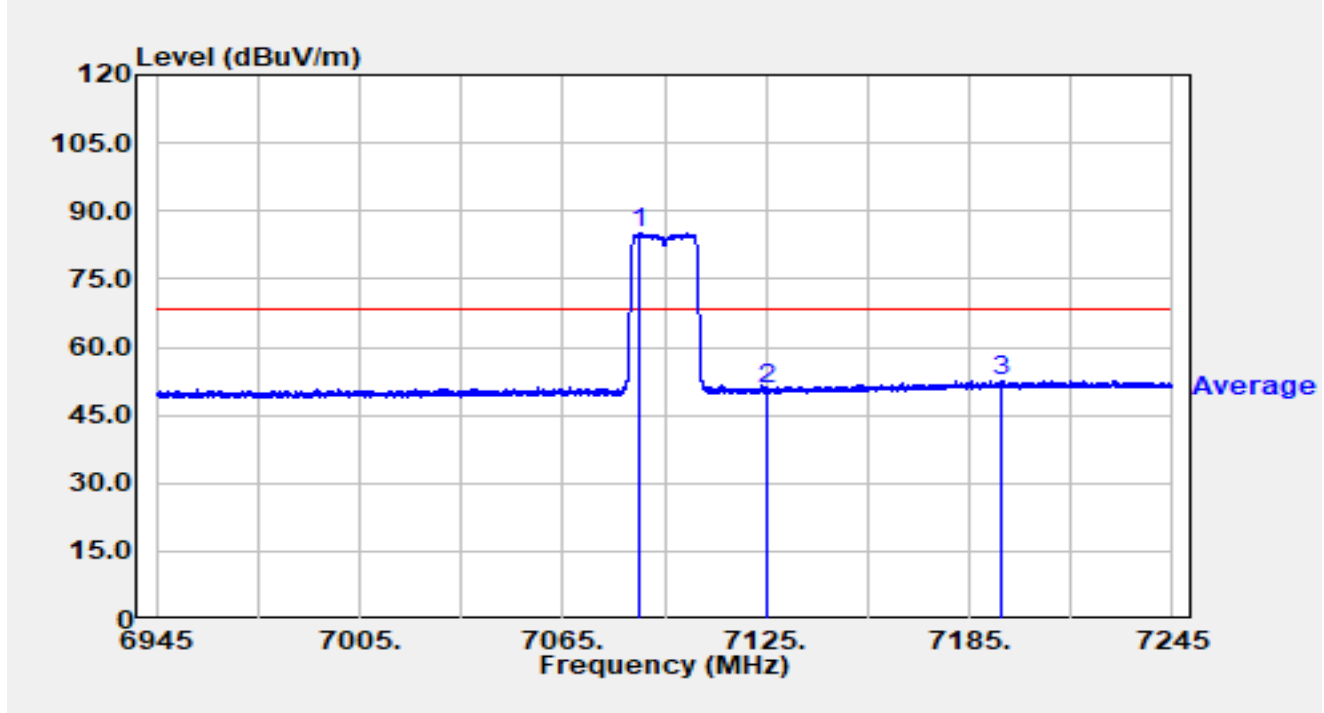


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.800	43.05	42.13	85.18	N/A	N/A	Average
2		7125.000	8.55	42.13	50.68	-17.52	68.20	Average
3	*	7194.360	10.49	42.20	52.69	-15.51	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

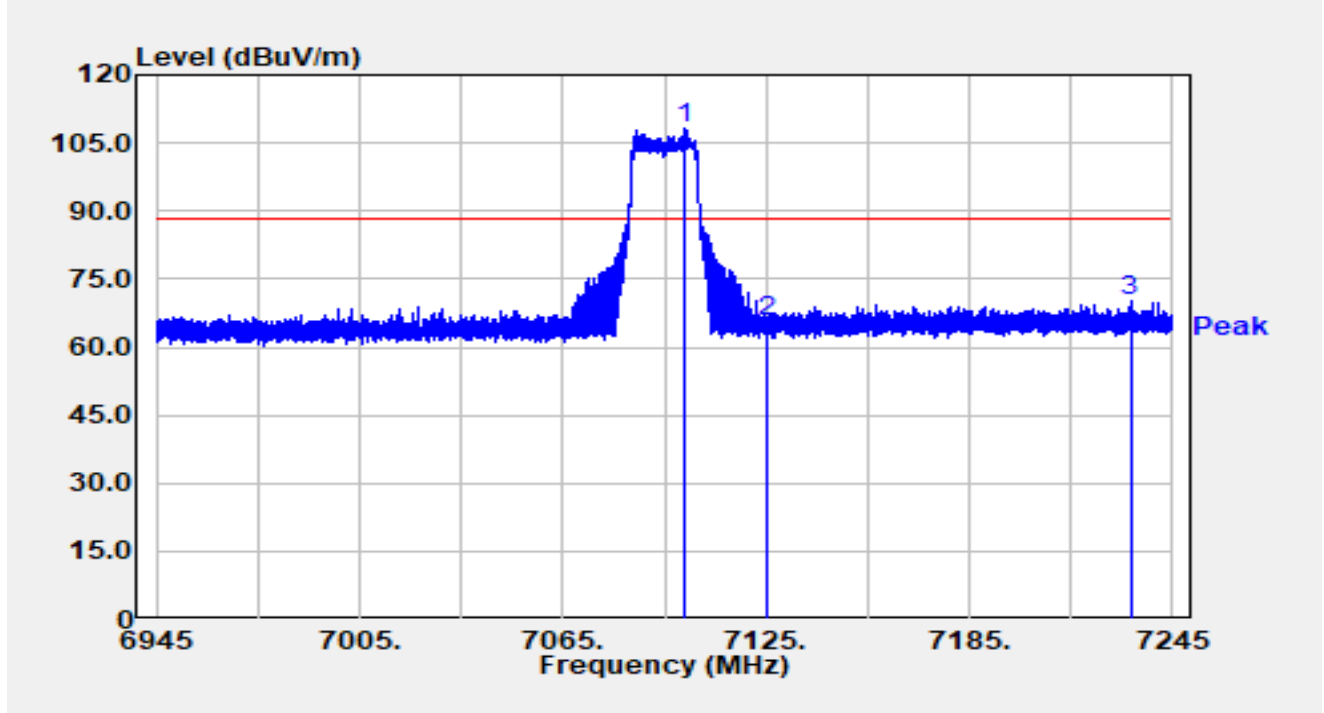


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.120	65.85	42.21	108.05	N/A	N/A	Peak
2		7125.000	23.66	42.13	65.80	-22.40	88.20	Peak
3	*	7232.550	27.82	42.23	70.05	-18.15	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

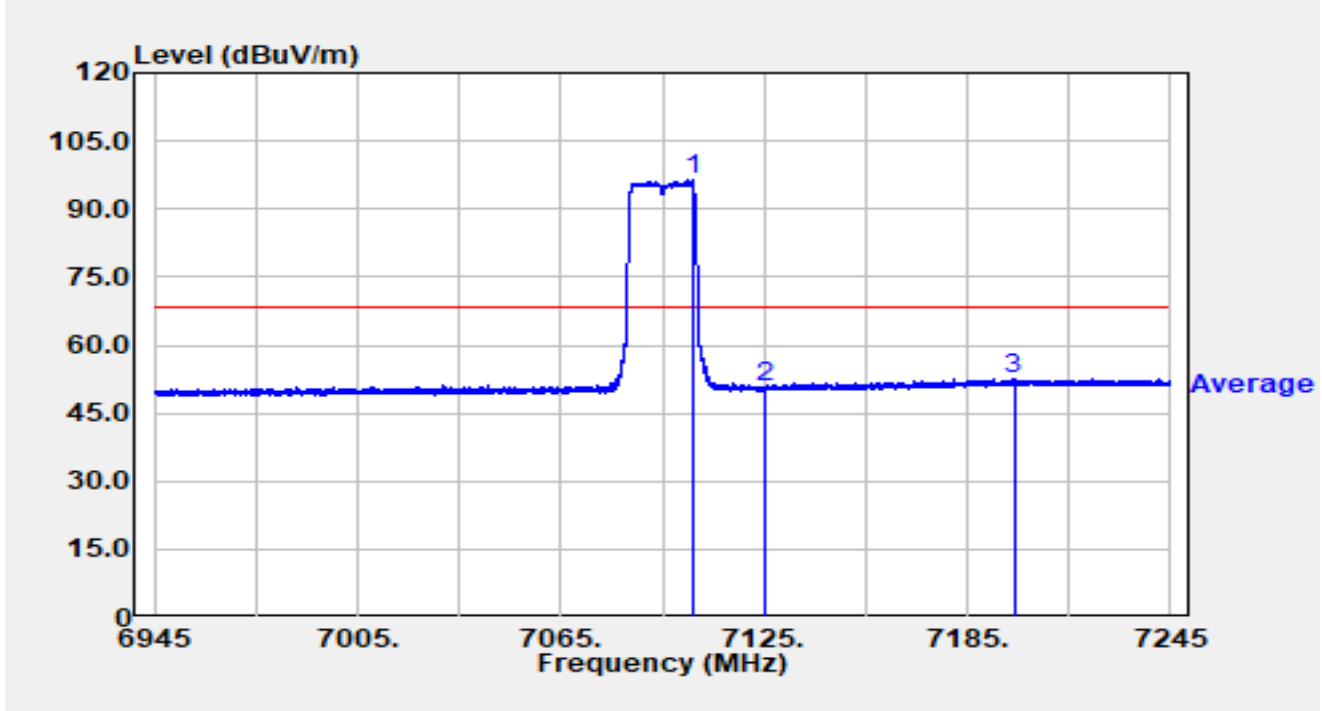


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.940	54.24	42.21	96.45	N/A	N/A	Average
2		7125.000	8.40	42.13	50.53	-17.67	68.20	Average
3	*	7198.740	10.38	42.18	52.57	-15.63	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

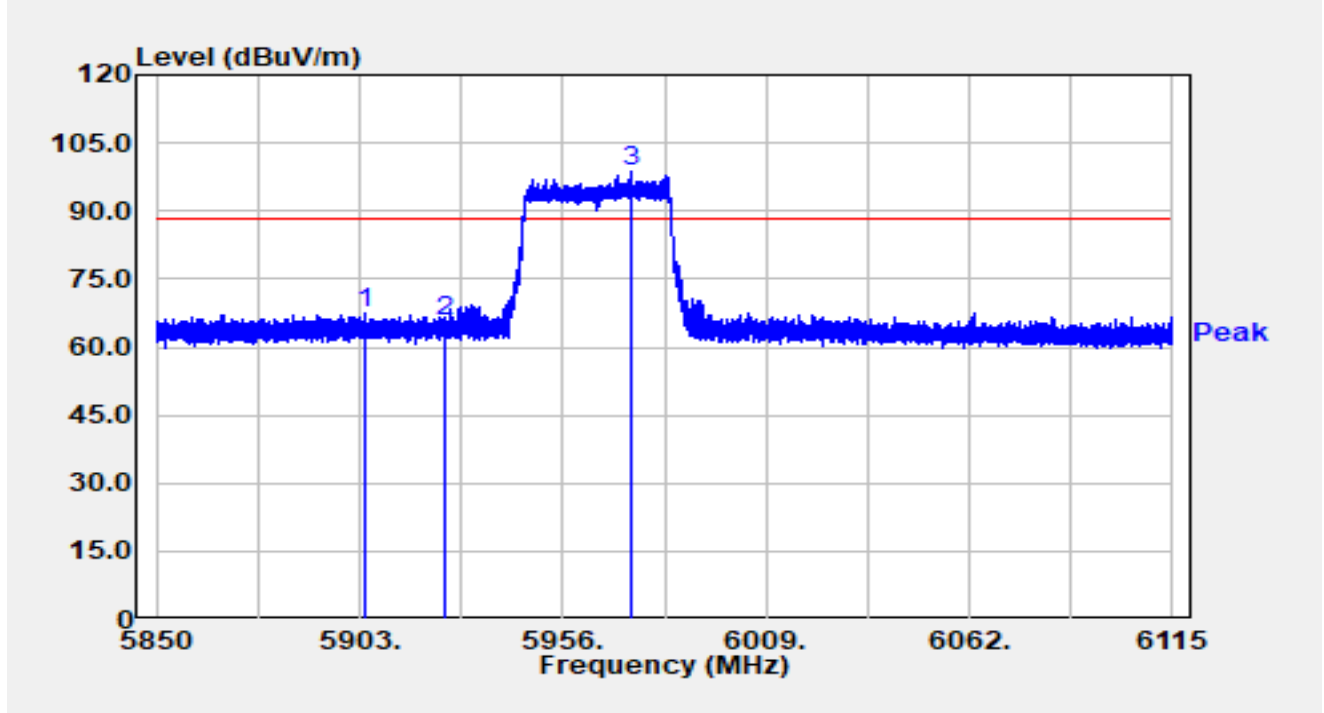


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5904.352	26.77	40.64	67.41	-20.79	88.20	Peak
2		5925.000	24.90	40.76	65.65	-22.55	88.20	Peak
3		5973.994	57.99	40.82	98.81	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

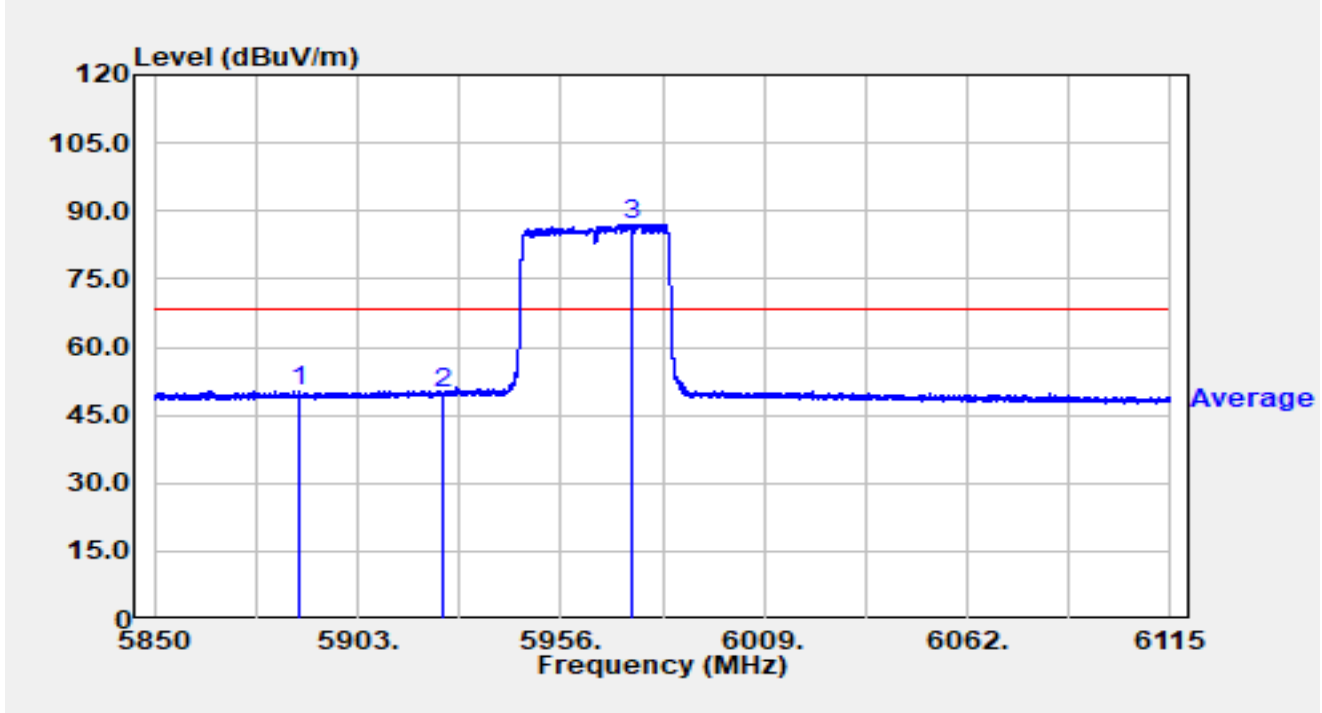


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5887.524	9.86	40.62	50.47	-17.73	68.20	Average
2		5925.000	9.06	40.76	49.82	-18.38	68.20	Average
3		5974.683	46.29	40.81	87.10	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBUV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

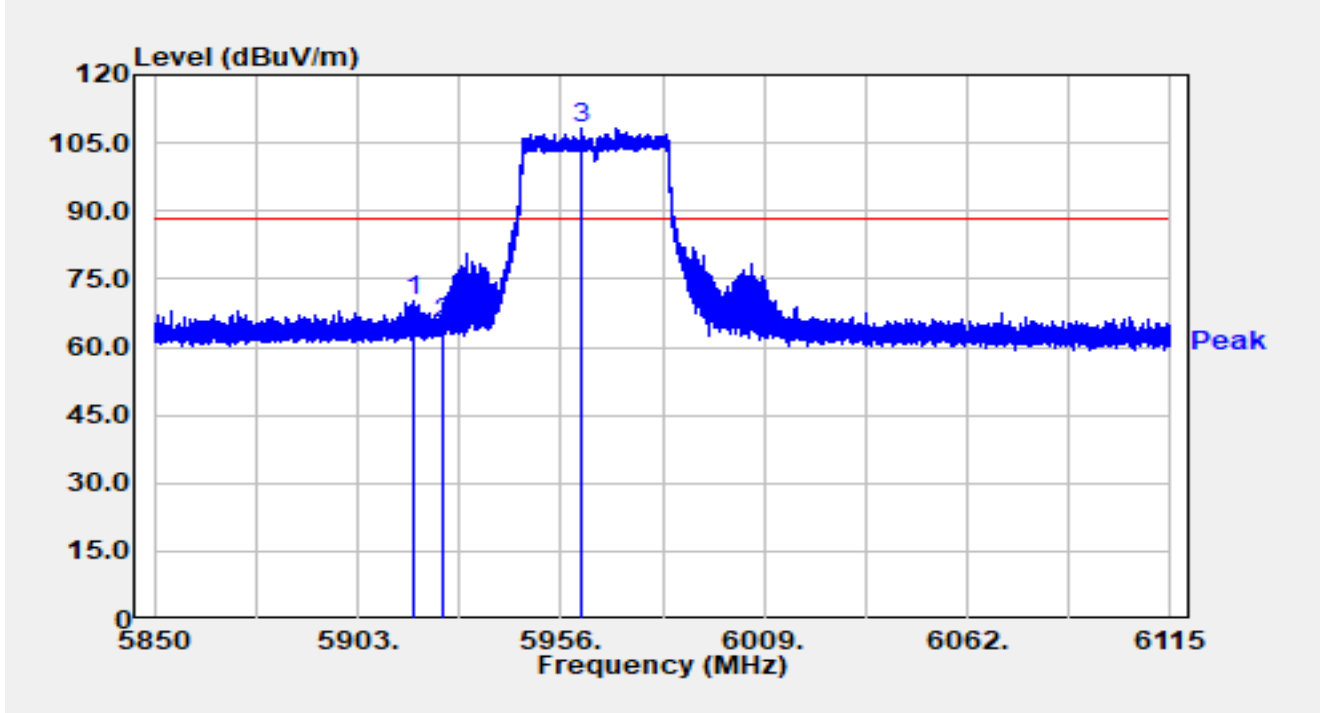


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.628	29.37	40.67	70.04	-18.16	88.20	Peak
2		5925.000	24.36	40.76	65.12	-23.08	88.20	Peak
3		5961.327	67.26	40.86	108.12	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

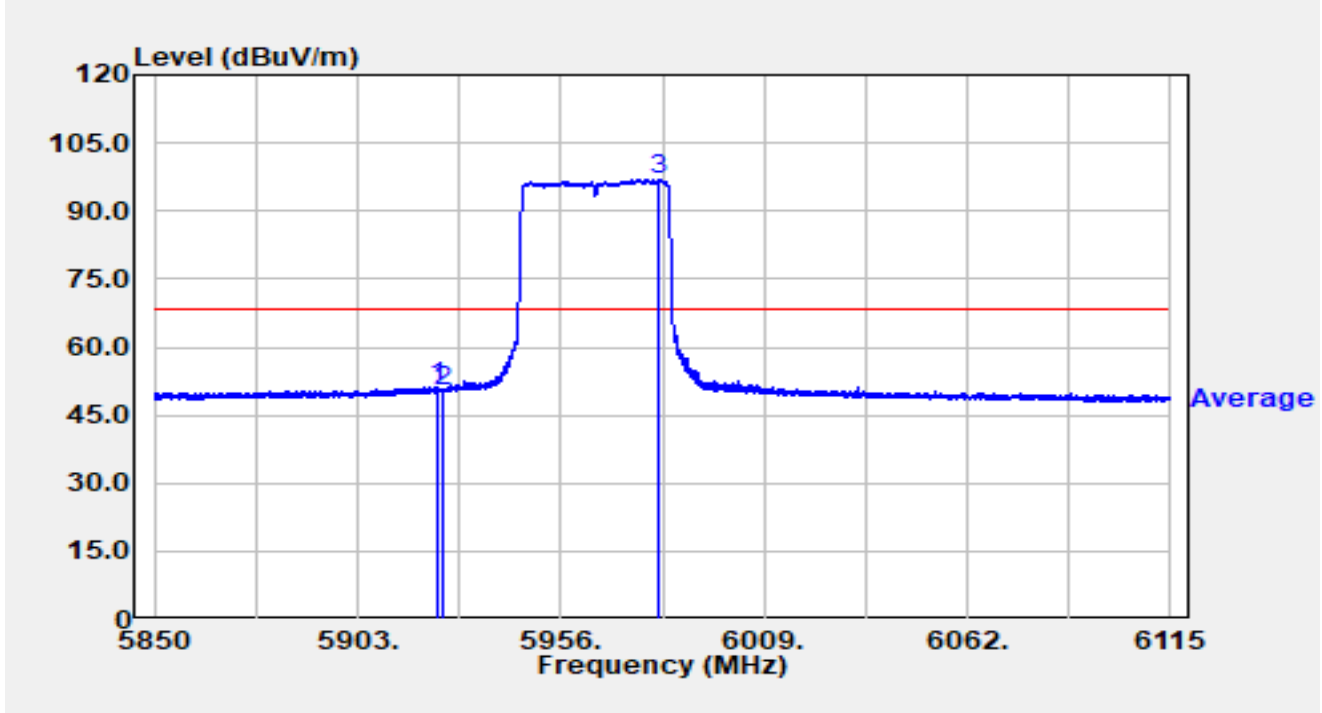


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.882	10.53	40.74	51.28	-16.92	68.20	Average
2		5925.000	9.47	40.76	50.23	-17.97	68.20	Average
3		5981.785	56.23	40.78	97.01	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

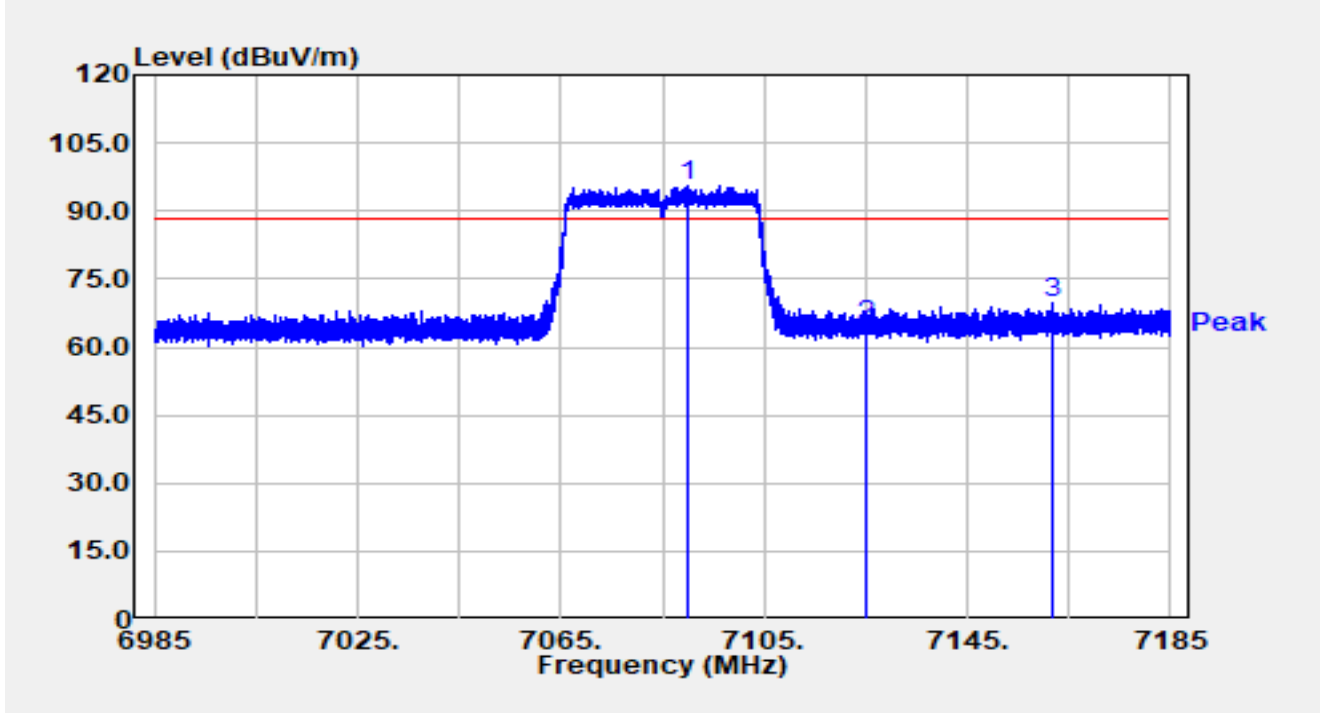


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.780	53.54	42.14	95.68	N/A	N/A	Peak
2		7125.000	22.82	42.13	64.96	-23.24	88.20	Peak
3	*	7161.740	27.72	42.22	69.95	-18.25	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

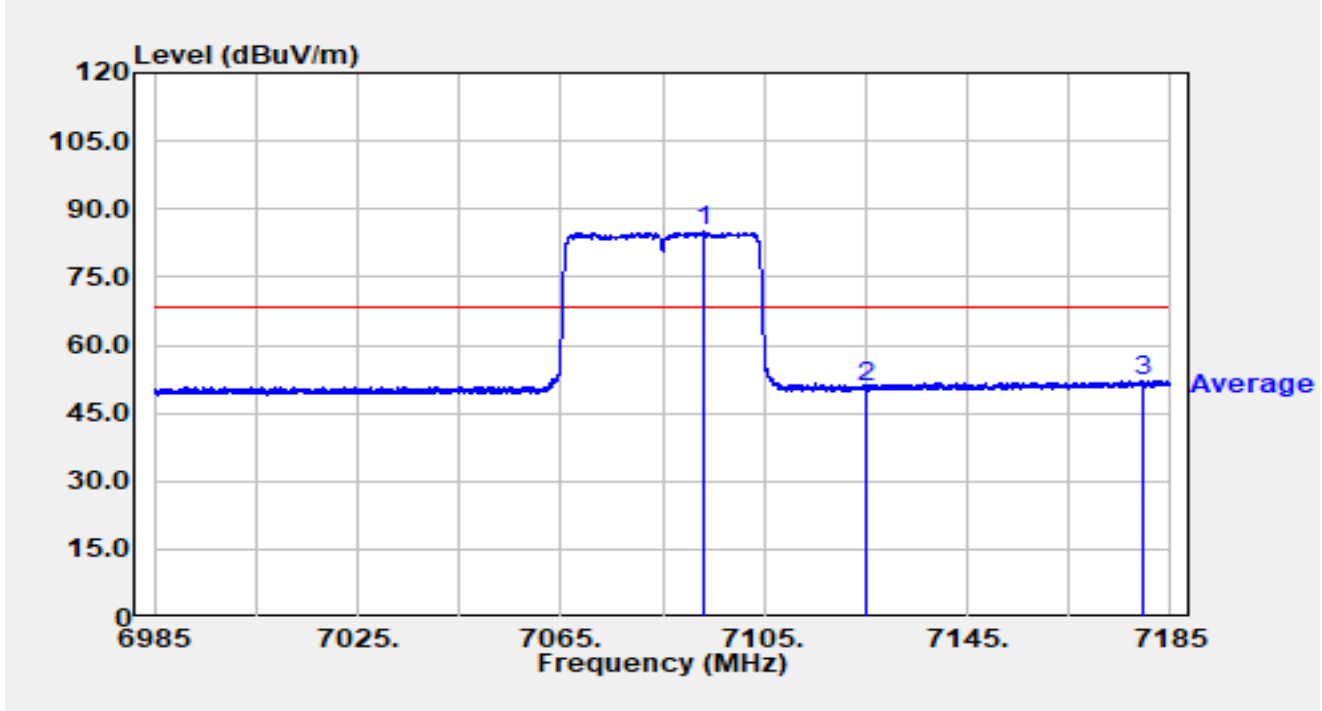


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7093.020	42.79	42.16	84.95	N/A	N/A	Average
2		7125.000	8.51	42.13	50.64	-17.56	68.20	Average
3	*	7179.440	9.99	42.21	52.19	-16.01	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

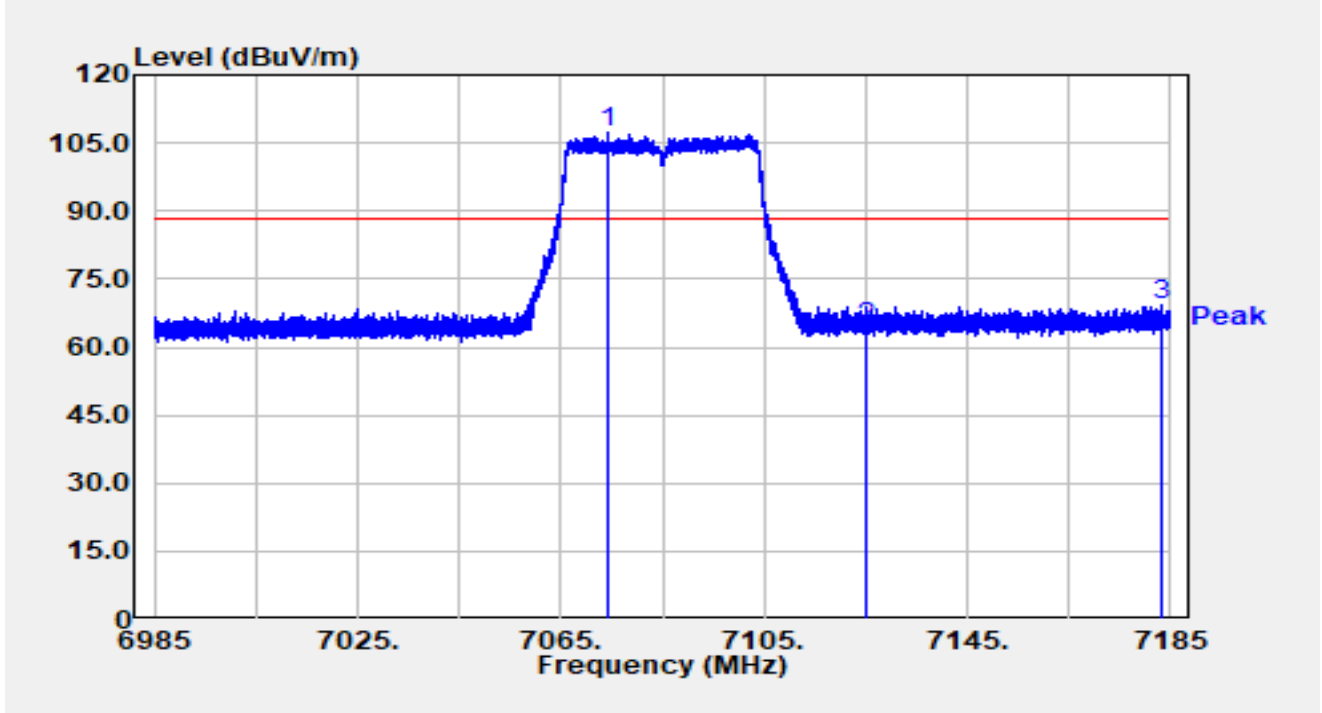


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7074.260	64.99	42.12	107.11	N/A	N/A	Peak
2		7125.000	22.34	42.13	64.47	-23.73	88.20	Peak
3	*	7183.420	27.04	42.22	69.25	-18.95	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

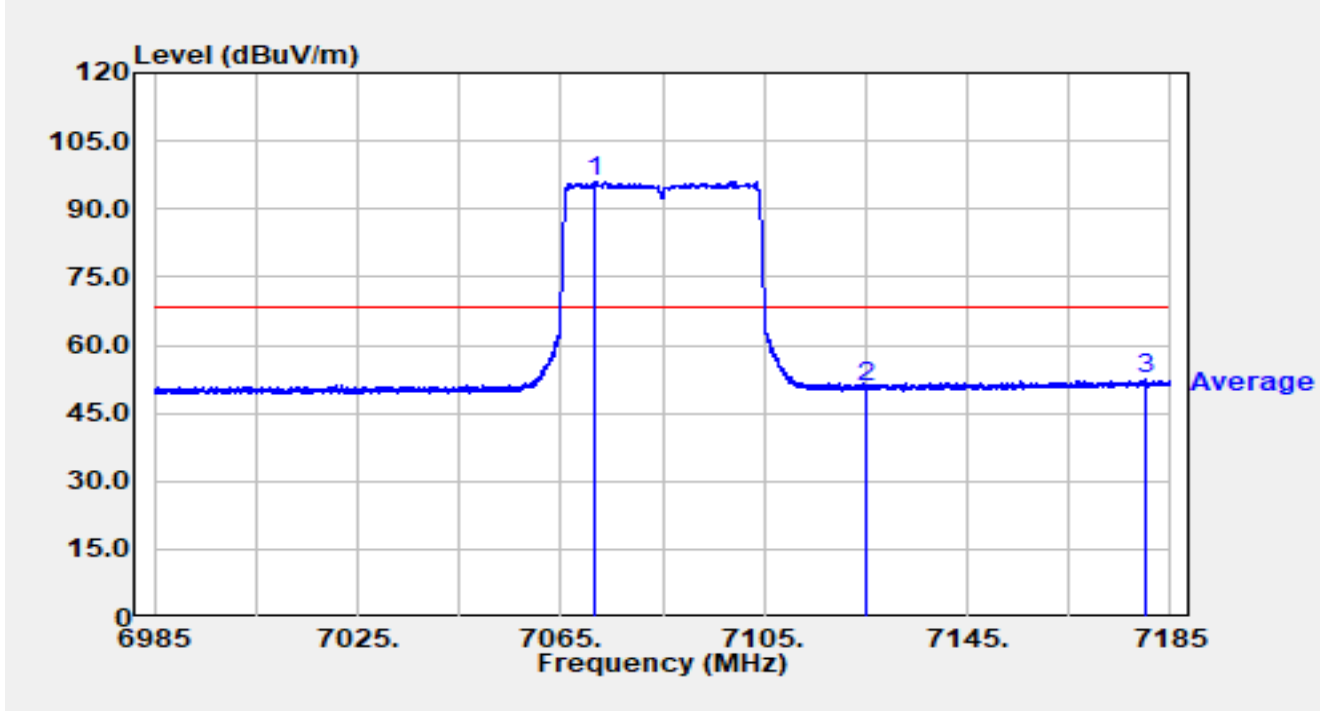


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7071.800	54.08	42.12	96.20	N/A	N/A	Average
2		7125.000	8.42	42.13	50.55	-17.65	68.20	Average
3	*	7179.920	10.23	42.21	52.44	-15.76	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

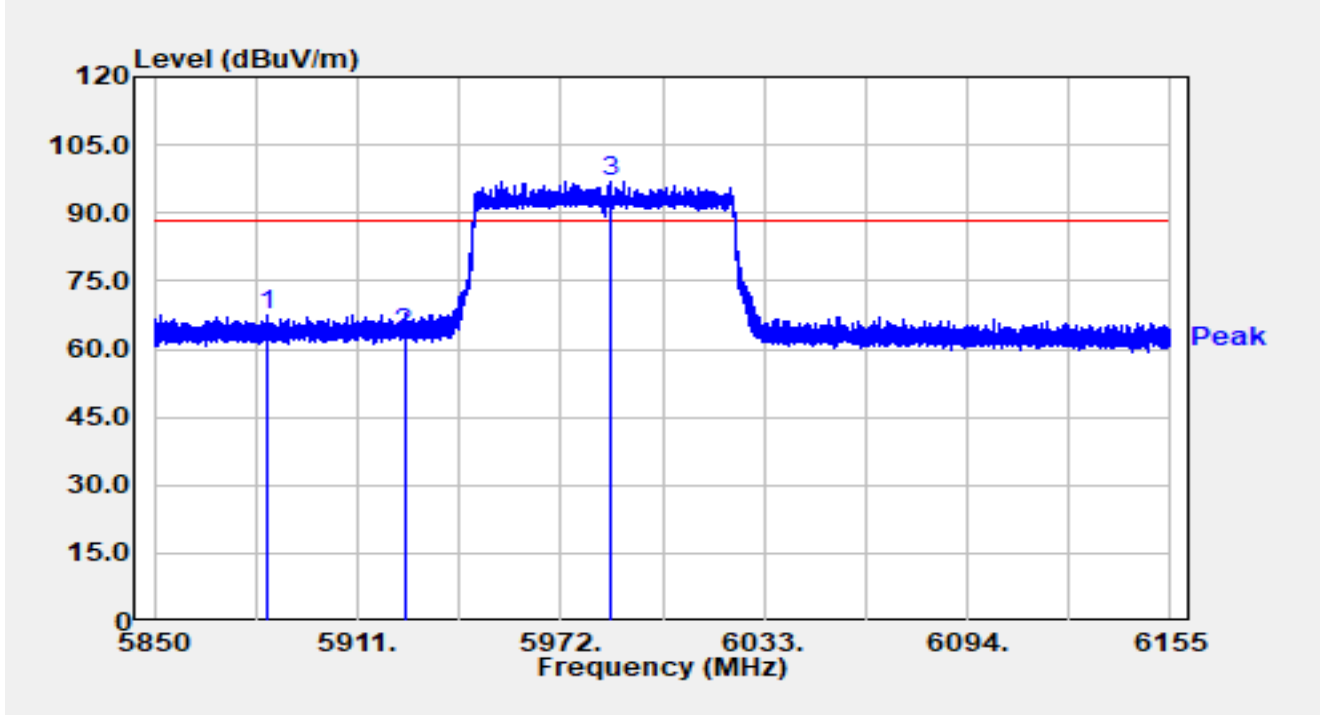


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5884.068	27.08	40.60	67.68	-20.52	88.20	Peak
2		5925.000	22.80	40.76	63.55	-24.65	88.20	Peak
3		5987.098	56.14	40.85	96.99	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

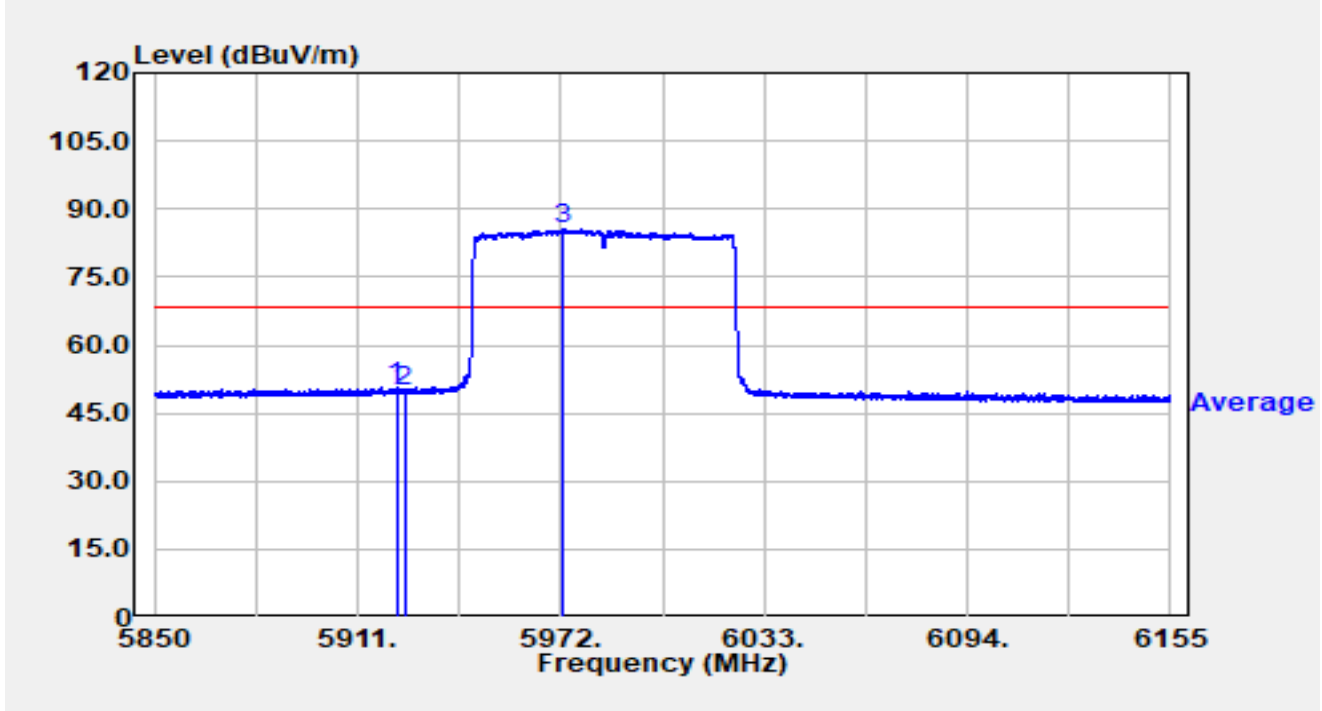


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.621	9.92	40.73	50.64	-17.56	68.20	Average
2		5925.000	9.23	40.76	49.99	-18.21	68.20	Average
3		5972.763	44.71	40.83	85.53	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

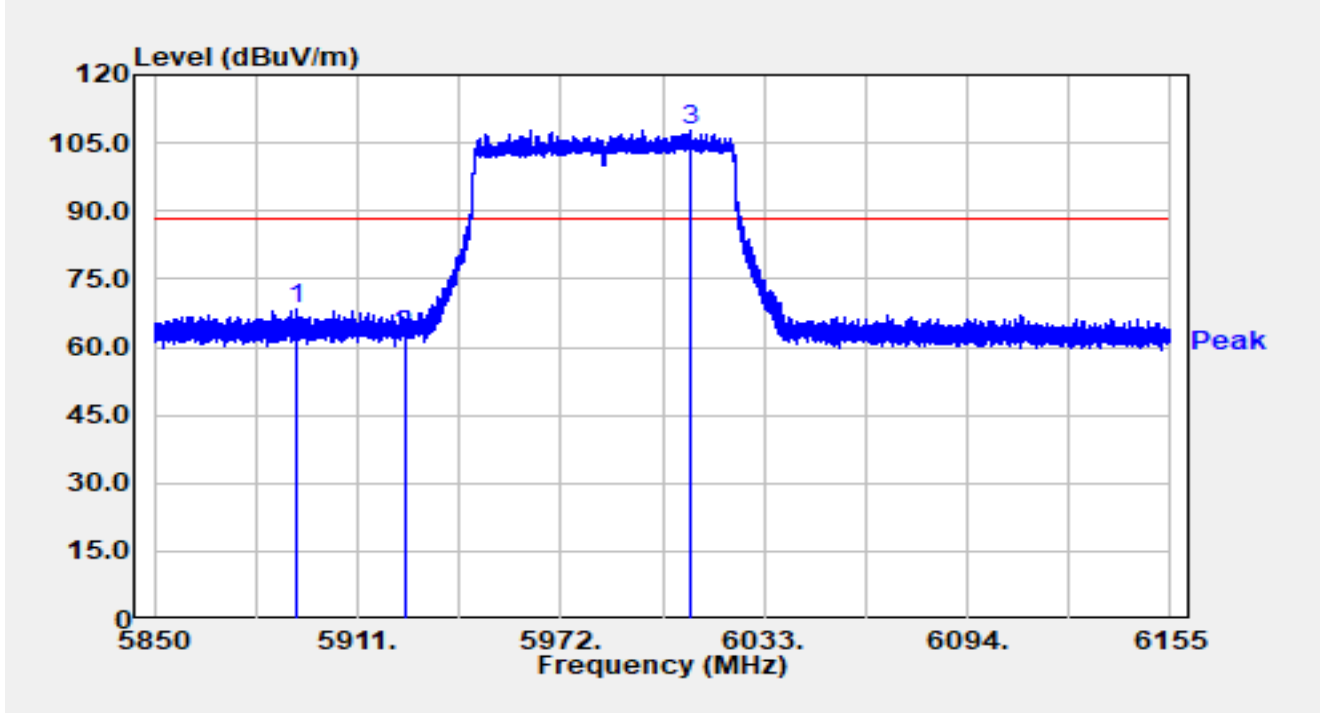


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5892.334	27.57	40.64	68.21	-19.99	88.20	Peak
2		5925.000	21.79	40.76	62.55	-25.65	88.20	Peak
3		6011.009	66.64	40.99	107.63	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

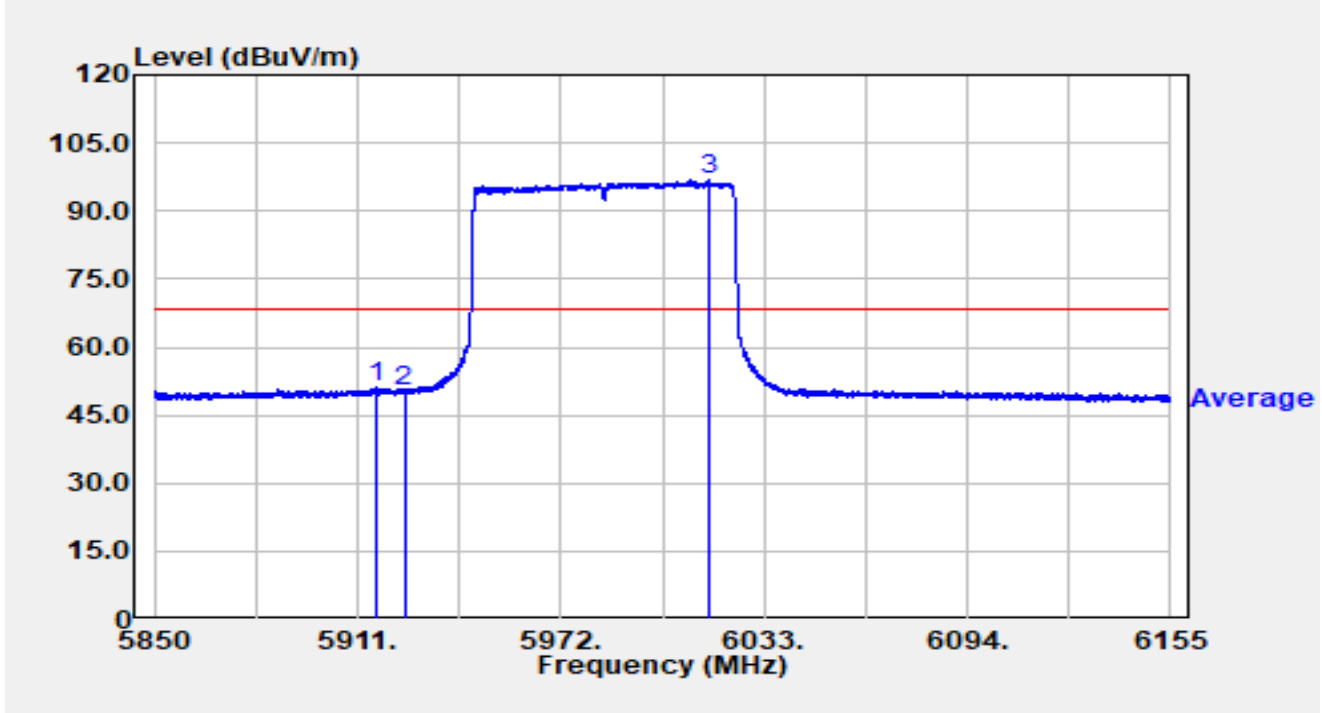


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.917	10.38	40.66	51.04	-17.16	68.20	Average
2		5925.000	9.43	40.76	50.18	-18.02	68.20	Average
3		6016.255	55.72	40.99	96.70	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

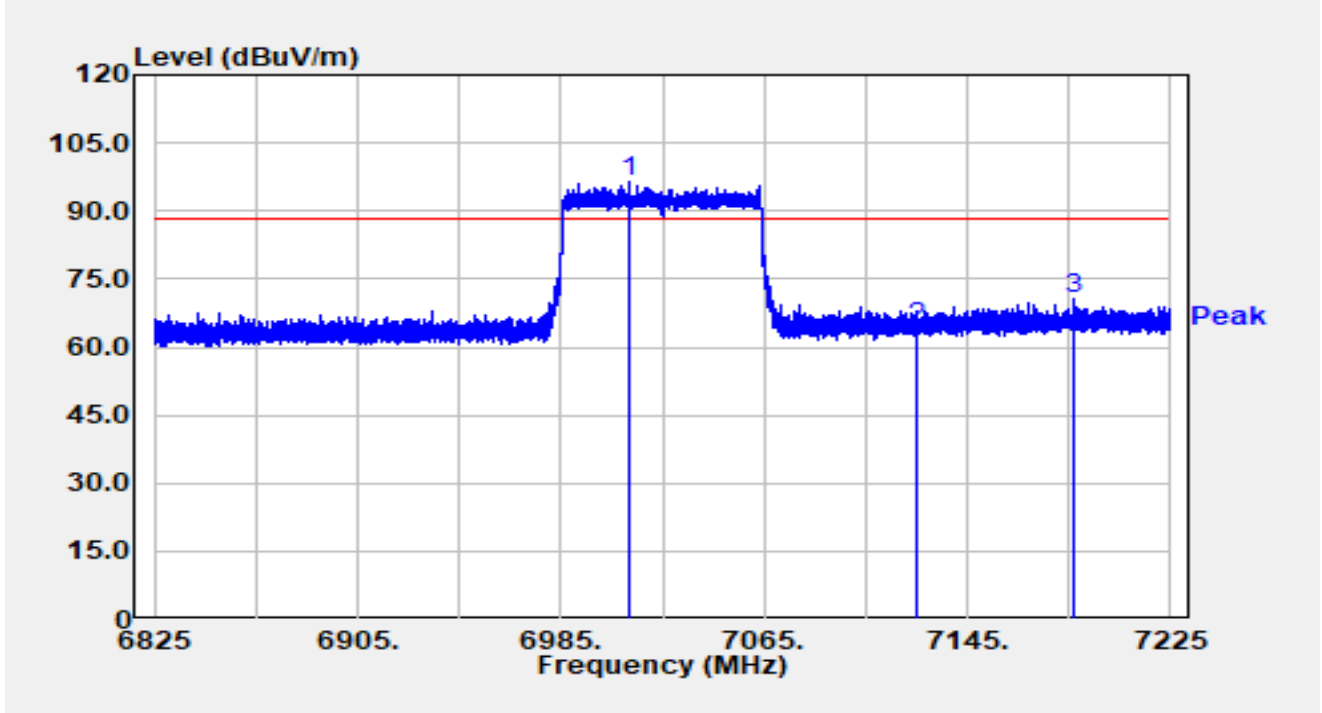


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7012.040	54.31	41.95	96.26	N/A	N/A	Peak
2		7125.000	22.19	42.13	64.33	-23.87	88.20	Peak
3	*	7187.200	28.47	42.22	70.69	-17.51	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

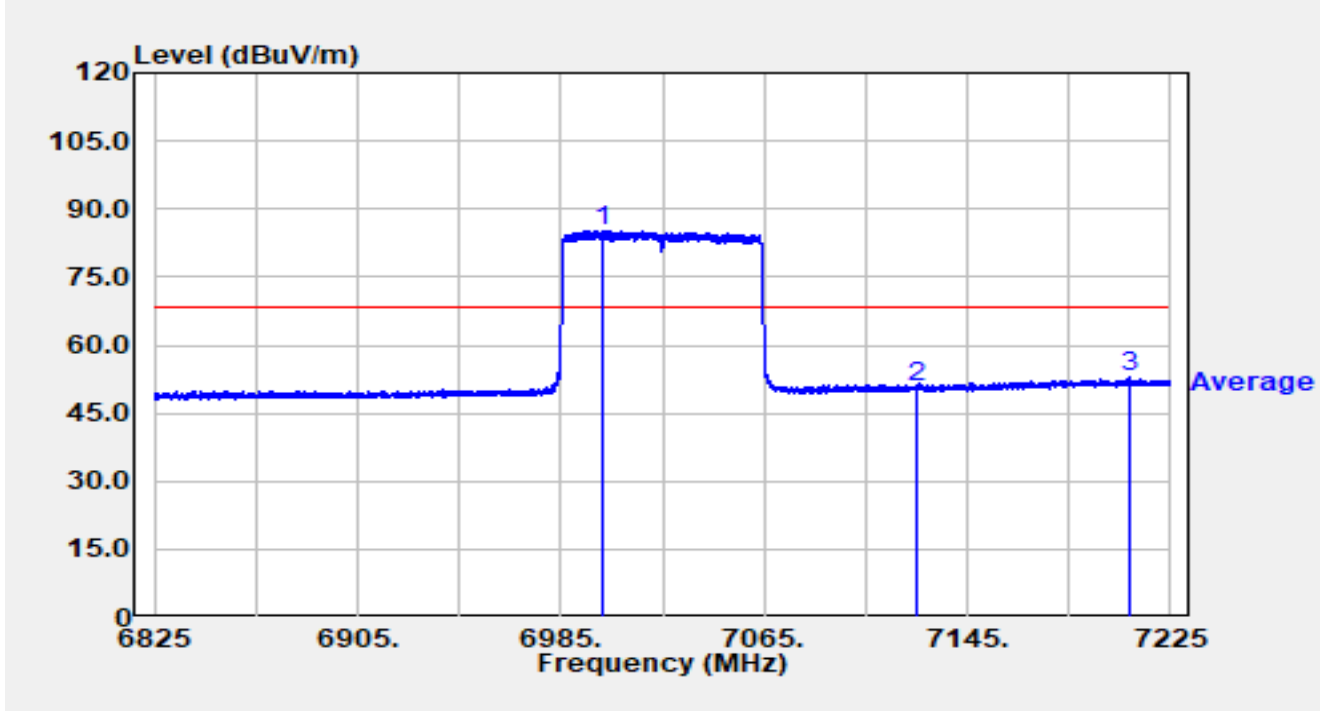


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7001.400	43.21	41.90	85.11	N/A	N/A	Average
2		7125.000	8.71	42.13	50.85	-17.35	68.20	Average
3	*	7208.800	10.62	42.18	52.80	-15.40	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

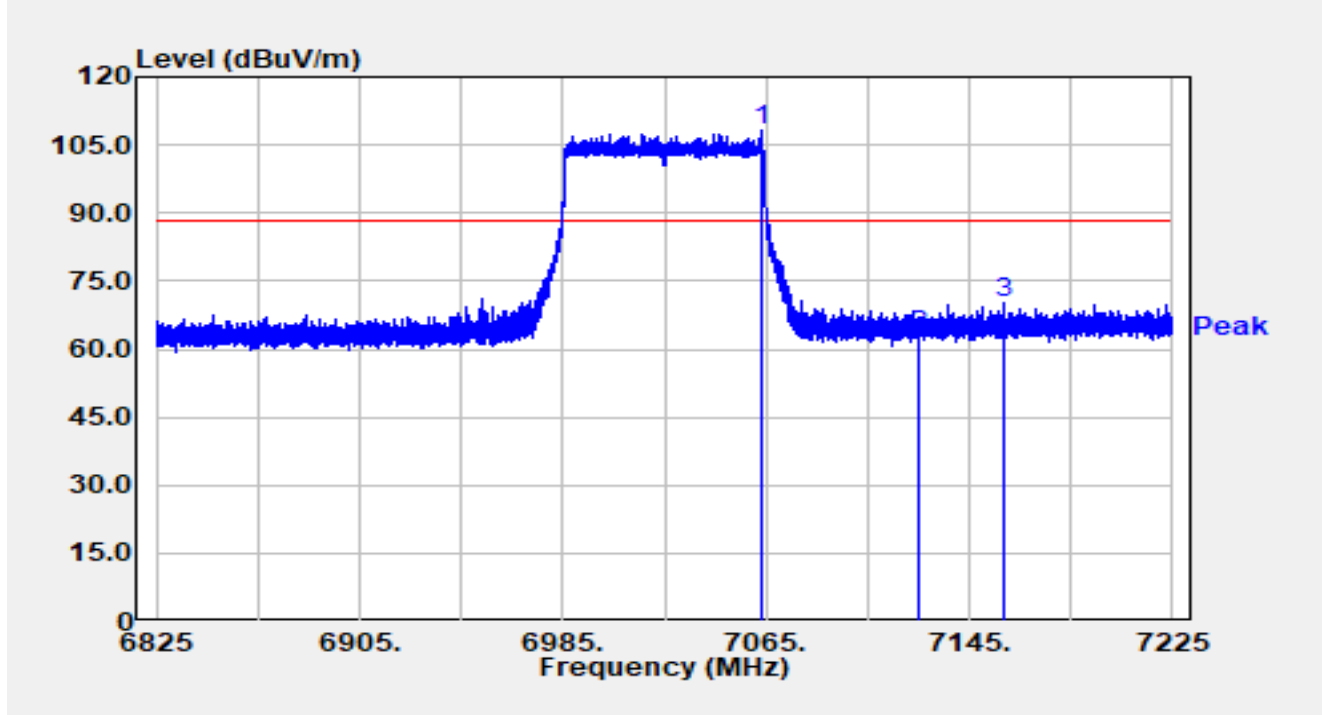


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7062.960	66.36	42.08	108.45	N/A	N/A	Peak
2		7125.000	21.03	42.13	63.16	-25.04	88.20	Peak
3	*	7158.280	27.77	42.24	70.01	-18.19	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

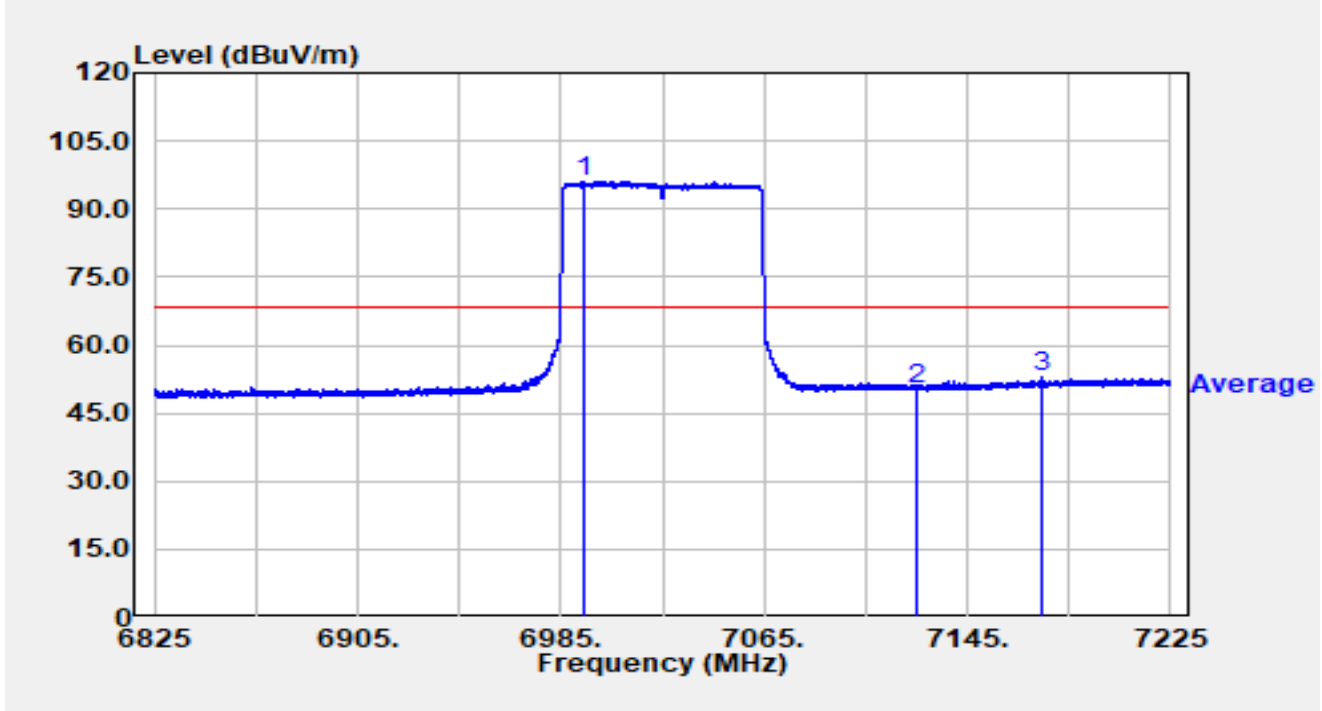


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.840	54.33	41.89	96.22	N/A	N/A	Average
2		7125.000	8.27	42.13	50.41	-17.79	68.20	Average
3	*	7174.280	10.56	42.20	52.76	-15.44	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

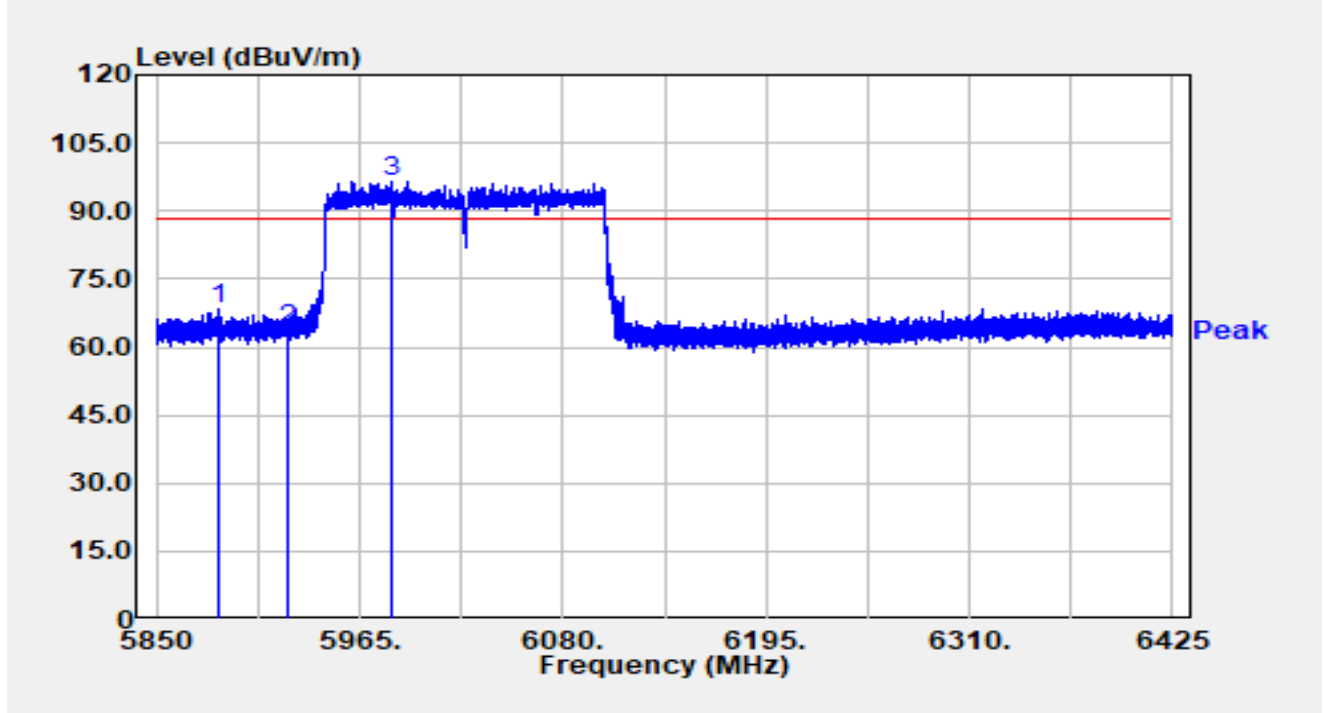


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.765	27.80	40.61	68.41	-19.79	88.20	Peak
2		5925.000	23.19	40.76	63.95	-24.25	88.20	Peak
3		5983.112	55.69	40.79	96.48	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

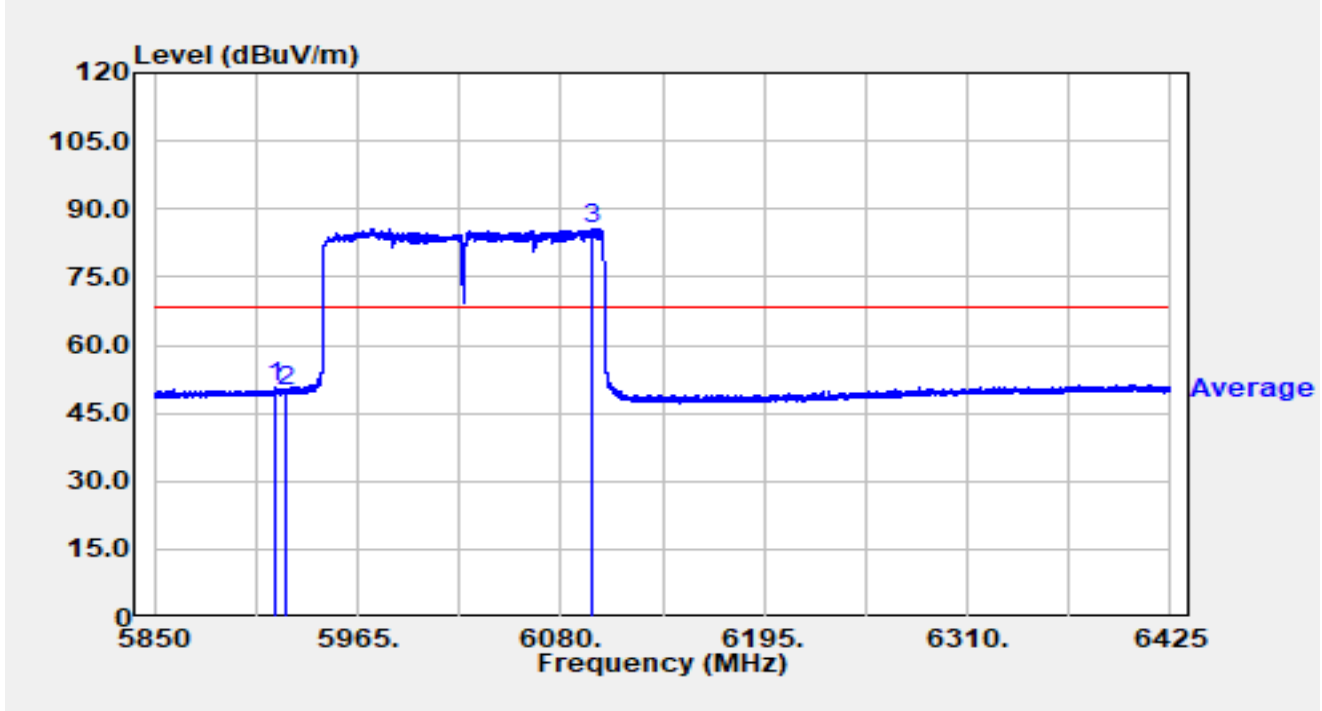


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.080	9.82	40.67	50.49	-17.71	68.20	Average
2		5925.000	8.96	40.76	49.71	-18.49	68.20	Average
3		6098.055	44.61	41.07	85.68	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

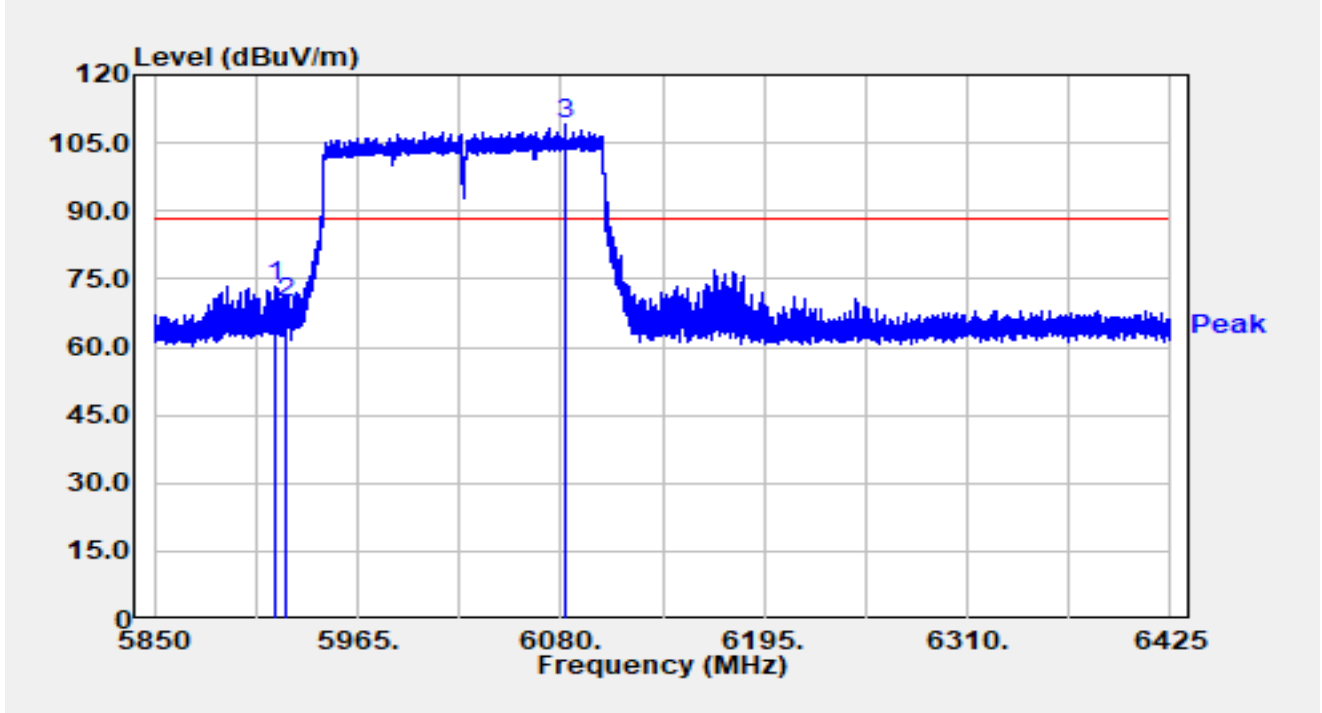


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.000	32.67	40.68	73.36	-14.84	88.20	Peak
2		5925.000	28.77	40.76	69.52	-18.68	88.20	Peak
3		6083.105	67.96	41.12	109.08	N/A	N/A	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

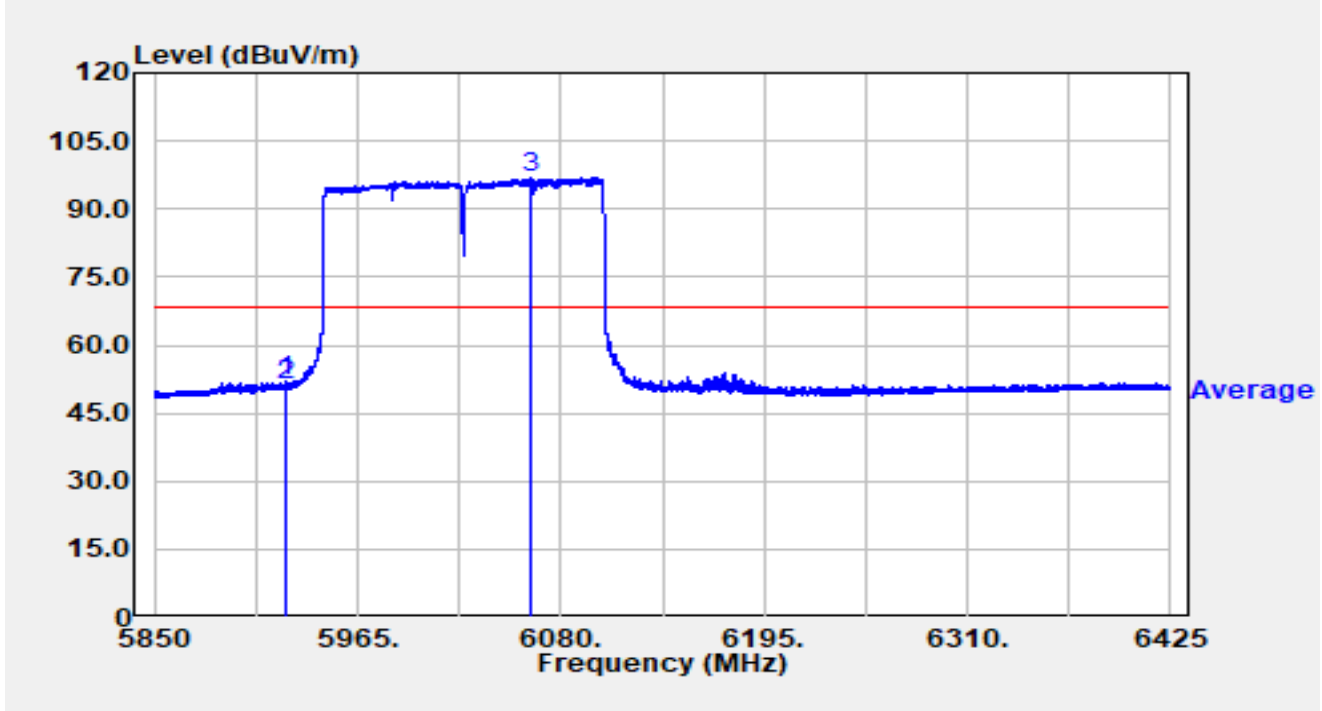


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.290	11.20	40.75	51.94	-16.26	68.20	Average
2		5925.000	10.46	40.76	51.21	-16.99	68.20	Average
3		6063.382	55.97	41.06	97.03	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

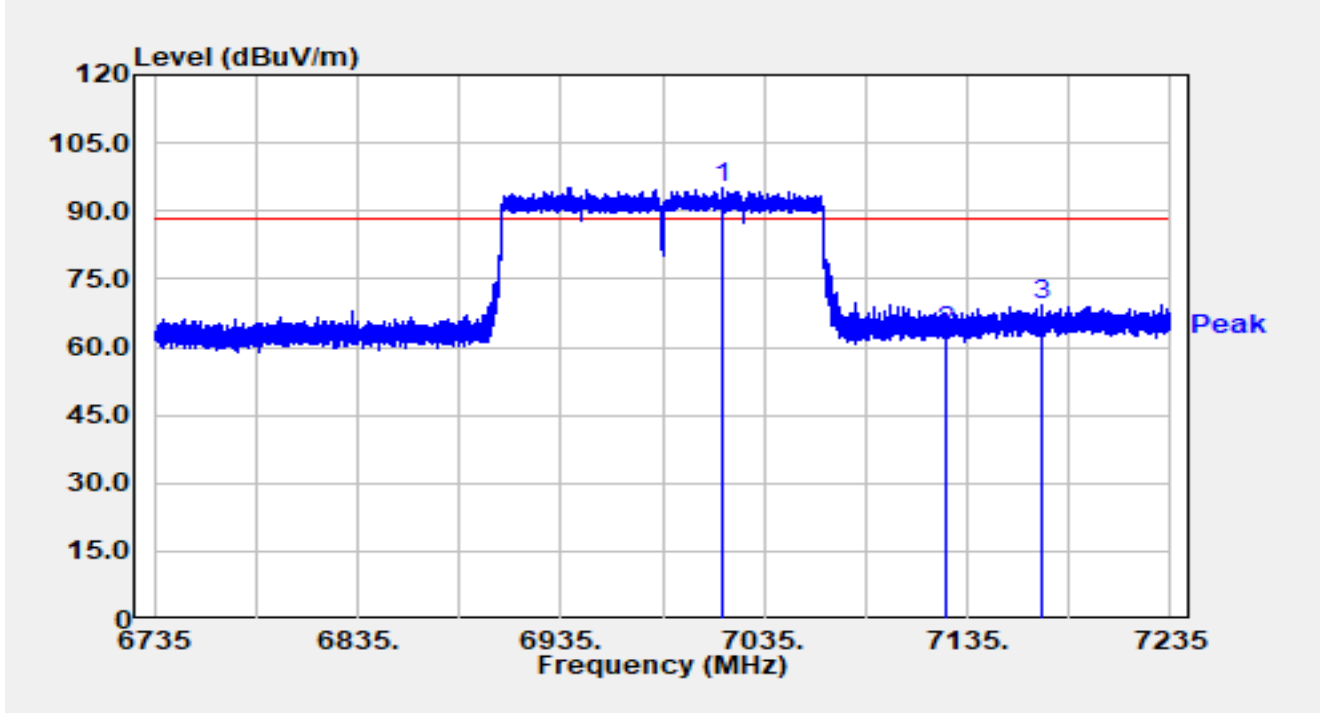


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7014.600	53.35	41.96	95.31	N/A	N/A	Peak
2		7125.000	21.28	42.13	63.42	-24.78	88.20	Peak
3	*	7171.150	27.27	42.19	69.46	-18.74	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

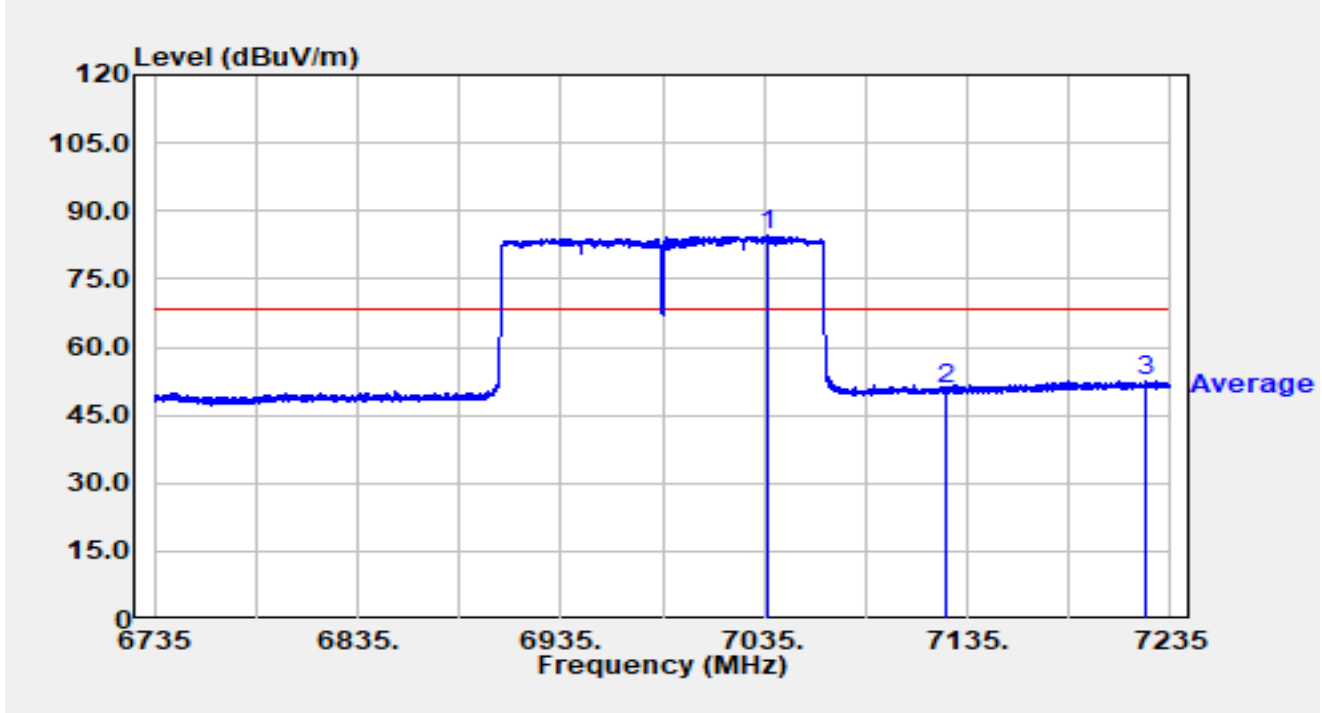


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7036.300	42.43	42.03	84.46	N/A	N/A	Average
2		7125.000	8.72	42.13	50.85	-17.35	68.20	Average
3	*	7222.350	10.50	42.24	52.74	-15.46	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

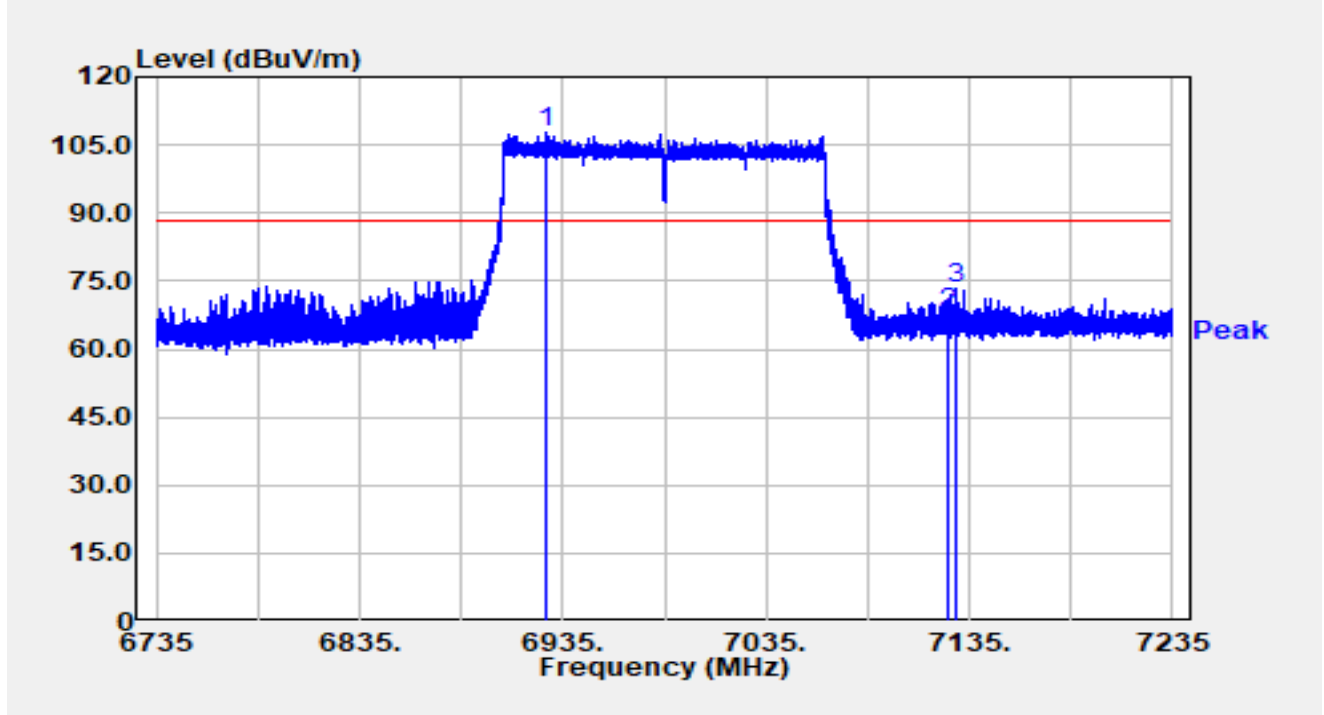


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6927.300	65.82	41.76	107.58	N/A	N/A	Peak
2		7125.000	25.69	42.13	67.83	-20.37	88.20	Peak
3	*	7128.100	31.20	42.16	73.36	-14.84	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

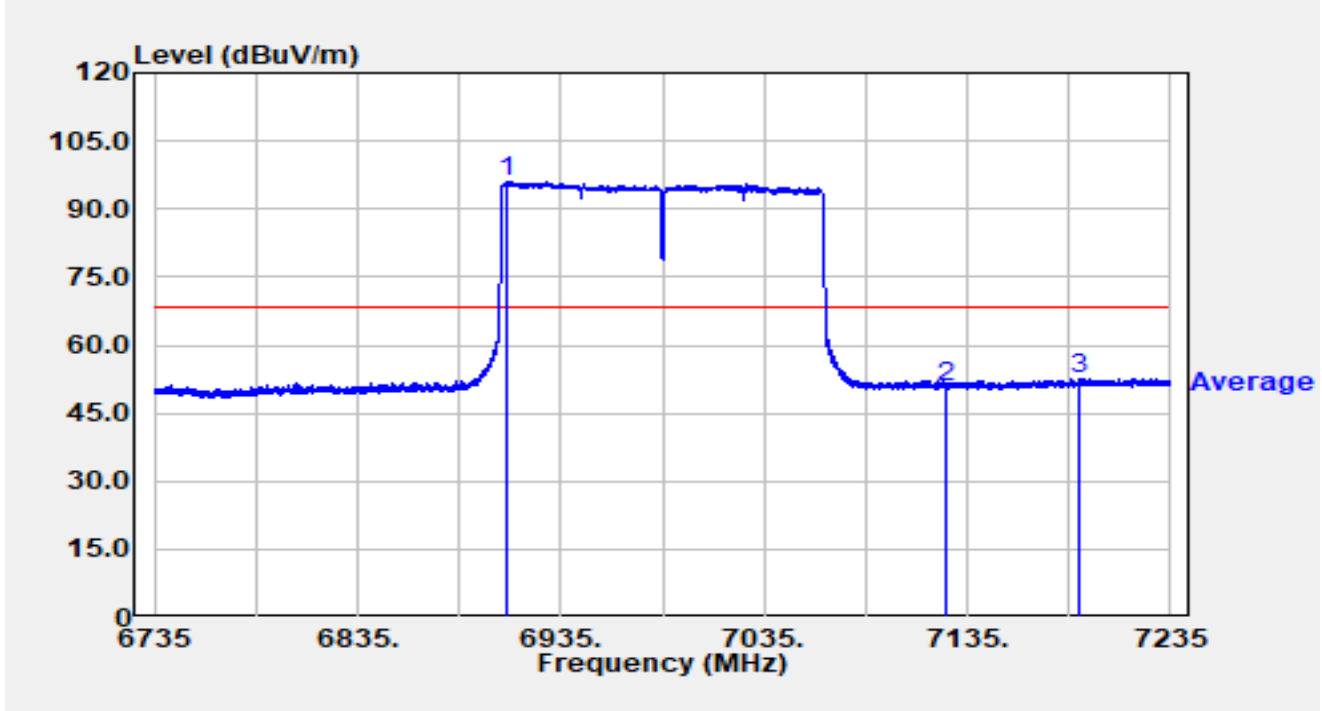


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6908.650	54.28	41.69	95.97	N/A	N/A	Average
2		7125.000	8.53	42.13	50.67	-17.53	68.20	Average
3	*	7189.550	10.47	42.22	52.69	-15.51	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

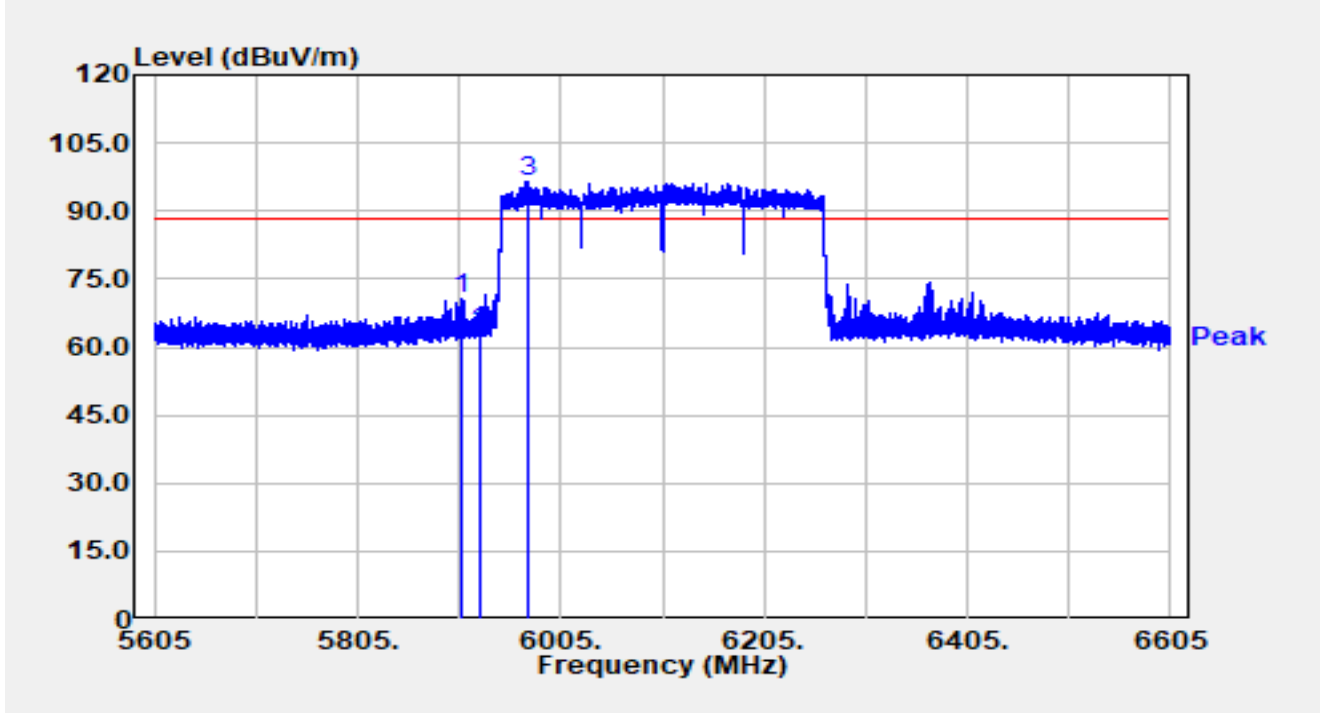


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.200	29.94	40.63	70.56	-17.64	88.20	Peak
2		5925.000	22.36	40.76	63.12	-25.08	88.20	Peak
3		5973.300	55.63	40.82	96.45	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

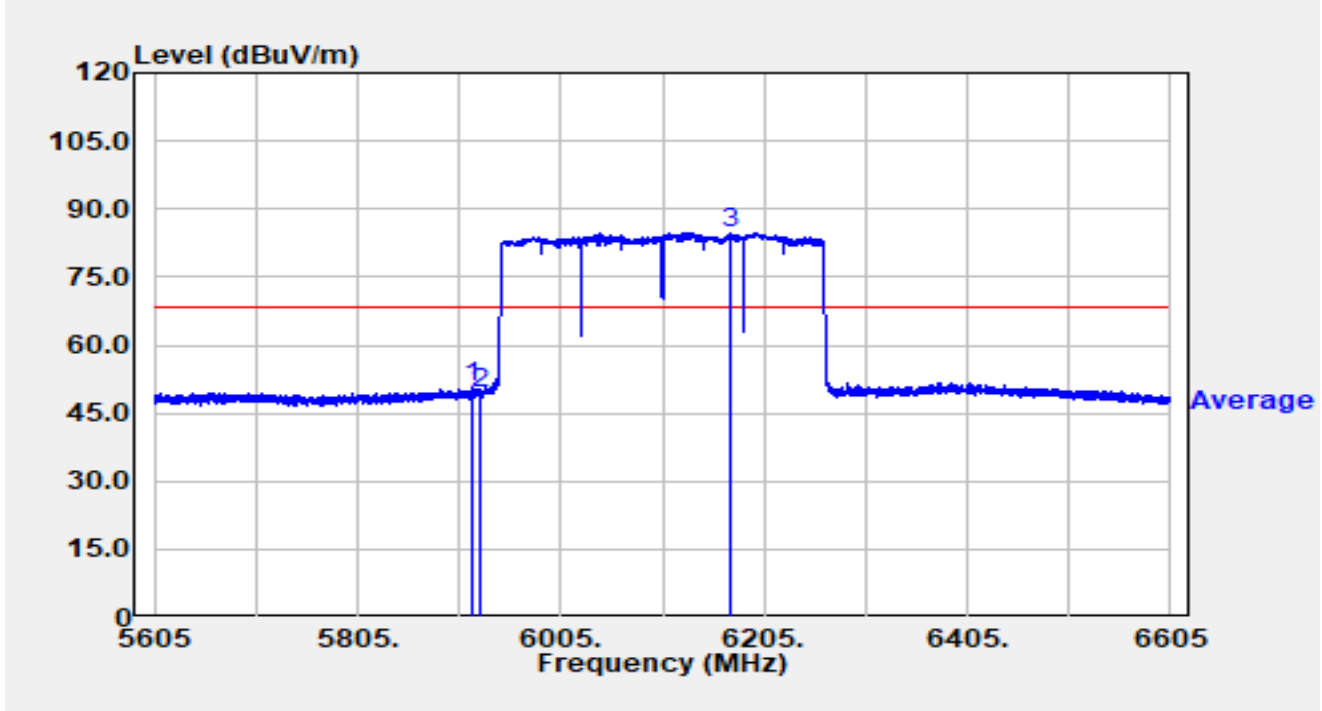


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.100	9.94	40.67	50.61	-17.59	68.20	Average
2		5925.000	8.76	40.76	49.52	-18.68	68.20	Average
3		6171.100	43.51	41.20	84.71	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

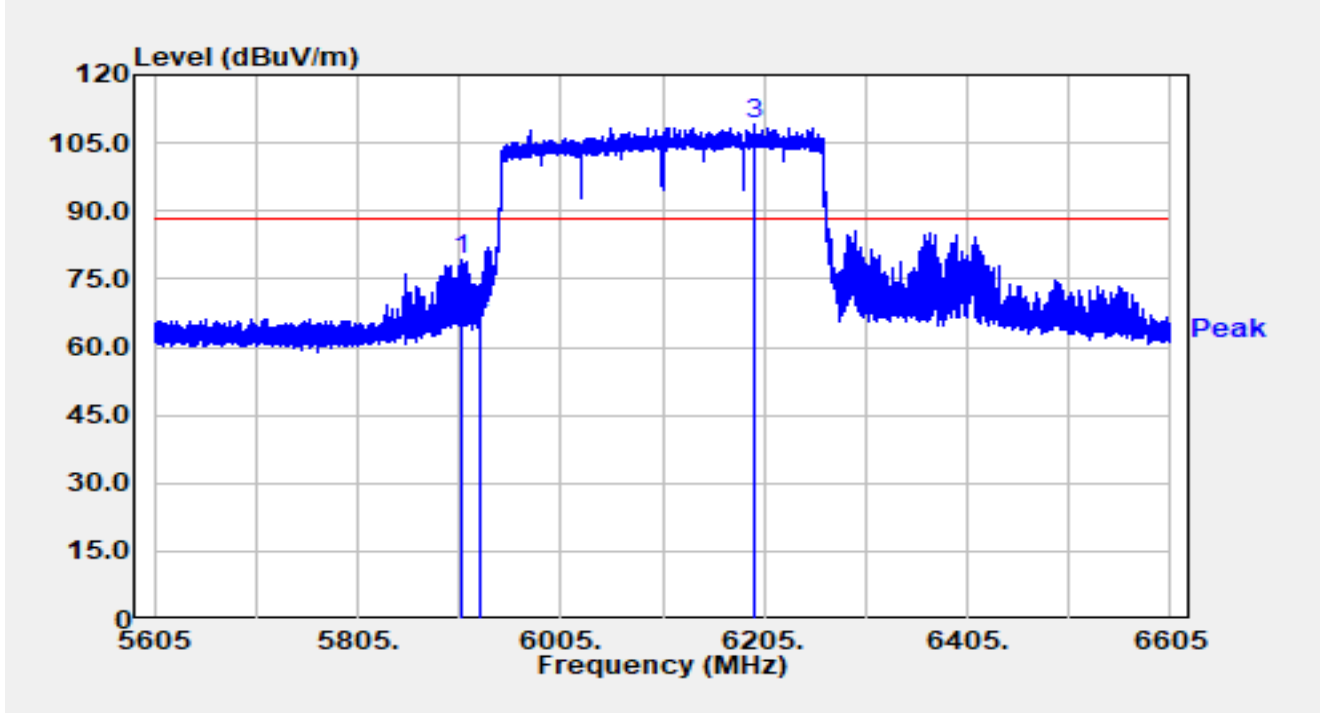


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.400	38.74	40.63	79.36	-8.84	88.20	Peak
2		5925.000	26.54	40.76	67.29	-20.91	88.20	Peak
3		6194.400	68.18	41.17	109.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

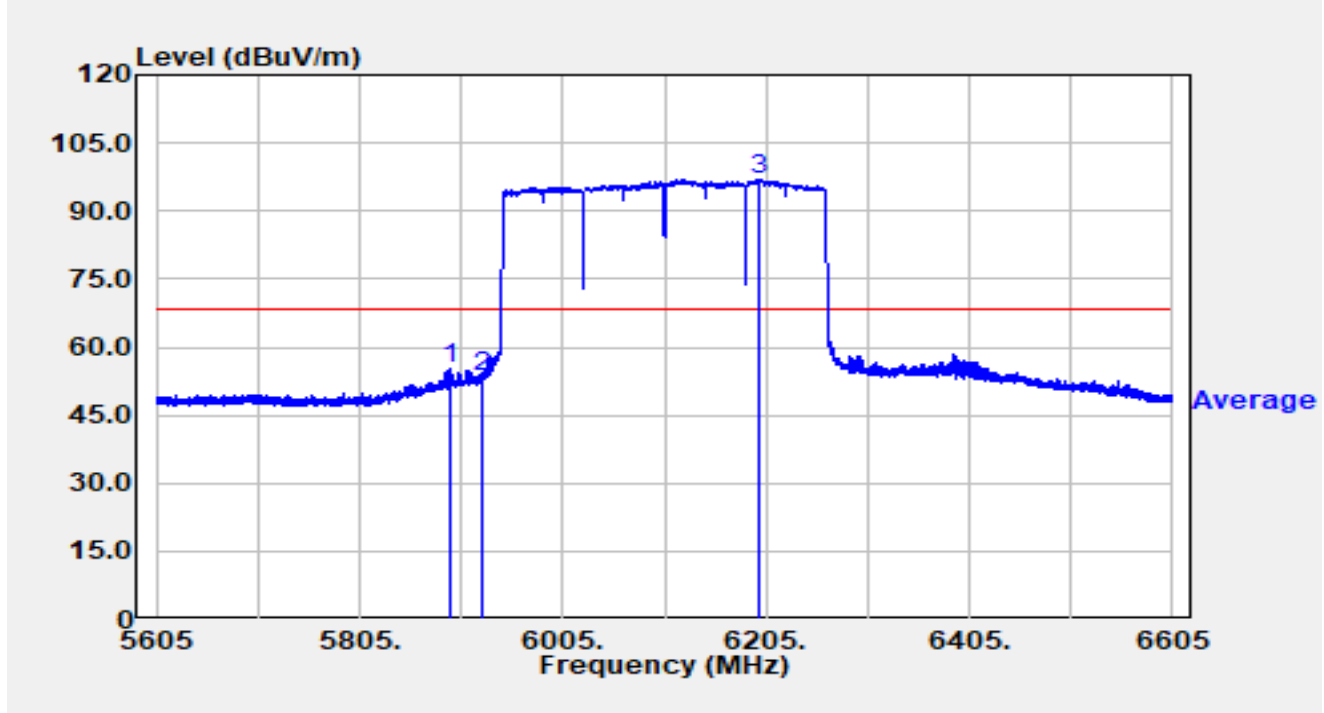


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5893.600	14.67	40.65	55.32	-12.88	68.20	Average
2		5925.000	12.67	40.76	53.43	-14.77	68.20	Average
3		6198.300	55.68	41.20	96.88	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

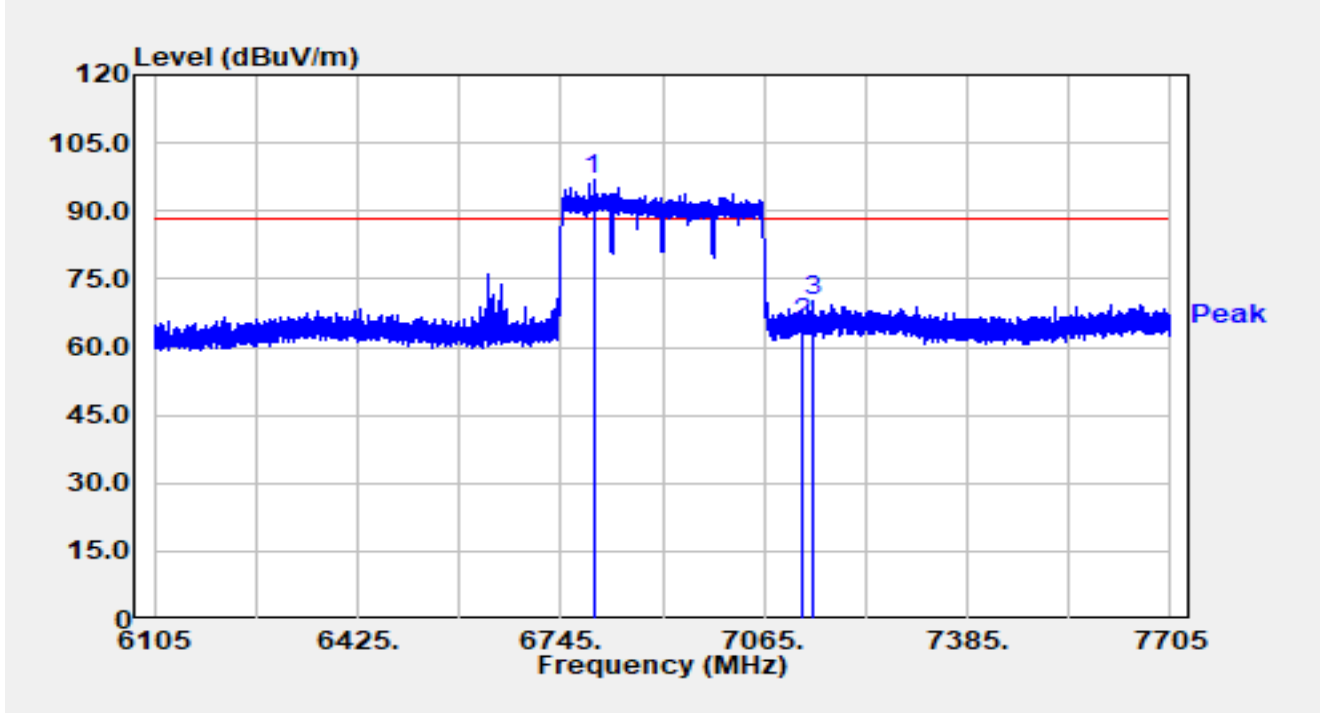


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6796.200	55.31	41.57	96.88	N/A	N/A	Peak
2		7125.000	23.14	42.13	65.28	-22.92	88.20	Peak
3	*	7141.960	28.03	42.23	70.26	-17.94	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Horizontal
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

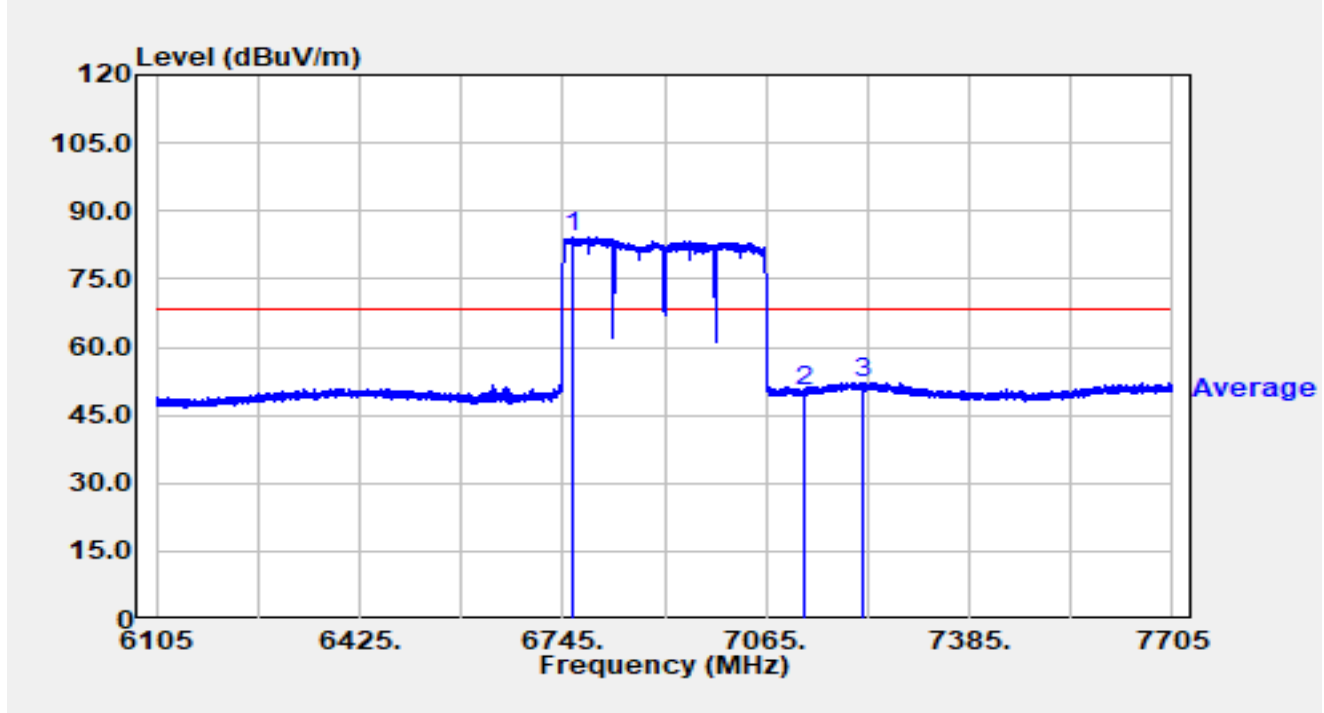


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6758.760	43.33	41.05	84.38	N/A	N/A	Average
2		7125.000	8.00	42.13	50.13	-18.07	68.20	Average
3	*	7217.640	10.06	42.22	52.29	-15.91	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

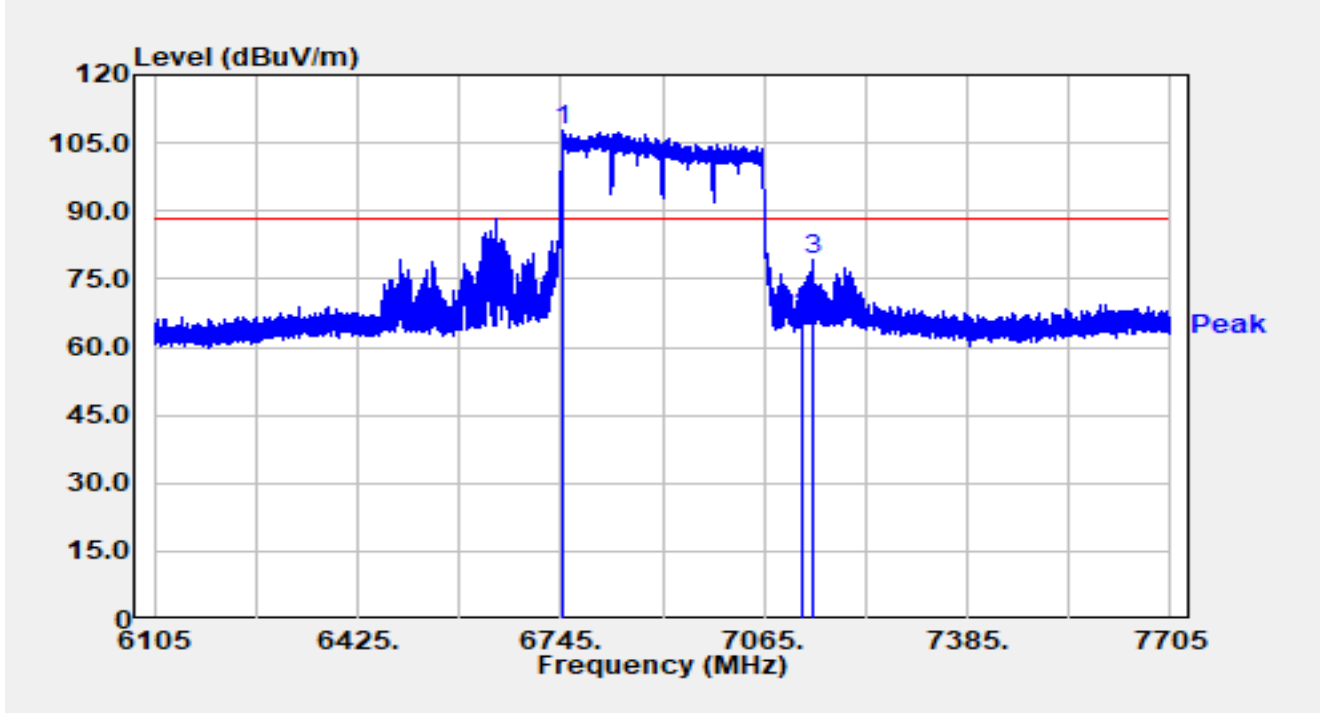


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6748.200	66.32	41.62	107.94	N/A	N/A	Peak
2		7125.000	24.23	42.13	66.37	-21.83	88.20	Peak
3	*	7141.480	36.94	42.23	79.18	-9.02	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-09-27
Test Engineer	Justin Guo	Temp./Humidity	24.3°C /65.2%
Factor	HF907_102861_1-18GHz	Polarity	Vertical
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

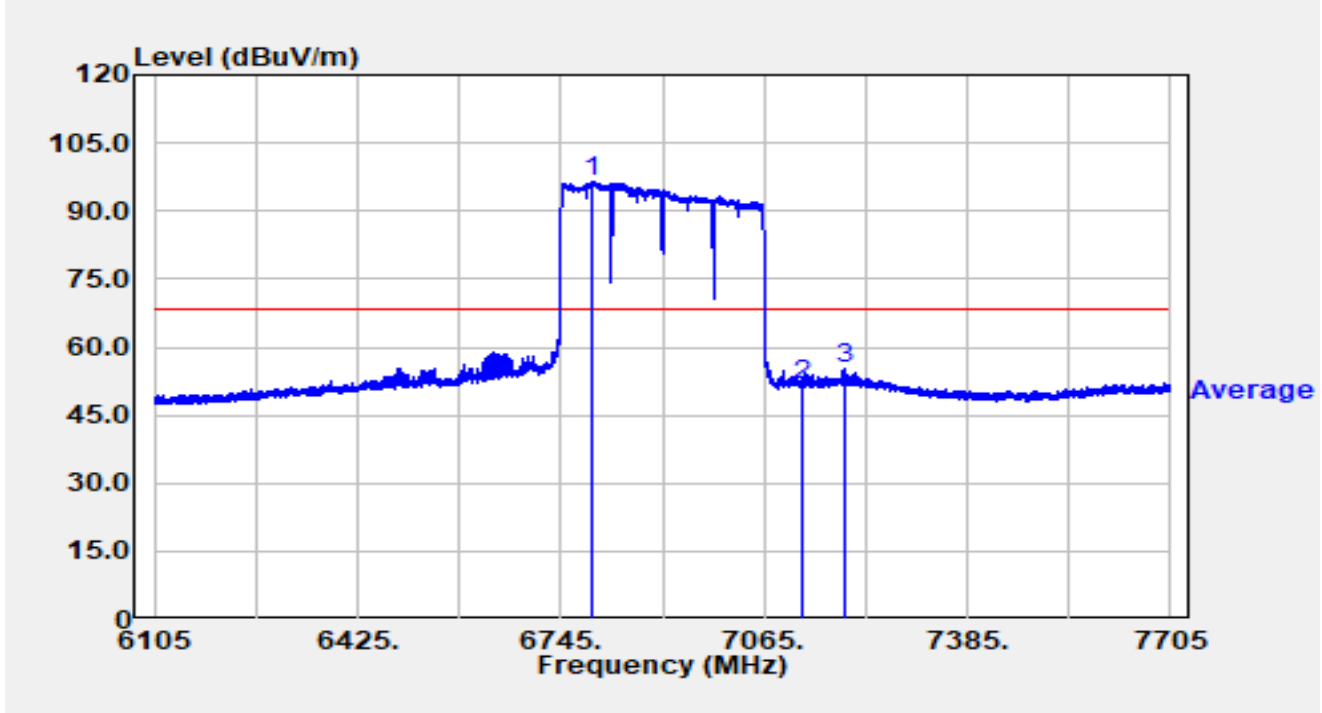


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6792.360	54.88	41.42	96.30	N/A	N/A	Average
2		7125.000	9.40	42.13	51.54	-16.66	68.20	Average
3	*	7190.280	13.15	42.22	55.36	-12.84	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2024-09-27
Test Engineer	Arvin Ding	Temp./Humidity	25.8°C /61.6%
Factor	SIP-SR2-ENV216_101684_C	Polarity	Line
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 NSS=4 at 6265MHz		

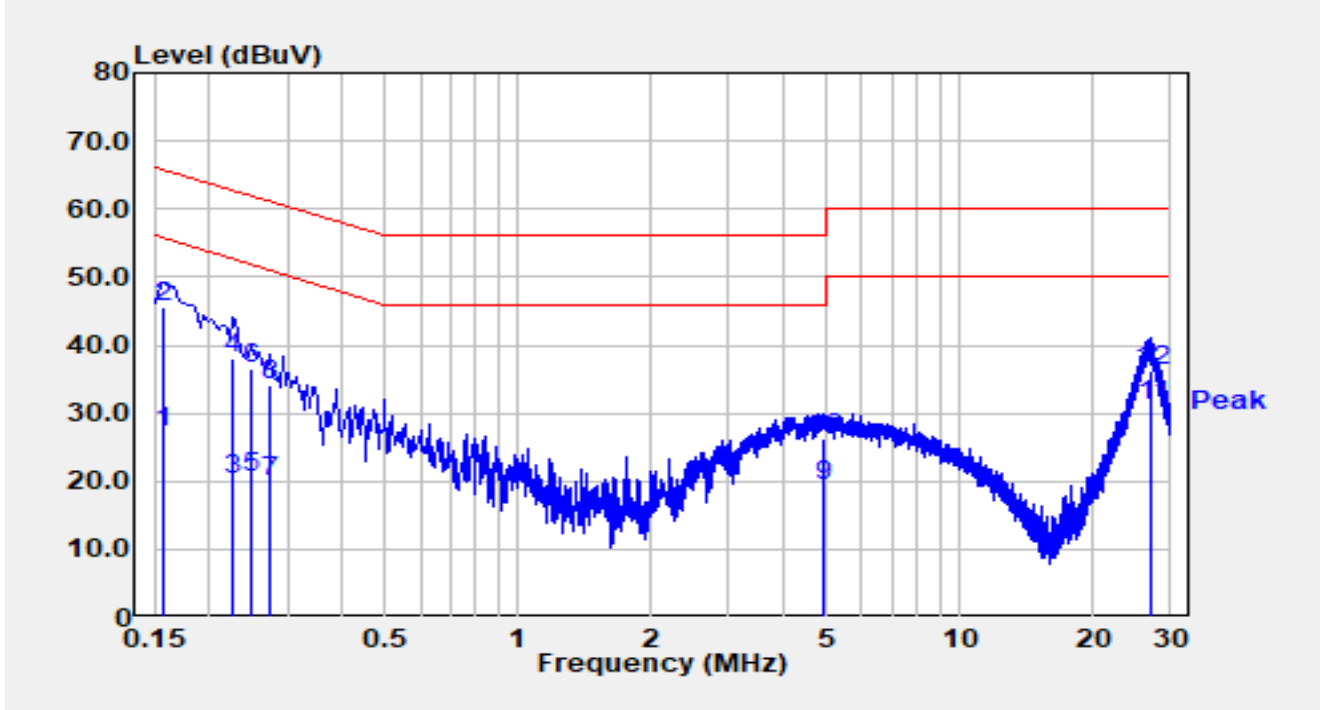


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	17.41	9.65	27.06	-28.51	55.57	Average
2		0.158	36.06	9.65	45.71	-19.86	65.57	QP
3		0.226	10.53	9.71	20.24	-32.36	52.60	Average
4		0.226	28.30	9.71	38.01	-24.58	62.60	QP
5		0.250	10.85	9.72	20.57	-31.19	51.76	Average
6		0.250	26.93	9.72	36.65	-25.11	61.76	QP
7		0.274	10.09	9.72	19.82	-31.18	51.00	Average
8		0.274	24.53	9.72	34.26	-26.74	61.00	QP
9		4.922	9.63	9.84	19.47	-26.53	46.00	Average
10		4.922	16.33	9.84	26.17	-29.83	56.00	QP
11	*	27.152	20.78	10.33	31.11	-18.89	50.00	Average
12		27.152	26.02	10.33	36.36	-23.64	60.00	QP

Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2024-09-27
Test Engineer	Arvin Ding	Temp./Humidity	25.8°C /61.6%
Factor	SIP-SR2-ENV216_101684_C	Polarity	Neutral
EUT	BE19000 Tri-Band Wi-Fi 7 Router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 NSS=4 at 6265MHz		

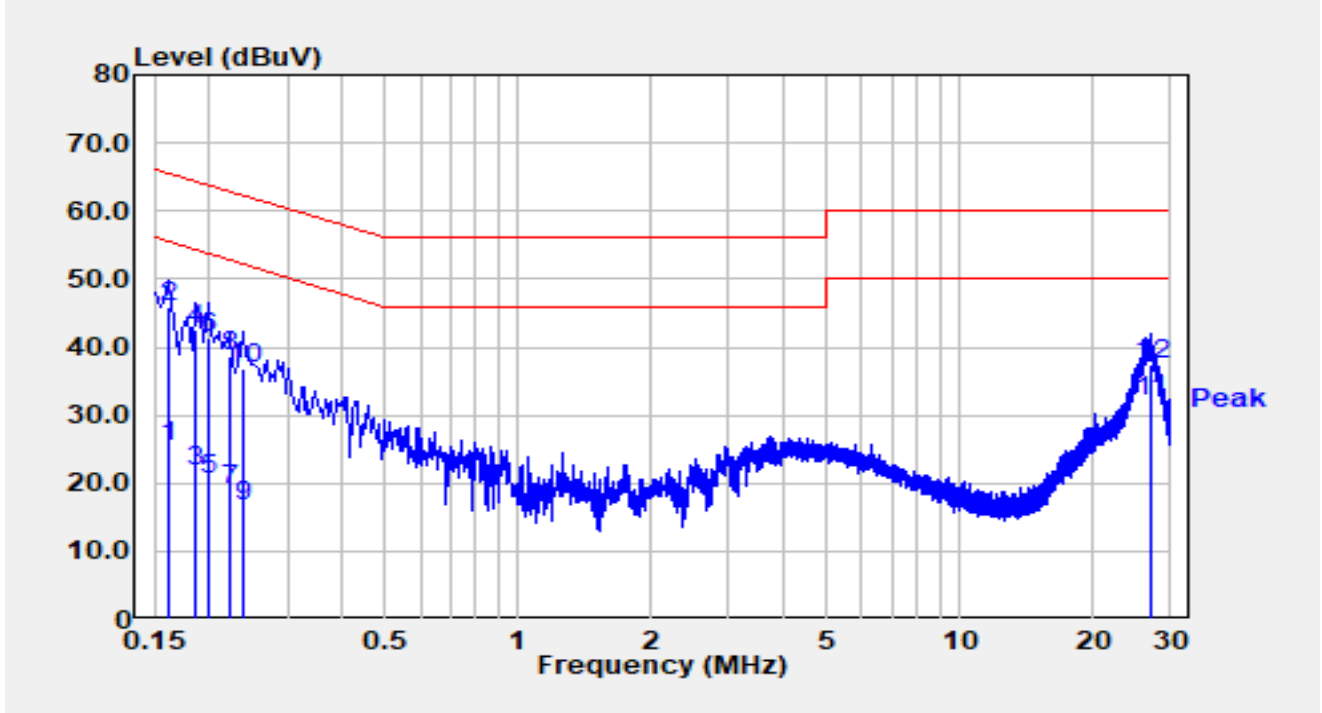

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	15.56	9.68	25.24	-30.12	55.36	Average
2		0.162	36.08	9.68	45.76	-19.60	65.36	QP
3		0.186	12.00	9.69	21.69	-32.53	54.21	Average
4		0.186	32.95	9.69	42.64	-21.57	64.21	QP
5		0.198	10.83	9.70	20.53	-33.16	53.69	Average
6		0.198	31.75	9.70	41.45	-22.24	63.69	QP
7		0.222	9.39	9.73	19.12	-33.63	52.74	Average
8		0.222	28.97	9.73	38.70	-24.05	62.74	QP
9		0.238	6.77	9.74	16.51	-35.66	52.17	Average
10		0.238	27.12	9.74	36.86	-25.31	62.17	QP
11	*	27.090	21.74	10.39	32.13	-17.87	50.00	Average
12		27.090	27.10	10.39	37.49	-22.51	60.00	QP

Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2408RSU042-UT” file.

Appendix C – EUT Photograph

Refer to “2408RSU042-UE” file.

The End _____