



FCC PART 15.407


TEST REPORT

For

Shenzhen Jingwah Information Technology Co., Ltd.

6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,
Futian District, Shenzhen

FCC ID: RBD-FAMILINK10

Report Type: Original Report	Product Type: Digital Photo Frame
Report Number: RSZ210317001-00C	
Report Date: 2021-04-06	
Reviewed By: RF Engineer	Candy Li 
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.407 (B) (8) §15.207 (A) – CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP	15
TEST PROCEDURE	15
TEST DATA	16
§15.205 & §15.209 & §15.407(B) (1), (4), (7), (8) , (9), (10) – UNDESIRABLE EMISSION	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	21
TEST DATA	21
FCC §15.407(a) (12), (e) – BANDWIDTH	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	28
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Digital Photo Frame
Trade	FAMILINK
Tested Model	M1018FLK
Multiple Model	Familink AWS 10.1 inches 4G + WiFi Photo Diary
Model Differences	Refer to DOS letter.
Frequency Range	5G Wi-Fi: 5150-5250 MHz; 5725-5850 MHz
Maximum Average Conducted Output Power	5G Wi-Fi: 5150-5250 MHz: 15.57dBm (802.11a), 14.89dBm(802.11n20), 15.20 dBm(802.11n40) 14.71dBm (802.11ac20), 15.68dBm (802.11ac40) 5725-5850 MHz: 10.04dBm (802.11a), 9.63dBm(802.11n20), 9.40dBm(802.11n40) 9.58dBm (802.11ac20), 9.36dBm (802.11ac40)
Modulation Technique	OFDM
Antenna Specification	FPC Antenna: 2.66dBi(provided by the applicant)
Voltage Range	DC 5V from adapter
Date of Test	2021-03-21 to 2021-03-30
Sample serial number	RSZ210317001-RF-S1(Assigned by ATC)
Received date	2021-003-15
Sample/EUT Status	Good condition
Adapter information	Model: MKD-0503000H INPUT: 100-240V, 50/60Hz, 0.5A OUTPUT: 5V, 3000mA

Objective

This type approval report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd.. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.73dB
Unwanted Emission, conducted		±1.6dB
RF Frequency		±0.082*10 ⁻⁷
Emissions, Radiated	30MHz - 1GHz	±4.28dB
	1GHz- 18GHz	±4.98dB
	18GHz- 26.5GHz	±5.06dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A-2

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device only supports 5GWi-Fi 802.11a/n20/n40/ac20/ac40 modes, which was declared by manufacturer.

For 5150-5250MHz Band, 6 hannels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a, 802.11n20, 802.11ac20 channel 36, 40, 48 were tested; For 802.11n40/ac40 channel 38, 46 were tested.

For 5725-5850MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785		

For 802.11a, 802.11n20, 802.11ac20 channel 149, 157, 165 were tested; For 802.11n40/ac40, channel 151, 159 were tested.

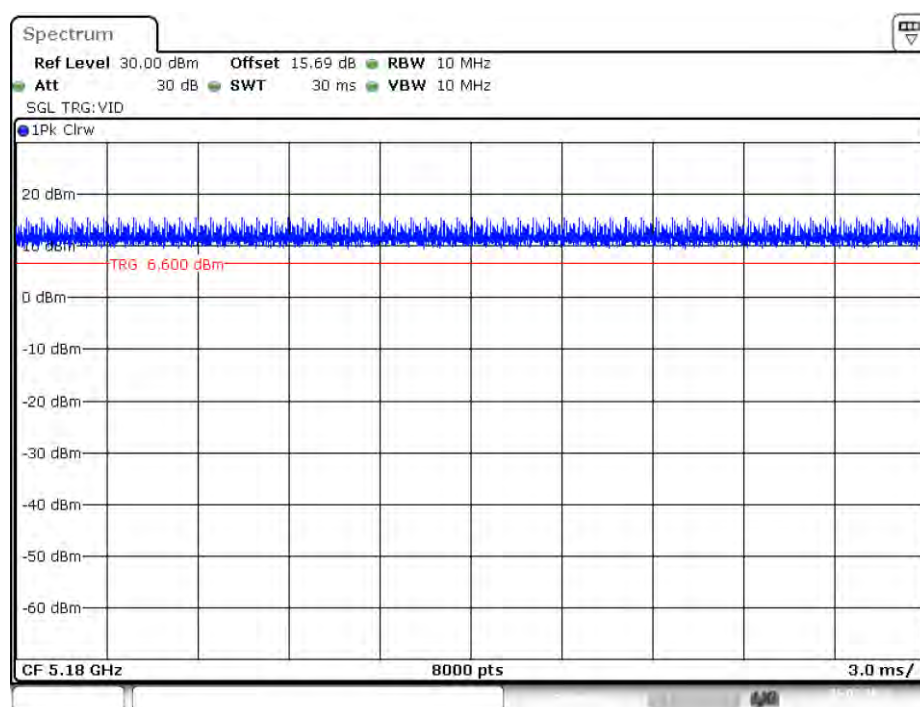
EUT Exercise Software

Test in the engineer mode during testing and power level as below:

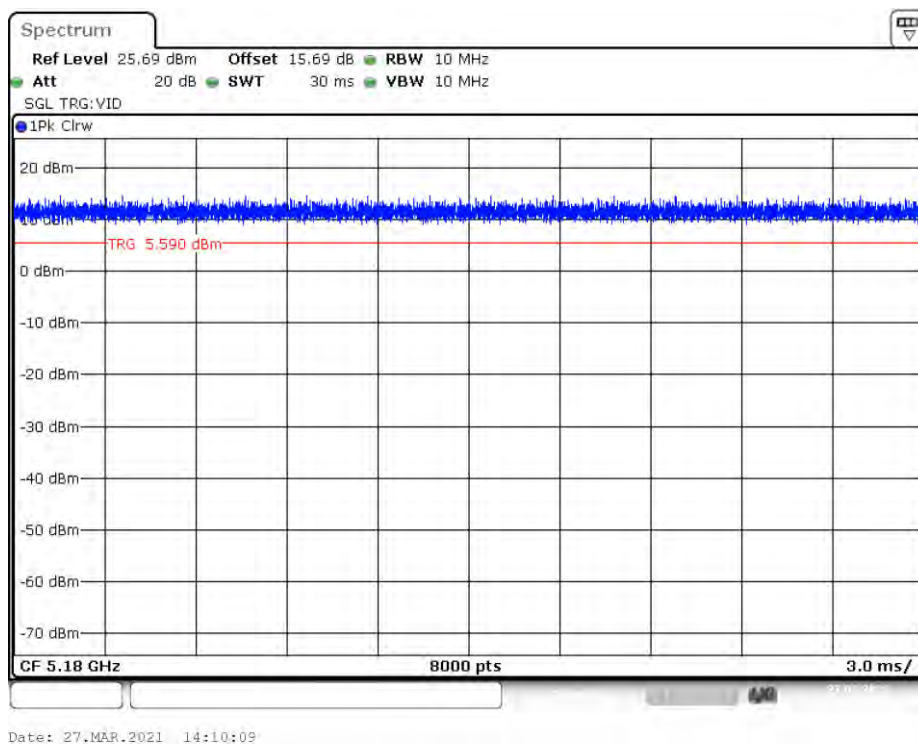
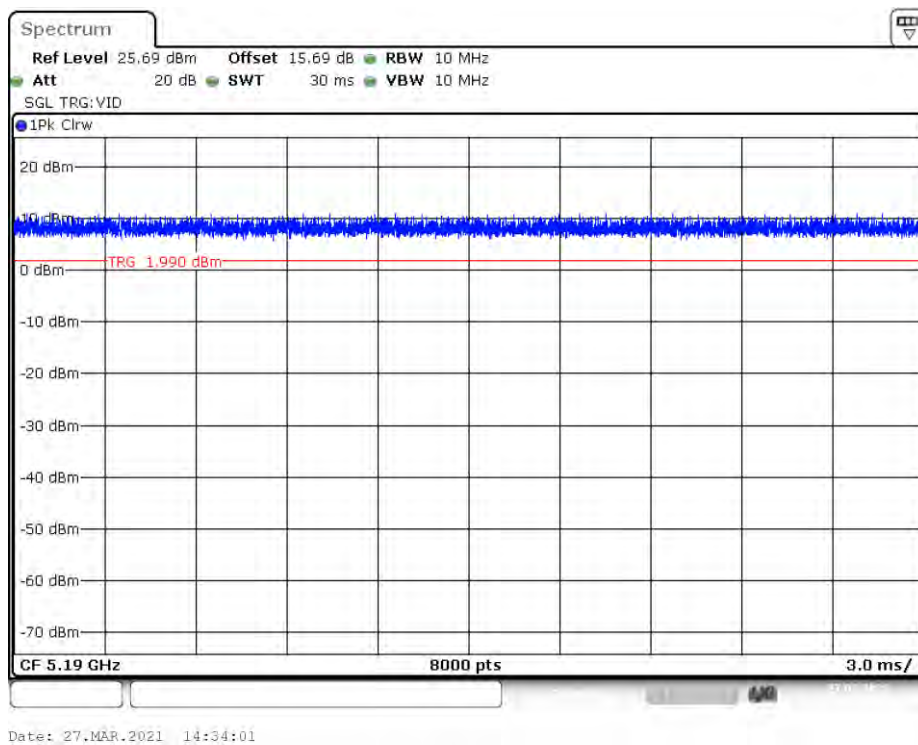
Mode	Data Rate (Mbps)	Power Level
802.11 a	6	12
802.11 n20/n40/ac20/ac40	MCS0	11

Duty cycle

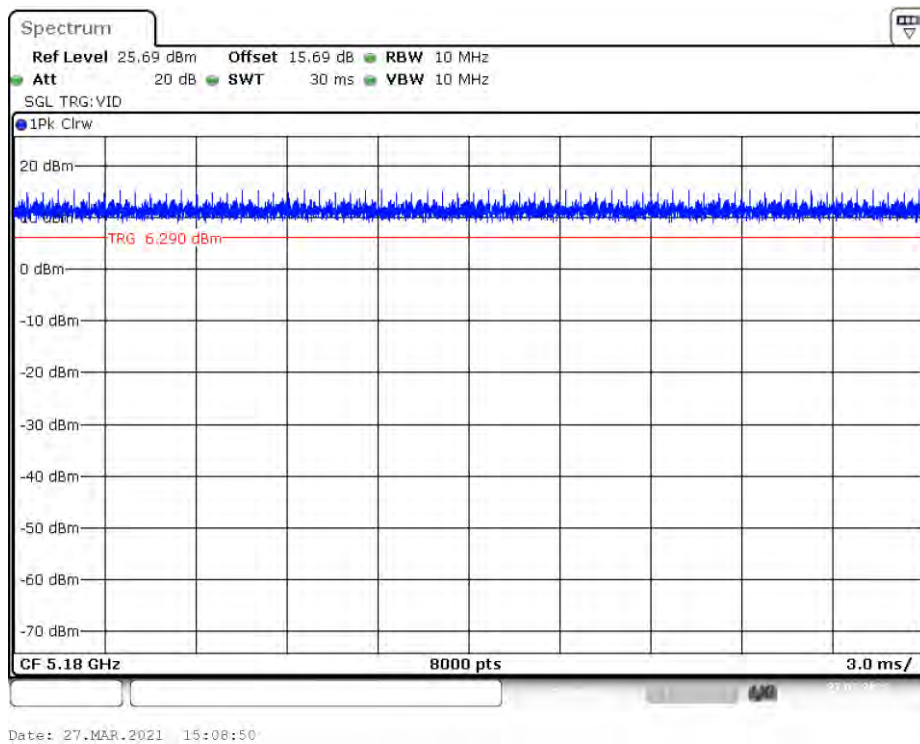
Mode	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	10*log(1/duty cycle) (dB)
802.11a	-	-	100	0
802.11n20	-	-	100	0
802.11n40	-	-	100	0
802.11ac20	-	-	100	0
802.11ac40	-	-	100	0

802.11a mode

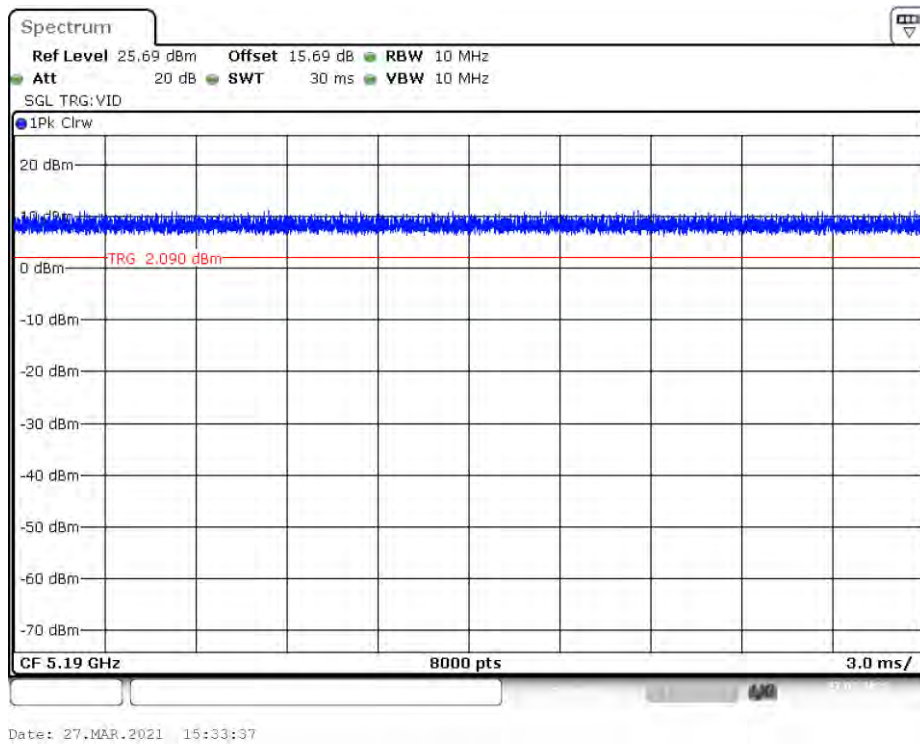
Date: 26.MAR.2021 17:41:59

802.11n20 mode**802.11n40 mode**

802.11ac20 Mode



802.11ac40 Mode



Equipment Modifications

No modification was made to the EUT tested.

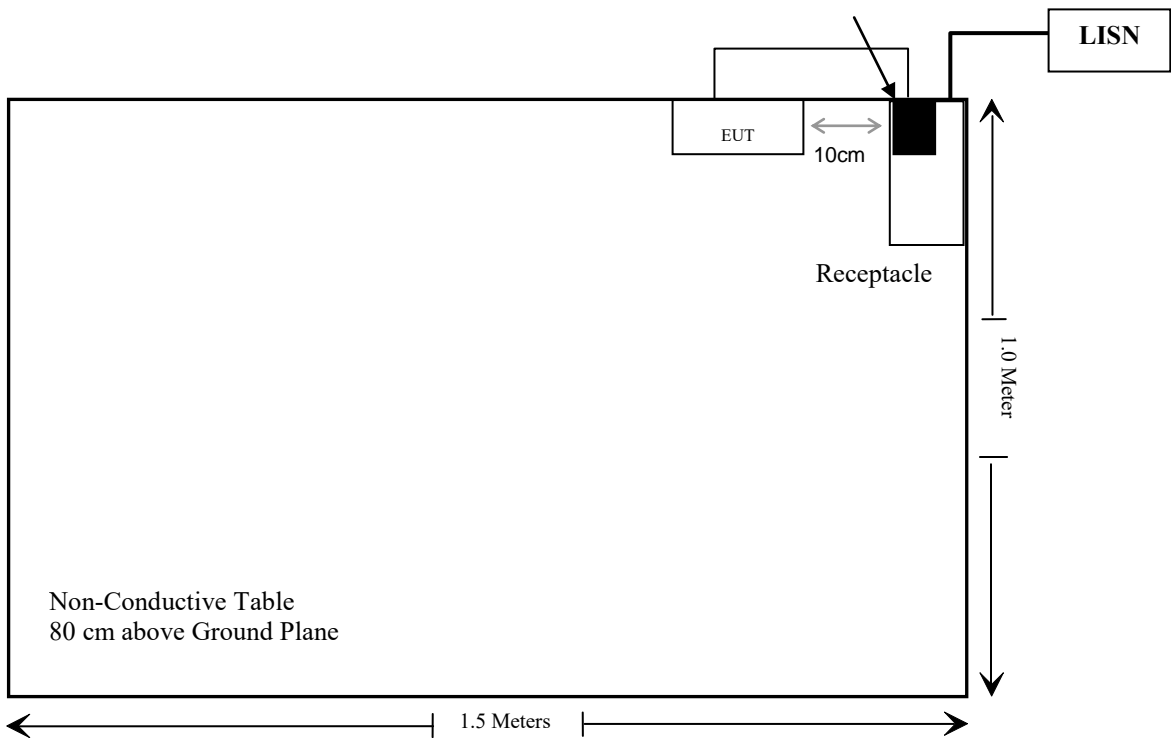
Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From/Port	To
DC IN	2.0	Adapter	EUT

Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(8) & §15.207(a)	Conducted Emissions	Compliance
§15.205 & §15.209 & §15.407(b) (1), (4), (7), (8), (9), (10)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (12), (e)	Bandwidth	Compliance
§15.407(a) (1), (3)	Conducted Transmitter Output Power	Compliance
§15.407 (a) (1), (3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50ΩCoaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2020/07/08	2021/07/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
RF conducted test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 +OSP -B157	101244 + 100866	2020/12/24	2021/12/23

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

For worst case:

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BDR/EDR	2402-2480	1.53	1.42	1.0	1.26	20	0.0004	1
BLE	2402-2480	1.53	1.42	4.0	2.51	20	0.0007	1
2.4G Wi-Fi	2412-2462	1.53	1.42	17.0	50.12	20	0.0142	1
5.2G Wi-Fi	5180-5270	2.66	1.85	16.0	39.81	20	0.0146	1
5.8G Wi-Fi	5745-5825	2.66	1.85	10.5	11.22	20	0.0041	1
GSM 850	824-849	0.9	1.23	32	1584.89	20	0.3879	0.55
PCS 1900	1850-1910	2.39	1.73	28.5	707.95	20	0.2442	1
WCDMA B2	1850-1910	2.39	1.73	22	158.49	20	0.0547	1
WCDMA B5	824-849	0.9	1.23	23	199.53	20	0.0488	0.55
LTE B2	1850-1910	2.39	1.73	24	251.19	20	0.0866	1
LTE B4	1710-1755	0.93	1.24	24.5	281.84	20	0.0695	1
LTE B7	2500-2570	1.58	1.44	21.5	141.25	20	0.0404	1
LTE B12	699-716	0.88	1.22	25.5	354.81	20	0.0864	0.47
LTE B13	777-787	0.88	1.22	25.5	354.81	20	0.0784	0.52
LTE B17	704-716	0.88	1.22	25.5	354.81	20	0.0714	0.47
LTE B25	1850-1915	2.39	1.73	24	251.19	20	0.0655	1

Note 1: The tune up conducted power was declared by the applicant.

Note 2: Bluetooth or Wi-Fi function can transmit at the same time with the WWAN.

So the worst simultaneous transmitting consideration:

$$\text{The ratio} = \text{MPE}_{5.2\text{GWi-Fi}}/\text{limit} + \text{MPE}_{\text{GSM 850}}/\text{limit} = 0.0146/1.0 + 0.3879/0.55 = 0.72 < 1.0$$

So simultaneous exposure is not required.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one FPC antenna arrangement, which was permanently attached and the antenna gain is 2.66 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

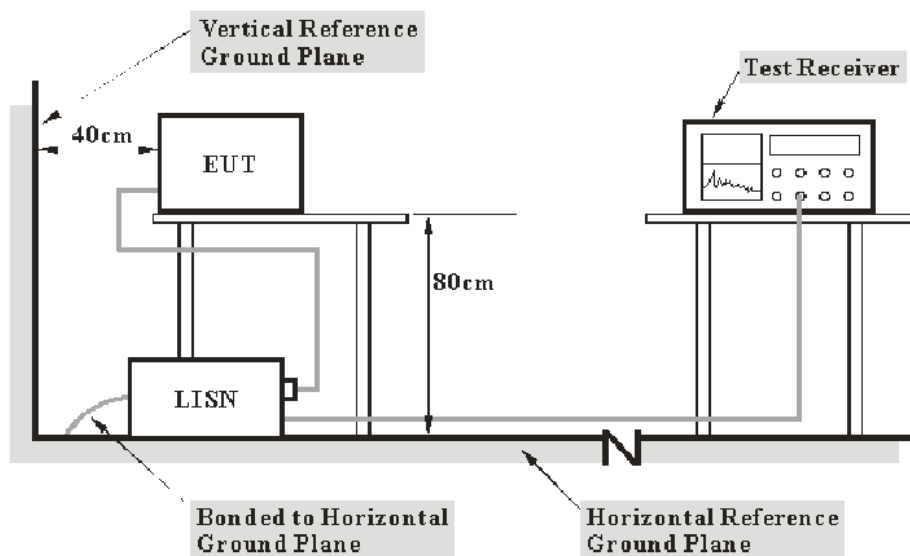
Result: Compliance.

FCC §15.407 (B) (8) §15.207 (A) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (8)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

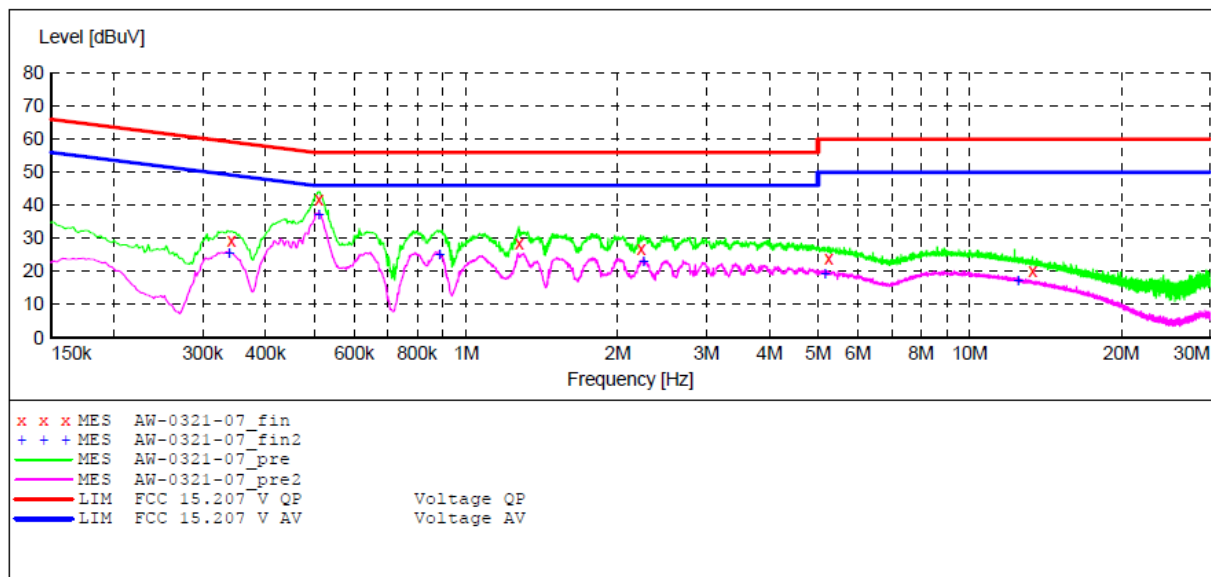
All data was recorded in the Quasi-peak and average detection mode.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-21.

EUT operation mode: Transmitting (Worst case as below)

AC 120V/60 Hz, Line**MEASUREMENT RESULT: "AW-0321-07_fin"**

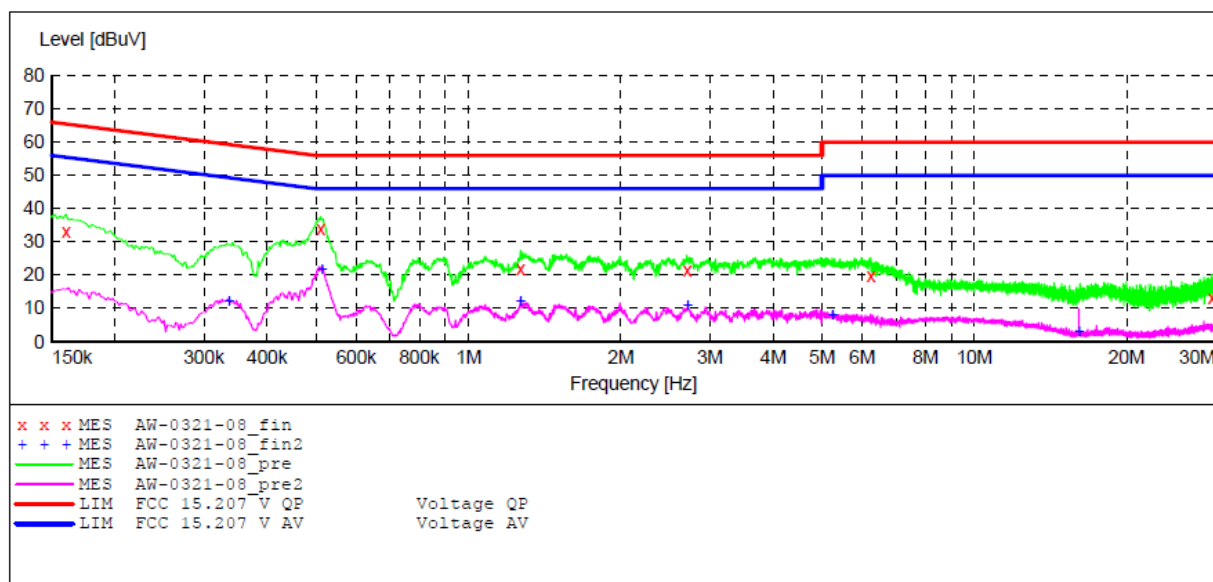
2021-3-21 11:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.342000	29.00	10.9	59	30.0	QP	L1	GND
0.510000	41.70	11.0	56	14.3	QP	L1	GND
1.274000	28.30	11.2	56	27.7	QP	L1	GND
2.225000	26.90	11.3	56	29.1	QP	L1	GND
5.250000	23.70	11.4	60	36.3	QP	L1	GND
13.330000	20.00	11.6	60	40.0	QP	L1	GND

MEASUREMENT RESULT: "AW-0321-07_fin2"

2021-3-21 11:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.338000	25.60	10.9	49	23.4	AV	L1	GND
0.510000	37.40	11.0	46	8.6	AV	L1	GND
0.886000	25.30	11.1	46	20.7	AV	L1	GND
2.250000	23.20	11.3	46	22.8	AV	L1	GND
5.165000	19.50	11.4	50	30.5	AV	L1	GND
12.480000	17.30	11.6	50	32.7	AV	L1	GND

AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "AW-0321-08_fin"**

2021-3-21 11:34

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.160000	33.10	10.8	66	32.9	QP	N	GND
0.510000	33.80	11.0	56	22.2	QP	N	GND
1.268000	22.00	11.2	56	34.0	QP	N	GND
2.705000	21.20	11.3	56	34.8	QP	N	GND
6.240000	19.60	11.5	60	40.4	QP	N	GND
29.505000	13.10	11.8	60	46.9	QP	N	GND

MEASUREMENT RESULT: "AW-0321-08_fin2"

2021-3-21 11:34

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.336000	12.40	10.9	49	36.6	AV	N	GND
0.514000	21.90	11.0	46	24.1	AV	N	GND
1.268000	12.20	11.2	46	33.8	AV	N	GND
2.715000	10.80	11.3	46	35.2	AV	N	GND
5.245000	8.00	11.4	50	42.0	AV	N	GND
16.100000	3.00	11.7	50	47.0	AV	N	GND

§15.205 & §15.209 & §15.407(B) (1), (4), (7), (8), (9), (10) – UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b) (1), (4), (7), (8), (9), (10); §15.209; §15.205;

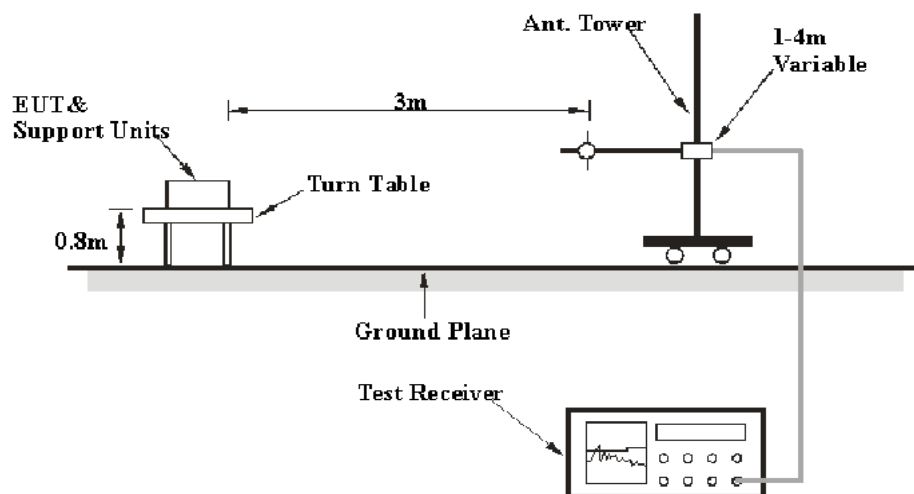
(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

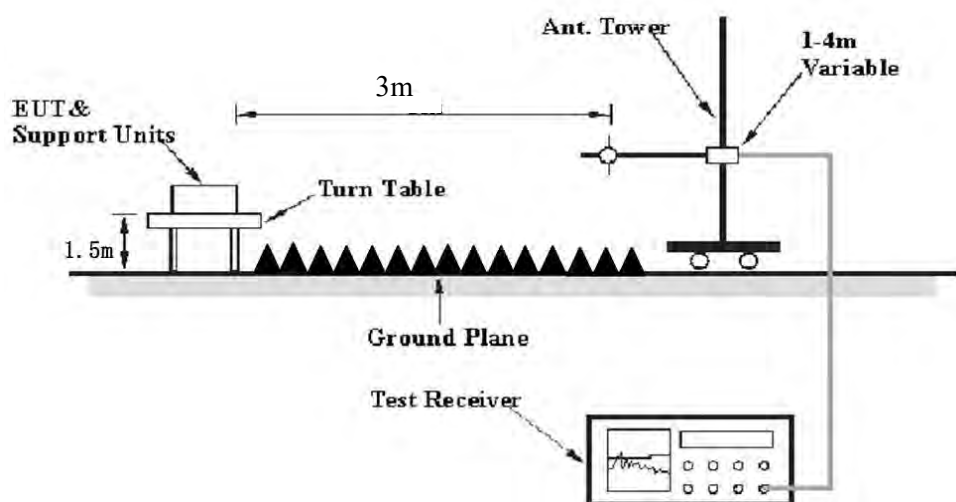
- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:



Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \lg(1/3) = -9.5$ dB

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~29 °C
Relative Humidity:	50~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-30.

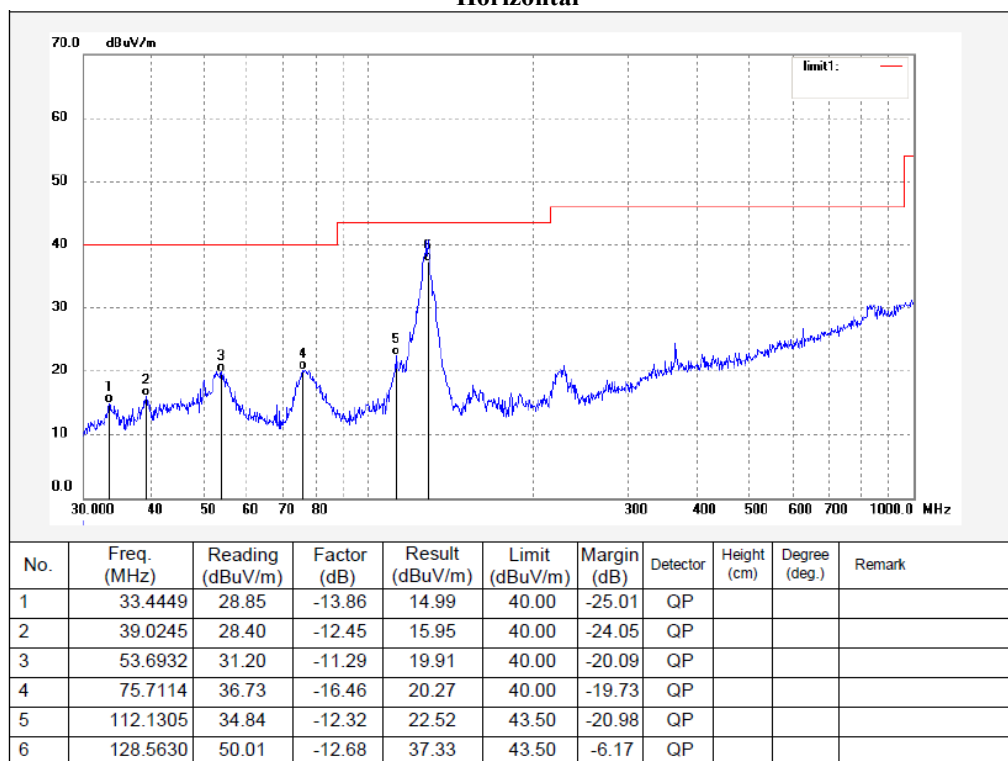
EUT operation mode: Transmitting

30 MHz~18 GHz: *Pretest with 802.11a, 802.11n20, 802.11n40, 802.11ac20, 802.11ac40, the worst case was 802.11a mode.*

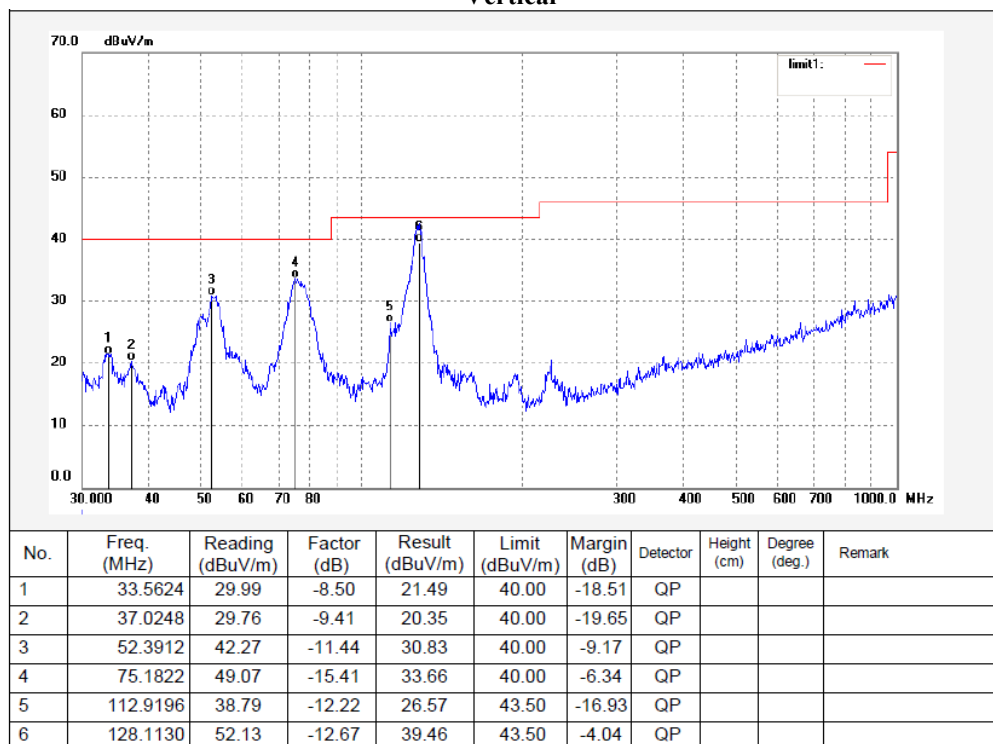
18~40GHz: *The test values lower than the limits of 20dB or in the noise floor level, the test data were not recorded in the report.*

30 MHz~1 GHz:
802.11a, 5180MHz:

Horizontal

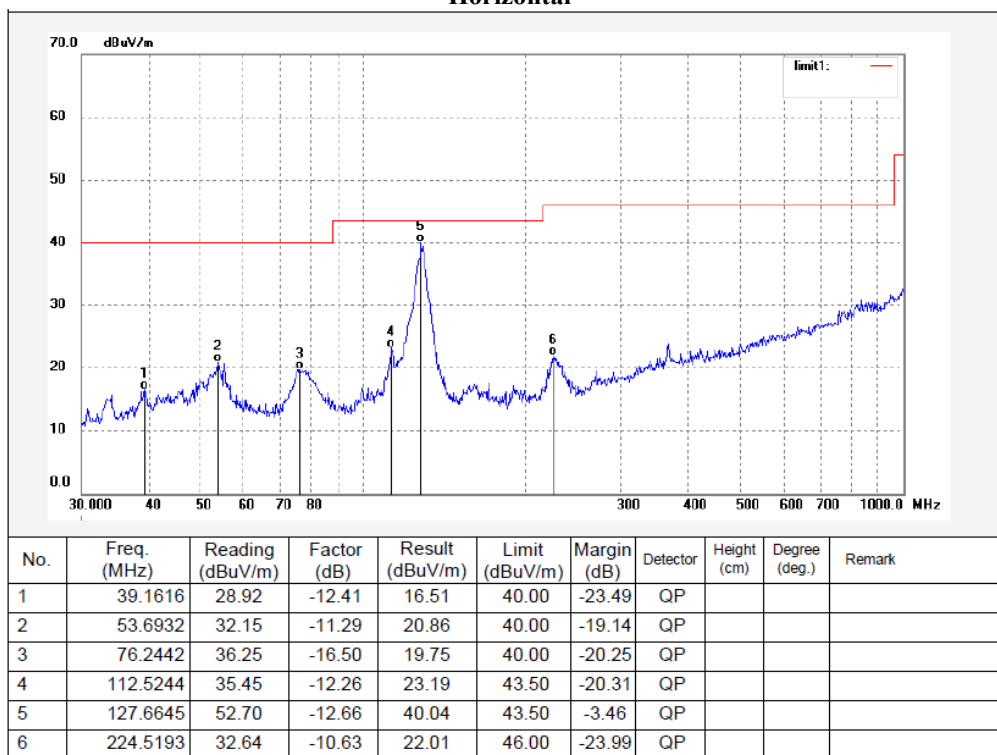


Vertical

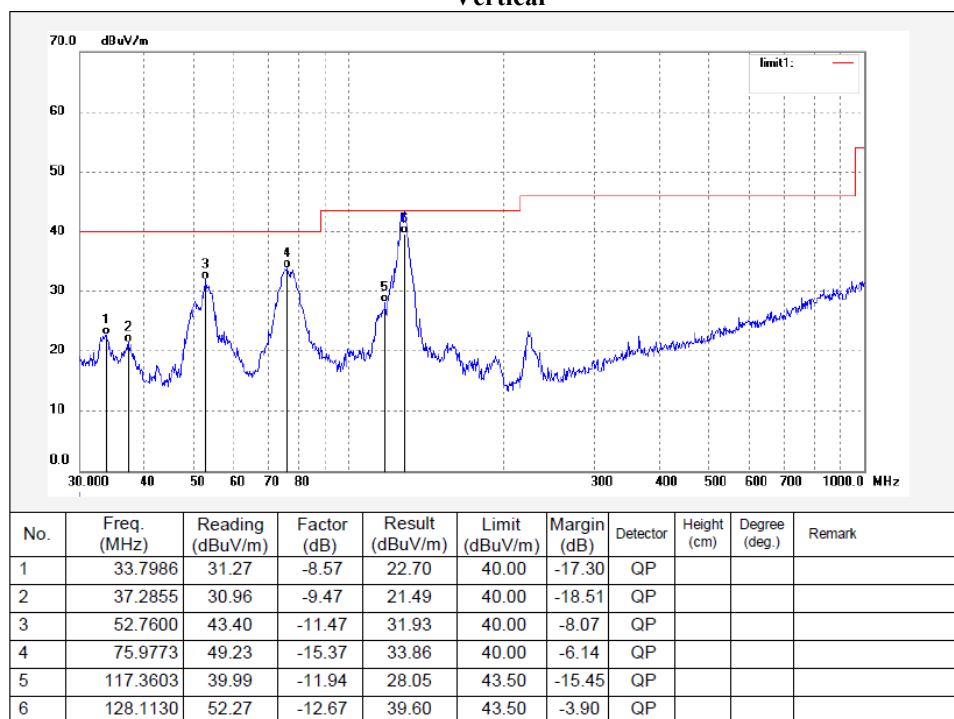


802.11a, 5745MHz:

Horizontal



Vertical



1 ~ 18 GHz:**5150-5250 MHz:**

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
4500.00	43.52	PK	111	1.50	H	1.89	45.41	74.00	28.59
4500.00	43.27	PK	142	1.70	V	1.89	45.16	74.00	28.84
5150.00	43.24	PK	76	1.70	H	3.37	45.61	74.00	28.39
5150.00	43.13	PK	342	1.80	V	3.37	46.50	74.00	27.50
10360.00	41.12	PK	251	1.60	H	11.41	52.53	68.20	15.67
10360.00	40.47	PK	134	1.40	V	11.41	51.88	68.20	16.32
5200 MHz									
10400.00	41.55	PK	121	1.70	H	11.46	53.01	68.20	15.19
10400.00	41.04	PK	136	1.60	V	11.46	52.50	68.20	15.70
5240 MHz									
10480.00	40.88	PK	154	1.60	H	11.53	52.41	68.20	15.79
10480.00	40.63	PK	272	1.80	V	11.53	52.16	68.20	16.04
5350.00	43.41	PK	164	1.80	H	3.43	46.84	74.00	27.16
5350.00	43.34	PK	139	1.60	V	3.43	46.77	74.00	27.23
5460.00	43.66	PK	84	2.10	H	3.58	47.24	74.00	26.76
5460.00	43.39	PK	16	1.60	V	3.58	46.97	74.00	27.03

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5745 MHz									
5648.67	43.42	PK	352	1.70	H	3.85	47.27	79.30	32.03
5665.33	43.53	PK	167	1.40	V	3.90	47.43	108.98	61.55
5713.50	43.67	PK	219	1.50	H	4.16	47.83	115.74	67.91
5722.17	44.11	PK	326	1.40	V	4.16	48.27	68.20	19.93
11490.00	37.42	PK	152	1.60	H	14.74	52.16	74.00	21.84
11490.00	37.14	PK	74	1.70	V	14.74	51.88	74.00	22.12
5785 MHz									
11570.00	37.02	PK	354	1.60	H	14.74	51.76	74.00	22.24
11570.00	36.97	PK	126	1.80	V	14.74	51.71	74.00	22.29
5825 MHz									
5851.07	44.27	PK	182	1.50	H	4.58	48.85	113.23	64.38
5867.89	44.52	PK	236	1.70	V	4.62	49.14	108.81	59.67
5885.50	44.24	PK	341	1.60	H	4.66	48.90	75.97	27.07
5927.57	44.19	PK	42	1.70	V	4.85	49.04	68.20	19.16
11650.00	37.62	PK	139	1.50	H	14.79	52.41	74.00	21.59
11650.00	37.31	PK	125	1.80	V	14.79	52.10	74.00	21.90

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

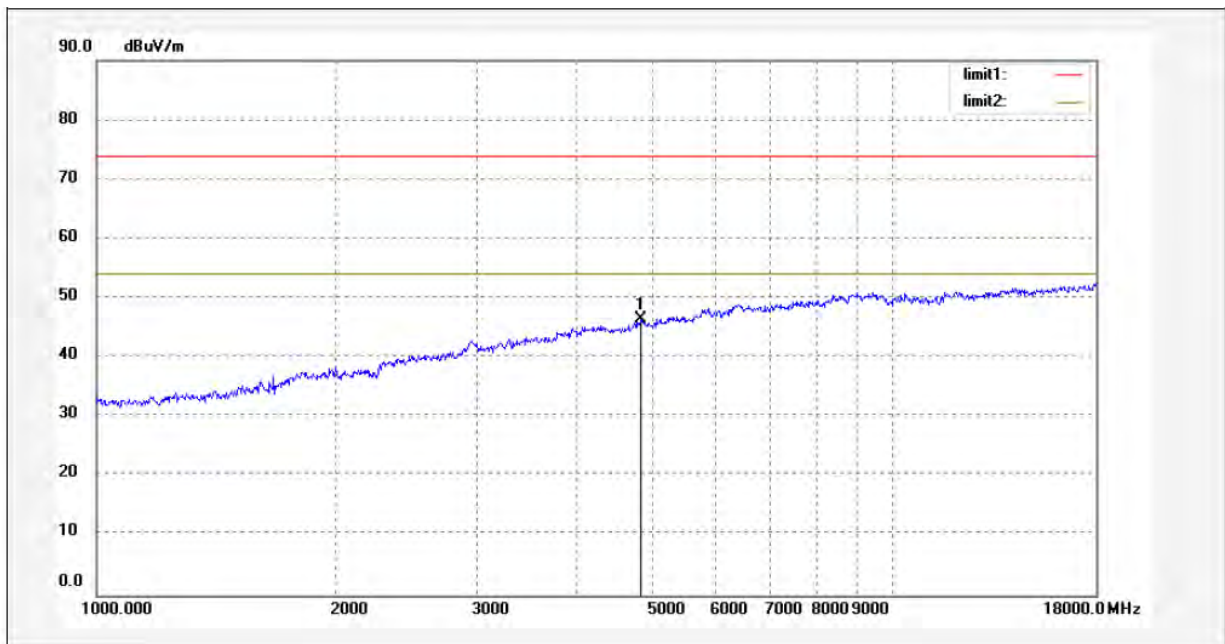
Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

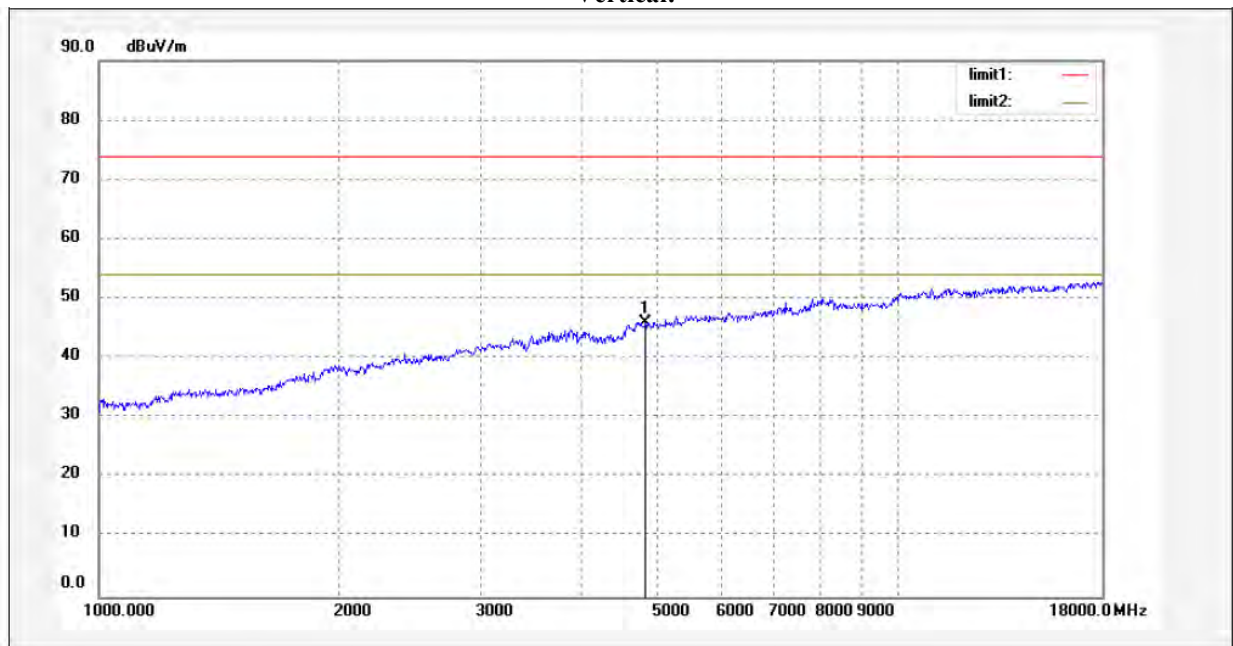
The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

**Pre-scan for Peak
802.11a 5180MHz
Horizontal:**



Vertical:



FCC §15.407(a) (12), (e) – BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


Test Procedure**1. Emission Bandwidth (EBW)**

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-27.

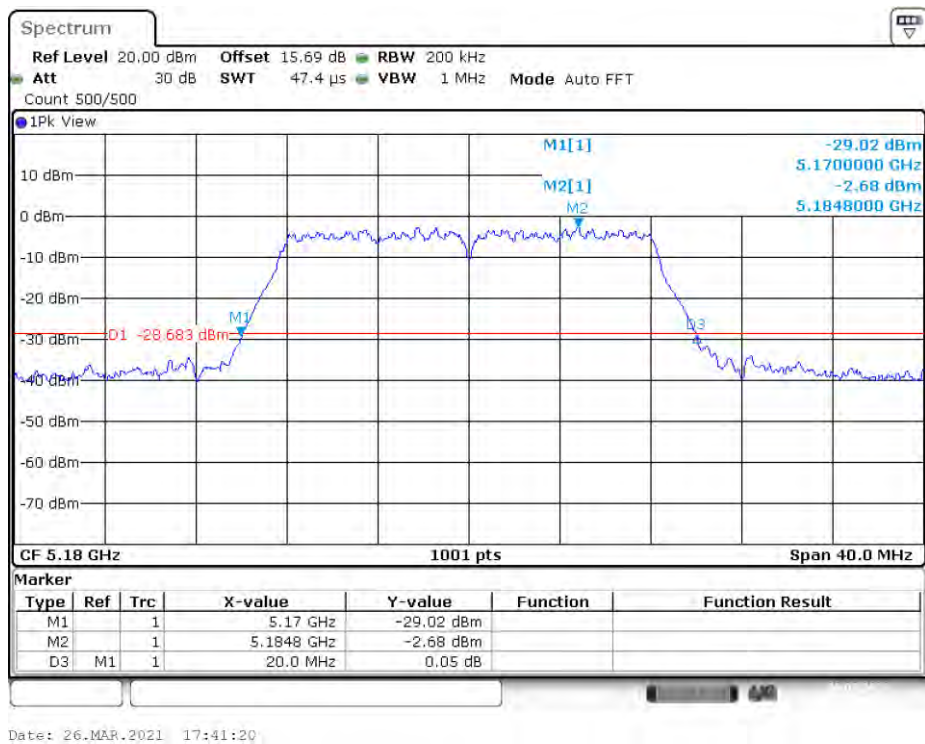
EUT operation mode: Transmitting

Test Result: Pass; please refer to the following tables and plots.

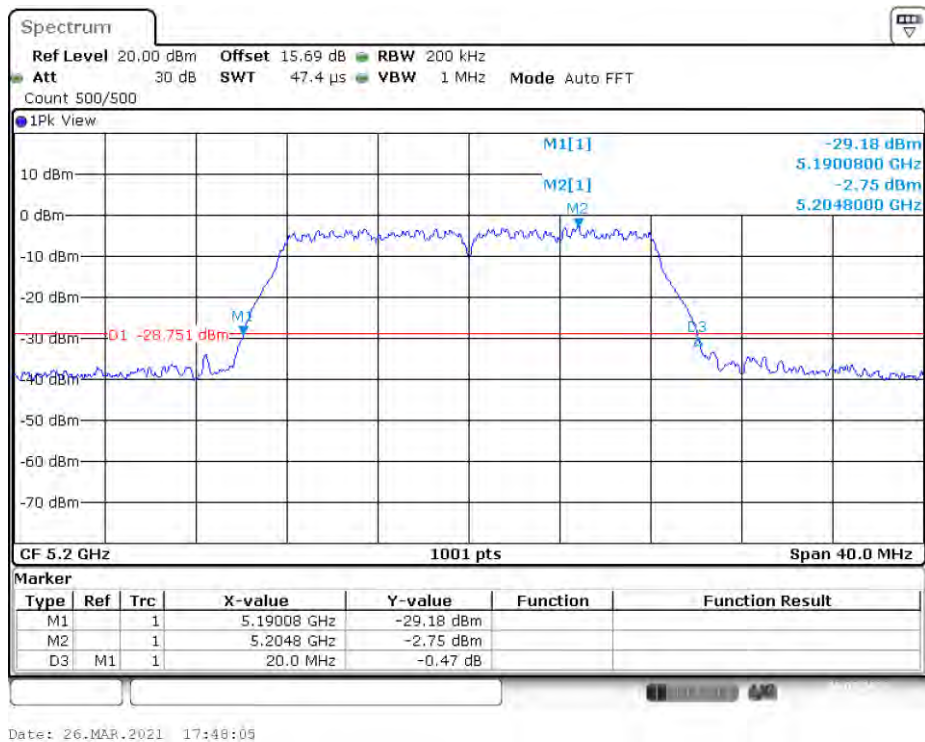
5150 MHz - 5250 MHz:

Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Remark
802.11a			No transmitted signal in the 99% bandwidth extends into the U-NII-2A band
5180	20.000	17.582	
5200	20.000	17.822	
5240	19.840	17.622	
802.11n20			
5180	19.960	18.062	
5200	19.960	18.062	
5240	20.000	18.102	
802.11n40			
5190	40.560	36.603	
5230	40.480	36.603	
802.11ac20			
5180	20.040	18.062	
5200	20.000	18.062	
5240	20.000	18.062	
802.11ac40			
5190	40.560	36.603	
5230	40.640	36.603	

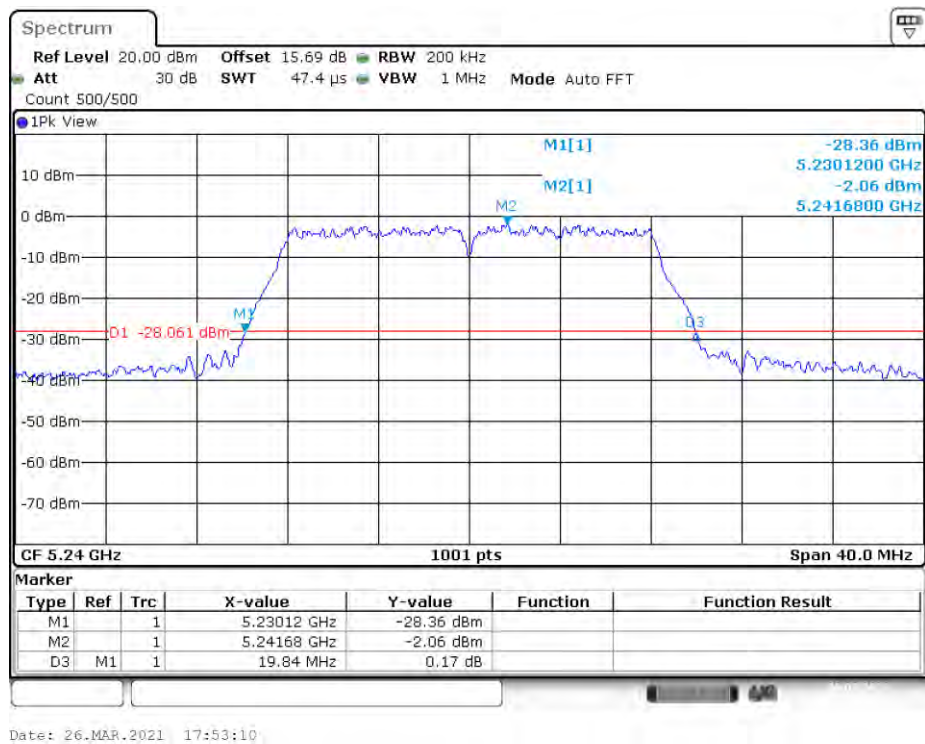
802.11a mode, 26 dB Emissions, 5180 MHz



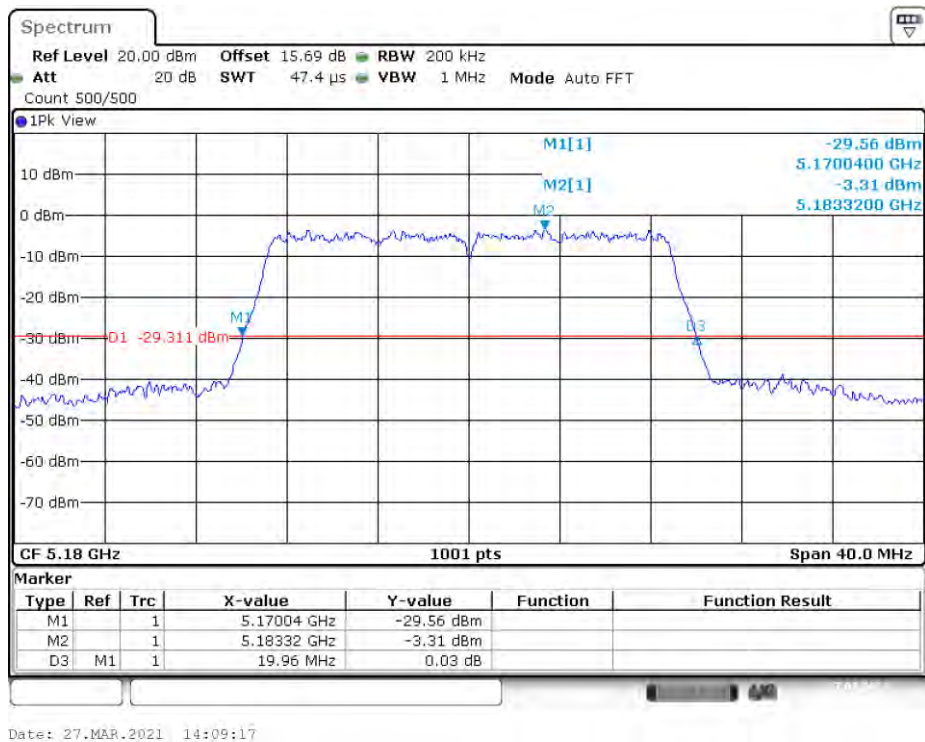
802.11a mode, 26 dB Emissions, 5200 MHz



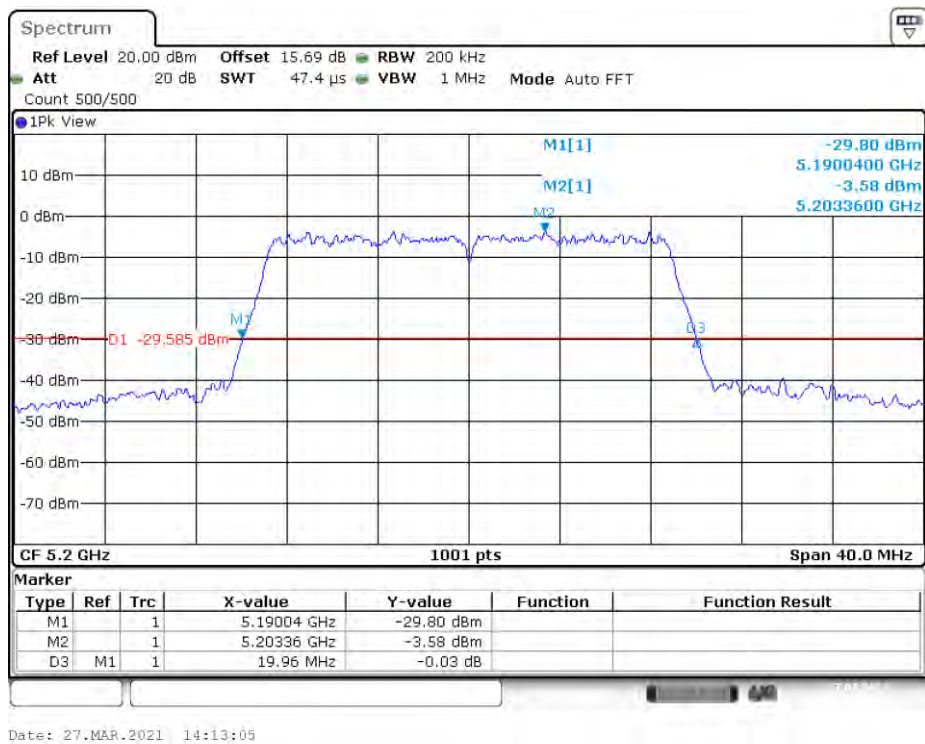
802.11a mode, 26 dB Emissions, 5240 MHz



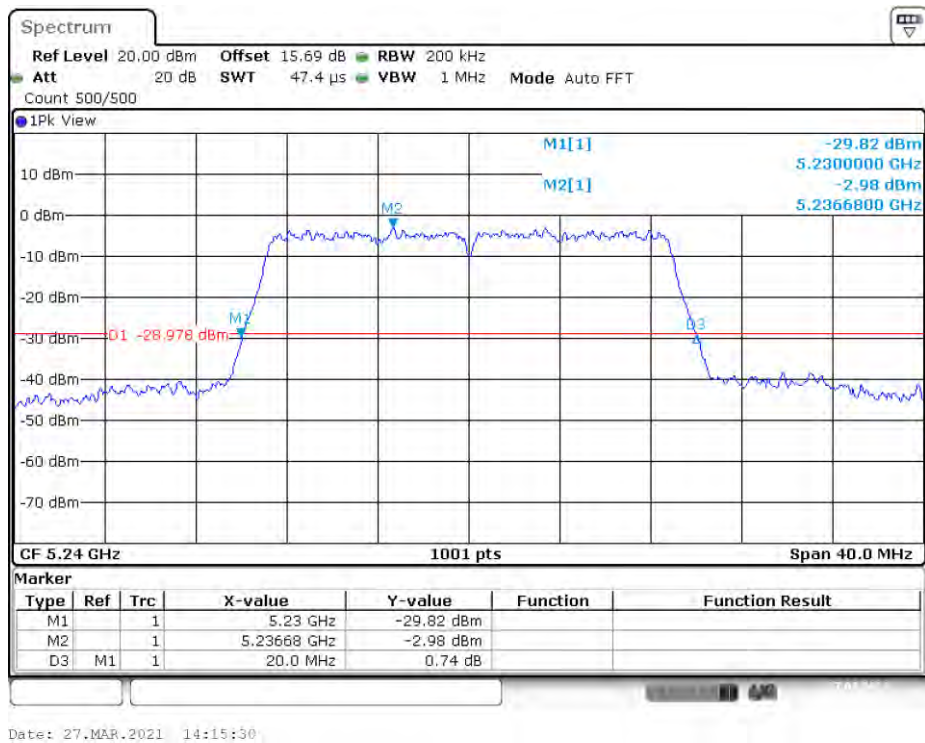
802.11n20 mode, 26 dB Emissions, 5180 MHz



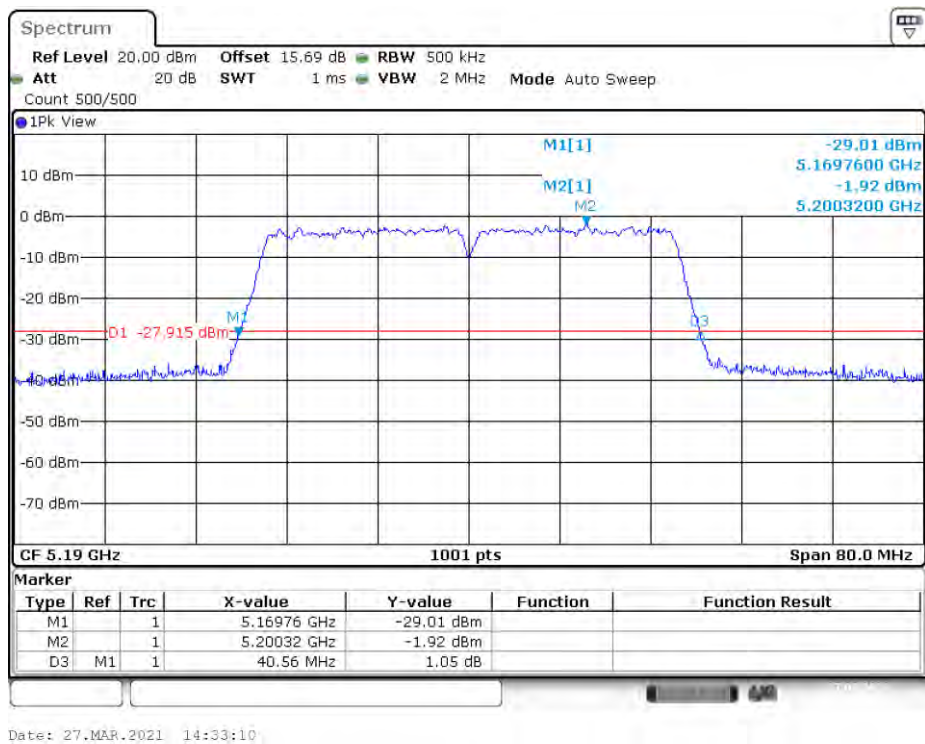
802.11n20 mode, 26 dB Emissions, 5200 MHz



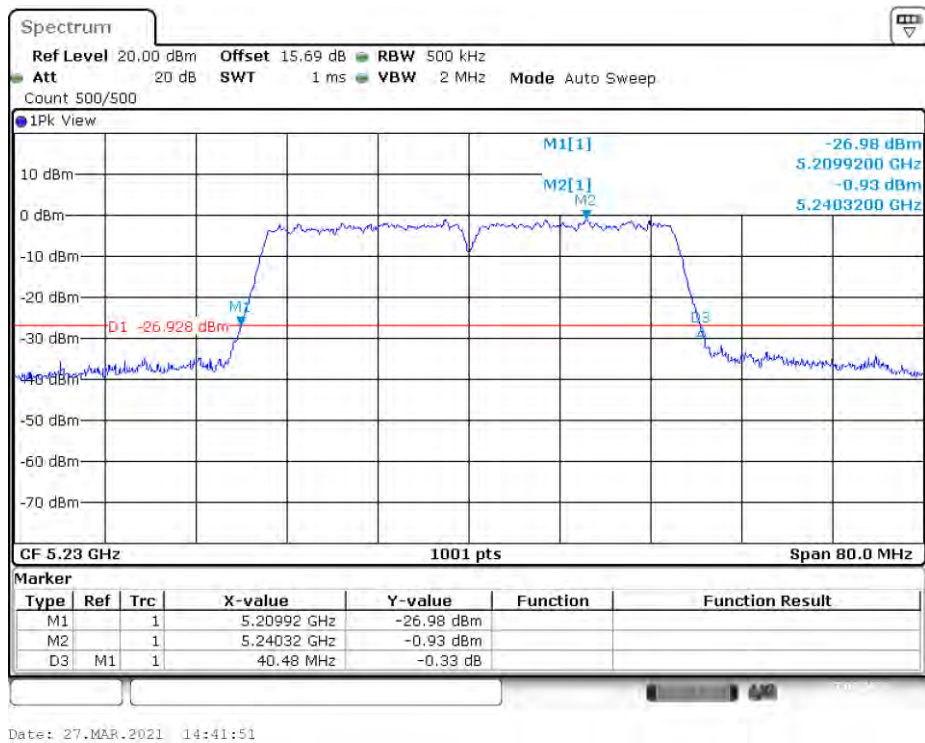
802.11n20 mode, 26 dB Emissions, 5240 MHz



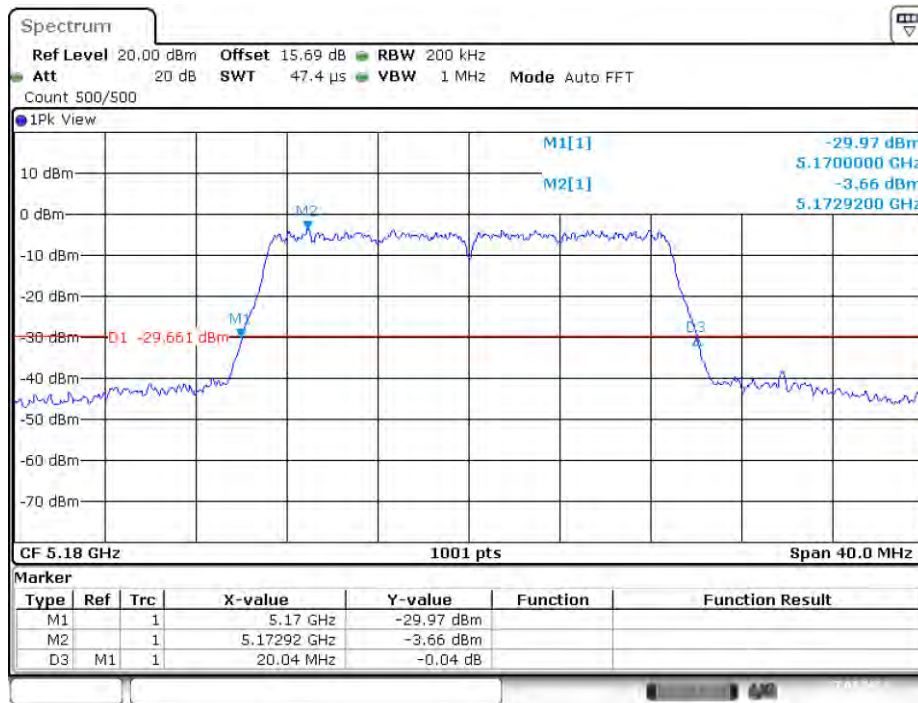
802.11n40 mode, 26 dB Emissions, 5190 MHz



802.11n40 mode, 26 dB Emissions, 5230 MHz

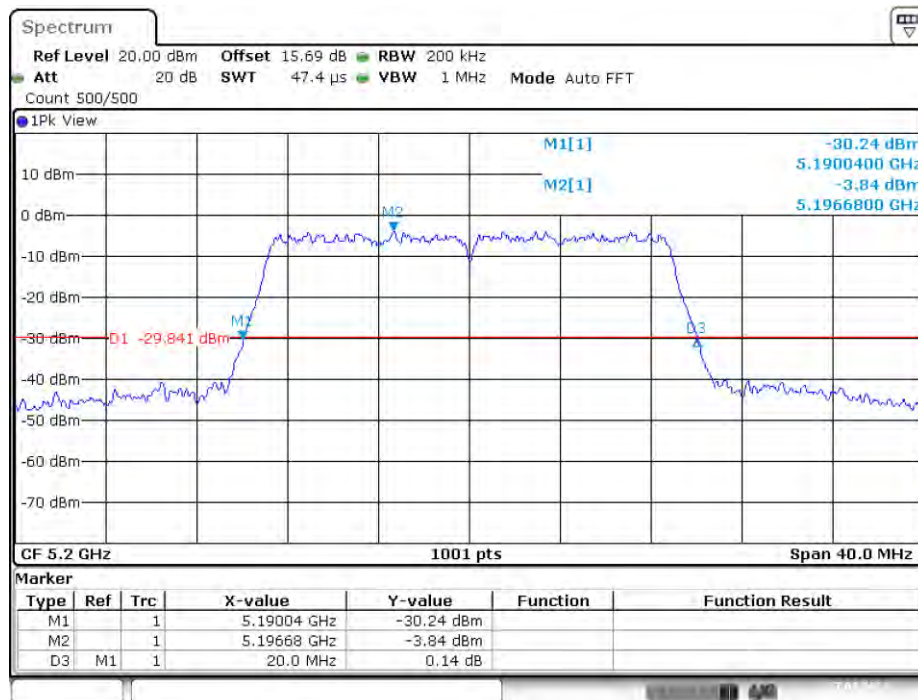


802.11ac20 mode, 26 dB Emissions, 5180 MHz



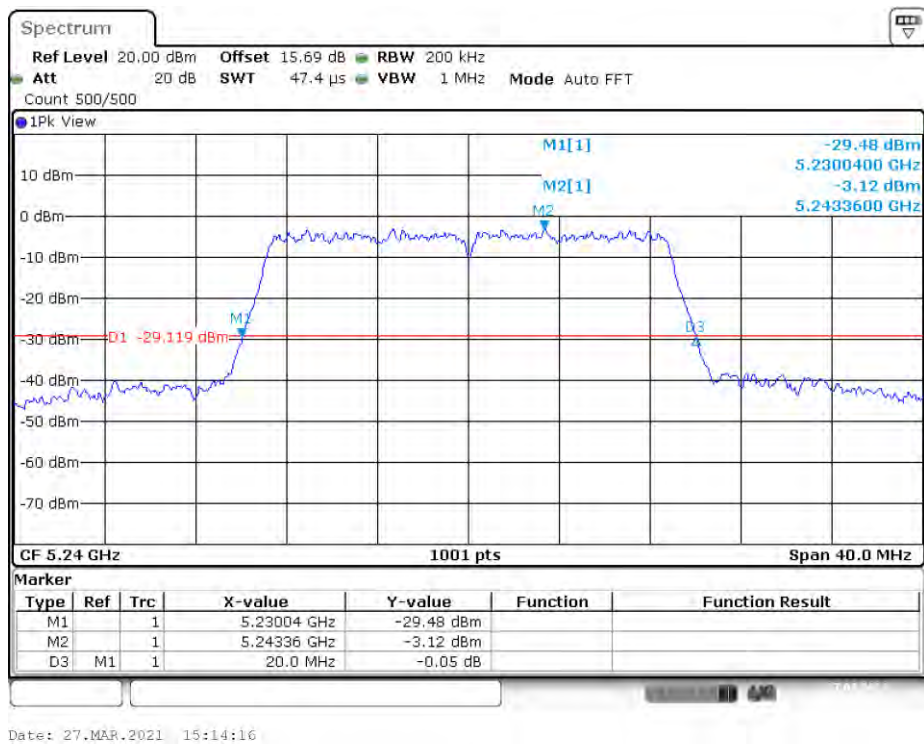
Date: 27.MAR.2021 15:07:59

802.11ac20 mode, 26 dB Emissions, 5200 MHz

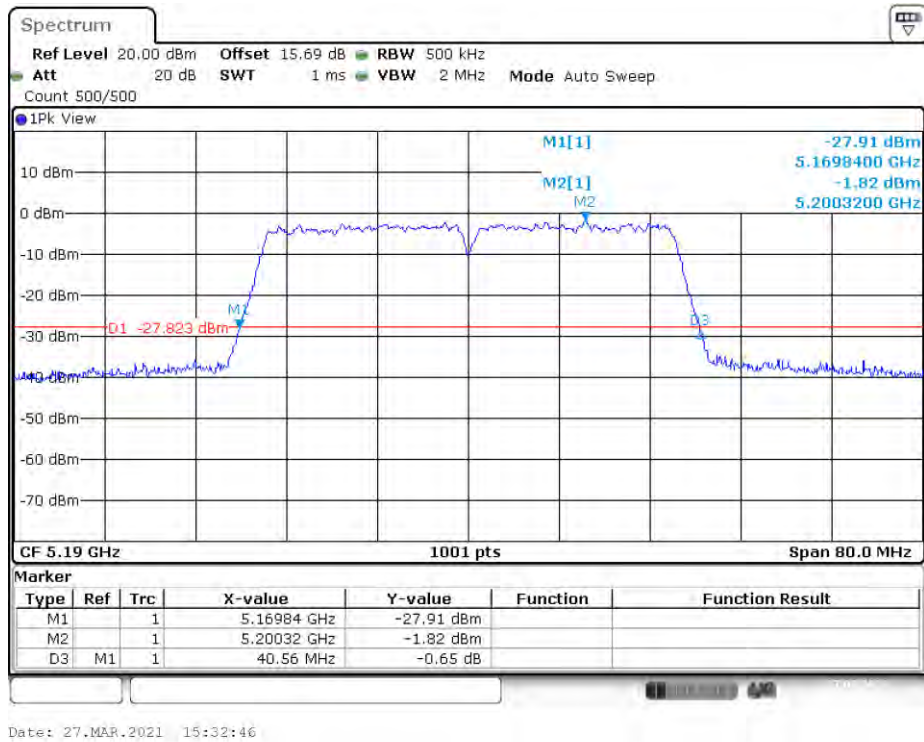


Date: 27.MAR.2021 15:11:46

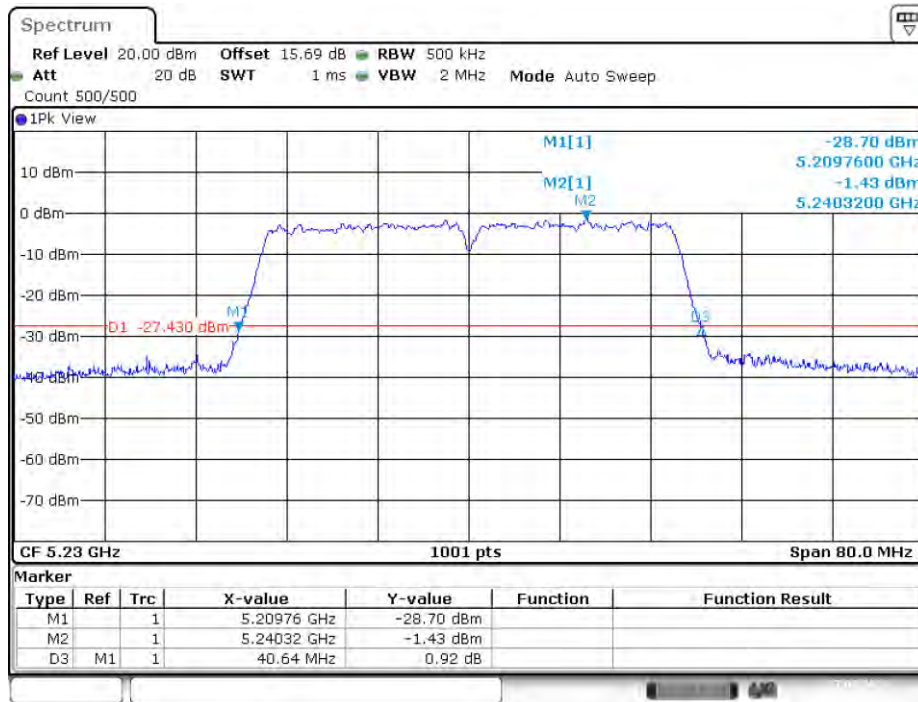
802.11ac20 mode, 26 dB Emissions, 5240 MHz



802.11ac40 mode, 26 dB Emissions, 5190 MHz

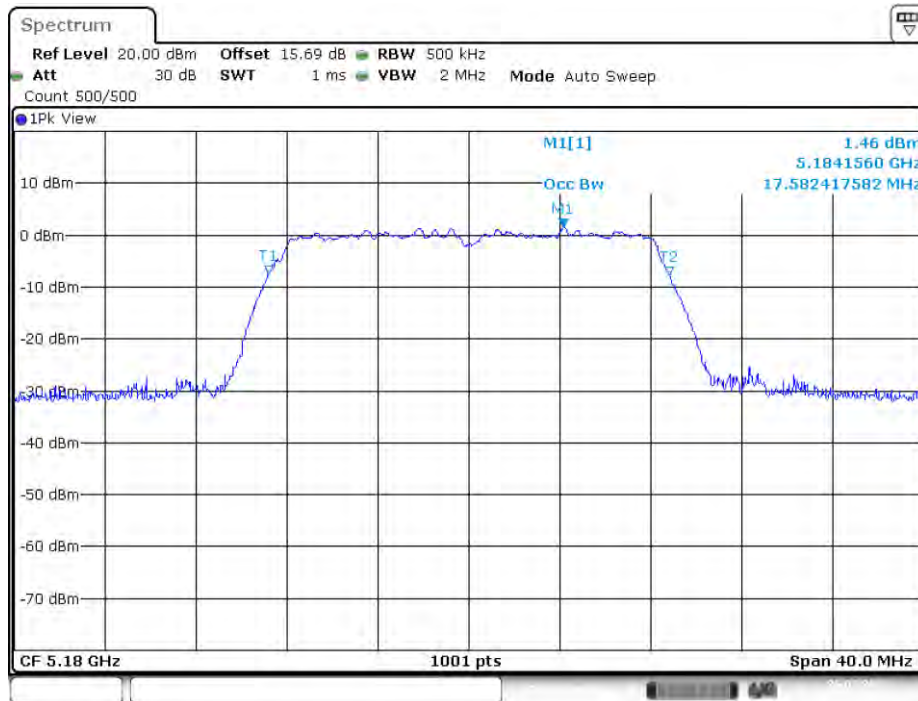


802.11ac40 mode, 26 dB Emissions, 5230 MHz

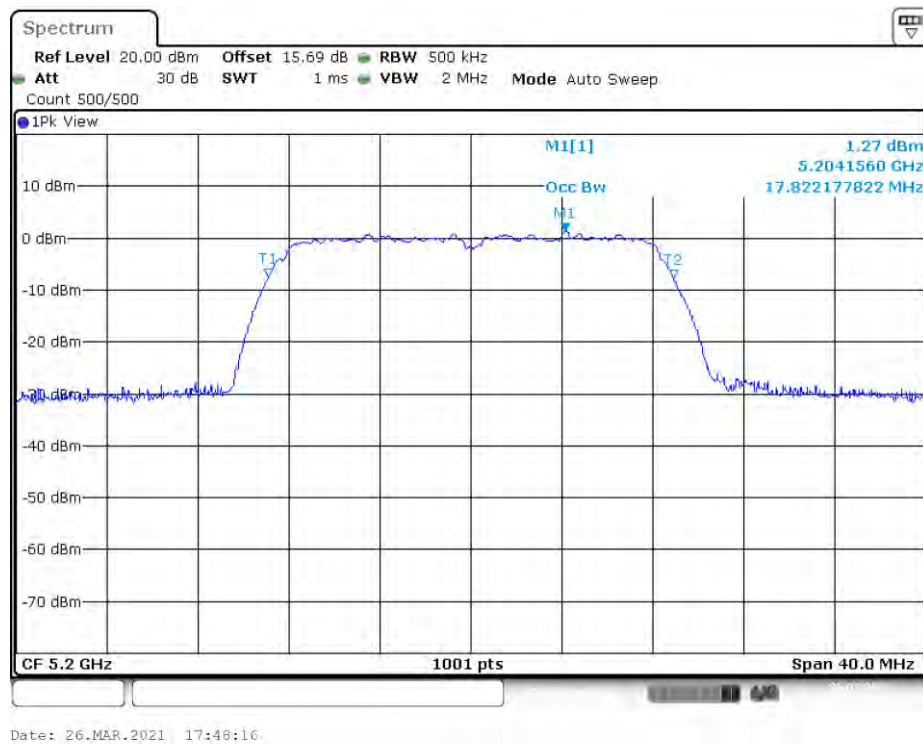
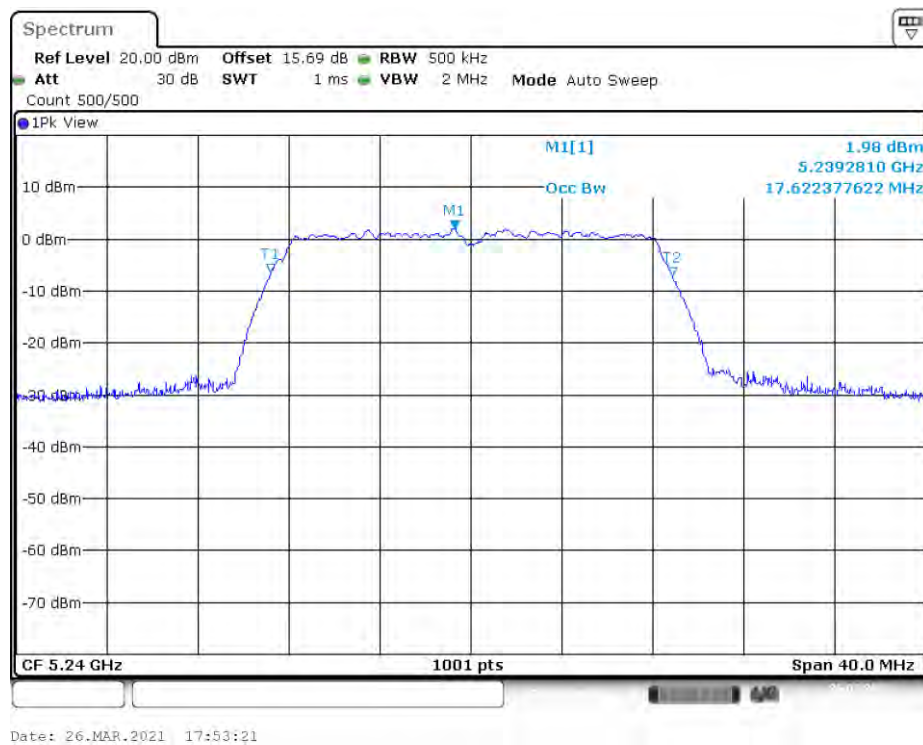


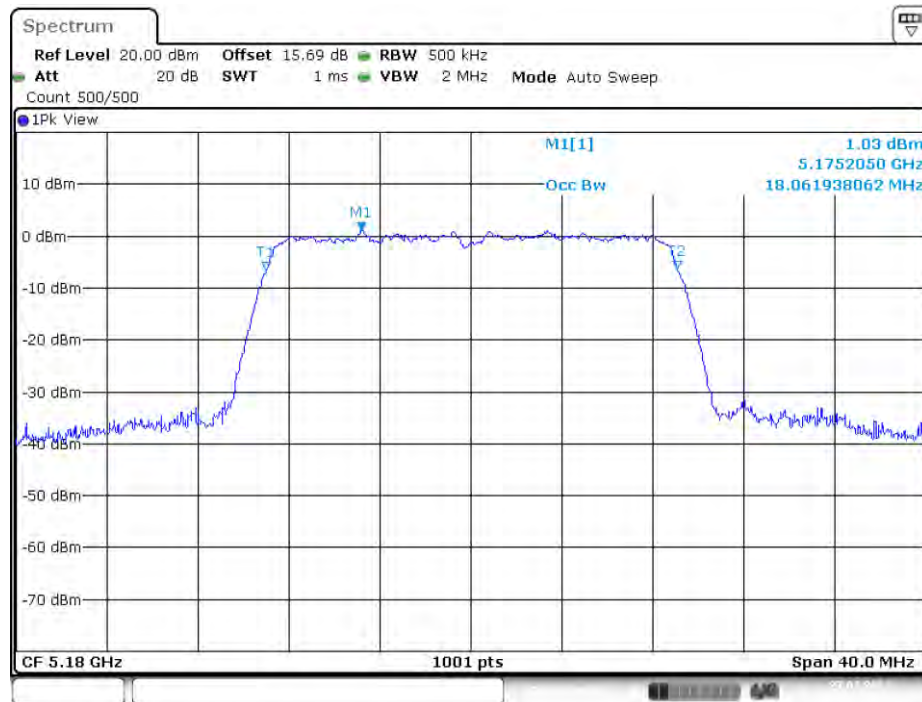
Date: 27.MAR.2021 15:37:36

802.11a mode, 99% Occupied Bandwidth, 5180 MHz

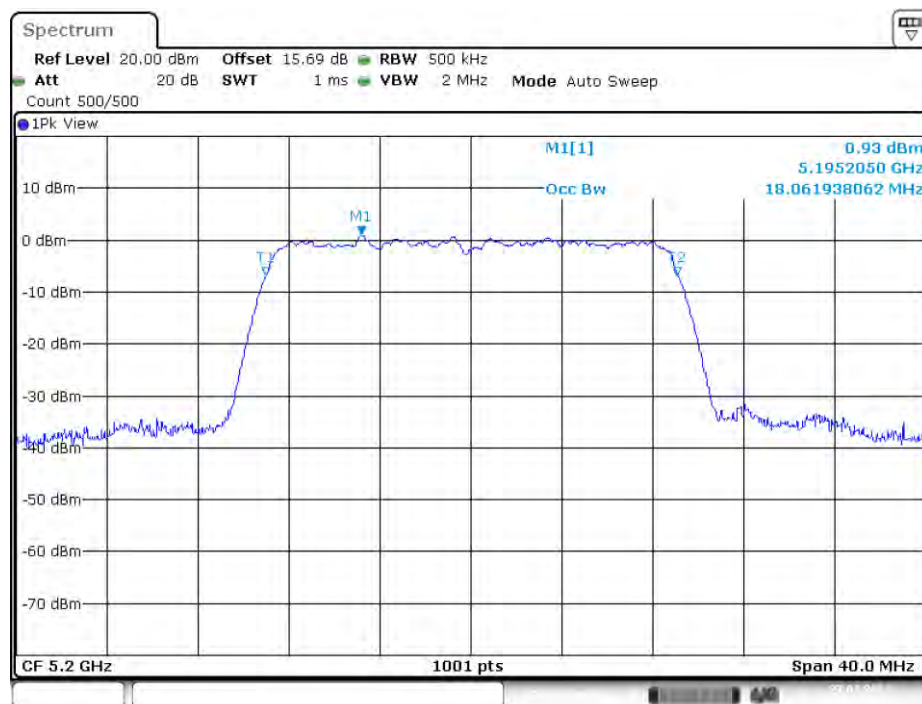


Date: 26.MAR.2021 17:41:31

802.11a mode, 99% Occupied Bandwidth, 5200 MHz**802.11a mode, 99% Occupied Bandwidth, 5240 MHz**

802.11n20 mode, 99% Occupied Bandwidth, 5180 MHz

Date: 27.MAR.2021 14:09:35

802.11n20 mode, 99% Occupied Bandwidth, 5200 MHz

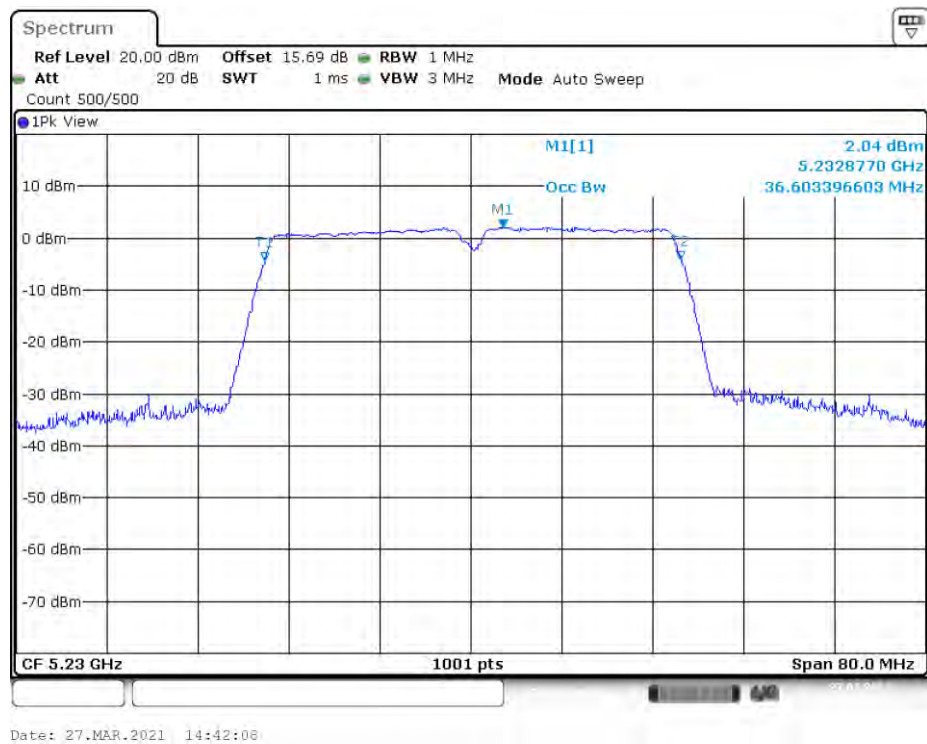
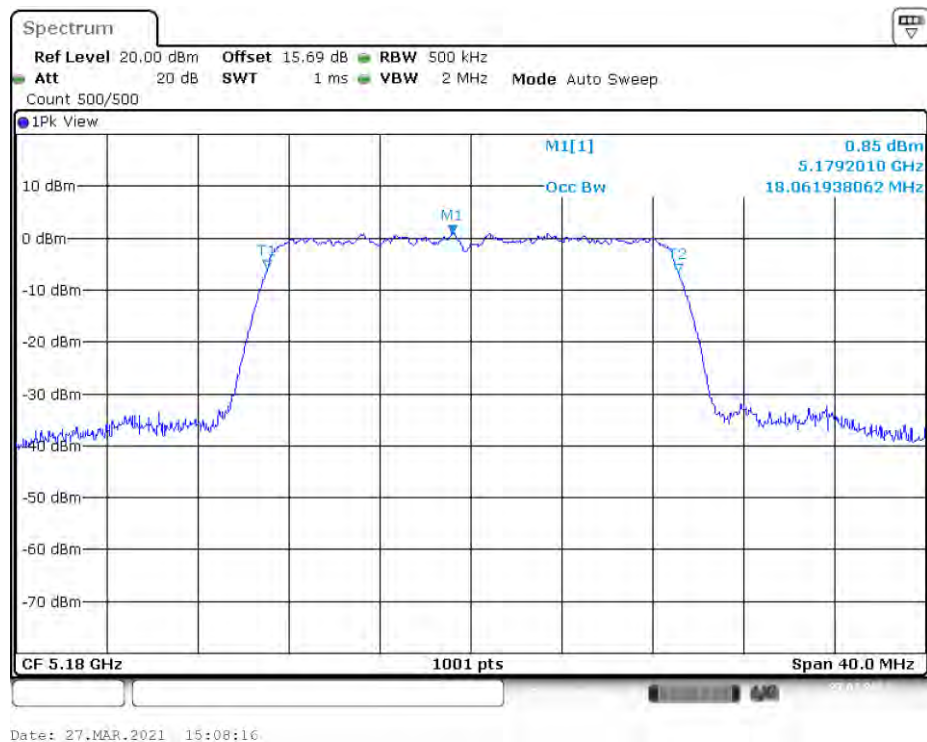
Date: 27.MAR.2021 14:13:22

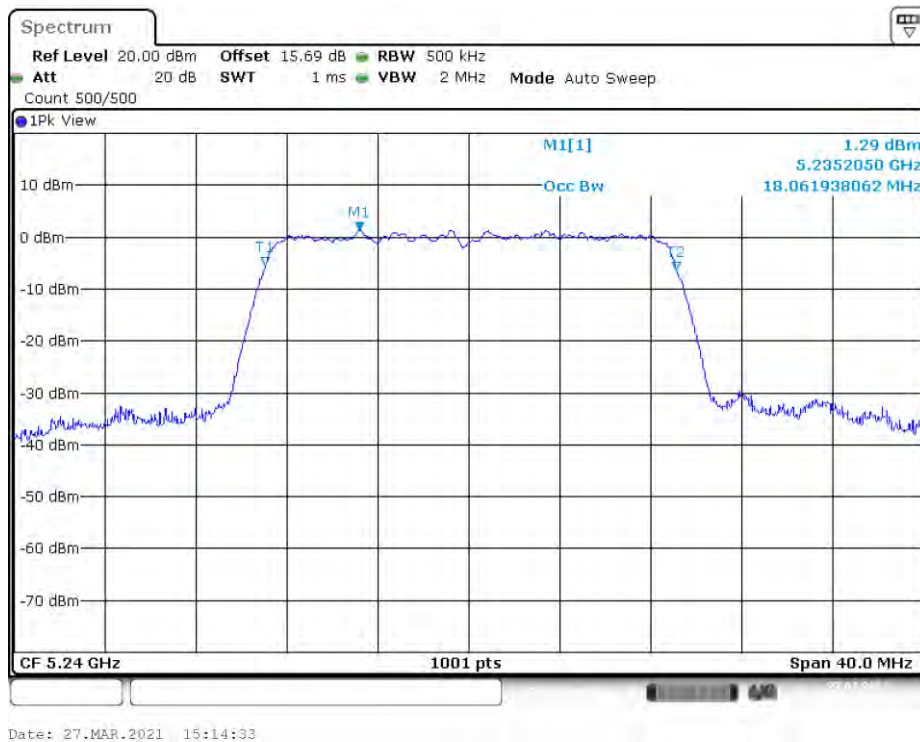
802.11n20 mode, 99% Occupied Bandwidth, 5240 MHz

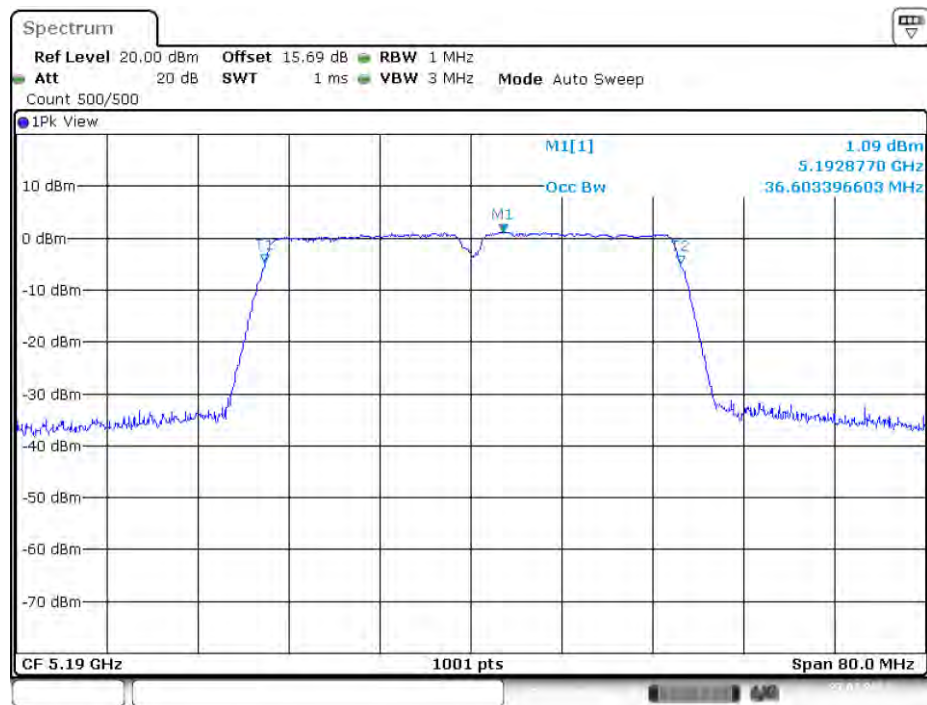
Date: 27.MAR.2021 14:15:48

802.11n40 mode, 99% Occupied Bandwidth, 5190 MHz

Date: 27.MAR.2021 14:33:27

802.11n40 mode, 99% Occupied Bandwidth, 5230 MHz**802.11ac20 mode, 99% Occupied Bandwidth, 5180 MHz**

802.11ac20 mode, 99% Occupied Bandwidth, 5200 MHz**802.11ac20 mode, 99% Occupied Bandwidth, 5240 MHz**

802.11ac40 mode, 99% Occupied Bandwidth, 5190 MHz

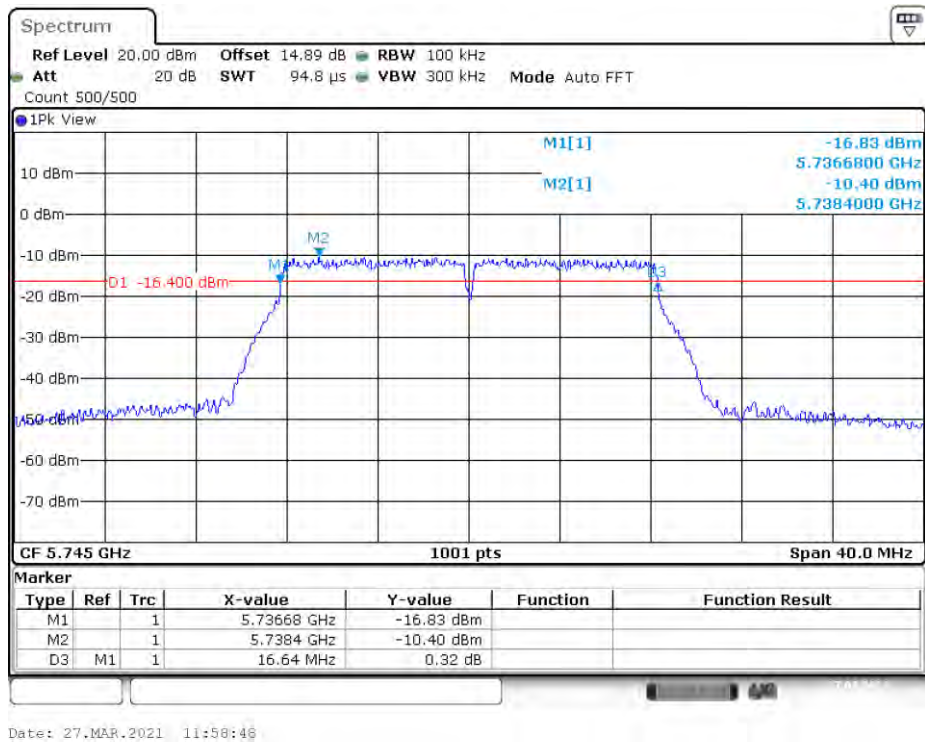
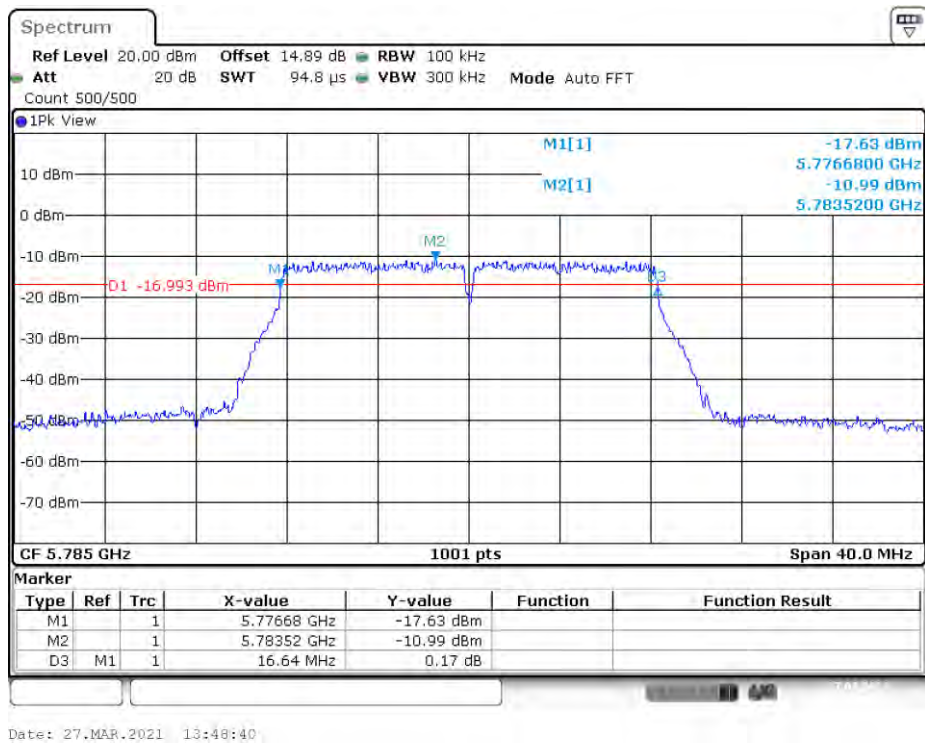
Date: 27.MAR.2021 15:33:04

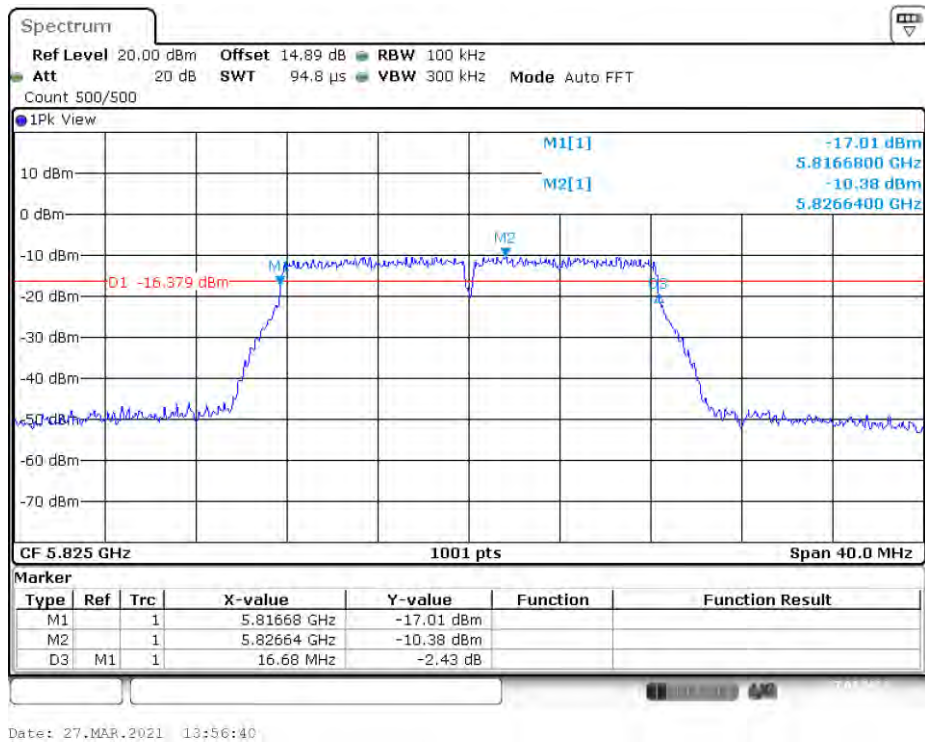
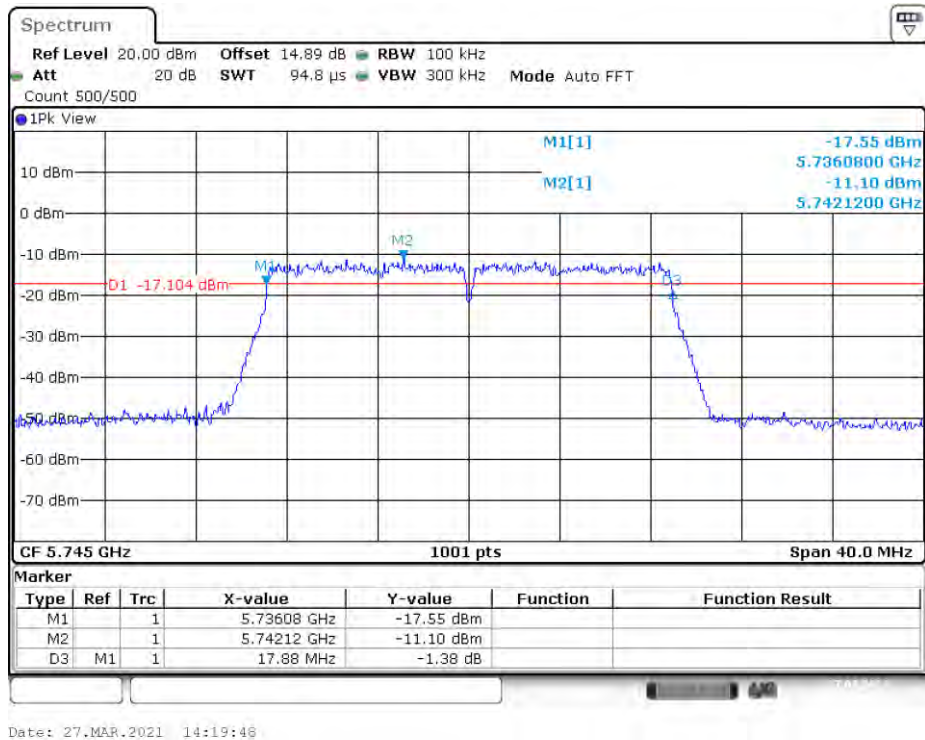
802.11ac40 mode, 99% Occupied Bandwidth, 5230 MHz

Date: 27.MAR.2021 15:37:53

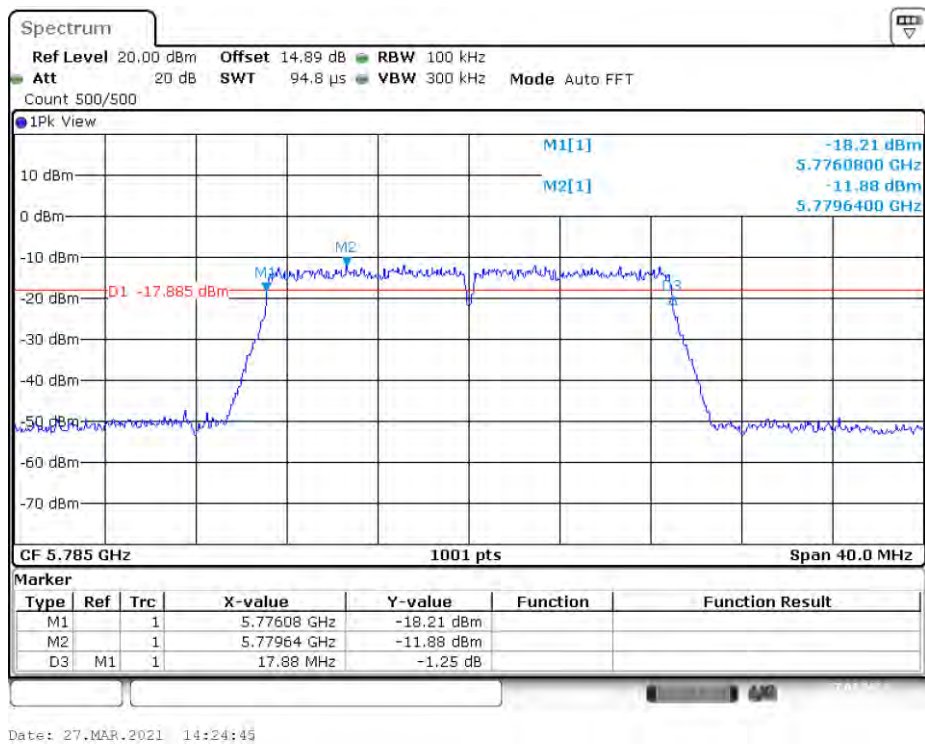
5725 MHz – 5850 MHz:

Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark
802.11a				No transmitted signal in the 99% bandwidth extends into the U-NII-2C band
5745	16.640	17.782	0.5	
5785	16.640	17.542	0.5	
5825	16.680	17.582	0.5	
802.11n20				
5745	17.880	18.102	0.5	
5785	17.880	18.062	0.5	
5825	17.880	18.062	0.5	
802.11n40				
5755	36.720	36.763	0.5	
5795	36.720	36.683	0.5	
802.11ac20				
5745	17.880	18.102	0.5	
5785	17.880	18.102	0.5	
5825	17.880	18.062	0.5	
802.11ac40				
5755	36.720	36.763	0.5	
5795	36.720	36.683	0.5	

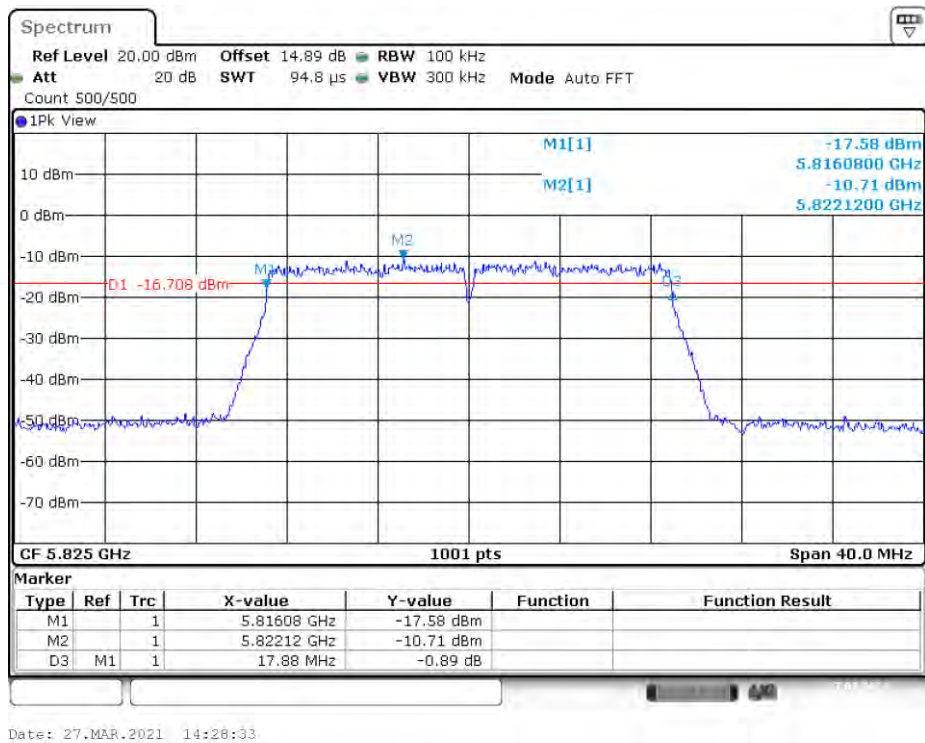
802.11a mode, 6dB Emission Bandwidth, 5745 MHz**802.11a mode, 6dB Emission Bandwidth, 5785 MHz**

802.11a mode, 6dB Emission Bandwidth, 5825 MHz**802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz**

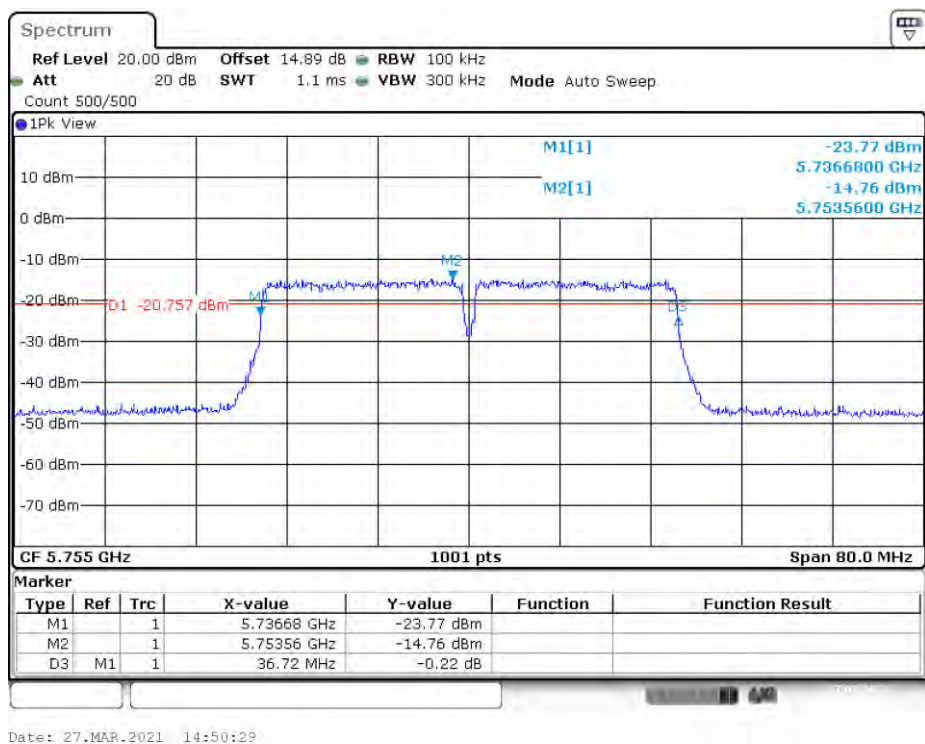
802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz



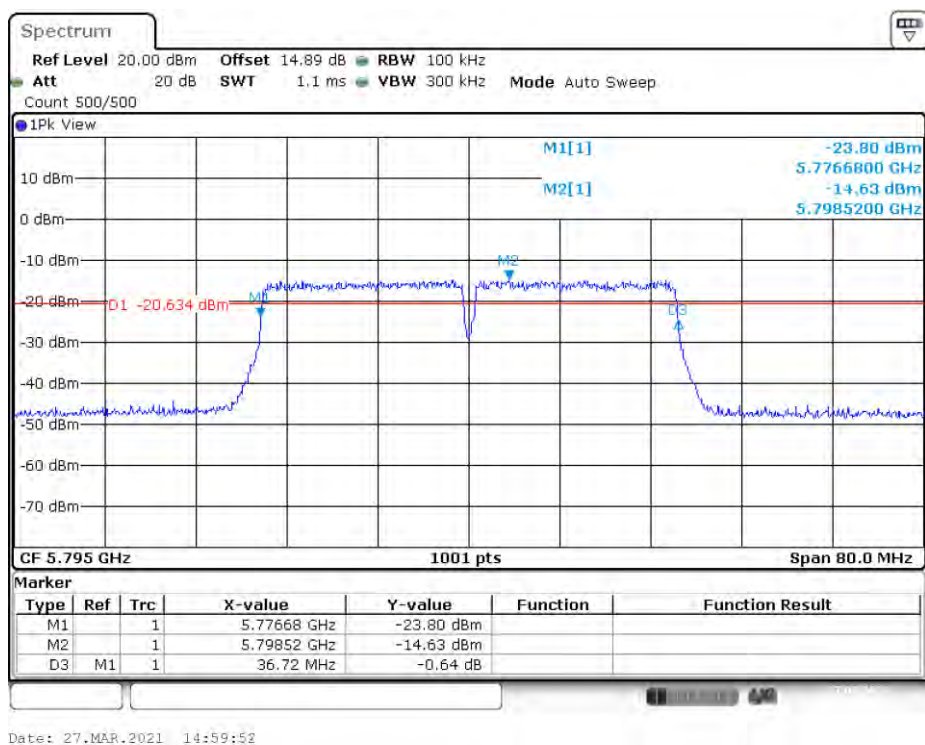
802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz



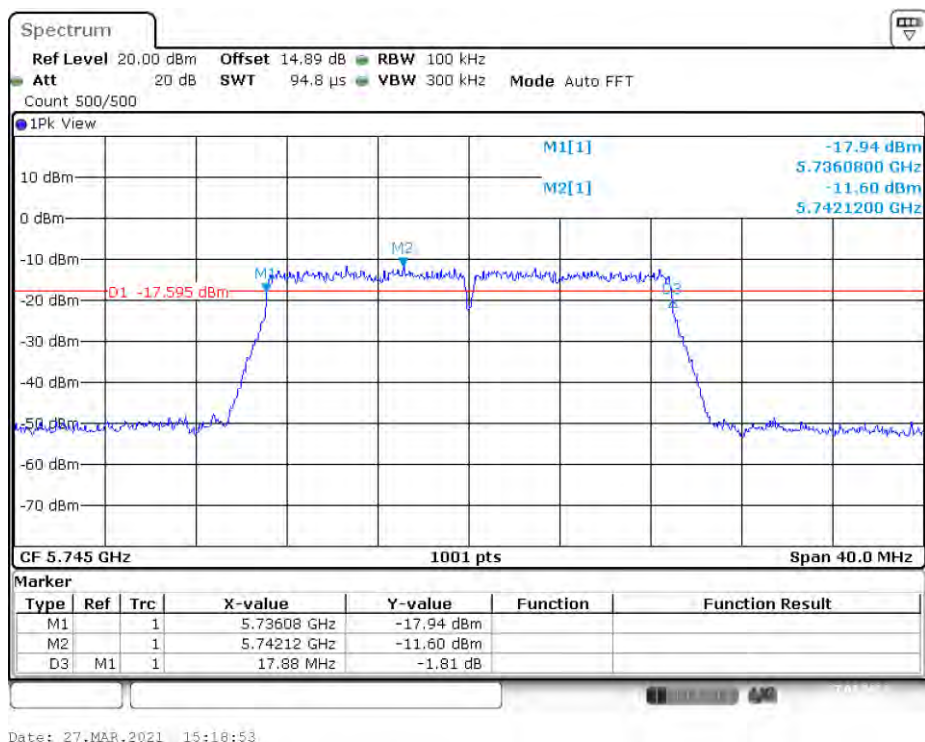
802.11n40 mode, 6dB Emission Bandwidth, 5755 MHz



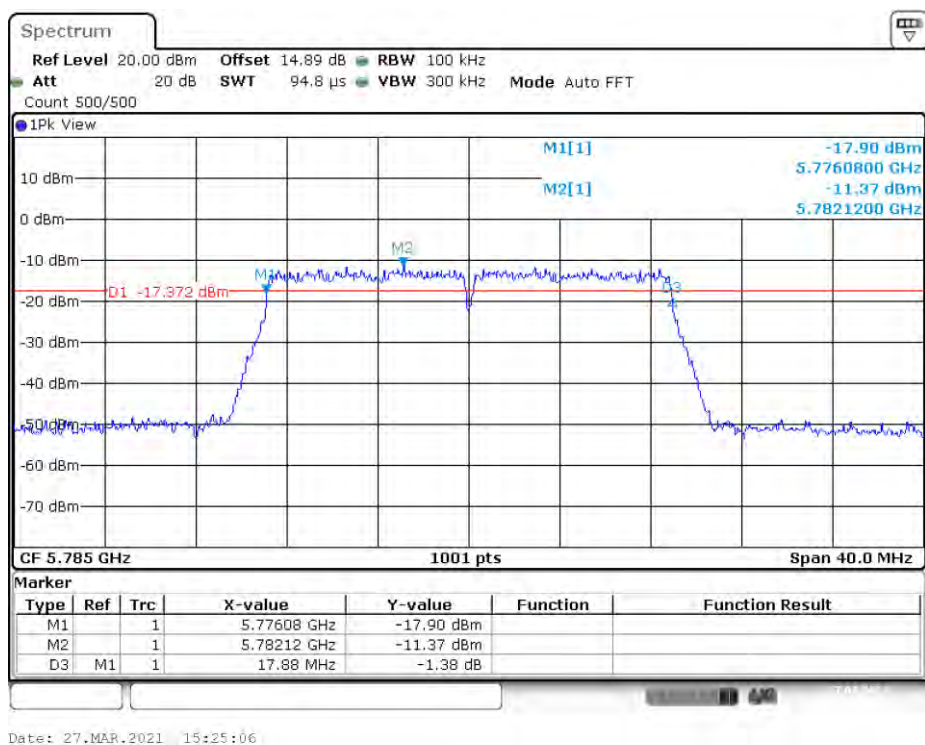
802.11n40 mode, 6dB Emission Bandwidth, 5795 MHz

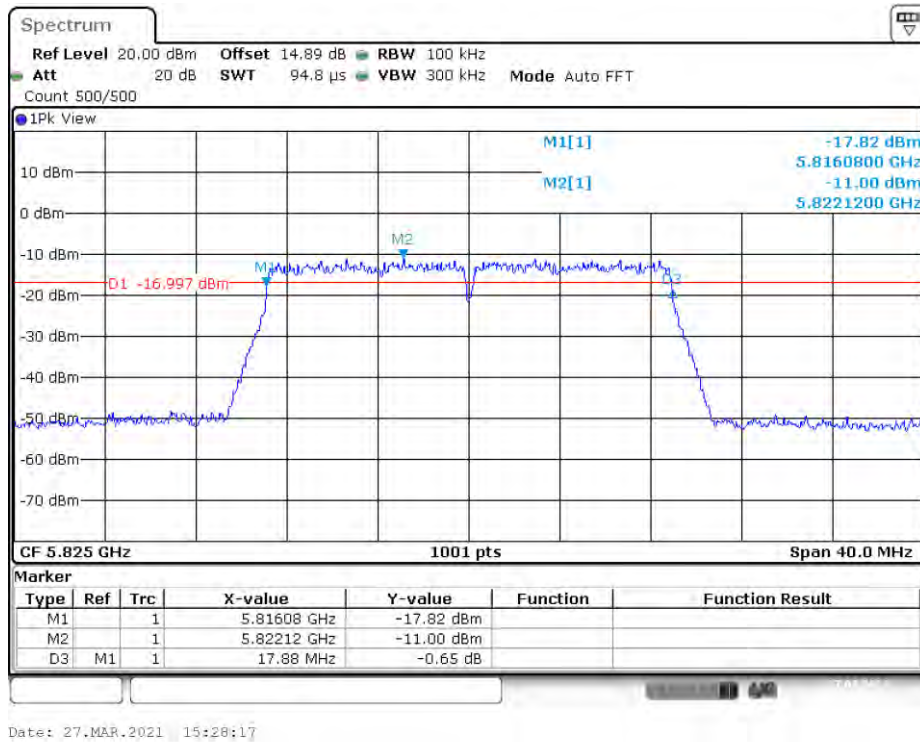
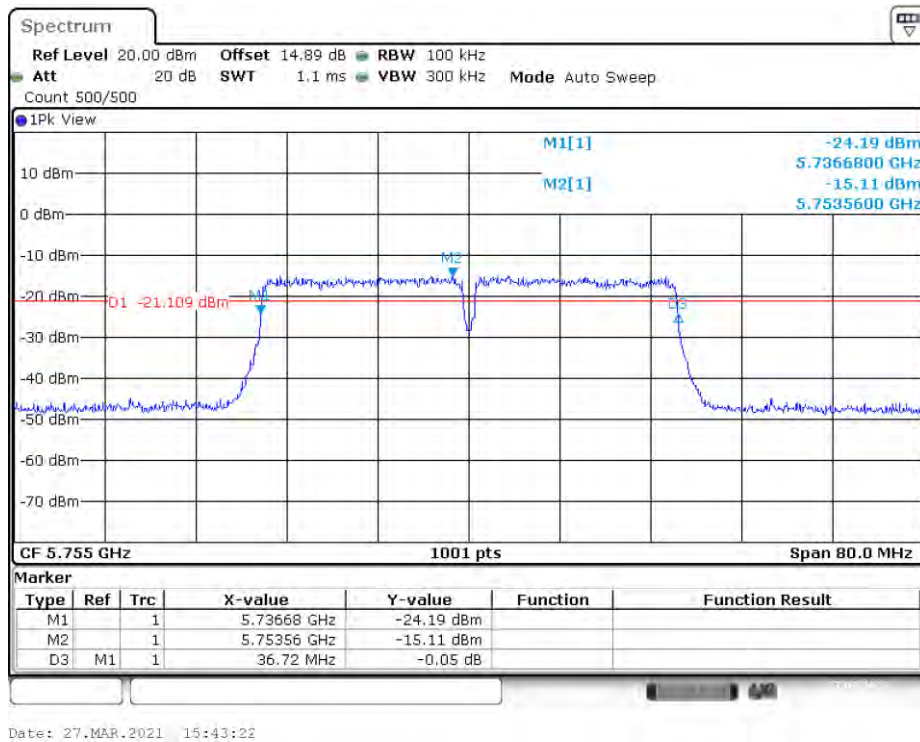


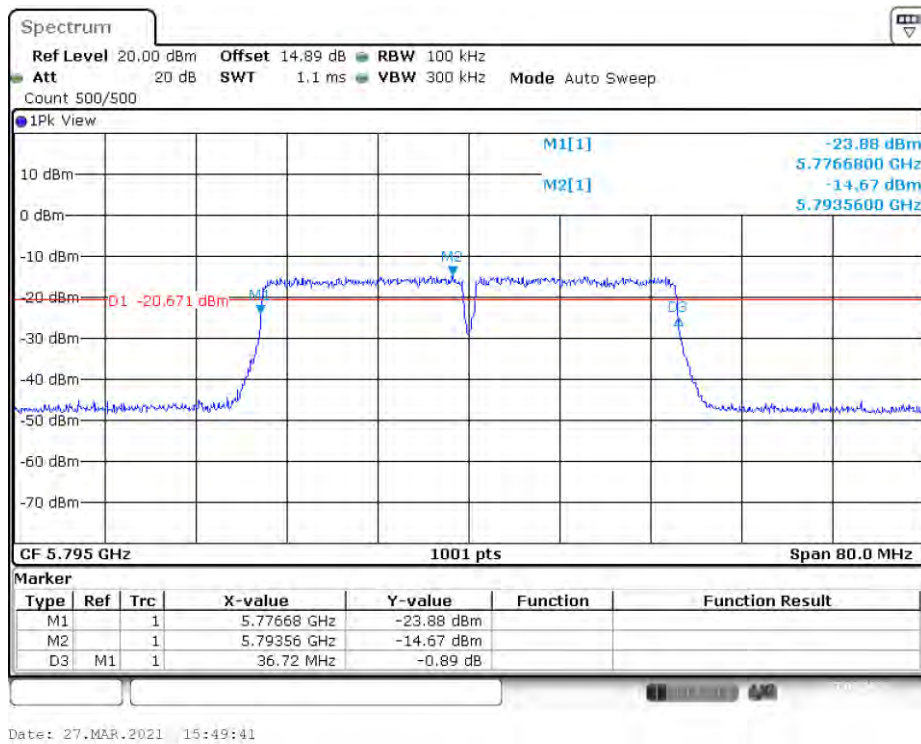
802.11ac20 mode, 6dB Emission Bandwidth, 5745 MHz

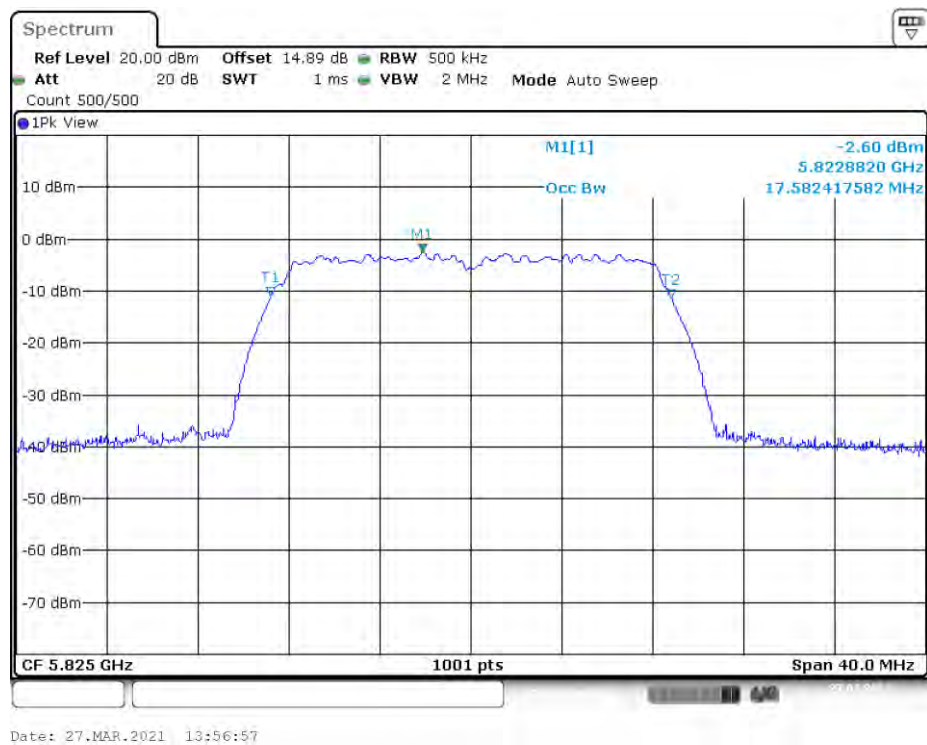


802.11ac20 mode, 6dB Emission Bandwidth, 5785 MHz

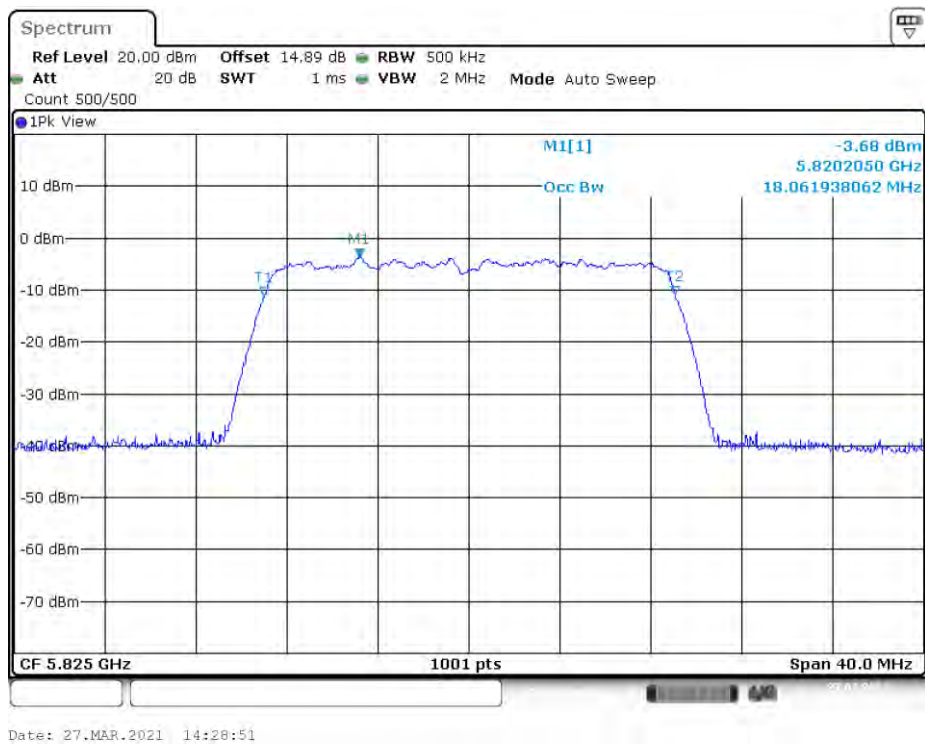
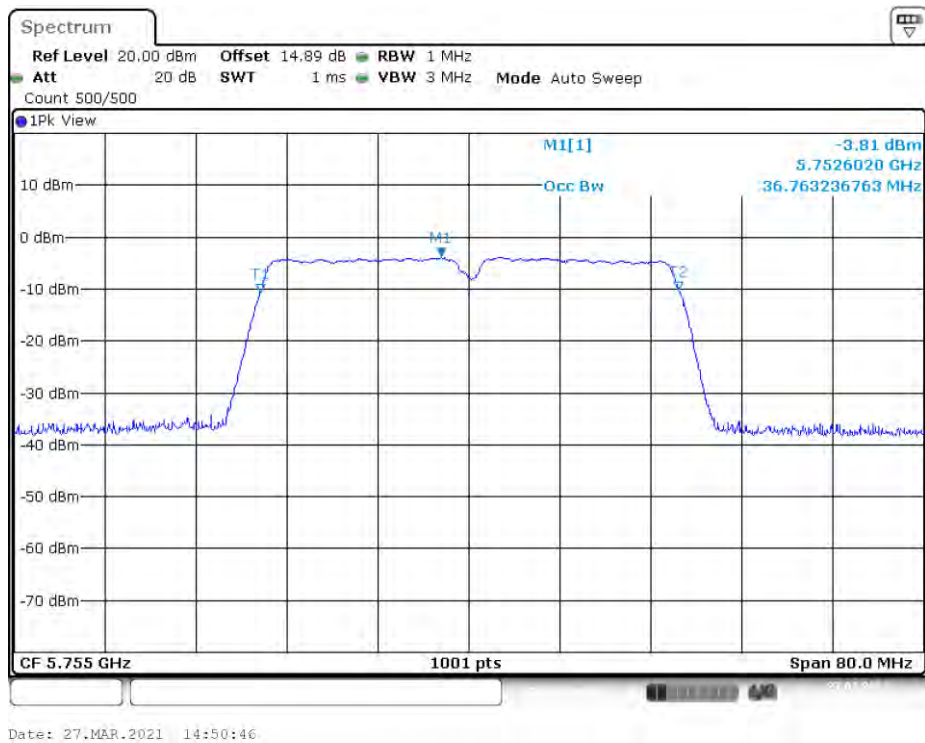


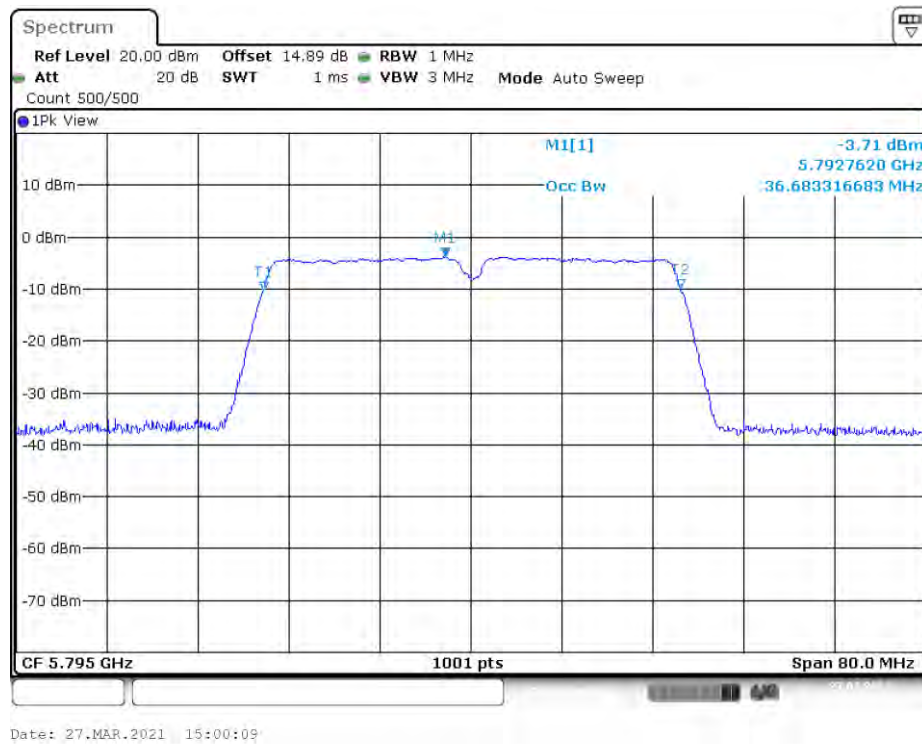
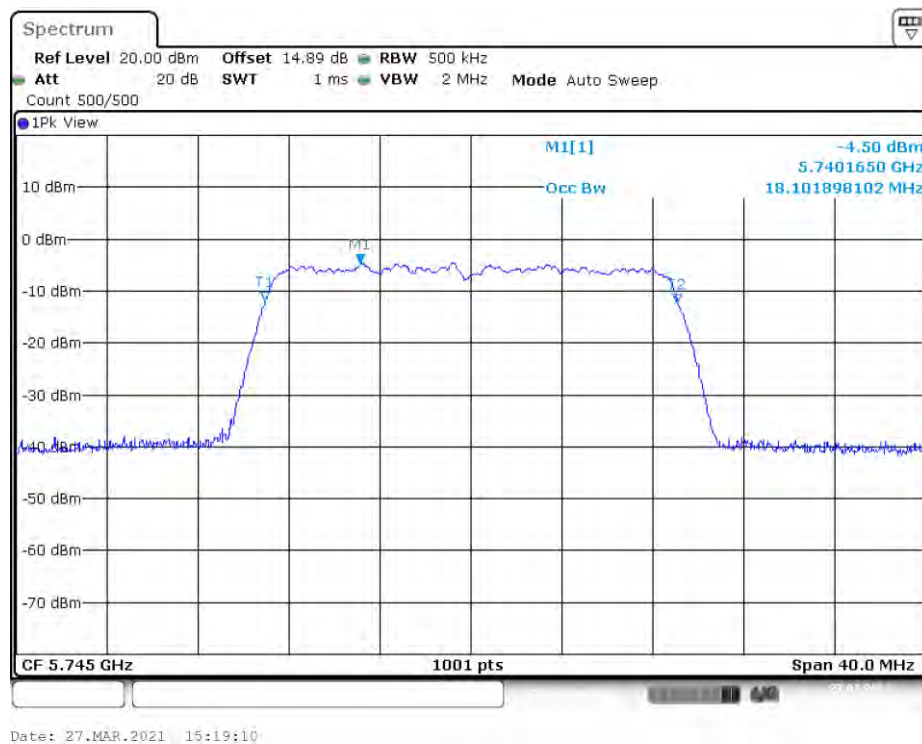
802.11ac20 mode, 6dB Emission Bandwidth, 5825 MHz**802.11ac40 mode, 6dB Emission Bandwidth, 5755 MHz**

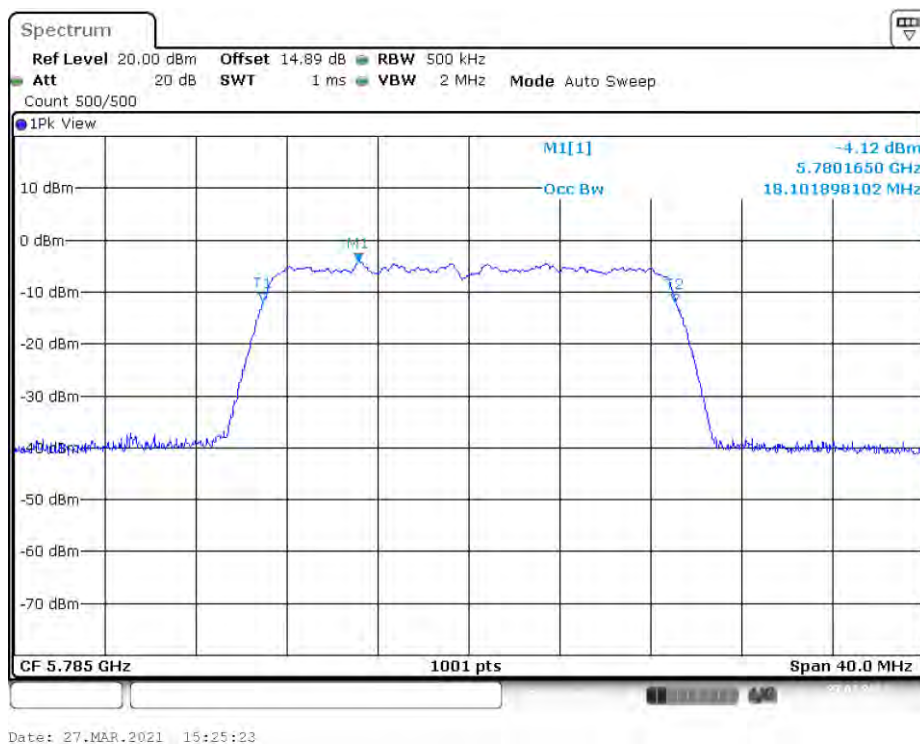
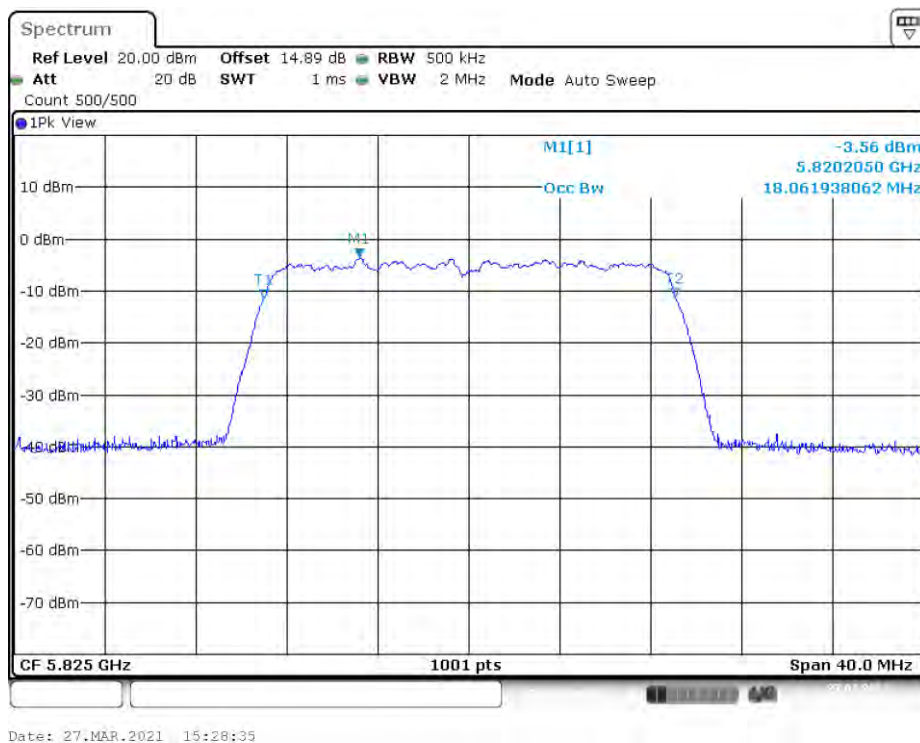
802.11ac40 mode, 6dB Emission Bandwidth, 5795 MHz**802.11a mode, 99% Occupied Bandwidth, 5745 MHz**

802.11a mode, 99% Occupied Bandwidth, 5785 MHz**802.11a mode, 99% Occupied Bandwidth, 5825 MHz**

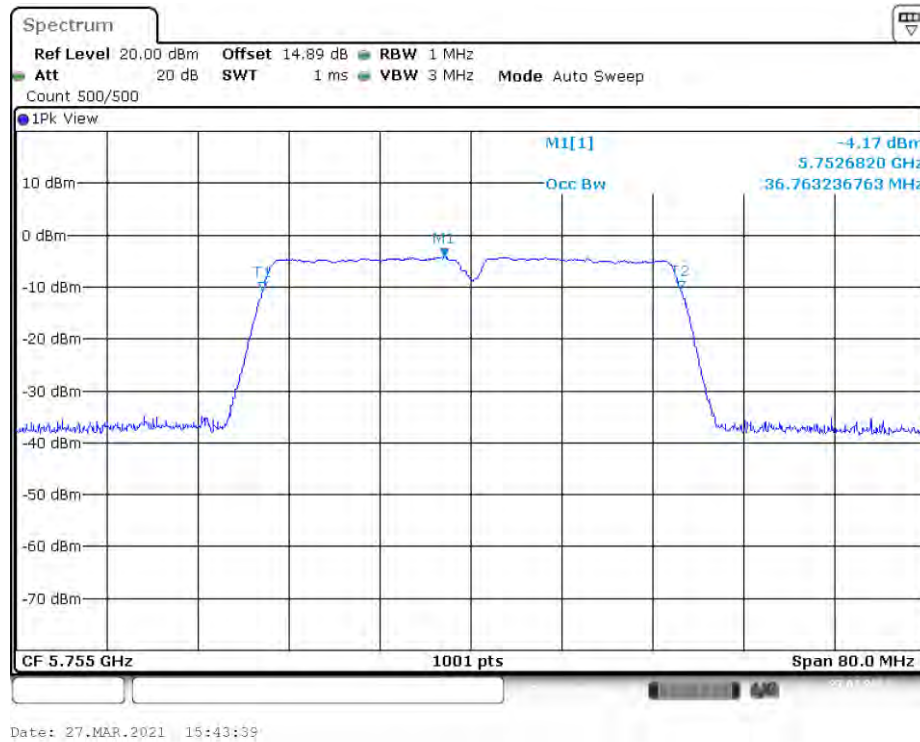
802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz**802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz**

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz**802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz**

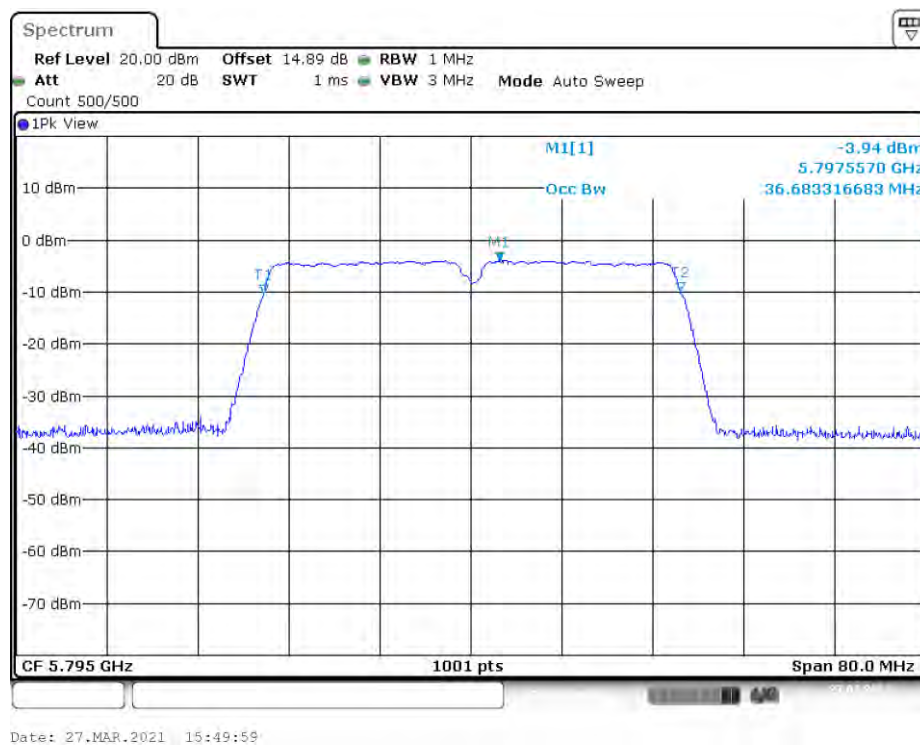
802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz**802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz**

802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz**802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz**

802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz



802.11ac40 mode, 99% Occupied Bandwidth, 5795 MHz




FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-27.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

5150 MHz – 5250 MHz

Frequency (MHz)	Conducted Output Peak Power (dBm)	Duty Cycle Factor (dB)	Corrected Conducted Output Peak Power (dBm)	Limit (dBm)
802.11a				
5180	14.78	0	14.78	24
5200	14.62	0	14.62	
5240	15.57	0	15.57	
802.11n20				
5180	14.40	0	14.40	24
5200	14.08	0	14.08	
5240	14.89	0	14.89	
802.11n40				
5190	15.14	0	15.14	24
5230	15.20	0	15.20	
802.11ac20				
5180	14.73	0	14.73	24
5200	14.67	0	14.67	
5240	14.71	0	14.71	
802.11ac40				
5190	15.21	0	15.21	24
5230	15.68	0	15.68	

5725 MHz – 5825 MHz:

Frequency (MHz)	Conducted Output Peak Power (dBm)	Duty Cycle Factor (dB)	Correct Conducted Output Peak Power (dBm)	Limit (dBm)
802.11a				
5745	9.70	0	9.70	30
5785	9.25	0	9.25	
5825	10.04	0	10.04	
802.11n20				
5745	9.29	0	9.29	30
5785	8.88	0	8.88	
5825	9.63	0	9.63	
802.11n40				
5755	9.25	0	9.25	30
5795	9.40	0	9.40	
802.11ac20				
5745	9.82	0	9.82	30
5785	9.68	0	9.68	
5825	9.58	0	9.58	
802.11n40				
5755	8.99	0	8.99	30
5795	9.36	0	9.36	

Note: This product is used for client device.

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-03-27.

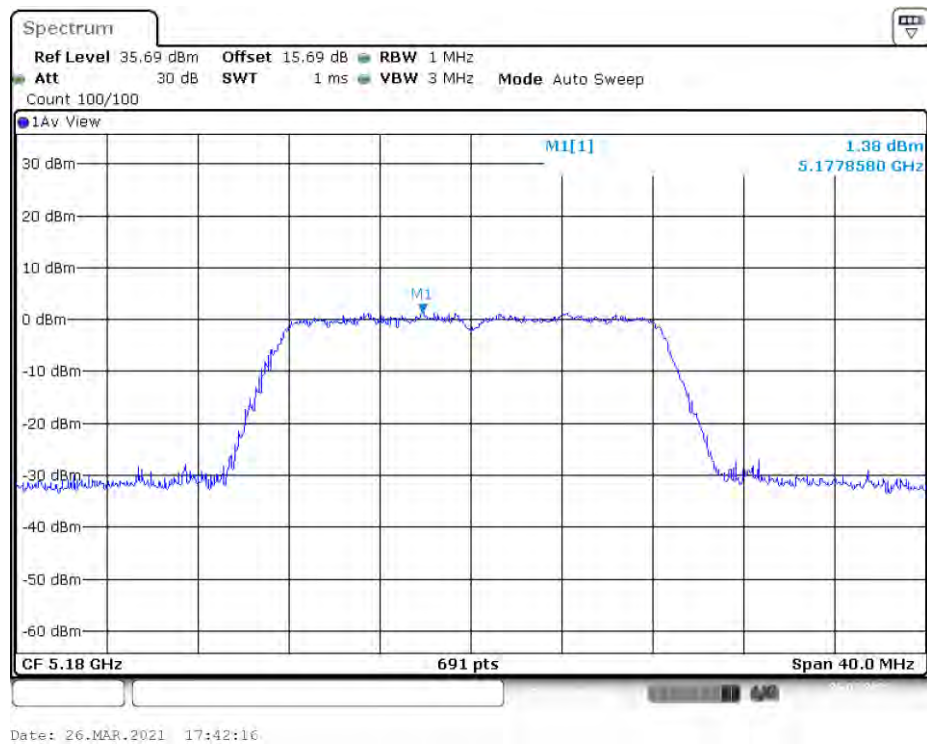
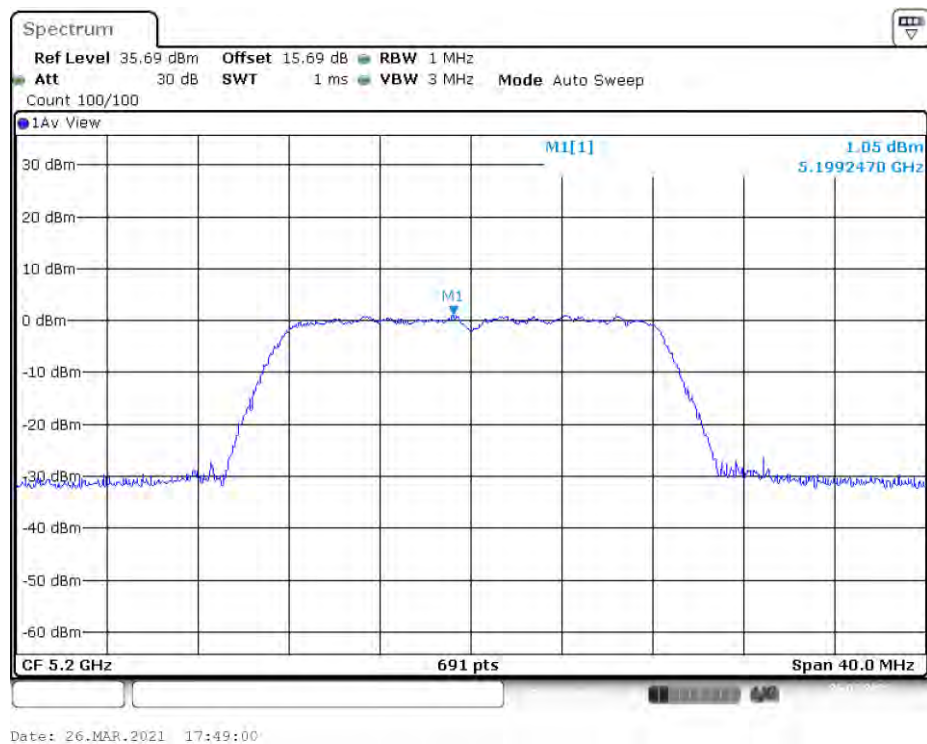
EUT operation mode: Transmitting

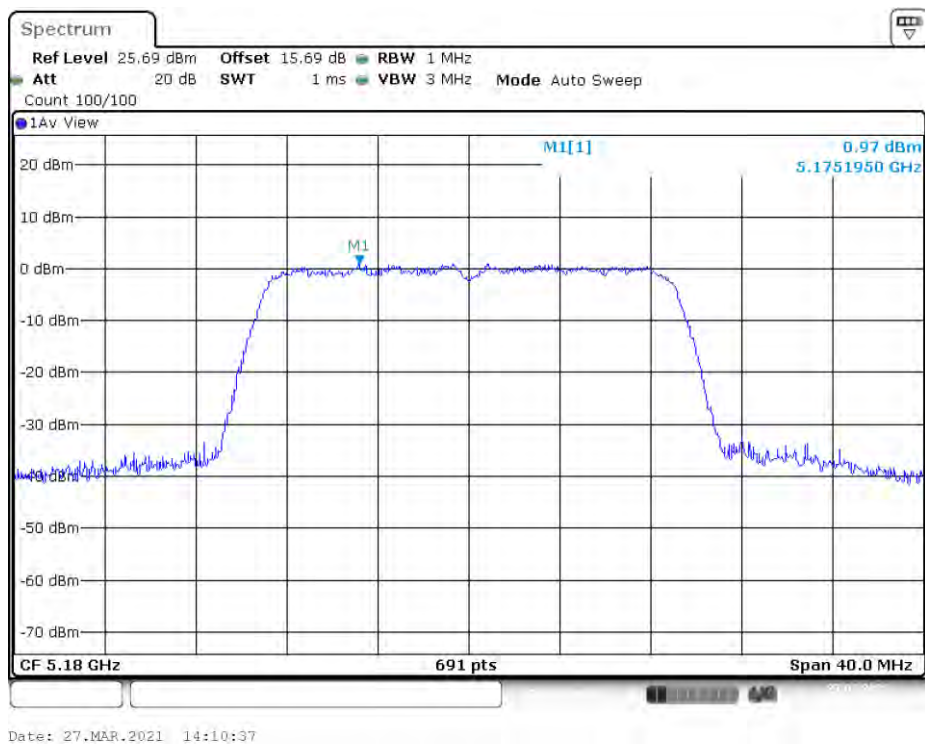
Test Result: Pass

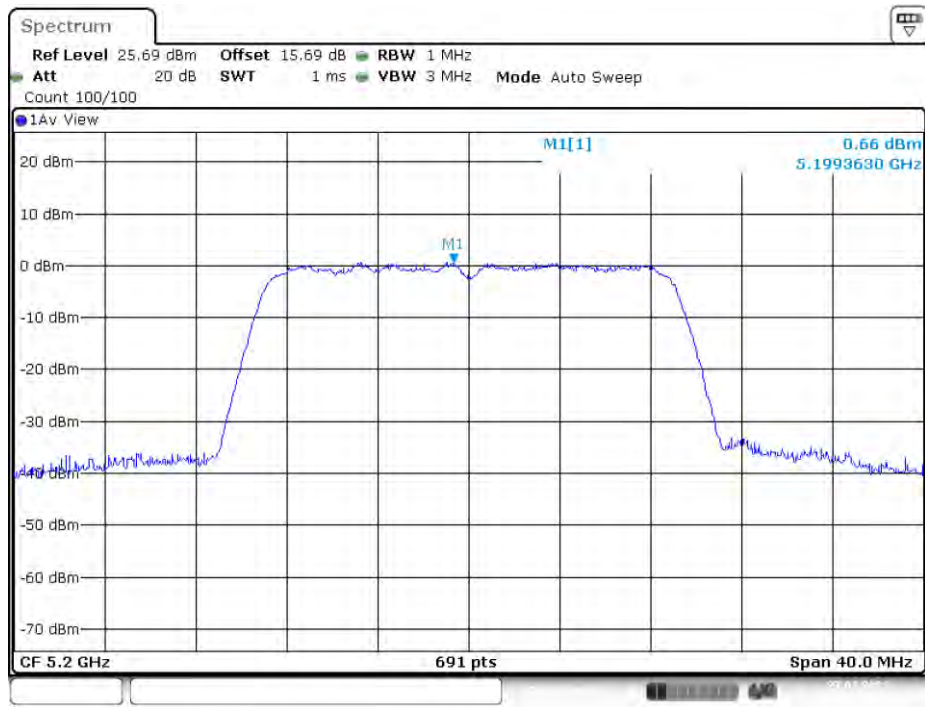
Please refer to the following tables and plots.

5150 – 5250 MHz

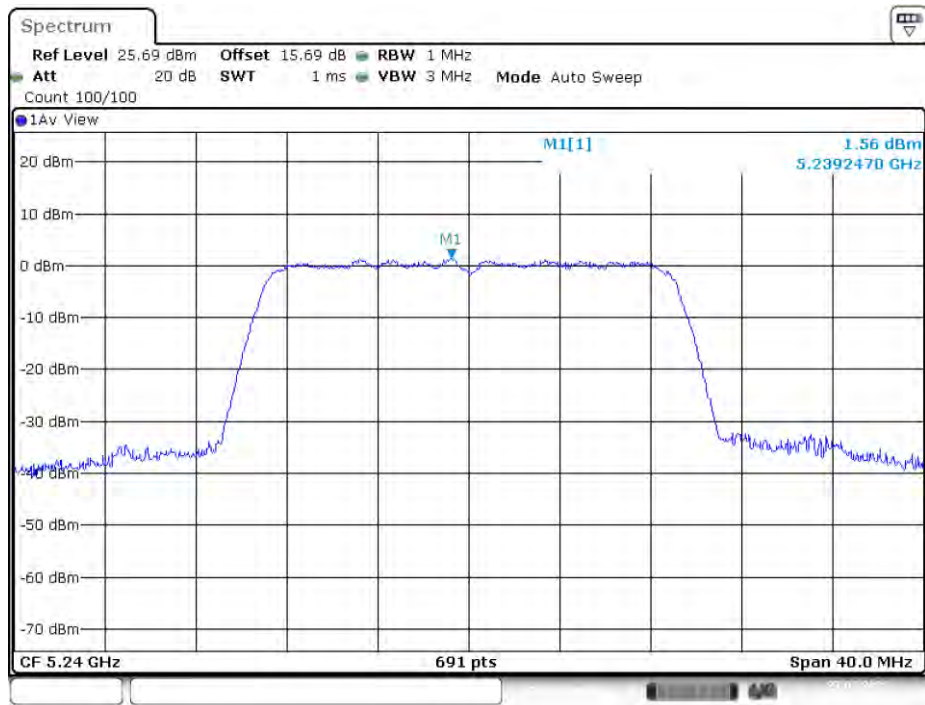
Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Cycle Factor (dB)	Corrected Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a				
5180	1.38	0	1.38	11
5200	1.05	0	1.05	
5240	2.35	0	2.35	
802.11n20				
5180	0.97	0	0.97	11
5200	0.66	0	0.66	
5240	1.56	0	1.56	
802.11n40				
5190	-2.55	0	-2.55	11
5230	-1.09	0	-1.09	
802.11ac20				
5180	1.1	0	1.1	11
5200	0.69	0	0.69	
5240	1.26	0	1.26	
802.11ac40				
5190	-2.67	0	-2.67	11
5230	-1.87	0	-1.87	

802.11a mode, Power Spectral Density, 5180 MHz**802.11a mode, Power Spectral Density, 5200 MHz**

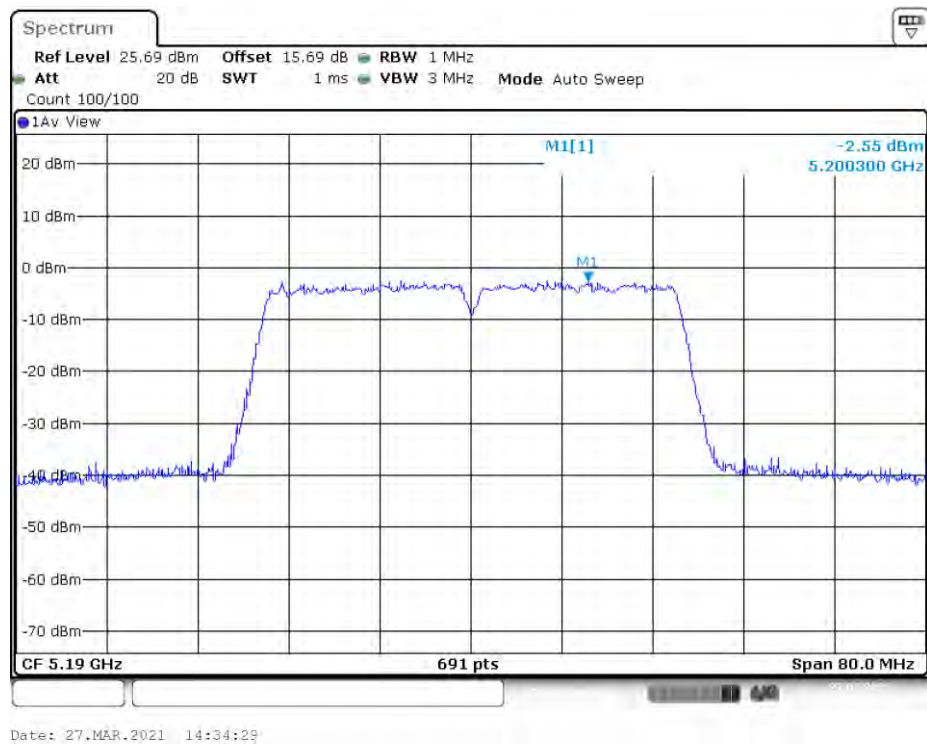
802.11a mode, Power Spectral Density, 5240 MHz**802.11n20 mode, Power Spectral Density, 5180 MHz**

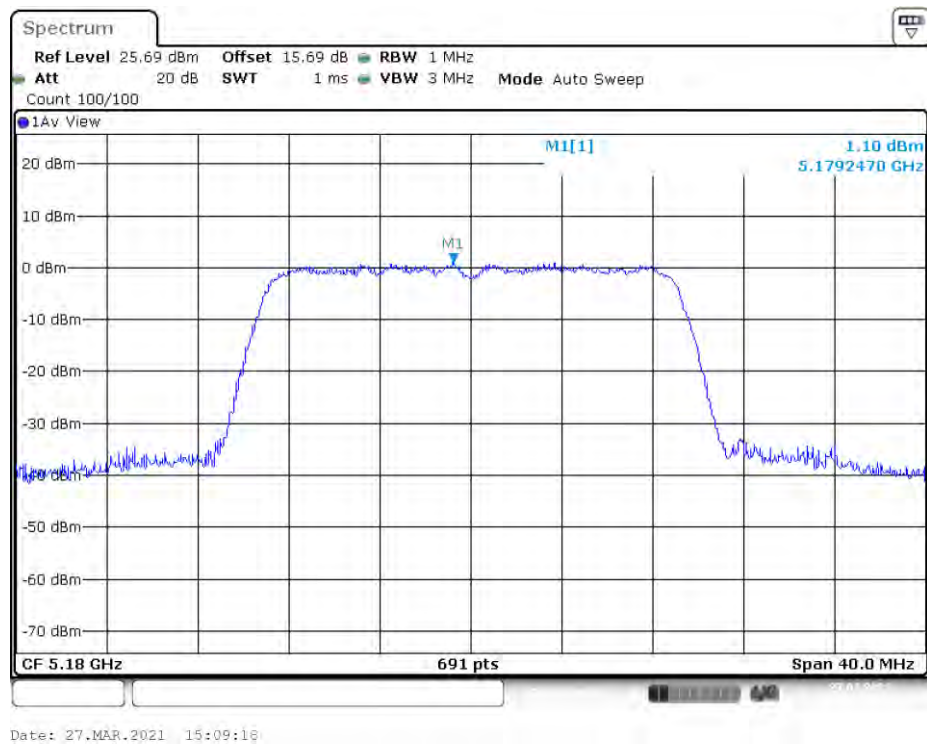
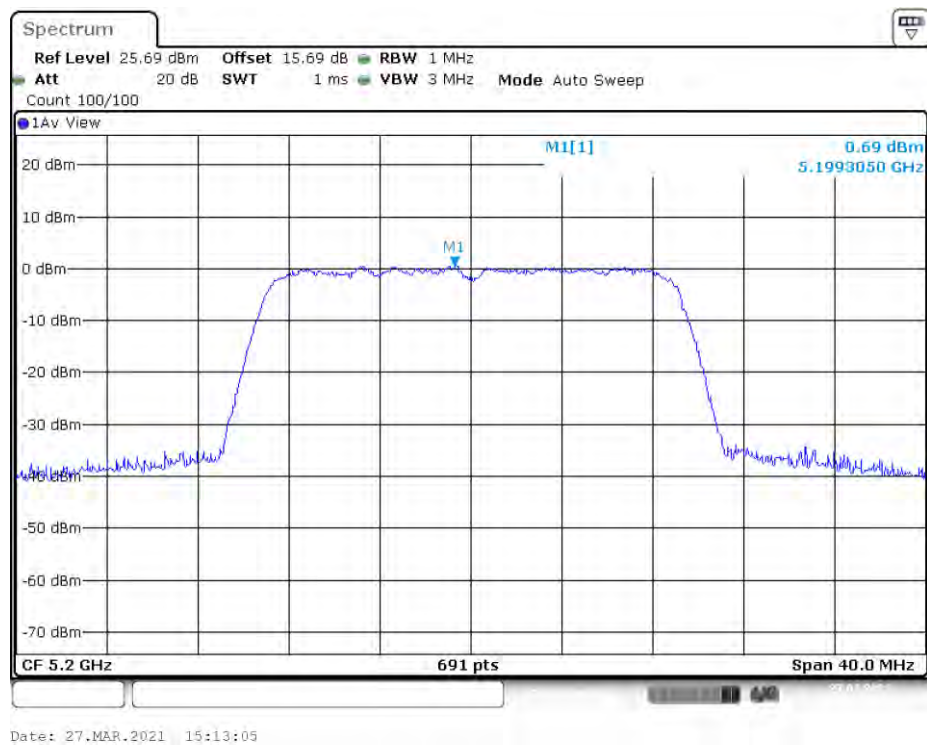
802.11n20 mode, Power Spectral Density, 5200 MHz

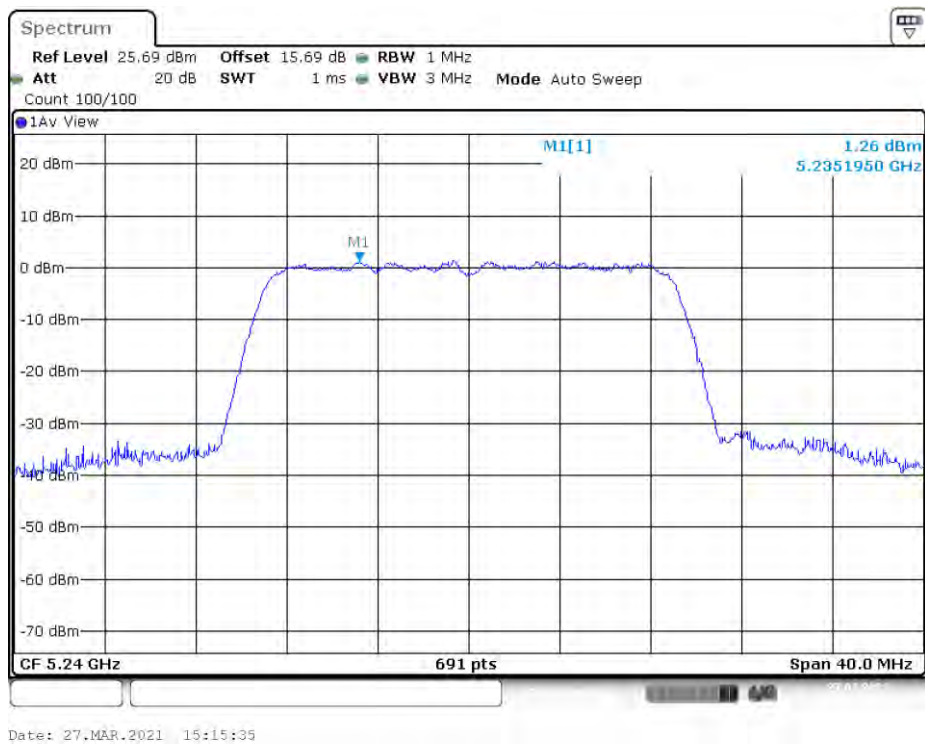
Date: 27.MAR.2021 14:14:25

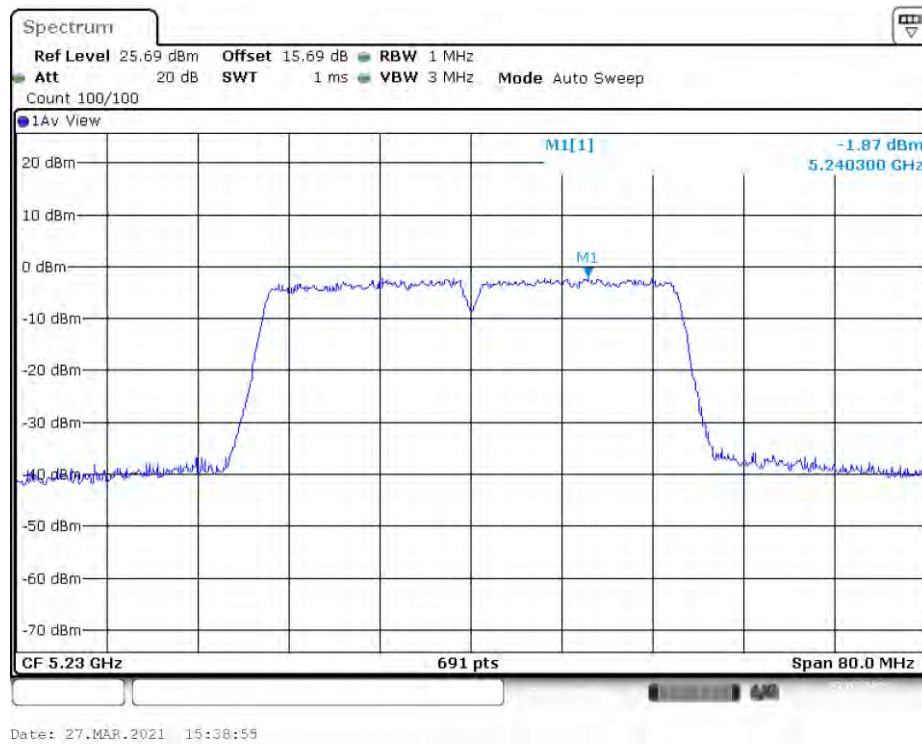
802.11n20 mode, Power Spectral Density, 5240 MHz

Date: 27.MAR.2021 14:16:50

802.11n40 mode, Power Spectral Density, 5190 MHz**802.11n40 mode, Power Spectral Density, 5230 MHz**

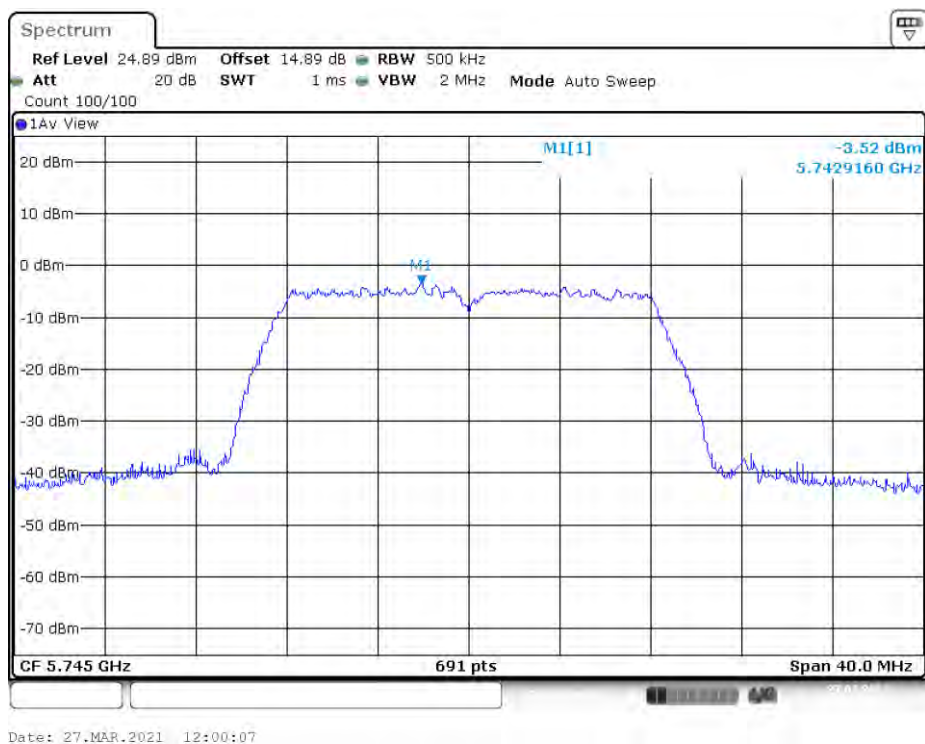
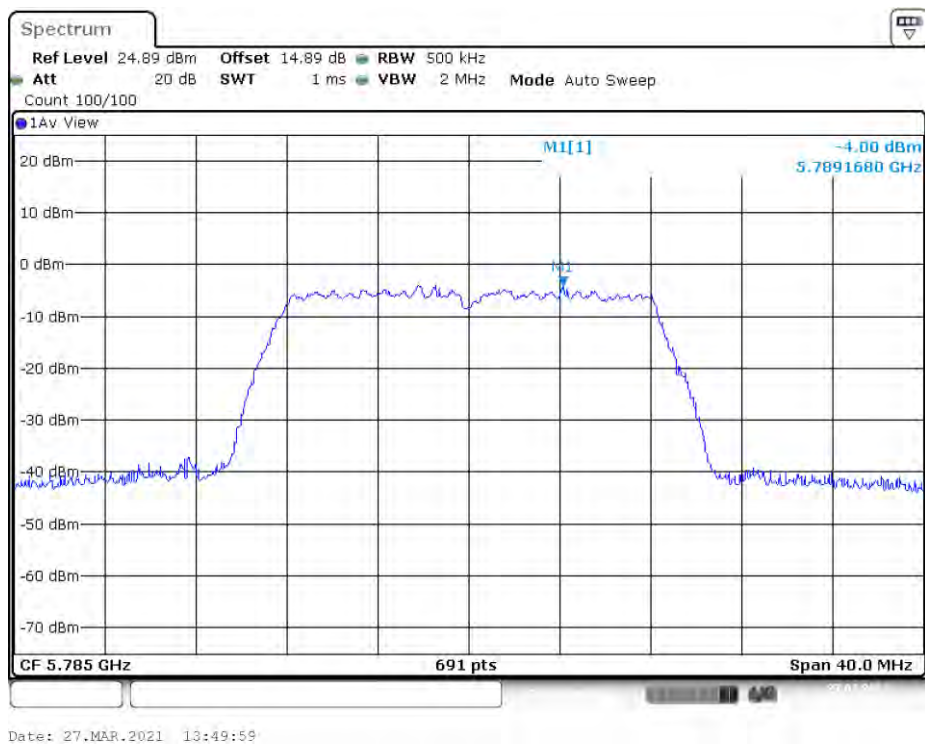
802.11ac20 mode, Power Spectral Density, 5180 MHz**802.11ac20 mode, Power Spectral Density, 5200 MHz**

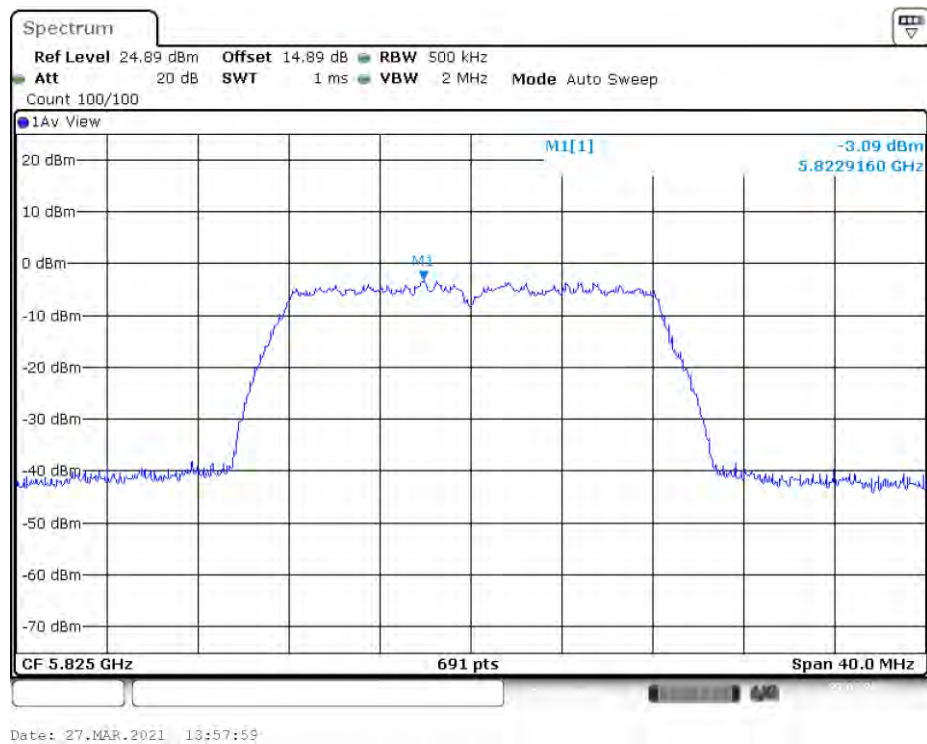
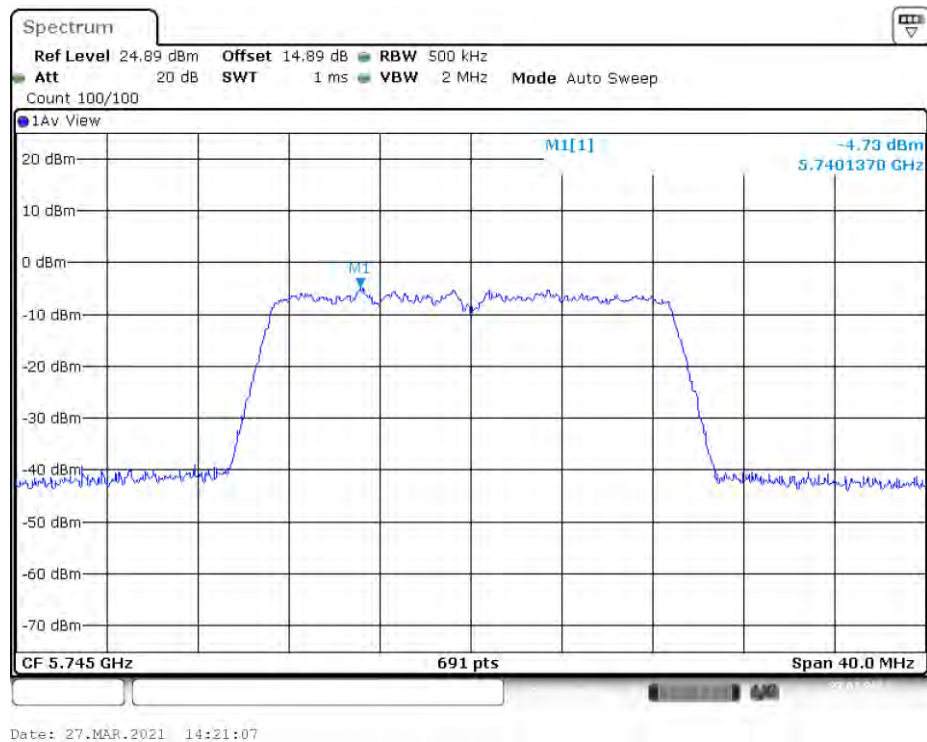
802.11ac20 mode, Power Spectral Density, 5240 MHz**802.11ac40 mode, Power Spectral Density, 5190 MHz**

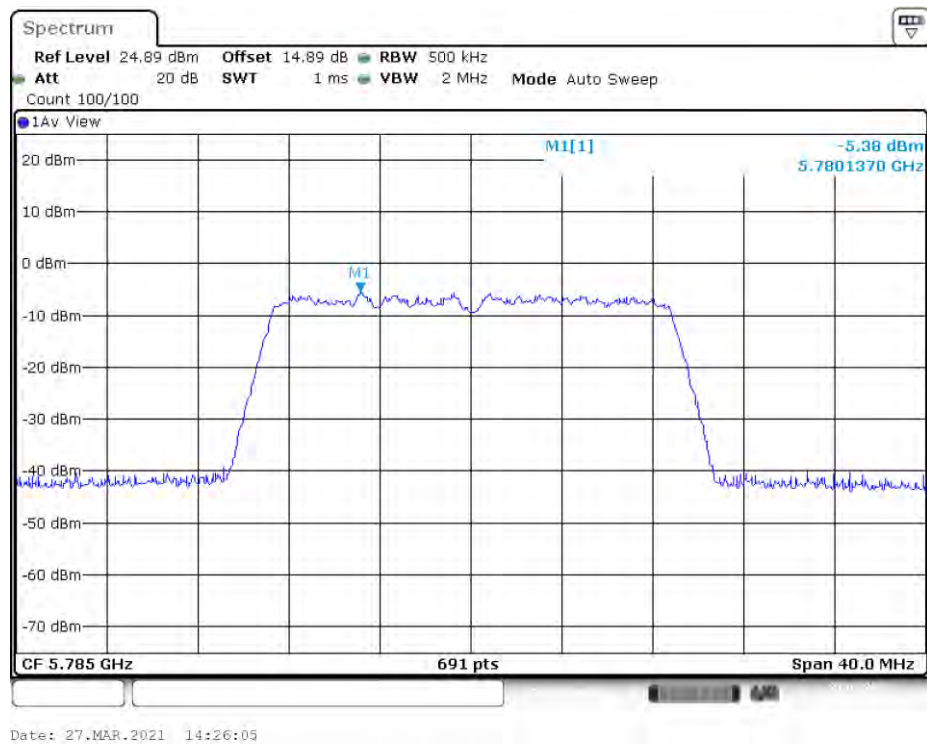
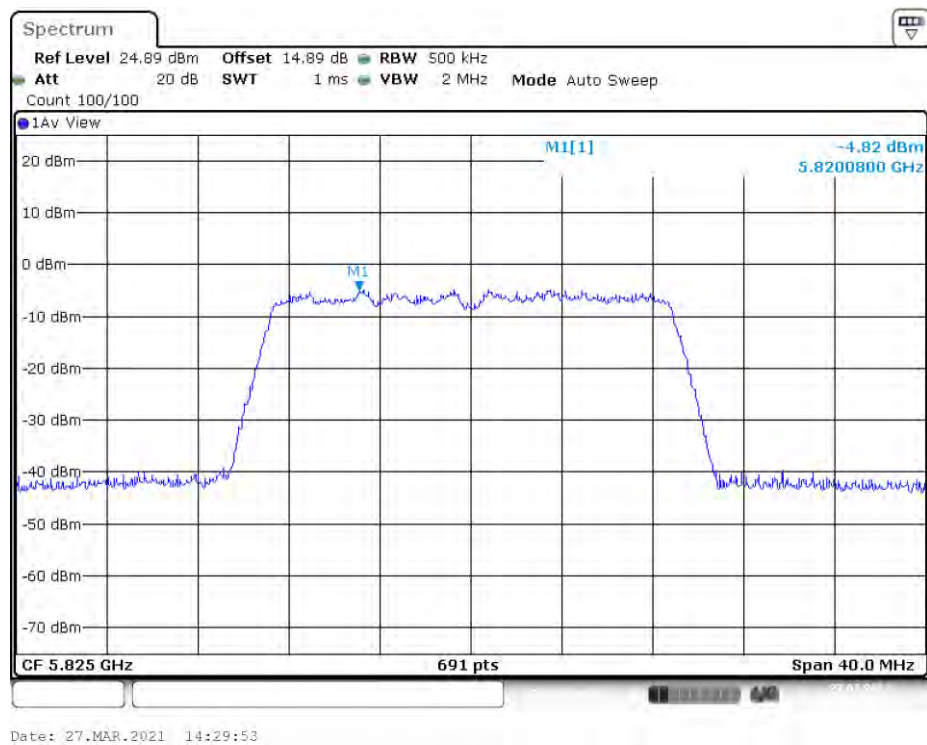
802.11ac40 mode, Power Spectral Density, 5230 MHz

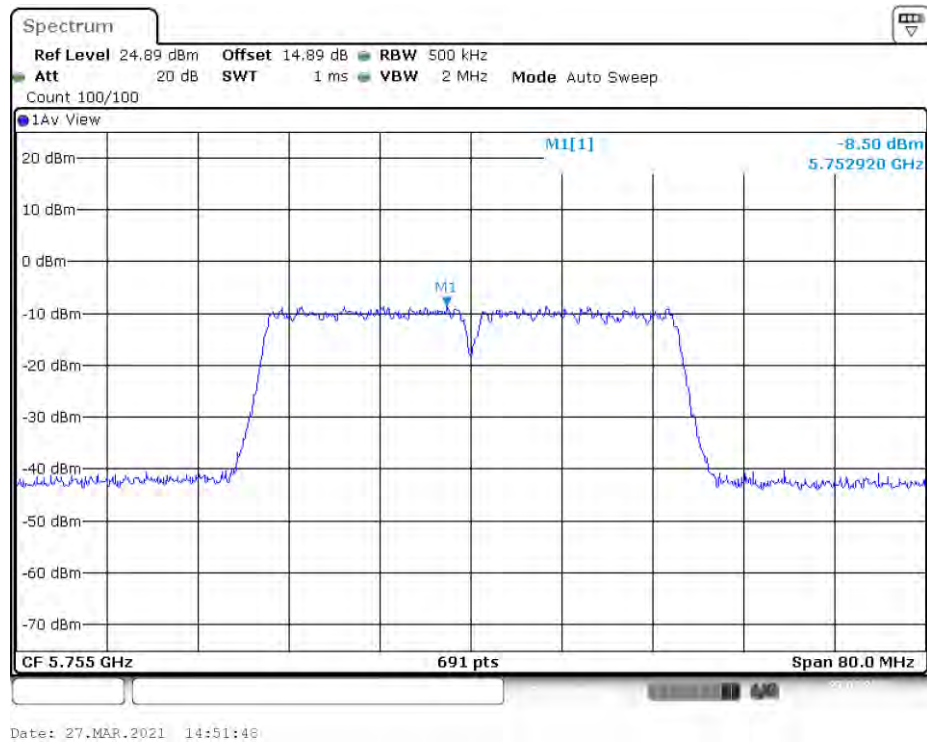
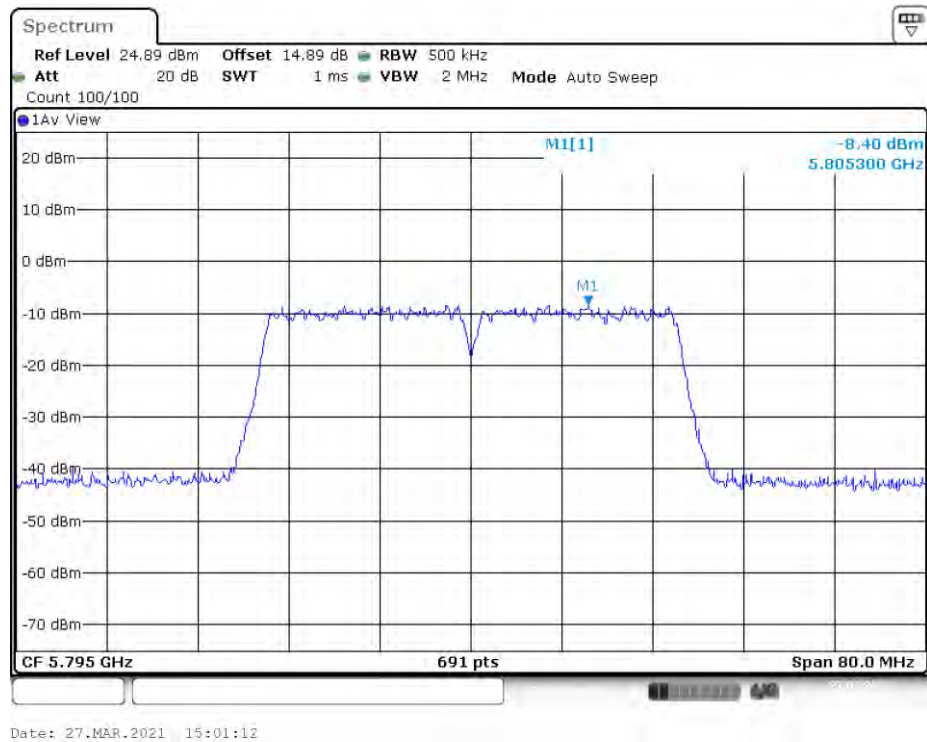
5745– 5825 MHz:

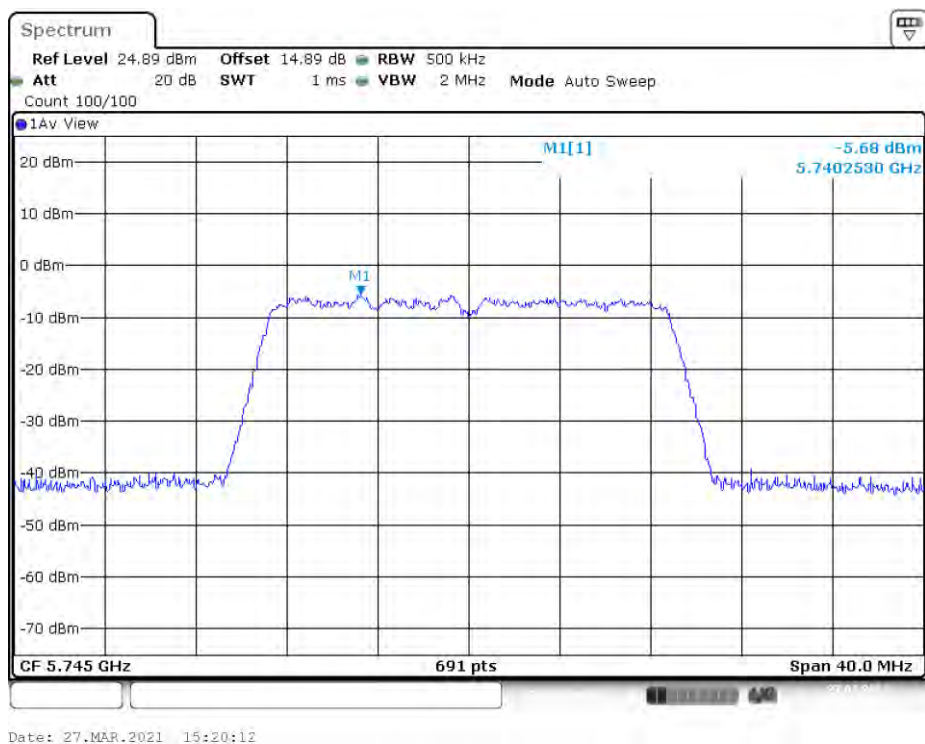
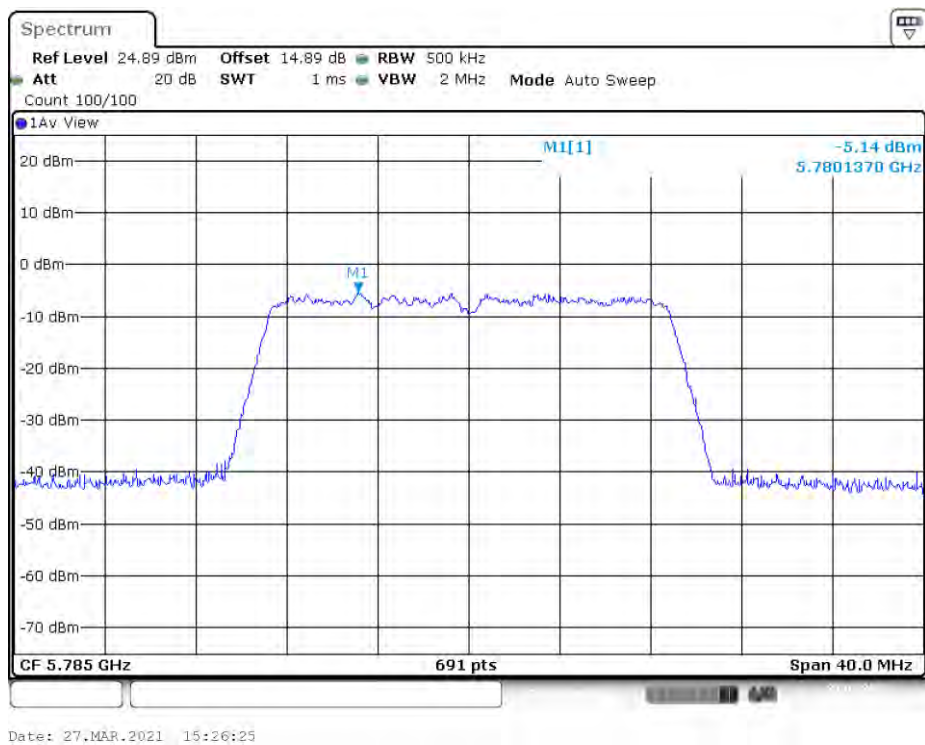
Frequency (MHz)	Power Spectral Density (dBm/500kHz)	Duty Cycle Factor (dB)	Corrected Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a				
5745	-3.52	0	-3.52	30
5785	-4.00	0	-4.00	
5825	-3.09	0	-3.09	
802.11n20				
5745	-4.73	0	-4.73	30
5785	-5.38	0	-5.38	
5825	-4.82	0	-4.82	
802.11n40				
5755	-8.5	0	-8.5	30
5795	-8.4	0	-8.4	
802.11ac20				
5745	-5.68	0	-5.68	30
5785	-5.14	0	-5.14	
5825	-4.54	0	-4.54	
802.11ac40				
5755	-8.91	0	-8.91	30
5795	-8.31	0	-8.31	

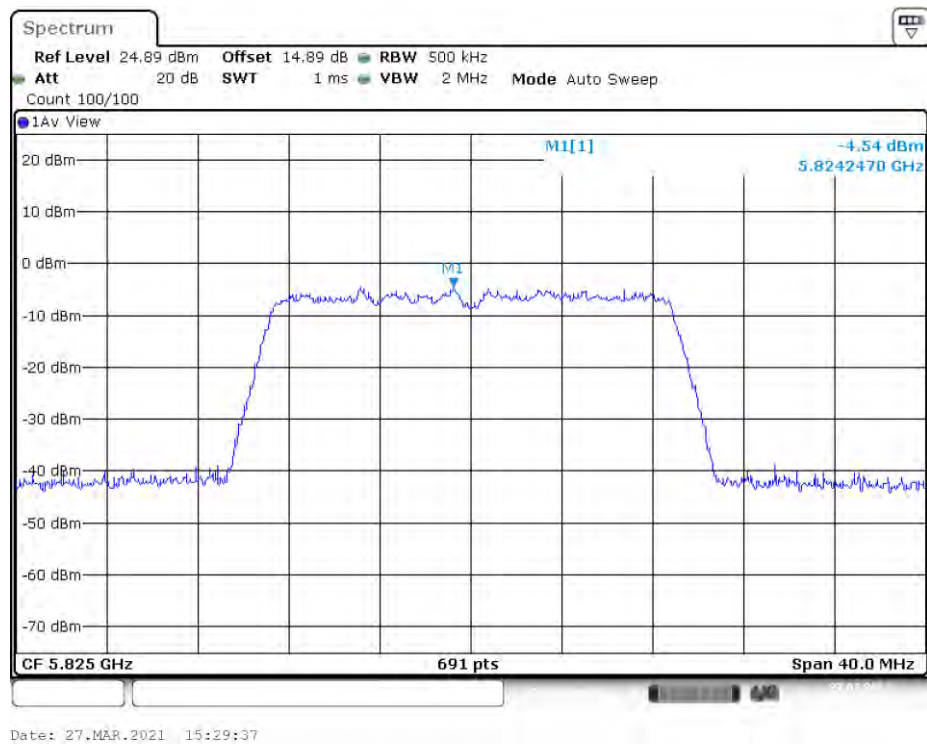
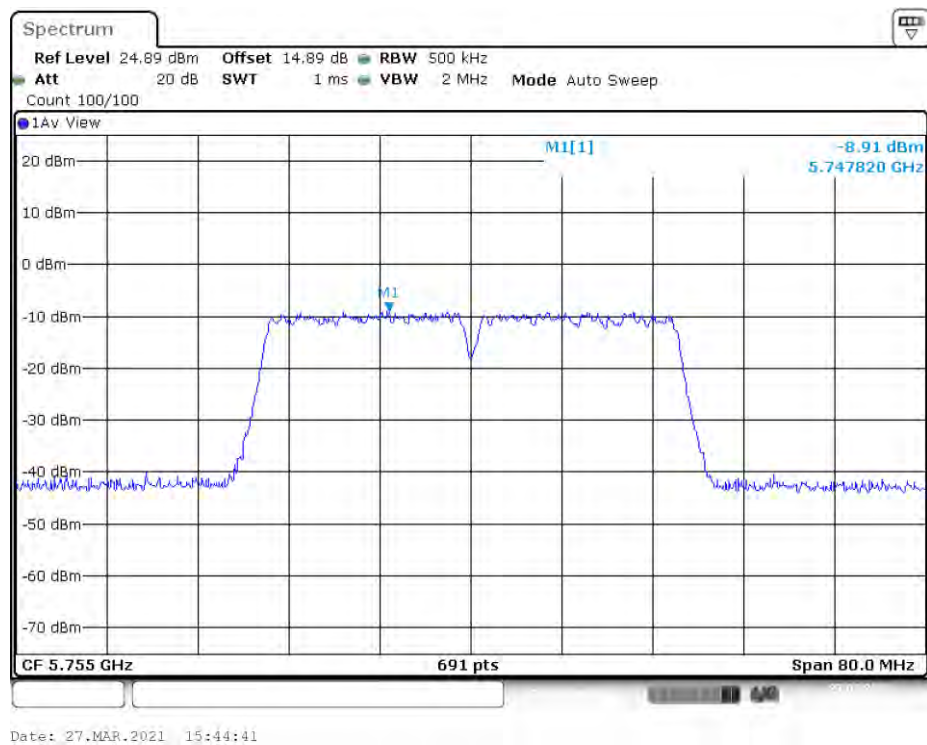
802.11a mode, Power Spectral Density, 5745 MHz**802.11a mode, Power Spectral Density, 5785 MHz**

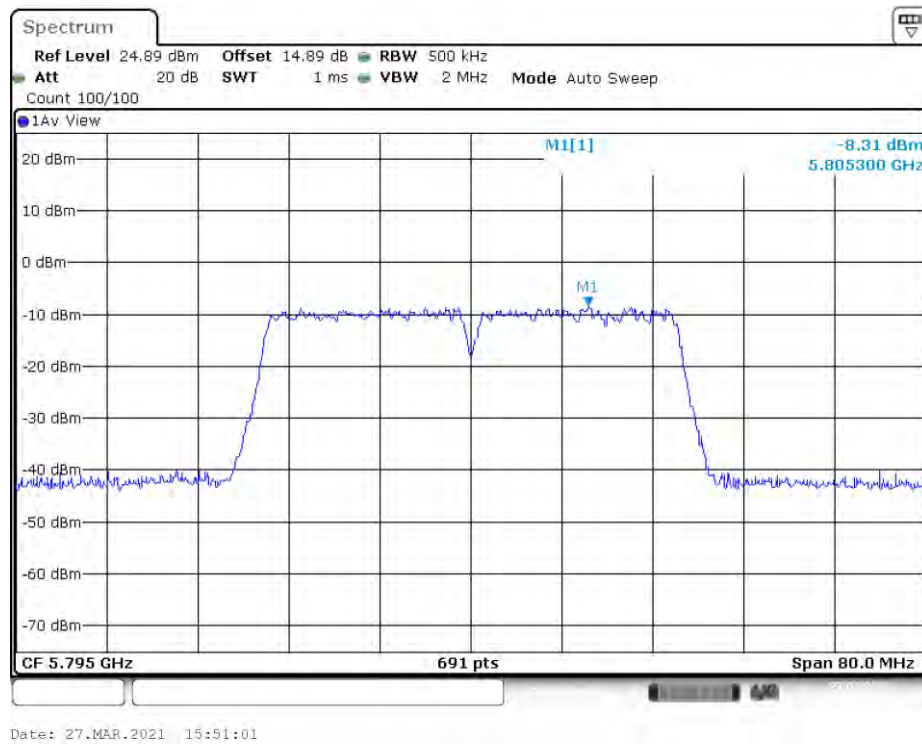
802.11a mode, Power Spectral Density, 5825 MHz**802.11n20 mode, Power Spectral Density, 5745 MHz**

802.11n20 mode, Power Spectral Density, 5785 MHz**802.11n20 mode, Power Spectral Density, 5825 MHz**

802.11n40 mode, Power Spectral Density, 5755 MHz**802.11n40 mode, Power Spectral Density, 5795 MHz**

802.11ac20 mode, Power Spectral Density, 5745 MHz**802.11ac20 mode, Power Spectral Density, 5785 MHz**

802.11ac20 mode, Power Spectral Density, 5825 MHz**802.11ac40 mode, Power Spectral Density, 5755 MHz**

802.11ac40 mode, Power Spectral Density, 5795 MHz

***** END OF REPORT *****