# SGS

# SGS-CSTC Standards Technical Services Ltd.

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: Fax: Email: +86 (0) 755 2601 2053 +86 (0) 755 2671 0594 ee.shenzhen@sgs.com

Report No.: SZEM140200059801 Page: 1 of 116

# **FCC REPORT**

Application No:	SZEM1402000598RF
Applicant:	Shenzhen Electron Technology Co., Ltd.
Manufacturer:	Shenzhen Electron Technology Co., Ltd.
Factory:	Shenzhen Electron Technology Co., Ltd.
Product Name:	WiFi Digital Photo Frame
Model No.(EUT):	W12A
Add Model No.:	W15A, W18A, W08C
Trade Mark:	nixplay
FCC ID:	2ABC5-W0215
Standards:	47 CFR Part 15, Subpart C (2013)
Date of Receipt:	2014-02-24
Date of Test:	2014-02-26 to 2014-04-17
Date of Issue:	2014-04-21
Test Result:	PASS *

.\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



### Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140200059801 Page: 2 of 116

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.:W12A, W15A, W18A, W08C

Only the Model W12A was tested, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, with difference on model No. and color.



Report No.: SZEM140200059801 Page: 3 of 116

# 3 Contents

			Page
1	cov	VER PAGE	1
2	TES <sup>.</sup>	ST SUMMARY	2
3	CON	NTENTS	3
4	GEN	NERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT AND MODE	6
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	EQUIPMENT LIST	8
5	TES	T RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4	6DB OCCUPY BANDWIDTH	
	5.5	Power Spectral Density	
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.7	RF CONDUCTED SPURIOUS EMISSIONS	
	5.8	RADIATED SPURIOUS EMISSIONS	
	5.8.1		
	5.8.2		
	5.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	83-116



Report No.: SZEM140200059801 Page: 4 of 116

# 4 General Information

# 4.1 Client Information

Applicant:	Shenzhen Electron Technology Co., Ltd.			
Address of Applicant:	5/F, A bldg, Northern Junyi Park, Cuigang Sixth Industrial area,			
	Fuyong Town, Bao'an district, Shenzhen, China			
Manufacturer:	Shenzhen Electron Technology Co., Ltd.			
Address of Manufacturer:	5/F, A bldg, Northern Junyi Park, Cuigang Sixth Industrial area,			
	Fuyong Town, Bao'an district, Shenzhen, China			
Factory:	Shenzhen Electron Technology Co., Ltd.			
Address of Factory:	5/F, A bldg, Northern Junyi Park, Cuigang Sixth Industrial area,			
	Fuyong Town, Bao'an district, Shenzhen, China			

# 4.2 General Description of EUT

Product Name:	WiFi Digital Photo Frame				
Model No.:	W12A, W15A, W18A, W08C				
Trade Mark:	nixplay				
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz				
	IEEE 802.11n(HT40): 2422MHz to 2452MHz				
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels				
Channel Separation:	5MHz				
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,				
	QPSK,BPSK)				
Sample Type:	Fixed production				
Antenna Type and Gain:	Type: Integral antenna				
	Gain:1.76 dBi				
AC Adapter:	MODEL:FKS106HSC-0501500U				
	INPUT:AC 100-240V~				
	50/60Hz 0.5A MAX				
	OUTPUT:5.0V=1.5A				
	3.0V DC (3.0V x 1 "CR2025" Button cells) for remote control				
Test Voltage:	AC 120V~60Hz				
DC Cable:	149cm(Unshielded)				



Report No.: SZEM140200059801 Page: 5 of 116

Operation Frequency each of channel(802.11b/g/n HT20)														
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency	Chan	nel	Frequency				
1	24	412MHz	4	2427MHz	7	244	42MHz	10	)	2457MHz				
2	24	417MHz	5	2432MHz	8	244	47MHz	11		2462MHz				
3	24	422MHz	6	2437MHz	9	24	52MHz							
Operation F	requ	ency each	of channe	el(802.11n HT40)										
Channe	l	Frequ	ency	Channel	Frequen	су	Chan	nel		Frequency				
1		2422	MHz	4	2437MHz 7		1Hz 7		z 7		2437MHz 7			2452MHz
2		2427	MHz	5	2442MF	łz								
3		2432	MHz	6	2447MF	łz								

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140200059801 Page: 6 of 116

# 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1020mbar
Test mode:	
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s).

# 4.4 Description of Support Units

The EUT has been tested independent unit.

# 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140200059801 Page: 7 of 116

# 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

# 4.7 Deviation from Standards

None.

# 4.8 Abnormalities from Standard Conditions

None.

# 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM140200059801 Page: 8 of 116

# 4.10 Equipment List

	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10			
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24			
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16			
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10			
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10			
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16			
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29			
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24			
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24			
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24			



Report No.: SZEM140200059801 Page: 9 of 116

	RE in Chamber							
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10			
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16			
3	EMI Test software	AUDIX	E3	SEL0050	N/A			
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24			
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24			
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24			
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16			
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24			
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29			
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29			
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29			
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29			
13	Band filter	Amindeon	82346	SEL0094	2014-05-16			
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24			
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24			
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24			
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16			
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24			
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04			



Report No.: SZEM140200059801 Page: 10 of 116

	RF connected test				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140200059801 Page: 11 of 116

# 5 Test results and Measurement Data

# 5.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)

### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.76dBi.

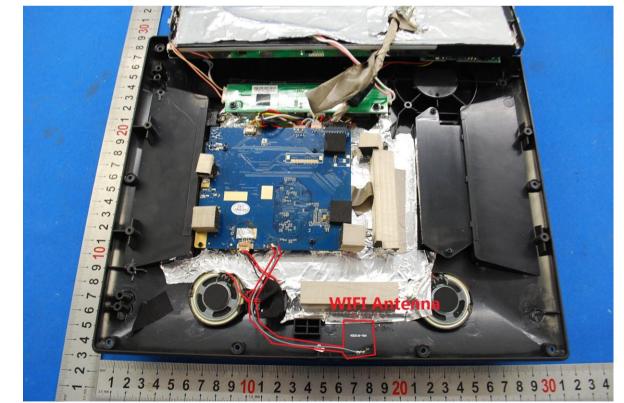




Report No.: SZEM140200059801 Page: 12 of 116

5.2 Conducted Enn				
Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range	150kHz to 30MHz			
Limit:		Limit (d	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		_
Test Procedure:	<ol> <li>Decreases with the logarithm of the frequency.</li> <li>The mains terminal disturbance voltage test was conducted in a shir room.</li> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω li impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground refer plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables single LISN provided the rating of the LISN was not exceeded.</li> <li>The tabletop EUT was placed upon a non-metallic table 0.8m above t ground reference plane. And for floor-standing arrangement, the EUT placed on the horizontal ground reference plane,</li> <li>The test was performed with a vertical ground reference plane. The reference plane. The LISN 1 was placed 0.8 m from the boundary of tunit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units the EUT and associated equipment was at least 0.8 m from the LISN</li> <li>In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according ANSI C63.10: 2009 on conducted measurement.</li> </ol>			

# 5.2 Conducted Emissions



Report No.: SZEM140200059801 Page: 13 of 116

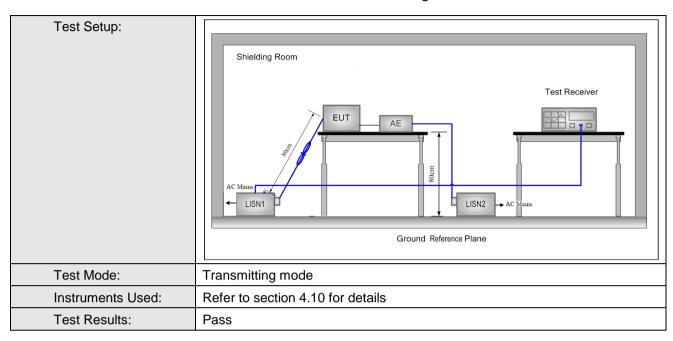




Report No.: SZEM140200059801 Page: 14 of 116

### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

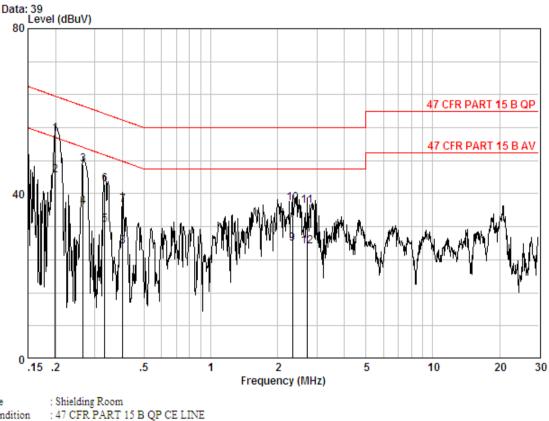

Site : Shielding Room Condition : 47 CFR PART 15 B QP CE LINE EUT : 0598RF Mode : TX


	Fre	Cable q Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
	MH	z dB	dB	dBuV	dBuV	dBuV	dB	
10	0.1986	3 0.02	9.70	44.75	54.47	63.67	-9.20	QP
2 0	0.1986	3 0.02	9.70	34.65	44.37	53.67	-9.30	Average
3	0.2658	3 0.01	9.70	37.29	47.00	61.25	-14.25	QP
4	0.2658	3 0.01	9.70	27.15	36.86	51.25	-14.38	Average
5	0.3320	8 0.01	9.74	22.69	32.44	49.40	-16.96	Average
6	0.3320	8 0.01	9.74	32.64	42.38	59.40	-17.02	QP
7	0.4018	7 0.01	9.80	27.48	37.29	57.81	-20.52	QP
8	0.4018	7 0.01	9.80	17.34	27.15	47.81	-20.66	Average
9	2.33	4 0.02	9.82	17.96	27.80	46.00	-18.20	Average
10	2.33	4 0.02	9.82	27.84	37.68	56.00	-18.32	QP
11	2.72	1 0.02	9.83	27.12	36.98	56.00	-19.02	QP
12	2.72	1 0.02	9.83	17.31	27.16	46.00	-18.84	Average





Report No.: SZEM140200059801 Page: 15 of 116

### Neutral Line:

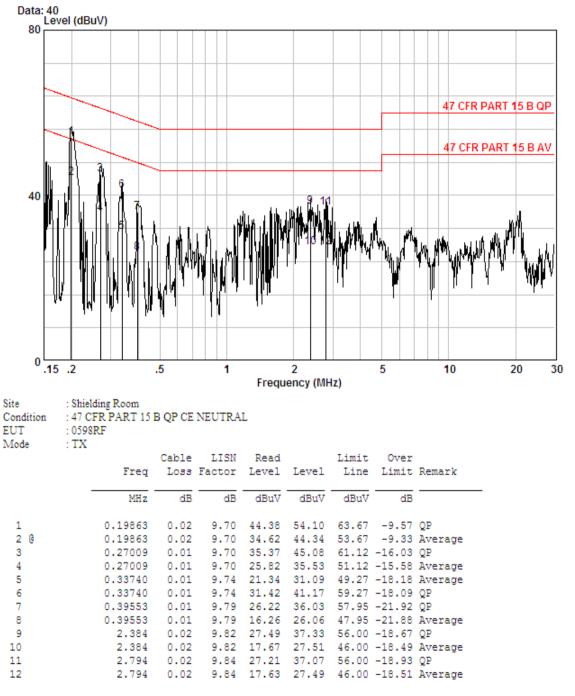

### Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140200059801 Page: 16 of 116

# 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	KDB558074 D01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g ; 6Mbps of rate is the worst case		
	of 802.11n(HT20) ; 6Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM140200059801 Page: 17 of 116

Pre-scan under all rate at lowest channel 1								
Mode		802	.11b			/		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	11.80	11.56	11.42	11.25				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	9.39	9.12	9.23	9.18	9.24	9.16	9.36	9.28
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	9.15	9.02	9.12	9.06	9.11	9.12	9.14	9.13
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	11.24	11.11	11.21	11.20	11.19	11.22	11.23	11.21
-	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 5.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).							




Report No.: SZEM140200059801 Page: 18 of 116

### **Measurement Data**

802.11b mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	11.80	30.00	Pass			
Middle	11.44	30.00	Pass			
Highest	12.44	30.00	Pass			
	802.11g mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	9.39	30.00	Pass			
Middle	10.85	30.00	Pass			
Highest	11.58	30.00	Pass			
	802.11n(HT20)	mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	9.15	30.00	Pass			
Middle	10.67	30.00	Pass			
Highest	11.39	30.00	Pass			
802.11n(HT40)mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	11.24	30.00	Pass			
Middle	11.96	30.00	Pass			
Highest	12.62	30.00	Pass			




Report No.: SZEM140200059801 Page: 19 of 116

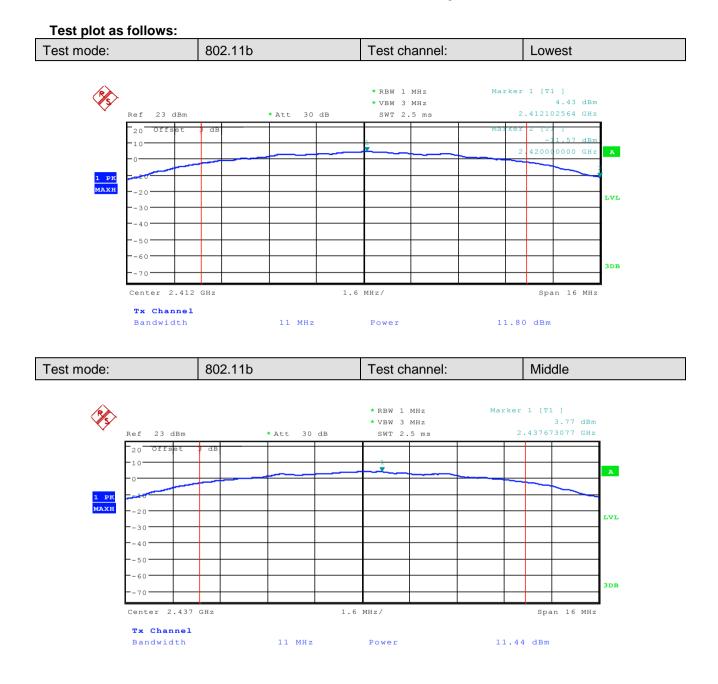




Report No.: SZEM140200059801 Page: 20 of 116

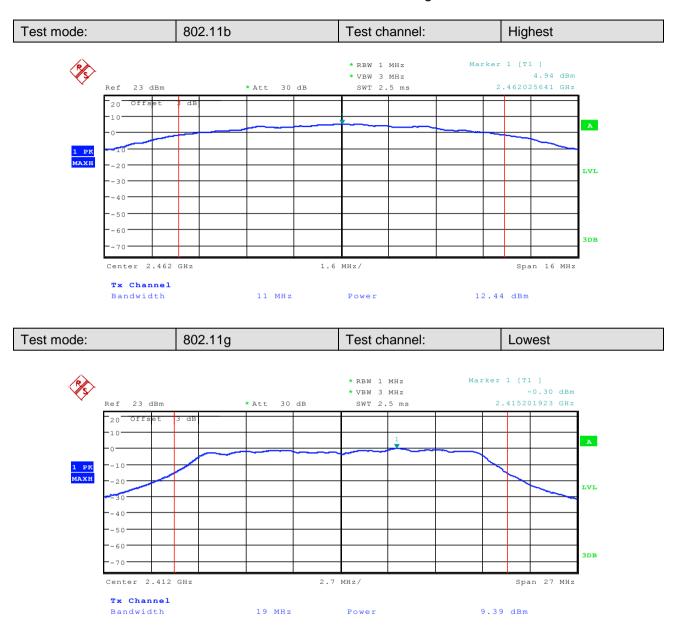




Report No.: SZEM140200059801 Page: 21 of 116

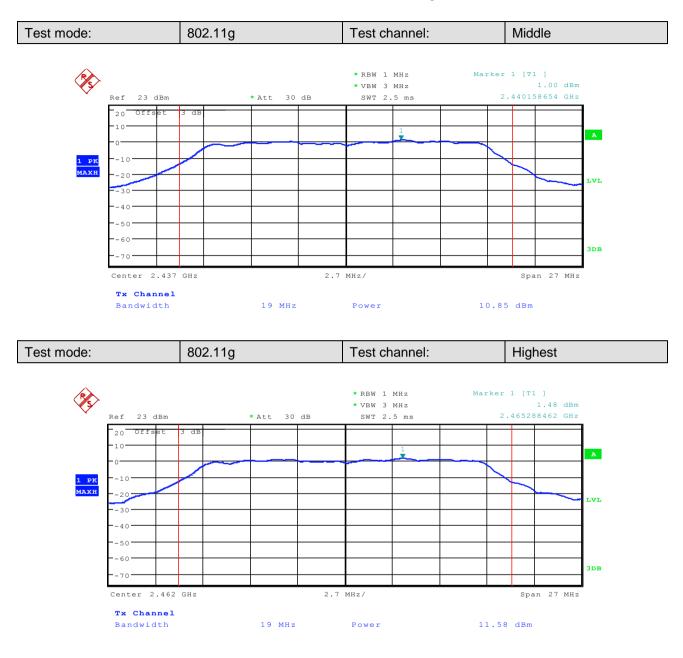




Report No.: SZEM140200059801 Page: 22 of 116

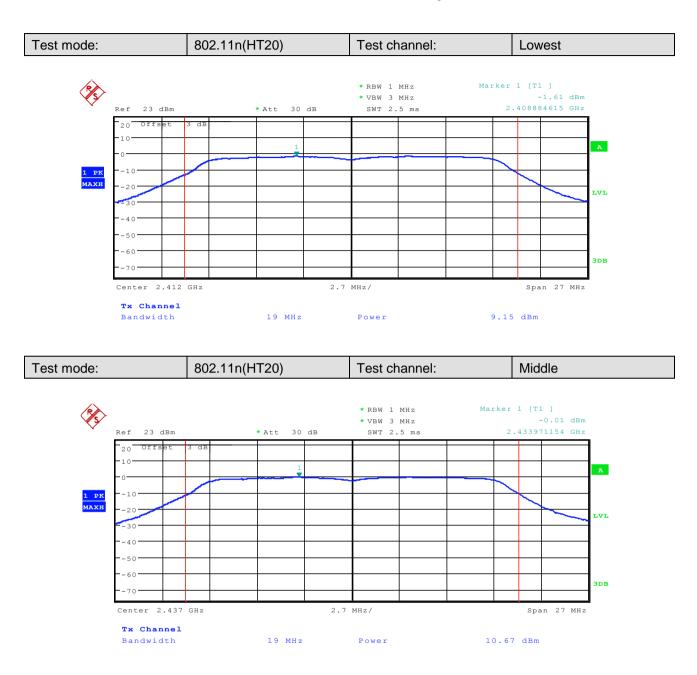





Report No.: SZEM140200059801 Page: 23 of 116

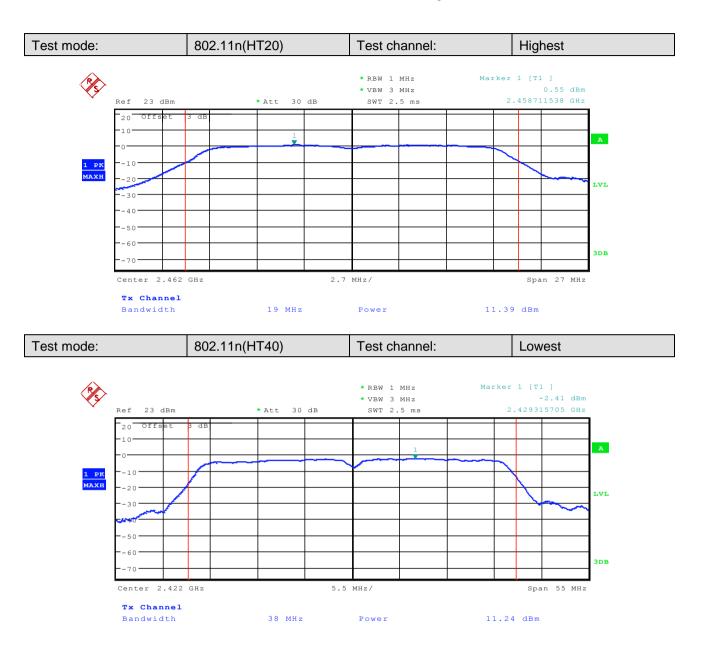



Report No.: SZEM140200059801 Page: 24 of 116

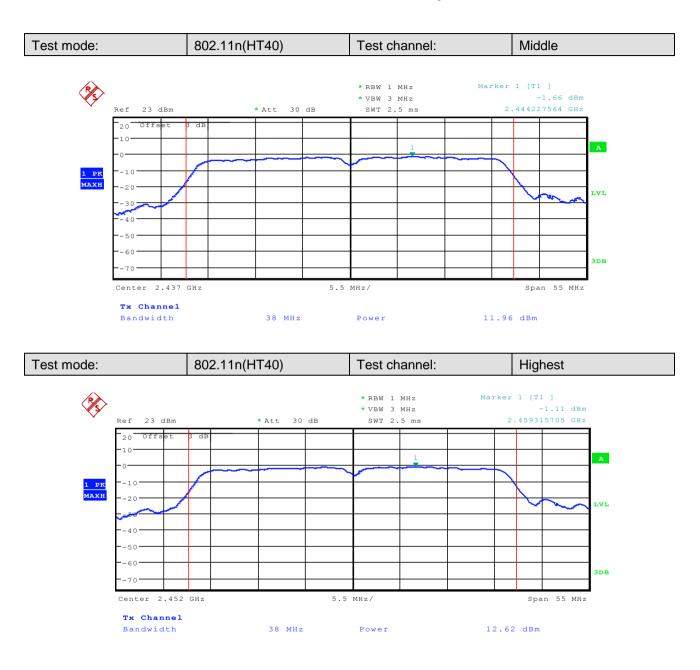

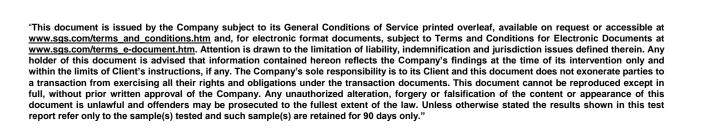



Report No.: SZEM140200059801 Page: 25 of 116

# 5.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)		
Test Method:	KDB558074 D01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Instruments Used:	Refer to section 4.10 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40).		
Limit:	≥ 500 kHz		
Test Results:	Pass		




Report No.: SZEM140200059801 Page: 26 of 116

Measurement Data							
802.11b mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	10.560897436	≥500	Pass				
Middle	10.336538462	≥500	Pass				
Highest	10.432692308	≥500	Pass				
	802.11g mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	16.586538462	≥500	Pass				
Middle	16.586538462	≥500	Pass				
Highest	16.586538462	≥500	Pass				
	802.11n(HT20) mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	17.692307692	≥500	Pass				
Middle	17.740384615	≥500	Pass				
Highest	17.740384615	≥500	Pass				
802.11n(HT40)mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	36.538461538	≥500	Pass				
Middle	36.538461538	≥500	Pass				
Highest	36.442307692	≥500	Pass				




Report No.: SZEM140200059801 Page: 27 of 116

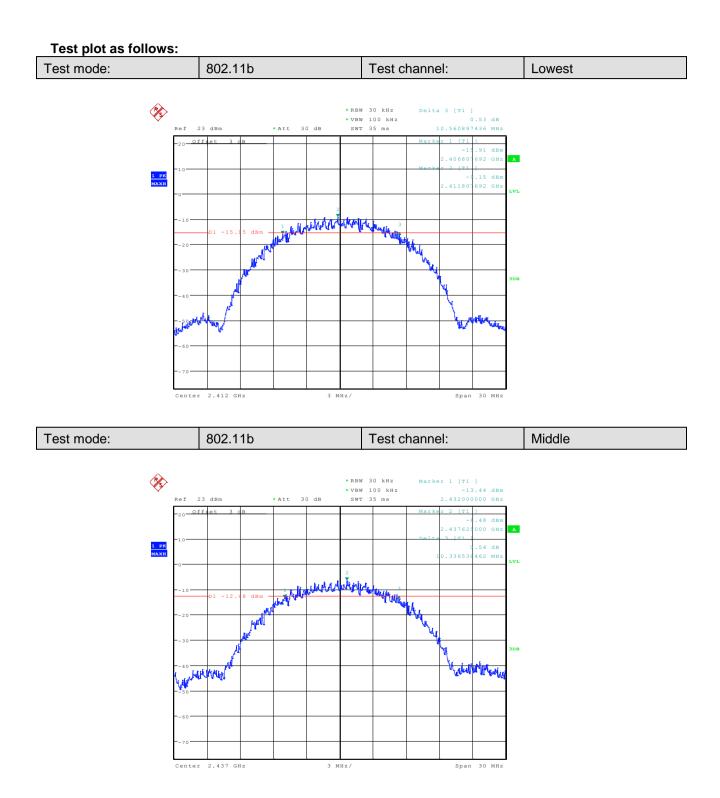




Report No.: SZEM140200059801 Page: 28 of 116

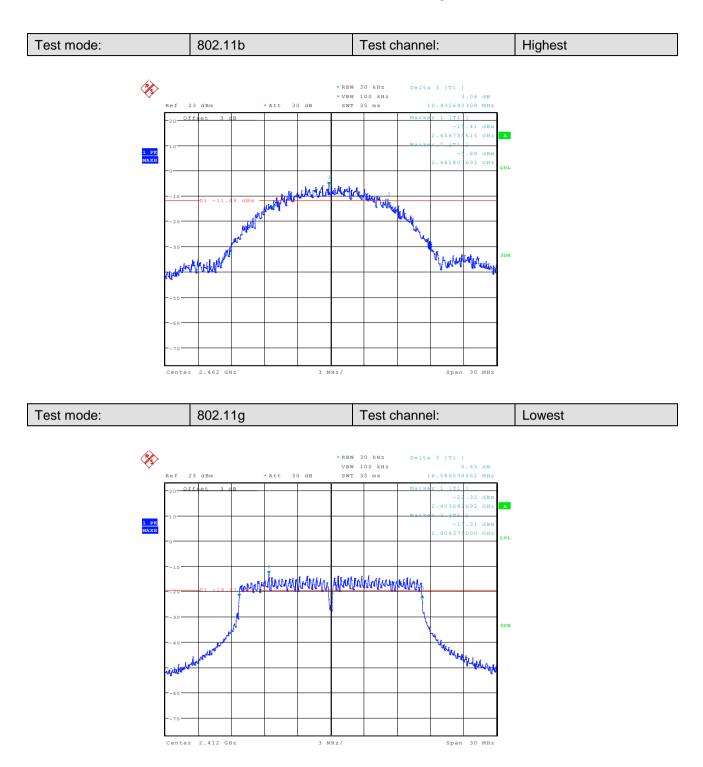




Report No.: SZEM140200059801 Page: 29 of 116

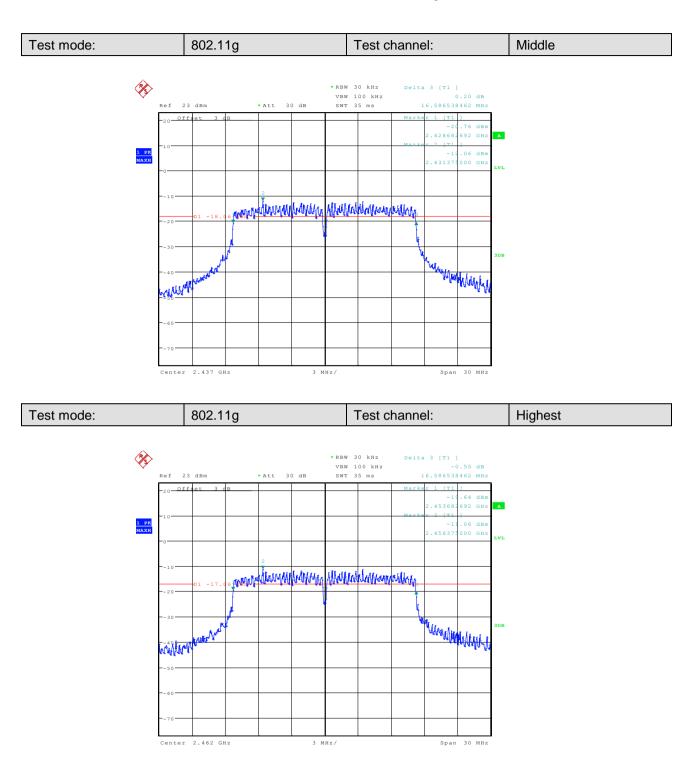




Report No.: SZEM140200059801 Page: 30 of 116

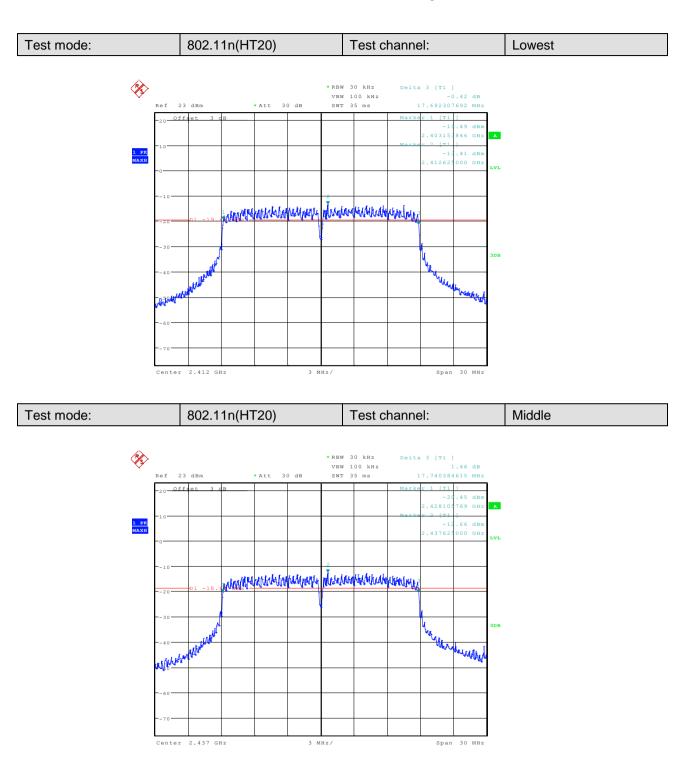




Report No.: SZEM140200059801 Page: 31 of 116

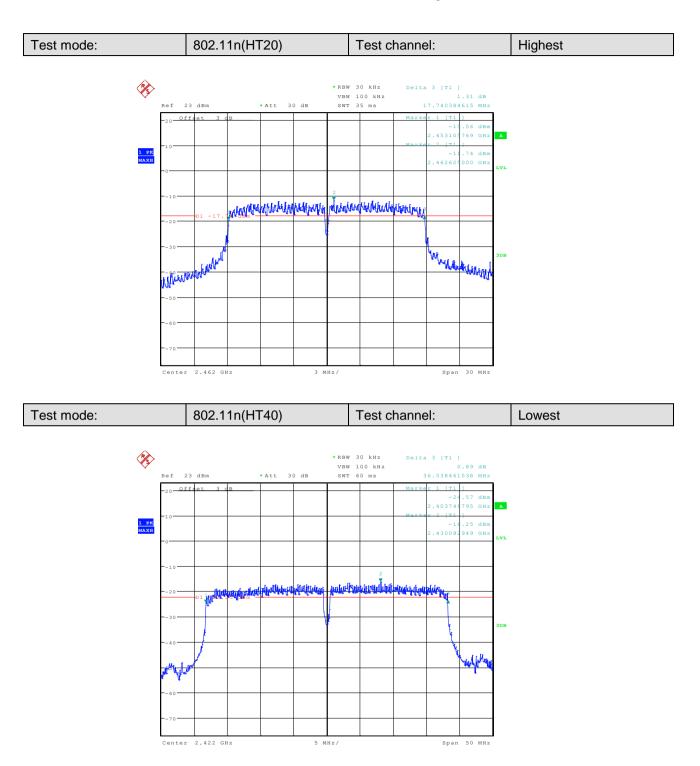



Report No.: SZEM140200059801 Page: 32 of 116

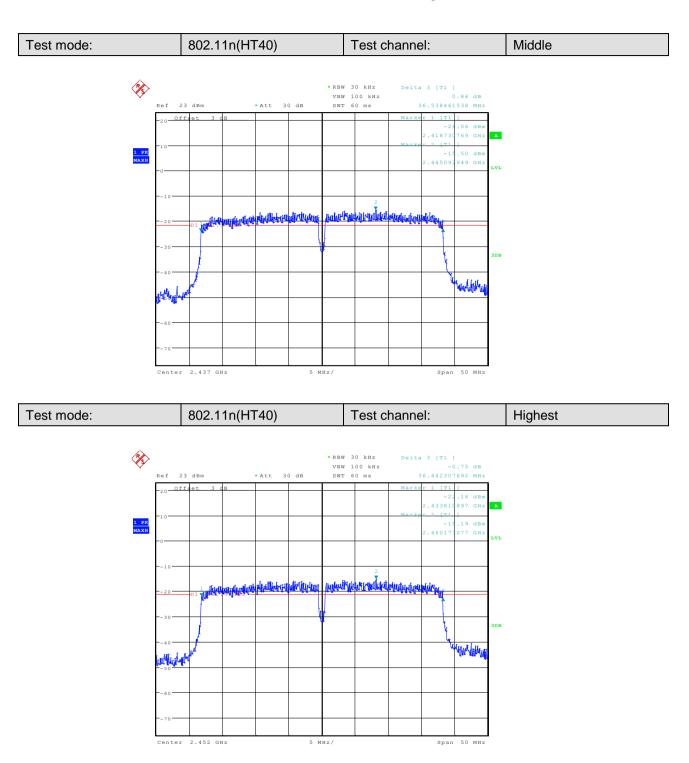



Report No.: SZEM140200059801 Page: 33 of 116

# 5.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	KDB558074 D01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	≤8.00dBm		
Test Results:	Pass		



Report No.: SZEM140200059801 Page: 34 of 116


Measurement Data	easurement Data							
	802.11b mode							
Test channel	Power Spectral Density (dBm) Limit (dBm)		Result					
Lowest	-16.80	≤8.00	Pass					
Middle	-16.90	≤8.00	Pass					
Highest	-15.85	≤8.00	Pass					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	-25.77	≤8.00	Pass					
Middle	-24.40	≤8.00	Pass					
Highest	-23.77	≤8.00	Pass					
	802.11n(HT20) mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	-27.39	≤8.00	Pass					
Middle	-26.56	≤8.00	Pass					
Highest	-25.20	≤8.00	Pass					
	802.11n(HT40) mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	-25.18	≤8.00	Pass					
Middle	-24.01	≤8.00	Pass					
Highest	-25.98	≤8.00	Pass					

### Measurement Data






Report No.: SZEM140200059801 Page: 35 of 116

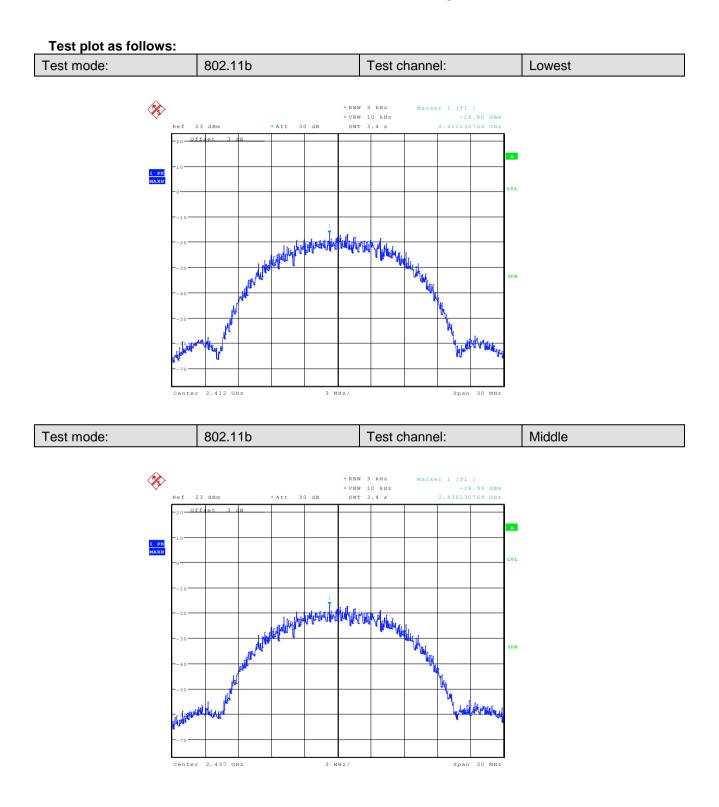




Report No.: SZEM140200059801 Page: 36 of 116

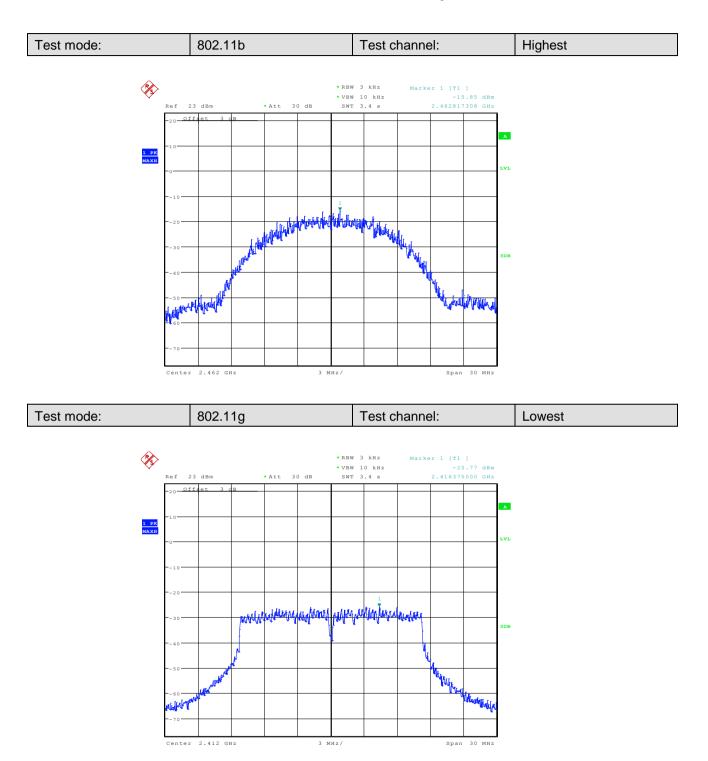




Report No.: SZEM140200059801 Page: 37 of 116

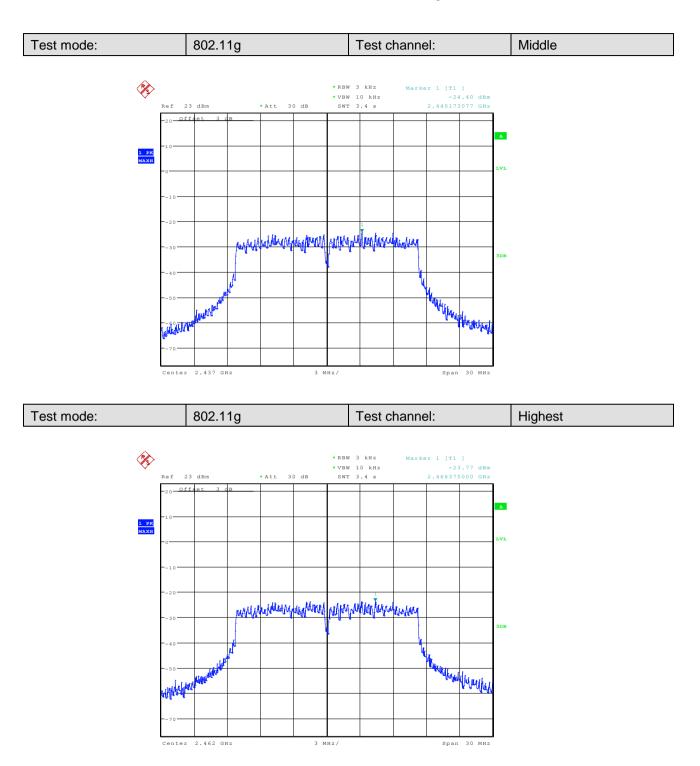



Report No.: SZEM140200059801 Page: 38 of 116

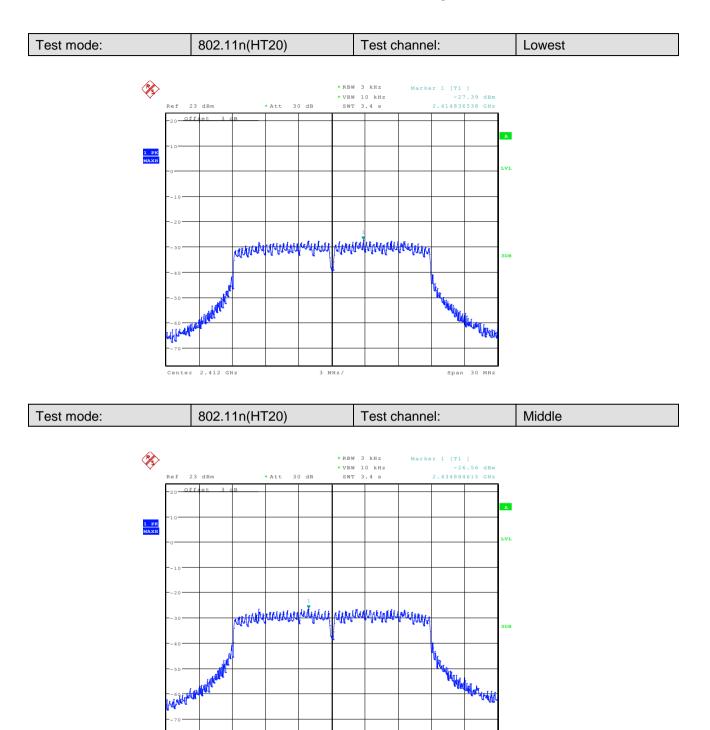

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


3 MHz,

Span 30 MHz

Center 2.437 GHz



Report No.: SZEM140200059801 Page: 39 of 116

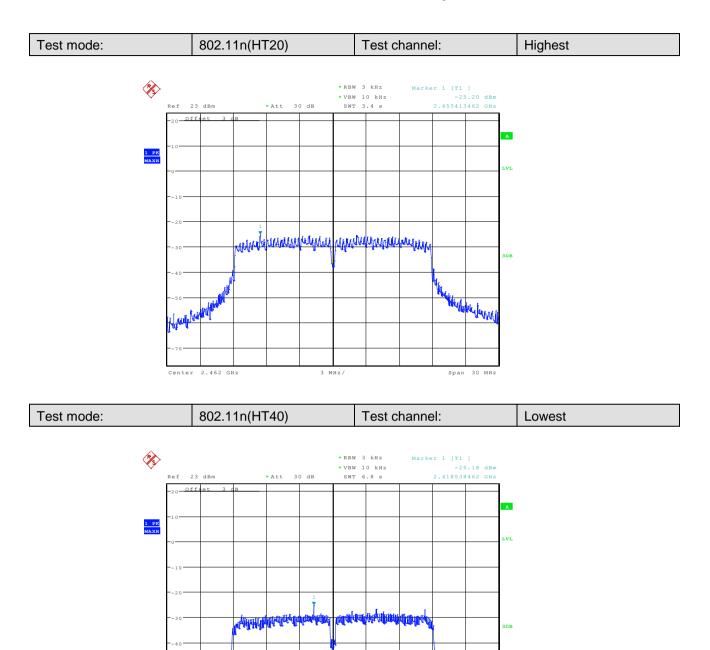

MHz

2.422

GH 2

Center

Laboration of


60

Span

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140200059801 Page: 40 of 116

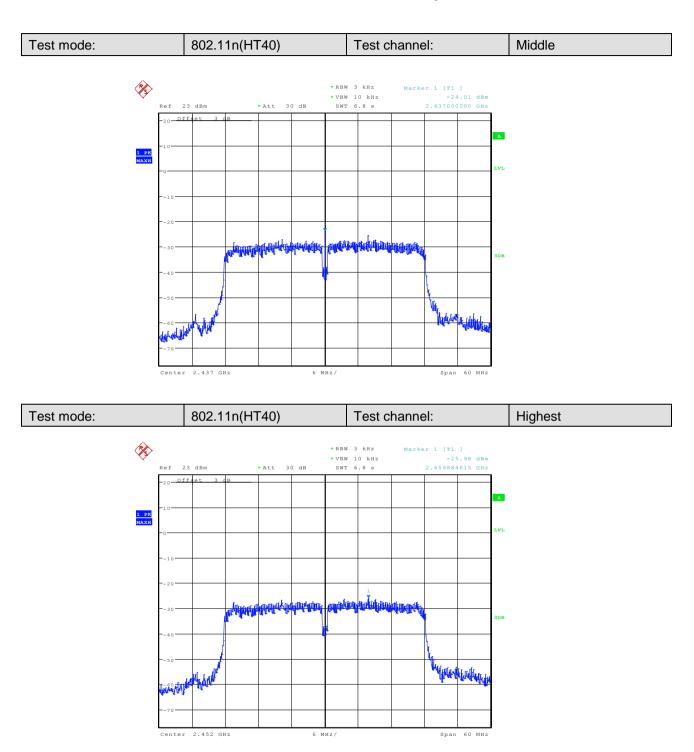




Report No.: SZEM140200059801 Page: 41 of 116

#### 5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	KDB558074 D01				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
	Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Exploratory Test Mode:	Transmitting mode				
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread				
	spectrum intentional radiator is operating, the radio frequency power that is				
	produced by the intentional radiator shall be at least 20 dB below that in the				
	100 kHz bandwidth within the band that contains the highest level of the				
	desired power, based on either an RF conducted or a radiated measurement.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				





Report No.: SZEM140200059801 Page: 42 of 116

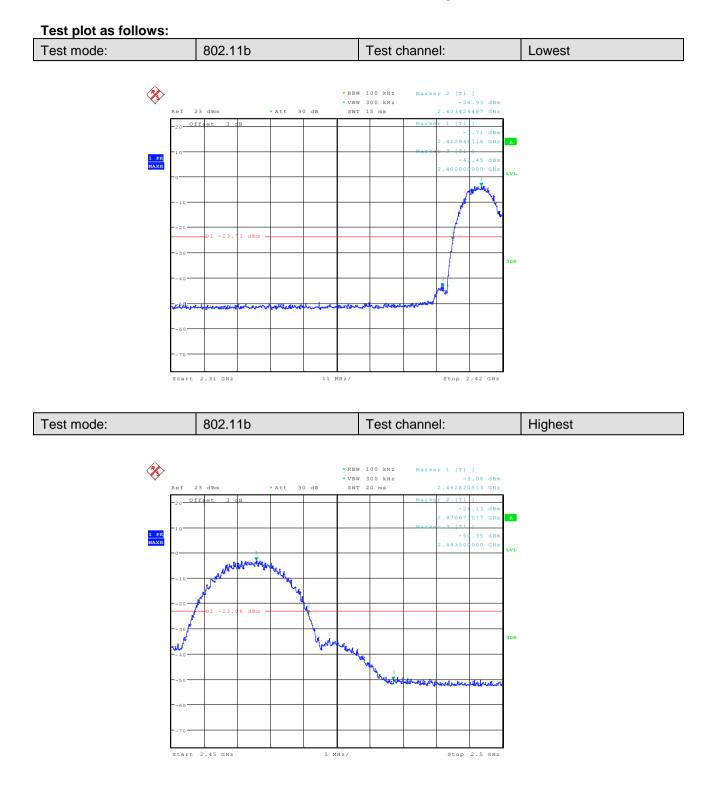




Report No.: SZEM140200059801 Page: 43 of 116

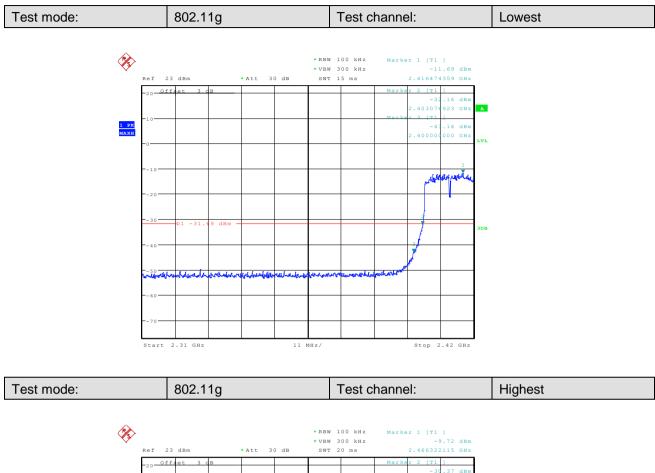

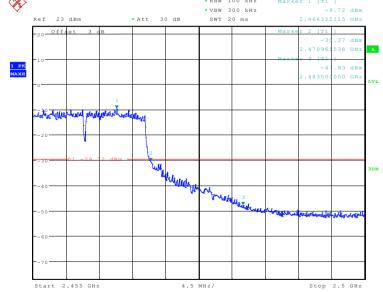




Report No.: SZEM140200059801 Page: 44 of 116

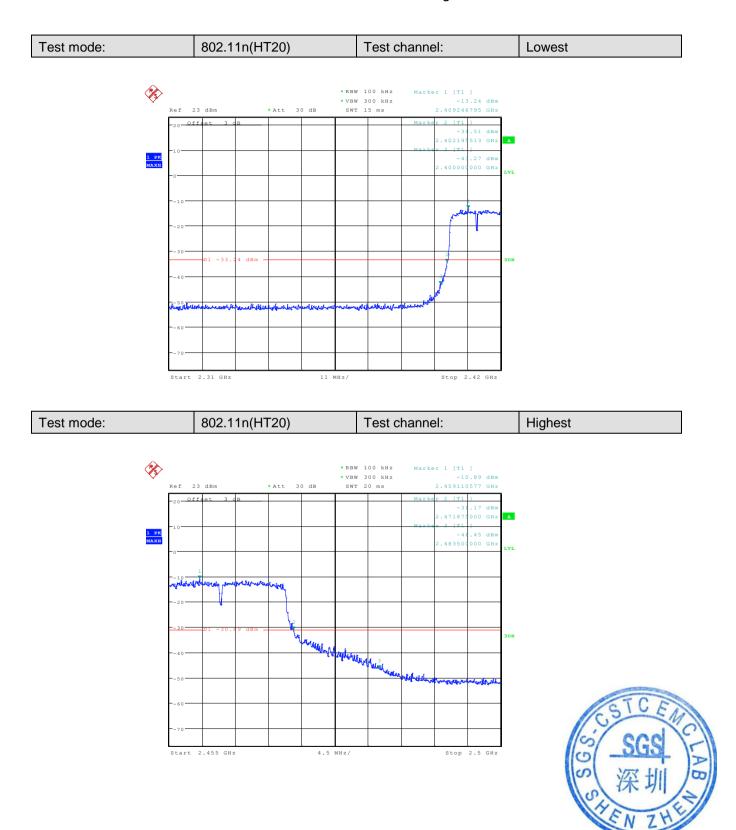



Report No.: SZEM140200059801 Page: 45 of 116

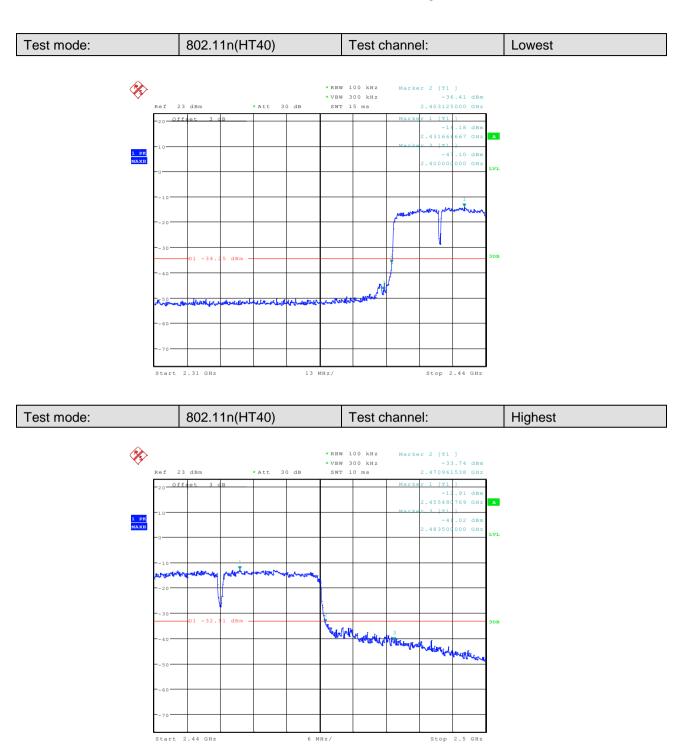



Report No.: SZEM140200059801 Page: 46 of 116


## 5.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	KDB558074 D01				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Exploratory Test Mode:	Transmitting mode				
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140200059801 Page: 47 of 116

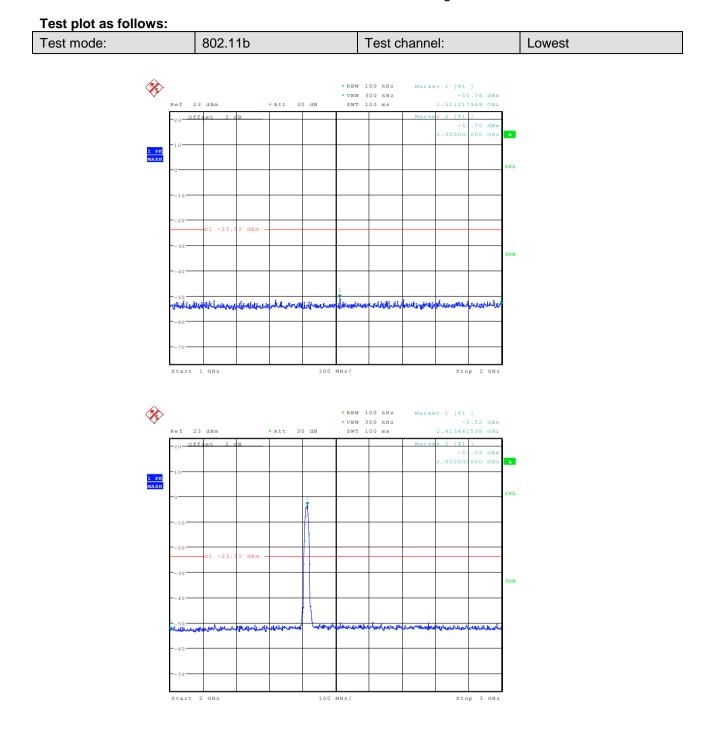


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 48 of 116

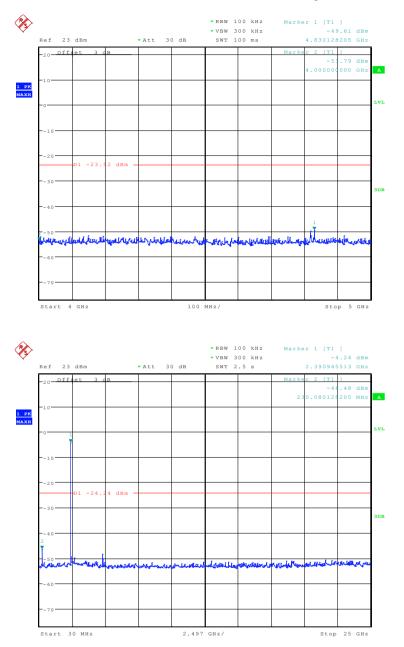




Report No.: SZEM140200059801 Page: 49 of 116

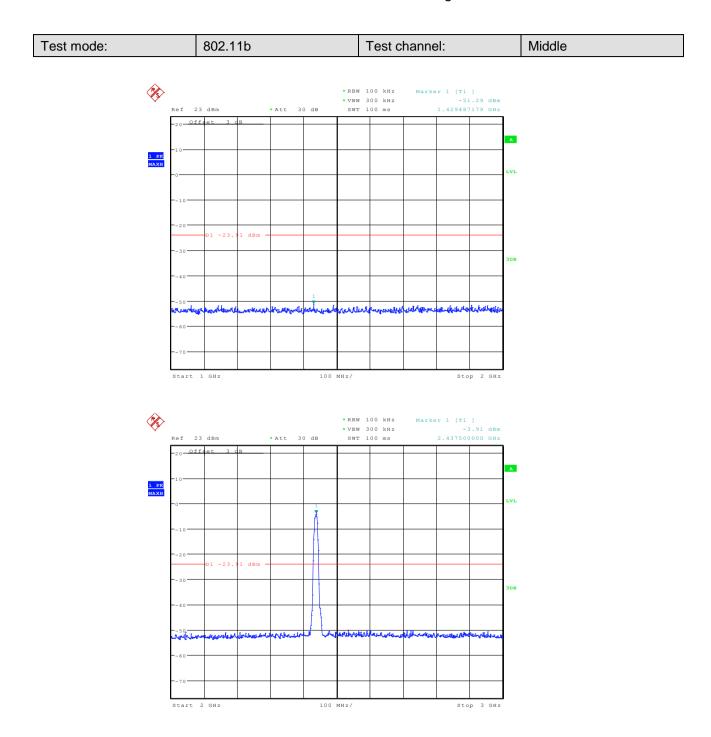


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 50 of 116

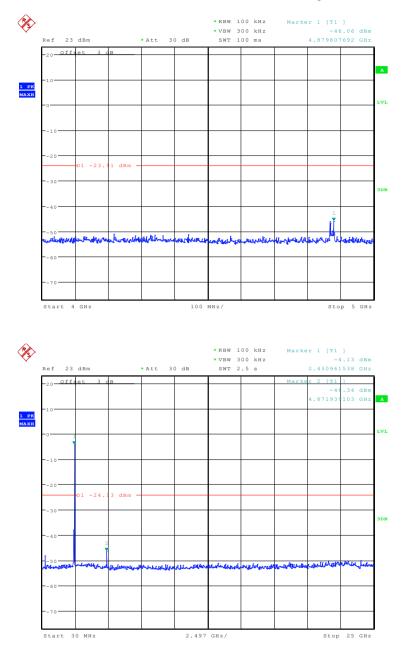




Report No.: SZEM140200059801 Page: 51 of 116

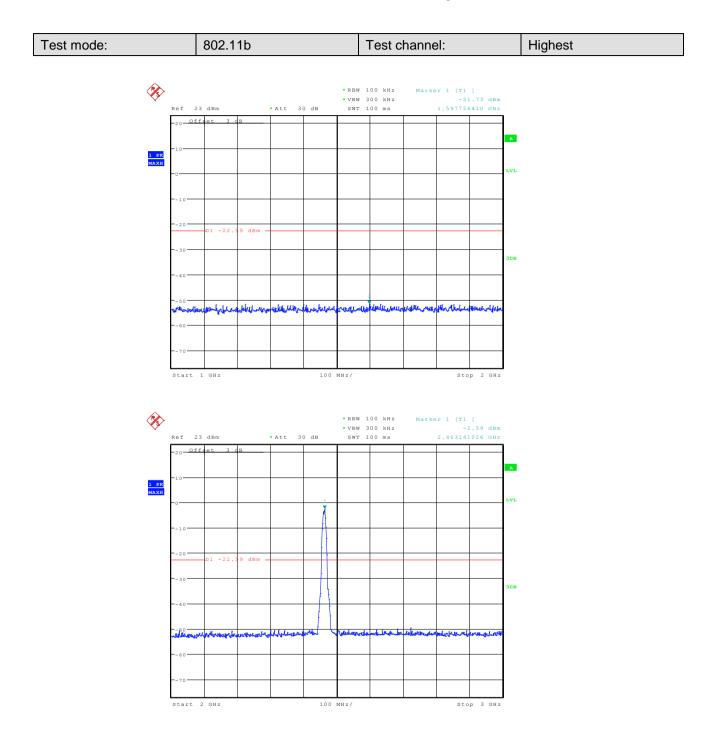


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 52 of 116

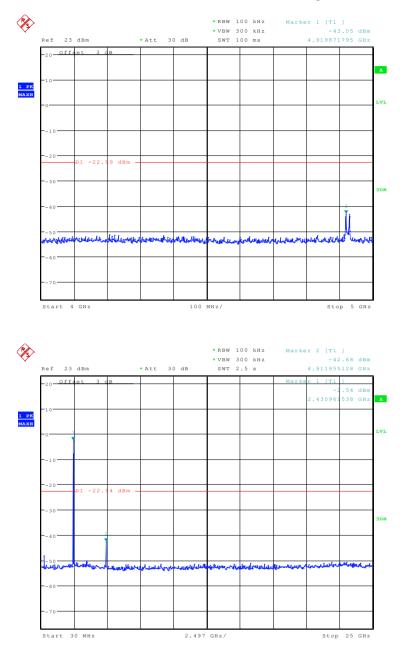




Report No.: SZEM140200059801 Page: 53 of 116

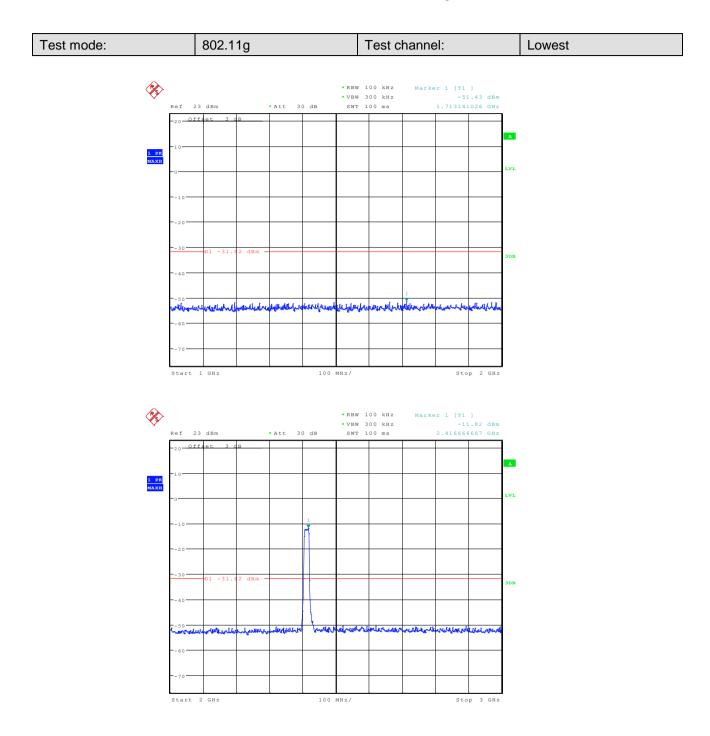

## SGS-CSTC Standards Technical Services Ltd.


Report No.: SZEM140200059801 Page: 54 of 116

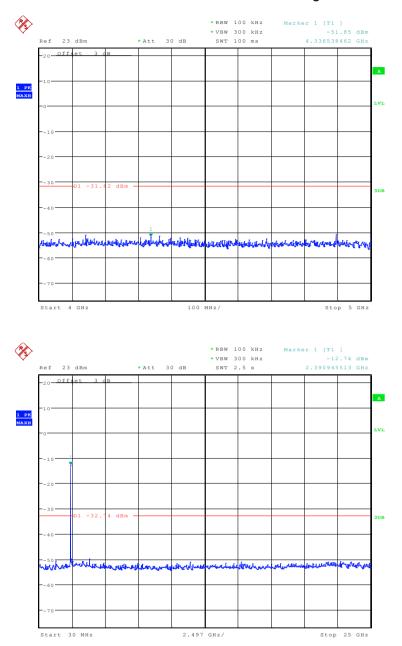






Report No.: SZEM140200059801 Page: 55 of 116

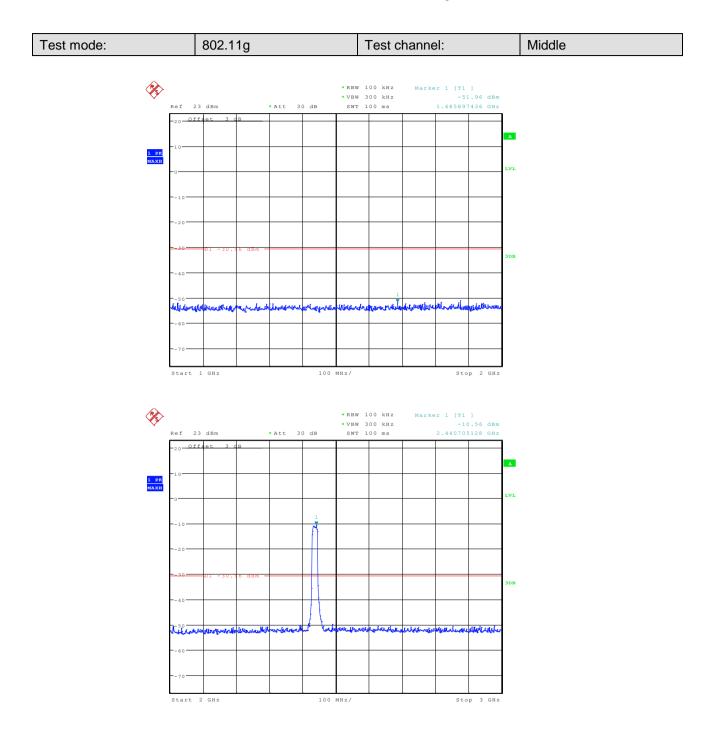


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 56 of 116

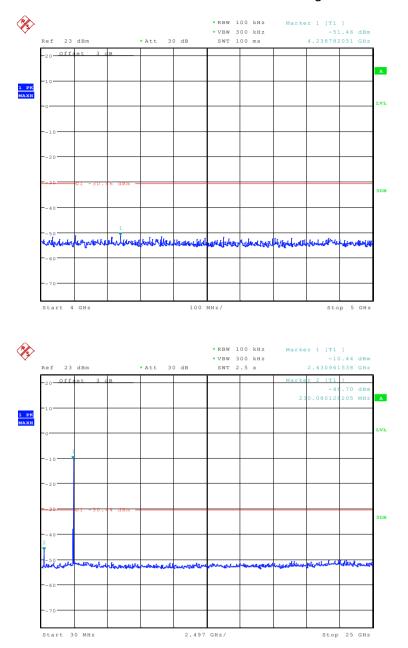




Report No.: SZEM140200059801 Page: 57 of 116

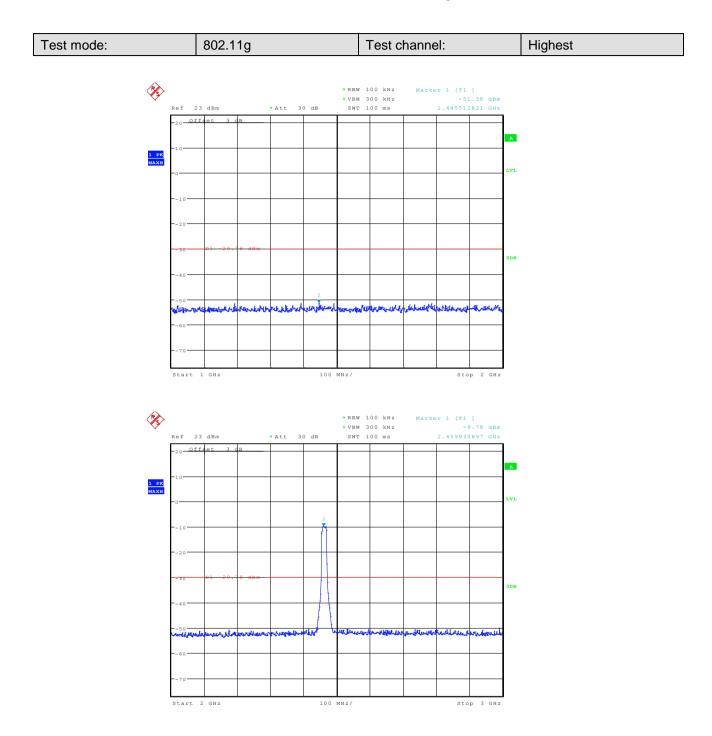


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 58 of 116

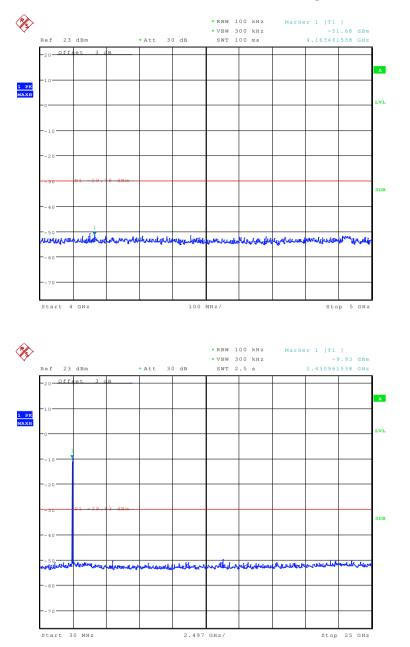




Report No.: SZEM140200059801 Page: 59 of 116

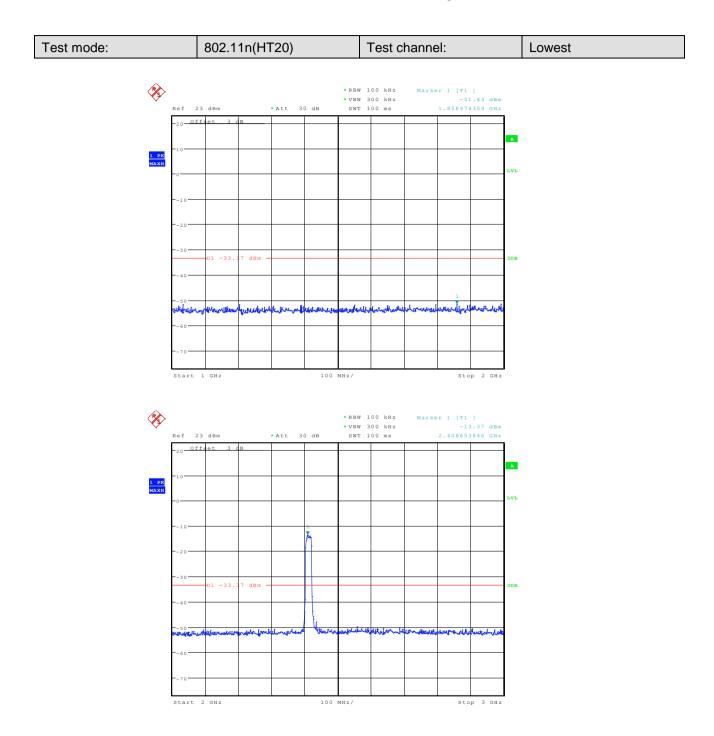


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 60 of 116

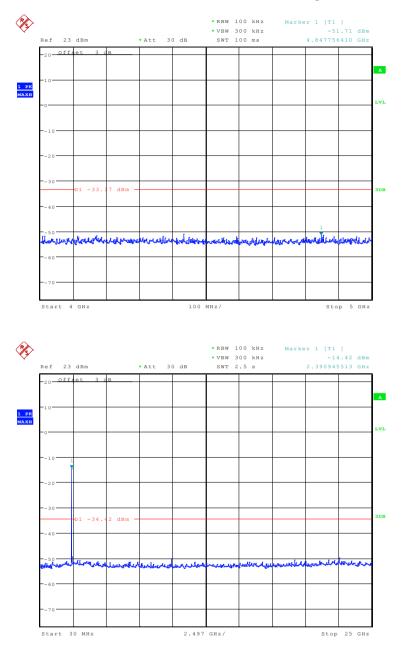




Report No.: SZEM140200059801 Page: 61 of 116

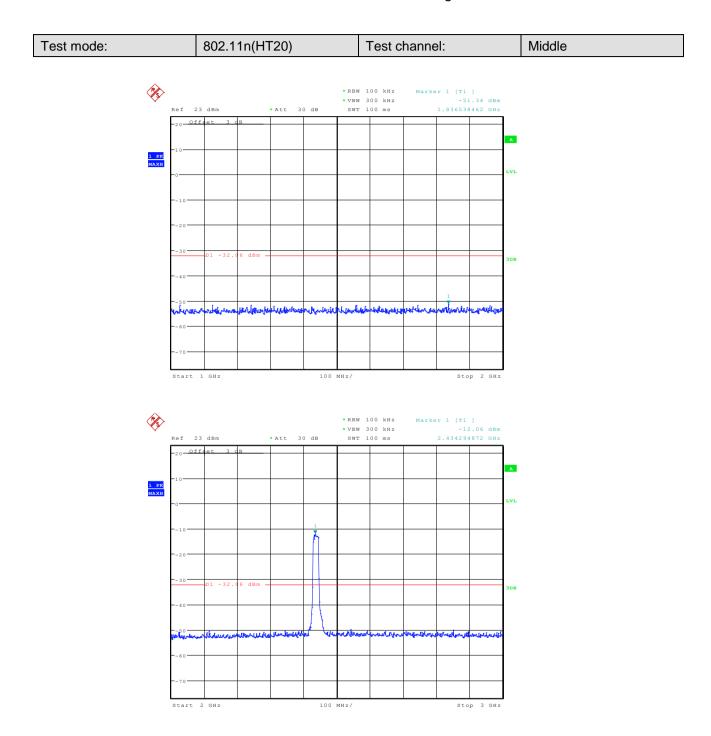


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 62 of 116

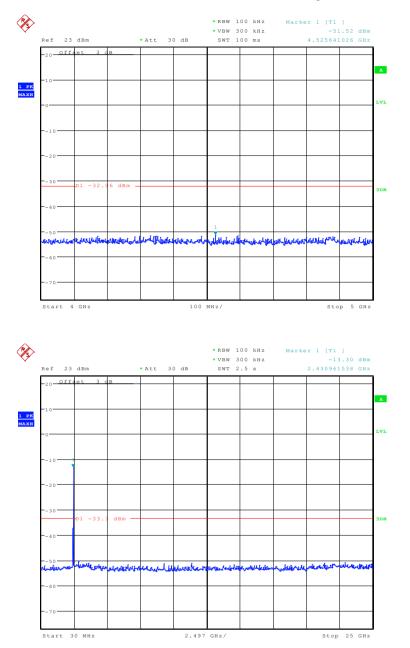




Report No.: SZEM140200059801 Page: 63 of 116

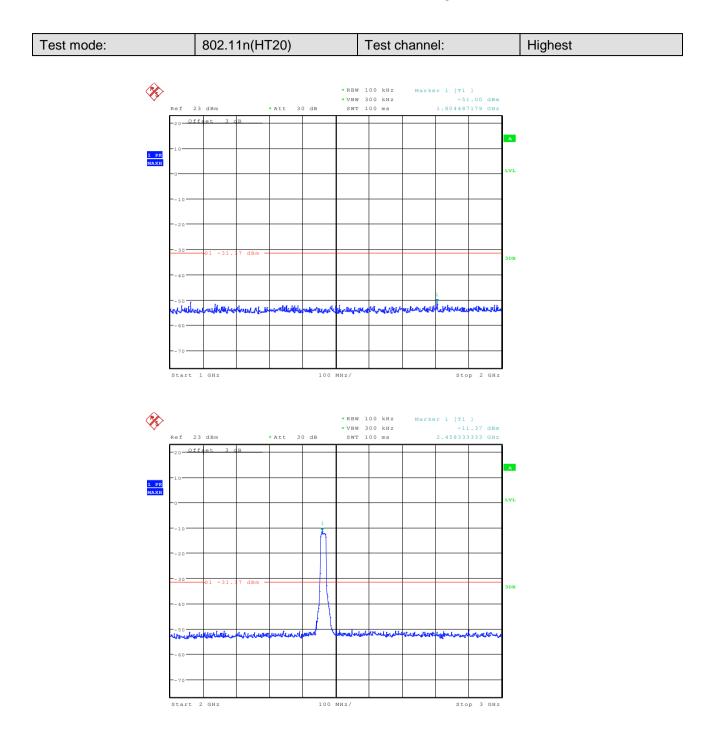

## SGS-CSTC Standards Technical Services Ltd.


Report No.: SZEM140200059801 Page: 64 of 116

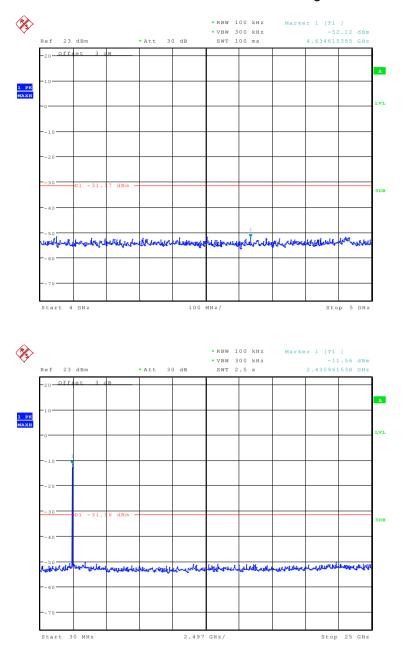






Report No.: SZEM140200059801 Page: 65 of 116

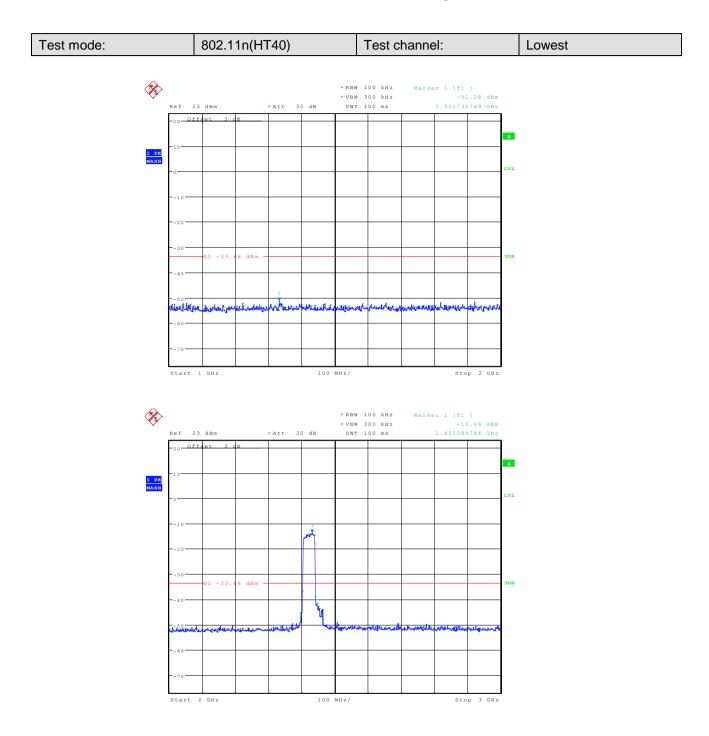


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 66 of 116

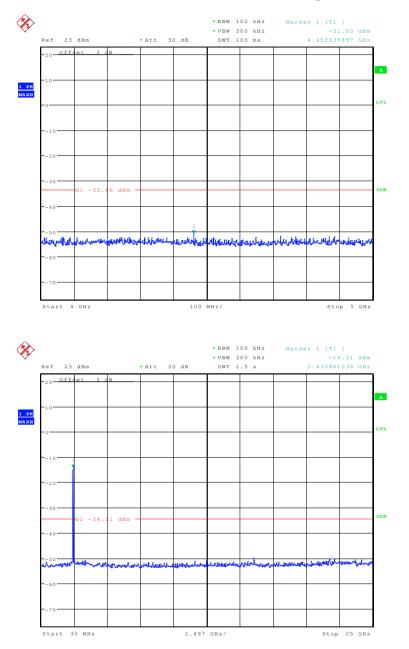




Report No.: SZEM140200059801 Page: 67 of 116

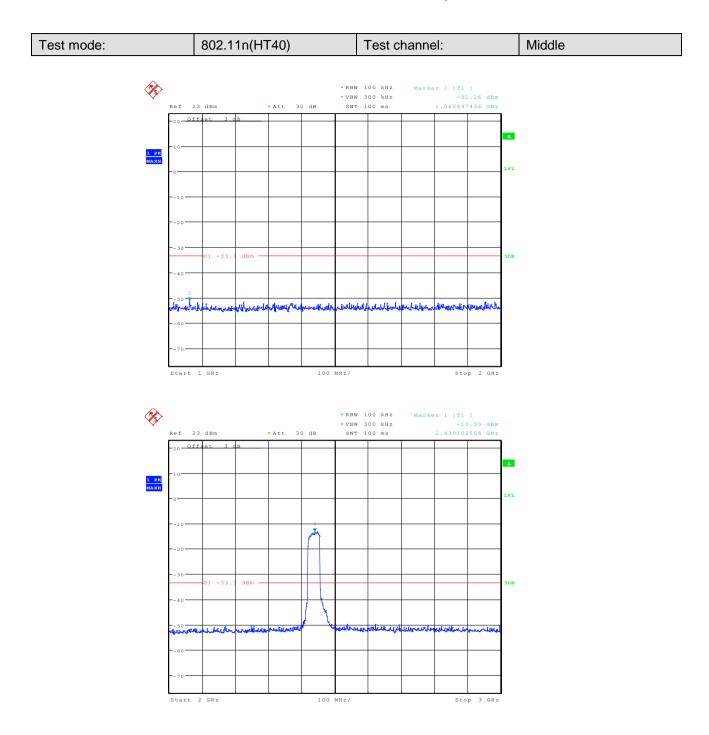


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 68 of 116

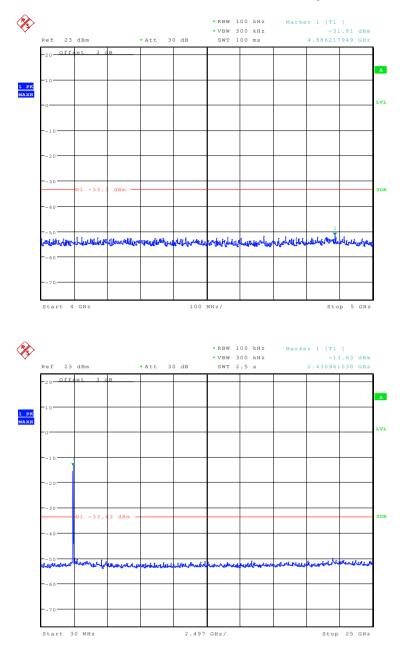




Report No.: SZEM140200059801 Page: 69 of 116

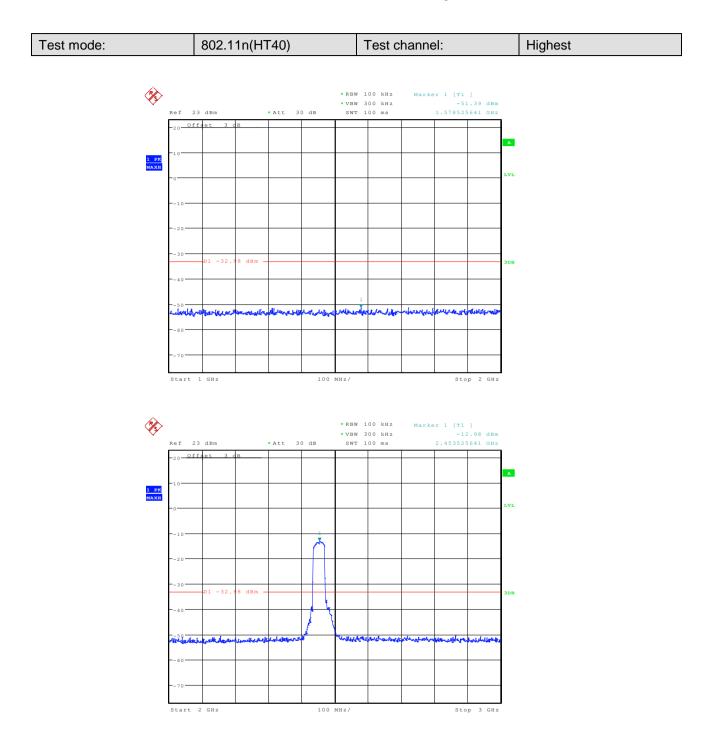

### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 70 of 116

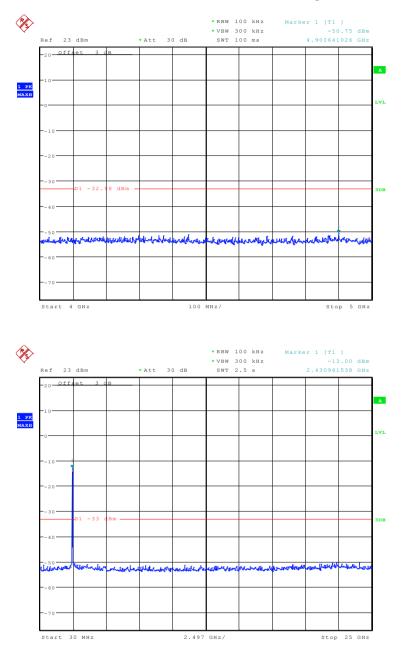

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.




Report No.: SZEM140200059801 Page: 71 of 116

## 5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
		Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							



Report No.: SZEM140200059801 Page: 72 of 116

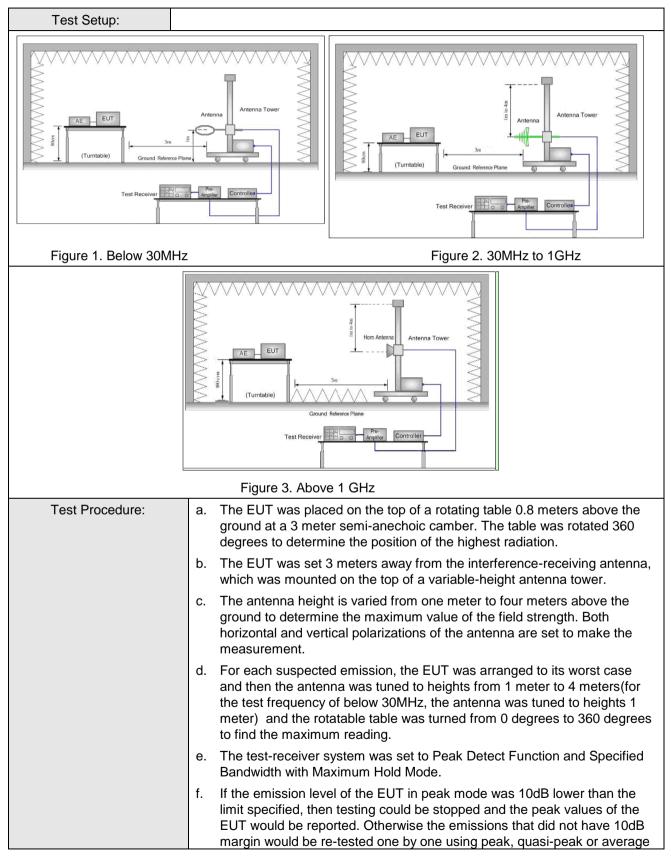



Report No.: SZEM140200059801 Page: 73 of 116


	method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
	<ul> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li> </ul>
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM140200059801 Page: 74 of 116

#### 5.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)							
Test mode:	Transmitting	Vertical					

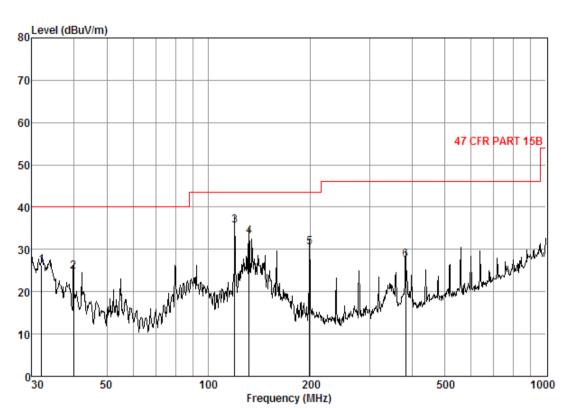


Condition: 47 CFR PART 15B 3m 3142C VERTICAL Job No. : 0598RF Mode : TX mode

oae	. 1. 10	uae						
		CableA	ntenna	Preamp	Read		Limit	Over
	Ψ							
	Freq	Loss	ractor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
							-	
1	32.07	0.67	21.40	25.69	29.88	26.26	40.00	-13.74
T								
2	39.85	0.80	11.24	25.79	38.47	24.72	40.00	-15.28
3	119.44	1.58	7.68	25.78	52.18	35.66	43.50	-7.84
4	131.76	1 69	8.24	25.37	48.46	33.02	43 50	-10.48
5	199.29	2.17	6.76	24.95	46.53	30.51	43.50	-12.99
6	383.93	3.18	11.66	25.08	37.85	27.61	46 00	-18.39
~	000.00	0.10	11.00	20.00	01.00	21.01	40.00	10.00





Report No.: SZEM140200059801 Page: 75 of 116

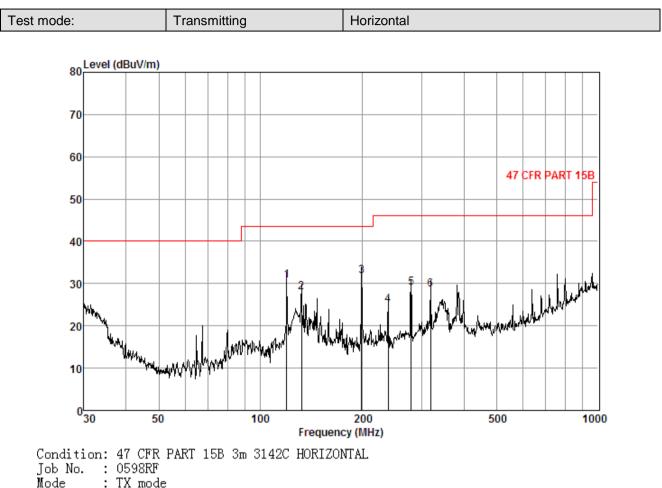

oue	. 17 10			_				_
		CableAr	ntenna	Preamp	Read		Limit	Over
	Frea	Loge B	factor	Factor	Level	Level	Line	Limit
	TICA	L035 I	actor	I de tor	LUVUI	LUVUI	LINC	LIMIC
-			ID /			ID II (	10.11/	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	119.44	1.58	7.68	25.78	47.22	30.70	43.50	-12.80
2	132.22	1.69	8.25	25.37	43.34	27.91	43, 50	-15.59
3	199.29	2.17	6.76	24.95	47.89	31.87		-11.63
-			** • *					
4	239.15	2.44	8.08	25.12	39.57	24.97	46.00	-21.03
5	279.04	2.65	9.28	24.54	41.60	28.99	46.00	-17.01
6	318.82	2.89	9.81	24.93	40.86	28.63	46.00	-17.37



Report No.: SZEM140200059801 Page: 76 of 116

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1655.354	4.04	29.33	39.42	49.27	43.22	74	-30.78	Vertical
2935.153	5.01	33.31	40.26	47.22	45.28	74	-28.72	Vertical
4824.000	7.45	34.68	41.64	52.01	52.50	74	-21.50	Vertical
7236.000	8.76	35.90	39.85	46.75	51.56	74	-22.44	Vertical
9648.000	9.69	37.36	37.76	41.40	50.69	74	-23.31	Vertical
12086.330	11.32	38.99	38.31	40.47	52.47	74	-21.53	Vertical
1577.198	3.97	28.72	39.38	46.03	39.34	74	-34.66	Horizontal
3525.555	5.80	33.24	40.69	47.04	45.39	74	-28.61	Horizontal
4824.000	7.45	34.68	41.64	51.78	52.27	74	-21.73	Horizontal
7236.000	8.76	35.90	39.85	44.45	49.26	74	-24.74	Horizontal
9648.000	9.69	37.36	37.76	41.48	50.77	74	-23.23	Horizontal
12210.020	11.37	39.11	38.36	40.74	52.86	74	-21.14	Horizontal

#### 5.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1724.166	4.10	29.83	39.45	46.82	41.30	74	-32.70	Vertical
3241.498	5.40	33.30	40.48	46.55	44.77	74	-29.23	Vertical
4874.000	7.48	34.59	41.68	51.50	51.89	74	-22.11	Vertical
7311.000	8.85	35.92	39.79	44.02	49.00	74	-25.00	Vertical
9748.000	9.74	37.46	37.68	40.10	49.62	74	-24.38	Vertical
12086.330	11.32	38.99	38.31	40.96	52.96	74	-21.04	Vertical
1495.101	3.89	28.10	39.35	46.83	39.47	74	-34.53	Horizontal
3525.555	5.80	33.24	40.69	47.35	45.70	74	-28.30	Horizontal
4874.000	7.48	34.59	41.68	52.11	52.50	74	-21.50	Horizontal
7311.000	8.85	35.92	39.79	43.49	48.47	74	-25.53	Horizontal
9748.000	9.74	37.46	37.68	41.20	50.72	74	-23.28	Horizontal
12055.600	11.31	38.95	38.30	40.85	52.81	74	-21.19	Horizontal



Report No.: SZEM140200059801 Page: 77 of 116

Test mode:	802	.11b	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	49.92	42.56	74	-31.44	Vertical
3026.195	5.09	33.39	40.33	46.18	44.33	74	-29.67	Vertical
4924.000	7.51	34.51	41.72	52.54	52.84	74	-21.16	Vertical
7386.000	8.94	35.96	39.72	43.24	48.42	74	-25.58	Vertical
9848.000	9.78	37.54	37.58	40.23	49.97	74	-24.03	Vertical
12210.020	11.37	39.11	38.36	40.06	52.18	74	-21.82	Vertical
1659.574	4.04	29.33	39.42	49.40	43.35	74	-30.65	Horizontal
3454.486	5.70	33.22	40.63	47.61	45.90	74	-28.10	Horizontal
4924.000	7.51	34.51	41.72	52.23	52.53	74	-21.47	Horizontal
7386.000	8.94	35.96	39.72	42.91	48.09	74	-25.91	Horizontal
9848.000	9.78	37.54	37.58	40.92	50.66	74	-23.34	Horizontal
12334.980	11.42	39.24	38.42	40.29	52.53	74	-21.47	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	48.57	41.21	74	-32.79	Vertical
3143.979	5.27	33.34	40.41	45.11	43.31	74	-30.69	Vertical
4824.000	7.45	34.68	41.64	51.12	51.61	74	-22.39	Vertical
7236.000	8.76	35.90	39.85	44.37	49.18	74	-24.82	Vertical
9648.000	9.69	37.36	37.76	41.74	51.03	74	-22.97	Vertical
12210.020	11.37	39.11	38.36	40.28	52.40	74	-21.60	Vertical
1495.101	3.89	28.10	39.35	48.76	41.40	74	-32.60	Horizontal
3018.502	5.09	33.39	40.31	45.36	43.53	74	-30.47	Horizontal
4824.000	7.45	34.68	41.64	50.93	51.42	74	-22.58	Horizontal
7236.000	8.76	35.90	39.85	44.45	49.26	74	-24.74	Horizontal
9648.000	9.69	37.36	37.76	42.36	51.65	74	-22.35	Horizontal
12429.540	11.46	39.33	38.46	40.74	53.07	74	-20.93	Horizontal



Report No.: SZEM140200059801 Page: 78 of 116

Test mode:	802	.11g	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1525.860	3.92	28.35	39.37	50.12	43.02	74	-30.98	Vertical
3625.669	5.93	33.34	40.76	46.12	44.63	74	-29.37	Vertical
4874.000	7.48	34.59	41.68	51.90	52.29	74	-21.71	Vertical
7311.000	8.85	35.92	39.79	45.76	50.74	74	-23.26	Vertical
9748.000	9.74	37.46	37.68	41.88	51.40	74	-22.60	Vertical
12055.600	11.31	38.95	38.30	40.45	52.41	74	-21.59	Vertical
1655.354	4.04	29.33	39.42	47.88	41.83	74	-32.17	Horizontal
3176.155	5.30	33.33	40.44	49.67	47.86	74	-26.14	Horizontal
4874.000	7.48	34.59	41.68	52.00	52.39	74	-21.61	Horizontal
7311.000	8.85	35.92	39.79	44.43	49.41	74	-24.59	Horizontal
9748.000	9.74	37.46	37.68	41.44	50.96	74	-23.04	Horizontal
11226.250	10.73	38.45	37.95	41.28	52.51	74	-21.49	Horizontal

Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	49.60	42.24	74	-31.76	Vertical
3018.502	5.09	33.39	40.31	46.61	44.78	74	-29.22	Vertical
4924.000	7.51	34.51	41.72	52.92	53.22	74	-20.78	Vertical
7386.000	8.94	35.96	39.72	44.58	49.76	74	-24.24	Vertical
9848.000	9.78	37.54	37.58	40.74	50.48	74	-23.52	Vertical
11963.890	11.26	38.87	38.26	40.33	52.20	74	-21.80	Vertical
1659.574	4.04	29.33	39.42	47.78	41.73	74	-32.27	Horizontal
3143.979	5.27	33.34	40.41	45.83	44.03	74	-29.97	Horizontal
4924.000	7.51	34.51	41.72	52.59	52.89	74	-21.11	Horizontal
7386.000	8.94	35.96	39.72	44.01	49.19	74	-24.81	Horizontal
9848.000	9.78	37.54	37.58	40.60	50.34	74	-23.66	Horizontal
12086.330	11.32	38.99	38.31	40.95	52.95	74	-21.05	Horizontal



Report No.: SZEM140200059801 Page: 79 of 116

Test mode:	802	2.11n(HT20)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	50.40	43.04	74	-30.96	Vertical
2789.463	4.90	33.10	40.14	47.99	45.85	74	-28.15	Vertical
4874.000	7.48	34.59	41.68	52.23	52.62	74	-21.38	Vertical
7311.000	8.85	35.92	39.79	44.37	49.35	74	-24.65	Vertical
9748.000	9.74	37.46	37.68	41.21	50.73	74	-23.27	Vertical
12055.600	11.31	38.95	38.30	40.31	52.27	74	-21.73	Vertical
1659.574	4.04	29.33	39.42	53.74	47.69	74	-26.31	Horizontal
3120.061	5.22	33.35	40.40	46.43	44.60	74	-29.40	Horizontal
4874.000	7.48	34.59	41.68	51.87	52.26	74	-21.74	Horizontal
7311.000	8.85	35.92	39.79	44.89	49.87	74	-24.13	Horizontal
9748.000	9.74	37.46	37.68	42.03	51.55	74	-22.45	Horizontal
11963.890	11.26	38.87	38.26	40.99	52.86	74	-21.14	Horizontal

Test mode:	802	.11n(HT20)	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	47.65	40.29	74	-33.71	Vertical
3151.992	5.27	33.34	40.41	47.16	45.36	74	-28.64	Vertical
4824.000	7.45	34.68	41.64	49.08	49.57	74	-24.43	Vertical
7236.000	8.76	35.90	39.85	45.09	49.90	74	-24.10	Vertical
9648.000	9.69	37.36	37.76	41.99	51.28	74	-22.72	Vertical
12055.600	11.31	38.95	38.30	40.86	52.82	74	-21.18	Vertical
1655.354	4.04	29.33	39.42	48.16	42.11	74	-31.89	Horizontal
3776.385	6.16	33.53	40.87	45.30	44.12	74	-29.88	Horizontal
4824.000	7.45	34.68	41.64	52.08	52.57	74	-21.43	Horizontal
7236.000	8.76	35.90	39.85	44.36	49.17	74	-24.83	Horizontal
9648.000	9.69	37.36	37.76	42.09	51.38	74	-22.62	Horizontal
12429.540	11.46	39.33	38.46	40.55	52.88	74	-21.12	Horizontal



Report No.: SZEM140200059801 Page: 80 of 116

Test mode:	80	2.11n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	55.19	47.83	74	-26.17	Vertical
3445.704	5.68	33.22	40.63	46.31	44.58	74	-29.42	Vertical
4924.000	7.51	34.51	41.72	49.02	49.32	74	-24.68	Vertical
7386.000	8.94	35.96	39.72	44.15	49.33	74	-24.67	Vertical
9848.000	9.78	37.54	37.58	42.11	51.85	74	-22.15	Vertical
12055.600	11.31	38.95	38.30	40.94	52.90	74	-21.10	Vertical
1659.574	4.04	29.33	39.42	51.78	45.73	74	-28.27	Horizontal
2810.846	4.91	33.14	40.16	47.19	45.08	74	-28.92	Horizontal
4924.000	7.51	34.51	41.72	52.98	53.28	74	-20.72	Horizontal
7386.000	8.94	35.96	39.72	43.87	49.05	74	-24.95	Horizontal
9848.000	9.78	37.54	37.58	41.26	51.00	74	-23.00	Horizontal
11963.890	11.26	38.87	38.26	40.79	52.66	74	-21.34	Horizontal

Test mode:	802	.11n(HT40)	Test ch	annel:	Lowest Remark:			Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1495.101	3.89	28.10	39.35	56.61	49.25	74	-24.75	Vertical
3588.939	5.88	33.30	40.73	45.49	43.94	74	-30.06	Vertical
4844.000	7.46	34.65	41.65	48.70	49.16	74	-24.84	Vertical
7266.000	8.81	35.91	39.82	43.34	48.24	74	-25.76	Vertical
9688.000	9.71	37.39	37.73	40.90	50.27	74	-23.73	Vertical
11963.890	11.26	38.87	38.26	40.63	52.50	74	-21.50	Vertical
1724.166	4.10	29.83	39.45	49.74	44.22	74	-29.78	Horizontal
3672.110	6.00	33.41	40.80	46.99	45.60	74	-28.40	Horizontal
4844.000	7.46	34.65	41.65	51.77	52.23	74	-21.77	Horizontal
7266.000	8.81	35.91	39.82	44.28	49.18	74	-24.82	Horizontal
9688.000	9.71	37.39	37.73	41.09	50.46	74	-23.54	Horizontal
11963.890	11.26	38.87	38.26	41.35	53.22	74	-20.78	Horizontal



Report No.: SZEM140200059801 Page: 81 of 116

Test mode:	802	2.11n(HT40)	Test ch	annel:	Middle	Remark:		iddle Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1495.101	3.89	28.10	39.35	55.57	48.21	74	-25.79	Vertical		
2957.654	5.02	33.33	40.27	45.75	43.83	74	-30.17	Vertical		
4874.000	7.48	34.59	41.68	52.26	52.65	74	-21.35	Vertical		
7311.000	8.85	35.92	39.79	43.33	48.31	74	-25.69	Vertical		
9748.000	9.74	37.46	37.68	41.12	50.64	74	-23.36	Vertical		
11963.890	11.26	38.87	38.26	40.94	52.81	74	-21.19	Vertical		
2905.419	4.98	33.26	40.23	44.76	42.77	74	-31.23	Horizontal		
3525.555	5.80	33.24	40.69	47.55	45.90	74	-28.10	Horizontal		
4874.000	7.48	34.59	41.68	52.49	52.88	74	-21.12	Horizontal		
7311.000	8.85	35.92	39.79	48.27	53.25	74	-20.75	Horizontal		
9748.000	9.74	37.46	37.68	41.10	50.62	74	-23.38	Horizontal		
11963.890	11.26	38.87	38.26	41.28	53.15	74	-20.85	Horizontal		

Test mode: 802.11n(H		11n(HT40)	Test channel:		Highest	Remark	:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1659.574	4.04	29.33	39.42	50.82	44.77	74	-29.23	Vertical	
2957.654	5.02	33.33	40.27	48.65	46.73	74	-27.27	Vertical	
4904.000	7.49	34.54	41.70	52.22	52.55	74	-21.45	Vertical	
7356.000	8.92	35.94	39.74	44.05	49.17	74	-24.83	Vertical	
9808.000	9.76	37.51	37.61	41.23	50.89	74	-23.11	Vertical	
12210.020	11.37	39.11	38.36	40.23	52.35	74	-21.65	Vertical	
1659.574	4.04	29.33	39.42	52.40	46.35	74	-27.65	Horizontal	
3057.166	5.14	33.38	40.34	44.26	42.44	74	-31.56	Horizontal	
4904.000	7.49	34.54	41.70	52.71	53.04	74	-20.96	Horizontal	
7356.000	8.92	35.94	39.74	43.36	48.48	74	-25.52	Horizontal	
9808.000	9.76	37.51	37.61	40.72	50.38	74	-23.62	Horizontal	
12178.980	11.36	39.09	38.35	40.53	52.63	74	-21.37	Horizontal	



Report No.: SZEM140200059801 Page: 82 of 116

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Report No.: SZEM140200059801 Page: 83 of 116

#### 5.9 Restricted bands around fundamental frequency

		• •					
Test Requirement:	47 CFR Part 15C Section	47 CFR Part 15C Section 15.209 and 15.205					
Test Method:	ANSI C63.10 2009						
Test Site:	Measurement Distance: 3r	n (Semi-Anechoic Chambe	r)				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value Quasi-peak Value				
	216MHz-960MHz	46.0					
	960MHz-1GHz	54.0	Quasi-peak Value				
	Above 4011-	54.0					
	Above 1GHz	74.0	Peak Value				
Test Setup:							

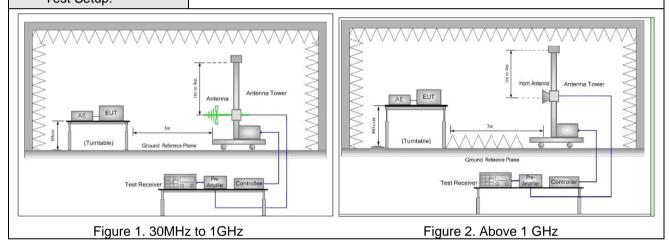




Report No.: SZEM140200059801 Page: 84 of 116

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	<ul> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> </ul>
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel , the Highest channel
	<ul> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li> </ul>
	<ol> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass






Report No.: SZEM140200059801 Page: 85 of 116

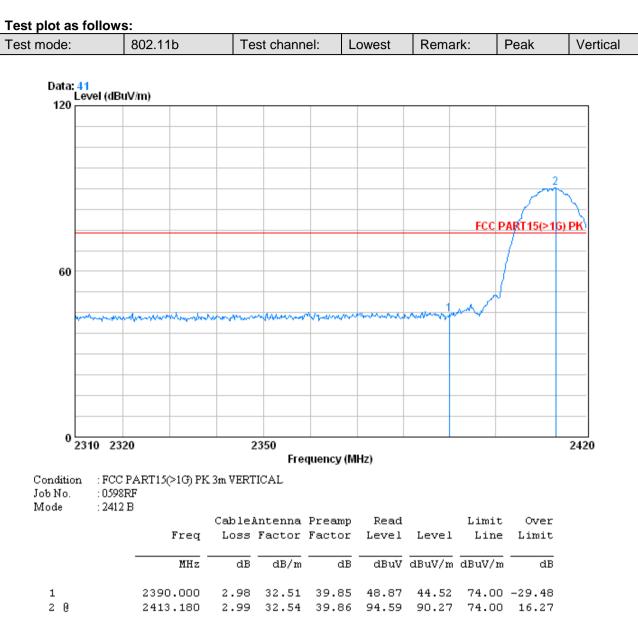



Report No.: SZEM140200059801 Page: 86 of 116



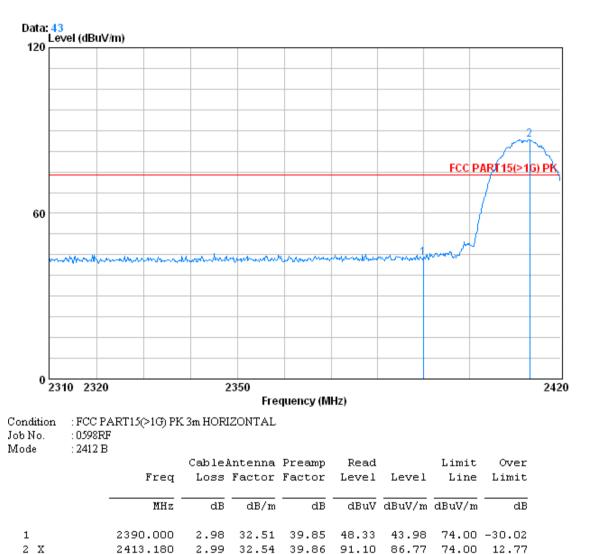



Report No.: SZEM140200059801 Page: 87 of 116


Test mode:	802.11b	Test channel:	Lowest	Remark:	Average	Vertical





Report No.: SZEM140200059801 Page: 88 of 116


|--|

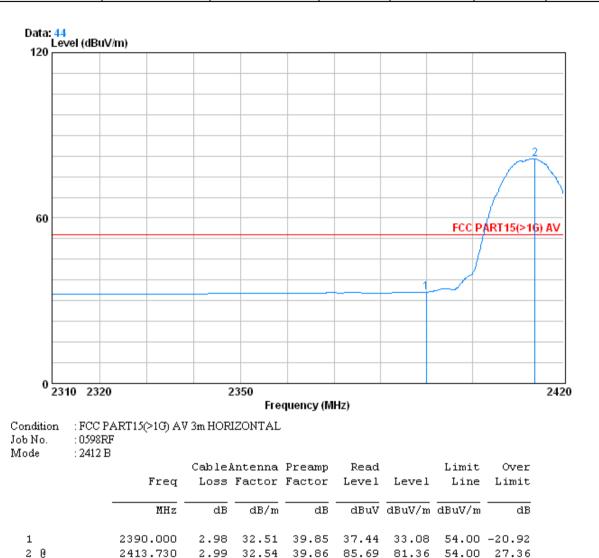



Report No.: SZEM140200059801 Page: 89 of 116

Test mode: 802.11	b Test channel:	Highest I	Remark:	Peak	Vertical
-------------------	-----------------	-----------	---------	------	----------

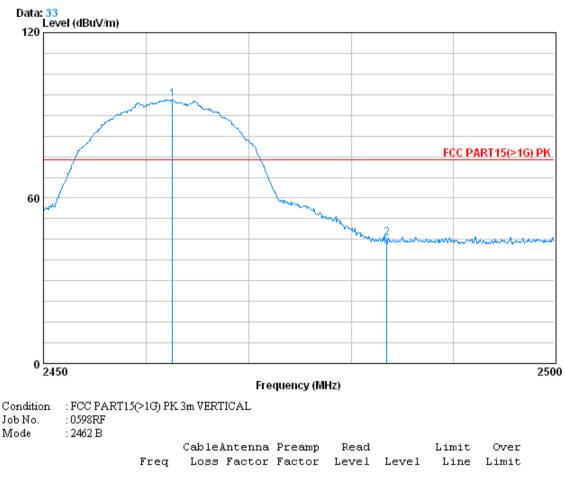


		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0	2462.550	3.02	32.64	39.91	99.92	95.67	74.00	21.67
2		2483.500	3.03	32.67	39.92	49.56	45.34	74.00	-28.66



Report No.: SZEM140200059801 Page: 90 of 116

Test mode: 802.11b Test channel: Highest Re	emark: Peak Horizontal
---	------------------------

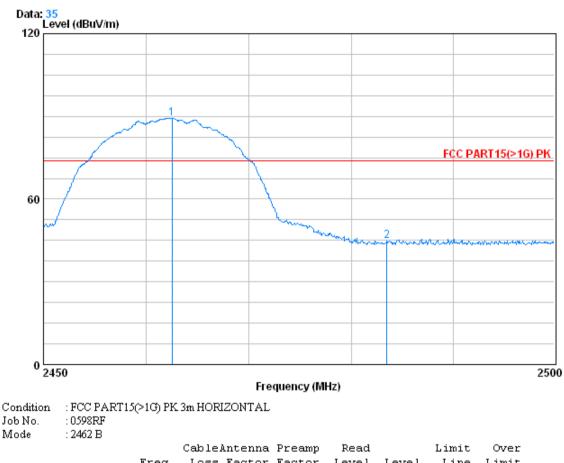


	Freq	LOSS	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2462.500 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 91 of 116


Test mode:	802.11b	Test channel:	Highest	Remark:	Average	Vertical
------------	---------	---------------	---------	---------	---------	----------

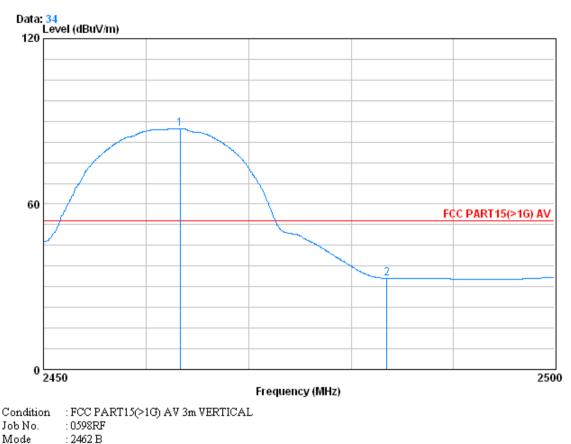

		Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2		2463.300 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 92 of 116

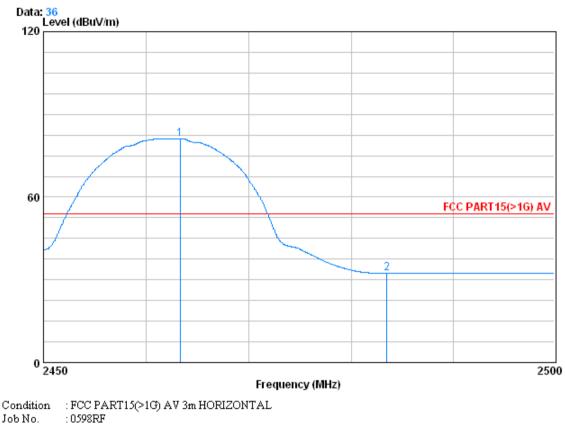


JOB NO.	
Mode	

: 2462 B

	Freq			Preamp Factor	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2463.300 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 93 of 116

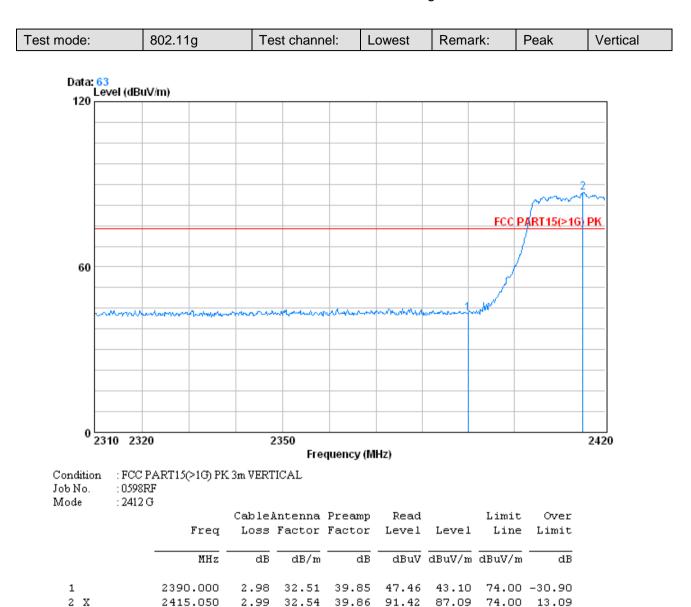



2 X


2415.050

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 94 of 116

88.71 84.39 74.00 10.39

	Test mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Horizontal
--	------------	---------	---------------	--------	---------	------	------------

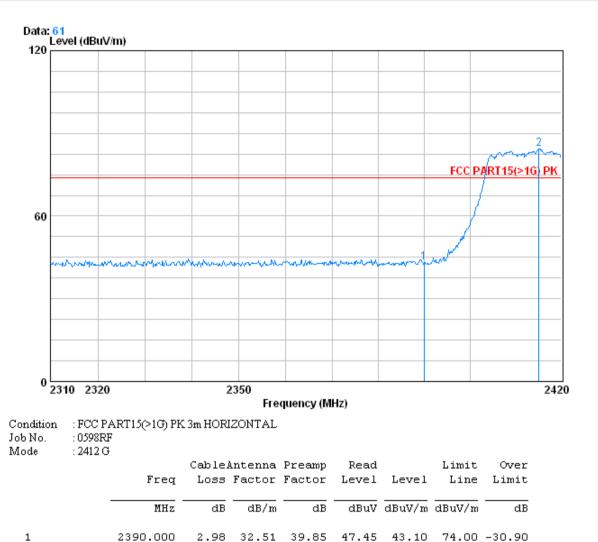


2.99 32.54 39.86





Report No.: SZEM140200059801 Page: 95 of 116

Test mode:   802.11g   Test channel:   Lowest   Remark:   Average   Vertical
--

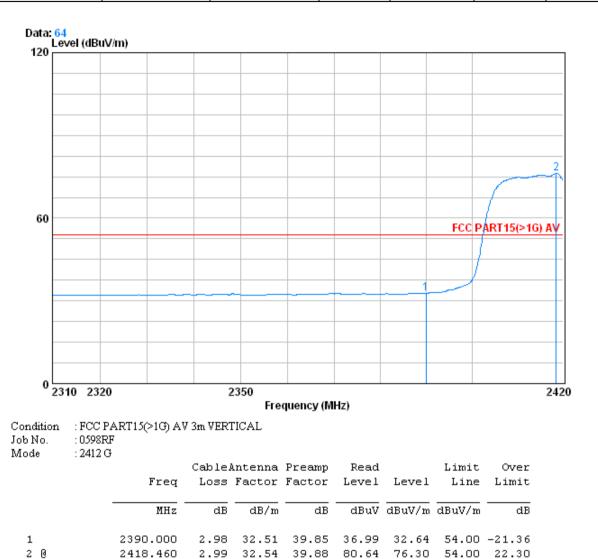



Report No.: SZEM140200059801 Page: 96 of 116


	Test mode:	802.11g	Test channel:	Lowest	Remark:	Average	Horizontal
--	------------	---------	---------------	--------	---------	---------	------------





Report No.: SZEM140200059801 Page: 97 of 116

	Test mode:	802.11g	Test channel:	Highest	Remark:	Peak	Vertical	
--	------------	---------	---------------	---------	---------	------	----------	--

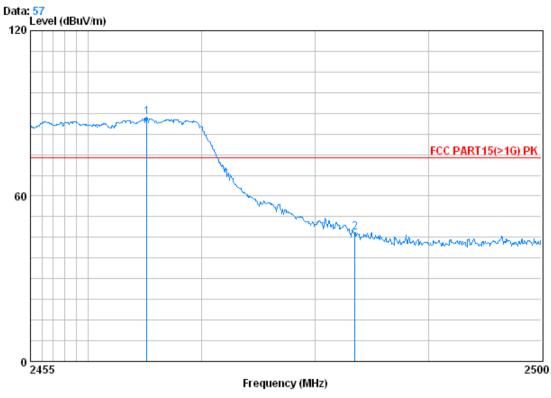


Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 0598RF Mode : 2462 G

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2465.170 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 98 of 116

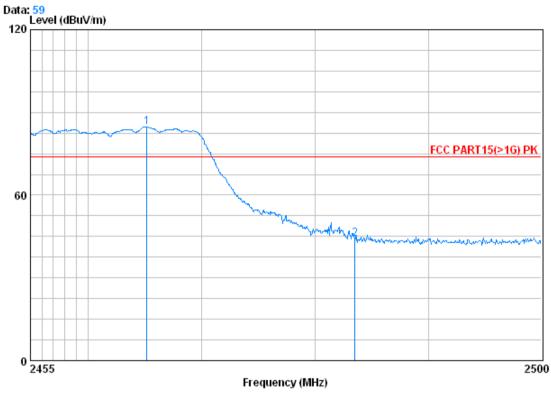


Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 0598RF Mode : 2462 G

	Free	Cable I Loss		Preamp Factor				
	MH:	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2465.170 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 99 of 116

Test mode:	802.11g	Test channel:	Highest	Remark:	Average	Vertical	
------------	---------	---------------	---------	---------	---------	----------	--

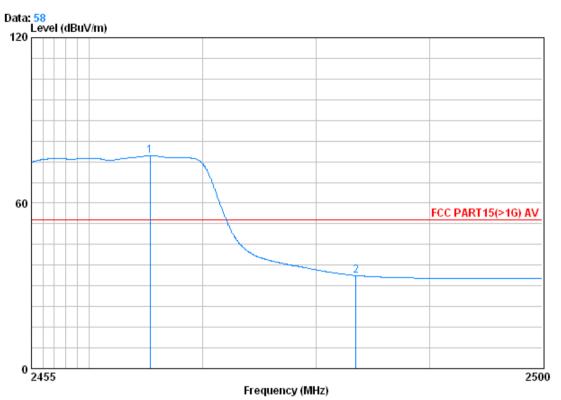


Condition : FCC PART15(>1G) AV 3m VERTICAL Job No. : 0598RF Mode : 2462 G

	 Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2465.395 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 100 of 116

	Test mode:	802.11g	Test channel:	Highest	Remark:	Average	Horizontal	l
--	------------	---------	---------------	---------	---------	---------	------------	---

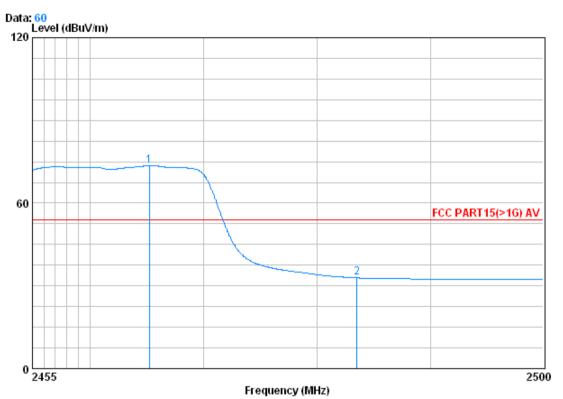


Condition : FCC PART15(>1G) AV 3m HORIZONTAL Job No. : 0598RF Mode : 2462 G

		Freq			Preamp Factor			Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	-	465.215 483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 101 of 116

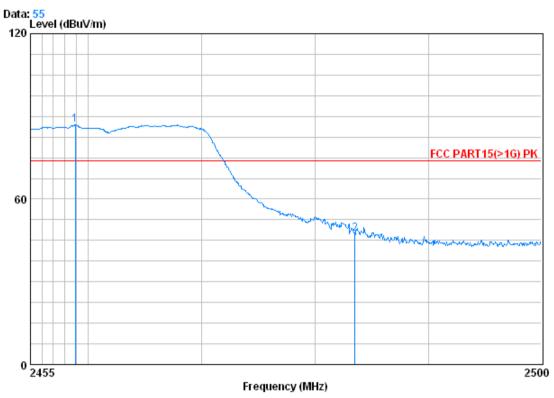


Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 0598RF Mode : 2462 N

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2458.915 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 102 of 116

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Horizontal	

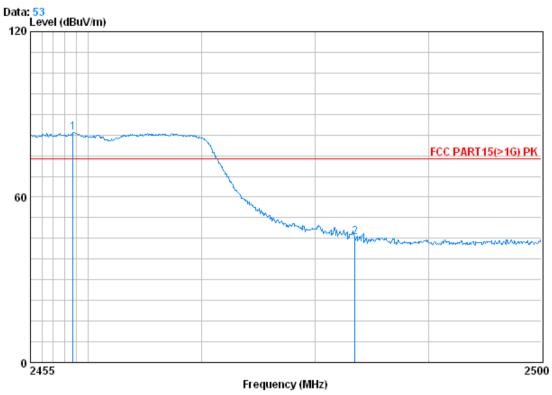


Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 0598RF Mode : 2462 N

	Freq			Preamp Factor	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2458.735 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 103 of 116

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Vertical	
------------	---------------	---------------	--------	---------	---------	----------	--

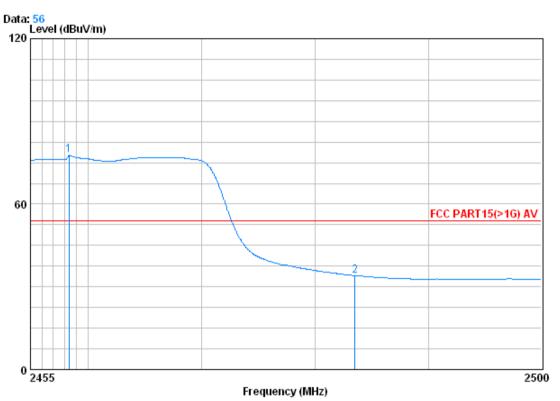


Condition : FCC PART15(>1G) AV 3m VERTICAL Job No. : 0598RF Mode : 2462 N

	 Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2458.375 2483.500			39.91 39.92				



Report No.: SZEM140200059801 Page: 104 of 116

Test mode: 802.	11n(HT20) Test channel:	Lowest	Remark:	Average	Horizontal	1
-----------------	-------------------------	--------	---------	---------	------------	---

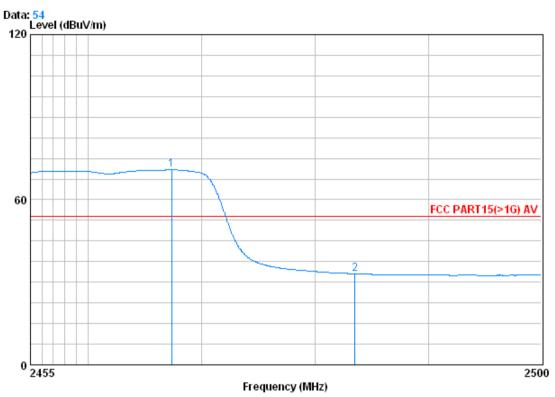

Condition	: FCC PART15(>1G) AV 3m HORIZONTAL
Job No.	: 0598RF
Mode	: 2462 N


	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2467.375 2483.500			39.91 39.92				





Report No.: SZEM140200059801 Page: 105 of 116


Test mode: 802.11n(HT20) Test channel:	Highest Remark:	Peak	Vertical
--	-----------------	------	----------

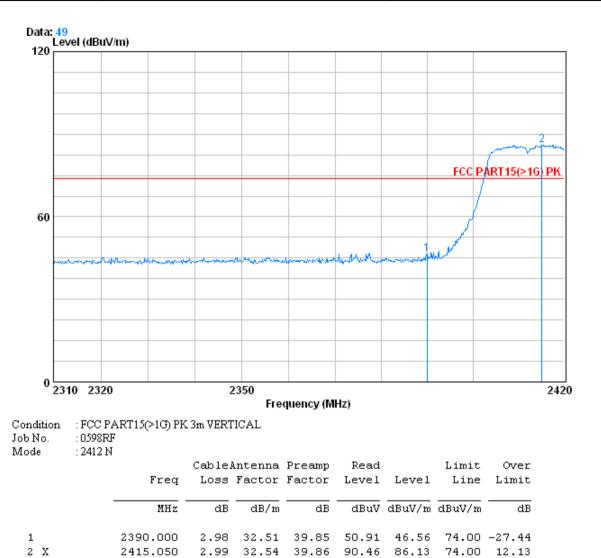



Report No.: SZEM140200059801 Page: 106 of 116



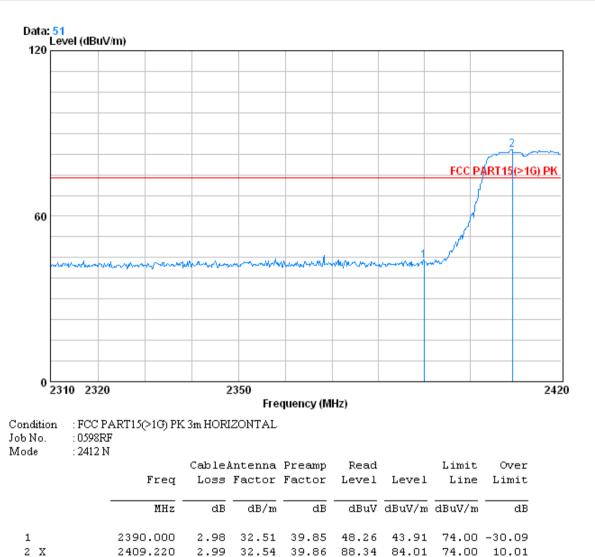



Report No.: SZEM140200059801 Page: 107 of 116

	Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Vertical
--	------------	---------------	---------------	---------	---------	---------	----------





Report No.: SZEM140200059801 Page: 108 of 116

Test mode:   802.11n(HT20)   Test channel:   Highest   Remark:   Average   Hori	Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Horizontal
---	------------	---------------	---------------	---------	---------	---------	------------





2 X


2426.740

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 109 of 116

84.87 74.00 10.87

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Vertical	Test mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Peak	Vertical
---	------------	---------------	---------------	--------	---------	------	----------

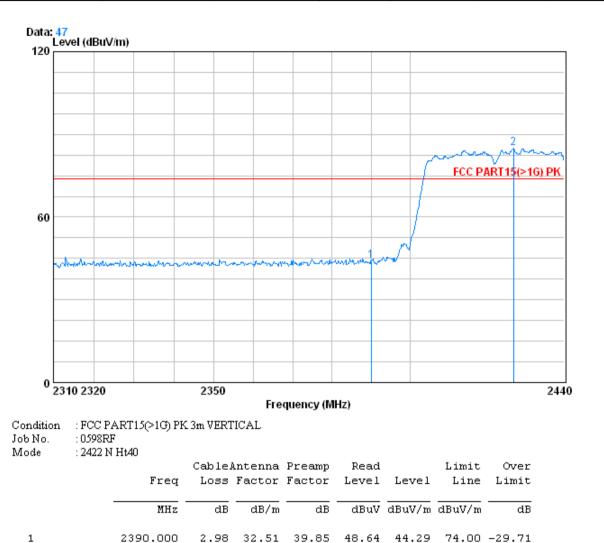

3.00 32.58 39.88 89.17




2 X

2426.740

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 110 of 116

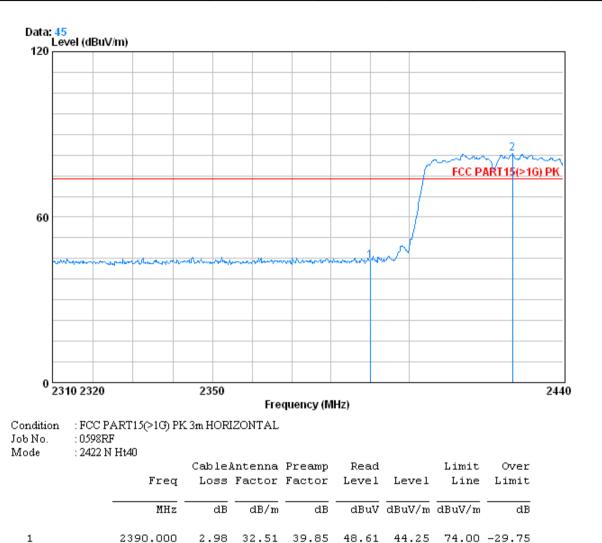

3.00 32.58 39.88 87.28


82.98 74.00

8.98



Report No.: SZEM140200059801 Page: 111 of 116

Test mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Average	Vertical

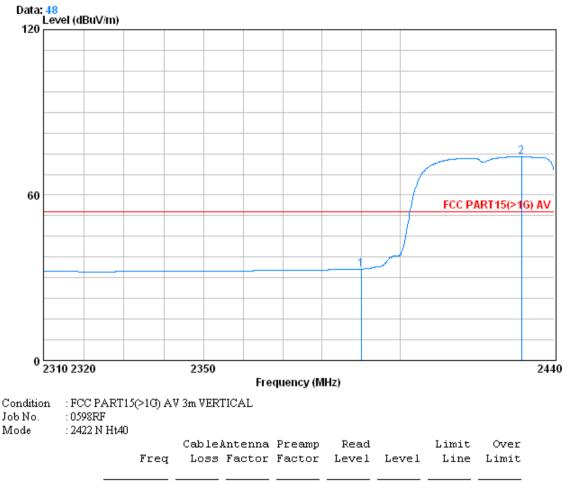


	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2431.420							



Report No.: SZEM140200059801 Page: 112 of 116

Test mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Average	Horizontal	1
------------	---------------	---------------	--------	---------	---------	------------	---

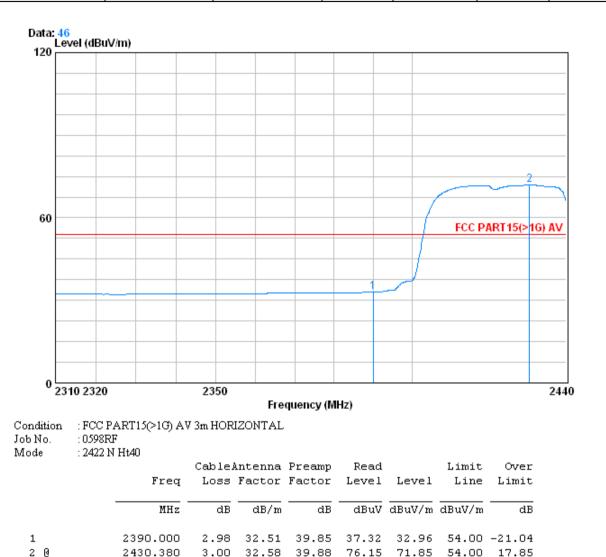

2430.380




2

2483.500

### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 113 of 116

Test mode:   802.11n(HT40)   Test channel:   Highest   Remark:   Peak   Vertical
--

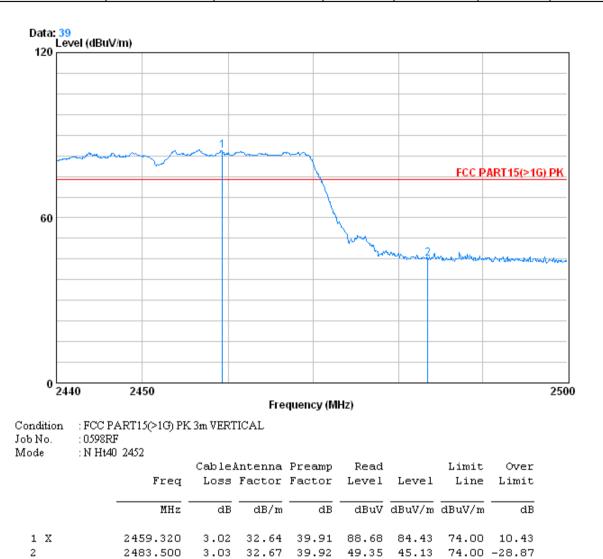


49.35

45.13 74.00 -28.87



Report No.: SZEM140200059801 Page: 114 of 116

Test mode:   802.11n(HT40)   Test channel:   Highest   Remark:   Peak   Horizontal
--

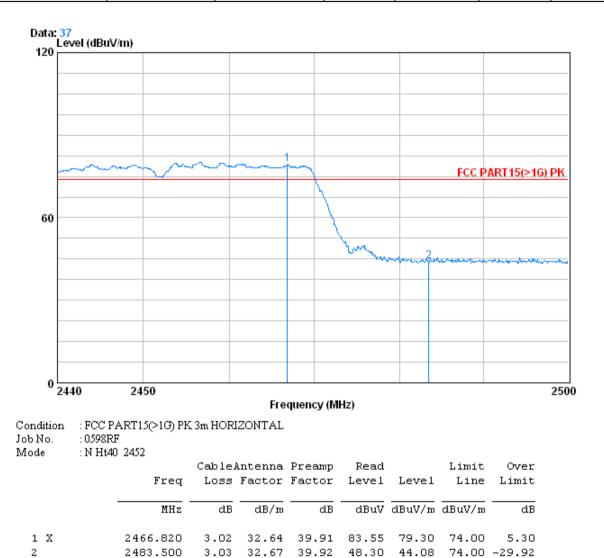



10

2


2460.760

2483.500

### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140200059801 Page: 115 of 116

Test mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Average	Vertical	
------------	---------------	---------------	---------	---------	---------	----------	--

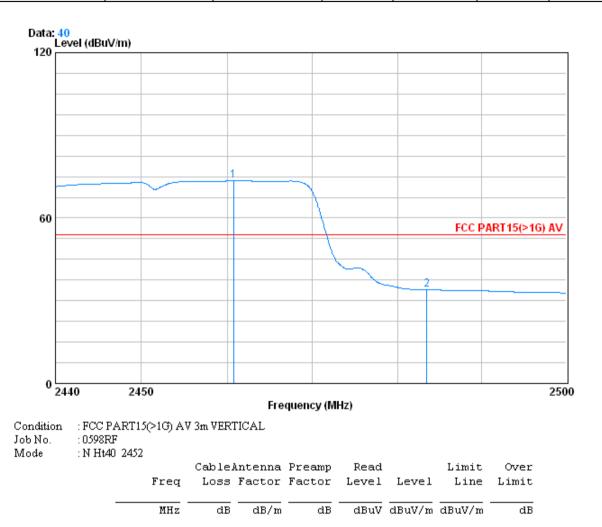

3.02 32.64 39.91

77.74


3.03 32.67 39.92 38.24 34.02 54.00 -19.98

73.49 54.00 19.49



Report No.: SZEM140200059801 Page: 116 of 116

Test mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Average	Horizontal
	( -)		J			

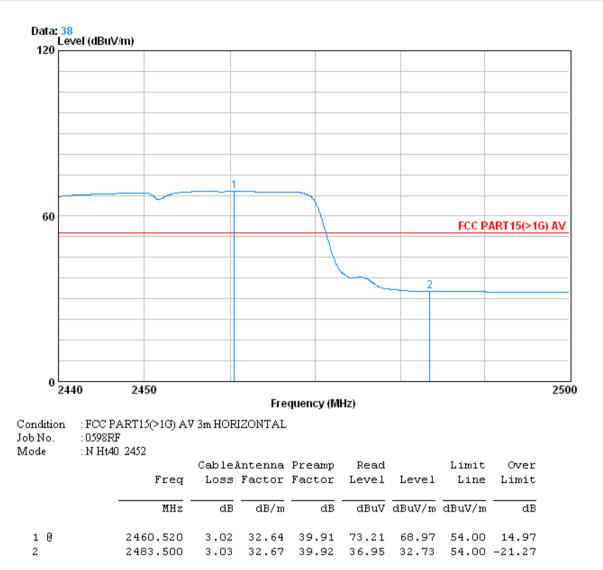

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor