


Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11A_5500	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:36:53

Test Graph

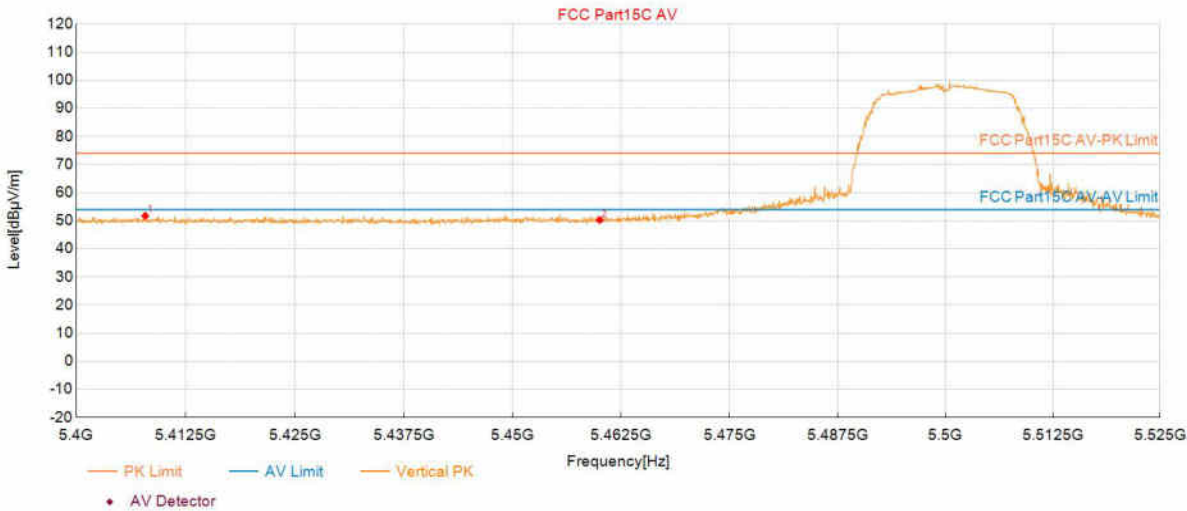


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5407.8789	51.74	74.00	22.26	150	176	Vertical	PASS
2	5460.0300	50.26	74.00	23.74	150	322	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11A_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:40:13

Test Graph

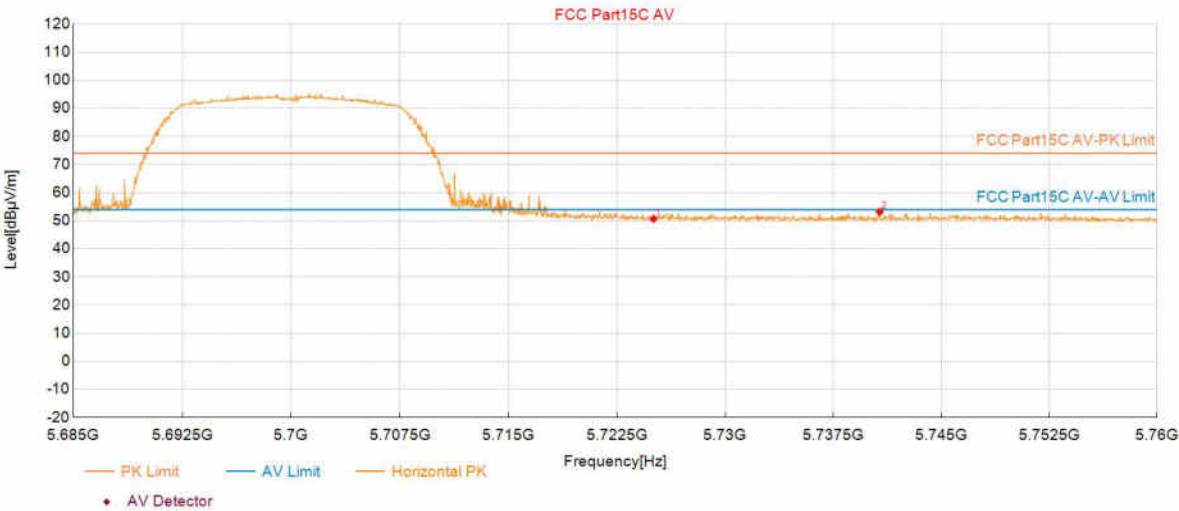


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	50.65	74.00	23.35	150	215	Horizontal	PASS
2	5740.7154	53.15	74.00	20.85	150	2	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11A_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:40:55

Test Graph

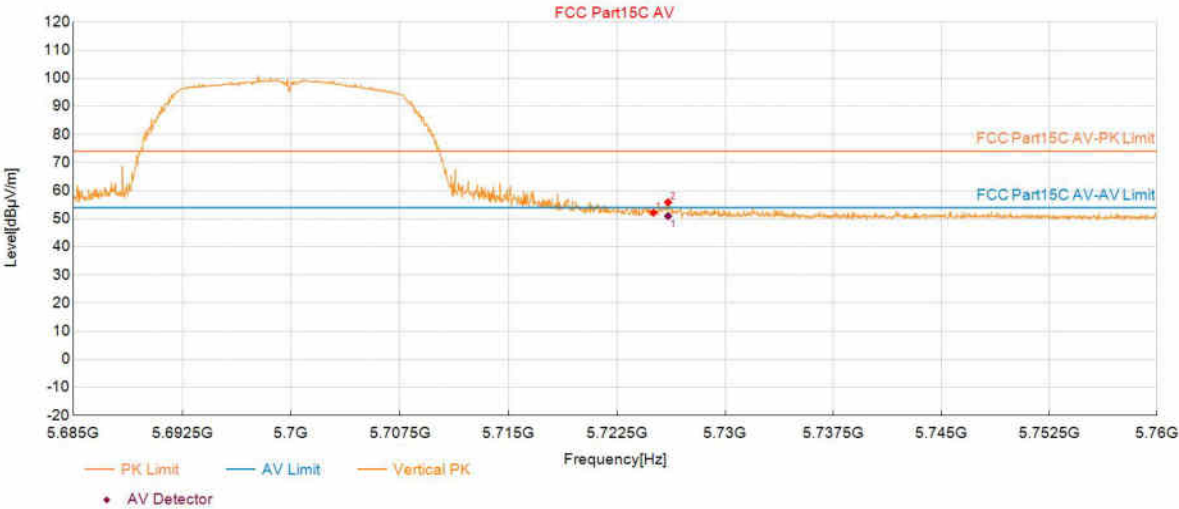

Suspected Data List

NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	52.16	74.00	21.84	150	208	Vertical	PASS
2	5726.0455	55.84	74.00	18.16	150	208	Vertical	PASS

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5726.0455	50.95	54.00	3.05	150	208	Vertical

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5180	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:47:58

Test Graph

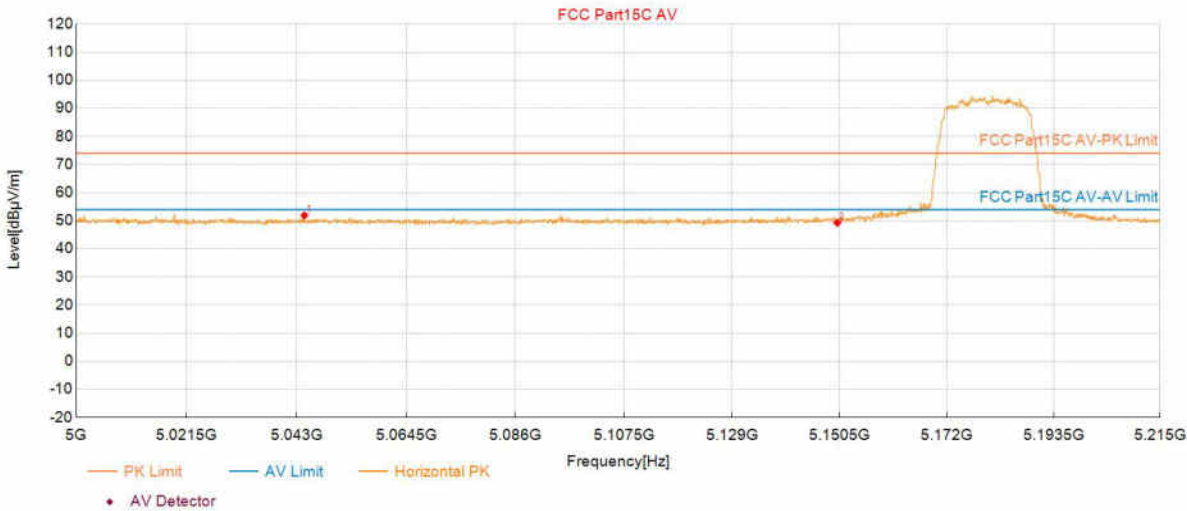


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5044.5273	51.88	74.00	22.12	150	176	Horizontal	PASS
2	5150.0375	49.27	74.00	24.73	150	228	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5180	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:48:40

Test Graph

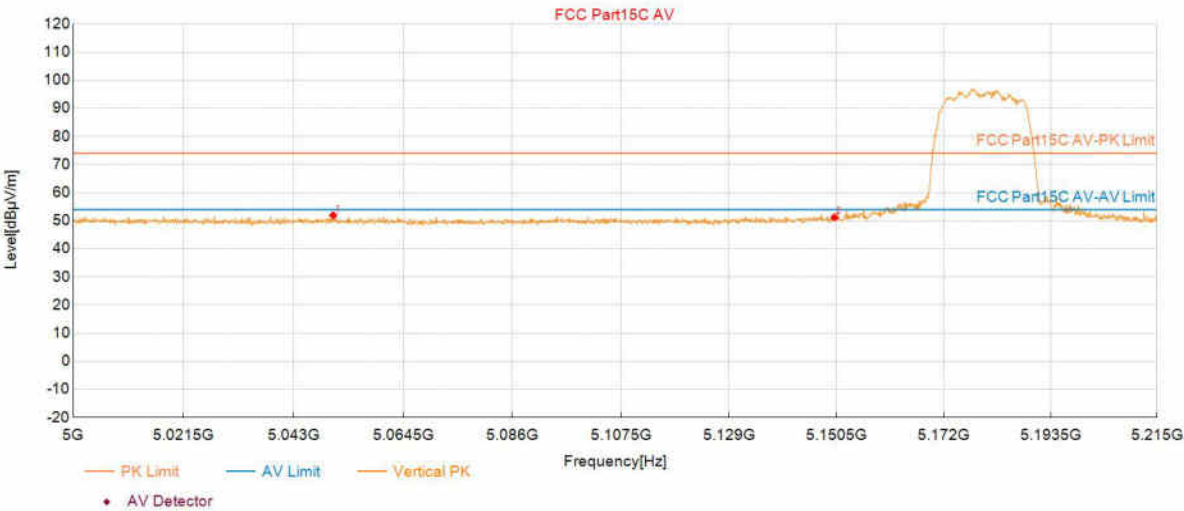


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5050.7654	51.94	74.00	22.06	150	273	Vertical	PASS
2	5150.0375	51.19	74.00	22.81	150	185	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5320	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:51:55

Test Graph

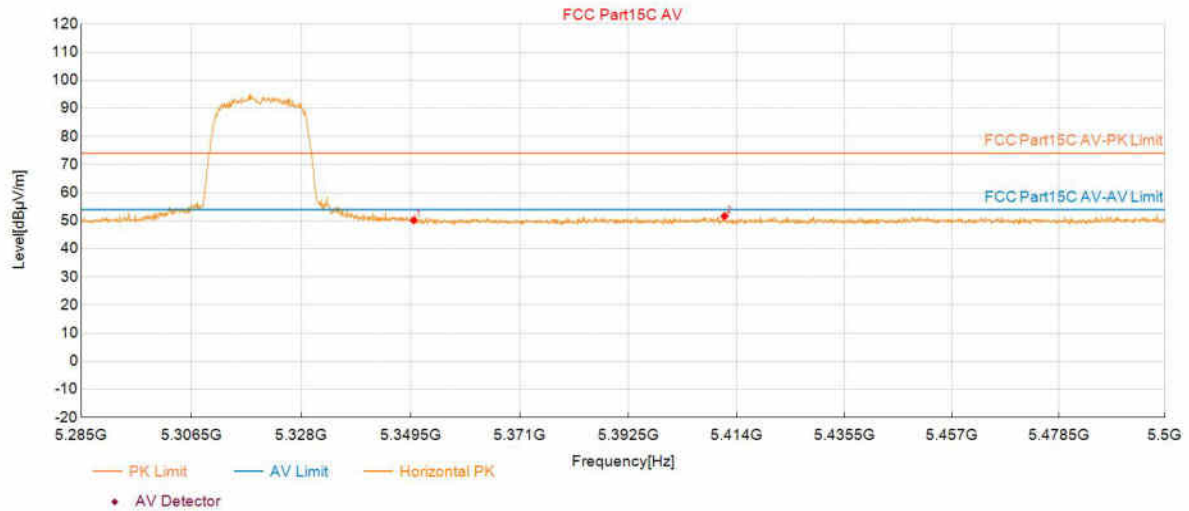

Suspected Data List


NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0700	50.15	74.00	23.85	150	28	Horizontal	PASS
2	5411.5908	51.64	74.00	22.36	150	8	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5320	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:52:37

Test Graph

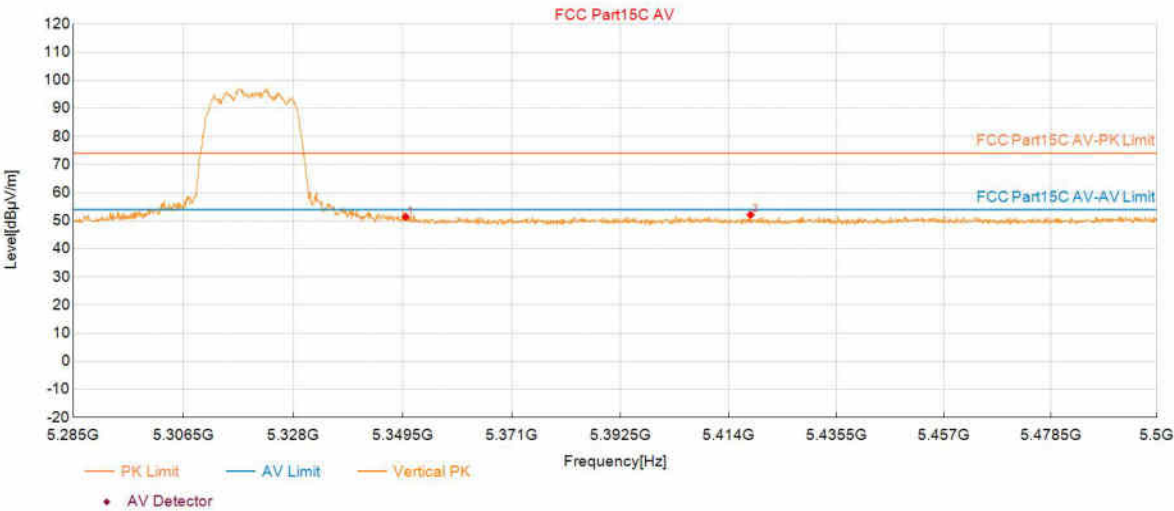


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0700	51.41	74.00	22.59	150	139	Vertical	PASS
2	5418.3667	52.13	74.00	21.87	150	358	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5500	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:54:55

Test Graph

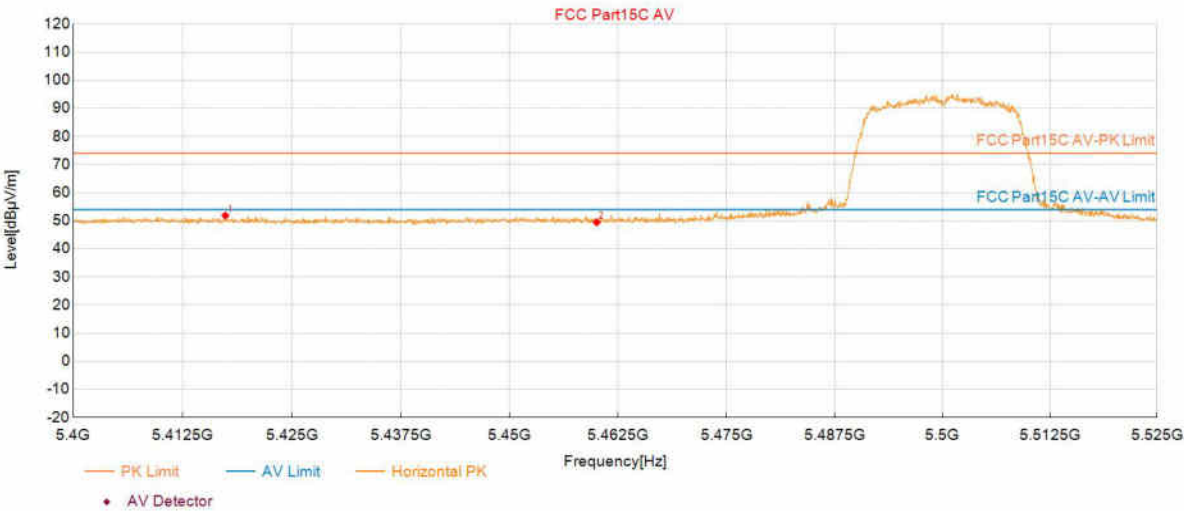


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5417.3837	51.81	74.00	22.19	150	43	Horizontal	PASS
2	5460.0300	49.44	74.00	24.56	150	155	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5500	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:55:38

Test Graph

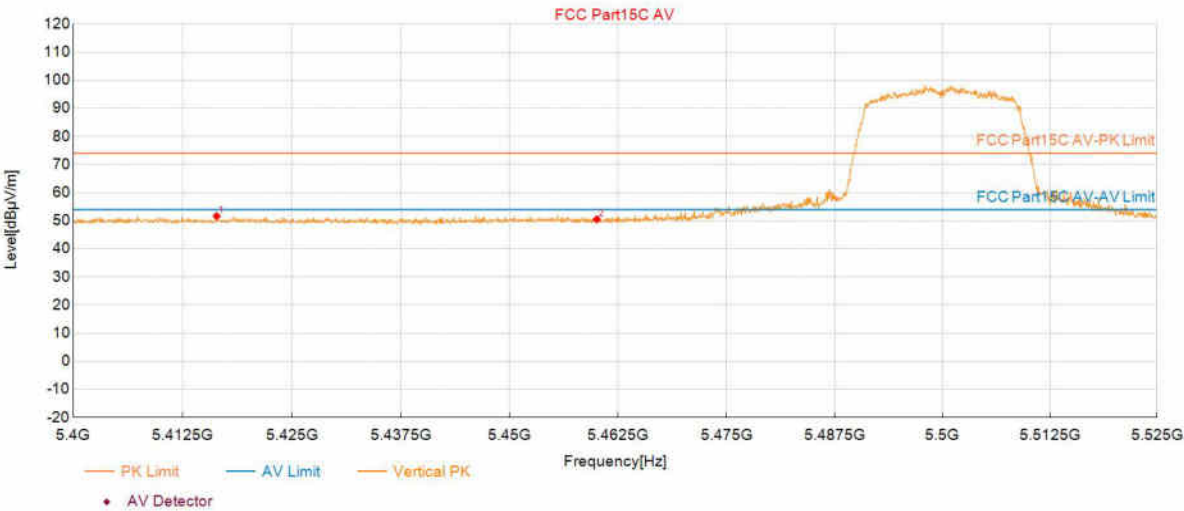


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5416.3832	51.63	74.00	22.37	150	72	Vertical	PASS
2	5460.0300	50.50	74.00	23.50	150	350	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:58:03

Test Graph

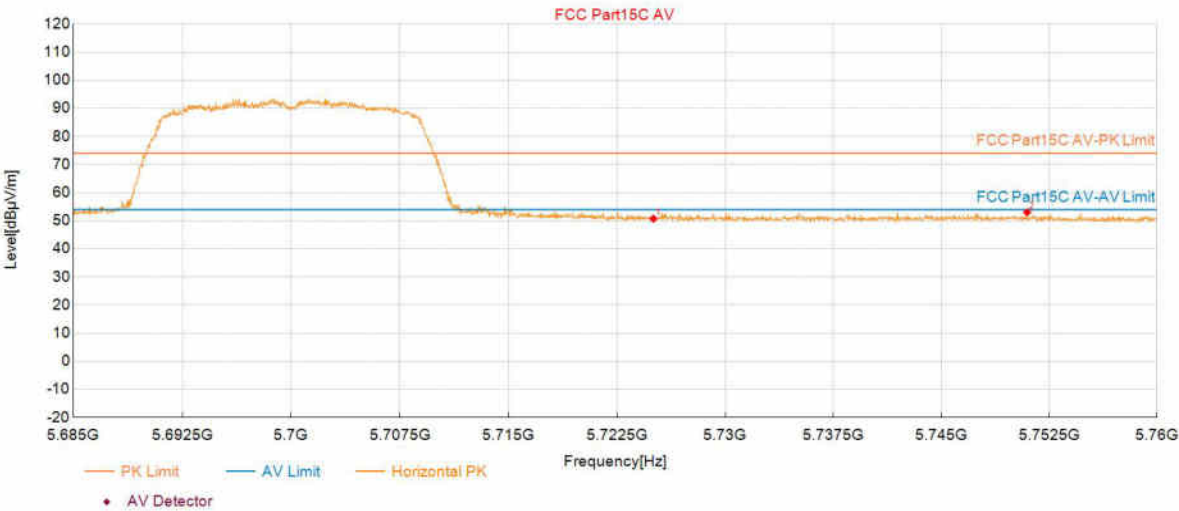


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	50.71	74.00	23.29	150	200	Horizontal	PASS
2	5750.9580	53.01	74.00	20.99	150	33	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N20_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 15:58:46

Test Graph

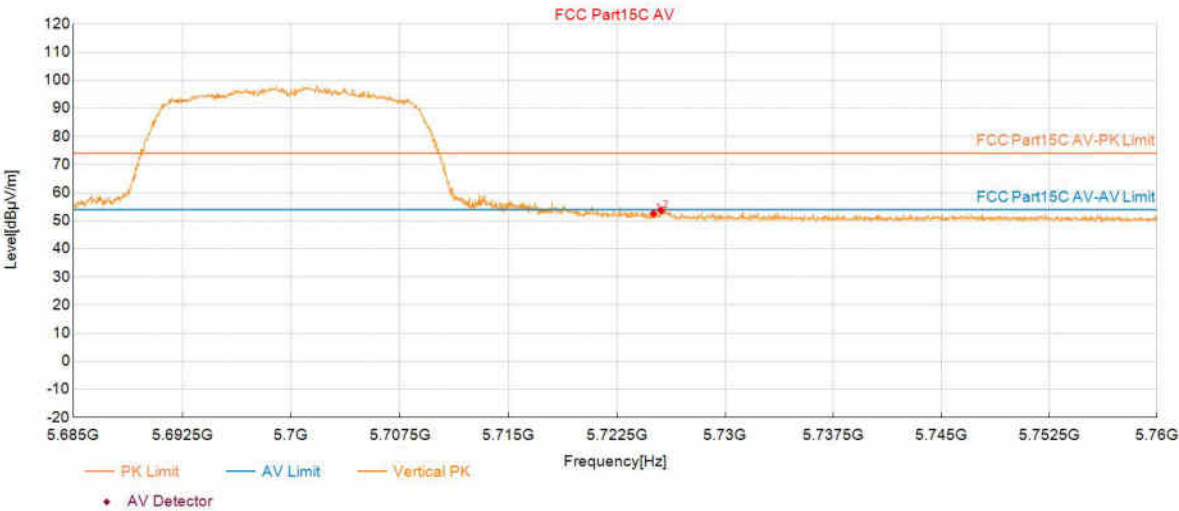


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	52.53	74.00	21.47	150	171	Vertical	PASS
2	5725.5578	53.68	74.00	20.32	150	216	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5190	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:02:12

Test Graph

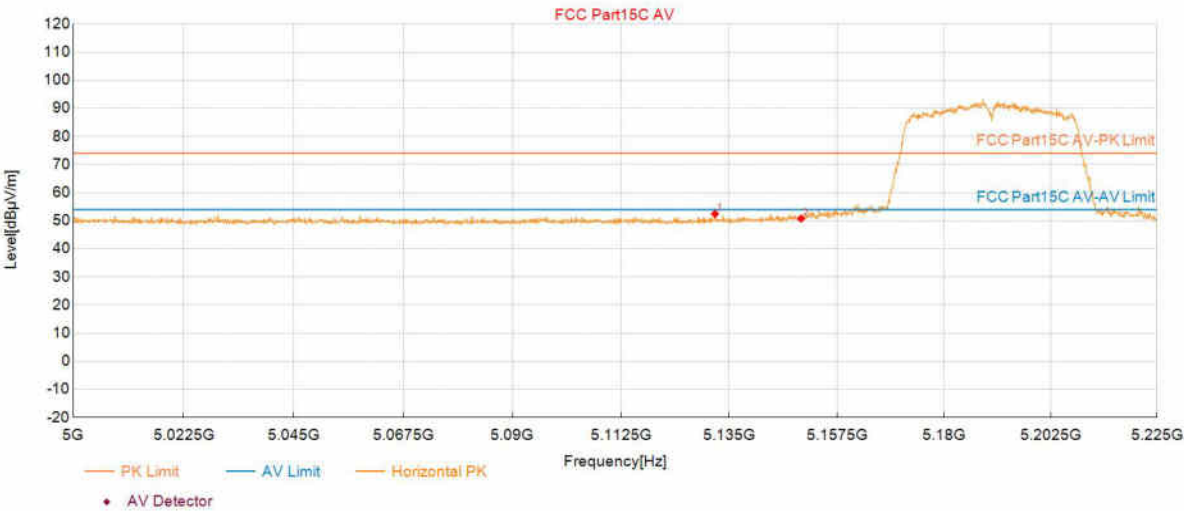


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5132.0285	52.45	74.00	21.55	150	62	Horizontal	PASS
2	5150.0375	50.78	74.00	23.22	150	156	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5190	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:02:54

Test Graph

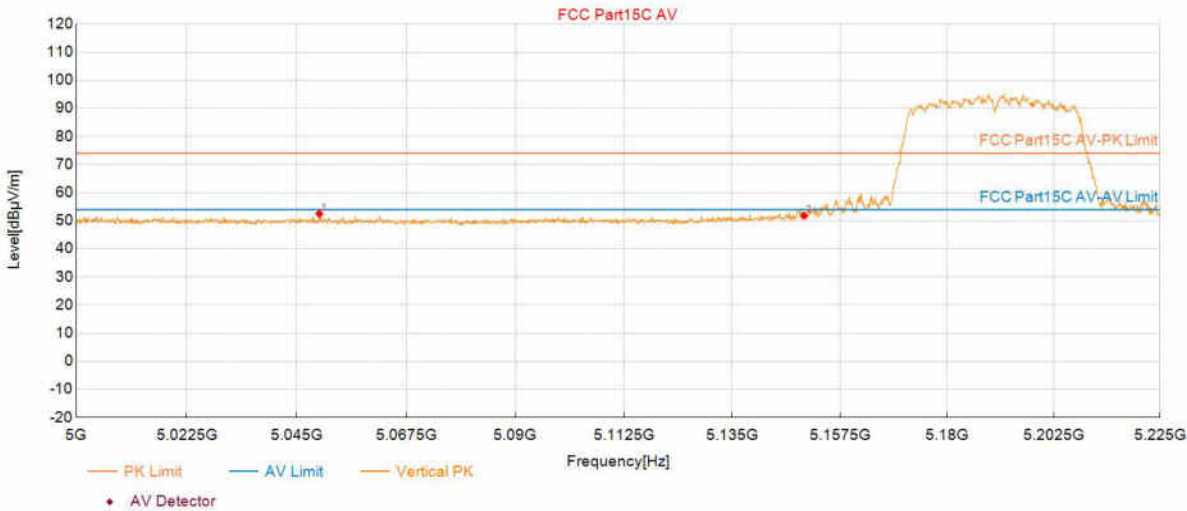


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5049.6373	52.51	74.00	21.49	150	116	Vertical	PASS
2	5150.0375	51.78	74.00	22.22	150	171	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5310	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:05:44

Test Graph

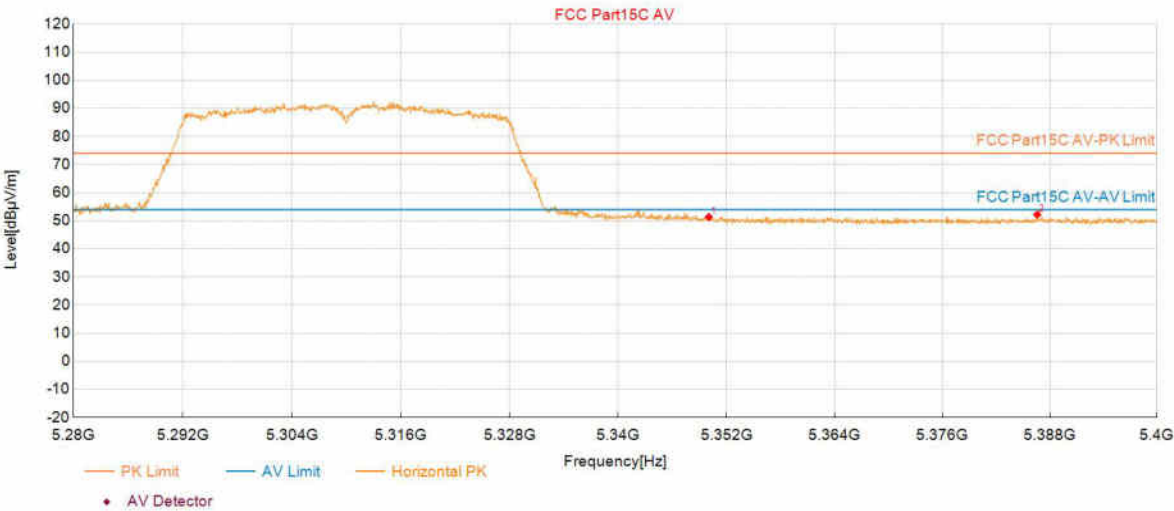


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0550	51.33	74.00	22.67	150	42	Horizontal	PASS
2	5386.6133	52.20	74.00	21.80	150	227	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5310	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:06:26

Test Graph

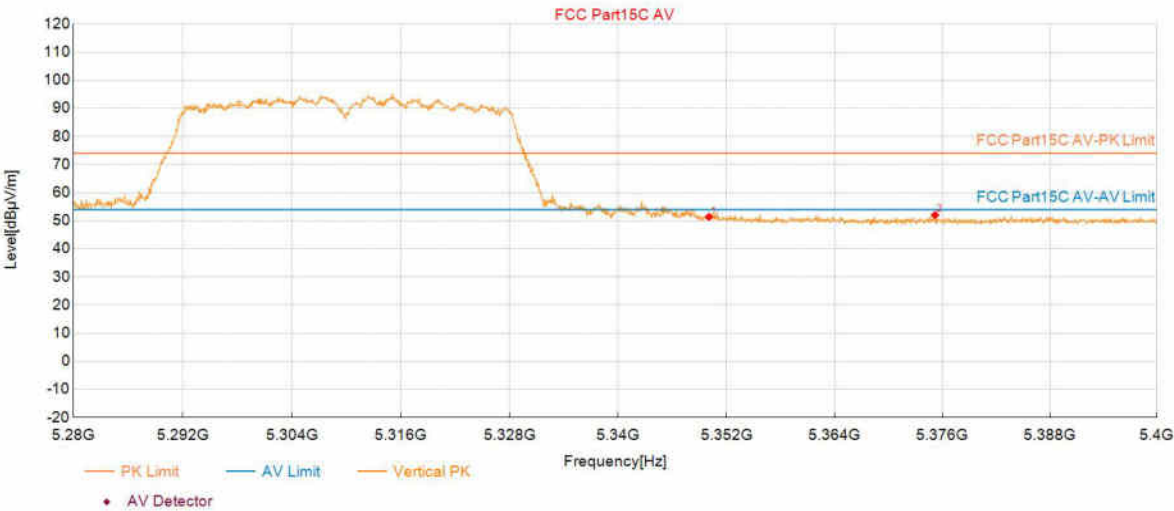


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0550	51.35	74.00	22.65	150	165	Vertical	PASS
2	5375.2076	52.03	74.00	21.97	150	210	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5510	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:08:38

Test Graph

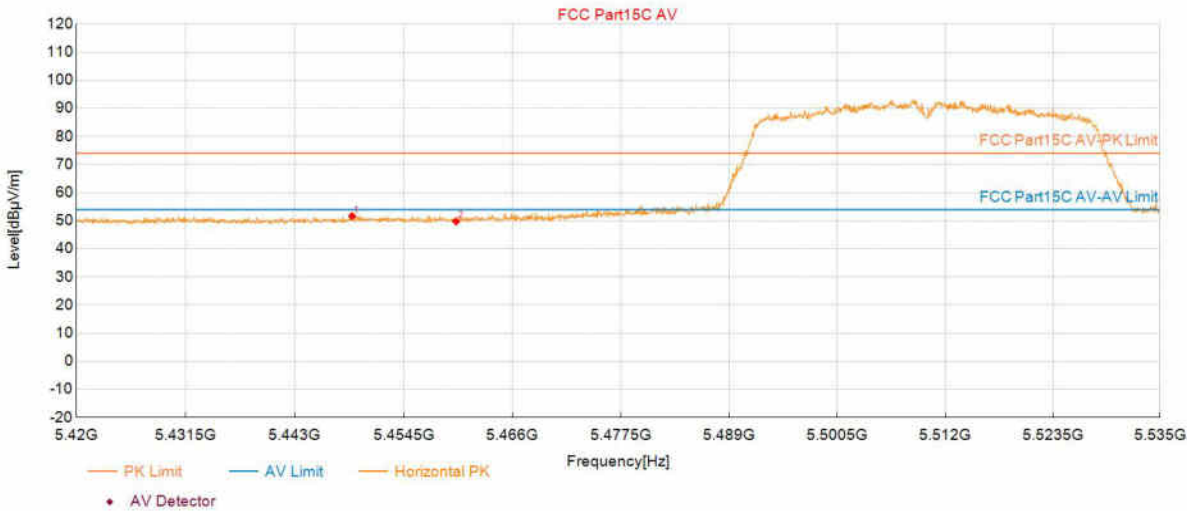


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5449.0520	51.66	74.00	22.34	150	348	Horizontal	PASS
2	5460.0400	49.77	74.00	24.23	150	12	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5510	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:09:21

Test Graph

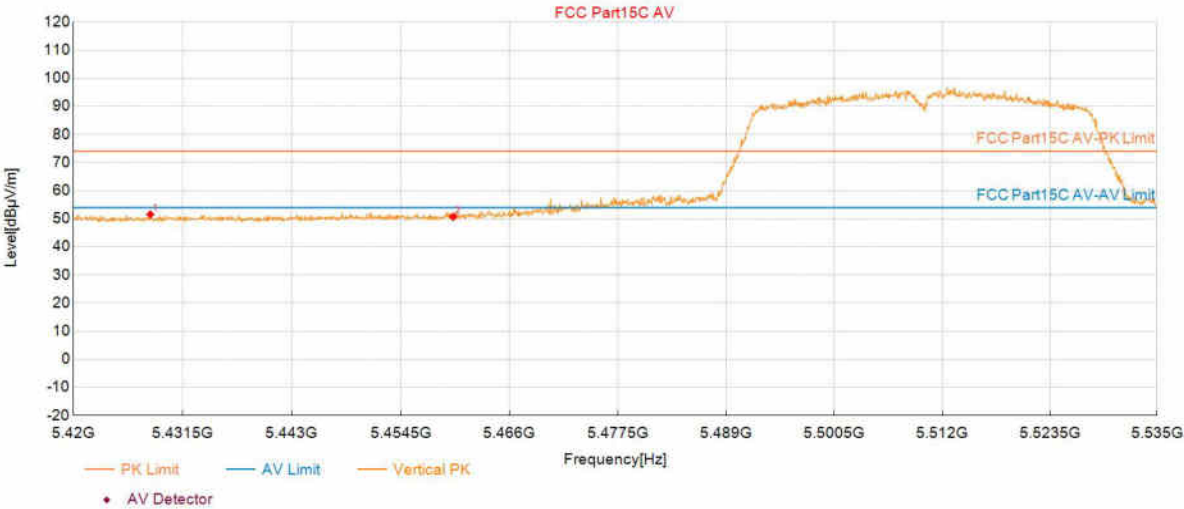


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5428.1116	51.53	74.00	22.47	150	225	Vertical	PASS
2	5460.0400	50.69	74.00	23.31	150	172	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5670	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:18:31

Test Graph

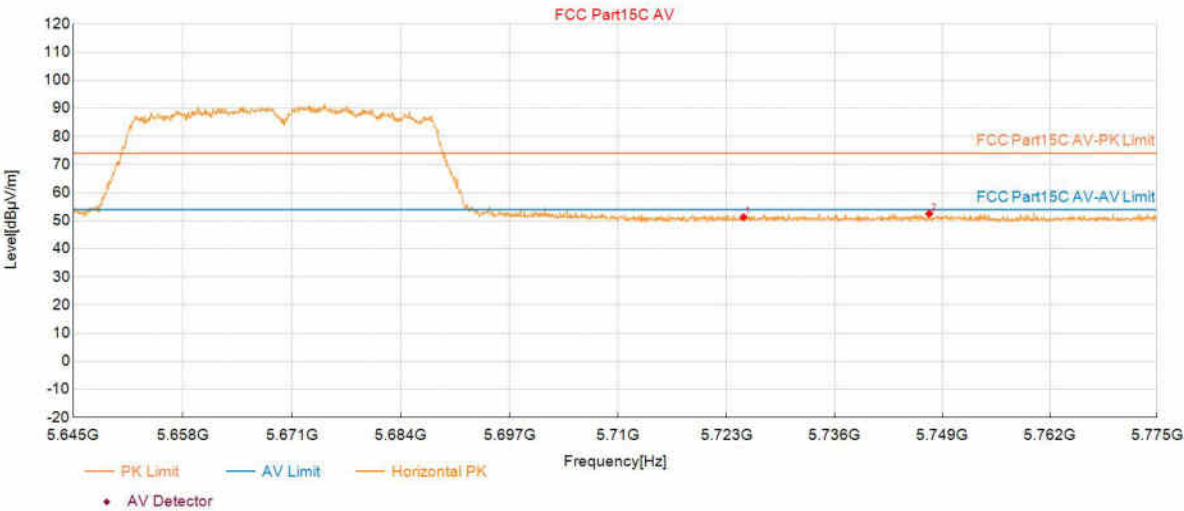


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0550	51.26	74.00	22.74	150	102	Horizontal	PASS
2	5747.4262	52.52	74.00	21.48	150	53	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11N40_5670	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:19:13

Test Graph

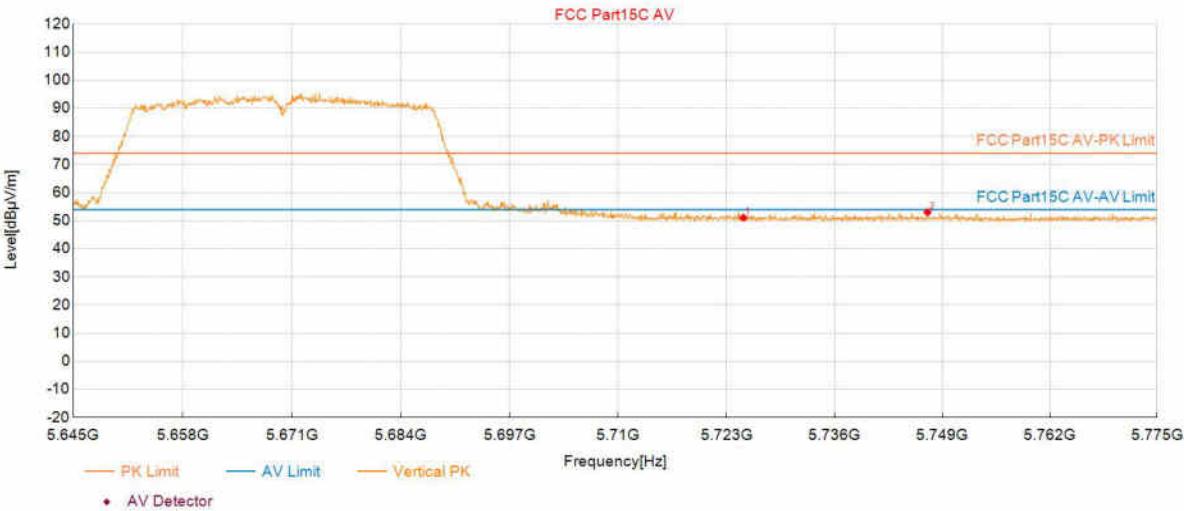


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0550	51.09	74.00	22.91	150	215	Vertical	PASS
2	5747.2311	53.01	74.00	20.99	150	211	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5180	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:22:07

Test Graph

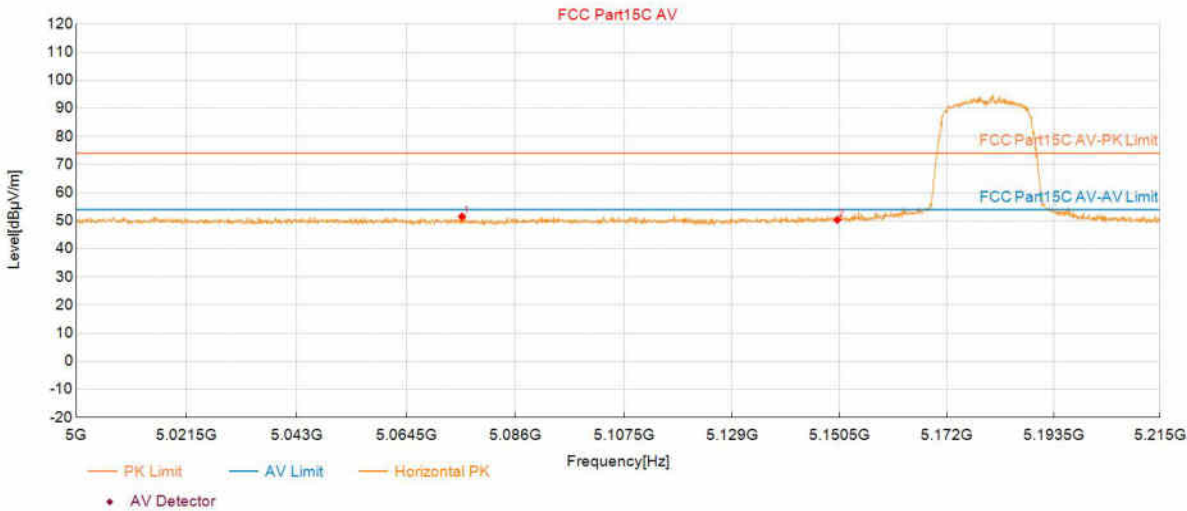


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5075.5028	51.49	74.00	22.51	150	90	Horizontal	PASS
2	5150.0375	50.31	74.00	23.69	150	183	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5180	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:22:50

Test Graph

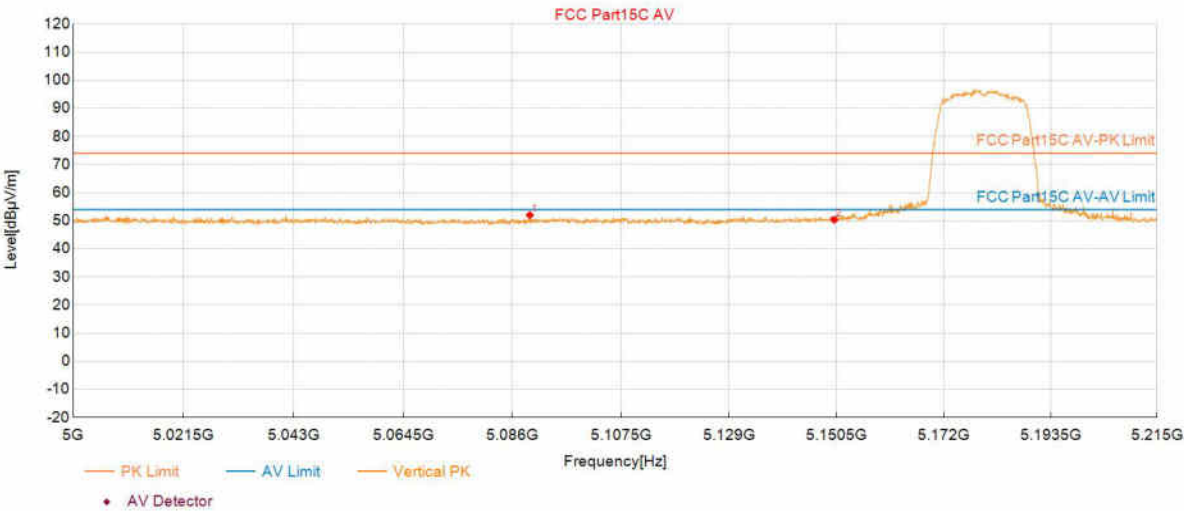


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5089.4847	52.01	74.00	21.99	150	2	Vertical	PASS
2	5150.0375	50.37	74.00	23.63	150	137	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5320	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:25:10

Test Graph

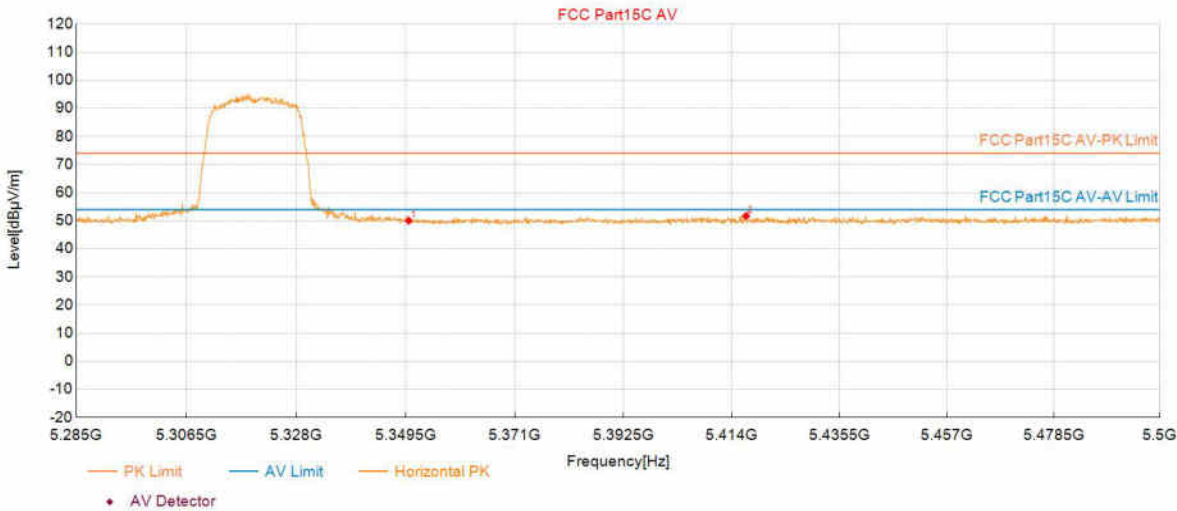


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0700	50.00	74.00	24.00	150	357	Horizontal	PASS
2	5416.8609	51.69	74.00	22.31	150	87	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5320	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:25:52

Test Graph

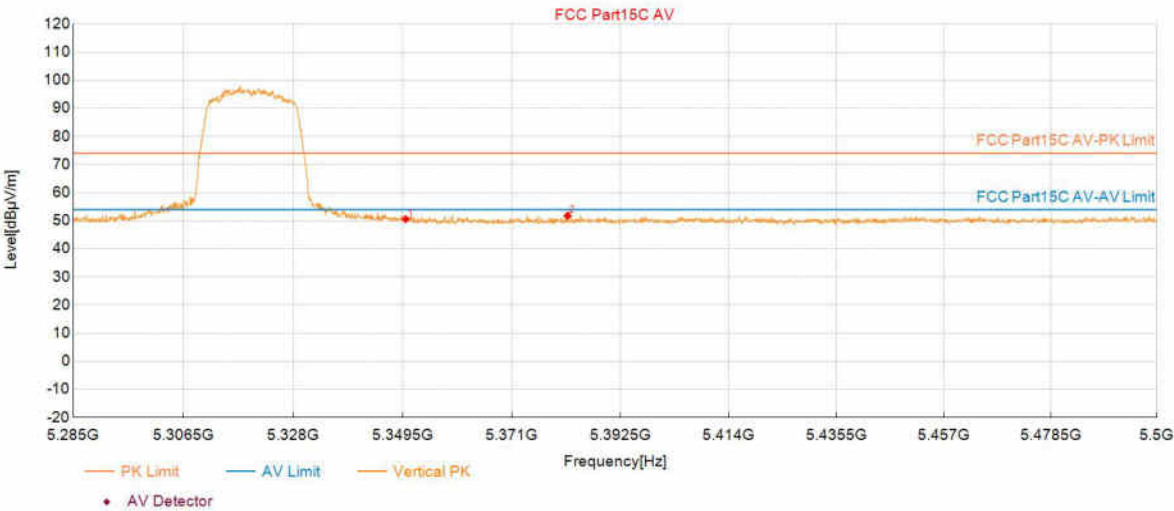


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0700	50.56	74.00	23.44	150	175	Vertical	PASS
2	5382.0135	51.80	74.00	22.20	150	161	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5500	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:14		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:32:26

Test Graph

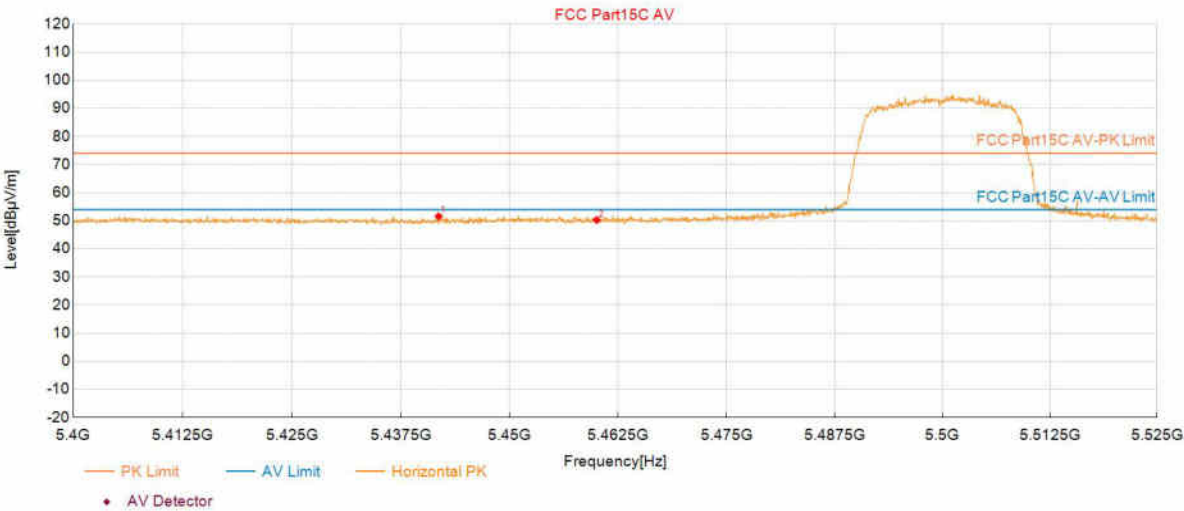


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5441.8334	51.58	74.00	22.42	150	120	Horizontal	PASS
2	5460.0300	50.25	74.00	23.75	150	320	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5500	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:14		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:33:09

Test Graph

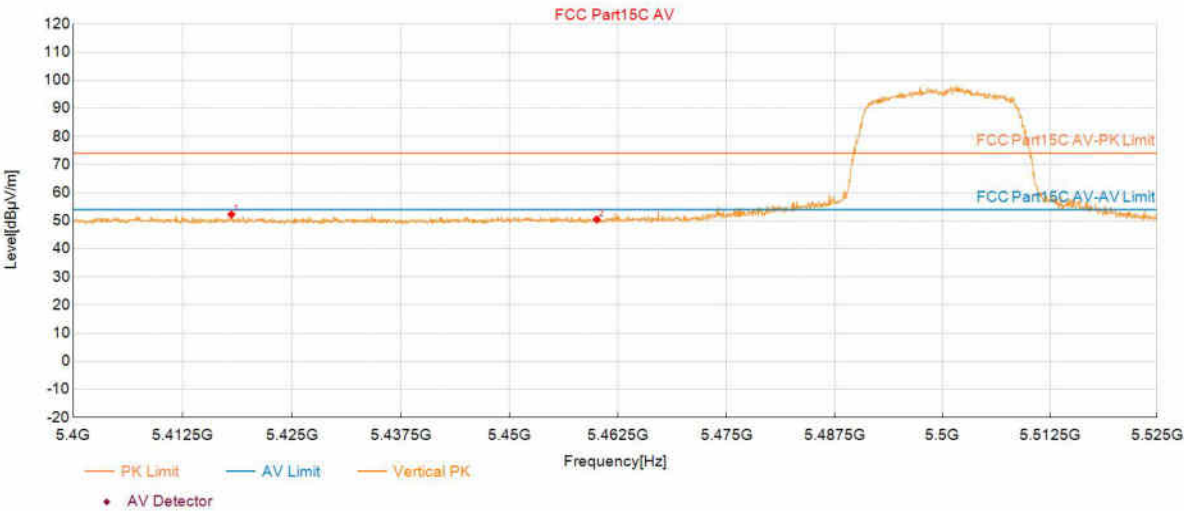


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5418.0715	52.22	74.00	21.78	150	2	Vertical	PASS
2	5460.0300	50.43	74.00	23.57	150	199	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:14		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:36:14

Test Graph

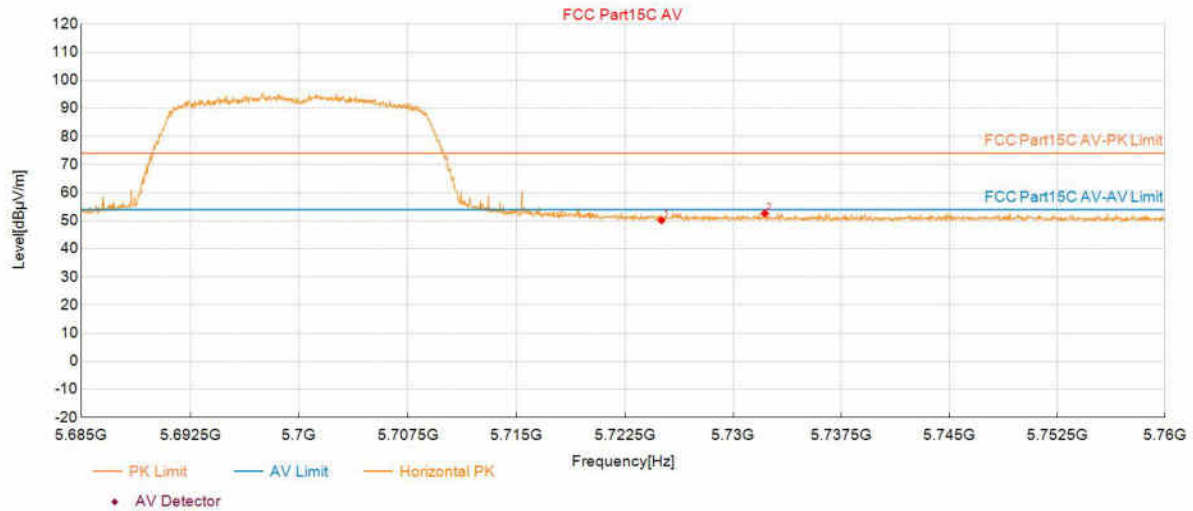

Suspected Data List


NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	50.14	74.00	23.86	150	357	Horizontal	PASS
2	5732.1986	52.60	74.00	21.40	150	357	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC20_5700	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:14		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:36:57

Test Graph

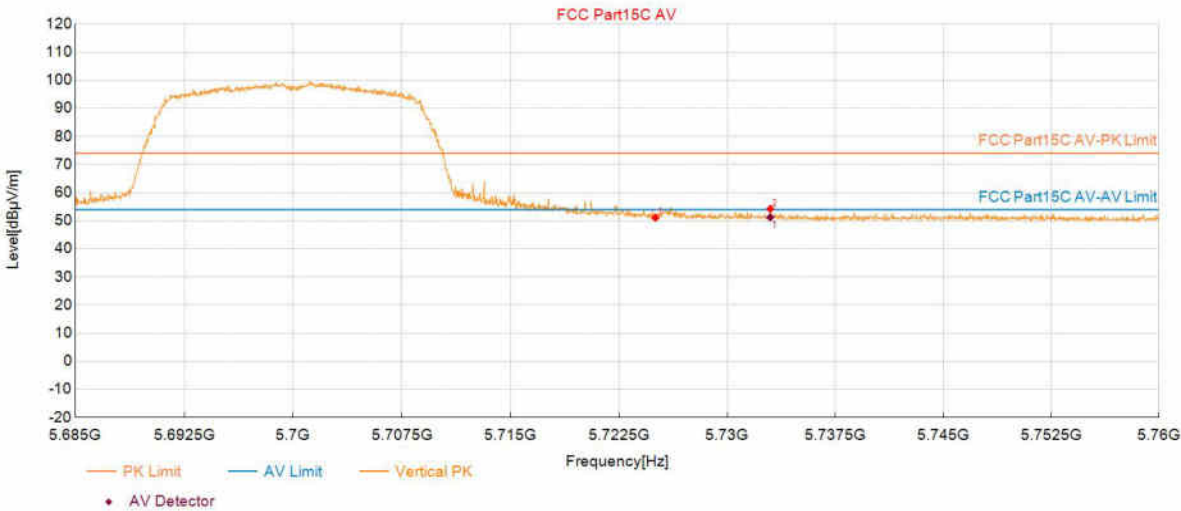

Suspected Data List

NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0325	51.05	74.00	22.95	150	102	Vertical	PASS
2	5732.9865	54.20	74.00	19.80	150	215	Vertical	PASS

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5732.9865	51.19	54.00	2.81	150	215	Vertical

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5190	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:44:18

Test Graph

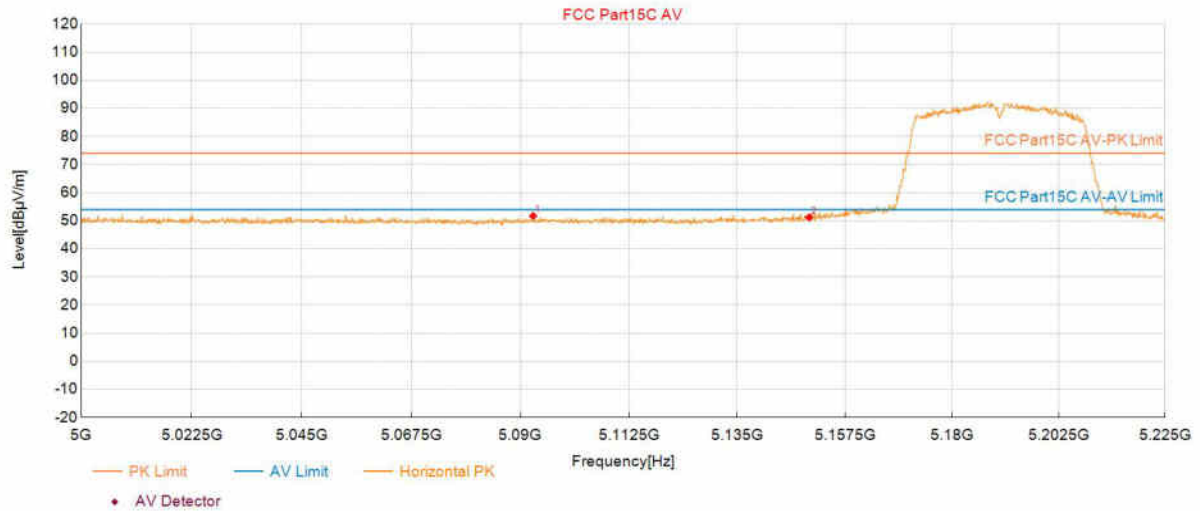


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5092.6338	51.71	74.00	22.29	150	341	Horizontal	PASS
2	5150.0375	51.20	74.00	22.80	150	160	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5190	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:45:01

Test Graph

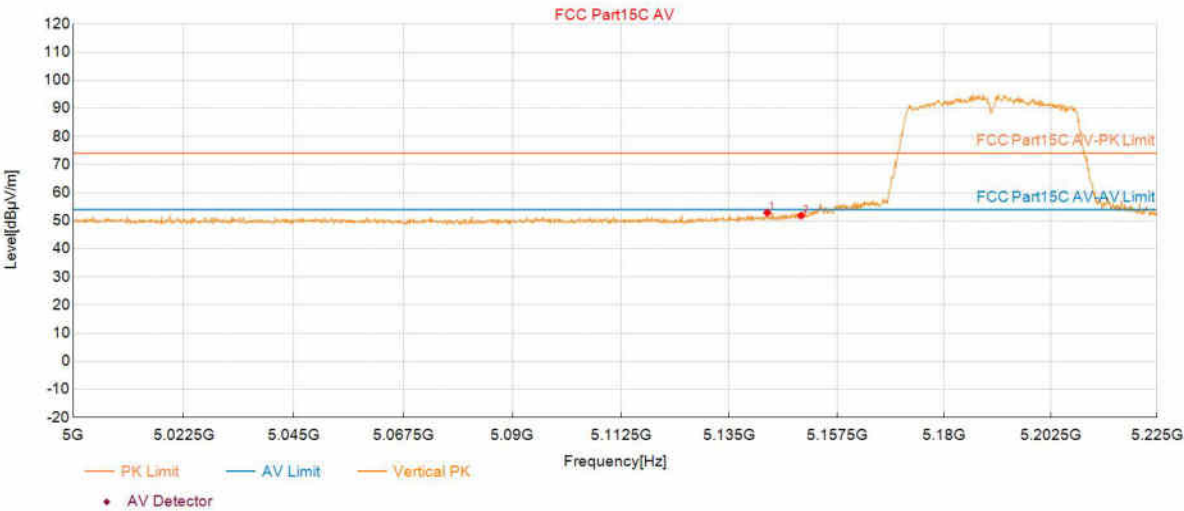


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5142.9465	52.86	74.00	21.14	150	158	Vertical	PASS
2	5150.0375	51.83	74.00	22.17	150	166	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5310	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:47:30

Test Graph

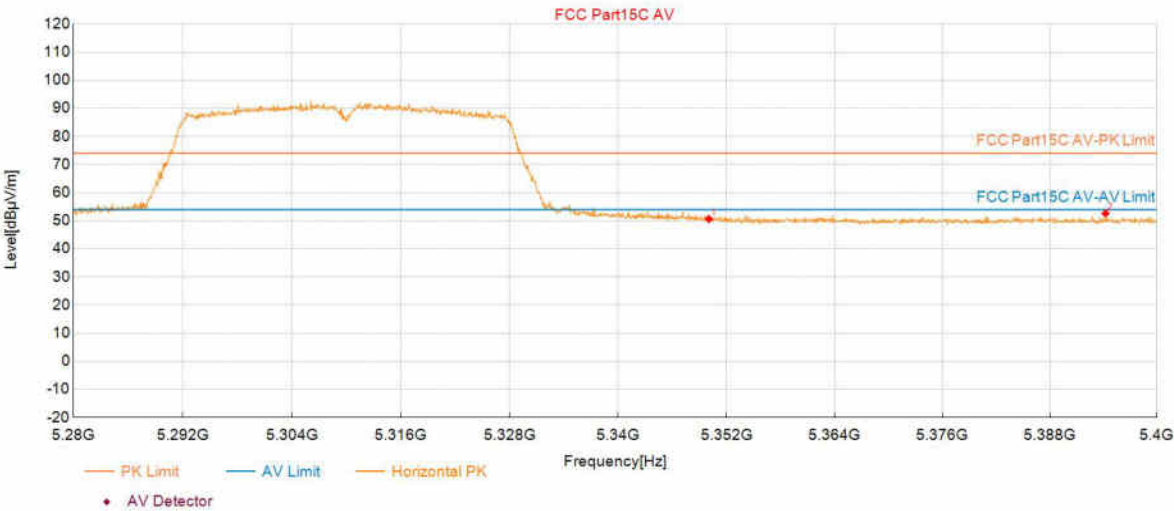


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0550	50.60	74.00	23.40	150	34	Horizontal	PASS
2	5394.2371	52.64	74.00	21.36	150	98	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5310	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:48:12

Test Graph

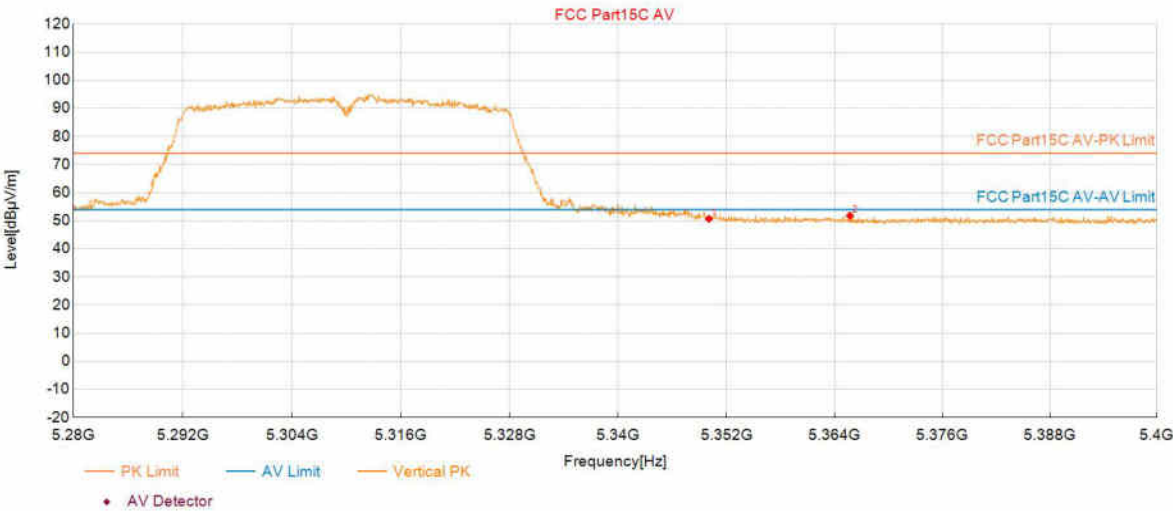


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.0550	50.67	74.00	23.33	150	183	Vertical	PASS
2	5365.7229	51.80	74.00	22.20	150	175	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5510	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:50:35

Test Graph

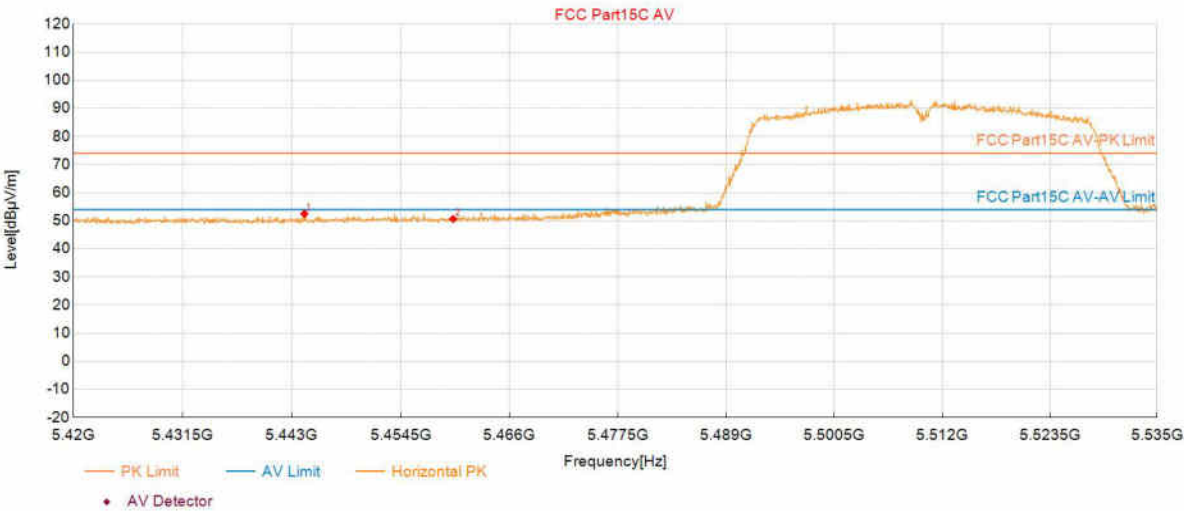


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5444.3347	52.53	74.00	21.47	150	229	Horizontal	PASS
2	5460.0400	50.65	74.00	23.35	150	127	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5510	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:51:18

Test Graph

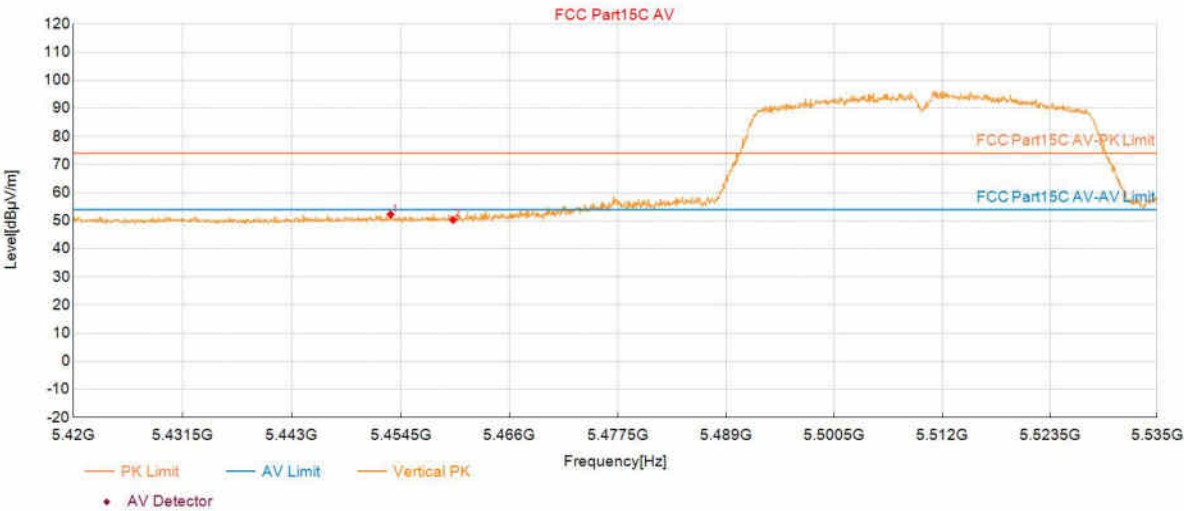


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5453.4242	52.25	74.00	21.75	150	141	Vertical	PASS
2	5460.0400	50.31	74.00	23.69	150	155	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5670	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:54:02

Test Graph

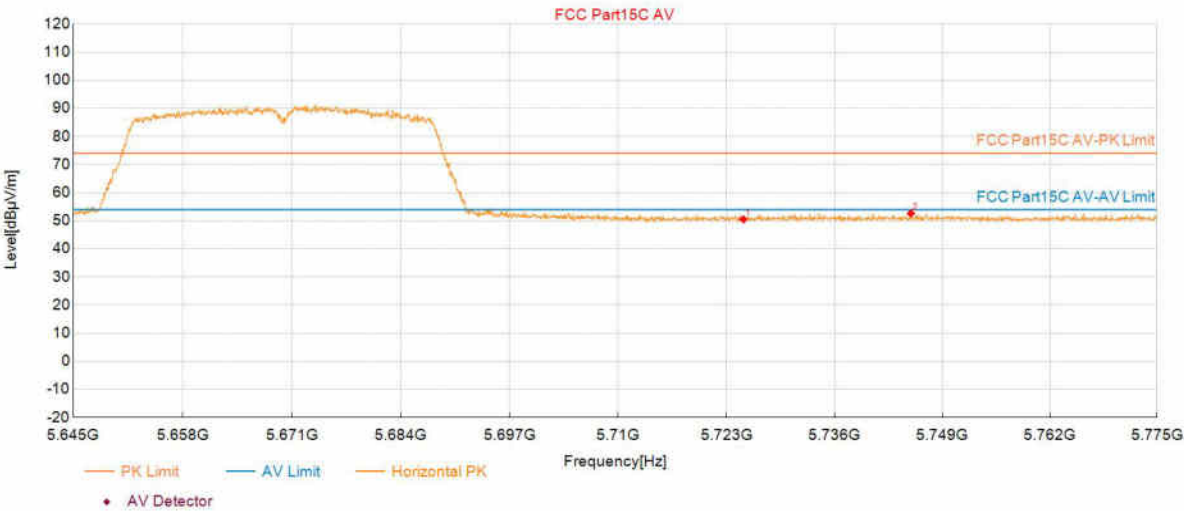


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0550	50.48	74.00	23.52	150	61	Horizontal	PASS
2	5745.2151	52.59	74.00	21.41	150	0	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC40_5670	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:Default		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:54:45

Test Graph

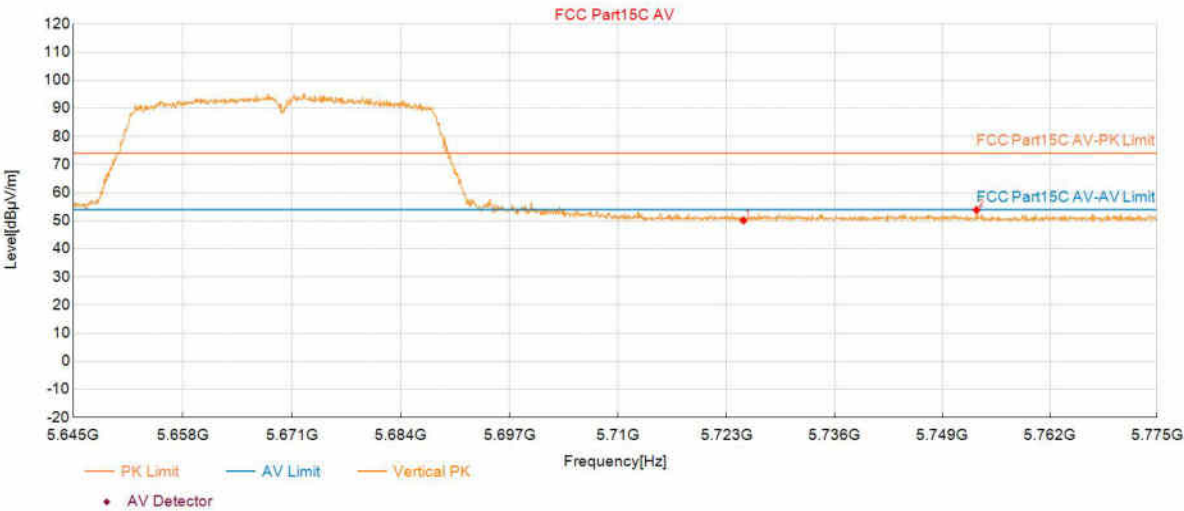


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5725.0550	50.09	74.00	23.91	150	349	Vertical	PASS
2	5753.1491	53.83	74.00	20.17	150	189	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC80_5210	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:11		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:57:54

Test Graph

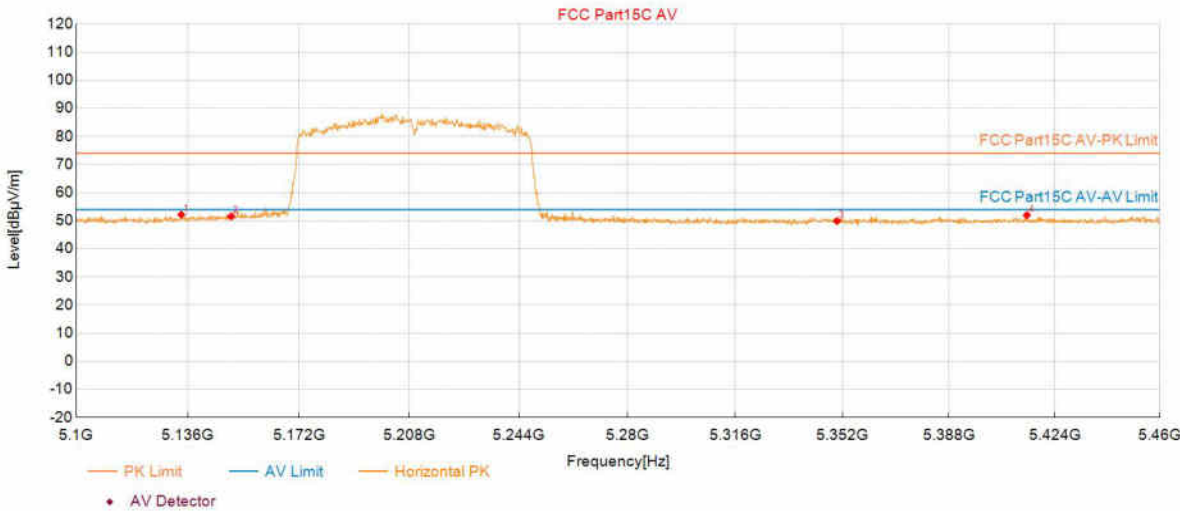


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5133.8569	52.17	74.00	21.83	150	104	Horizontal	PASS
2	5150.0650	51.54	74.00	22.46	150	148	Horizontal	PASS
3	5350.1451	49.89	74.00	24.11	150	286	Horizontal	PASS
4	5414.4372	51.98	74.00	22.02	150	243	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC80_5210	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:11		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 16:58:36

Test Graph

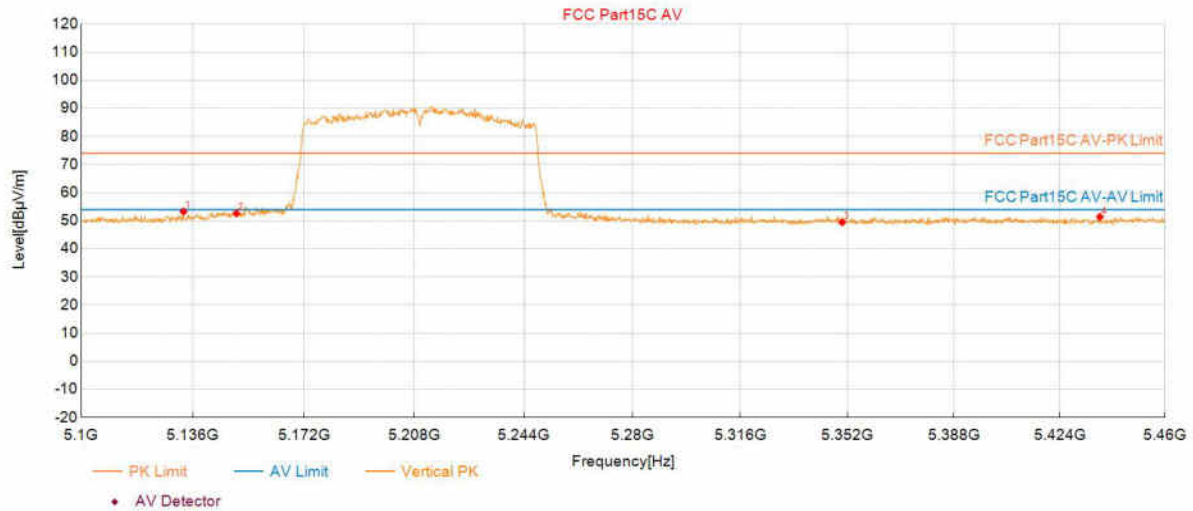

Suspected Data List


NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5132.9565	53.29	74.00	20.71	150	134	Vertical	PASS
2	5150.0650	52.61	74.00	21.39	150	218	Vertical	PASS
3	5350.1451	49.46	74.00	24.54	150	33	Vertical	PASS
4	5437.6688	51.38	74.00	22.62	150	169	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC80_5290	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:11		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 17:23:00

Test Graph

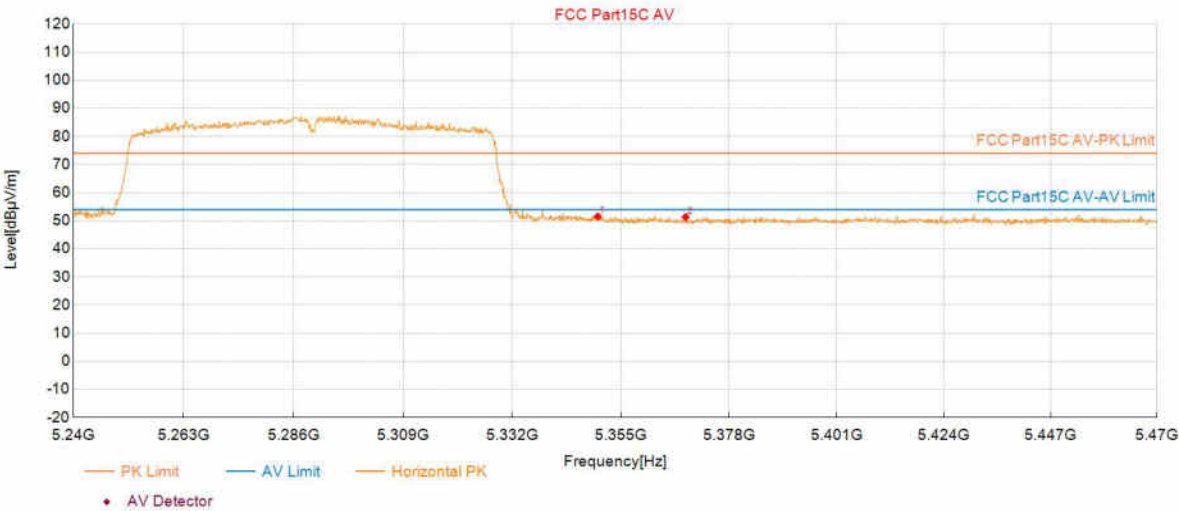


Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.1101	51.54	74.00	22.46	150	34	Horizontal	PASS
2	5368.7494	51.33	74.00	22.67	150	73	Horizontal	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC80_5290	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:11		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 17:23:42

Test Graph

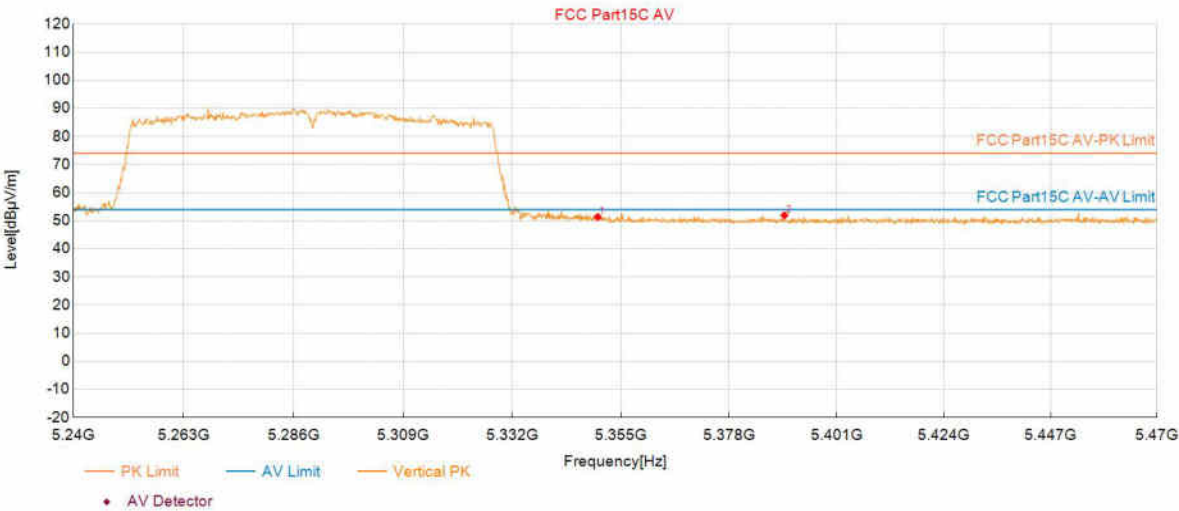


Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5350.1101	51.36	74.00	22.64	150	165	Vertical	PASS
2	5389.8049	51.89	74.00	22.11	150	175	Vertical	PASS

Test Report

Project Information			
EUT:	Vehicle wireless module		
Customer:			
Model:	P13.A01.H4	SN:	
Mode:	11AC80_5530	Voltage:	DC 4.2V
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:10		
Test Standard: FCC Part15C AV			

Start of Test:2024-12-04 17:26:30

Test Graph

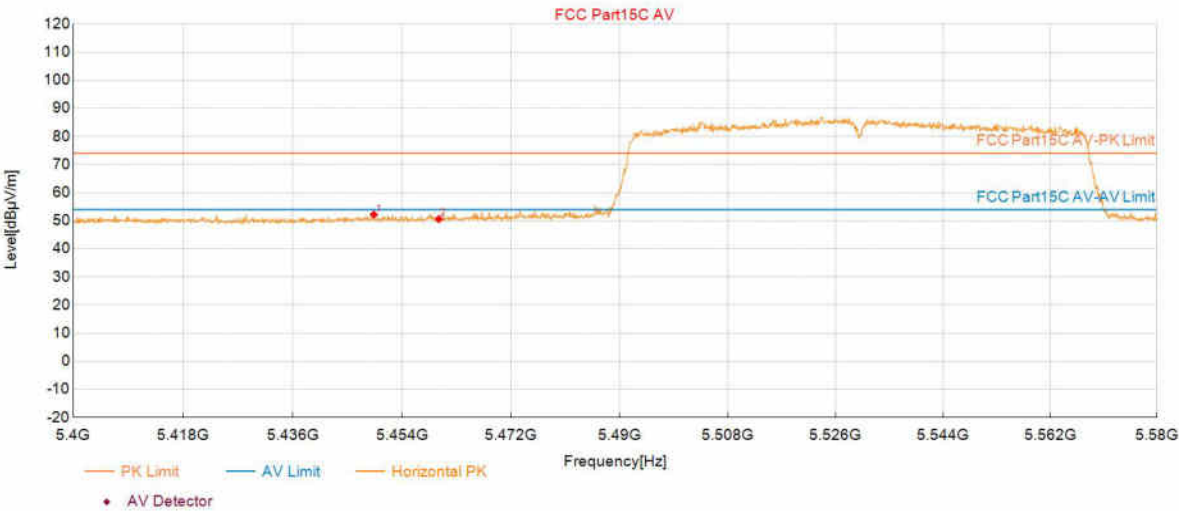

Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	5449.3447	52.16	74.00	21.84	150	134	Horizontal	PASS
2	5460.0600	50.60	74.00	23.40	150	98	Horizontal	PASS