

# FCC Test Report

## (Class II Permissive Change)

Product Name	Intel® Wi-Fi 6 AX201
Model No.	AX201D2W
FCC ID.	PD9AX201D2

Applicant	Intel Corporation
Address	100 Center Point Circle Suite 200 Columbia, South Carolina 29210, United States

Date of Receipt	Mar. 30, 2019
Issued Date	Oct. 02, 2019
Report No.	1930505R-RFUSP23V00-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

# Test Report


Issued Date: Oct. 02, 2019

Report No.: 1930505R-RFUSP23V00-A



Product Name	Intel® Wi-Fi 6 AX201
Applicant	Intel Corporation
Address	100 Center Point Circle Suite 200 Columbia, South Carolina 29210, United States
Manufacturer	INTEL MOBILE COMMUNICATIONS
Model No.	AX201D2W
FCC ID.	PD9AX201D2
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V (Power By Test Fixture)
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



( Adm. Assistant / Ida Tung )

Tested By :



( Engineer / Nova Chu )

Approved By :



( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
1.7. List of Test Equipment.....	9
1.8. Uncertainty .....	10
<b>2. PEAK POWER OUTPUT .....</b>	<b>11</b>
2.1. Test Setup .....	11
2.2. Limit .....	11
2.3. Test Procedure .....	11
2.4. Uncertainty .....	11
2.5. Test Result of Peak Power Output.....	12
<b>3. RADIATED EMISSION .....</b>	<b>13</b>
3.1. Test Setup .....	13
3.2. Limits.....	14
3.3. Test Procedure .....	15
3.4. Uncertainty .....	16
3.5. Test Result of Radiated Emission.....	17
<b>4. BAND EDGE .....</b>	<b>25</b>
4.1. Test Setup .....	25
4.2. Limit .....	26
4.3. Test Procedure .....	26
4.4. Uncertainty .....	27
4.5. Test Result of Band Edge .....	28
<b>5. DUTY CYCLE.....</b>	<b>36</b>
5.1. Test Setup .....	36
5.2. Test Procedure .....	36
5.3. Uncertainty .....	36
5.4. Test Result of Duty Cycle.....	37
<b>6. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>38</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Intel® Wi-Fi 6 AX201
Trade Name	Intel
Model No.	AX201D2W
FCC ID.	PD9AX201D2
Frequency Range	2402 – 2480MHz
Channel Number	V5.0: 40CH
Type of Modulation	V5.0: GFSK(2Mbps)
Antenna Type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON	GY121HT0321-003-H / GY121C888-001-H	Dipole Antenna	2.89dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

## Center Frequency of Each Channel: (For V5.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

## Note:

1. The EUT is an Intel® Wi-Fi 6 AX201 with built-in WLAN (802.11a/b/g/n/ac/ax) with Bluetooth (5.0 and V3.0+HS, V2.1+EDR) transceiver, this report for Bluetooth V5.0.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. This is to request a Class II permissive change for FCC ID: PD9AX201D2, originally granted on 11/20/2018.

The major change filed under this application is:

Change #1: Addition a Dipole Antenna, the antenna type is different with the original application.

Test Mode	Mode 1: Transmit - BLE
-----------	------------------------


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P62G	9TSGJC2	N/A
2	Test Fixture	Intel	N/A	N/A	N/A

Signal Cable Type		Signal cable Description
A	Test Fixture Line Cable	Non-shielded, 1m
B	USB Cable	Shielded, 1.8m

### 1.4. Configuration of Tested System

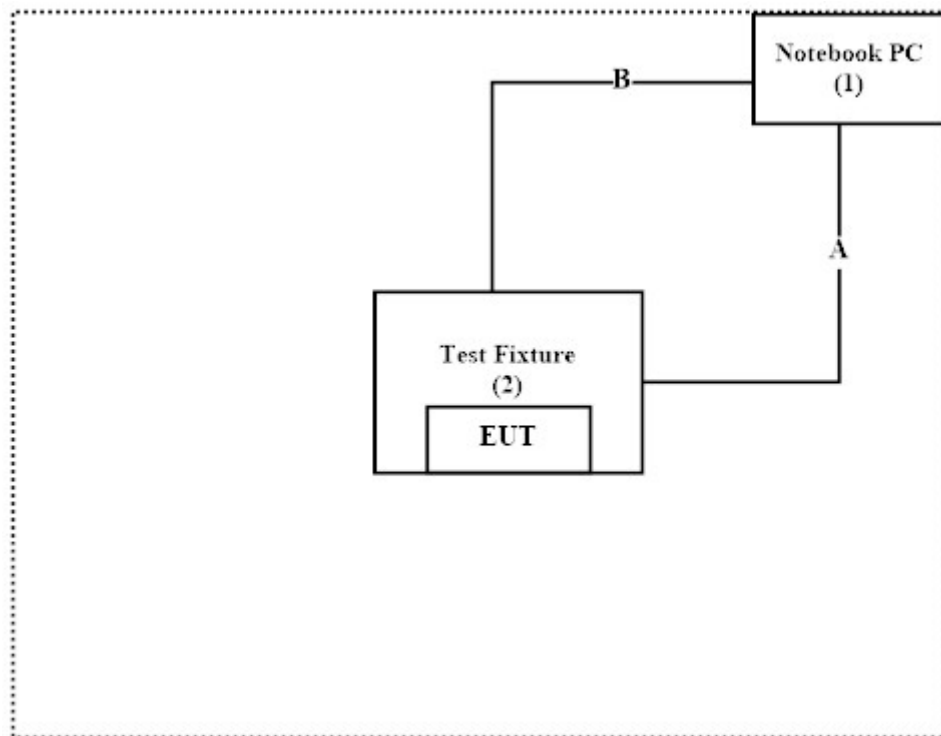

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute software “DRTU (Ver 11.1850.0-08900)” on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	25 °C
	Humidity (%RH)	10~90 %	57 %
Radiated Emission	Temperature (°C)	10~40 °C	25 °C
	Humidity (%RH)	10~90 %	57 %
Conductive	Temperature (°C)	10~40 °C	25 °C
	Humidity (%RH)	10~90 %	57 %

**USA : FCC Registration Number: TW0023**

**Canada : IC Registration Number: 4075A**

Site Description : Accredited by TAF  
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd  
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,  
New Taipei City 24457, Taiwan, R.O.C.  
Phone number : 886-2-2602-7968  
Fax number : 866-2-2602-3286  
Email address : [info.tw@dekra.com](mailto:info.tw@dekra.com)  
Website : <http://www.dekra.com.tw>

## 1.7. List of Test Equipment

### For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2019.01.25	2020.01.24
X	Power Meter	Anritsu	ML2496A	1548003	2018.12.19	2019.12.18
X	Power Sensor	Anritsu	MA2411B	1531024	2018.12.19	2019.12.18
X	Power Sensor	Anritsu	MA2411B	1531025	2018.12.19	2019.12.18
	Bluetooth Tester	R&S	CBT	101238	2019.01.21	2020.01.20

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.1

### For Radiated measurements /ACB1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2019.02.22	2020.02.21
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2019.04.23	2020.04.22
X	Horn Antenna	ETS-Lindgren	3117	00203800	2018.12.11	2019.12.10
X	Horn Antenna	Com-Power	AH-840	101087	2019.05.30	2020.05.29
X	Pre-Amplifier	EMCI	EMC001330	980316	2019.06.14	2020.06.13
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2019.06.13	2020.06.12
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2019.06.24	2020.06.23
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2019.05.28	2020.05.27
X	Filter	MICRO TRONICS	BRM50702	G251	2019.09.03	2020.09.02
	Filter	MICRO TRONICS	BRM50716	G188	2019.09.03	2020.09.02
X	EMI Test Receiver	R&S	ESR7	101602	2018.12.17	2019.12.16
X	Spectrum Analyzer	R&S	FSV40	101148	2019.02.20	2020.02.19
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2019.05.25	2020.05.24
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2019.05.28	2020.05.27

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113



## **1.8. Uncertainty**


Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

## 2. Peak Power Output

### 2.1. Test Setup

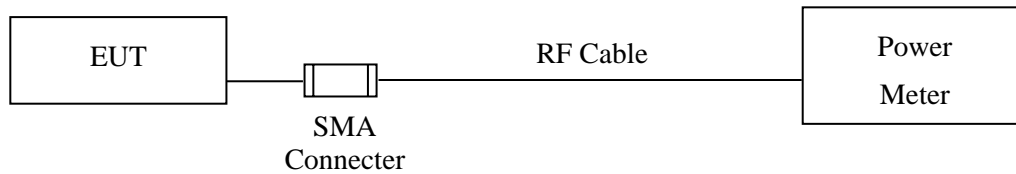

### 2.2. Limit

The maximum peak power shall be less 1Watt.

### 2.3. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 8.3.1.3 PKPM1 Peak power meter method.

### 2.4. Uncertainty

$\pm 0.86$  dB

## 2.5. Test Result of Peak Power Output


Product : Intel® Wi-Fi 6 AX201  
Test Item : Peak Power Output  
Test Mode : Mode 1: Transmit - BLE  
Test Date : 2019/08/20

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	7.38	1 Watt= 30 dBm	Pass
Channel 19	2440.00	8.13	1 Watt= 30 dBm	Pass
Channel 39	2480.00	8.12	1 Watt= 30 dBm	Pass


### 3. Radiated Emission

#### 3.1. Test Setup


Radiated Emission Under 30MHz

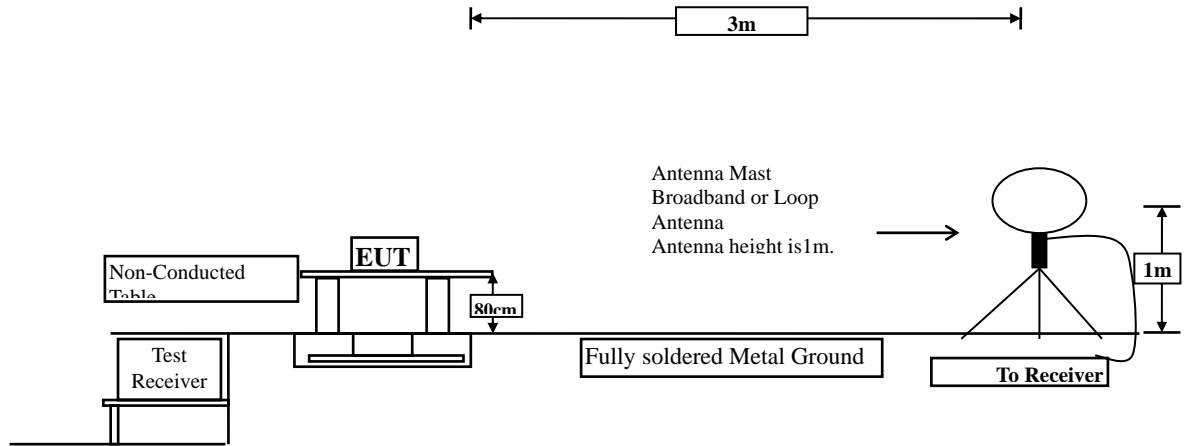

Radiated Emission Below 1GHz

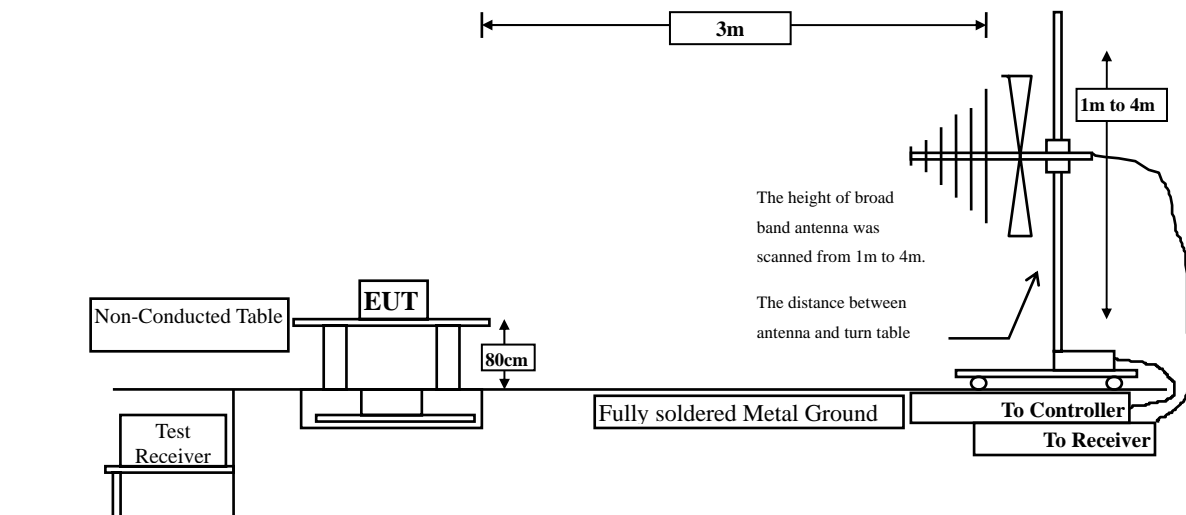

Radiated Emission Above 1GHz

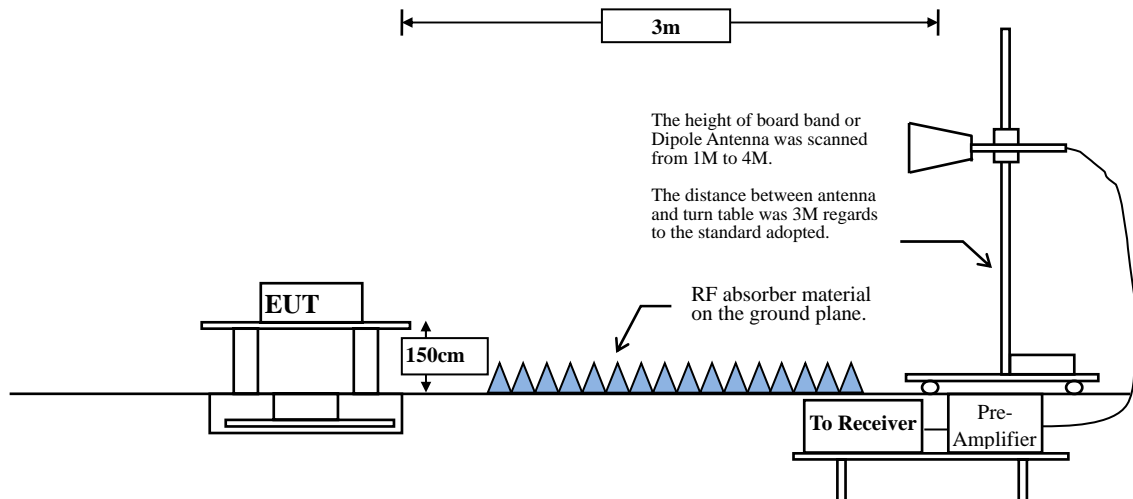

### 3.2. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level.

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

**RBW and VBW Parameter setting:**

According to KDB 558074 Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$ .

**Table 1 —RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle  $\geq 98\%$

$VBW \geq 1/T$ , when duty cycle  $< 98\%$

( T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE	86.40	2.1600	463	500

Note: Duty Cycle Refer to Section 5

**3.4. Uncertainty**

Horizontal polarization :

30-300MHz:  $\pm 4.08\text{dB}$  ; 300M-1GHz:  $\pm 3.86\text{dB}$  ; 1-18GHz:  $\pm 3.77\text{dB}$  ; 18-40GHz:  $\pm 3.98\text{dB}$


Vertical polarization :

30-300MHz:  $\pm 4.81\text{dB}$  ; 300M-1GHz:  $\pm 3.87\text{dB}$  ; 1-18GHz:  $\pm 3.83\text{dB}$  ; 18-40GHz:  $\pm 3.98\text{dB}$

### 3.5. Test Result of Radiated Emission

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/22

#### Horizontal

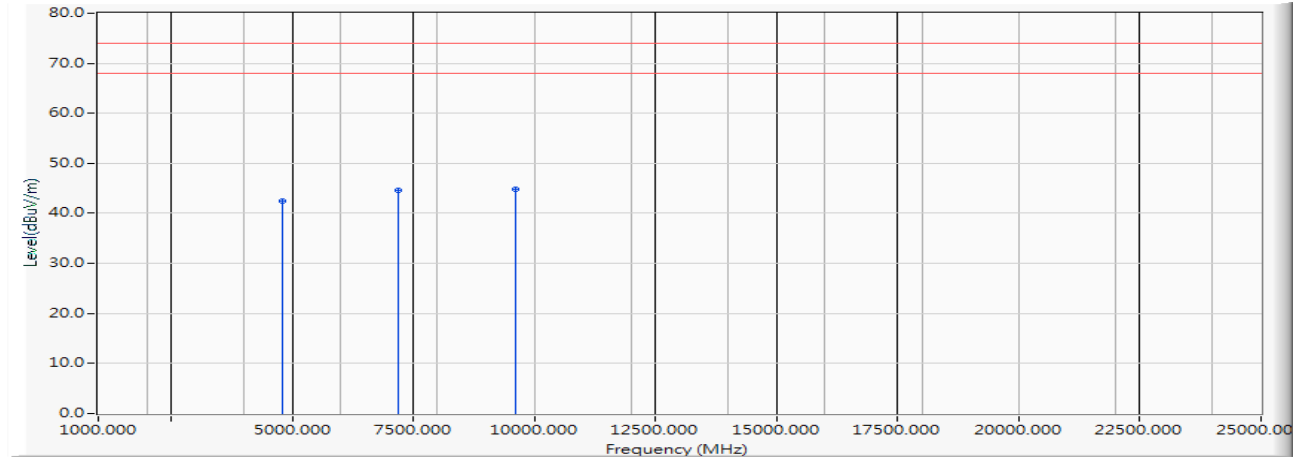


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4804.000	-6.081	48.440	42.359	-31.641	74.000	PEAK
2		7206.000	-3.033	47.580	44.547	-29.453	74.000	PEAK
3	*	9608.000	-0.774	45.570	44.797	-29.203	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/22

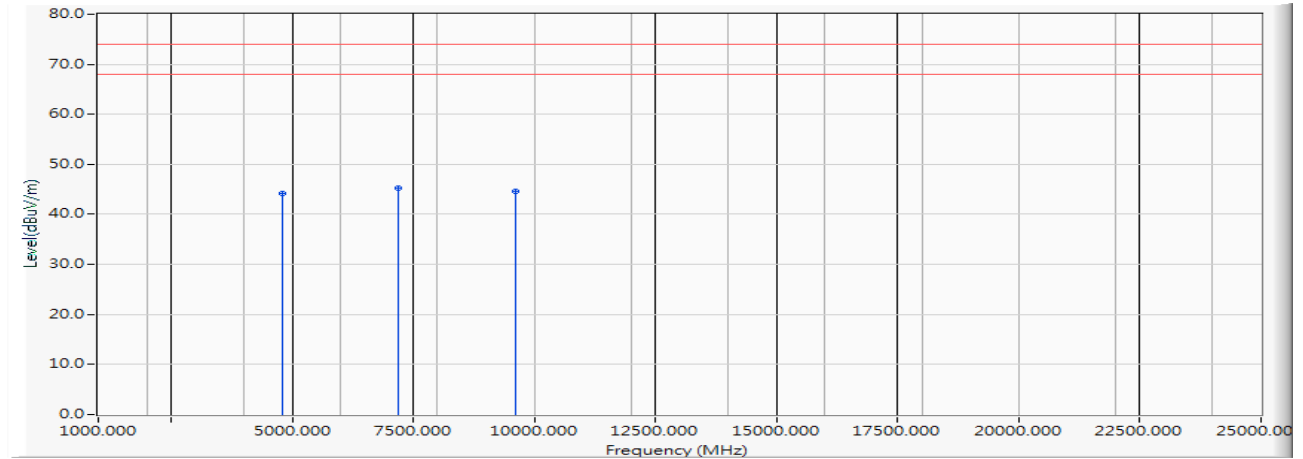**Vertical**


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4804.000	-6.081	50.300	44.219	-29.781	74.000	PEAK
2	*	7206.000	-3.033	48.290	45.257	-28.743	74.000	PEAK
3		9608.000	-0.774	45.340	44.567	-29.433	74.000	PEAK

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2440MHz)  
 Test Date : 2019/08/22

### Horizontal

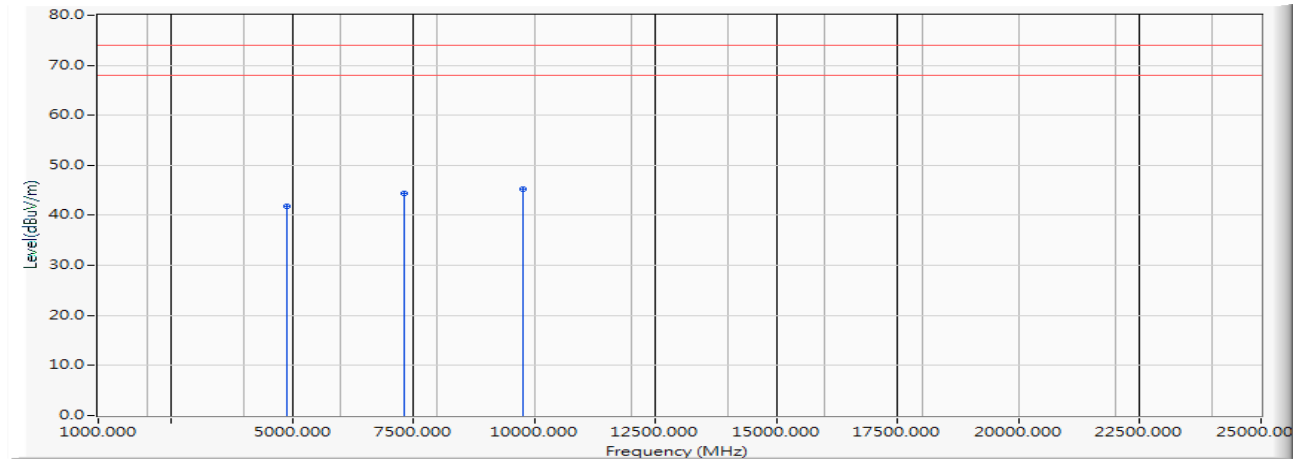


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4880.000	-6.045	47.780	41.735	-32.265	74.000	PEAK
2		7320.000	-2.959	47.450	44.491	-29.509	74.000	PEAK
3	*	9760.000	-0.492	45.760	45.268	-28.732	74.000	PEAK

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2440MHz)  
 Test Date : 2019/08/22

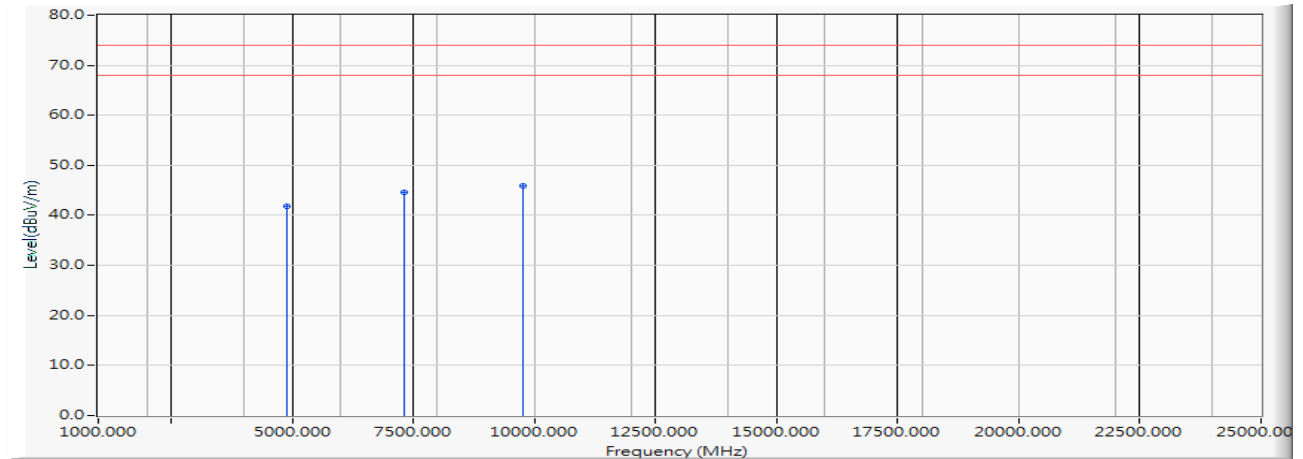**Vertical**


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4880.000	-6.045	47.830	41.785	-32.215	74.000	PEAK
2		7320.000	-2.959	47.470	44.511	-29.489	74.000	PEAK
3	*	9760.000	-0.492	46.320	45.828	-28.172	74.000	PEAK

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/22

### Horizontal

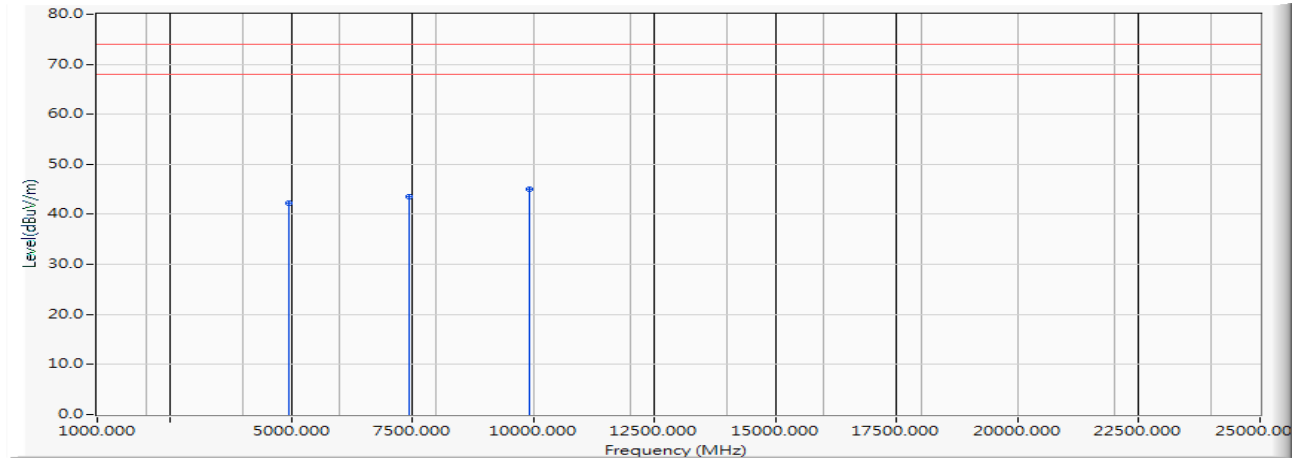


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4960.000	-6.041	48.290	42.249	-31.751	74.000	PEAK
2		7440.000	-2.805	46.440	43.635	-30.365	74.000	PEAK
3	*	9920.000	-0.260	45.340	45.080	-28.920	74.000	PEAK

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/22

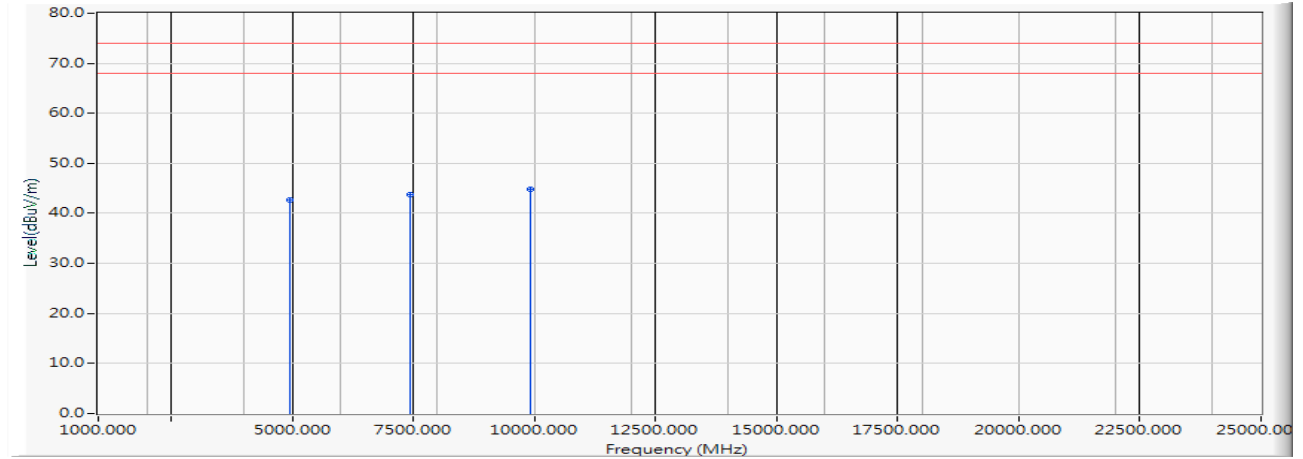**Vertical**


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		4960.000	-6.041	48.620	42.579	-31.421	74.000	PEAK
2		7440.000	-2.805	46.560	43.755	-30.245	74.000	PEAK
3	*	9920.000	-0.260	45.140	44.880	-29.120	74.000	PEAK

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : General Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2440MHz)  
 Test Date : 2019/09/24

### Horizontal

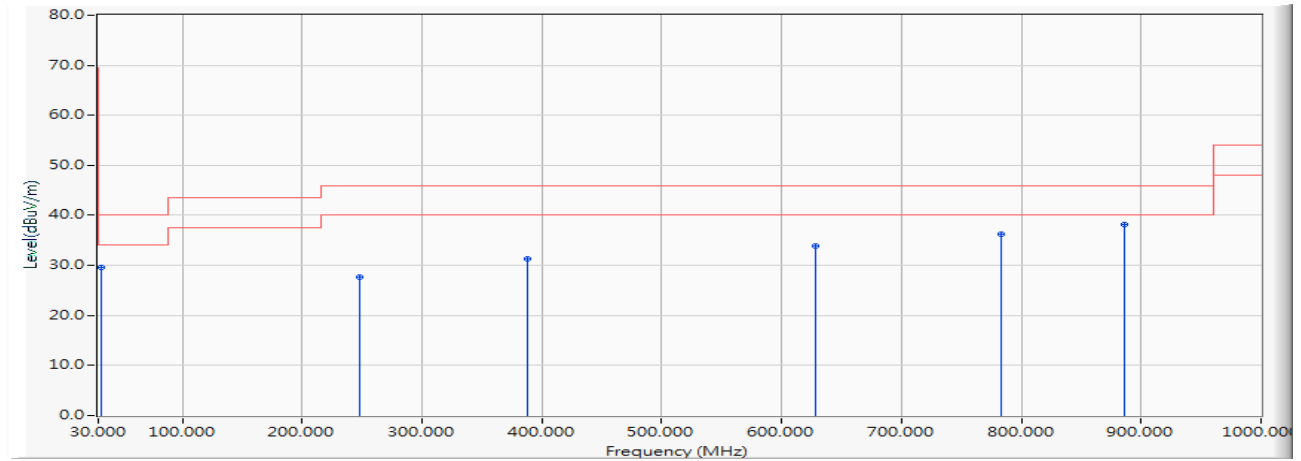


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		32.812	-12.011	41.602	29.591	-10.409	40.000	QUASIPeAK
2		247.899	-12.110	39.718	27.609	-18.391	46.000	QUASIPeAK
3		388.478	-8.299	39.512	31.214	-14.786	46.000	QUASIPeAK
4		628.870	-3.827	37.725	33.898	-12.102	46.000	QUASIPeAK
5		783.507	-1.783	37.928	36.145	-9.855	46.000	QUASIPeAK
6	*	886.130	-0.388	38.637	38.249	-7.751	46.000	QUASIPeAK

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : General Radiated Emission  
 Test Mode : Mode 1: Transmit - BLE (2440MHz)  
 Test Date : 2019/09/24

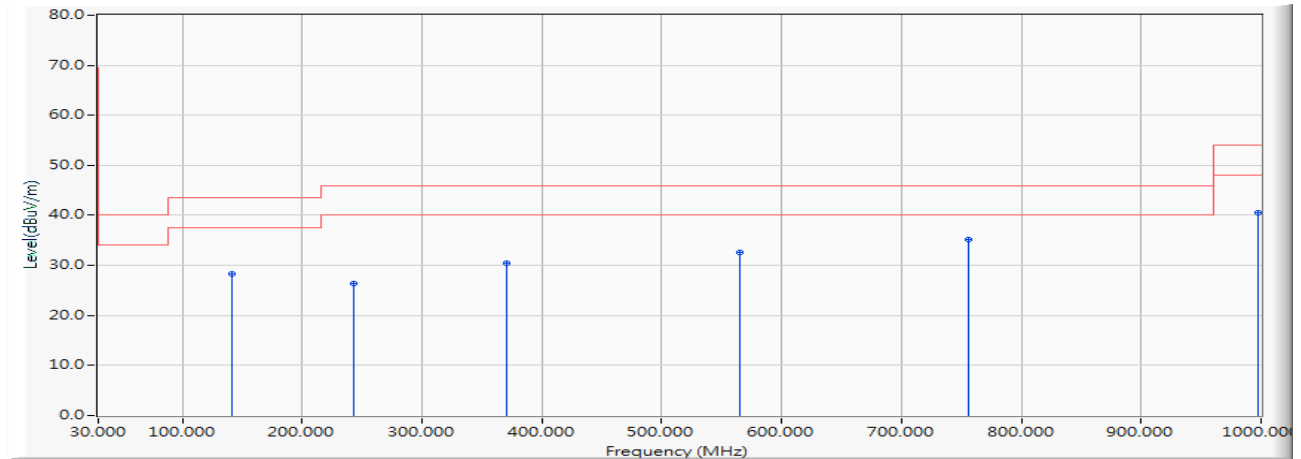**Vertical**

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		141.058	-11.394	39.705	28.311	-15.189	43.500	QUASIPeAK
2		243.681	-12.163	38.548	26.384	-19.616	46.000	QUASIPeAK
3		370.203	-8.720	39.222	30.502	-15.498	46.000	QUASIPeAK
4		565.609	-4.810	37.433	32.622	-13.378	46.000	QUASIPeAK
5	*	755.391	-1.985	37.103	35.118	-10.882	46.000	QUASIPeAK
6		997.188	0.970	39.575	40.545	-13.455	54.000	QUASIPeAK


**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


4. Band Edge

4.1. Test Setup

RF Conducted Measurement

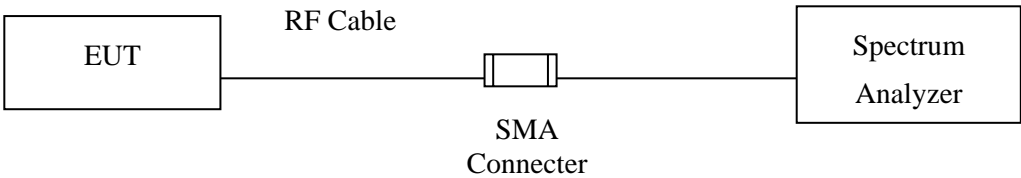

RF Radiated Measurement:

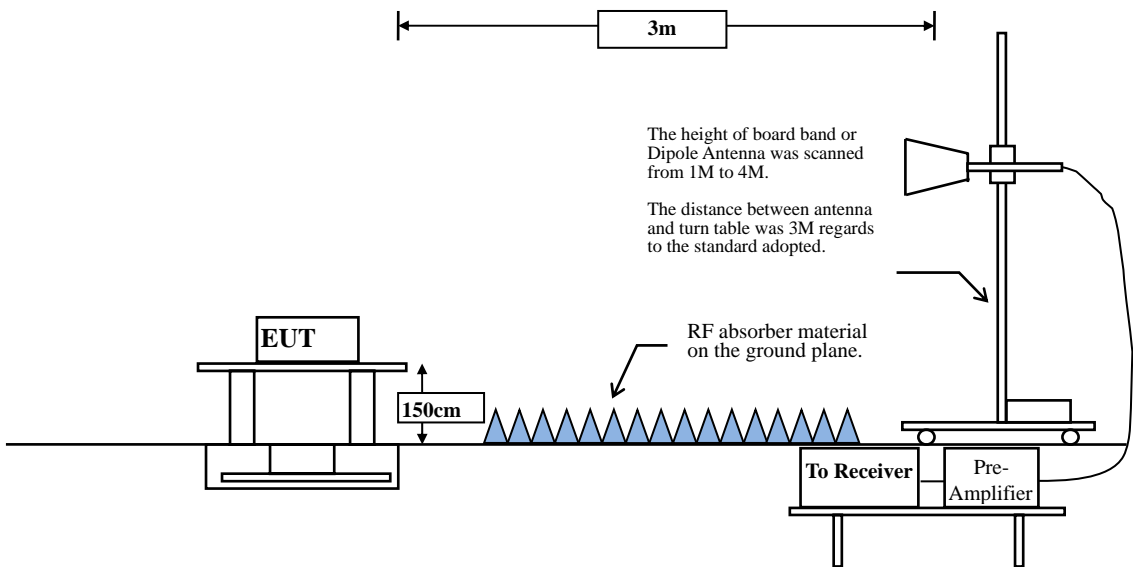



## **4.2. Limit**

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## **4.3. Test Procedure**

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

**RBW and VBW Parameter setting:**

According to KDB 558074 Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$ .

**Table 1 —RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle  $\geq 98\%$

$VBW \geq 1/T$ , when duty cycle  $< 98\%$

( T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE	86.40	2.1600	463	500

Note: Duty Cycle Refer to Section 5

**4.4. Uncertainty**

Conducted:  $\pm 1.23\text{dB}$

Radiated:


Horizontal polarization : 1-18GHz:  $\pm 3.77\text{dB}$

Vertical polarization : 1-18GHz :  $\pm 3.83\text{dB}$

#### 4.5. Test Result of Band Edge

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/02

##### Horizontal

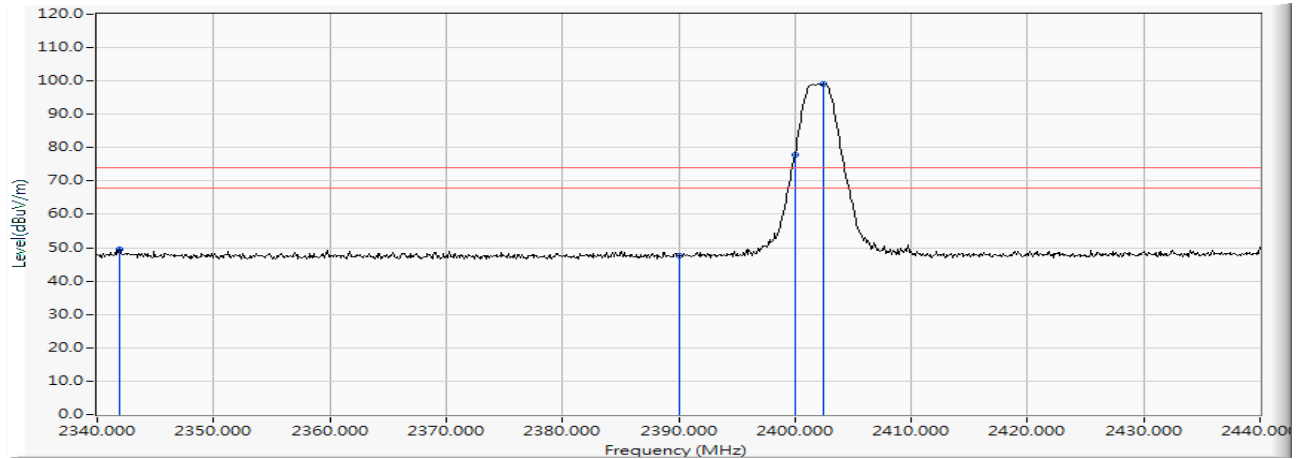


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2341.900	10.062	39.515	49.578	-24.422	74.000	PEAK
2		2390.000	10.262	37.216	47.478	-26.522	74.000	PEAK
3		2400.000	10.304	67.666	77.969	--	--	PEAK
4	*	2402.500	10.313	88.752	99.066	--	--	PEAK

##### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/02

### Horizontal

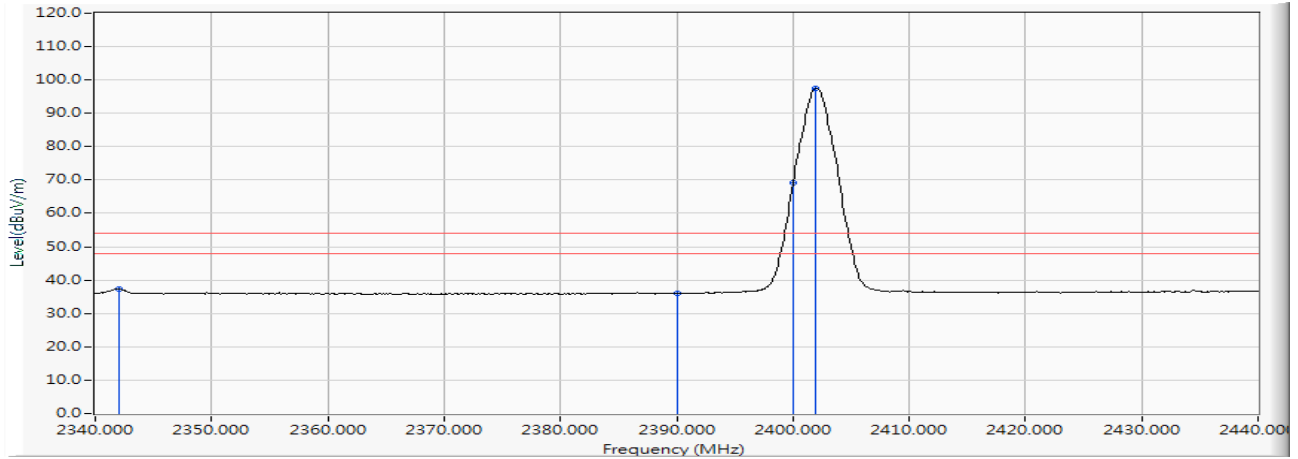


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2342.000	10.063	27.382	37.445	-16.555	54.000	AVERAGE
2		2390.000	10.262	25.804	36.066	-17.934	54.000	AVERAGE
3		2400.000	10.304	58.983	69.286	--	--	AVERAGE
4	*	2402.000	10.311	87.210	97.522	--	--	AVERAGE

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/02

### Vertical

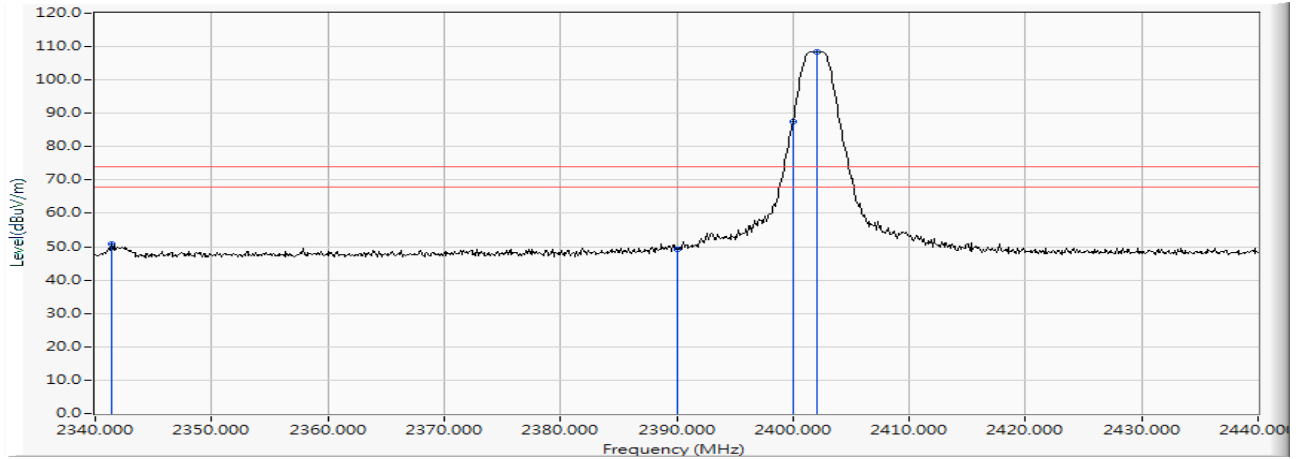


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2341.400	10.061	40.641	50.702	-23.298	74.000	PEAK
2		2390.000	10.262	39.101	49.363	-24.637	74.000	PEAK
3		2400.000	10.304	77.105	87.408	--	--	PEAK
4	*	2402.100	10.312	98.157	108.469	--	--	PEAK

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2402MHz)  
 Test Date : 2019/08/02

### Vertical

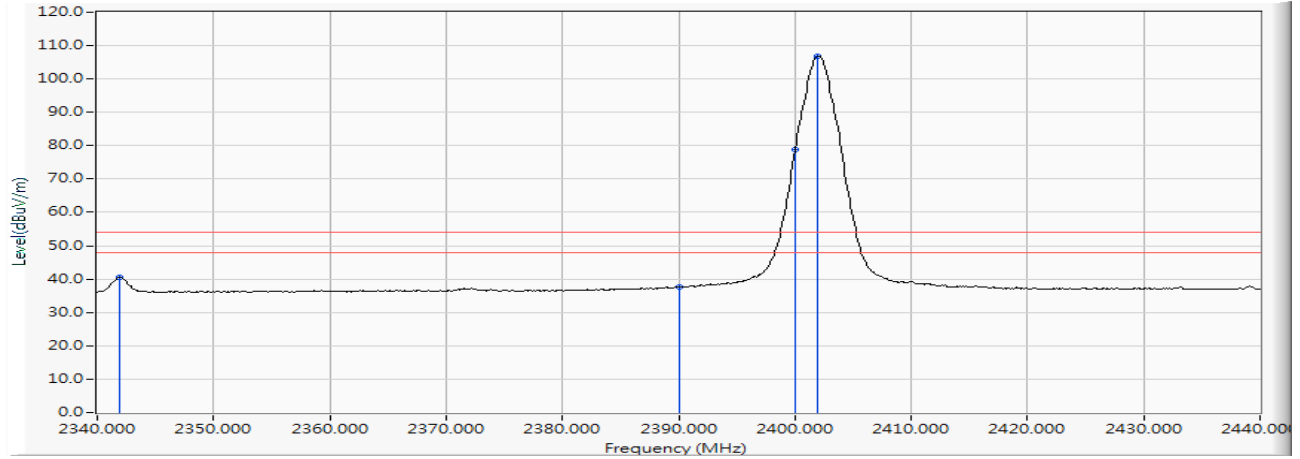


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2341.900	10.062	30.522	40.585	-13.415	54.000	AVERAGE
2		2390.000	10.262	27.401	37.663	-16.337	54.000	AVERAGE
3		2400.000	10.304	68.388	78.691	--	--	AVERAGE
4	*	2402.000	10.311	96.621	106.933	--	--	AVERAGE

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/02

### Horizontal

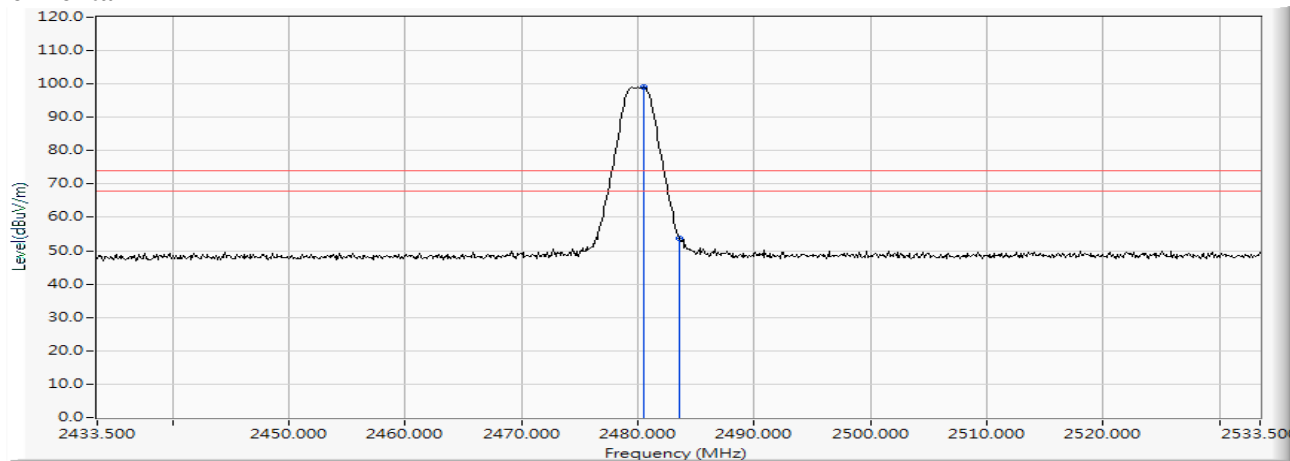


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.500	10.630	88.315	98.945	--	--	PEAK
2		2483.500	10.640	43.204	53.845	-20.155	74.000	PEAK

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/02

### Horizontal

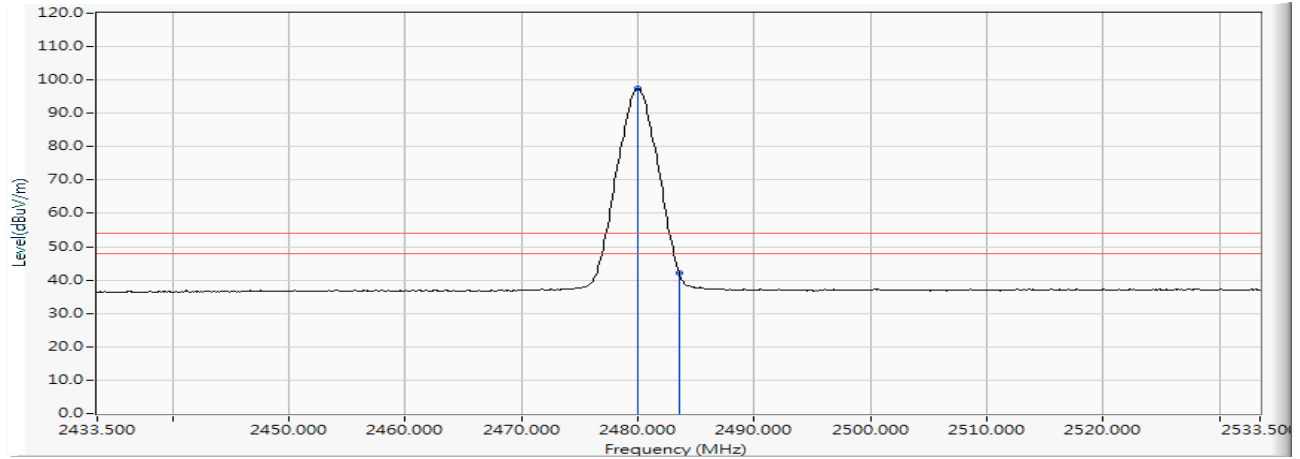

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.000	10.628	86.742	97.370	--	--	AVERAGE
2		2483.500	10.640	31.519	42.160	-11.840	54.000	AVERAGE


### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/02

### Vertical

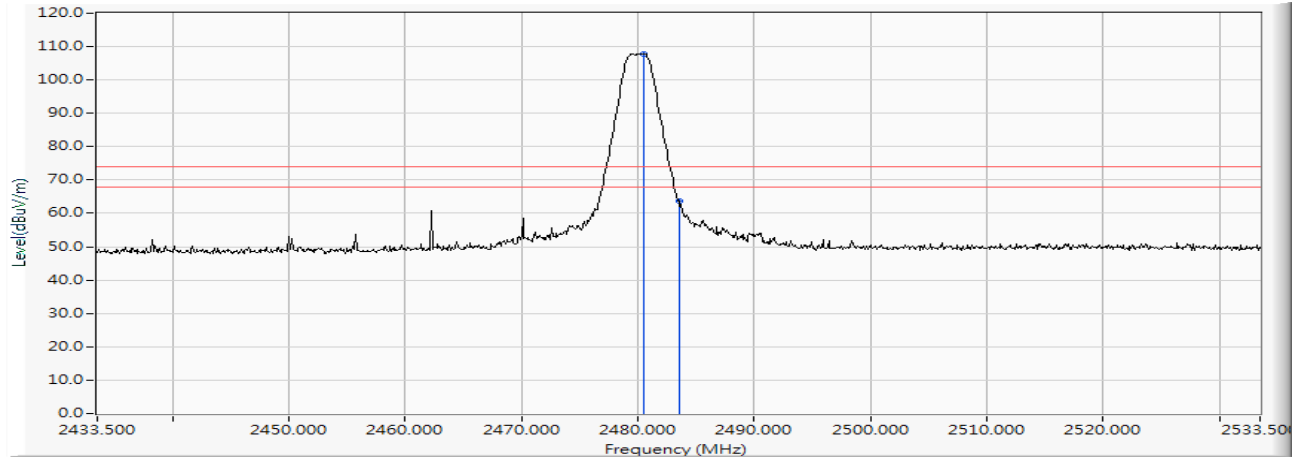


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.500	10.630	97.298	107.928	--	--	PEAK
2		2483.500	10.640	53.049	63.690	-10.310	74.000	PEAK

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit - BLE (2480MHz)  
 Test Date : 2019/08/02

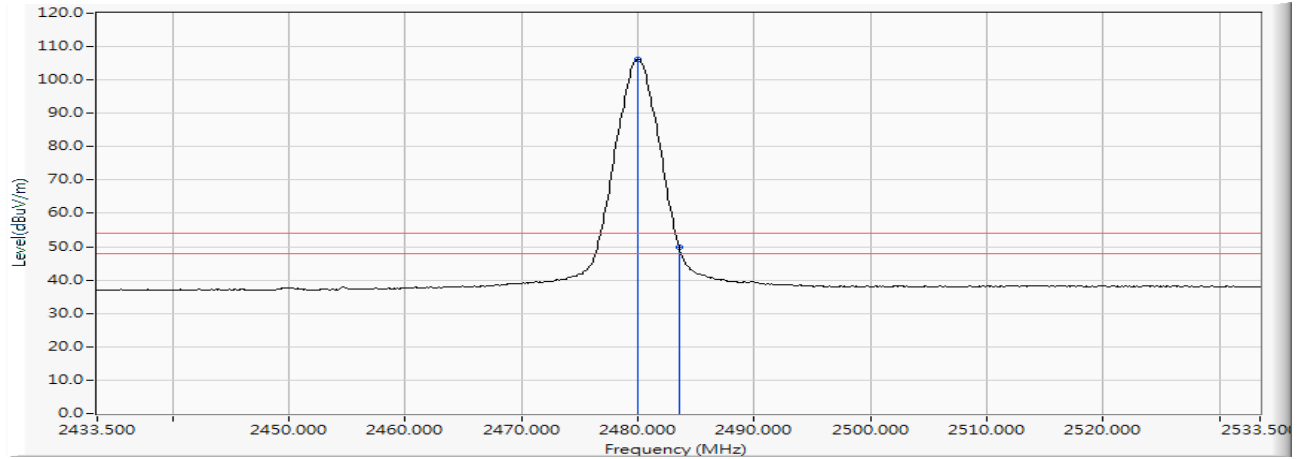**Vertical**


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.000	10.628	95.671	106.299	--	--	AVERAGE
2		2483.500	10.640	39.246	49.887	-4.113	54.000	AVERAGE

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

## 5. Duty Cycle

### 5.1. Test Setup

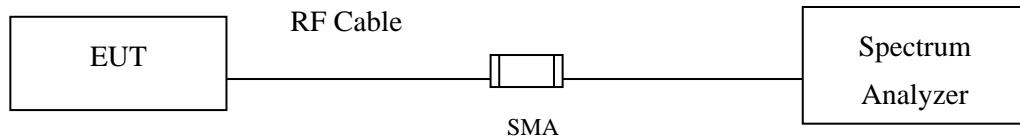

### 5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

### 5.3. Uncertainty

$\pm 2.31\text{msec}$

#### 5.4. Test Result of Duty Cycle

Product : Intel® Wi-Fi 6 AX201  
 Test Item : Duty Cycle  
 Test Mode : Mode 1: Transmit - BLE


Duty Cycle Formula:

Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE	2.1600	2.5000	86.40	0.63

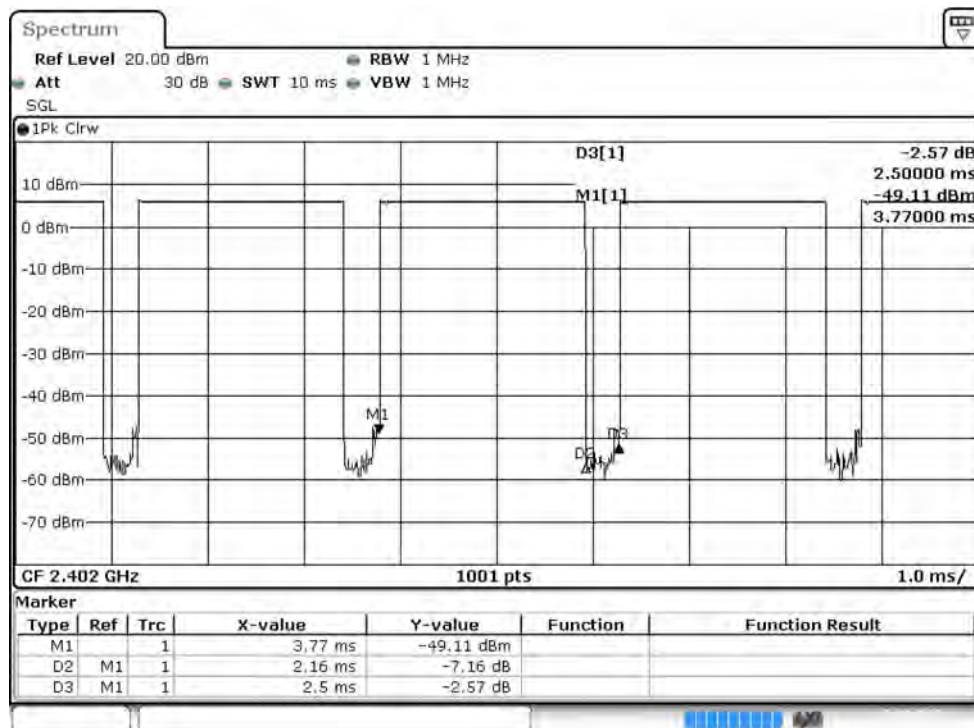

## **6. EMI Reduction Method During Compliance Testing**

No modification was made during testing.