



Test Report

Report No	EF0640-2
Client	Colubris Networks 200 West Street Waltham, MA 02451
Phone	781-547-0378
Fax	781-684-0009
FRN	0010292464
Models	WAP-200 and WCB-200
FCC ID	RTP-550-10016-6
IC	4891A-0100166
Equipment Type	Low Power Communication Device Transmitter
Equipment Code	DTS and NII
Application Type	New Certification
Rule Part	FCC 15.247, 15E, RSS 210 issue 6
Emission Designator	16M5G1D & 53M0G1D
Results	As detailed within this report
Prepared by	 Mairaj Hussain – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	1/27/06
Conditions of issue	This Test Report is issued subject to the conditions stated in ‘terms and conditions’ section of this

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data and opinions which are not covered by the A2LA accreditation.



Summary	3
Test Methodology	4
Modifications Required for Compliance	4
EUT Configuration	5
Compliance Statement	7
Test Data and Plots	9
Section 15.31(e)	9
15.247(b)(3)	10
15.247(e) Power Spectral Density	13
15.247(d)	15
15.407(a)(1) Peak Output Power 5.15 – 5.25GHz band	21
Power Spectral Density 5.15 – 5.25GHz band	22
15.407(a)(6) Peak Excursion	23
Band Edge	27
Spurious Emissions	27
15.407(a)(3) 5.725 – 5.825GHz band	28
IC Peak Excursion and PPSD Data	34
15.407(g)	36
Bandwidth	37
6dB BW for 15.247(a)(2)	37
26dB BW for 5GHz band	41
AC Line Conducted Emission Measurements	45
Antenna Gain Check	46
Test Equipment Used	47
Terms And Conditions	51
A2LA Accreditation	53

Summary

This report is an application for certification of a transmitter operating under 47 CFR 15.247 of the FCC rules provided for operation of Digital Transmissions Systems and 15.407 Unlicensed National Information Infrastructure Devices operating in the frequency bands of 5.15-5.25GHz and 5.725 – 5.825 GHz. The product covered by this report is WAP-200 which is a wireless LAN access device.

WAP-200 is similar to CN200 with FCC ID: RTP-550-10016-4, please see the attached letter describing the similarities between two radios.

Please note that this report also covers the WCB-200. The WCB-200 has the same hardware operation as the WAP-200 but fewer software features.

The product was tested using the methods outlined in FCC public notice DA 02-2138, released August 30, 2002 and ANSI C63.4 (2003).

Product intends to use the following antenna:

Antenna	Gain (dBi)	Frequency of Operation
WTS WLAN Tri-Band antenna MN: WTS2450-RPSMA Connector type: RP-SMA	2.5 @ 2.45GHz	2.4 – 2.5GHz
	3.4 @ 5.875GHz	4.9 - 5.875GHz

Test Methodology

Frequency range investigated:	150KHz – 40GHz
--------------------------------------	----------------

Measurement Distance:		
<i>Frequency (MHz)</i>	<i>Distance (m)</i>	<i>Comments</i>
0.15 – 30MHz	-	AC line Conducted
30MHz – 26.5GHz	3	Fundamental & Spurious, Conducted
30MHz – 40GHz	3	Spurious Radiated

The EUT was maximized around three orthogonal axes. EUT antennas were maximized within there range of motion.

Product was tested on a non conductive table 80cm above the ground plane. Receiving antenna was placed at a distance of 3m from the product. Radio output power was set to maximum level unless otherwise stated.

The product was powered by a support AC/DC power supply. Voltage variations were performed on the DC side of the supply. AC line conducted emissions were performed on AC side of the supply using a 50Ω/50μH LISN.

All readings are peak unless otherwise noted.


<i>Equipment Operation and FCC Rule Part</i>		
<i>CFR 47 Section</i>	<i>Band of Operation</i>	<i>Yes/No</i>
15.247	2.4GHz – 2.4835GHz	Yes
15.247	902MHz – 928MHz	No
15.247	5.725GHz – 5.850GHz	No
15.407	5.15GHz – 5.25GHz	Yes
15.407	5.25GHz – 5.35GHz	No
	5.47GHz – 5.725GHz	No
	5.725GHz – 5.825GHz	Yes

Modifications Required for Compliance

1. 5.725 – 5.825 GHz band operation is limited to CH161 at 5.805GHz
2. Power must be set no higher than 12dBm when radio runs at CH161

EUT Configuration

Eut Model Number	WAP200
EUT Serial Number	B008-00405
Cables	Ethernet quantity 1 unshielded 2 m long

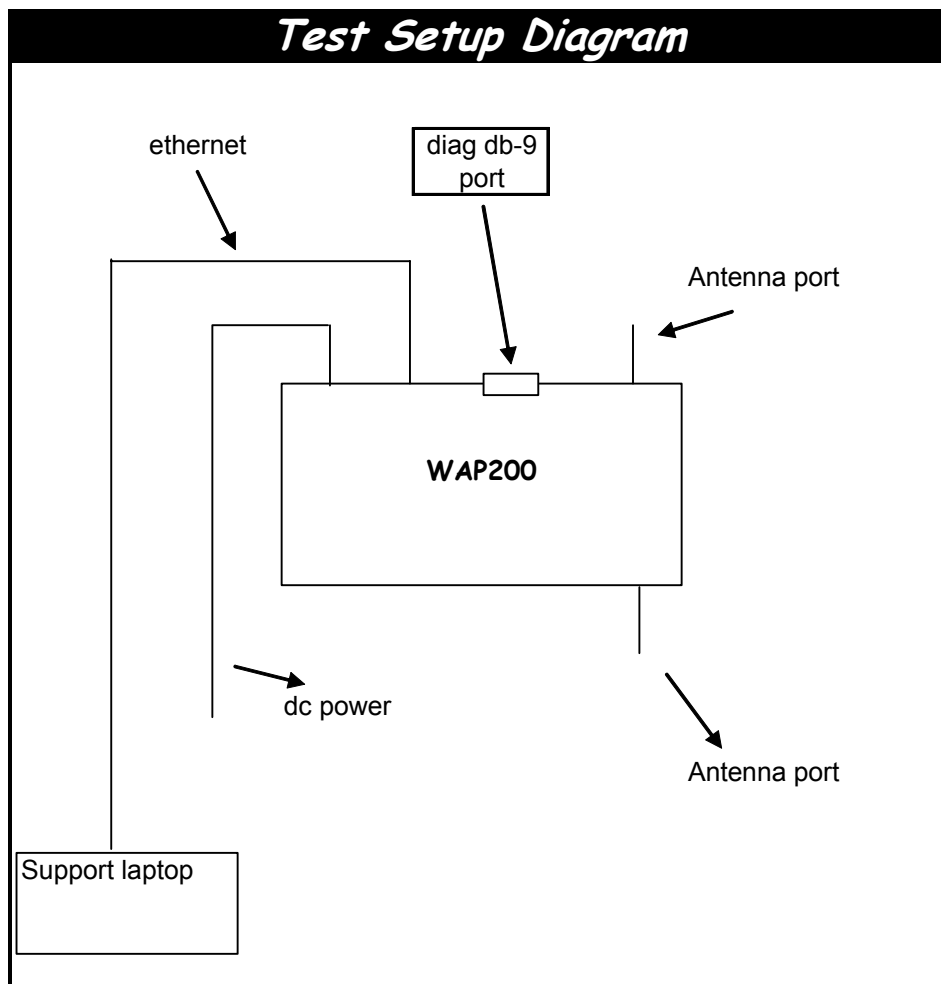

802.11g	Data Rate(mbps)	Modulation
	1	DSS
	2	
	5.5	
	11	
	6	
	12	
	9	OFDM
	18	
	24	
	36	
	48	
	54	
802.11b	1	DSS
	2	
	5.5	
	11	
802.11a	6	OFDM
	9	
	12	
	18	
	24	
	36	
	54	

Modulation Schemes	Data Rates (mbps)
BPSK	6 & 9
QPSK	12 & 18
16-QAM	24 & 36
64-QAM	48 & 54

Compliance Statement

RSS-GEN	RSS 210	47 CFR Part	Comments
5.3		15.15(b)	The product contains no user accessible controls that increase transmission power above allowable levels.
5.2		2.925: 15.19	The label is shown in the label exhibit.
7.1.5		15.21	Information to the user is shown in the instruction manual exhibit.
		15.27	Please see the modification section of the report.
		15.31(e)	The input power was varied from its nominal value to 3.3V and 5.0V. The respective radiated power was measured see table.
7.1.4		15.203	The device utilizes reverse sex SMA type antenna connector.
7.1.4		15.204	See attached documentation describing the antenna(s).
4.7		15.205 15.209	The fundamental is not in a Restricted band and the spurious emissions in the Restricted bands comply with the general emission limits of 15.209.
7.2.2		15.207	Unit is DC powered. Conducted EMI data is provided in this report.
		15.247(a)(2)	EUT complies with minimum 6dB BW requirement.
4.6		15.247(b)(3)	EUT complies with conducted POP requirement.
		15.247(b)(4)	Antennas used with the product have gain of 3.6dBi at 4.9GHz (antenna specs).
4.7, 4.8		15.247(d)	Spurious emissions comply with the requirements of this section and 15.205.
	A9.2 (3)	15.247(e)	EUT's power spectral density complies with the requirements of this section.
		15.247(i)	RF exposure exhibit for this section is attached.
		15.407(a)	EUT complies with the requirements of PoP of 50mW and PSD limit of 4dBm.
		15.407(a)(3)	EUT complies with the requirements of PoP of 1W and PSD limit of 17dBm.
		15.407(b)(1)	Spurious emissions above 1GHz comply with the requirements of this section and 15.205.

	A9.3 (4)	15.407(b)(4)	Spurious emissions above 1GHz comply with the requirements of this section and 15.205.
		15.407(b)(6)	Unwanted emissions below 1GHz comply with section 15.209 and AC conducted emissions comply with section 15.207.
4.5	A9.5 (e)	15.407(g)	Product meets the requirements of frequency stability.
5.5		15.407(f)	RF exposure exhibit for this section is attached.

*Test Data and Plots***Section 15.31(e)****Table 1**

Voltage Variation FCC 47CFR 15.31(e)			
Date: 12/9/2004 Company: Colubris Networks EUT: CN200 Engineer: Mairaj Hussain			
Nominal Temp: 20 degC PDAC set at 44			
Operating Frequency (MHz)	Nominal	-15%	15%
	5VDC	4.25 VDC	5.75 VDC
	Amplitude (channel power)		
2462	-6.01	-6.5	-6.1
5220	-9.9	-9.7	-9.5
5765	-5.1	-5.1	-4.7

Conclusion:	The peak output power does not change with input voltage.
--------------------	---

Note: Above PoP readings are off of spectrum analyzer and do not take in account for cable loss and any attenuator used.

CN200 is same as WAP200 please see attached letter.


15.247(b)(3)*Maximum conducted output power shall be 1W or less.***Table 2**

Peak Output Power					
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/27/2005					
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 3MHz Method: POP option 2 method #1					
		Spa. Integration Method (dBm)	Cab+ pad factor (dB)	Adj. Power Int method (dBm)	PoP Limit (dBm)
CH1, 1mbps		-3.4	22.2	18.8	30
5.5mbps		-3	22.2	19.2	30
18mbps		-8.1	22.2	14.1	30
54mbps		-8.1	22.2	14.1	30
CH6, 1mbps		-3	22.2	19.2	30
5.5mbps		-2.9	22.2	19.3	30
18mbps		-4.3	22.2	17.9	30
54mbps		-7.6	22.2	14.6	30
CH11, 1mbps		-3.8	22.2	18.4	30
5.5mbps		-3.1	22.2	19.1	30
18mbps		-7.5	22.2	14.7	30
54mbps		-6.9	22.2	15.3	30

Sample plot of conducted peak out put power.

Agilent 10:23:22 Aug 29, 2005

R L

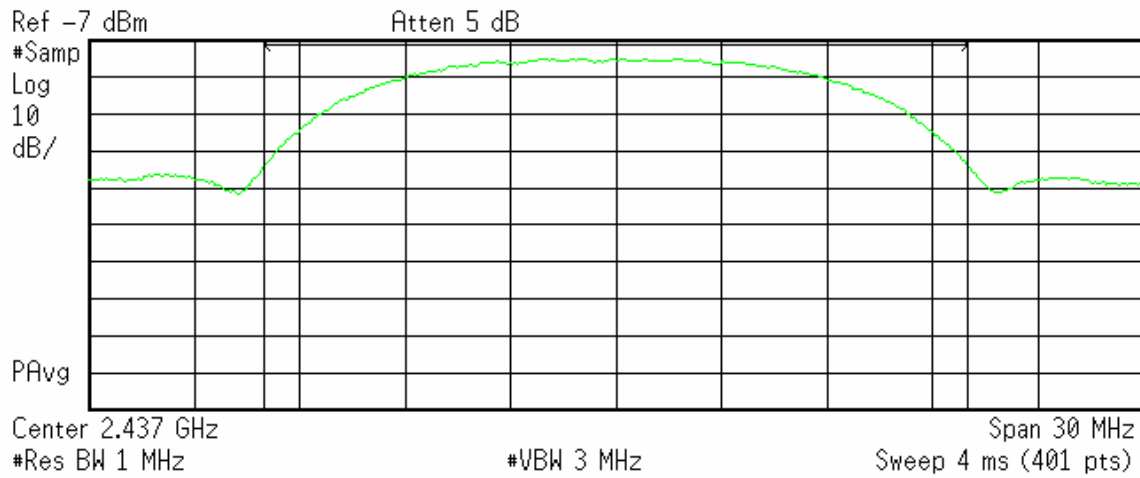

Channel Power

-2.90 dBm /20.0000 MHz


Power Spectral Density

-75.91 dBm/Hz

CH6, 5.5mbps

Agilent 11:01:12 Aug 29, 2005

R L

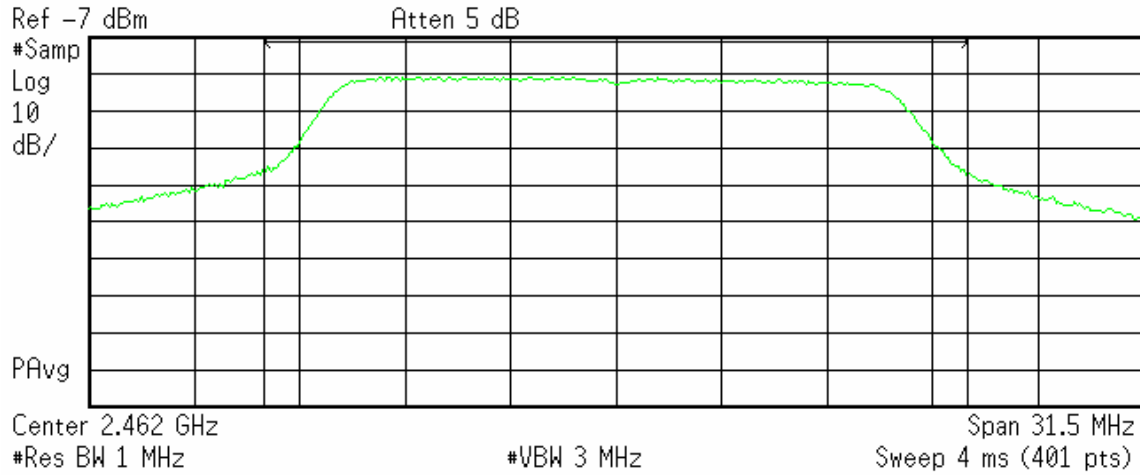


Channel Power

Power Spectral Density

-6.86 dBm /21.0000 MHz

-80.08 dBm/Hz




CH11, 54mbps

15.247(e) Power Spectral Density**Table 3**

PSD				
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/27/2005				
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 3KHz VBW: 10KHz Method: PSD Option 2				
	PSD (dB)	Cab+ pad factor (dB)	Adj PSD (dB)	Limit (dBm)
CH1, 1mbps	-35.5	22.2	-13.3	8
5.5mbps	-27.2	22.2	-5	8
18mbps	-31.8	22.2	-9.6	8
54mbps	-30.8	22.2	-8.6	8
CH6, 1mbps	-29	22.2	-6.8	8
5.5mbps	-32	22.2	-9.8	8
18mbps	-20.1	22.2	2.1	8
54mbps	-23	22.2	-0.8	8
CH11, 1mbps	-30	22.2	-7.8	8
5.5mbps	-29	22.2	-6.8	8
18mbps	-29.1	22.2	-6.9	8
54mbps	-24.2	22.2	-2	8

Sample plot

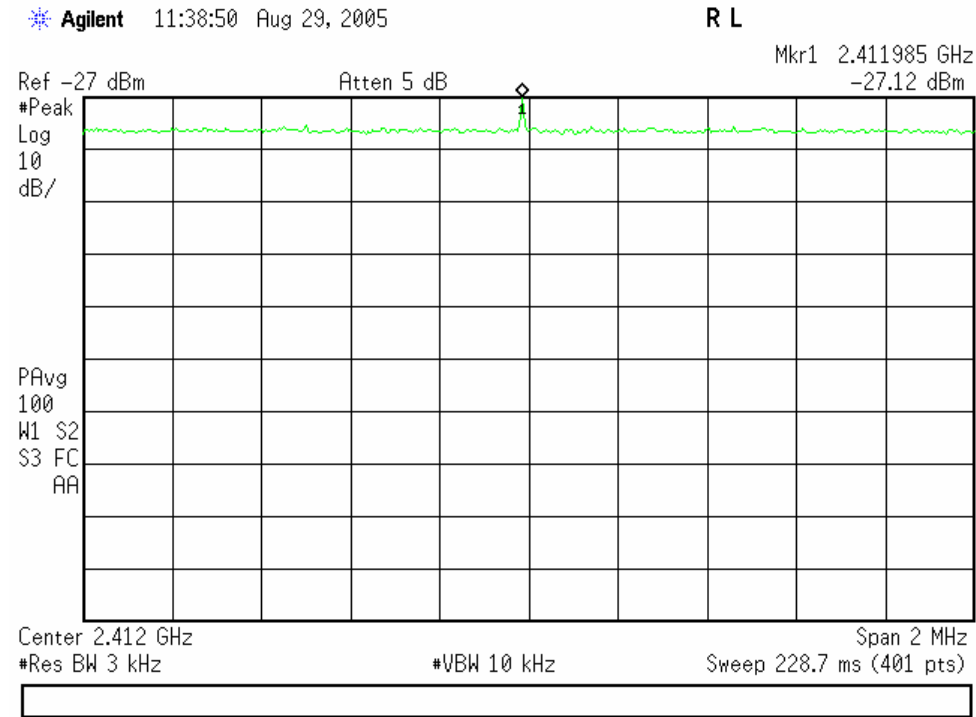


CH1, 5.5mbps

15.247(d)

"Radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100KHz BW within the band that contains the highest level of desired power."


Agilent 10:33:16 Aug 31, 2005

R L

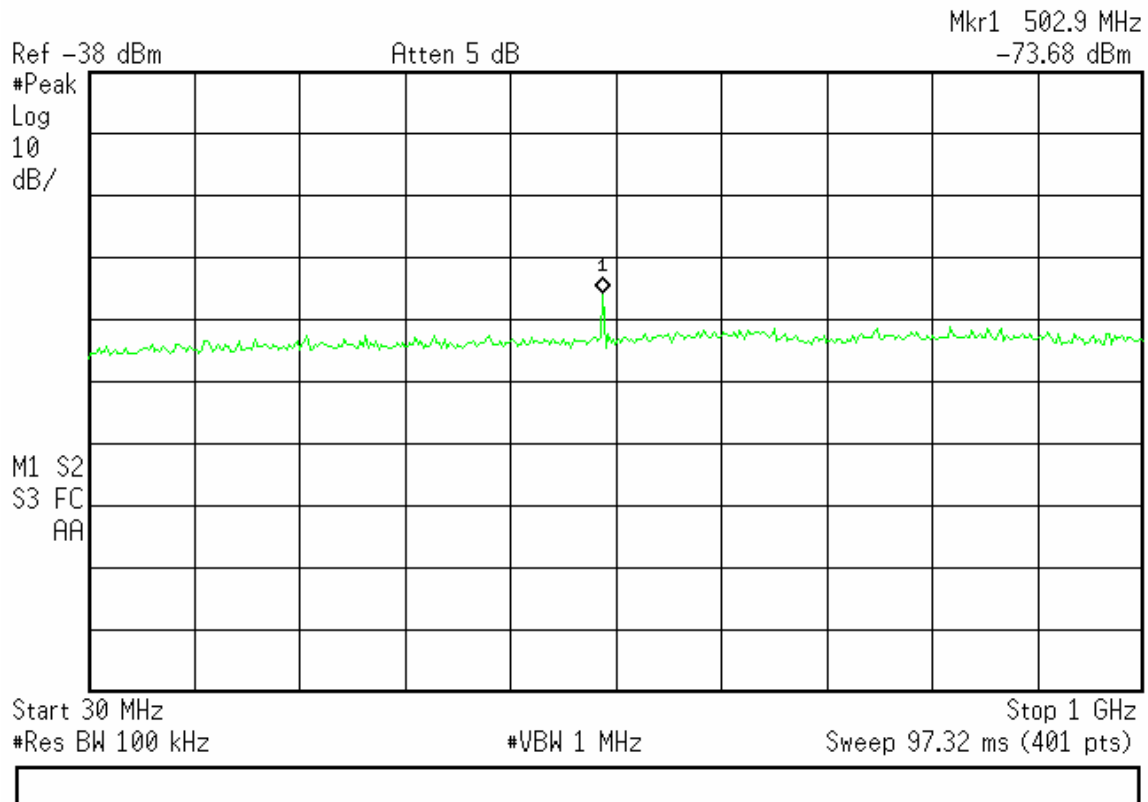


* Agilent 10:34:55 Aug 31, 2005

R L

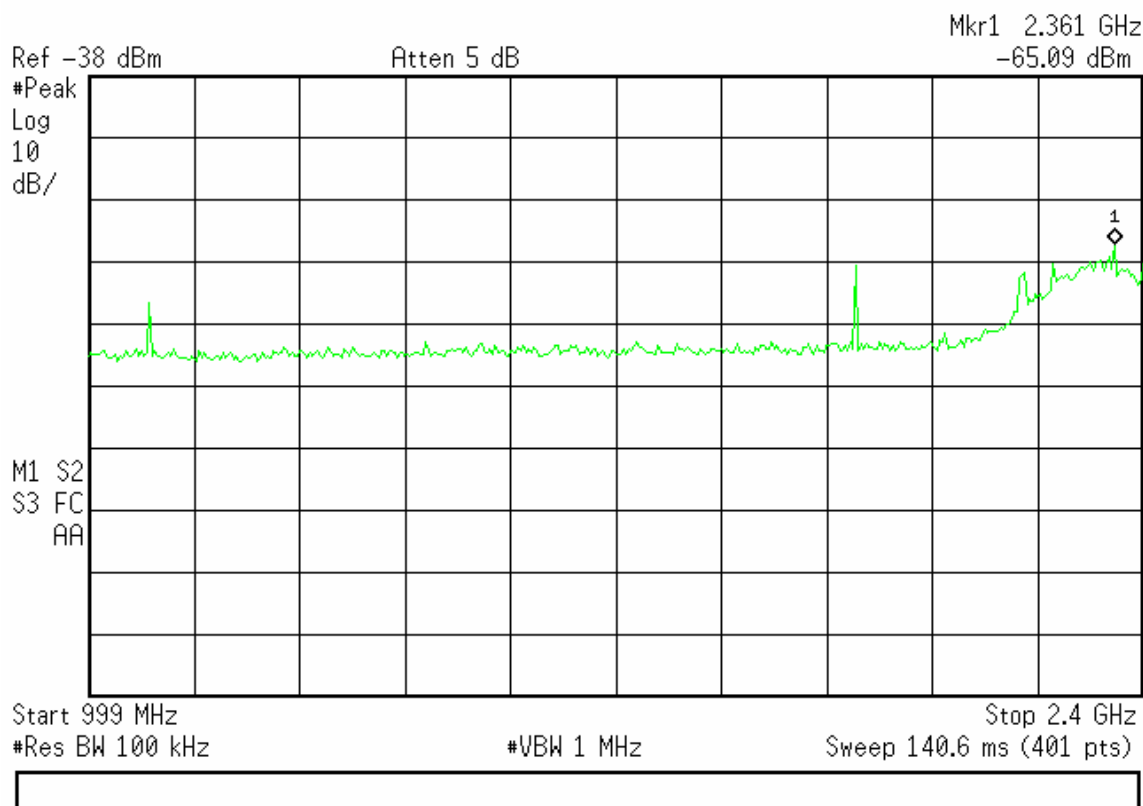


* Agilent 10:38:43 Aug 31, 2005

R L

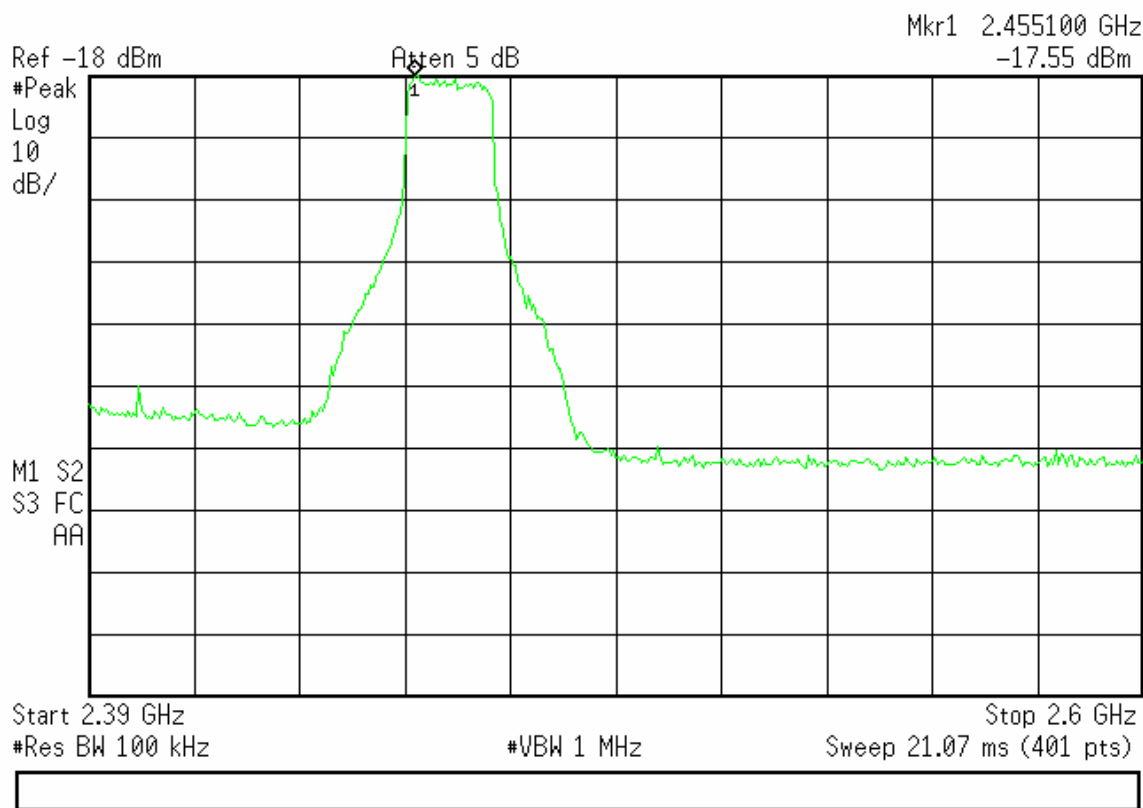

* Agilent 10:44:05 Aug 31, 2005

R L

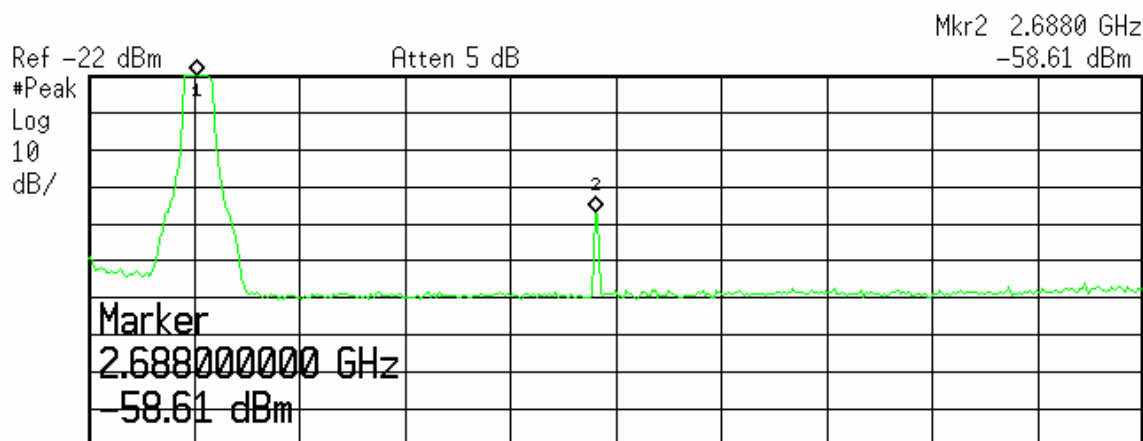


Start 2.4 GHz Stop 3 GHz
#Res BW 100 kHz #VBW 1 MHz Sweep 60.2 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.4615 GHz	-20.74 dBm
2	(1)	Freq	2.6880 GHz	-58.61 dBm


* Agilent 10:45:45 Aug 31, 2005

R L

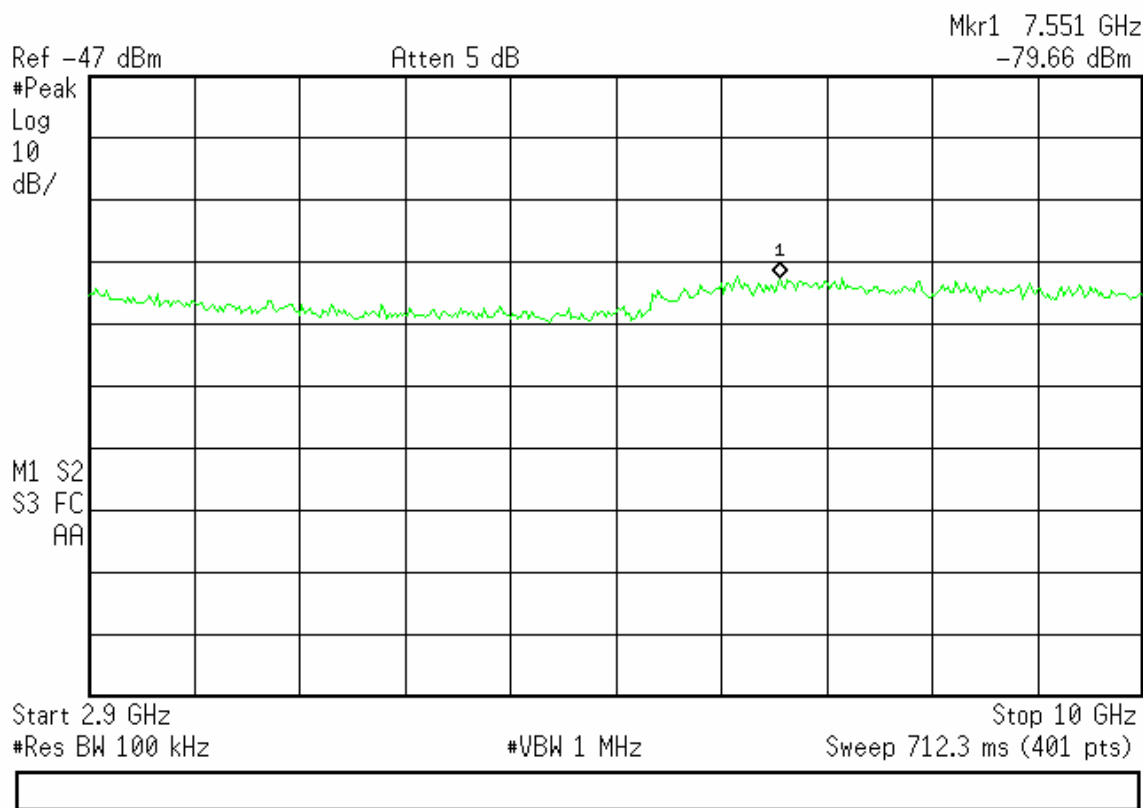

* Agilent 10:46:44 Aug 31, 2005

R L

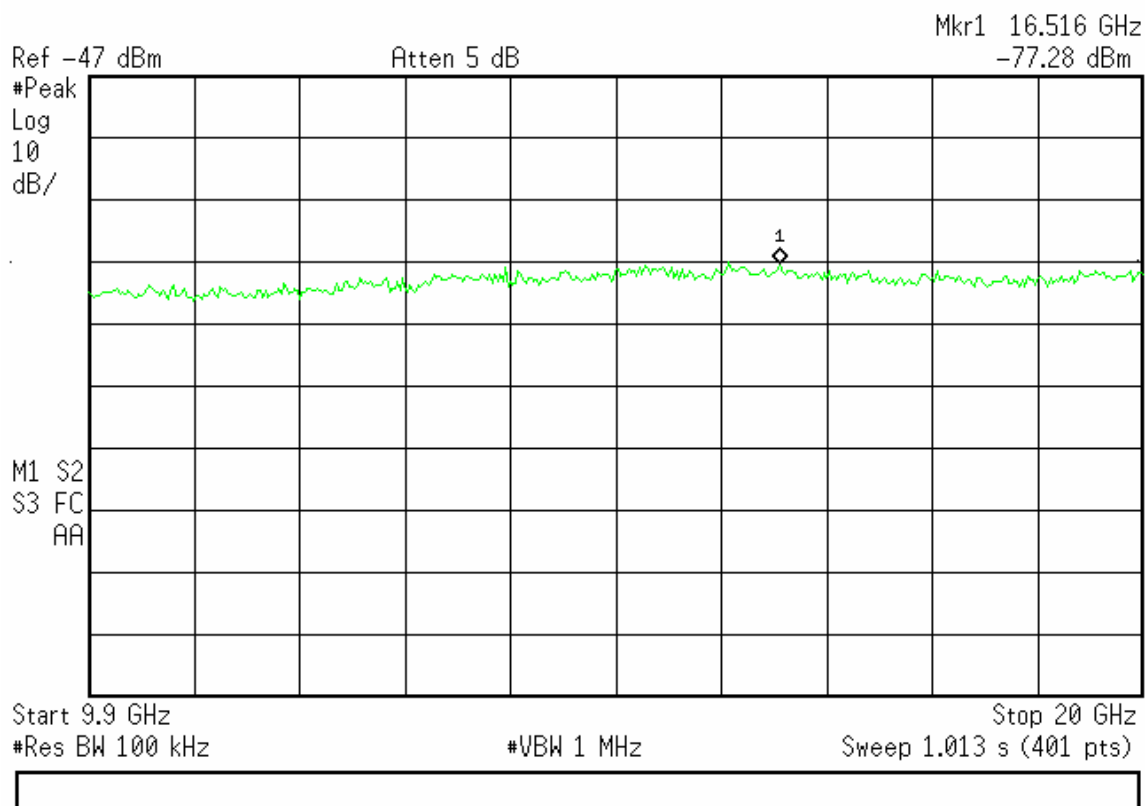

* Agilent 10:47:59 Aug 31, 2005

R L

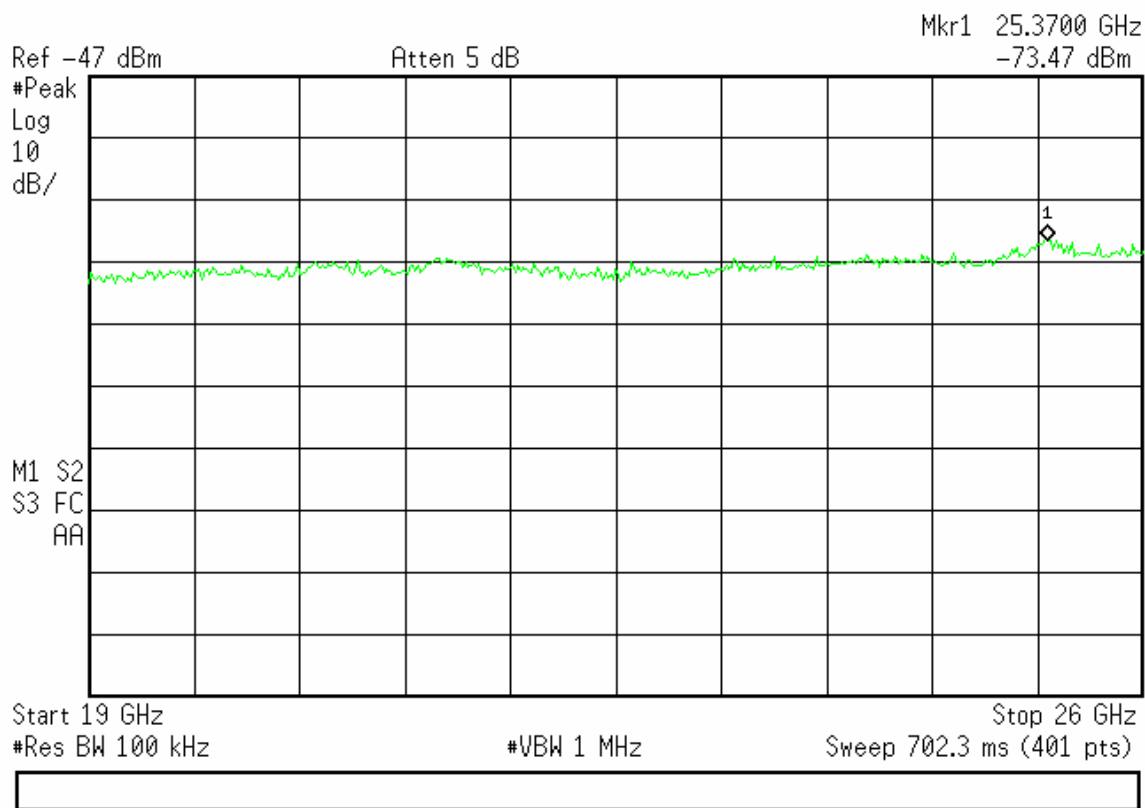


Table 4

Radiated Emissions Table							Curtis-Straus LLC					
Date: 02-Sep-05			Company: Colubris Networks				Work Order: F0640					
Engineer: Mairaj Hussain			EUT Desc: WAP200									
Frequency Range: 30 - 1000MHz							Measurement Distance: 3 m					
Notes: RBW: 120KHz; VBW 300KHz Detector: QP												
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)				FCC Class B		
										Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
v	129.1	34.6	24.5	14.6	1.3	26.0				43.5	-17.5	Pass
h	250.0	39.0	24.2	12.4	1.9	29.1				46.0	-16.9	Pass
h	270.0	48.4	24.2	13.5	2.0	39.7				46.0	-6.3	Pass
h	360.0	45.2	24.0	15.3	2.4	38.9				46.0	-7.1	Pass
h	450.0	38.4	23.8	17.1	2.9	34.6				46.0	-11.4	Pass
h	720.0	34.0	23.8	20.5	3.8	34.5				46.0	-11.5	Pass
h	810.0	35.0	23.8	21.9	4.2	37.3				46.0	-8.7	Pass
h	900.0	36.6	23.1	23.0	4.4	40.9				46.0	-5.1	Pass
Table Result: Pass by -5.1 dB							Worst Freq: 900.0 MHz					
Test Site: "F"		Pre-Amp: Orange		Cable: EMIR-01		Analyzer: Black		Antenna: Red-Black				

Table 5

Spurious Emissions										Curtis-Straus LLC		
Date: 8/24 & 31/2005				Company: Colubris Networks				Work Order: F0640				
Engineer: Mairaj Hussain				EUT Desc: WAP 200								
Frequency Range: 1 - 26GHz							Measurement Distance: 3 m					
Notes: RBW: 1MHz; VBW:1MHz & 10Hz							EUT Max Freq: 5805MHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)				FCC Class B		
										Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Hpk	2687.0	48.6	18.5	30.6	2.4	63.1				74.0	-10.9	Pass
Havg	2687.0	28.4	18.5	30.6	2.4	42.9				54.0	-11.1	Pass
Table Result: Pass by -10.9 dB Worst Freq: 2687.0 MHz												
Test Site: "T"		Pre-Amp: White		Cable: EMIR-HIGH 11		Analyzer: Green		Antenna: Orange Horn				

Tables below show the band edges at the restricted bands while radio running at CH1 and CH11.

Table 6(a)

Band Edge							Curtis-Straus LLC						
Date: 24-Aug-05			Company: Colubris Networks				Work Order: F0640						
Engineer: Mairaj Hussain			EUT Desc: WAP200										
Measurement Distance: 3 m													
Notes: At CH1, 2412MHz													
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	---			FCC Class B			
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
1 mbps Non cont	Tx mode												
	Hpk	2412.0											
	Havg	2412.0	30.0										
	300KHz RBW												
	Hbe	2390.0	27.6										
	Hpk	2412.0	82.0										
	delta:		54.4										
	mkr delta pk	2390.0	29.6	0.0	29.7	2.2	61.5				74.0	-12.5	Pass
	mkr delta avg	2390.0	-24.4	0.0	29.7	2.2	7.5				54.0	-46.5	Pass
	54 mbps Non Cont	Tx mode											
54 mbps Non Cont	Hpk	2412.0	83.7										
	Havg	2412.0	29.0										
	300KHz RBW												
	Hpk	2412.0	81.0										
	Hbe	2390.0	31.5										
	delta:		49.5										
	mkr delta pk	2390.0	34.2	0.0	29.7	2.2	66.1				74.0	-7.9	Pass
	mkr delta avg	2390.0	-20.5	0.0	29.7	2.2	11.4				54.0	-42.6	Pass
	Test Site: "T"			Pre-Amp: none		Cable: EMIR-HIGH 11		Analyzer: Green		Antenna: Orange Horn			

Table 6(b)

Band Edge							Curtis-Straus LLC					
Date: 24-Aug-05			Company: Colubris Networks				Work Order: F0640					
Engineer: Mairaj Hussain			EUT Desc: WAP200									
							Measurement Distance: 3 m					
Notes:							EUT Max Freq: 5805MHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBuV/m)	---			FCC Class B		
							Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
At CH 11, 2462MHz												
1 mbps Non cont Tx mode												
Hpk	2463.0	84.4										
Havg	2462.0	28.0										
300KHz RBW												
Hbe	2483.5	28.5										
Hpk	2460.0	81.0										
delta:		52.5										
mkr delta pk	2483.5	31.9	0.0	30.0	2.4	64.3				74.0	-9.7	Pass
mkr delta avg	2483.5	-24.5	0.0	30.0	2.4	7.9				54.0	-46.1	Pass
54 mbps Non Cont Tx mode												
Hpk	2461.0	84.4										
Havg	2462.0	24.5										
300KHz RBW												
Hpk	2461.0	81.0										
Hbe	2483.5	28.5										
delta:		52.5										
mkr delta pk	2483.5	31.9	0.0	30.0	2.4	64.3				74.0	-9.7	Pass
mkr delta avg	2483.5	-28.0	0.0	30.0	2.4	4.4				54.0	-49.6	Pass
Test Site: "T"			Pre-Amp: none		Cable: EMIR-HIGH 11		Analyzer: Green		Antenna: Orange Horn			

15.407(a)(1) Peak Output Power 5.15 – 5.25GHz band

Table 7

Peak Output Power				
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/28/2005				
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 3MHz Method: POP option 2 method #1				
	Integration method	Cab+ pad factor	Adj. Power Int method	Limit
	(dBm)	(dB)	(dBm)	(dBm)
CH36; 6mbps	-11.6	23.3	11.7	17
18mbps	-9.6	23.3	13.7	17
54mbps	-10	23.3	13.3	17
CH44; 6mbps	-9.7	23.3	13.6	17
18mbps	-9.6	23.3	13.7	17
54mbps	-8.7	23.3	14.6	17
CH48; 6mbps	-10.1	23.3	13.2	17
18mbps	-9.3	23.3	14	17
54mbps	-9.5	23.3	13.8	17

Power Spectral Density 5.15 – 5.25GHz band**Table 8**

PSD					
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/28/2005					
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 3MHz Method: PSD Option 2 Detector: Sample					
		SPA PSD Reading (dBm)	Cab+ pad factor (dB)	Adj. PSD Reading (dBm)	Limit (dBm)
CH36; 6mbps		-22.7	23.3	0.6	4
18mbps		-21	23.3	2.3	4
54mbps		-21.1	23.3	2.2	4
CH44; 6mbps		-20.1	23.3	3.2	4
18mbps		-21.6	23.3	1.7	4
54mbps		-20.9	23.3	2.4	4
CH48; 6mbps		-20.4	23.3	2.9	4
18mbps		-20	23.3	3.3	4
54mbps		-20.7	23.3	2.6	4


15.407(a)(6) Peak Excursion**Table 9**

FCC 15.407(a)(1) & (6)			Curtis-Straus	
Work Order: F0640				
Company: Colubris Networks				
EUT: WAP200				
Date: Dec 15-05				
Engineer: Mairaj Hussain				
Spectrum Analyzer: Orange				
Cable: Hi Freq #11				
Trace :1 RBW: 1MHz; VBW: 3MHz Det: Max hold Peak				
Trace 2: RBW: 1MHz; VBW: 3MHz Det: Max hold Sample				
Channel	Data Rate	Exe Frequency (GHz)	Peak Excursion (dB)	Limit (dB)
36	6	5.17494000	5.2	13
	18	5.17135000	8.2	13
	36	5.17839975	5.5	13
	54	5.18549275	6.5	13
44	6	5.21135000	5.2	13
	18	5.21135000	6.7	13
	36	5.21342600	5.5	13
	54	5.22743900	6.8	13
48	6	5.24017300	6.1	13
	18	5.24000000	6.8	13
	36	5.24657400	7	13
	54	5.24644250	6.4	13

Sample plot (PoP)

Agilent 16:26:23 Aug 30, 2005

R L

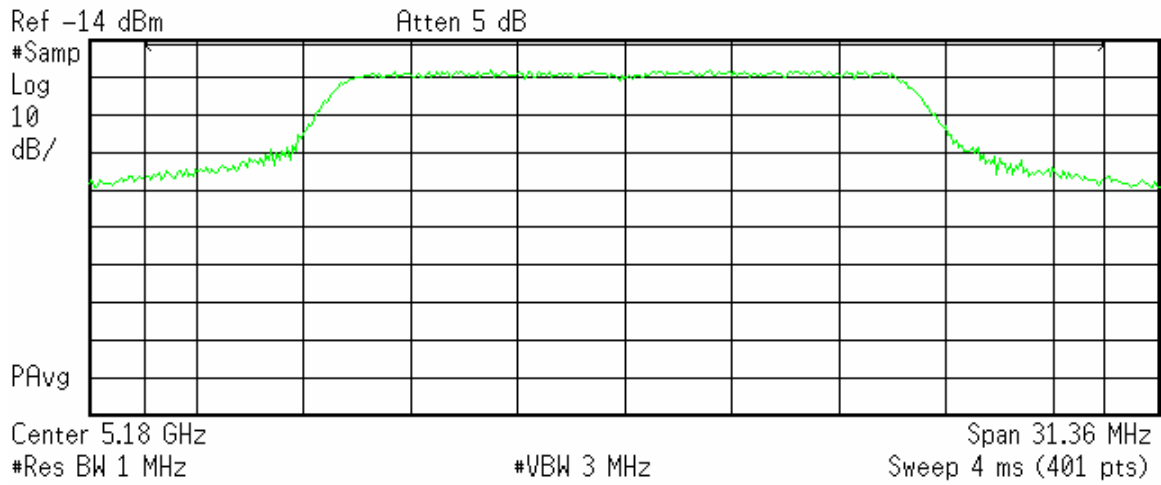


Channel Power

-11.56 dBm /28.0000 MHz

Power Spectral Density

-86.03 dBm/Hz



CH36; 6mbps

Sample plot (PSD)


Agilent 13:49:30 Aug 30, 2005

R L

Mkr1 5.183963 GHz
-22.65 dBm

Ref -14 dBm

Atten 5 dB

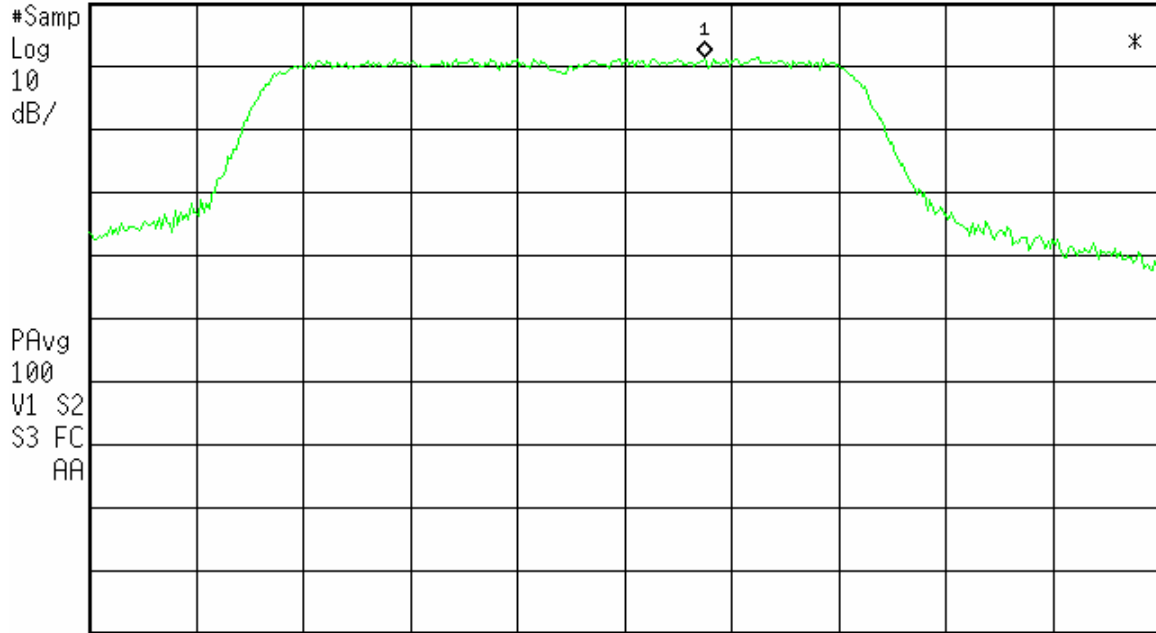

Center 5.182 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 30 MHz

Sweep 4 ms (401 pts)

CH36; 6mbps


Sample Peak Excursion Plot

CH 36

DR 6 mbps

Agilent 18:26:29 Dec 15, 2005

R L

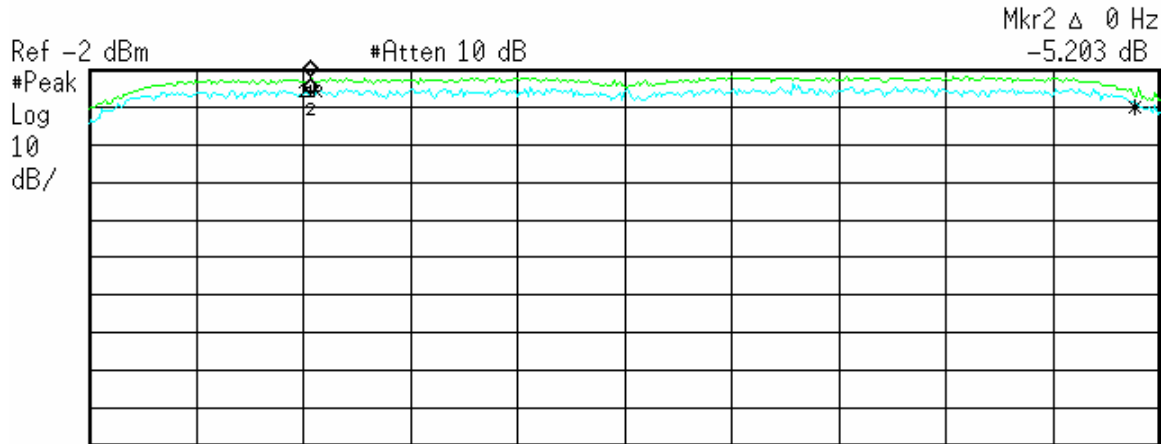

Center 5.18 GHz

Span 17.3 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 4 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.17494 GHz	-3.716 dBm
2R	(2)	Freq	5.17494 GHz	-3.716 dBm
2Δ	(2)	Freq	0 Hz	-5.203 dB

Band Edge

Table 10

Band Edge							Curtis-Straus LLC					
Date: 25-Aug-05			Company: Colubris Networks				Work Order: F0640					
Engineer: Mairaj Hussain			EUT Desc: WAP 200									
Measurement Distance: 3 m												
Notes: 5.15 - 5.25GHz operation												
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	---			FCC Class B		
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Running at CH36; 6mbps												
HpK	5178.0	73.9										
Havg	5180.0	24.0										
300KHz RBW												
HpK	5176.0	70.5										
Hbe	5150.0	24.0										
delta:		46.5										
mkr delta pk	5150.0	27.4	0.0	36.0	3.1	66.5				74.0	-7.5	Pass
mkr delta avg	5150.0	-22.5	0.0	36.0	3.1	16.6				54.0	-37.4	Pass
54 mbps DR												
HpK	5180.0	75.6										
Havg	5180.0	20.3										
300KHz RBW												
HpK	5170.0	70.3										
Hbe	5150.0	26.4										
delta:		43.9										
mkr delta pk	5150.0	31.7	0.0	36.0	3.1	70.8				74.0	-3.2	Pass
mkr delta avg	5150.0	-23.6	0.0	36.0	3.1	15.5				54.0	-38.5	Pass
Test Site: "T"			Pre-Amp: none		Cable: EMIR-HIGH 11		Analyzer: Orange			Antenna: Orange Horn		

Table 12 presents band edge data at the restricted band while radio runs at CH36.

Spurious Emissions

Table 11

Spurious Emissions										Curtis-Straus LLC			
Date: 25-Aug-05			Company: Colubris Networks							Work Order: F0640			
Engineer: Mairaj Hussain			EUT Desc: WAP 200										
Frequency Range: 1 - 40GHz							Measurement Distance: 3 m						
Notes: 5.15 - 5.25GHz and 5.725 - 5.825GHz bands							EUT Max Freq: 5805MHz						
*Power setting reduced to 12dBm													
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	Adjusted EIRP (dBm)			FCC Class B			
								Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m) or dBm	Margin (dB)	Result (Pass/Fail)	
SN: B008-00405													
DR 6mbps													
Max power													
Hpk	4390.0	39.0	18.5	34.4	2.9	57.8	-50.8			74.0	-16.2	Pass	
Havg	4390.0	24.2	18.5	34.4	2.9	43.0		54.0	-11.0	Pass			
Hpk	5961.0	39.0	18.8	36.8	3.2	60.2		68.2	-8.0	Pass			
Hpk	6906.0	36.8	17.4	37.4	3.5	60.3		68.2	-7.9	Pass			
Hpk	10361.0	40.2	17.6	40.6	4.1	67.3		68.2	-0.9	Pass			
Vpk	2053	53.0	39.4	28.8	2.0	44.4		-27.0	-23.8	Pass			
Hpk	6586.0	36.0	17.9	36.9	3.3	58.3		68.2	-9.9	Pass			
Hpk	5015.0	35.9	19.3	35.8	3.2	55.6		74.0	-18.4	Pass			
Havg	5015.0	25.3	19.3	35.8	3.2	45.0		54.0	-9.0	Pass			
*Hpk	5825.1	37.9	0.0	36.7	3.2	77.8		78.2	-0.4	Pass			
*Hpk	5835.0	33.0	0.0	36.7	3.2	72.9		78.2	-5.3	Pass			
Hpk	17419.0	35.8	17.3	44.0	5.1	67.6		68.2	-0.6	Pass			
Table Result: Pass by -0.4 dB Worst Freq: 5825.1 MHz													
Test Site: "T"			Pre-Amp: White		Cable: EMIR-HIGH 11		Analyzer: Orange		Antenna: Orange Horn				

For spurious emissions below 1000MHz please see table 7.

15.407(a)(3) 5.725 – 5.825GHz band**Table 12**

Peak Output Power				
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/28/2005				
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 3MHz Method: POP option 2 method #1				
	Reading (dBm)	Cab+ pad factor (dB)	Adj. Power Int method (dBm)	Limit (dBm)
CH149; 6mbps	-6.8	23.3	16.5	30
18mbps	-6.5	23.3	16.8	30
54mbps	-9.9	23.3	13.4	30
CH157; 6mbps	-7.8	23.3	15.5	30
18mbps	-6.9	23.3	16.4	30
54mbps	-10	23.3	13.3	30
CH161; 6mbps	-7.1	23.3	16.2	30
18mbps	-6.8	23.3	16.5	30
54mbps	-10.5	23.3	12.8	30

Table 13

PSD					
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/28/2005					
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 3MHz Method: PSD Option 2 Detector: Sample					
		SPA PSD Reading (dBm)	Cab+ pad factor (dB)	Adj. PSD Reading (dBm)	Limit (dBm)
CH149; 6mbps		-19.8	23.3	3.5	17
18mbps		-20.2	23.3	3.1	17
54mbps		-20.5	23.3	2.8	17
CH157; 6mbps		-18.6	23.3	4.7	17
18mbps		-17.6	23.3	5.7	17
54mbps		-17.9	23.3	5.4	17
CH161; 6mbps		-18	23.3	5.3	17
18mbps		-17.8	23.3	5.5	17
54mbps		-21	23.3	2.3	17


Table 14

FCC 15.407(a)(3)			Curtis-Straus	
Work Order: F0640				
Company: Colubris Networks				
EUT: WAP200				
Date: Dec 15-05				
Engineer: Mairaj Hussain				
Spectrum Analyzer: Orange				
Cable: Hi Freq #11				
Trace :1 RBW: 1MHz; VBW: 3MHz Det: Max hold Peak				
Trace 2: RBW: 1MHz; VBW: 3MHz Det: Max hold Sample				
Channel	Data Rate	Exe Frequency (GHz)	Peak Excursion (dB)	Limit (dB)
149	6	5.73635000	6.5	13
	18	5.74504325	6.8	13
	36	5.74504325	5.9	13
	54	5.73639325	5.7	13
153	6	5.76244825	6	13
	18	5.76500000	6	13
	36	5.76668675	5.5	13
	54	5.76923850	3.5	13
161	6	5.80517300	6.1	13
	18	5.80517300	5.8	13
	36	5.81080000	8.6	13
	54	5.80192925	6.4	13

Sample POP plot

Agilent 16:29:21 Aug 30, 2005

R L

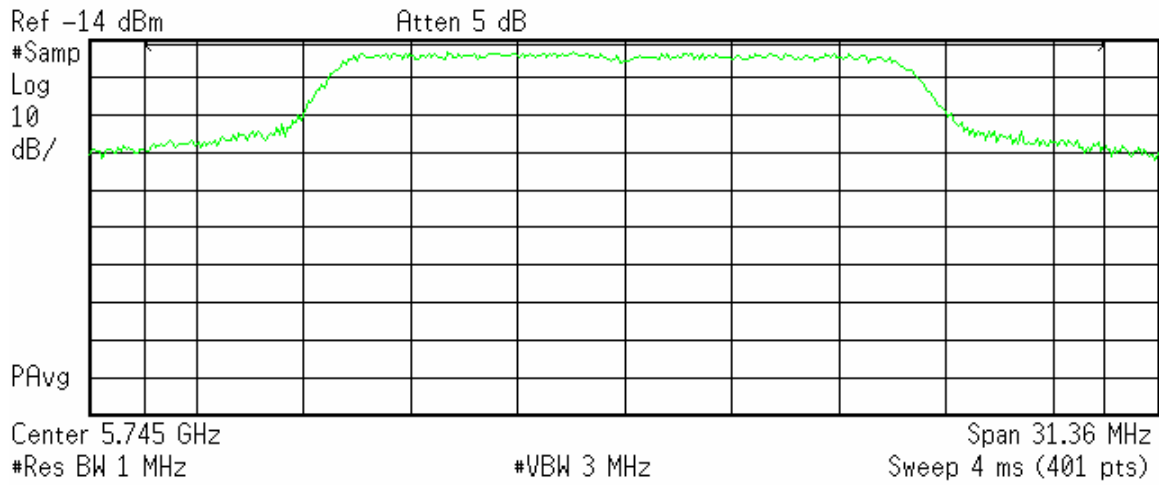

Channel Power

-6.80 dBm /28.0000 MHz

Power Spectral Density


-81.56 dBm/Hz

CH149; 6mbps

Sample PSD plot

* Agilent 09:28:45 Aug 31, 2005

R L

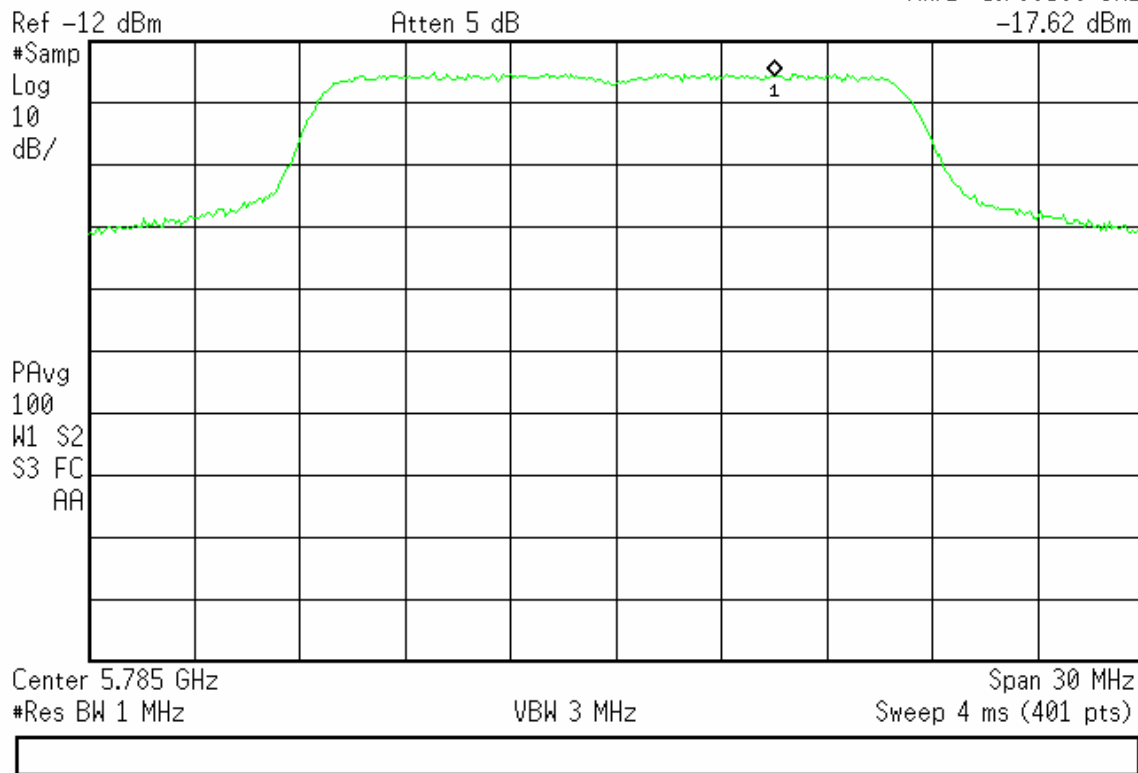
Mkr1 5.789500 GHz
-17.62 dBm

CH157; 18mbps

Sample Peak excursion plot CH149; DR 18mbps

Agilent 19:58:20 Dec 15, 2005

R L

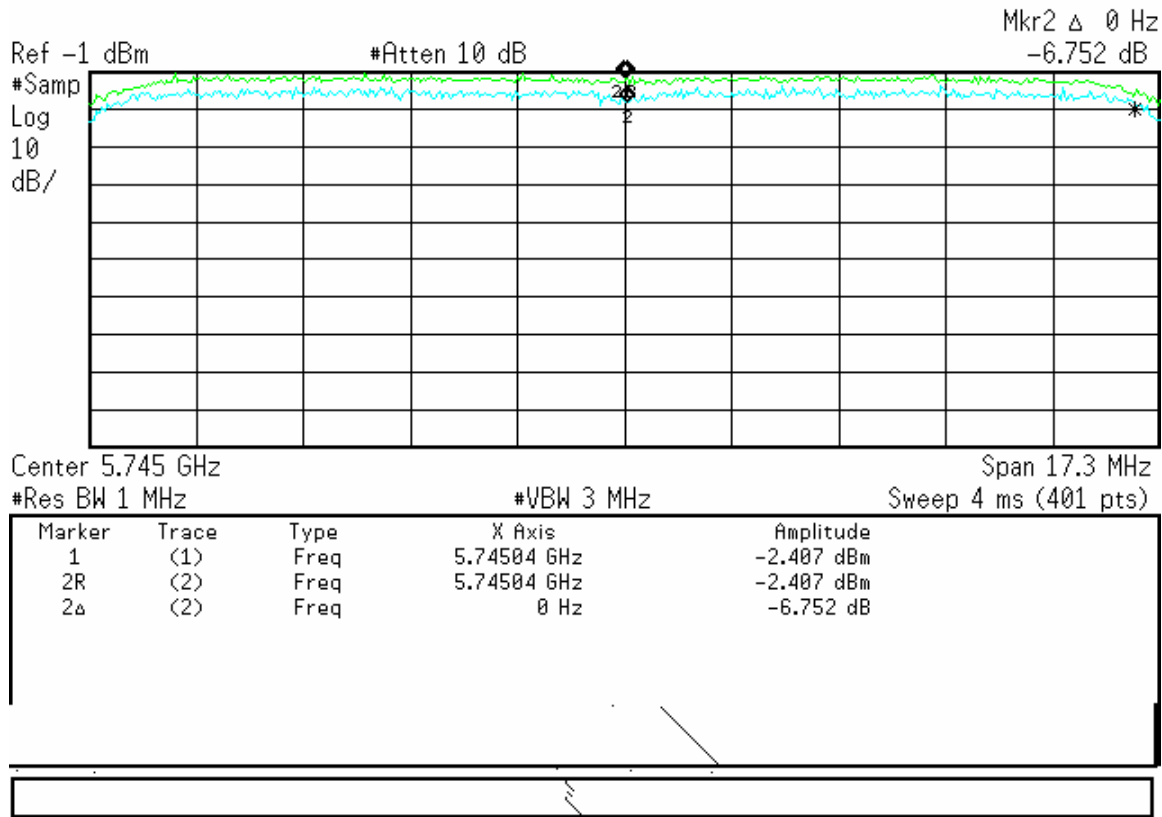

Note:

For spurious emissions and band edges please see table 4 and 11.

IC Peak Excursion and PPSD Data

Table 15

<i>RSS 210 Issue 6</i>					
Work Order: E1000 Company: Colubris Networks EUT: WAP200 Date: Dec-10-13-04 Engineer: Mairaj Hussain					
Peak Excursion					
CH	DR (mbps)	Peak Excursion (dB)	A9.5(b)		
			Limit (dB)	Reduction in PPSD limit (dB)	
36	6	5.2	3	2.2	
	18	8.2	3	5.2	
	54	6.5	3	3.5	
44	6	5.2	3	2.2	
	18	6.7	3	3.7	
	54	6.8	3	3.8	
48	6	6.1	3	3.1	
	18	6.8	3	3.8	
	54	6.4	3	3.4	
Peak Power Spectral Density					
CH	DR	PPSD	A9.5(b)		
			Adjusted PPSD Limit	Margin	Result
		(dBm)	(dBm)	(dB)	(Pass/Fail)
36	6	0.6	14.8	-14.2	Pass
	18	2.3	11.8	-9.5	Pass
	54	2.2	13.5	-11.3	Pass
44	6	3.2	14.8	-11.6	Pass
	18	1.7	13.3	-11.6	Pass
	54	2.4	13.2	-10.8	Pass
48	6	2.9	13.9	-11	Pass
	18	3.3	13.2	-9.9	Pass
	54	2.6	13.6	-11	Pass

Adjusted PPSD Limit = 17dBm – (Peak Ex > 3dB)

RSS 210 Issue 6

Work Order: F0640

Company: Colubris Networks

EUT: WAP200

Date: Dec 15-05

Engineer: Mairaj Hussain

Peak Excursion

CH	DR	Excursion Frequency	Peak Excursion	A9.5(b)	
				Limit	Reduction in
	(mbps)	(MHz)	(dB)	(dB)	PPSD limit (dB)
149	6	5.73635	6.5	3	3.5
	18	5.7450433	6.8	3	3.8
	54	5.7363933	5.7	3	2.7
161	6	5.805173	6.1	3	3.1
	18	5.805173	5.8	3	2.8
	36	5.8108	8.6	3	5.6
	54	5.8019293	6.4	3	3.4

Peak Power Spectral Density

CH		Center Frequency	PPSD	A9.5(b)		
				Adjusted	Margin	Result
	DR	(MHz)	(dBm)	PPSD Limit	(dB)	(Pass/Fail)
149	6	5745	3.5	13.5	-10	Pass
	18	5745	3.1	13.2	-10.1	Pass
	54	5745	2.8	14.3	-11.5	Pass
161	6	5805	5.3	13.9	-8.6	Pass
	18	5805	5.5	14.2	-8.7	Pass
	54	5805	2.3	13.6	-11.3	Pass

15.407(g)

Table 17

Frequency Stability			Curtis-Straus LLC	
Engineer: Mairaj Hussain			Company: Colubris	
Date: 2/17/2005			EUT: CN200	
Analyzer: White			Work Order: E1000	
Cable: 142LL#6				
Note: Nominal values are taken at 20°C, 5VDC				
Temperature	Supply Voltage	Channel	Center Frequency	Frequency Delta
(°C)	(VDC)	(#)	(Hz)	(Hz)
-10	5	36	5179990586	41187
-10	5	149	5744988504	48411
20	4.25	36	5179961599	12200
20	4.25	149	5744955065	14972
20	5	36	5179949399	0
20	5	149	5744940093	0
20	5.75	36	5179949612	213
20	5.75	149	5744943330	3237
50	5	36	5179943664	-5735
50	5	149	5744943335	3242
Limit				
10ppm for CH149			57450	
10ppm for CH36			51800	


Result: Pass

Bandwidth

6dB BW for 15.247(a)(2)

*6db Bandwidth shall be at least 500KHz***Operating mode: 802.11b**

Sample plot of 6dB/Occupied bandwidth

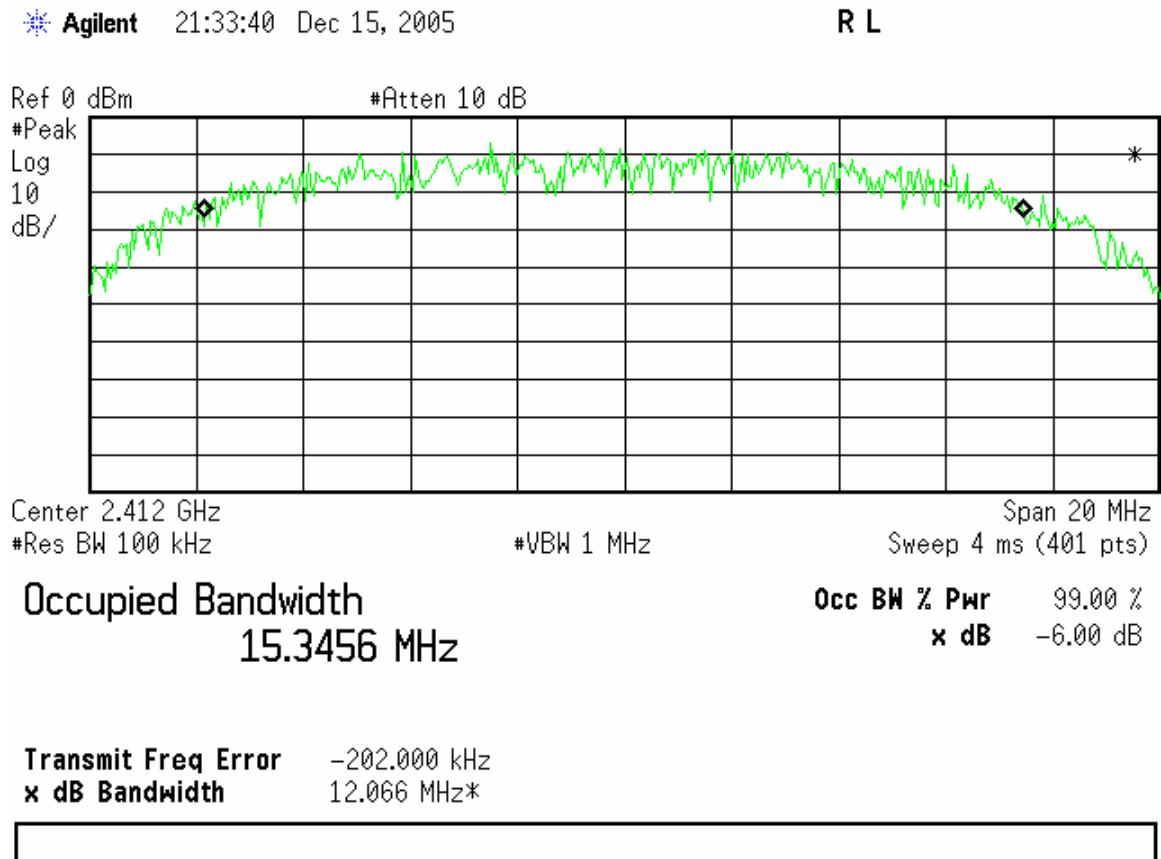

CH1; 5.5mbps

Table 18

FCC 15.247(a)(2)		Curtis-Straus	
Work Order: F0640 Company: Colubris Networks Date: Dec 15-05 Engineer: Mairaj Hussain			
Spectrum Analyzer:		Orange	Operating: 802.11b
Cable:		Hi Freq #11	
RBW: 100KHz; VBW: 3MHz		Det: Max hold Peak	
Channel	Data Rate	6dB BW (MHz)	Occupied BW (MHz)
1	1	11.0	15.6
	5.5	12.0	15.3
	11	11.2	15.3
6	1	10.5	15.6
	5.5	11.7	15.2
	11	10.2	15.3
11	1	10.0	15.3
	5.5	11.5	15.1
	11	10.1	15.1


Minimum 6dB bandwidth requirement is 500KHz.

Operating mode: 802.11g

Sample 6dB/Occupied BW plot

Agilent 21:51:37 Dec 15, 2005


R L

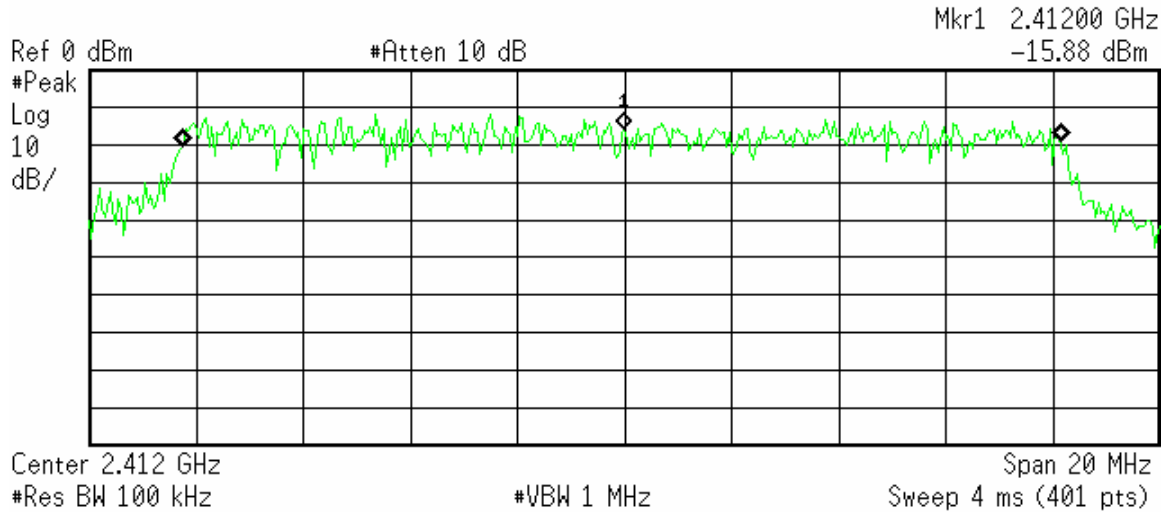

Occupied Bandwidth
16.3841 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -65.765 kHz
x dB Bandwidth 16.317 MHz*



Ch1; 54mbps

Table 19

FCC 15.247(a)(2)			Curtis-Straus
Work Order: F0640 Company: Colubris Networks Date: Dec 15-05 Engineer: Mairaj Hussain			
Spectrum Analyzer:		Orange	Operating: 802.11g
Cable:		Hi Freq #11	
RBW: 100KHz; VBW: 3MHz		Det: Max hold Peak	
Channel	Data Rate	6dB BW (MHz)	Occupied BW (MHz)
1	6	16.4	16.4
	18	16.3	16.3
	54	16.3	16.3
6	6	16.5	16.5
	18	16.4	16.4
	54	16.5	16.4
11	6	16.5	16.41
	18	16.3	16.31
	36	16.5	16.41
	54	16.4	16.35

26dB BW for 5GHz band

Table 20

26dB Bandwidth			Curtis-Straus
Work Order: F0640			
Company: Colubris Networks			
Date: Dec 15-05			
Engineer: Mairaj Hussain			
Spectrum Analyzer:		Orange	Operating: 802.11a
Cable:		Hi Freq #11	
RBW: 100KHz; VBW: 3MHz		Det: Max hold Peak	
Channel	Data Rate	26dB BW (MHz)	Occupied BW (MHz)
149	6	29.9	16.8
	18	28.1	16.8
	36	30.2	17
	54	24.6	16.6
153	6	31.0	16.9
	18	30.6	16.8
	36	28.8	16.7
	54	30.2	16.9
161	6	30.0	16.8
	18	29.5	16.8
	36	27.1	16.6
	54	24.4	16.7

Table 21

26dB Bandwidth			Curtis-Straus
Work Order: F0640 Company: Colubris Networks Date: Dec 15-05 Engineer: Mairaj Hussain			
Spectrum Analyzer: Orange Cable: Hi Freq #11		Operating: 802.11a	
RBW: 100KHz; VBW: 3MHz		Det: Max hold Peak	
Channel	Data Rate	26dB BW (MHz)	Occupied BW (MHz)
36	6	27.0	16.71
	18	28.0	16.9
	36	29.5	16.9
	54	29.8	16.8
44	6	29.0	16.7
	18	26.0	16.8
	36	27.4	17
	54	26.5	16.9
48	6	27.6	16.9
	18	29.0	16.8
	36	28.4	16.7
	54	28.0	16.7

Sample BW Plot

* Agilent 22:19:31 Dec 15, 2005

R L

Mkr1 5.7450 GHz

-15.95 dBm

Ref 0 dBm


#Atten 10 dB

#Peak

Log

10

dB/

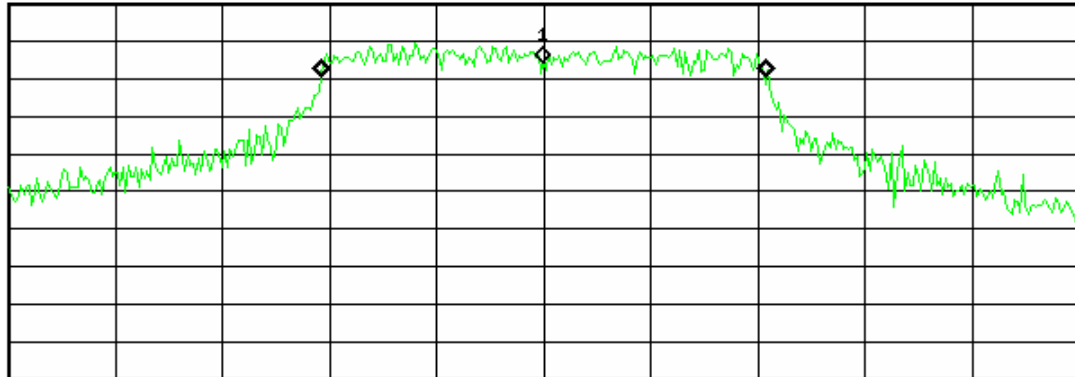

Center 5.745 GHz

Span 40 MHz

#Res BW 300 kHz

#VBW 3 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth**16.6615 MHz****Occ BW % Pwr** 99.00 %**x dB** -26.00 dB**Transmit Freq Error** 15.104 kHz**x dB Bandwidth** 24.647 MHz*

CH149; DR 54mbps

Sample BW plot
CH36; DR 6 mbps


* Agilent 22:03:05 Dec 15, 2005

R L

Mkr1 5.1800 GHz
-15.22 dBm

Ref 0 dBm

#Atten 10 dB
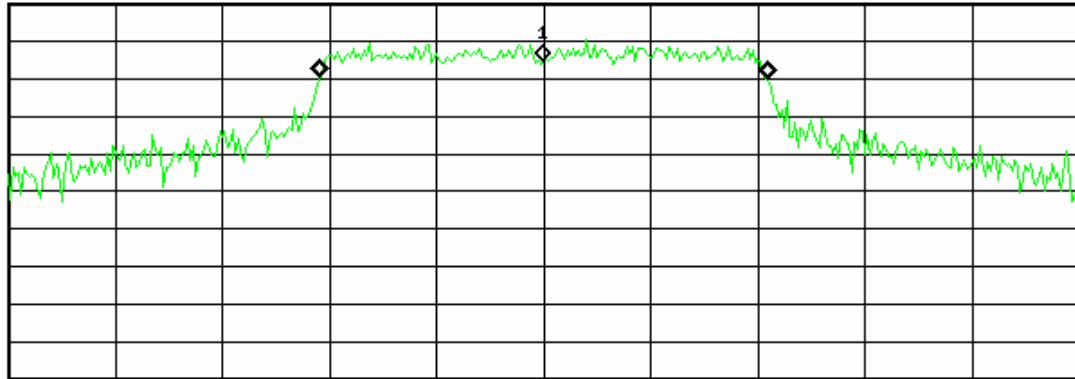
#Peak
Log
10
dB/

Center 5.18 GHz

Span 40 MHz

#Res BW 300 kHz

#VBW 3 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth
16.7179 MHz**Occ BW % Pwr** 99.00 %
x dB -26.00 dB**Transmit Freq Error** 3.992 kHz
x dB Bandwidth 27.053 MHz*

AC Line Conducted Emission Measurements

Table 22

AC Mains Conducted Emissions										Curtis-Straus LLC			
Date: 20-Dec-04			Company: Colubris Networks					Work Order: E1000					
Engineer: Mairaj Hussain			EUT Desc: EMI2					Test Site: EMI2					
Notes:													
LISN(s): Red Yellow-Black													
Range: 0.15-30Mhz			Other Equipment: ---					Spectrum Analyzer: Blue					
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	---		FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)	
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		Limit (dBµV)	Margin dB	qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB		
0.16	24.7	24.0			20.0	---	---	65.5	-20.8	55.5	-10.8	Pass	
0.22	21.6	26.0			20.0	---	---	62.8	-16.8	52.8	-6.8	Pass	
0.28	16.0	15.8			20.0	---	---	60.8	-24.8	50.8	-14.8	Pass	
0.33	17.8	18.5			20.0	---	---	59.4	-20.9	49.4	-10.9	Pass	
0.56	12.0	13.5			20.0	---	---	56.0	-22.5	46.0	-12.5	Pass	
0.96	12.0	10.5			20.0	---	---	56.0	-24.0	46.0	-14.0	Pass	
4.10	9.6	7.7			20.0	---	---	56.0	-26.4	46.0	-16.4	Pass	
9.87	11.5	11.2			20.0	---	---	60.0	-28.5	50.0	-18.5	Pass	
Table Result: Pass by -6.80 dB Worst Freq: 0.22 MHz													

LIMITS

Quasi-Peak: 250µV = 47.9dBµV in the range 450kHz to 30MHz

[47 CFR 15.207(a) Revised as of October 1, 2001]

Note: On July 12, 2004, FCC adopts the conducted emissions limits of the European CISPR 22 standard as outlined below

Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a) Revised as of October 1, 2002; amended by ET Docket 98-80; FCC 02-157, published in the Federal Register Vol. 67, No. 132, on Wednesday, July 10, 2002]

Antenna Gain Check**Table 23**

<i>Antenna Gain</i>			
Work Order: F0640 Company: Colubris Networks EUT: WAP200 Engineer: Mairaj Hussain Date: 8/24/2005			
Spectrum Analyzer: Orange Cable: EMI High #11 RBW: 1MHz VBW: 1MHz Method: For conducted reading method 1			
Frequency	Radiated EIRP	Channle Power (conducted)	Antenna Gain
(MHz)	(dBm)	(dBm)	(dBi)
2462	21.6	18.7	2.9
5805	18.3	14.7	3.6

Worst case antenna gain (from antenna specs or measured) will be used in MPE calculations.

Test Equipment Used

REV. 22-JUL-2005

SPECTRUM ANALYZERS / RECEIVERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	13-JAN-2006
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	08-MAR-2006
BLUE	9kHz-1.8GHz	8591E	HP	3223A00227	00070	03-NOV-2005
YELLOW	9kHz-2.9GHz	8594E	HP	3523A01958	00100	20-APR-2006
GREEN	9kHz-26.5GHz	8593E	HP	3829A03618	00143	02-AUG-2005
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	27-DEC-2005
YELLOW-BLACK	20Hz-40.0MHz	3585A	HP	2504A05219	00030	08-OCT-2005
TELECOM 3585A	20Hz-40.0MHz	3585A	HP	1750A02762	01067	04-FEB-2006
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	22-JUN-2006
EMI TEST RECEIVER	20-1000MHz	ESVS30	R&S	827957/001	01098	27-OCT-2005

LISNS/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	15-APR-2006
BLUE (DC)	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956349	00752	02-MAY-2006
YELLOW-BLACK	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984735	00248	15-APR-2006
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	02-MAY-2006
GOLD (DC)	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984734	00247	02-MAY-2006
BROWN	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411656	00986	04-MAY-2006
GREEN	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411657	00987	04-MAY-2006
YELLOW	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	0411658	1080	04-MAY-2006
WHITE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972019	00678	15-APR-2006
BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972017	00675	15-APR-2006
RED-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972016	00677	15-APR-2006
BLUE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972018	00676	15-APR-2006
BLUE MONITORING PROBE	0.01-150MHz	91550-2	TEGAM	12350	00807	26-MAY-2007
YELLOW MONITORING PROBE	0.01-150MHz	91550-2	ETS	50972	00493	24-NOV-2005
GREEN CURRENT TRANSFORMER	40Hz-20MHz	150	PEARSON	10226	00793	07-APR-2007
CISPR LINE PROBE	150kHz- 30MHz	N/A	C-S	01	00805	06-MAY-2007
CISPR TELCO VOLTAGE PROBE	10kHz-30MHz	CS A/C-10	C-S	CS01	00296	28-SEP-2005
CISPR 22 TELCO ISN	9kHz-30MHz	FCC-TLISN-T4	FISCHER	20115	00746	26-OCT-2006

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
SITE F	93448	IC 2762-F	R-1688	04-APR-2007
SITE T	93448	IC 2762-T	R-905	20-MAR-2007
SITE A	93448	IC 2762-A	R-903	20-MAR-2007
SITE M	93448	IC 2762-M	R-904	19-MAR-2007
SITE J				09-MAY-2007

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
EMI 1	93448	N/A	C-1801	01-MAY-2006
EMI 2	93448	N/A	C-1802	01-MAY-2006
EMI 3	93448	N/A	C-1803	01-MAY-2006

MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
MIXER / HORN	26.5-40 GHz	11970A/28-442- 6	HP/ATM	2332A01695/A046903-01	1087	23-AUG-2005
MIXER / HORN	26.5-40 GHz	11970A/28-442- 6	HP/ATM	3003A07825/A046903-01	1086	23-AUG-2005
MIXER / HORN	40-60 GHz	M19HW/A	OML	U30110-1	00821	02-MAR-2007
MIXER / HORN	60-90 GHz	M12HW/A	OML	E30110-1	00822	03-MAR-2007
MIXER / HORN	90-140 GHz	MO8HW/A	OML	F21206-1	00811	03-MAR-2007
MIXER / HORN	140-220 GHz	MO5HW/A	OML	G21206-1	00812	05-JAN-2005
DIPLEXER		DPL.26	OML	N/A	00813	03-MAR-2007

ABSORBING CLAMPS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
FISCHER CLAMP	30-1000MHz	F-201-23MM	FISCHER	10	00081	16-JAN-2006

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.10-2000MHz	ZFL-1000-LN	C-S	N/A	00798	08-APR-2006
BLUE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00759	26-JUL-2005
BLUE-BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00800	10-FEB-2006
GREEN	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00802	21-JUL-2006
BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00799	10-FEB-2006
ORANGE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00765	10-FEB-2006
WHITE	1-20GHz	SMC-12A	C-S	426643	00760	21-AUG-2005
BROWN	1-20GHz	PM2-38-218-4R5-17-15-SFF	C-S	PL1655	1132	27-JUN-2006
YELLOW-BLACK	1-20GHz	SMC-12A	C-S	535055	00801	21-AUG-2005
ORANGE-BLACK	1-20GHz	SMC-12A	C-S	637367	00761	21-AUG-2005
HF (YELLOW)	18-26.5GHz	AFS4-18002650-60-8P-4	C-S	467559	00758	20-AUG-2005
HIGH PASS FILTER	1-18 GHz	SPA-F-55204	K&L	36	00817	06-JAN-2006
LOW PASS FILTER	1-9 GHz	11SL10-4100/X4400-O/O	K&L	4	00816	06-JAN-2006
HF 20dB 50W ATTENUATOR	0.03-20 GHz	PE 7019-20	PASTERNAK	01	00791	10-MAY-2006
HF 30dB 50WATTENUATOR	0.03-20 GHz	PE 7019-30	PASTERNAK	02		10-MAY-2006
LOW FREQ LPF	10-100kHz	L200K1G1	MICROWAVE CIRCUITS	4460-01 DC0432	1019	30-AUG-2005
LOW FREQ LPF	10-100kHz	L200K1G1	MICROWAVE CIRCUITS	4777-01 DC0434	1088	30-AUG-2005

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN BILOG	30-2000MHz	CBL6112B	CHASE	2742	00620	06-APR-2006
GREEN-BLACK BILOG	30-2000MHz	CBL6112B	CHASE	2412	00127	06-JAN-2006
GREEN-RED BILOG	30-2000MHz	CBL6112B	CHASE	2435	00990	06-APR-2006
BLUE BILOG	30-1000MHz	3143	EMCO	1271	00803	06-MAY-2007
GRAY BILOG	26-2000MHz	3141	EMCO	9703-1038	00066	06-MAY-2007(EMI) / 24-SEP-2005(RFI)
YELLOW-BLACK BILOG	20-2000MHz	CBL6140A	CHASE	1112	00126	06-MAY-2007(EMI) / 02-JUN-2006(RFI)
RED-WHITE BILOG	30-2000MHz	JB1	SUNOL	A091604-1	01105	28-SEP-2006
RED-BLACK BILOG	30-2000MHz	JB1	SUNOL	A091604-2	01106	28-SEP-2006
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	27-MAY-2007(EMI) / 05-JUN-2006 (RFI)
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	17-JUN-2007
ORANGE HORN	1-18GHz	3115	EMCO	0004-6123	00390	09-JUN-2007
HF (WHITE) HORN	18-26.5GHz	801-WLM	WAVELINE	00758	00758	20-AUG-2005
SMALL LOOP (RENTAL)	10kHz-30MHz	PLA-130/A	ARA	1009	TELOGY	11-FEB-2006
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755	23-FEB-2006
LARGE LOOP	20Hz-5MHz	6511	EMCO	9704-1154	00067	12-NOV-2005
ACTIVE MONOPOLE	30Hz-30MHz	3301B	EMCO	3824	00068	04-MAY-2006
INDUCTION COIL	50-60Hz	1000-4-8	C-S	N/A	00778	13-SEP-2006
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00757	18-MAR-2007
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1371	00756	18-MAR-2007
RE101 LOOP SENSOR	30Hz-100kHz	RE101-13.3cm	C-S	N/A	00818	13-MAR-2007
RS101 RADIATING LOOP	30Hz-100kHz	RS101-12cm	C-S	N/A	00819	13-MAR-2007
RS101 LOOP SENSOR	30Hz-100kHz	RS101-4cm	C-S	N/A	00820	13-MAR-2007

EFT	MN	MFR	SN	ASSET	CALIBRATION DUE
EFT DIRECT COUPLING CAP	N/A	C-S	01	00794	29-JAN-2006

ESD GENERATORS	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN	NSG435	SCHAFFNER	000839	00763	17-FEB-2006
RED	NSG435	SCHAFFNER	001625	00762	29-DEC-2005
YELLOW	930D	ETS	201	00673	16-JUL-2005

BEST EMC-2	MN	MFR	SN	ASSET	CALIBRATION DUE
BLUE	711-1100	SCHAFFNER	199824-002SC	00117	16-JUN-2006 (SURGE) / 28-JUL-2005 (D+I/EFT)
RED	711-1100	SCHAFFNER	200122-074SC	00623	16-JUN-2006 (SURGE) / 28-JUL-2005 (D+I) / 03-DEC-2005 (EFT)

FREQUENCY COUNTER	MN	MFR	SN	ASSET	CALIBRATION DUE
5340A	HP5340A	HP	1440A02320	00787	30-JUL-2005

REPORT:EF0640-2
FCC ID:RTP-550-10016-6

HARMONIC & FLICKER ANALYZER		MN	MFR	SN	ASSET	CALIBRATION DUE	
HFTS		HP6842A	HP	3531A-00169	00738	03-DEC-2005	
100011/2 AC POWER SYSTEM		(2) 500I	CALIFORNIA INSTRUMENTS	HK53687/HK53688	00376	20-JAN-2006	
CHAMBERS AND STRIPLINE		MN	MFR	SN	ASSET	CALIBRATION DUE	
RFI 1 CHAMBER		3 METER COMPACT	PANASHIELD	N/A	00797	02-JUN-2006	
RFI 2 CHAMBER		04' x 07' SHIELDING SYSTEM	LINDGREN	13329	00795	24-SEP-2005	
RFI 3 STRIPLINE		N/A	C-S	N/A	00796	22-AUG-2005	
ENVIRONMENTAL (SAFETY)		ECL5	B-M-A INC.	2041	00029	12-JAN-2006	
ENVIRONMENTAL (SAFETY)		SGTH-31S	B-M-A INC.	2245	00321	12-JAN-2006	
AMPLIFIERS		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED		0.5-1000MHZ	10W1000B	AR	18708	00032	02-JUN-2006
GREEN		0.5-1000MHZ	10W1000B	AR	23423	00123	28-SEP-2005
BLUE		0.01-250MHZ	75A250	AR	19165	00039	10-FEB-2006(CRFI) / 02-JUN-2006 (RFI)
BLACK		0.01-250MHZ	75A250	AR	23411	00122	30-JUN-2006 (EU CRFI)
ORANGE		0.01-250MHZ	75A250	AR	26827	00367	10-FEB-2006 (CRFI)
HP489A		1.0-2.0GHZ	HP489A	HP	449-00762	00971	28-SEP-2005
HUGHES 10W		1.0-2.0GHZ	1177H09	HUGHES	143	RENTAL	05-JUN -2006
HP491C		2.0-4.0GHZ	HP491C	HP	449-00638	00764	05-JUN-2006
HUGHES 10W		4.0-8.0GHZ	1177H02	HUGHES	092	RENTAL	05-JUN-2006
HP493A #1		4.0-8.0GHZ	HP493A	HP	17140224 2	00085	28-SEP-2005
HP493A #2		4.0-8.0GHZ	HP493A	HP	449-00562	00771	28-SEP-2005
HP495A		7.0-12.0GHZ	HP495A	HP	904-00237	00086	05-JUN-2006
FIELD PROBES		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED		0.01-1000MHZ	HI-4422	HOLADAY	90369	00031	11-OCT-2005
GREEN		0.01-1000MHZ	HI-4422	HOLADAY	97363	00136	05-AUG-2005
BLUE		0.01-1000MHZ	HI-4422	HOLADAY	95696	01100	27-OCT-2005
SIGNAL GENERATORS		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED		0.09-2000MHZ	HP8648B	HP	3847U02192	00366	15-FEB-2006
BLUE		0.1-1000MHZ	HP8648A	HP	3426A00548	00034	20-AUG-2005
GREEN		0.09-2000MHZ	HP8648B	HP	3623A02072	00125	12-OCT-2005
ORANGE		0.1-1000MHZ	HP8648B	HP	3537A01210	00025	24-JUN-2006
BLACK (TELECOM)		15MHZ	HP33120A	HP	US36004674	00766	21-OCT-2005
YELLOW		15MHZ	HP33120A	HP	US36014119	00249	02-JUN-2006
BLUE-WHITE		0.1Hz-13MHZ	HP3312A	HP	1432A07632	00775	11-MAR-2006
SWEEPER		0.01-20.0GHZ	HP83752A	HP	3610A01133	00087	03-MAY-2006
AM/FM STEREO SIG. GEN.		0.1-170MHZ	LG3236	LEADER	3687301	00959	03-SEP-2005
BULK INJECTION CLAMPS		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN		0.01-100MHZ	95236-1	ETS	50215	00118	10-FEB-2006
RED		0.01-100MHZ	95236-1	ETS	34026	1020	10-FEB-2006
CDN NETWORKS		RANGE	MN	MFR	ASSET	CALIBRATION DUE	
BLACK		0.10-100MHZ	20A M-2	C-S	00783	30-JUN-2006	
BLUE		0.10-100MHZ	15A M-3	C-S	00806	30-JUN-2006	
ORANGE		0.10-100MHZ	15A M-2	C-S	00786	30-JUN-2006	
RED		0.10-100MHZ	15A M-3	C-S	00780	30-JUN-2006	
WHITE		0.10-100MHZ	15A M-3	C-S	00782	30-JUN-2006	
YELLOW-BLACK		0.10-100MHZ	15A M-3	C-S	00784	30-JUN-2006	
GREEN		0.10-100MHZ	30A M-3	C-S	00779	30-JUN-2006	
YELLOW		0.10-100MHZ	30A M-5	C-S	00804	30-JUN-2006	
BLUE-WHITE		0.10-100MHZ	15A M-5	C-S	00788	30-JUN-2006	
BROWN		0.10-100MHZ	M-3	C-S		30-JUN-2006	
BROWN-WHITE		0.10-100MHZ	M-3	C-S		30-JUN-2006	
BROWN_BLACK		0.10-100MHZ	M-2	C-S		30-JUN-2006	
YELLOW (RES)		0.10-100MHZ	100Ω RESISTOR NWK	C-S	00810	28-SEP-2005	
GREEN (RES)		0.10-100MHZ	100Ω RESISTOR NWK	C-S	NA	17-JAN-2006	
OSCILLOSCOPES		MN	MFR	SN	ASSET	CALIBRATION DUE	
OSCILLOSCOPE 100MHZ		TDS 220	TEKTRONIX	B068748	00885	14-JUN-2006	
OSCILLOSCOPE 100MHZ (SAFETY)		TDS 340	TEKTRONIX	B012357	00737	05-OCT-2005	
OSCILLOSCOPE 100MHZ (TELECOM)		54645A	HP	US36320452	00103	02-JUL-2005	

Page 49 of 55

Curtis-Straus LLC • 527 Great Road • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

RMS VOLTMETERS/CURRENT CLAMP	MN	MNFR	SN	ASSET	CALIBRATION DUE
TRUE-RMS MULTIMETER	79III	FLUKE	71700298	00769	21-OCT-2005
TRUE-RMS MULTIMETER	177	FLUKE	83390024	00973	10-MAR-2006
TRUE-RMS MULTIMETER (REFERENCE)	177	FLUKE	83390025	00974	10-MAR-2006
TRUE-RMS MULTIMETER (TELECOM)	177	FLUKE	83430419	00975	10-MAR-2006
TRUE-RMS CLAMP METER (SAFETY)	36	FLUKE	68805882	00700	11-MAR-2006
SURGE GENERATORS					
TRANSIENT WAVEFORM MONITOR	TWM-5	CDI	003982	00323	17-JUL-2005
UNIVERSAL SURGE GENERATOR	M5	CDI	003966	00324	09-JUN-2006
THREE PHASE COUPLING NWK	3CN	CDI	003455	00325	09-JUN-2006
1.2x50uS PLUGIN MODULE	1.2x50uS PLUGIN	CDI	N/A	00842	09-JUN-2006
10x160uS PLUGIN MODULE	10x160uS PLUGIN	C-S	N/A	00843	09-JUN-2006
10x560uS PLUGIN MODULE	10x560uS PLUGIN	C-S	N/A	00841	09-JUN-2006
PSURGE CONTROLLER MODULE	PSURGE 8000	HAEFELY	150267	00879	13-JUN-2006
COUPLING/DECOUPLING MODULE	PSD 900	HAEFELY	149213	00880	13-JUN-2006
IMPULSE MODULE	PIM 900	HAEFELY	149202	00881	13-JUN-2006
HIGH VOLTAGE CAP NWK 5kVDC, 18uF	CS-HVCC	C-S	01	00772	28-SEP-2006
NEBS SURGE GENERATOR	N/A	C-S	N/A	00088	08-JUN-2006
2x10uS SURGE GENERATOR	2x10uS	C-S	N/A	00846	09-JUN-2006
10x700uS SURGE GENERATOR	10x700uS	C-S	N/A	00847	09-JUN-2006
12 PAIR SURGE RESISTOR MODULE	N/A	C-S	N/A	00768	28-SEP-2005
POWER/NOISE METERS					
POWER METER	435B	HP	2445A11012	00773	06-APR-2006
POWER METER	437B	HP	2912A01367	01099	27-OCT-2005
POWER SENSOR	8481A	HP	2702A61351	00774	05-APR-2006
PSOPHOMETER	2429	BRUEL & KJAER	1237642	00585	14-FEB-2007
TRANSMISSION LINE TESTER (DBRNC)	185T	AMREL	998658	00823	07-MAR-2006
OVERVOLTAGE CHAMBERS					
72kW POWER FAULT SIMULATOR	OV1	C-S	N/A	00792	31-MAR-2007
POWER FAULT SIMULATOR	OV2	C-S	N/A	00116	31-MAR-2007
DIPLOLE TAPE MEASURES					
26FT TAPE #1	2338CME	LUFKIN	C3166-1	00776	13-MAR-2007
26FT TAPE #2	2338CME	LUFKIN	C3166-2	00777	13-MAR-2007
METEOROLOGICAL METERS					
TEMP./HUMIDITY/ATM. PRESSURE GAUGE	7400 PERCEPTION II	DAVIS	N/A	00965	08-FEB-2007
TEMPERATURE /HUMIDITY GAUGE	THG-912	HUGER	4000562	00789	01-FEB-2007
WEATHER CLOCK (PRESSURE ONLY)	BA928	OREGON SCIENTIFIC	C3166-1	00831	02-FEB-2007
CONSUMABLES					
NEBS CHEESE CLOTH	26-28M/KG	ED&D	ACC-01	N/A	N/A
NEBS CARBON BLOCK	3-MIL-GAP 1kV SURGE	RELIABLE	3AB	N/A	N/A

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Terms And Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.
- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

A2LA Accreditation

<u>SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999</u> CURTIS-STRAUS¹ 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880 ELECTRICAL Valid until: January 31, 2006 Certificate Number: 1627.01 In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests</u>: Electromagnetic Compatibility (EMC) Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements <table><tr><th>EMC Standards</th><th>Title</th></tr><tr><td><i>Emissions</i> CISPR 22 1997 with amendments 1 and 2</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr><tr><td>CNS13438 1994</td><td>Limits and methods of measurement of radio interference characteristics of information technology equipment.</td></tr><tr><td>EN55022:1994 and 1998</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr><tr><td>SABS CISPR 22:1997</td><td>Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement</td></tr><tr><td>Canada ICES-003 1997 AS/NZS 3548 1995</td><td>Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment</td></tr><tr><td>CISPR 11 1990, 1997, 1999</td><td>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</td></tr></table> ¹ Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460 (A2LA Cert. No. 1627-01) 11/28/05 Page 1 of 11		EMC Standards	Title	<i>Emissions</i> CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.	EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement	Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment	CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.	EN 55011 1991, 1998 SABS CISPR 11:1997 Canada ICES-001 1998 CNS13803 AS/NZS 2064: 1997 CSA C108.8 – M1983 CISPR 13:1996, 1998, 2001 EN 55013: 1990, 2001 EN 55013 Amend 12 1994 SABS CISPR 13: 1996 CNS 13439 AS/NZS 1053: 1999 CISPR 14 1993 (<i>except discontinuous disturbances</i>) EN 55014 1993, 1997 (<i>discontinuous disturbances</i>) AS/NZS 1044: 1995 (<i>discontinuous disturbances</i>) <i>Immunity</i> CNS13783-1 SABS CISPR 14-1 1993 SABS CISPR 14-2 1997 + A1:2001 Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. Industrial, scientific and medical (ISM) radio-frequency equipment. Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics Limits and methods of measurement Industrial, scientific and medical radio frequency generators Industrial, Scientific and Medical Instrument Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. Electromagnetic Emission from Data Processing Equipment and Electronic Office Machines Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12 Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. Limits and methods of measurement of radio disturbance characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and electric apparatus. Limits and methods of measurement of radio disturbance (<i>except</i> characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus). Limits and methods of measurement of radio disturbance (<i>except</i> characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus). Household Electrical Appliances Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity - Product family standard (A2LA Cert. No. 1627-01) 11/28/05 Page 2 of 11
EMC Standards	Title															
<i>Emissions</i> CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.															
EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement															
Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment															
CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.															
CISPR 14-2 1996, 1997 + A1:2001 CISPR 20: 1995, 2002 with amendment 3 (<i>associated group only</i>) EN 55020: 1995, 2002 (<i>associated group only</i>) CISPR 24 SABS CISPR 24 1997 AS/NZS 3200.1.2: 1995 <i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001 EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999 EN 61000-4-4 1995 EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999 EN 61000-4-8 1994 EN 61000-4-11 1994 ENV 61000-2-2 1993 <i>EU Product Family Standards</i> EN 50081-1 1992 EN 50081-2 1993 EN 50082-1 1992, 1998 EN 50082-2 1995 Immunity requirements for household appliances, tools and similar apparatus. Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment. Electromagnetic immunity of broadcast receivers and Associated equipment. Information technology equipment – Immunity characteristics – Limits and methods of measurement Information technology equipment – Immunity characteristics – Limits and methods of measurement Approval and test specification – Medical electrical Equipment – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication (EMC) Part 4: Testing and measurement techniques. Section 5: Surge immunity test. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induce by radio-frequency fields. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic field immunity test. (EMC) Part 4: Testing and measurement techniques. Section 11: Voltage dips, short interruptions and voltage Variations immunity tests. Electromagnetic compatibility (EMC). Part 2: Environment, Section 2: Compatibility levels for low-frequency conducted disturbances and signaling in public low-voltage power supply systems (IEC 1000-2-2:1990) Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.) Electromagnetic compatibility – Generic emission standard. Part 2: Industrial environment Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment (A2LA Cert. No. 1627-01) 11/28/05 Page 3 of 11	EN 61000-6-1: 1997, 2001 EN 61000-6-2: 1998, 2001 EN 50091-2 1996 EN 55024 1998 EN 55103-1 1997 EN 55103-2 1997 (<i>excluding Annex A3</i>) EN 61326 1998 EN 61547 1996 EN 50130-4 1996 EN 55104 1995 EN 50083-2 1995 EN 60601-1-2: 1993, 2002 IEC 1800-3 1995 EN 60555 Part 2 1987 EN 60555 Part 3 1987 EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999 ETS 300 386-1 1994 Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 1: Immunity for residential, commercial and light-industrial environments Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 2: Immunity for industrial environments Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements Information technology equipment – Immunity Characteristics – Limits and methods of measurement. Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity Electrical equipment for measurement, control and laboratory use – EMC requirements Equipment for general lighting purposes – EMC immunity requirements Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems. Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard. Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment. Medical electrical equipment Part 1: general requirements for safety Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods. Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations. Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems. Equipment Engineering (EE): Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels (A2LA Cert. No. 1627-01) 11/28/05 Page 4 of 11															

ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1 ETS 300 132-1 1996 ETS 300 132-2 1996 ETR 283 1997 <i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999 EN 300 330 v1.2.1: 1998, 1999 ETS 300 328 1996 ETS EN 300 440 v1.2.1 1999 EN 301 893:2002 v1.2.1 ETS 300 836-1:1998 EN301 489-17:2002 v1.2.1	Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard. Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc) Equipment Engineering (EE); Transient voltages at Interface A on telecommunications direct current (DC) power distributions. Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS) Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 40 GHz frequency range Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2.4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment	EN 300 328-2:2001 v1.2.1 EN 301 489-1:2002 EN 60669-2-1:2002 <i>Canada Radio Standards</i> Canadian GL-36 1995 Canadian RSS-119 1999, 2000 Issue 6 Canadian RSS-134 1996 & 2000, Issue 1 Rev 1 Canadian RSS-210 2000 Issue 3, RFS29 1998 <i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices. 47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices. 47 CFR FCC Unlicensed Personal Scope Communications System (PCS) devices 47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques. 47 CFR FCC Personal mobile Scope Radio Services in the following FCC Rule Parts 22, 24, 25, 27. 47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97. 47 CFR FCC Maritime and Aviation Scope Radio Services in 47 CFR Parts 80 and 87 47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101. Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band. Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz Industry Canada -- 900 MHz narrowband personal communications services Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices Specification for Restricted Radiation Radio Apparatus (New Zealand) Scope A1 Scope A2 A3 A4 B1 B2 B3 B4	(A2/LA Cert. No. 1627-01) 11/28/05 Page 5 of 11	(A2/LA Cert. No. 1627-01) 11/28/05 Page 6 of 11
FCC/OST MP-5 1986 GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3 <i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001, 2003 ANSI C63.5 1988 <i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991 <i>Swedish EMC Standards</i> BAKOM 3336.3 1995 <i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996 <i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999 Telecommunications Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (<i>excluding volume control</i>); Protocol analysis and Jitter testing. <u>Telecom Standards</u> FCC 47 CFR Part 68 Telephone CS-03 Issue 8 1996 through amendment 5 TIA/EIA TSB31-B 1998	FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment. Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment. American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz. American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas. IEEE recommended practice on surge voltages in low-voltage AC power circuits Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements. South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment. Technical Requirements Instruction for Test Conditions for Requirement under Test	TIA/EIA-IS-968 TIA/EIA-IS-883 TIA-968-A T1.TRQ.6-2001 Canada VDSL Issue 1 January 2003 AS/ACIF S002-2001 AS/ACIF S016-2001 AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001 ITU-T G.703 HKTA 2028 HKTA 2029 TBR 1 : 1995 TBR 2 : 1997 Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Technical Requirements for SHDSL, HDSL2, HDSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network Requirements for Customer Equipment for connection to hierarchical digital interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network --- Part 1: General Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband Physical/electrical characteristics of hierarchical Digital interfaces Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit	(A2/LA Cert. No. 1627-01) 11/28/05 Page 7 of 11	(A2/LA Cert. No. 1627-01) 11/28/05 Page 8 of 11

TBR 3 : 1995 + Amdt : 1997 TBR 4 : 1995 + Amdt : 1997 TBR 012 : 1993 + Amdt : 1996 TBR 013 : 1996 TBR 21 : 1998 TBR 24 : 1997 Australia TS 002 : 1997 TS 016 : 1997 TS 031 : 1997 TS 038 : 1997 AS/ACIF S043.2:2001 Product Safety General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (<i>excluding x-ray tests</i>). <u>Product Safety Standards</u> Specific Product Safety Standards IEC 950 1991 UL 1950 1998 CSA C22.2 No.950-95 UL 60950 2000 (A2LA Cert. No. 1627.01) 11/28/05	Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband <u>Title</u> Safety of information technology equipment including Includes Amendments 1, 2, 3, and 4 electrical business equipment. Safety of information technology equipment, including electrical business equipment. Safety of Information Technology Equipment (UL 1950) Safety of information technology equipment Page 9 of 11	IEC 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 UL 60950-1 2003 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993 AS/NZS 3260 Supp 1 1996 ACA TS 001 1997 UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 IEC 61010-1 2001 UL 61010B-1 2003 UL 3101-1 1993 CAN/CSA 1010-1 1999 (<i>Including AM 2</i>) UL 3111-1 1996 UL 3121-1 1995 IEC 60601-1 1995 EN 60601-1 1995 (<i>Including AM 2</i>) UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 CAN/CSA 60065-00 AS/NZS 3250 1995 AS/NZS 60065 2000 Canadian C22.2 No. 1-94 (1-98) 1998 EN 60065 1994 IEC 60825 1990 EN 60825-1 1994 IEC 60825-1 2001 IEC 60825-2 2000-5 IEC 60825-4 1997-11 IEC 60335-1 1995 (<i>Including AM2 – 1997 & AM 12 – 1997</i>) Part 1: General requirements EN 60335-1 2001 UL 60335-1 1998 CAN/CSA E335-1 1994 Safety of information technology equipment Safety of information technology equipment, including Electrical business equipment. Approval and test specification – Safety of information technology equipment including electrical business Equipment. Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993) Australian Communications Authority – Safety requirements for customer equipment. Telephone Equipment Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Electrical equipment for laboratory use Part 1: General requirements. Electrical measuring and test equipment. Part 1: General requirements. Medical electrical equipment. Part 1: General requirements for safety. Medical electrical equipment Medical electrical equipment. Part 1: General Requirements for safety. Audio, video and similar electronic apparatus – Safety requirements Audio/video and musical instrument apparatus for Household, commercial and similar general use Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use Audio, video and similar electronic equipment. Consumer and 1994, commercial products Safety requirements for main operated electronic and related apparatus for household and similar general use. Radiation safety of laser products, equipment Classification, requirements and user's guide Safety of laser products Part 1: equipment Classification, requirements and user's guide. Safety of laser products – Part 2: Safety of optical communication systems Safety of laser products – Part 4: Laser guards Safety of household and similar electrical appliances Part 1: General requirements Page 10 of 11
UL 61010A-1 : 2002 EN 61010-1 : 2001 AS/NZS 60950 : 2000 Environmental² <u>Environmental Standards</u> GR-63-CORE ETS 300 019 (vibration up to 1000Hz) Page 11 of 11	Electrical equipment for laboratory use; part 1: General requirements Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements Safety information technology equipment <u>Title</u> NEBS Requirements: Physical Protection Environmental conditions and environmental tests For telecommunications equipment	

² Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460