



RADIO TEST REPORT

Applicant : AOpen Inc.

Address : 5F., No.15, Ln. 128, Sinhu 1st Rd.,
Neihu District, Taipei City 114, Taiwan(R.O.C.)

Equipment : AOPEN Chromebox Commercial

Model No. : WT22M-FBG

Trade Name : AOPEN

FCC ID : YEW -22MFBG7260NGW


IC ID : 20532-22MFBG7260N

I HEREBY CERTIFY THAT :

The sample was received on Aug. 11, 2015 and the testing was carried out on Sep. 02, 2015 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Tested by:


Steven Wang
Manager


Spree Yei
Engineer

Laboratory Accreditation:

☒ CerpPASS Technology Corporation Test Laboratory



☐ CerpPASS Technology(SuZhou) Co., Ltd.





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software	7
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements.....	11
4.1 Standard Applicable	11
4.2 Antenna Construction and Directional Gain.....	11
5. Test of AC Power Line Conducted Emission	12
5.1 Test Limit	12
5.2 Test Procedures	12
5.3 Typical Test Setup	13
5.4 Test Result and Data.....	14
5.5 Test Photographs	16
6. Test of Spurious Emission (Radiated)	17
6.1 Test Limit	17
6.2 Test Procedures	17
6.3 Typical Test Setup	18
6.4 Test Result and Data (9KHz ~ 30MHz)	19
6.5 Test Result and Data (30MHz ~ 1GHz).....	19
6.6 Test Result and Data (1GHz~25GHz).....	23
6.7 Restricted Bands of Operation	35
6.8 Restrict Band Emission Measurement Data	36
6.9 Test Photographs (30MHz~1GHz)	39
6.10 Test Photographs (1GHz~25GHz)	40
7. Test of Spurious Emission (Conducted).....	41
7.1 Test Limit	41
7.2 Test Procedure	41
7.3 Test Setup Layout	41
7.4 Test Result and Data.....	41
8. Occupied Bandwidth Measurement Data	46
8.1 Test Limit	46
8.2 Test Procedures	46
8.3 Test Setup Layout	46
8.4 Test Result and Data.....	47
9. Maximum Peak and Average Output Power.....	56
9.1 Test Limit	56
9.2 Test Procedures	56
9.3 Test Setup Layout	56



9.4	Test Result and Data	57
10.	Power Spectral Density	58
10.1	Test Limit	58
10.2	Test Procedures	58
10.3	Test Setup Layout	58
10.4	Test Result and Data	59



History of this test report

☒ ORIGINAL.

☐ Additional attachment as following record:

Attachment No.	Issue Date	Description
TEG1508142	Sep. 09, 2015	Original.



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4: 2009

FCC Rules and Regulations Part 15 Subpart C §15.247

KDB558074

KDB662911

RSS-247 issue 1

RSS-Gen issue 3

FCC Rule	IC Rule	Description of Test	Result
15.203	RSS-GEN 6.7	Antenna Requirement	Pass
15.207	RSS-GEN 8.8	AC Power Line Conducted Emission	Pass
15.209 15.205	RSS-GEN Section 8.9 & 8.10	Spurious Emission(Radiated)	Pass
15.247(d)	RSS-247 5.5	Spurious Emission(Conducted)	Pass
15.247(a)(2)	RSS-247 5.2 (1)	Occupied Bandwidth	Pass
15.247(b)	RSS-247 5.4 (4)	Maximum Peak Output Power	Pass
15.247(e)	RSS-247 5.2 (2)	Power Spectral Density	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	802.11a/an/ac: 5150-5250MHz/ 5250-5350MHz, 5470-5725MHz, 5725-5850MHz 802.11b/g/n: 2412-2462MHz Bluetooth: 2402-2480 MHz
Type of Modulation	OFDM, DSSS, FHSS, GFSK (Bluetooth low energy)
Channel of Bandwidth	802.11a/an/ac: 20MHz/ 40MHz/ 80MHz 802.11b/g/n: 5MHz Bluetooth: 1MHz Bluetooth Low Energy: 2MHz
Data Rate	802.11a/an/ac: up to 867Mbps 802.11b/g/n: up to 270Mbps Bluetooth: 1, 2, 3Mbps Bluetooth Low Energy: 1Mbps
Type of Antenna	Printed Antenna *2
Antenna Gain	2 dBi
Rating Input	I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 19Vdc, 4.74A

2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11an HT40(2422-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included Mouse, Keyboard, Notebook and EUT for RF test.
- An executive program, "DRUT" under Chrome was executed to transmit and receive data via WLAN.
- Pre-Scanned RF Power:

Antenna A:

802.11b mode								
Data Rate	1M	2M	5.5M	11M	---	---	---	---
Avg. Power Output(dBm)	14.34	14.55	14.33	14.29	---	---	---	---
Peak. Power Output(dBm)	17.15	17.16	17.18	17.26	---	---	---	---

802.11g mode								
Data Rate	6M	9M	12M	18M	24M	36M	48M	54M
Avg. Power Output(dBm)	12.02	12.00	11.96	11.85	11.94	11.83	11.72	11.65
Peak. Power Output(dBm)	17.63	17.88	17.86	17.93	18.24	18.55	19.21	19.66

802.11n HT20 mode								
Data Rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power Output(dBm)	9.44	9.52	9.47	9.44	9.50	9.37	9.48	9.52
Peak. Power Output(dBm)	15.38	15.76	16.23	16.95	17.43	18.42	18.93	19.37

802.11n HT40 mode								
Data Rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power Output(dBm)	7.37	7.33	7.28	7.15	7.06	6.99	6.82	6.78
Peak. Power Output(dBm)	14.78	15.45	15.78	16.45	16.96	17.33	18.11	18.88



Antenna B:

802.11b mode								
Data Rate	1M	2M	5.5M	11M	---	---	---	---
Avg. Power Output(dBm)	13.94	14.12	14.28	14.34	---	---	---	---
Peak. Power Output(dBm)	16.82	16.92	17.15	17.32	---	---	---	---

802.11g mode								
Data Rate	6M	9M	12M	18M	24M	36M	48M	54M
Avg. Power Output(dBm)	10.37	10.31	10.17	10.33	10.28	10.15	10.29	10.27
Peak. Power Output(dBm)	15.96	16.12	16.34	17.03	17.52	17.89	18.46	18.78

802.11n HT20 mode								
Data Rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power Output(dBm)	9.56	9.43	9.41	9.32	9.47	9.25	9.37	9.33
Peak. Power Output(dBm)	15.44	16.33	16.82	17.12	17.78	18.56	19.37	19.46

802.11n HT40 mode								
Data Rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Avg. Power Output(dBm)	7.11	7.10	7.08	7.03	6.91	6.83	6.72	6.67
Peak. Power Output(dBm)	13.77	14.68	15.28	15.97	16.61	17.05	17.69	18.56

*The highest powers were chosen for the full test.

e. Test modes:

Mode 1: 802.11b (11Mbps)

Mode 2: 802.11g (54Mbps)

Mode 3: 802.11n HT20 (130Mbps)

Mode 4: 802.11n HT40 (270Mbps)

For conduction test, Test Mode 4 generates the worst case; it was reported as final result.

For radiation test, Test Mode 3 generates the worst case; it was reported as final result.

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Mouse	DELL	M-UV83	USB Cable, Shielding, 1.8m
Keyboard	DELL	SK-8175	USB Cable, Shielding, 1.8m
Notebook	HP	ProBook 5310m	Power Cable, Unshielding, 1.8m

Used cable

Cable	Quantity	Description
Network Cable	1	Unshielding, 1.2m



2.5 General Information of Test

☒	Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
	FCC	TW1079, TW1061,390316, 228391, 641184
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
☐	Test Site	CerpPASS Technology (Suzhou) Co.,Ltd Address: No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China Tel: +86-512-6917-5888 Fax: +86-512-6917-5666
	FCC	916572, 331395
	IC	7290A-1, 7290A-2
	VCCI	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test G-227 for radiated disturbance above 1GHz
Frequency Range Investigated:		Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz
Test Distance:		The test distance of radiated emission from antenna to EUT is 3 M.



3. Test Equipment and Ancillaries Used for Tests

Instrument	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2015/03/07	2016/03/06
PREAMPLIFIER	AGILENT	8449B	3008A01954	2015/03/05	2016/03/04
HORN ANTENNA	EMCO	3115	31589	2015/03/09	2016/03/08
HIGH PASS FILTER	HP	84300-80038	002	N/A	N/A
Bilog Antenna	SchwarzBeck	VULB 9168	275	2014/09/18	2015/09/17
SERIES POWER METER	ANRITSU	ML2495A	1224005	2015/03/05	2016/03/04
POWER SENSOR	ANRITSU	MA2411B	1207295	2015/03/05	2016/03/04
Bluetooth Tester	R&S	CBT	101133	2015/03/12	2016/03/11



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

No.	Antenna Type	Antenna Gain
A	Printed antenna	2.0 dBi
B	Printed antenna	2.0 dBi

$$\begin{aligned}\text{Directional gain} &= G_{\text{ant}} + 10\log(N) \text{ dBi} \\ &= 2 + 10\log(2) \\ &= 5 \text{ (dBi)}\end{aligned}$$



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

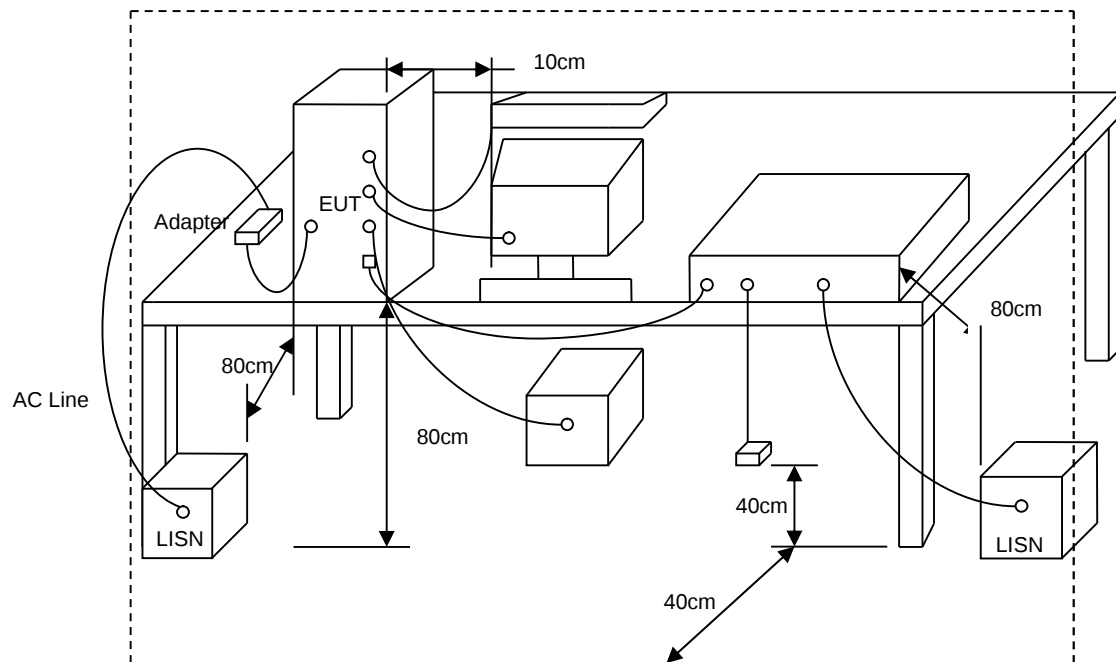



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 4	Temperature	: 26 °C
Test date	: Sep. 01, 2015	Humidity	: 48 %
Memo	:	Atmospheric Pressure	: 1008 hpa

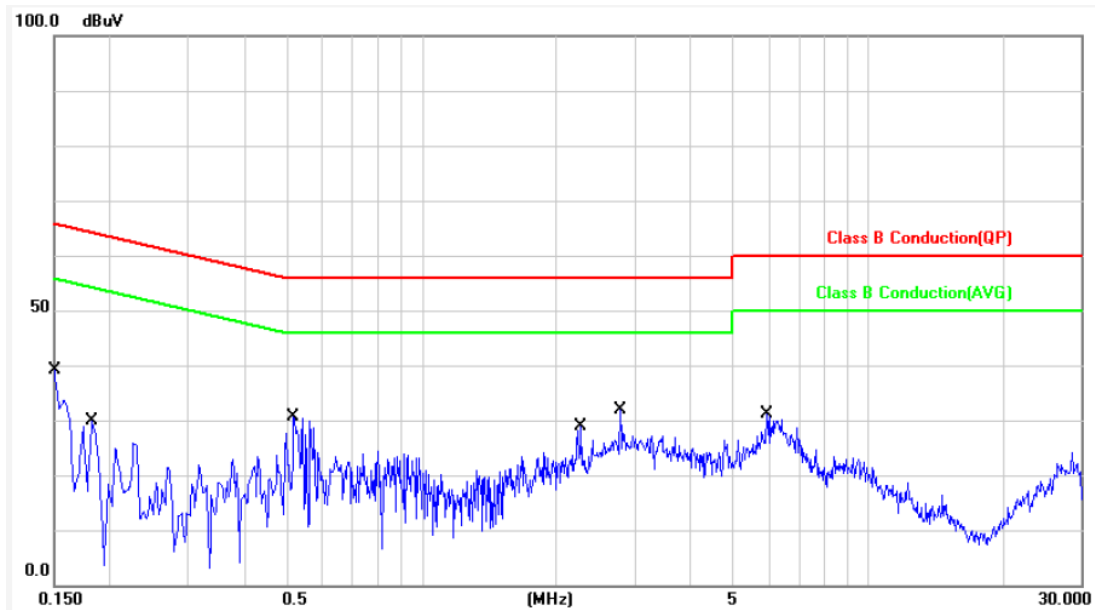


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	-0.02	32.86	32.84	65.99	-33.15	QP	P
2	0.1500	-0.02	19.62	19.60	55.99	-36.39	AVG	P
3	0.1819	-0.02	27.05	27.03	64.39	-37.36	QP	P
4	0.1819	-0.02	12.08	12.06	54.39	-42.33	AVG	P
5	0.5180	-0.04	29.59	29.55	56.00	-26.45	QP	P
6	0.5180	-0.04	19.08	19.04	46.00	-26.96	AVG	P
7	2.2780	-0.10	26.83	26.73	56.00	-29.27	QP	P
8	2.2780	-0.10	16.00	15.90	46.00	-30.10	AVG	P
9	2.7940	-0.11	30.44	30.33	56.00	-25.67	QP	P
10	2.7940	-0.11	20.17	20.06	46.00	-25.94	AVG	P
11	5.9380	-0.16	24.78	24.62	60.00	-35.38	QP	P
12	5.9380	-0.16	16.67	16.51	50.00	-33.49	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 4	Temperature	: 26 °C
Test date	: Sep. 01, 2015	Humidity	: 48 %
Memo	:	Atmospheric Pressure	: 1008 hpa

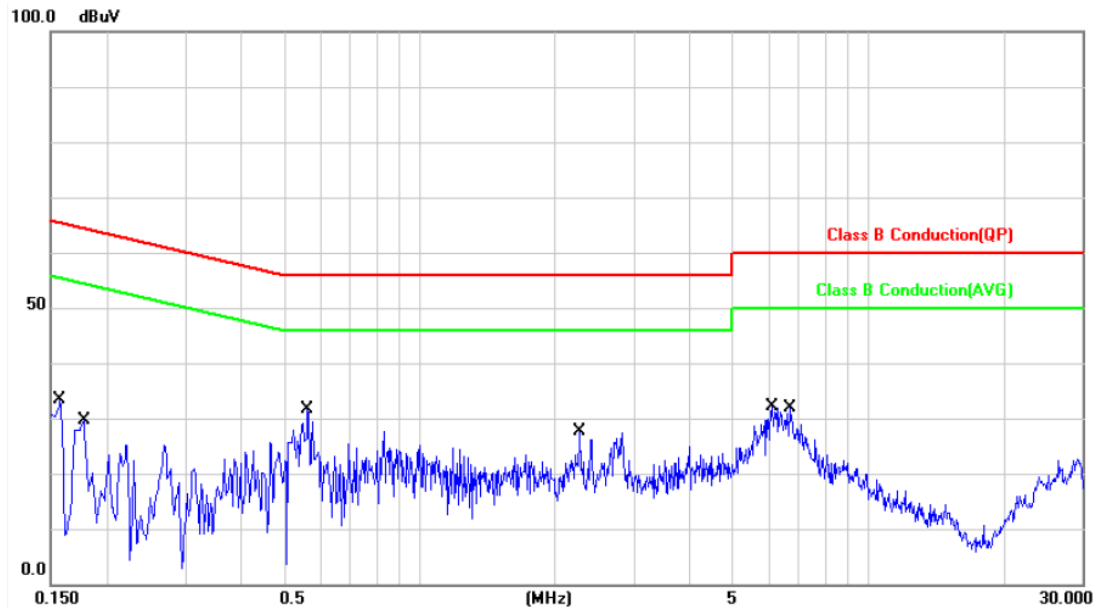

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	-0.02	33.42	33.40	65.56	-32.16	QP	P
2	0.1580	-0.02	22.02	22.00	55.56	-33.56	AVG	P
3	0.1780	-0.02	23.94	23.92	64.57	-40.65	QP	P
4	0.1780	-0.02	7.65	7.63	54.57	-46.94	AVG	P
5	0.5620	-0.04	27.94	27.90	56.00	-28.10	QP	P
6	0.5620	-0.04	18.41	18.37	46.00	-27.63	AVG	P
7	2.2740	-0.10	26.03	25.93	56.00	-30.07	QP	P
8	2.2740	-0.10	13.55	13.45	46.00	-32.55	AVG	P
9	6.1060	-0.16	25.69	25.53	60.00	-34.47	QP	P
10	6.1060	-0.16	18.78	18.62	50.00	-31.38	AVG	P
11	6.6820	-0.16	25.14	24.98	60.00	-35.02	QP	P
12	6.6820	-0.16	17.66	17.50	50.00	-32.50	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

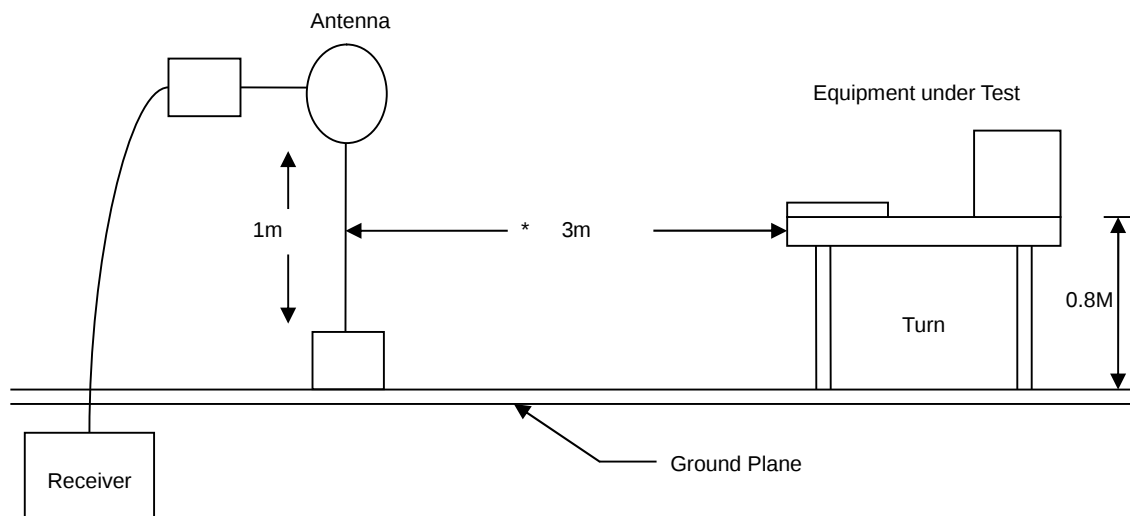

30MHz- 1GHz Test Setup

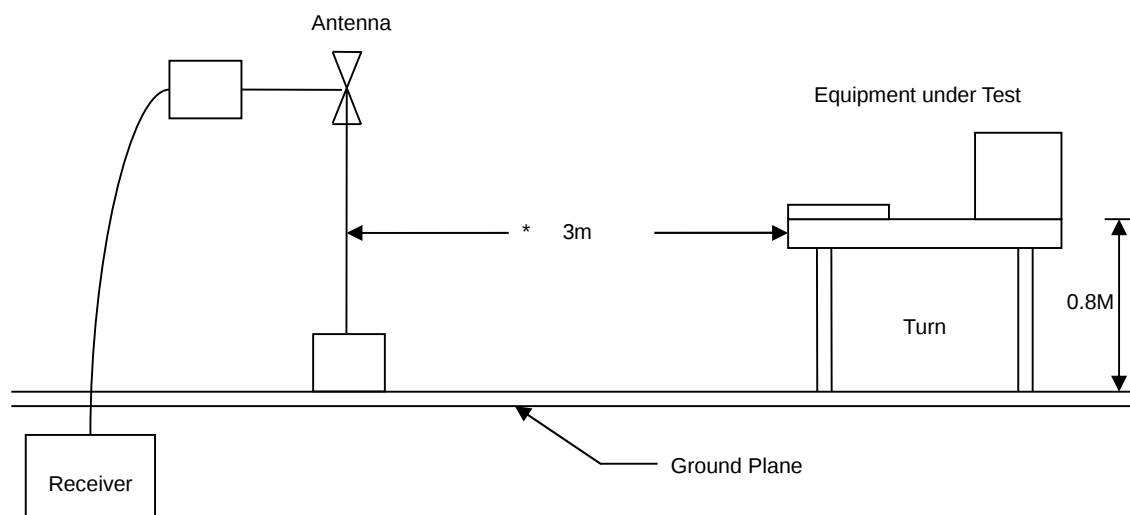

Above 1GHz Test Setup

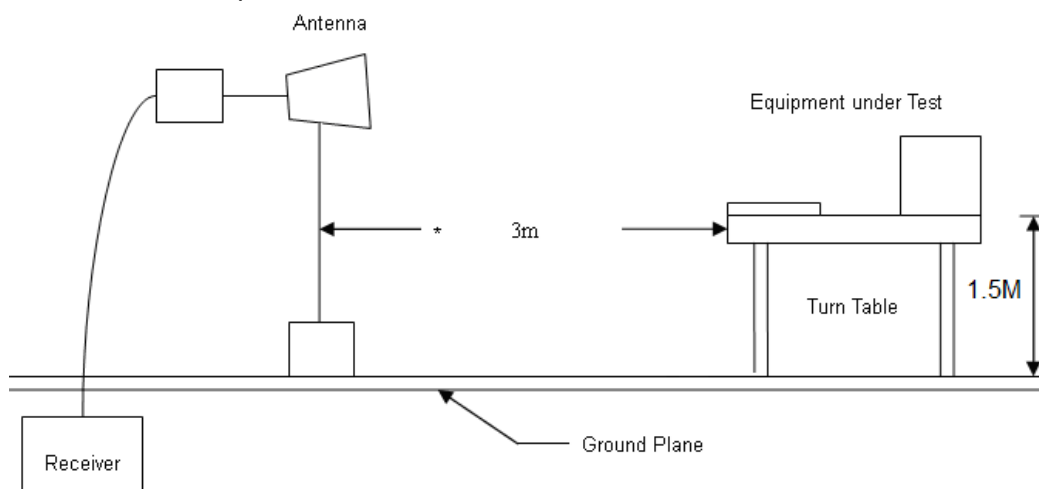




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

6.5.1 Test Result and Data of Transmitter

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 01, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

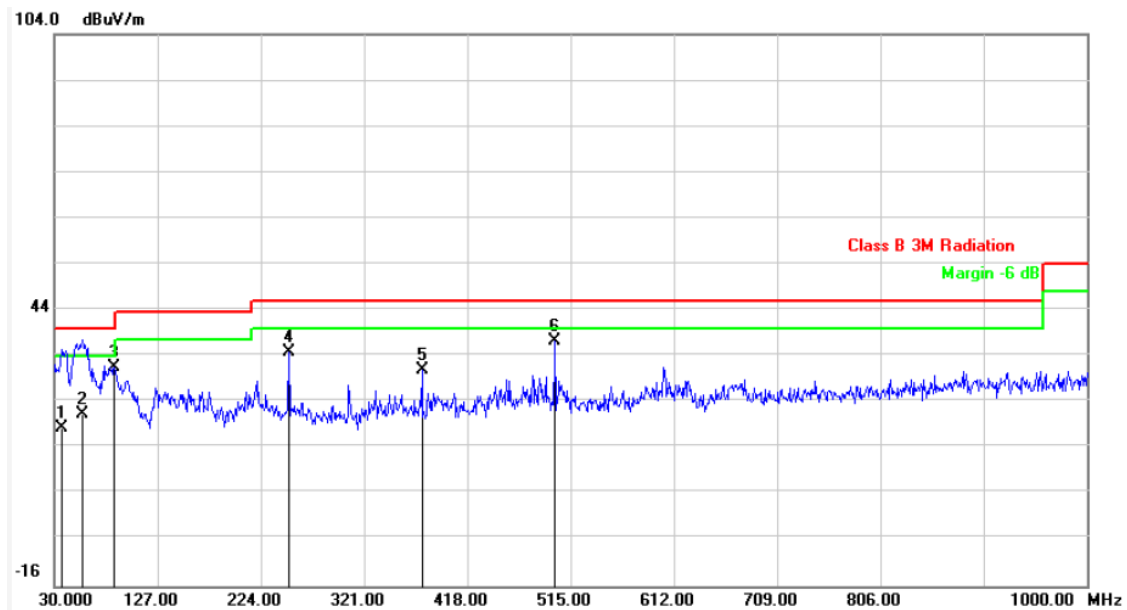

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	36.7900	-7.74	26.14	18.40	40.00	-21.60	QP	102	185	P
2	56.1900	-7.86	29.26	21.40	40.00	-18.60	QP	102	185	P
3	86.2600	-13.24	44.83	31.59	40.00	-8.41	peak	102	185	P
4	250.1900	-8.34	43.27	34.93	46.00	-11.07	peak	102	185	P
5	375.3200	-4.39	35.35	30.96	46.00	-15.04	peak	102	185	P
6	500.4500	-1.37	38.60	37.23	46.00	-8.77	peak	102	185	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 01, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

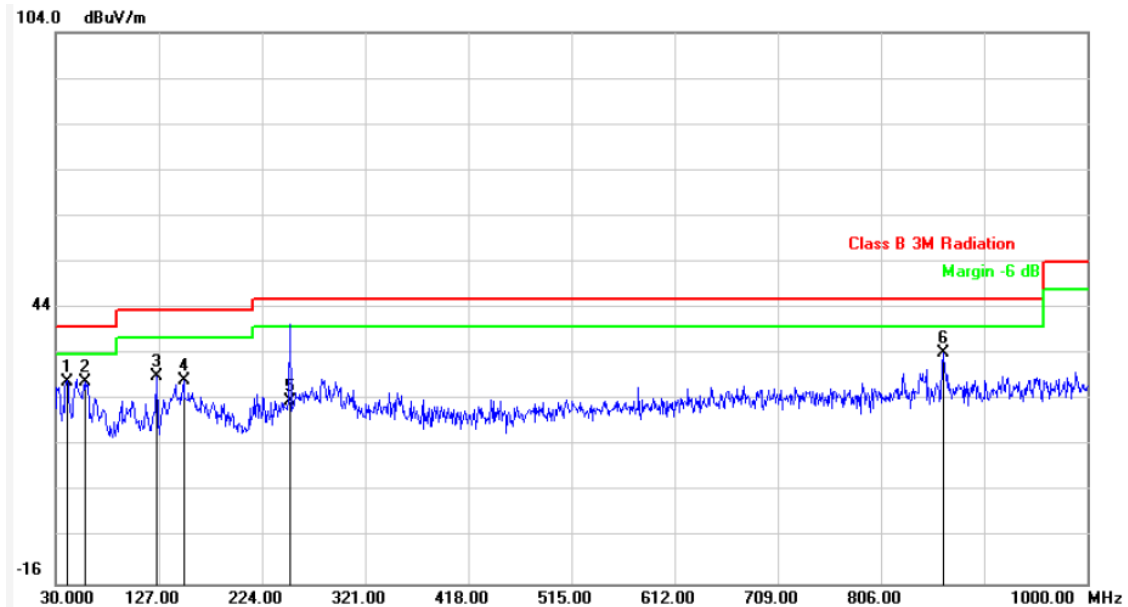

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	40.6699	-7.45	35.55	28.10	40.00	-11.90	peak	102	185	P
2	58.1300	-8.06	36.05	27.99	40.00	-12.01	peak	102	185	P
3	125.0600	-8.98	38.20	29.22	43.50	-14.28	peak	102	185	P
4	150.2800	-7.30	35.67	28.37	43.50	-15.13	peak	102	185	P
5	250.1900	-8.34	32.04	23.70	46.00	-22.30	QP	102	185	P
6	865.1700	4.54	29.59	34.13	46.00	-11.87	peak	102	185	P

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



6.5.2 Test Result and Data of Receiver

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 01, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

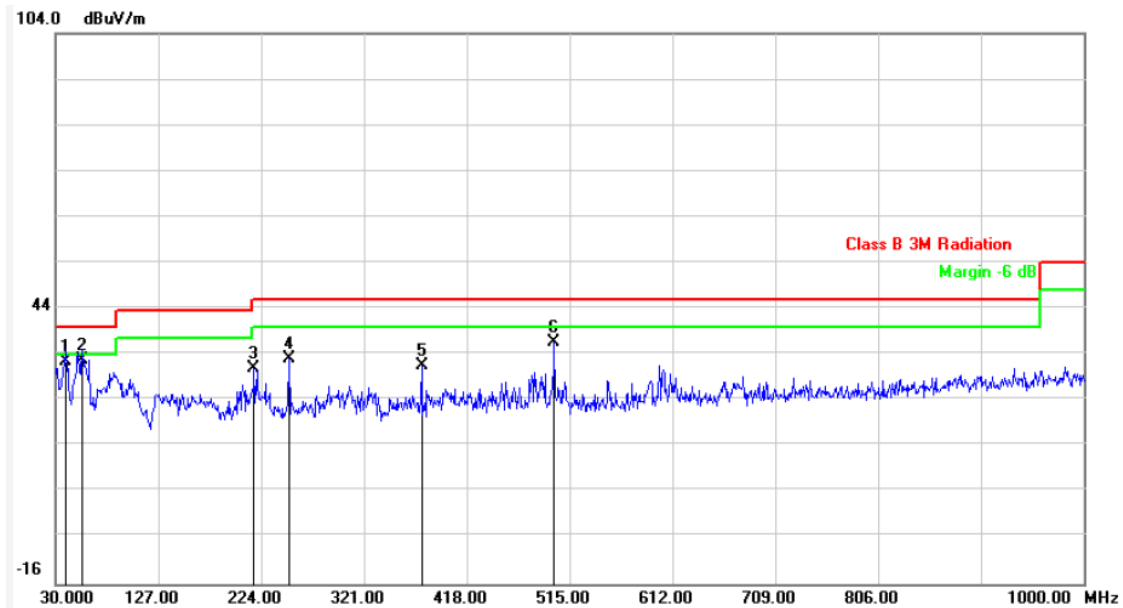

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	39.7000	-7.53	40.13	32.60	40.00	-7.40	QP	100	186	P
2	55.2200	-7.75	40.55	32.80	40.00	-7.20	QP	100	186	P
3	217.2100	-10.04	40.88	30.84	46.00	-15.16	peak	100	186	P
4	250.1900	-8.34	41.33	32.99	46.00	-13.01	peak	100	186	P
5	375.3200	-4.39	35.82	31.43	46.00	-14.57	peak	100	186	P
6	500.4500	-1.37	38.09	36.72	46.00	-9.28	peak	100	186	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 01, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

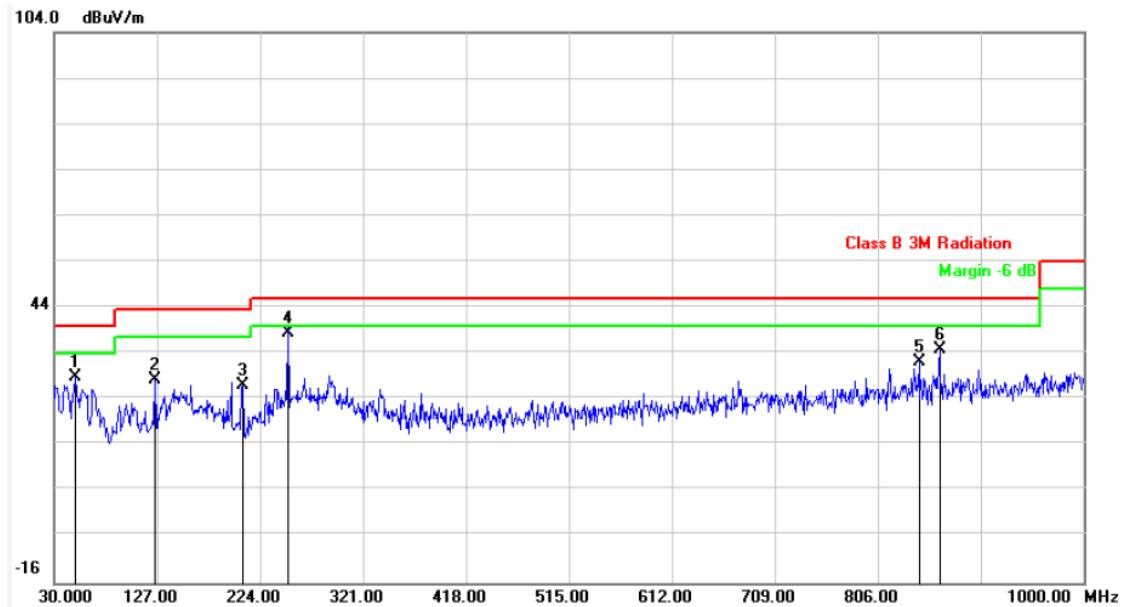

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	50.3700	-7.26	36.01	28.75	40.00	-11.25	peak	100	186	P
2	125.0600	-8.98	37.22	28.24	43.50	-15.26	peak	100	186	P
3	207.5100	-10.17	37.32	27.15	43.50	-16.35	peak	100	186	P
4	250.1900	-8.34	46.86	38.52	46.00	-7.48	peak	100	186	P
5	844.8000	4.22	27.97	32.19	46.00	-13.81	peak	100	186	P
6	864.2000	4.52	30.33	34.85	46.00	-11.15	peak	100	186	P

Note: Level = Reading + Factor

Margin = Level – Limit


Factor= Antenna Factor + Cable Loss - Amplifier Factor



6.6 Test Result and Data (1GHz~25GHz)

6.6.1 Test Result and Data of Transmitter

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

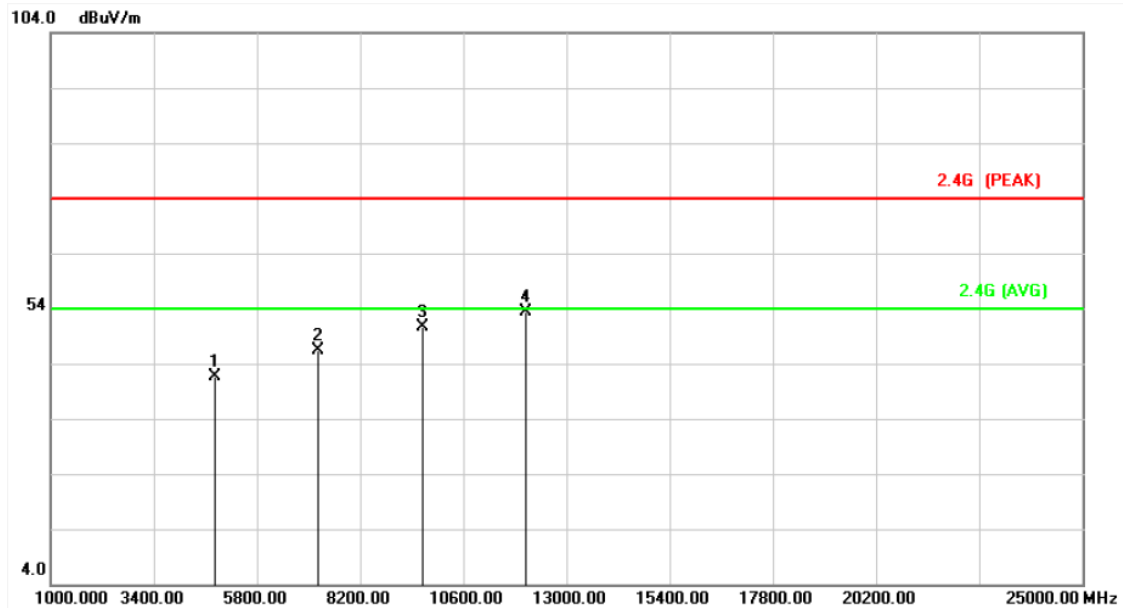

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4824.000	7.91	33.80	41.71	74.00	-32.29	peak	102	179	P
2	7236.000	13.12	33.24	46.36	74.00	-27.64	peak	102	179	P
3	9648.000	16.44	34.19	50.63	74.00	-23.37	peak	102	179	P
4	12060.000	20.21	33.06	53.27	74.00	-20.73	peak	102	179	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

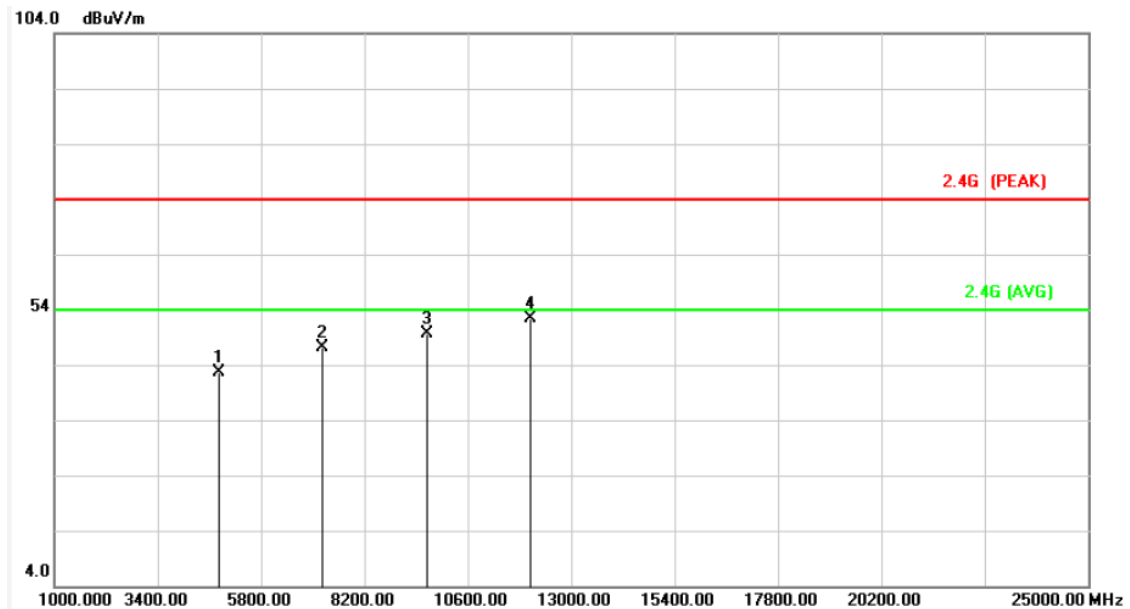

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4824.000	7.91	34.69	42.60	74.00	-31.40	peak	102	179	P
2	7236.000	13.12	33.99	47.11	74.00	-26.89	peak	102	179	P
3	9648.000	16.44	33.28	49.72	74.00	-24.28	peak	102	179	P
4	12060.000	20.21	32.29	52.50	74.00	-21.50	peak	102	179	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

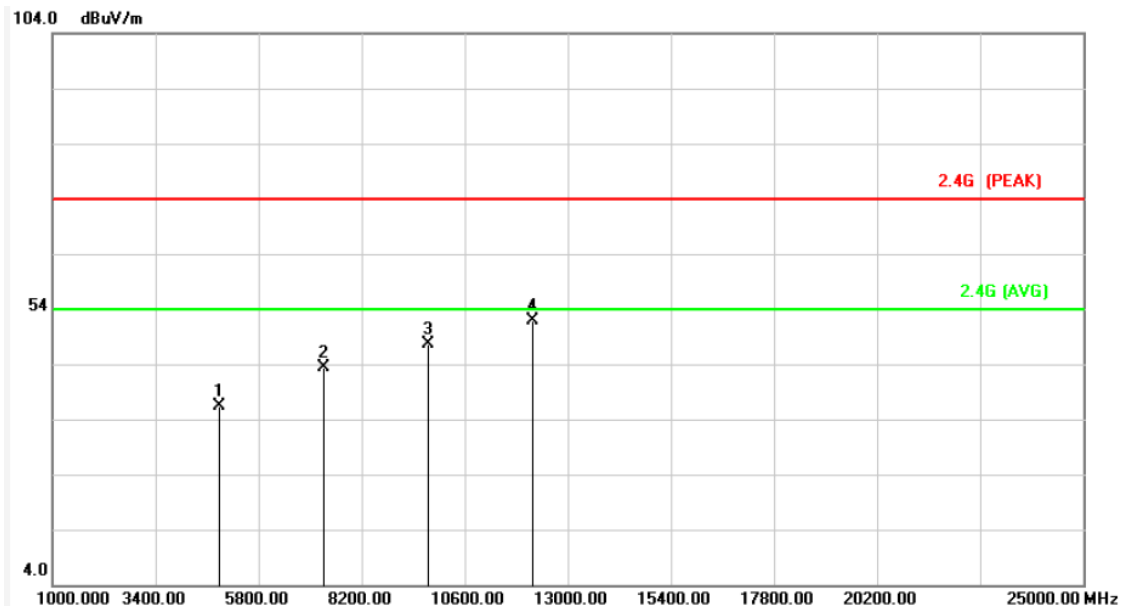

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4874.000	8.07	28.36	36.43	74.00	-37.57	peak	101	182	P
2	7311.000	13.39	30.09	43.48	74.00	-30.52	peak	101	182	P
3	9748.000	16.59	30.96	47.55	74.00	-26.45	peak	101	182	P
4	12185.000	20.22	31.74	51.96	74.00	-22.04	peak	101	182	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

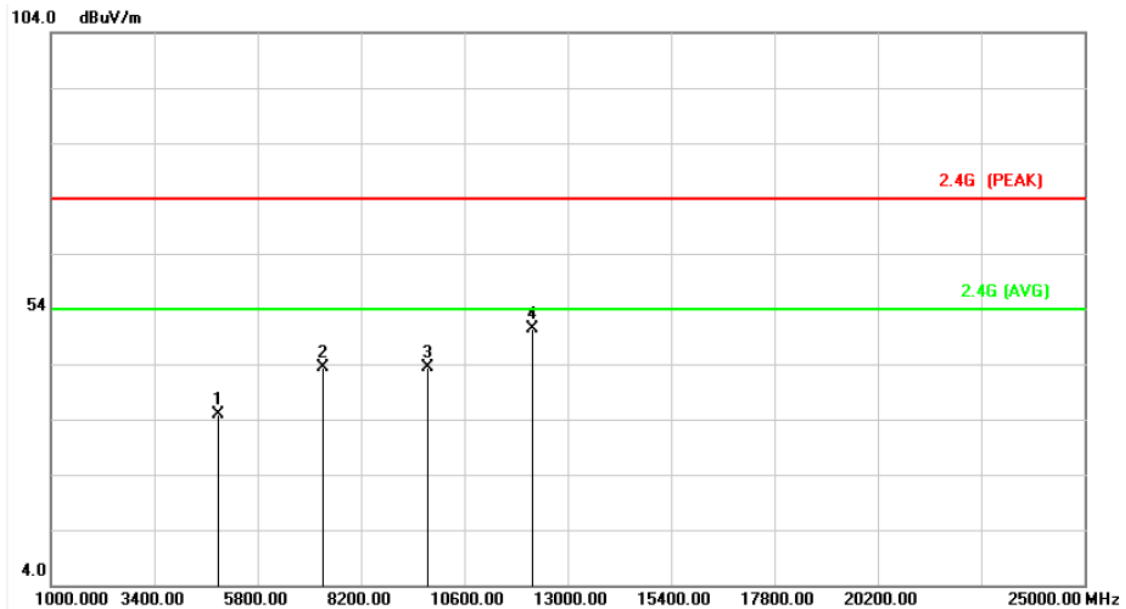

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4874.000	8.07	26.72	34.79	74.00	-39.21	peak	101	185	P
2	7311.000	13.39	29.89	43.28	74.00	-30.72	peak	101	185	P
3	9748.000	16.59	26.67	43.26	74.00	-30.74	peak	101	185	P
4	12185.000	20.22	30.13	50.35	74.00	-23.65	peak	101	185	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

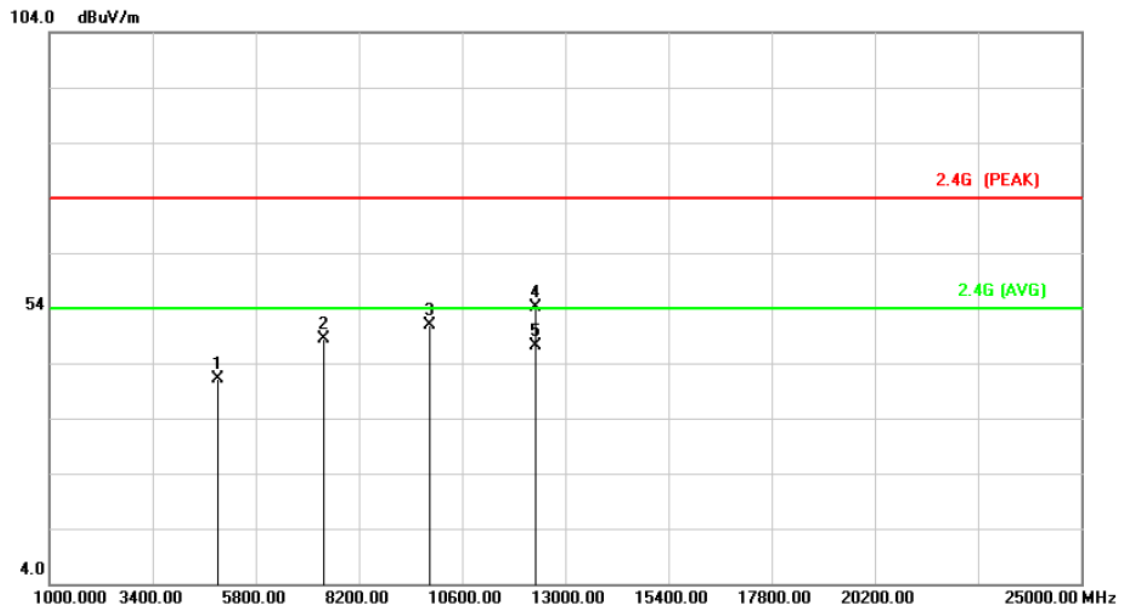

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4924.000	8.23	32.95	41.18	74.00	-32.82	peak	100	184	P
2	7386.000	13.65	34.84	48.49	74.00	-25.51	peak	100	184	P
3	9848.000	16.73	34.22	50.95	74.00	-23.05	peak	100	184	P
4	12310.000	20.23	33.97	54.20	74.00	-19.80	peak	100	184	P
5	12310.000	20.23	26.89	47.12	54.00	-6.88	AVG	100	184	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

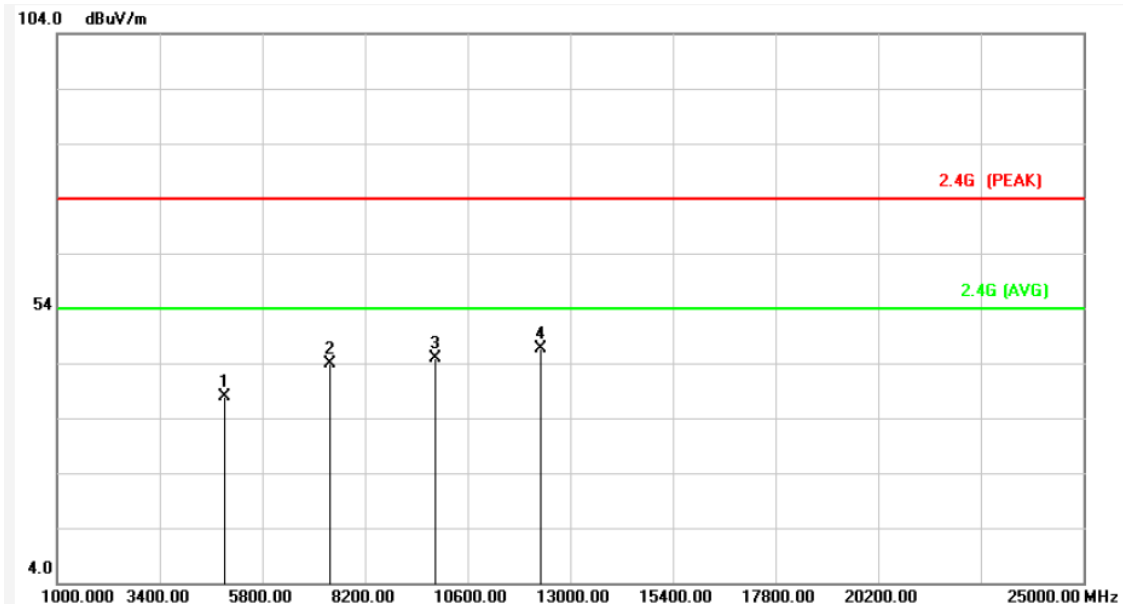

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4924.000	8.23	29.54	37.77	74.00	-36.23	peak	100	184	P
2	7386.000	13.65	30.11	43.76	74.00	-30.24	peak	100	184	P
3	9848.000	16.73	28.03	44.76	74.00	-29.24	peak	100	184	P
4	12310.000	20.23	26.46	46.69	74.00	-27.31	peak	100	184	P

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



6.6.2 Test Result and Data of Receiver

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

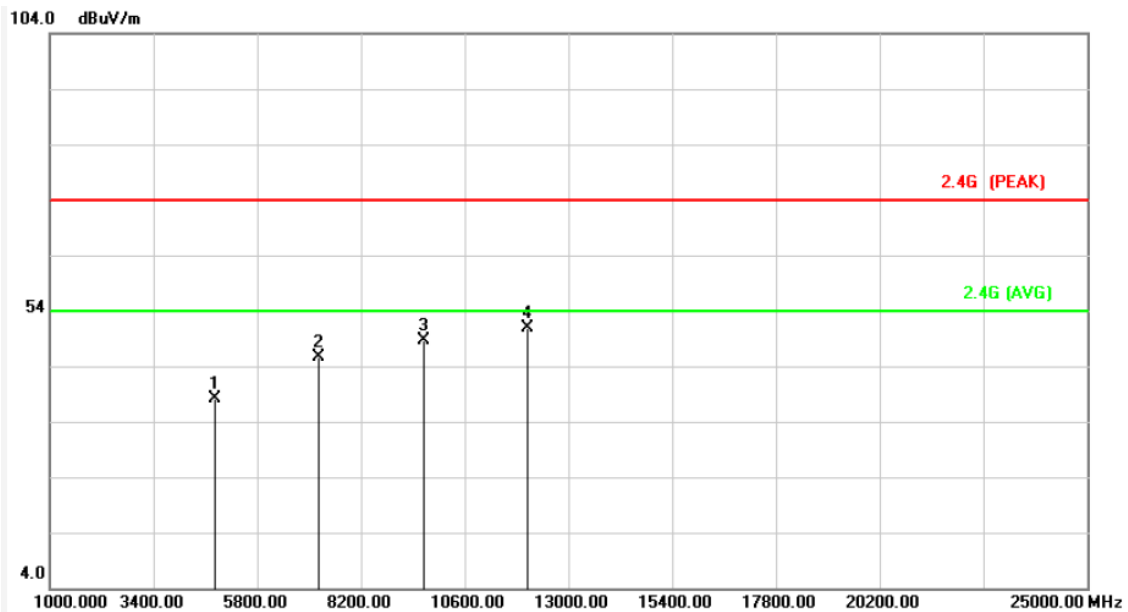

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4824.000	7.91	30.10	38.01	74.00	-35.99	peak	106	179	P
2	7236.000	13.12	32.41	45.53	74.00	-28.47	peak	106	179	P
3	9648.000	16.44	32.27	48.71	74.00	-25.29	peak	106	179	P
4	12060.000	20.21	30.74	50.95	74.00	-23.05	peak	106	179	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

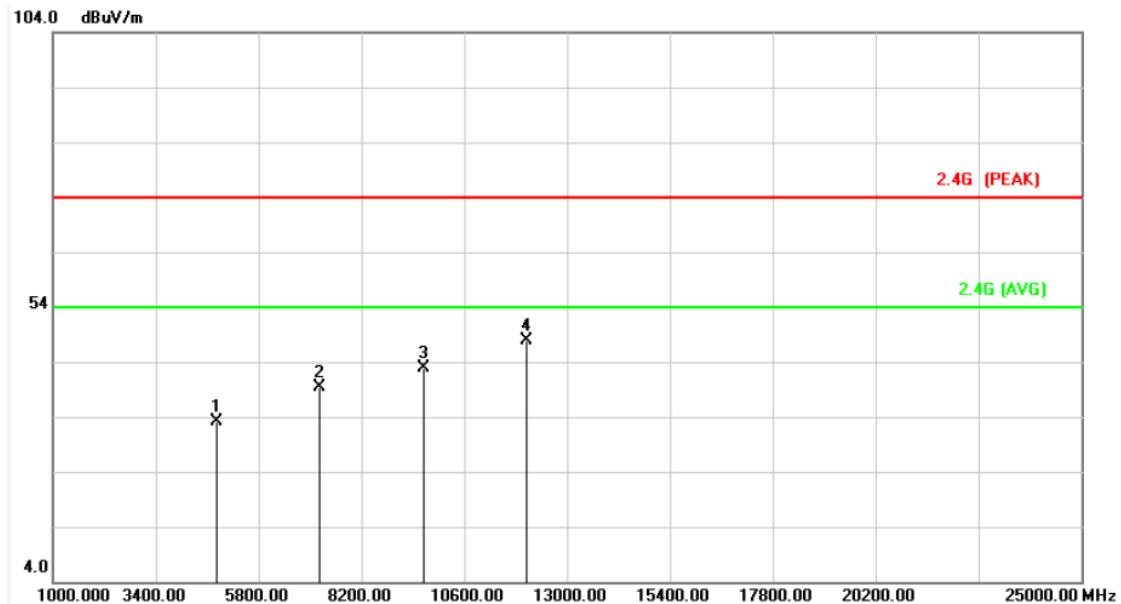

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4824.000	7.91	25.26	33.17	74.00	-40.83	peak	106	179	P
2	7236.000	13.12	26.15	39.27	74.00	-34.73	peak	106	179	P
3	9648.000	16.44	26.36	42.80	74.00	-31.20	peak	106	179	P
4	12060.000	20.21	27.79	48.00	74.00	-26.00	peak	106	179	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

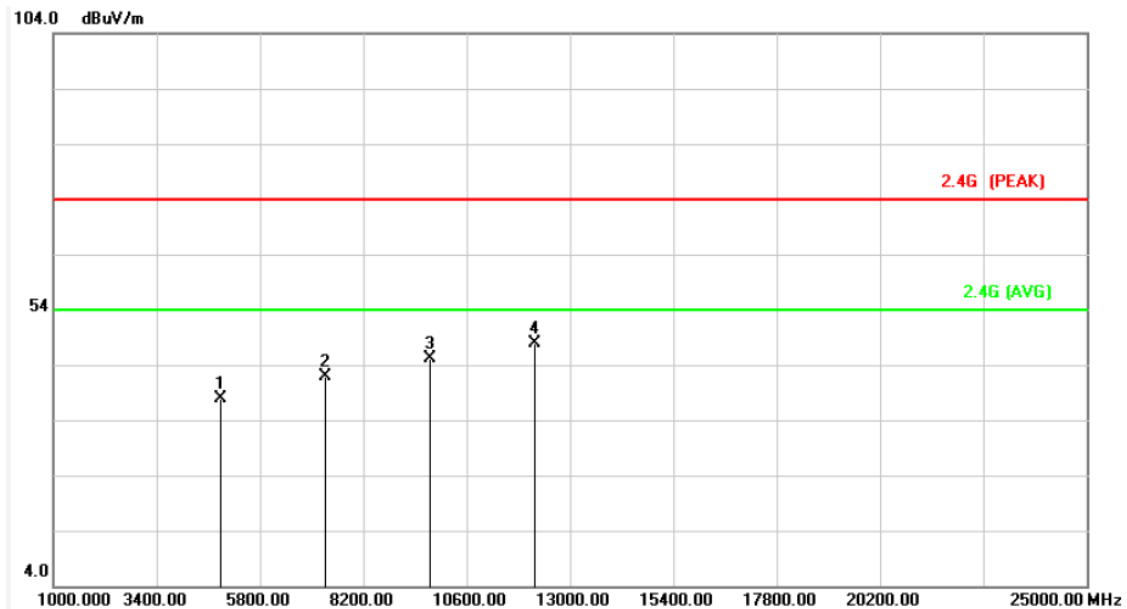

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4874.000	8.07	29.93	38.00	74.00	-36.00	peak	104	182	P
2	7311.000	13.39	28.51	41.90	74.00	-32.10	peak	104	182	P
3	9748.000	16.59	28.50	45.09	74.00	-28.91	peak	104	182	P
4	12185.000	20.22	27.67	47.89	74.00	-26.11	peak	104	182	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

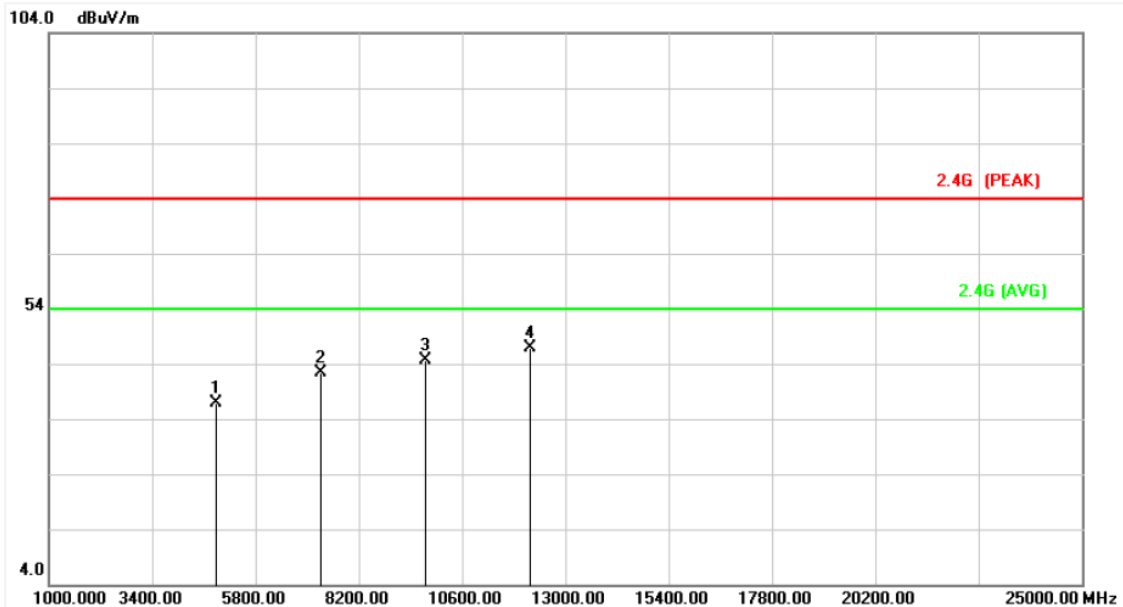

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4874.000	8.07	28.83	36.90	74.00	-37.10	peak	104	182	P
2	7311.000	13.39	29.06	42.45	74.00	-31.55	peak	104	182	P
3	9748.000	16.59	28.09	44.68	74.00	-29.32	peak	104	182	P
4	12185.000	20.22	26.66	46.88	74.00	-27.12	peak	104	182	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

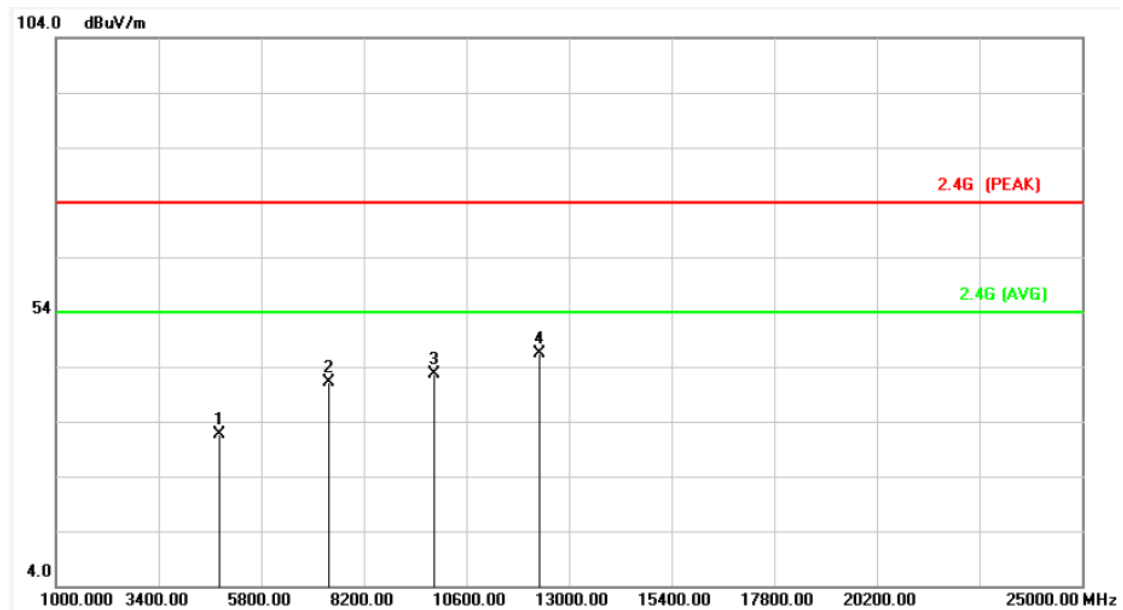

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4824.000	7.91	23.61	31.52	74.00	-42.48	peak	102	186	P
2	7386.000	13.65	27.41	41.06	74.00	-32.94	peak	102	186	P
3	9848.000	16.73	26.02	42.75	74.00	-31.25	peak	102	186	P
4	12310.000	20.23	26.26	46.49	74.00	-27.51	peak	102	186	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 18 °C
Test Date	: Sep. 02, 2015	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

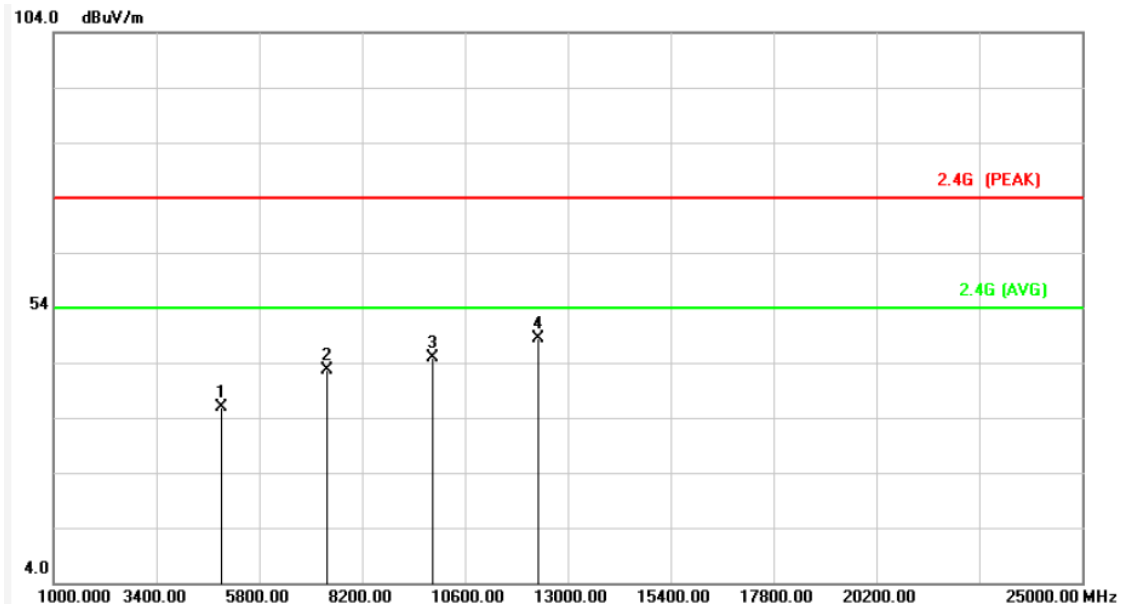

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	4924.000	8.23	27.72	35.95	74.00	-38.05	peak	102	186	P
2	7386.000	13.65	29.03	42.68	74.00	-31.32	peak	102	186	P
3	9848.000	16.73	28.08	44.81	74.00	-29.19	peak	102	186	P
4	12310.000	20.23	28.25	48.48	74.00	-25.52	peak	102	186	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor.



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

**6.8 Restrict Band Emission Measurement Data**

Test Date: Sep. 02, 2015

Temperature: 18 °C

Atmospheric pressure: 1008 hPa

Humidity: 49 %

Antenna A:

Modulation Standard: IEEE 802.11b

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2388.540	V	47.31	-0.99	46.32	Peak	74	54	-27.68	188	1.02
---	V	---	---	---	Ave	74	54	---	---	---
2398.638	H	46.87	-0.94	45.93	Peak	74	54	-28.07	188	1.02
---	H	---	---	---	Ave	74	54	---	---	---
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2547.698	V	45.81	-0.31	45.50	Peak	74	54	-28.50	186	1.04
---	V	---	---	---	Ave	74	54	---	---	---
2499.812	H	45.47	-0.55	44.92	Peak	74	54	-29.08	186	1.04
---	H	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11g

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2382.338	V	50.94	-1.00	49.94	Peak	74	54	-24.06	185	1.01
---	V	---	---	---	Ave	74	54	---	---	---
2373.750	H	45.70	-1.05	44.65	Peak	74	54	-29.35	185	1.01
---	H	---	---	---	Ave	74	54	---	---	---
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2492.222	V	46.32	-0.58	45.74	Peak	74	54	-28.26	176	1.02
---	V	---	---	---	Ave	74	54	---	---	---
2497.328	H	46.26	-0.56	45.70	Peak	74	54	-28.30	176	1.02
---	H	---	---	---	Ave	74	54	---	---	---



Antenna B:

Modulation Standard: IEEE 802.11b

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2386.194	V	47.52	-1.00	46.52	Peak	74	54	-27.48	177	1.01
---	V	---	---	---	Ave	74	54	---	---	---
2384.664	H	46.31	-1.00	45.31	Peak	74	54	-28.69	176	1.01
---	H	---	---	---	Ave	74	54	---	---	---
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2487.944	V	47.51	-0.60	46.91	Peak	74	54	-27.09	181	1.05
---	V	---	---	---	Ave	74	54	---	---	---
2477.594	H	45.91	-0.64	45.27	Peak	74	54	-28.73	181	1.05
---	H	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11g

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2389.458	V	50.98	-0.98	50.00	Peak	74	54	-24.00	184	1.01
---	V	---	---	---	Ave	74	54	---	---	---
2387.826	H	46.15	-0.99	45.16	Peak	74	54	-28.84	184	1.01
---	H	---	---	---	Ave	74	54	---	---	---
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2499.674	V	51.79	-0.55	51.24	Peak	74	54	-22.76	189	1.02
---	V	---	---	---	Ave	74	54	---	---	---
2511.542	H	46.87	-0.49	46.38	Peak	74	54	-27.62	189	1.01
---	H	---	---	---	Ave	74	54	---	---	---



Modulation Standard: IEEE 802.11n HT20

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2389.254	V	-0.99	54.28	53.29	Peak	74	54	-20.71	185	1.01
---	V	---	---	---	Ave	74	54	---	---	---
2387.724	H	-0.99	47.12	46.13	Peak	74	54	-27.87	185	1.01
---	H	---	---	---	Ave	74	54	---	---	---
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2493.326	V	51.03	-0.58	50.45	Peak	74	54	-23.55	181	1.05
---	V	---	---	---	Ave	74	54	---	---	---
2538.038	H	46.82	-0.36	46.46	Peak	74	54	-27.54	181	1.05
---	H	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11n HT40

Channel 3						Fundamental Frequency: 2422 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2379.664	V	50.15	-1.02	49.13	Peak	74	54	-24.87	187	1.03
---	V	---	---	---	Ave	74	54	---	---	---
2383.696	H	47.01	-1.00	46.01	Peak	74	54	-27.99	187	1.03
---	H	---	---	---	Ave	74	54	---	---	---
Channel 9						Fundamental Frequency: 2452 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2490.924	V	50.44	-0.58	49.86	Peak	74	54	-24.14	182	1.06
---	V	---	---	---	Ave	74	54	---	---	---
2517.712	H	46.82	-0.47	46.35	Peak	74	54	-27.65	182	1.06
---	H	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout





7.4 Test Result and Data

Test Date	: Aug. 11, 2015	Temperature	: 23°C
Atmospheric pressure	: 1055 hPa	Humidity	: 53%
Test Result	: PASS		



Note: Test plots refers to the following pages.





Antenna A:
Modulation Type: 802.11b, CH01

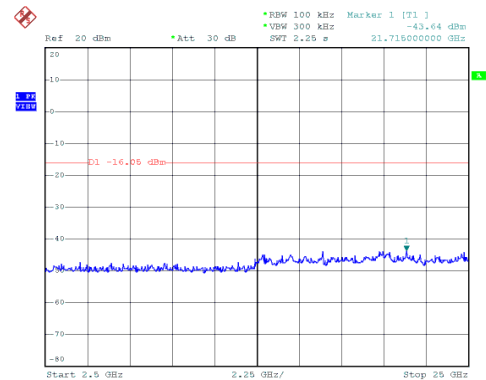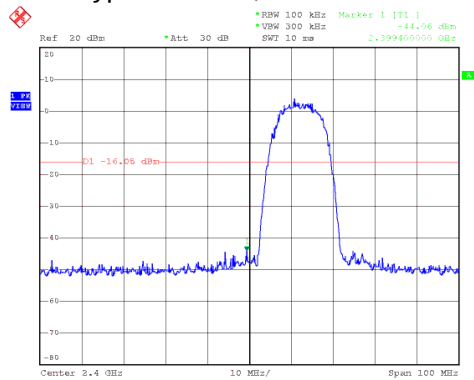



Modulation Type: 802.11b, CH11

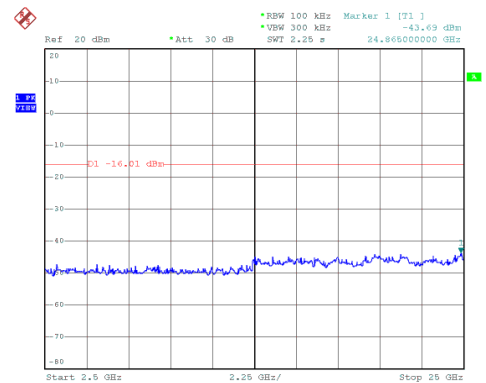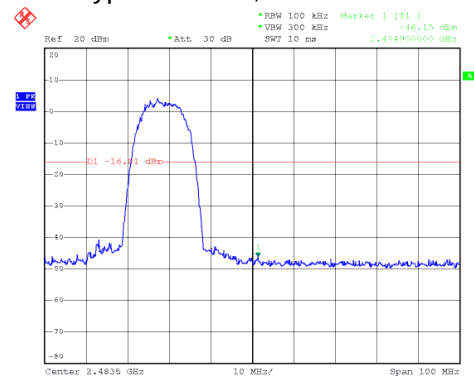

Modulation Type: 802.11g, CH01

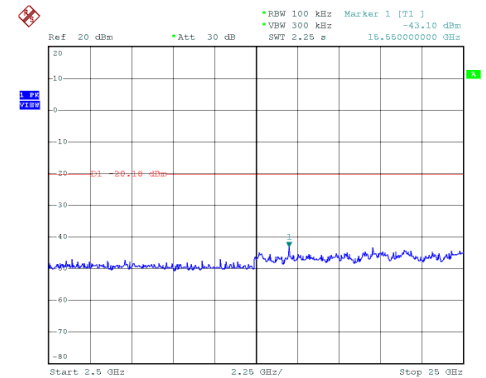
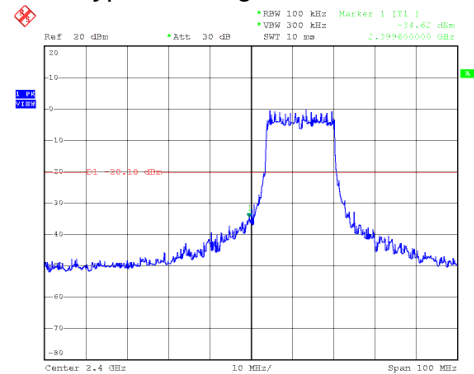


Modulation Type: 802.11g, CH11

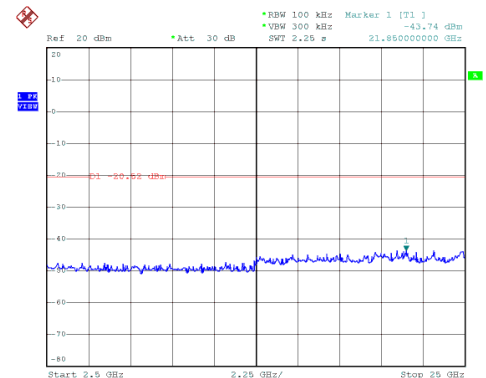
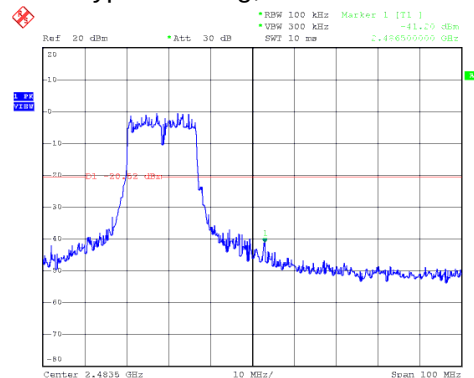






Modulation Type: 802.11n HT20, CH01

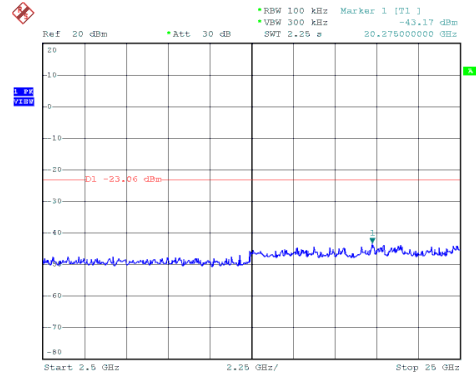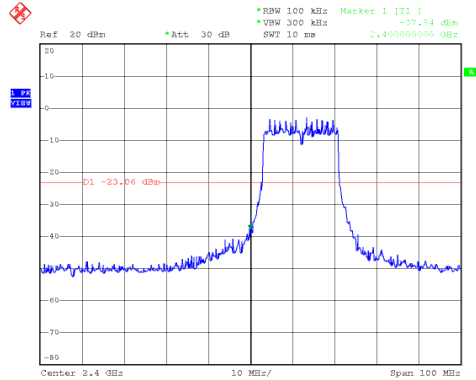



Modulation Type: 802.11n HT20, CH11

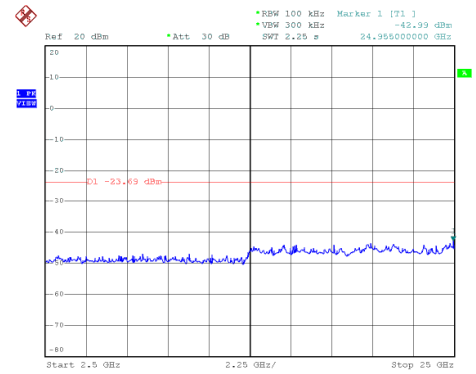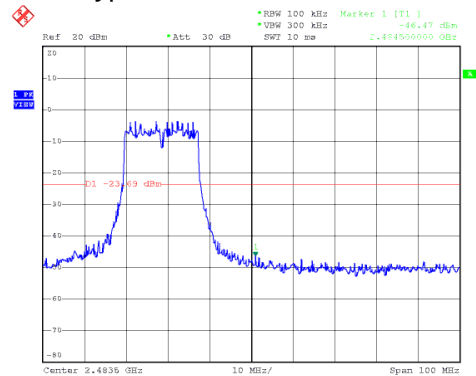

Modulation Type: 802.11n HT40, CH03

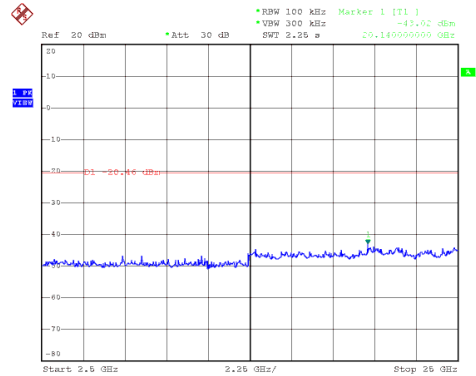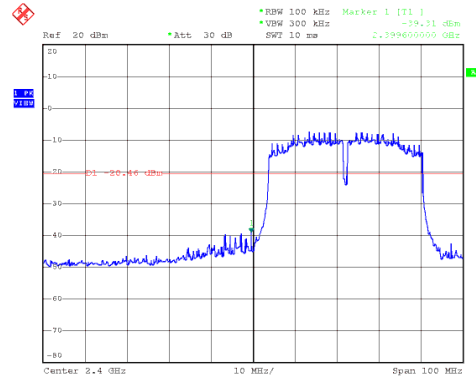



Modulation Type: 802.11n HT40, CH09

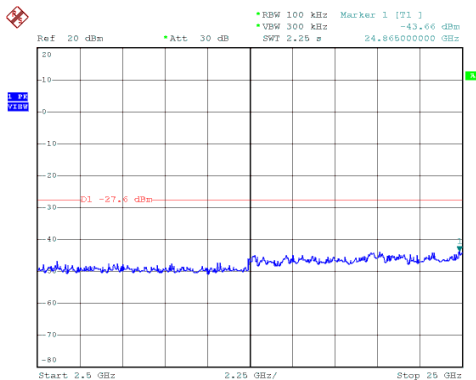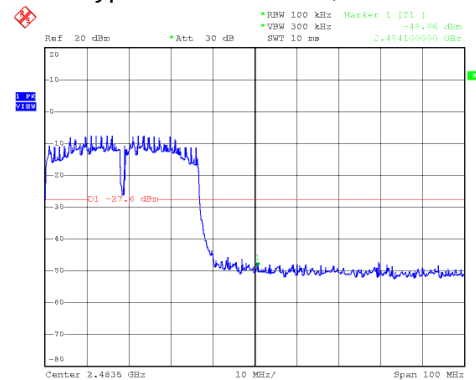



Antenna B:





Modulation Type: 802.11b, CH01

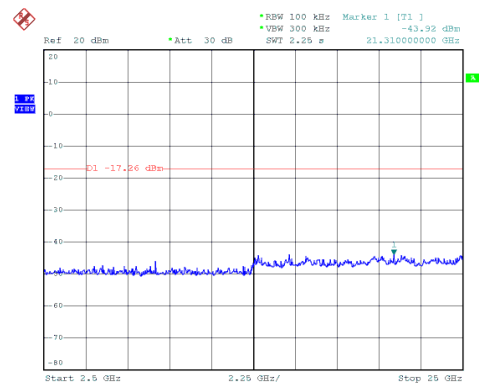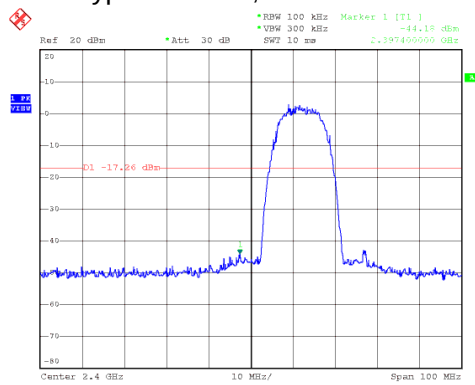



Modulation Type: 802.11b, CH11

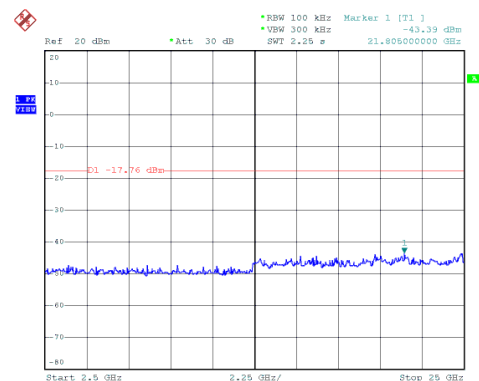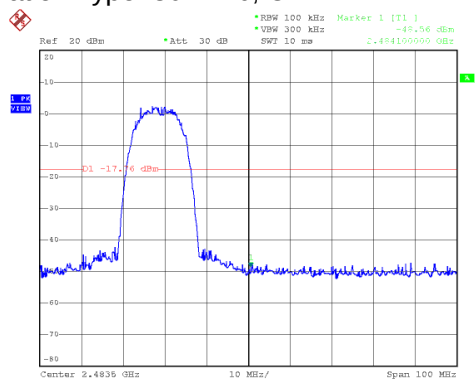

Modulation Type: 802.11g, CH01

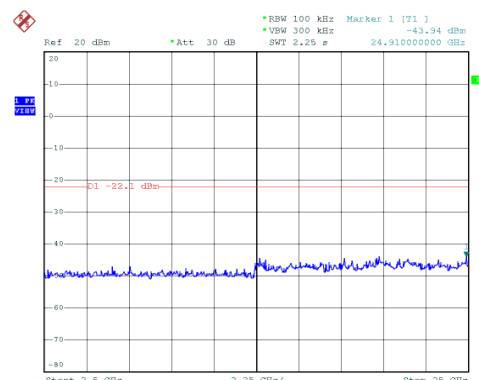
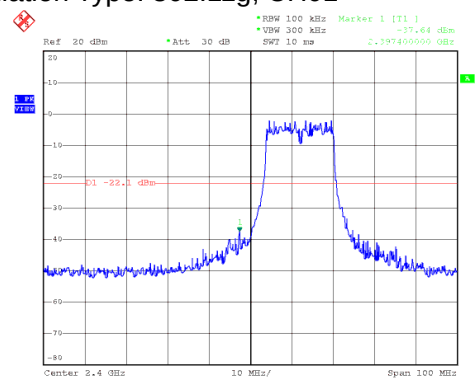


Modulation Type: 802.11g, CH11

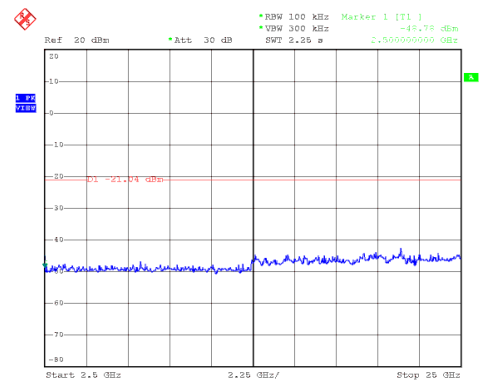
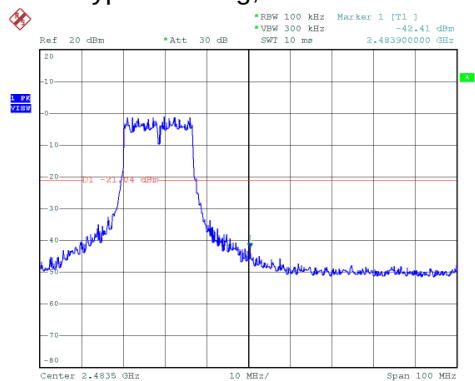






Modulation Type: 802.11n HT20, CH01

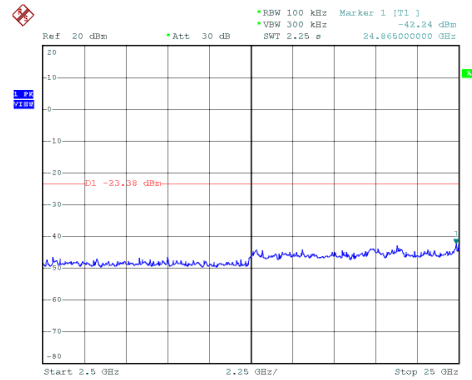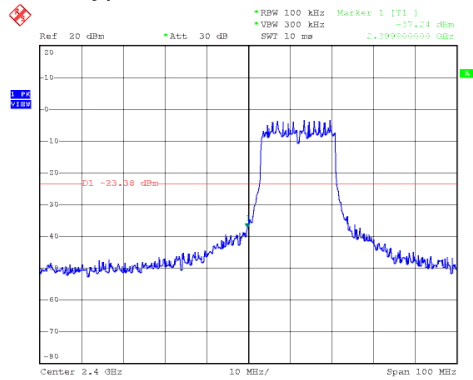



Modulation Type: 802.11n HT20, CH11

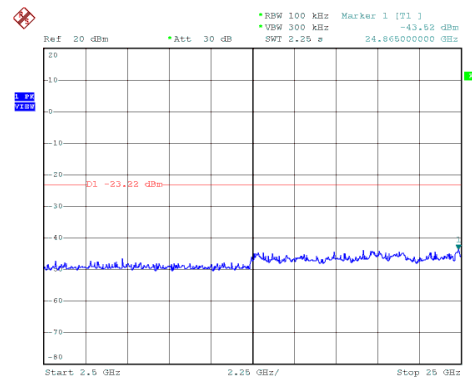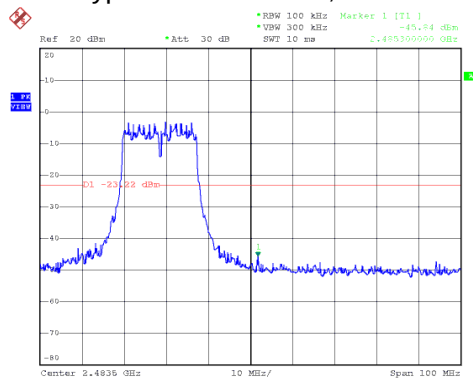

Modulation Type: 802.11n HT40, CH03

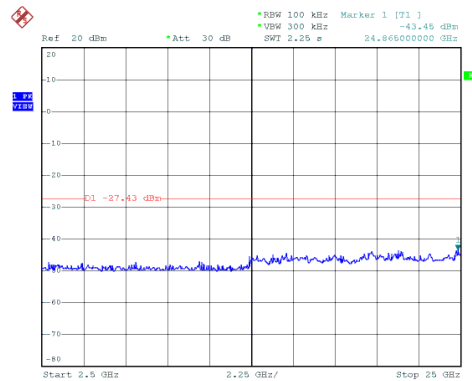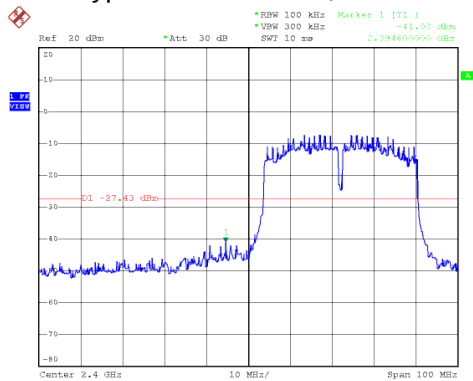

Modulation Type: 802.11n HT40, CH09

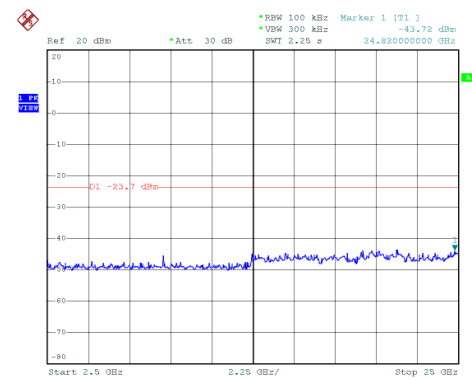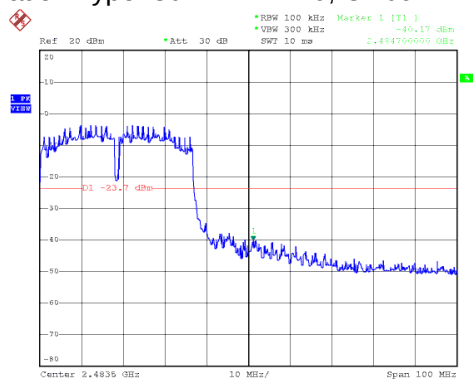



8. Occupied Bandwidth Measurement Data


8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

8.3 Test Setup Layout





8.4 Test Result and Data

Test Date : Aug. 11, 2015

Temperature : 23°C


Atmospheric pressure : 1055 hPa

Humidity : 53 %


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
			ANT A	ANT B	ANT A	ANT B
IEEE 802.11b (11Mbps)	01	2412	10.1	10.5	13.5	13.5
	06	2437	10.2	10.6	13.5	13.5
	11	2462	10.0	10.5	13.5	13.5
IEEE 802.11g (54Mbps)	01	2412	16.6	16.5	16.5	16.5
	06	2437	16.3	16.5	16.5	16.5
	11	2462	16.6	16.5	16.5	16.6
IEEE 802.11n HT20 (130Mbps)	01	2412	17.8	17.8	17.7	17.8
	06	2437	17.8	17.8	17.7	17.8
	11	2462	17.8	17.8	17.8	17.7
IEEE 802.11n HT40 (270Mbps)	03	2422	36.0	36.0	35.8	36.0
	06	2437	36.2	36.6	36.0	35.8
	09	2452	36.0	36.0	36.0	36.2




Antenna A:
6dB Bandwidth:
Modulation Type: 802.11b
CH01

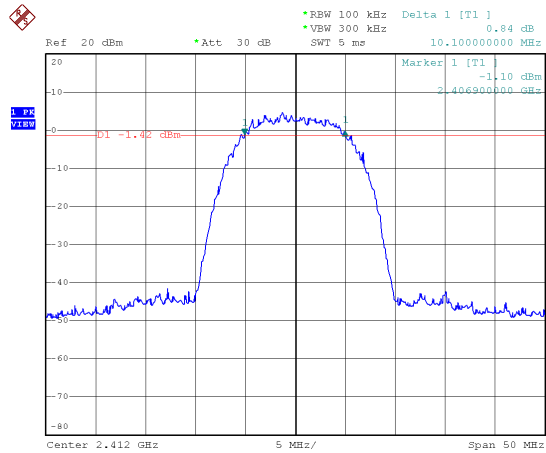


Modulation Type: 802.11g
CH01

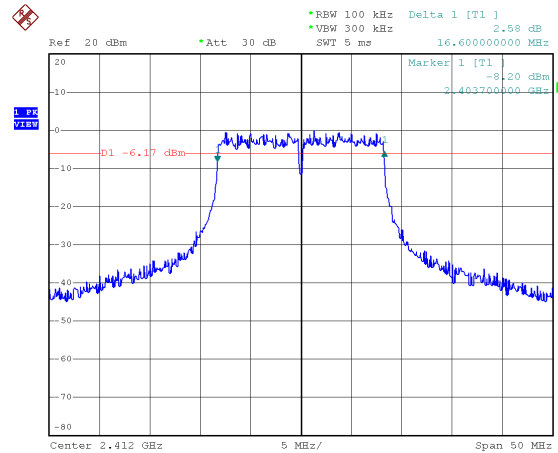


CH06

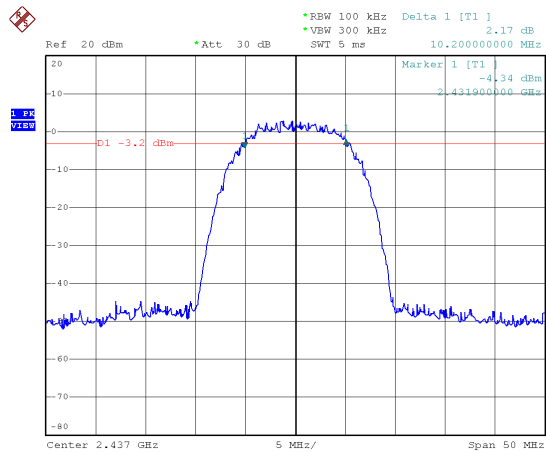


CH06


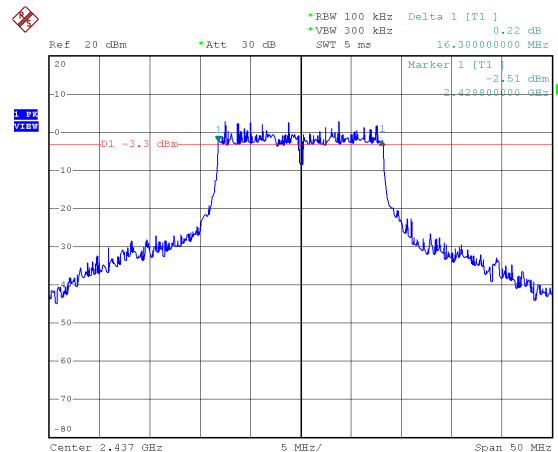


CH11

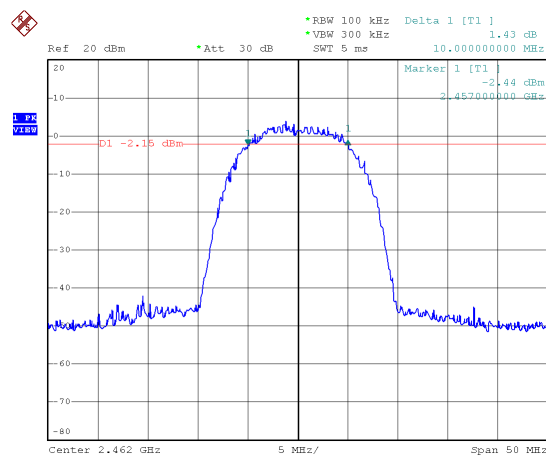


CH11

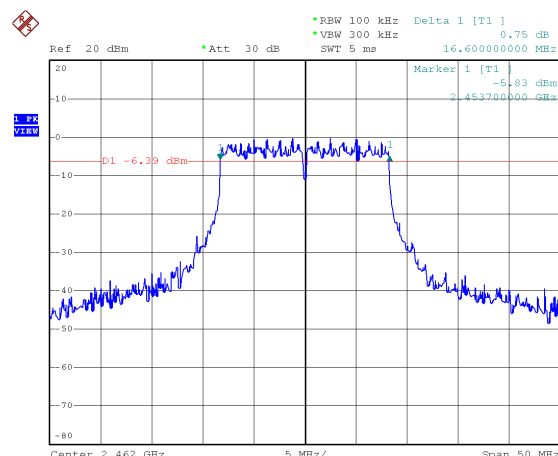


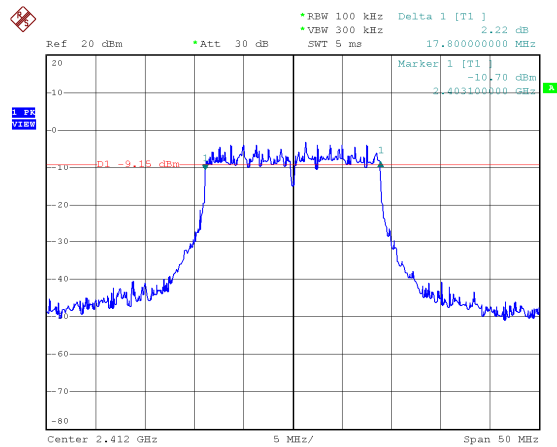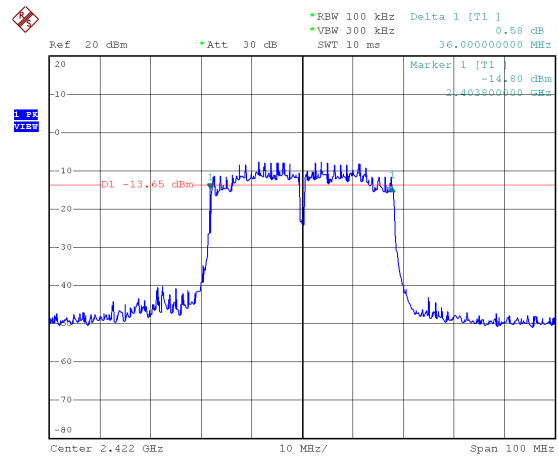Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

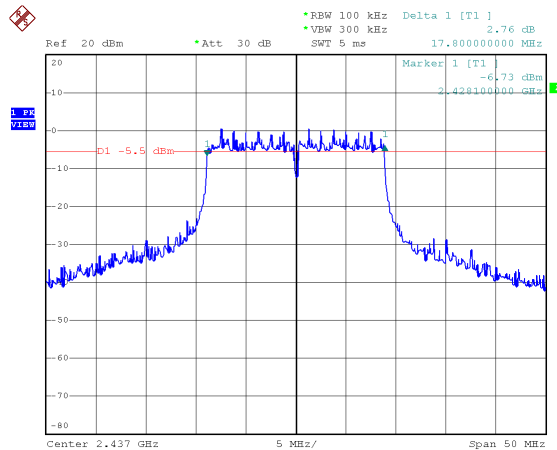


CH06

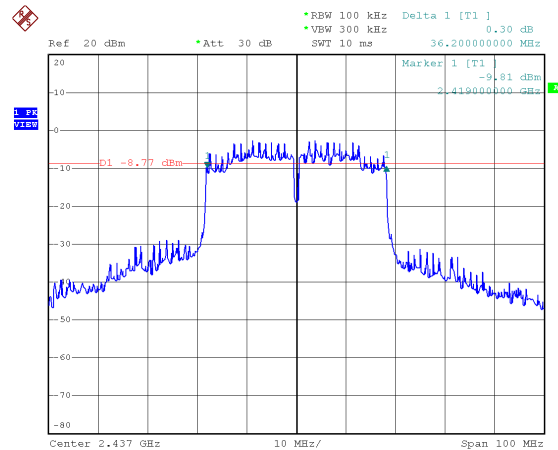

CH11

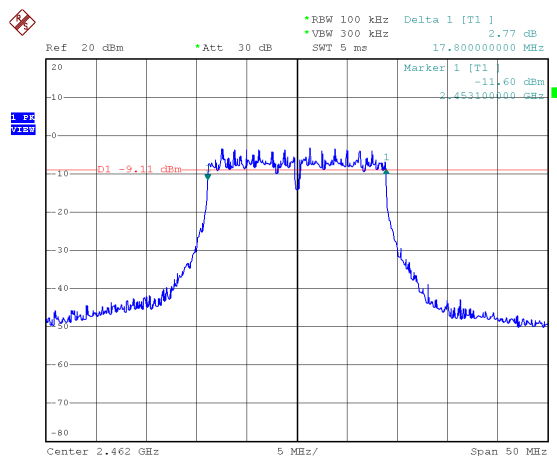


CH09

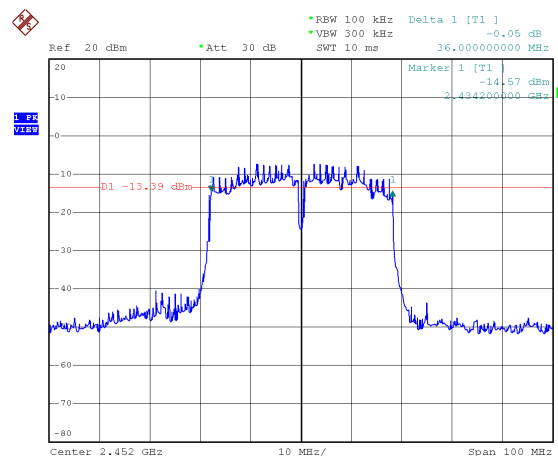





99% Occupied Bandwidth:
Modulation Type: 802.11b
CH01

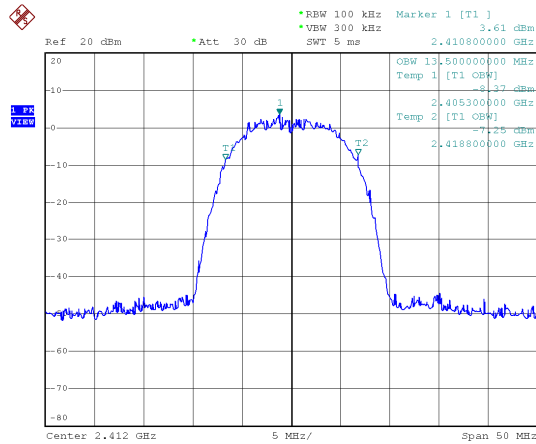


Modulation Type: 802.11g
CH01

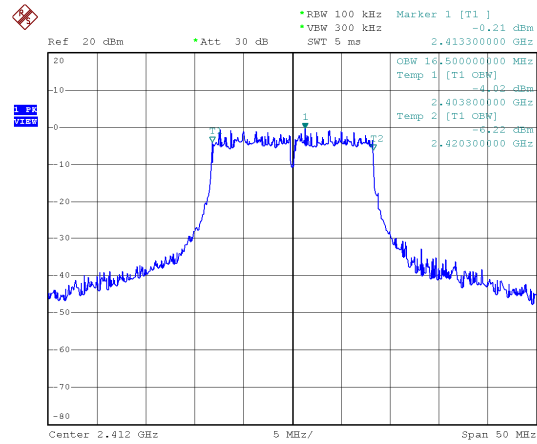


CH06

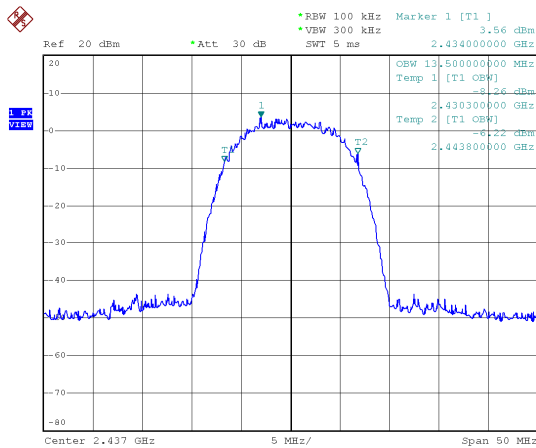


CH06


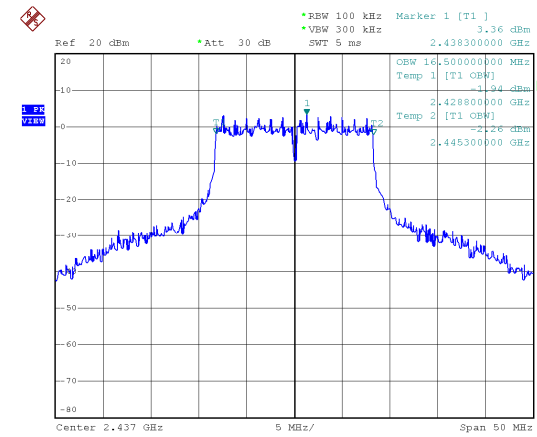


CH11

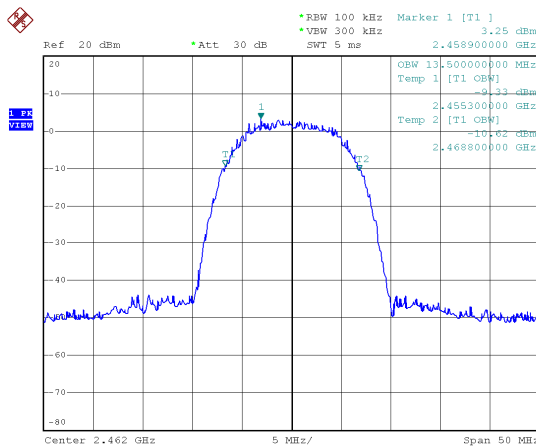


CH11

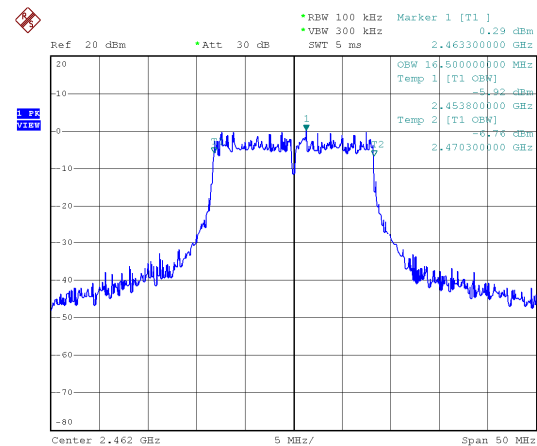


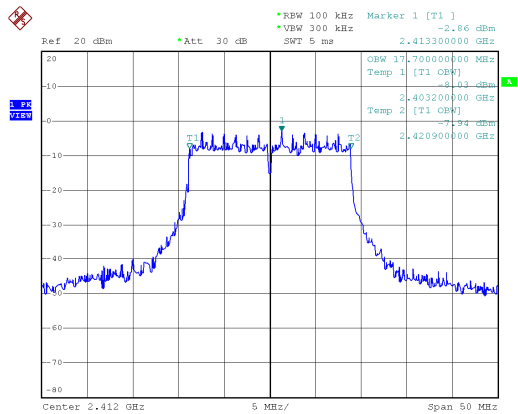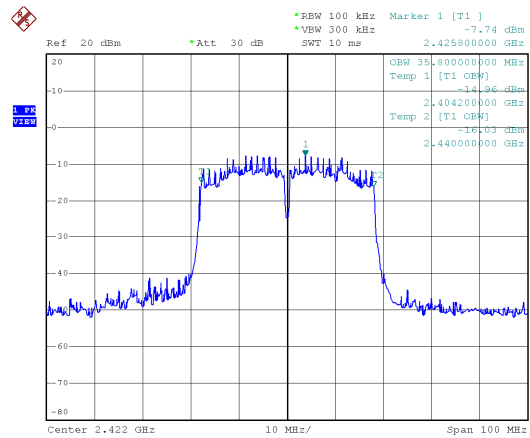Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

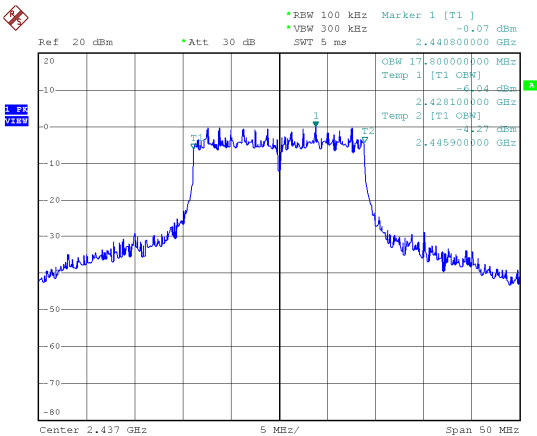


CH06

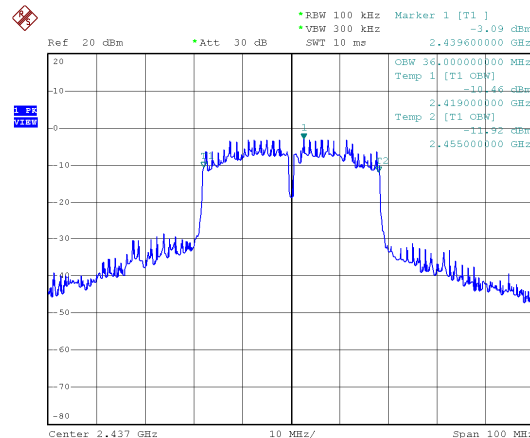

CH11

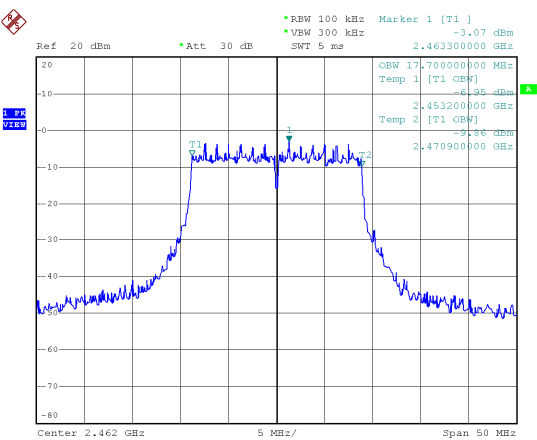


CH09

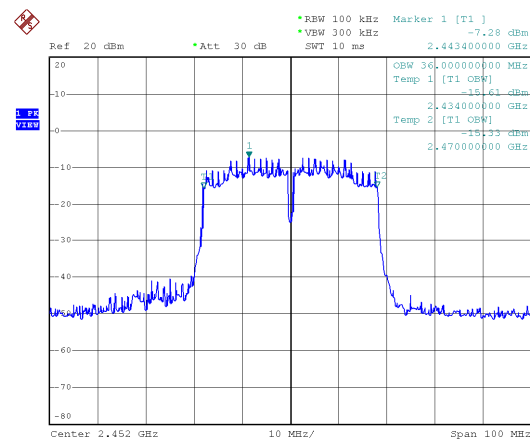





Antenna B:
6dB Bandwidth:
Modulation Type: 802.11b
CH01

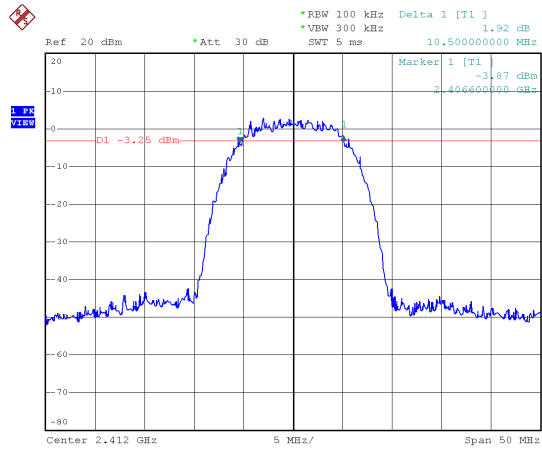


Modulation Type: 802.11g
CH01

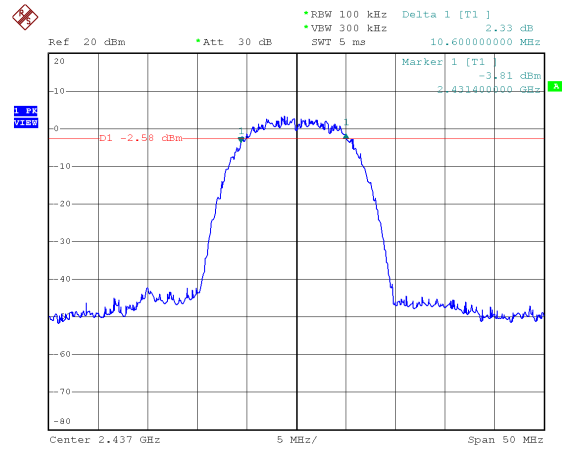


CH06

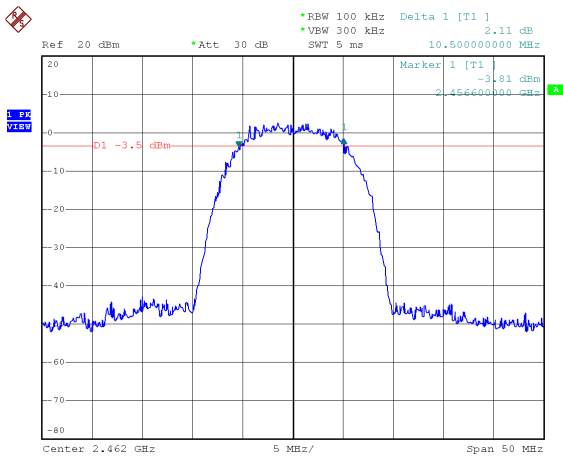


CH06


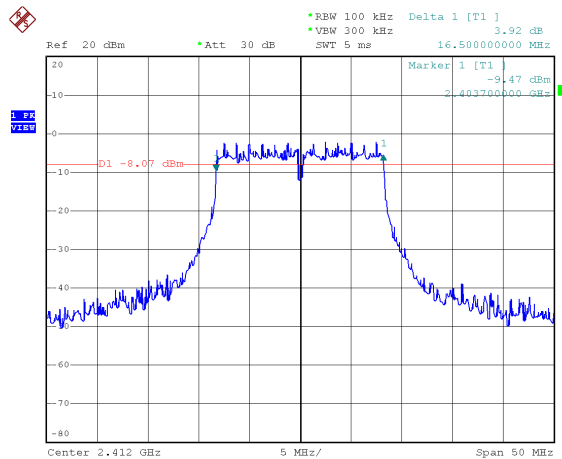


CH11

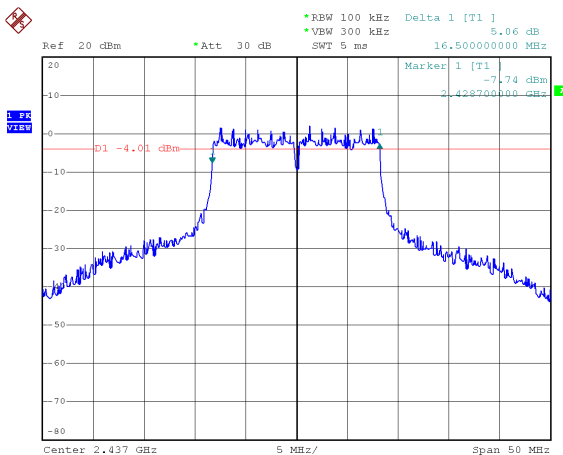


CH11

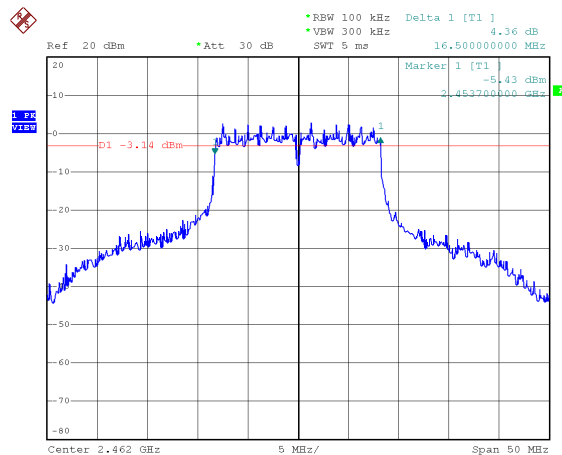


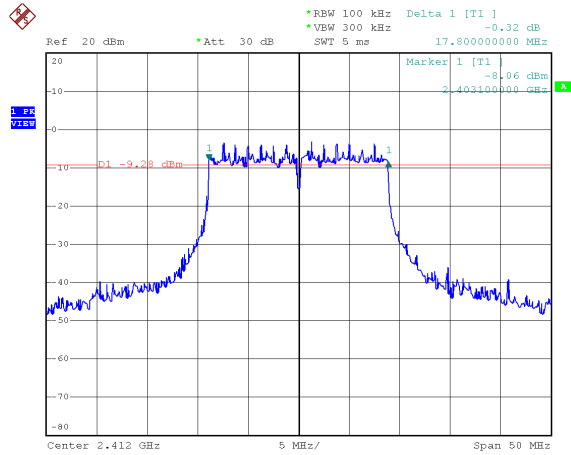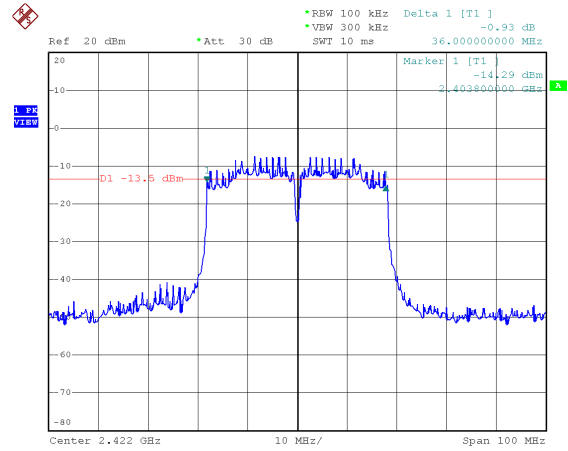Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

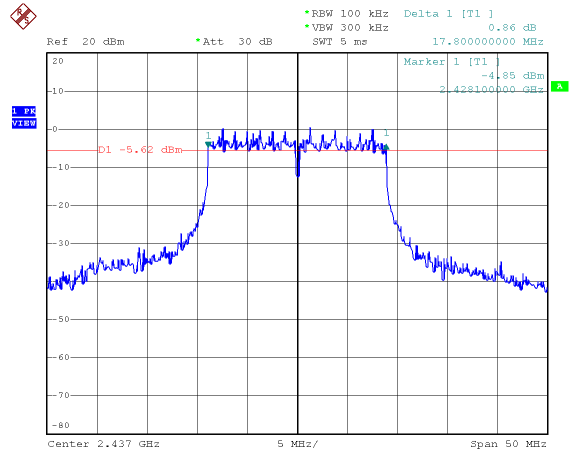


CH06

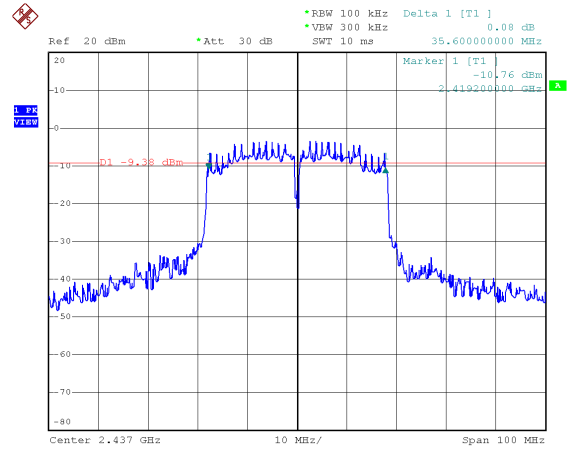

CH11

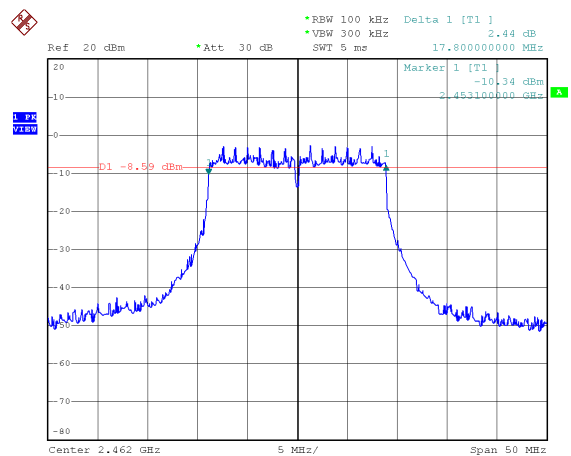


CH09

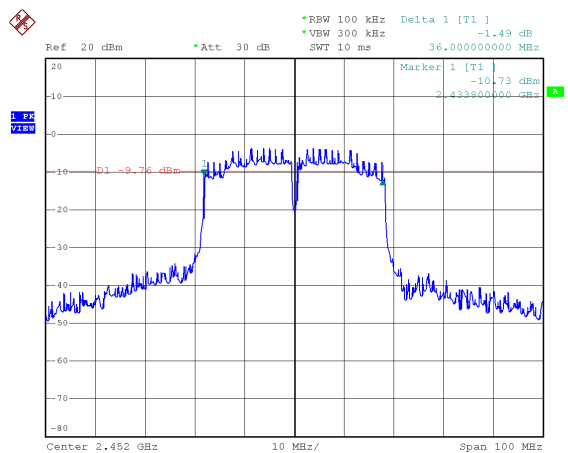





99% Occupied Bandwidth:
Modulation Type: 802.11b
CH01

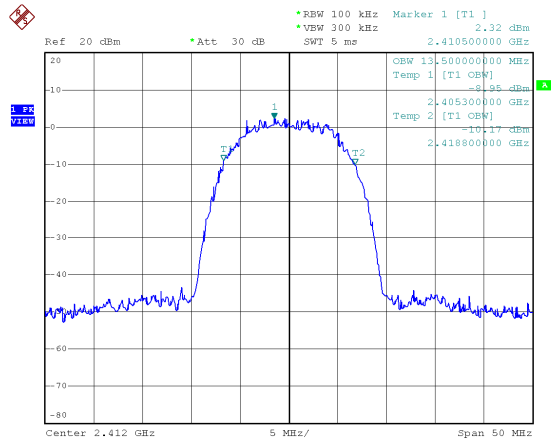


Modulation Type: 802.11g
CH01

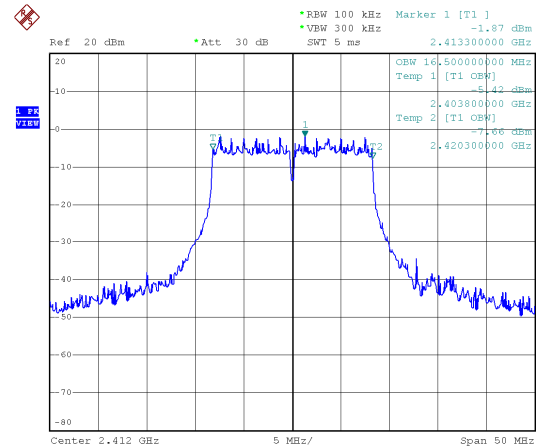


CH06

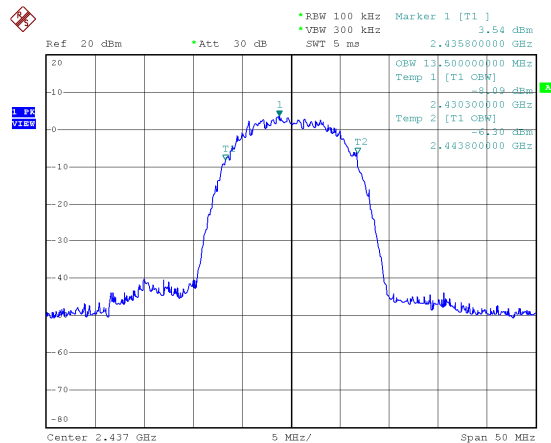


CH06


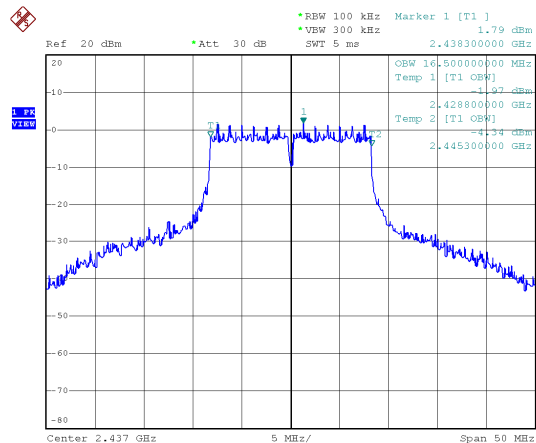


CH11

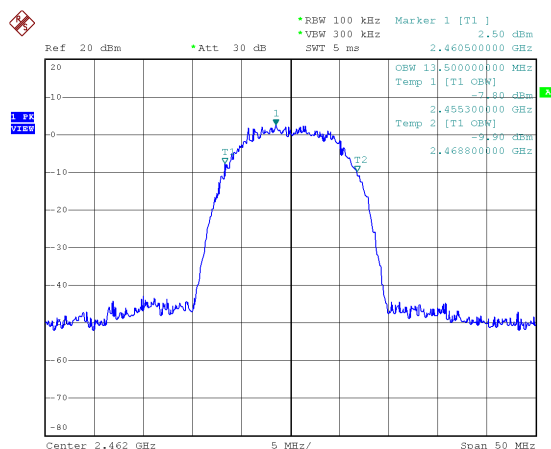


CH11

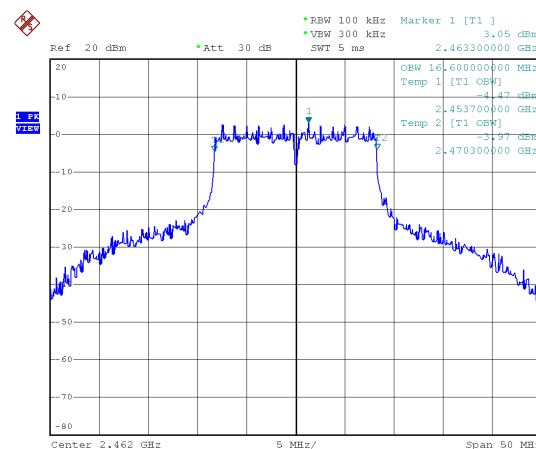


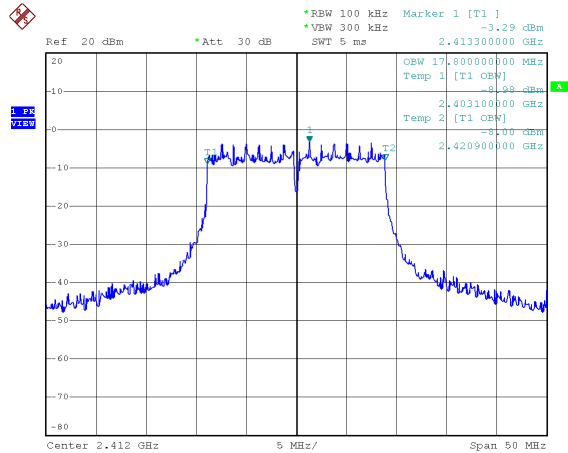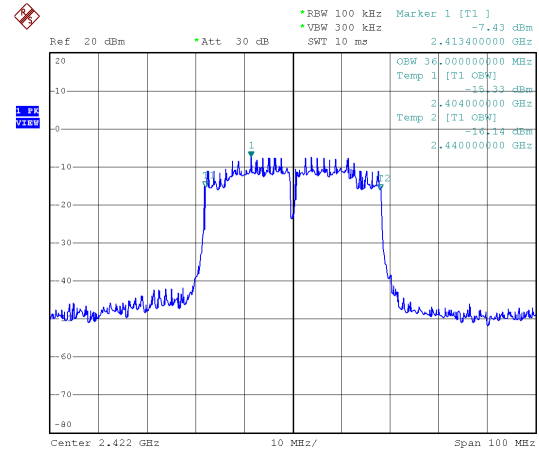Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

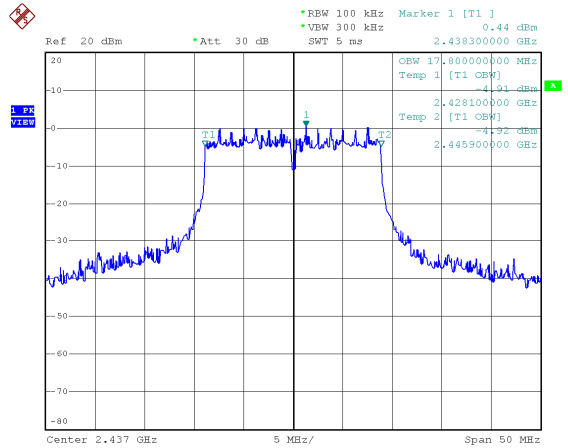


CH06

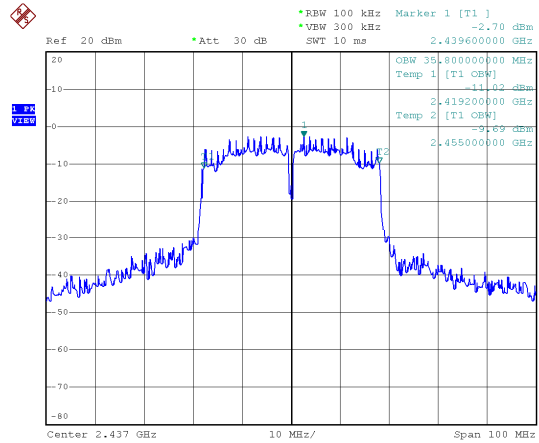

CH11

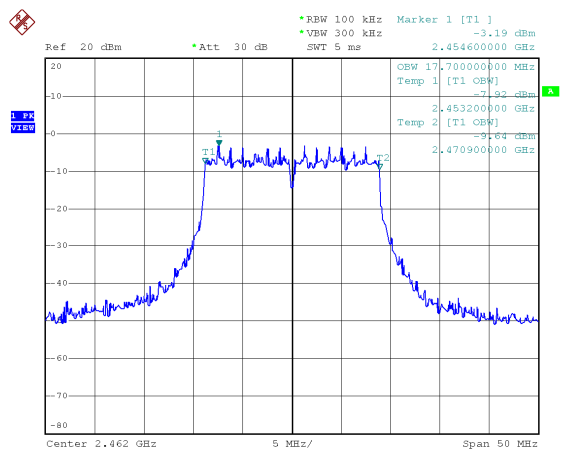

CH09

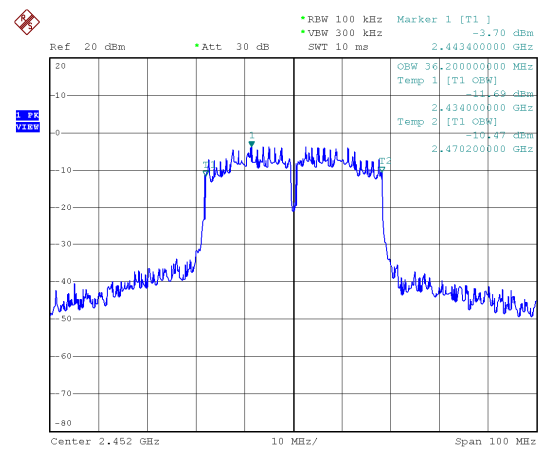



9. Maximum Peak and Average Output Power

9.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout





9.4 Test Result and Data

Test Date : Aug. 11, 2015 Temperature : 23°C
Atmospheric pressure : 1055 hPa Humidity : 53%

Modulation Type	Channel	Frequency (MHz)	Peak Power Output (dBm)			Peak Power Output (mW)		
			ANT A	ANT B	A+B	ANT A	ANT B	A+B
IEEE 802.11b (11Mbps)	01	2412	17.26	17.32	20.30	53.21	53.95	107.15
	06	2437	17.44	17.33	20.40	55.47	54.08	109.65
	11	2462	17.55	17.37	20.47	56.89	54.58	111.43
IEEE 802.11g (54Mbps)	01	2412	19.66	18.78	22.25	92.47	75.51	167.88
	06	2437	21.18	20.22	23.74	131.22	105.2	236.59
	11	2462	20.22	18.69	22.53	105.20	73.96	179.06
IEEE 802.11n HT20 (130Mbps)	01	2412	19.37	19.46	22.43	86.497	88.308	174.99
	06	2437	20.28	20.67	23.49	106.66	116.68	223.36
	11	2462	19.47	19.65	22.57	88.512	92.257	180.72
IEEE 802.11n HT40 (270Mbps)	03	2422	18.88	18.56	21.73	77.268	71.779	148.94
	06	2437	20.44	20.56	23.51	110.66	113.76	224.39
	09	2452	20.18	20.37	23.29	104.23	108.89	213.30

Modulation Type	Channel	Frequency (MHz)	Avg. Power Output (dBm)			Avg. Power Output (mW)		
			ANT A	ANT B	A+B	ANT A	ANT B	A+B
IEEE 802.11b (11Mbps)	01	2412	14.29	14.34	17.33	26.85	27.16	54.02
	06	2437	14.35	14.32	17.35	27.23	27.04	54.27
	11	2462	14.42	14.39	17.42	27.67	27.48	55.15
IEEE 802.11g (54Mbps)	01	2412	11.65	10.27	14.02	14.62	10.64	25.26
	06	2437	14.82	14.09	17.48	30.34	25.65	55.98
	11	2462	11.51	10.52	14.05	14.16	11.27	25.41
IEEE 802.11n HT20 (130Mbps)	01	2412	9.52	9.33	12.44	8.95	8.57	17.52
	06	2437	12.12	12.35	15.25	16.29	17.18	33.47
	11	2462	8.86	8.92	11.90	7.69	7.80	15.49
IEEE 802.11n HT40 (270Mbps)	03	2422	6.78	6.67	9.74	4.76	4.65	9.41
	06	2437	11.12	11.32	14.23	12.94	13.55	26.49
	09	2452	10.22	10.07	13.16	10.52	10.16	20.68



10. Power Spectral Density

10.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

10.3 Test Setup Layout






10.4 Test Result and Data

Test Date : Aug. 11, 2015 Temperature : 23°C
Atmospheric pressure : 1055 hPa Humidity : 53%


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)		
			ANT A	ANT B	A+B
IEEE 802.11b (11Mbps)	01	2412	-11.14	-10.76	-7.94
	06	2437	-10.70	-11.94	-8.27
	11	2462	-10.38	-10.52	-7.44
IEEE 802.11g (54Mbps)	01	2412	-14.31	-16.77	-12.36
	06	2437	-15.83	-13.35	-11.41
	11	2462	-15.35	-15.78	-12.55
IEEE 802.11n HT20 (130Mbps)	01	2412	-17.49	-17.19	-14.33
	06	2437	-14.50	-13.53	-10.98
	11	2462	-17.10	-17.08	-14.08
IEEE 802.11n HT40 (270Mbps)	03	2422	-19.71	-19.40	-16.54
	06	2437	-16.67	-14.92	-12.70
	09	2452	-20.15	-14.72	-13.63




Antenna A:
Modulation Type: 802.11b
CH01

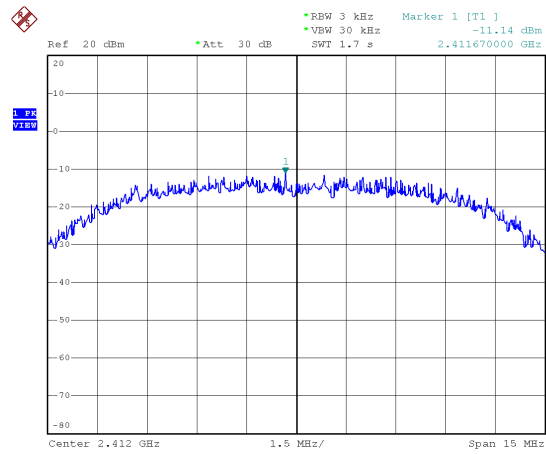


Modulation Type: 802.11g
CH01

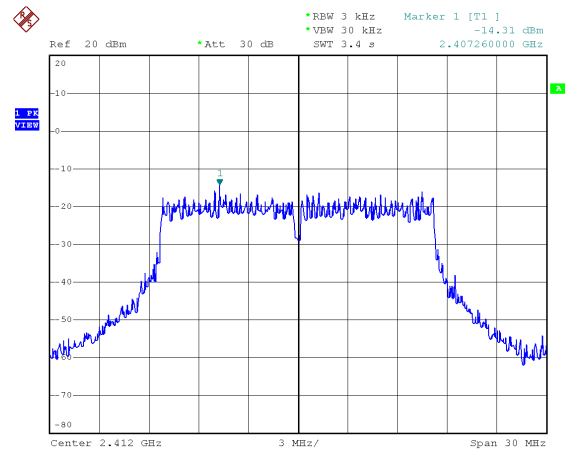


CH06

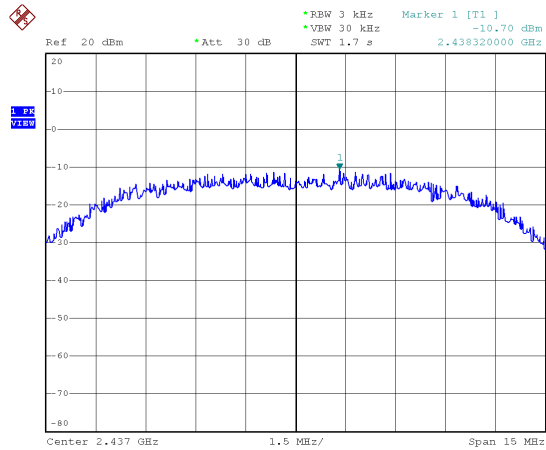

CH06

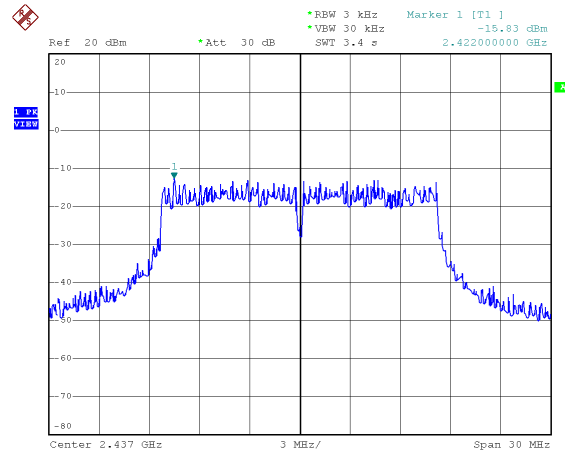

CH11

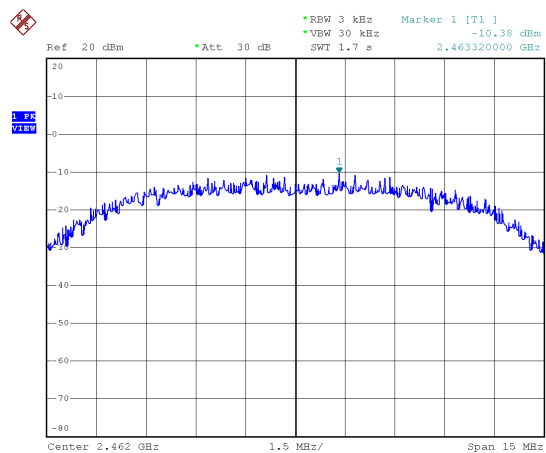

CH11

